




SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	4F, No. 9, Park Avenue II, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.
FCC ID	RAXWN6401F
Manufacturer's company	Arcadyan Technology Corporation
Manufacturer Address	4F, No. 9, Park Avenue II, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.

Product Name	mini-PCI wireless module
Brand Name	Fortinet
Model Name	WN6401F-IM
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz
Receive Date	Dec. 13, 2005
Test Date	Jan. 19, 2006
Submission Type	Original Equipment

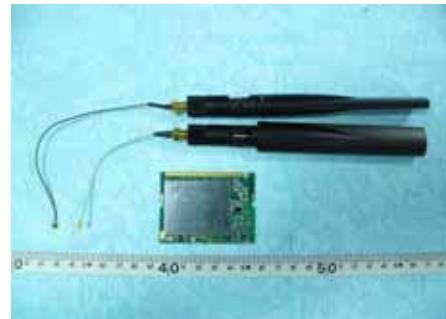

Statement

Test result included is only for the 802.11a (5150 ~ 5350MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

NVLAP[®]

Lab Code: 200079-0

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Table for Filed Antenna.....	3
3.3. Table for Carrier Frequencies	4
3.4. Table for Test Modes	4
3.5. Table for Testing Locations.....	4
3.6. Table for Supporting Units	5
3.7. Table for Parameters of Test Software Setting	5
3.8. Test Configurations	5
4. TEST RESULT	7
4.1. AC Power Line Conducted Emissions Measurement.....	7
4.2. 99% Occupied Bandwidth Measurement	11
4.3. Maximum Conducted Output Power Measurement.....	17
4.4. Power Spectral Density Measurement	23
4.5. Peak Excursion Measurement.....	29
4.6. Radiated Emissions Measurement	35
4.7. Band Edge Emissions Measurement	53
4.8. Frequency Stability Measurement	68
4.9. Antenna Requirements	70
5. LIST OF MEASURING EQUIPMENTS	71
6. SPONDON COMPANY PROFILE	73
6.1. Test Location.....	73
7. NVLAP CERTIFICATE OF ACCREDITATION	74
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A5
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3



History of This Test Report

Original Issue Date: Jan. 19, 2006

Report No.: FR5D1401

No additional attachment.

Additional attachment were issued as following record:

1. CERTIFICATE OF COMPLIANCE

Product Name : mini-PCI wireless module
Brand Name : Fortinet
Model Name : WN6401F-IM
Applicant : Arcadyan Technology Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 13, 2005 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Supervisor
Sportun International Inc.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	15.44 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.15 dB
4.4	15.407(a)	Power Spectral Density	Complies	2.92 dB
4.5	15.407(a)	Peak Excursion	Complies	8.33 dB
4.6	15.407(b)	Radiated Emissions	Complies	1.34 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.97 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.71dB	Confidence levels of 95%
Power Spectral Density	±0.71dB	Confidence levels of 95%
Peak Excursion	±0.71dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±6.25x10-7	Confidence levels of 95%
Radiated Emissions/ Band Edge Emissions	±3.72dB	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

EUT is a mini-PCI wireless module with IEEE 802.11a/b/g radio functions. Only the radio detail of IEEE 802.11a is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Product Type	WLAN
Radio Type	Intentional Transceiver
Power Type	3.3V DC form host system (NB)
Interface Type	NA
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54/108)
Frequency Range	5150 ~ 5350MHz
Channel Number	Please refer to section 3.3
Channel Band Width (99%)	11a: 17.76 MHz ; 11a Turbo: 33.80 MHz
Conducted Output Power	Band 1: 16.85 dBm ; Band 2: 17.76 dBm
Carrier Frequencies	Please refer to section 3.3
Antenna	Please refer to section 3.2

3.2. Table for Filed Antenna

For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	smartant	SAA05-220170	Dual-Band Omni-Directional Antenna	Revise-SMA	5.0

3.3. Table for Carrier Frequencies

Frequency Allocation for 802.11a

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz (USA/Canada) Band 1	36	5180 MHz	Turbo 42	5210 MHz
	40	5200 MHz	Turbo 50	5250 MHz
	44	5220 MHz		
	48	5240 MHz		
5250~5350 MHz (USA/Canada/Taiwan) Band 2	52	5260 MHz	Turbo 58	5290 MHz
	56	5280 MHz		
	60	5300 MHz		
	64	5320 MHz		

3.4. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Conducted Emission	Normal Link	54Mbps	64
26dB Spectrum Bandwidth	Band 1~2/BPSK	6Mbps	36/52/64
Max. Conducted Output Power	Band 1~2	12Mbps	42/50/58
Power Spectral Density	Turbo/BPSK		
Peak Excursion			
Radiated Emission Below 1GHz	BPSK	6Mbps	64
Radiated Emission Above 1GHz	Band 1~2/BPSK	6Mbps	36/52/64
Band Edge Emission	Band 1~2	12Mbps	42/50/58
	Turbo/BPSK		
Frequency Stability	Un-modulation	-	52

3.5. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.6. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	PP01L	DoC
Modem	ACEEX	DM-1414	IFAXDM1414
Printer	EPSON	LQ-300	DoC

3.7. Table for Parameters of Test Software Setting


During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11a

Test Software Version	ART		
Frequency	5180 MHz	5260 MHz	5320 MHz
IEEE 802.11a	16	16.5	17
Frequency	5210 MHz	5250 MHz	5290 MHz
IEEE 802.11a Turbo	17.5	17.5	17.5


3.8. Test Configurations

3.8.1. Radiation Emissions Test Configuration

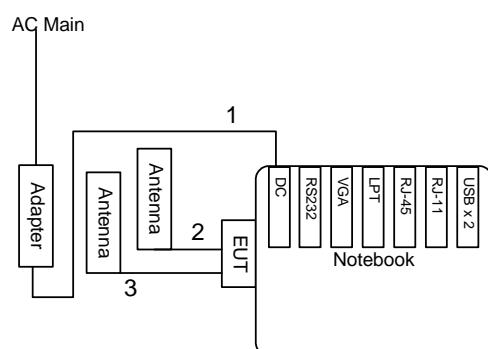

1. DC power line, 1.5m, No-shielding
2. RF Cable, 10cm, Shielding
3. RF Cable, 15cm, Shielding

3.8.2. AC Power Line Conduction Emissions Test Configuration

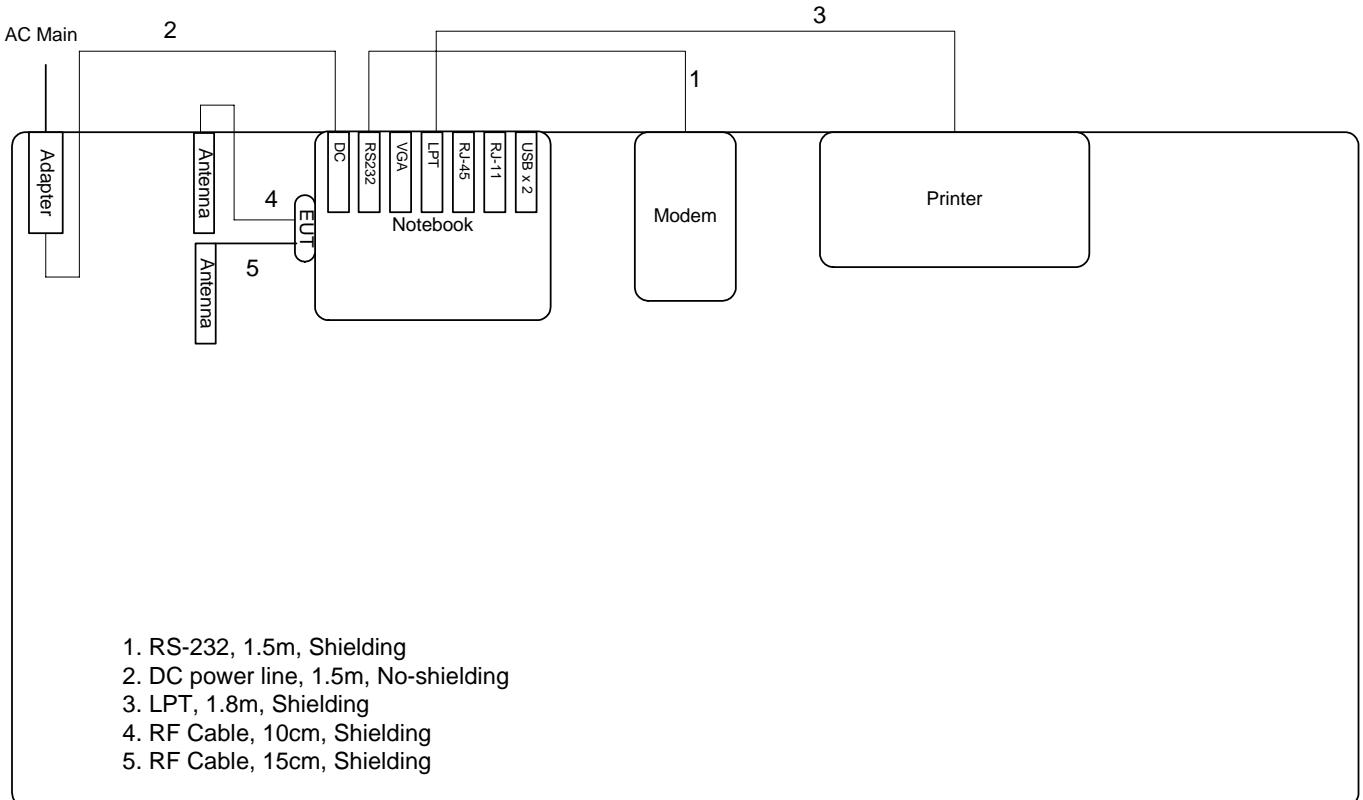

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

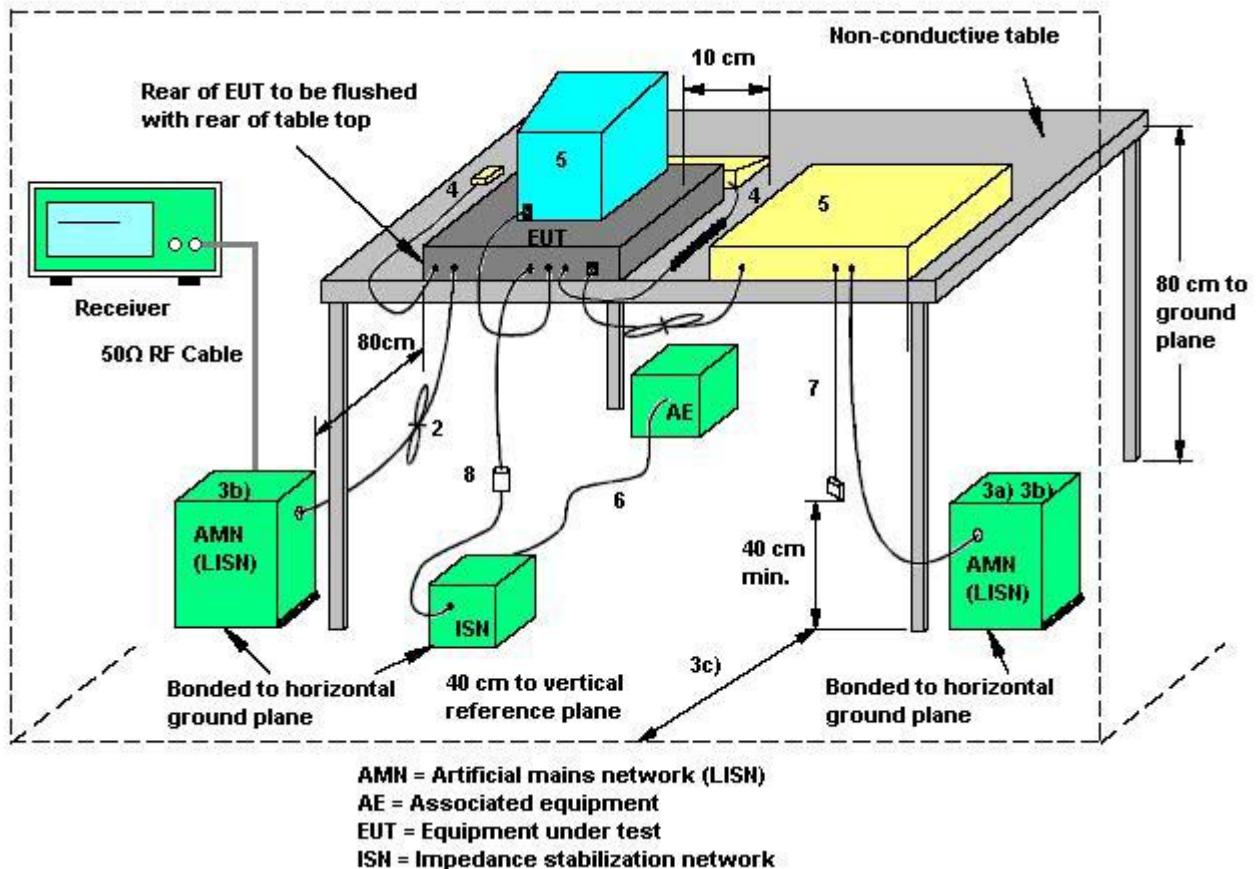

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
4. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
5. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
6. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
7. Cables of hand operated devices, such as keyboards, mouses, etc. shall be placed as for normal usage.
8. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
9. I/O signal cable intended for external connection.
10. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
11. If used, the current probe shall be placed at 0,1 m from the ISN.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	20	Humidity	64%
Test Engineer	Stan Peng	Phase	Line
Configuration	Normal Use		

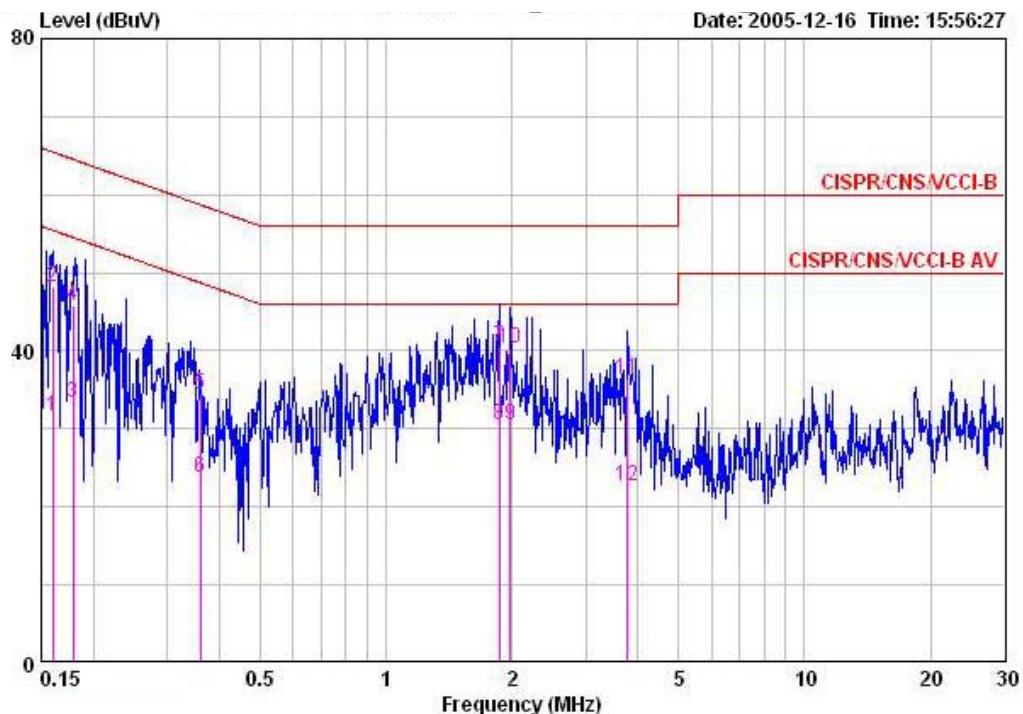

Freq	Level	Over	Limit	Read	LISN	Cable	
		Line	dBuV	Level	Factor	Loss	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15985	31.53	-23.94	55.47	29.23	2.10	0.20 AVERAGE
2	0.15985	48.12	-17.35	65.47	45.82	2.10	0.20 QP
3	0.17835	33.37	-21.19	54.56	31.45	1.72	0.20 AVERAGE
4	0.17835	45.70	-18.86	64.56	43.78	1.72	0.20 QP
5	0.35987	34.52	-24.21	58.73	33.62	0.70	0.20 QP
6	0.35987	23.66	-25.07	48.73	22.76	0.70	0.20 AVERAGE
7	1.862	40.56	-15.44	56.00	40.09	0.30	0.17 QP
8	1.862	30.46	-15.54	46.00	29.99	0.30	0.17 AVERAGE
9	1.980	30.55	-15.45	46.00	30.05	0.30	0.20 AVERAGE
10	1.980	40.29	-15.71	56.00	39.79	0.30	0.20 QP
11	3.779	36.38	-19.62	56.00	35.72	0.36	0.30 QP
12	3.779	22.74	-23.26	46.00	22.08	0.36	0.30 AVERAGE

Temperature	20	Humidity	64%
Test Engineer	Stan Peng	Phase	Neutral
Configuration	Normal Use		

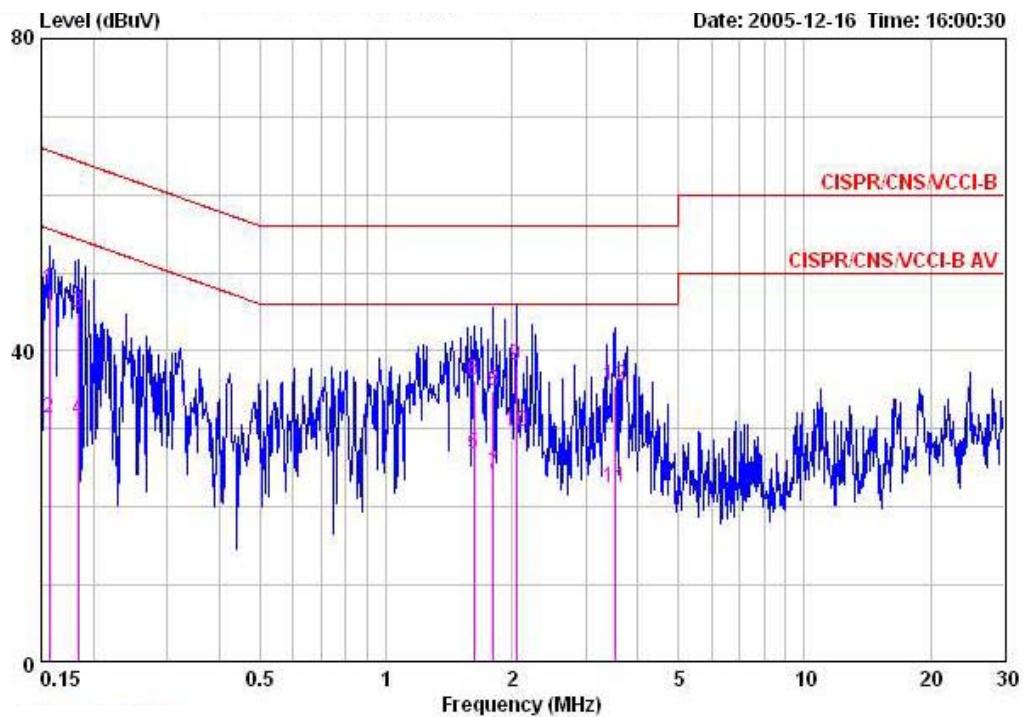

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	dBuV	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15650	47.88	-17.77	65.65	45.78	1.90	0.20 QP
2	0.15650	31.49	-24.16	55.65	29.39	1.90	0.20 AVERAGE
3	0.18346	44.99	-19.34	64.33	43.47	1.32	0.20 QP
4	0.18346	31.13	-23.20	54.33	29.61	1.32	0.20 AVERAGE
5	1.619	26.87	-19.13	46.00	26.47	0.27	0.13 AVERAGE
6	1.619	36.25	-19.75	56.00	35.85	0.27	0.13 QP
7	1.810	24.25	-21.75	46.00	23.85	0.24	0.16 AVERAGE
8	1.810	34.78	-21.22	56.00	34.38	0.24	0.16 QP
9	2.044	38.05	-17.95	56.00	37.64	0.21	0.20 QP
10	2.044	29.71	-16.29	46.00	29.30	0.21	0.20 AVERAGE
11	3.547	22.52	-23.48	46.00	21.92	0.30	0.30 AVERAGE
12	3.547	35.61	-20.39	56.00	35.01	0.30	0.30 QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

4.2.4. Test Setup Layout

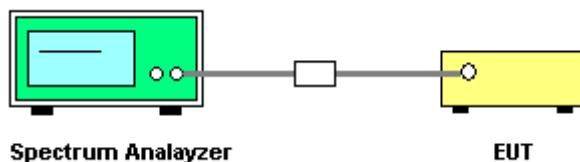

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a


Configuration IEEE 802.11a

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	27.52	17.76
52	5260 MHz	27.20	17.60
64	5320 MHz	28.16	17.76

Configuration IEEE 802.11a Turbo


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	38.20	34.00
50	5250 MHz	39.20	33.60
58	5290 MHz	37.60	33.60

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

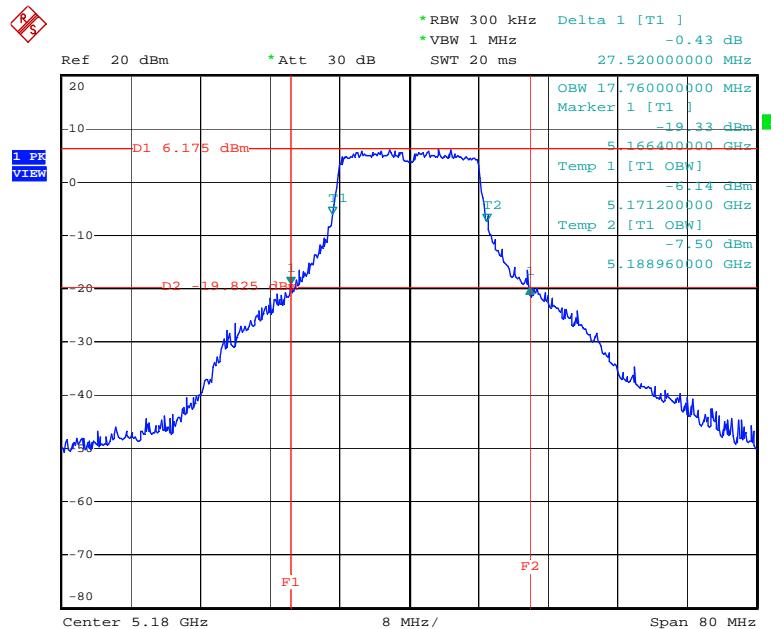


Date: 20.DEC.2005 21:06:37

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5260 MHz

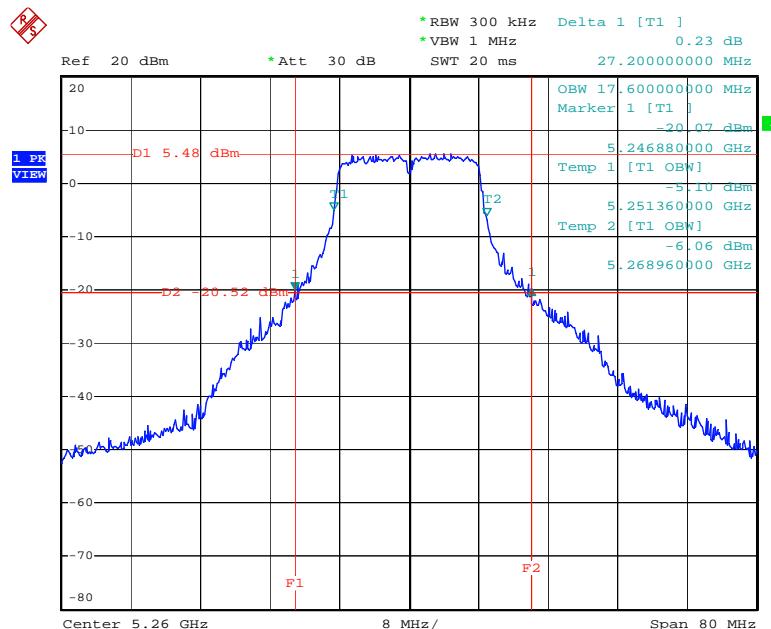


Date: 20.DEC.2005 21:37:30

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5320 MHz

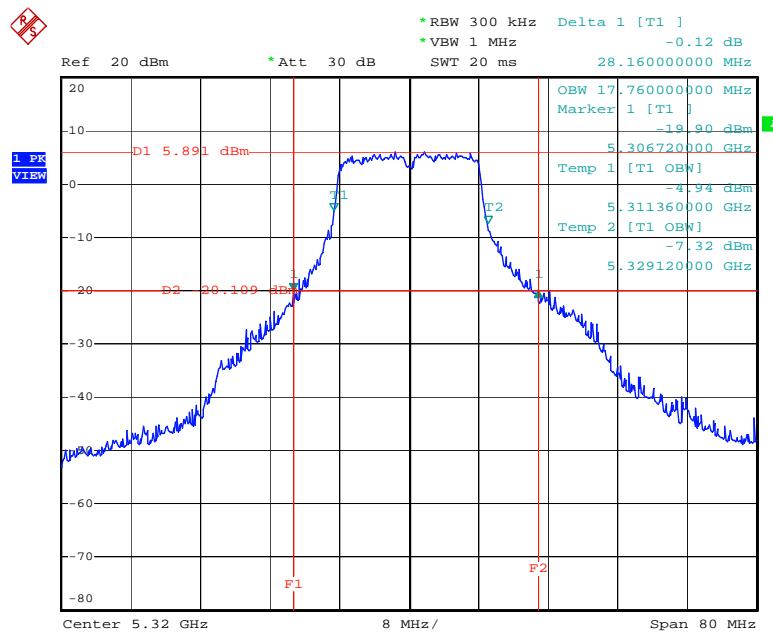


Date: 20.DEC.2005 21:48:47

26 dB Bandwidth Plot on Configuration IEEE 802.11a Turbo / 5210 MHz

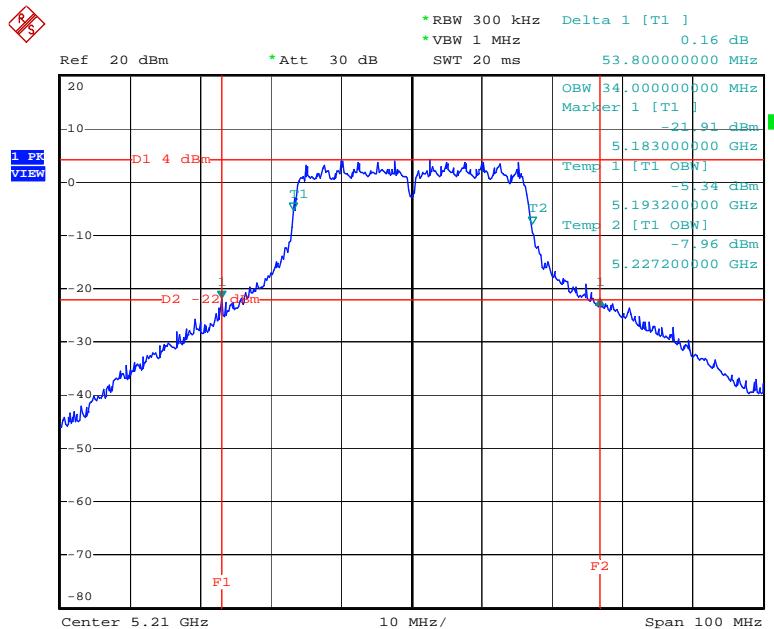


Date: 3.JAN.2006 10:19:11

26 dB Bandwidth Plot on Configuration IEEE 802.11a Turbo / 5250 MHz

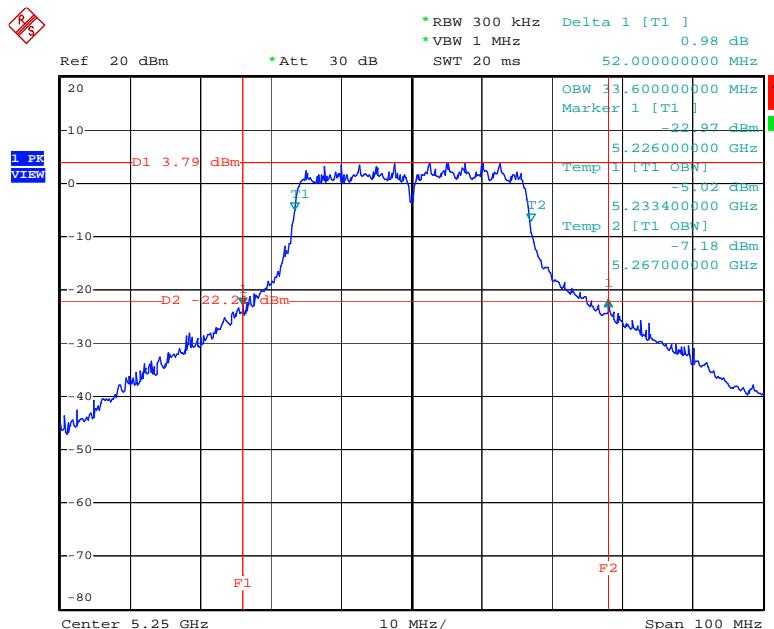

Date: 3.JAN.2006 10:20:32

26 dB Bandwidth Plot on Configuration IEEE 802.11a Turbo / 5290 MHz

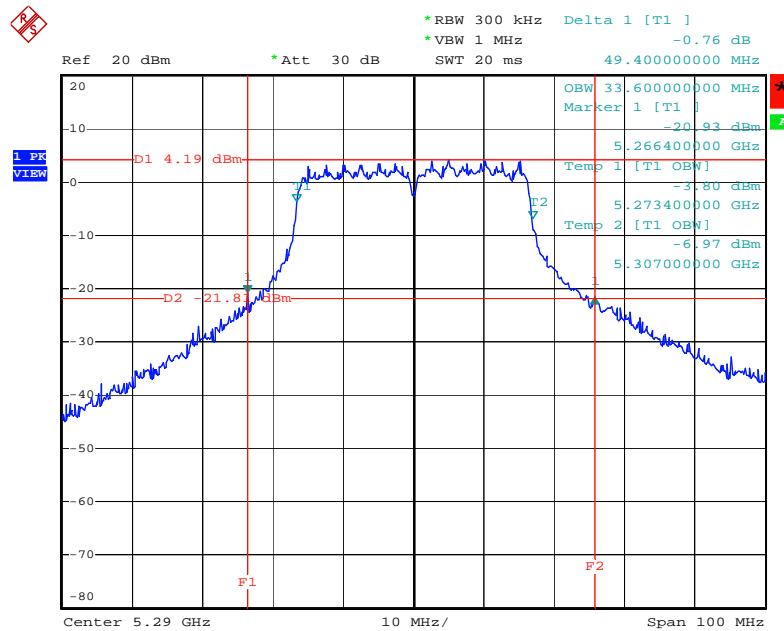

Date: 3.JAN.2006 10:21:36

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or 17 dBm + 10log B. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power or peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the spectrum.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	300 kHz
Detector	Sample
Trace	Max Hold
Sweep Time	60s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with method #3 of FCC Public Notice DA-02-2138.

4.3.4. Test Setup Layout

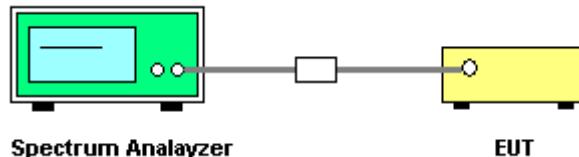

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.80	17.00	Complies
52	5260 MHz	16.82	24.00	Complies
64	5320 MHz	17.76	24.00	Complies

Configuration IEEE 802.11a Turbo

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
42	5210 MHz	16.85	17.00	Complies
50	5250 MHz	16.83	17.00	Complies
58	5290 MHz	17.15	24.00	Complies

Channel Output Power Plot on Configuration IEEE 802.11a / 5180 MHz




Date: 20.DEC.2005 21:33:17

Channel Output Power Plot on Configuration IEEE 802.11a / 5260 MHz



Date: 20.DEC.2005 21:35:30

Channel Output Power Plot on Configuration IEEE 802.11a / 5320 MHz

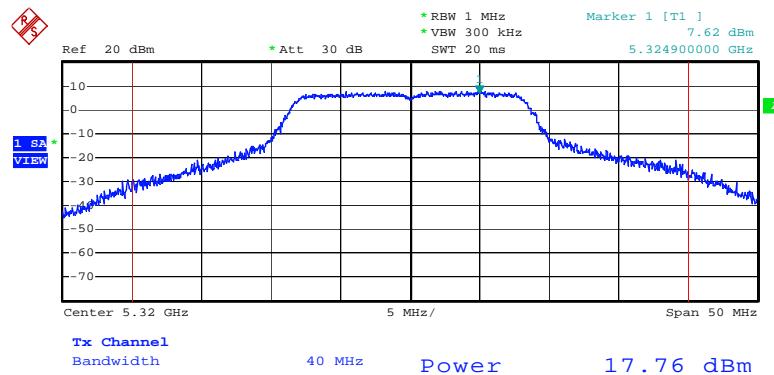


Date: 20.DEC.2005 22:04:33

Channel Output Power Plot on Configuration IEEE 802.11a Turbo / 5210 MHz



Date: 21.DEC.2005 09:06:50

Channel Output Power Plot on Configuration IEEE 802.11a Turbo / 5250 MHz

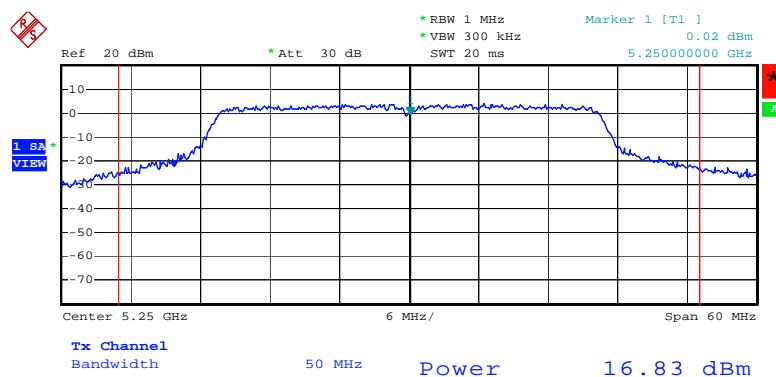

Date: 21.DEC.2005 09:06:24

Channel Output Power Plot on Configuration IEEE 802.11a Turbo / 5290 MHz



Date: 21.DEC.2005 09:05:46

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5.725-5.825	17

4.4.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.

4.4.4. Test Setup Layout

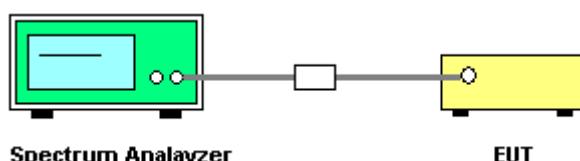

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a


Configuration IEEE 802.11a

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	1.08	4.00	Complies
5260 MHz	0.68	11.00	Complies
5320 MHz	1.46	11.00	Complies

Configuration IEEE 802.11a Turbo


Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5210 MHz	-1.84	4.00	Complies
5250 MHz	-2.07	4.00	Complies
5290 MHz	-1.45	11.00	Complies

Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

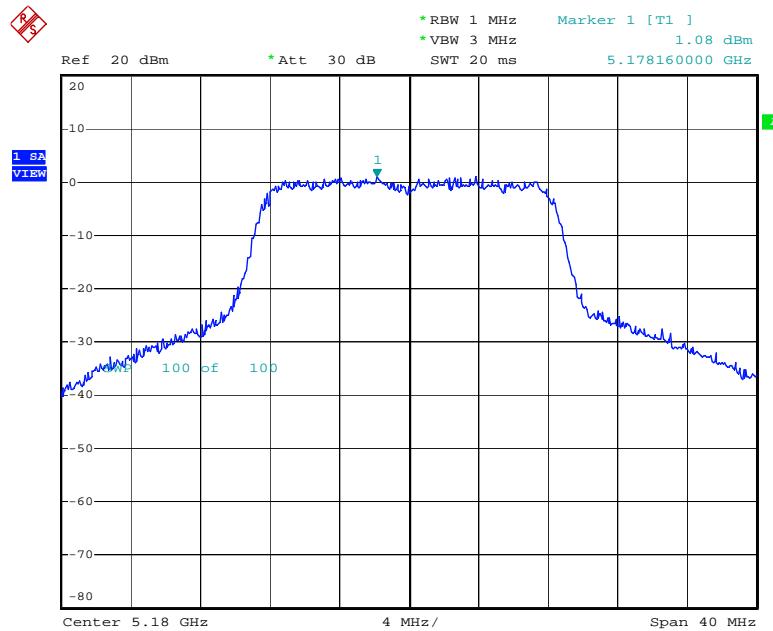


Date: 21.DEC.2005 20:49:31

Power Density Plot on Configuration IEEE 802.11a / 5260 MHz

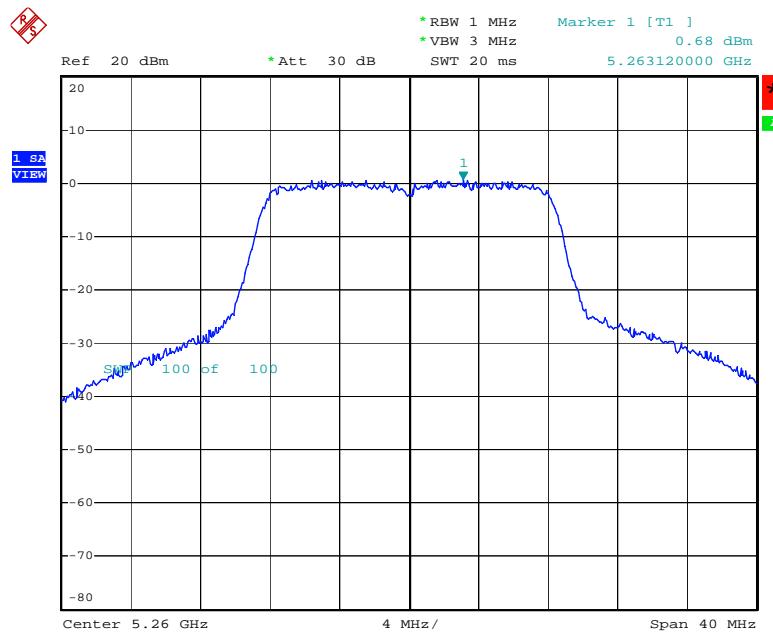


Date: 21.DEC.2005 20:50:13

Power Density Plot on Configuration IEEE 802.11a / 5320 MHz

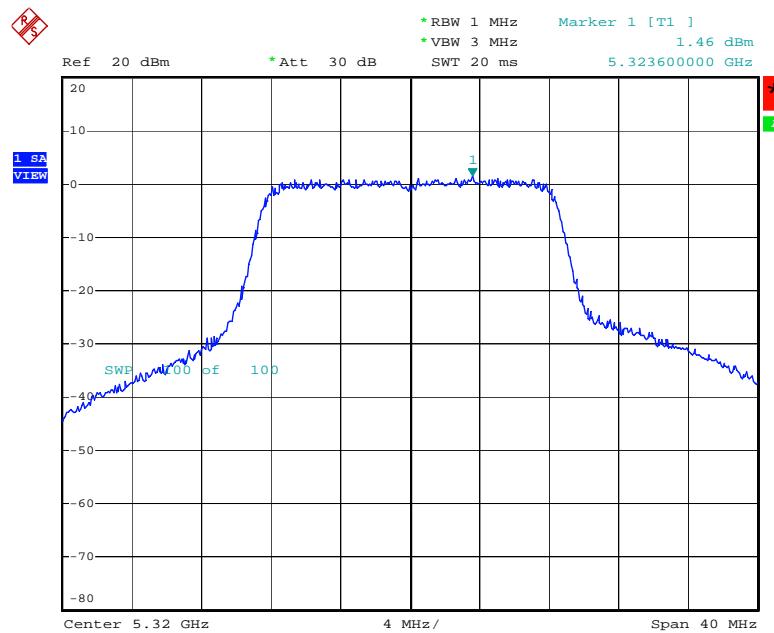


Date: 21.DEC.2005 20:50:38

Power Density Plot on Configuration IEEE 802.11a Turbo / 5210 MHz

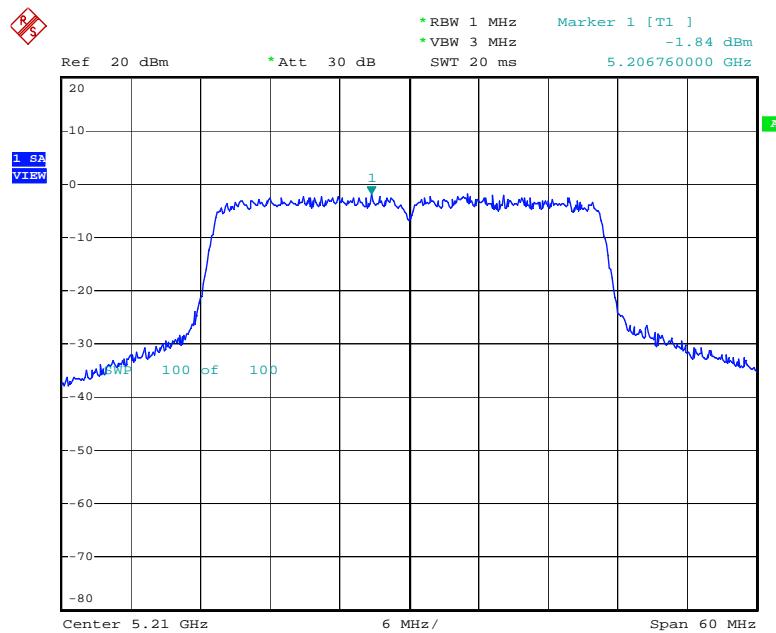


Date: 21.DEC.2005 09:07:28

Power Density Plot on Configuration IEEE 802.11a Turbo / 5250 MHz

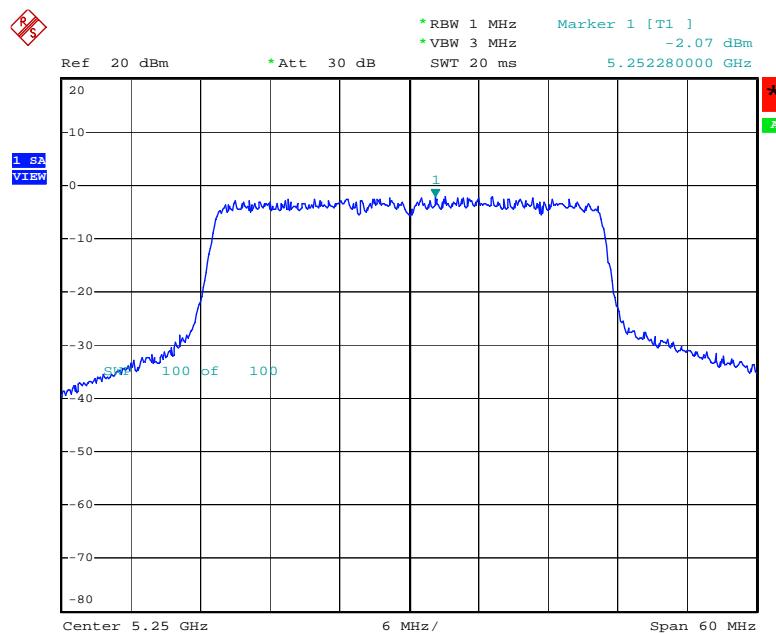

Date: 21.DEC.2005 09:07:50

Power Density Plot on Configuration IEEE 802.11a Turbo / 5290 MHz

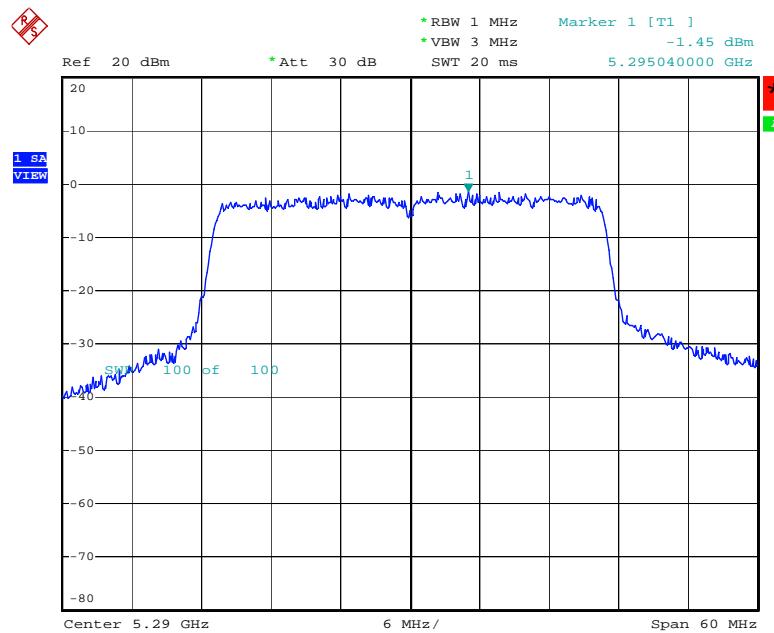

Date: 21.DEC.2005 09:08:28

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW \geq 3 MHz with peak detector and maxhold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW $\geq 1/T$ (IEEE 802.11a VBW = 300kHz $\geq 1/4 \mu s$). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode . Set max hold. Allow max hold to run for 60 seconds.

4.5.4. Test Setup Layout

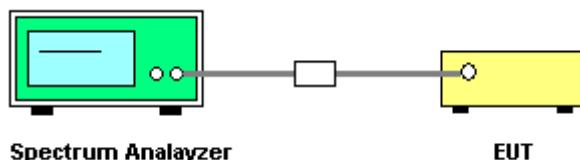

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a


Configuration IEEE 802.11a

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	4.60	13	Complies
5260 MHz	4.66	13	Complies
5320 MHz	4.40	13	Complies

Configuration IEEE 802.11a Turbo


Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5210 MHz	3.97	13	Complies
5250 MHz	4.67	13	Complies
5290 MHz	3.46	13	Complies

Peak Excursion Plot on Configuration IEEE 802.11a / 5180 MHz

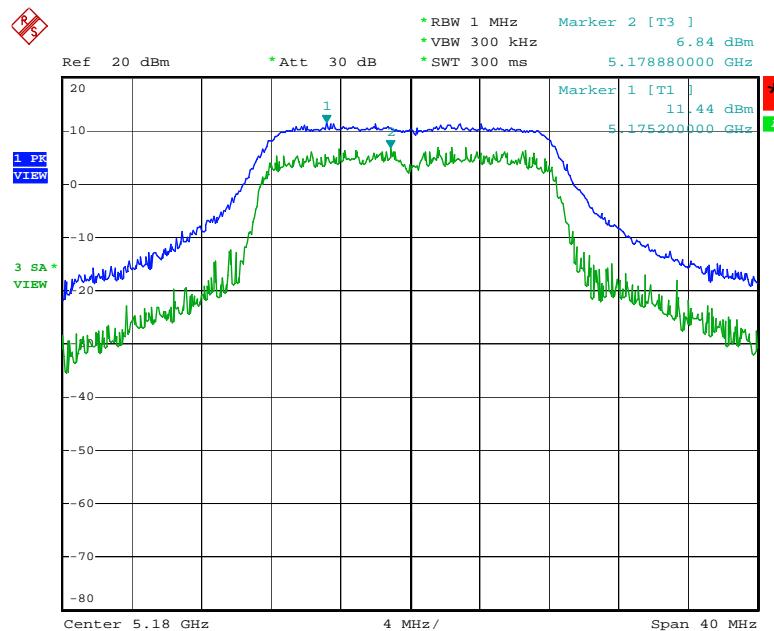


Date: 20.DEC.2005 21:29:27

Peak Excursion Plot on Configuration IEEE 802.11a / 5260 MHz

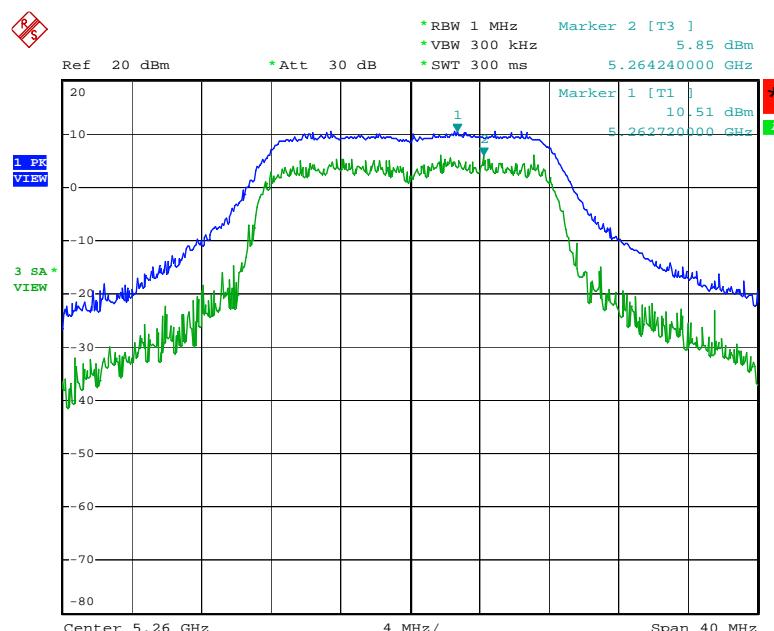


Date: 20.DEC.2005 21:47:30

Peak Excursion Plot on Configuration IEEE 802.11a / 5320 MHz

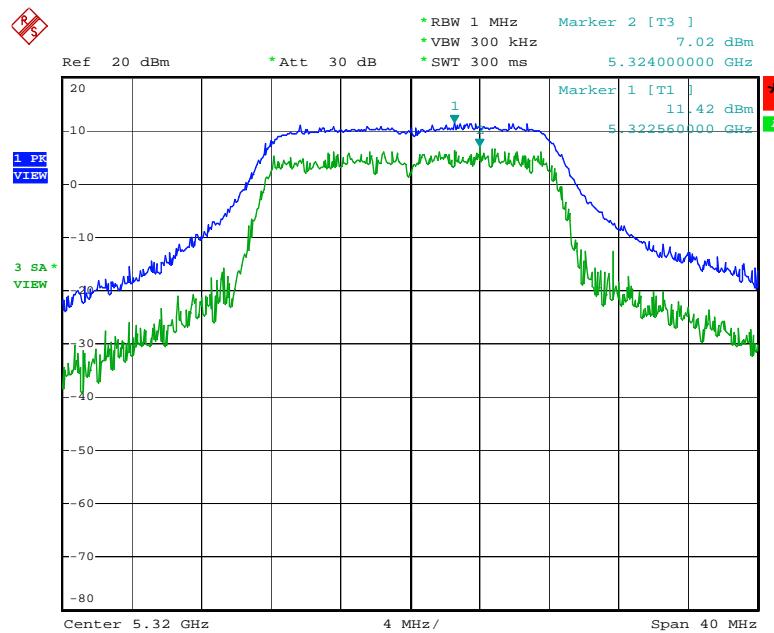


Date: 20.DEC.2005 21:46:34

Peak Excursion Plot on Configuration IEEE 802.11a Turbo / 5210 MHz

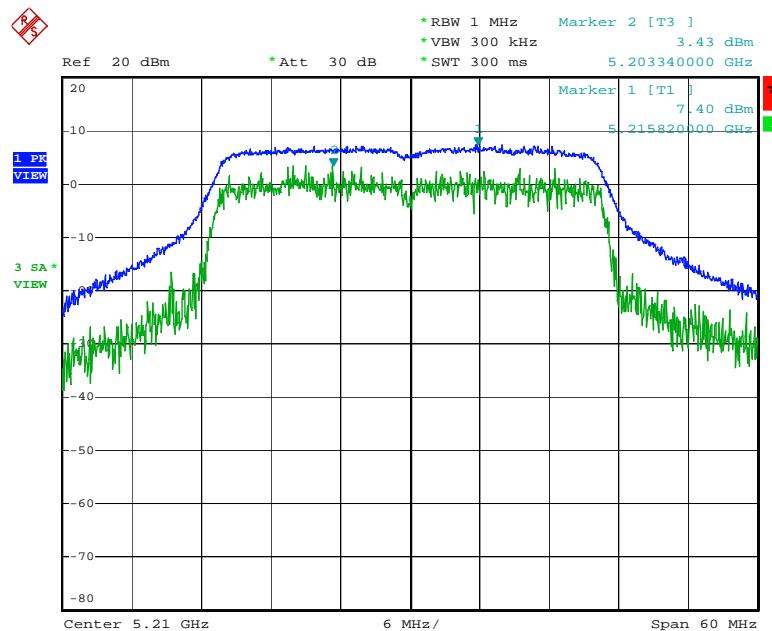


Date: 21.DEC.2005 09:37:35

Peak Excursion Plot on Configuration IEEE 802.11a Turbo / 5250 MHz

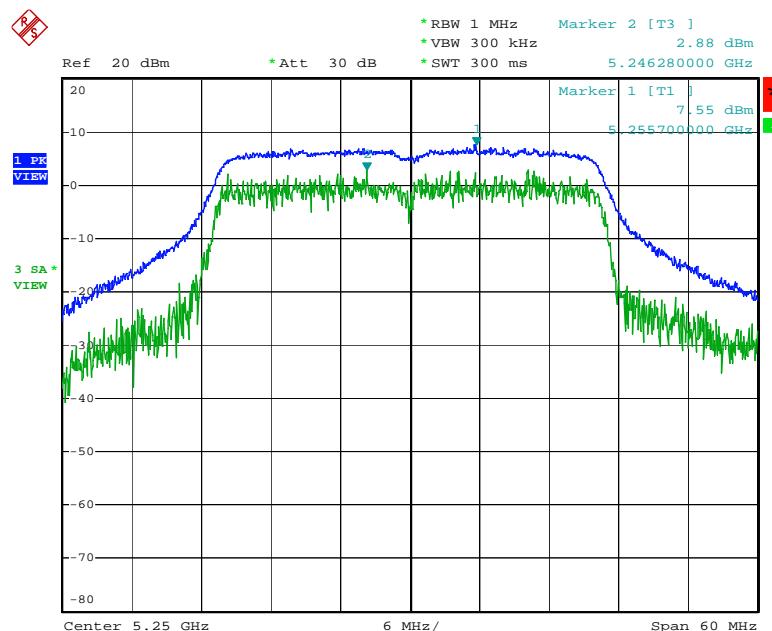

Date: 21.DEC.2005 09:36:36

Peak Excursion Plot on Configuration IEEE 802.11a Turbo / 5290 MHz

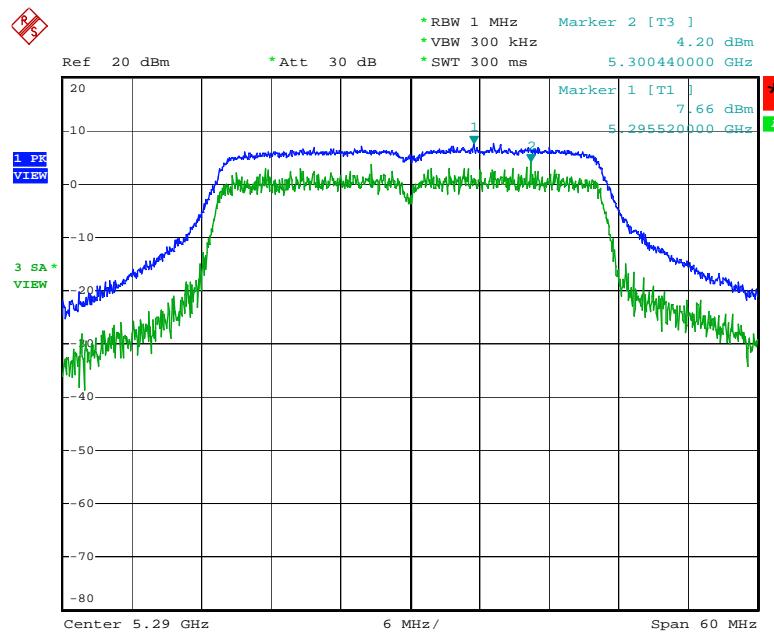

Date: 21.DEC.2005 09:35:08

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, in case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

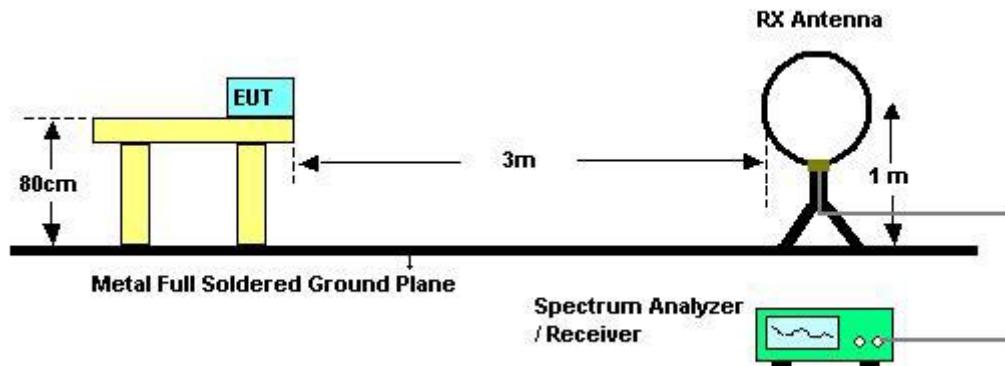

For radiated emissions above 30MHz

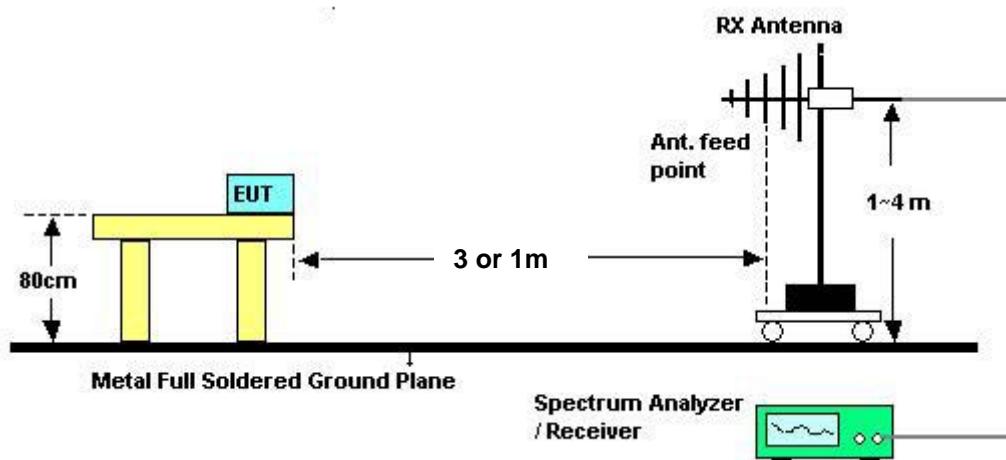

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 64

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.




4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	20	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 64

Horizontal

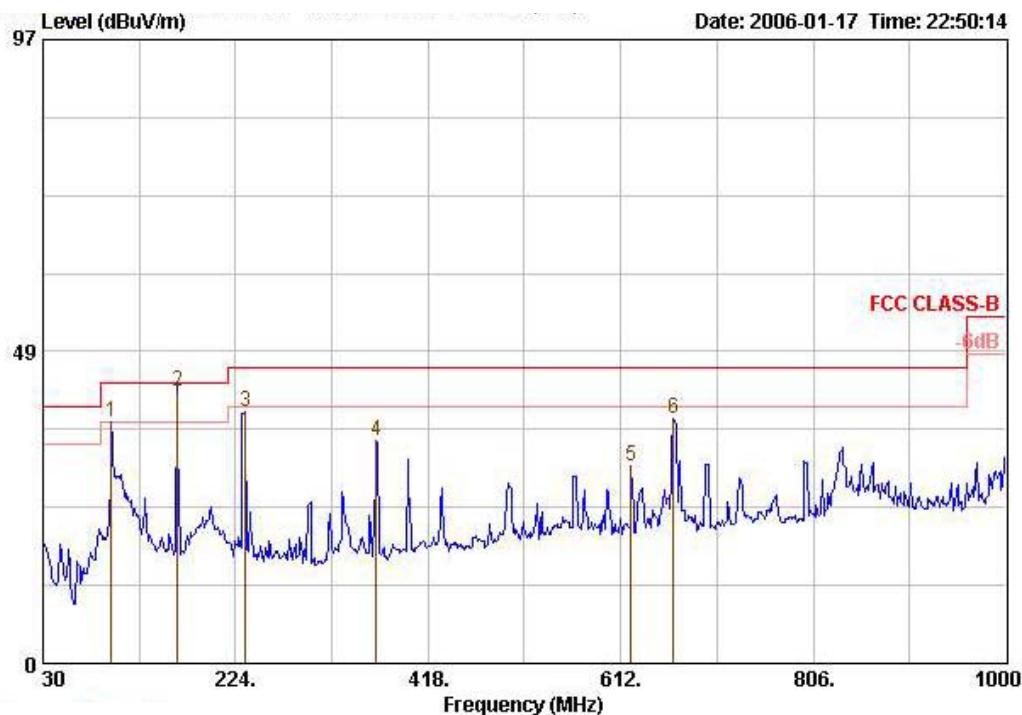

	Freq	Level	Over Limit	Antenna Line Factor	Cable		Read Level	Remark	Ant Pos	Table Pos
					Loss	Preamp Factor				
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	98.870	37.42	-6.08	43.50	10.35	0.80	30.10	56.36 Peak	---	---
2 !	165.200	42.16	-1.34	43.50	9.35	1.02	30.19	61.98 QP	---	---
3	233.700	39.05	-6.95	46.00	10.26	1.21	30.07	57.65 Peak	---	---
4	365.620	34.53	-11.47	46.00	14.83	1.51	30.55	48.75 Peak	---	---
5	622.670	30.63	-15.37	46.00	18.73	1.97	30.63	40.56 Peak	---	---
6	665.350	38.15	-7.85	46.00	18.91	2.06	30.35	47.54 Peak	---	---

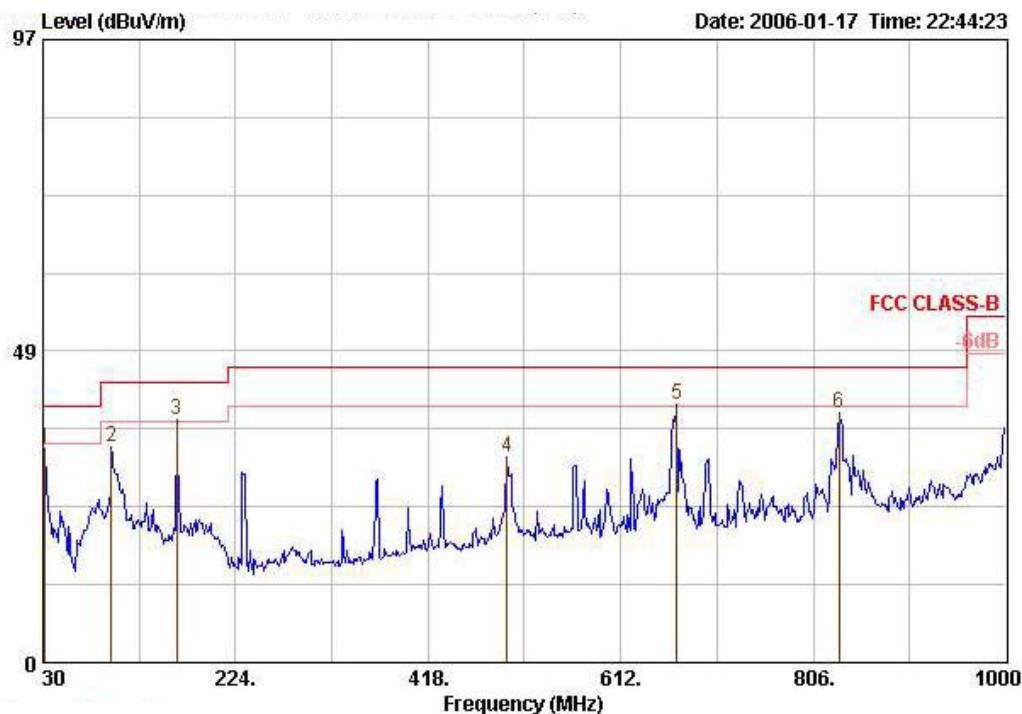Vertical


Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table		
		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	Pos	Pos
1	31.940	33.42	-6.58	40.00	17.00	0.48	29.79	45.72	Peak	---	---
2	98.870	33.60	-9.90	43.50	10.35	0.80	30.10	52.54	Peak	---	---
3 !	164.830	37.89	-5.61	43.50	9.35	1.02	30.19	57.70	Peak	---	---
4	497.540	32.04	-13.96	46.00	17.34	1.77	30.54	43.47	Peak	---	---
5 !	668.260	40.24	-5.76	46.00	18.91	2.06	30.36	49.62	Peak	---	---
6	832.190	38.90	-7.10	46.00	20.30	2.32	30.01	46.29	Peak	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Channel 36

Horizontal

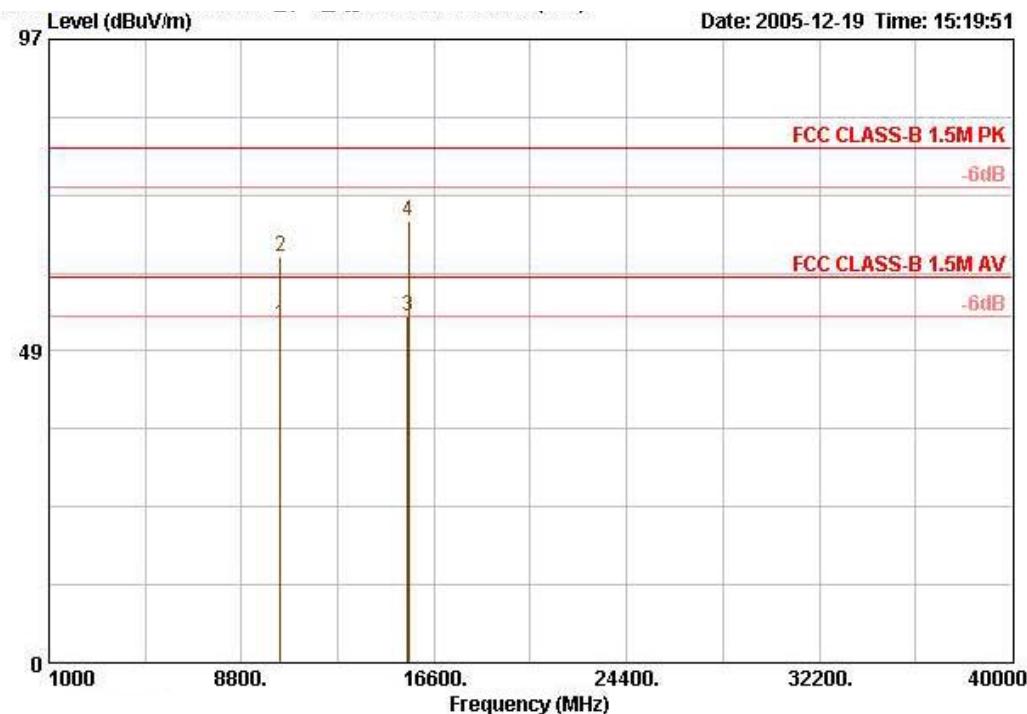

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Ant Table	
							Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm deg
1 @	10360.560	52.70	-7.30	60.00	39.34	5.80	35.55	43.12 AVERAGE 118 209
2	10360.560	63.27	-16.73	80.00	39.34	5.80	35.55	53.69 PEAK 118 209
3 @	15539.040	53.93	-6.07	60.00	38.15	9.26	35.68	42.20 AVERAGE 103 253
4 @	15548.160	68.67	-11.33	80.00	38.13	9.26	35.67	56.96 PEAK 103 253


Vertical

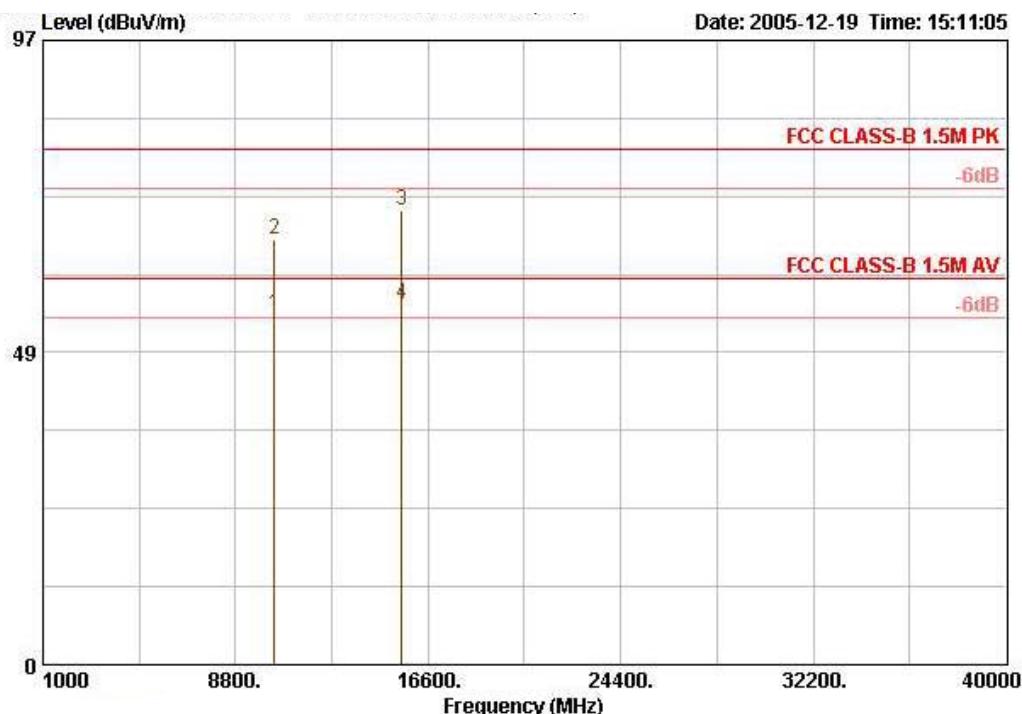


Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant Pos	Table Pos
		Line	Factor	Loss	Factor	Level	Remark		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	10359.720	54.51	-5.49	60.00	39.34	5.80	35.55	44.92 AVERAGE	101 265
2 @	10359.720	65.96	-14.04	80.00	39.34	5.80	35.55	56.37 PEAK	101 265
3 @	15540.040	70.60	-9.40	80.00	38.15	9.26	35.68	58.88 PEAK	100 261
4 @	15541.880	55.91	-4.09	60.00	38.15	9.26	35.68	44.19 AVERAGE	100 261

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Channel 52

Horizontal

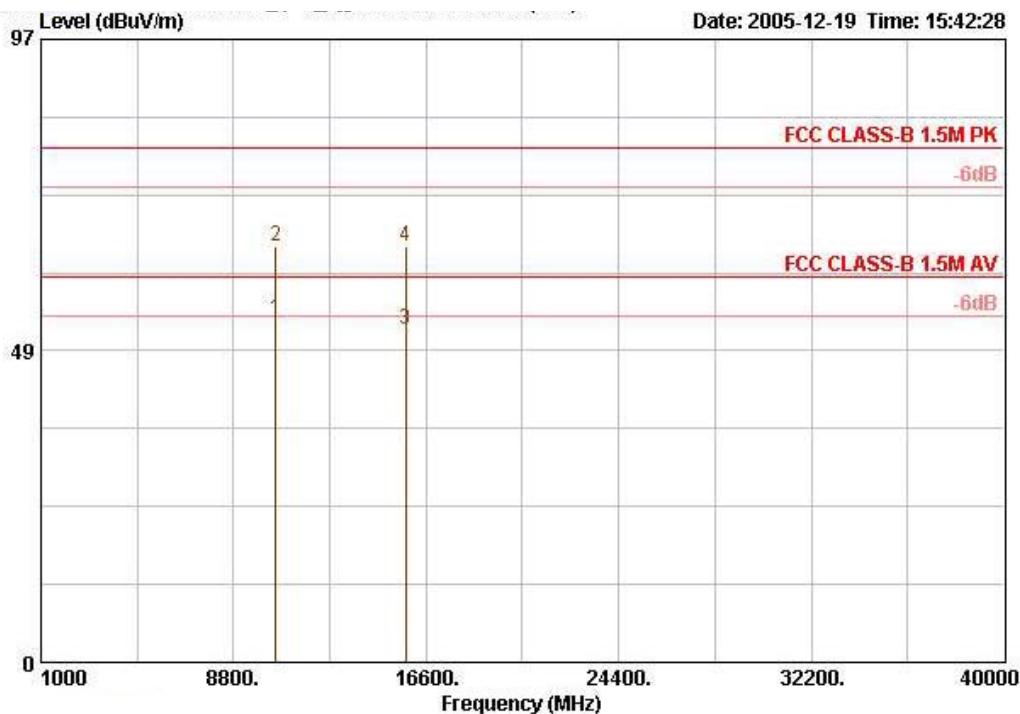


Freq	Level	Over Limit	Antenna Line Factor	Cable Preamp		Read Level		Ant Pos	Table Pos
				dB	dB/m	dB	dBuV		
1 @	10520.840	53.32	-6.68	60.00	39.49	5.93	35.40	43.30	AVERAGE
2 @	10520.840	64.71	-15.29	80.00	39.49	5.93	35.40	54.69	PEAK
3 @	15779.880	51.85	-8.15	60.00	37.81	9.45	35.53	40.11	AVERAGE
4 @	15779.880	64.80	-15.20	80.00	37.81	9.45	35.53	53.06	PEAK

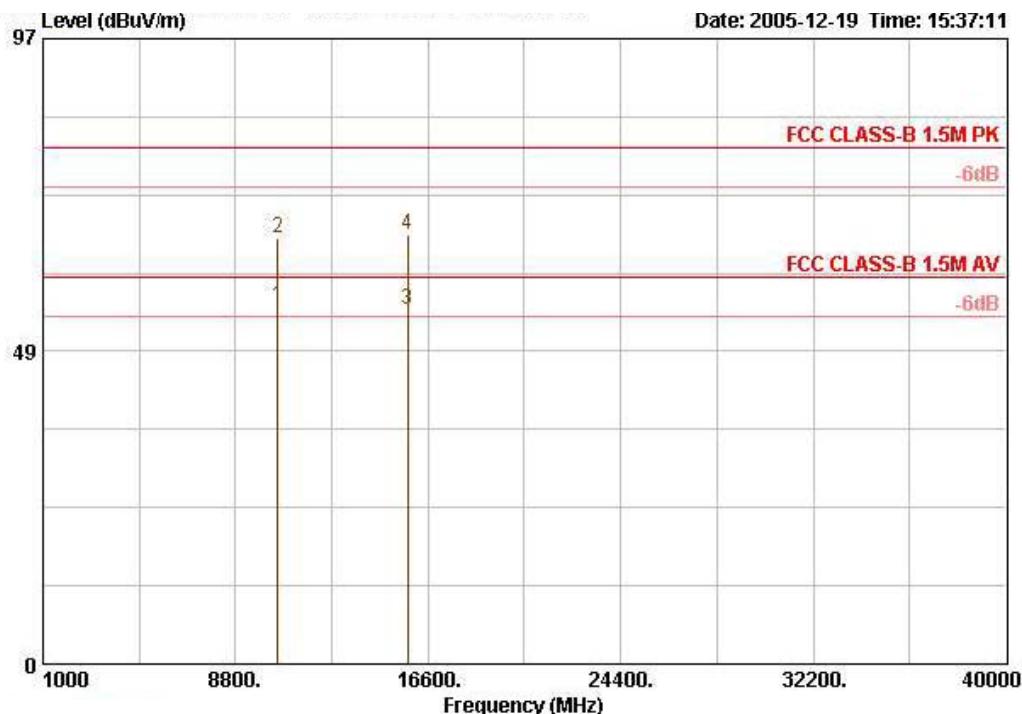Vertical


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level			Ant Pos	Table Pos	
							MHz	dBuV/m	dB	dBuV/m	dB/m
1 @	10520.880	55.39	-4.61	60.00	39.49	5.93	35.40	45.37	AVERAGE	108	254
2 @	10520.880	66.06	-13.94	80.00	39.49	5.93	35.40	56.03	PEAK	108	254
3 @	15779.780	55.03	-4.97	60.00	37.81	9.45	35.53	43.29	AVERAGE	100	298
4 @	15779.780	66.72	-13.28	80.00	37.81	9.45	35.53	54.98	PEAK	100	298


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Channel 64

Horizontal

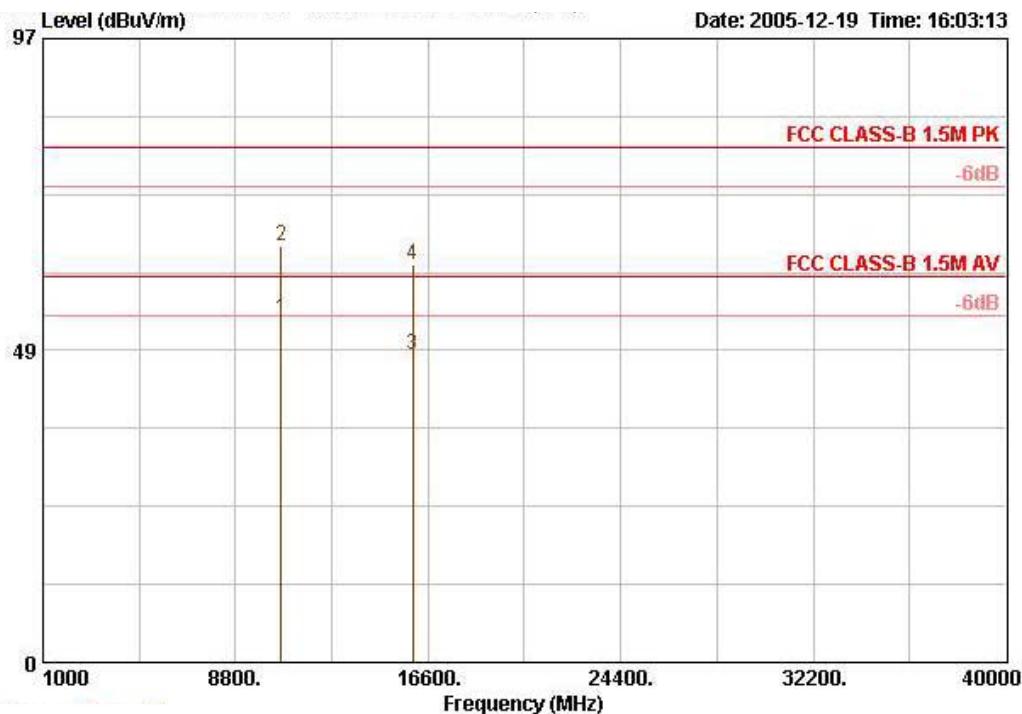

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level		Ant Pos	Table Pos
						dB	dBuV/m		
						MHz	dBuV/m	dB	dBuV/m
1	10640.800	53.32	-6.68	60.00	39.42	6.03	35.32	43.19	AVERAGE
2	10640.800	64.72	-15.28	80.00	39.42	6.03	35.32	54.59	PEAK
3	15961.040	47.87	-12.13	60.00	37.55	9.62	35.42	36.12	AVERAGE
4	15961.040	61.95	-18.05	80.00	37.55	9.62	35.42	50.20	PEAK


Vertical

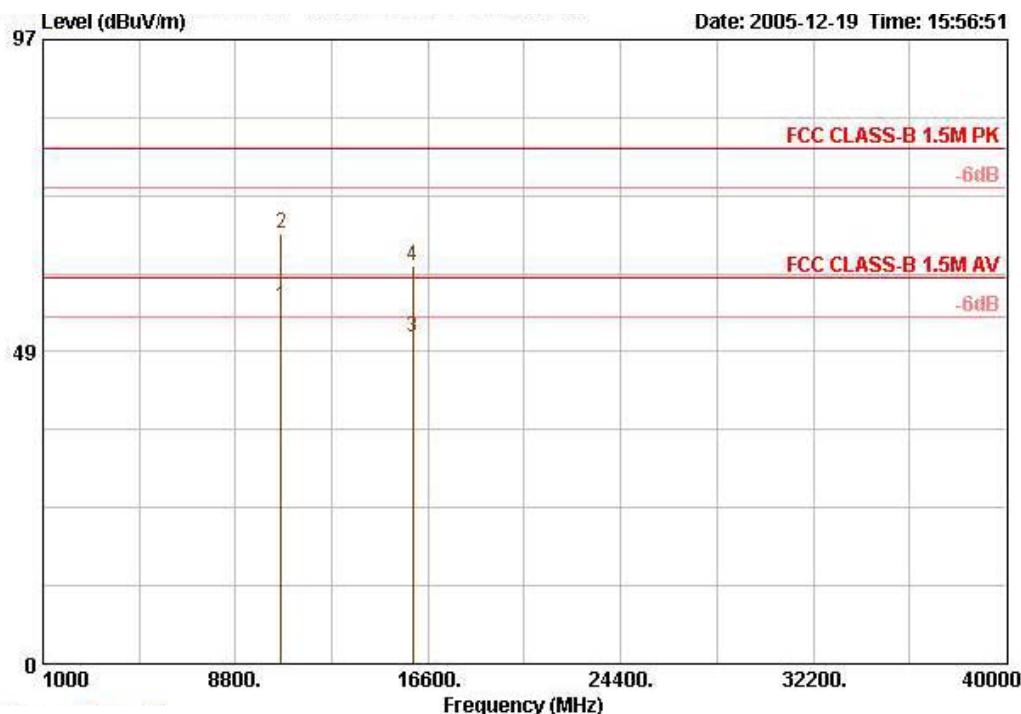


Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant Pos	Table Pos
		Line	Factor	Loss	Factor	Level	Remark		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 !	10639.360	55.49	-4.51	60.00	39.42	6.03	35.32	45.36 AVERAGE	109 253
2	10639.360	66.82	-13.18	80.00	39.42	6.03	35.32	56.69 PEAK	109 253
3	15961.040	50.75	-9.25	60.00	37.55	9.62	35.42	39.01 AVERAGE	103 268
4	15961.040	61.87	-18.13	80.00	37.55	9.62	35.42	50.12 PEAK	103 268

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 42

Horizontal

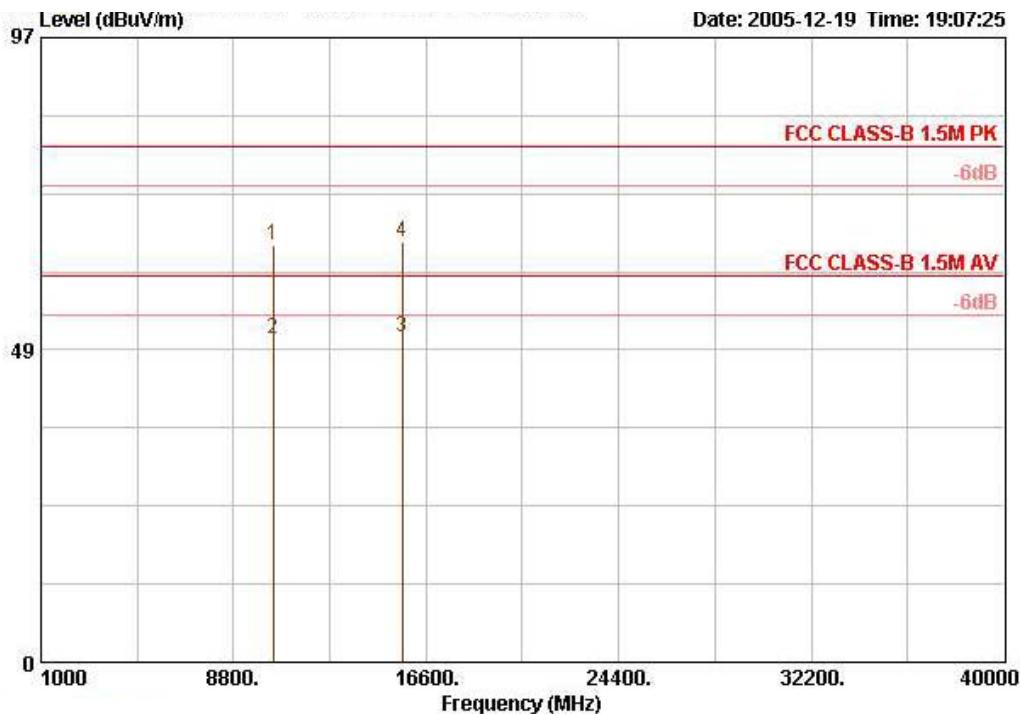


Freq	Level	Over Limit	Antenna Line Factor	Cable Preamp		Read Level		Ant Pos	Table Pos		
				MHz	dBuV/m	dB	dBuV/m	dB	dBuV	cm	deg
1	10421.760	64.70	-15.30	80.00	39.40	5.86	35.50	54.94	PEAK	119	247
2	10422.680	50.16	-9.84	60.00	39.40	5.86	35.48	40.37	AVERAGE	119	247
3	15625.500	50.58	-9.42	60.00	38.03	9.32	35.62	38.84	AVERAGE	114	214
4	15636.200	65.18	-14.82	80.00	38.01	9.32	35.62	53.47	PEAK	114	214

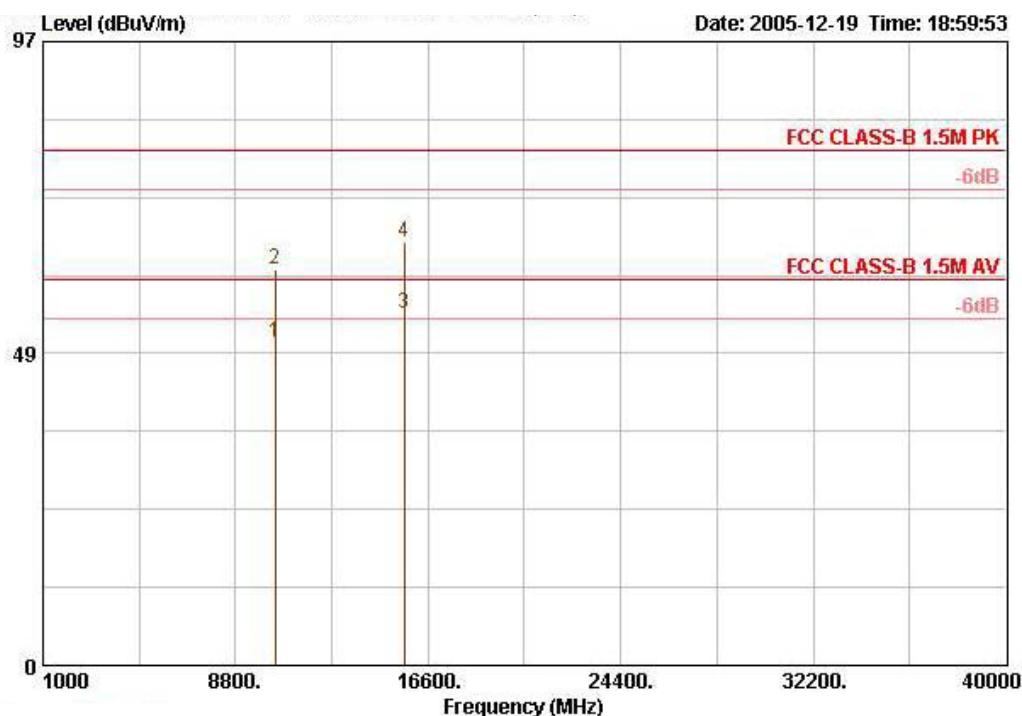Vertical


Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Line	Factor	dB/m	dB	dB	dBuV		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	10422.600	50.19	-9.81	60.00	39.40	5.86	35.48	40.41	AVERAGE
2	10422.600	61.65	-18.35	80.00	39.40	5.86	35.48	51.86	PEAK
3 !	15628.400	54.60	-5.40	60.00	38.03	9.32	35.62	42.87	AVERAGE
4	15628.400	65.75	-14.25	80.00	38.03	9.32	35.62	54.01	PEAK


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 50

Horizontal

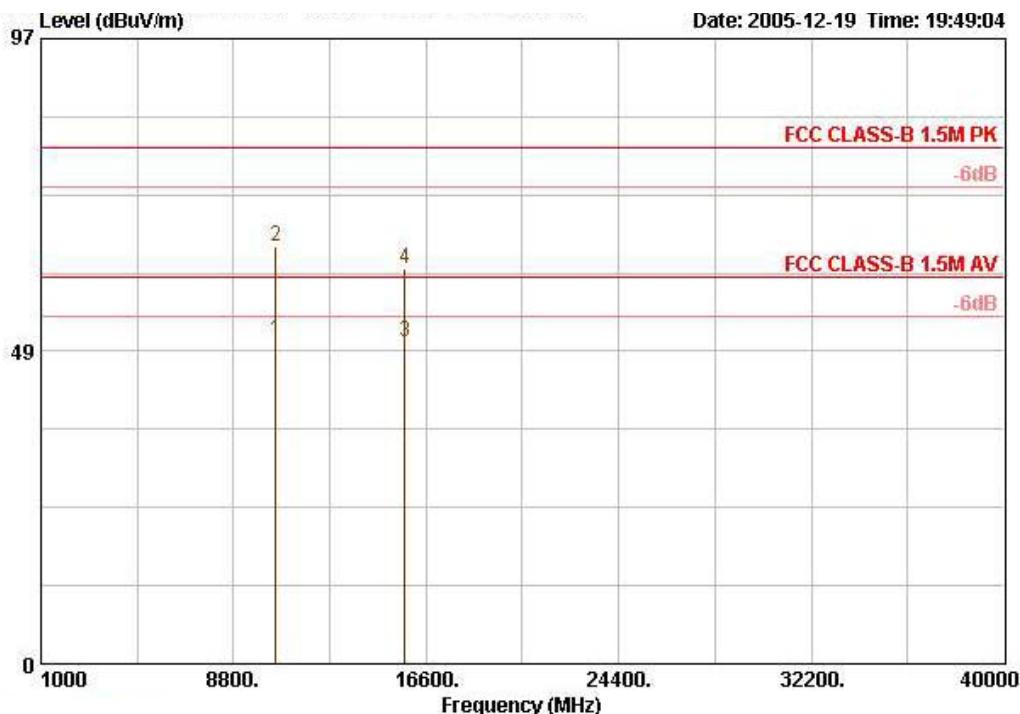


Freq	Level	Over Limit	Antenna Line Factor	Cable Preamp		Read Level	Remark	Ant Pos	Table Pos		
				MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	
1	10497.900	50.34	-9.66	60.00	39.50	5.93	35.43	40.34	AVERAGE	119	207
2	10502.200	64.85	-15.15	80.00	39.50	5.93	35.40	54.82	PEAK	119	207
3	15750.560	50.00	-10.00	60.00	37.84	9.42	35.56	38.30	AVERAGE	120	231
4	15750.560	61.24	-18.76	80.00	37.84	9.42	35.56	49.54	PEAK	120	231

Vertical

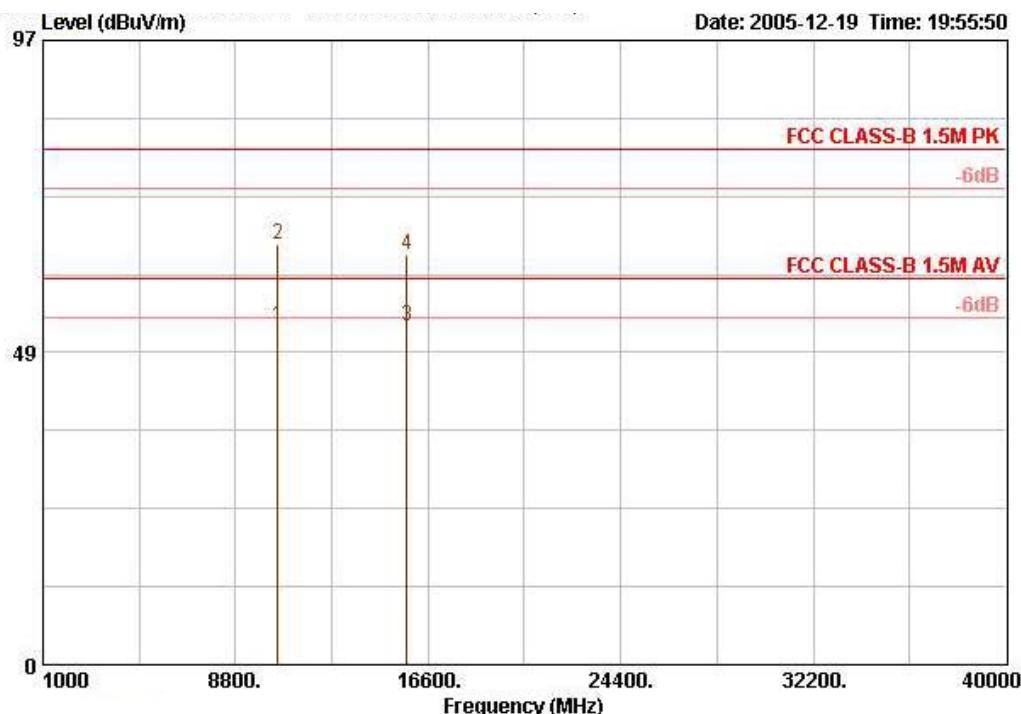


Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant Pos	Table Pos
		Line	Factor	Line	Loss	Factor	Level		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	10500.900	52.66	-7.34	60.00	39.50	5.93	35.40	42.63	AVERAGE
2	10500.900	65.37	-14.63	80.00	39.50	5.93	35.40	55.34	PEAK
3	15750.500	52.67	-7.33	60.00	37.84	9.42	35.56	40.97	AVERAGE
4	15750.500	63.74	-16.26	80.00	37.84	9.42	35.56	52.04	PEAK

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 58

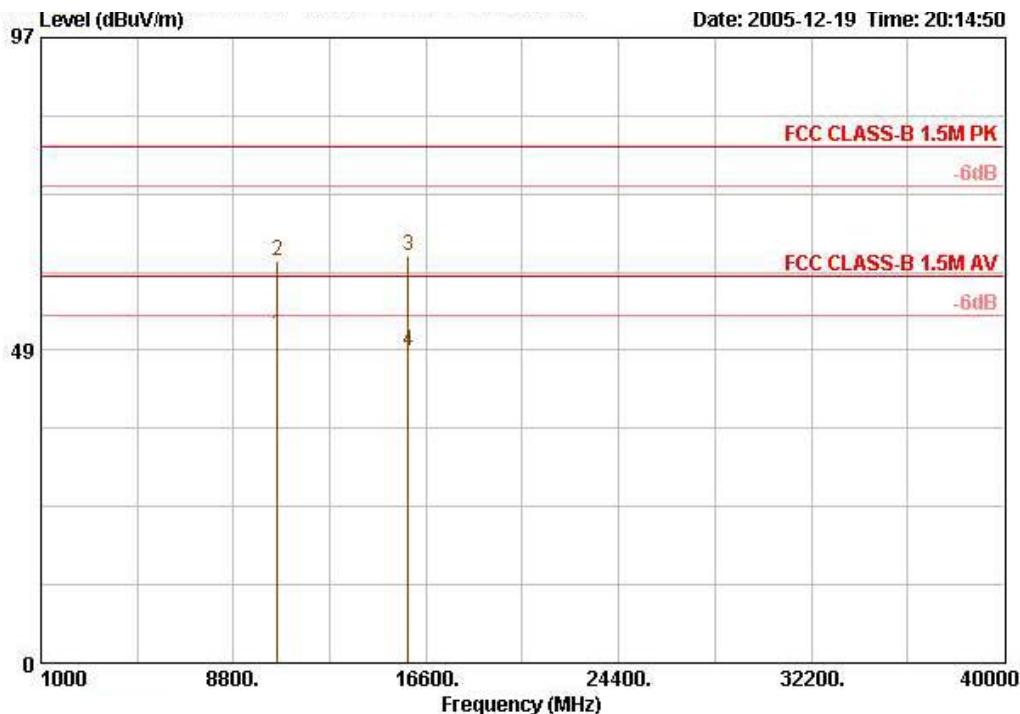Horizontal


Freq	Level	Over Limit	Antenna Line Factor	Cable Preamp		Read		Ant Pos	Table Pos
				dB	dB/m	dB	dBuV		
1	10577.900	50.90	-9.10	60.00	39.46	6.00	35.35	40.79	AVERAGE
2	10577.900	62.46	-17.54	80.00	39.46	6.00	35.35	52.36	PEAK
3	15859.000	63.10	-16.90	80.00	37.69	9.52	35.48	51.37	PEAK
4	15864.000	48.40	-11.60	60.00	37.69	9.52	35.48	36.67	AVERAGE

Vertical

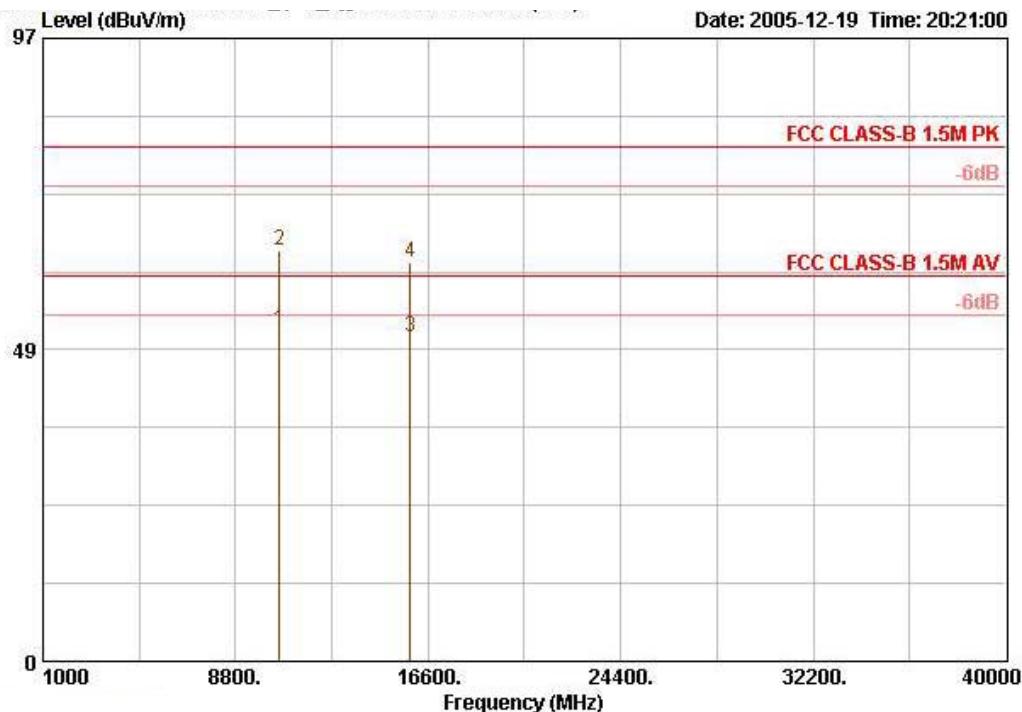

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Line	Factor	Loss	Factor	Level	Remark		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	10581.880	51.51	-8.49	60.00	39.45	6.00	35.35	41.41	AVERAGE
2	10581.880	63.94	-16.06	80.00	39.45	6.00	35.35	53.85	PEAK
3	15865.880	50.55	-9.45	60.00	37.69	9.52	35.48	38.82	AVERAGE
4	15865.880	62.18	-17.82	80.00	37.69	9.52	35.48	50.45	PEAK

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = 20 log (specific distanc [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, in case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	1 MHz /1 MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge Emissions

For Emission in Restricted Band

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Channel 36, 64

Channel 36

Freq	Level	Over Limit	Antenna Line Factor	Cable Preamp		Read Level	Remark	Ant Pos	Table Pos		
				MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV
1 @	5150.000	68.52	-11.48	80.00	33.84	4.88	0.00	29.80	PEAK	104	278
2 @	5150.000	56.77	-3.23	60.00	33.84	4.88	0.00	18.06	AVERAGE	104	278

Channel 64

Freq	Level	Over Limit	Antenna Line Factor	Cable Preamp		Read Level	Remark	Ant Pos	Table Pos		
				MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV
3 !	5350.000	77.28	-2.72	80.00	34.16	5.11	0.00	38.01	PEAK	100	82
4 @	5350.000	59.03	-0.97	60.00	34.16	5.11	0.00	19.76	AVERAGE	100	82

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 42, 58

Channel 42

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
			Line	Factor	Loss	Factor	Level	Remark		
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	5150.000	68.80	-11.20	80.00	33.84	4.88	0.00	30.08 PEAK	102	276
2 !	5150.000	56.80	-3.20	60.00	33.84	4.88	0.00	18.08 AVERAGE	102	276

Channel 58

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
			Line	Factor	Loss	Factor	Level	Remark		
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
3	5350.000	73.77	-6.23	80.00	34.16	5.11	0.00	34.50 PEAK	104	82
4 @	5350.000	58.97	-1.03	60.00	34.16	5.11	0.00	19.70 AVERAGE	104	82

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Receiving maximum band edge emissions are Vertical Polarization /Horizontal Polarization.


The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].


For EIRP Emission in Band

Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Channel 36, 64

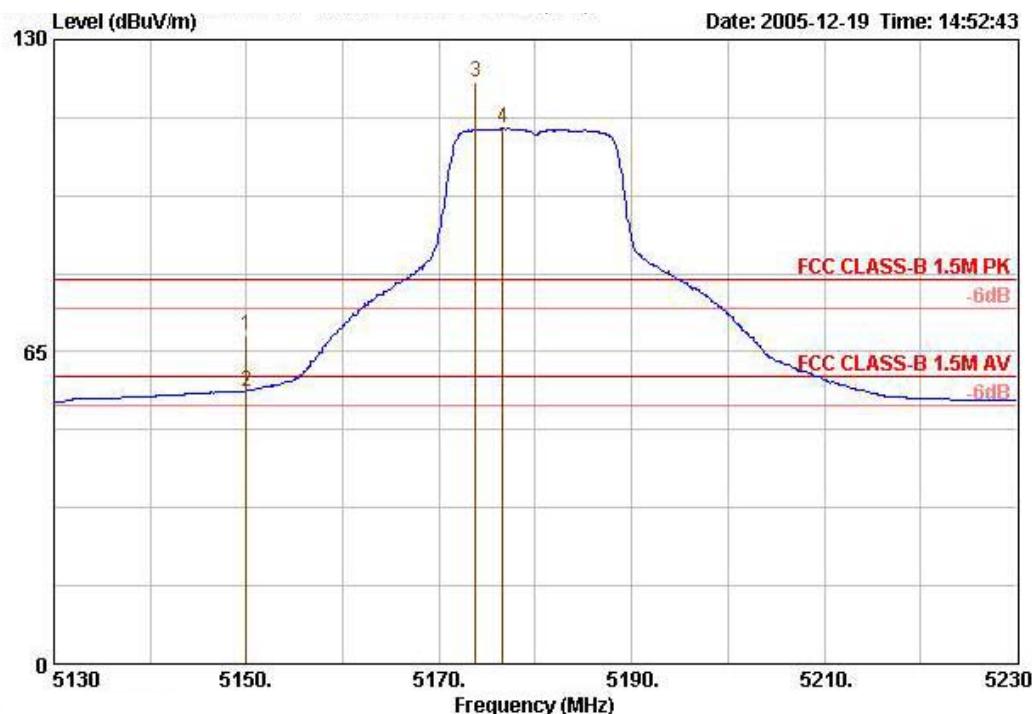Channel 36


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table	
								Pos	Pos	
								cm	deg	
1 @	5150.000	68.52	-11.48	80.00	33.84	4.88	0.00	29.80 PEAK	104	278
2 @	5150.000	56.77	-3.23	60.00	33.84	4.88	0.00	18.06 AVERAGE	104	278


Channel 64

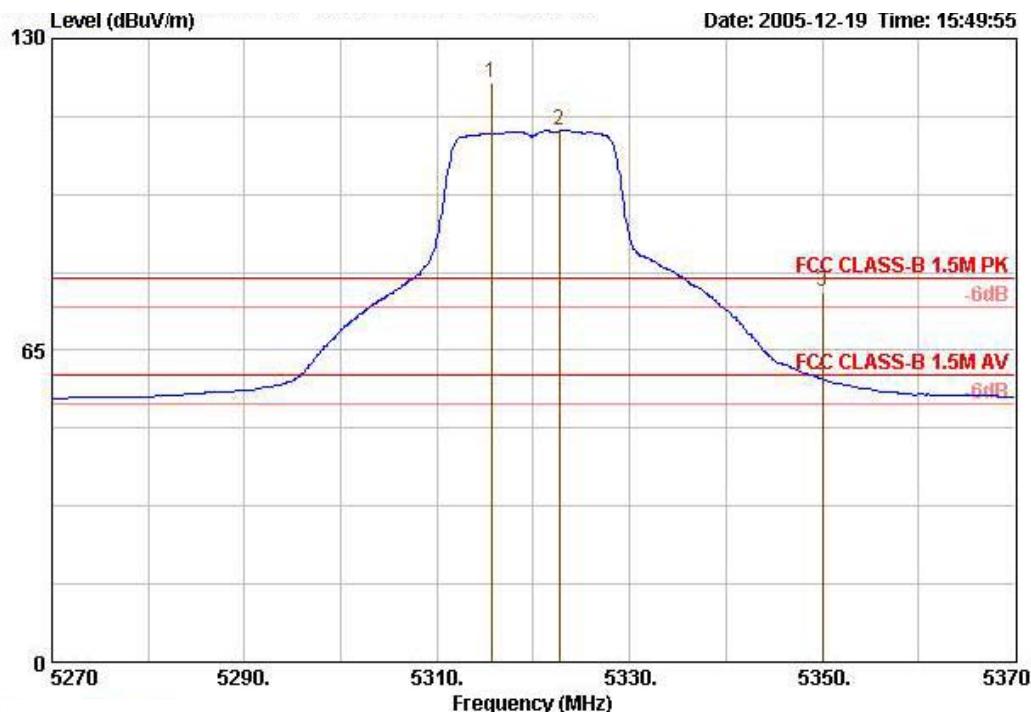

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table	
		Limit	Line Factor	dB/m	dB	dB	Level			
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg	
3 1	5350.000	77.28	-2.72	60.00	34.16	5.11	0.00	38.01 PEAK	100	82
4 @	5350.000	59.03	-0.97	60.00	34.16	5.11	0.00	19.76 AVERAGE	100	82


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 42, 58

Channel 42

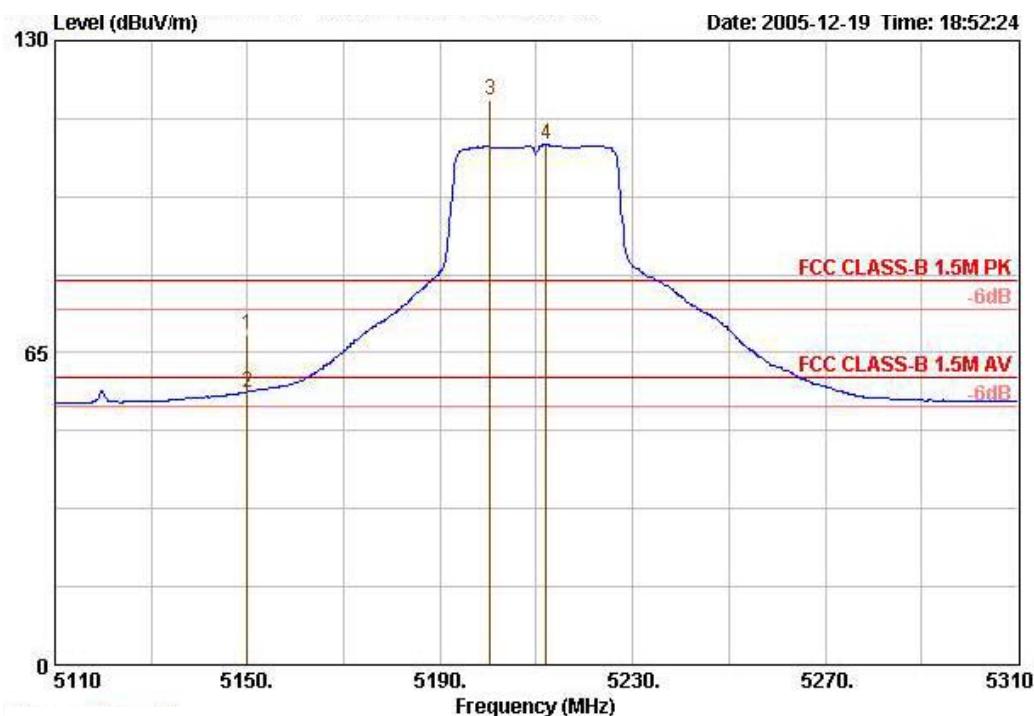

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level		Ant Pos	Table Pos
						dB	dBuV		
5150.000	68.80	-11.20	80.00	33.84	4.88	0.00	30.08 PEAK	102	276
5150.000	56.80	-3.20	60.00	33.84	4.88	0.00	18.08 AVERAGE	102	276

Channel 58

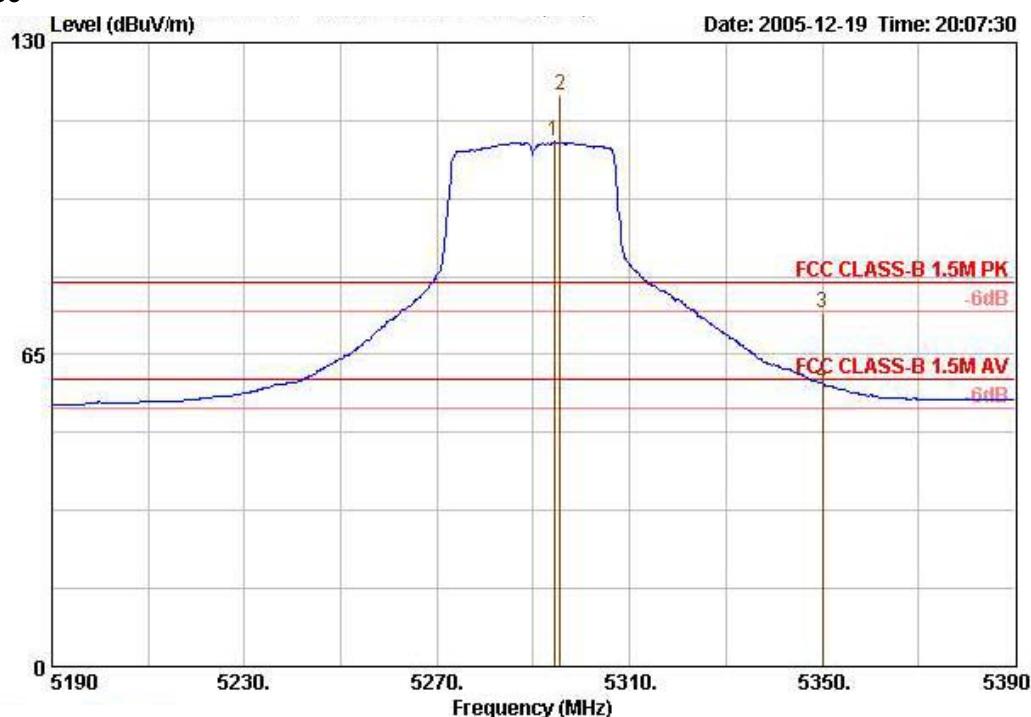

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table		
		Limit	Line Factor	dB/m	dB	dB	Level				
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg		
3	5350.000	73.77	-6.23	80.00	34.16	5.11	0.00	34.50	PEAK	104	82
4 @	5350.000	58.97	-1.03	60.00	34.16	5.11	0.00	19.70	AVERAGE	104	82

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Receiving maximum band edge emissions are Vertical Polarization /Horizontal Polarization.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.


Distance extrapolation factor = 20 log (specific distanc [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

For Field Strength


Temperature	20	Humidity	60%
Test Engineer	Rush Kao	Configurations	802.11a Channel 36, 52, 64, 42, 50, 58

Channel 36

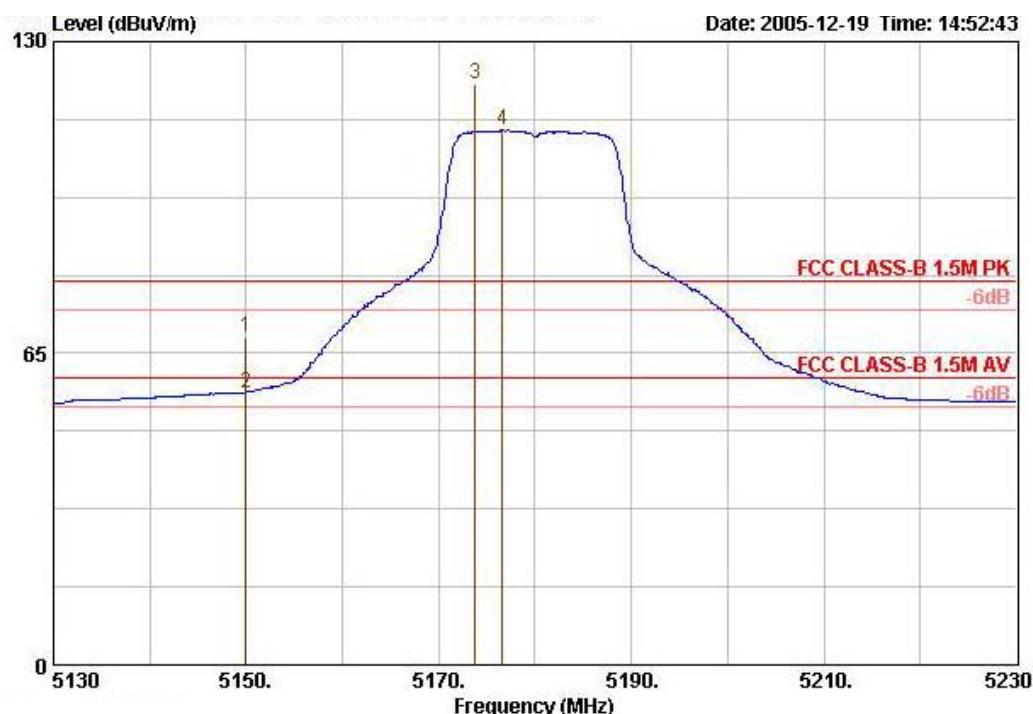


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table
								Pos	Pos
								cm	deg
3 @	5173.800 121.02	41.02	80.00	33.89	4.92	0.00	82.21 PEAK	104	278
4 @	5176.600 111.46	51.46	60.00	33.89	4.92	0.00	72.65 Average	---	---

Channel 52

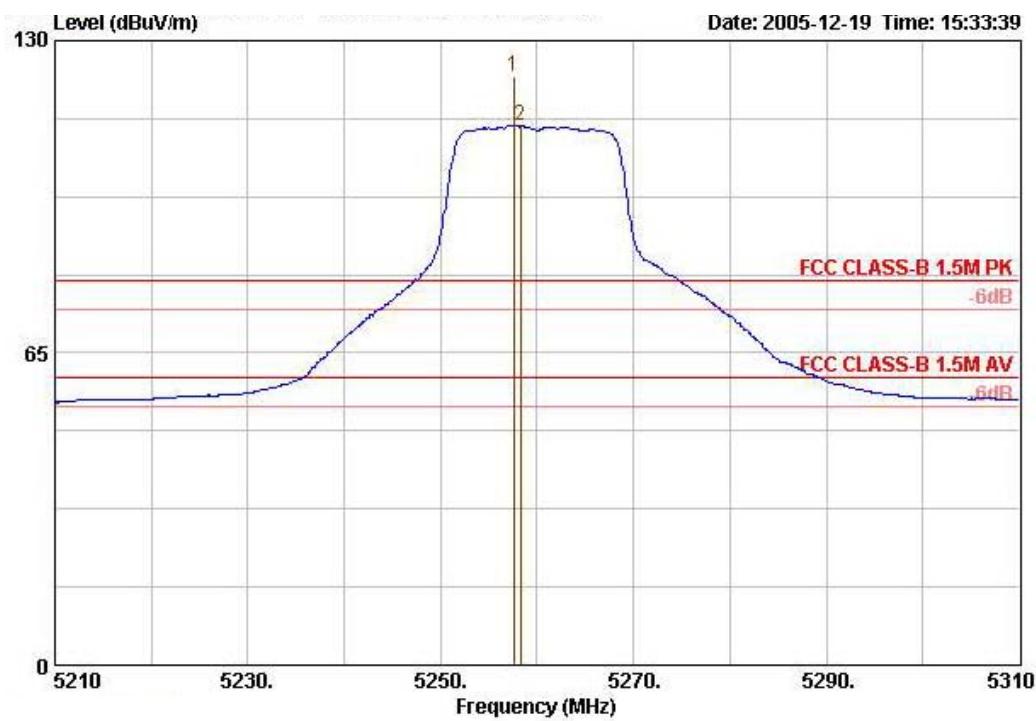


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level			Ant Pos	Table Pos
							dB	dBuV/m		
MHz	dBuV/m			dB	dBuV/m		dB	dB	cm	deg
1 @	5257.600	122.56	42.56	80.00	34.00	5.00	0.00	83.57 PEAK	106	250
2 @	5258.300	112.21	52.21	60.00	34.00	5.00	0.00	73.22 Average	---	---

Channel 64

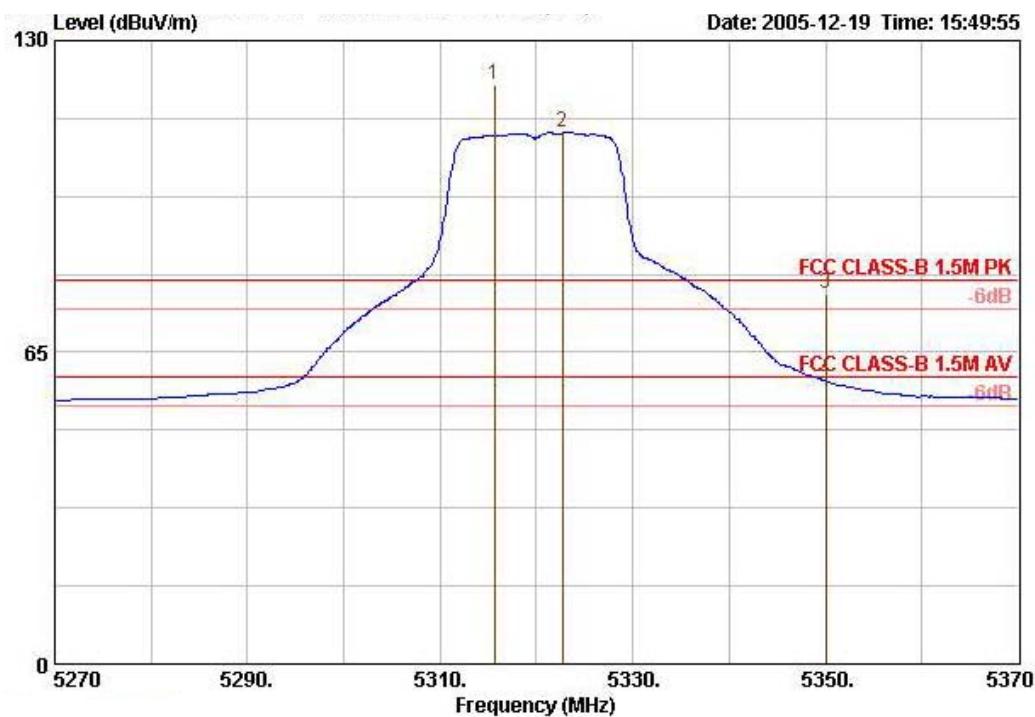


Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Remark	Ant	Table
		Limit	Line	Factor	Loss	Factor	Level		Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm		deg
1 @	5315.600	120.73	40.73	80.00	34.11	5.07	0.00	81.55	PEAK	100
2 @	5322.700	110.82	50.82	60.00	34.11	5.07	0.00	71.64	Average	---

Channel 42

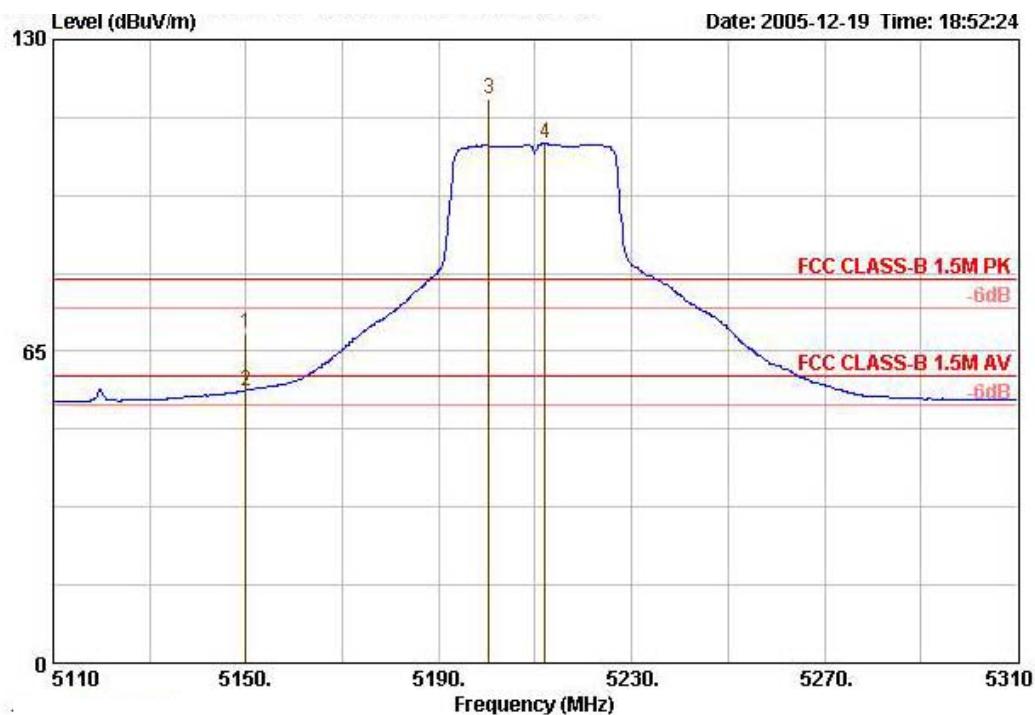


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level			Ant Pos	Table Pos	
							dB	dBuV/m	dB	dBuV	cm
3 @	5200.400	117.77	37.77	80.00	33.92	4.96	0.00	78.90	PEAK	102	276
4 @	5212.000	108.36	48.36	60.00	33.95	4.96	0.00	69.46	Average	---	---

Channel 50

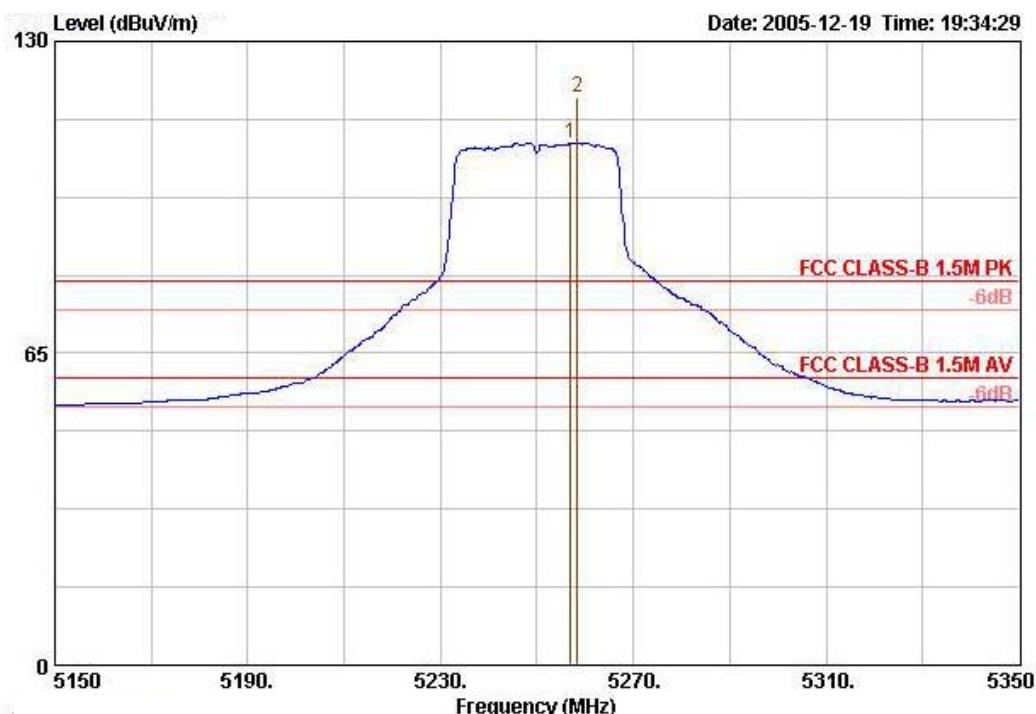

 1
2
3
4
5
6

Freq	Level	Over Limit		Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos	
		MHz	dBuV/m		dB	dBuV/m	dB/m	dB	dBuV	cm	deg
1 @	5257.000	108.87	48.87	60.00	34.00	5.00	0.00	69.88	Average	---	---
2 @	5258.400	118.36	58.36	60.00	34.00	5.00	0.00	79.36	Peak	106	81


Channel 58

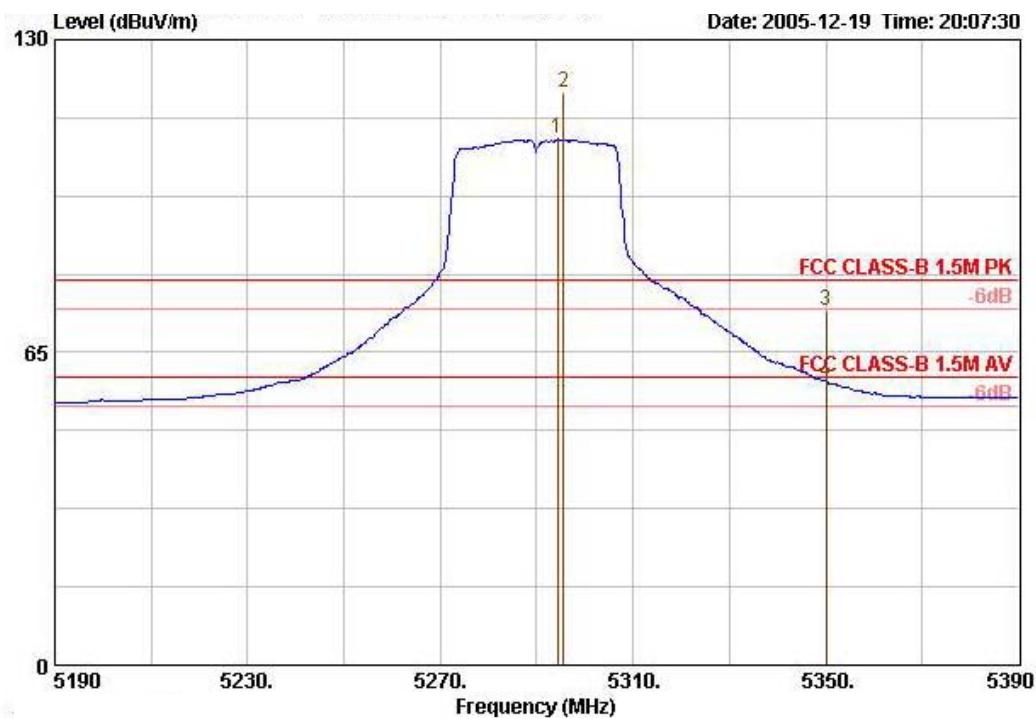


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Ant Table		
							Pos	Pos	
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	5294.400	109.30	49.30	60.00	34.08	5.03	0.00	70.19	Average
2 @	5295.600	119.04	39.04	80.00	34.08	5.03	0.00	79.93	PEAK
								104	82

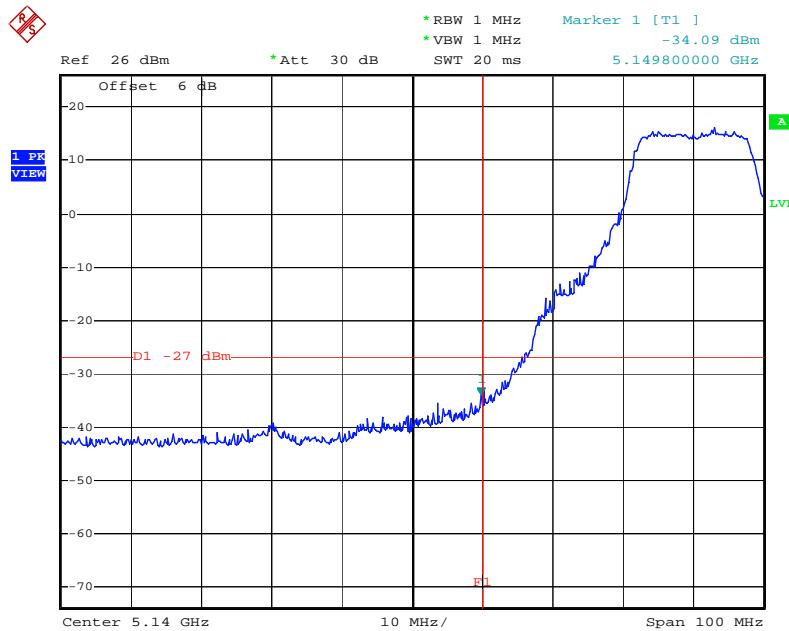EIRP Emission in Band on Configuration IEEE 802.11a / 5180 MHz


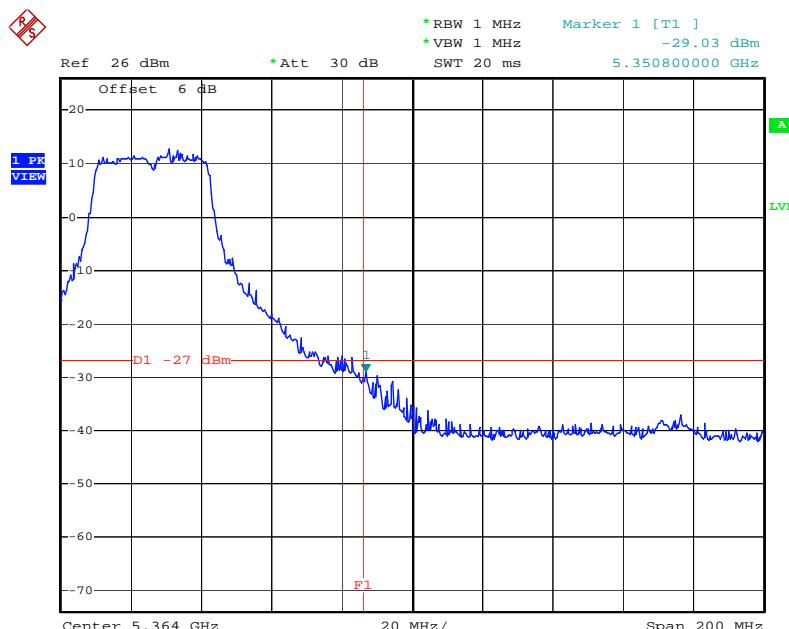
Date: 26.DEC.2005 13:22:18

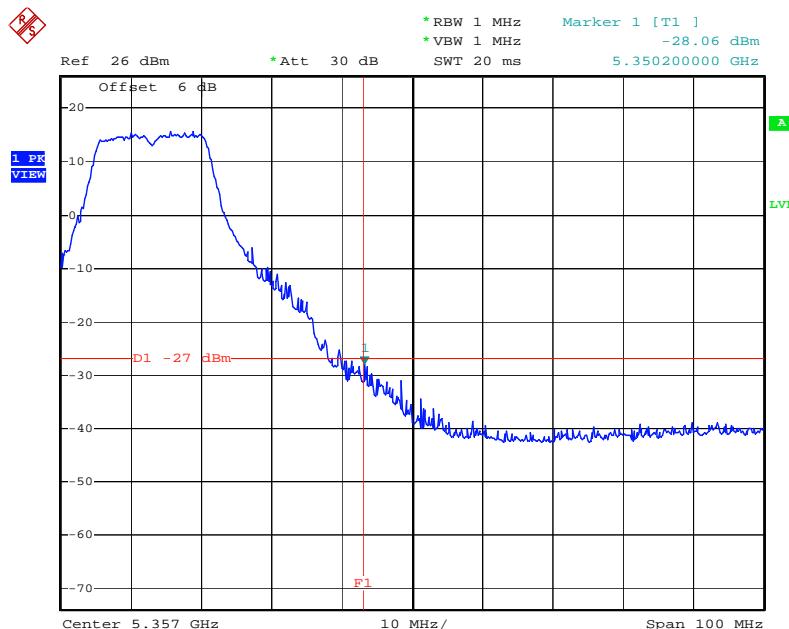EIRP Emission in Band on Configuration IEEE 802.11a / 5320 MHz


Date: 26.DEC.2005 13:25:00

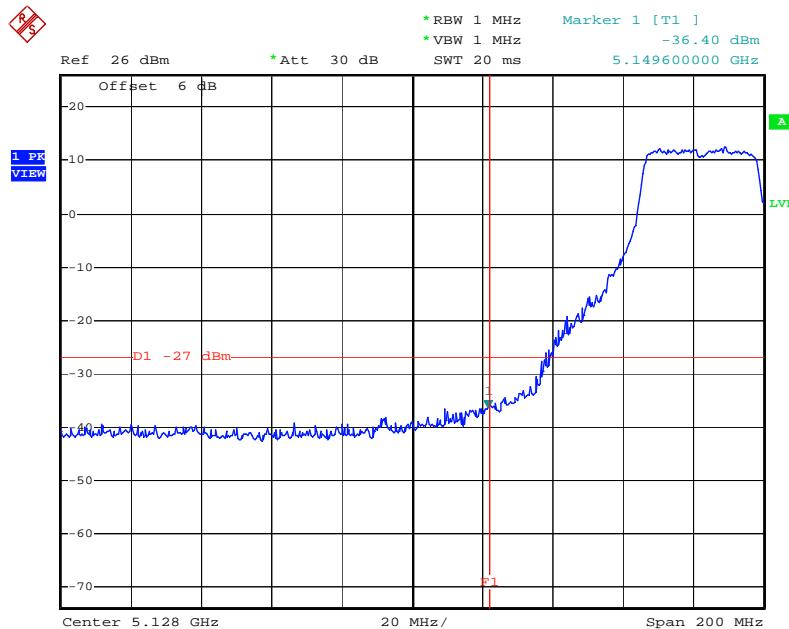EIRP Emission in Band on Configuration IEEE 802.11a Turbo / 5210 MHz


Date: 26.DEC.2005 13:27:40

EIRP Emission in Band on Configuration IEEE 802.11a Turbo / 5290 MHz


Date: 26.DEC.2005 13:26:55

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11a specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c-f)/f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11a specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

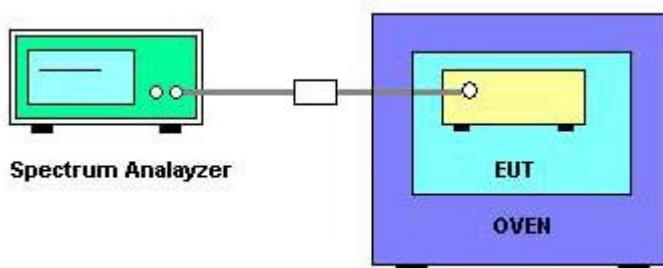

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260
126.50	5260.0112
110.00	5260.0142
93.50	5260.0136
Max. Deviation (MHz)	0.0142
Max. Deviation (ppm)	2.7017

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
()	5260
-30	5260.0475
-20	5260.0533
-10	5260.0572
0	5260.0456
10	5260.0325
20	5260.0192
30	5260.0161
40	5260.0074
50	5260.0110
Max. Deviation (MHz)	0.0572
Max. Deviation (ppm)	10.8745

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

4.9.2. Antenna Connector Construction

Please refer to section 3.2 in this test report, all antenna connectors comply with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 16, 2005	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Dec. 15, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz – 30MHz	Mar. 14, 2005	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2005	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 16, 2005	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	18667	9 kHz - 2 GHz	Jan. 10, 2005	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 31, 2005	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30 MHz - 200 MHz	Jul. 22, 2005	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200 MHz - 1 GHz	Jul. 22, 2005	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1 GHz - 18 GHz	Apr. 22, 2005	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Feb. 22, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.01, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100116	9kHz ~ 40GHz	Jan. 28, 2005	Conducted (TH01-HY)
Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Apr. 28, 2005	Conducted (TH01-HY)
AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 01, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 01, 2005	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Apr. 15, 2005	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 05, 2004*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 24, 2004*	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jun. 09, 2004*	Radiation (03CH03-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 02, 2005	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

6. SPORTON COMPANY PROFILE

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test familial apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufacturers. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

6.1. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. TEL : 03-656-9065 FAX : 03-656-9085

7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200079-0

Sportun International, Inc. Hwa Ya EMC Laboratory


Tao Yuan Hsien 333
TAIWAN

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

2006-01-01 through 2006-12-31

Effective dates



For the National Institute of Standards and Technology