

FCC PART 15.247 TEST REPORT

For

Shenzhen Jingwah Information Technology Co., Ltd.

6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei, Futian District, Shenzhen

FCC ID: RBD-FAMILINK10

Report Type: Original Report	Product Type: Digital Photo Frame
Report Number: RSZ210317001-00A	
Report Date: 2021-04-06	
Reviewed By: RF Engineer	Candy Li 
Prepared By: Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 Http://www.atc-lab.com	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
§1.1307 (B) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	10
APPLICABLE STANDARD	10
RESULT	10
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	13
TRANSD FACTOR & MARGIN CALCULATION	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
FACTOR & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA	22
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	26
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37

TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	50
APPLICABLE STANDARD	50
TEST PROCEDURE	50
TEST DATA	50
FCC §15.247(d) - BAND EDGES TESTING	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	57

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Digital Photo Frame
Trade	FAMILINK
Tested Model	M1018FLK
Multiple Model	Familink AWS 10.1 inches 4G + WiFi Photo Diary
Model Differences	Refer to DOS letter.
Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 0.78dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	FPC Antenna: 1.53dBi(provided by the applicant)
Voltage Range	DC 5V from adapter
Date of Test	2021-03-21 to 2021-03-30
Sample number	RSZ210317001-RF-S1(Assigned by ATC)
Received date	2021-03-15
Sample/EUT Status	Good condition
Adapter information	Model: MKD-0503000H INPUT: 100-240V, 50/60Hz, 0.5A OUTPUT: 5V, 3000mA

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±0.73dB
Unwanted Emission, conducted		±1.6dB
RF Frequency		±0.082*10 ⁻⁷
Emissions, Radiated	30MHz - 1GHz	±4.28dB
	1GHz- 18GHz	±4.98dB
	18GHz- 26.5GHz	±5.06dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

BT test in the engineer mode, the power level is default.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
DC IN	1.5	Adapter	EUT

Block Diagram of Test Setup

For conducted emission:

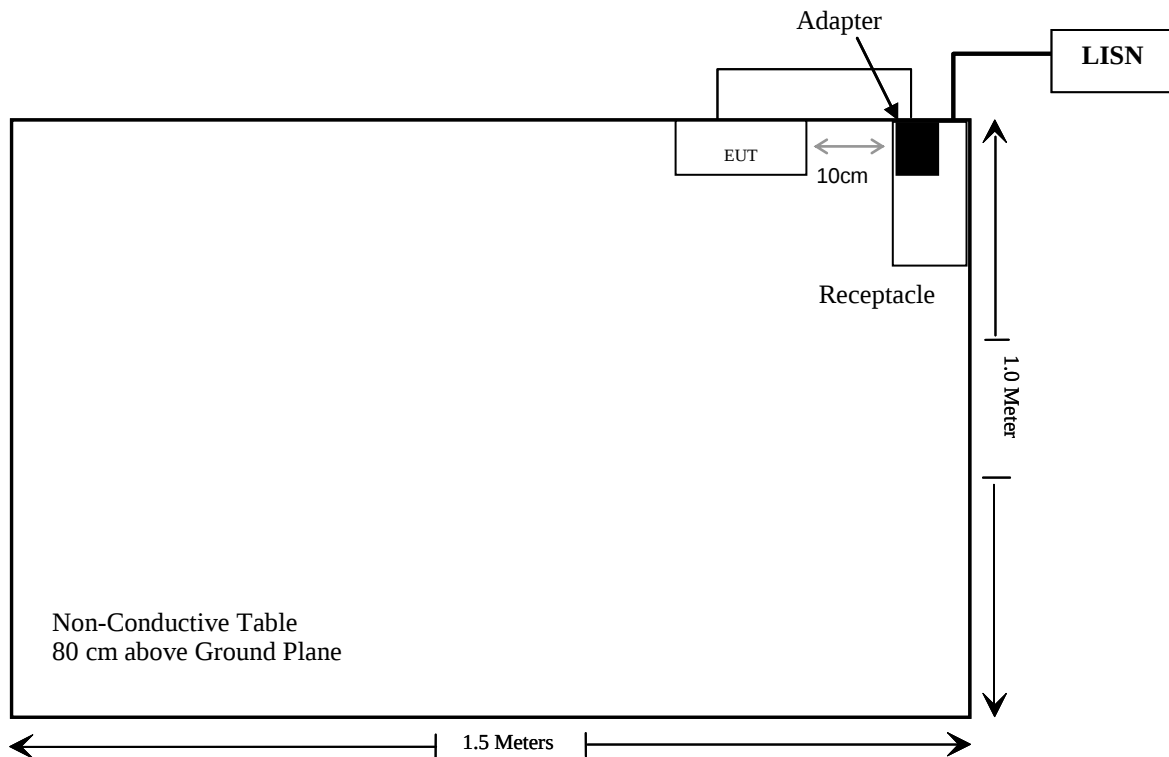

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Radiated Emissions Test					
Rohde&Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2020/07/08	2021/07/07
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/04	2023/01/03
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 +OSP -B157	101244 + 100866	2020/12/24	2021/12/23

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§1.1307 (B) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

For worst case:

Mode	Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BDR/EDR	2402-2480	1.53	1.42	1.0	1.26	20	0.0004	1
BLE	2402-2480	1.53	1.42	4.0	2.51	20	0.0007	1
2.4G Wi-Fi	2412-2462	1.53	1.42	17.0	50.12	20	0.0142	1
5.2G Wi-Fi	5180-5270	2.66	1.85	16.0	39.81	20	0.0146	1
5.8G Wi-Fi	5745-5825	2.66	1.85	10.5	11.22	20	0.0041	1
GSM 850	824-849	0.9	1.23	32	1584.89	20	0.3879	0.55
PCS 1900	1850-1910	2.39	1.73	28.5	707.95	20	0.2442	1
WCDMA B2	1850-1910	2.39	1.73	22	158.49	20	0.0547	1
WCDMA B5	824-849	0.9	1.23	23	199.53	20	0.0488	0.55
LTE B2	1850-1910	2.39	1.73	24	251.19	20	0.0866	1
LTE B4	1710-1755	0.93	1.24	24.5	281.84	20	0.0695	1
LTE B7	2500-2570	1.58	1.44	21.5	141.25	20	0.0404	1
LTE B12	699-716	0.88	1.22	25.5	354.81	20	0.0864	0.47
LTE B13	777-787	0.88	1.22	25.5	354.81	20	0.0784	0.52
LTE B17	704-716	0.88	1.22	25.5	354.81	20	0.0714	0.47
LTE B25	1850-1915	2.39	1.73	24	251.19	20	0.0655	1

Note 1: The tune up conducted power was declared by the applicant.

Note 2: Bluetooth or Wi-Fi function can transmit at the same time with the WWAN.

So the worst simultaneous transmitting consideration:

$$\text{The ratio} = \text{MPE}_{5.2\text{GWi-Fi}}/\text{limit} + \text{MPE}_{\text{GSM 850}}/\text{limit} = 0.0146/1.0 + 0.3879/0.55 = 0.72 < 1.0$$

So simultaneous exposure is not required.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 1.53dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

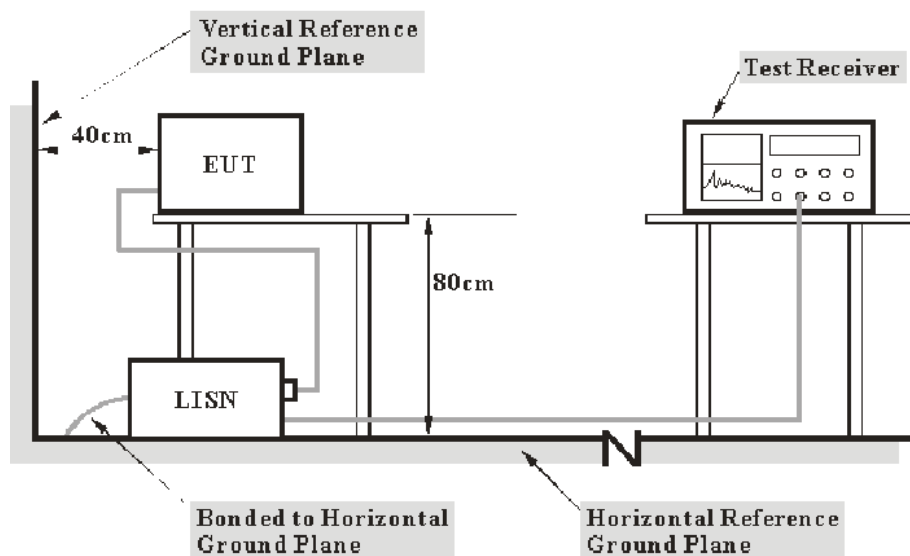

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the device was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Margin} &= \text{Limit} - \text{level} \\ \text{Level} &= \text{reading level} + \text{Transd Factor}\end{aligned}$$


Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-03-21.

EUT operation mode: Transmitting (the worst case is GFSK Mode, Middle channel)

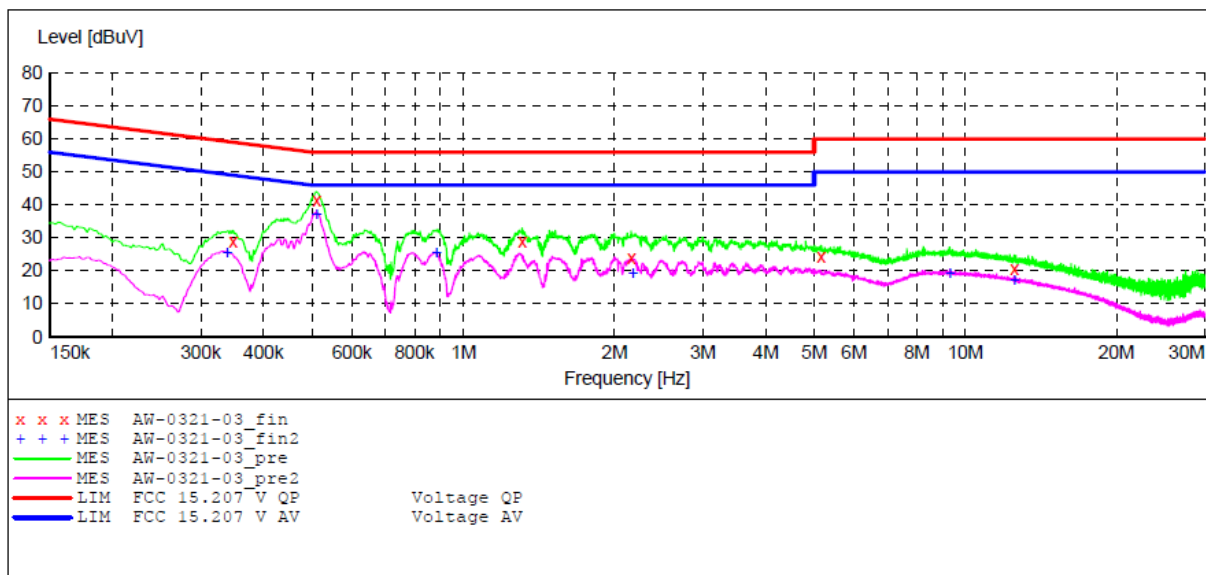AC 120V/60 Hz, Line**MEASUREMENT RESULT: "AW-0321-03_fin"**


2021-3-21 10:46

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.348000	28.70	10.9	59	30.3	QP	L1	GND
0.510000	41.50	11.0	56	14.5	QP	L1	GND
1.310000	29.00	11.2	56	27.0	QP	L1	GND
2.160000	23.80	11.3	56	32.2	QP	L1	GND
5.160000	24.40	11.4	60	35.6	QP	L1	GND
12.525000	20.70	11.6	60	39.3	QP	L1	GND

MEASUREMENT RESULT: "AW-0321-03_fin2"

2021-3-21 10:46

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.338000	25.60	10.9	49	23.4	AV	L1	GND
0.510000	37.30	11.0	46	8.7	AV	L1	GND
0.884000	25.50	11.1	46	20.5	AV	L1	GND
2.175000	19.50	11.3	46	26.5	AV	L1	GND
9.315000	19.30	11.6	50	30.7	AV	L1	GND
12.525000	17.30	11.6	50	32.7	AV	L1	GND

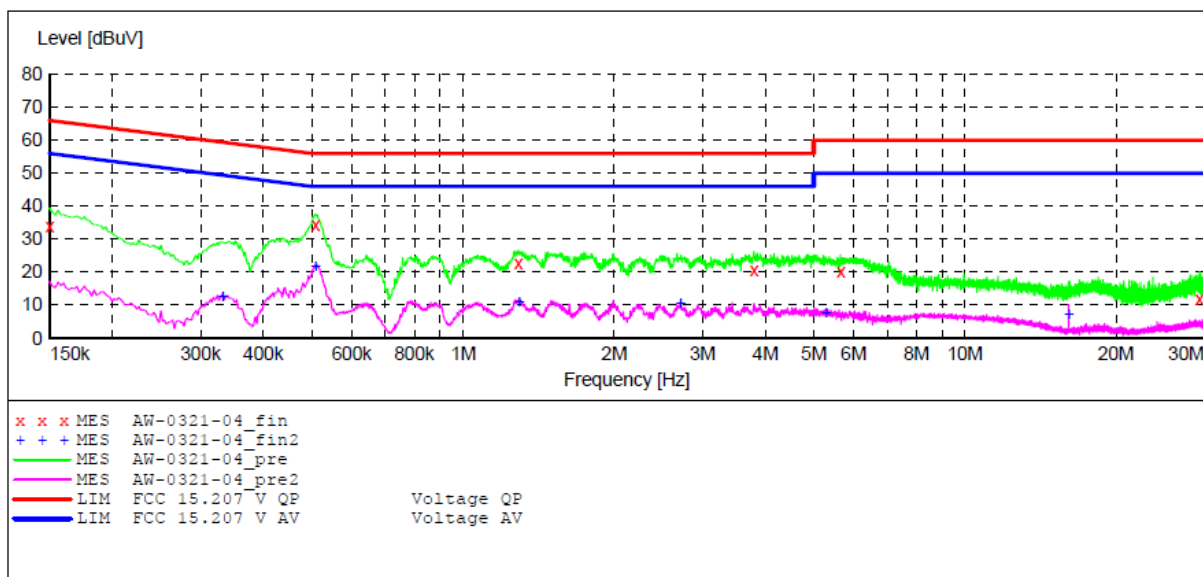AC 120V/60 Hz, Neutral**MEASUREMENT RESULT: "AW-0321-04_fin"**

2021-3-21 10:55

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	34.00	10.8	66	32.0	QP	N	GND
0.508000	34.10	11.0	56	21.9	QP	N	GND
1.288000	22.60	11.2	56	33.4	QP	N	GND
3.800000	20.60	11.4	56	35.4	QP	N	GND
5.655000	20.20	11.5	60	39.8	QP	N	GND
29.355000	12.00	11.8	60	48.0	QP	N	GND

MEASUREMENT RESULT: "AW-0321-04_fin2"

2021-3-21 10:55

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.332000	12.60	10.9	49	36.4	AV	N	GND
0.508000	22.00	11.0	46	24.0	AV	N	GND
1.294000	11.10	11.2	46	34.9	AV	N	GND
2.715000	10.70	11.3	46	35.3	AV	N	GND
5.300000	7.50	11.4	50	42.5	AV	N	GND
16.100000	7.40	11.7	50	42.6	AV	N	GND


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

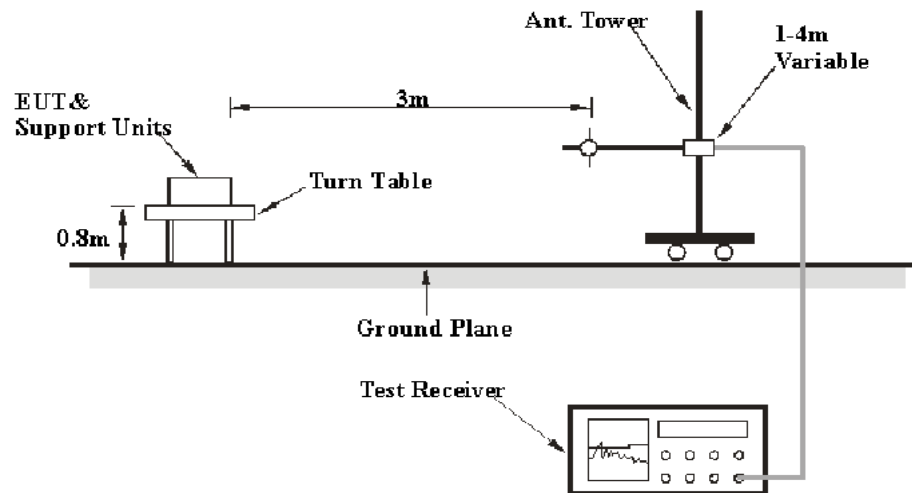

Above 1GHz:

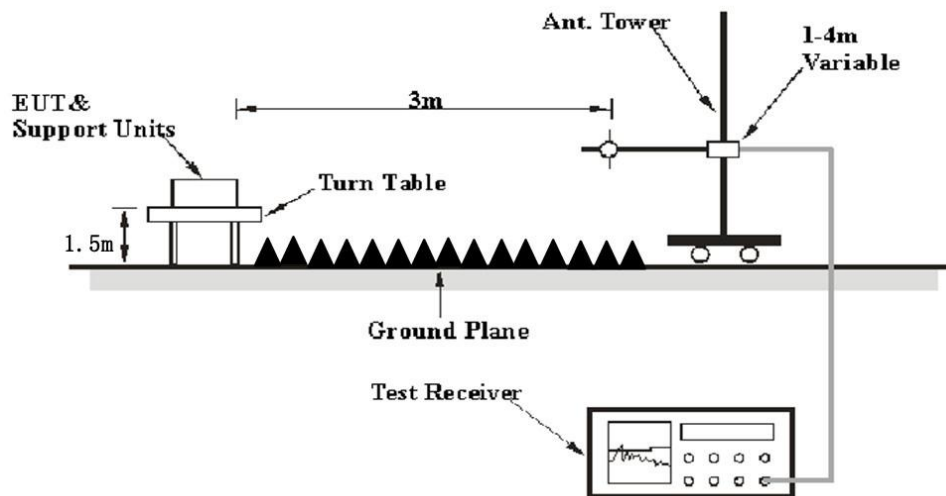

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Result} - \text{Limit} \\ \text{Result} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-03-30.


EUT operation mode: Transmitting

30 MHz~18 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is GFSK Mode)


18~25GHz: The test values lower than the limits of 20dB or in the noise floor level, the test data were not recorded in the report.

**Below 1GHz:
GFSK TX2402MHz (worst case)**

Horizontal

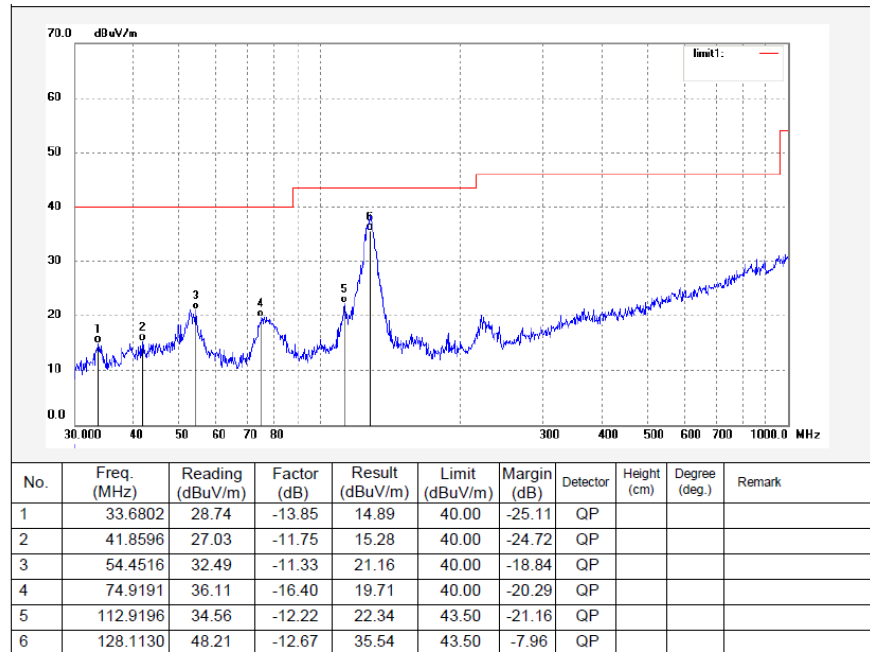

Vertical

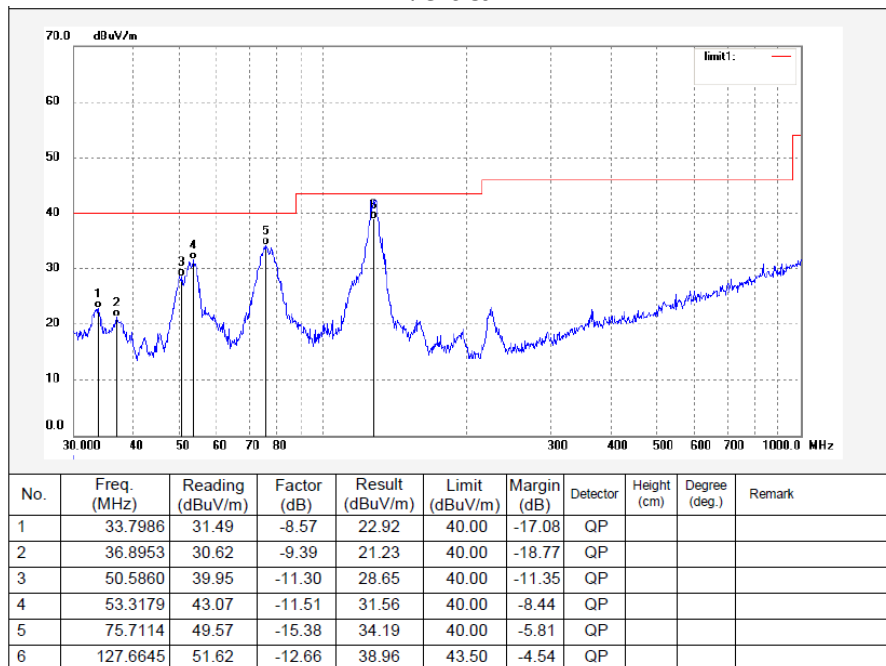

Above 1GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310.00	49.88	PK	58	1.50	H	-6.84	43.04	74.00	30.96
2310.00	49.75	PK	162	1.50	V	-6.84	42.91	74.00	31.09
2390.00	49.67	PK	137	1.60	H	-6.44	43.23	74.00	30.77
2390.00	49.47	PK	245	1.70	V	-6.44	43.03	74.00	30.97
4804.00	42.68	PK	17	1.50	H	2.81	45.49	74.00	28.51
4804.00	42.52	PK	106	1.70	V	2.81	45.33	74.00	28.67
Middle Channel (2441 MHz)									
4882.00	42.59	PK	249	1.50	H	3.04	45.63	74.00	28.37
4882.00	42.44	PK	155	1.60	V	3.04	45.48	74.00	28.52
High Channel (2480 MHz)									
2483.50	50.35	PK	313	1.70	H	-5.96	44.39	74.00	29.61
2483.50	50.59	PK	243	2.10	V	-5.96	44.63	74.00	29.37
2500.00	50.28	PK	54	1.60	H	-5.88	44.40	74.00	29.60
2500.00	50.45	PK	160	1.70	V	-5.88	44.57	74.00	29.43
4960.00	42.43	PK	157	1.50	H	3.29	45.72	74.00	28.28
4960.00	42.64	PK	92	1.60	V	3.29	45.93	74.00	28.07

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak value were recorded.

Pre-scan for Peak

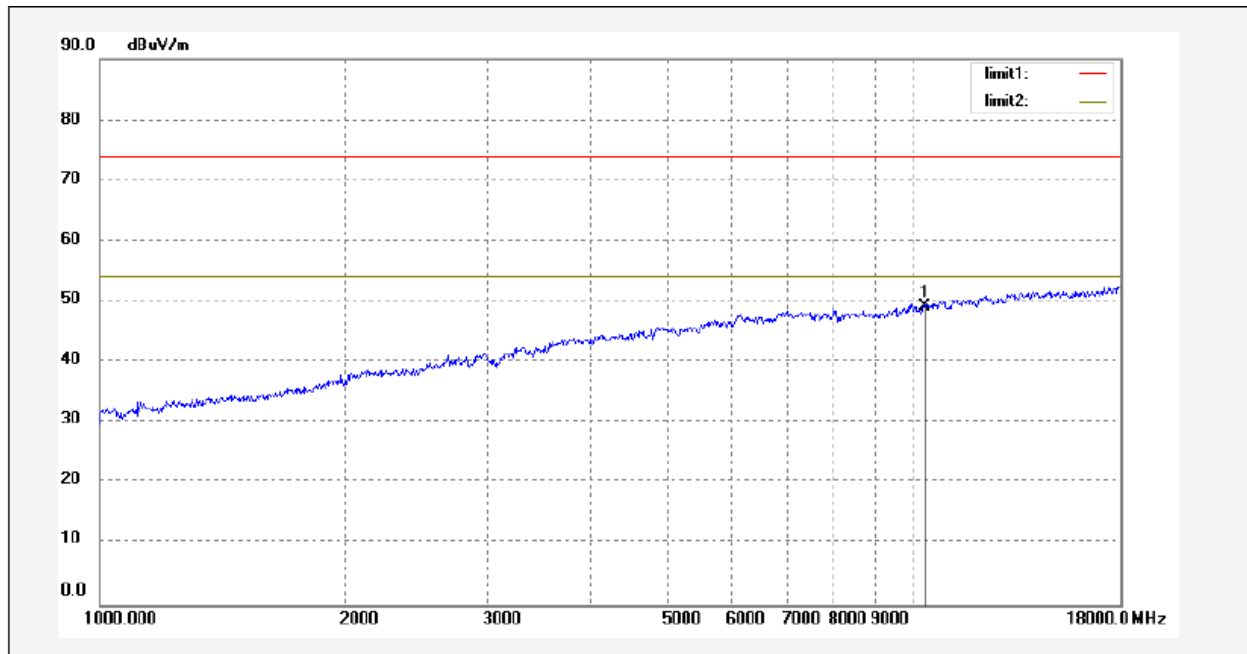Middle Channel
Horizontal:

Vertical:

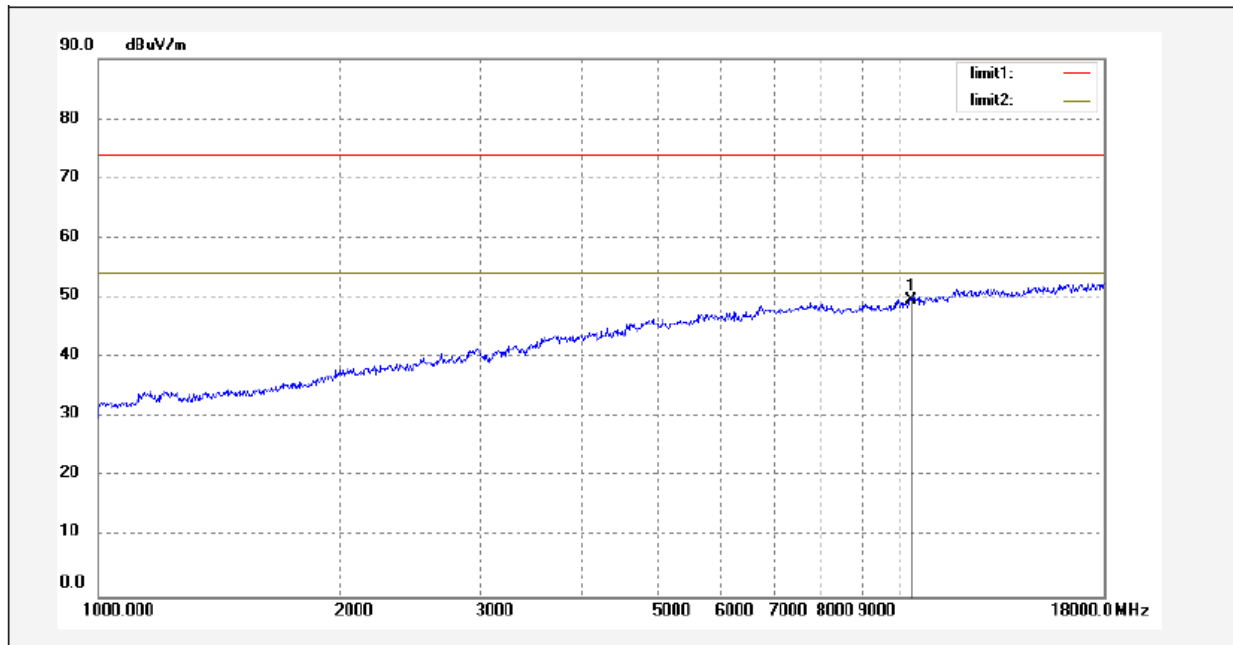

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 201-03-26.


EUT operation mode: Transmitting

Test Result: Compliant.

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	≥ 0.930	PASS
2DH1	Ant1	Hop	1.003	≥ 0.846	PASS
3DH1	Ant1	Hop	1.003	≥ 0.846	PASS


Please refer to the below plots:

DH1_Ant1_Hop

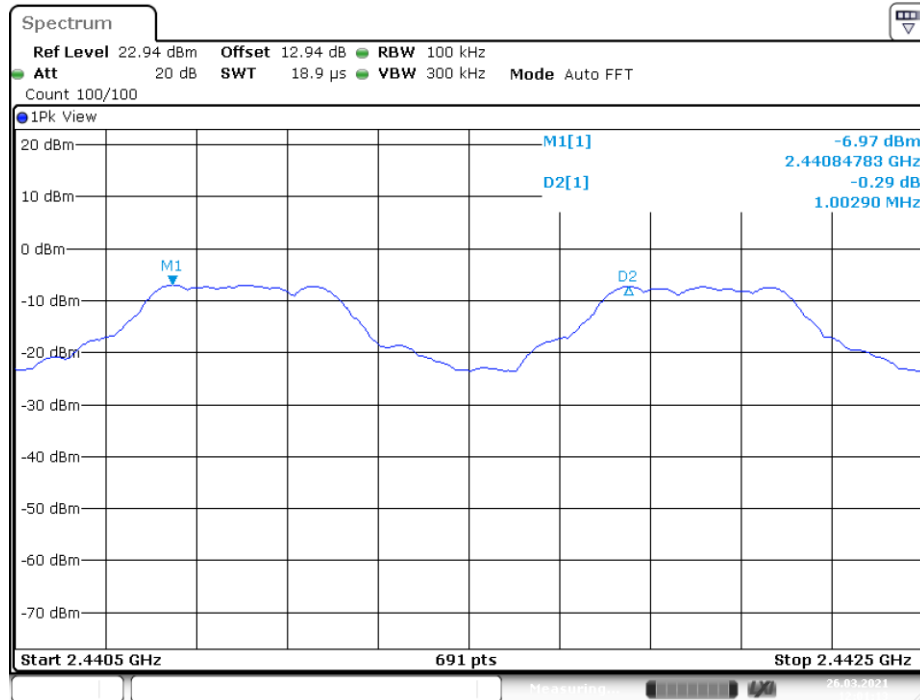


Date: 26.MAR.2021 12:01:14

2DH1_Ant1_Hop

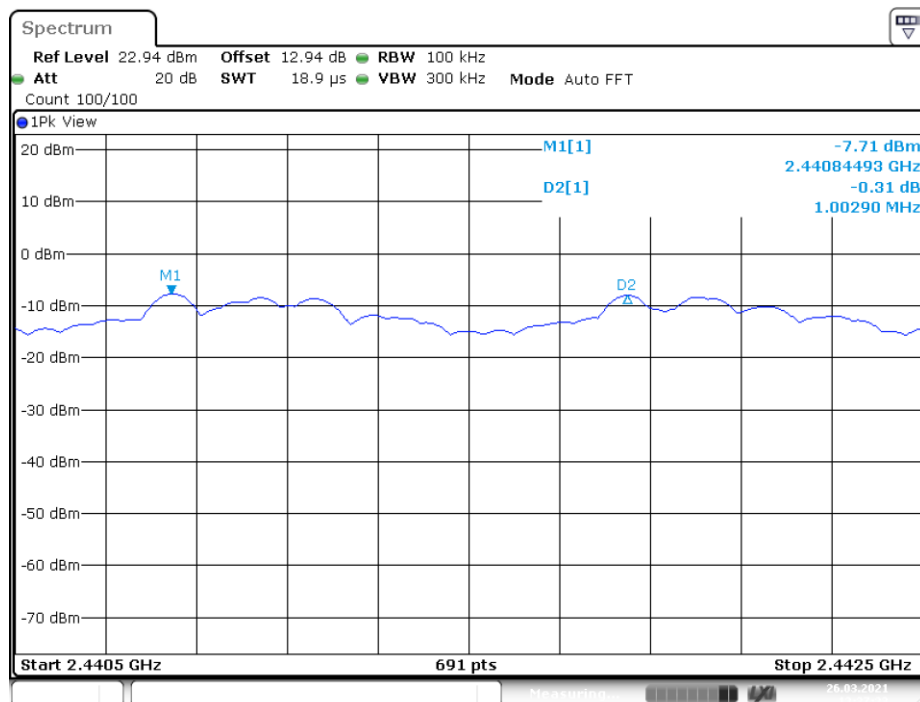

Date: 26.MAR.2021 13:37:33

3DH1_Ant1_Hop

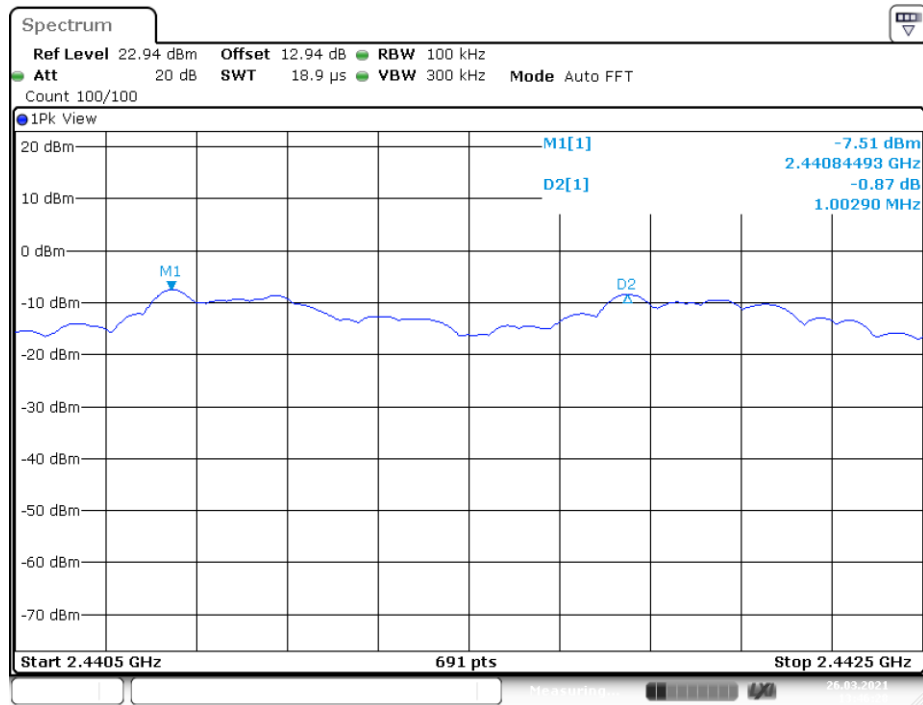

Date: 26.MAR.2021 13:46:29

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-03-26.

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel[MHz]	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.930	---	PASS
		2441	0.888	---	PASS
		2480	0.891	---	PASS
2DH1	Ant1	2402	1.269	---	PASS
		2441	1.251	---	PASS
		2480	1.251	---	PASS
3DH1	Ant1	2402	1.266	---	PASS
		2441	1.266	---	PASS
		2480	1.269	---	PASS

Test Mode	Antenna	Channel	99% Occupied Bandwidth [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.857	---	PASS
		2441	0.851	---	PASS
		2480	0.851	---	PASS
2DH1	Ant1	2402	1.187	---	PASS
		2441	1.175	---	PASS
		2480	1.166	---	PASS
3DH1	Ant1	2402	1.181	---	PASS
		2441	1.175	---	PASS
		2480	1.169	---	PASS

Please refer to the below plots:


20 dB EMISSION BANDWIDTH

DH1_Ant1_2402MHz

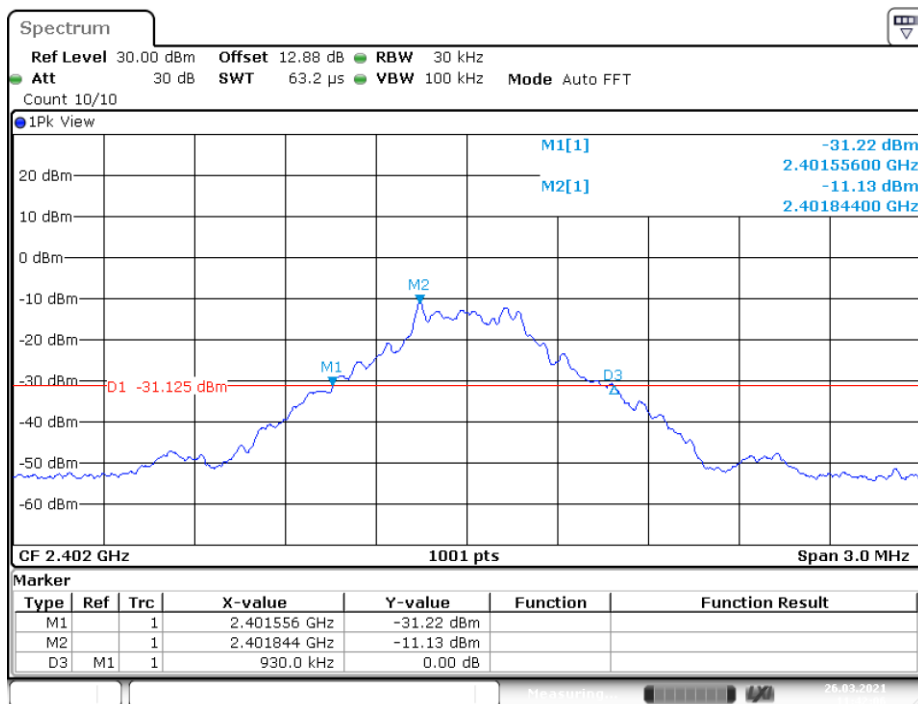


Date: 26.MAR.2021 11:42:07

DH1_Ant1_2441MHz

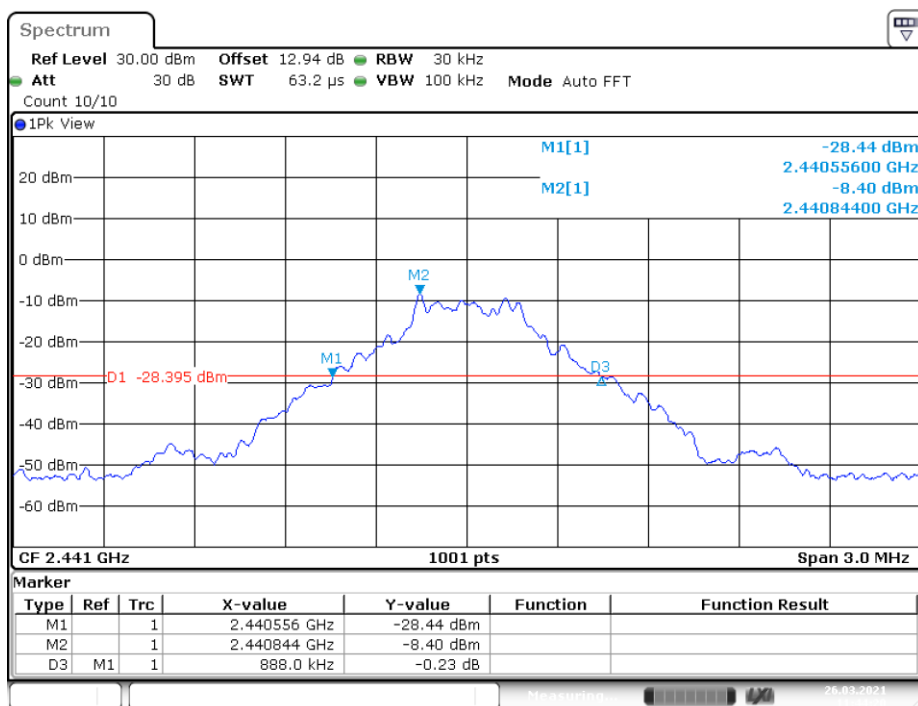


Date: 26.MAR.2021 11:44:21

DH1_Ant1_2480MHz

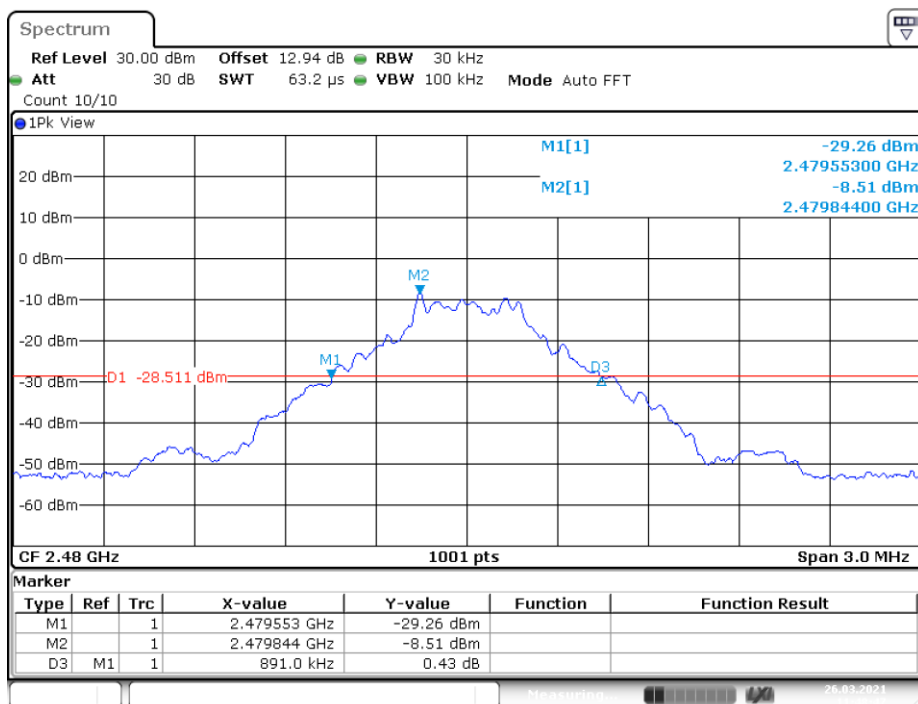


Date: 26.MAR.2021 11:48:48

2DH1_Ant1_2402MHz

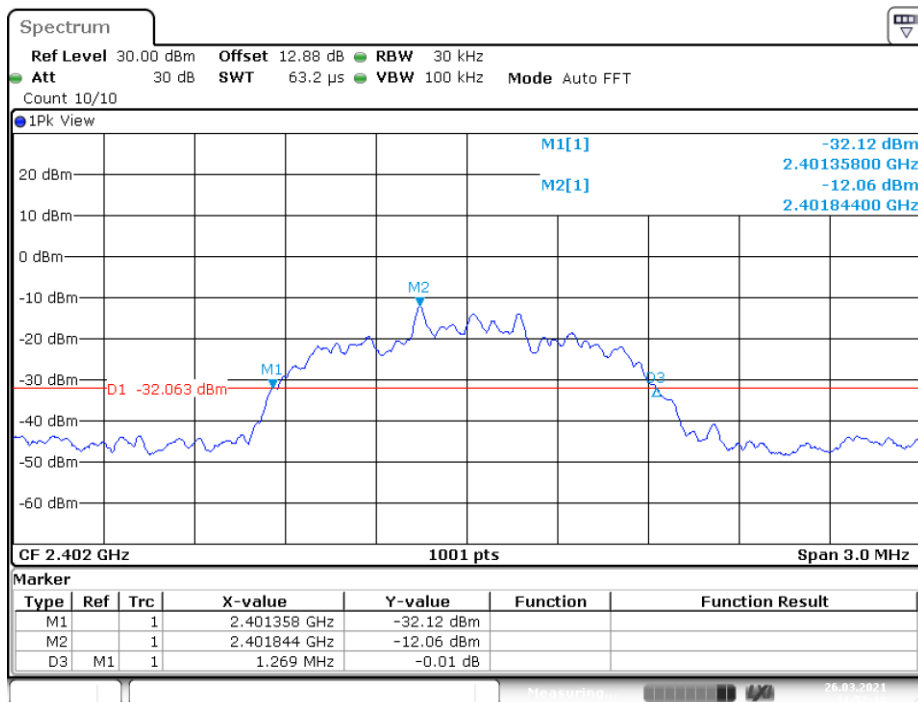


Date: 26.MAR.2021 11:52:18

2DH1_Ant1_2441MHz

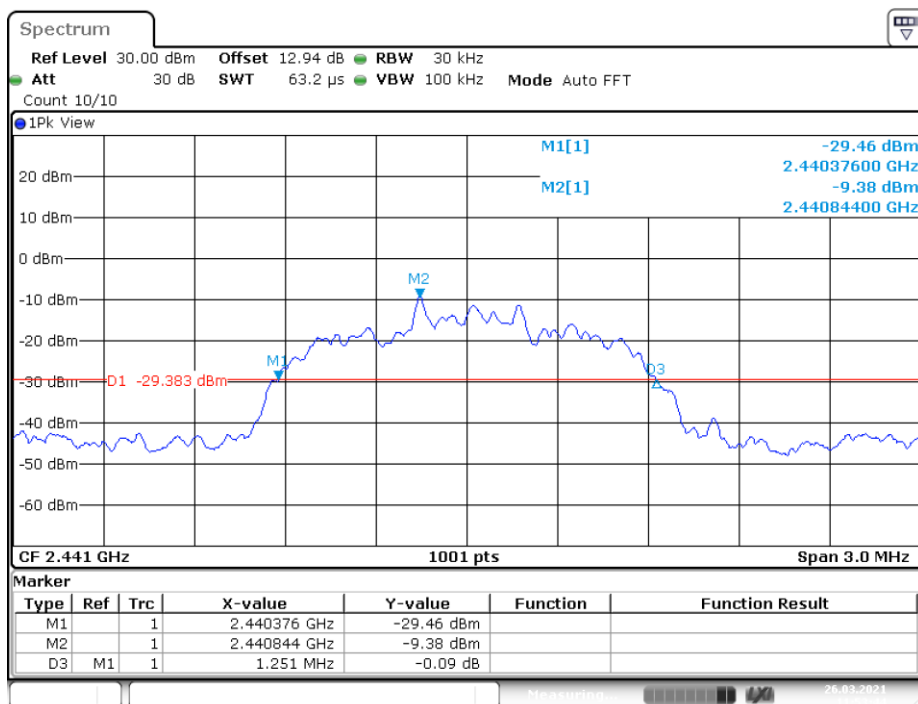


Date: 26.MAR.2021 11:53:44

2DH1_Ant1_2480MHz

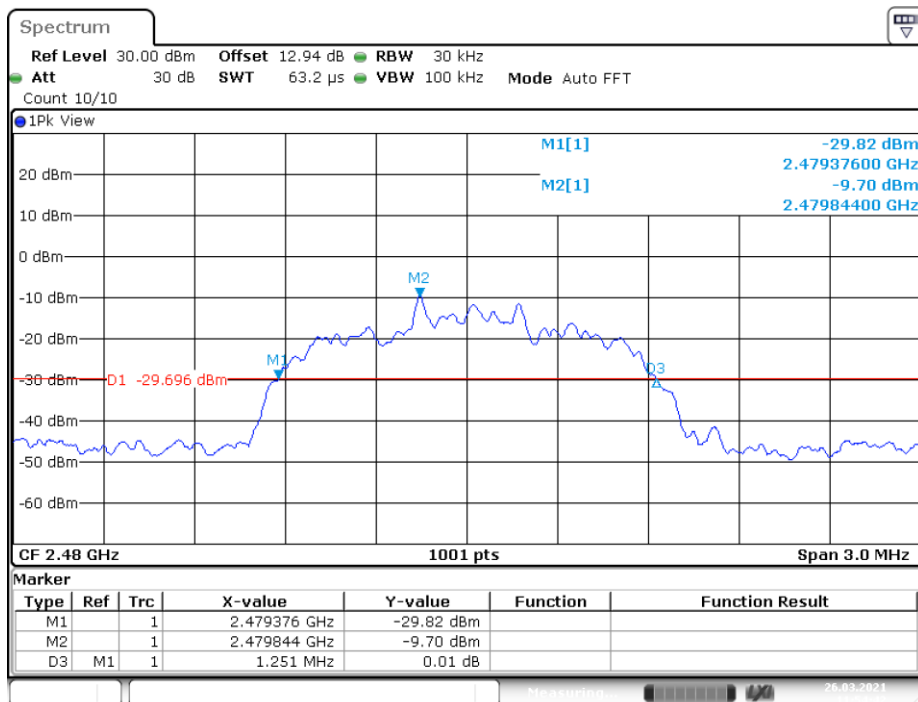


Date: 26.MAR.2021 11:54:43

3DH1_Ant1_2402MHz

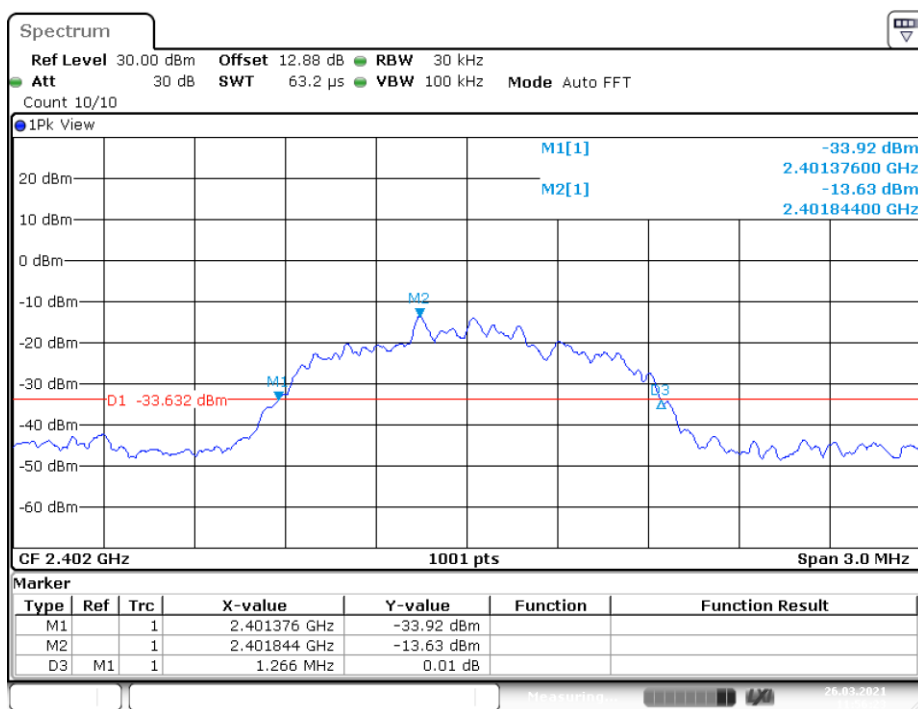


Date: 26.MAR.2021 11:56:24

3DH1_Ant1_2441MHz

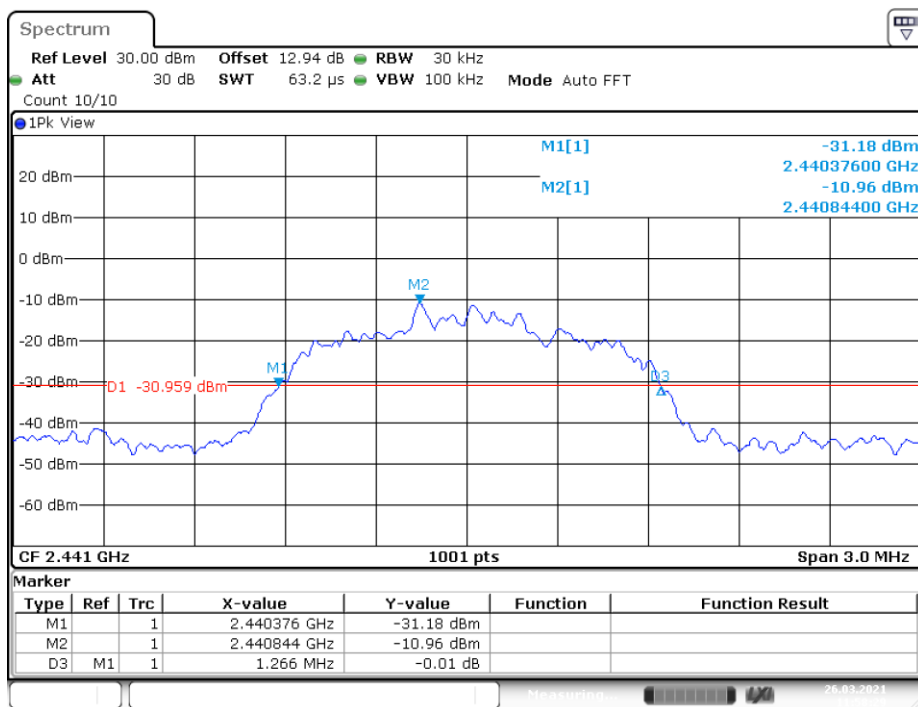


Date: 26.MAR.2021 11:58:29


3DH1_Ant1_2480MHz

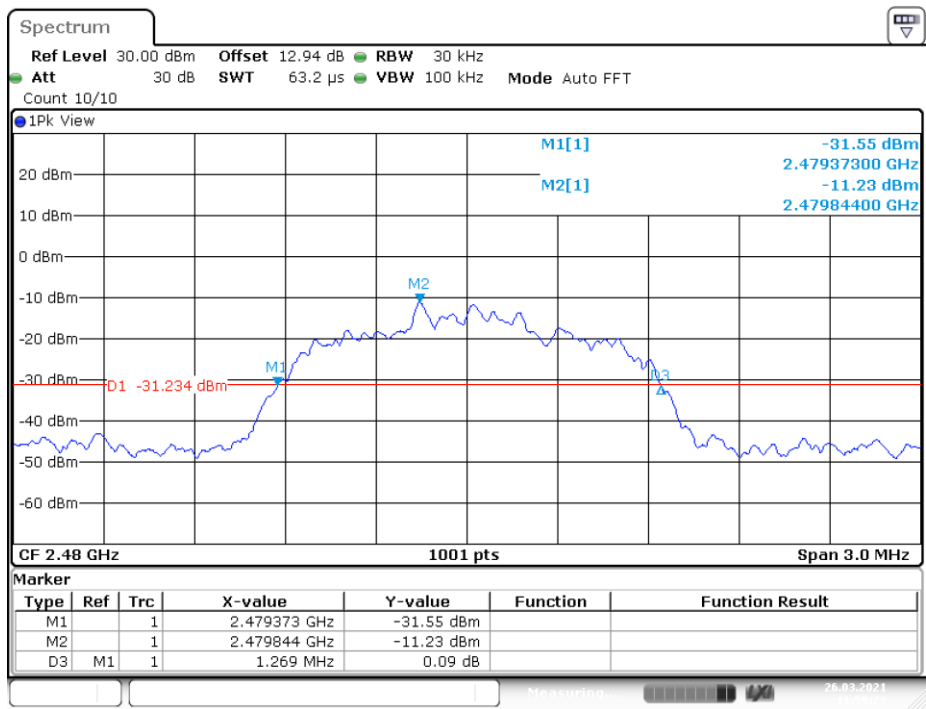

Date: 26.MAR.2021 11:59:23

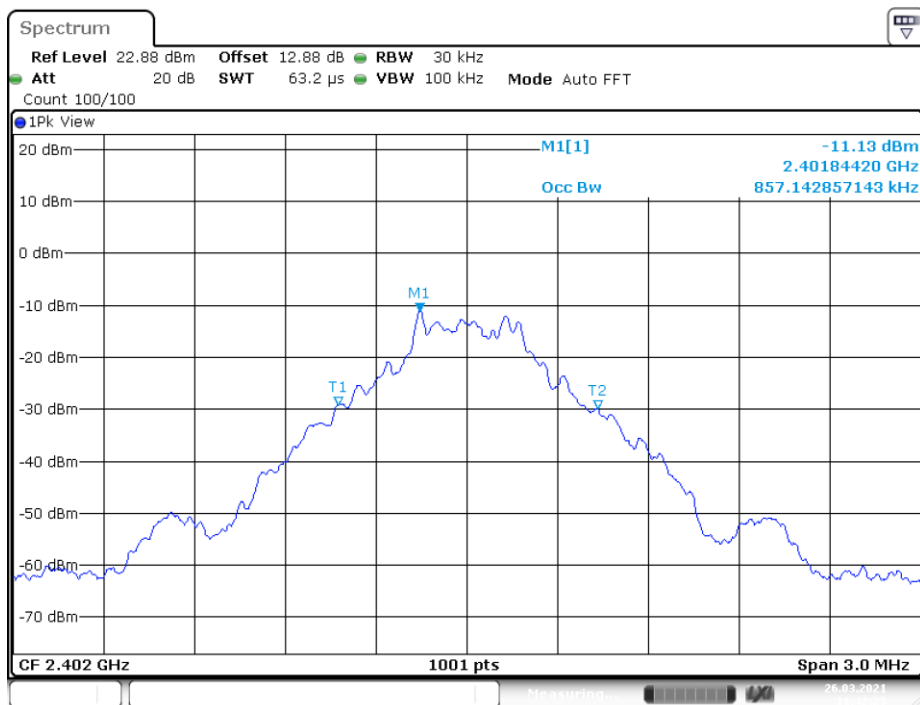
99% OCCUPIED BANDWIDTH**DH1_Ant1_2402MHz**

Date: 26.MAR.2021 11:42:24

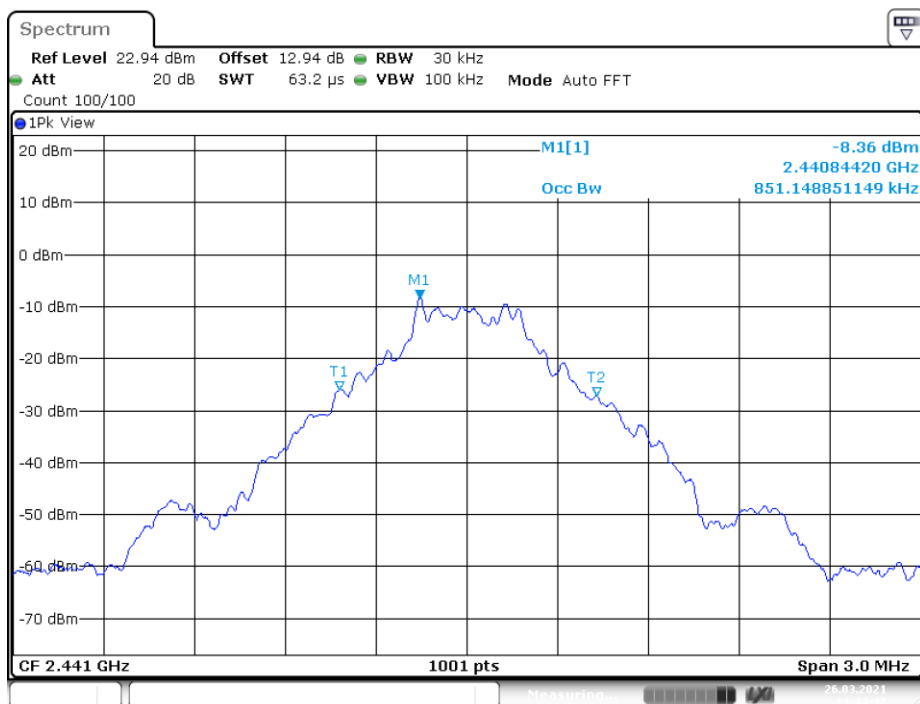DH1_Ant1_2441MHz


Date: 26.MAR.2021 11:44:37

DH1_Ant1_2480MHz

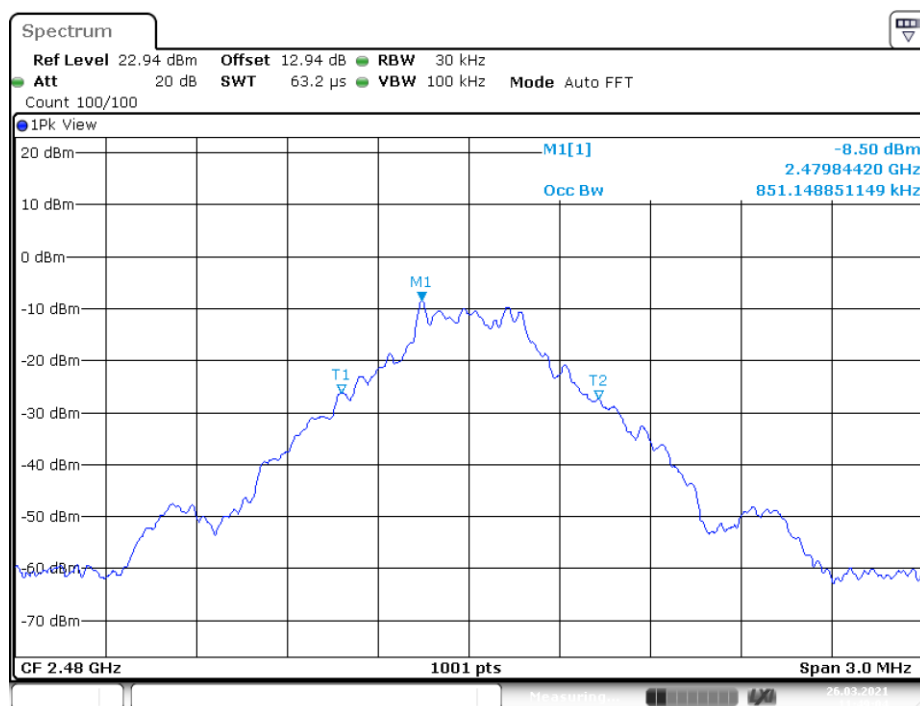


Date: 26.MAR.2021 11:49:05

2DH1_Ant1_2402MHz

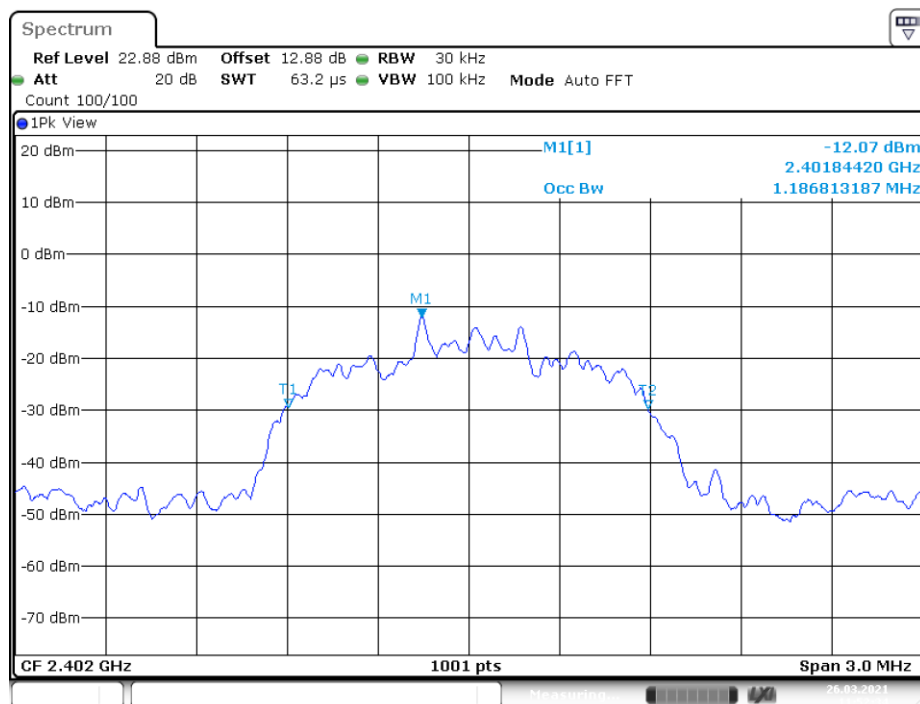


Date: 26.MAR.2021 11:52:35

2DH1_Ant1_2441MHz

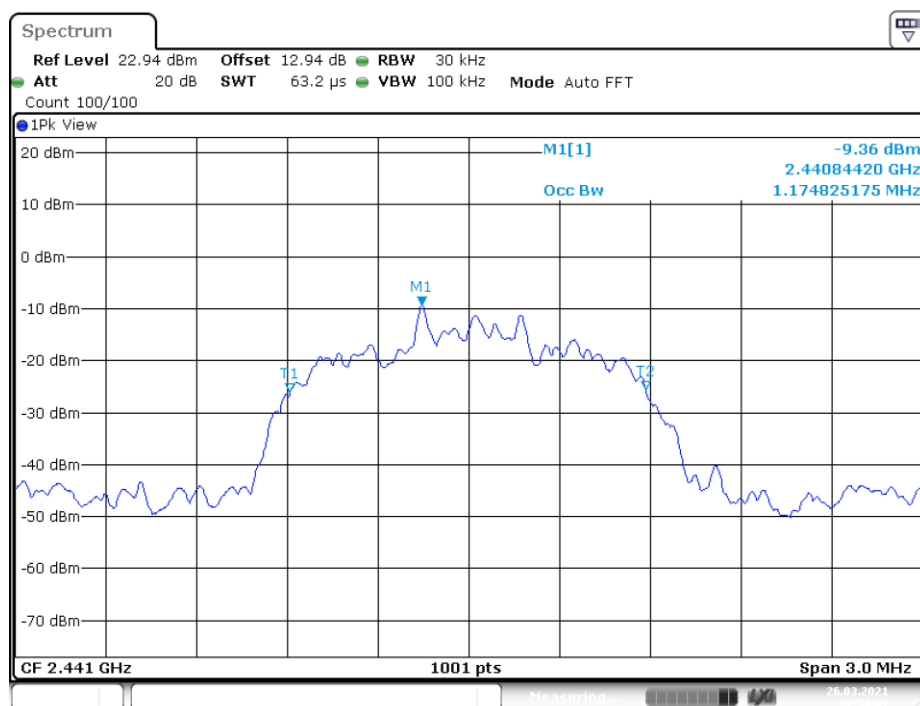


Date: 26.MAR.2021 11:54:01

2DH1_Ant1_2480MHz

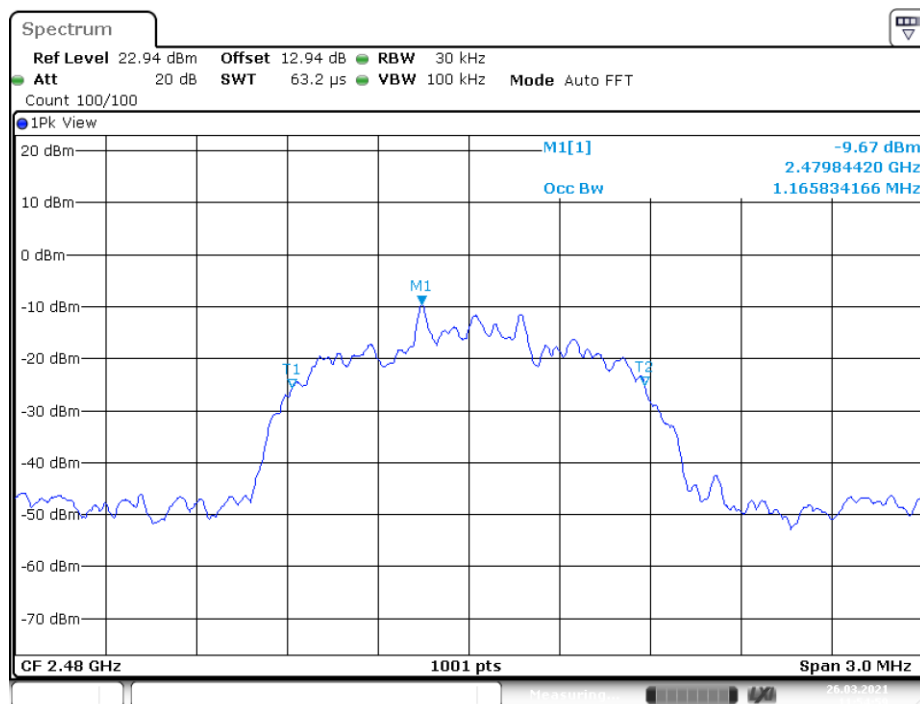


Date: 26.MAR.2021 11:54:59

3DH1_Ant1_2402MHz

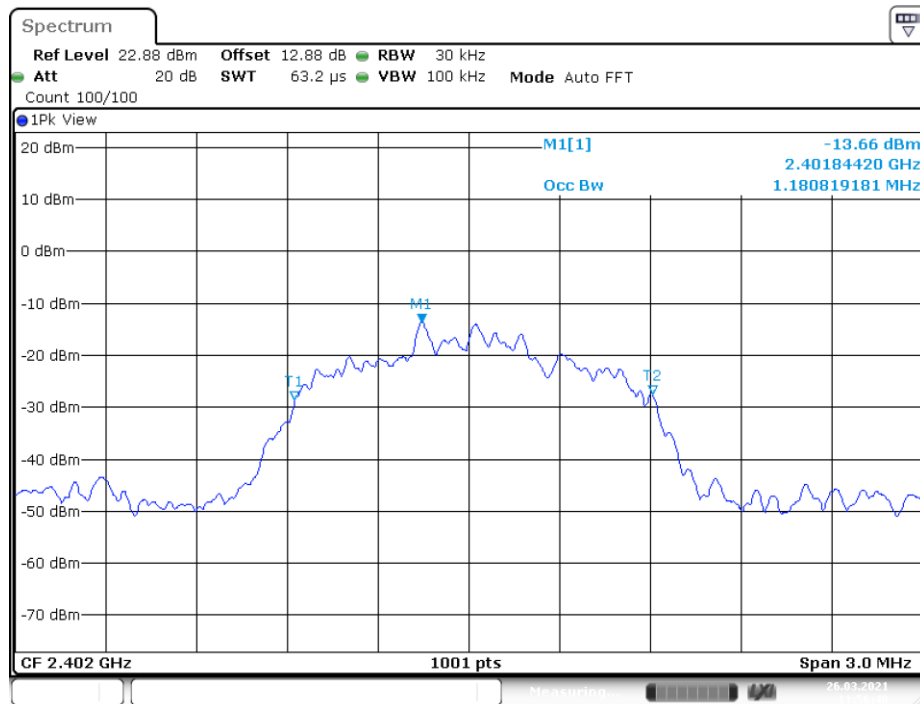


Date: 26.MAR.2021 11:56:40

3DH1_Ant1_2441MHz

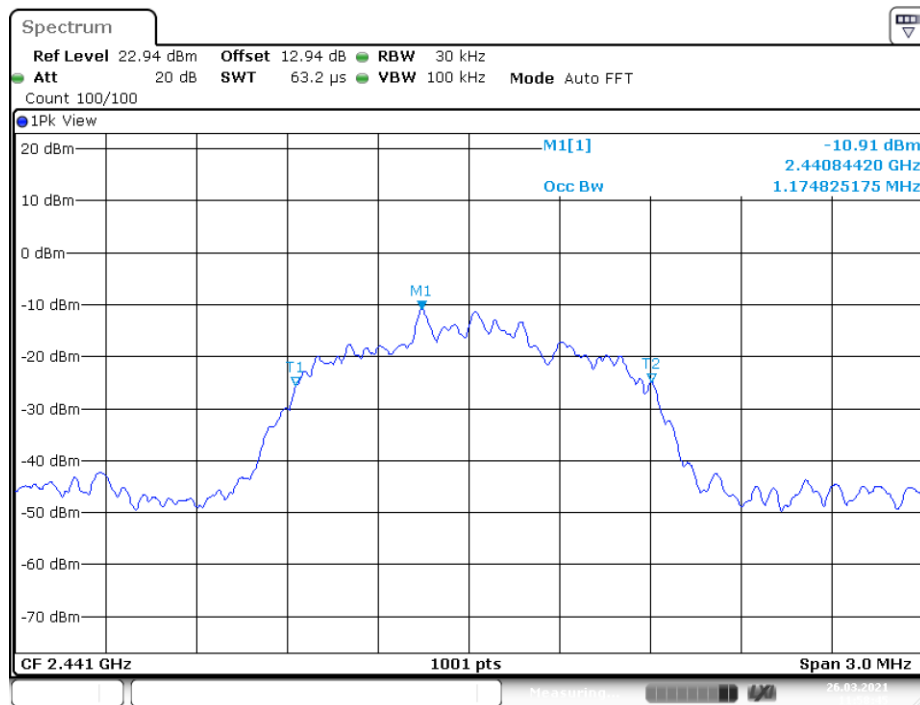

Date: 26.MAR.2021 11:58:46

3DH1_Ant1_2480MHz

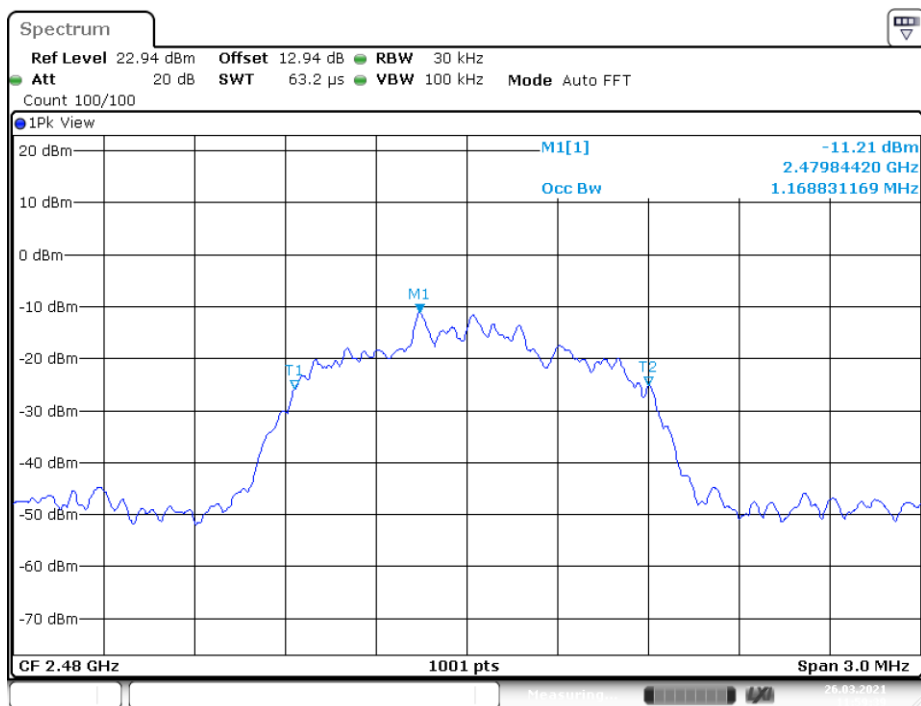

Date: 26.MAR.2021 11:59:40

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Black Ding on 2021-03-26.

EUT operation mode: Transmitting

Test Result: Compliant.


TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	>=15	PASS
2DH1	Ant1	Hop	79	>=15	PASS
3DH1	Ant1	Hop	79	>=15	PASS

DH1_Ant1_Hop

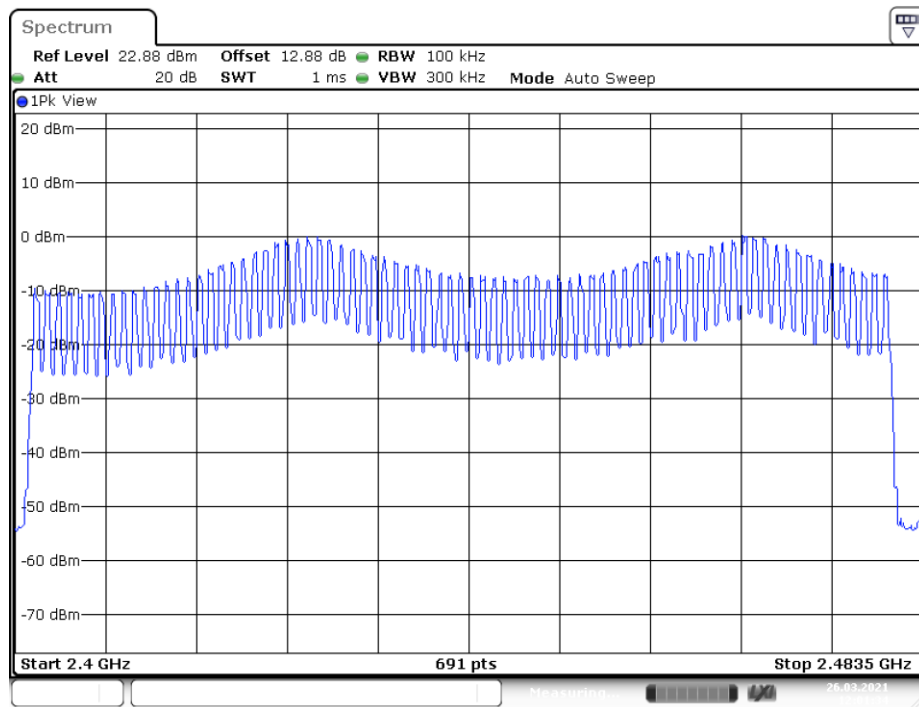


Date: 26.MAR.2021 12:01:34

2DH1_Ant1_Hop

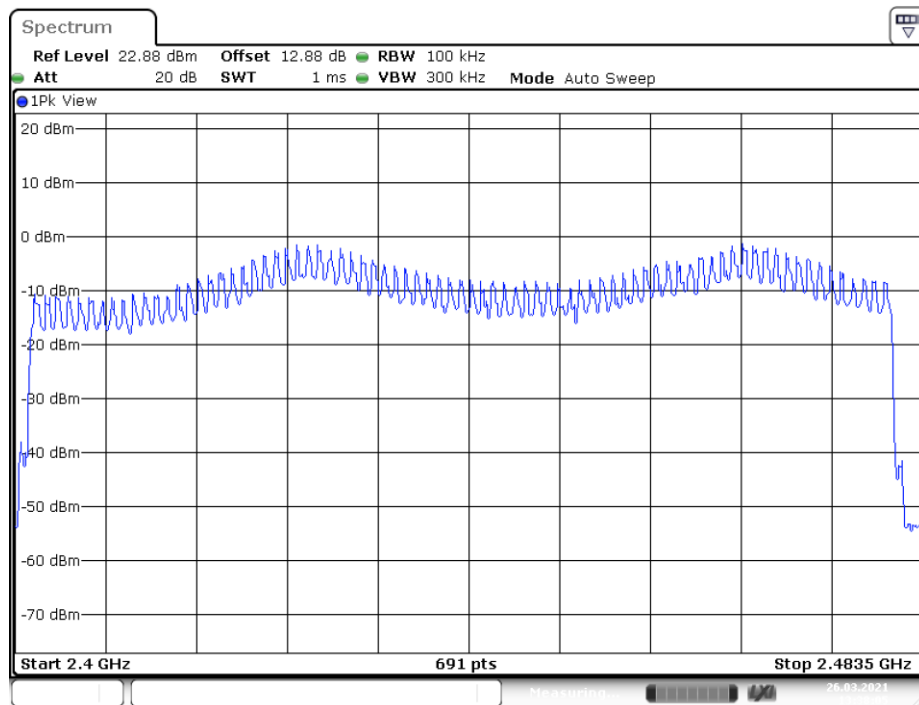

Date: 26.MAR.2021 13:38:06

3DH1_Ant1_Hop

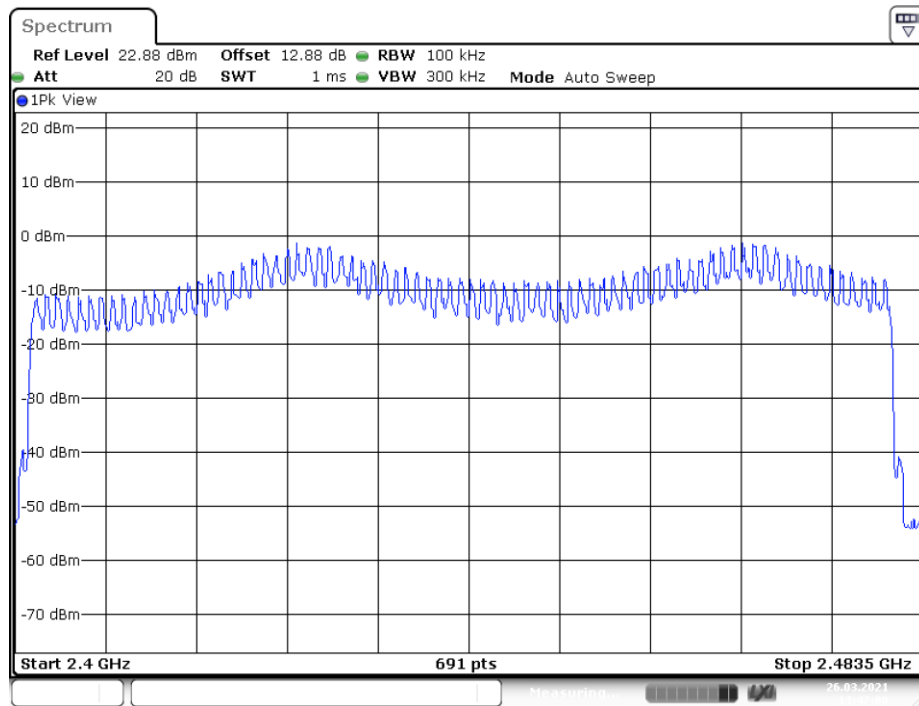

Date: 26.MAR.2021 13:47:01

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Black Ding on 2021-03-26.

EUT operation mode: Transmitting


Test Result: Compliant.

Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.35	320	0.112	≤ 0.4	PASS
DH3	Ant1	Hop	1.62	150	0.243	≤ 0.4	PASS
DH5	Ant1	Hop	2.86	90	0.258	≤ 0.4	PASS
2DH1	Ant1	Hop	0.38	330	0.126	≤ 0.4	PASS
2DH3	Ant1	Hop	1.63	190	0.309	≤ 0.4	PASS
2DH5	Ant1	Hop	2.87	130	0.373	≤ 0.4	PASS
3DH1	Ant1	Hop	0.38	330	0.126	≤ 0.4	PASS
3DH3	Ant1	Hop	1.62	180	0.292	≤ 0.4	PASS
3DH5	Ant1	Hop	2.87	80	0.229	≤ 0.4	PASS

DH1_Ant1_Hop

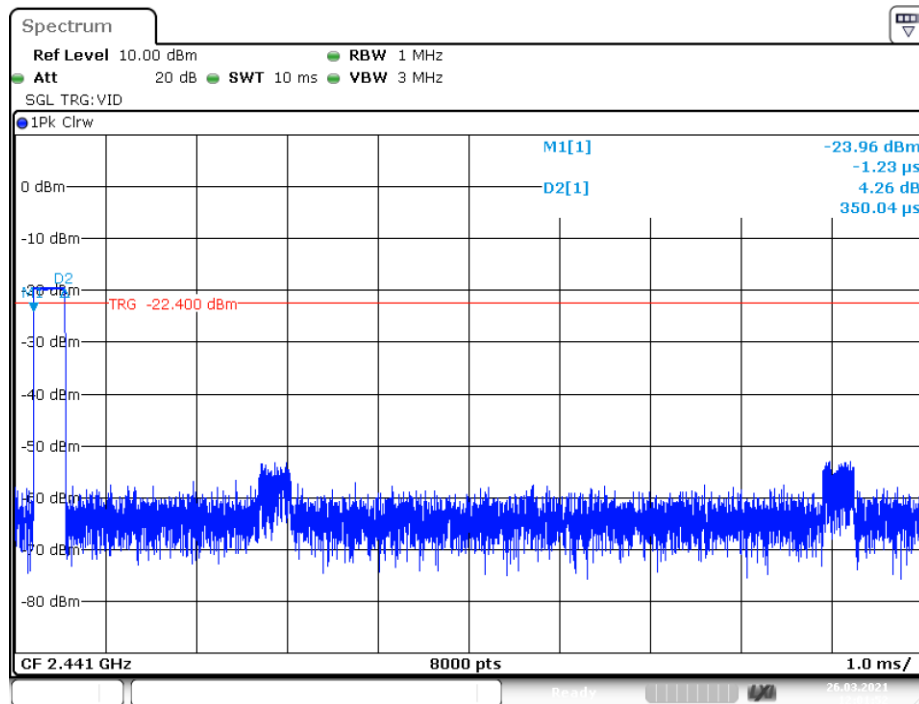


Date: 26.MAR.2021 12:01:52

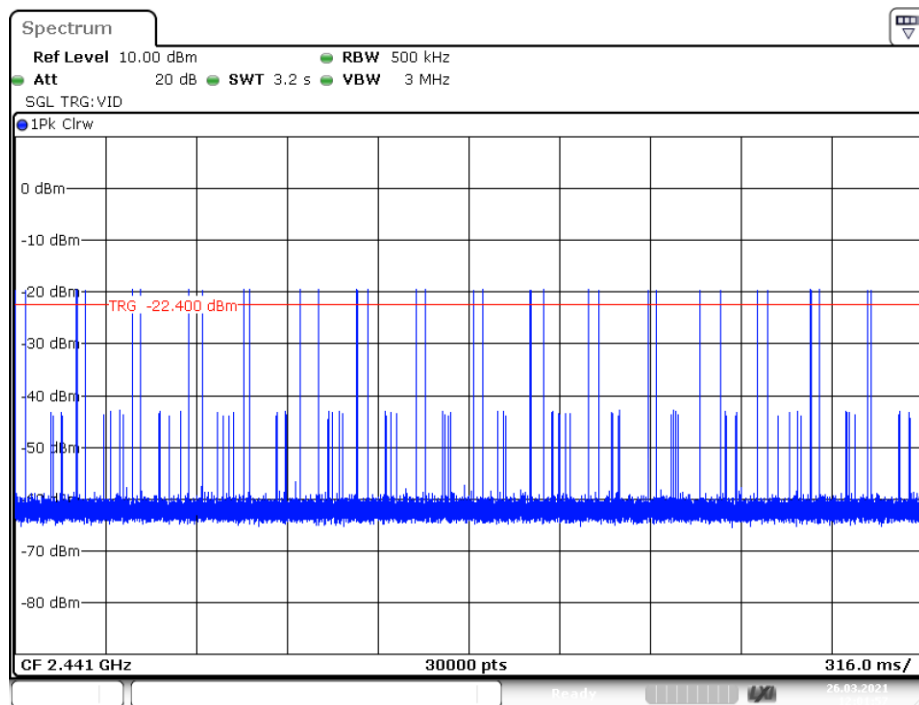


Date: 26.MAR.2021 12:01:58

DH3_Ant1_Hop

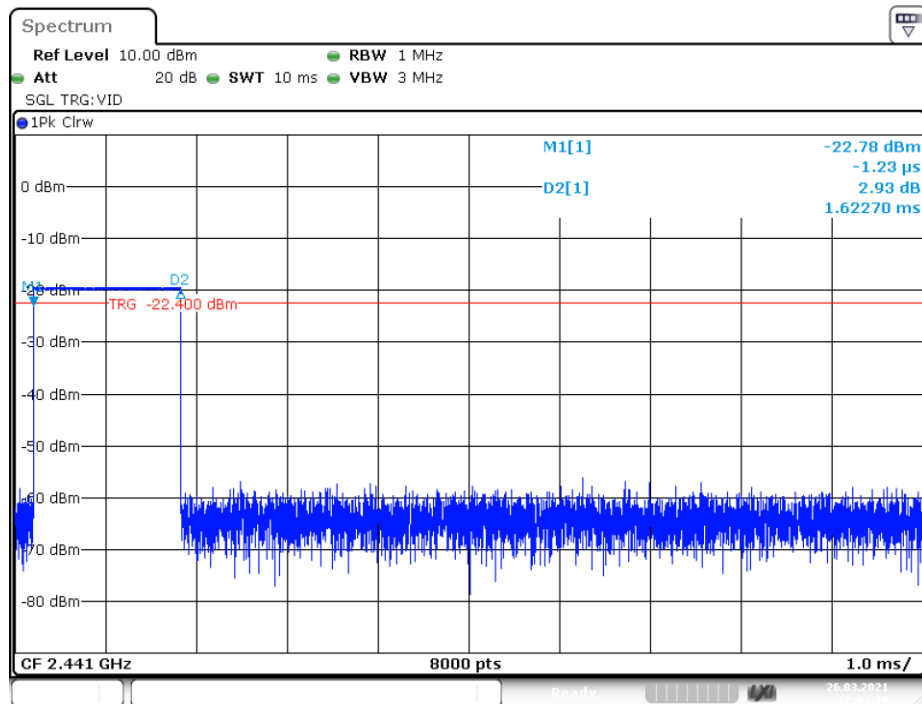


Date: 26.MAR.2021 12:03:19

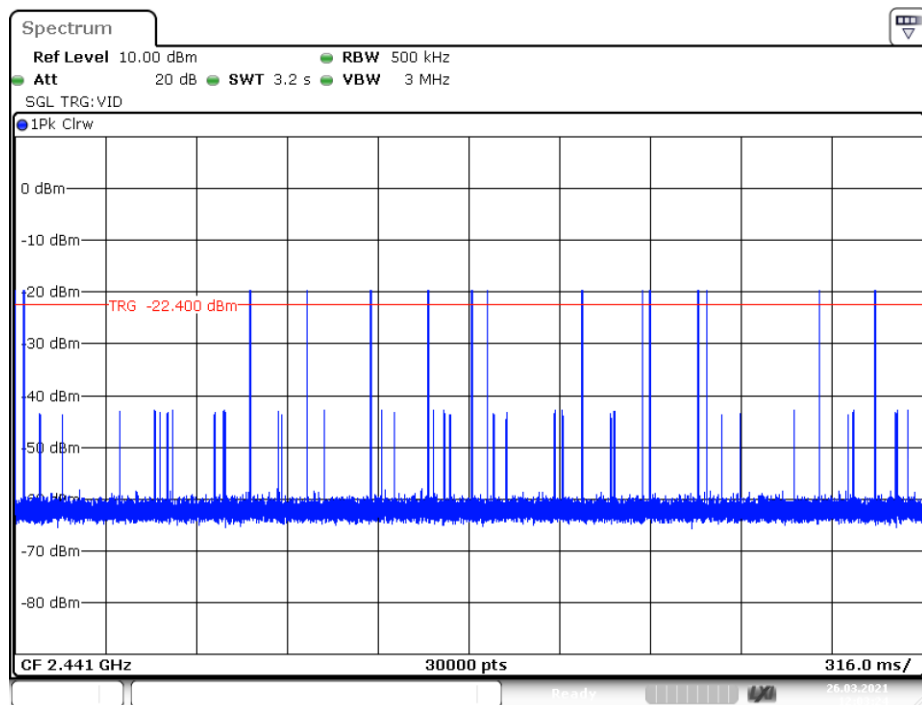


Date: 26.MAR.2021 12:03:24

DH5_Ant1_Hop

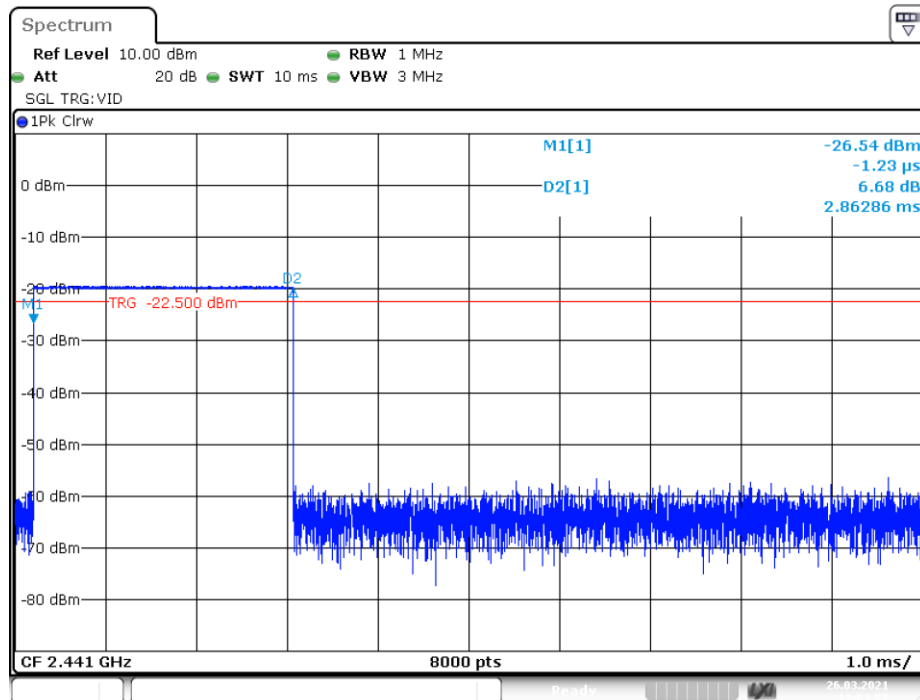


Date: 26.MAR.2021 12:03:58

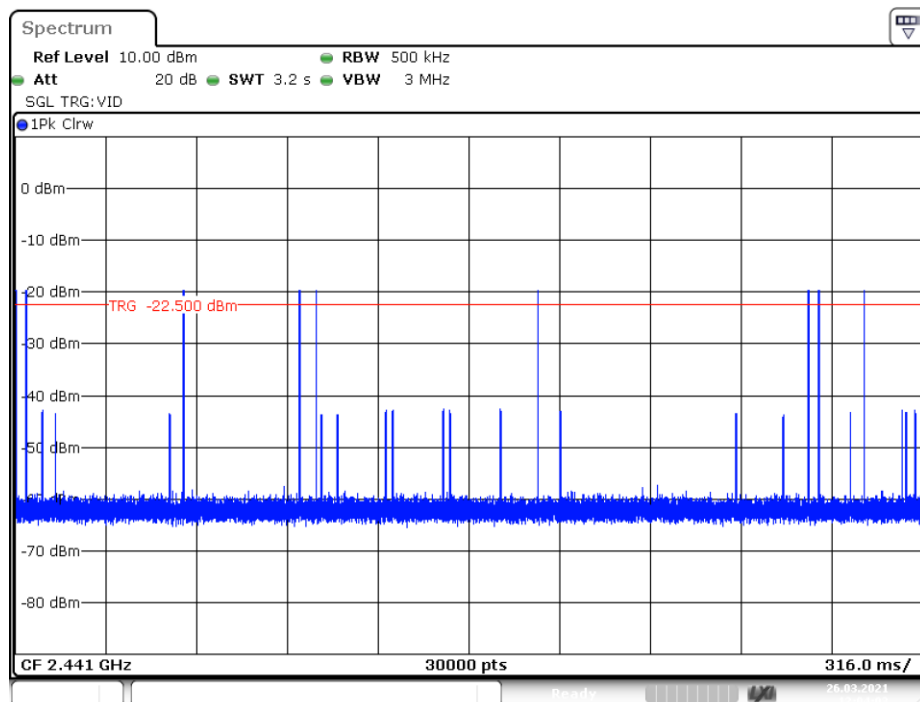


Date: 26.MAR.2021 12:04:03

2DH1_Ant1_Hop

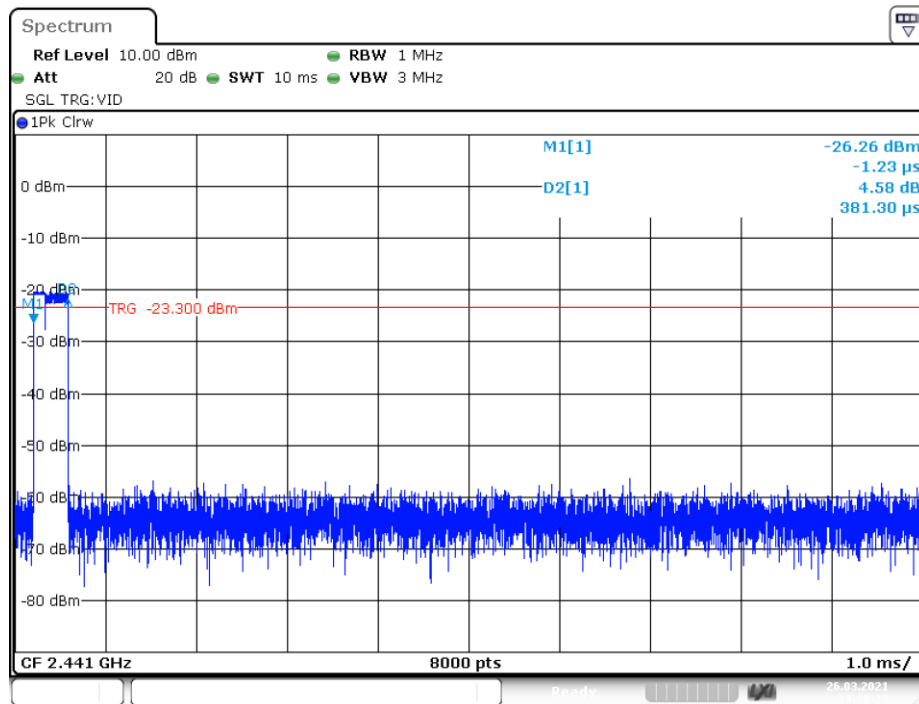


Date: 26.MAR.2021 13:38:24

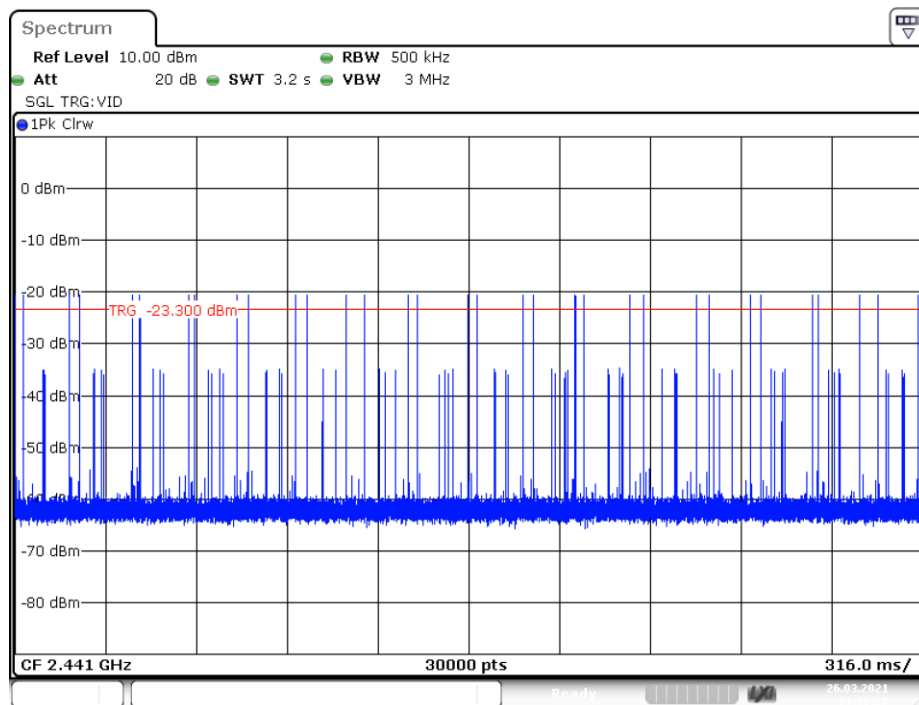


Date: 26.MAR.2021 13:38:29

2DH3_Ant1_Hop

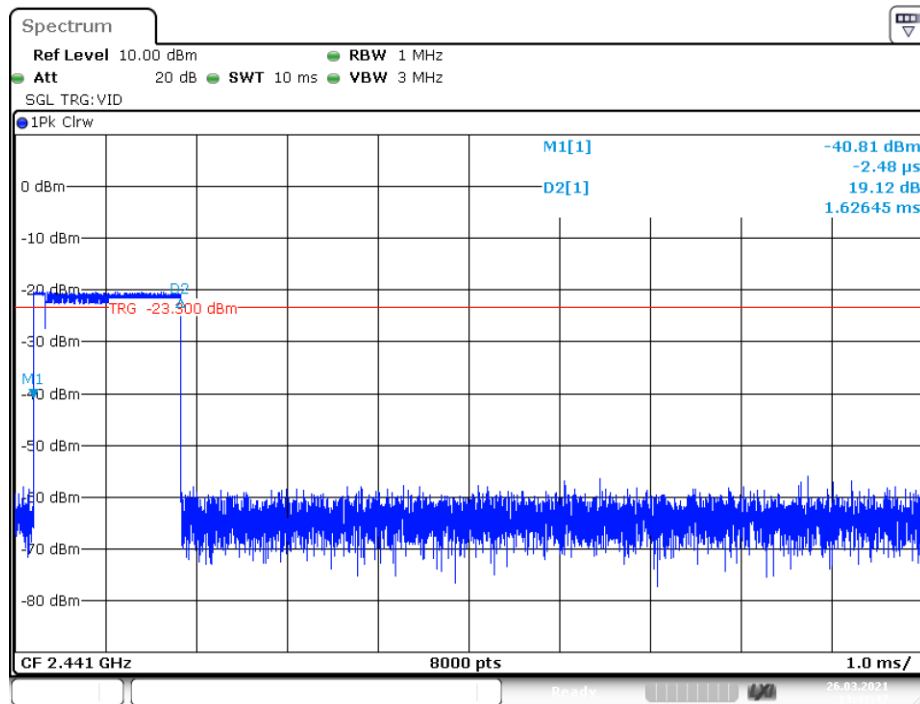


Date: 26.MAR.2021 13:41:47

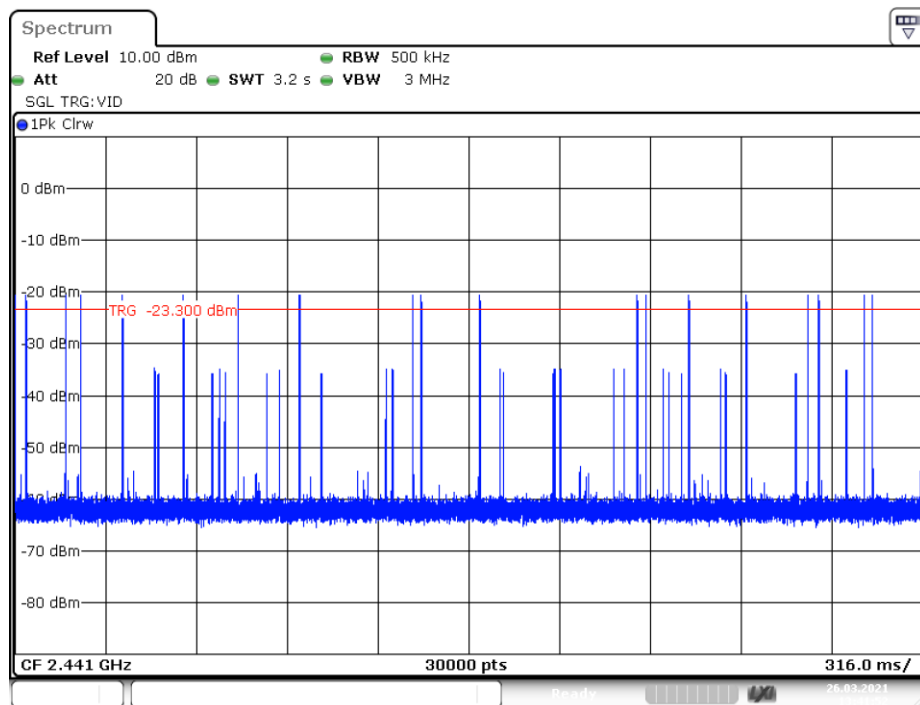


Date: 26.MAR.2021 13:41:53

2DH5_Ant1_Hop

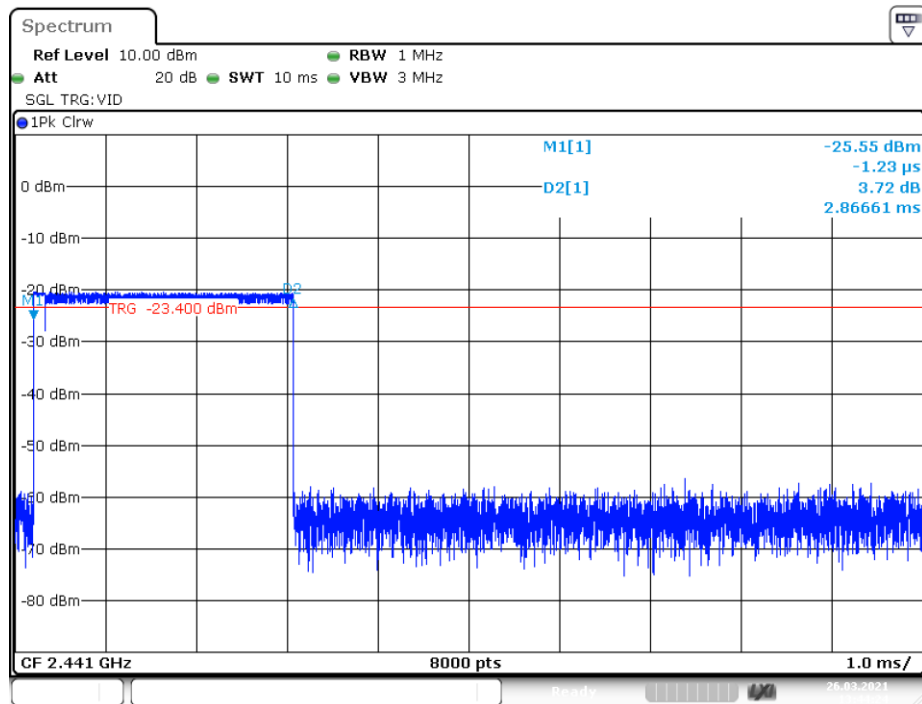


Date: 26.MAR.2021 13:44:25

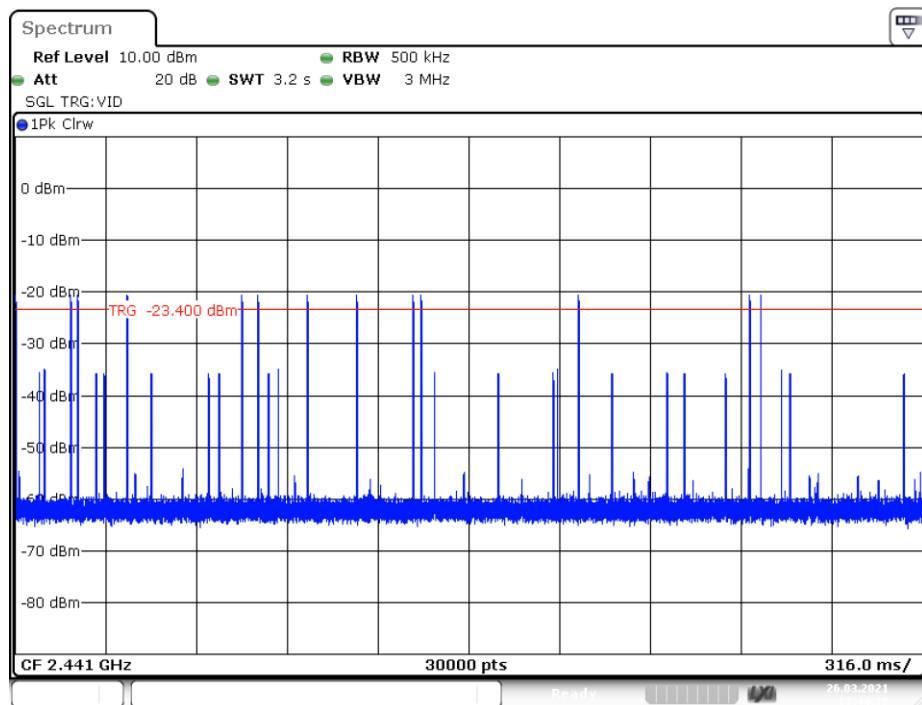


Date: 26.MAR.2021 13:44:30

3DH1_Ant1_Hop

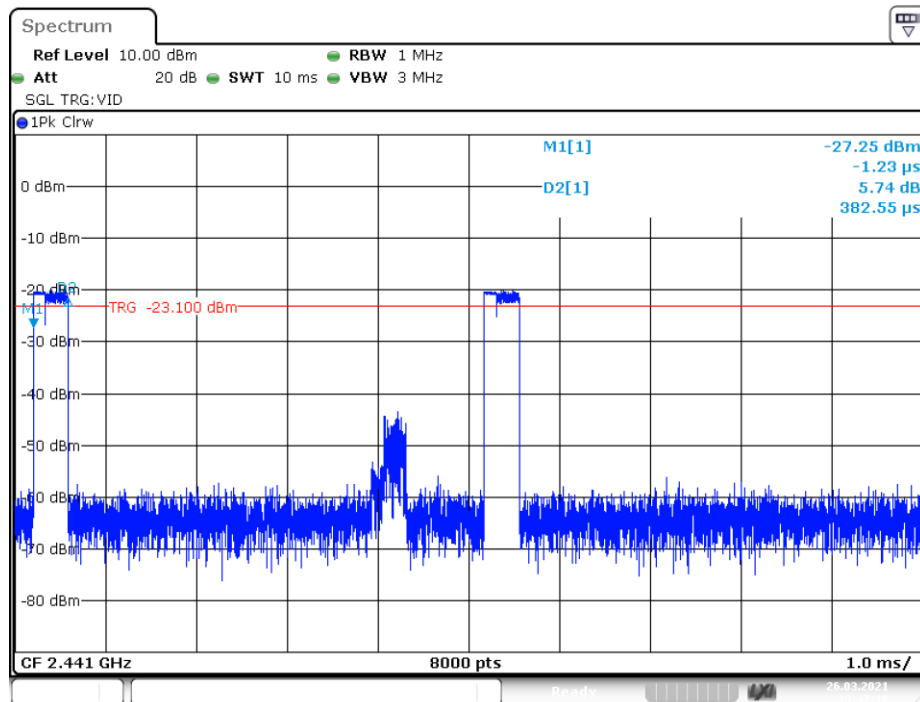


Date: 26.MAR.2021 13:47:19

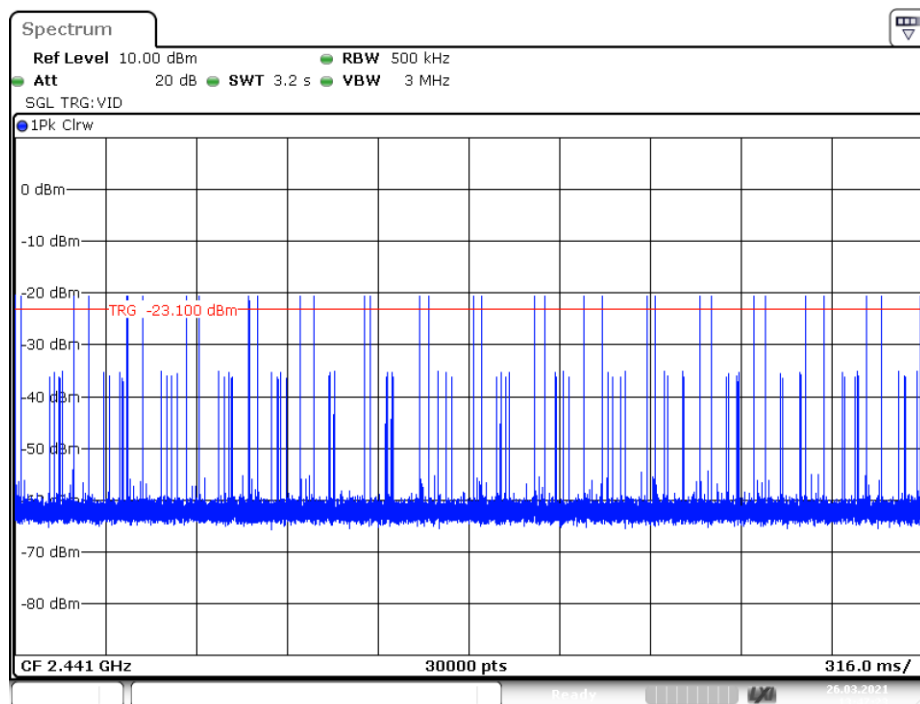


Date: 26.MAR.2021 13:47:24

3DH3_Ant1_Hop

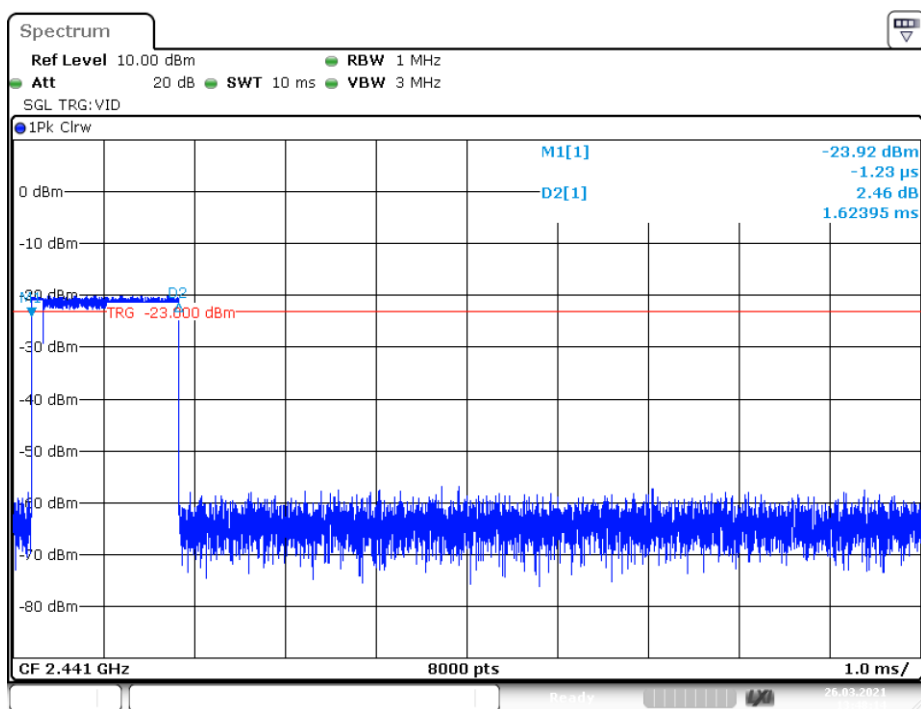


Date: 26.MAR.2021 13:48:14

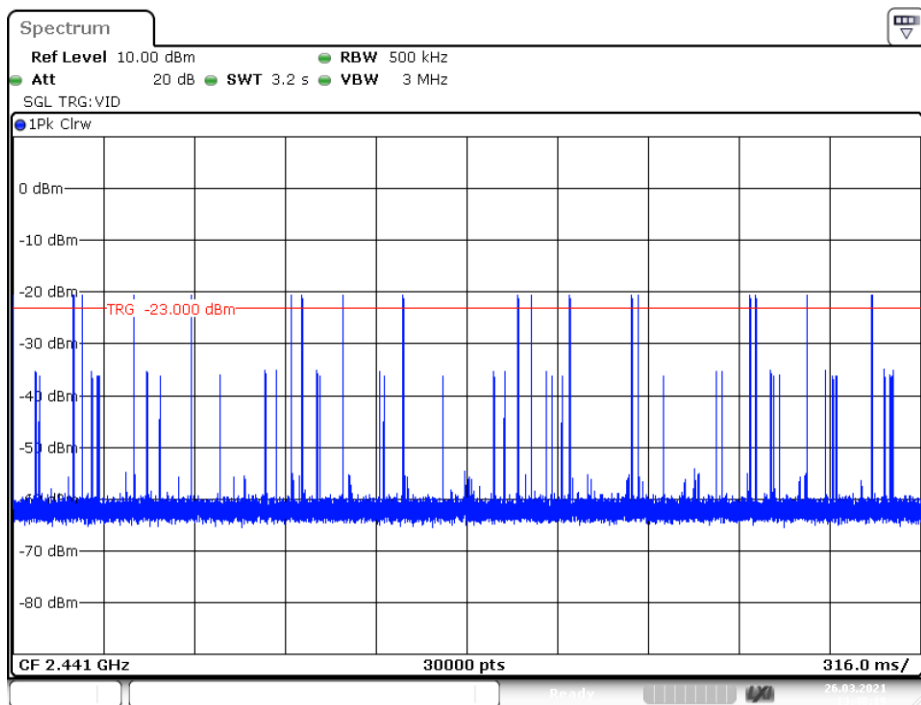


Date: 26.MAR.2021 13:48:19

3DH5_Ant1_Hop

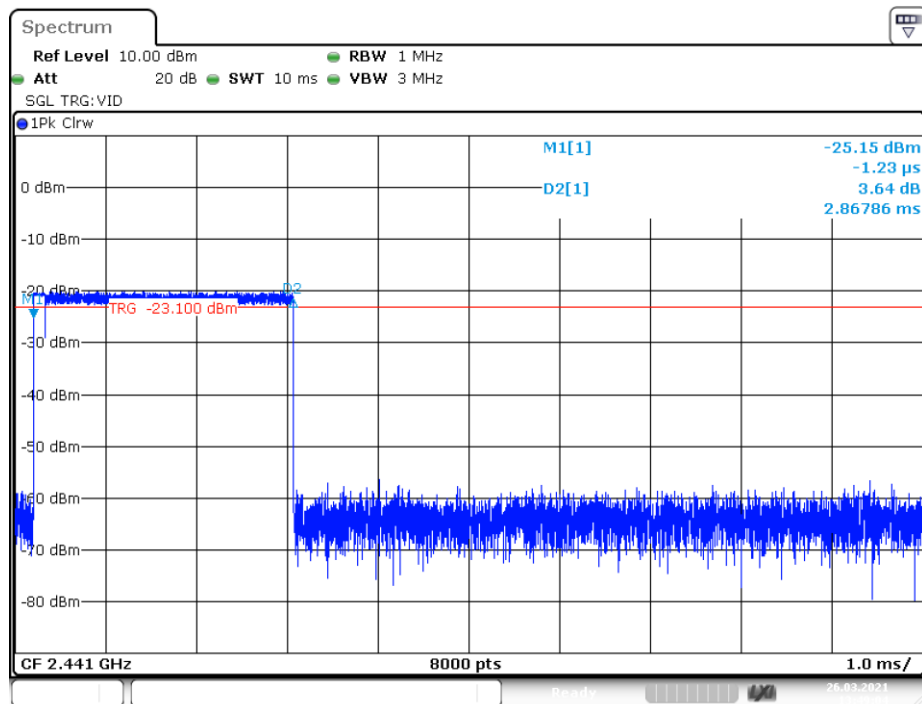

Date: 26.MAR.2021 13:49:05

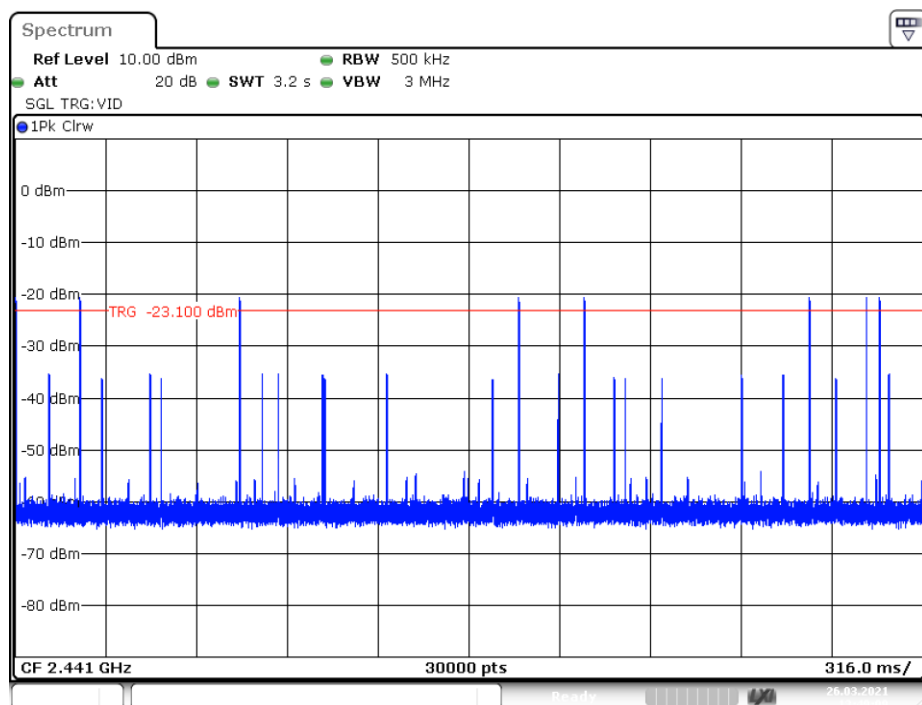

Date: 26.MAR.2021 13:49:10

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Black Ding on 2021-03-26.

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel[MHz]	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	-9.08	<=20.97	PASS
		2441	-6.31	<=20.97	PASS
		2467	0.78	<=20.97	PASS
		2480	-6.48	<=20.97	PASS
2DH1	Ant1	2402	-9.53	<=20.97	PASS
		2441	-6.82	<=20.97	PASS
		2467	-0.16	<=20.97	PASS
		2480	-7.04	<=20.97	PASS
3DH1	Ant1	2402	-9.42	<=20.97	PASS
		2441	-6.7	<=20.97	PASS
		2467	0.16	<=20.97	PASS
		2480	-6.92	<=20.97	PASS

DH1_Ant1_2402MHz

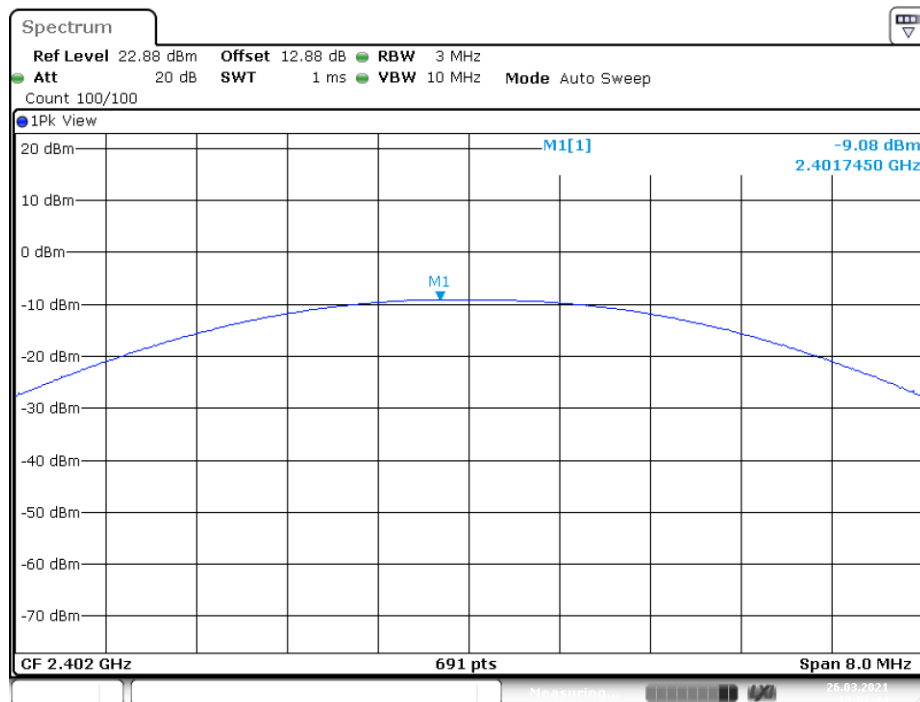


Date: 26.MAR.2021 13:51:44

DH1_Ant1_2441MHz

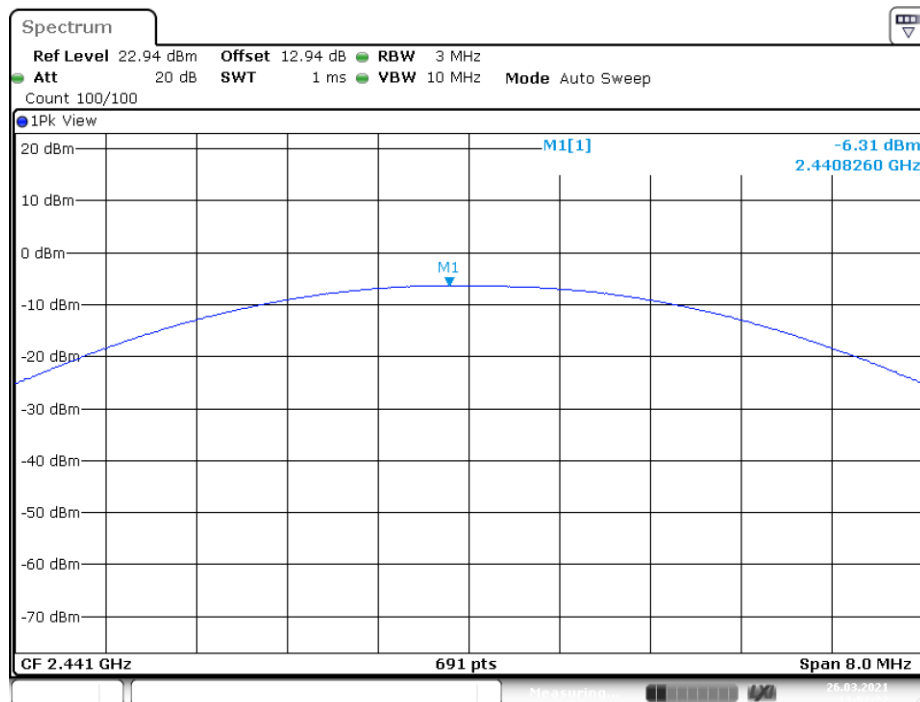


Date: 26.MAR.2021 13:52:22

DH1_Ant1_2467MHz

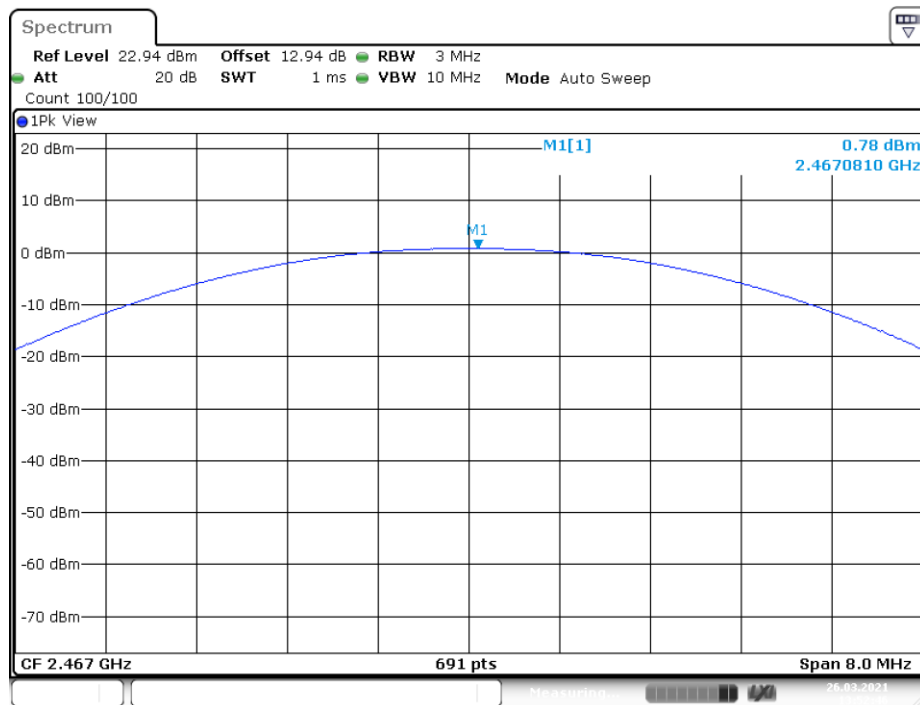


Date: 26.MAR.2021 13:52:46

DH1_Ant1_2480MHz

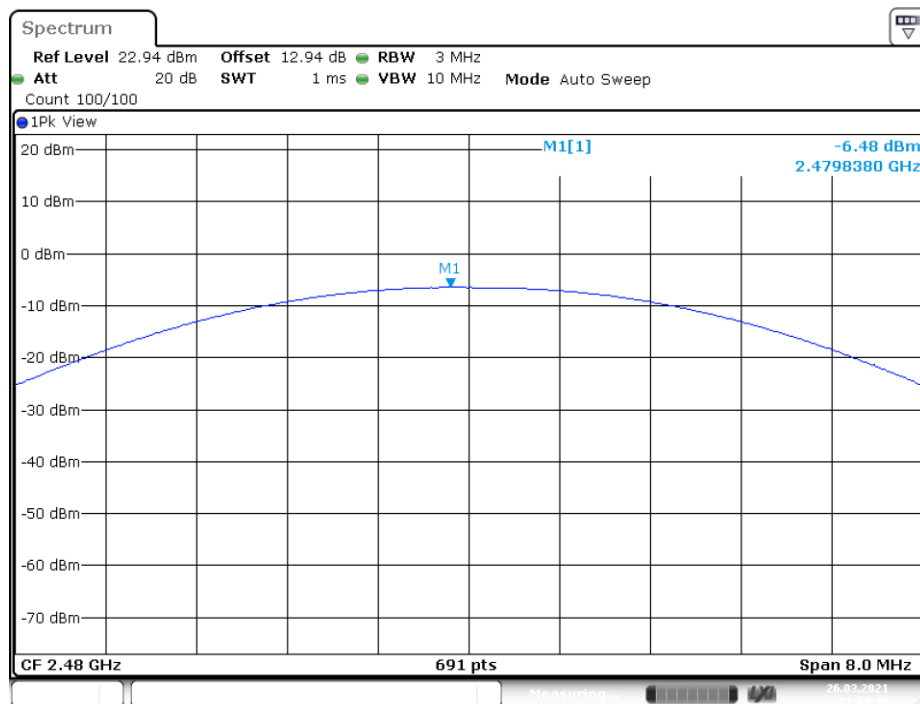


Date: 26.MAR.2021 13:54:47

2DH1_Ant1_2402MHz

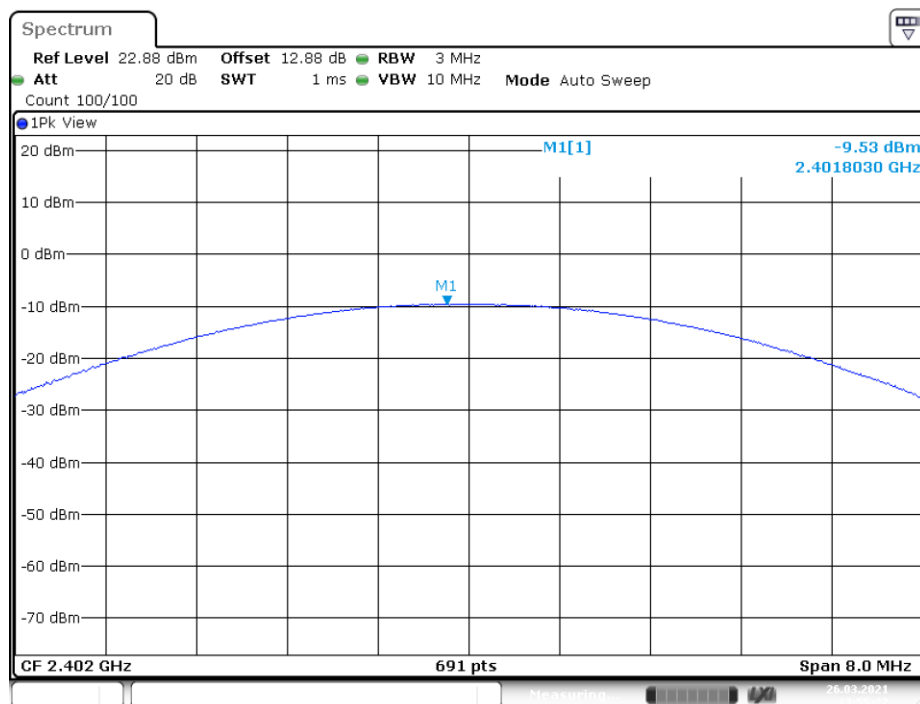


Date: 26.MAR.2021 13:55:22

2DH1_Ant1_2441MHz

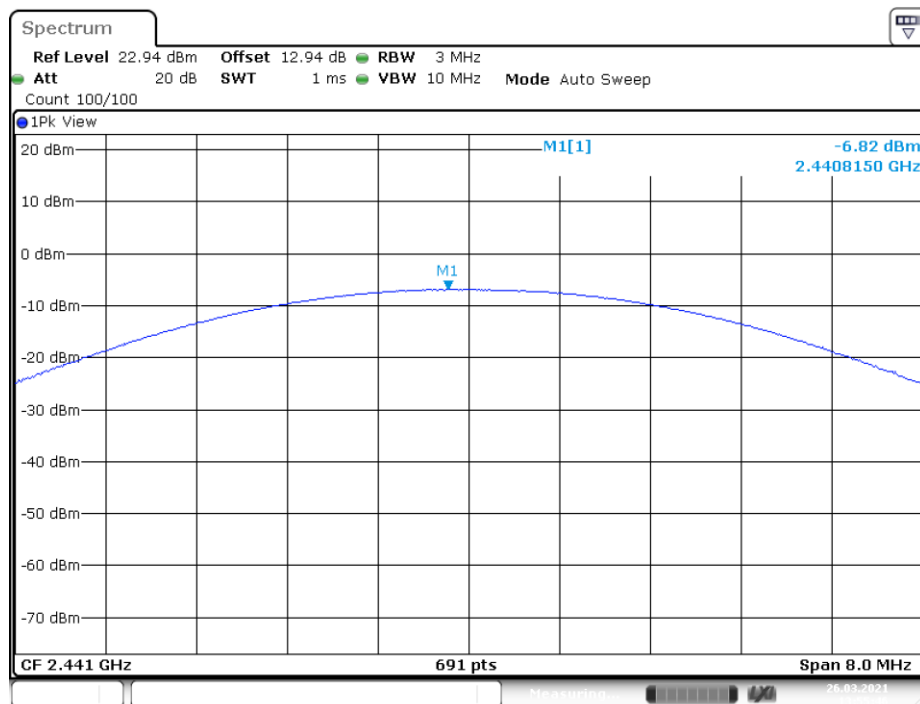


Date: 26.MAR.2021 13:55:47

2DH1_Ant1_2467MHz

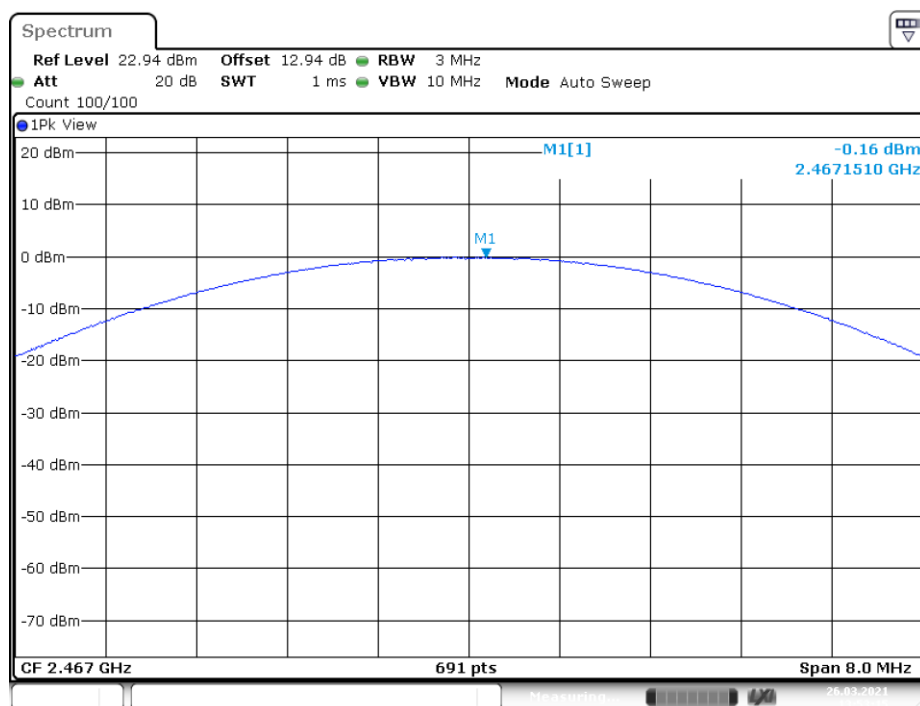


Date: 26.MAR.2021 13:53:16

2DH1_Ant1_2480MHz

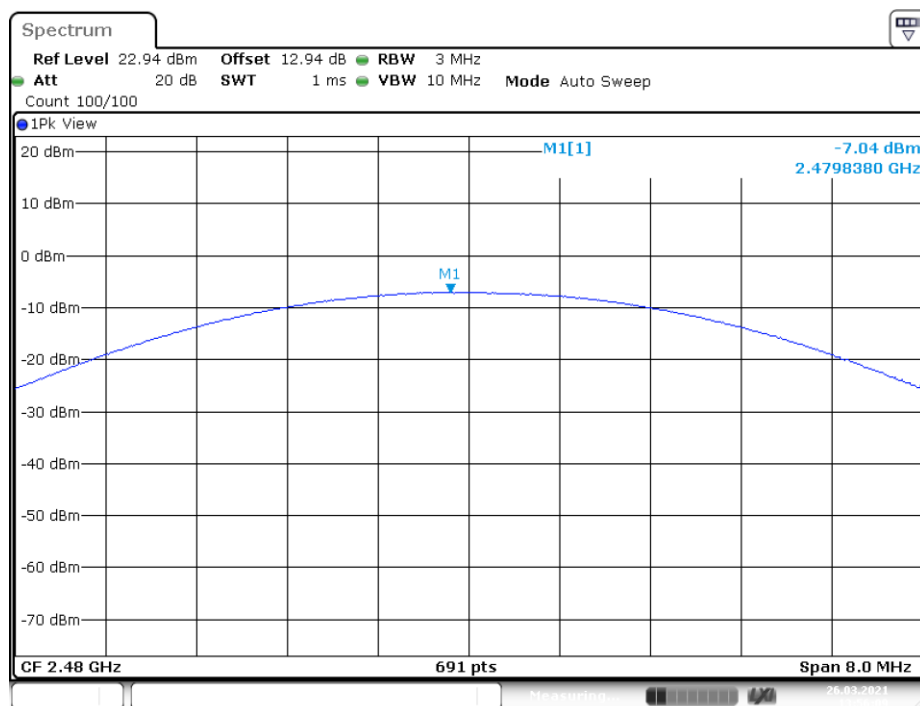


Date: 26.MAR.2021 13:56:09

3DH1_Ant1_2402MHz

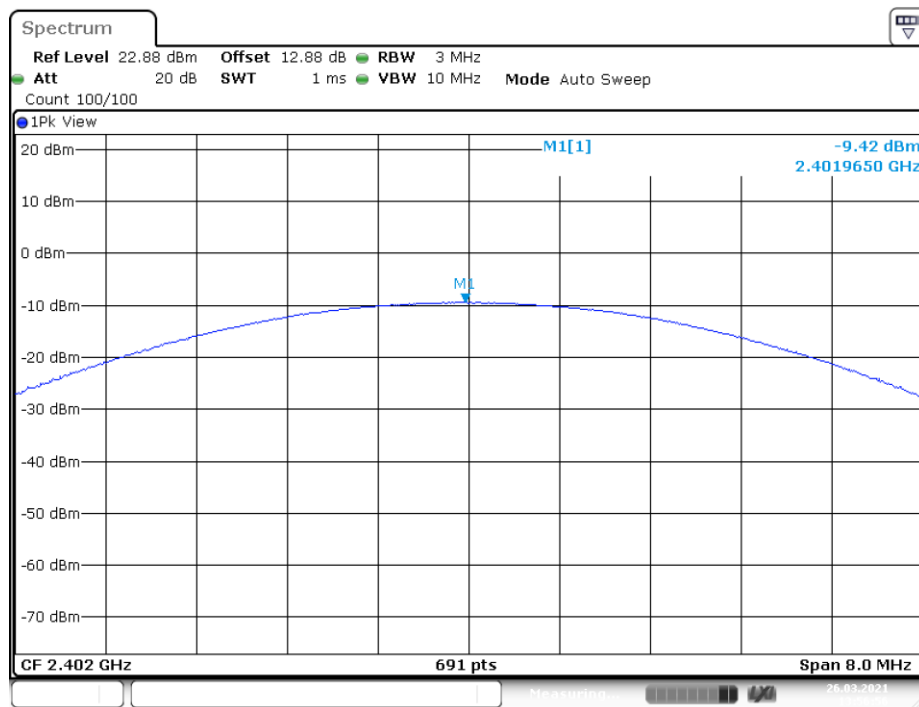


Date: 26.MAR.2021 13:56:57

3DH1_Ant1_2441MHz

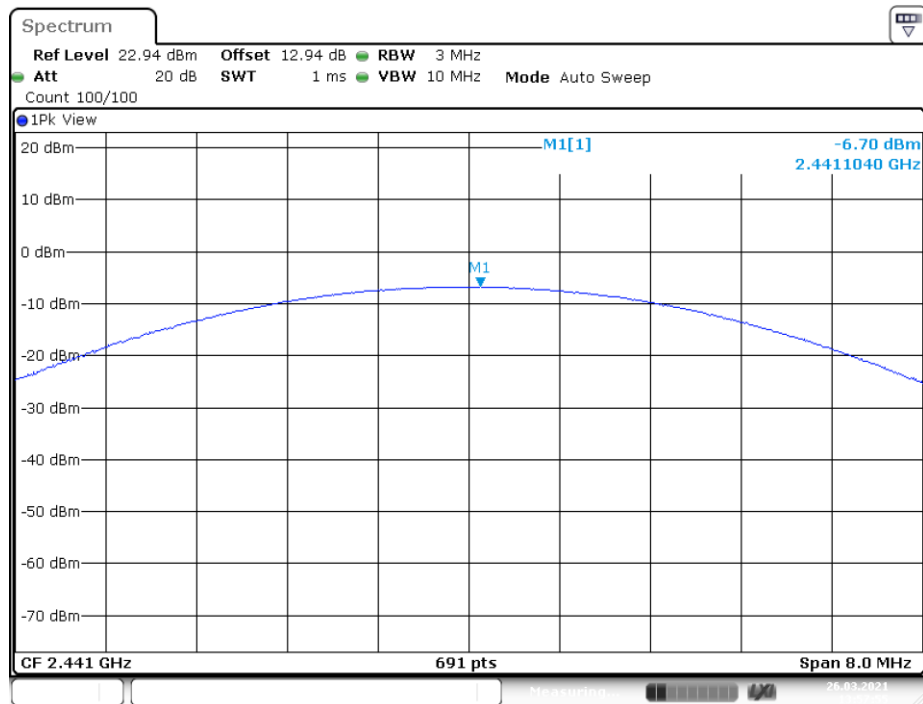


Date: 26.MAR.2021 13:57:55

3DH1_Ant1_2467MHz

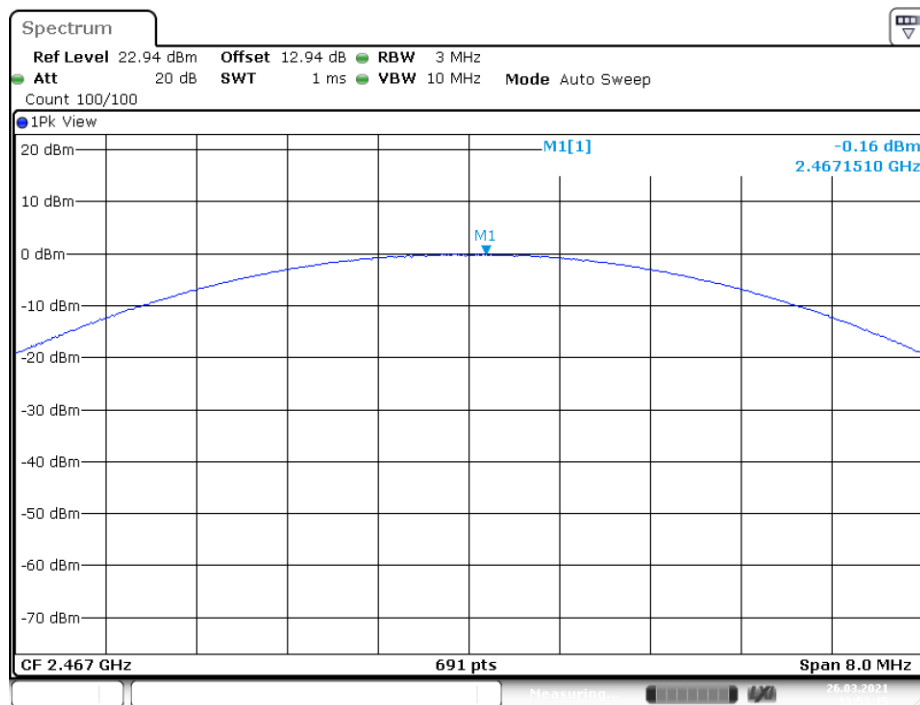

Date: 26.MAR.2021 13:53:16

3DH1_Ant1_2480MHz

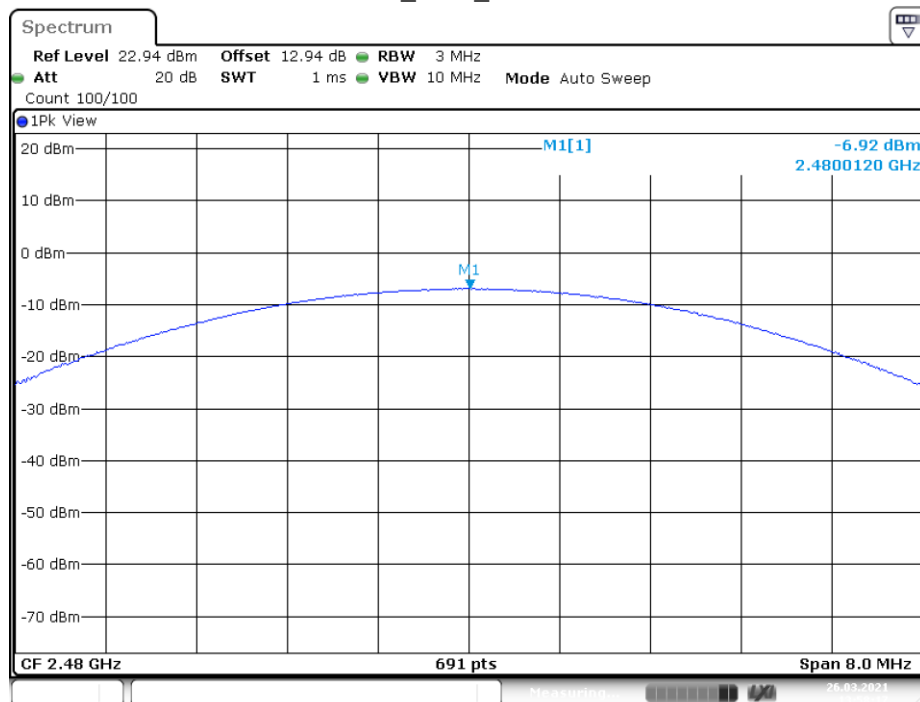

Date: 26.MAR.2021 13:58:18

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data


Environmental Conditions

Temperature:	24°C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Black Ding on 2021-03-26.

EUT operation mode: Transmitting

Test Result: Compliant.

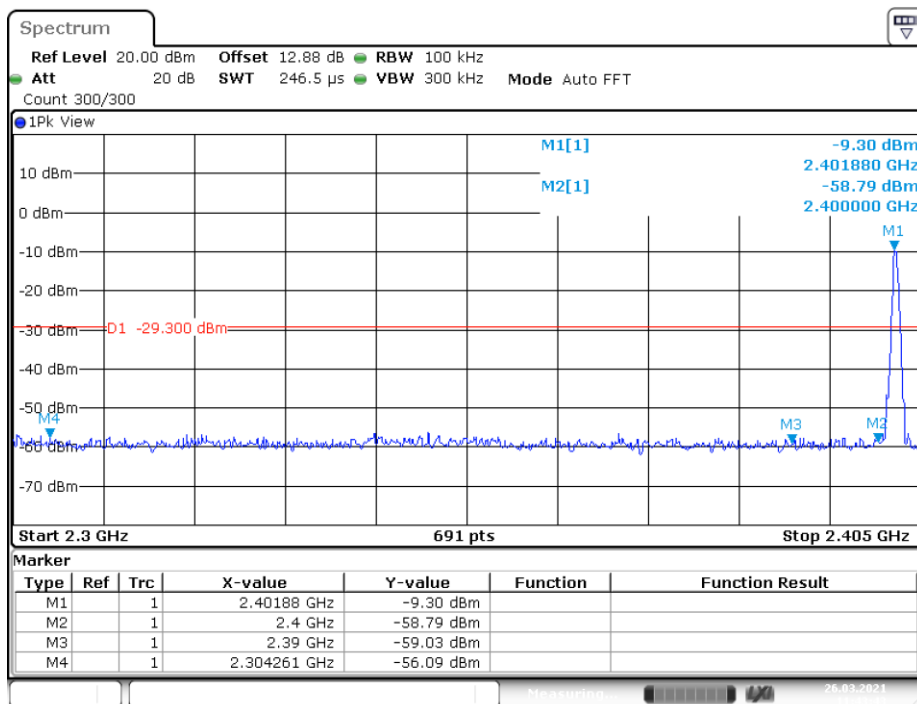
Conducted Band Edge Result:**DH1_Ant1_Low_2402MHz**

Date: 26.MAR.2021 11:43:44

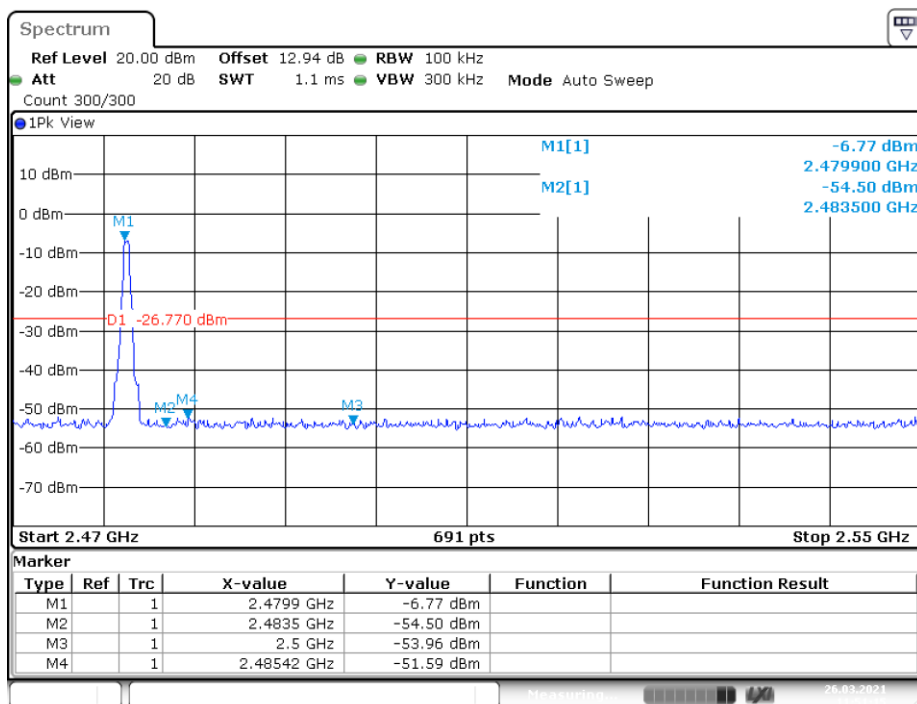DH1_Ant1_High_2480MHz


Date: 26.MAR.2021 11:51:15

DH1_Ant1_Low_Hop_2402MHz

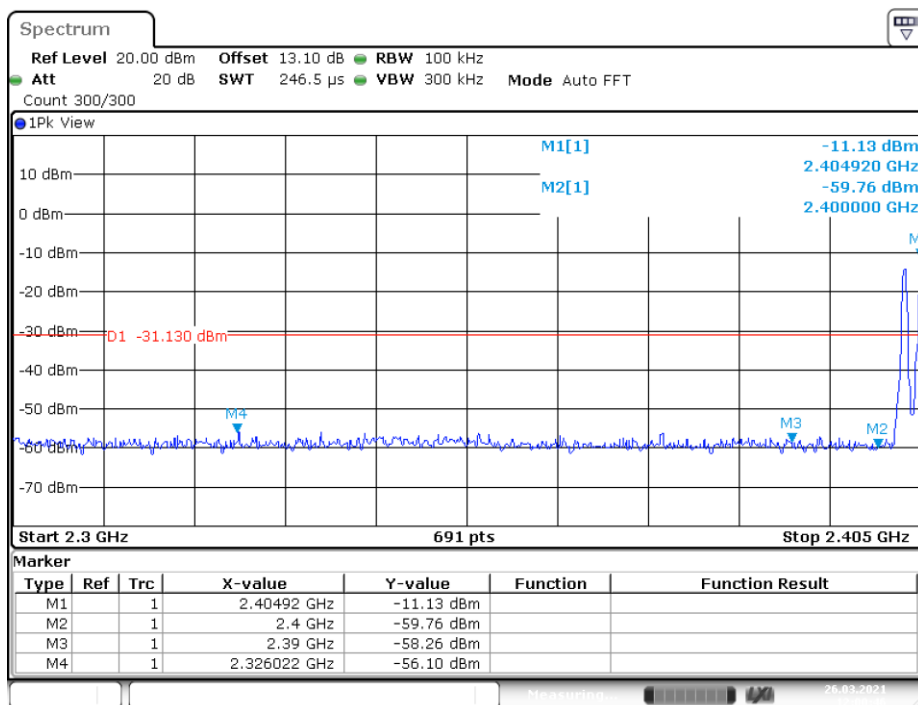


Date: 26.MAR.2021 12:00:47

DH1_Ant1_High_Hop_2480MHz

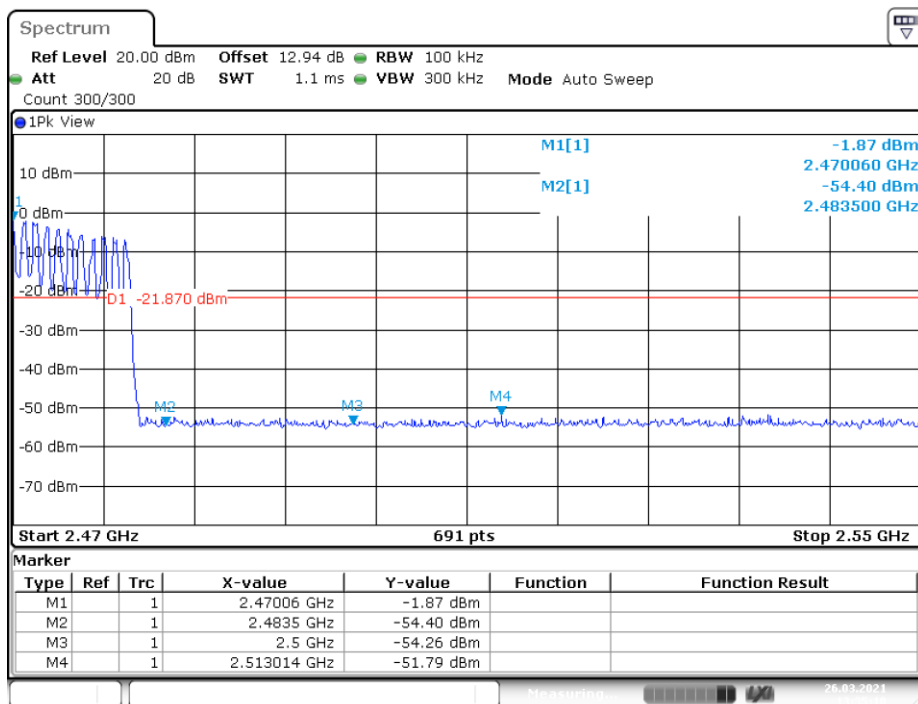


Date: 26.MAR.2021 13:35:10

2DH1_Ant1_Low_2402MHz

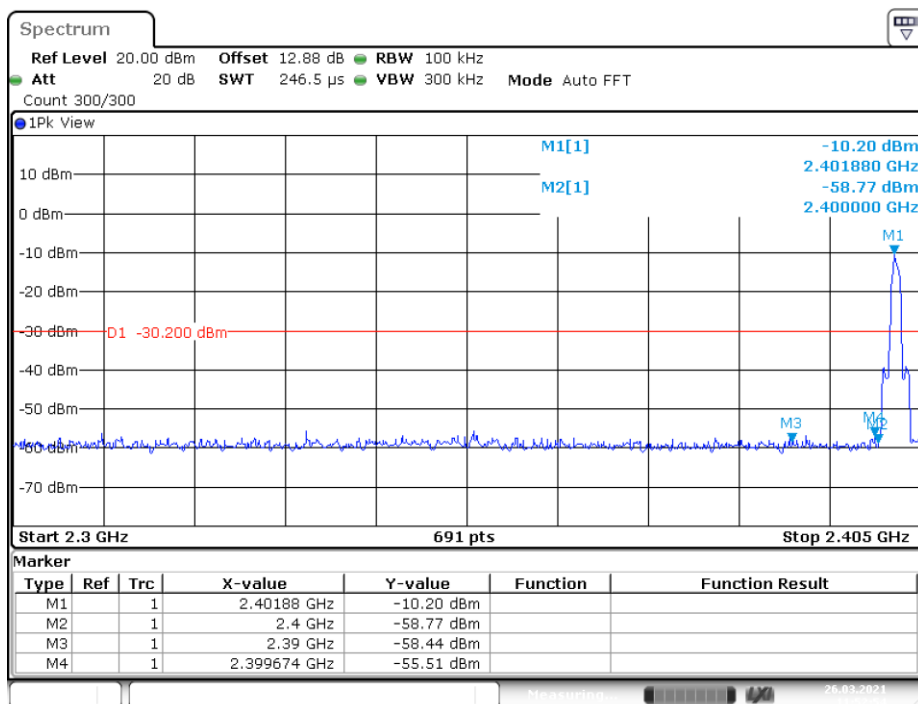


Date: 26.MAR.2021 11:52:54

2DH1_Ant1_High_2480MHz

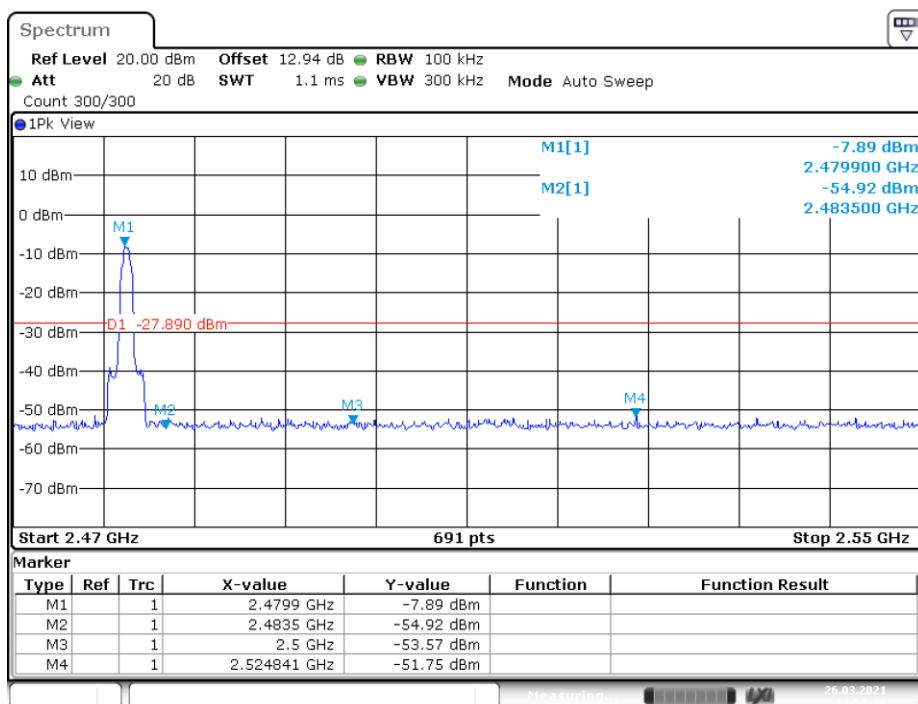


Date: 26.MAR.2021 11:55:39

2DH1_Ant1_Low_Hop_2402MHz

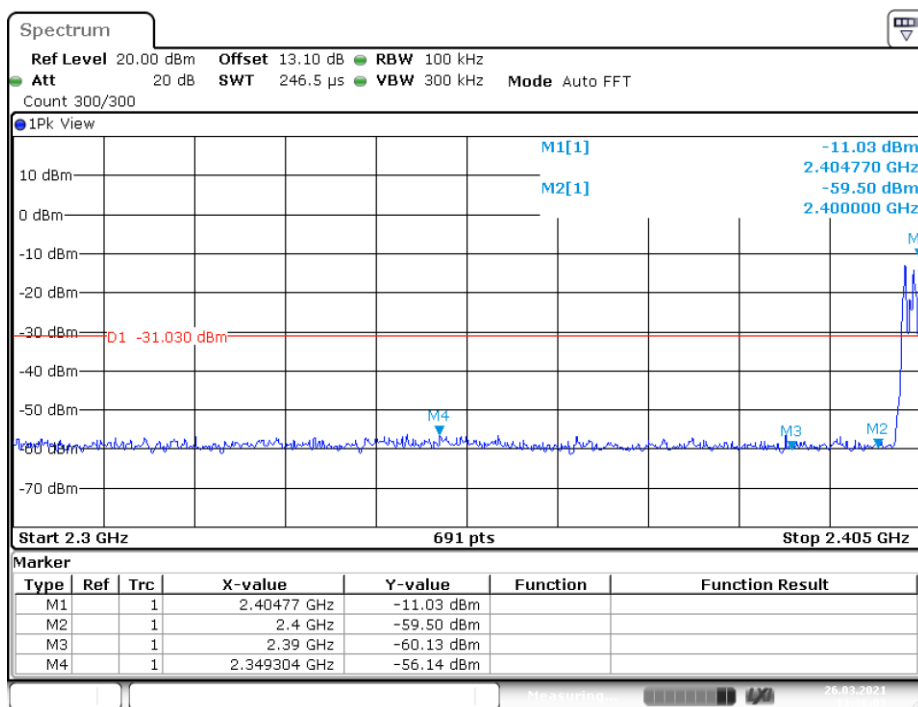


Date: 26.MAR.2021 13:36:04

2DH1_Ant1_High_Hop_2480MHz

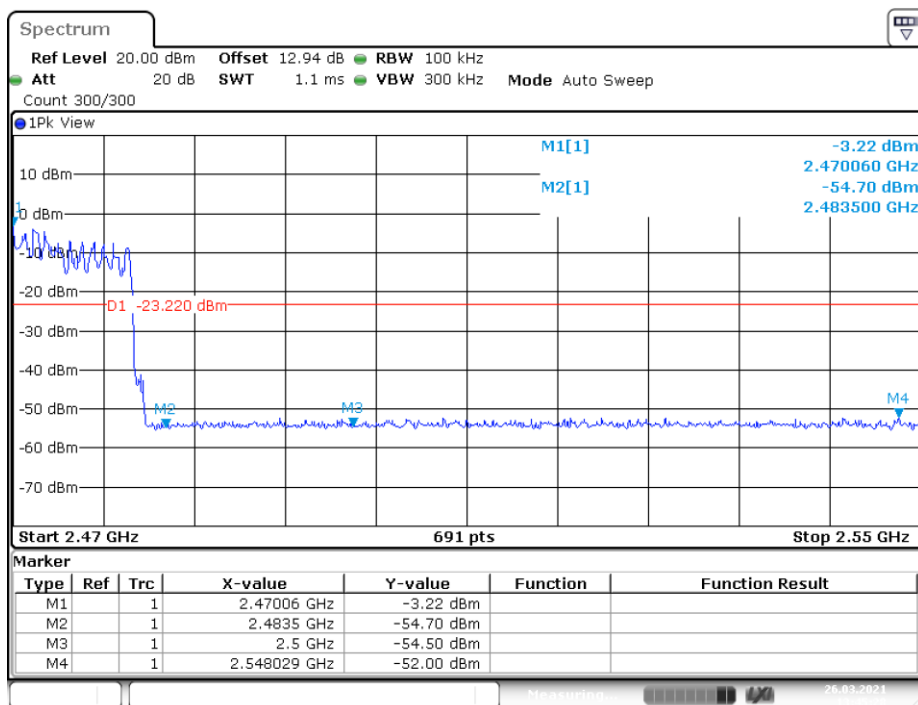


Date: 26.MAR.2021 13:45:29

3DH1_Ant1_Low_2402MHz

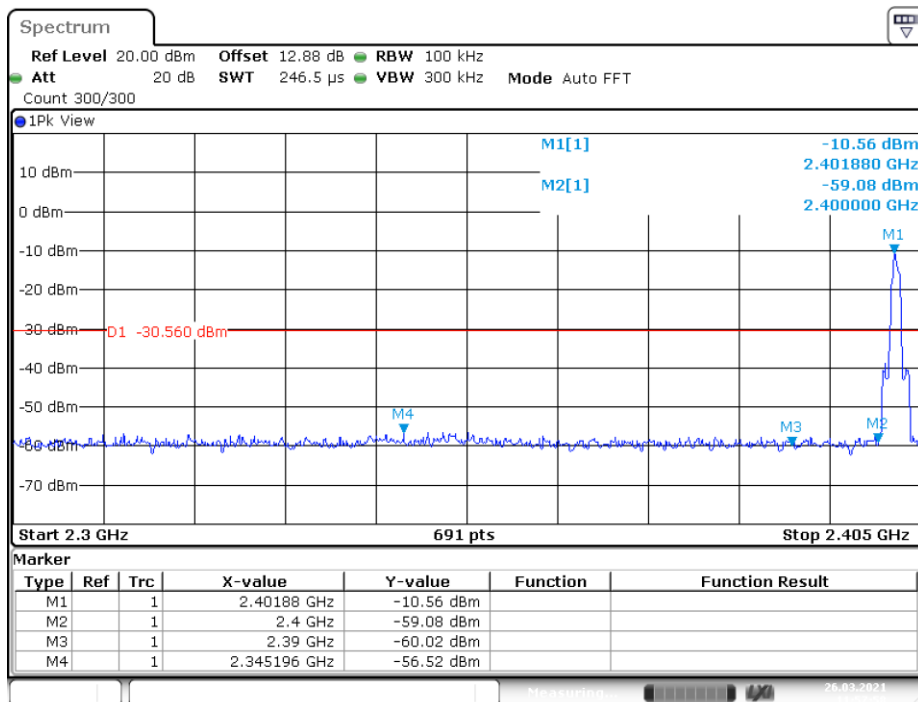


Date: 26.MAR.2021 11:57:58

3DH1_Ant1_High_2480MHz

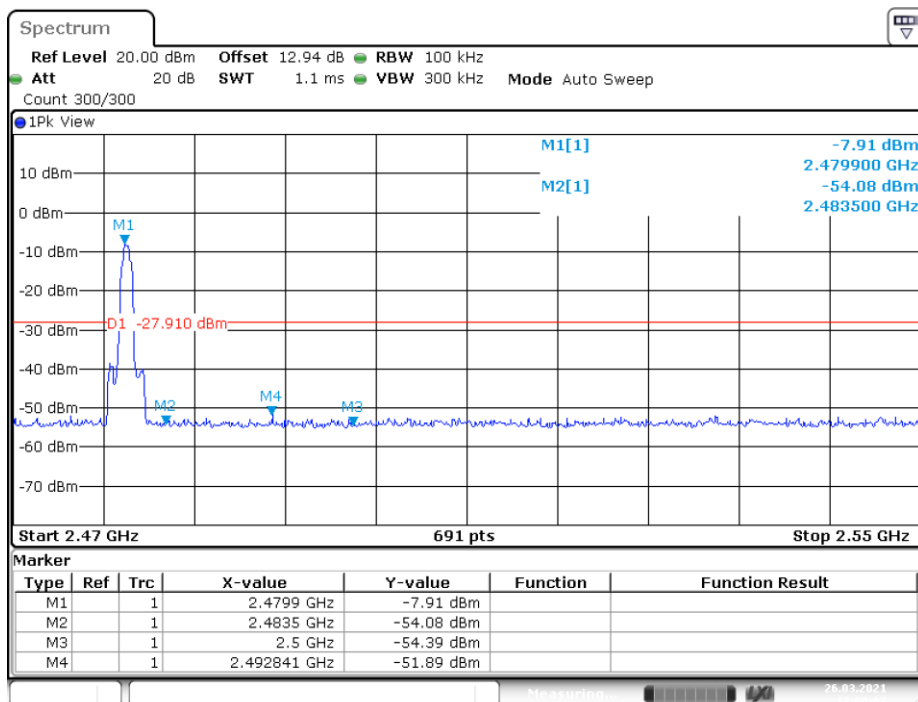


Date: 26.MAR.2021 12:00:08

3DH1_Ant1_Low_Hop_2402MHz

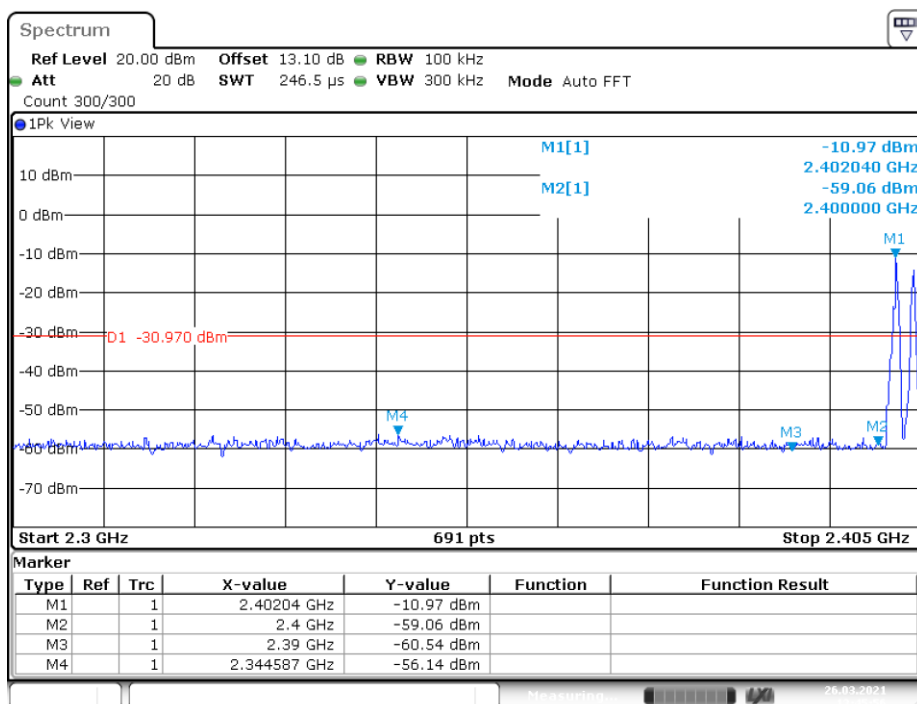

Date: 26.MAR.2021 13:45:57

3DH1_Ant1_High_Hop_2480MHz

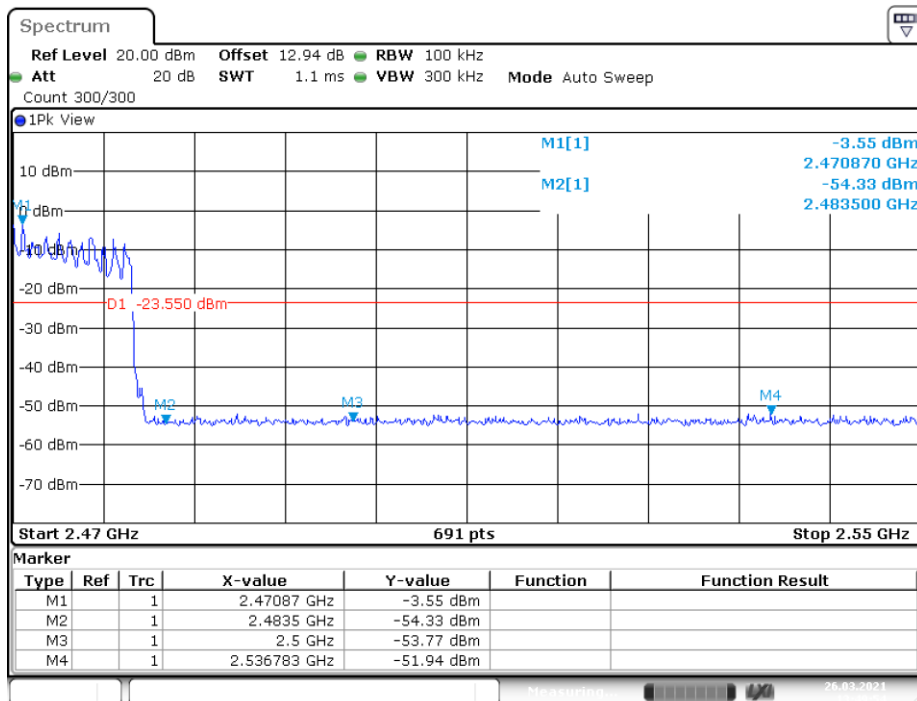

Date: 26.MAR.2021 13:49:54

***** END OF REPORT *****