

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 52.809$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2402 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/BT DH1 Low/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0879 W/kg


Body Back/BT DH1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.221 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.049 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0893 W/kg

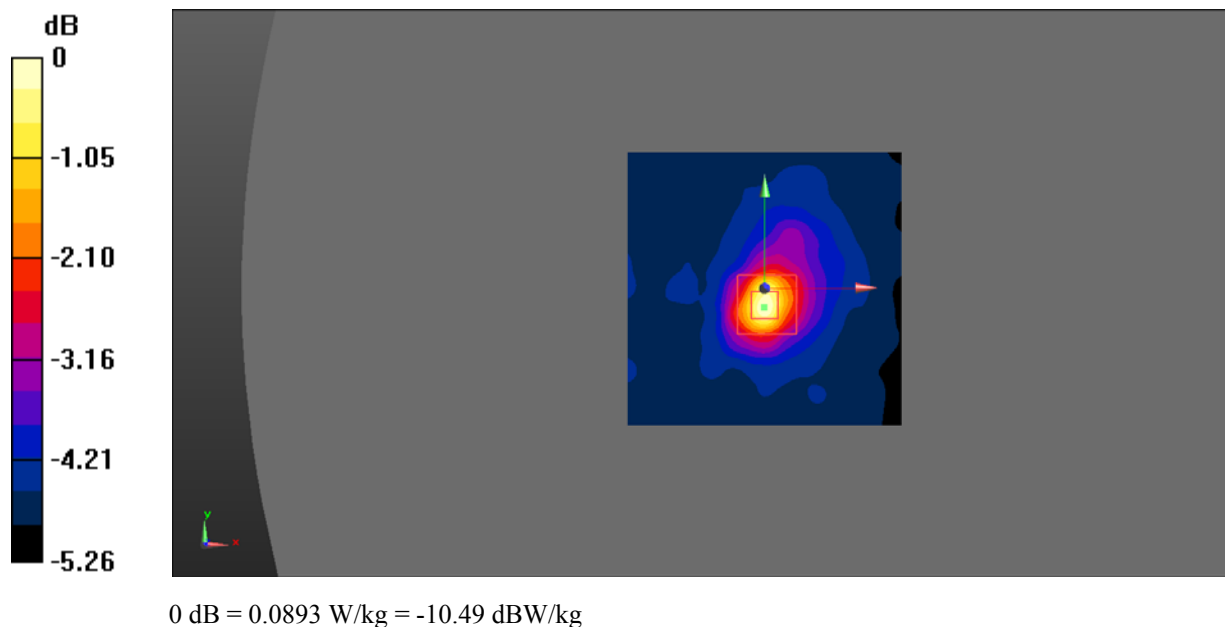

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 52.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2441 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/BT DH1 Mid/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.281 W/kg


Body Back/BT DH1 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.630 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.111 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.278 W/kg

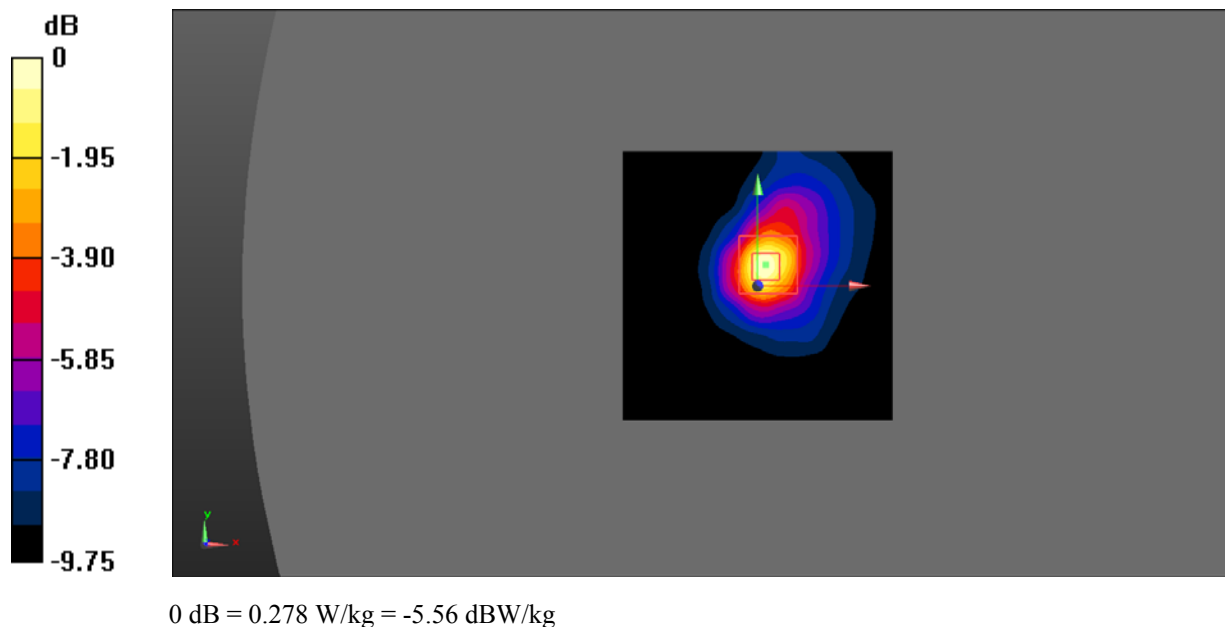

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.991$ S/m; $\epsilon_r = 52.317$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2480 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/BT DH1 High/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.205 W/kg


Body Back/BT DH1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.451 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.087 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.203 W/kg

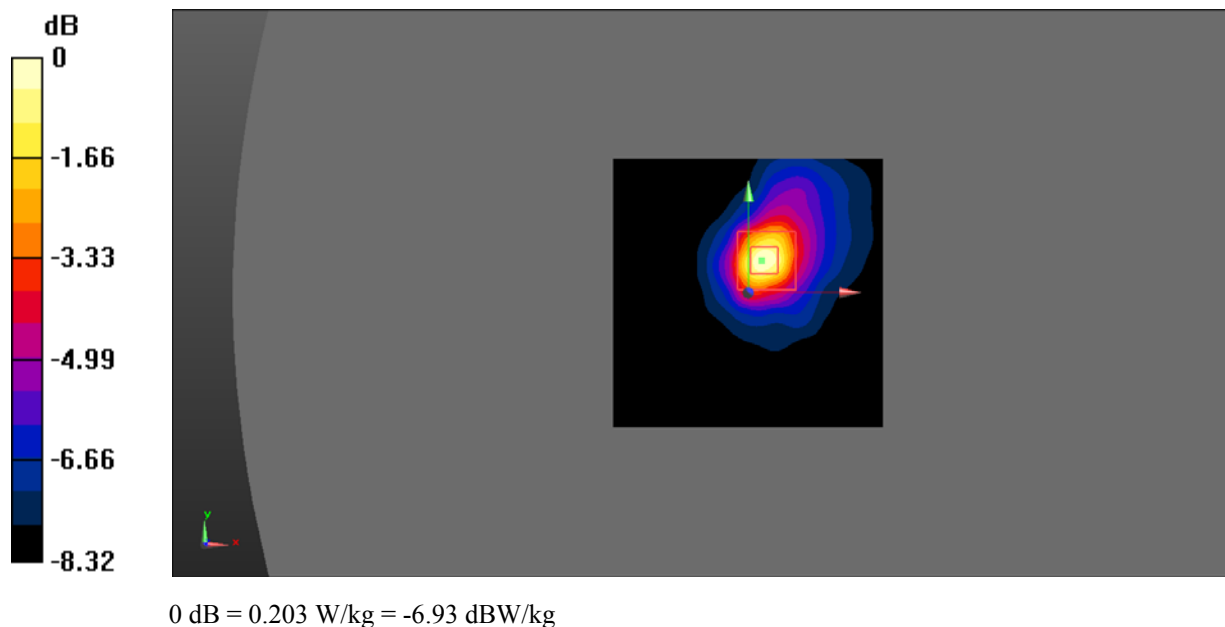

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.991$ S/m; $\epsilon_r = 52.317$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2441 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/BT DH1 High/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0339 W/kg


Body Top/BT DH1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.936 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.034 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0370 W/kg

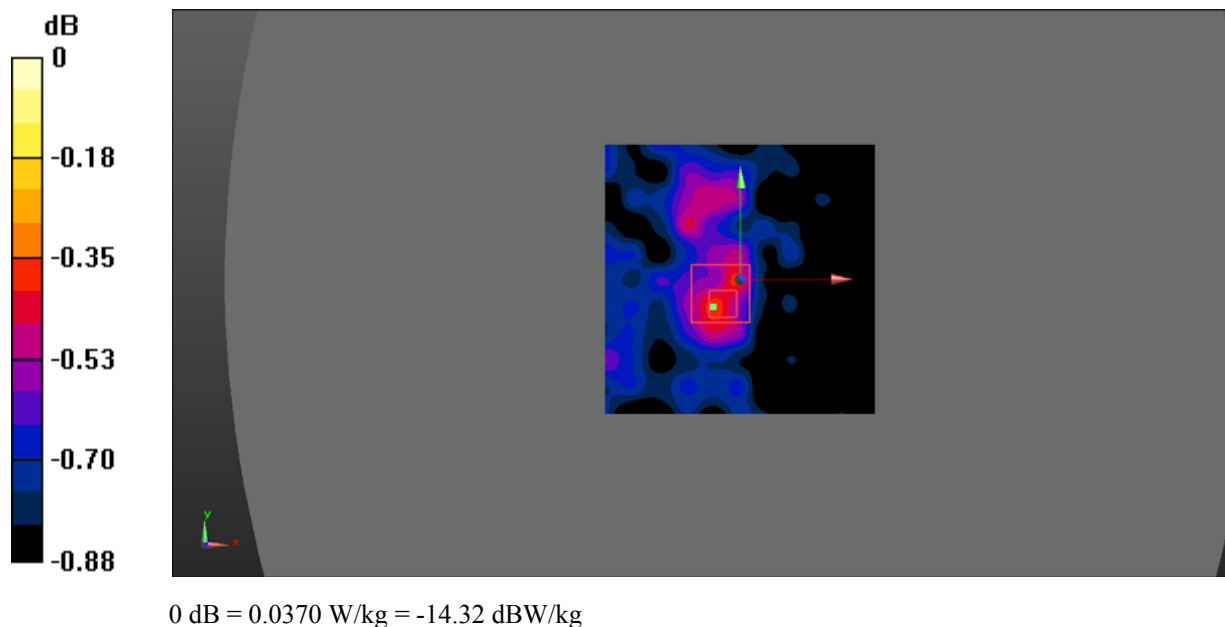

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.923$ S/m; $\epsilon_r = 52.454$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2412 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 2.4G 802.11b Low/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.742 W/kg


Body Back/WLAN 2.4G 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.84 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.262 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.746 W/kg

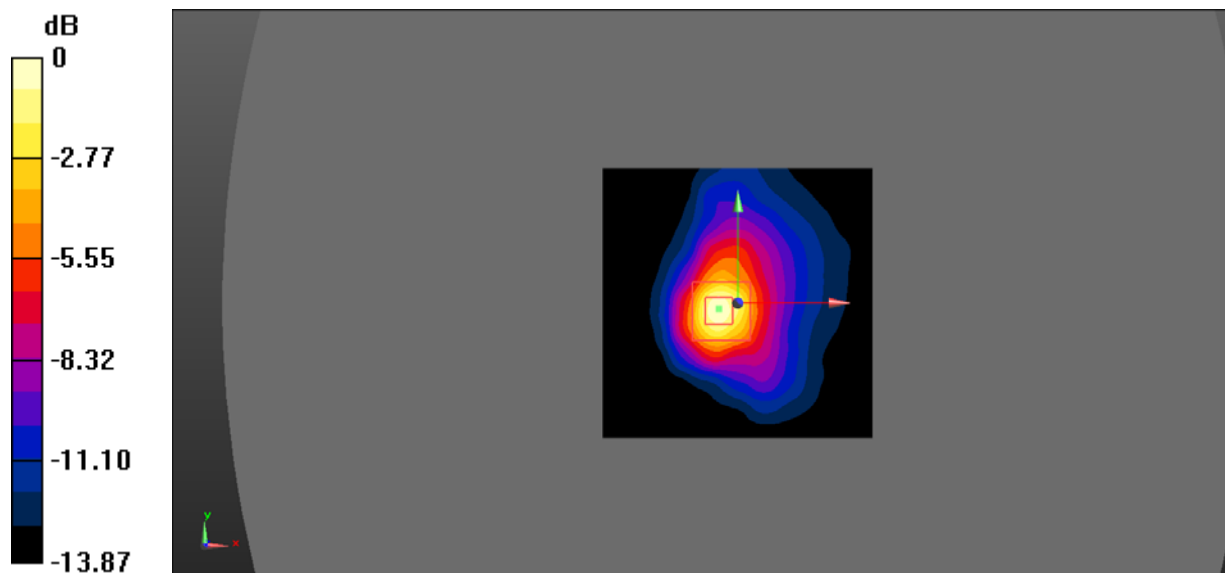

0 dB = 0.746 W/kg = -1.27 dBW/kg

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 52.588$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 2.4G 802.11b Mid/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.701 W/kg


Body Back/WLAN 2.4G 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.87 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.249 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.707 W/kg

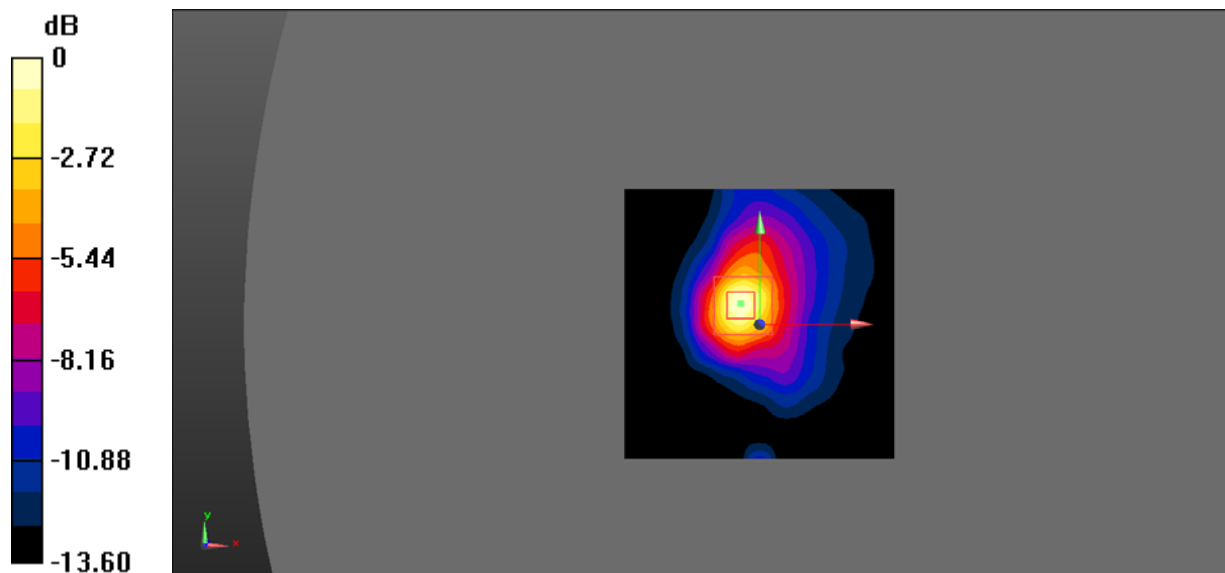

0 dB = 0.707 W/kg = -1.51 dBW/kg

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2472$ MHz; $\sigma = 1.998$ S/m; $\epsilon_r = 52.43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2472 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 2.4G 802.11b High/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.510 W/kg


Body Back/WLAN 2.4G 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.60 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.186 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.512 W/kg

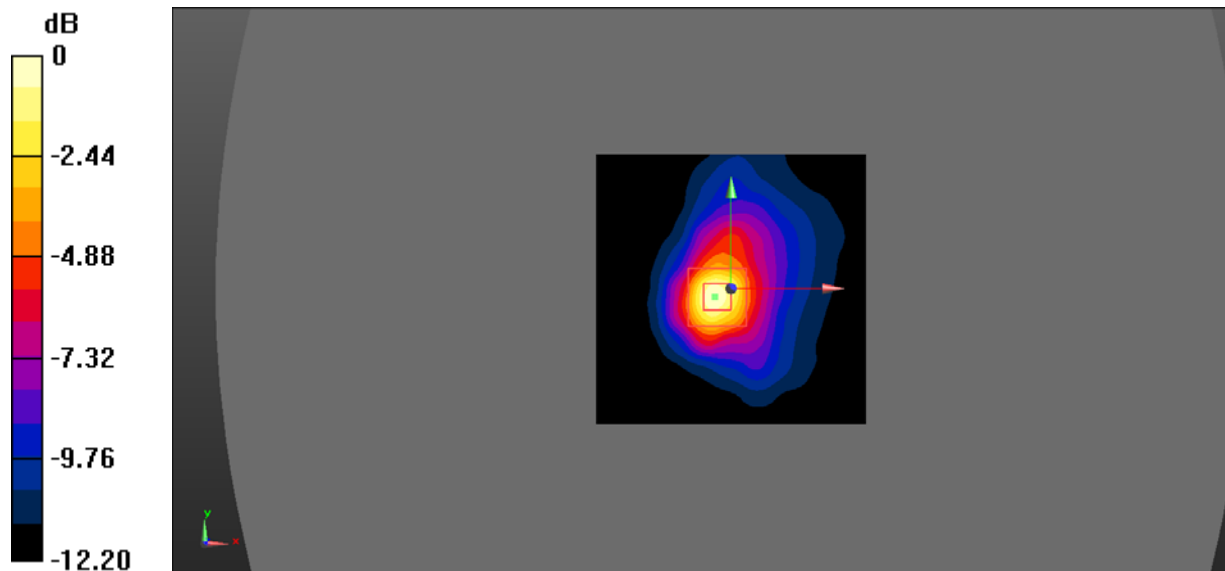

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.923$ S/m; $\epsilon_r = 52.454$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 2.4G 802.11b Low/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0933 W/kg


Body Top/WLAN 2.4G 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.094 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.052 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0846 W/kg

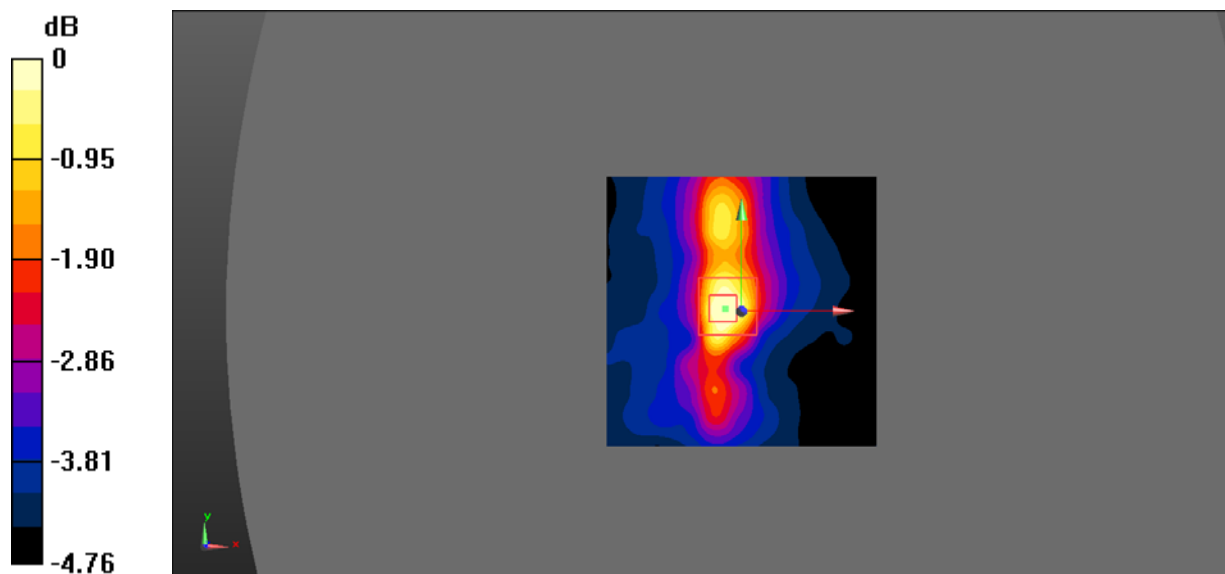

0 dB = 0.0846 W/kg = -10.73 dBW/kg

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 5.492$ S/m; $\epsilon_r = 49.181$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.77, 4.77, 4.77) @ 5290 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.2G 802.11ac80 Mid/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.20 W/kg


Body Back/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.25 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.272 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.20 W/kg

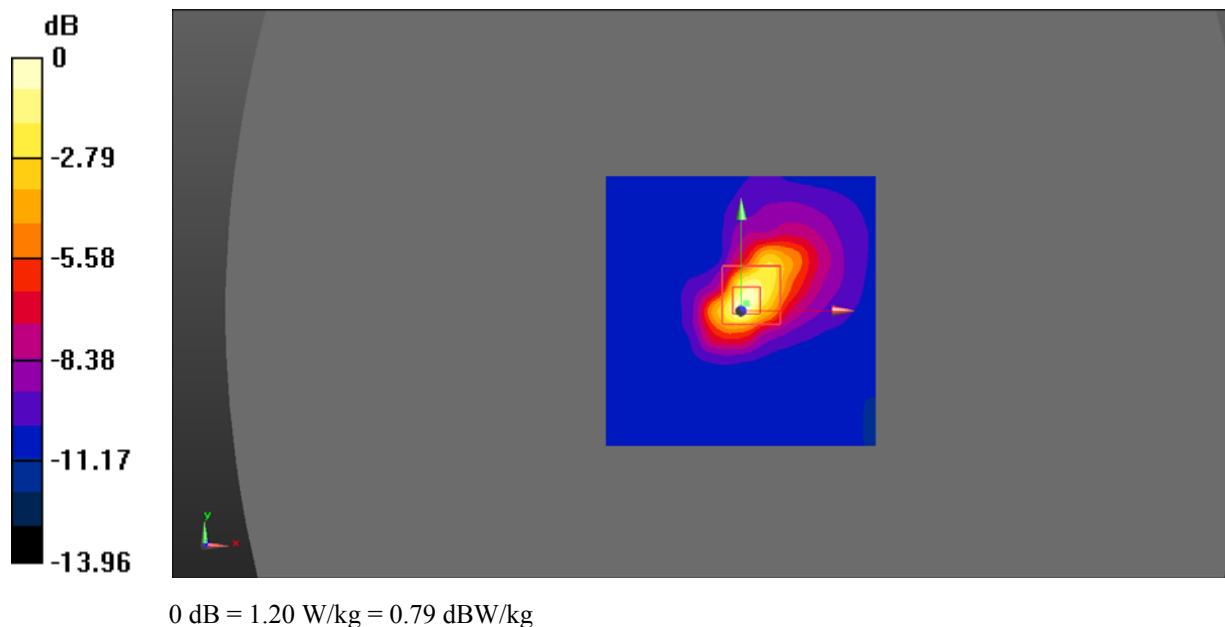

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 5.492$ S/m; $\epsilon_r = 49.181$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.77, 4.77, 4.77) @ 5290 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 5.2G 802.11ac80 Mid/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.710 W/kg


Body Top/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.175 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.191 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.726 W/kg

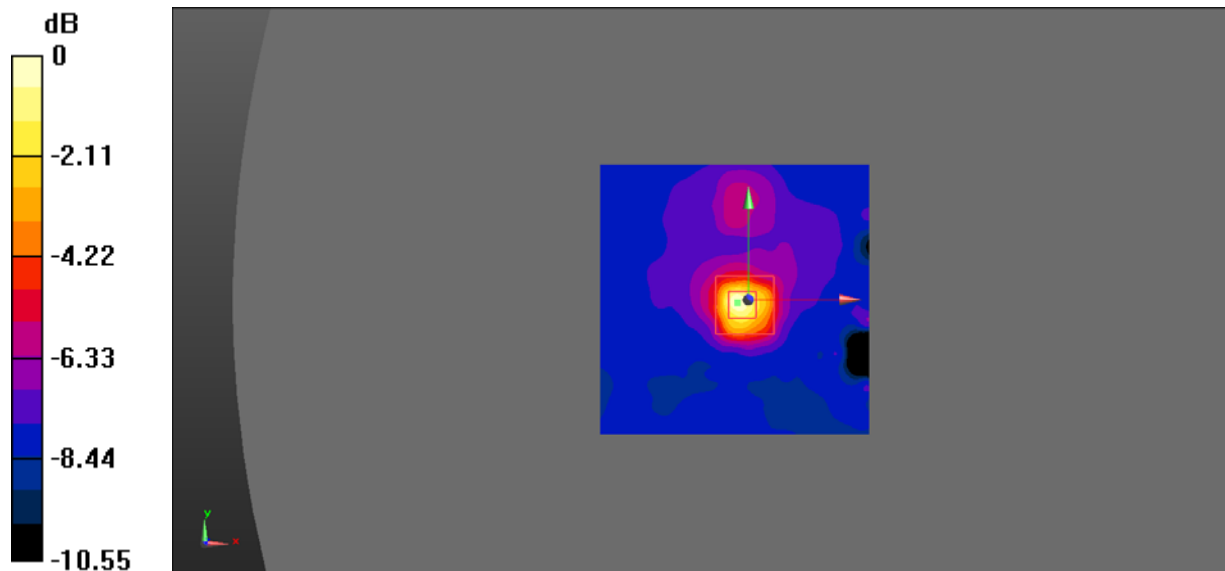

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.733$ S/m; $\epsilon_r = 48.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.27, 4.27, 4.27) @ 5500 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.6G 802.11a Low/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.58 W/kg


Body Back/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.98 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.331 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.50 W/kg

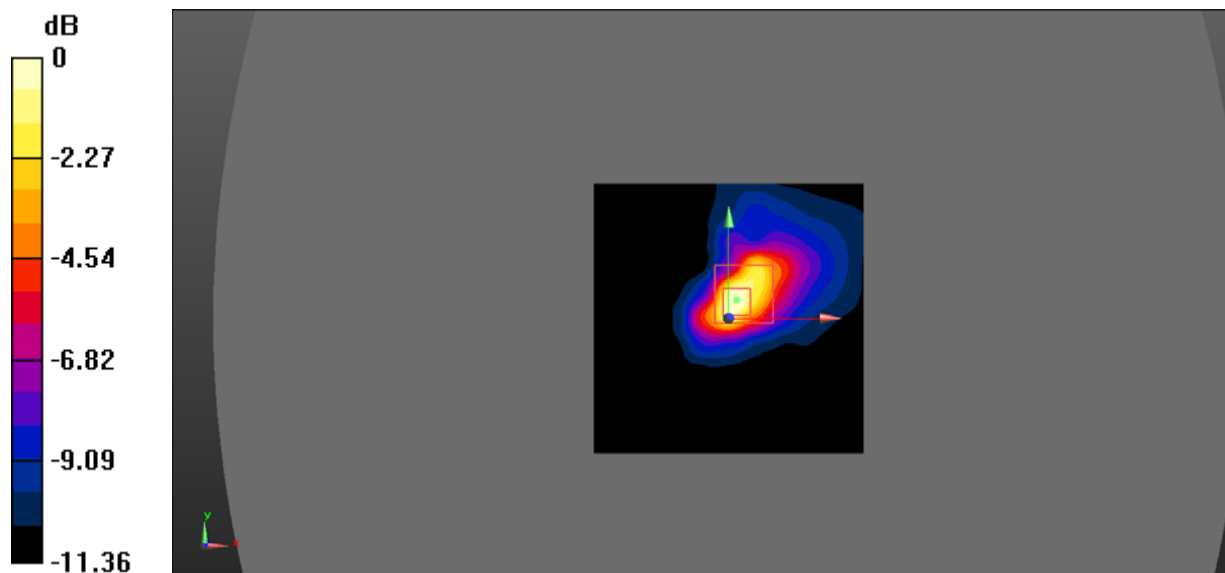

0 dB = 1.50 W/kg = 1.76 dBW/kg

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5600$ MHz; $\sigma = 5.862$ S/m; $\epsilon_r = 48.777$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.27, 4.27, 4.27) @ 5600 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.6G 802.11a Mid/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.32 W/kg


Body Back/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.820 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.307 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.34 W/kg

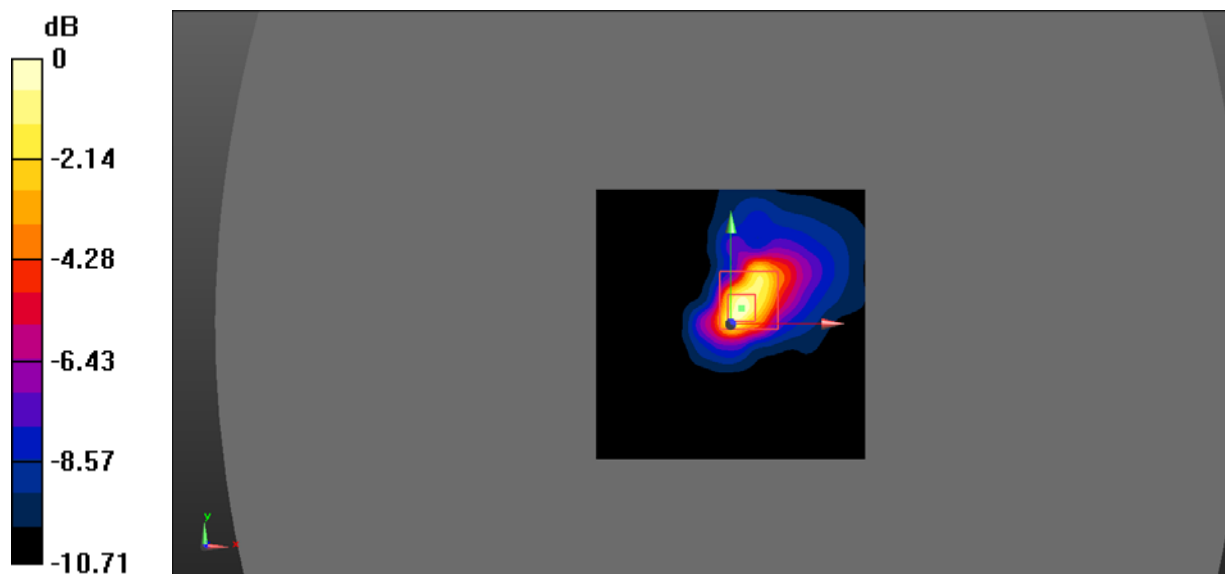

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.937$ S/m; $\epsilon_r = 48.536$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.27, 4.27, 4.27) @ 5700 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.6G 802.11a High/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.799 W/kg


Body Back/WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.824 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.84 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.243 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.853 W/kg

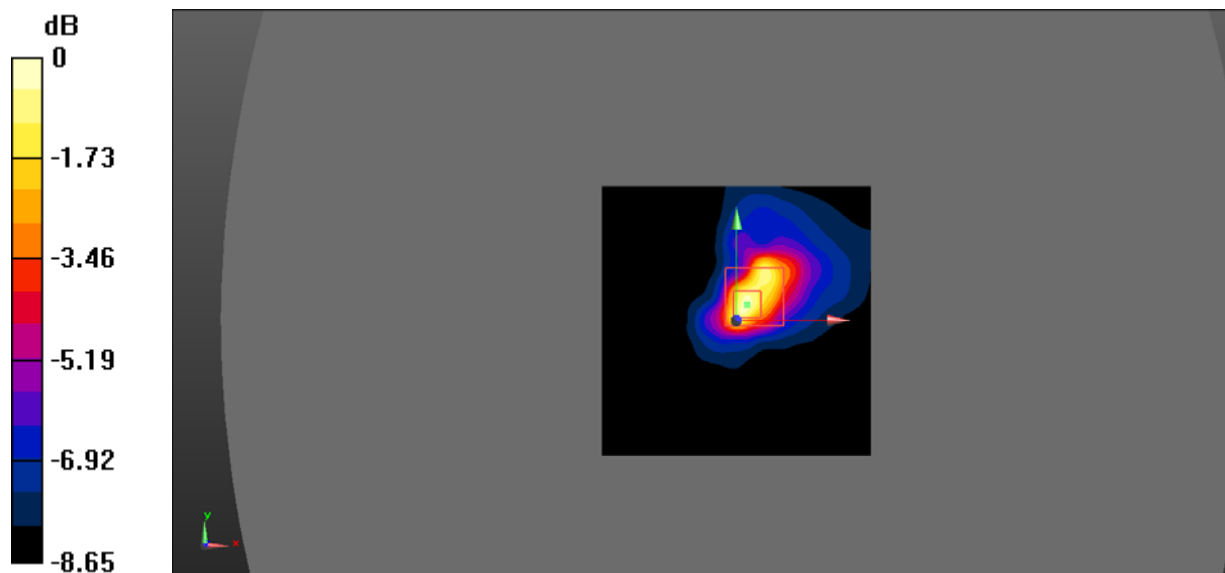

0 dB = 0.853 W/kg = -0.69 dBW/kg

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5600$ MHz; $\sigma = 5.862$ S/m; $\epsilon_r = 48.777$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.27, 4.27, 4.27) @ 5600 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 5.6G 802.11a Mid/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.640 W/kg


Body Top/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.883 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.195 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.594 W/kg

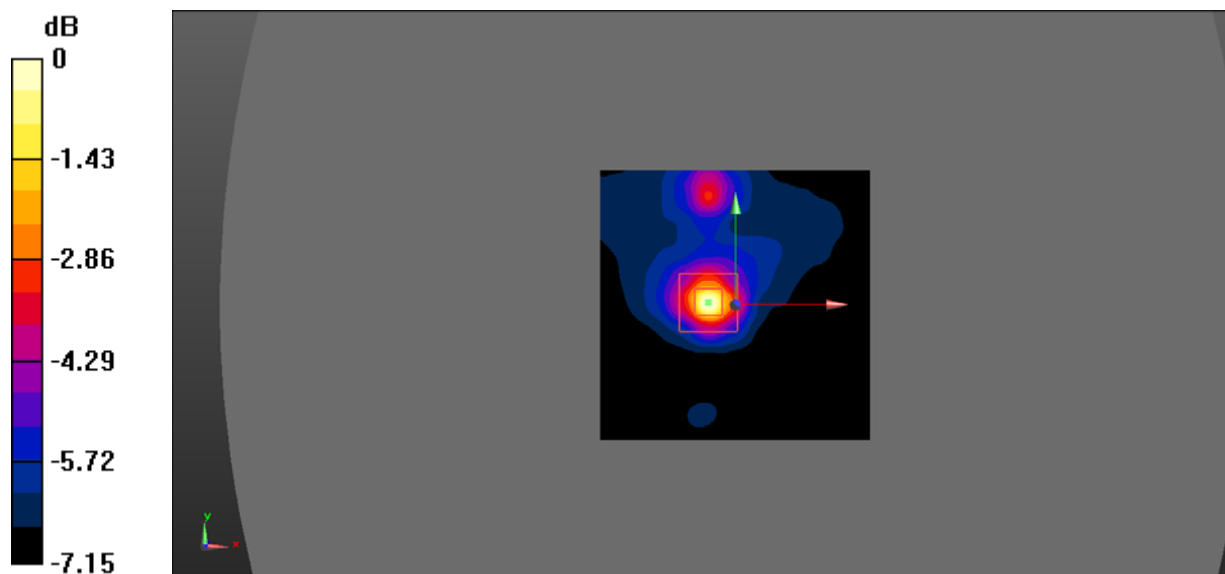

0 dB = 0.594 W/kg = -2.26 dBW/kg

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.031$ S/m; $\epsilon_r = 48.369$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.31, 4.31, 4.31) @ 5775 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.8G 802.11ac80 Mid/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Body Back/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.522 V/m; Power Drift = -0.24 dB

Peak SAR (extrapolated) = 3.93 W/kg

SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.330 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.42 W/kg

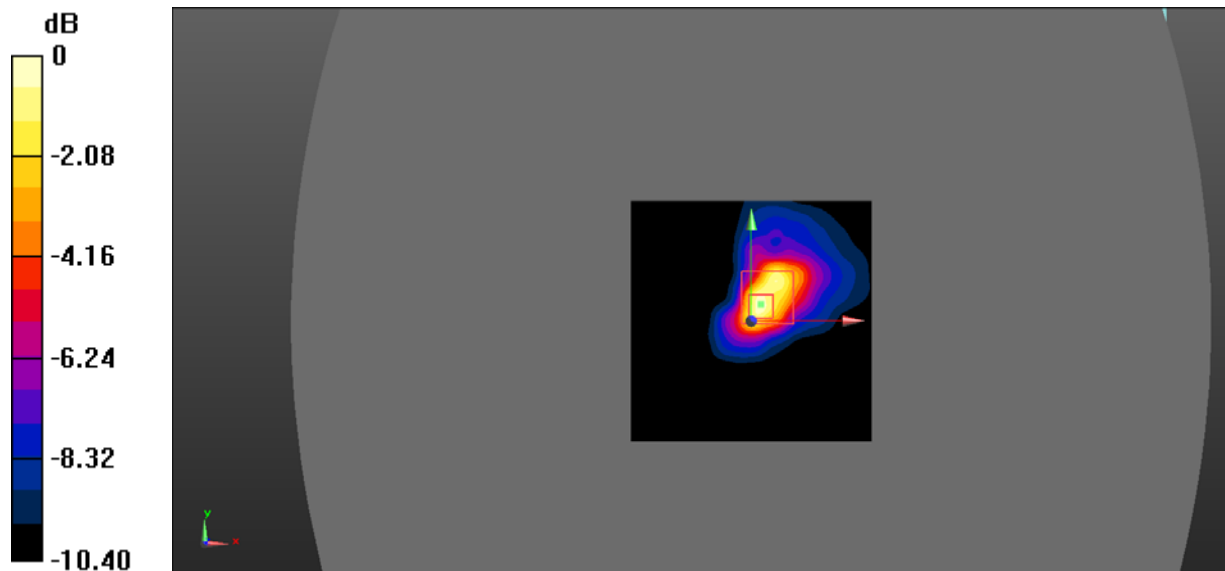

DUT: Tablet PC; Type: M11550; Serial: 19022500103

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.031$ S/m; $\epsilon_r = 48.369$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.31, 4.31, 4.31) @ 5775 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 5.8G 802.11ac80 Mid/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.519 W/kg

Body Top/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.573 V/m; Power Drift = 0.118 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.187 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.516 W/kg

