

FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

Shenzhen Jingwah Information Technology Co., Ltd.

4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Shenzhen, China

FCC ID: RBD-S50L

Report Type: Original Report	Product Type: Smart Phone
Test Engineer: <u>Simon Wang</u> <i>Simon wang</i>	
Report Number: <u>RSZ160106004-00D</u>	
Report Date: <u>2016-01-23</u>	
Reviewed By: <u>RF Engineer</u> <i>Bell Hu</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER.....	10
APPLICABLE STANDARDS.....	10
TEST PROCEDURE	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	39
APPLICABLE STANDARDS.....	39
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA	40
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	98
APPLICABLE STANDARDS.....	98
TEST PROCEDURE	98
TEST EQUIPMENT LIST AND DETAILS.....	98
TEST DATA	99
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	127
APPLICABLE STANDARDS.....	127
TEST PROCEDURE	127
TEST EQUIPMENT LIST AND DETAILS.....	128
TEST DATA	128
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	132
APPLICABLE STANDARDS.....	132
TEST PROCEDURE	132
TEST EQUIPMENT LIST AND DETAILS.....	133
TEST DATA	133
FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....	191

APPLICABLE STANDARDS.....191

TEST PROCEDURE191

TEST EQUIPMENT LIST AND DETAILS.....192

TEST DATA192

PRODUCT SIMILARITY DECLARATION LETTER200

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Shenzhen Jingwah Information Technology Co., Ltd.'s product, model number: S50L (FCC ID: RBD-S50L) or the "EUT" in this report was a Smart Phone, which was measured approximately: 145 mm (L) × 72 mm (W) × 9 mm (H), rated with input voltage: DC 3.8V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Model: KA25-0501600US

Input AC: 100-240V, 50/60Hz, 0.25A, Max

Output DC: 5.0V, 1000mA

Note: The series product, model S50 and S50L are identical schematics, they are just different from model number due to marketing purposes. Model S50L was selected for fully testing. The detail was explained in the attached product similarity declaration letter provided and guaranteed by applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1601034 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2016-01-06.*

Objective

This type approval report is prepared on behalf of Shenzhen Jingwah Information Technology Co., Ltd. in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: RBD-S50L.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2103. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Block Diagram of Test Setup

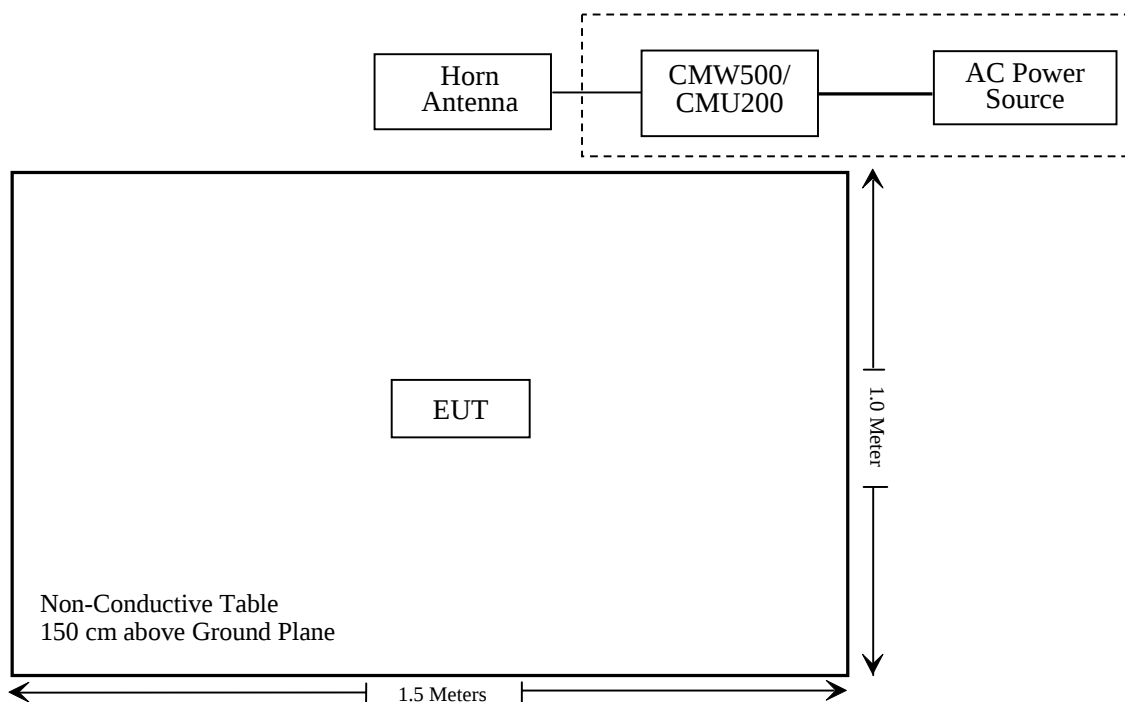

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (i)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53 (c)	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53(c) (g)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (c) (g)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (c) (g);	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ160106004-20.

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ160106004-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.

Test Procedure*Conducted method:*

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.

*Radiated method:*

TIA603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
HP	Synthesized Sweeper	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Simon Wang on 2016-01-19.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.59	38.45
	190	836.6	32.54	38.45
	251	848.8	32.37	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.79	32.11	30.42	29.35	38.45
	190	836.6	32.67	31.92	30.11	29.02	38.45
	251	848.8	32.14	31.43	29.71	28.57	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	28.65	27.58	25.72	24.78	38.45
	190	836.6	28.34	27.24	25.39	24.44	38.45
	251	848.8	27.96	26.84	24.97	24.02	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		21.83	21.97	21.67
		Rel 6 HSDPA	1	20.85	21.02	20.53
			2	20.83	21.01	20.56
			3	20.84	21.04	20.57
			4	20.86	21.05	20.54
		Rel 6 HSUPA	1	20.64	20.74	20.44
			2	20.69	20.76	20.42
			3	20.68	20.71	20.45
			4	20.62	20.72	20.43
			5	20.63	20.75	20.47
		HSPA+	1	20.55	21.02	20.54

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.05	33
	661	1880.0	29.62	33
	810	1909.8	28.58	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	30.57	29.26	26.54	25.41	33
	661	1880.0	29.65	28.82	26.57	25.46	33
	810	1909.8	28.68	28.15	26.49	25.52	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	25.44	24.60	22.92	21.43	33
	661	1880.0	25.84	25.07	23.49	22.00	33
	810	1909.8	26.00	25.37	23.94	22.54	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		21.85	21.89	21.39
		Rel 6 HSDPA	1	20.86	20.92	20.35
			2	20.84	20.90	20.38
			3	20.82	20.95	20.41
			4	20.83	20.97	20.40
		Rel 6 HSUPA	1	20.63	20.69	20.38
			2	20.65	20.72	20.37
			3	20.67	20.71	20.45
			4	20.69	20.74	20.44
			5	20.64	20.70	20.37
		HSPA+	1	20.71	20.75	20.54

AWS Band (Part 27)

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	RMC12.2k		21.53	22.18	21.51
		Rel 6 HSDPA	1	20.60	21.12	20.55
			2	20.58	21.18	20.57
			3	20.55	21.19	20.53
			4	20.56	21.14	20.59
		Rel 6 HSUPA	1	20.47	20.94	20.45
			2	20.43	20.91	20.47
			3	20.49	20.93	20.42
			4	20.45	20.97	20.50
			5	20.46	20.92	20.49
		HSPA+	1	20.42	21.01	20.55

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.45	13
	Middle	0.47	13
	High	0.39	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.25	13
	Middle	0.28	13
	High	0.21	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.48	13
	Middle	3.44	13
	High	3.47	13
HSDPA (16QAM)	Low	3.36	13
	Middle	3.37	13
	High	3.39	13
HSUPA (BPSK)	Low	3.40	13
	Middle	3.36	13
	High	3.41	13
HSPA+ (BPSK)	Low	3.45	13
	Middle	3.39	13
	High	3.29	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.34	13
	Middle	0.31	13
	High	0.36	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.29	13
	Middle	0.32	13
	High	0.35	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	1.23	13
	Middle	1.25	13
	High	1.42	13
HSDPA (16QAM)	Low	1.37	13
	Middle	1.30	13
	High	1.35	13
HSUPA (BPSK)	Low	1.40	13
	Middle	1.37	13
	High	1.43	13
HSPA+ (BPSK)	Low	1.47	13
	Middle	1.35	13
	High	1.43	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	0.92	13
	Middle	0.89	13
	High	0.96	13
HSDPA (16QAM)	Low	0.87	13
	Middle	0.84	13
	High	0.74	13
HSUPA (BPSK)	Low	0.79	13
	Middle	0.76	13
	High	0.75	13
HSPA+ (BPSK)	Low	0.85	13
	Middle	0.79	13
	High	0.73	13

Radiated Power**ERP & EIRP****GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	95.32	282	1	H	28.9	0.67	0	28.23	38.45	10.22
836.6	95.80	128	2.4	V	29.4	0.67	0	28.73	38.45	9.72
EIRP for PCS Band (Part 24E), Middle Channel										
1880	89.86	324	1.2	H	14.5	1	9.4	22.9	33	10.1
1880	86.12	110	1.4	V	18.5	1	9.4	26.9	33	6.1

EDGE Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	91.12	32	1.5	H	24.7	0.67	0	24.03	38.45	14.42
836.6	90.65	139	2.4	V	24.3	0.67	0	23.63	38.45	14.82
EIRP for PCS Band (Part 24E), High Channel										
1909.8	110.96	113	2.2	H	14.94	1.4	7.3	20.84	33	12.16
1909.8	111.38	242	2.2	V	16.93	1.4	7.3	22.83	33	10.17

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	87.62	83	1	H	21.2	0.67	0	20.53	38.45	17.92
836.6	87.86	79	2.4	V	21.4	0.67	0	20.73	38.45	17.72
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880	84.12	115	1.1	H	15.4	1.40	7.30	21.30	33	11.7
1880	83.78	185	1.8	V	14.5	1.40	7.30	20.40	33	12.6
EIRP for WCDMA Band IV (Part 27), Middle Channel										
1732.6	83.52	159	2.5	H	14.7	1.60	6.90	20.00	30	10
1732.6	84.6	348	1.1	V	15.4	1.60	6.90	20.70	30	9.3

Note:

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

LTE Band 2:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.15	22.37	22.52
		RB Size=1, RB Offset=2	22.12	22.52	22.42
		RB Size=1, RB Offset=5	22.17	22.44	21.99
		RB Size=3, RB Offset=0	22.17	22.40	22.44
		RB Size=3, RB Offset=1	22.12	22.51	22.49
		RB Size=3, RB Offset=2	22.19	22.55	22.56
		RB Size=6, RB Offset=0	21.19	21.46	21.46
	16QAM	RB Size=1, RB Offset=0	21.38	21.66	21.66
		RB Size=1, RB Offset=2	21.06	21.64	22.61
		RB Size=1, RB Offset=5	21.31	21.65	21.2
		RB Size=3, RB Offset=0	21.34	21.29	21.2
		RB Size=3, RB Offset=1	21.45	21.41	21.07
		RB Size=3, RB Offset=2	21.40	21.52	21.27
		RB Size=6, RB Offset=0	20.35	20.55	20.62
3.0	QPSK	RB Size=1, RB Offset=0	22.28	22.41	22.75
		RB Size=1, RB Offset=7	22.26	22.56	22.6
		RB Size=1, RB Offset=14	22.14	22.5	22.03
		RB Size=8, RB Offset=0	22.27	22.54	22.15
		RB Size=8, RB Offset=4	22.32	22.43	22.31
		RB Size=8, RB Offset=7	22.21	22.41	22.38
		RB Size=15, RB Offset=0	21.14	21.6	21.77
	16QAM	RB Size=1, RB Offset=0	21.49	21.64	22.19
		RB Size=1, RB Offset=7	21.46	21.35	22.06
		RB Size=1, RB Offset=14	21.37	21.57	21.78
		RB Size=8, RB Offset=0	21.46	21.24	21.68
		RB Size=8, RB Offset=4	21.39	21.22	21.82
		RB Size=8, RB Offset=7	21.37	21.3	21.85
		RB Size=15, RB Offset=0	20.28	20.61	20.74

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.35	21.41	22.82
		RB Size=1, RB Offset=12	22.22	21.67	22.86
		RB Size=1, RB Offset=24	22.1	22.49	22.17
		RB Size=12, RB Offset=0	22.27	22.52	22.3
		RB Size=12, RB Offset=6	22.24	22.58	22.14
		RB Size=12, RB Offset=11	22.25	22.52	22.76
		RB Size=25, RB Offset=0	20.96	21.04	21.69
	16QAM	RB Size=1, RB Offset=0	21.72	21.59	21.99
		RB Size=1, RB Offset=12	21.41	21.64	22.36
		RB Size=1, RB Offset=24	21.75	21.72	21.52
		RB Size=12, RB Offset=0	21.66	21.66	21.49
		RB Size=12, RB Offset=6	21.74	21.53	21.57
		RB Size=12, RB Offset=11	21.48	21.61	21.47
		RB Size=25, RB Offset=0	20.19	20.46	20.84
10.0	QPSK	RB Size=1, RB Offset=0	21.61	22.42	22.3
		RB Size=1, RB Offset=24	21.75	22.42	22.32
		RB Size=1, RB Offset=49	21.7	22.55	22.2
		RB Size=25, RB Offset=0	21.76	22.43	22.27
		RB Size=25, RB Offset=12	21.66	22.42	22.51
		RB Size=25, RB Offset=24	21.68	22.39	22.52
		RB Size=50, RB Offset=0	21.69	21.89	22.37
	16QAM	RB Size=1, RB Offset=0	21.65	22.4	22.52
		RB Size=1, RB Offset=24	21.71	22.33	22.51
		RB Size=1, RB Offset=49	21.7	22.38	22.61
		RB Size=25, RB Offset=0	21.72	22.21	22.45
		RB Size=25, RB Offset=12	21.73	22.25	22.4
		RB Size=25, RB Offset=24	21.64	22.49	22.47
		RB Size=50, RB Offset=0	21.63	21.01	22.67

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.31	21.81	22.16
		RB Size=1, RB Offset=37	22.17	21.97	22.57
		RB Size=1, RB Offset=74	22.54	21.9	21.95
		RB Size=36, RB Offset=0	22.43	21.87	21.97
		RB Size=36, RB Offset=18	22.29	21.84	21.87
		RB Size=36, RB Offset=37	22.4	21.91	22.66
		RB Size=75, RB Offset=0	22.11	21.86	22.5
	16QAM	RB Size=1, RB Offset=0	22.18	21.73	21.86
		RB Size=1, RB Offset=37	22.1	21.81	21.9
		RB Size=1, RB Offset=74	22.28	21.94	22.62
		RB Size=36, RB Offset=0	22.07	21.78	22.46
		RB Size=36, RB Offset=18	21.97	21.77	22.1
		RB Size=36, RB Offset=37	21.95	21.89	21.85
		RB Size=75, RB Offset=0	21.94	21.88	22.32
20.0	QPSK	RB Size=1, RB Offset=0	22.2	22.02	22.05
		RB Size=1, RB Offset=49	22.27	22.02	22.42
		RB Size=1, RB Offset=99	22.24	21.99	22.55
		RB Size=50, RB Offset=0	22.35	21.94	22.58
		RB Size=50, RB Offset=24	22.32	22.12	22.65
		RB Size=50, RB Offset=49	22.19	22.35	22.37
		RB Size=100, RB Offset=0	22.3	22.3	22.83
	16QAM	RB Size=1, RB Offset=0	22.3	22.01	22.36
		RB Size=1, RB Offset=49	22.35	22.18	22.15
		RB Size=1, RB Offset=99	22.26	22.53	23.31
		RB Size=50, RB Offset=0	22.32	22.64	22.59
		RB Size=50, RB Offset=24	22.28	22.53	23.07
		RB Size=50, RB Offset=49	22.21	22.55	23.38
		RB Size=100, RB Offset=0	22.42	22.67	23.08

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	4.22	13	Pass
QPSK (100%RB Size)	4.39	13	Pass
16QAM (1RB Size)	4.42	13	Pass
16QAM (100%RB Size)	4.42	13	Pass

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880	83.96	294	1.1	H	15.3	1.40	7.30	21.20	33
1880	84.18	181	1.0	V	14.9	1.40	7.30	20.80	33
3 MHz Bandwidth									
1880	83.85	177	2.4	H	15.2	1.40	7.30	21.10	33
1880	83.74	216	1.4	V	14.5	1.40	7.30	20.40	33
5 MHz Bandwidth									
1880	83.74	298	1.5	H	15.1	1.40	7.30	21.00	33
1880	83.89	149	2.1	V	14.7	1.40	7.30	20.60	33
10 MHz Bandwidth									
1880	83.52	173	2.4	H	14.8	1.40	7.30	20.70	33
1880	84.11	102	1.7	V	14.9	1.40	7.30	20.80	33
15 MHz Bandwidth									
1880	83.9	316	1.7	H	15.2	1.40	7.30	21.10	33
1880	84.02	341	1.6	V	14.8	1.40	7.30	20.70	33
20 MHz Bandwidth									
1880	83.35	181	1.9	H	14.7	1.40	7.30	20.60	33
1880	84.18	349	2.4	V	14.9	1.40	7.30	20.80	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880	84.22	273	1.8	H	15.5	1.40	7.30	21.40	33
1880	84.35	315	1.0	V	15.1	1.40	7.30	21.00	33
3 MHz Bandwidth									
1880	84.01	315	1.1	H	15.3	1.40	7.30	21.20	33
1880	84.16	240	2.2	V	14.9	1.40	7.30	20.80	33
5 MHz Bandwidth									
1880	83.76	196	2.1	H	15.1	1.40	7.30	21.00	33
1880	84.17	210	2.2	V	14.9	1.40	7.30	20.80	33
10 MHz Bandwidth									
1880	83.43	175	2.2	H	14.8	1.40	7.30	20.70	33
1880	83.94	106	1.1	V	14.7	1.40	7.30	20.60	33
15 MHz Bandwidth									
1880	83.76	226	1.9	H	15.1	1.40	7.30	21.00	33
1880	84.33	211	1.2	V	15.1	1.40	7.30	21.00	33
20 MHz Bandwidth									
1880	83.48	336	1.0	H	14.8	1.40	7.30	20.70	33
1880	83.74	176	2.1	V	14.5	1.40	7.30	20.40	33

LTE Band 4:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	21.07	22.48	21.23
		RB Size=1, RB Offset=2	20.75	22.67	21.08
		RB Size=1, RB Offset=5	20.98	22.57	21.32
		RB Size=3, RB Offset=0	20.89	22.70	21.2
		RB Size=3, RB Offset=1	20.85	22.60	21.01
		RB Size=3, RB Offset=2	20.65	22.59	21.1
		RB Size=6, RB Offset=0	20.69	22.67	21.11
	16QAM	RB Size=1, RB Offset=0	20.98	22.56	21.24
		RB Size=1, RB Offset=2	20.75	22.54	20.99
		RB Size=1, RB Offset=5	20.84	22.60	21.21
		RB Size=3, RB Offset=0	20.65	22.47	21.34
		RB Size=3, RB Offset=1	20.63	22.48	21.38
		RB Size=3, RB Offset=2	20.71	22.47	21.44
		RB Size=6, RB Offset=0	20.68	22.52	21.37
3.0	QPSK	RB Size=1, RB Offset=0	20.7	22.48	21.43
		RB Size=1, RB Offset=7	20.78	22.6	21.28
		RB Size=1, RB Offset=14	20.77	22.48	21.43
		RB Size=8, RB Offset=0	20.73	22.58	21.61
		RB Size=8, RB Offset=4	20.71	22.71	21.35
		RB Size=8, RB Offset=7	20.78	22.52	21.57
		RB Size=15, RB Offset=0	20.61	22.54	21.59
	16QAM	RB Size=1, RB Offset=0	21.01	22.82	21.44
		RB Size=1, RB Offset=7	21.1	22.96	21.37
		RB Size=1, RB Offset=14	20.76	22.81	21.41
		RB Size=8, RB Offset=0	20.73	20.95	21.19
		RB Size=8, RB Offset=4	20.64	21.16	21.47
		RB Size=8, RB Offset=7	20.81	21.24	21.21
		RB Size=15, RB Offset=0	20.87	21.1	21.43

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	20.56	22.5	21.09
		RB Size=1, RB Offset=12	20.68	22.38	20.95
		RB Size=1, RB Offset=24	20.67	21.92	21.1
		RB Size=12, RB Offset=0	20.89	22.23	20.94
		RB Size=12, RB Offset=6	20.67	22.17	21.08
		RB Size=12, RB Offset=11	20.58	22.22	20.98
		RB Size=25, RB Offset=0	20.48	22.25	20.84
	16QAM	RB Size=1, RB Offset=0	20.81	22.6	21.14
		RB Size=1, RB Offset=12	20.73	22.69	21.3
		RB Size=1, RB Offset=24	20.77	22.9	21.27
		RB Size=12, RB Offset=0	20.87	22.78	21.19
		RB Size=12, RB Offset=6	20.88	22.74	21.17
		RB Size=12, RB Offset=11	21.02	22.85	21.26
		RB Size=25, RB Offset=0	20.86	22.29	20.97
10.0	QPSK	RB Size=1, RB Offset=0	21.02	21.78	20.86
		RB Size=1, RB Offset=24	20.51	21.82	20.72
		RB Size=1, RB Offset=49	20.66	21.72	20.98
		RB Size=25, RB Offset=0	20.35	21.66	20.84
		RB Size=25, RB Offset=12	20.65	21.51	20.93
		RB Size=25, RB Offset=24	20.53	22.11	20.85
		RB Size=50, RB Offset=0	20.18	22.08	20.92
	16QAM	RB Size=1, RB Offset=0	20.24	22.17	20.94
		RB Size=1, RB Offset=24	20.34	22.05	20.82
		RB Size=1, RB Offset=49	20.45	22.33	20.67
		RB Size=25, RB Offset=0	20.76	22.11	20.59
		RB Size=25, RB Offset=12	20.63	22.01	20.73
		RB Size=25, RB Offset=24	20.57	22.17	20.83
		RB Size=50, RB Offset=0	20.59	22.23	20.81

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	20.86	21.87	21.85
		RB Size=1, RB Offset=37	20.79	21.81	22.73
		RB Size=1, RB Offset=74	20.69	21.91	21.31
		RB Size=36, RB Offset=0	20.65	21.28	22.37
		RB Size=36, RB Offset=18	20.59	21.25	22.25
		RB Size=36, RB Offset=37	20.58	21.41	22.10
		RB Size=75, RB Offset=0	20.72	21.69	21.48
	16QAM	RB Size=1, RB Offset=0	20.59	22.11	22.05
		RB Size=1, RB Offset=37	20.63	22.37	22.15
		RB Size=1, RB Offset=74	21.15	22.28	21.39
		RB Size=36, RB Offset=0	21.19	22.03	22.14
		RB Size=36, RB Offset=18	21.5	22.45	22.09
		RB Size=36, RB Offset=37	20.46	22.65	22.17
		RB Size=75, RB Offset=0	20.59	22.06	21.14
20.0	QPSK	RB Size=1, RB Offset=0	20.65	21.42	22.01
		RB Size=1, RB Offset=49	20.72	21.32	21.68
		RB Size=1, RB Offset=99	21.56	21.19	20.70
		RB Size=50, RB Offset=0	20.65	21.45	21.29
		RB Size=50, RB Offset=24	20.68	21.52	21.62
		RB Size=50, RB Offset=49	20.69	21.4	21.59
		RB Size=100, RB Offset=0	20.68	22.11	21.34
	16QAM	RB Size=1, RB Offset=0	20.57	21.55	22.41
		RB Size=1, RB Offset=49	20.58	21.58	22.73
		RB Size=1, RB Offset=99	21.58	21.71	20.87
		RB Size=50, RB Offset=0	21.51	21.73	22.91
		RB Size=50, RB Offset=24	20.9	21.58	22.85
		RB Size=50, RB Offset=49	20.96	21.66	22.65
		RB Size=100, RB Offset=0	20.87	22.01	21.49

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	5.29	13	Pass
QPSK (100%RB Size)	5.17	13	Pass
16QAM (1RB Size)	5.34	13	Pass
16QAM (100%RB Size)	5.51	13	Pass

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.5	84.45	178	1.5	H	15.7	1.60	6.90	21.00	30
1732.5	83.98	149	1.3	V	14.8	1.60	6.90	20.10	30
3 MHz Bandwidth									
1732.5	84.25	292	2.4	H	15.5	1.60	6.90	20.80	30
1732.5	83.86	356	2.0	V	14.6	1.60	6.90	19.90	30
5 MHz Bandwidth									
1732.5	84.28	76	1.6	H	15.5	1.60	6.90	20.80	30
1732.5	83.91	61	1.6	V	14.7	1.60	6.90	20.00	30
10MHz Bandwidth									
1732.5	84.57	306	2.5	H	15.8	1.60	6.90	21.10	30
1732.5	84.2	52	1.9	V	15.0	1.60	6.90	20.30	30
15 MHz Bandwidth									
1732.5	84.31	89	2.1	H	15.5	1.60	6.90	20.80	30
1732.5	83.86	182	2.3	V	14.6	1.60	6.90	19.90	30
20 MHz Bandwidth									
1732.5	84.41	30	1.1	H	15.6	1.60	6.90	20.90	30
1732.5	84.35	124	2.3	V	15.1	1.60	6.90	20.40	30

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.5	84.29	136	1.2	H	15.5	1.60	6.90	20.80	30
1732.5	84.77	167	1.3	V	15.6	1.60	6.90	20.90	30
3 MHz Bandwidth									
1732.5	84.41	58	2.1	H	15.6	1.60	6.90	20.90	30
1732.5	84.36	294	1.1	V	15.1	1.60	6.90	20.40	30
5 MHz Bandwidth									
1732.5	84.21	158	2.4	H	15.4	1.60	6.90	20.70	30
1732.5	84.69	182	2.0	V	15.5	1.60	6.90	20.80	30
10 MHz Bandwidth									
1732.5	84.4	16	1.9	H	15.6	1.60	6.90	20.90	30
1732.5	84.3	275	2.0	V	15.1	1.60	6.90	20.40	30
15 MHz Bandwidth									
1732.5	84.61	144	1.1	H	15.8	1.60	6.90	21.10	30
1732.5	84.86	322	2.4	V	15.6	1.60	6.90	20.90	30
20 MHz Bandwidth									
1732.5	84.71	25	1.5	H	15.9	1.60	6.90	21.20	30
1732.5	84.6	148	2.3	V	15.4	1.60	6.90	20.70	30

LTE Band 5:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.5	22.65	22.51
		RB Size=1, RB Offset=2	22.57	22.72	23.09
		RB Size=1, RB Offset=5	22.43	22.51	22.18
		RB Size=3, RB Offset=0	22.66	22.53	22.97
		RB Size=3, RB Offset=1	22.39	22.69	22.82
		RB Size=3, RB Offset=2	22.22	22.71	22.85
		RB Size=6, RB Offset=0	21.32	21.66	21.65
	16QAM	RB Size=1, RB Offset=0	21.73	22.02	21.68
		RB Size=1, RB Offset=2	21.37	22.01	22.96
		RB Size=1, RB Offset=5	21.51	22.02	21.22
		RB Size=3, RB Offset=0	21.69	21.86	21.54
		RB Size=3, RB Offset=1	21.68	21.84	21.77
		RB Size=3, RB Offset=2	21.61	21.83	21.19
		RB Size=6, RB Offset=0	20.93	20.78	20.93
3.0	QPSK	RB Size=1, RB Offset=0	22.31	23.01	23.25
		RB Size=1, RB Offset=7	22.74	22.82	23.27
		RB Size=1, RB Offset=14	22.52	23.09	22.4
		RB Size=8, RB Offset=0	22.57	23.02	22.27
		RB Size=8, RB Offset=4	22.59	22.55	22.41
		RB Size=8, RB Offset=7	22.61	22.71	22.72
		RB Size=15, RB Offset=0	21.33	21.9	22.06
	16QAM	RB Size=1, RB Offset=0	21.53	21.87	22.63
		RB Size=1, RB Offset=7	21.81	21.59	22.19
		RB Size=1, RB Offset=14	22.03	22.07	22.06
		RB Size=8, RB Offset=0	22.01	21.72	22.07
		RB Size=8, RB Offset=4	21.61	21.49	22.23
		RB Size=8, RB Offset=7	21.59	21.53	22.31
		RB Size=15, RB Offset=0	21.02	21.04	20.84

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.51	21.75	23.23
		RB Size=1, RB Offset=12	22.53	22.27	23
		RB Size=1, RB Offset=24	22.6	22.72	22.36
		RB Size=12, RB Offset=0	22.8	23.04	22.5
		RB Size=12, RB Offset=6	22.2	22.89	22.44
		RB Size=12, RB Offset=11	22.33	22.74	23.03
		RB Size=25, RB Offset=0	21.43	21.58	21.99
	16QAM	RB Size=1, RB Offset=0	22.23	22.01	22.01
		RB Size=1, RB Offset=12	21.87	22.06	22.75
		RB Size=1, RB Offset=24	21.84	22.08	21.78
		RB Size=12, RB Offset=0	21.83	21.75	21.73
		RB Size=12, RB Offset=6	21.92	21.94	21.7
		RB Size=12, RB Offset=11	21.7	21.7	21.73
		RB Size=25, RB Offset=0	20.61	20.74	21.13
10.0	QPSK	RB Size=1, RB Offset=0	22.19	22.84	22.53
		RB Size=1, RB Offset=24	22.19	22.83	22.74
		RB Size=1, RB Offset=49	21.86	22.8	22.38
		RB Size=25, RB Offset=0	22.04	22.88	22.68
		RB Size=25, RB Offset=12	21.95	22.9	22.53
		RB Size=25, RB Offset=24	21.82	22.47	22.86
		RB Size=50, RB Offset=0	22.22	22.04	22.97
	16QAM	RB Size=1, RB Offset=0	21.84	22.81	22.88
		RB Size=1, RB Offset=24	21.99	22.68	23.1
		RB Size=1, RB Offset=49	22.12	22.5	23.01
		RB Size=25, RB Offset=0	22.09	22.58	22.93
		RB Size=25, RB Offset=12	22.09	22.29	22.62
		RB Size=25, RB Offset=24	21.77	22.87	22.98
		RB Size=50, RB Offset=0	21.76	21.25	22.09

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	4.72	13	Pass
QPSK (100%RB Size)	5.86	13	Pass
16QAM (1RB Size)	4.89	13	Pass
16QAM (100%RB Size)	6.31	13	Pass

ERP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
836.5	86.64	142	1.8	H	20.1	0.67	0	19.43	38.45
836.5	87.63	245	1.5	V	21.1	0.67	0	20.43	38.45
3 MHz Bandwidth									
836.5	86.71	231	1.2	H	20.2	0.67	0	19.53	38.45
836.5	87.89	42	1.3	V	21.4	0.67	0	20.73	38.45
5 MHz Bandwidth									
836.5	87.78	96	1.6	H	21.3	0.67	0	20.63	38.45
836.5	87.46	55	1.7	V	21	0.67	0	20.33	38.45
10MHz Bandwidth									
836.5	87.95	202	1.5	H	21.5	0.67	0	20.83	38.45
836.5	87.74	157	1.4	V	21.2	0.67	0	20.53	38.45

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
836.5	87.5	46	1.5	H	21	0.67	0	20.33	38.45
836.5	87.96	89	1.7	V	21.5	0.67	0	20.83	38.45
3 MHz Bandwidth									
836.5	88.15	47	1.4	H	21.7	0.67	0	21.03	38.45
836.5	87.86	107	1.8	V	21.4	0.67	0	20.73	38.45
5 MHz Bandwidth									
836.5	88.3	223	1.6	H	21.8	0.67	0	21.13	38.45
836.5	87.81	50	1.3	V	21.3	0.67	0	20.63	38.45
10 MHz Bandwidth									
836.5	87.94	64	1.5	H	21.4	0.67	0	20.73	38.45
836.5	88.16	153	1.4	V	21.7	0.67	0	21.03	38.45

LTE Band 7:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.5	21.69	23.09
		RB Size=1, RB Offset=12	22.45	21.96	23.07
		RB Size=1, RB Offset=24	22.45	22.7	22.44
		RB Size=12, RB Offset=0	22.59	22.8	22.55
		RB Size=12, RB Offset=6	22.2	22.99	22.21
		RB Size=12, RB Offset=11	22.33	22.75	23.06
		RB Size=25, RB Offset=0	21.12	21.07	22.04
	16QAM	RB Size=1, RB Offset=0	21.91	21.87	22.11
		RB Size=1, RB Offset=12	21.83	21.92	22.46
		RB Size=1, RB Offset=24	21.99	21.91	21.7
		RB Size=12, RB Offset=0	21.69	21.7	21.82
		RB Size=12, RB Offset=6	22.14	21.78	21.57
		RB Size=12, RB Offset=11	21.73	21.75	21.75
		RB Size=25, RB Offset=0	20.65	20.83	20.8
10.0	QPSK	RB Size=1, RB Offset=0	23.19	22.54	23.06
		RB Size=1, RB Offset=24	22.75	22.4	22.28
		RB Size=1, RB Offset=49	22.56	22.9	22.97
		RB Size=25, RB Offset=0	22.29	22.27	22.31
		RB Size=25, RB Offset=12	22.61	22.44	22.35
		RB Size=25, RB Offset=24	22.59	21.38	22.41
		RB Size=50, RB Offset=0	21.92	21.51	22.31
	16QAM	RB Size=1, RB Offset=0	22.6	21.87	21.71
		RB Size=1, RB Offset=24	22.48	21.84	21.35
		RB Size=1, RB Offset=49	21.48	21.97	21.39
		RB Size=25, RB Offset=0	21.62	21.48	21.52
		RB Size=25, RB Offset=12	21.62	21.72	21.65
		RB Size=25, RB Offset=24	22.21	21.51	21.63
		RB Size=50, RB Offset=0	20.93	20.81	20.66

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.57	22.08	22.59
		RB Size=1, RB Offset=37	22.72	22.24	22.79
		RB Size=1, RB Offset=74	22.66	21.99	22.23
		RB Size=36, RB Offset=0	22.71	22.46	22.22
		RB Size=36, RB Offset=18	22.44	22.2	22.09
		RB Size=36, RB Offset=37	22.54	22.26	22.79
		RB Size=75, RB Offset=0	22.56	22.10	22.65
	16QAM	RB Size=1, RB Offset=0	22.27	22.12	22.28
		RB Size=1, RB Offset=37	22.38	22.2	22.33
		RB Size=1, RB Offset=74	22.75	22.07	22.63
		RB Size=36, RB Offset=0	22.33	22.22	22.73
		RB Size=36, RB Offset=18	22.2	22.24	22.45
		RB Size=36, RB Offset=37	22.22	22.23	22.26
		RB Size=75, RB Offset=0	22.13	22.2	22.73
20.0	QPSK	RB Size=1, RB Offset=0	22.44	22.38	22.25
		RB Size=1, RB Offset=49	22.64	22.27	22.58
		RB Size=1, RB Offset=99	22.41	22.09	22.94
		RB Size=50, RB Offset=0	22.50	22.12	22.94
		RB Size=50, RB Offset=24	22.69	22.39	23.01
		RB Size=50, RB Offset=49	22.69	22.41	22.53
		RB Size=100, RB Offset=0	22.43	22.55	23.1
	16QAM	RB Size=1, RB Offset=0	22.78	22.37	22.59
		RB Size=1, RB Offset=49	22.47	22.22	22.39
		RB Size=1, RB Offset=99	22.43	22.92	23.49
		RB Size=50, RB Offset=0	22.59	22.8	22.76
		RB Size=50, RB Offset=24	22.66	22.81	22.47
		RB Size=50, RB Offset=49	22.44	22.85	22.65
		RB Size=100, RB Offset=0	22.54	22.67	22.32

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	2.98	13	Pass
QPSK (100%RB Size)	4.76	13	Pass
16QAM (1RB Size)	3.21	13	Pass
16QAM (100%RB Size)	5.55	13	Pass

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	80.12	175	1.5	H	13.7	1.70	8.60	20.60	33
2535.00	81.32	223	1.7	V	14.6	1.70	8.60	21.50	33
10MHz Bandwidth									
2535.00	81.12	56	2.4	H	14.7	1.70	8.60	21.60	33
2535.00	80.74	79	1.6	V	14.0	1.70	8.60	20.90	33
15 MHz Bandwidth									
2535.00	80.47	63	1.8	H	14.1	1.70	8.60	21.00	33
2535.00	80.62	157	1.4	V	13.9	1.70	8.60	20.80	33
20 MHz Bandwidth									
2535.00	80.69	48	1.6	H	14.3	1.70	8.60	21.20	33
2535.00	80.42	64	1.5	V	13.7	1.70	8.60	20.60	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535	80.54	100	1.5	H	14.2	1.70	8.60	21.10	33
2535	80.40	74	1.7	V	13.7	1.70	8.60	20.60	33
10 MHz Bandwidth									
2535	79.86	203	1.1	H	13.5	1.70	8.60	20.40	33
2535	80.5	114	1.7	V	13.8	1.70	8.60	20.70	33
15 MHz Bandwidth									
2535	80.21	110	1.5	H	13.8	1.70	8.60	20.70	33
2535	79.86	169	1.7	V	13.2	1.70	8.60	20.10	33
20 MHz Bandwidth									
2535	80.63	53	1.5	H	14.2	1.70	8.60	21.10	33
2535	80.3	245	1.6	V	13.6	1.70	8.60	20.50	33

LTE Band 17:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5	QPSK	RB Size=1, RB Offset=0	22.91	22.73	22.7
		RB Size=1, RB Offset=12	22.74	22.76	22.59
		RB Size=1, RB Offset=24	22.74	22.82	22.8
		RB Size=12, RB Offset=0	22.66	22.7	22.87
		RB Size=12, RB Offset=6	22.7	22.66	22.73
		RB Size=12, RB Offset=11	22.81	21.76	21.57
		RB Size=25, RB Offset=0	21.61	21.64	21.76
	16QAM	RB Size=1, RB Offset=0	22.19	22.04	21.92
		RB Size=1, RB Offset=12	22.06	21.66	21.73
		RB Size=1, RB Offset=24	22.31	21.75	22.09
		RB Size=12, RB Offset=0	22.4	22.45	21.31
		RB Size=12, RB Offset=6	22.41	22.51	21.53
		RB Size=12, RB Offset=11	22.16	22.38	21.33
		RB Size=25, RB Offset=0	20.63	20.77	20.65
10	QPSK	RB Size=1, RB Offset=0	22.66	22.42	22.52
		RB Size=1, RB Offset=24	22.6	22.5	22.69
		RB Size=1, RB Offset=49	22.75	22.7	22.53
		RB Size=25, RB Offset=0	22.54	22.51	22.6
		RB Size=25, RB Offset=12	22.55	22.49	22.61
		RB Size=25, RB Offset=24	22.56	22.54	22.52
		RB Size=50, RB Offset=0	21.58	21.66	21.82
	16QAM	RB Size=1, RB Offset=0	22.37	21.89	21.69
		RB Size=1, RB Offset=24	21.4	21.78	21.68
		RB Size=1, RB Offset=49	21.8	21.96	22.23
		RB Size=25, RB Offset=0	21.7	21.73	22.16
		RB Size=25, RB Offset=12	21.66	21.91	22.44
		RB Size=25, RB Offset=24	21.61	21.59	21.56
		RB Size=50, RB Offset=0	20.81	20.81	21.02

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	4.95	13	Pass
QPSK (100%RB Size)	7.02	13	Pass
16QAM (1RB Size)	5.14	13	Pass
16QAM (100%RB Size)	6.94	13	Pass

ERP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710.00	87.45	342	1.6	H	21	0.62	0	20.38	34.8
710.00	87.24	141	1.5	V	20.7	0.62	0	20.08	34.8
10MHz Bandwidth									
710.00	87.24	225	1.2	H	20.7	0.62	0	20.08	34.8
710.00	87.57	302	1.3	V	21.1	0.62	0	20.48	34.8

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710.00	87.85	331	1.3	H	21.4	0.62	0	20.78	34.8
710.00	87.41	276	1.9	V	20.9	0.62	0	20.28	34.8
10 MHz Bandwidth									
710.00	87.45	45	1.2	H	20.9	0.62	0	20.28	34.8
710.00	87.64	123	1.5	V	21.1	0.62	0	20.48	34.8

Note:

All above data were tested with no amplifier

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

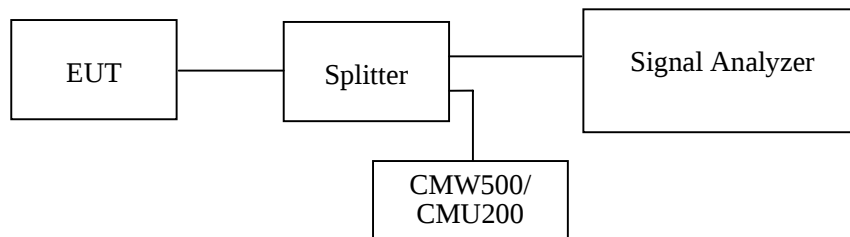

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	22~24
Relative Humidity:	51~55 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Simon Wang from 2016-01-14 to 2016-01-19.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	242.48	316.63
EGPRS(8PSK)	836.6	248.50	316.63

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	836.6	4.17	4.69
HSUPA (BPSK)	836.6	4.17	4.71
HSDPA (16QAM)	836.6	4.19	4.71

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	248.50	320.64
EGPRS(8PSK)	1880.0	254.51	330.66


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1880.0	4.23	4.93
HSUPA (BPSK)	1880.0	4.22	4.91
HSDPA (16QAM)	1880.0	4.20	4.91

AWS Band (Part 27)


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1732.6	4.25	4.99
HSUPA (BPSK)	1732.6	4.23	4.89
HSDPA (16QAM)	1732.6	4.23	4.93



Cellular Band (Part 22H)



99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode


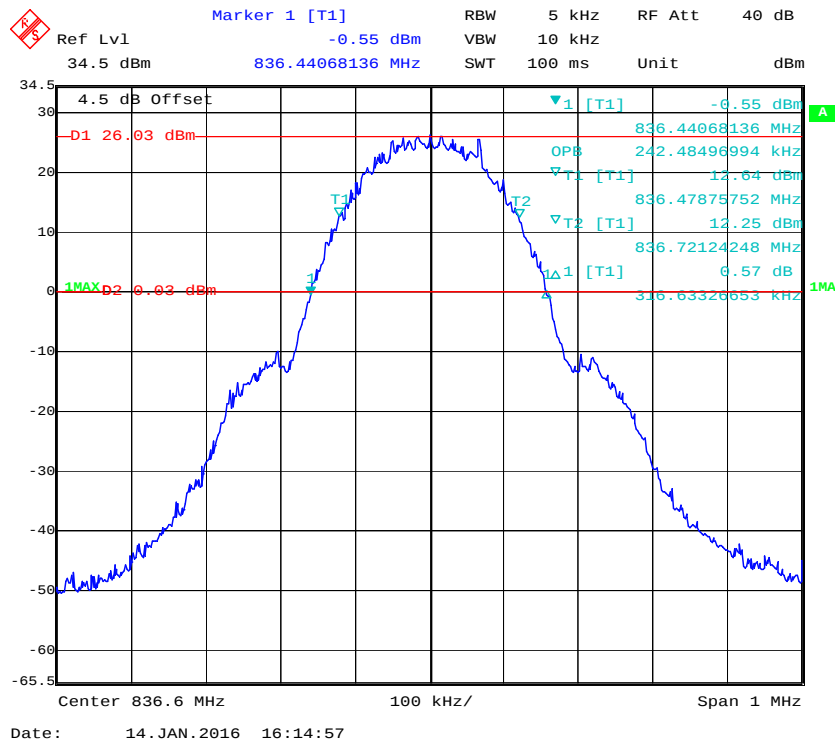


99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode

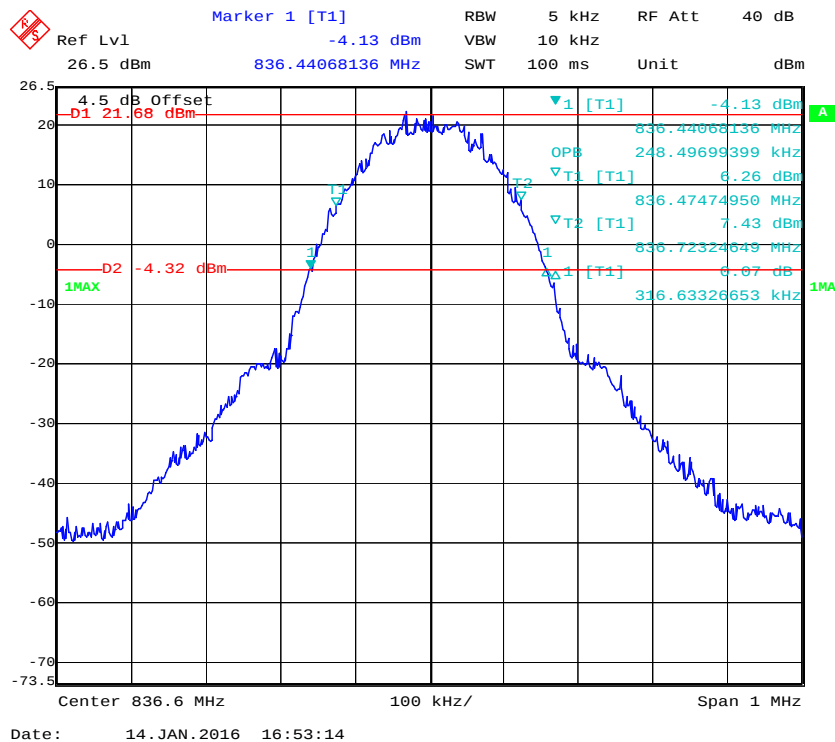


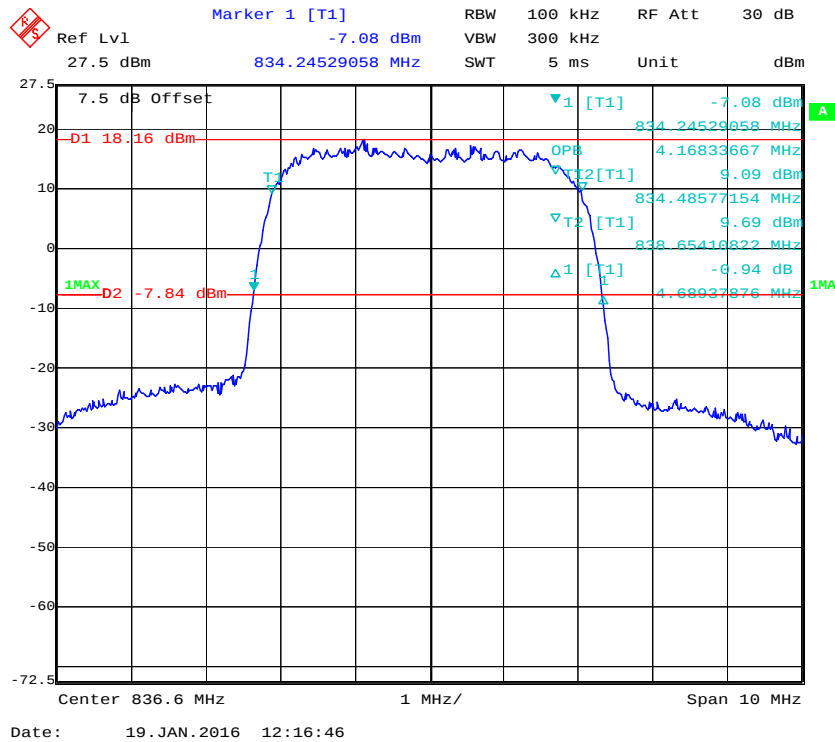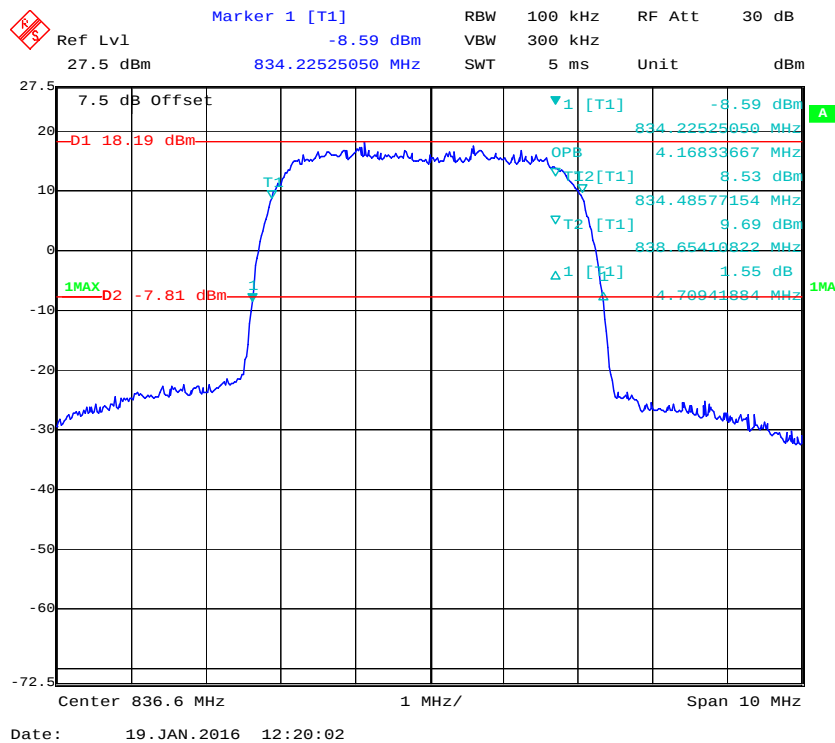99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode**

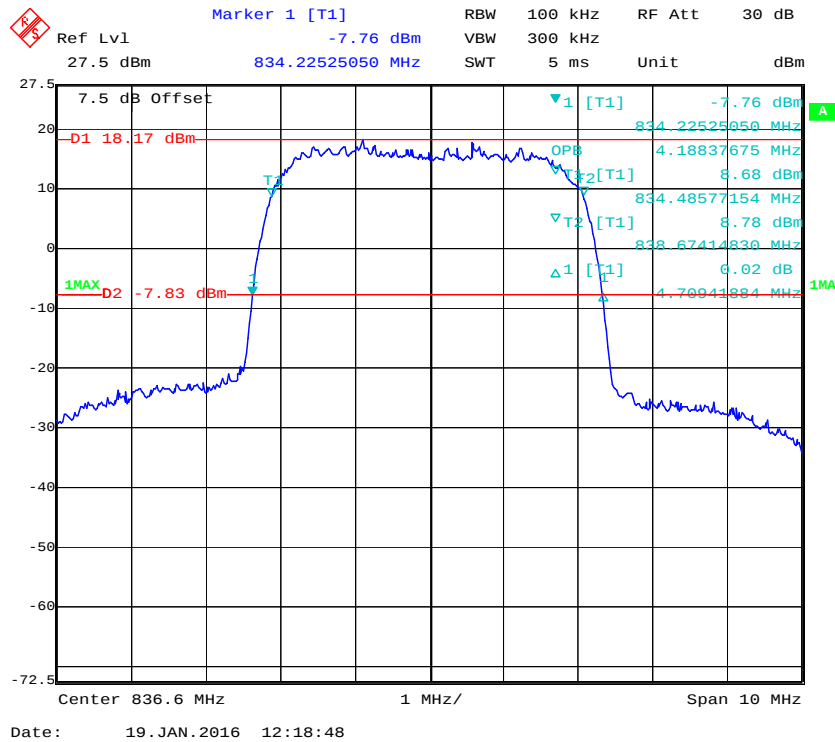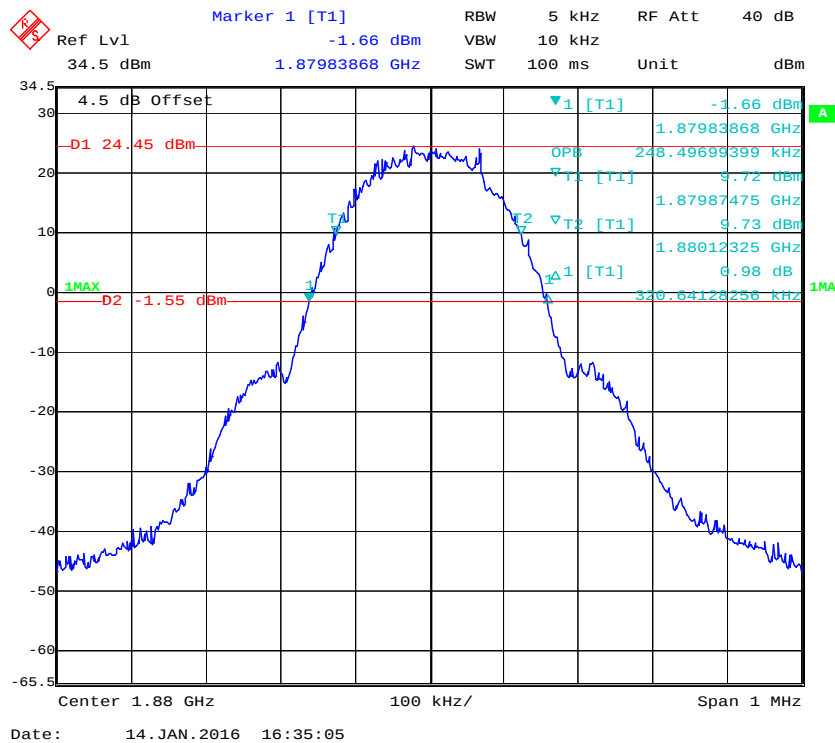
99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode**PCS Band (Part 24E)****99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode**

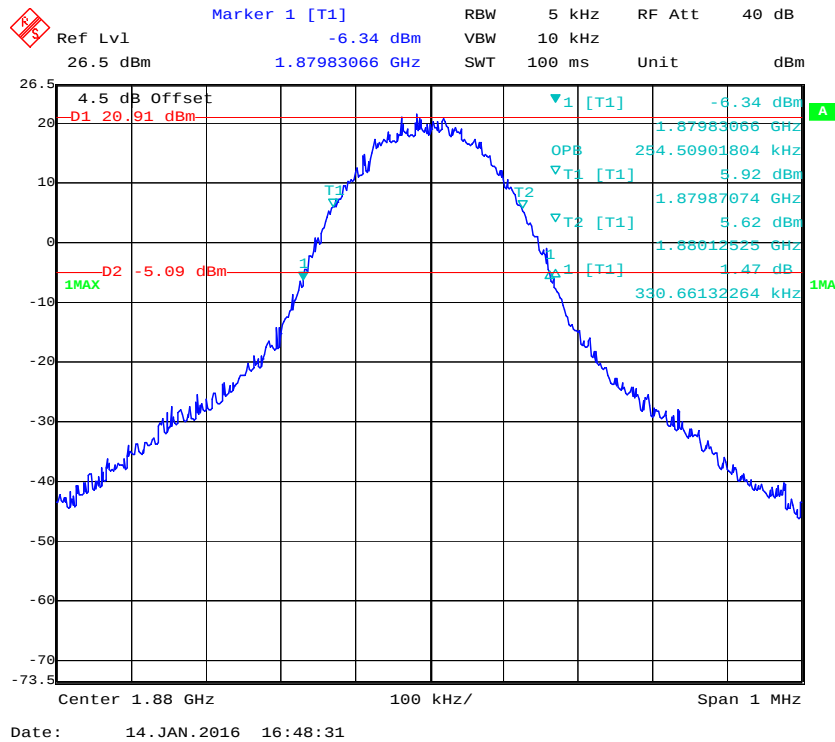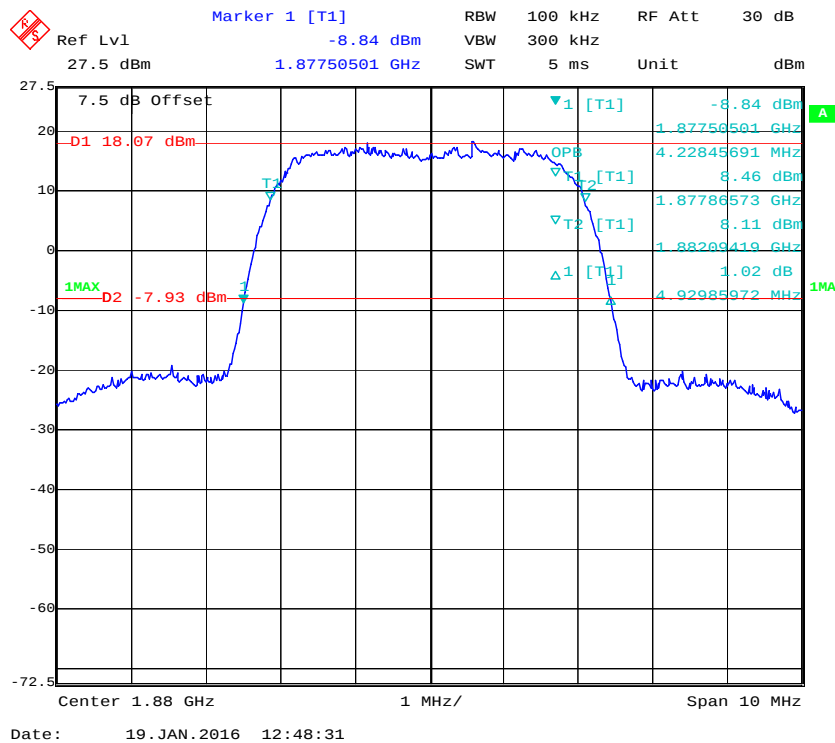99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode**999% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

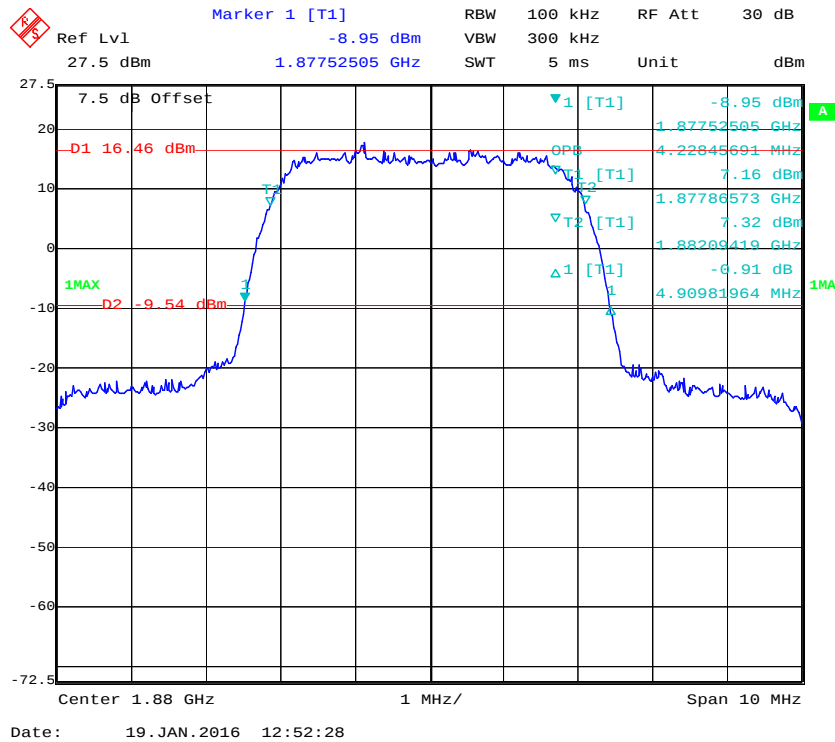

99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

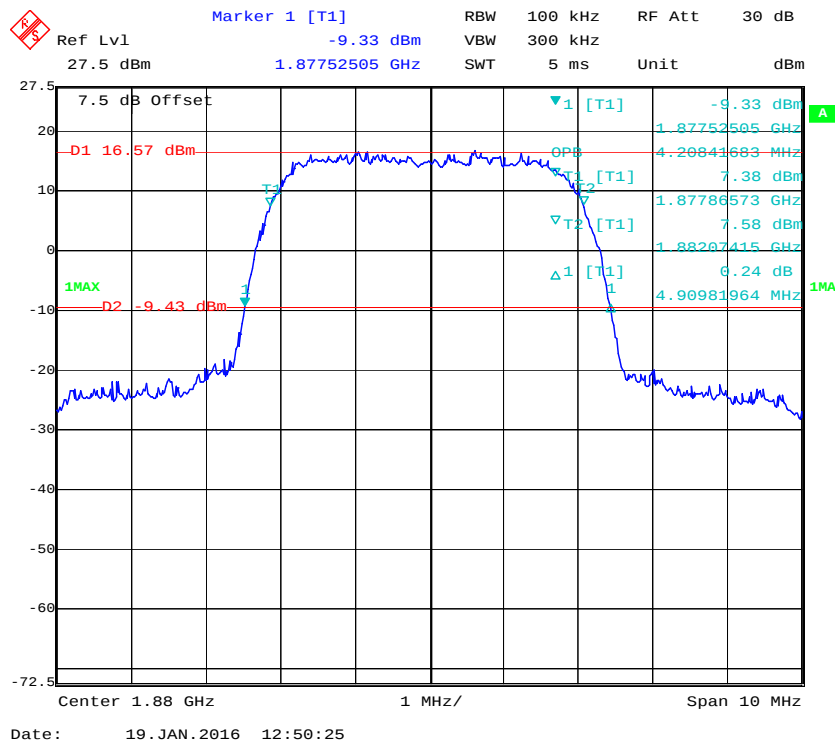


99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode



99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode







99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode


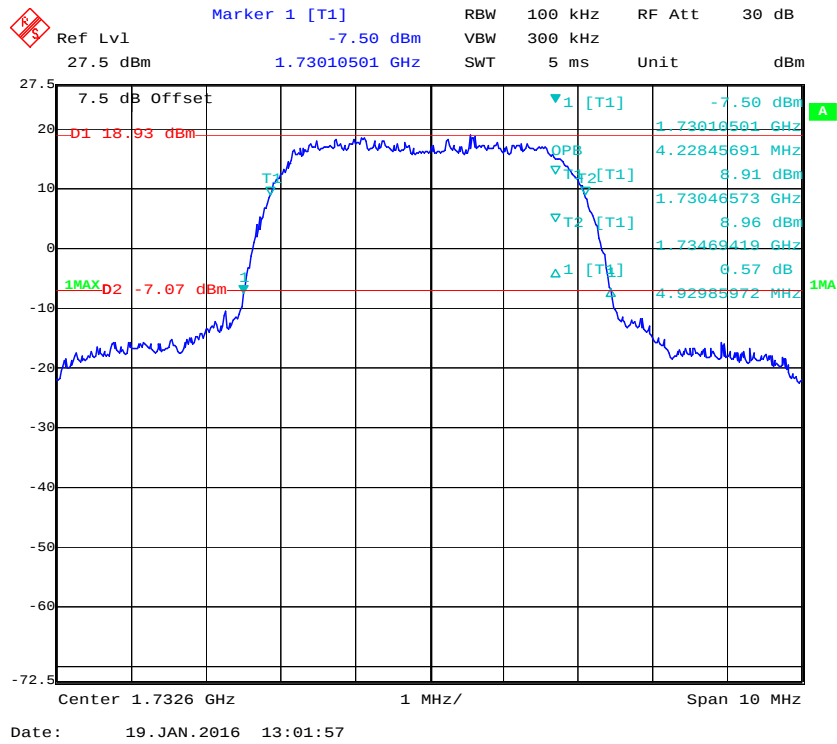




LTE Band 2: (Middle Channel)



Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.10	1.27
	16QAM	1.11	1.27
3.0	QPSK	2.74	3.10
	16QAM	2.74	3.11
5.0	QPSK	4.55	5.09
	16QAM	4.55	5.09
10.0	QPSK	9.10	10.26
	16QAM	9.10	10.26
15.0	QPSK	13.59	15.09
	16QAM	13.59	15.09
20.0	QPSK	18.52	21.16
	16QAM	18.60	21.00

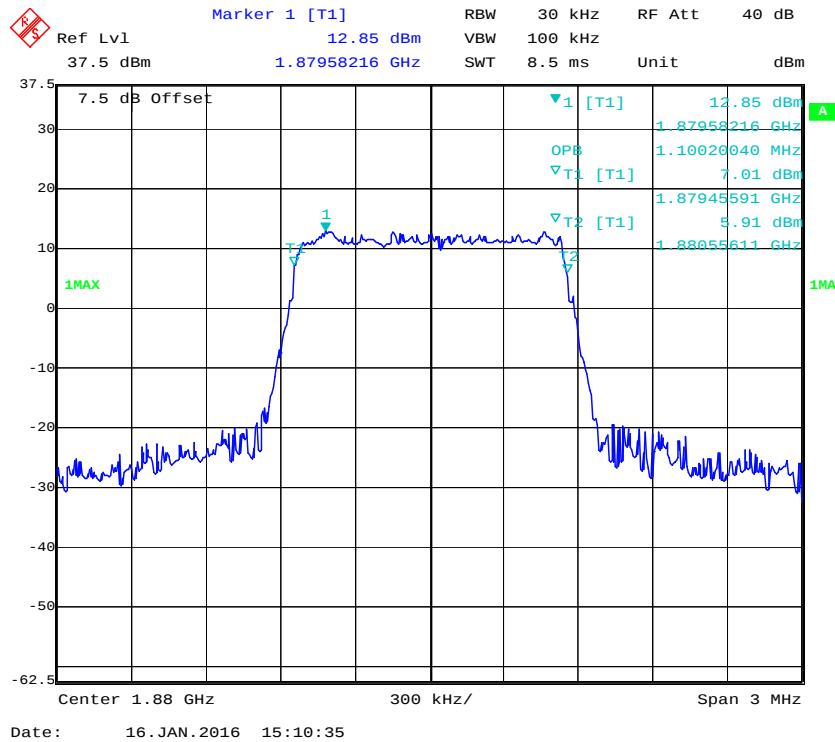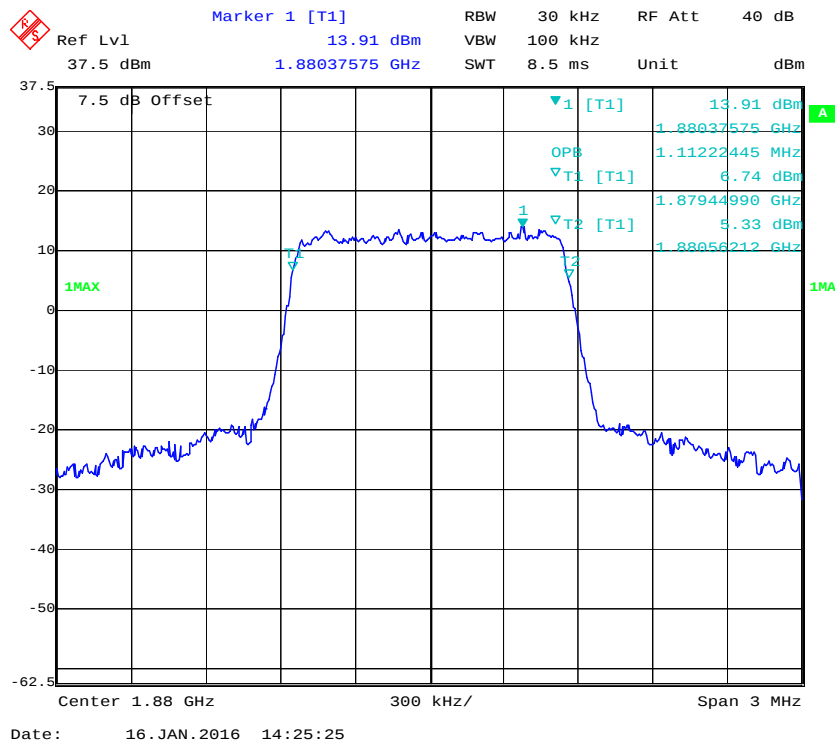QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**

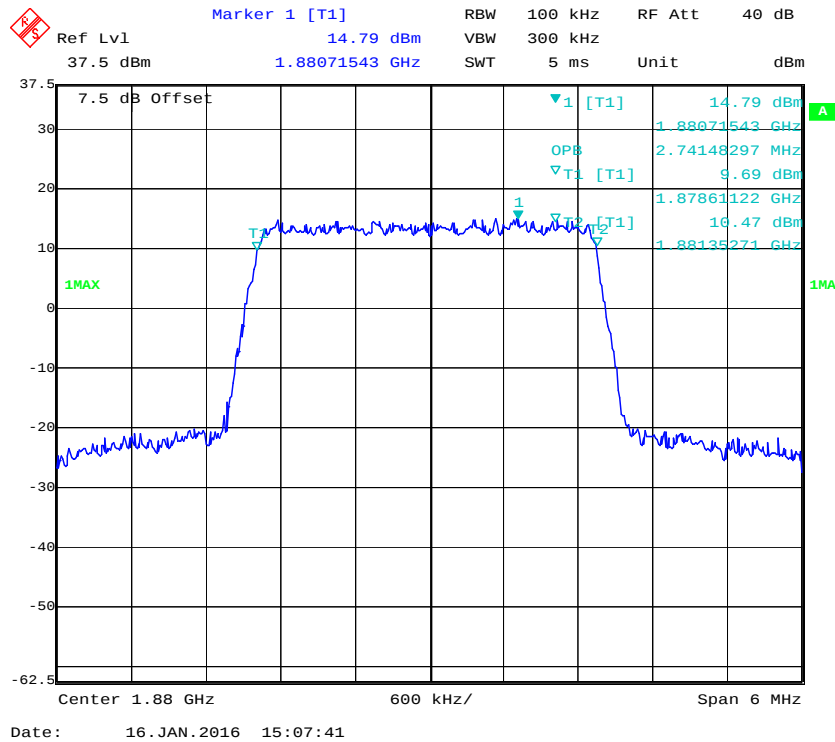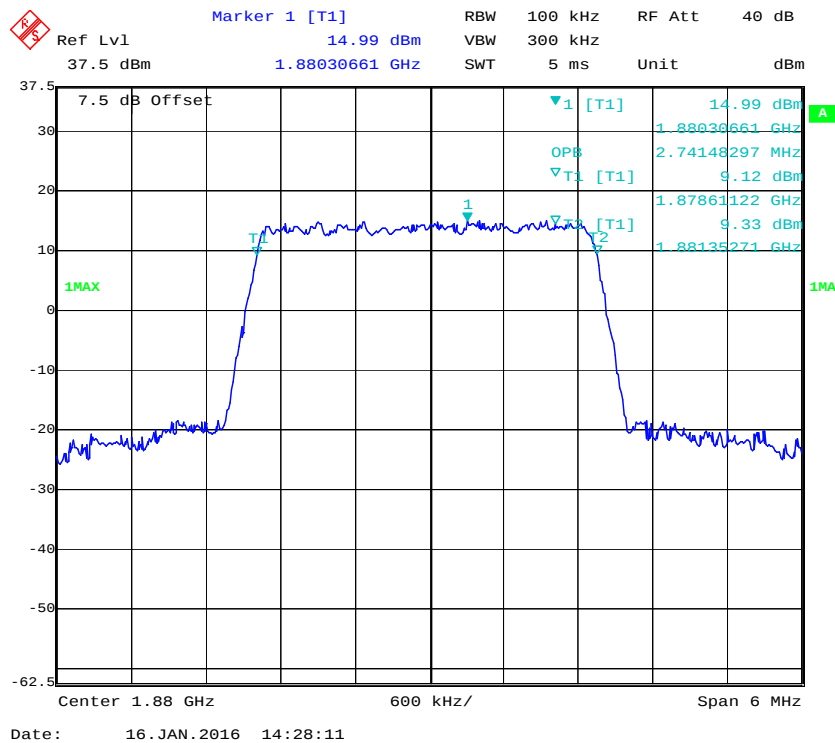
QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**

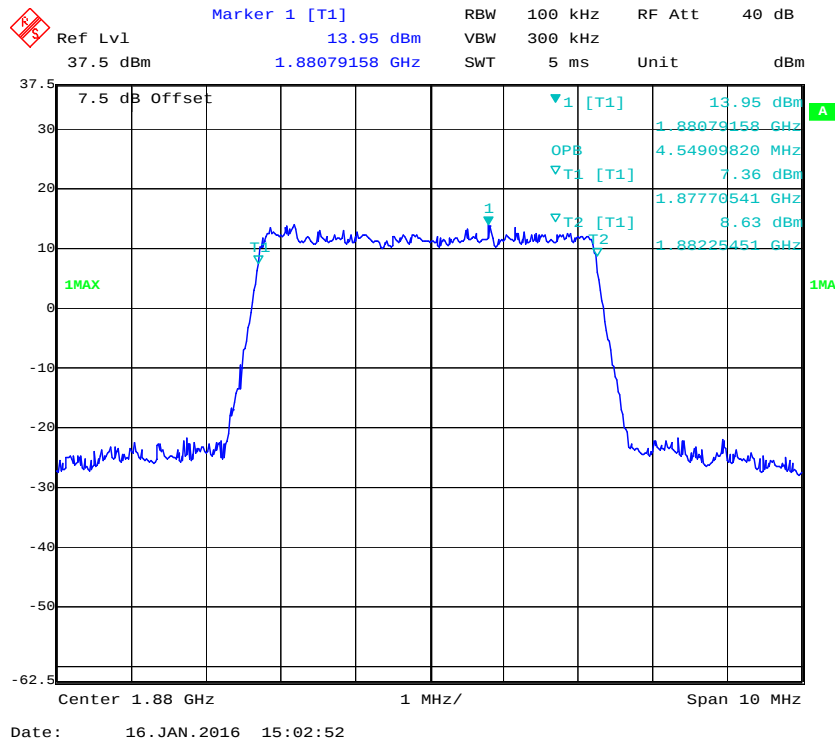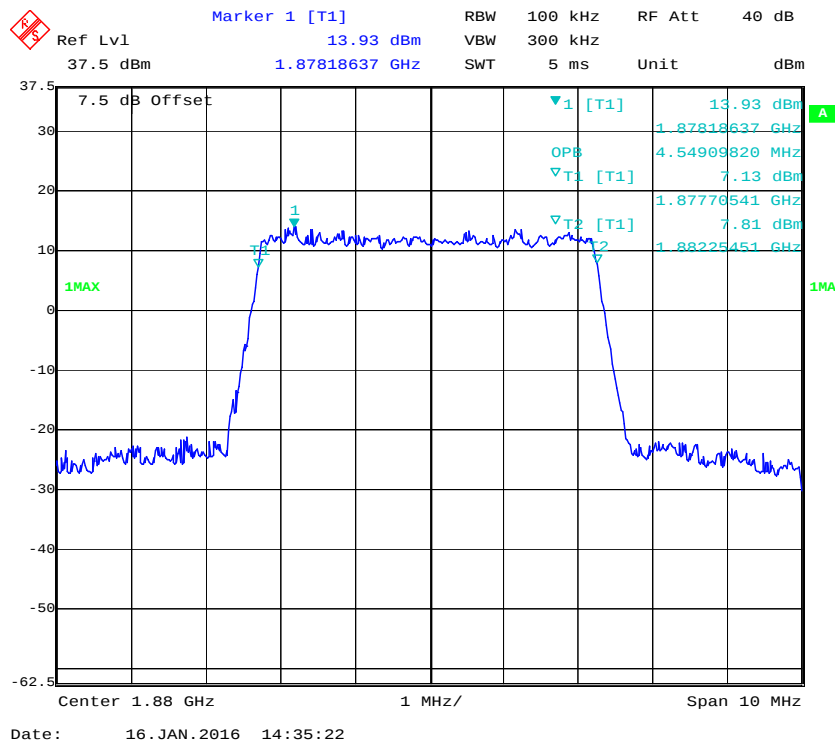QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**

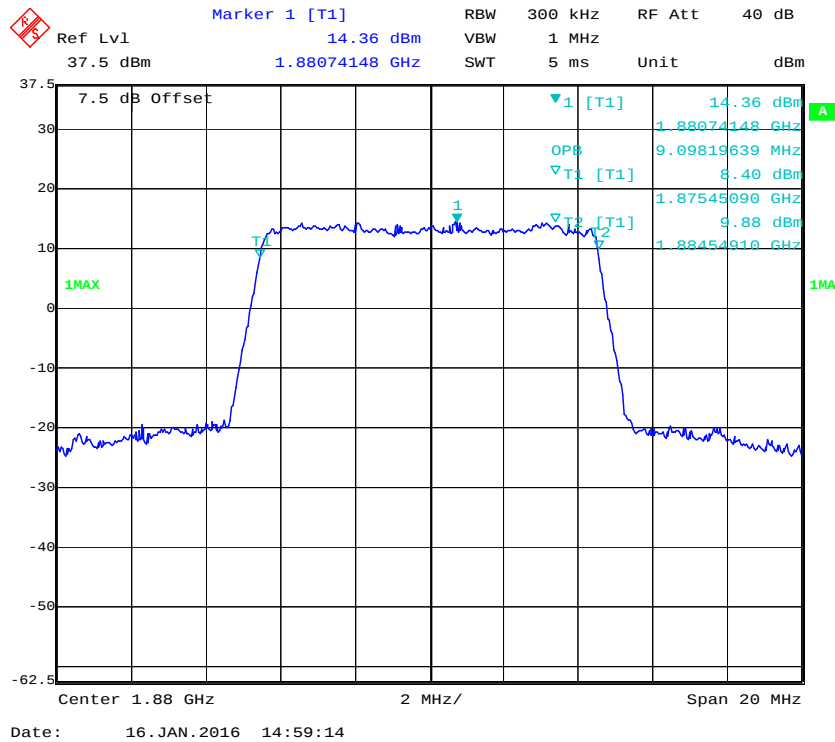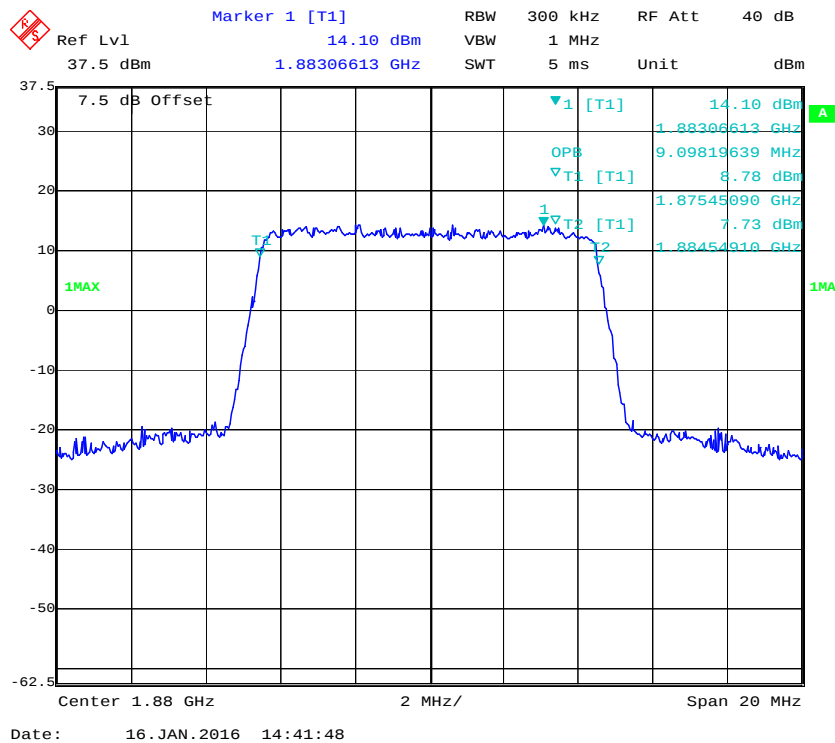
QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**

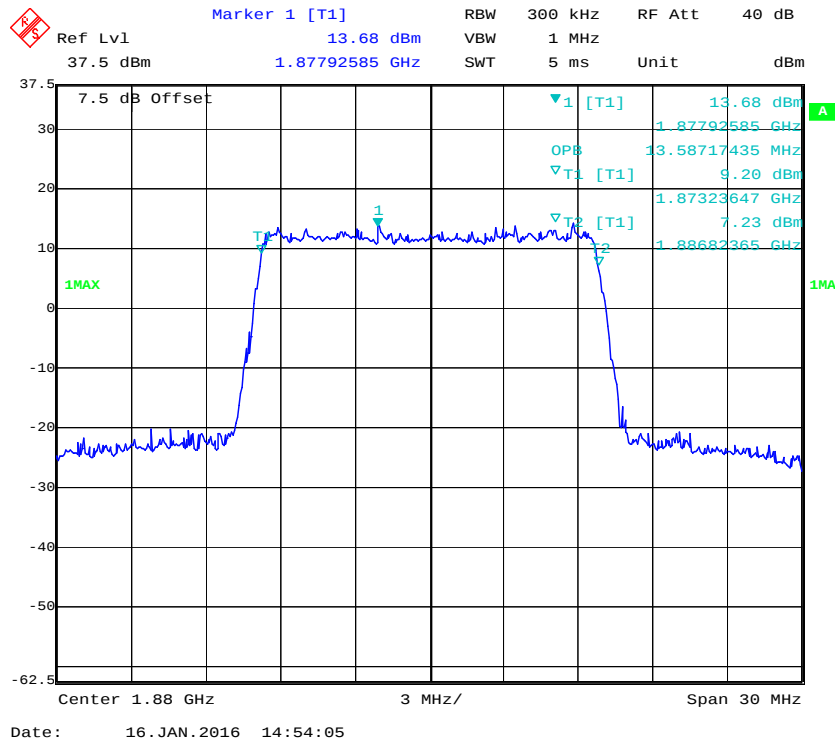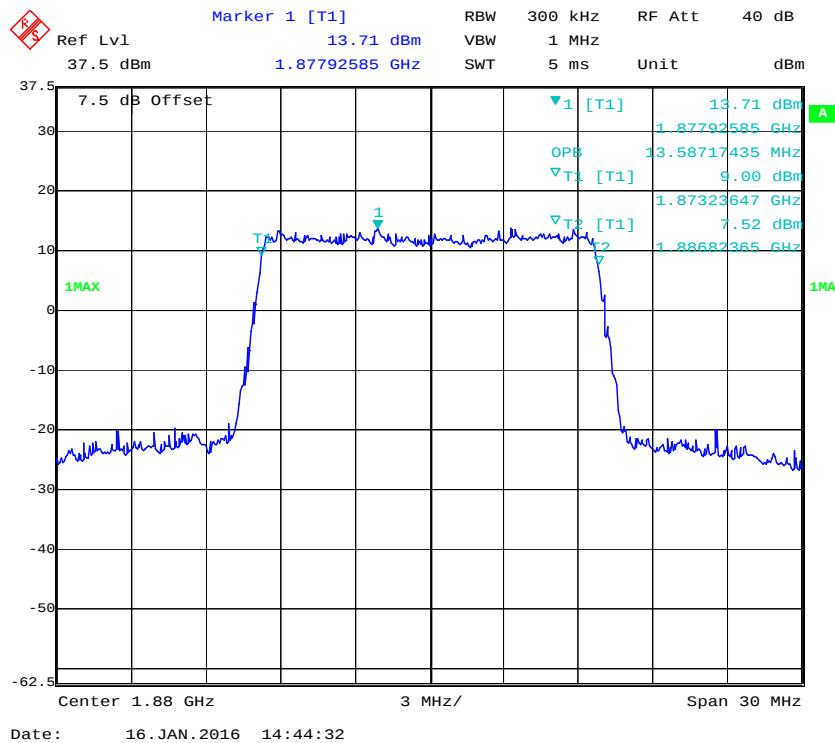QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**


QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

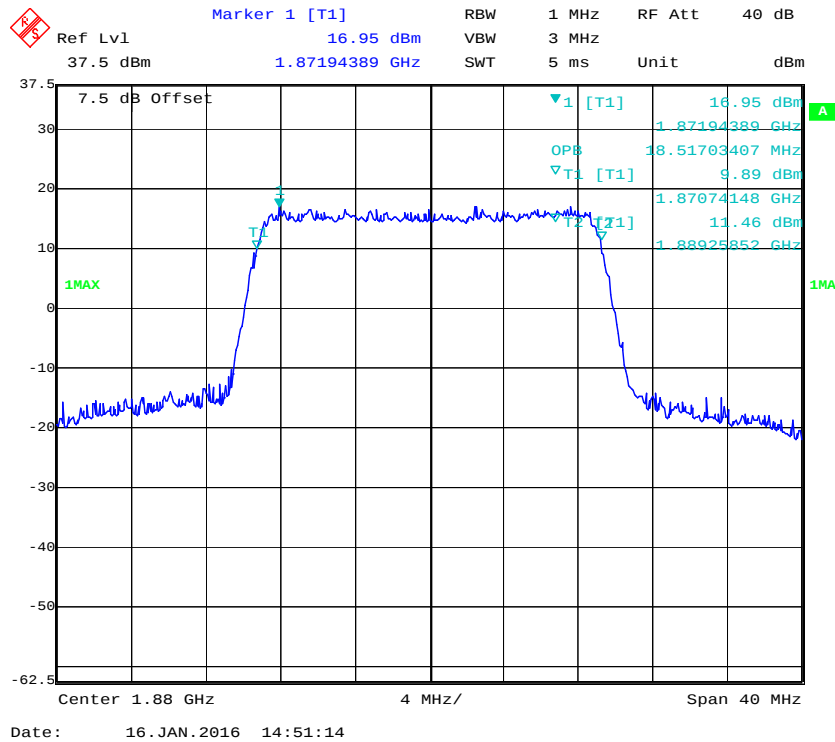


16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

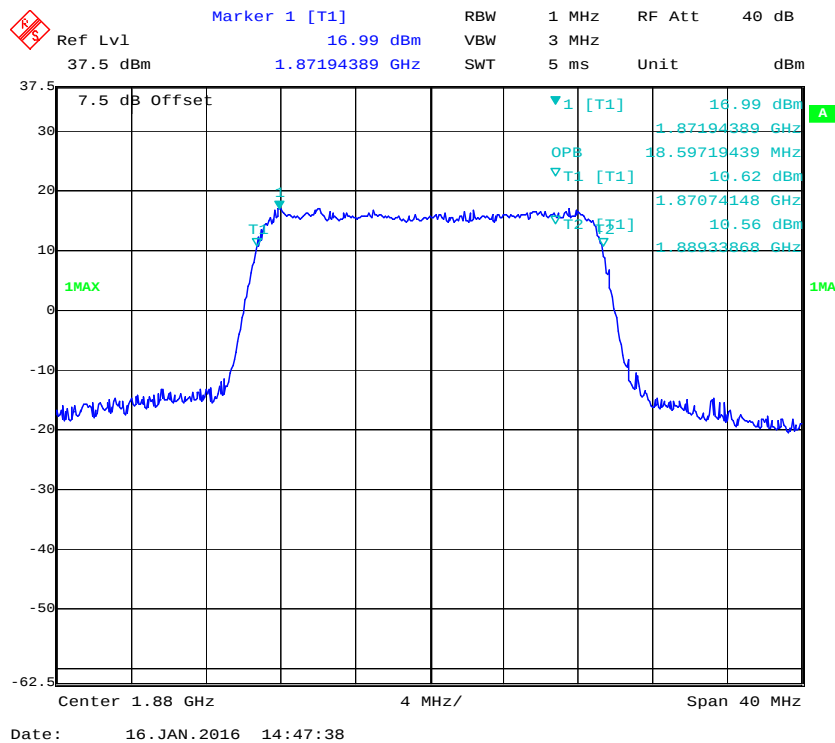


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

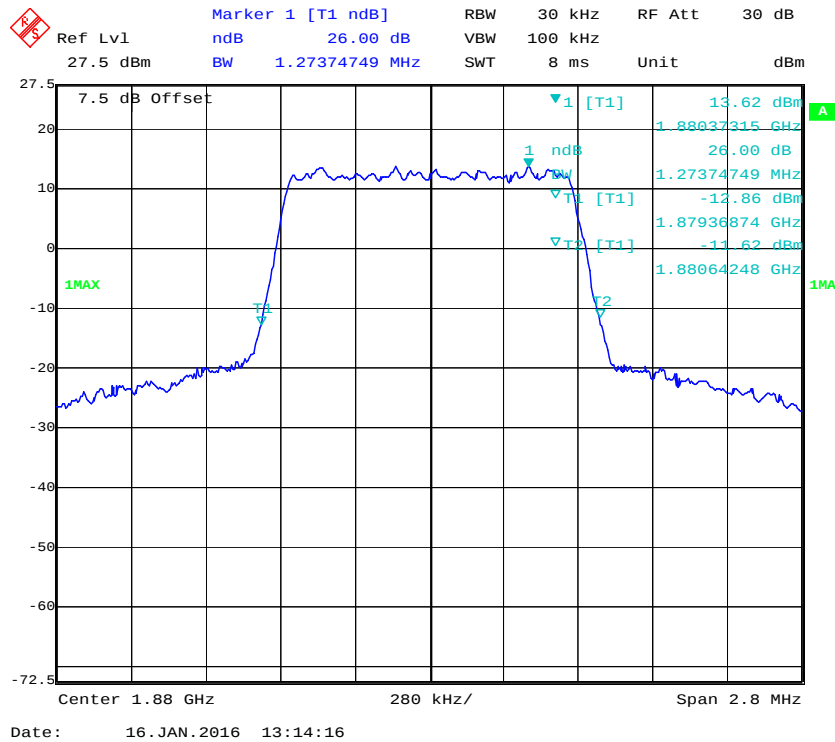


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

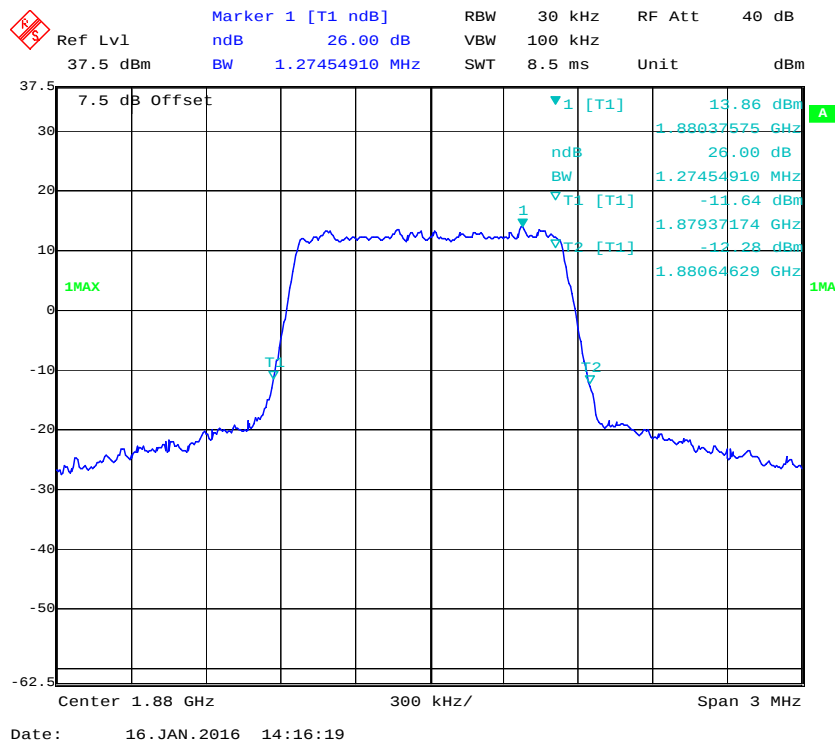


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

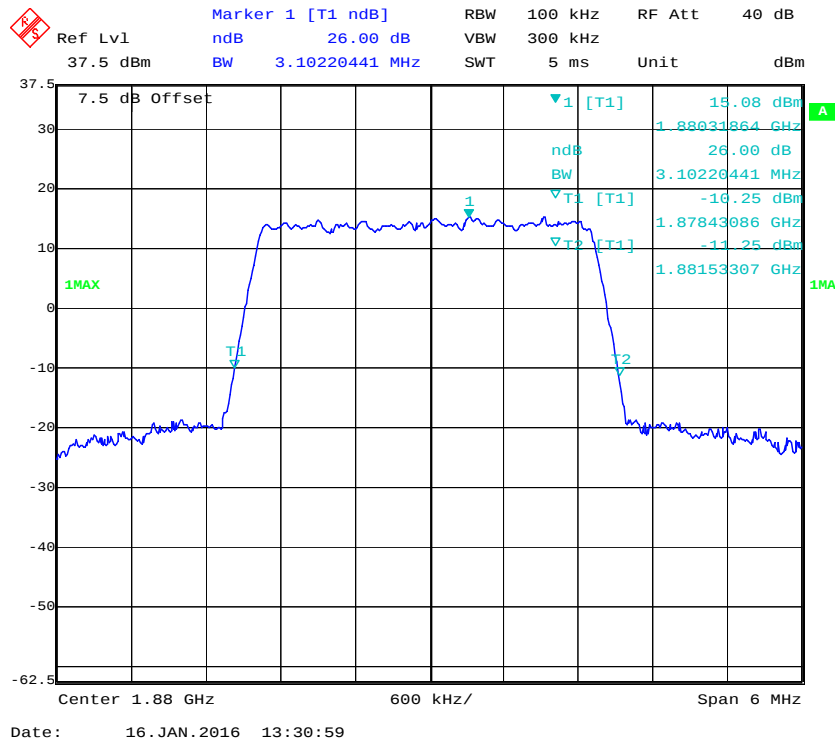


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel

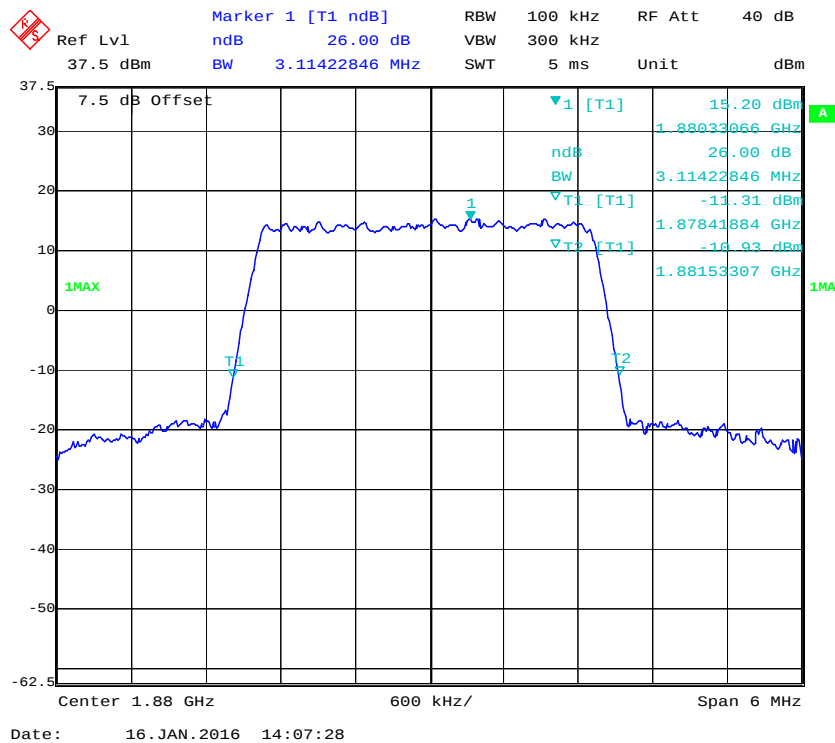


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

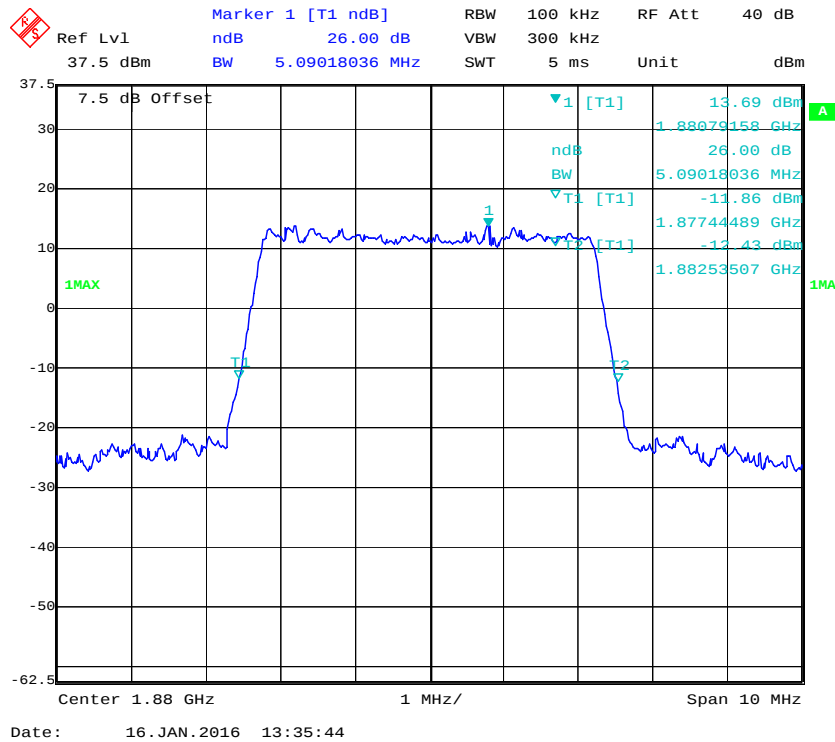


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

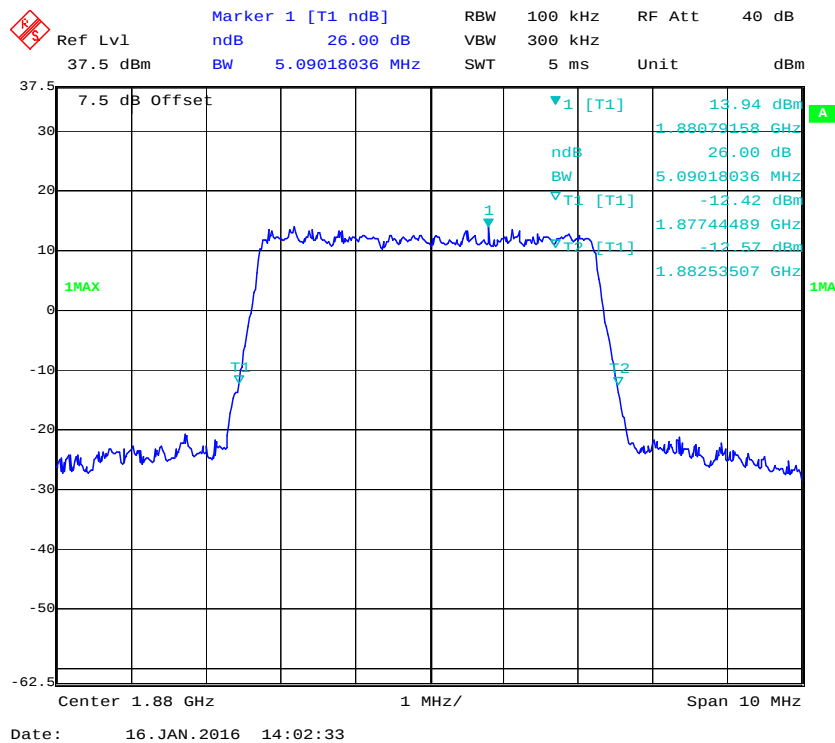


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

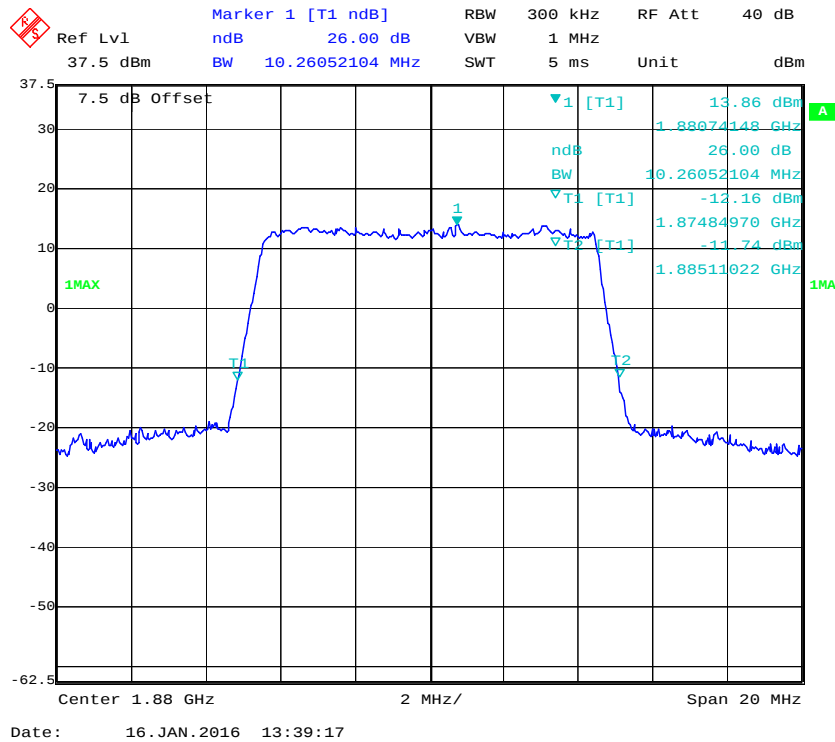


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

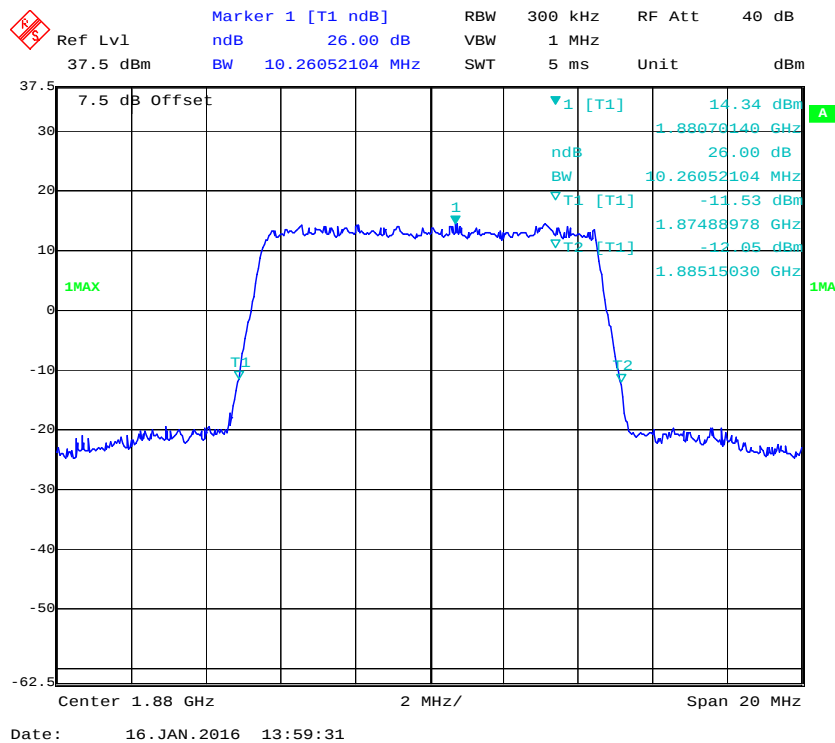


QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel

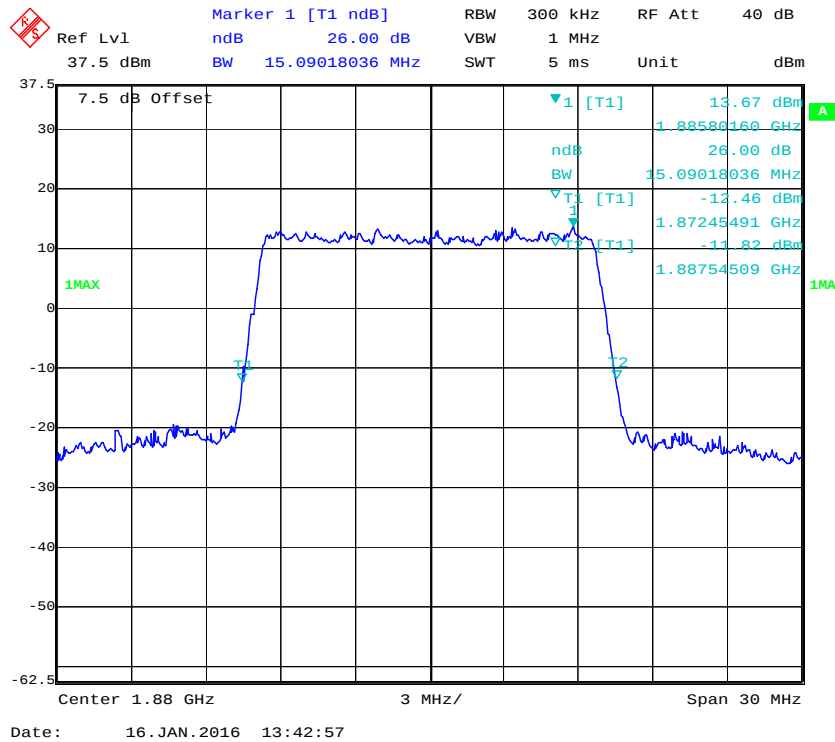


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

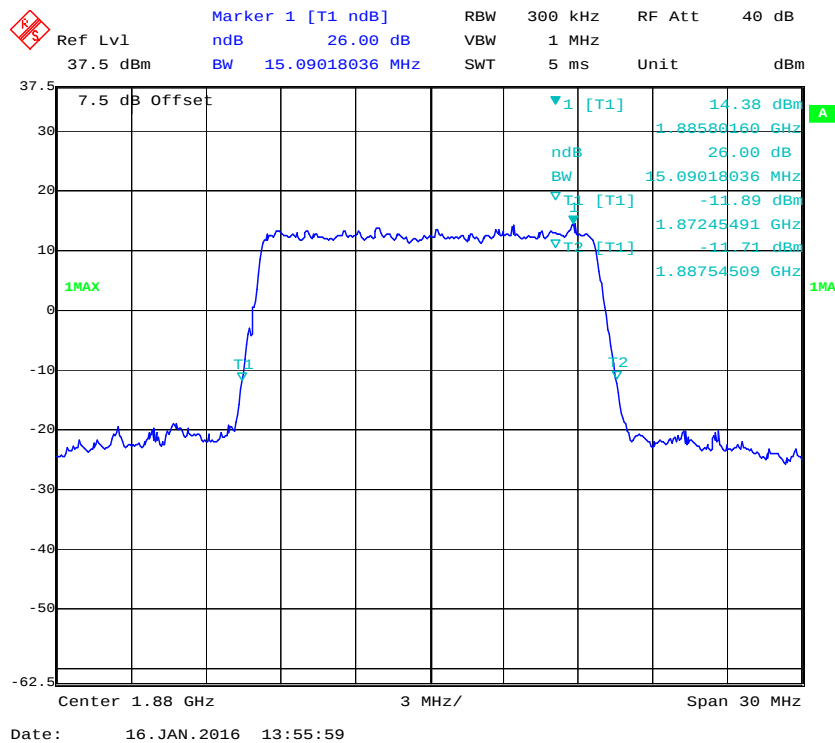

QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel


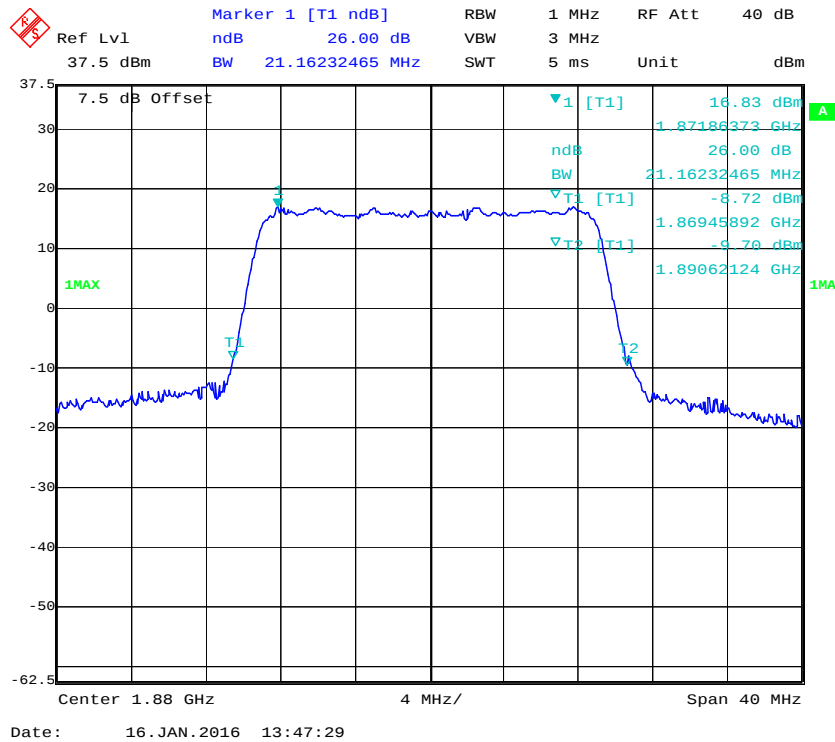




16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel

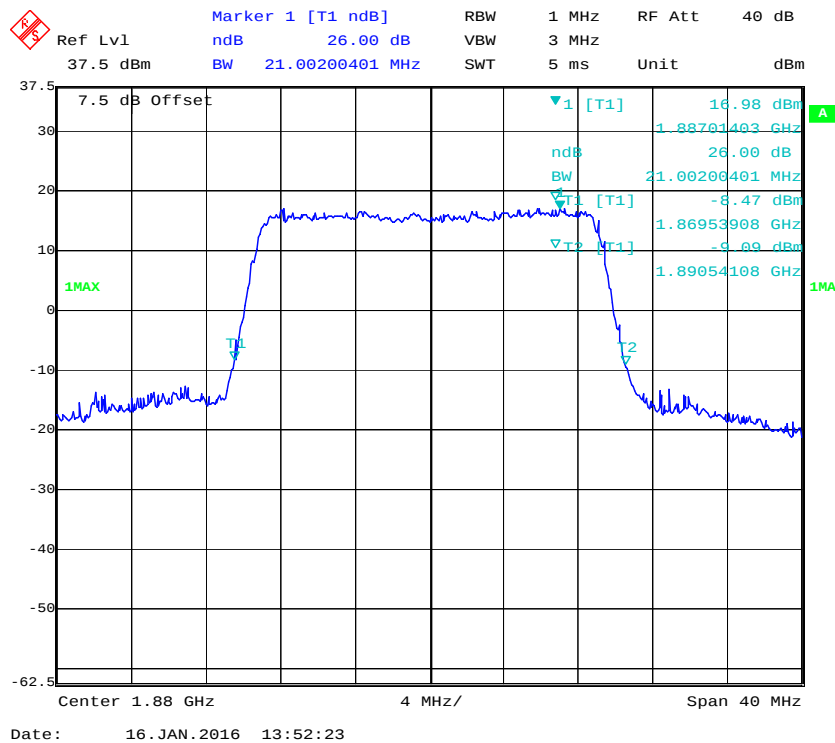


LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.11	1.31
	16QAM	1.10	1.31
3.0	QPSK	2.77	3.15
	16QAM	2.77	3.16
5.0	QPSK	4.55	5.15
	16QAM	4.55	5.11
10.0	QPSK	9.10	10.30
	16QAM	9.14	10.30
15.0	QPSK	13.59	14.97
	16QAM	13.53	14.97
20.0	QPSK	18.52	21.00
	16QAM	18.44	21.24

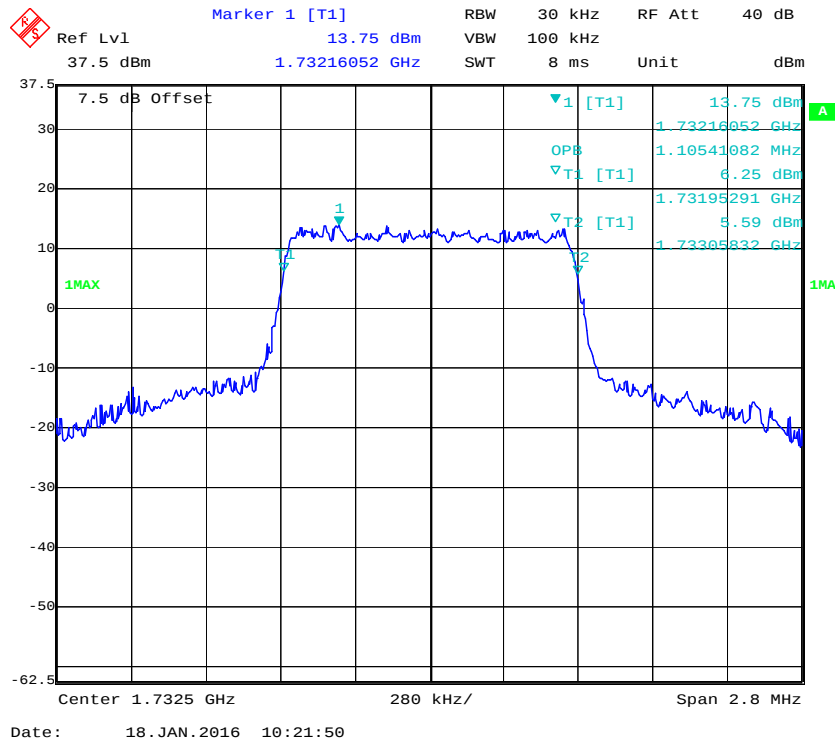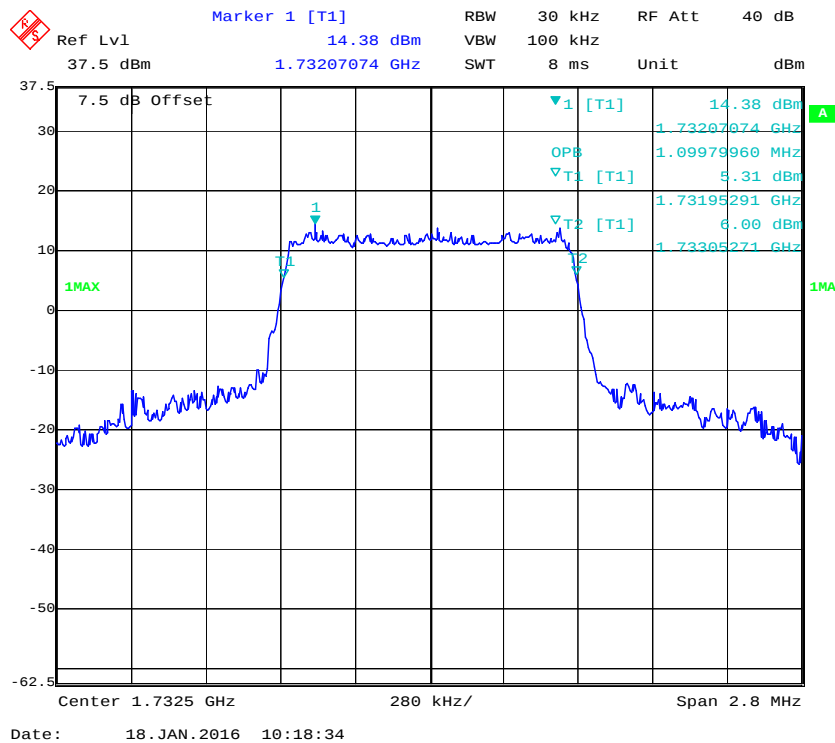
QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**

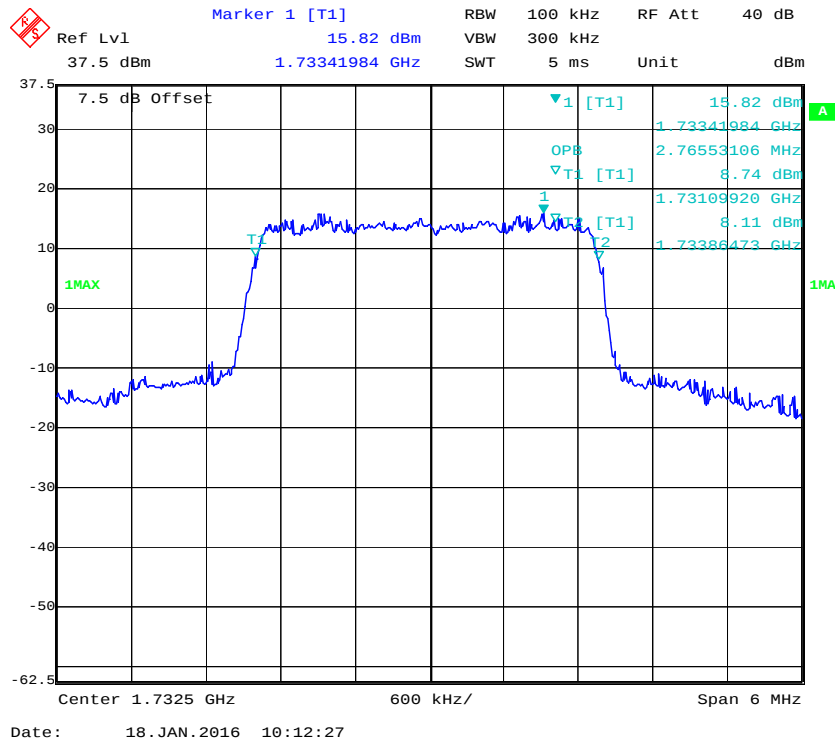
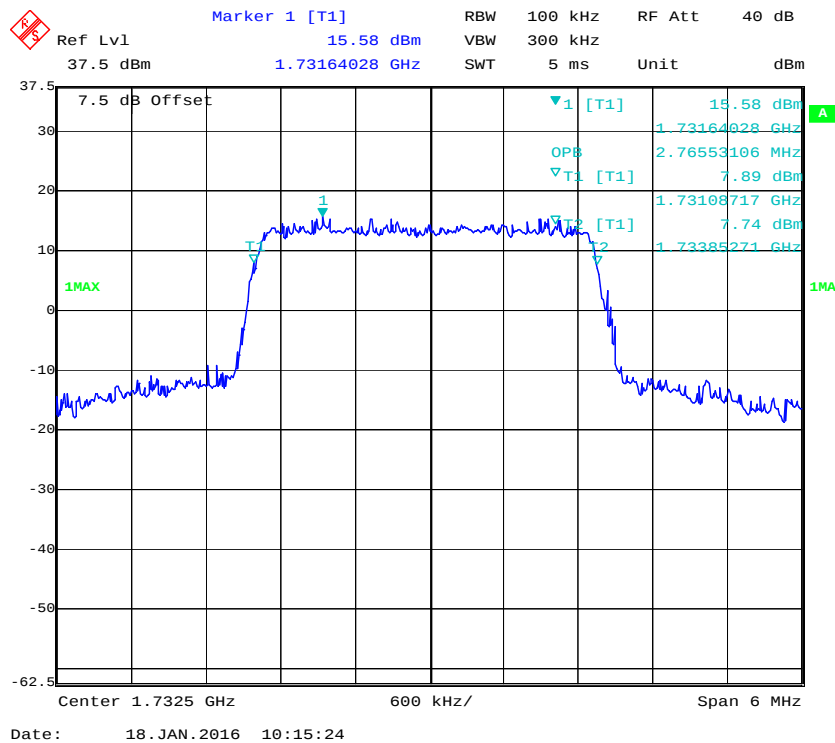
QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**



QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

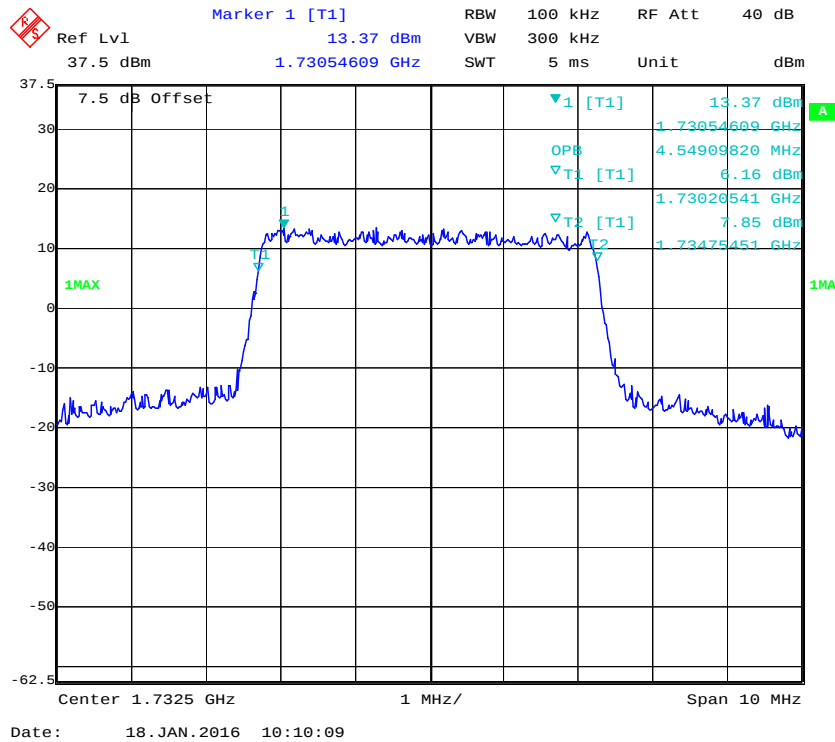


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

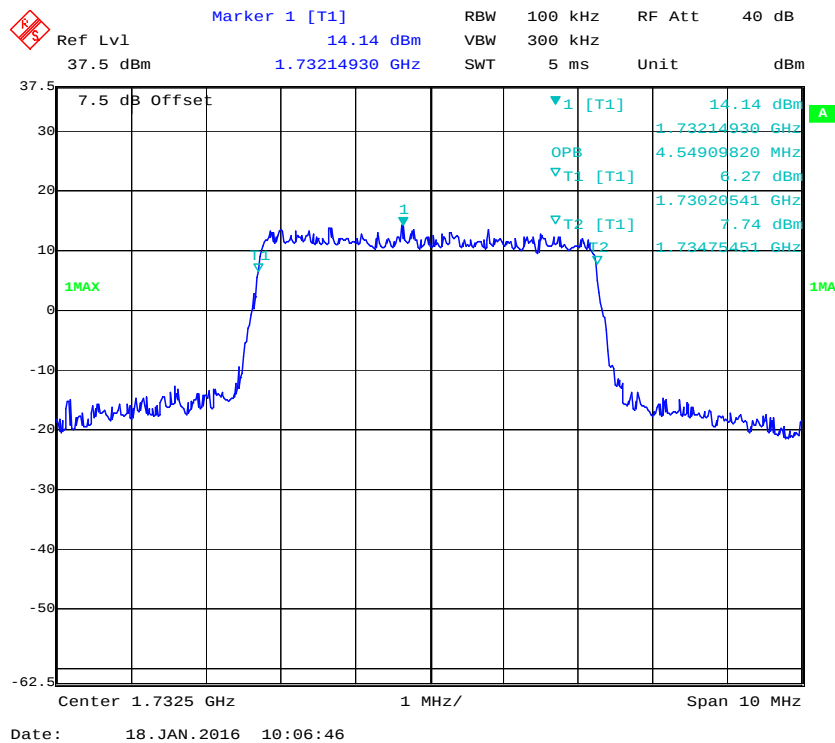

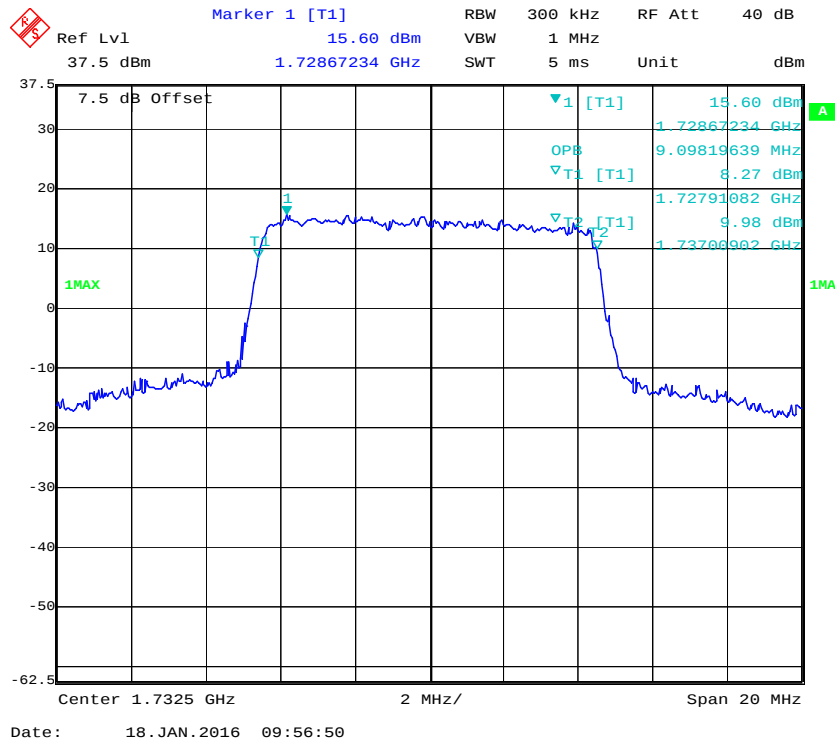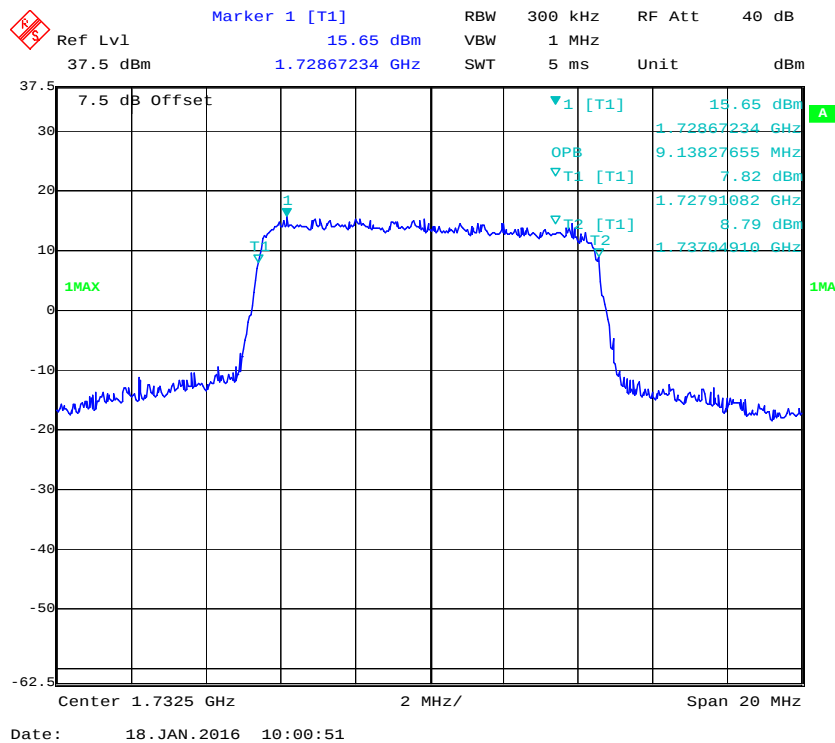
QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**

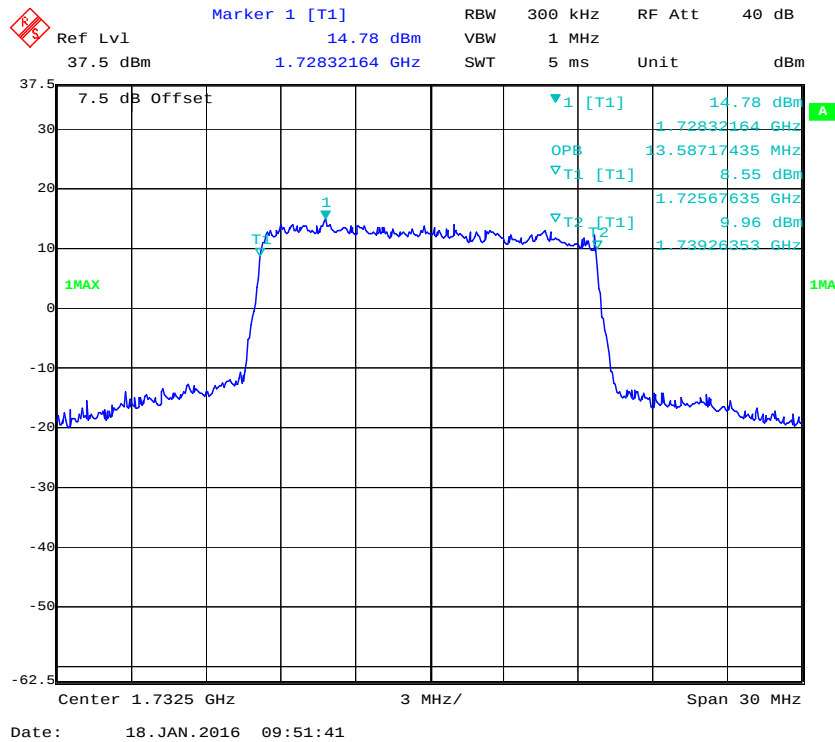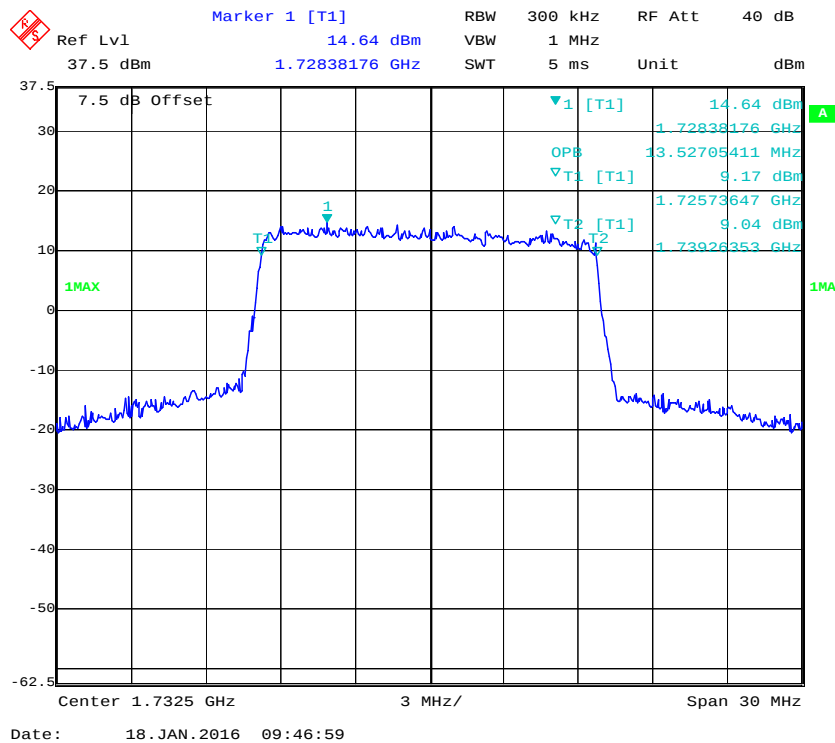QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**


QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

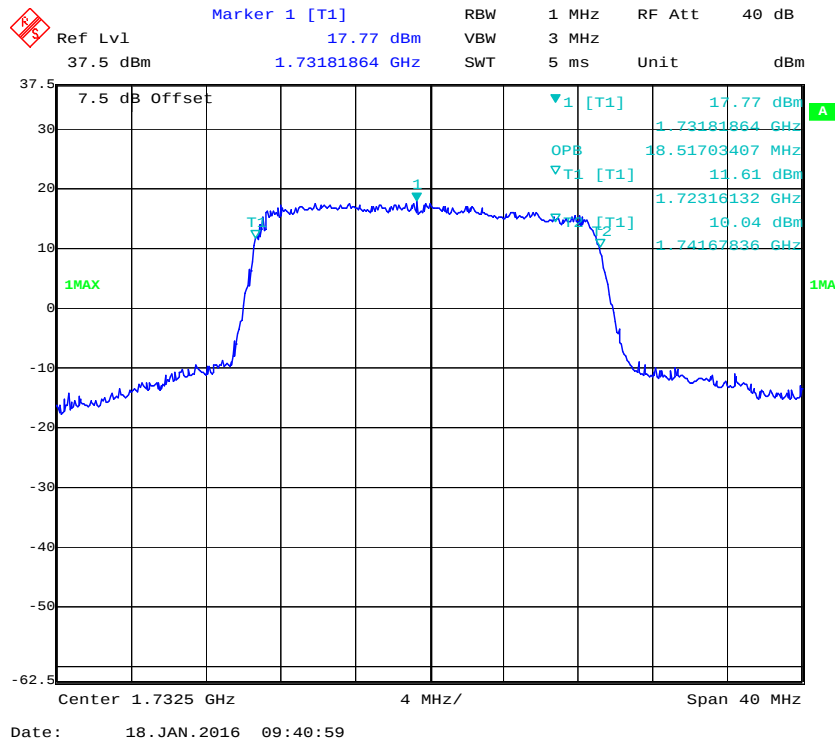


16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

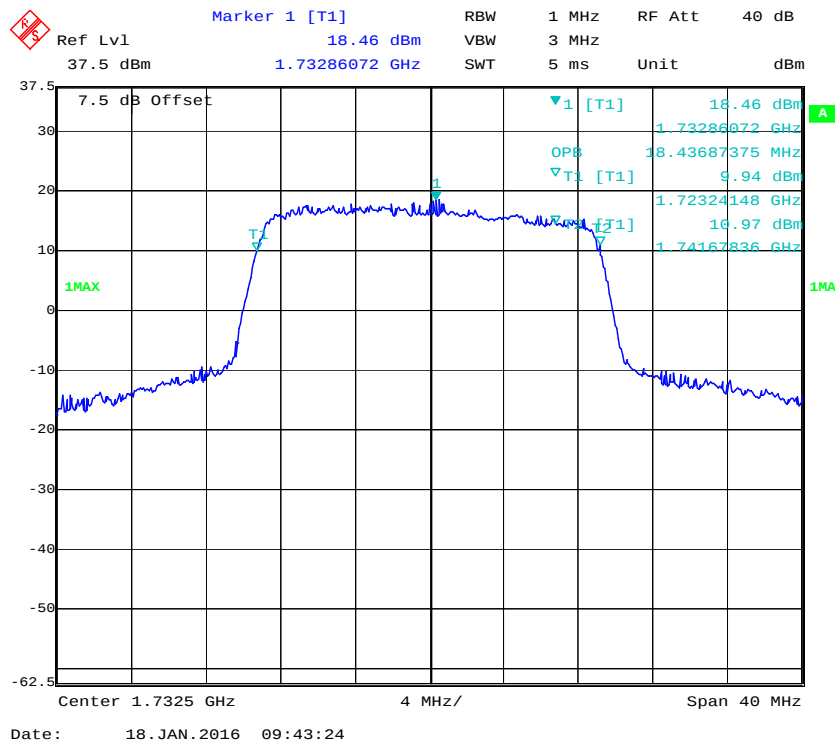


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

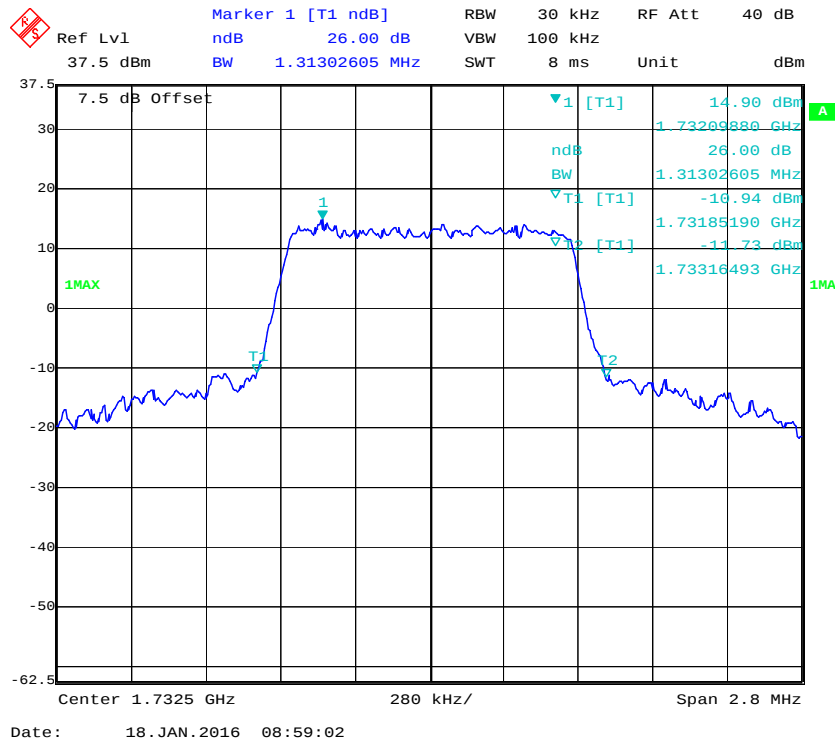


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

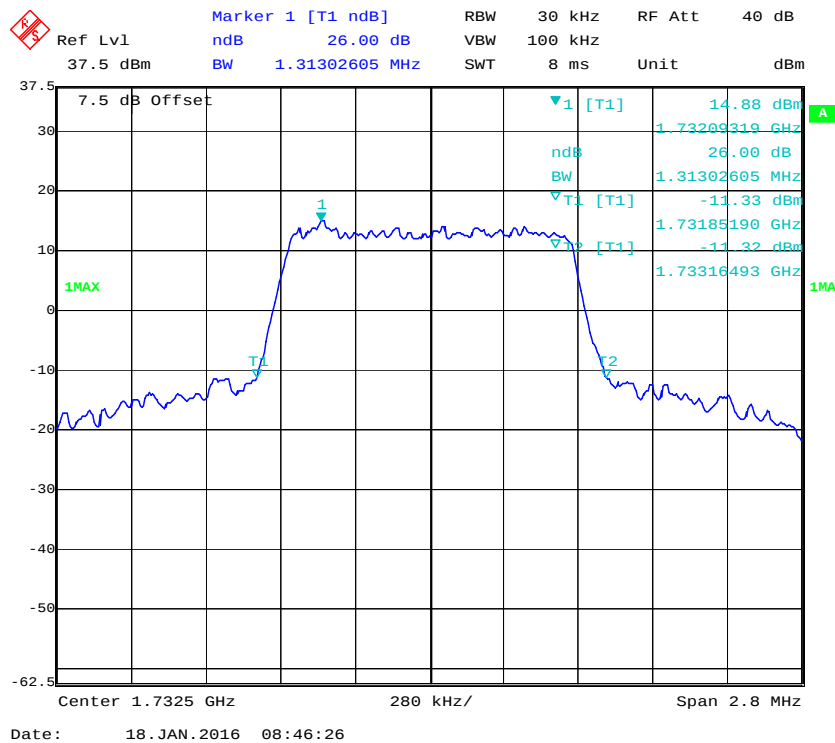


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

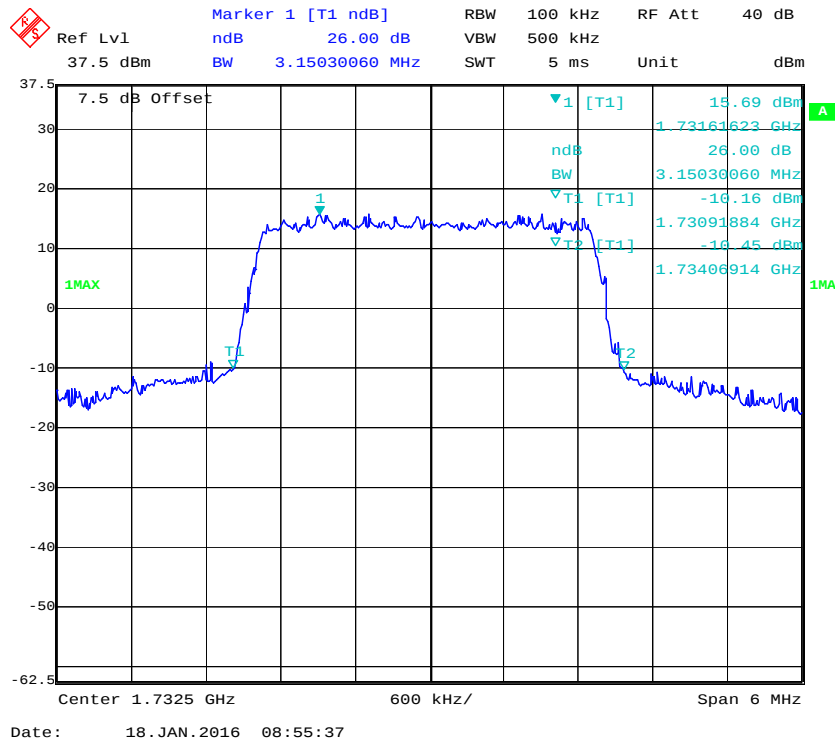


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel

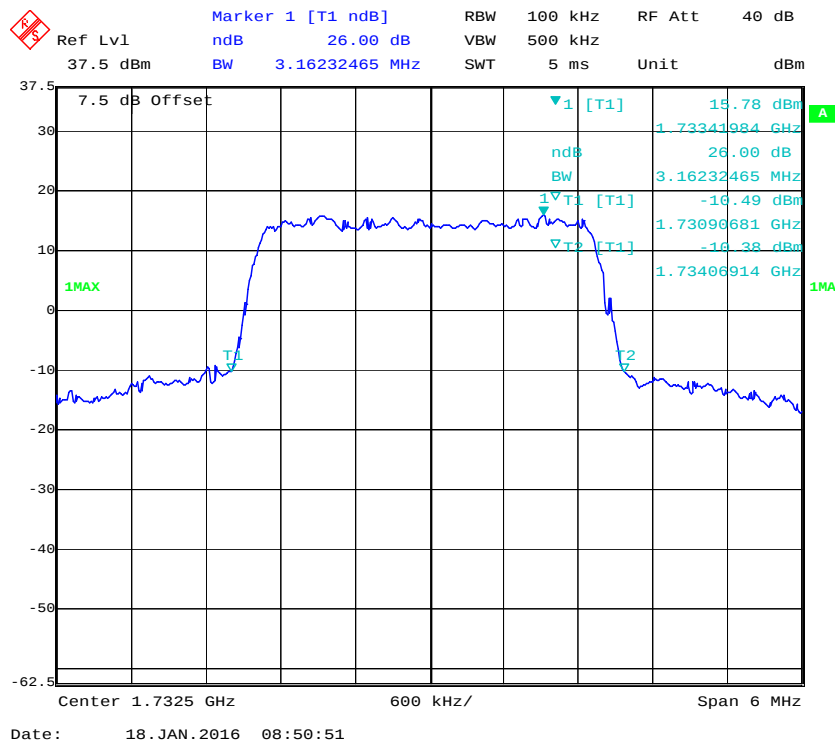


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

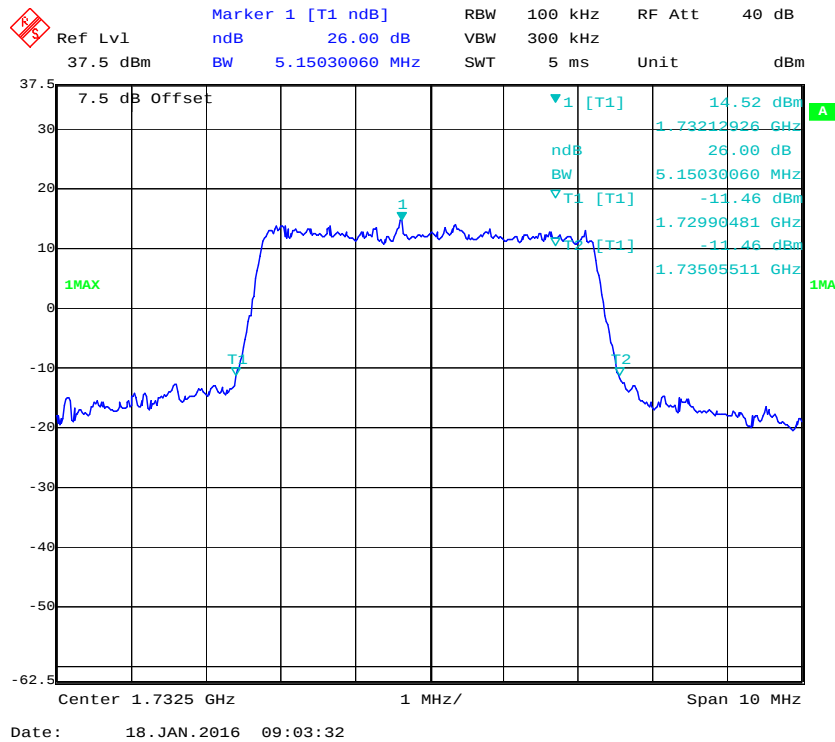


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

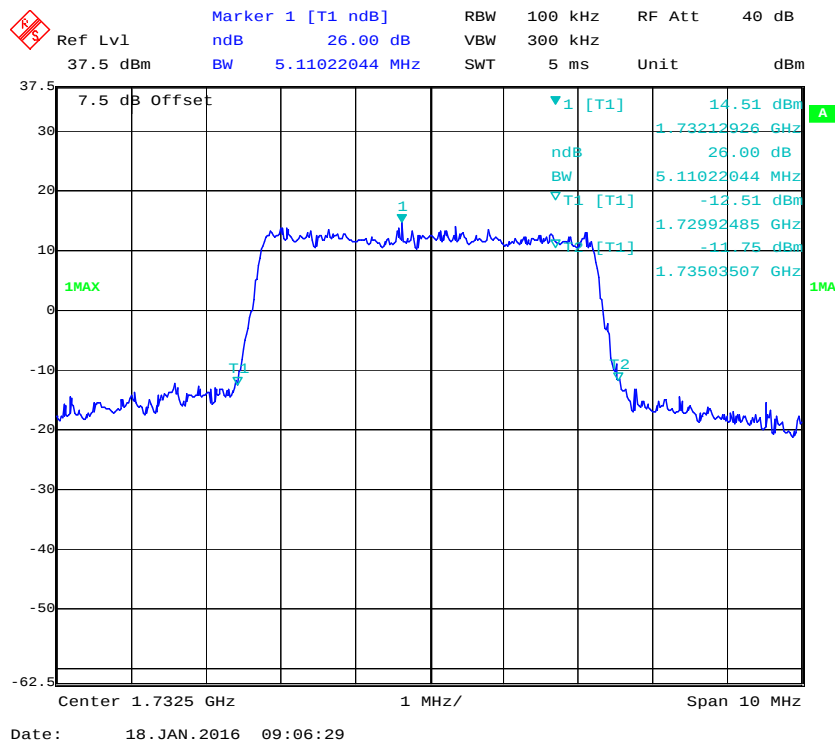


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

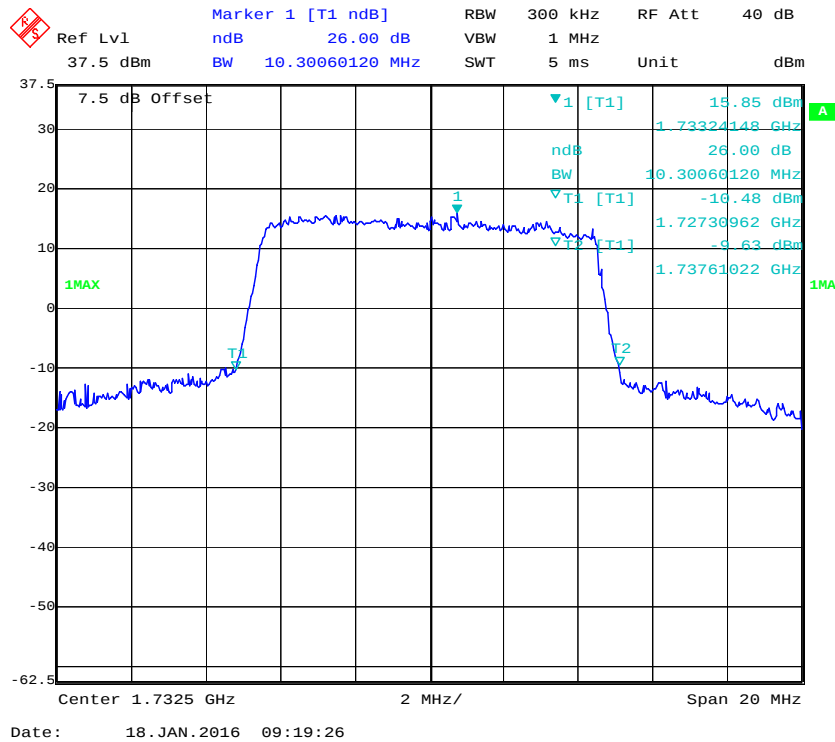


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

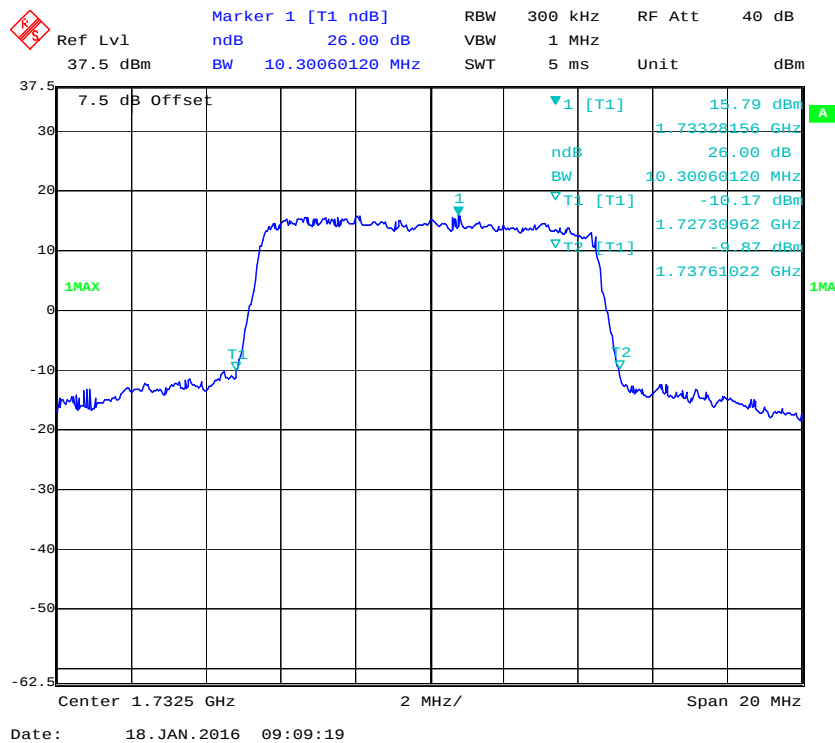


QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel

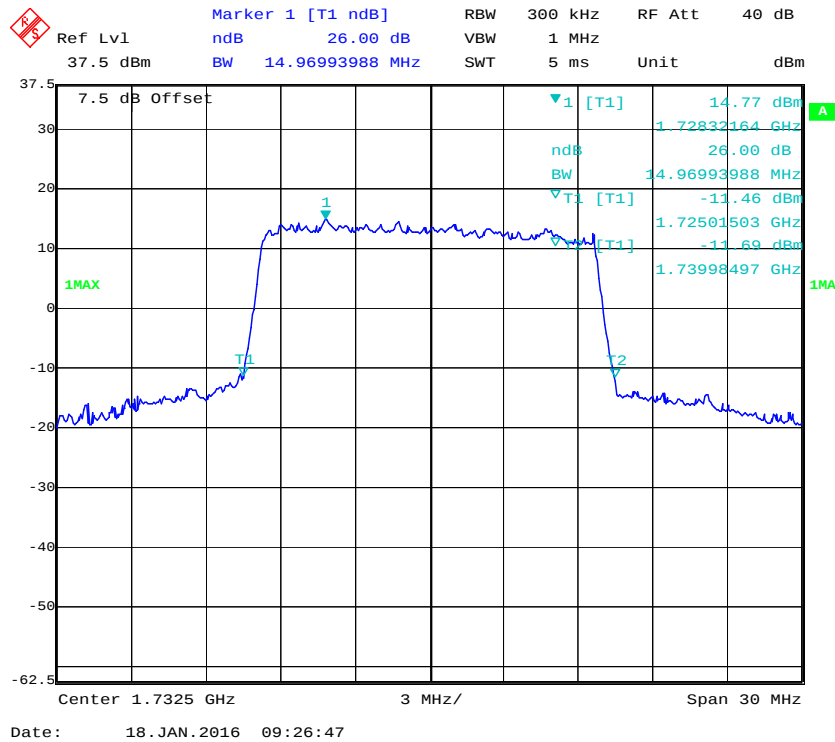


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

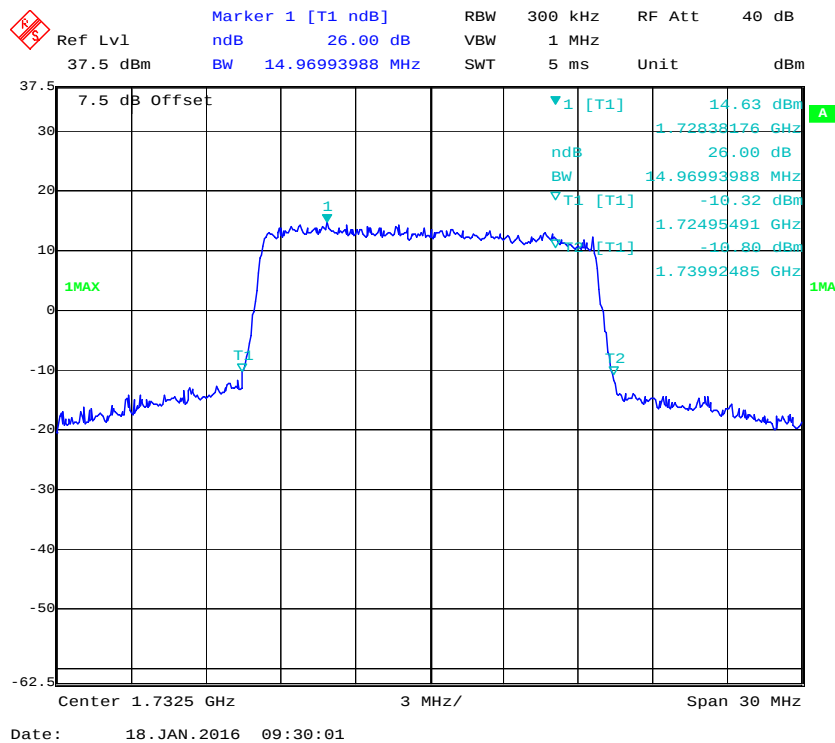

QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel


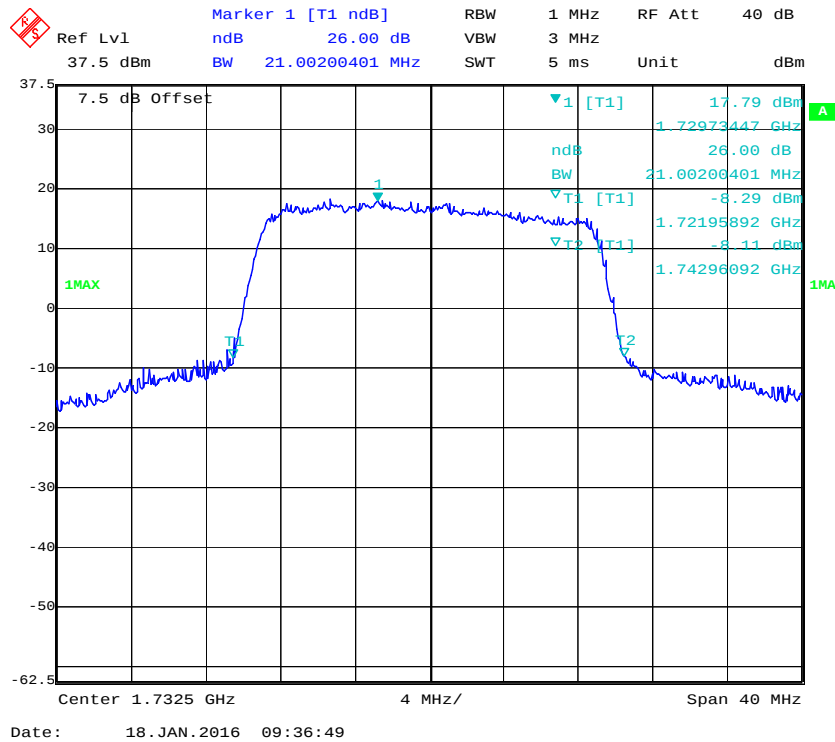




16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel


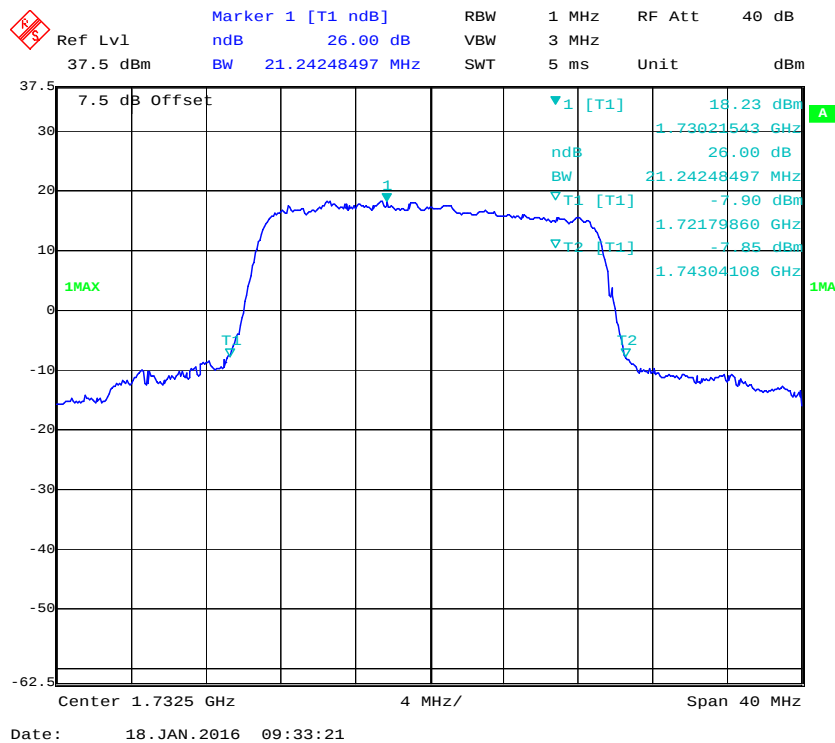




LTE Band 5: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.10	1.28
	16QAM	1.10	1.28
3.0	QPSK	2.74	3.05
	16QAM	2.77	3.07
5.0	QPSK	4.55	5.01
	16QAM	4.53	5.05
10.0	QPSK	9.10	10.18
	16QAM	9.10	10.18

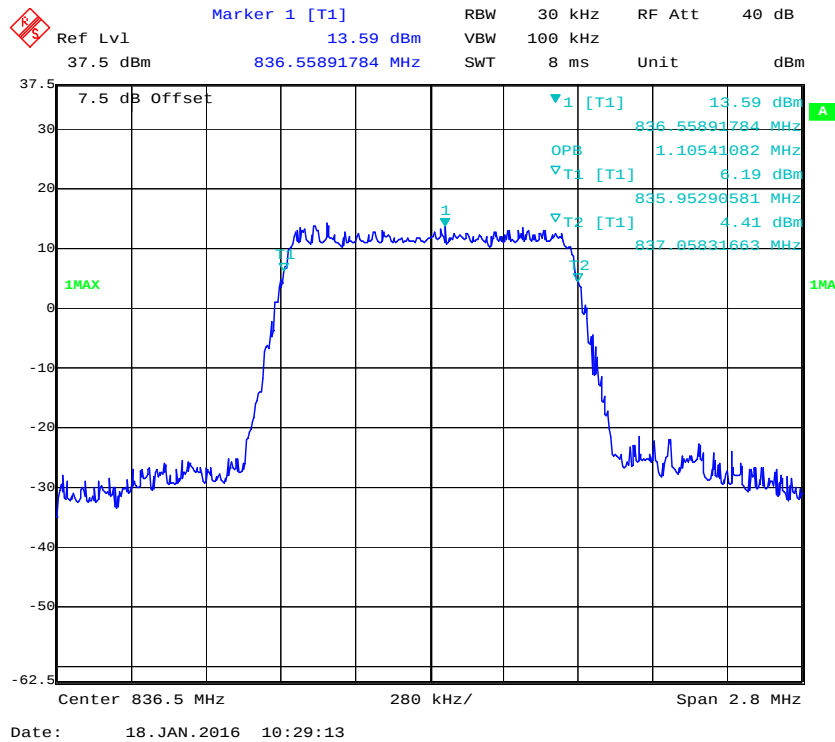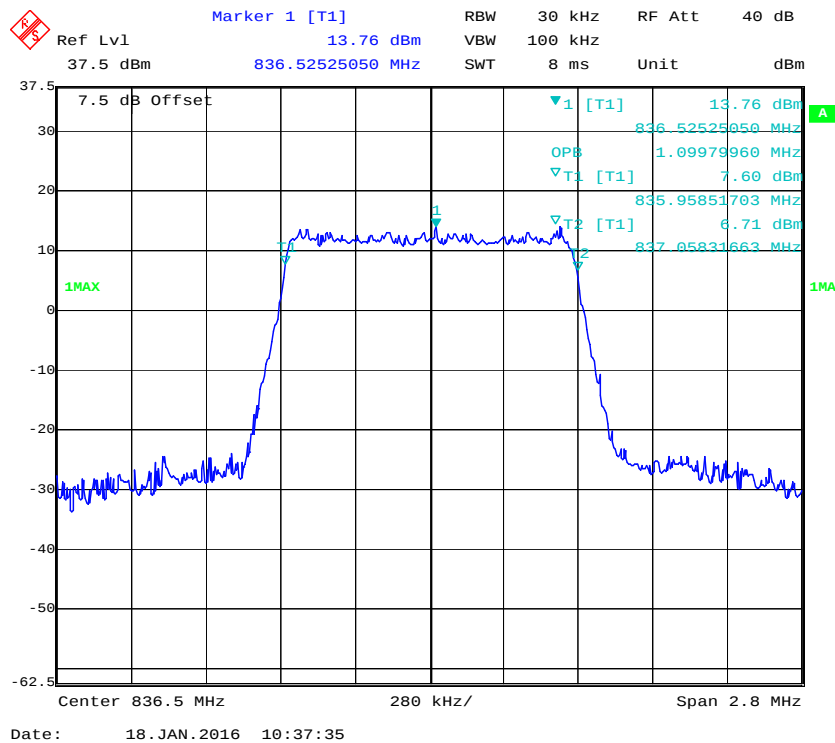
QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**

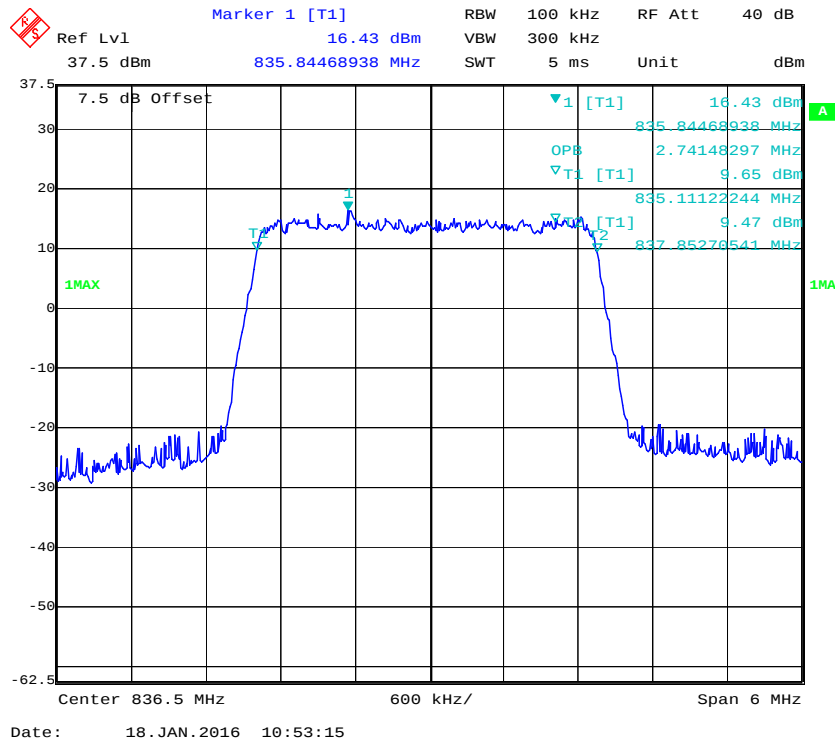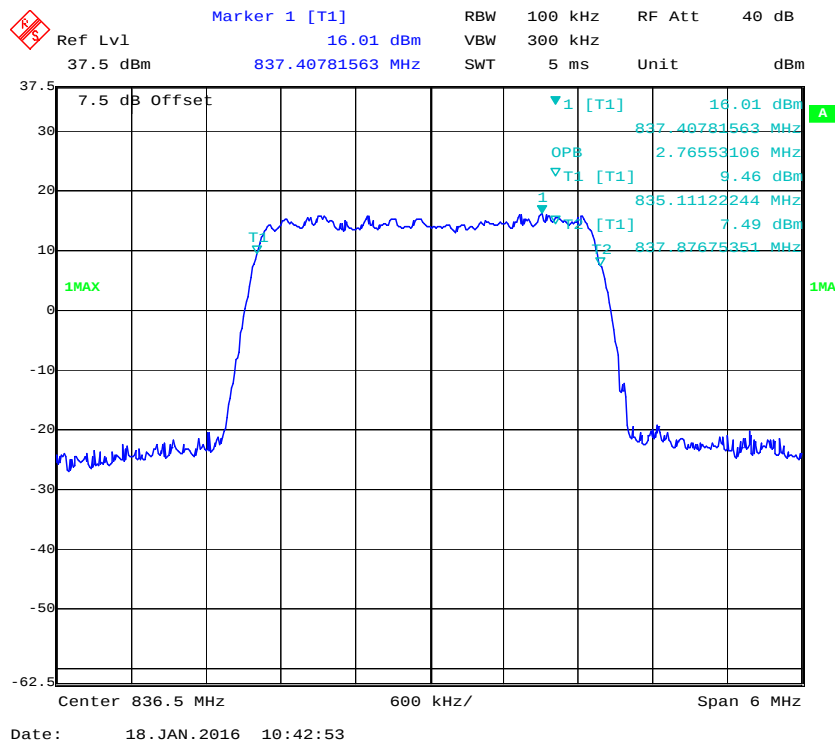QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**

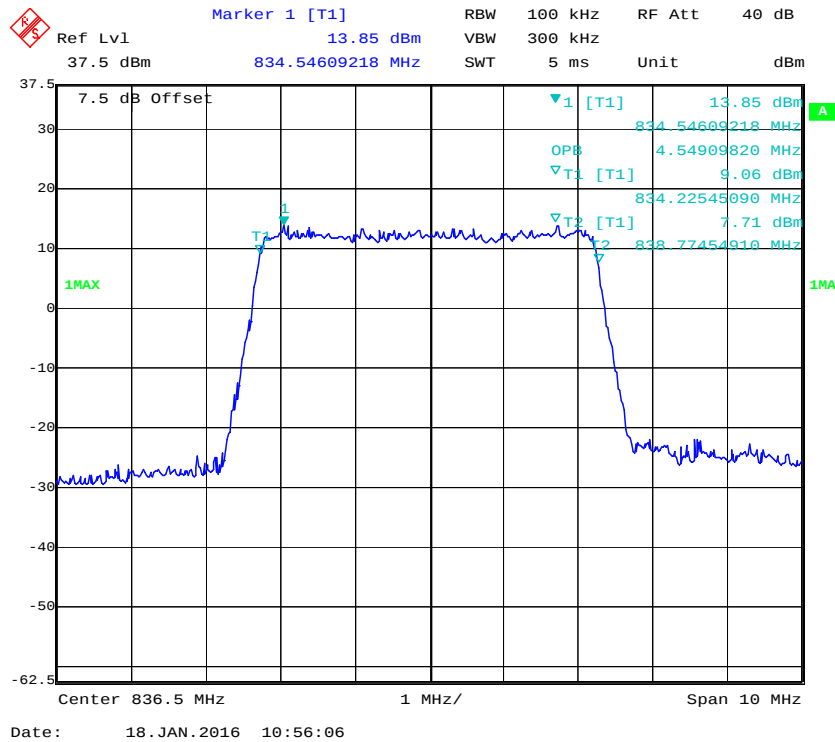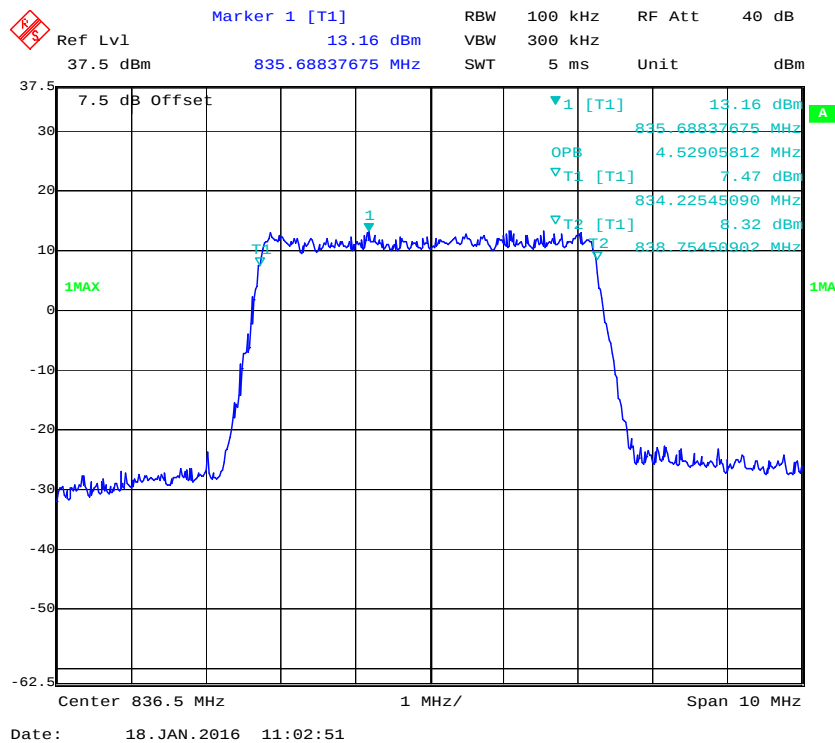
QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**

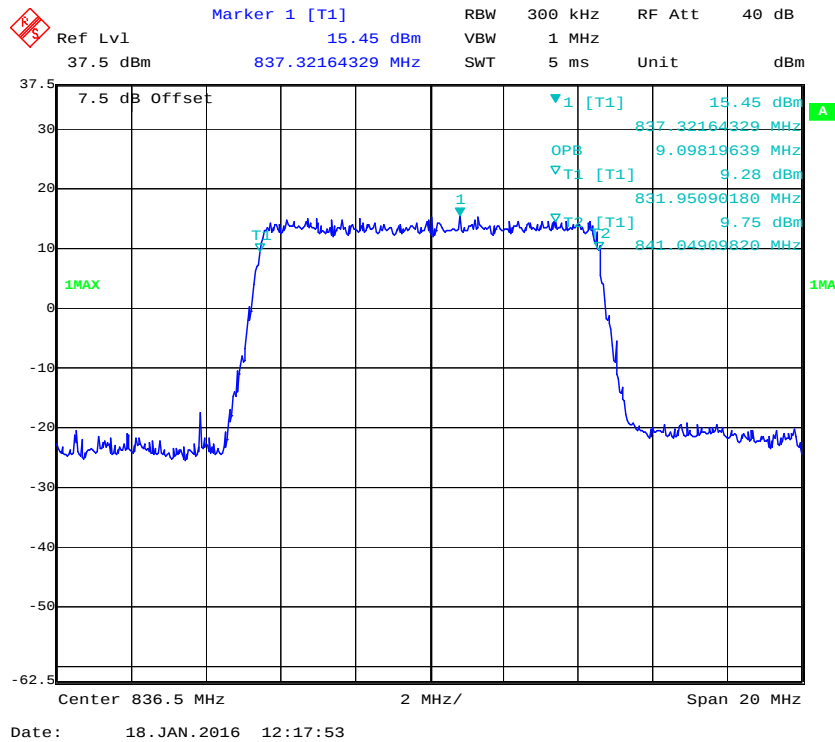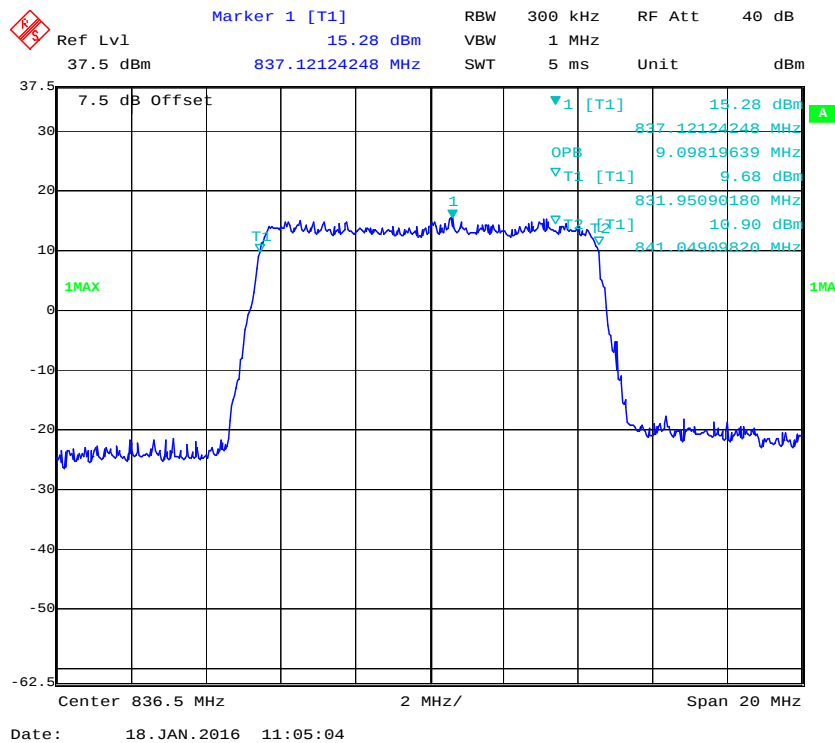QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

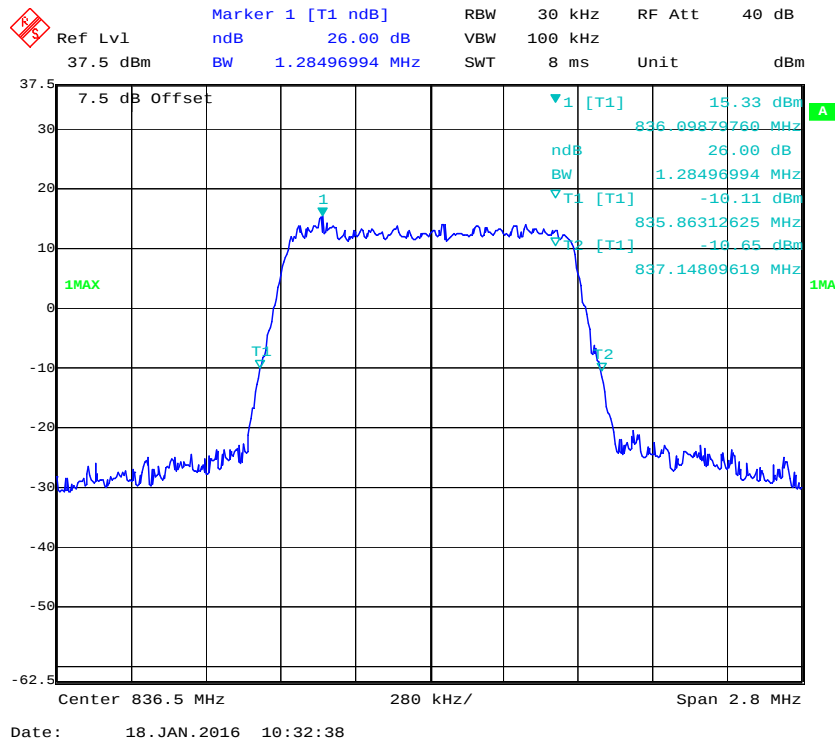


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

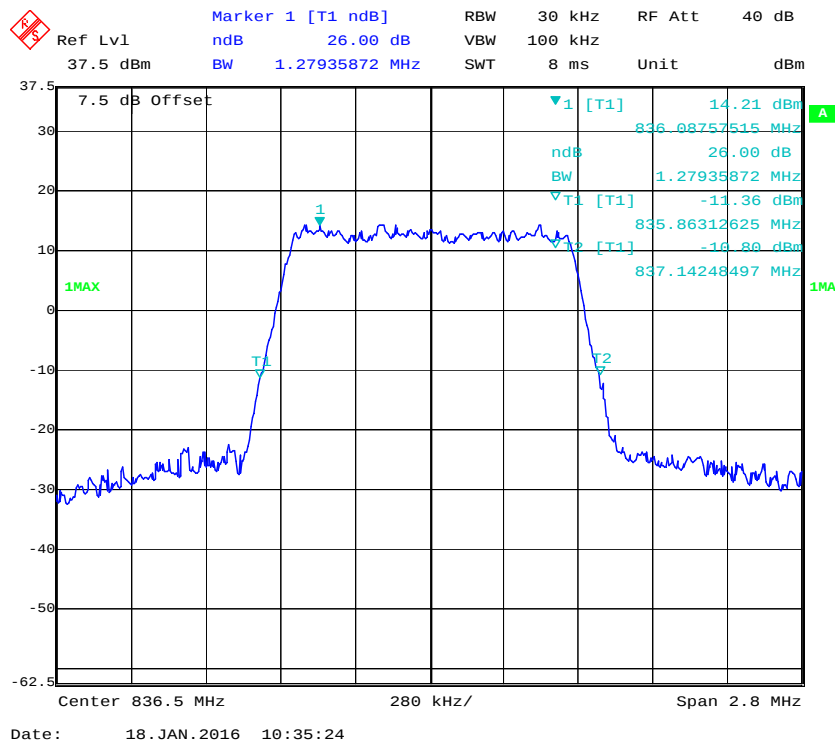


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

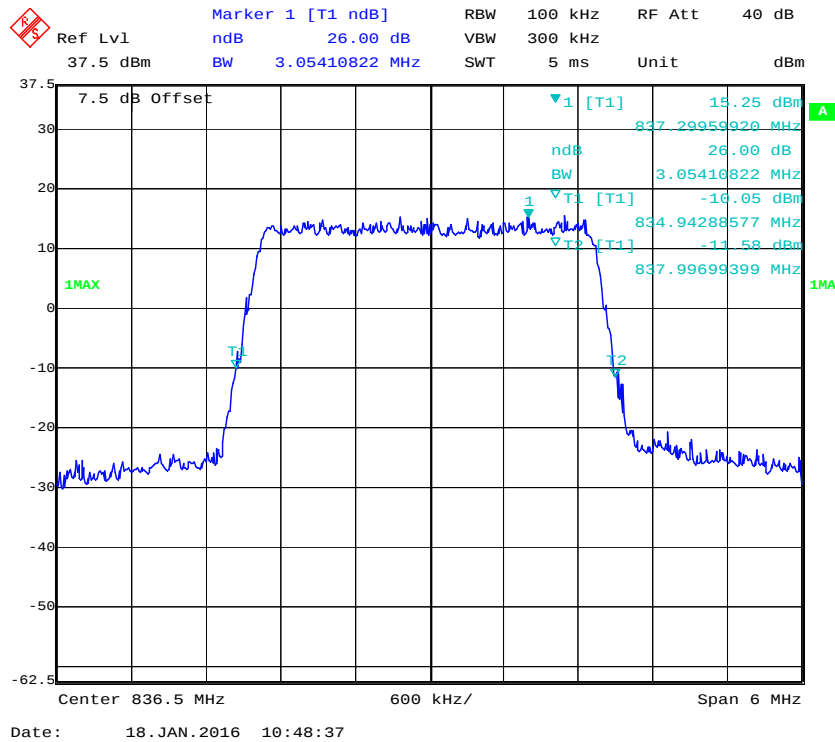


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel

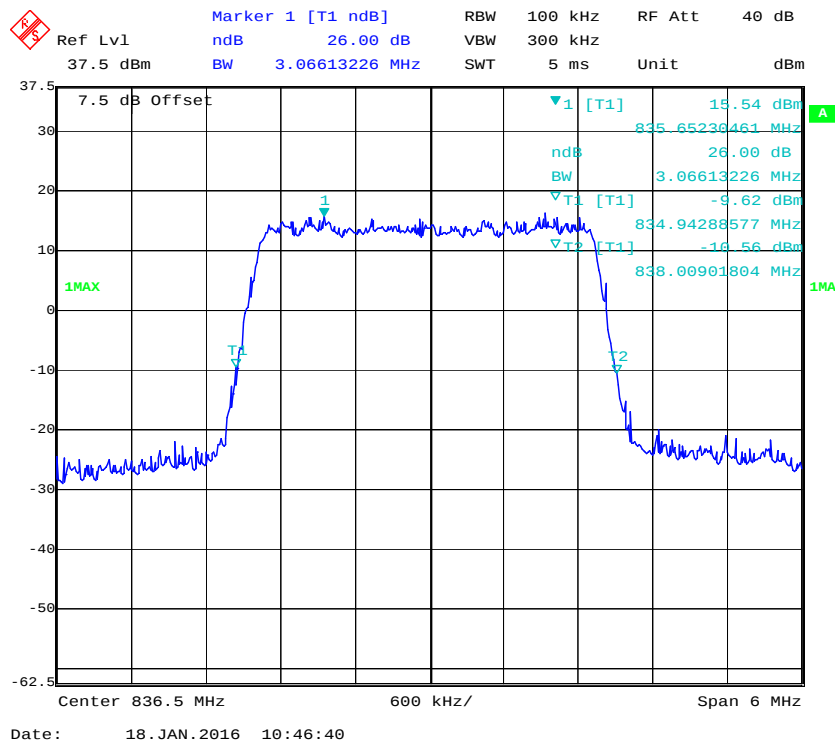


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

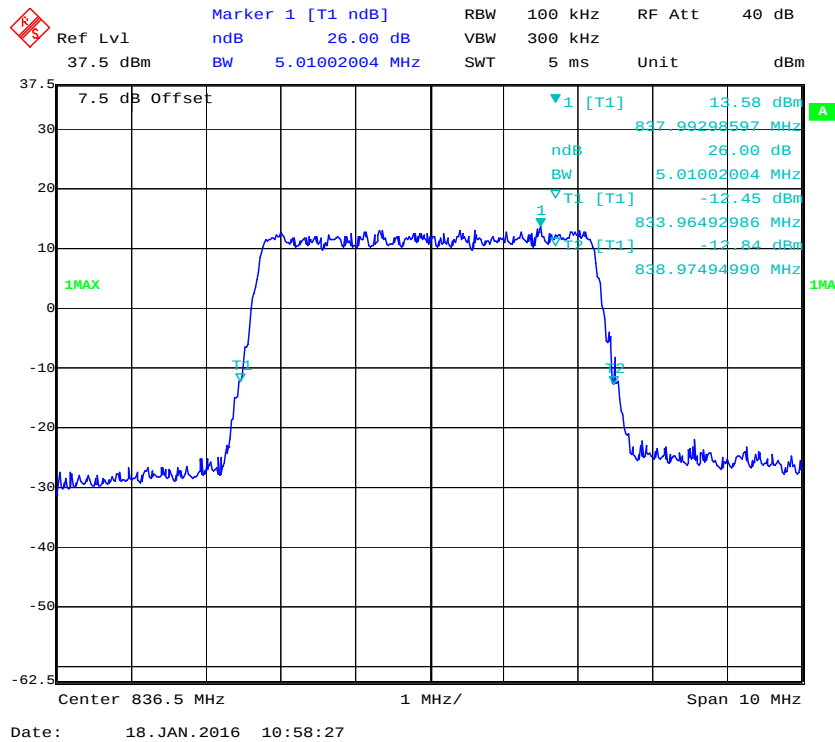


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

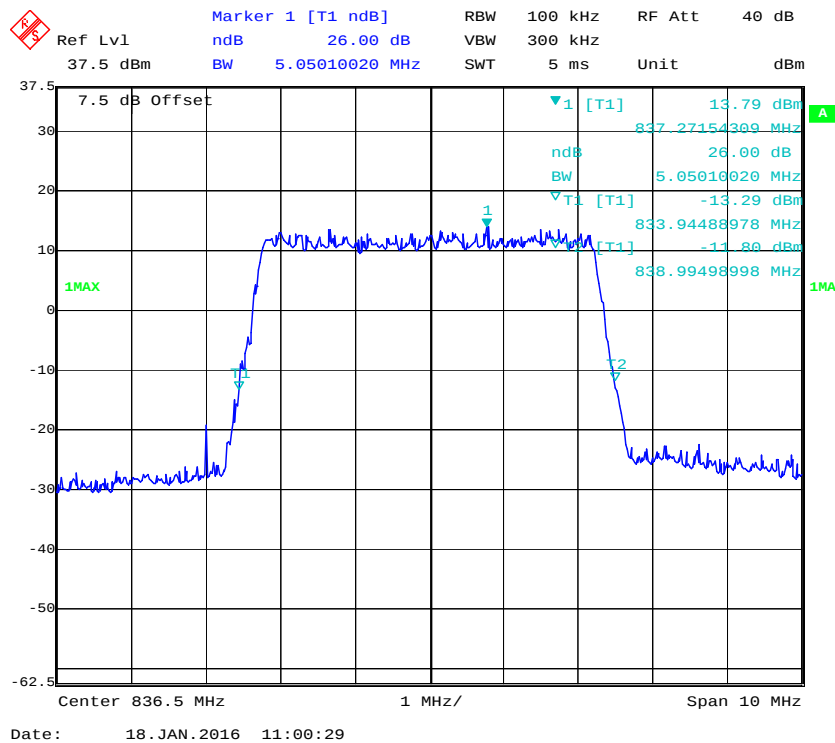

QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel


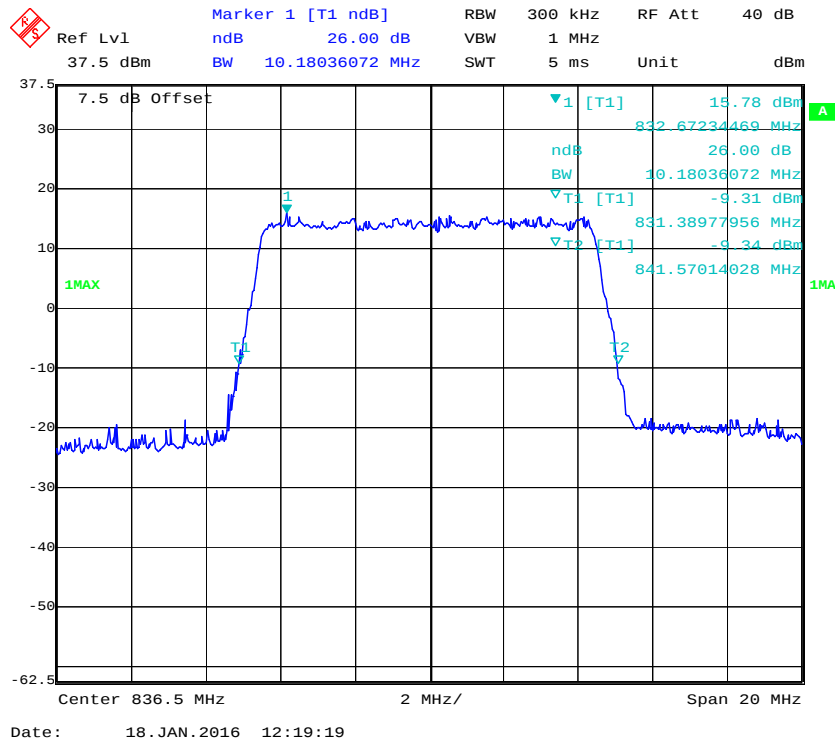


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

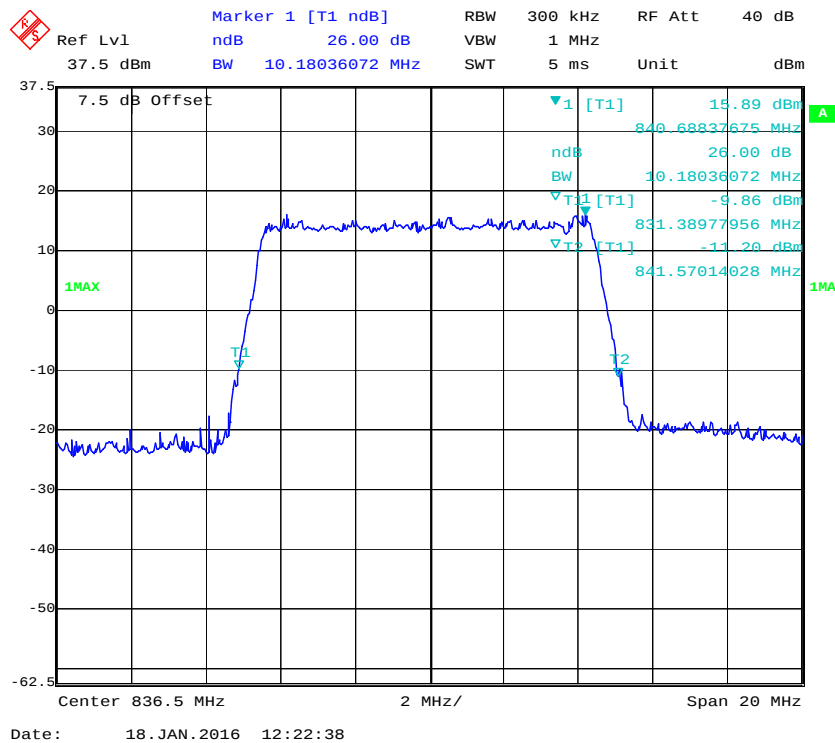


LTE Band 7: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.61	5.21
	16QAM	4.59	5.45
10.0	QPSK	9.18	13.75
	16QAM	9.22	11.18
15.0	QPSK	13.89	14.78
	16QAM	13.89	14.73
20.0	QPSK	19.56	19.48
	16QAM	19.80	19.48

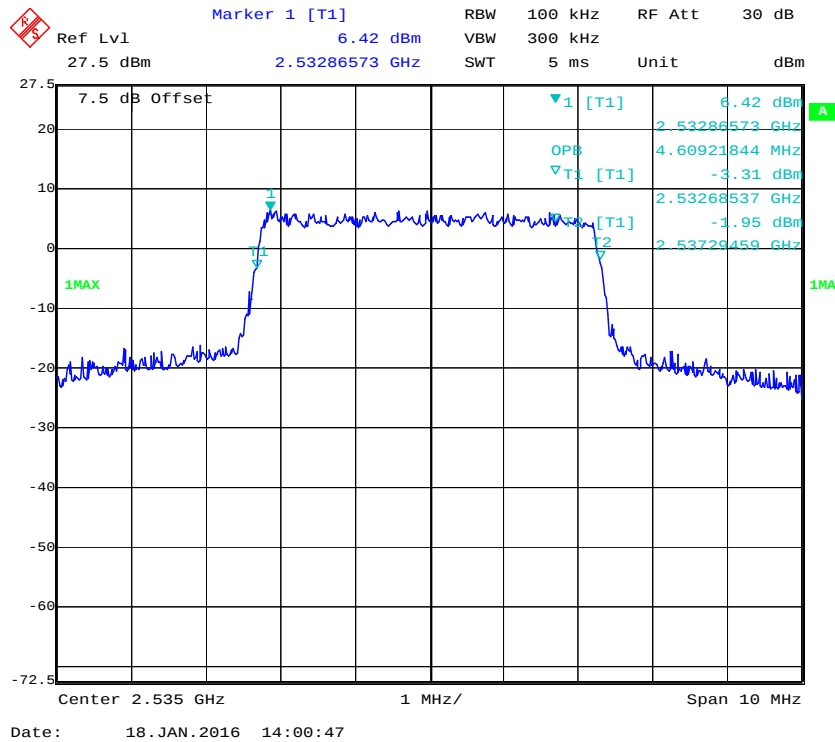
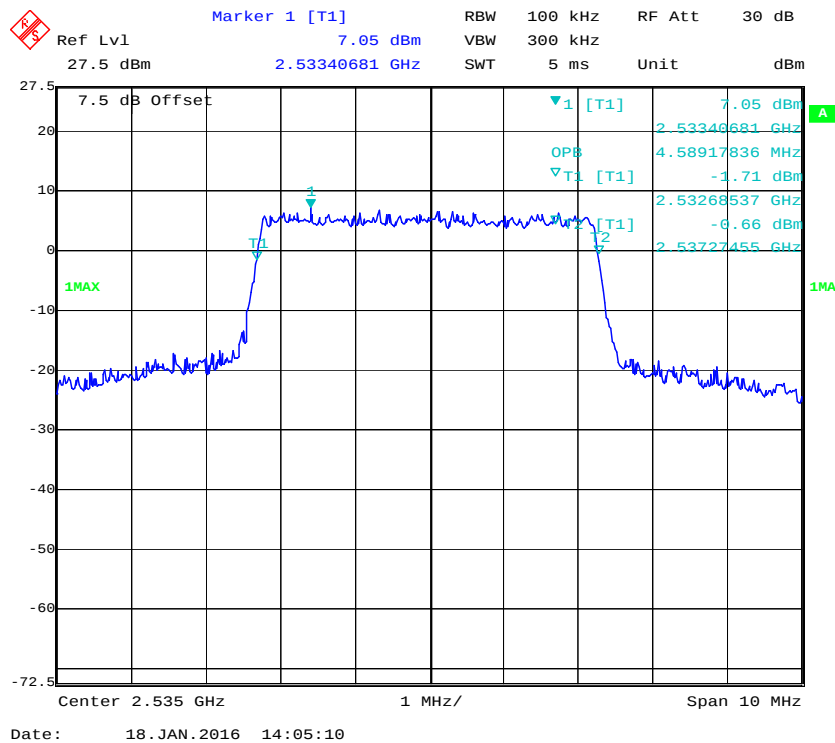
QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**



QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel


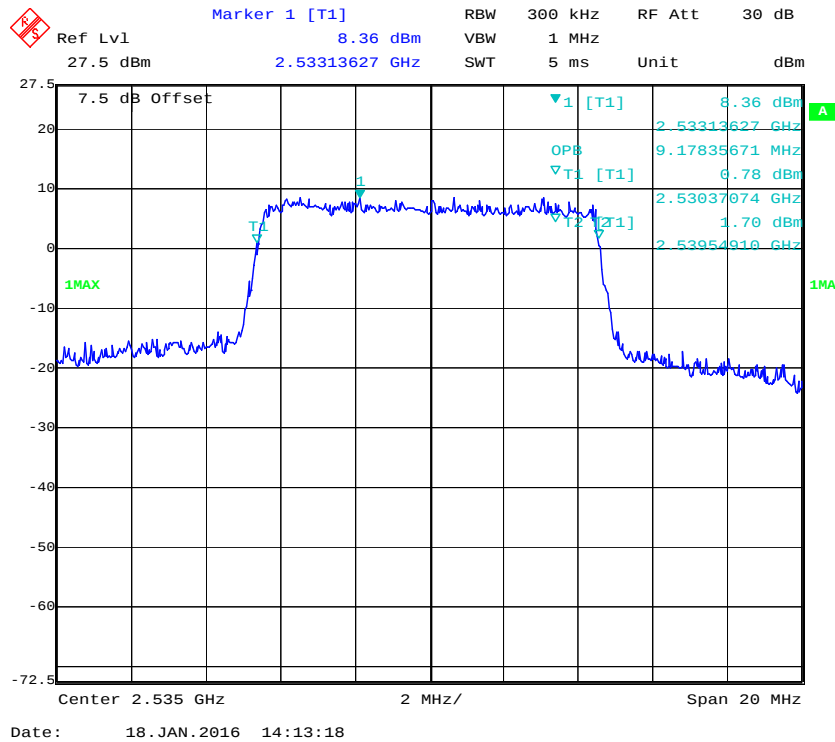




16-QAM (10.0MHz) - 99% Occupied Bandwidth, Middle channel


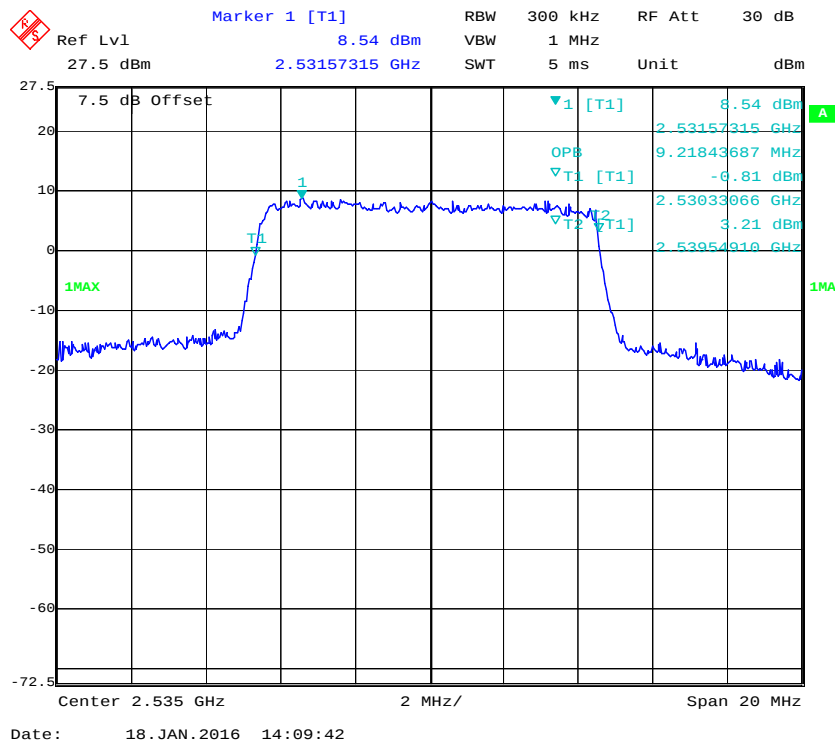


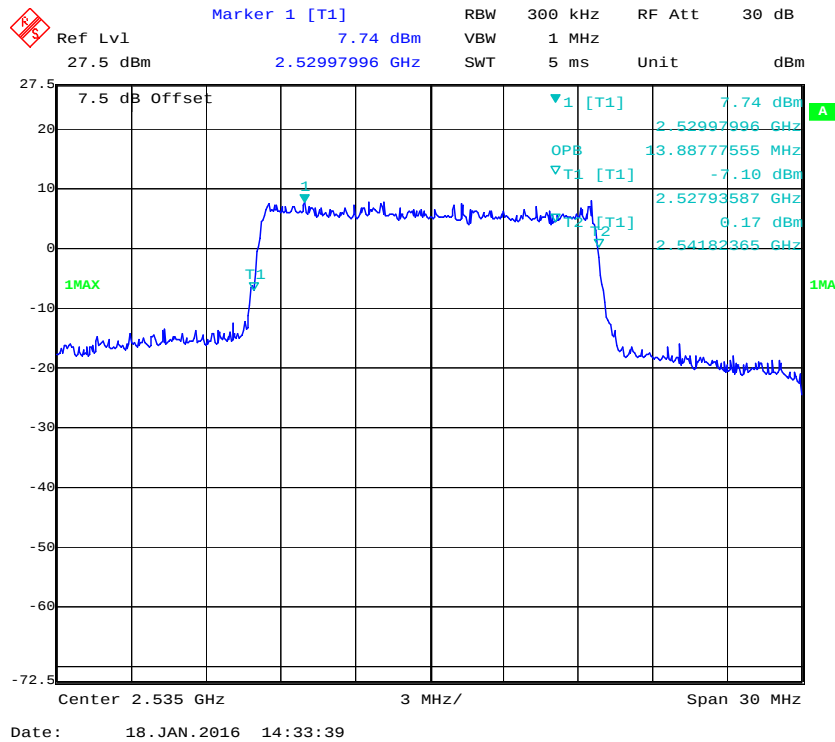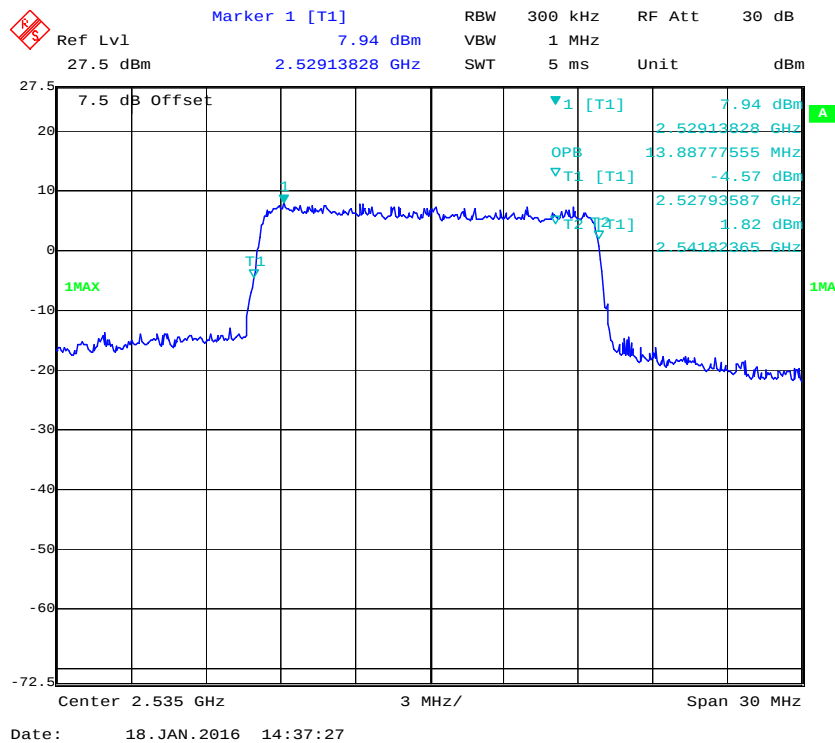QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**

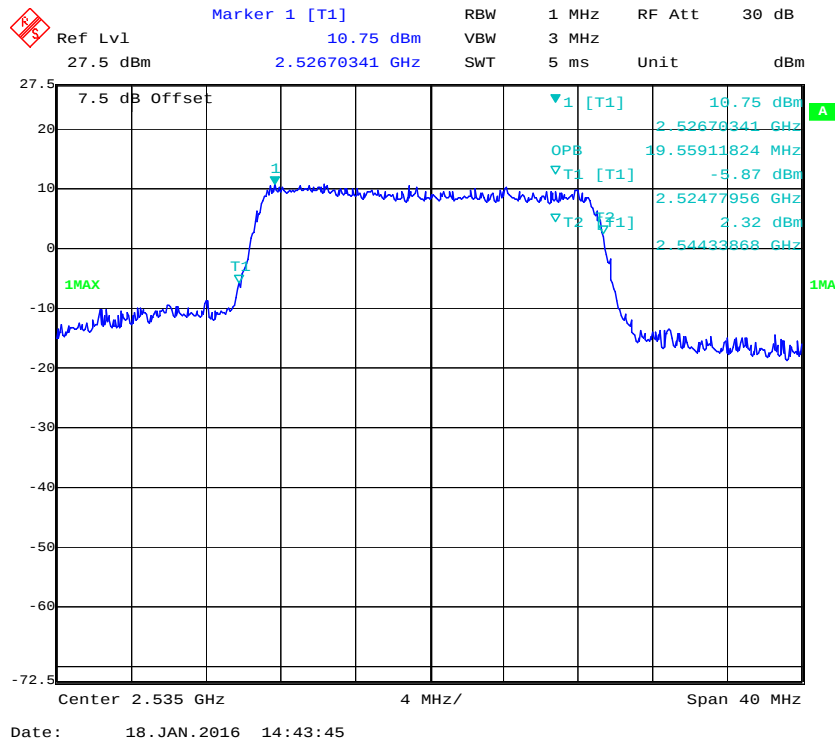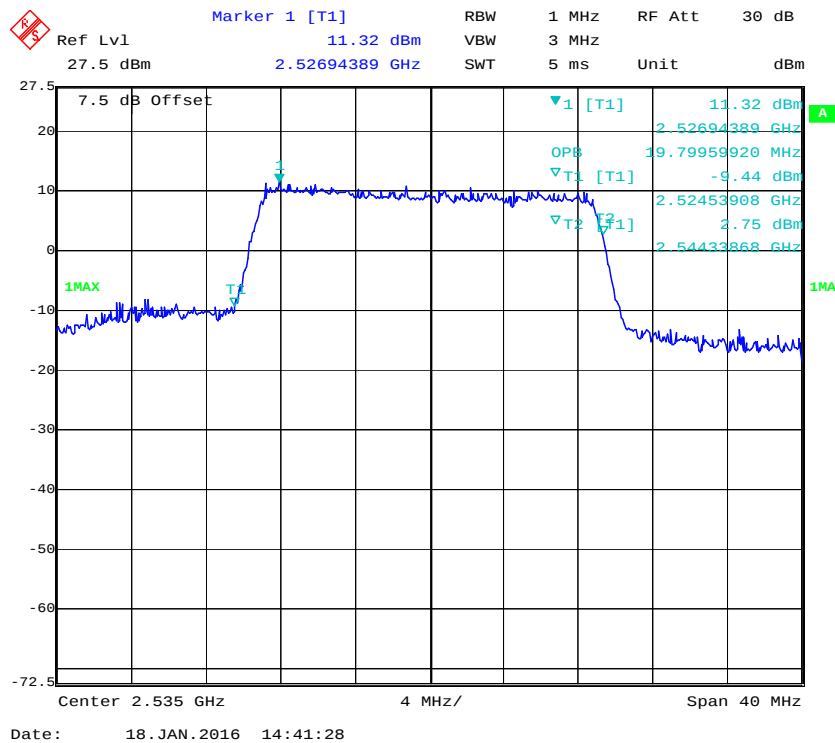
QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel**

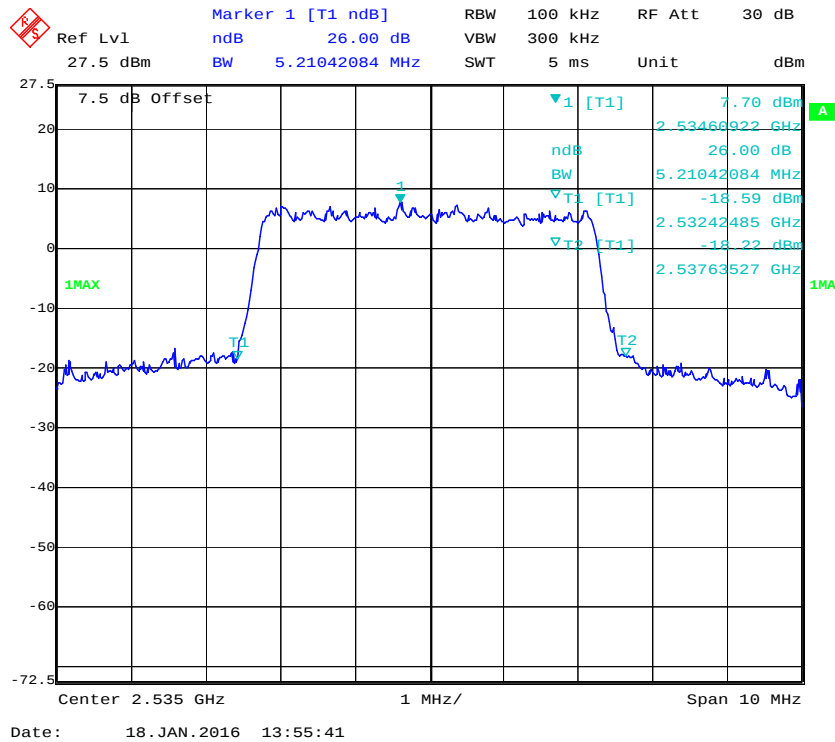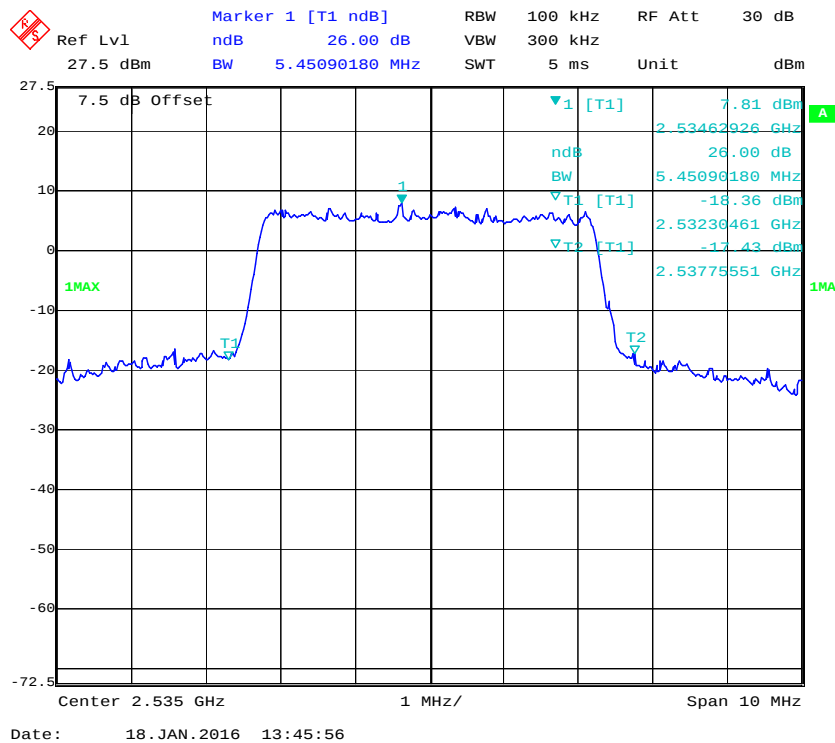QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel**

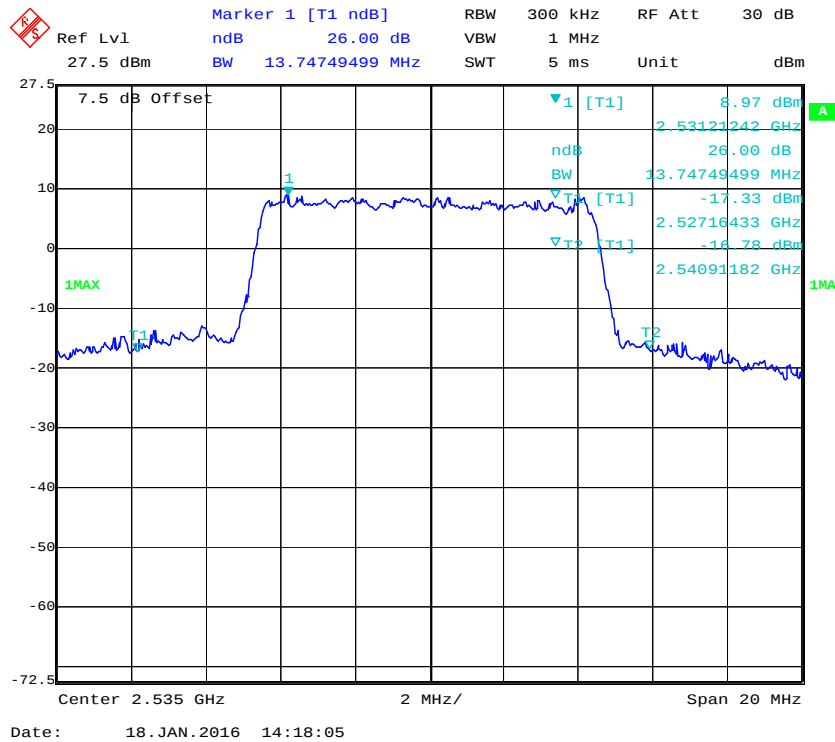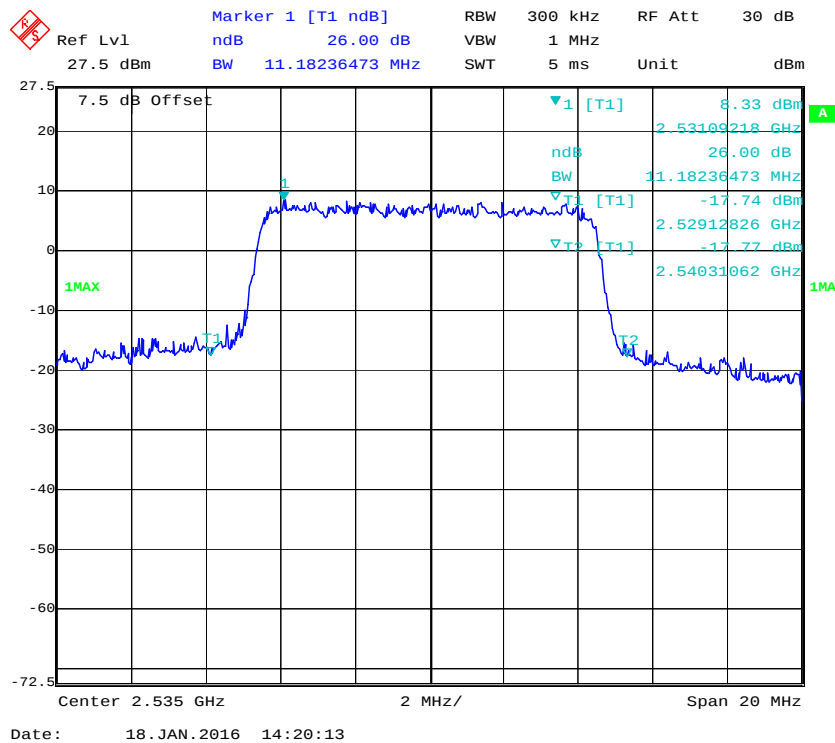
QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**

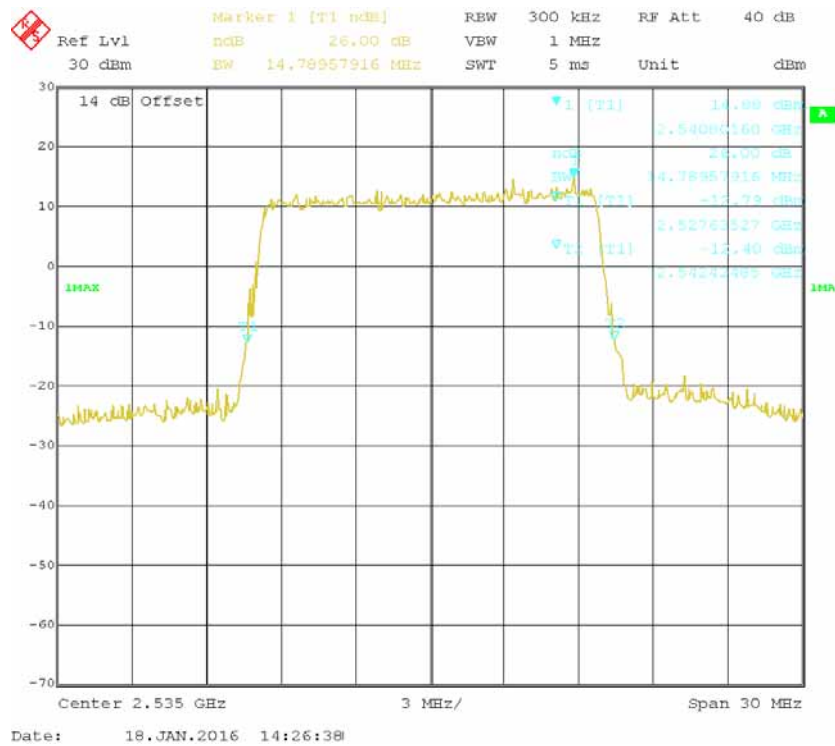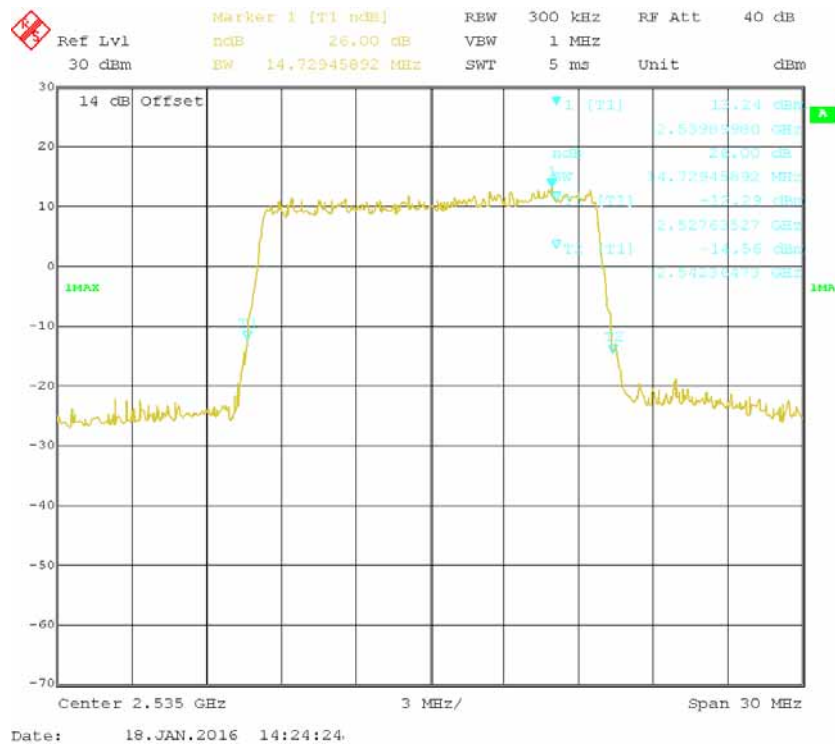QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel**

QPSK (20.0MHz) - 26 dB Bandwidth, Middle channel


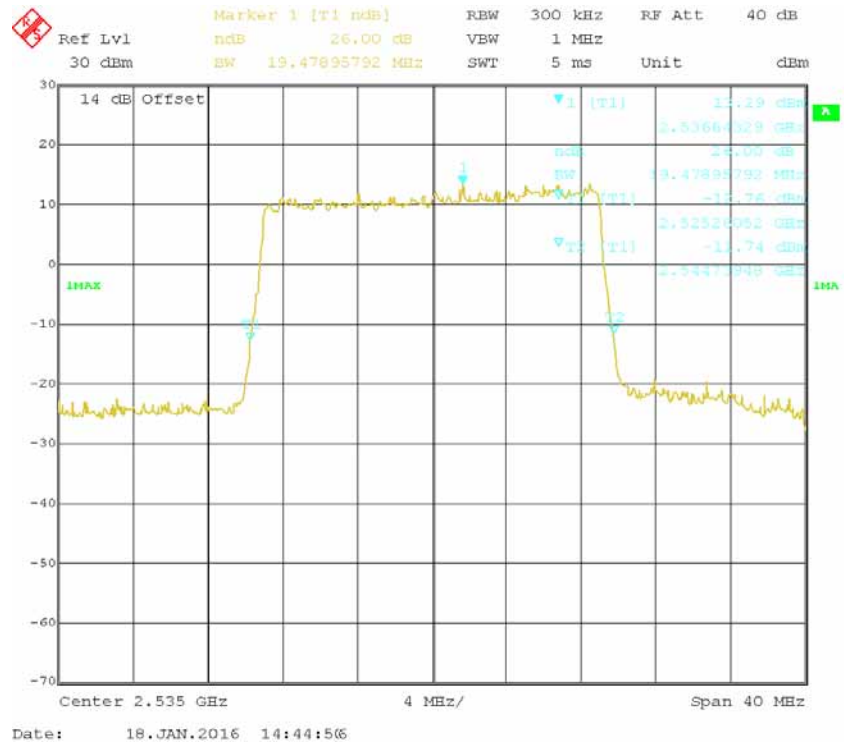




16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel

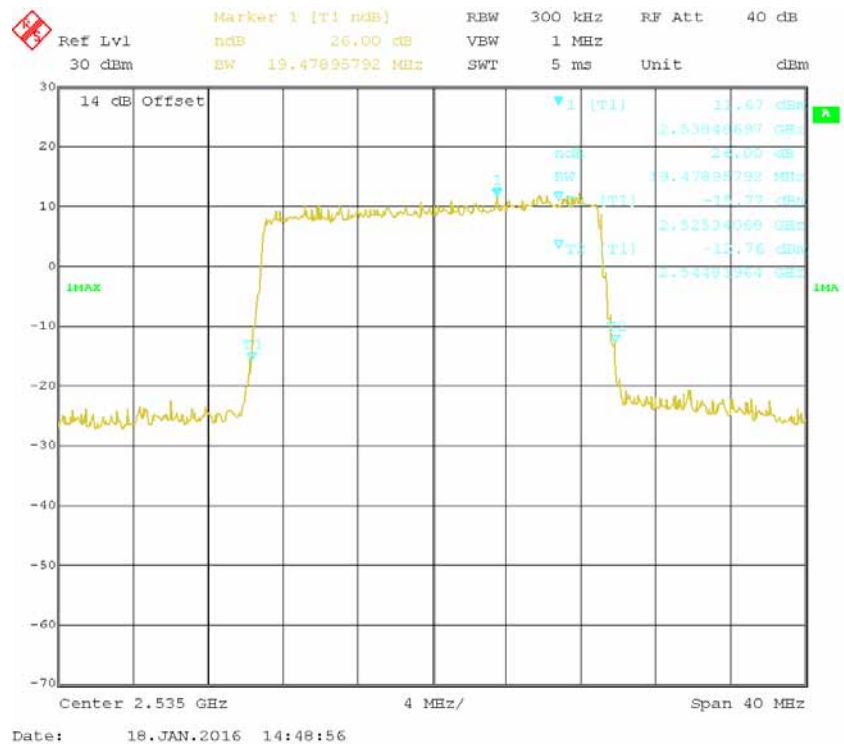


LTE Band 17: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.55	5.07
	16QAM	4.55	5.07
10.0	QPSK	9.10	10.26
	16QAM	9.06	10.14

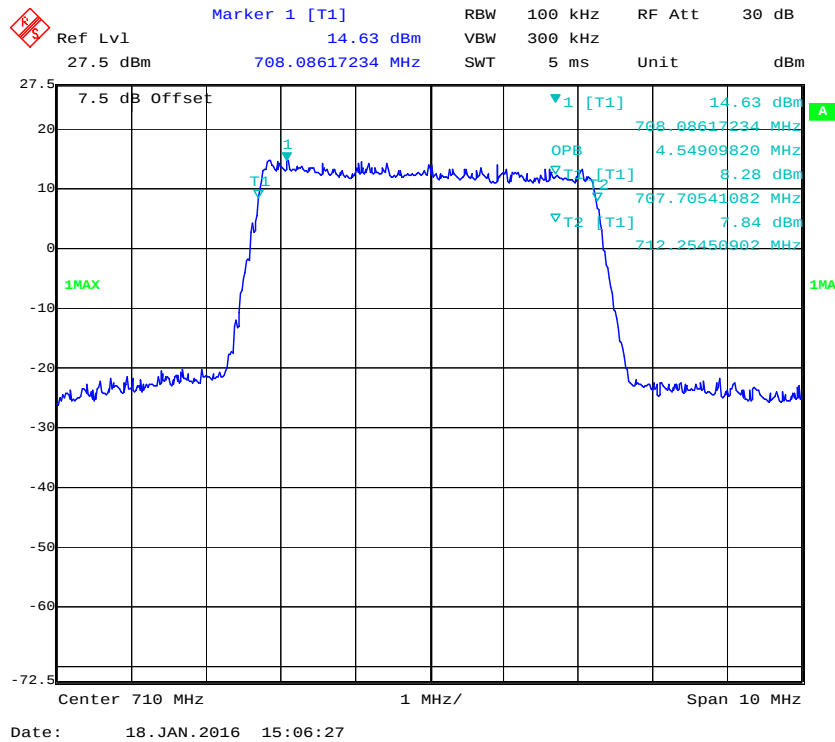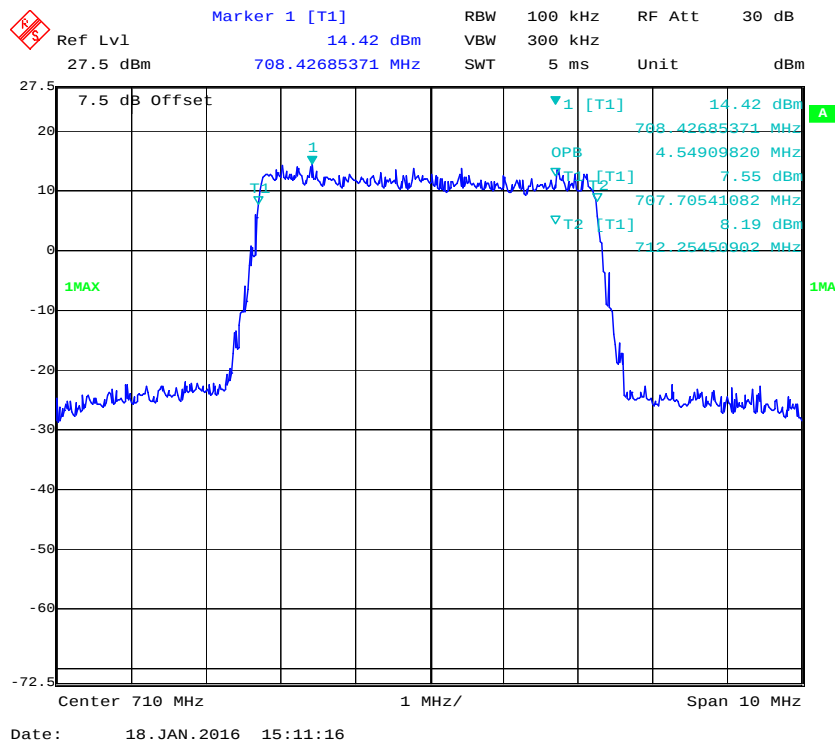
QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**

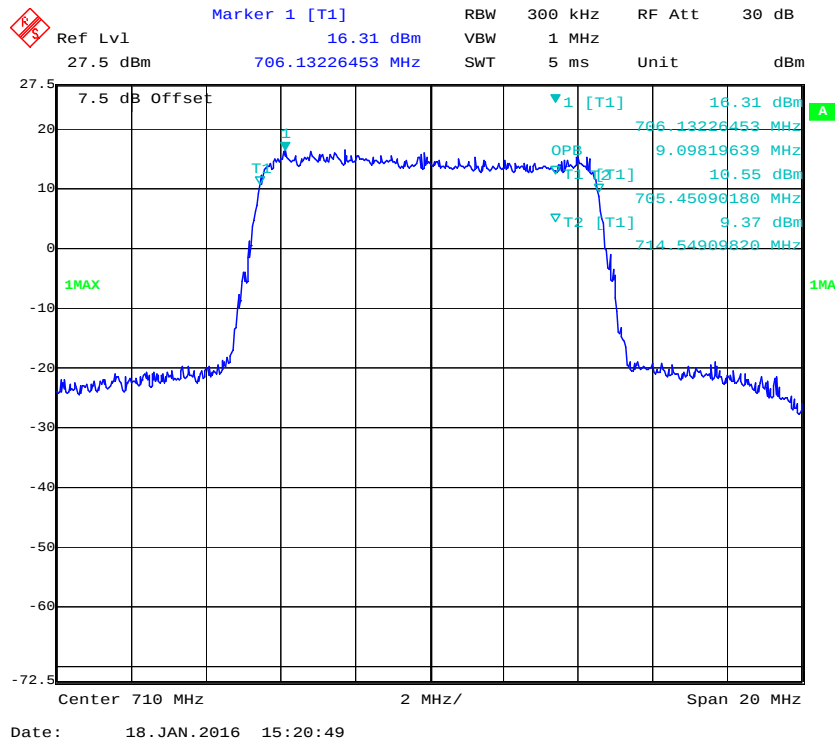
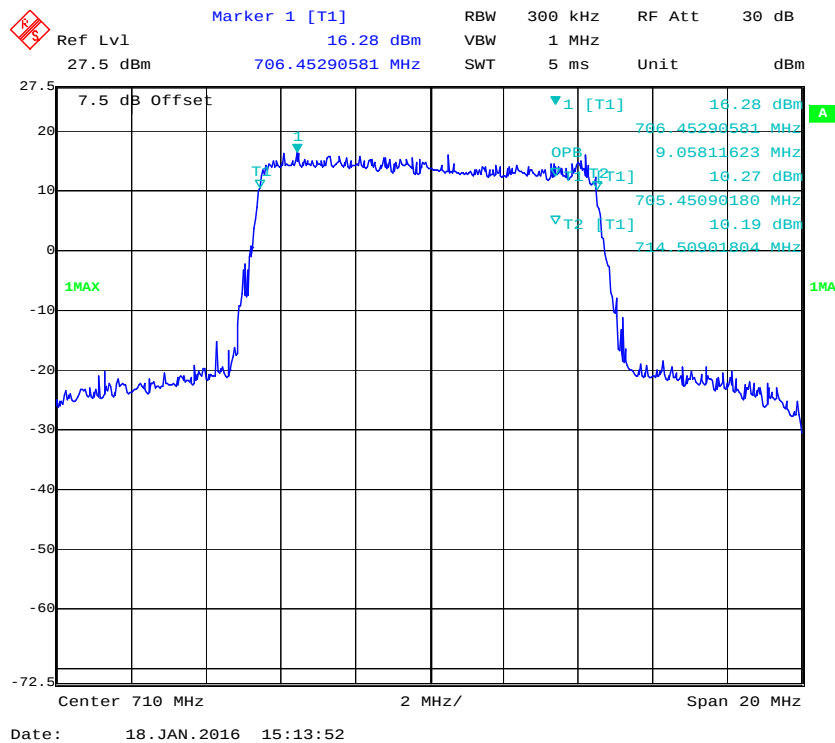
QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**

QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

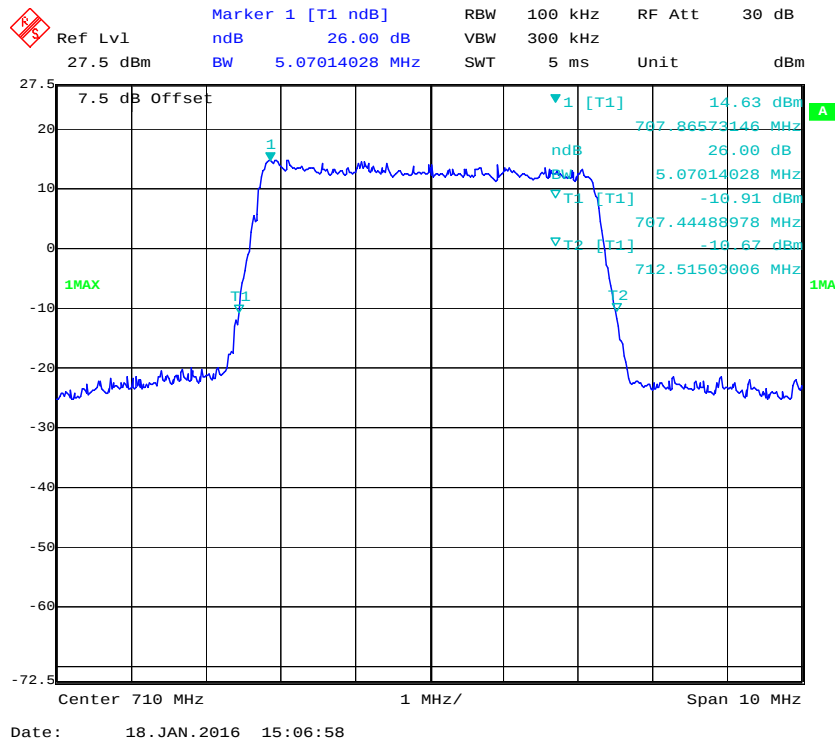

16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

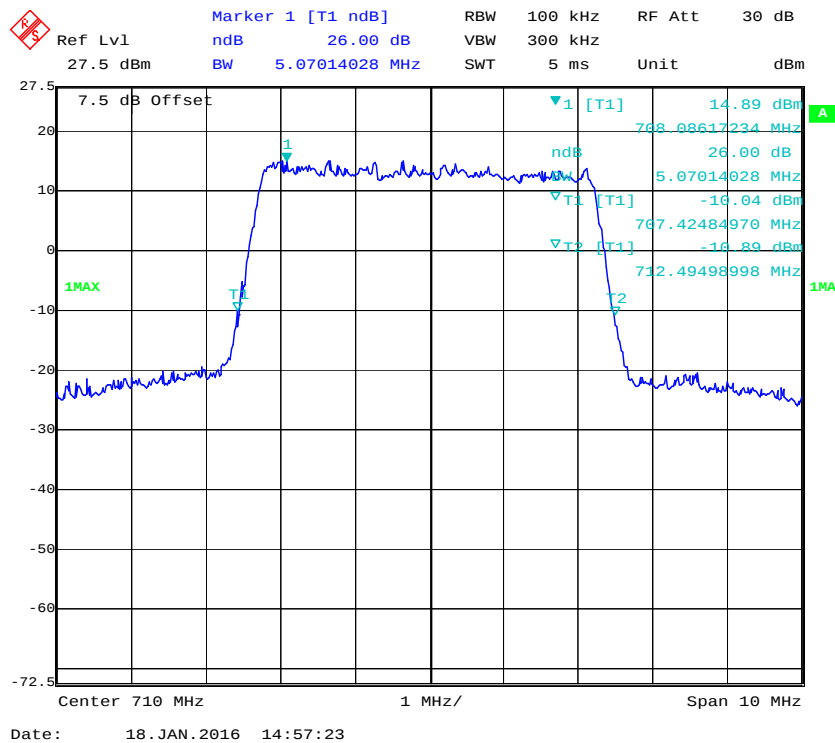

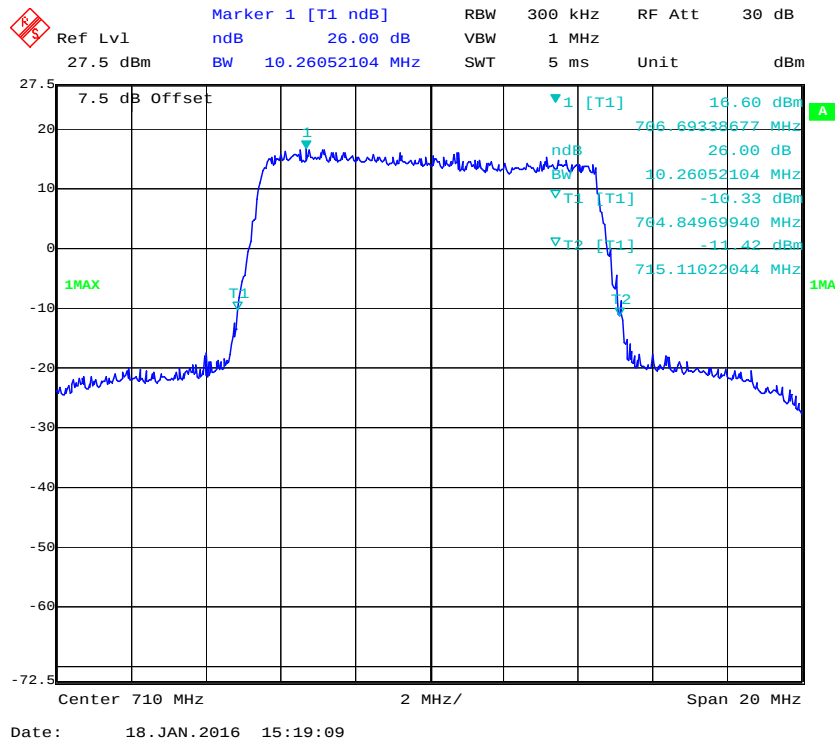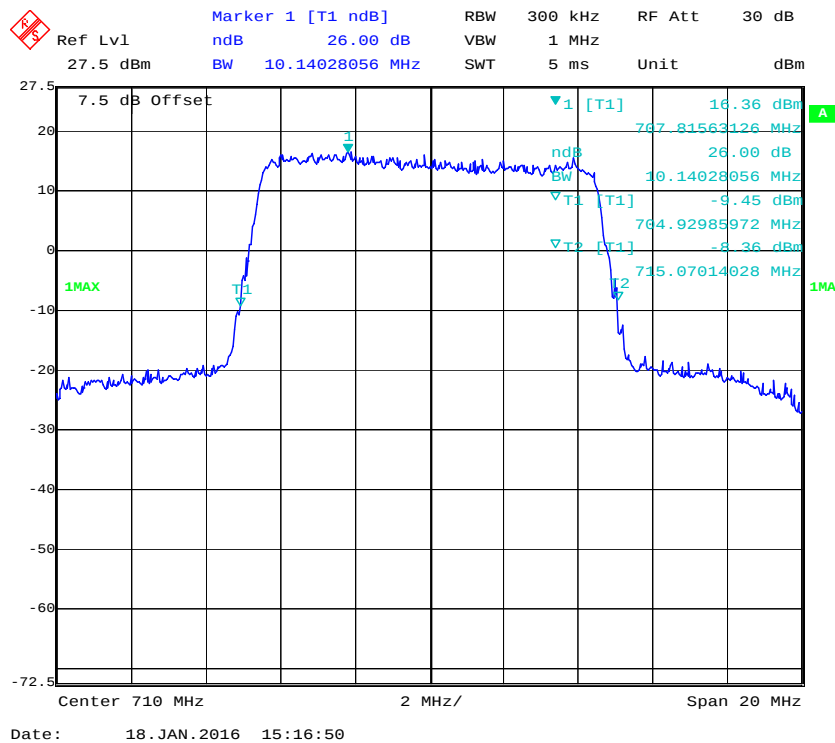QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

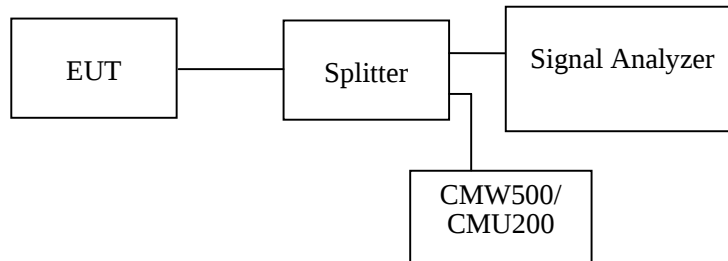

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	22~24
Relative Humidity:	53~55 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Simon Wang from 2016-01-14 to 2016-01-19.


Please refer to the following plots.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

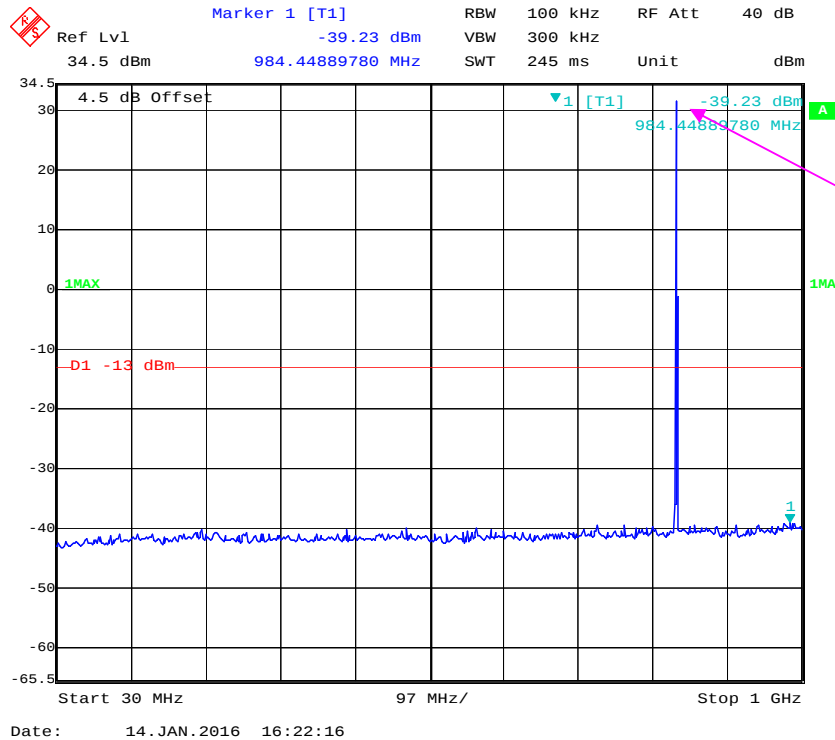

1 GHz – 20 GHz (GSM Mode)

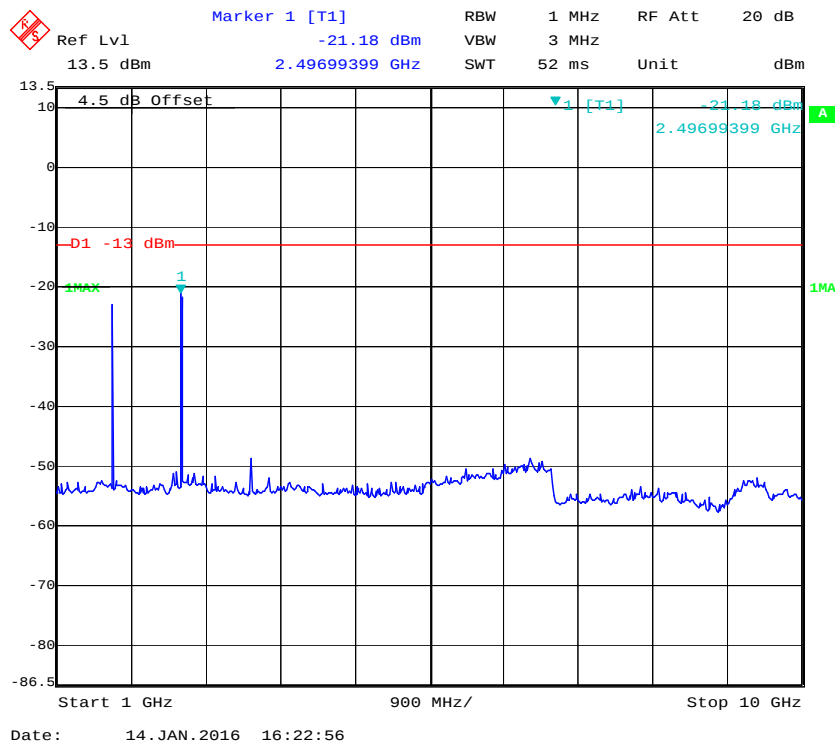


30 MHz – 1 GHz (WCDMA Mode)

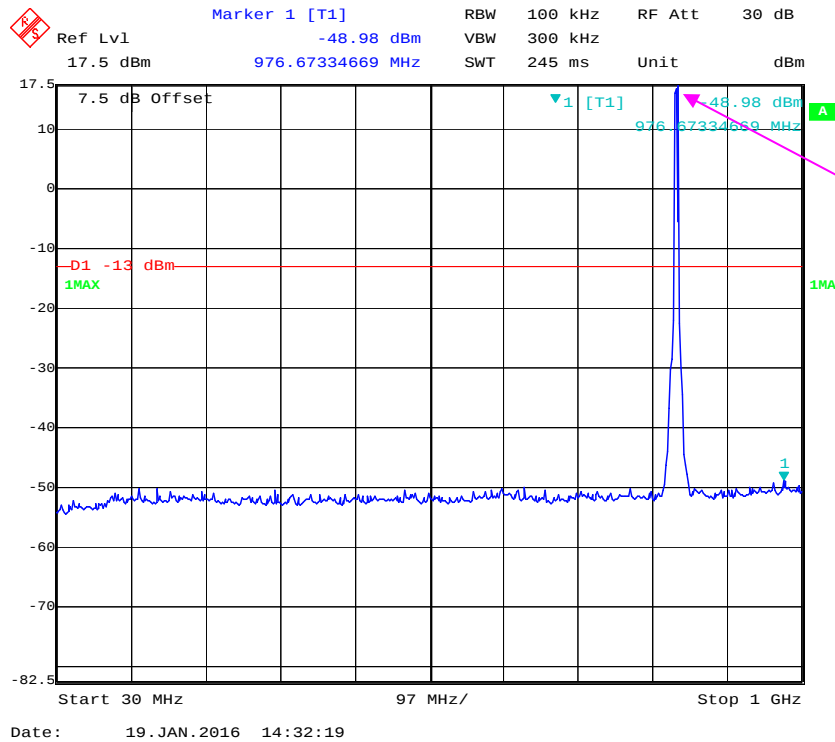


Fundamental test

1 GHz – 10 GHz (WCDMA Mode)

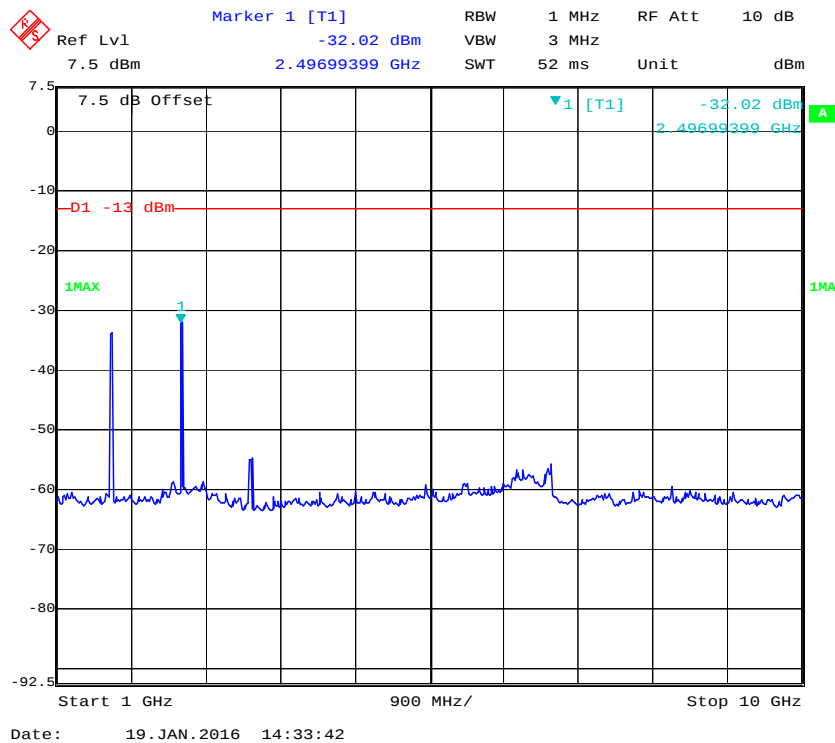


PCS Band (Part 24E)


30 MHz – 1 GHz (GSM Mode)

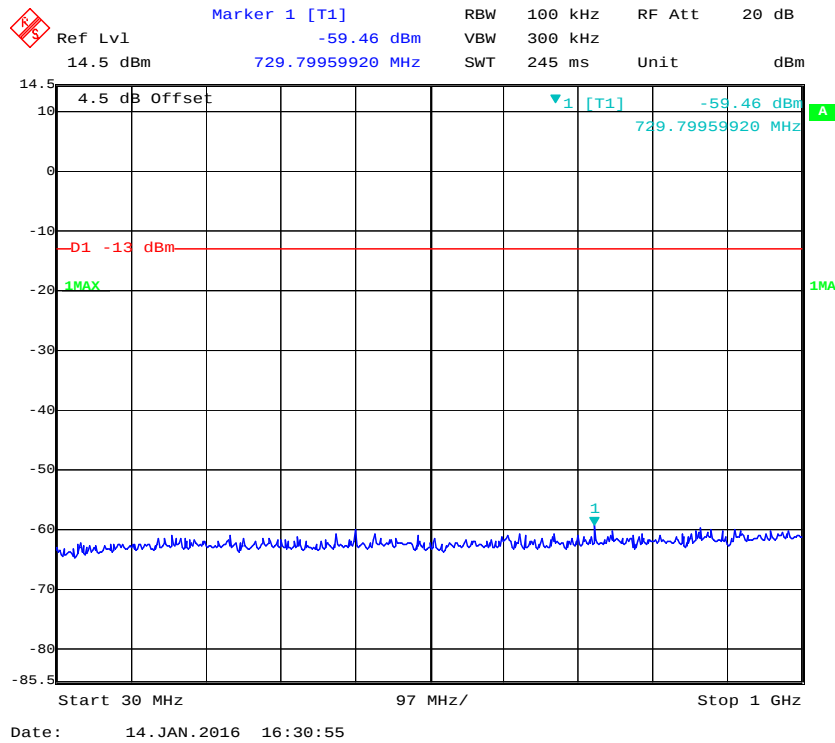


1 GHz – 20 GHz (GSM Mode)

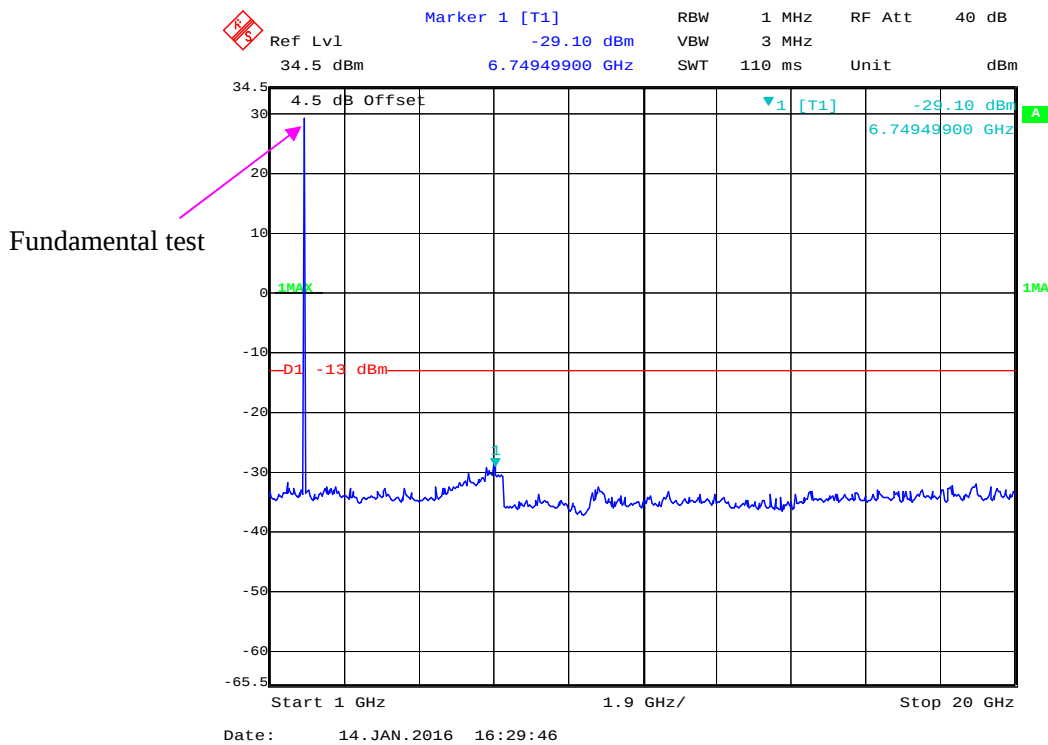

30 MHz – 1 GHz (WCDMA Mode)

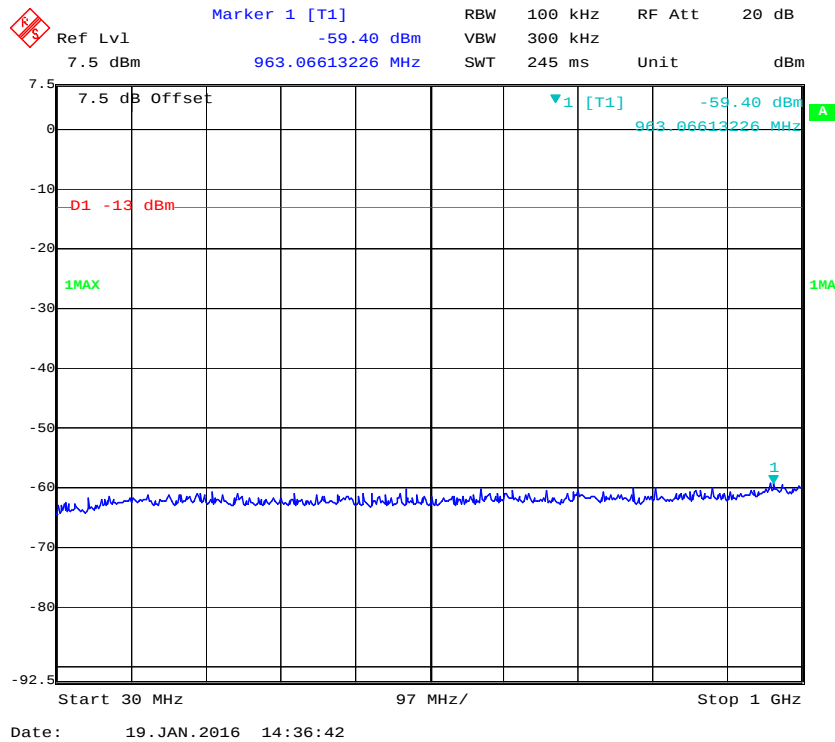


1 GHz – 20 GHz (WCDMA Mode)

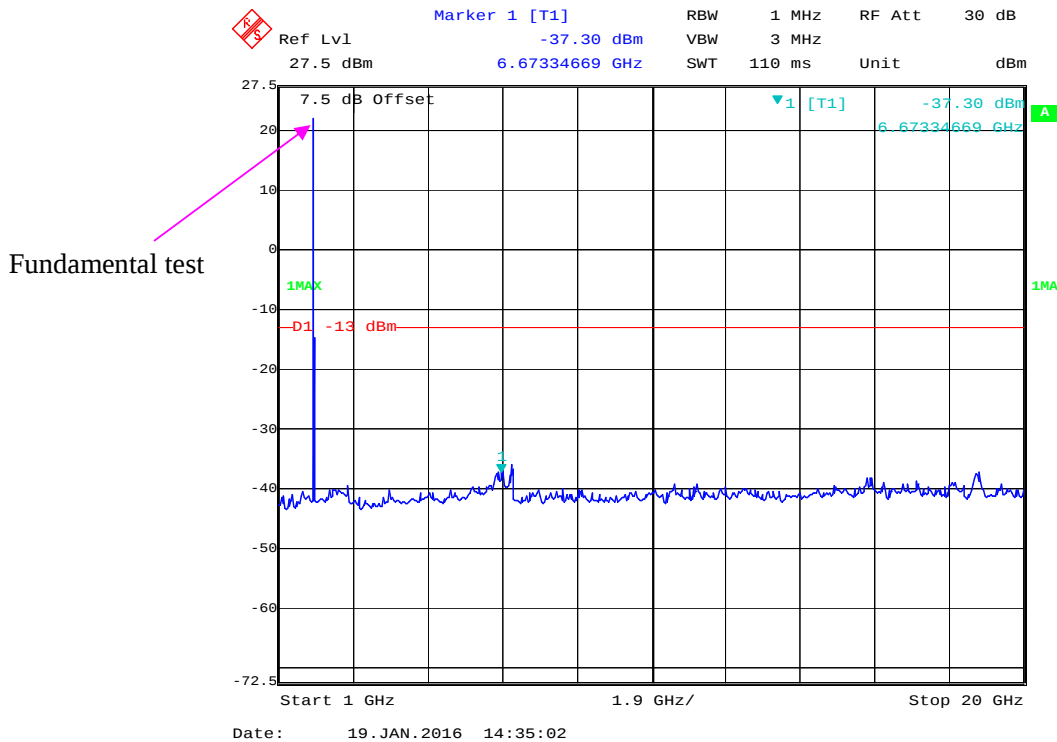


AWS Band (Part 27)

30 MHz – 1 GHz (WCDMA Mode)

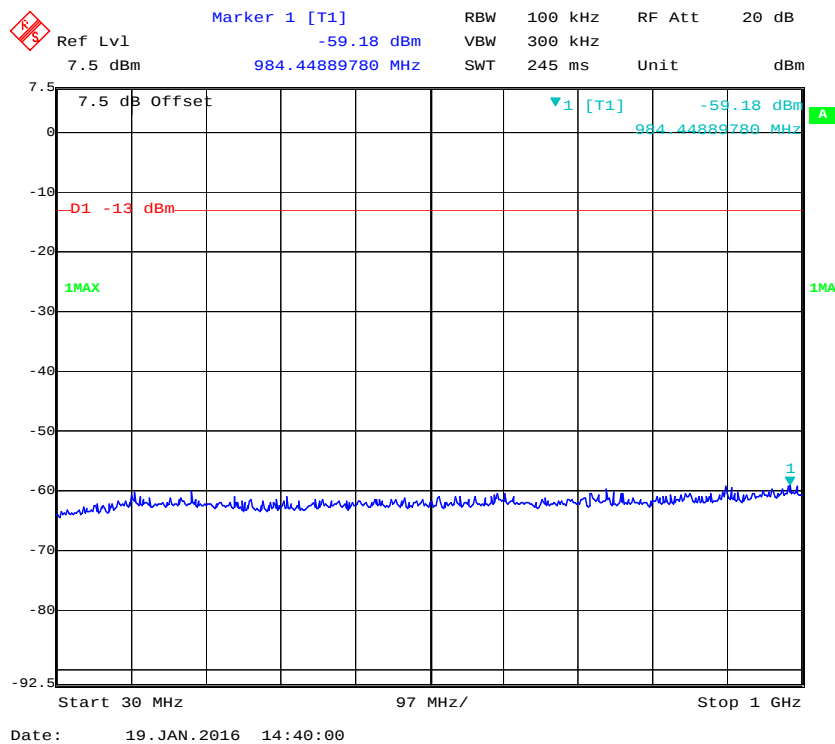


1 GHz – 20 GHz (WCDMA Mode)

Fundamental test

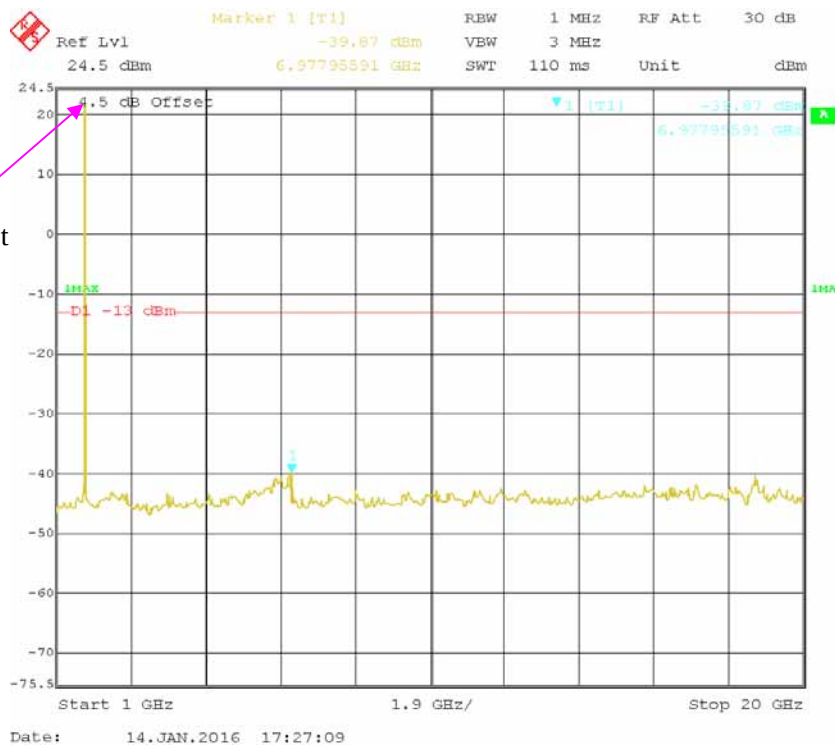


LTE Band 2:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)

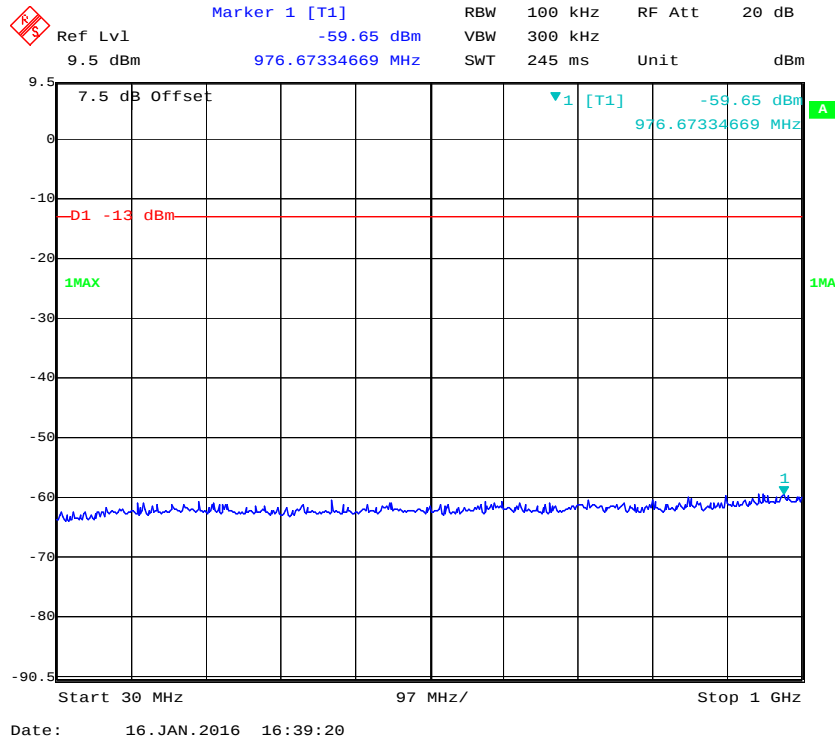


1 GHz – 20 GHz (1.4 MHz, Middle Channel)

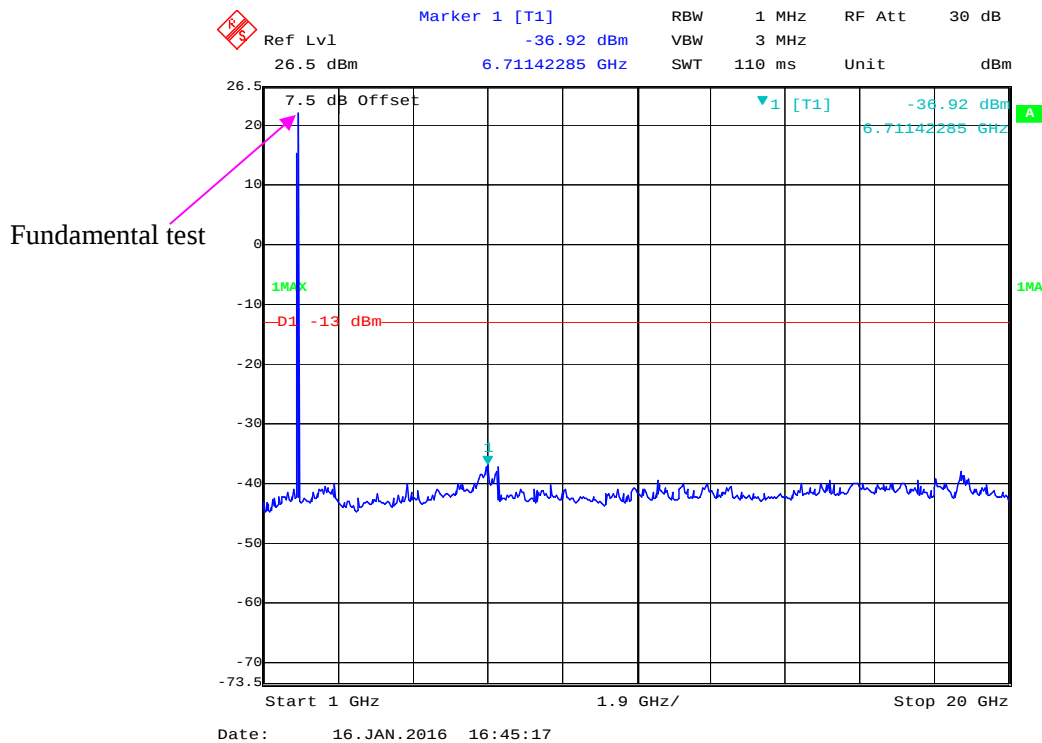


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

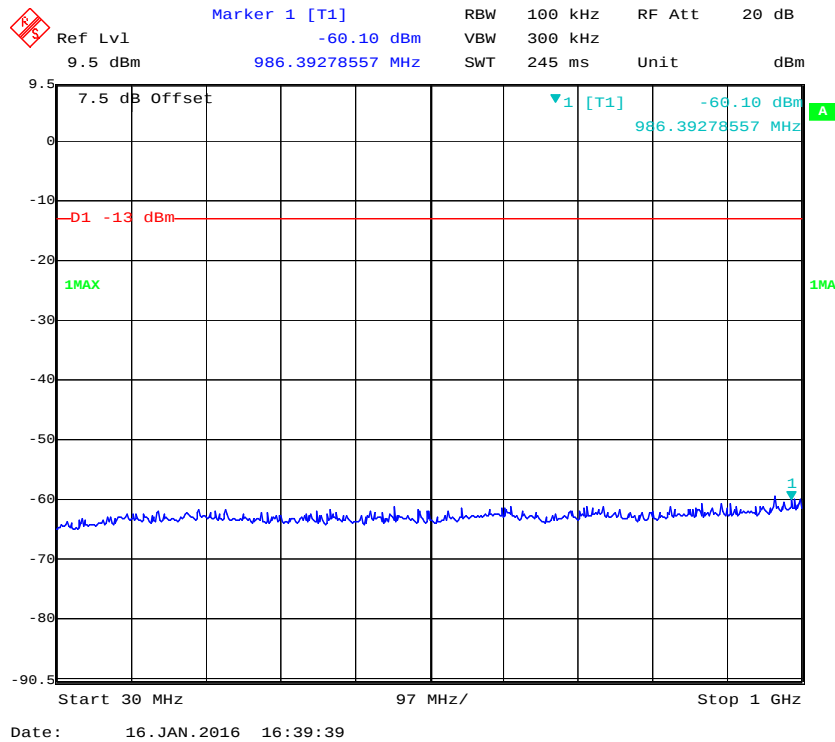


1 GHz – 20 GHz (3.0 MHz, Middle Channel)

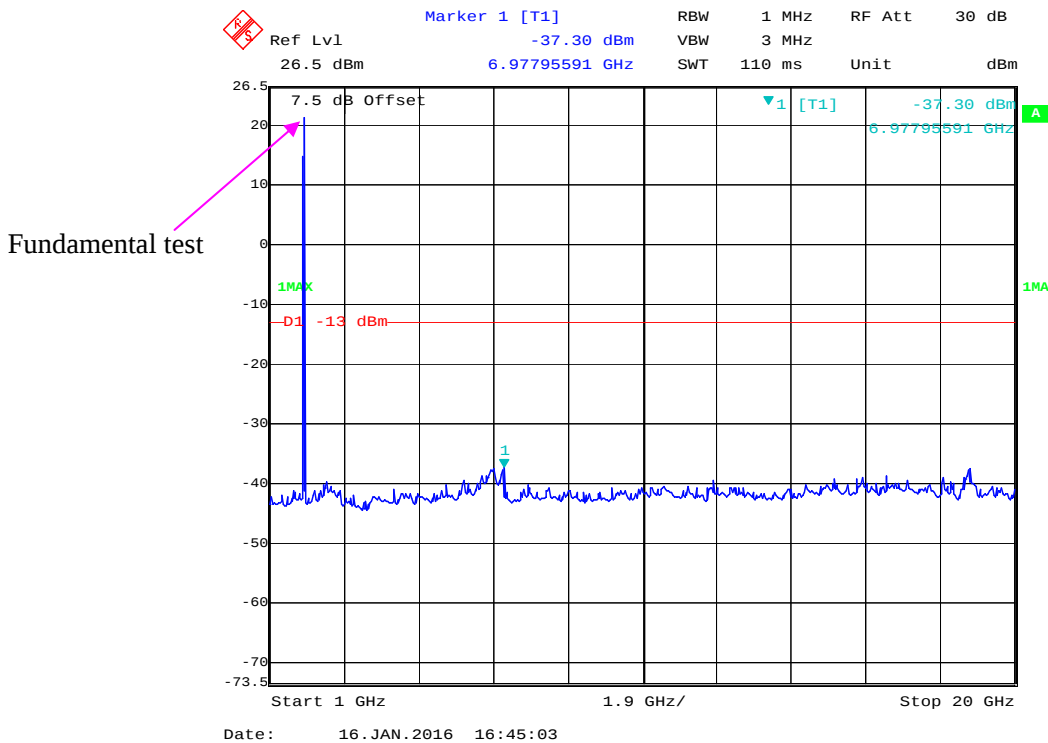


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

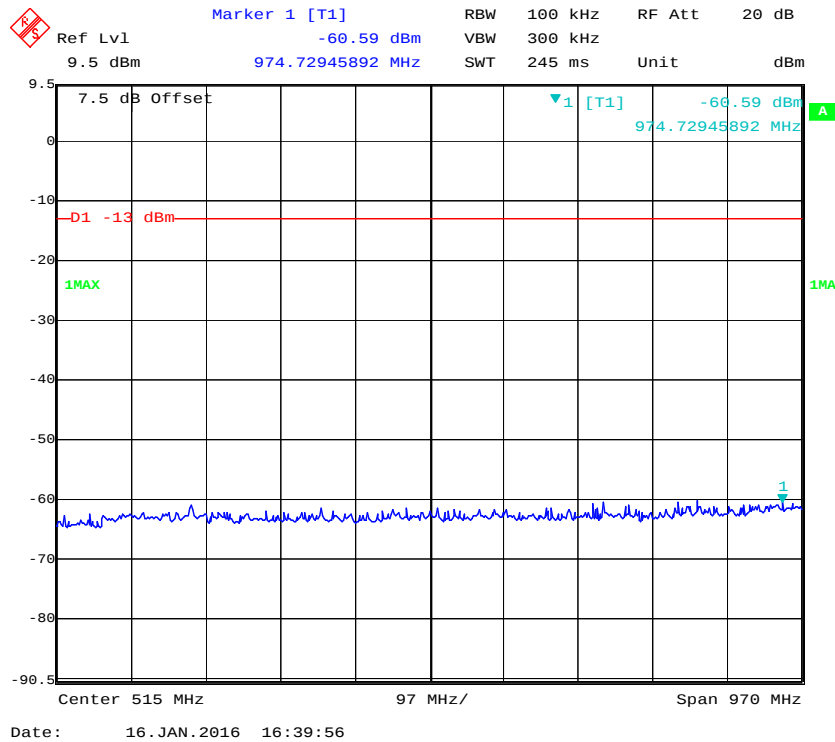


1 GHz – 20 GHz (5.0 MHz, Middle Channel)

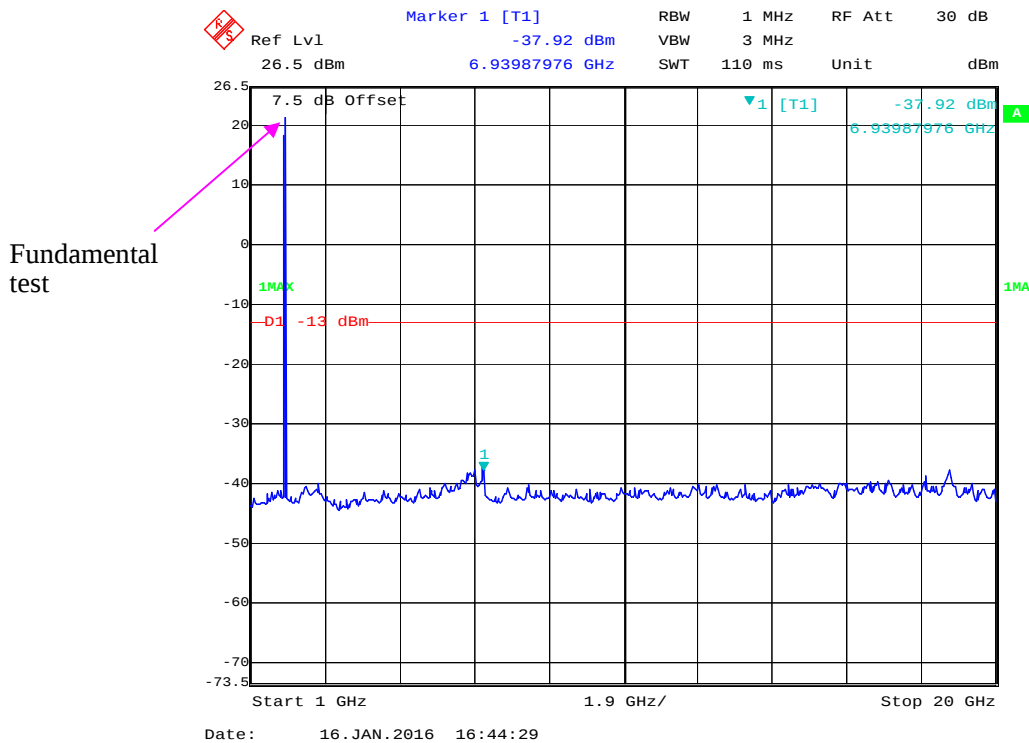


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

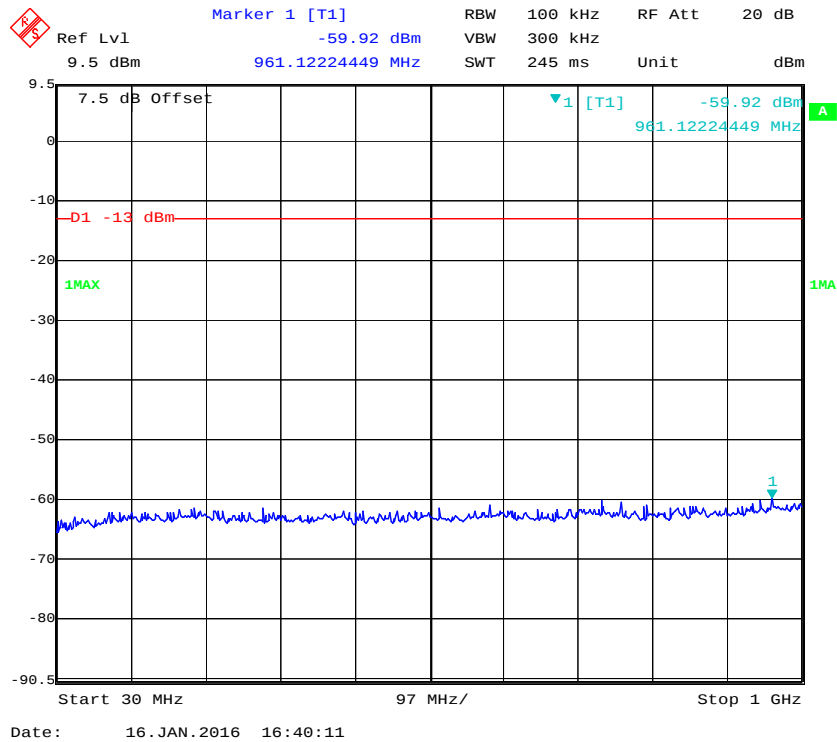


1 GHz – 20 GHz (10.0 MHz, Middle Channel)

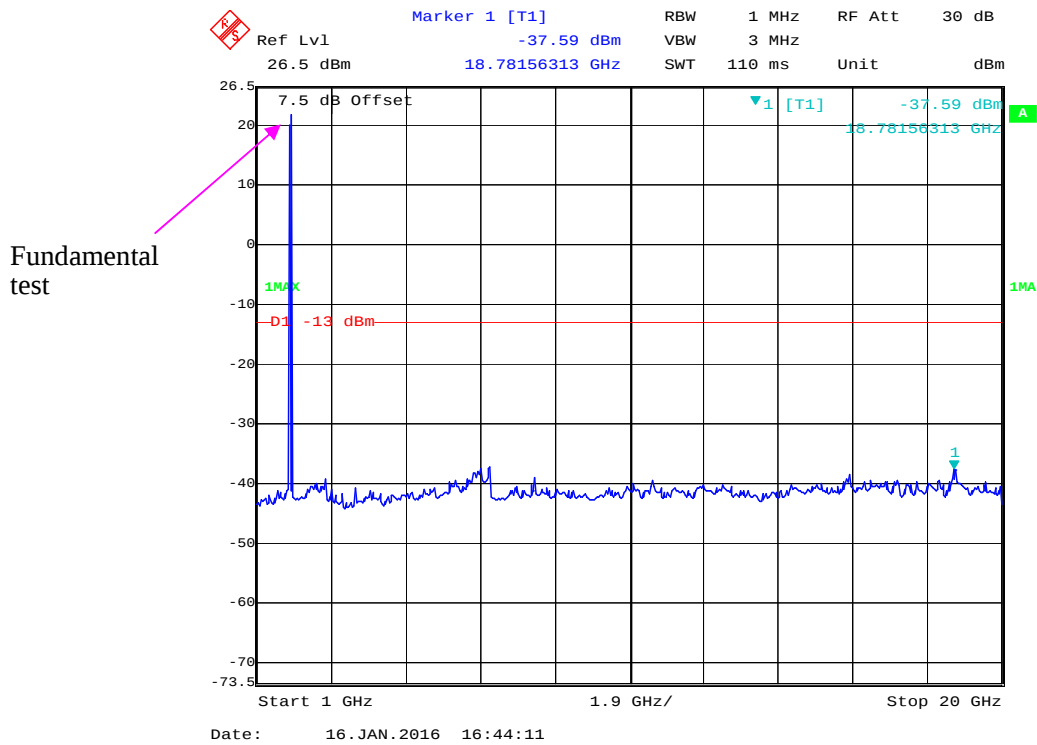


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

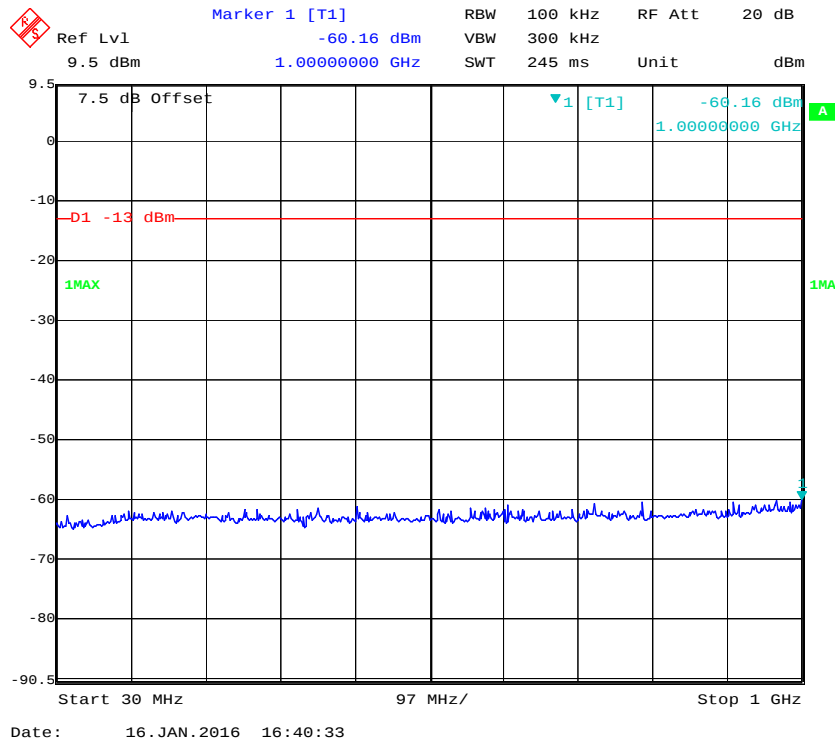


1 GHz - 20 GHz (15.0 MHz, Middle Channel)


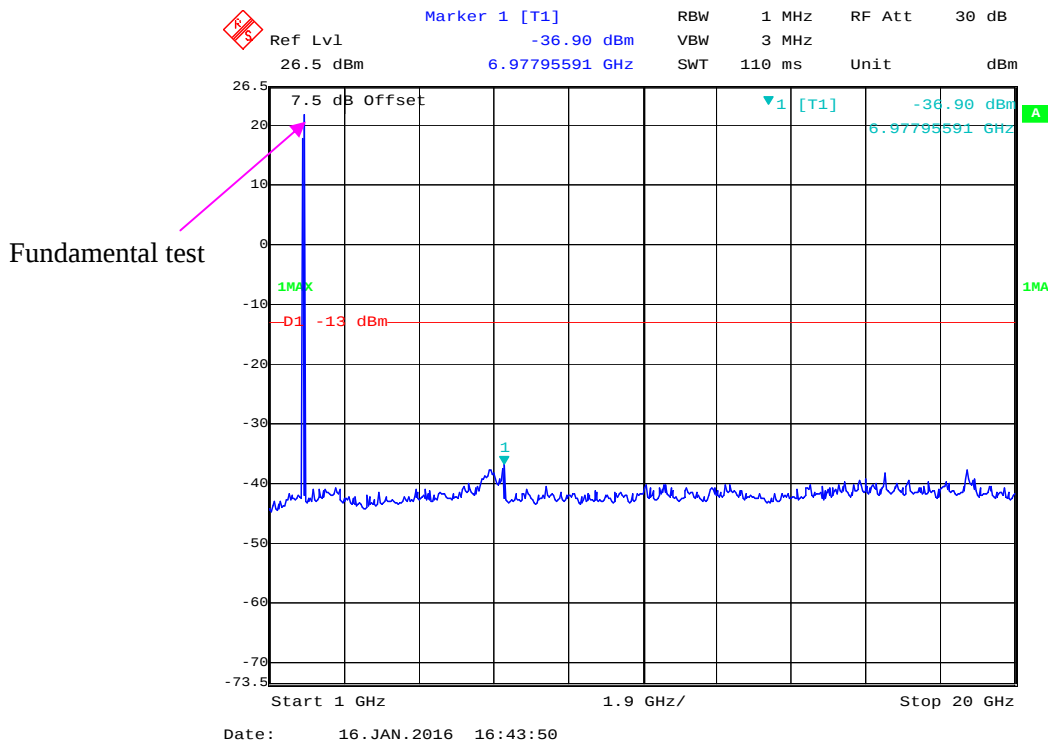


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

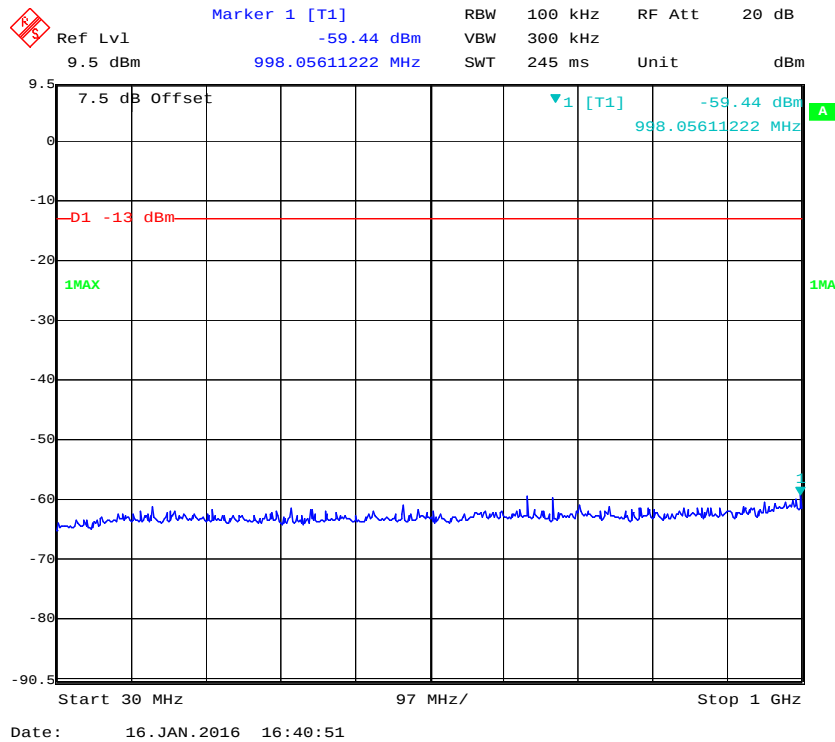


1 GHz - 20 GHz (20.0 MHz, Middle Channel)

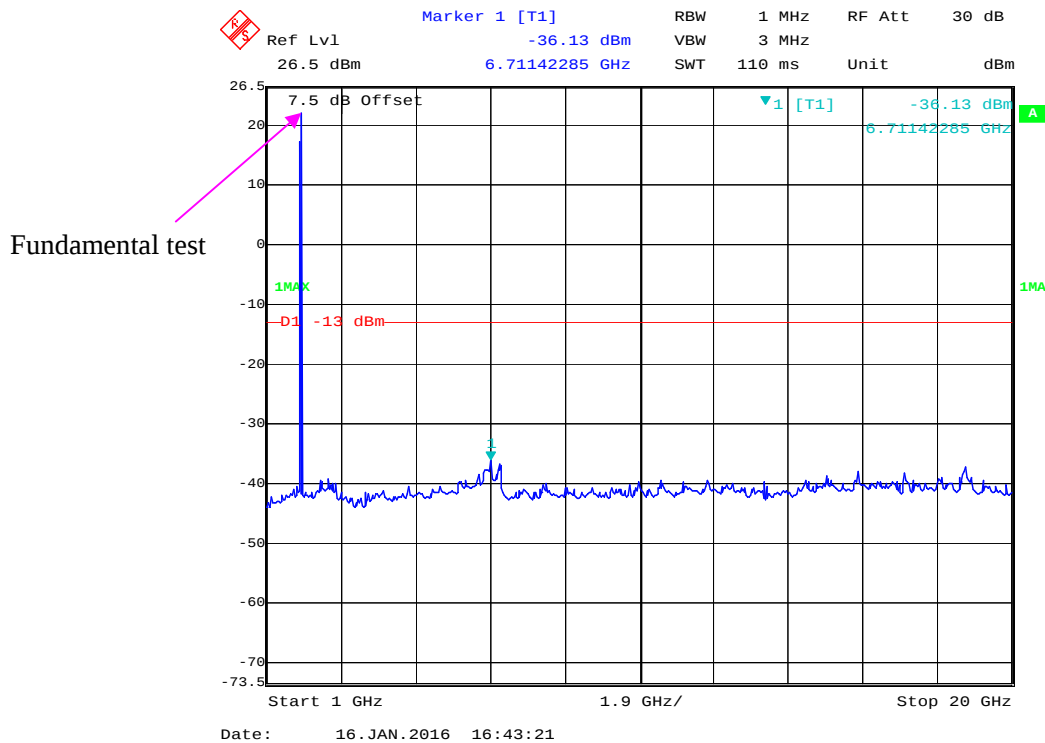


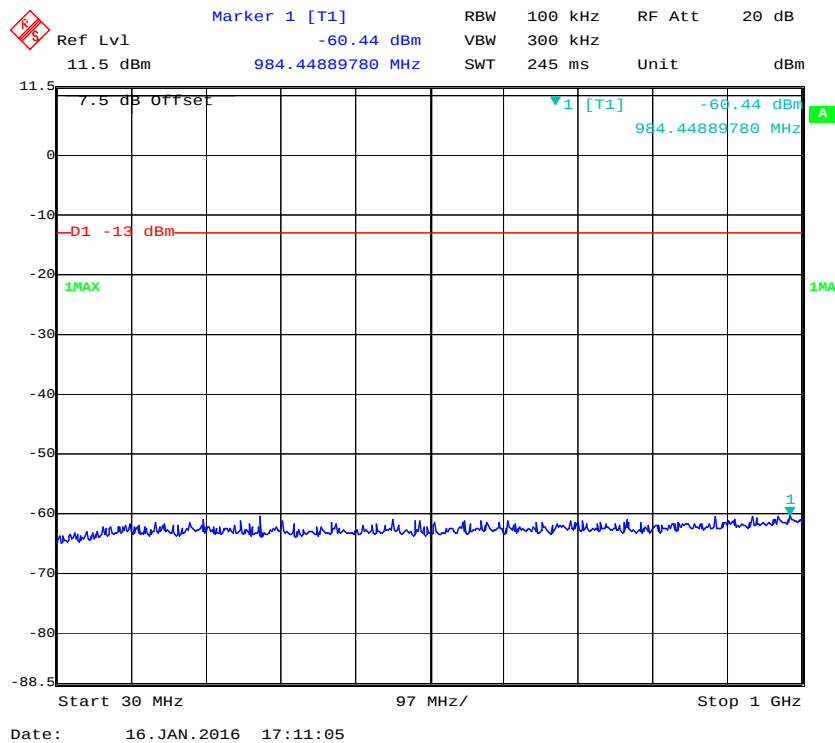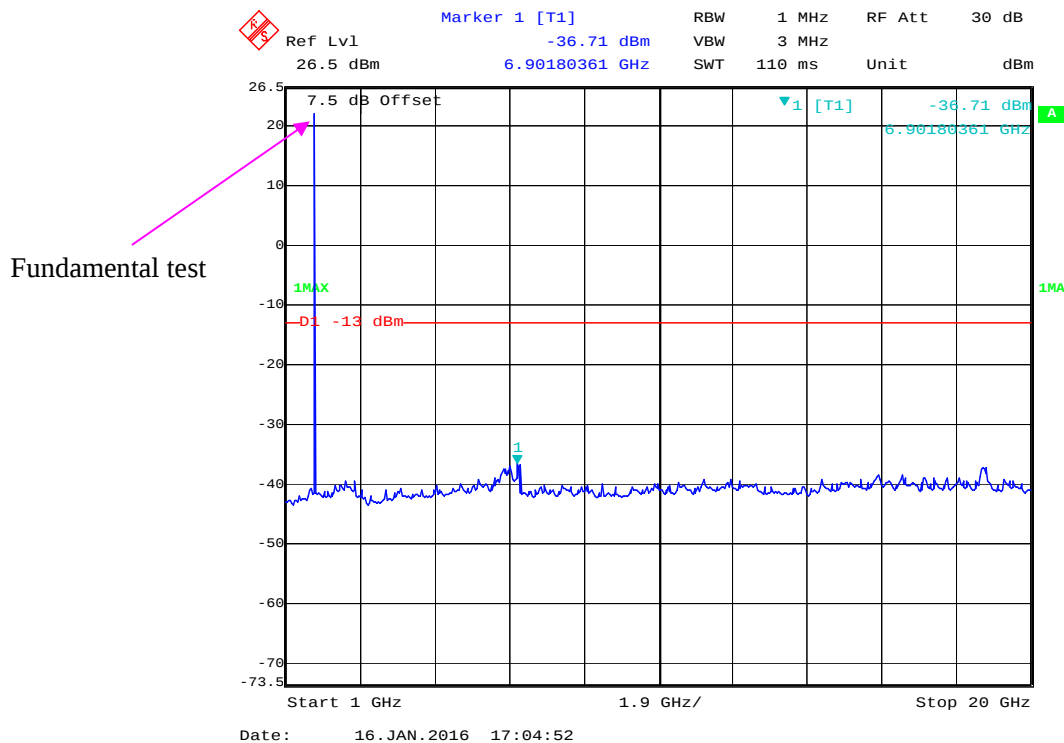LTE Band 4:**30 MHz - 1 GHz (1.4 MHz, Middle Channel)****1 GHz – 20 GHz (1.4 MHz, Middle Channel)**


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

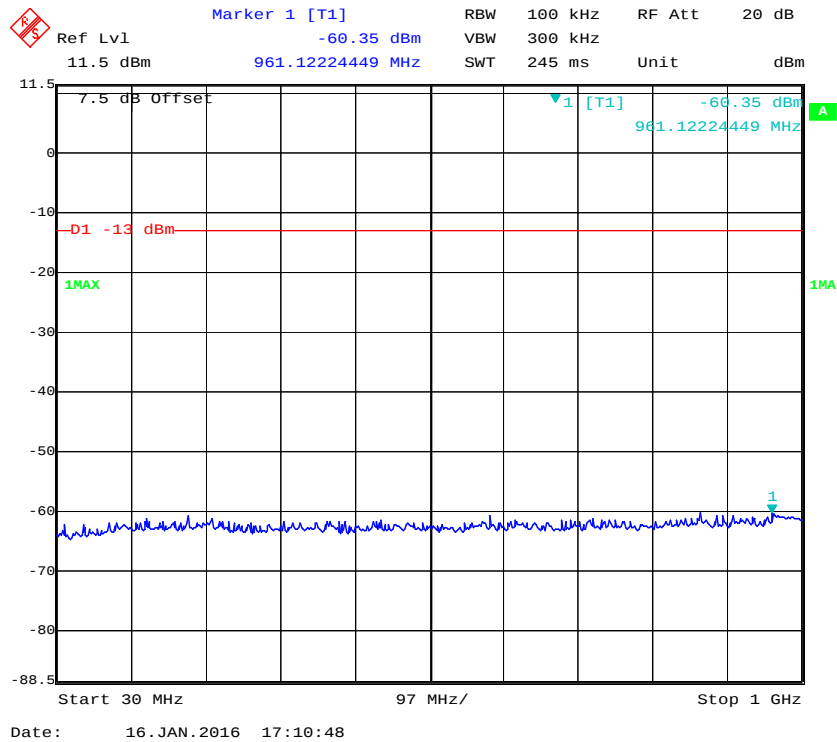


1 GHz – 20 GHz (3.0 MHz, Middle Channel)

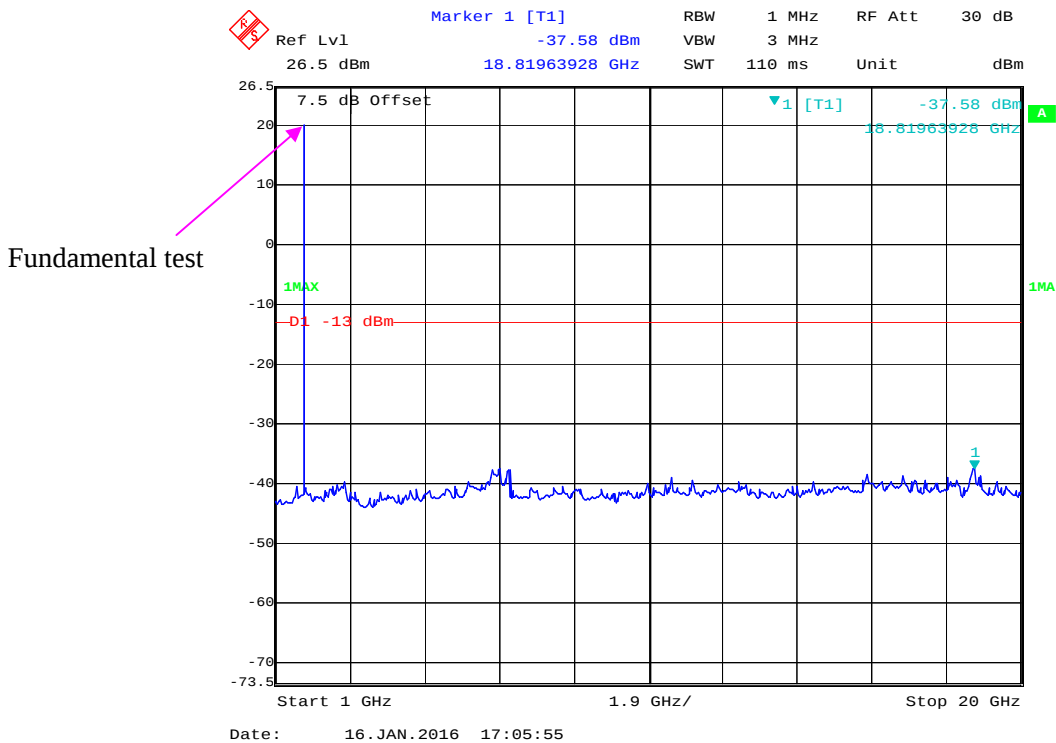


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

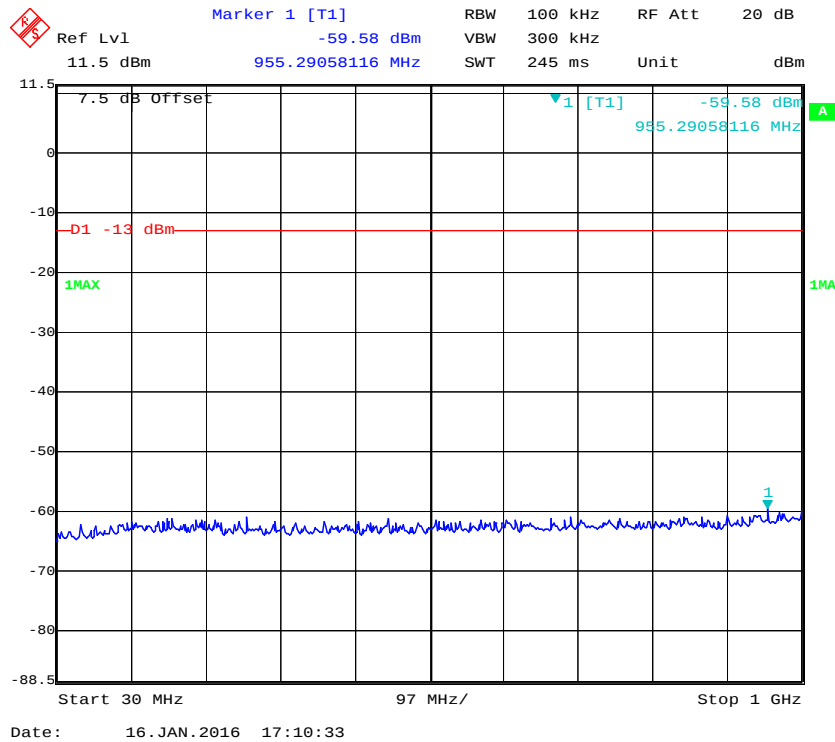


1 GHz – 20 GHz (5.0 MHz, Middle Channel)

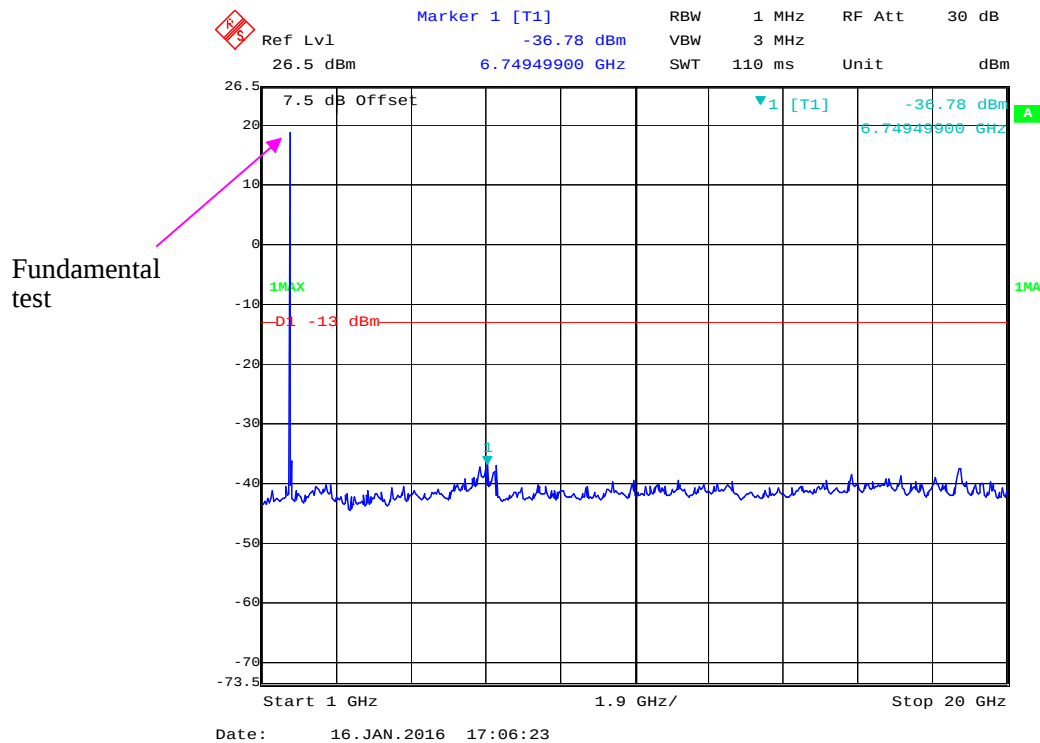


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

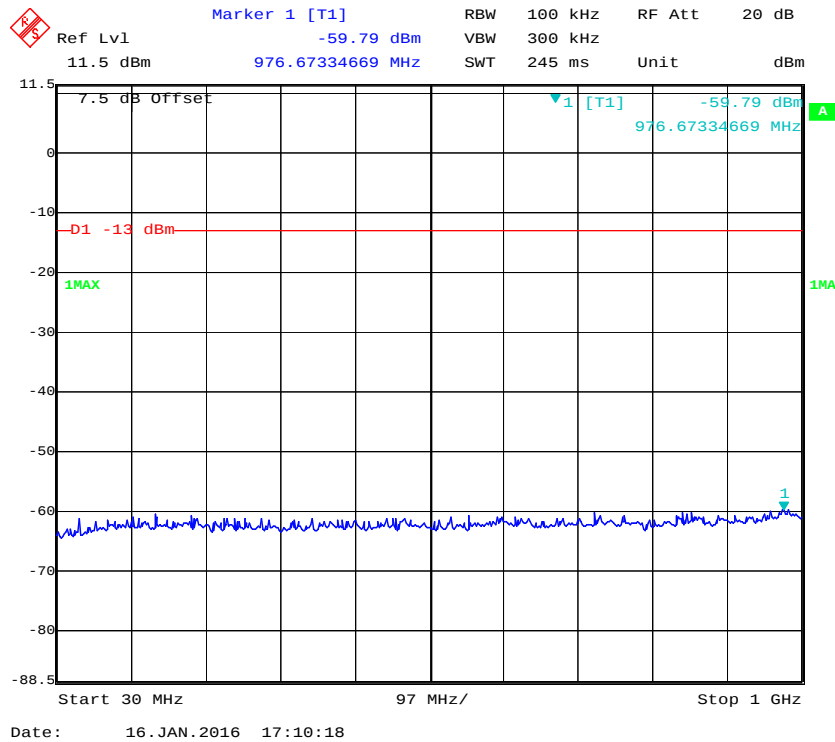

1 GHz – 20 GHz (10.0 MHz, Middle Channel)

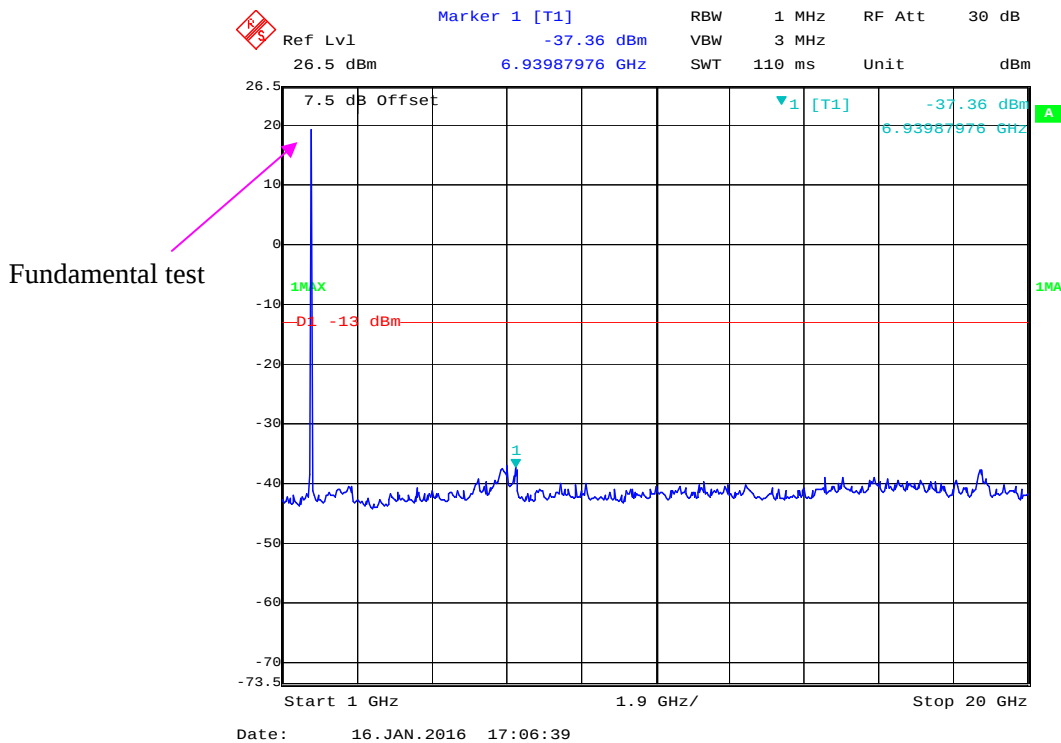


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

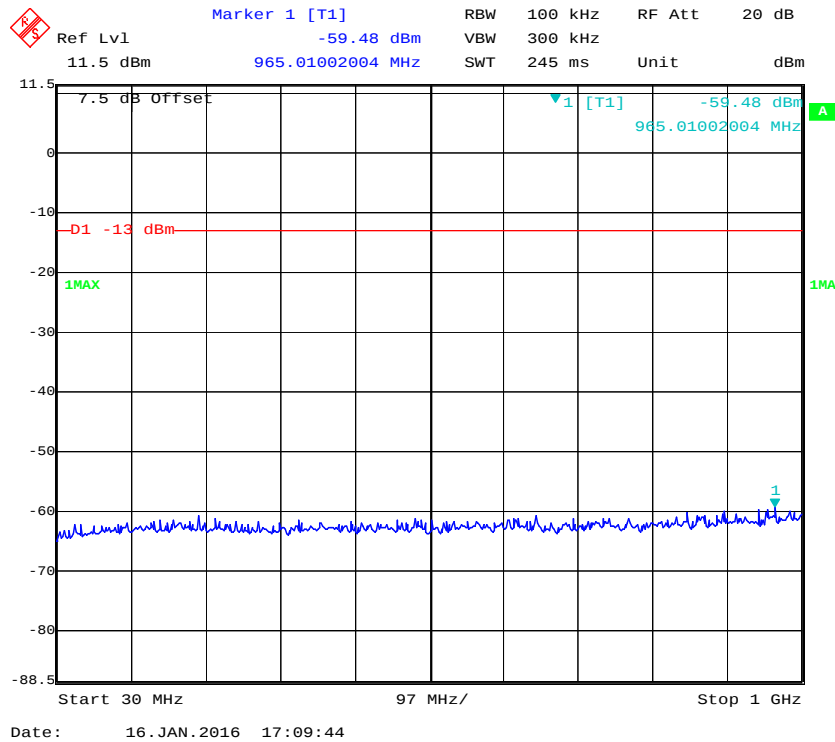


1 GHz - 20GHz (15.0 MHz, Middle Channel)


Fundamental test

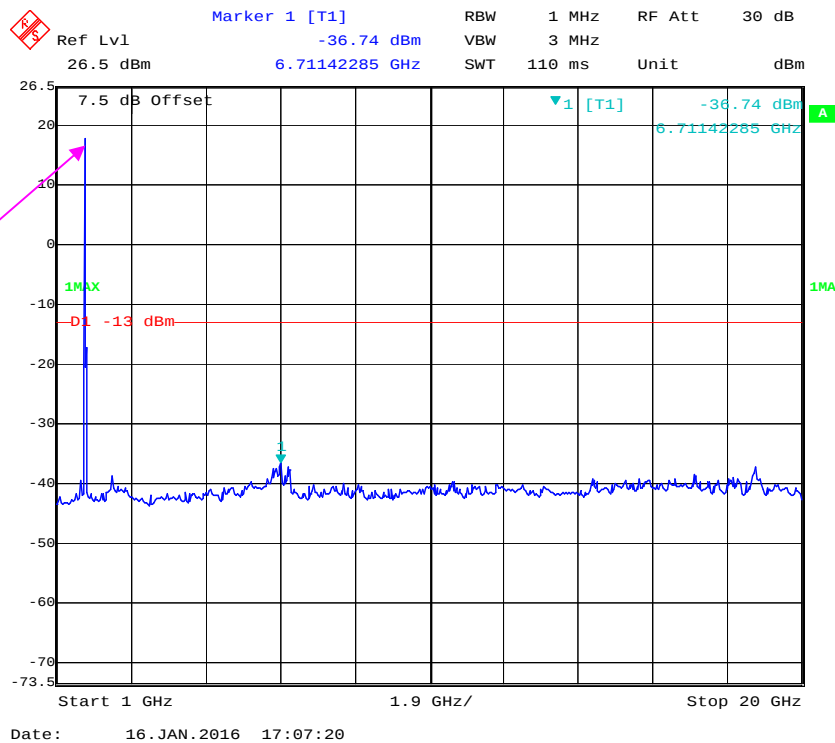

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

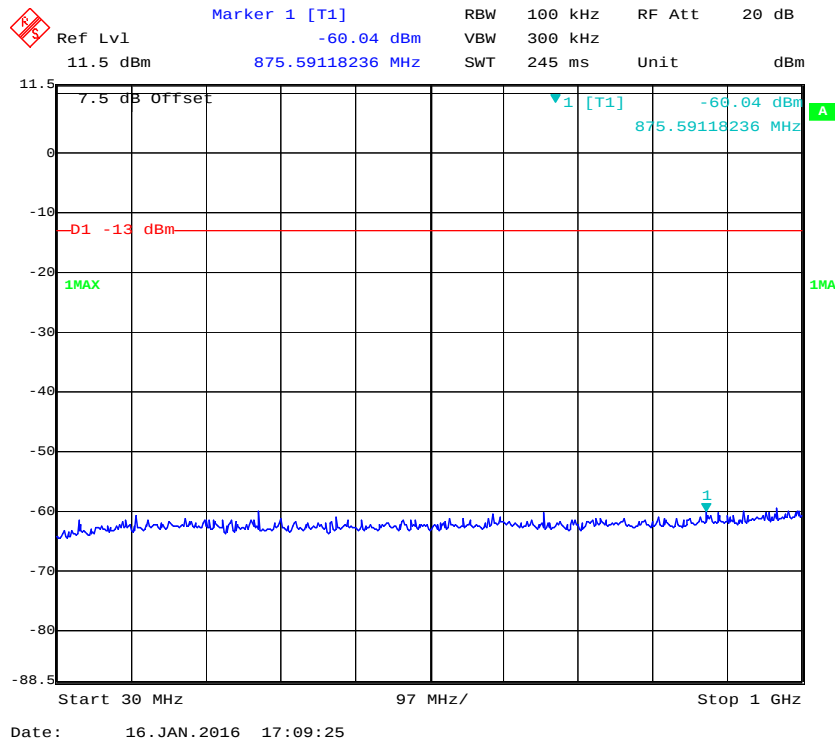


1 GHz - 20 GHz (20.0 MHz, Middle Channel)

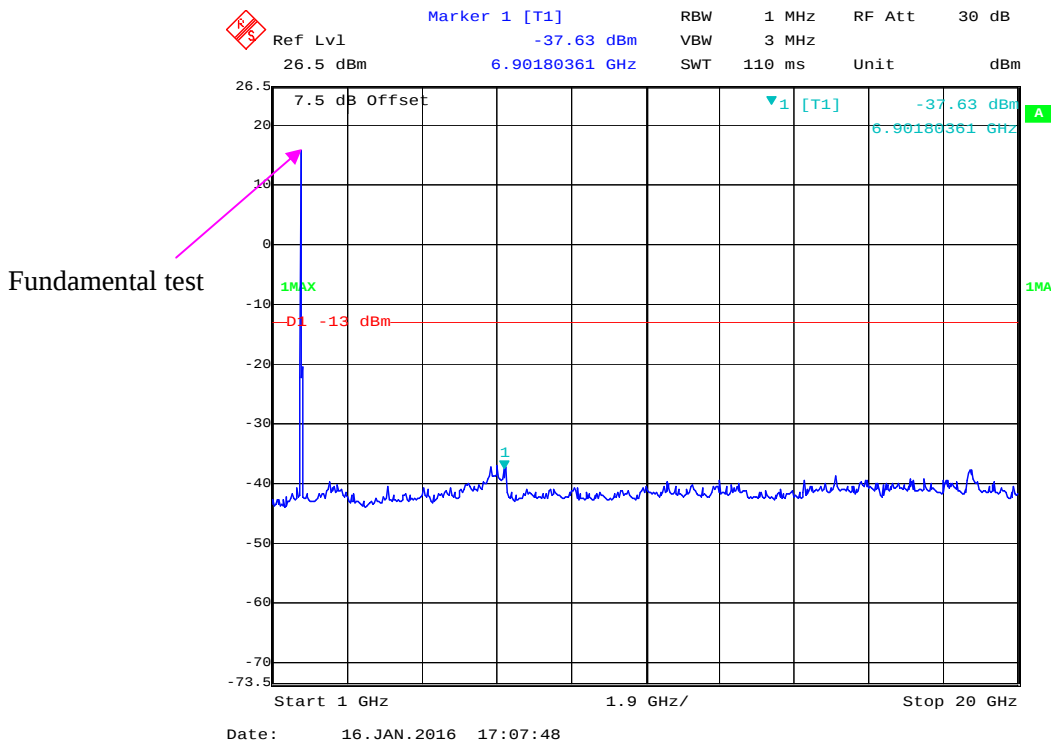


LTE Band 5:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

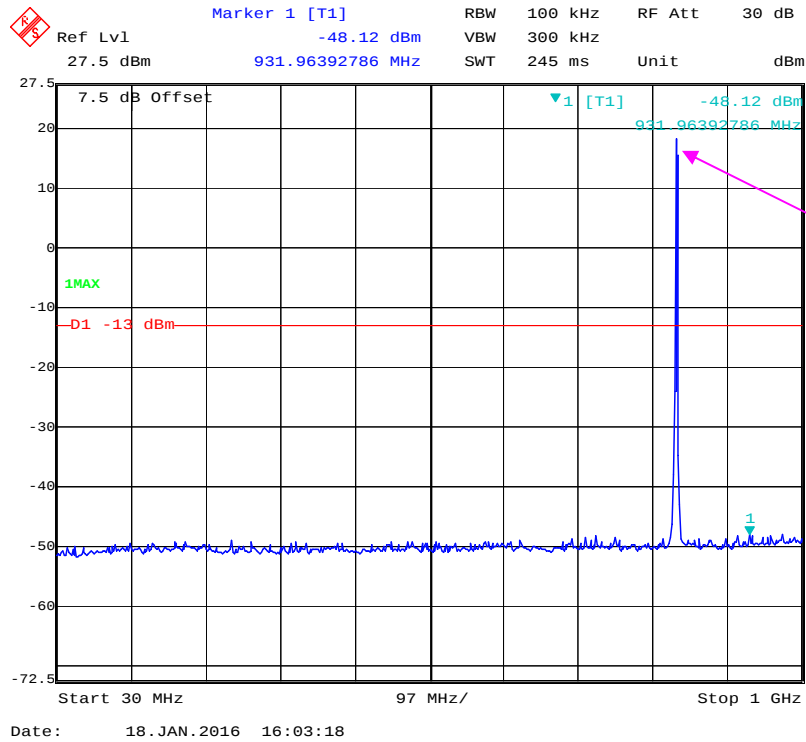


Fundamental test


1 GHz – 10 GHz (1.4 MHz, Middle Channel)

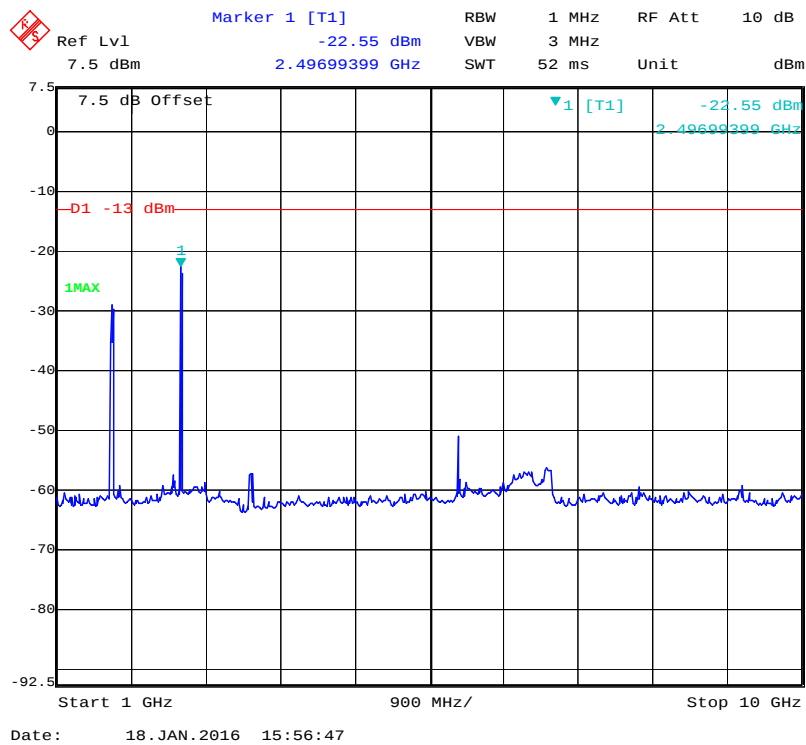


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

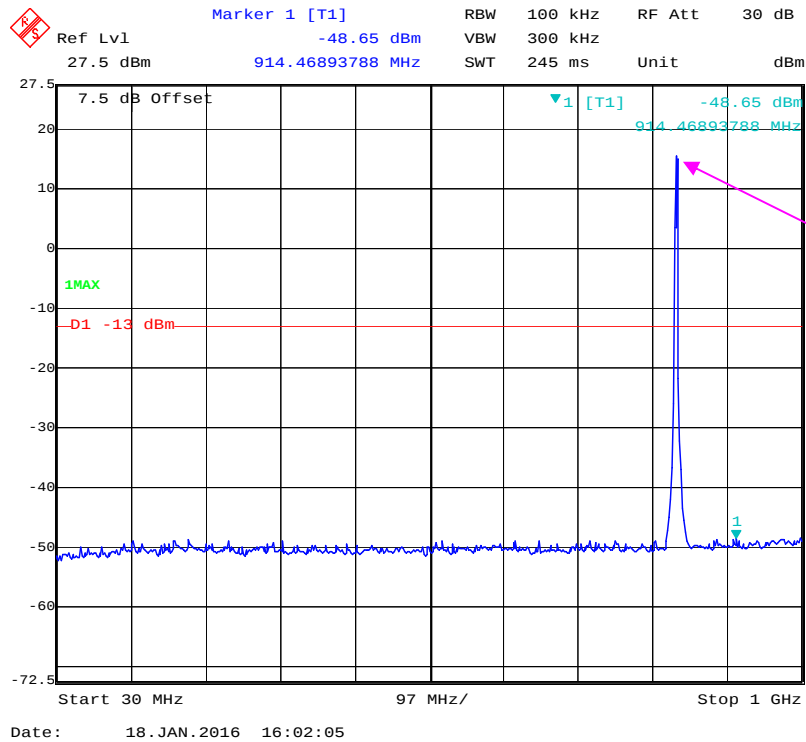


1 GHz – 10 GHz (3.0 MHz, Middle Channel)


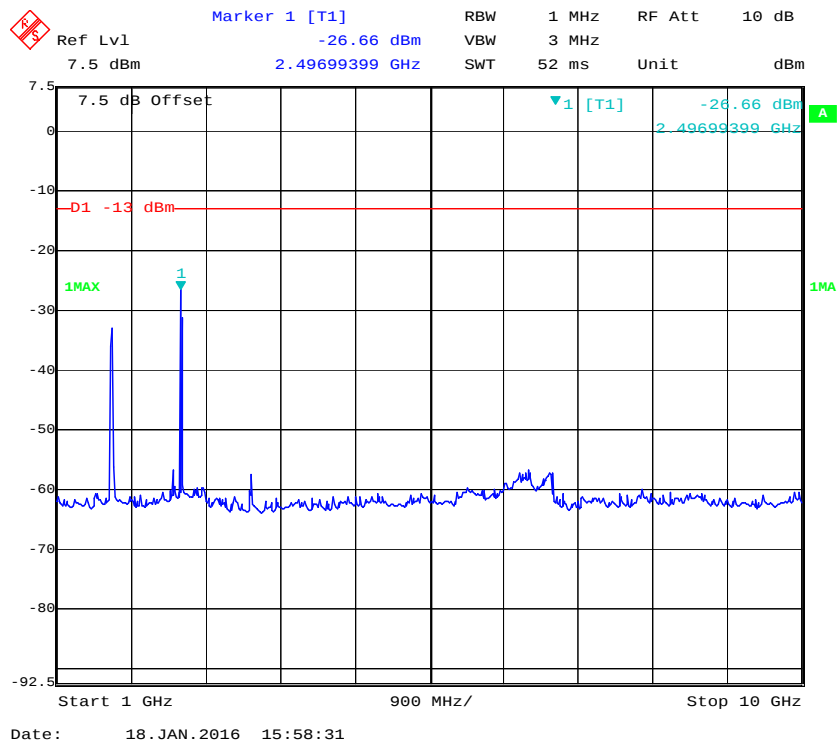


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

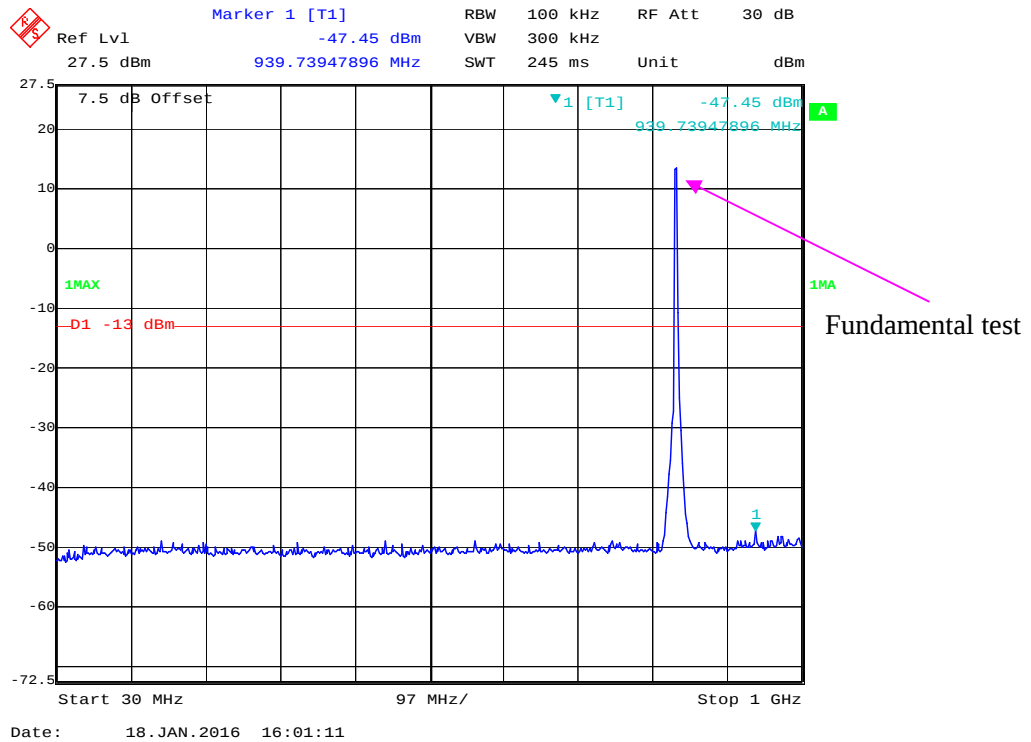


1 GHz – 10 GHz (5.0 MHz, Middle Channel)

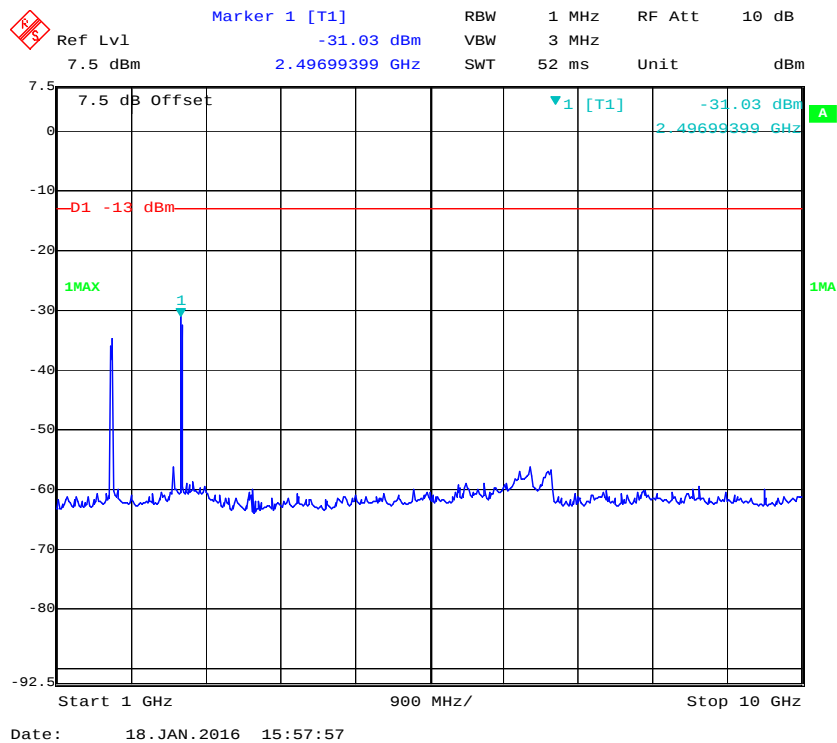

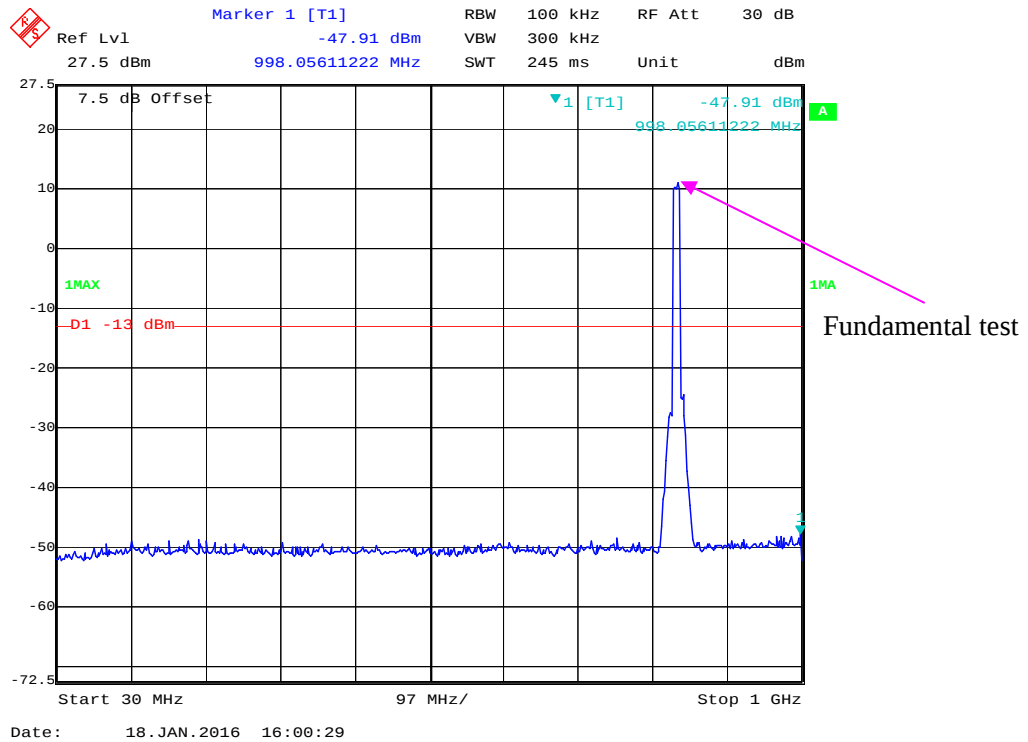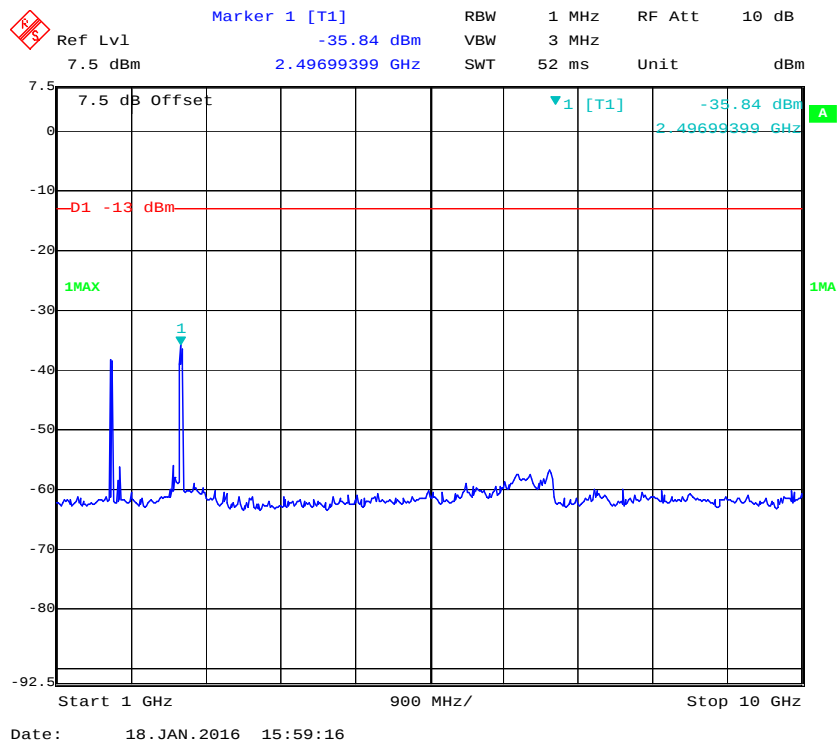30 MHz - 1 GHz (10.0 MHz, Middle Channel)**1 GHz – 10 GHz (10.0 MHz, Middle Channel)**


LTE Band 7:

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

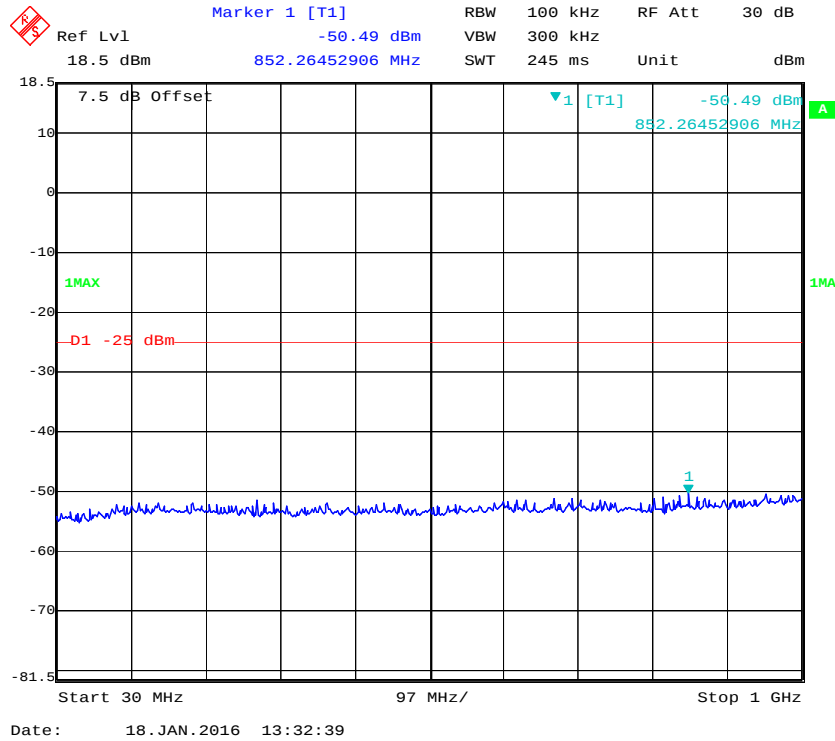


1 GHz – 26 GHz (5.0 MHz, Middle Channel)


Fundamental test


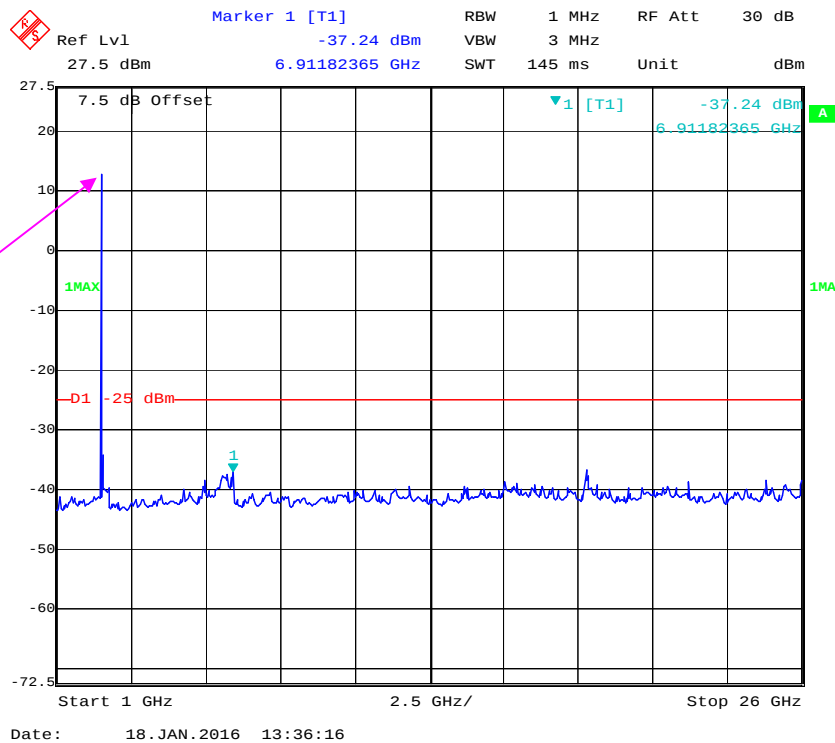


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

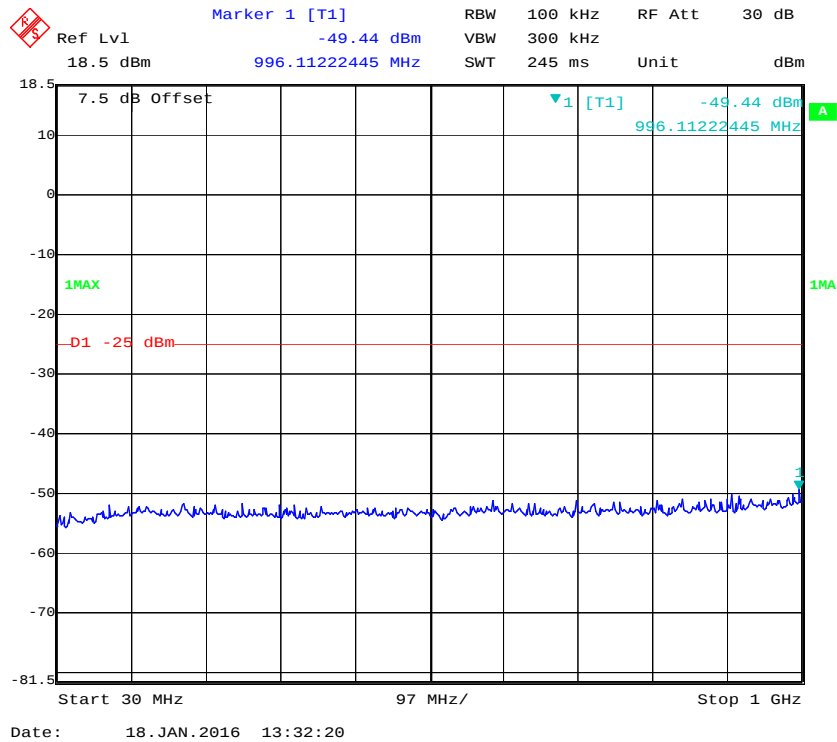


1 GHz - 26 GHz (10.0 MHz, Middle Channel)

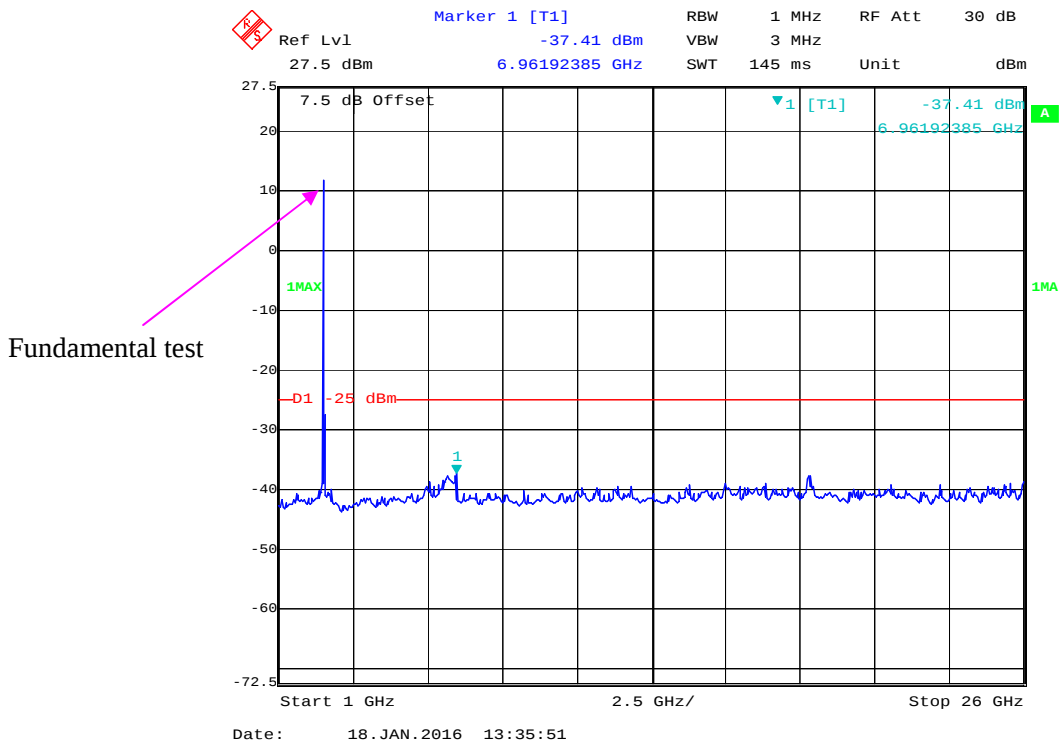


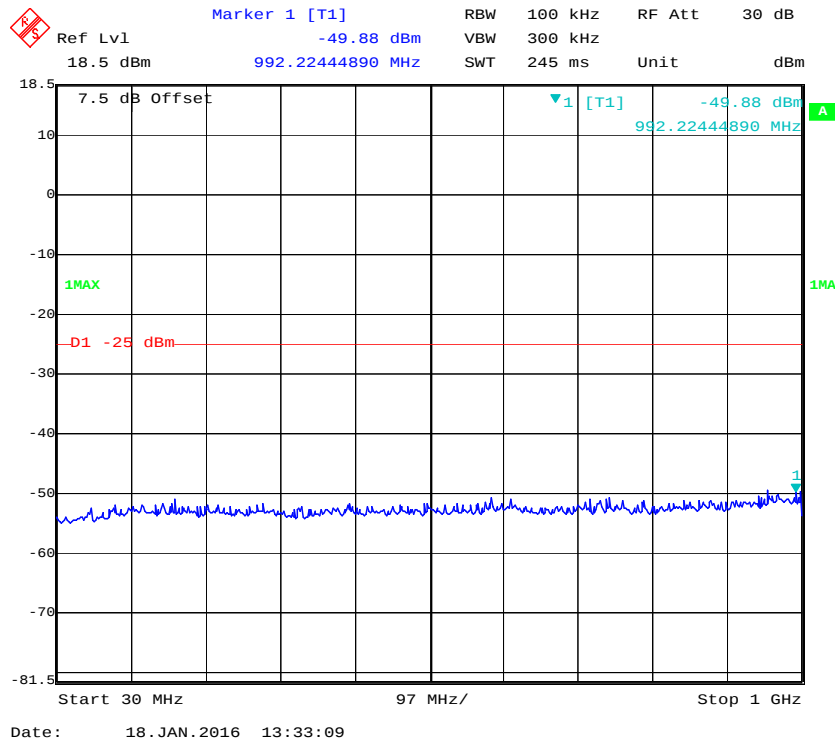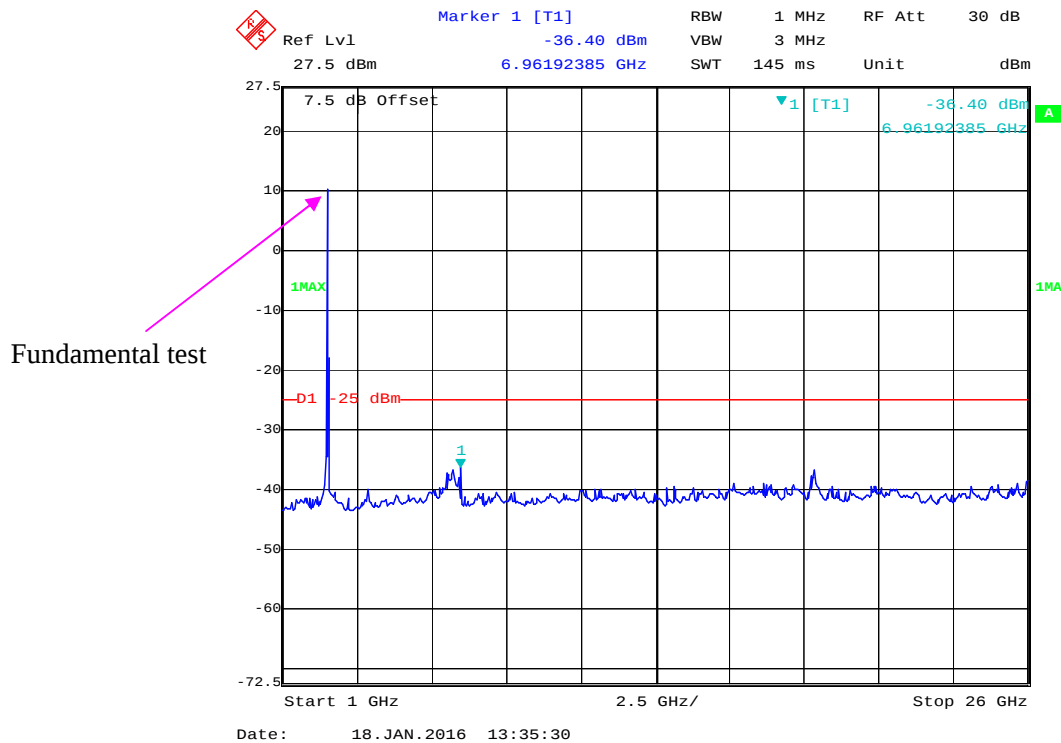
30 MHz - 1 GHz (15.0 MHz, Middle Channel)**1 GHz - 26 GHz (15.0 MHz, Middle Channel)**

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

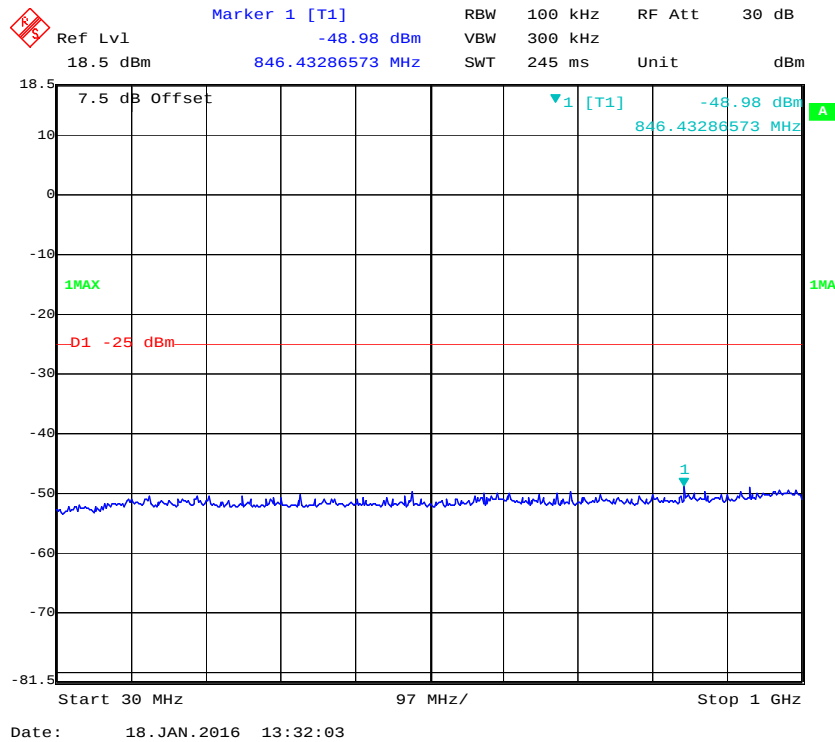




1 GHz - 26 GHz (20.0 MHz, Middle Channel)

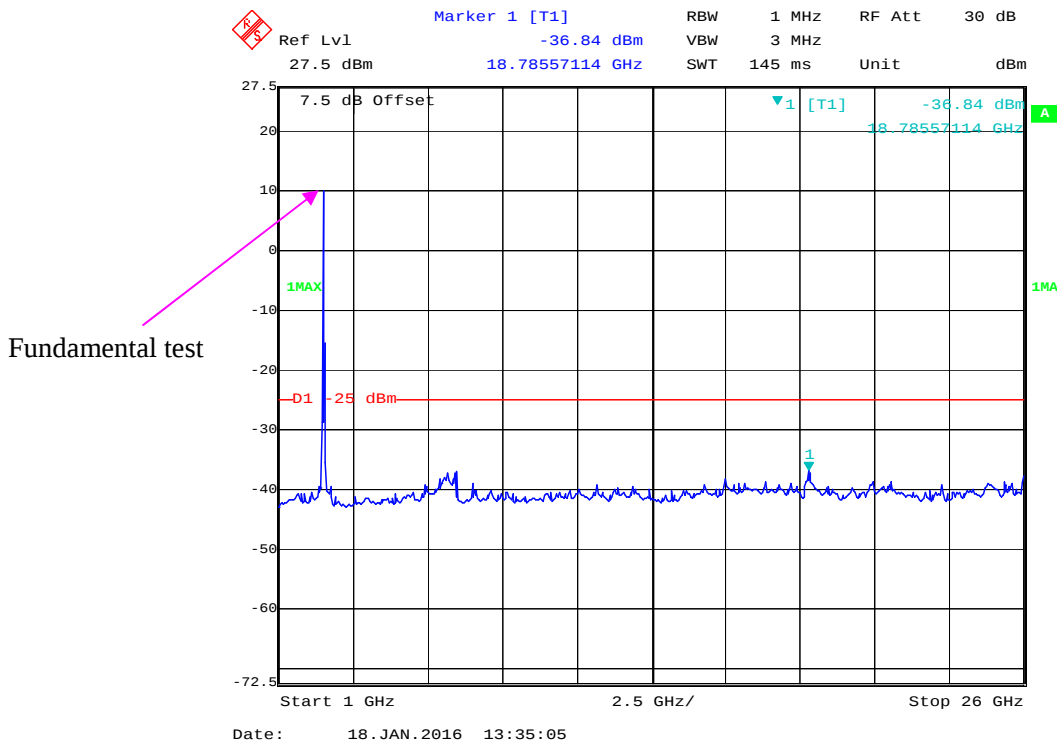

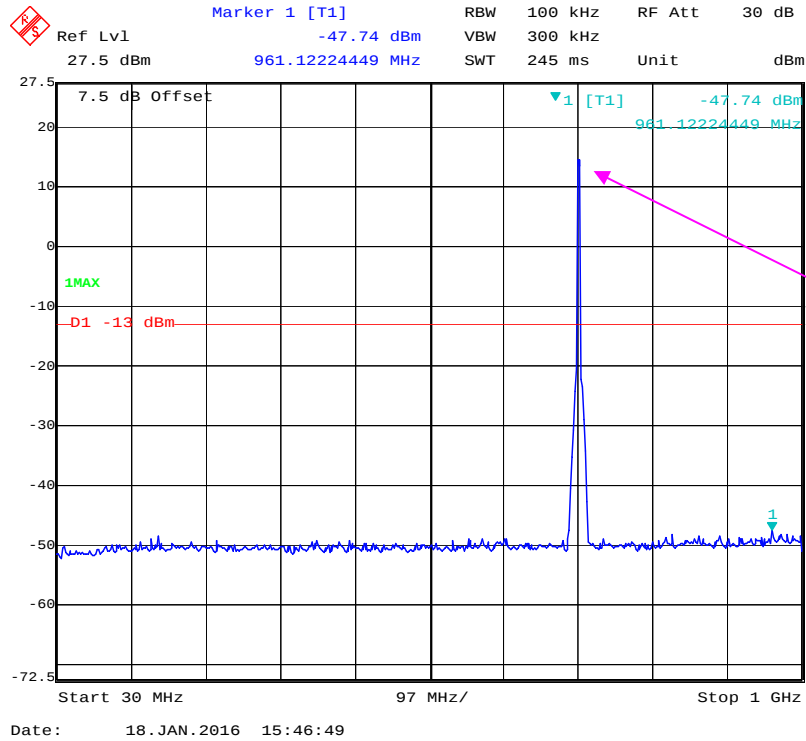LTE Band 17:**30 MHz - 1 GHz (5.0 MHz, Middle Channel)**

Fundamental test

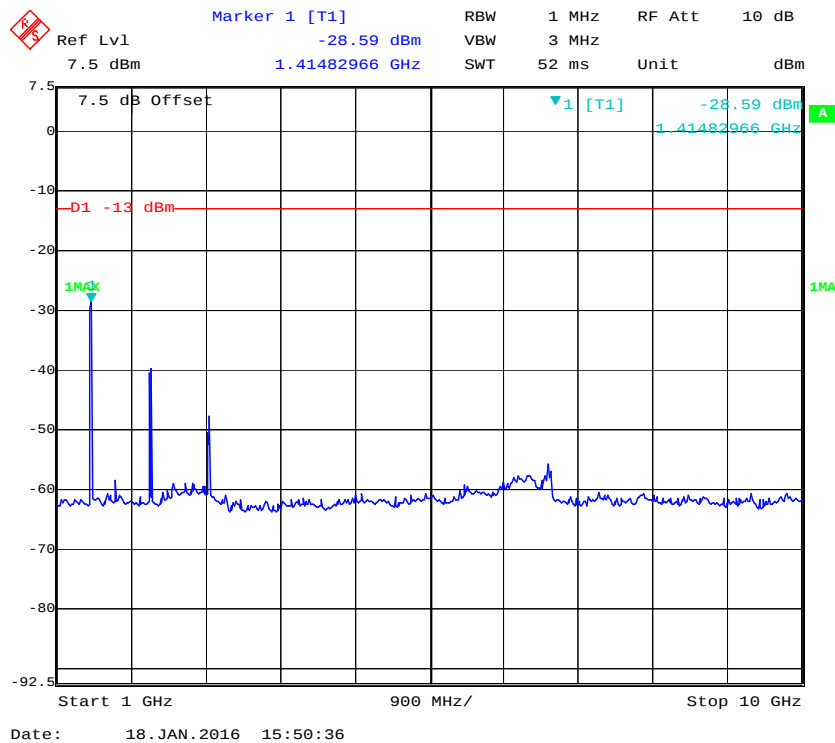1 GHz – 10 GHz (5.0 MHz, Middle Channel)

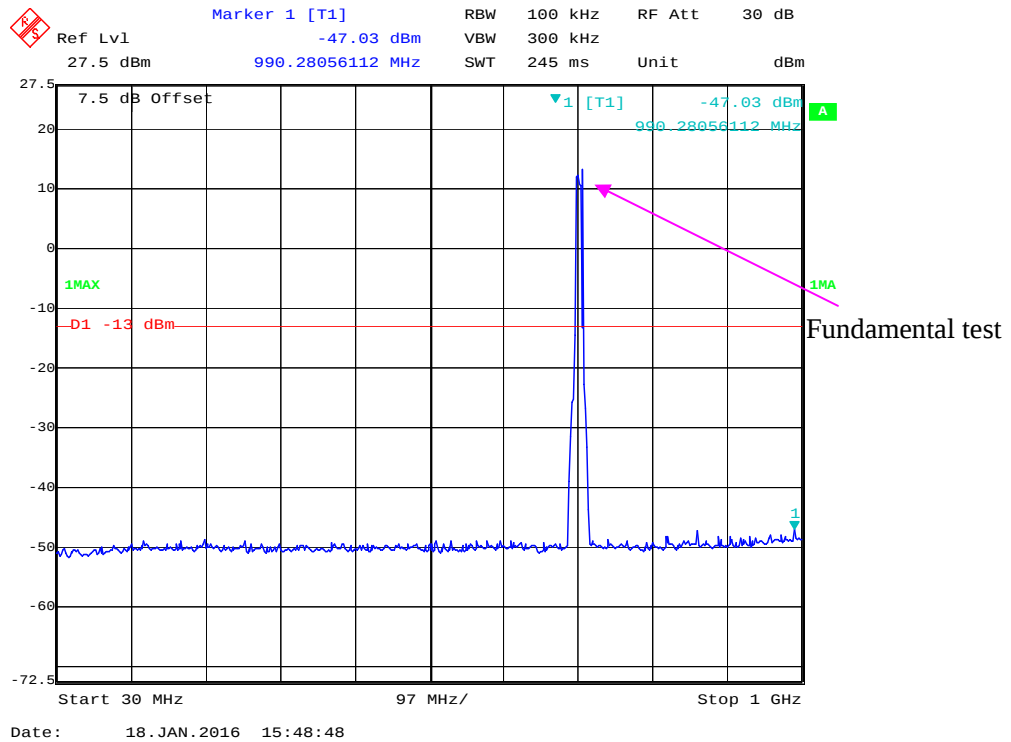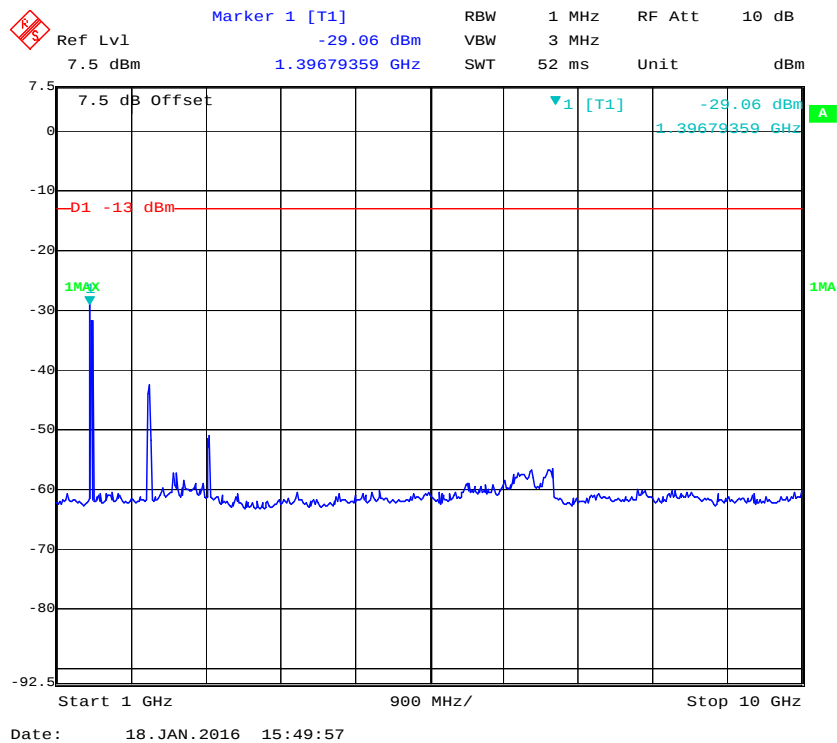30 MHz - 1 GHz (10.0 MHz, Middle Channel)**1 GHz – 10 GHz (10.0 MHz, Middle Channel)**

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917 and § 24.238 and § 27.53.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-06
HP	Signal Generator	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Electro-Mechanics	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Simon Wang on 2016-01-19.

Test mode: Transmitting

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode, Low channel										
189.35	30.20	357	1.6	H	-66.8	0.29	0	-67.09	-13	54.09
189.35	29.87	194	1.0	V	-67.1	0.29	0	-67.39	-13	54.39
1648.4	44.68	349	1.8	H	-64.6	1.30	6.70	-59.20	-13	46.20
1648.4	45.71	310	1.1	V	-63.0	1.30	6.70	-57.60	-13	44.60
2472.6	45.23	303	1.5	H	-60.1	1.70	8.60	-53.20	-13	40.20
2472.6	47.62	31	1.9	V	-58.0	1.70	8.60	-51.10	-13	38.10
3296.8	41.85	17	1.7	H	-60.2	1.90	9.80	-52.30	-13	39.30
3296.8	41.59	279	1.0	V	-61.1	1.90	9.80	-53.20	-13	40.20
WCDMA Mode, Middle channel										
430.7	30.23	270	1.3	H	-66.8	0.44	0	-67.24	-13	54.24
430.7	30.85	107	2.3	V	-66.1	0.44	0	-66.54	-13	53.54
1673.2	45.63	178	1.3	H	-62.5	1.60	6.90	-57.20	-13	44.20
1673.2	46.31	42	2.5	V	-62.2	1.60	6.90	-56.90	-13	43.90
2509.8	42.51	38	2.4	H	-62.8	1.70	8.60	-55.90	-13	42.90
2509.8	43.18	4	1.4	V	-62.5	1.70	8.60	-55.60	-13	42.60
3346.4	38.94	202	2.3	H	-63.2	1.90	9.80	-55.30	-13	42.30
3346.4	38.27	50	2.2	V	-64.4	1.90	9.80	-56.50	-13	43.50

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode, Middle channel										
189.35	30.56	310	2.5	H	-66.4	0.29	0	-66.69	-13	53.69
189.35	30.10	328	1.9	V	-66.9	0.29	0	-67.19	-13	54.19
3760	50.89	134	1.3	H	-51.2	1.90	9.90	-43.20	-13	30.20
3760	51.77	62	2.4	V	-49.9	1.90	9.90	-41.90	-13	28.90
5640	48.63	134	1.1	H	-51.8	2.10	10.30	-43.60	-13	30.60
5640	49.98	157	2.4	V	-49.9	2.10	10.30	-41.70	-13	28.70
7520	42.85	1	1.8	H	-48.1	2.60	10.70	-40.00	-13	27.00
7520	44.52	43	1.8	V	-47.5	2.60	10.70	-39.40	-13	26.40
WCDMA Mode, Low channel										
430.7	30.45	256	1.7	H	-66.5	0.44	0	-66.94	-13	53.94
430.7	30.97	207	2.0	V	-66.0	0.44	0	-66.44	-13	53.44
3704.8	42.33	212	1.8	H	-60.2	1.80	10.00	-52.00	-13	39.00
3704.8	41.58	78	1.9	V	-61.3	1.80	10.00	-53.10	-13	40.10

AWS Band (Part 27)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
WCDMA Mode, High channel										
430.7	30.31	276	1.9	H	-66.7	0.44	0	-67.14	-13	54.14
430.7	30.19	62	1.7	V	-66.8	0.44	0	-67.24	-13	54.24
3505.2	46.79	321	1.1	H	-56.2	1.90	10.00	-48.10	-13	35.10
3505.2	45.9	25	1.9	V	-57.3	1.90	10.00	-49.20	-13	36.20
7010.4	42.33	117	2.0	H	-52.4	2.10	10.60	-43.90	-13	30.90
7010.4	41.78	234	1.7	V	-52.9	2.10	10.60	-44.40	-13	31.40

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H&24E&27	
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
Band 2										
350.7	30.74	189	2.3	H	-66.3	0.40	0	-66.70	-13	53.70
350.7	30.15	33	2.1	V	-66.8	0.40	0	-67.20	-13	54.20
3760	38.52	88	2.4	H	-63.6	1.90	9.90	-55.60	-13	42.60
3760	39.1	308	1.8	V	-62.6	1.90	9.90	-54.60	-13	41.60
Band 4										
369.58	30.61	214	2.4	H	-66.4	0.40	0	-66.80	-13	53.80
369.58	30.74	63	1.6	V	-66.3	0.40	0	-66.70	-13	53.70
3465	40.15	62	2.5	H	-62.9	1.90	10.00	-54.80	-13	41.80
3465	39.7	39	2.3	V	-63.5	1.90	10.00	-55.40	-13	42.40
5197.5	42.36	5	2.0	H	-57.5	1.80	10.10	-49.20	-13	36.20
5197.5	43.1	205	2.2	V	-56.0	1.80	10.10	-47.70	-13	34.70
Band 5										
567.4	30.75	170	1.7	H	-66.2	0.54	0	-66.74	-13	53.74
567.4	30.61	160	2.2	V	-66.4	0.54	0	-66.94	-13	53.94
1673	48.33	176	1.1	H	-59.8	1.60	6.90	-54.50	-13	41.50
1673	53.25	74	2.5	V	-55.3	1.60	6.90	-50.00	-13	37.00
2509.5	37.84	238	1.6	H	-67.5	1.70	8.60	-60.60	-13	47.60
2509.5	37.52	228	1.3	V	-68.1	1.70	8.60	-61.20	-13	48.20
Band 7										
361.7	31.24	329	2.0	H	-65.8	0.40	0	-66.20	-25	41.20
361.7	31.65	246	2.2	V	-65.3	0.40	0	-65.70	-25	40.70
5070	38.95	187	2.4	H	-62.8	2.30	10.10	-55.00	-25	30.00
5070	38.6	225	1.7	V	-62.4	2.30	10.10	-54.60	-25	29.60
Band 17										
267.8	30.52	52	1.5	H	-66.5	0.32	0	-66.82	-13	53.82
267.8	29.98	274	1.1	V	-67.0	0.32	0	-67.32	-13	54.32
1420	42.13	187	2.4	H	-67.5	1.20	6.40	-62.30	-13	49.30
1420	41.16	96	1.4	V	-68.5	1.20	6.40	-63.30	-13	50.30

Note:

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

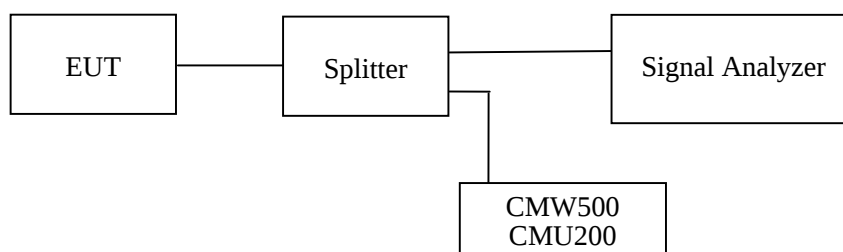

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	22~24
Relative Humidity:	52~55 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Simon Wang from 2016-01-14 to 2016-01-19.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.

Marker 1 [T1]

Ref Lvl 24.5 dBm

RBW 5 kHz

VBW 10 kHz

SWT 200 ms

RF Att 40 dB

Unit dBm

4.5 dB Offset

1 [T1] -17.17 dBm

823.98196393 MHz

1MAX

D1 -13 dBm

1AV

Center 824 MHz


200 kHz/

Span 2 MHz


Date: 14.JAN.2016 16:17:08



Ref Lvl 24.5 dBm Marker 1 [T1] -15.20 dBm RBW 5 kHz RF Att 40 dB
 24.5 dB 4.5 dB Offset: 20 -15.20 dBm 849.01803607 MHz
 10 849.01803607 MHz
 0
 -10 1MAX
 -20 D1 -13 dBm
 -30
 -40
 -50
 -60
 -70
 -75.5
 Center 849 MHz 200 kHz/ Span 2 MHz
 Date: 14. JAN. 2016 16:19:46

Cellular Band, Left Band Edge for EGPRS Mode

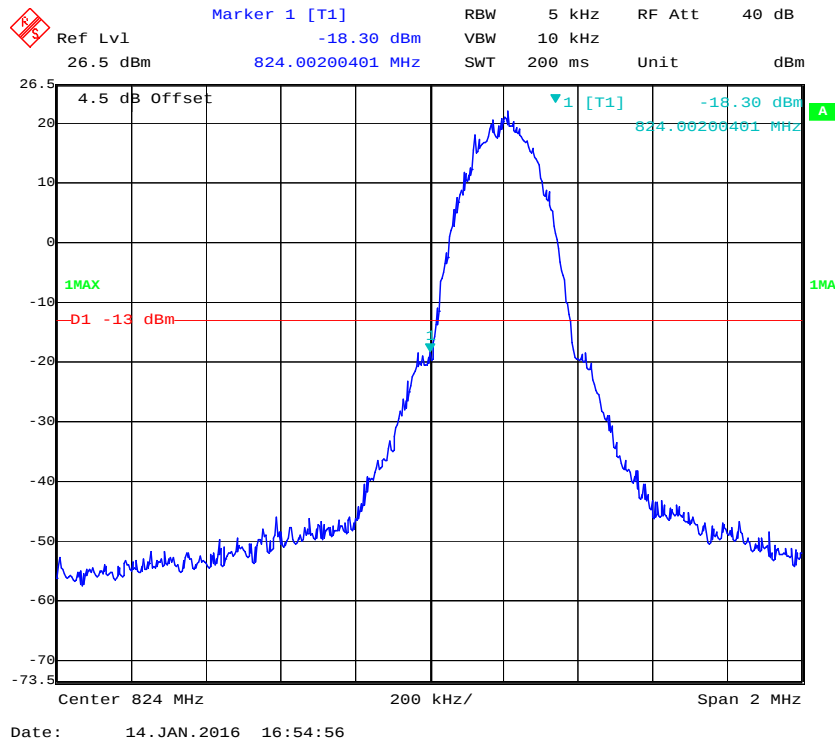


Cellular Band, Right Band Edge for EGPRS Mode

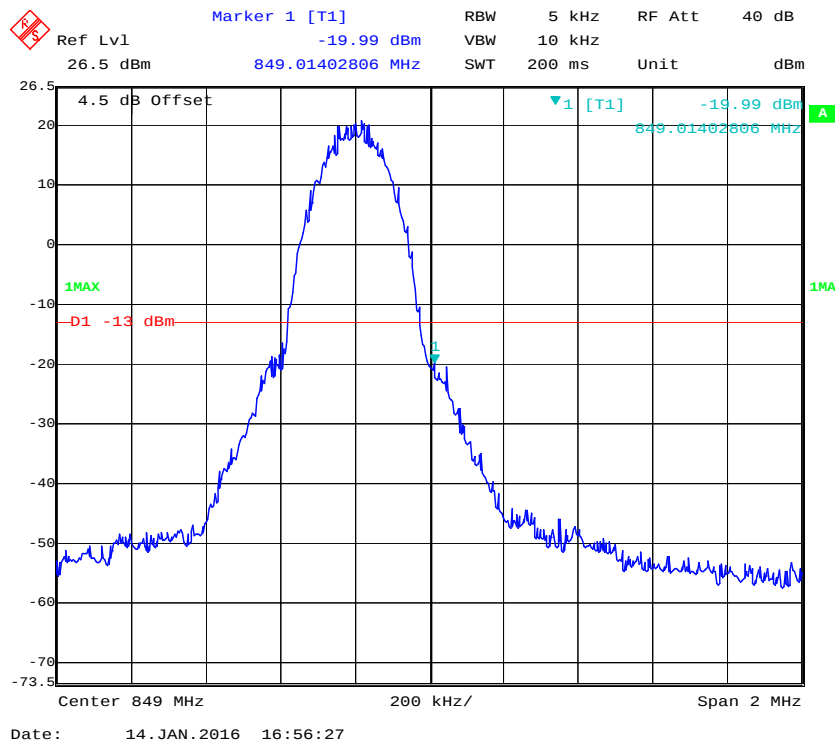


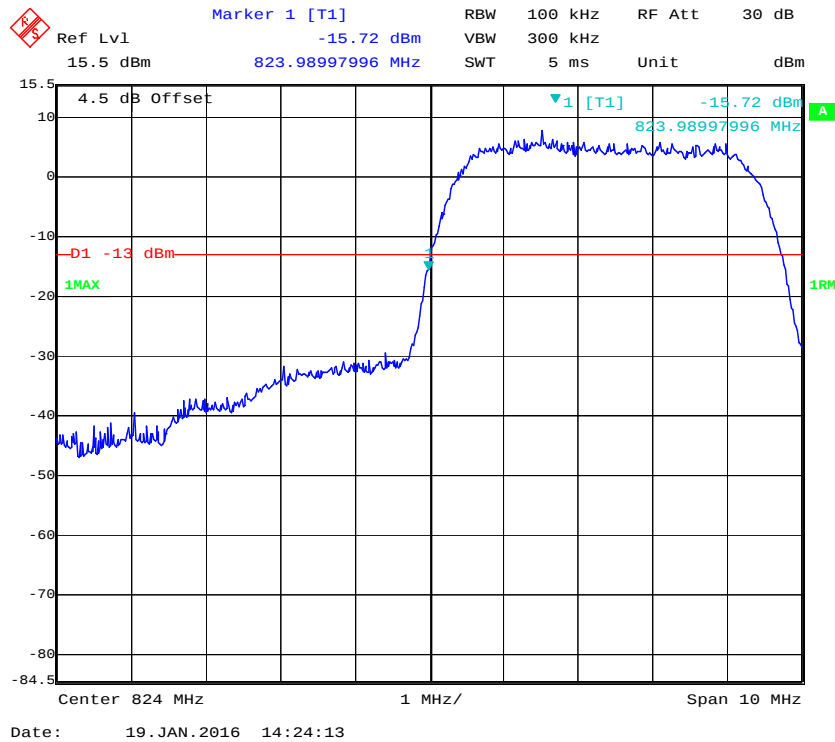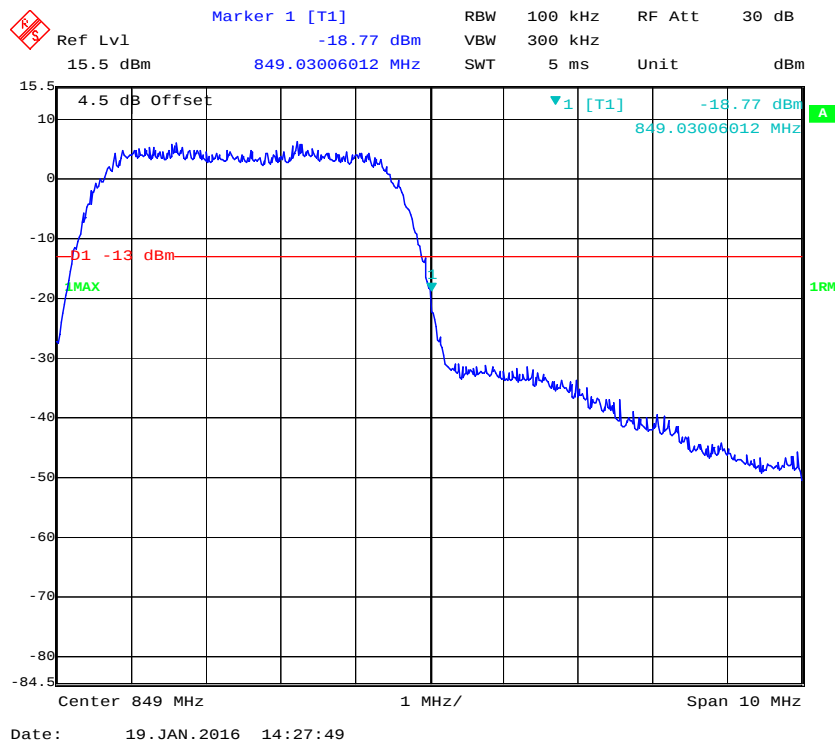Cellular Band, Left Band Edge for WCDMA (BPSK) Mode**Cellular Band, Right Band Edge for WCDMA (BPSK) Mode**


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

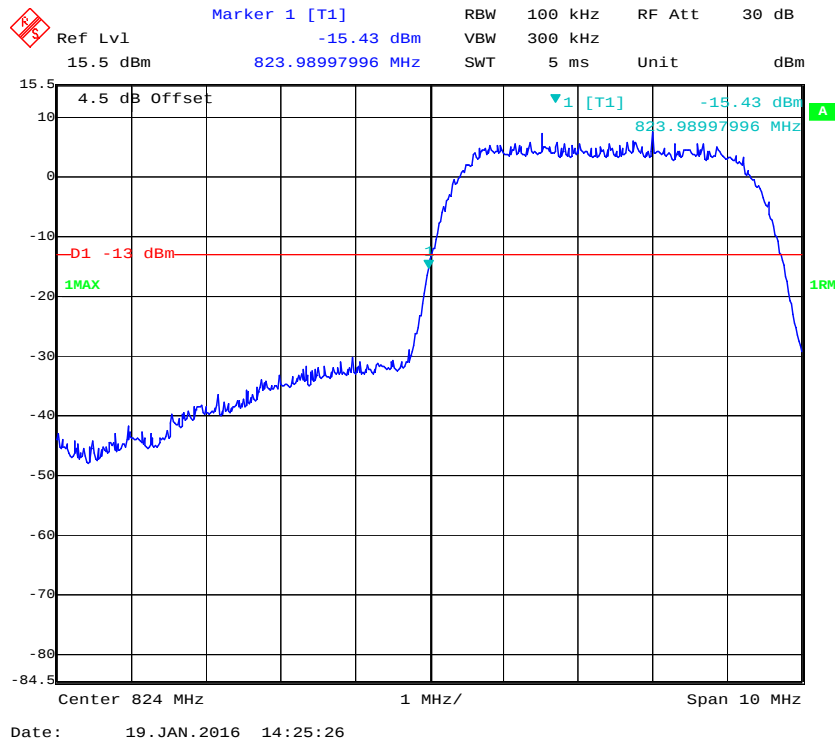


Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

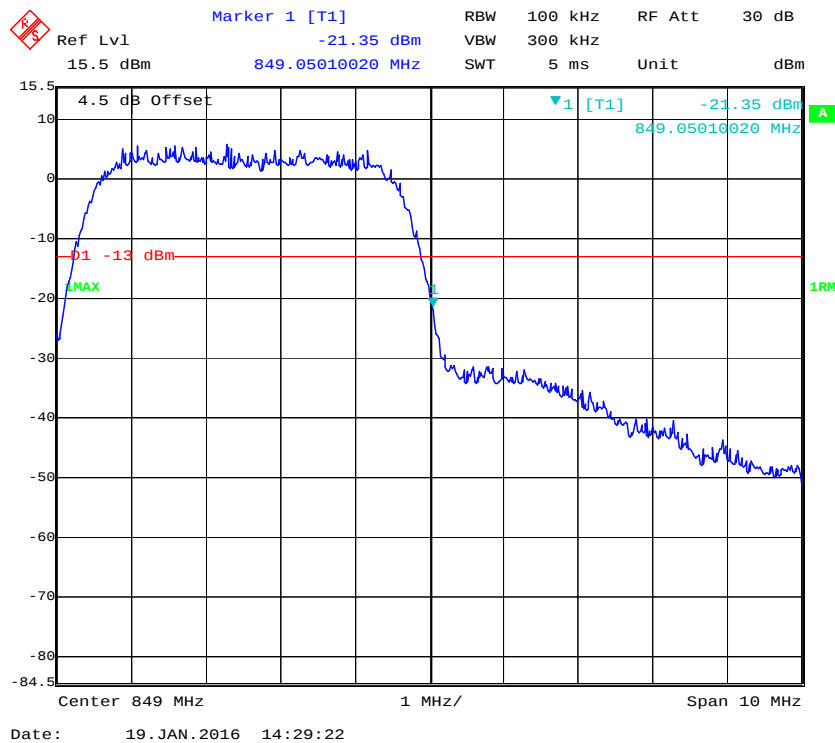


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

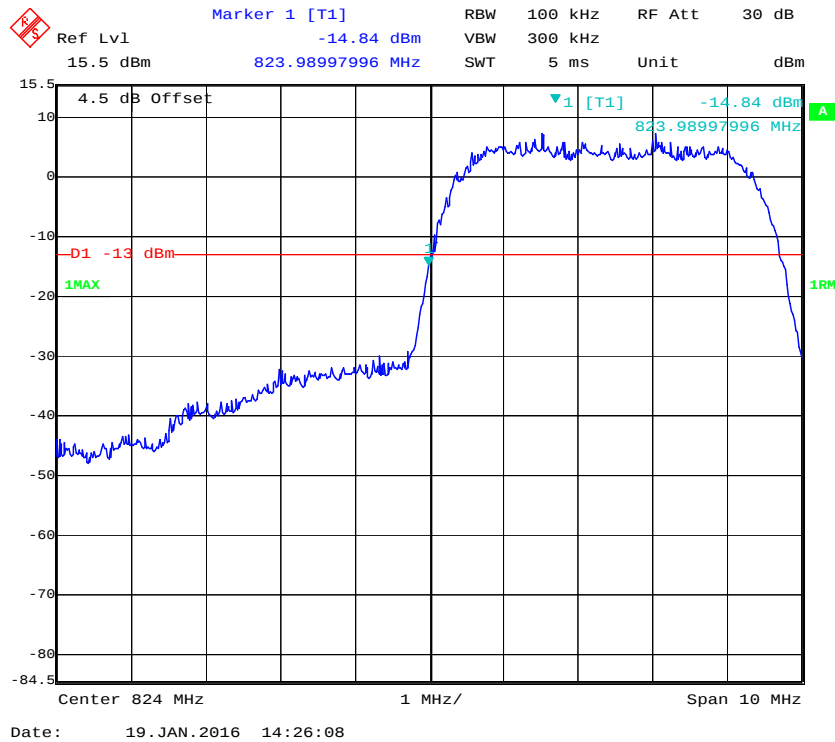


Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

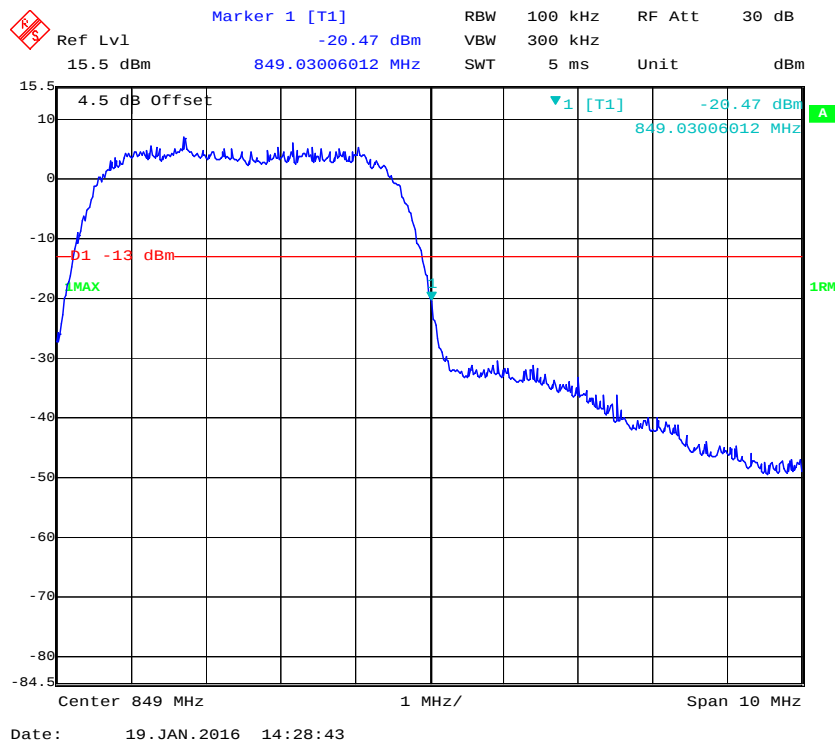


PCS Band, Left Band Edge for GSM (GMSK) Mode

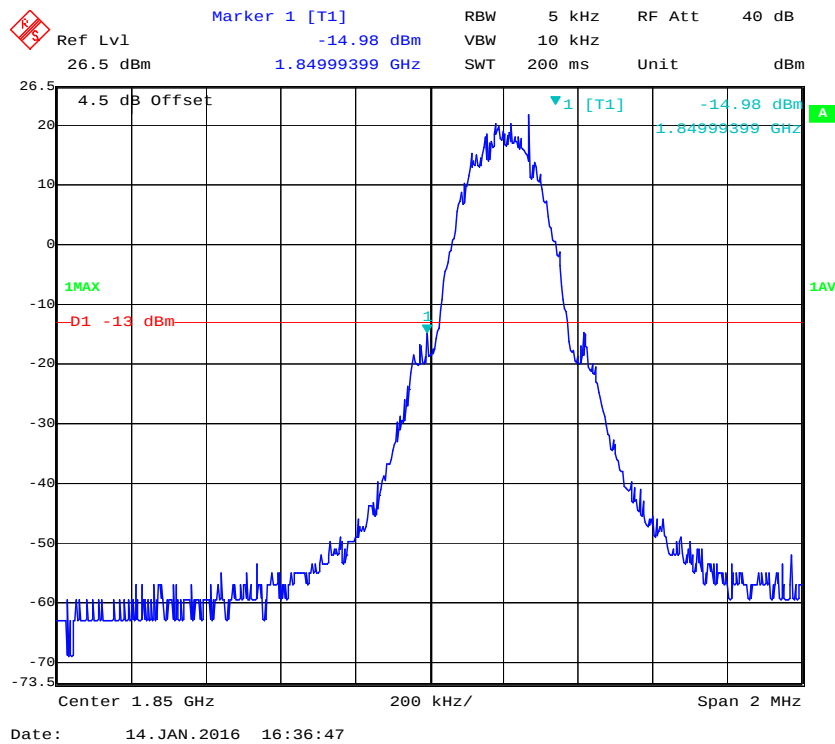


PCS Band, Right Band Edge for GSM (GMSK) Mode

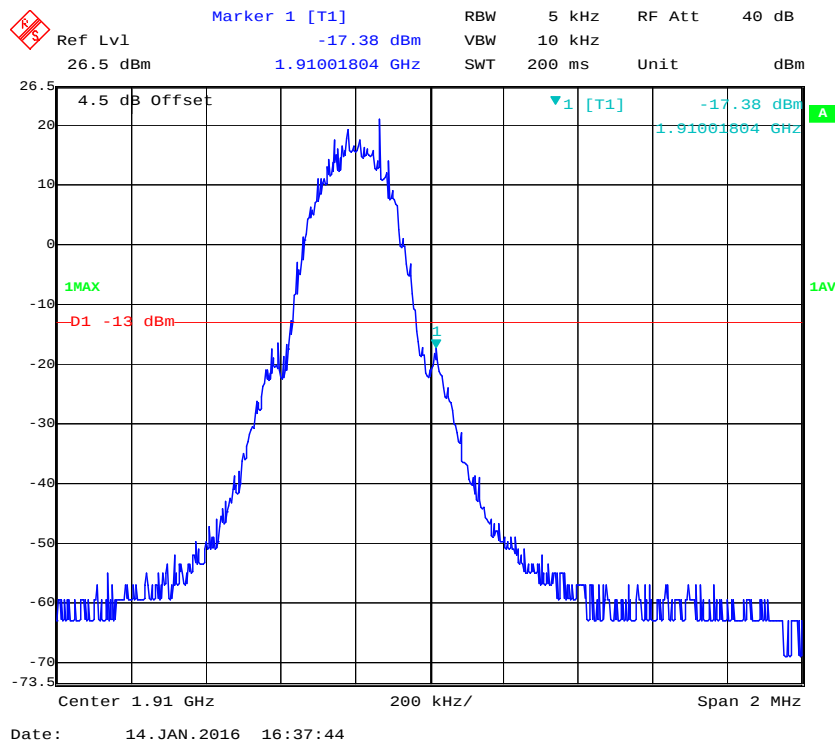


PCS Band, Left Band Edge for EGPRS Mode

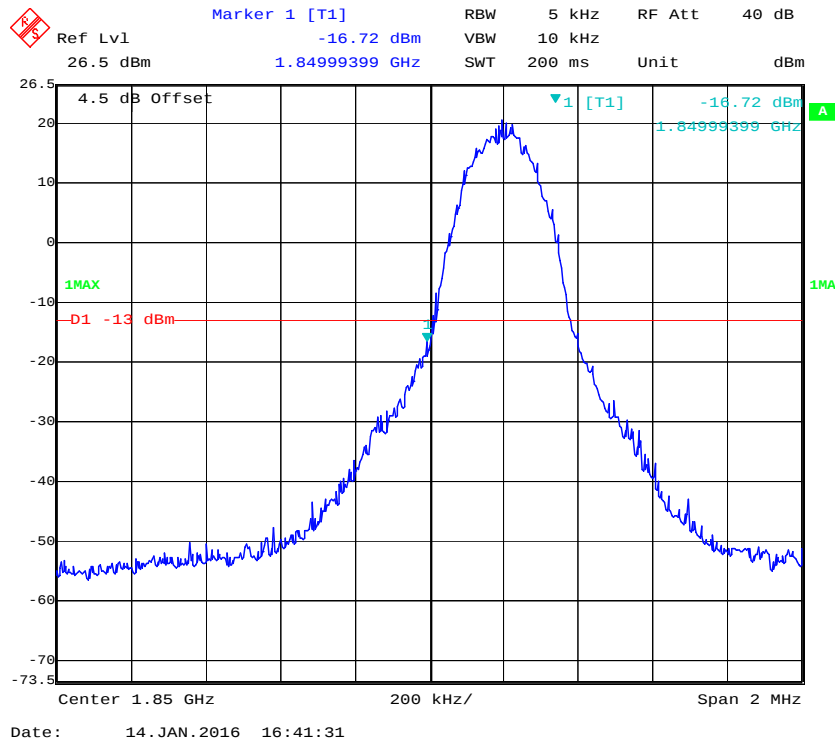


PCS Band, Right Band Edge for EGPRS Mode

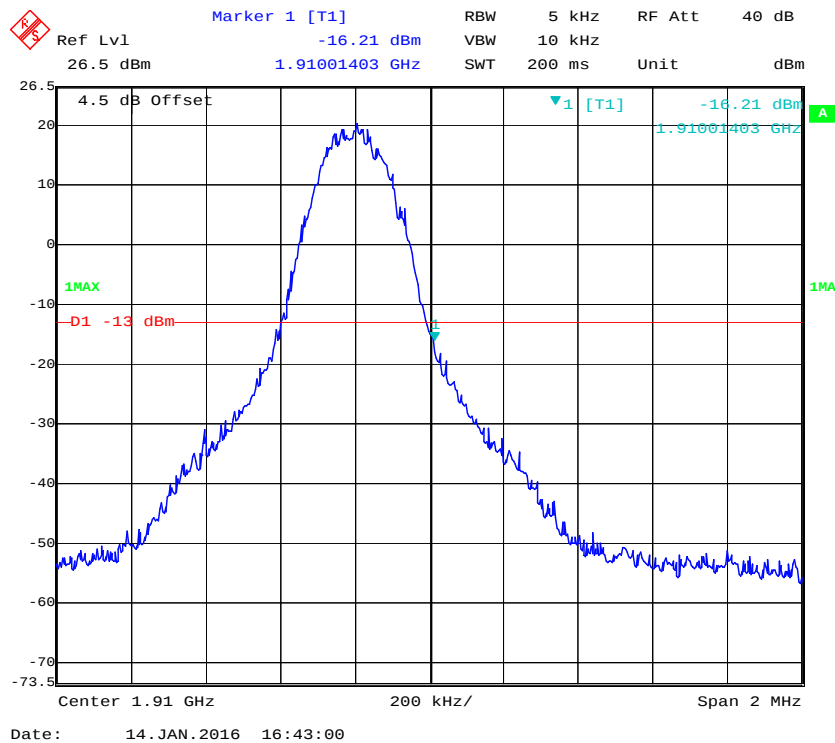

PCS Band, Left Band Edge for WCDMA (BPSK) Mode

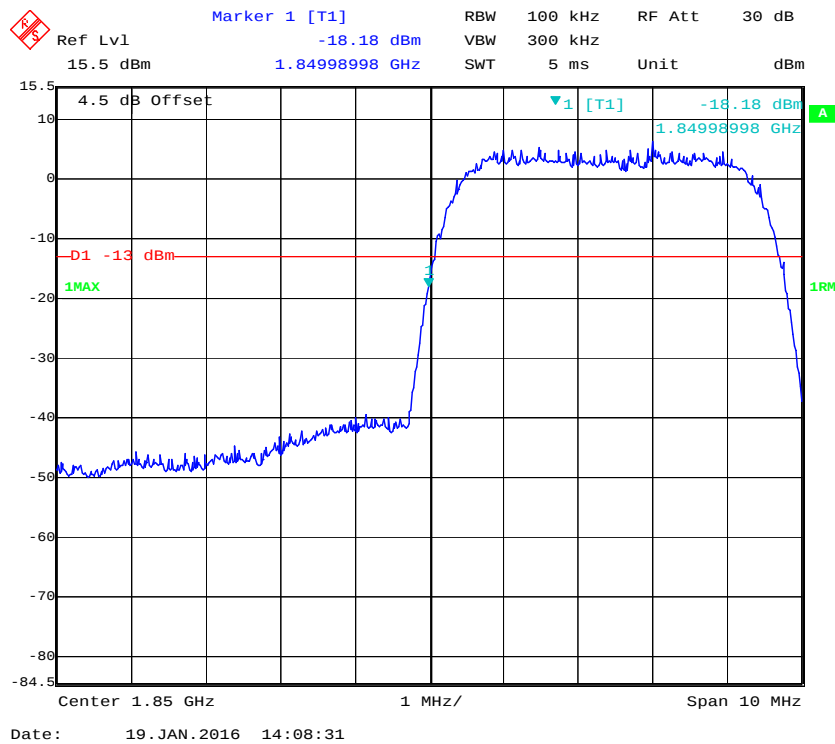

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

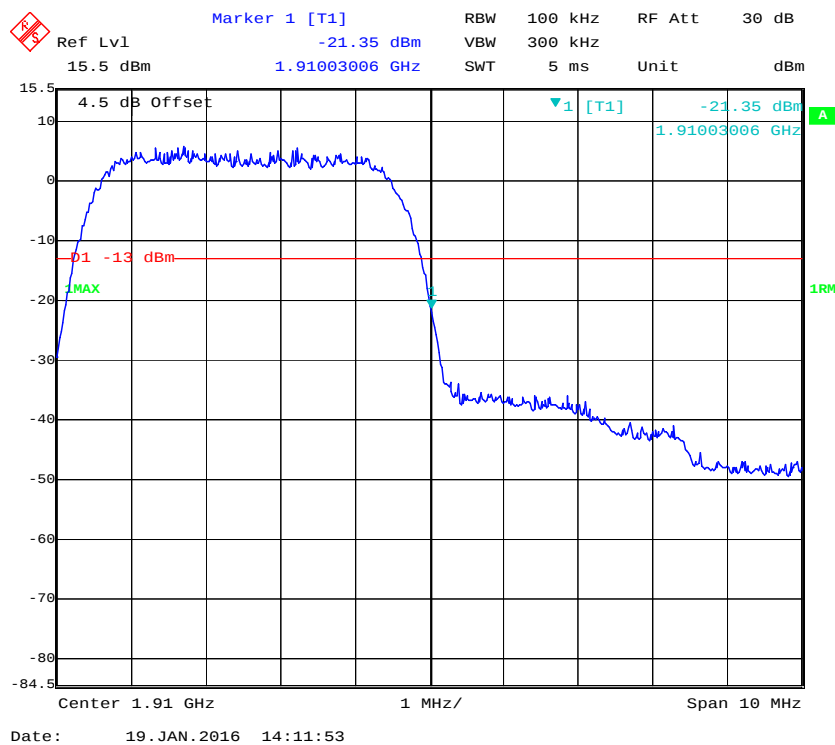

Ref Lvl 15.5 dBm Marker 1 [T1] -16.72 dBm RBW 100 kHz VBW 300 kHz RF Att 30 dB SWT 5 ms Unit dBm

4.5 dB Offset 1.84998998 GHz 1 [T1] -16.72 dBm 1.84998998 GHz

D1 -13 dBm 1MAX 1RM

Center 1.85 GHz 1 MHz/ Span 10 MHz

Date: 19. JAN. 2016 14:07:54

Ref Lvl: 15.5 dBm
 Marker 1 [T1]: -23.93 dBm
 RBW: 100 kHz
 VBW: 300 kHz
 RF Att: 30 dB
 4.5 dB Offset
 1.91007014 GHz
 SWT: 5 ms
 Unit: dBm


15.5
 10
 6
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 -80
 -84.5

4.5 dB Offset
 1 [T1] -23.93 dBm
 1.91007014 GHz
 -13 dBm
 MAX
 1


Center 1.91 GHz
 1 MHz/
 Span 10 MHz

Date: 19. JAN. 2016 14:12:22


PCS Band, Left Band Edge for HSUPA (BPSK) Mode

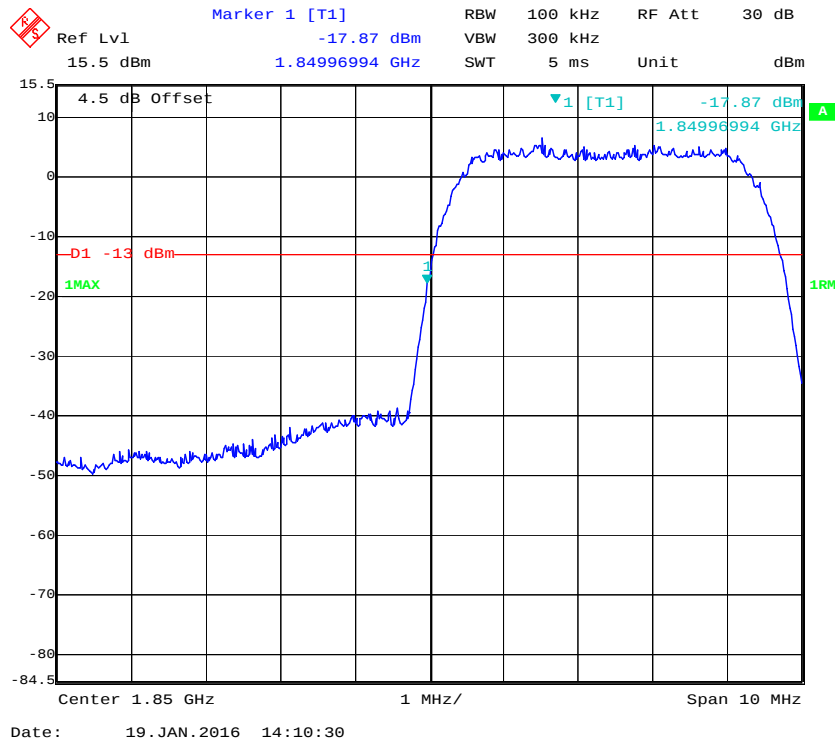


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

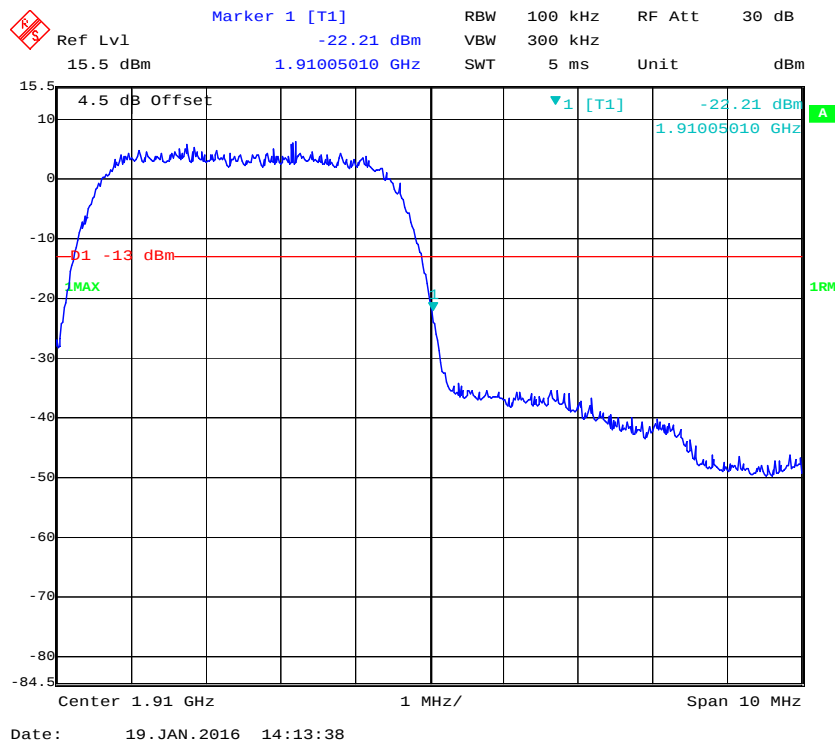


AWS Band, Left Band Edge for WCDMA (BPSK) Mode

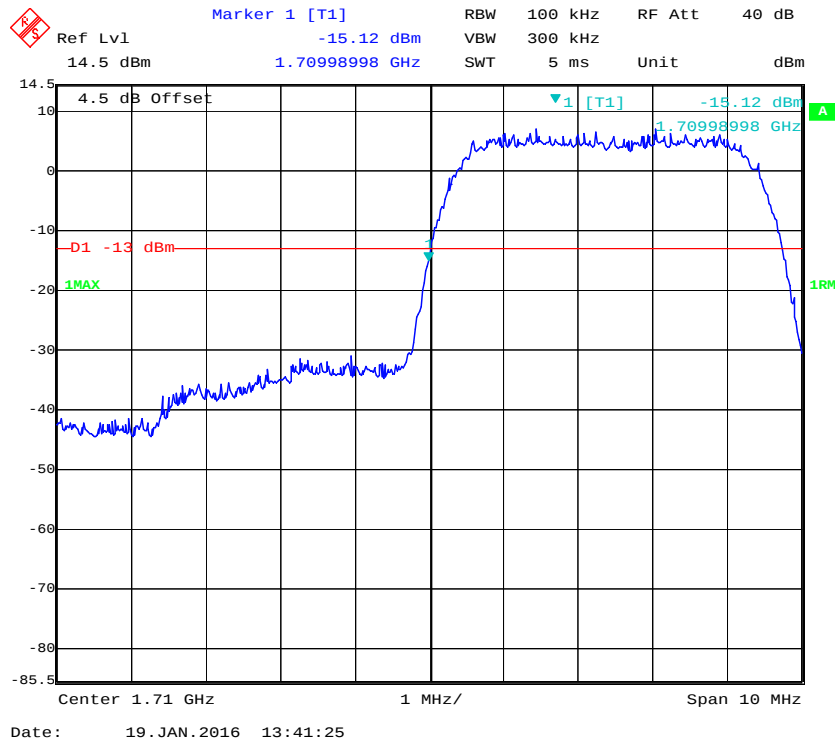


AWS Band, Right Band Edge for WCDMA (BPSK) Mode

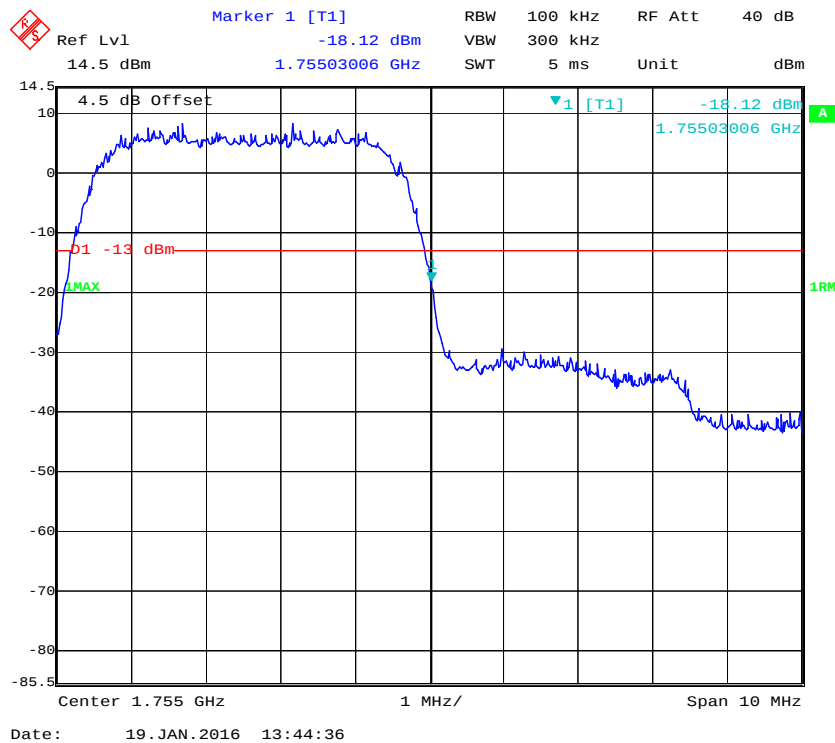

AWS Band, Left Band Edge for HSDPA (16QAM) Mode

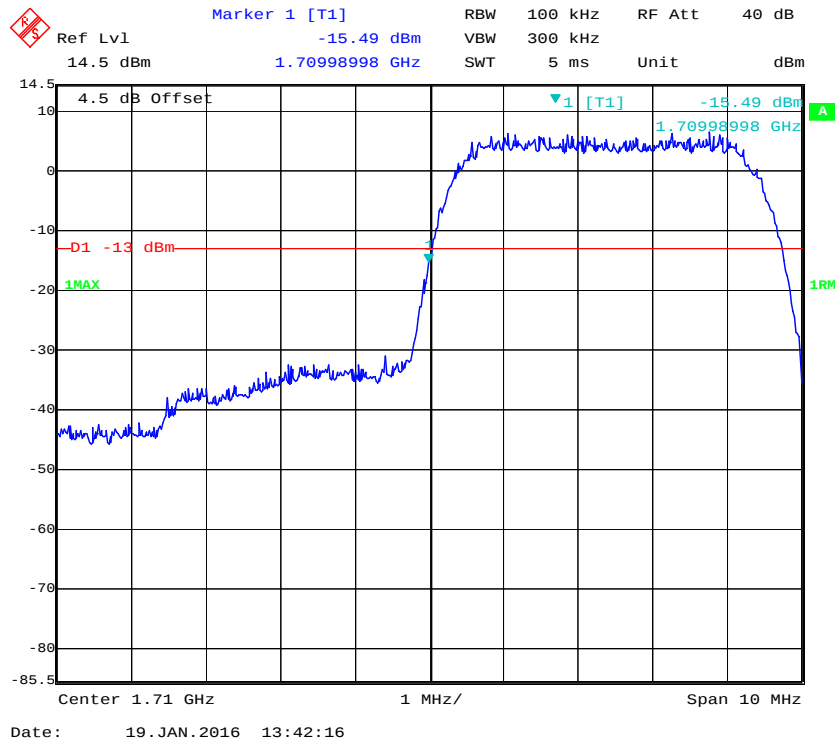

AWS Band, Right Band Edge for HSDPA (16QAM) Mode

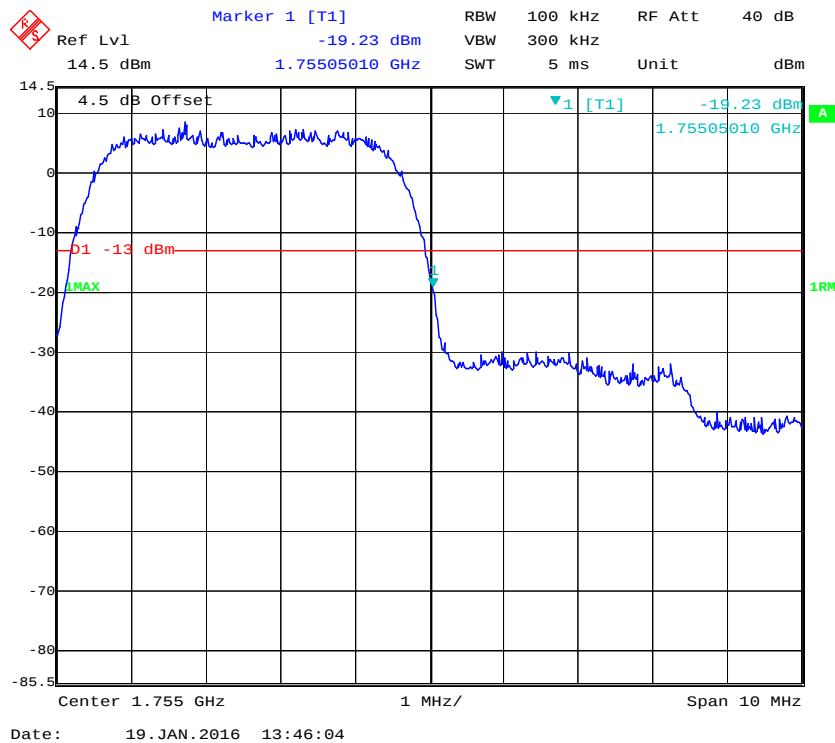

Ref Lvl 14.5 dBm
 Marker 1 [T1] -14.66 dBm
 1.70998998 GHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 40 dB
 Unit dBm

4.5 dB Offset

D1 -13 dBm

1MAX

1 [T1] -14.66 dBm
 1.70998998 GHz

Center 1.71 GHz
 1 MHz/
 Span 10 MHz

Date: 19. JAN. 2016 13:43:42

Ref Lvl 14.5 dBm

Marker 1 [T1] -18.01 dBm

RBW 100 kHz RF Att 40 dB

VBW 300 kHz

SWT 5 ms Unit dBm

4.5 dB Offset

▼ 1 [T1] -18.01 dBm

1.75503006 GHz

01 -13 dBm

1MAX



1RM



Center 1.755 GHz

1 MHz/


Span 10 MHz

Date: 19. JAN. 2016 13:48:00

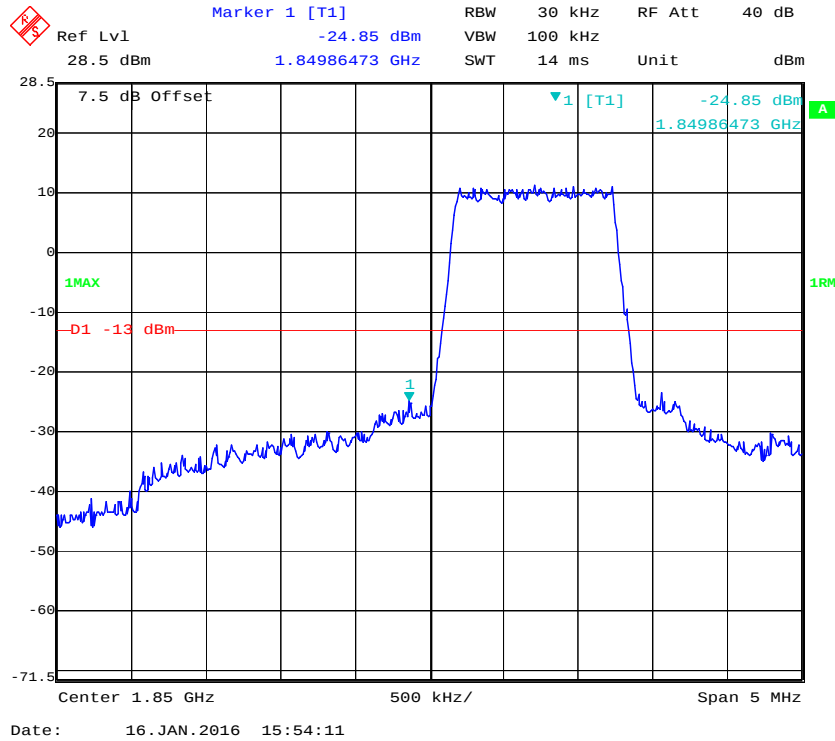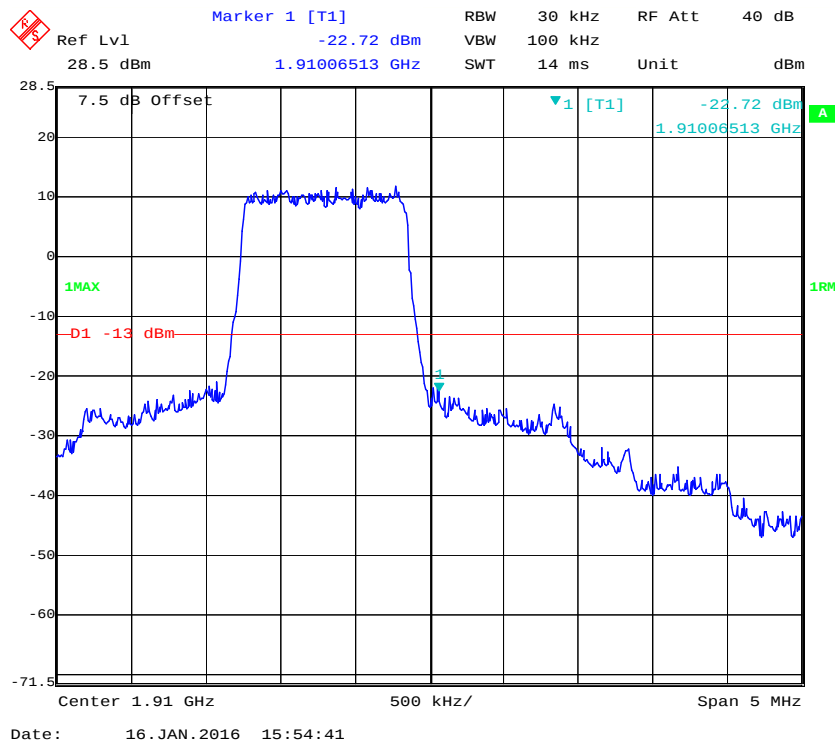
Band 2:**QPSK (1.4 MHz, FULL RB) - Left Band Edge****QPSK (1.4 MHz, FULL RB) - Right Band Edge**

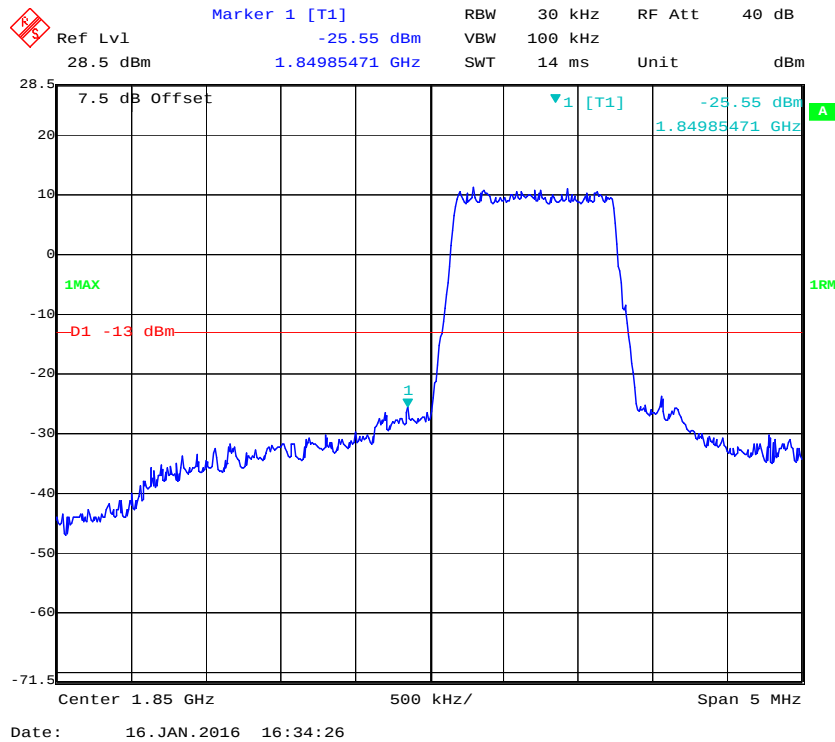
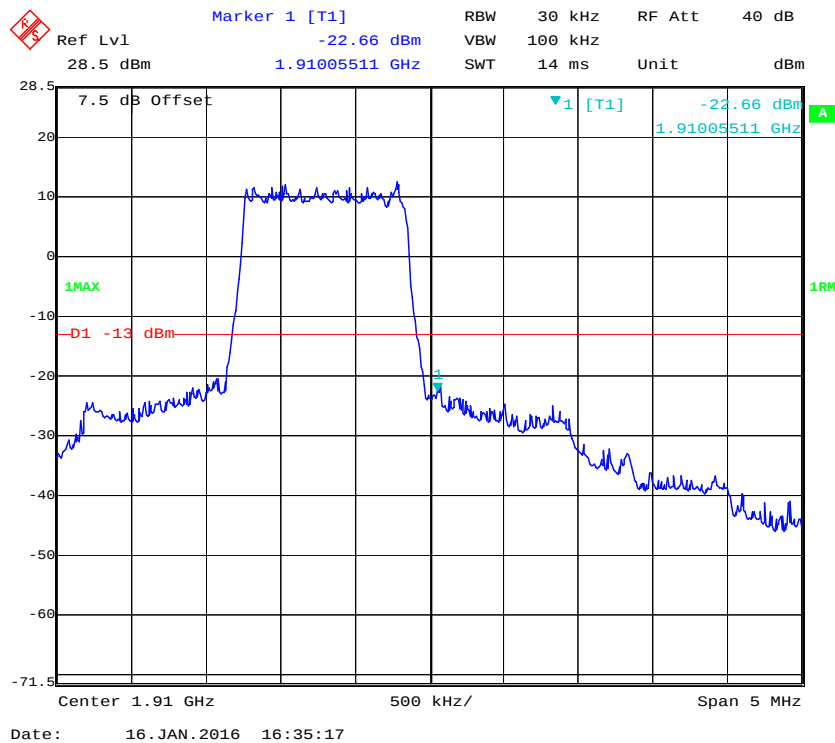
16-QAM (1.4 MHz, FULL RB) - Left Band Edge**16-QAM (1.4 MHz, FULL RB) - Right Band Edge**

QPSK (3.0 MHz, FULL RB) - Left Band Edge

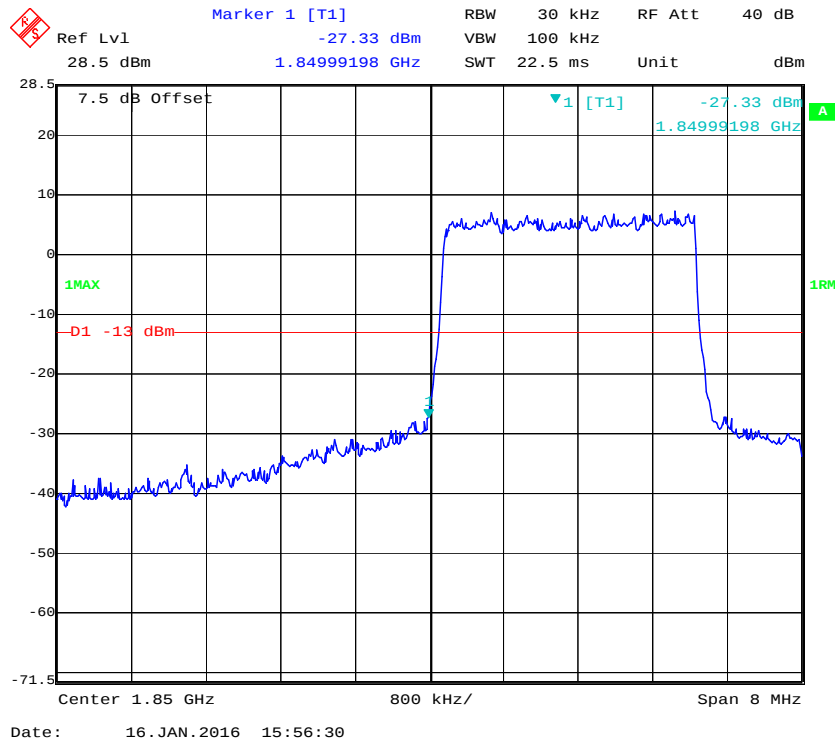


QPSK (3.0 MHz, FULL RB) - Right Band Edge

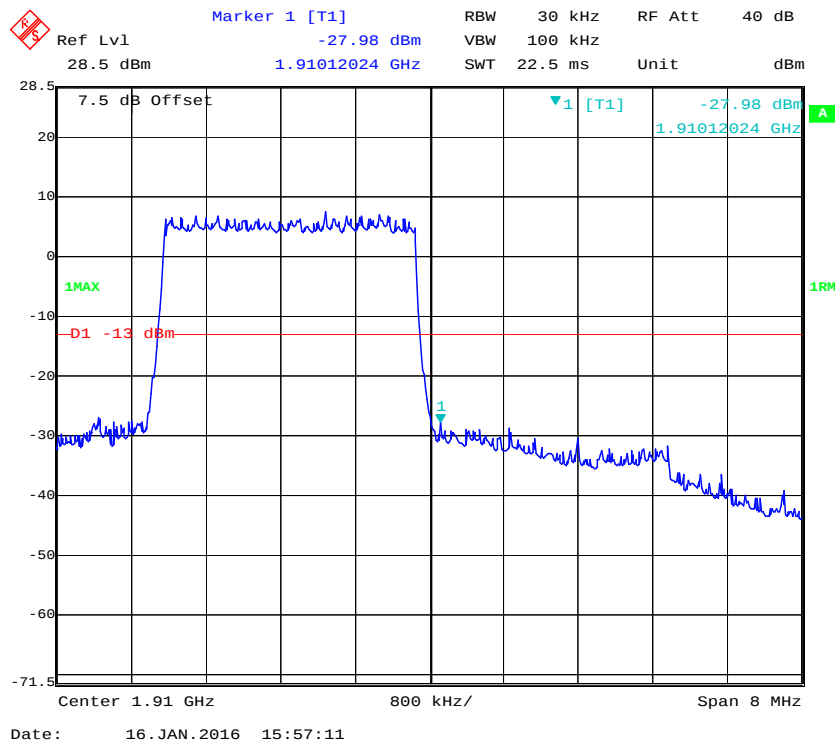


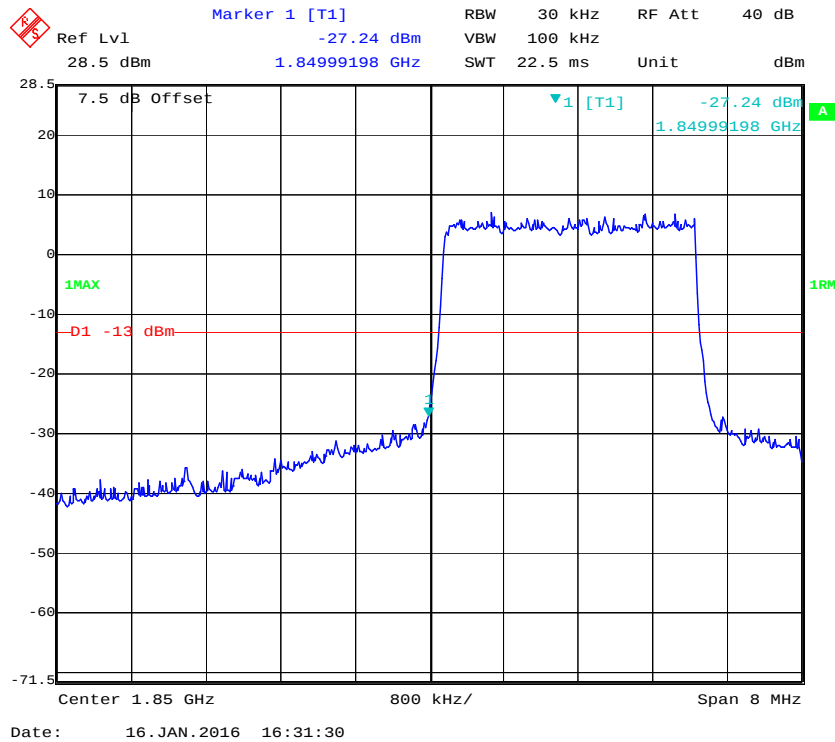
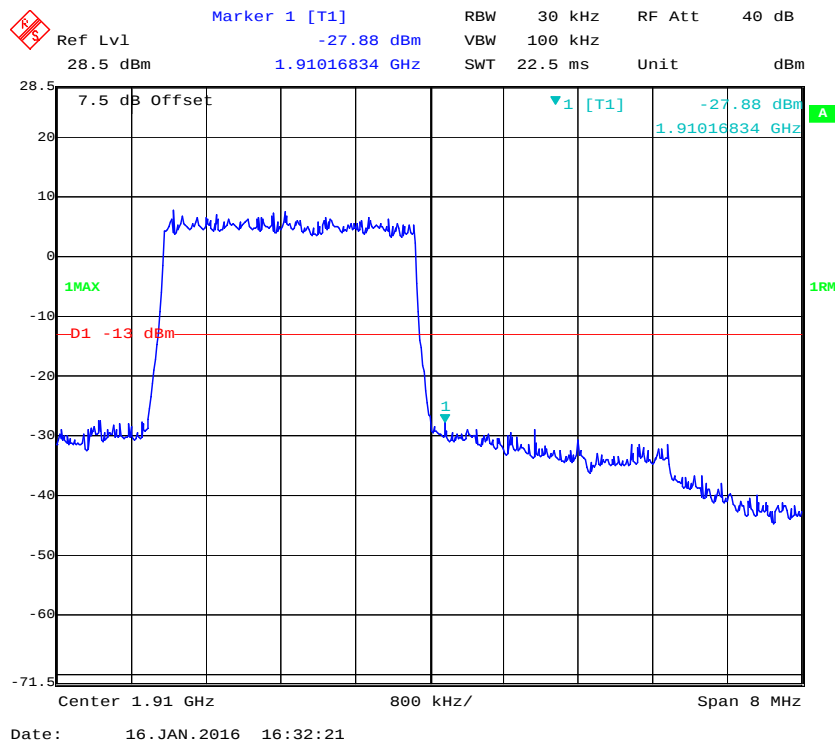
16-QAM (3.0 MHz, FULL RB) - Left Band Edge**16-QAM (3.0 MHz, FULL RB) - Right Band Edge**

QPSK (5.0 MHz, FULL RB) - Left Band Edge

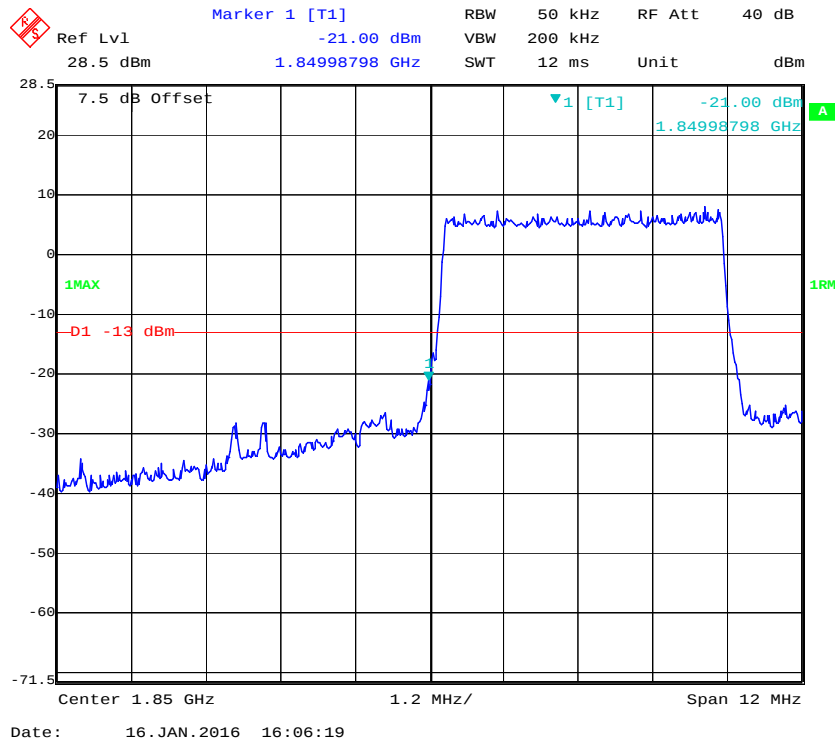


QPSK (5.0 MHz, FULL RB) - Right Band Edge

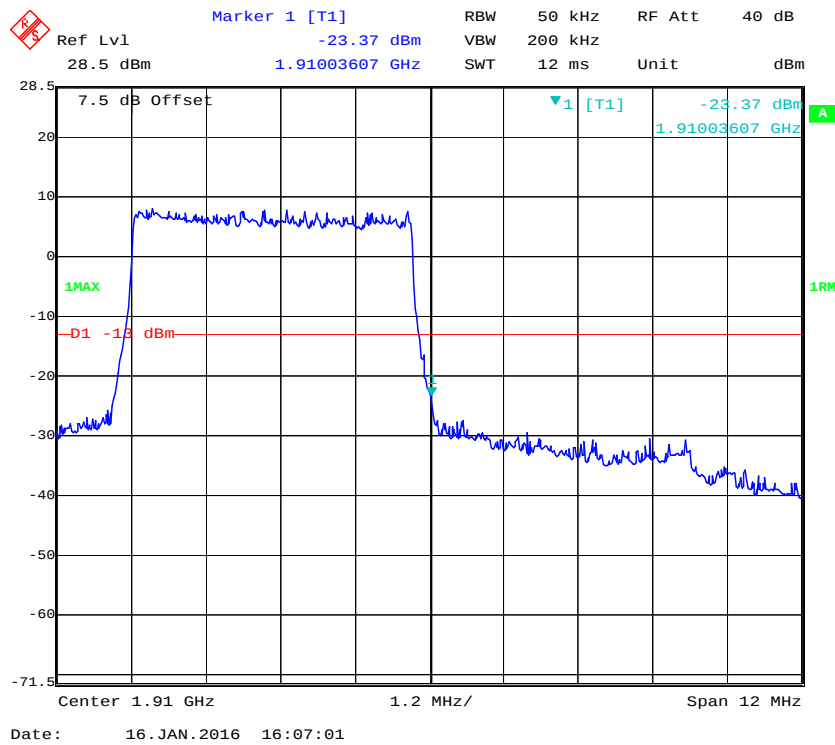


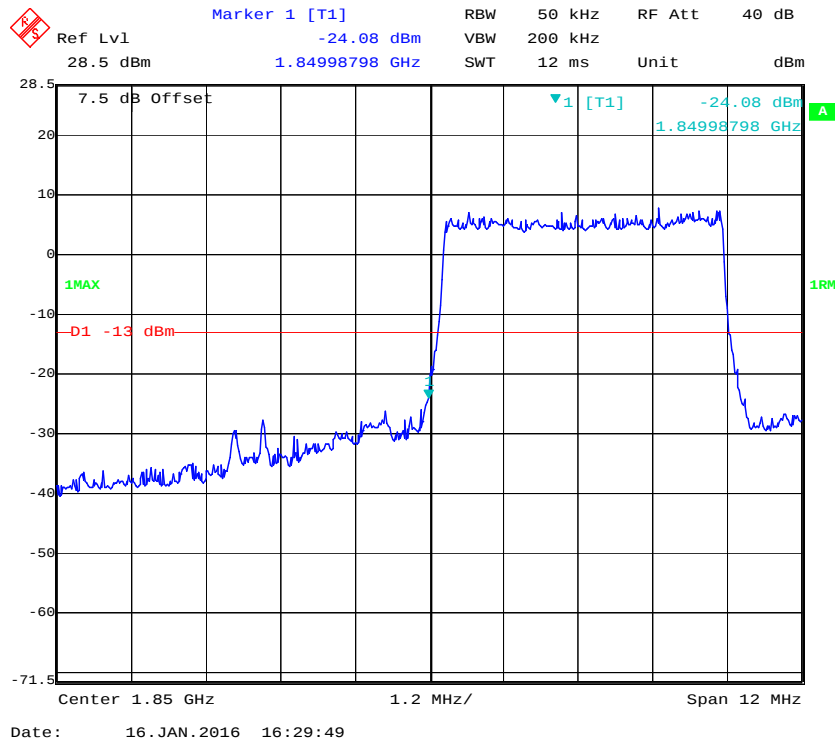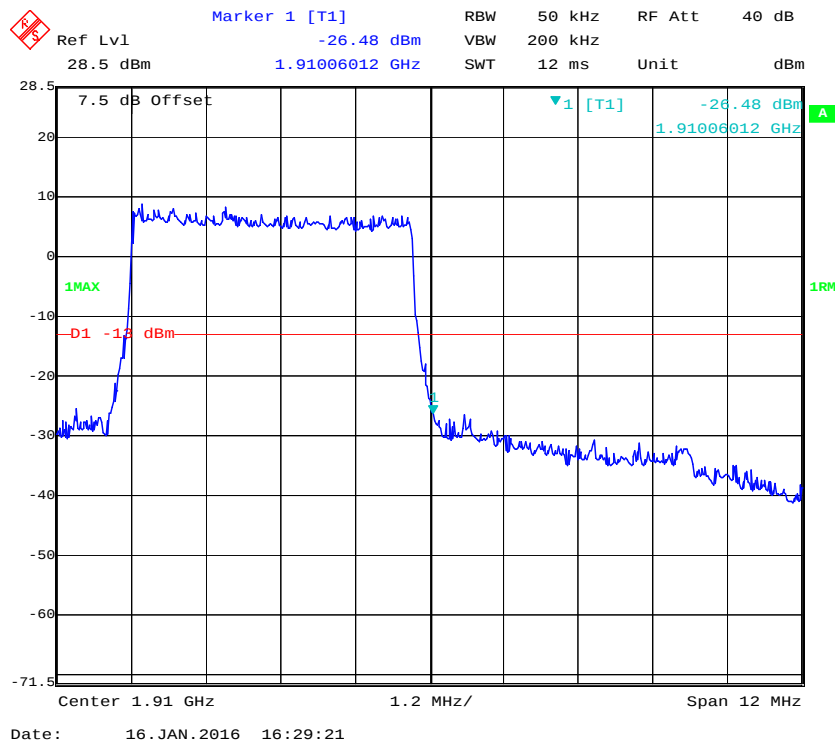16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**


QPSK (10.0 MHz, FULL RB) - Left Band Edge

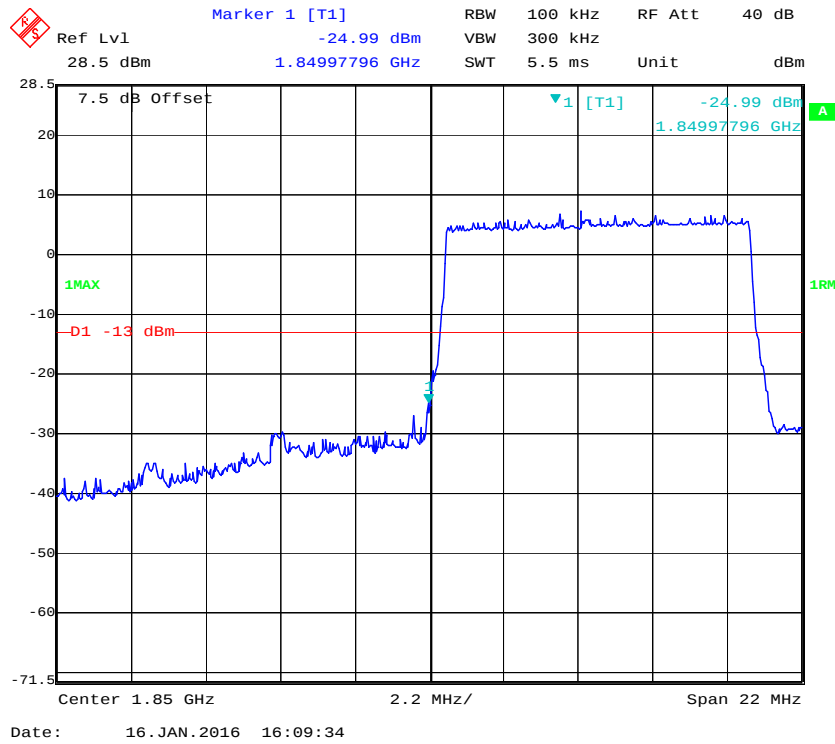


QPSK (10.0 MHz, FULL RB) - Right Band Edge


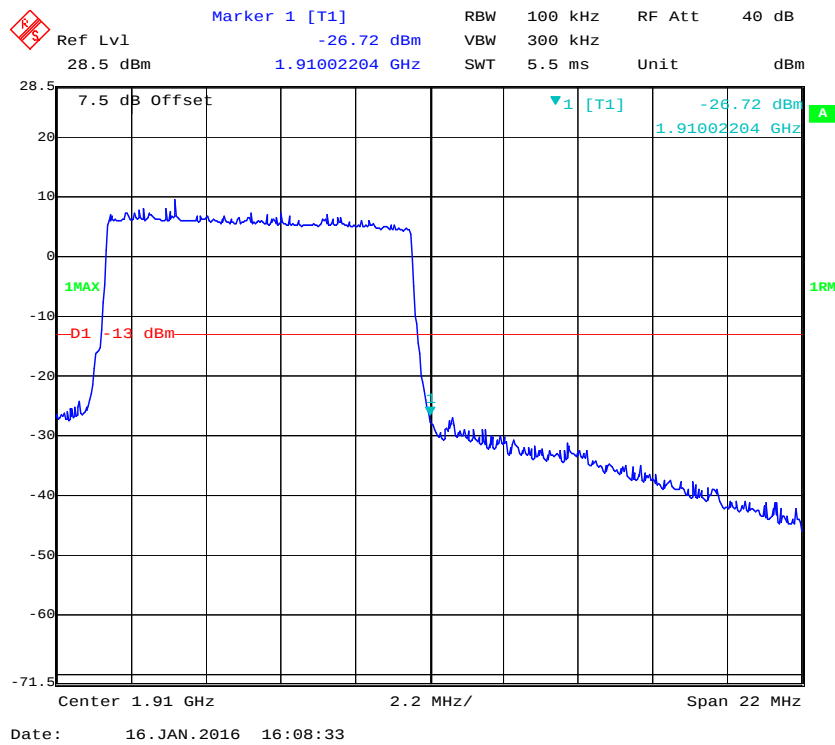




16-QAM (10.0 MHz, FULL RB) - Left Band Edge

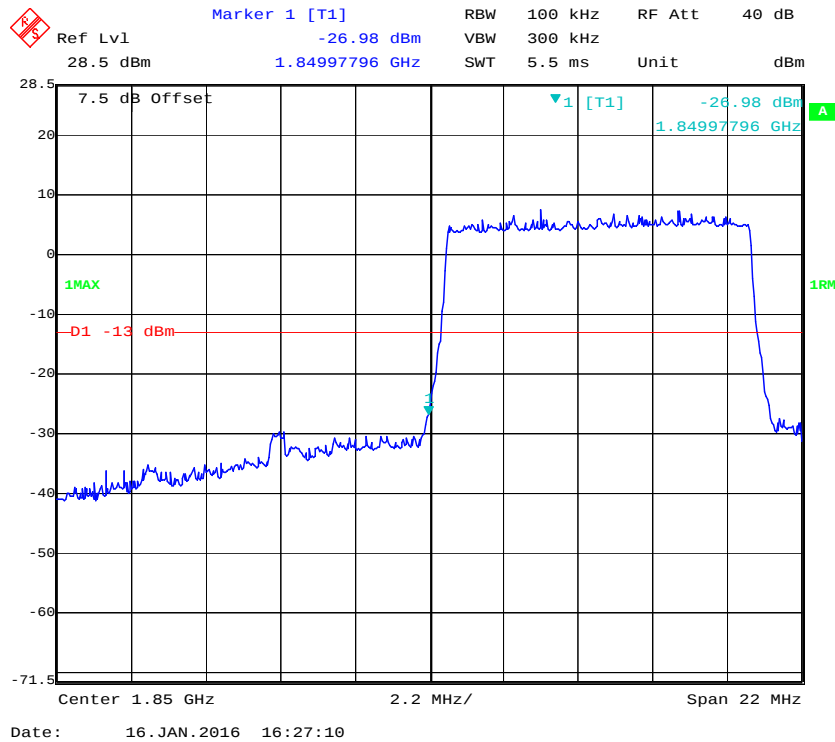


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

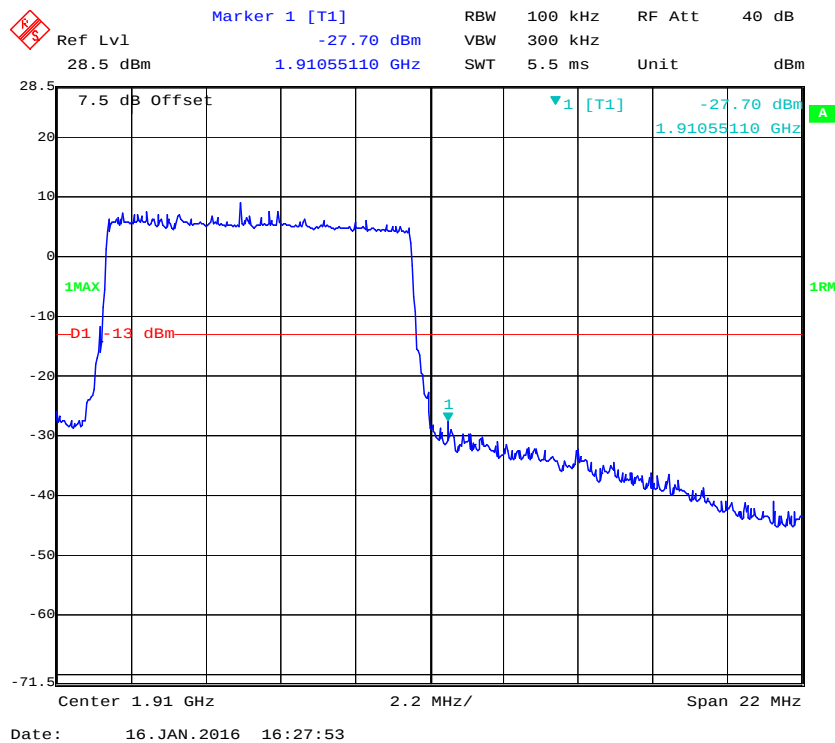

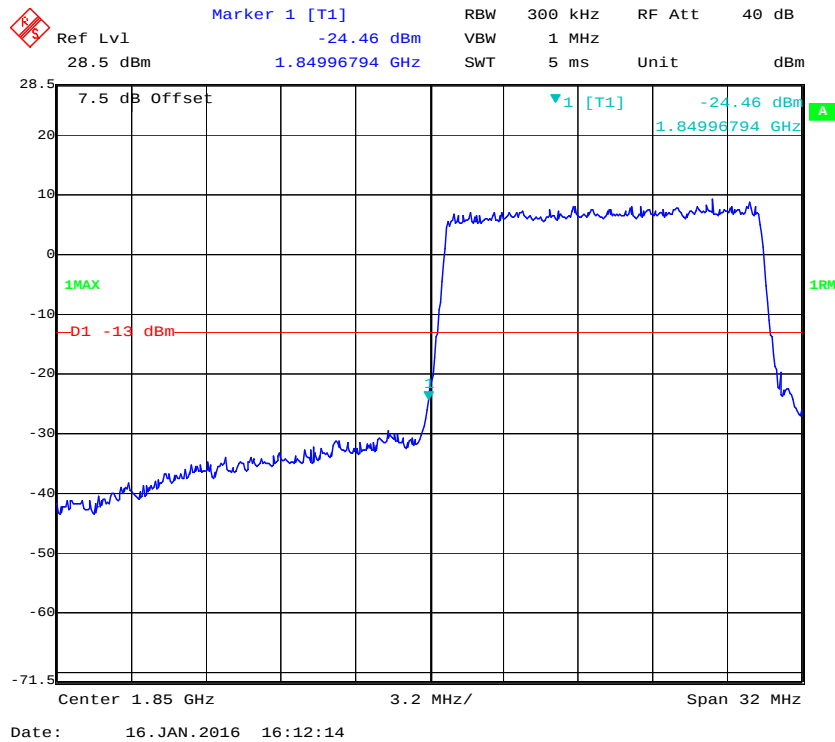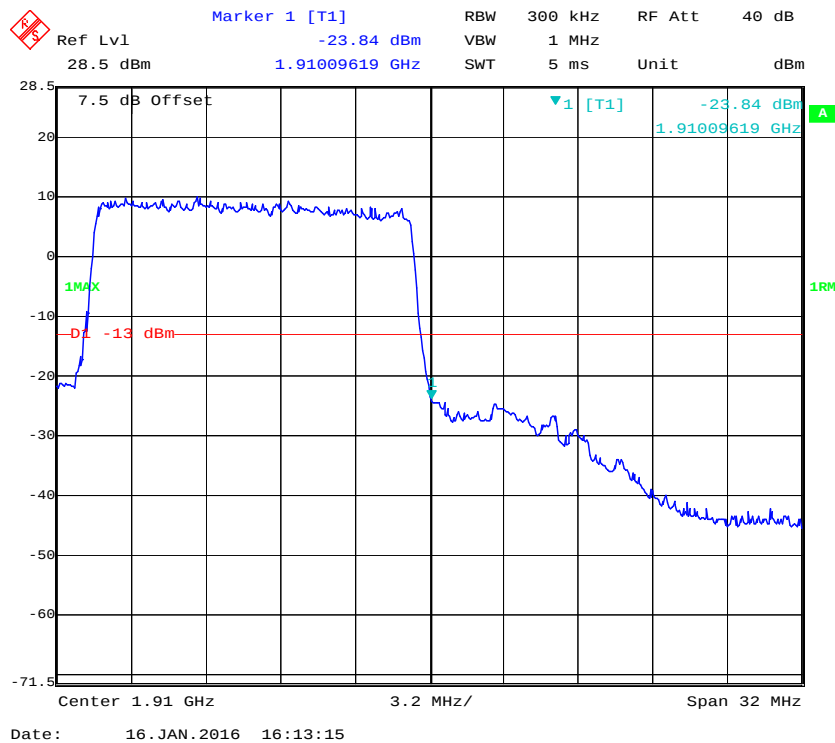
QPSK (15.0 MHz, FULL RB) - Left Band Edge**QPSK (15.0 MHz, FULL RB) - Right Band Edge**

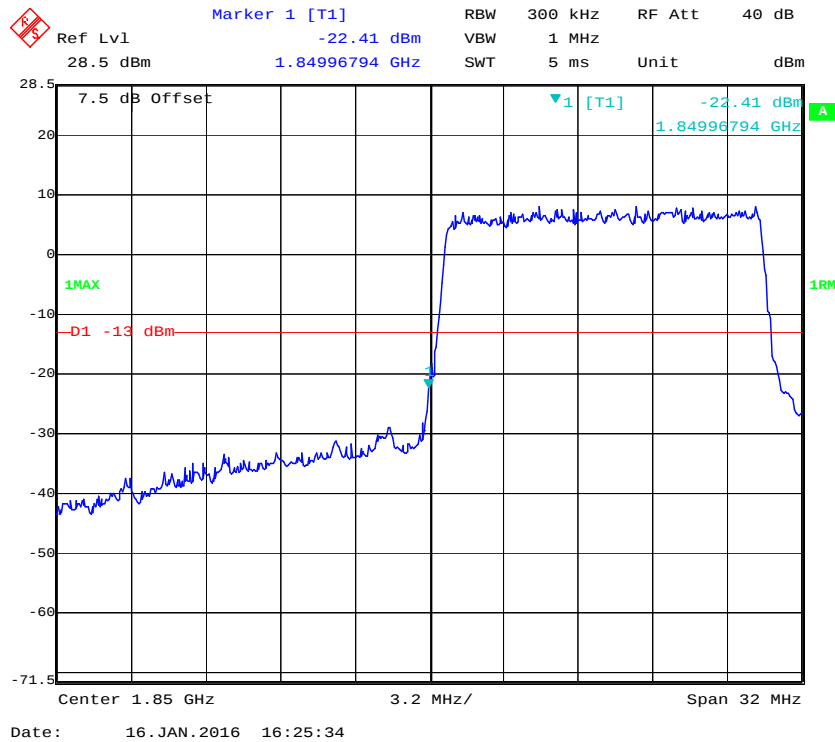
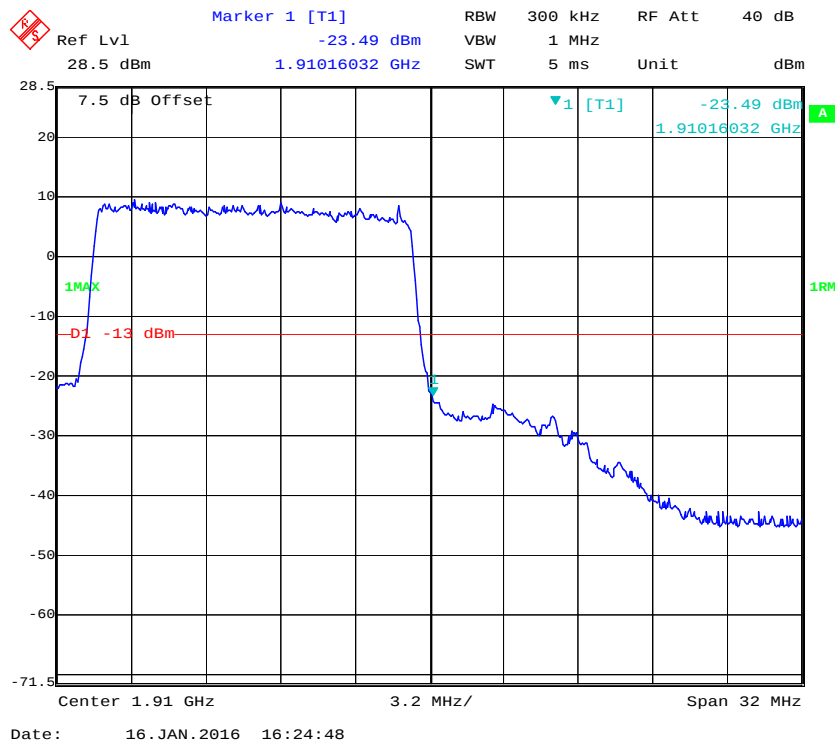
16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**



QPSK (20.0 MHz, FULL RB) - Left Band Edge


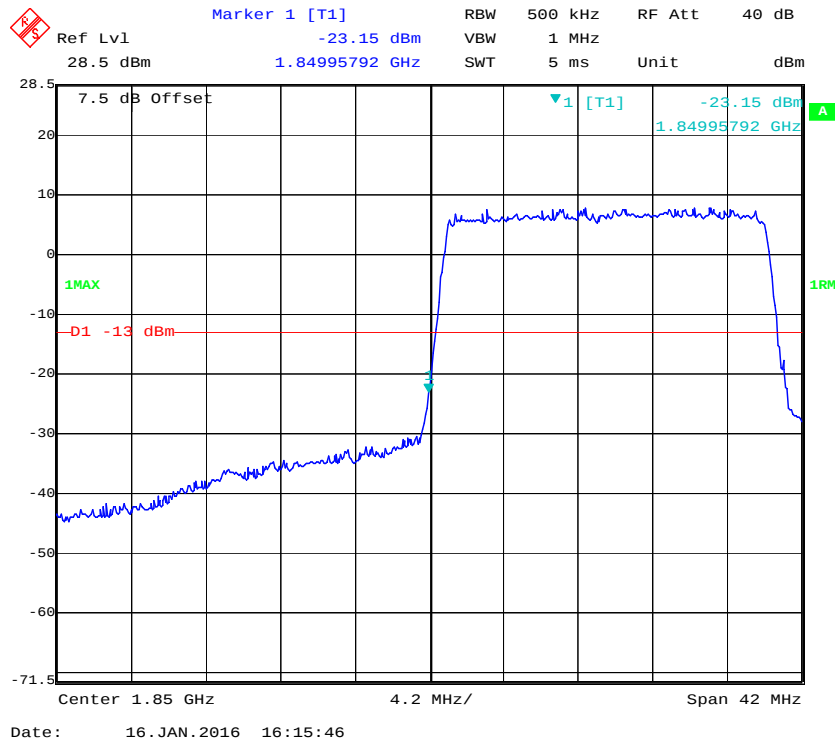


QPSK (20.0 MHz, FULL RB) - Right Band Edge

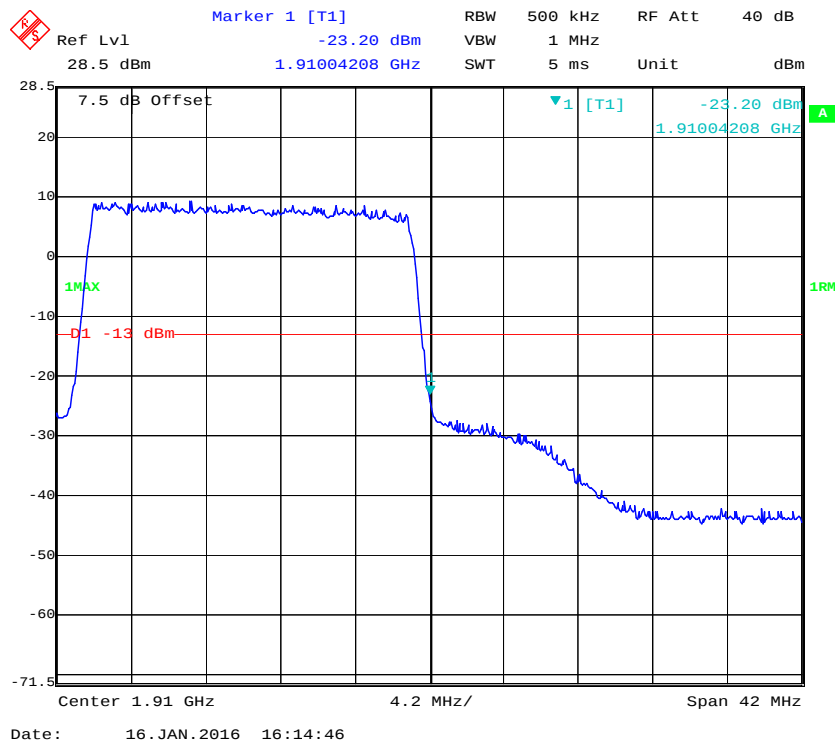


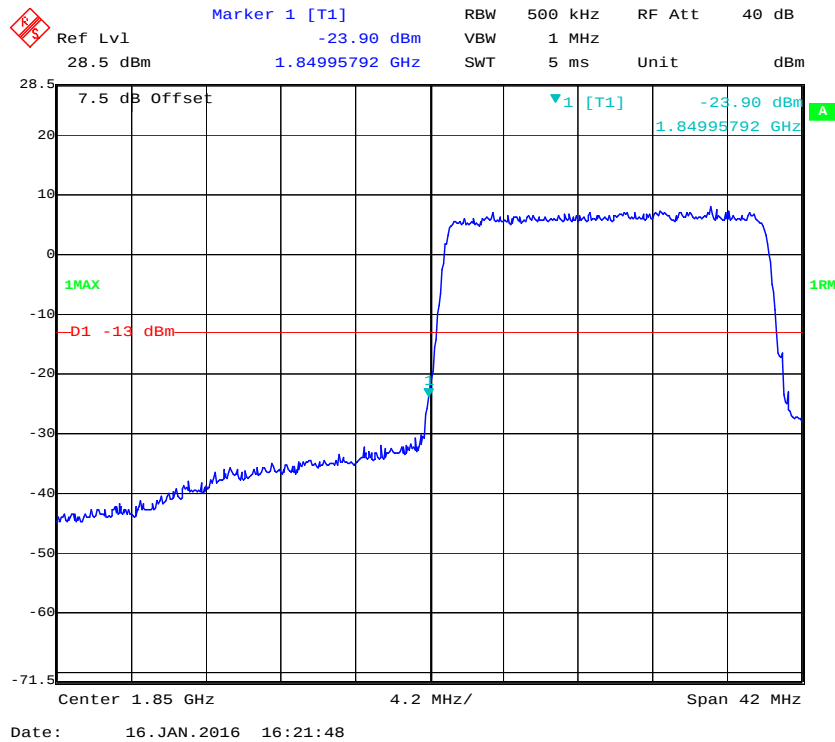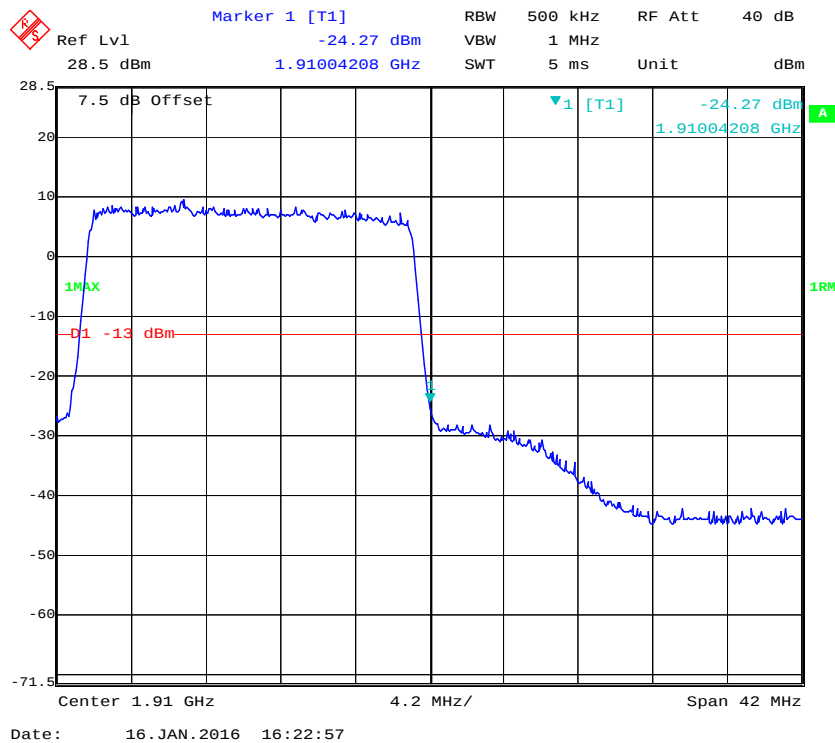16-QAM (20.0 MHz, FULL RB) - Left Band Edge**16-QAM (20.0 MHz, FULL RB) - Right Band Edge**

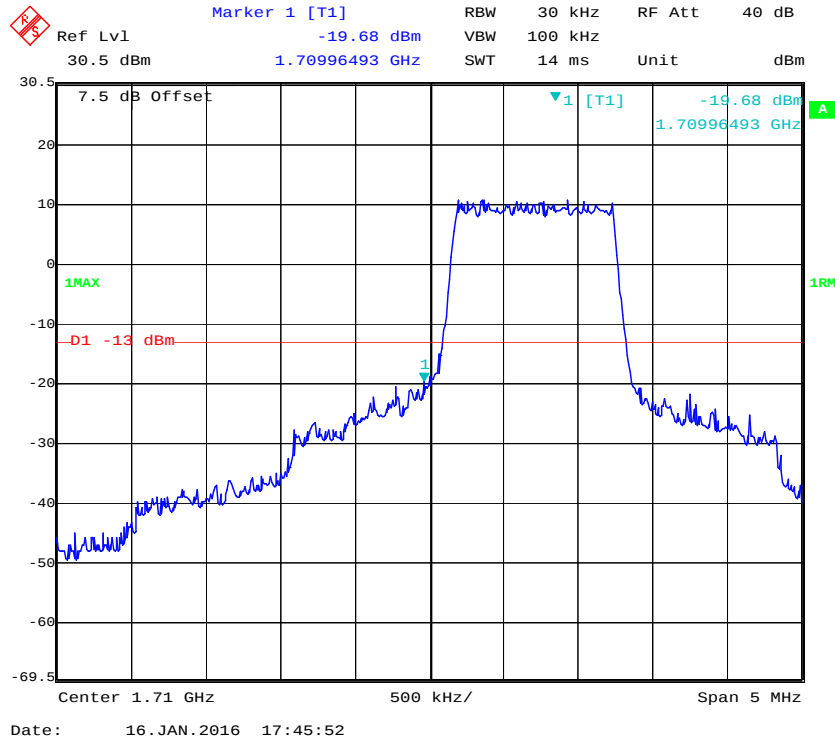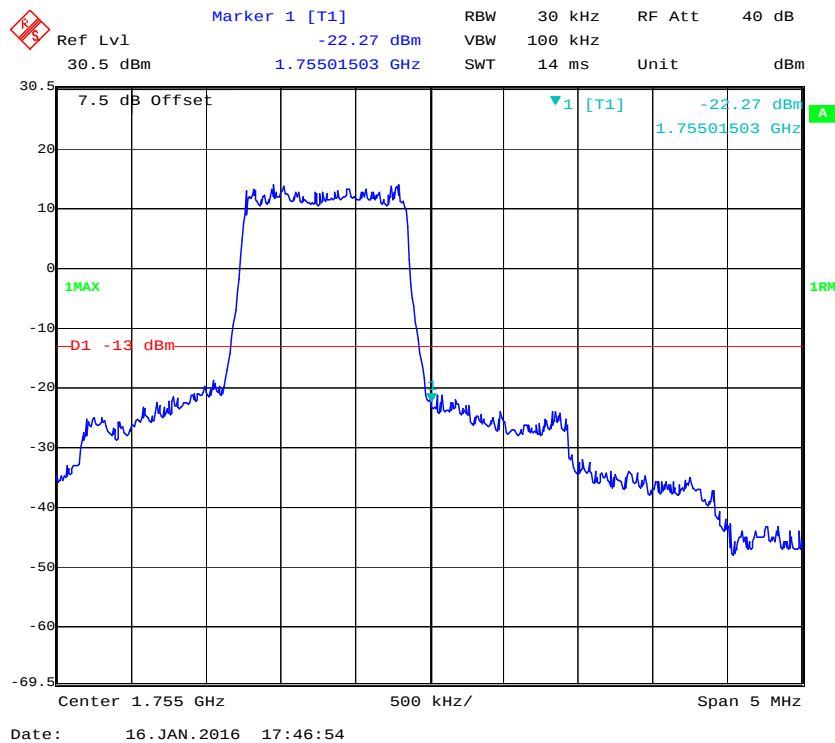
Band 4:**QPSK (1.4 MHz, FULL RB) - Left Band Edge****QPSK (1.4 MHz, FULL RB) - Right Band Edge**

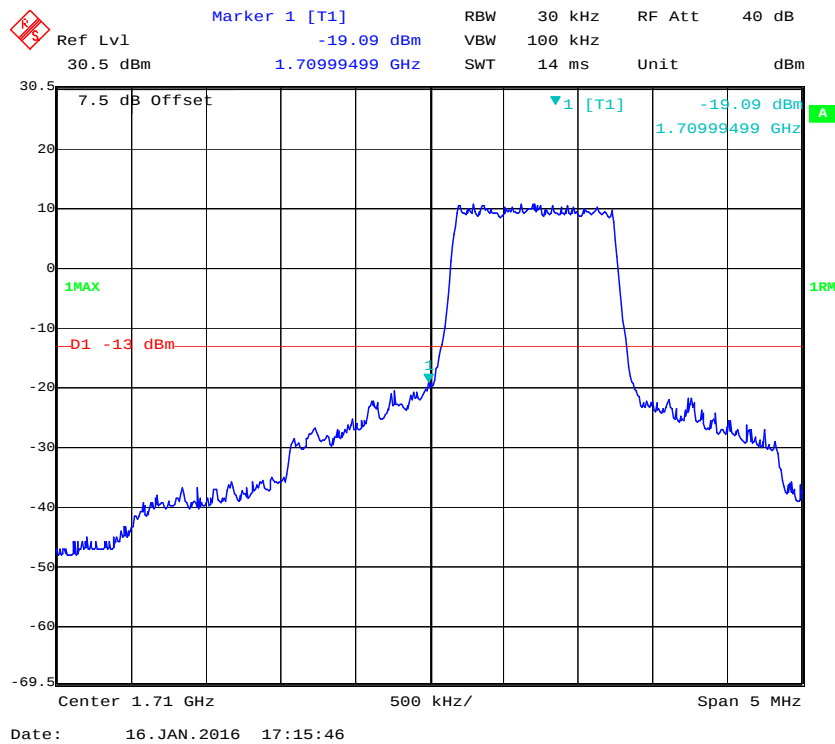
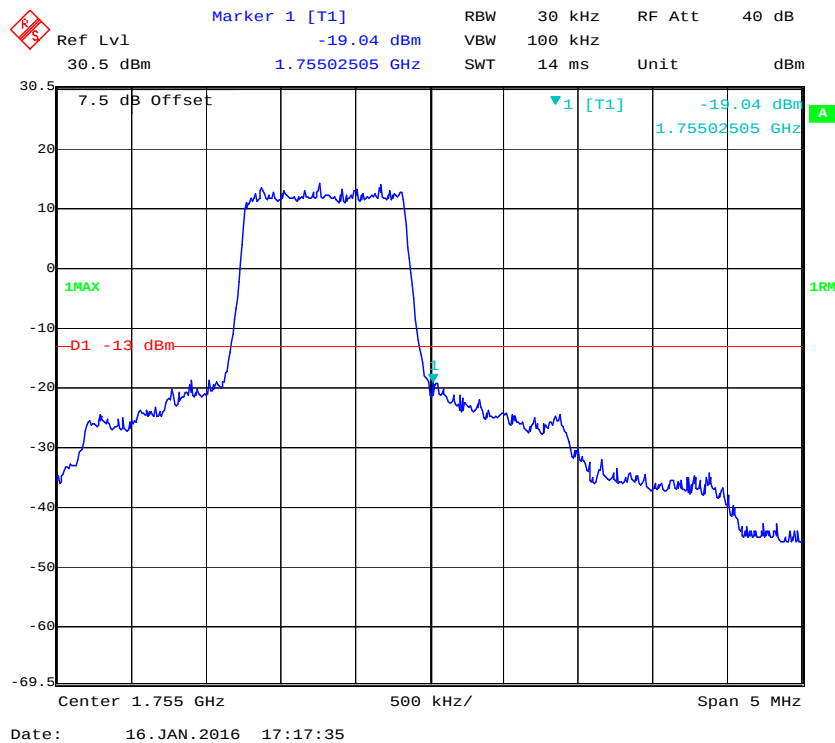
16-QAM (1.4 MHz, FULL RB) - Left Band Edge**16-QAM (1.4 MHz, FULL RB) - Right Band Edge**



QPSK (3.0 MHz, FULL RB) - Left Band Edge


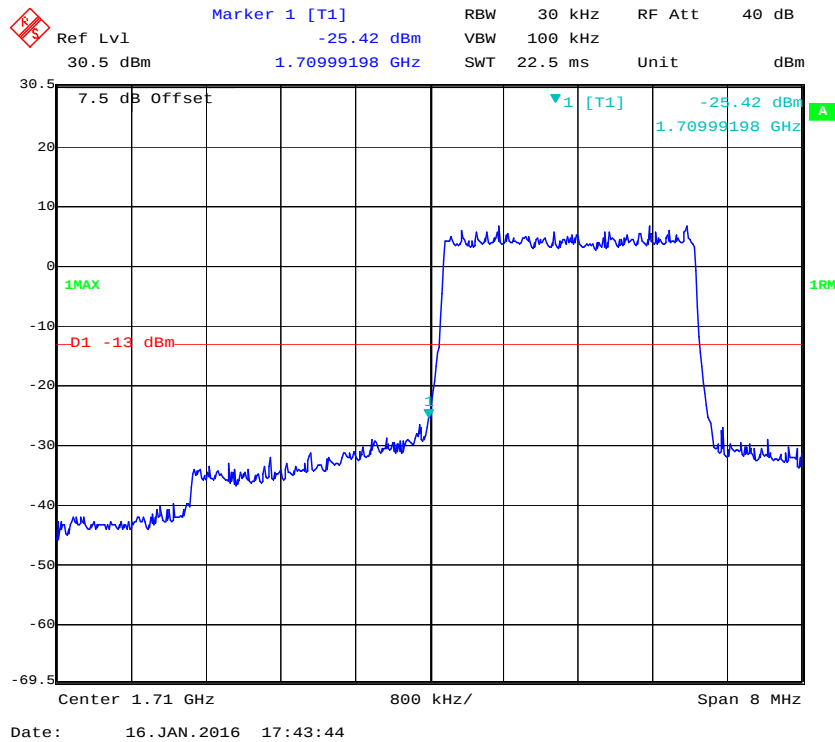


QPSK (3.0 MHz, FULL RB) - Right Band Edge

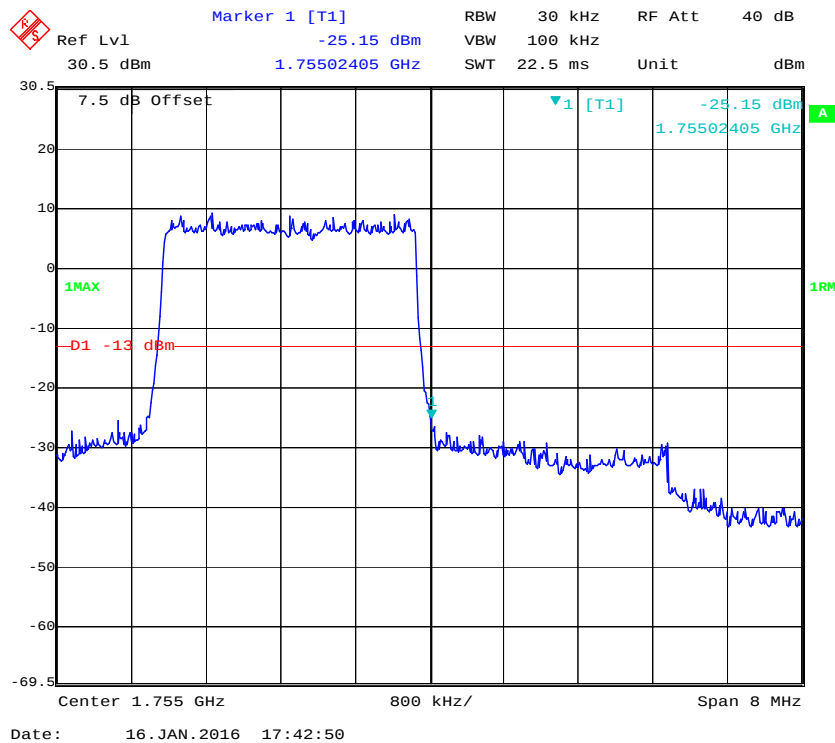


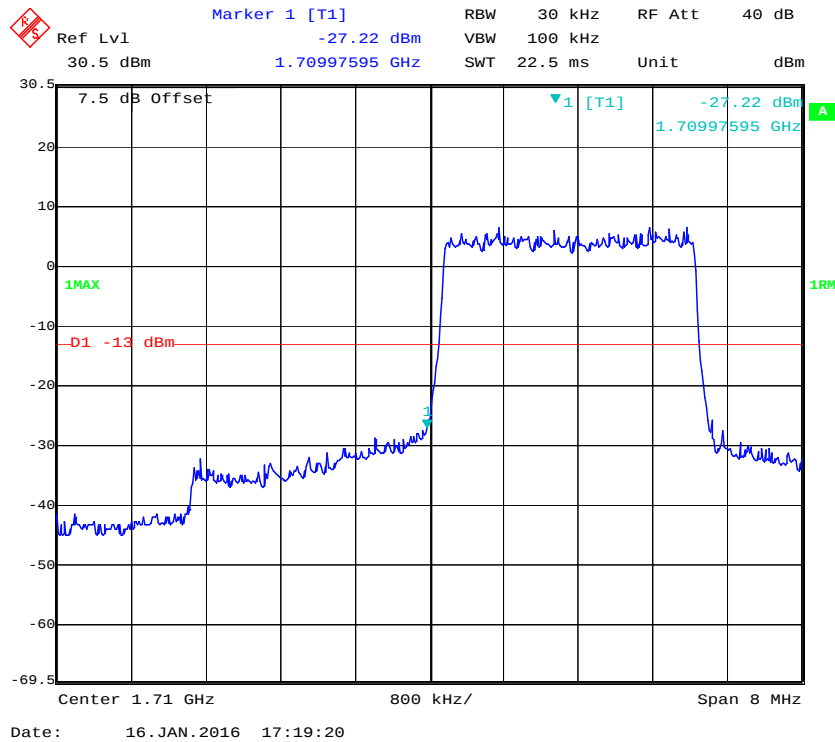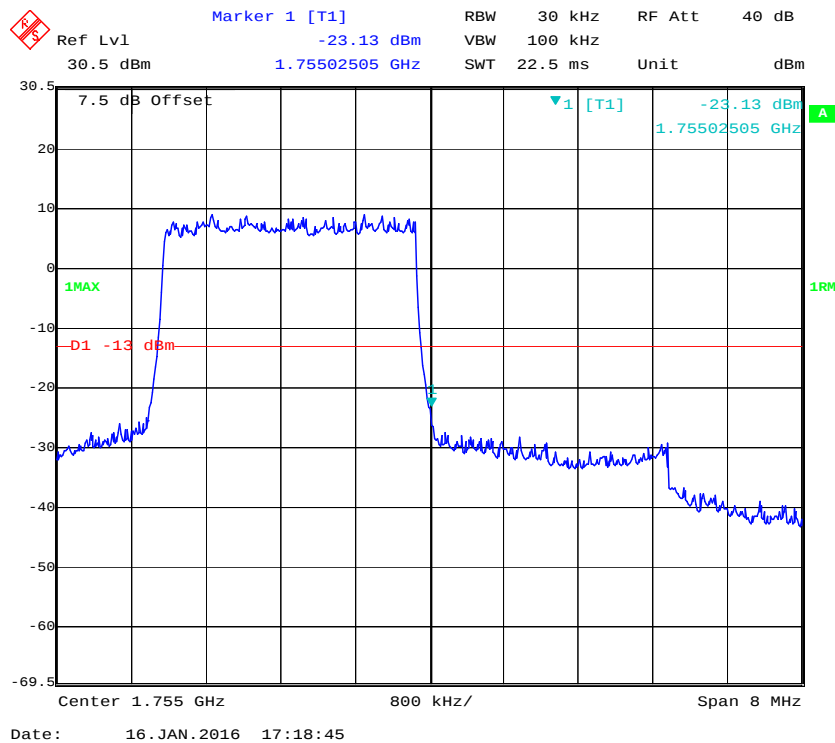16-QAM (3.0 MHz, FULL RB) - Left Band Edge**16-QAM (3.0 MHz, FULL RB) - Right Band Edge**

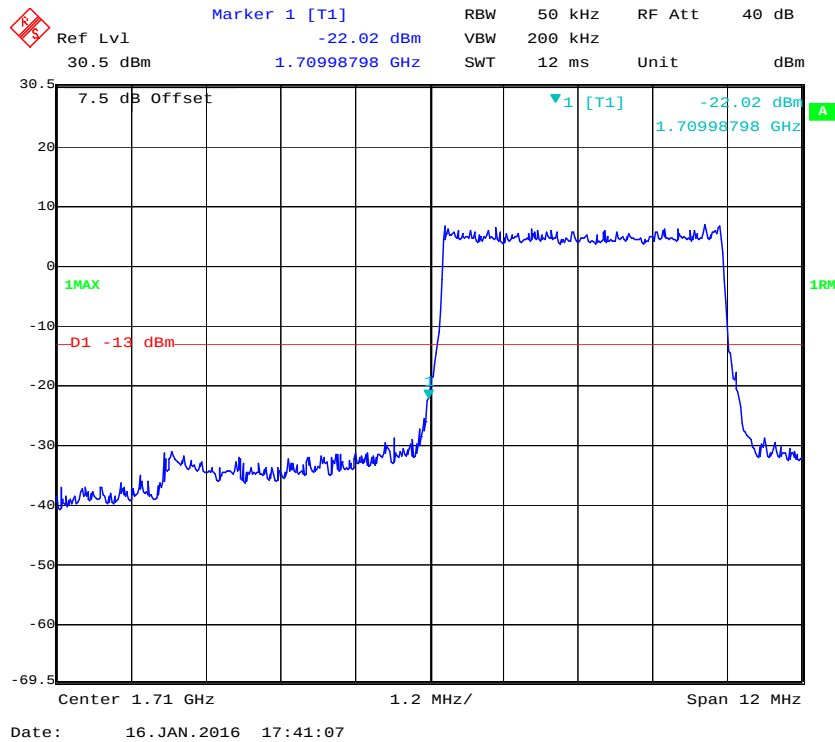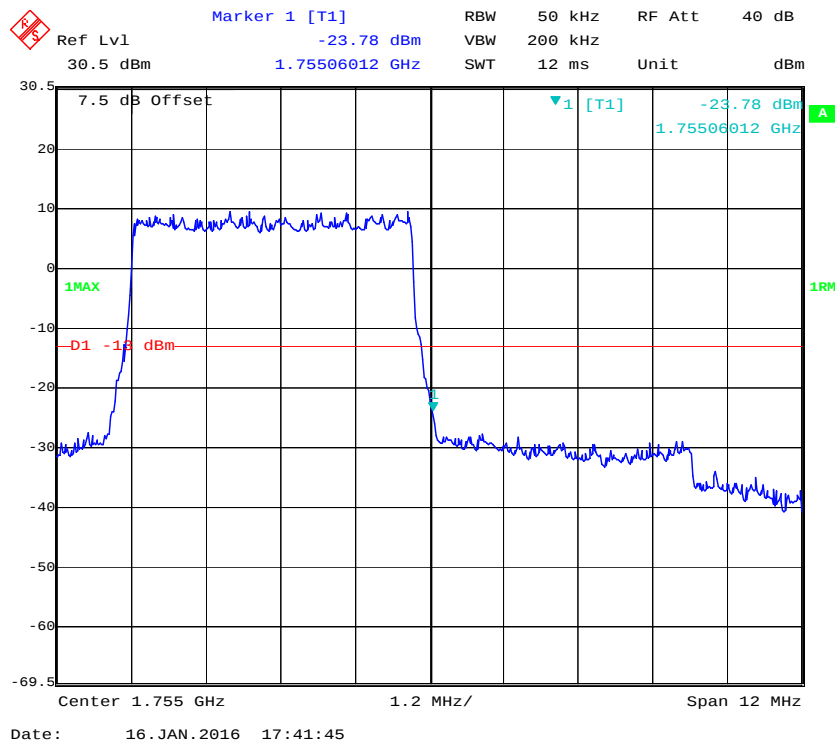
QPSK (5.0 MHz, FULL RB) - Left Band Edge**QPSK (5.0 MHz, FULL RB) - Right Band Edge**

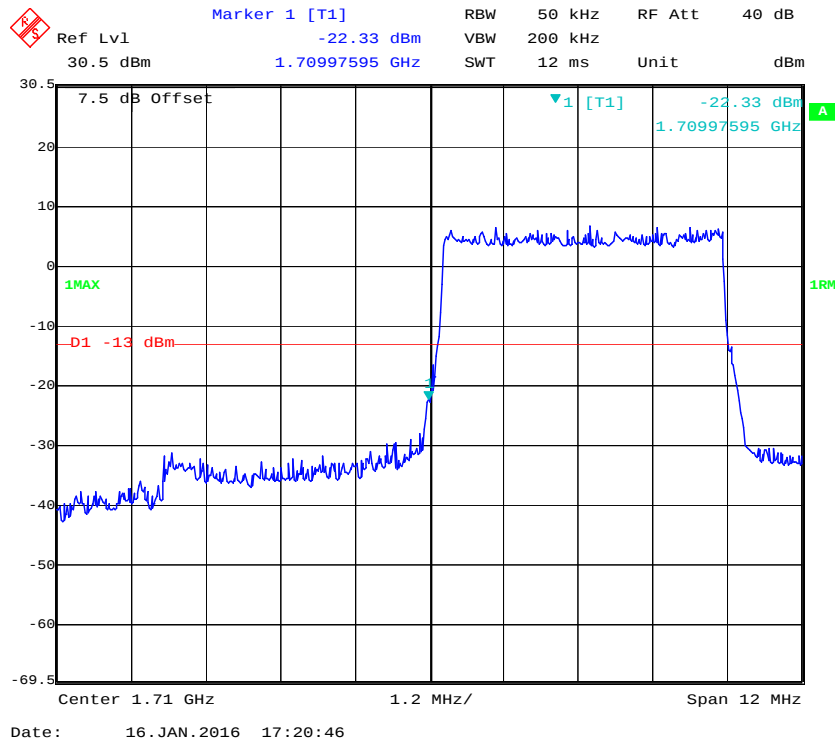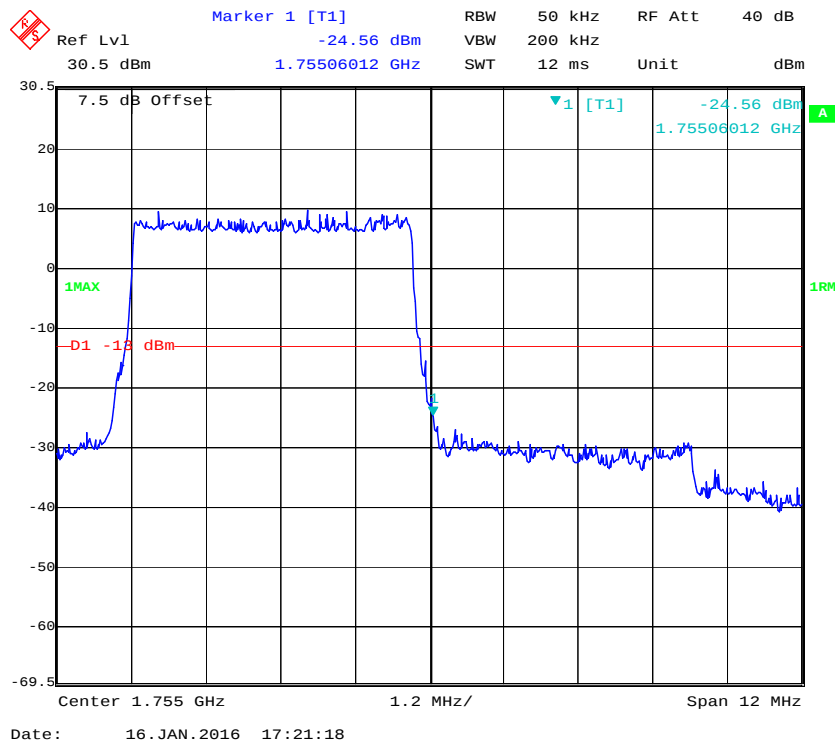16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**


QPSK (10.0 MHz, FULL RB) - Left Band Edge

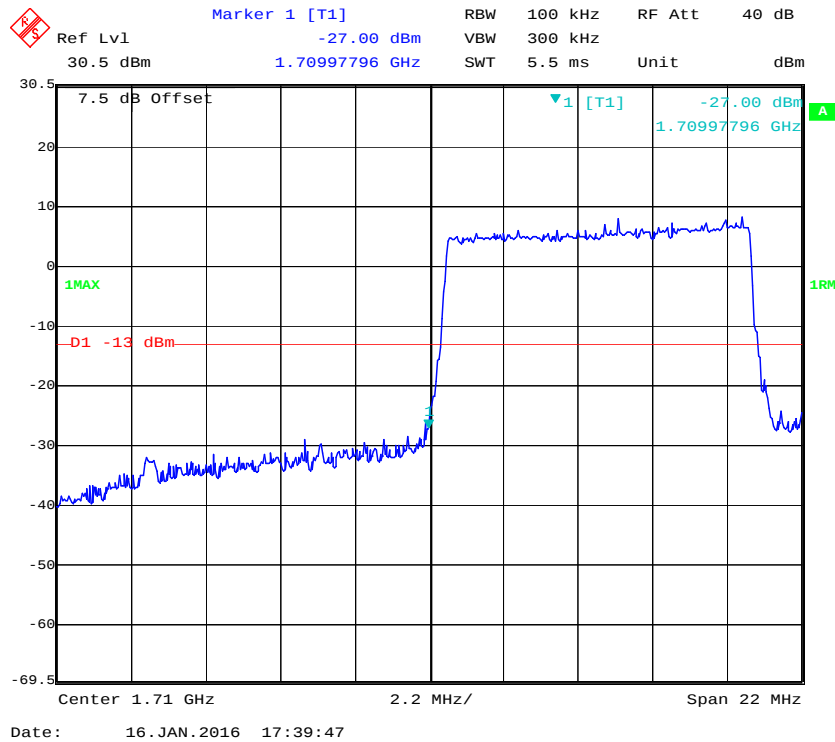


QPSK (10.0 MHz, FULL RB) - Right Band Edge


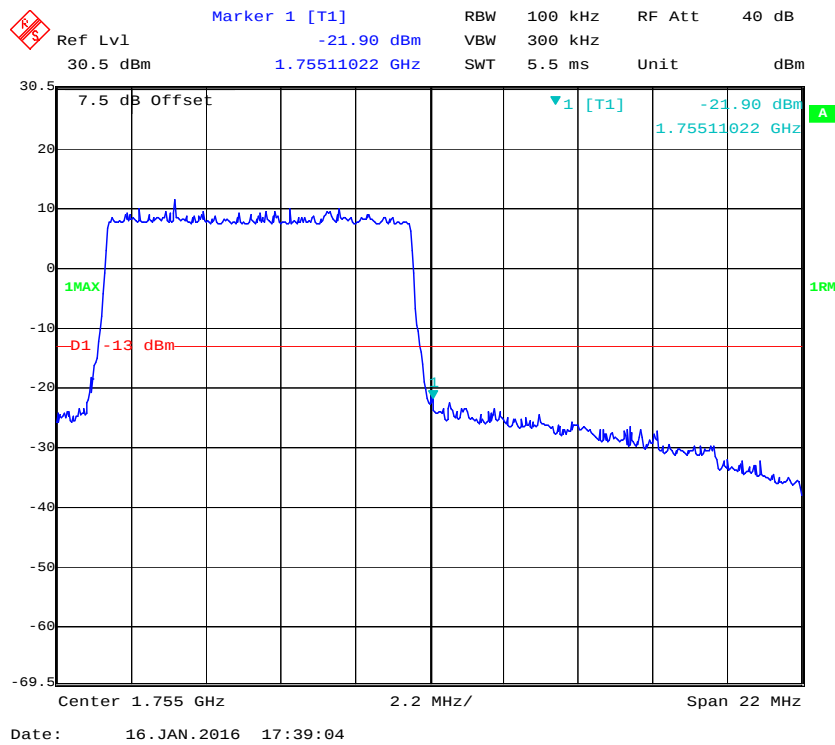




16-QAM (10.0 MHz, FULL RB) - Left Band Edge


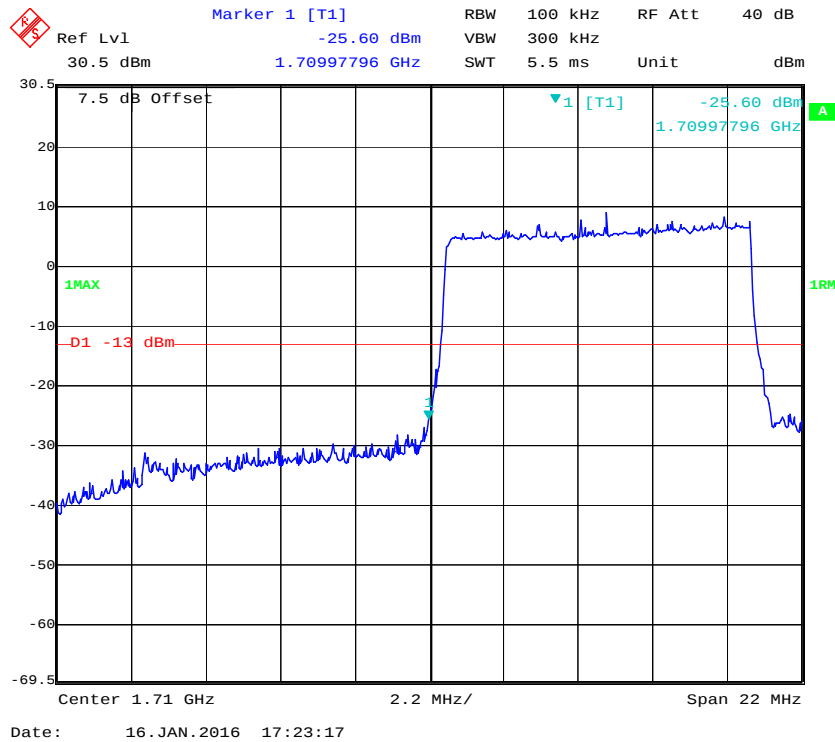


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

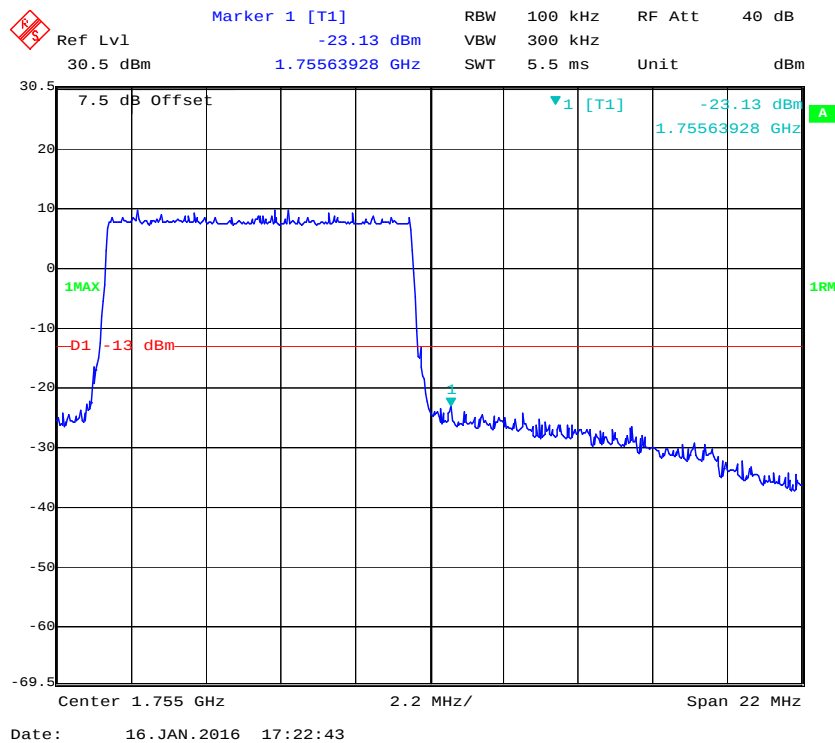


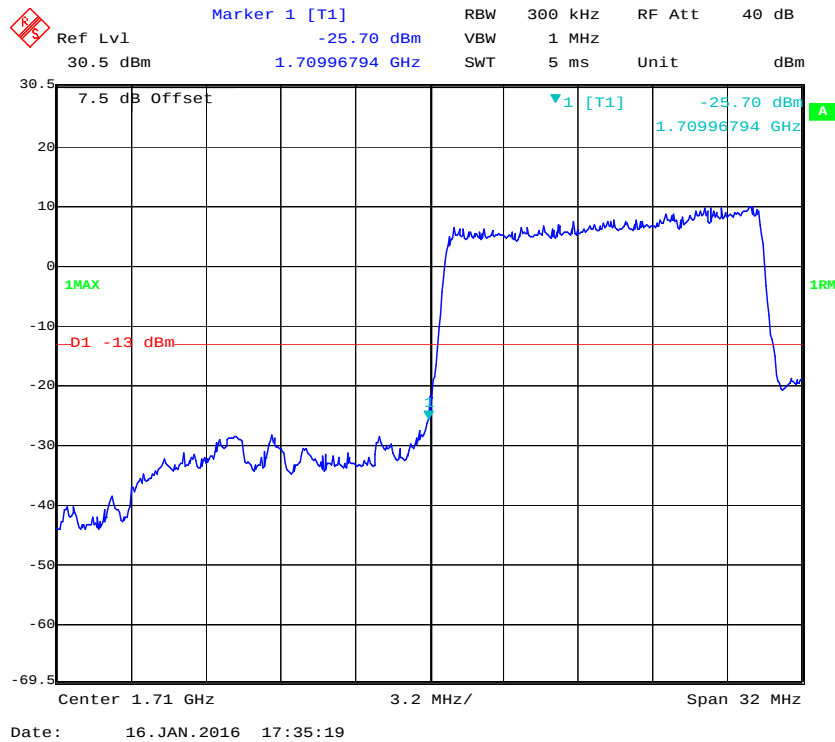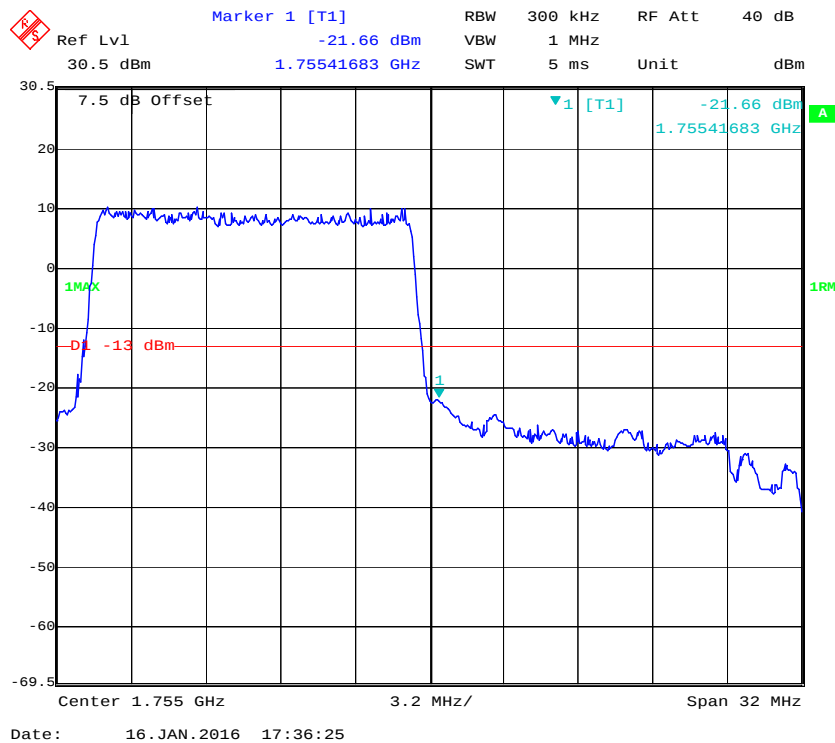QPSK (15.0 MHz, FULL RB) - Left Band Edge**QPSK (15.0 MHz, FULL RB) - Right Band Edge**

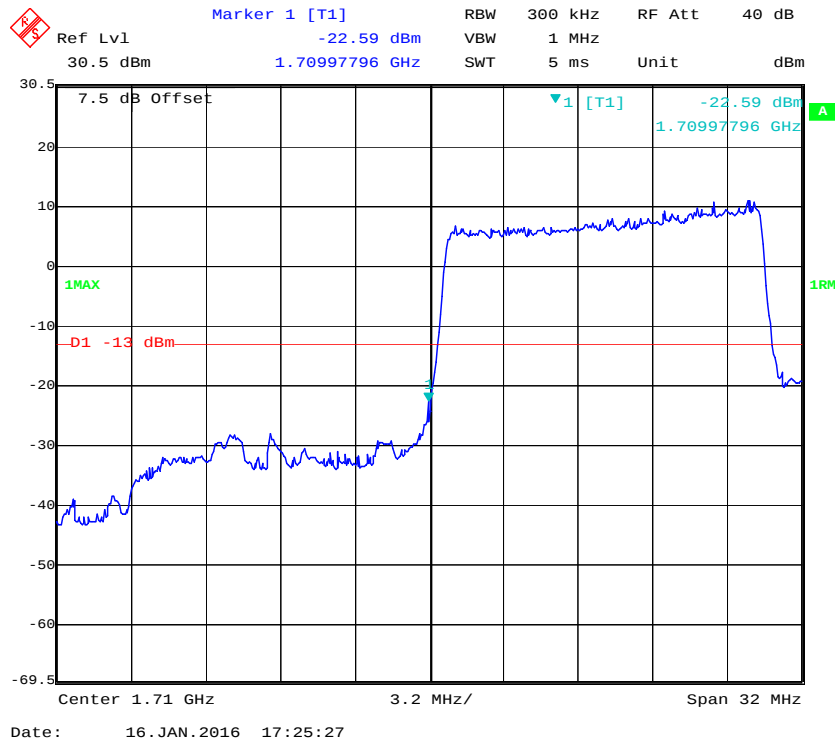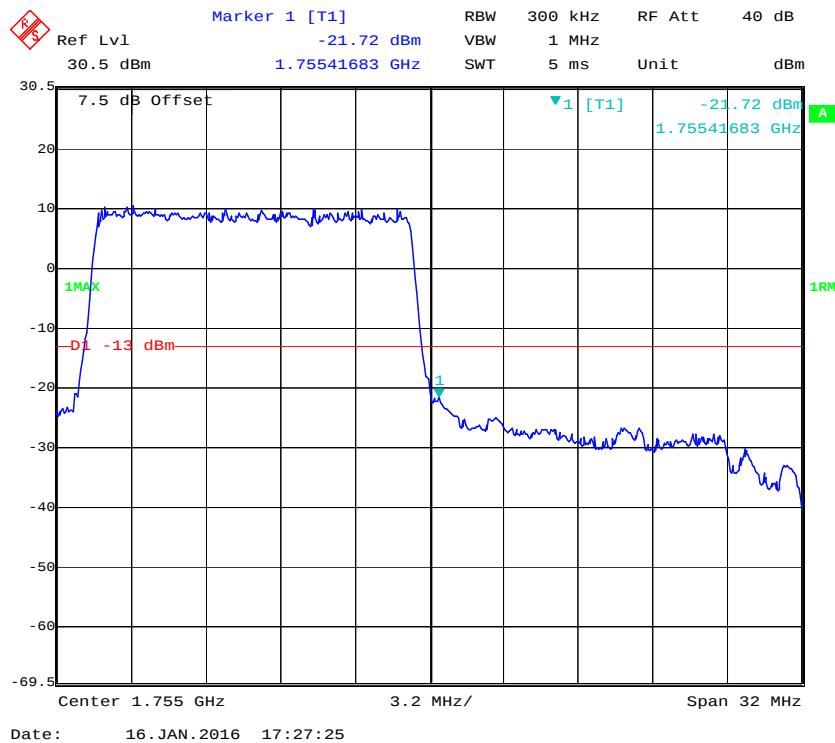
16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**

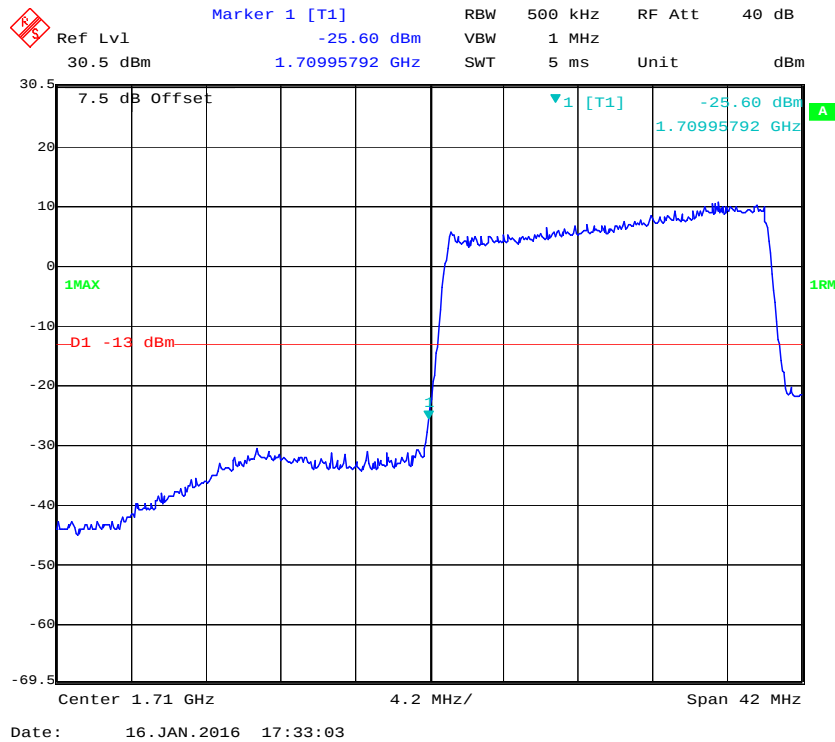
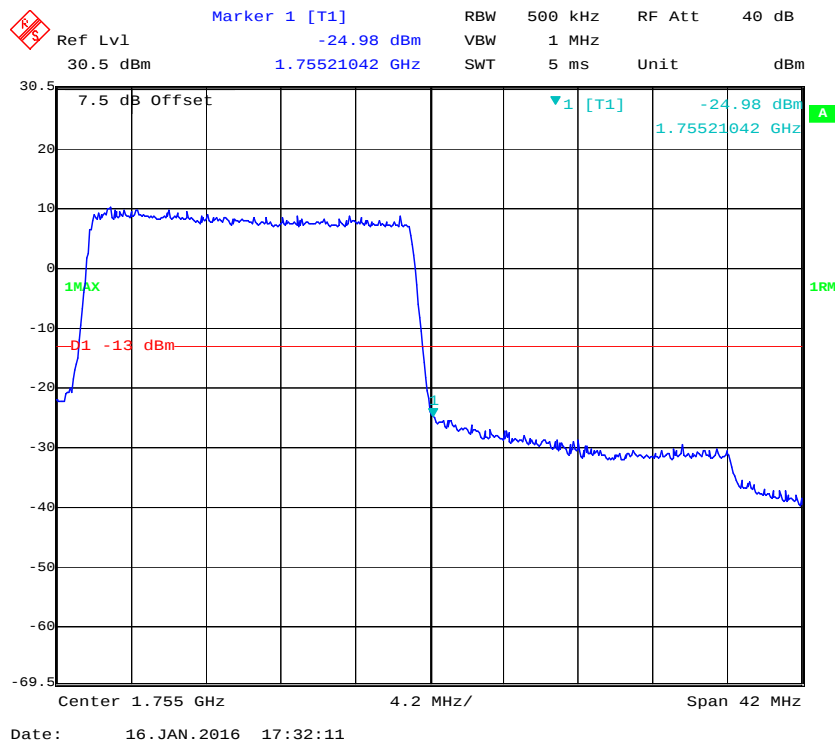
QPSK (20.0 MHz, FULL RB) - Left Band Edge**QPSK (20.0 MHz, FULL RB) - Right Band Edge**

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

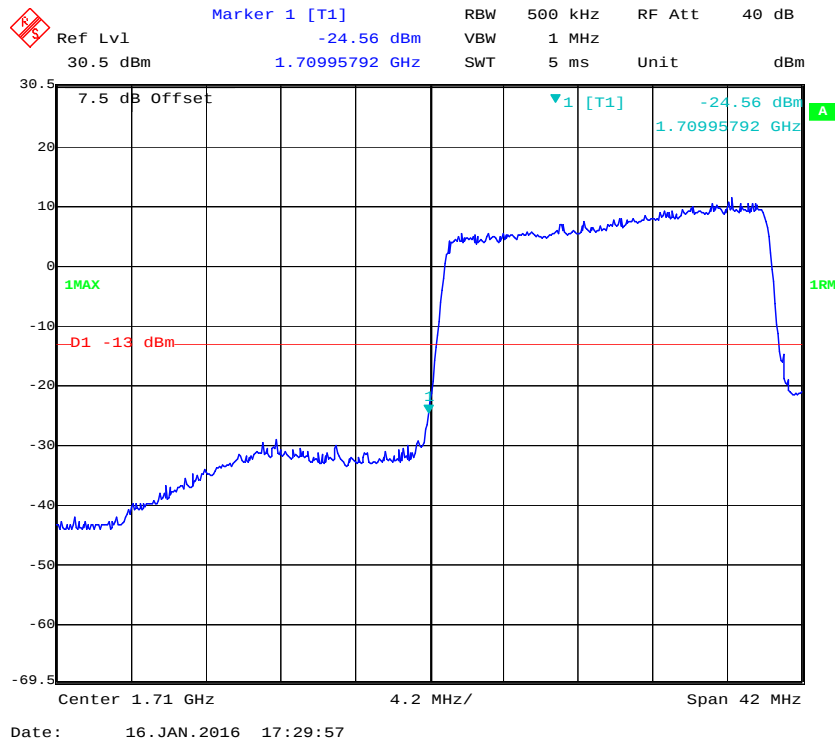


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

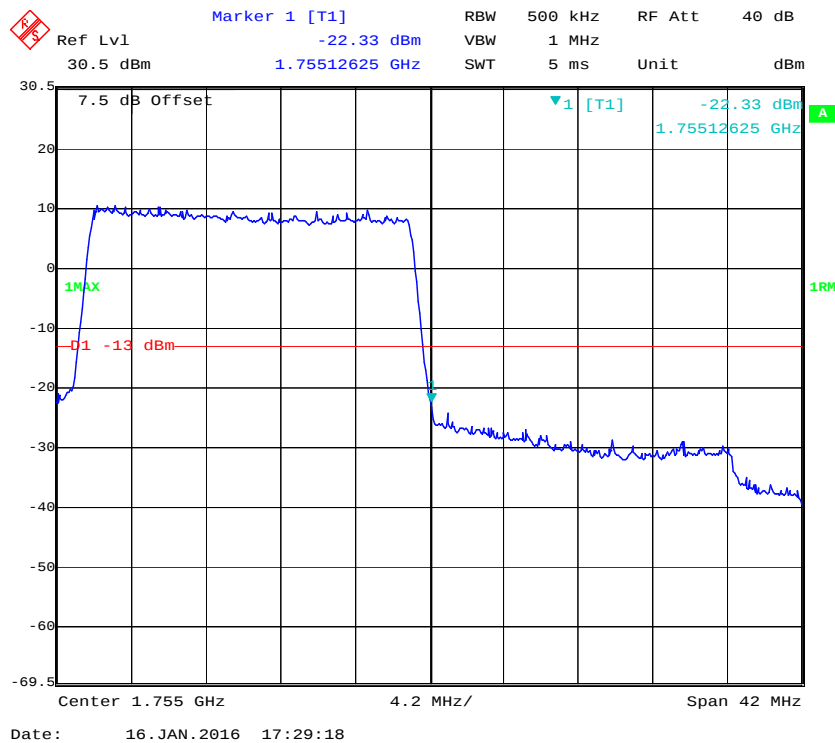


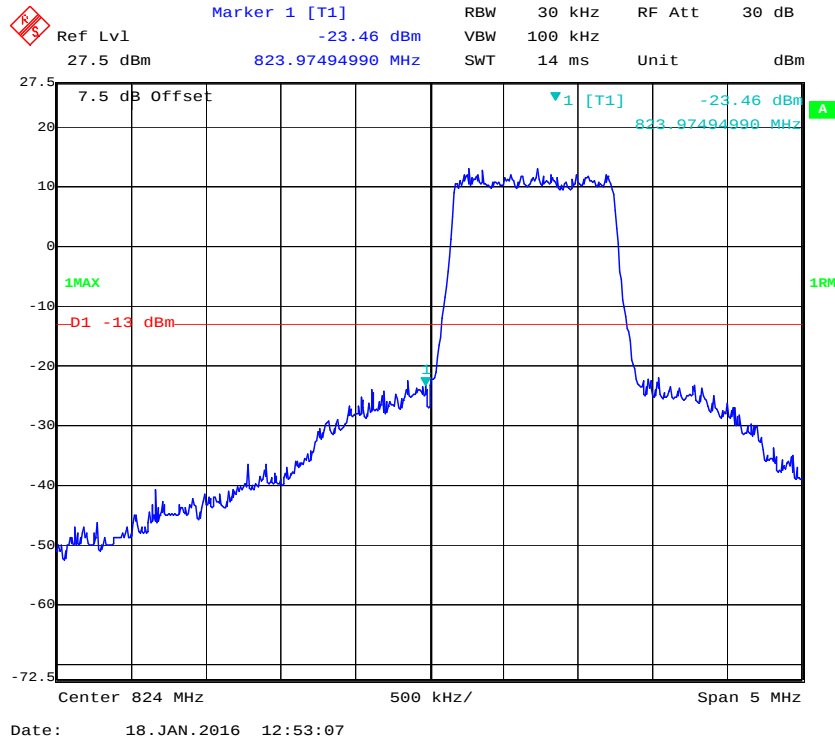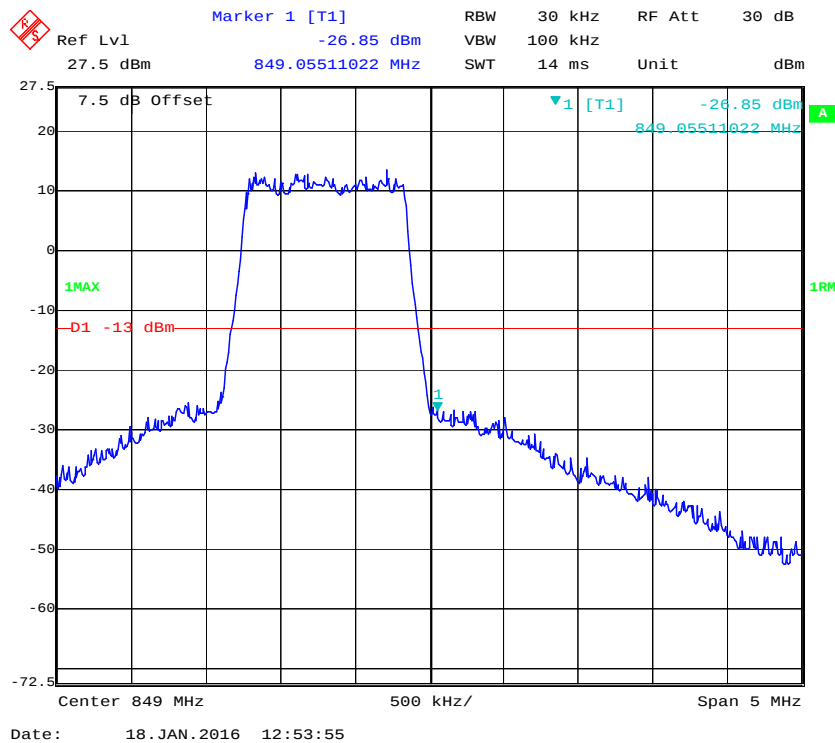Band 5:**QPSK (1.4 MHz, FULL RB) - Left Band Edge****QPSK (1.4 MHz, FULL RB) - Right Band Edge**


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

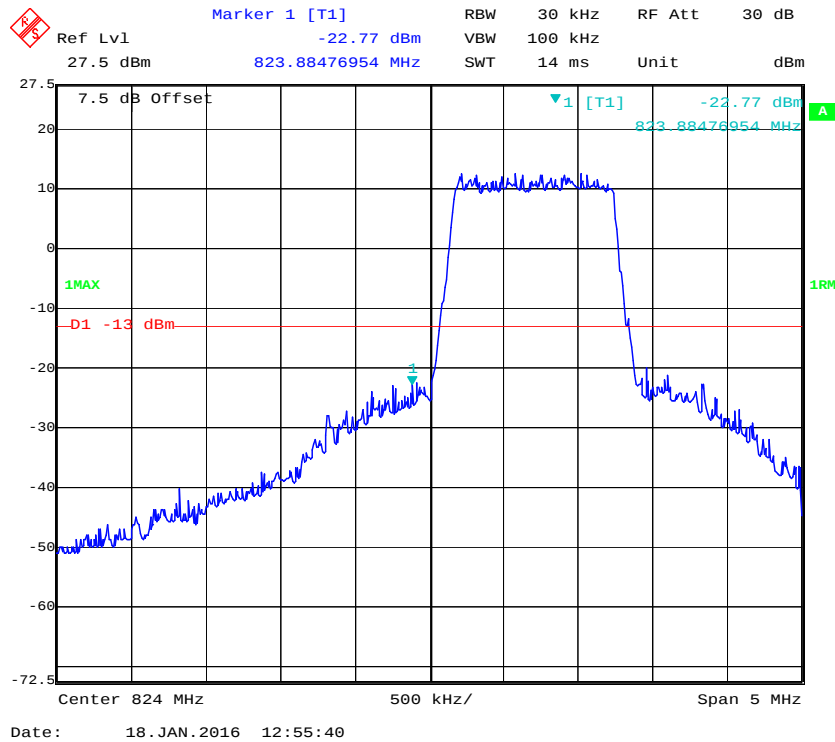


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

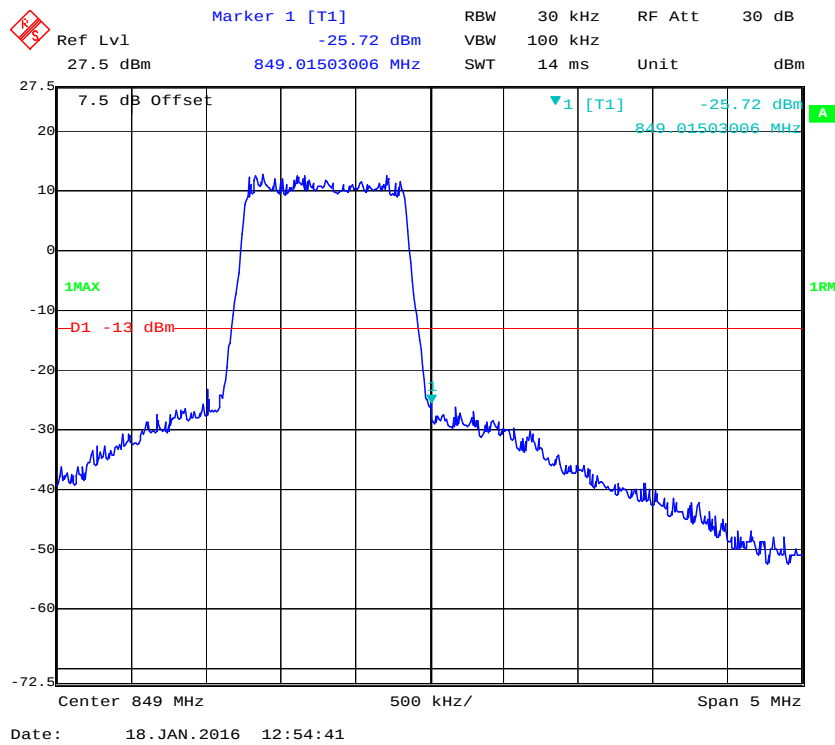


QPSK (3.0 MHz, FULL RB) - Left Band Edge

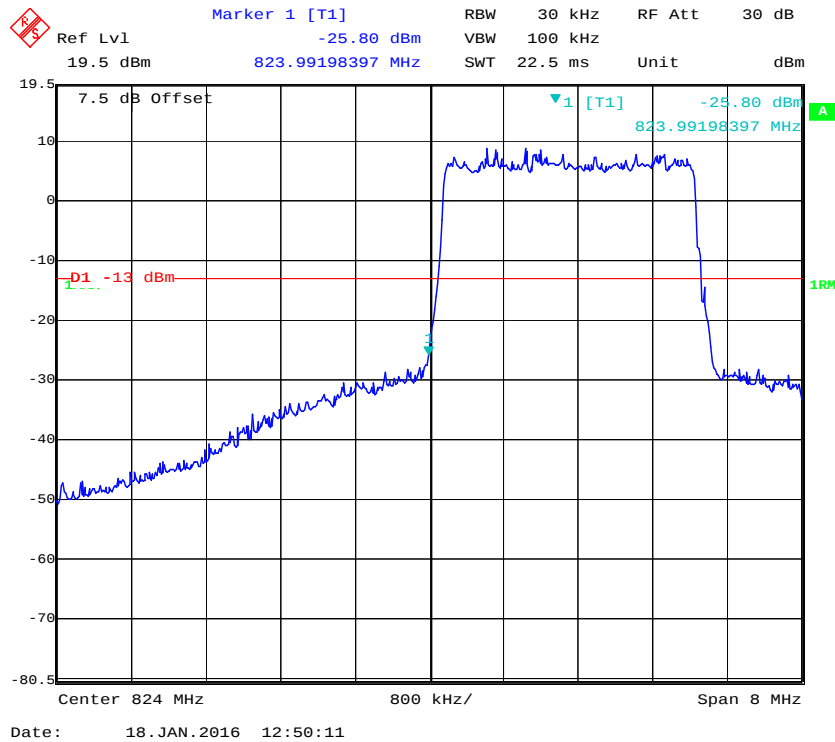


QPSK (3.0 MHz, FULL RB) - Right Band Edge

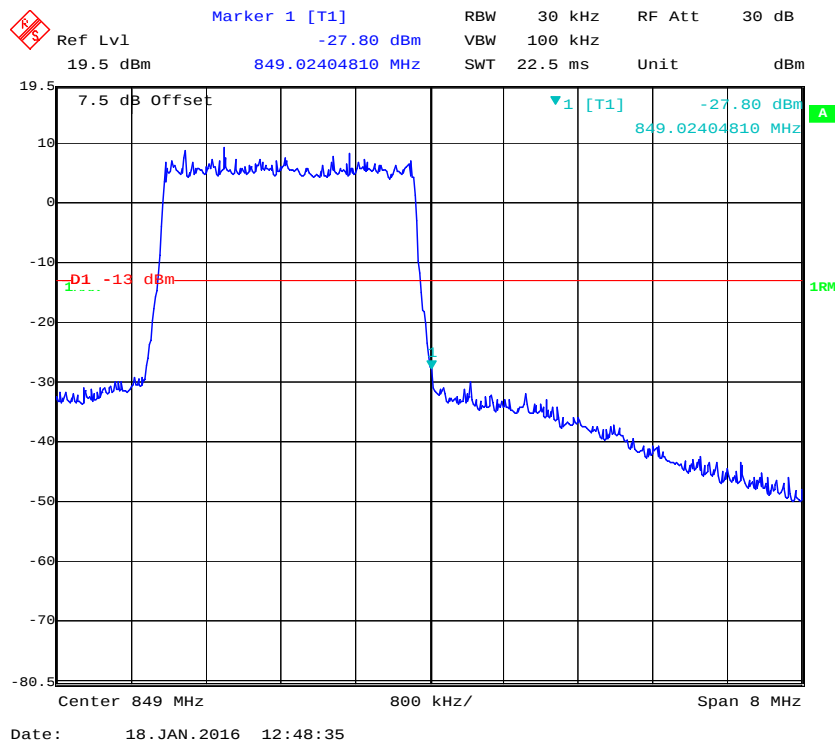


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

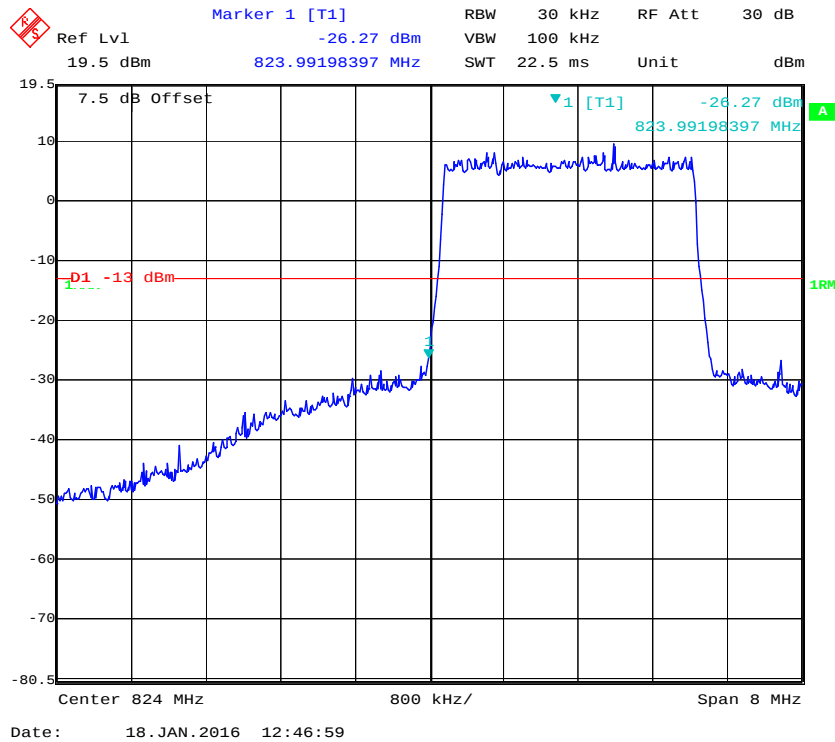


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

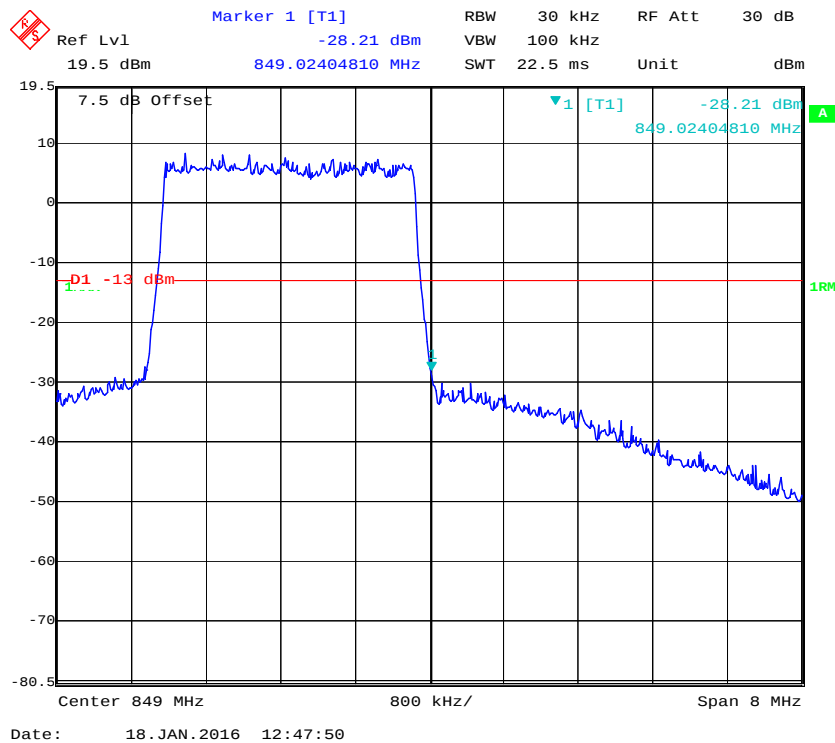


QPSK (5.0 MHz, FULL RB) - Left Band Edge

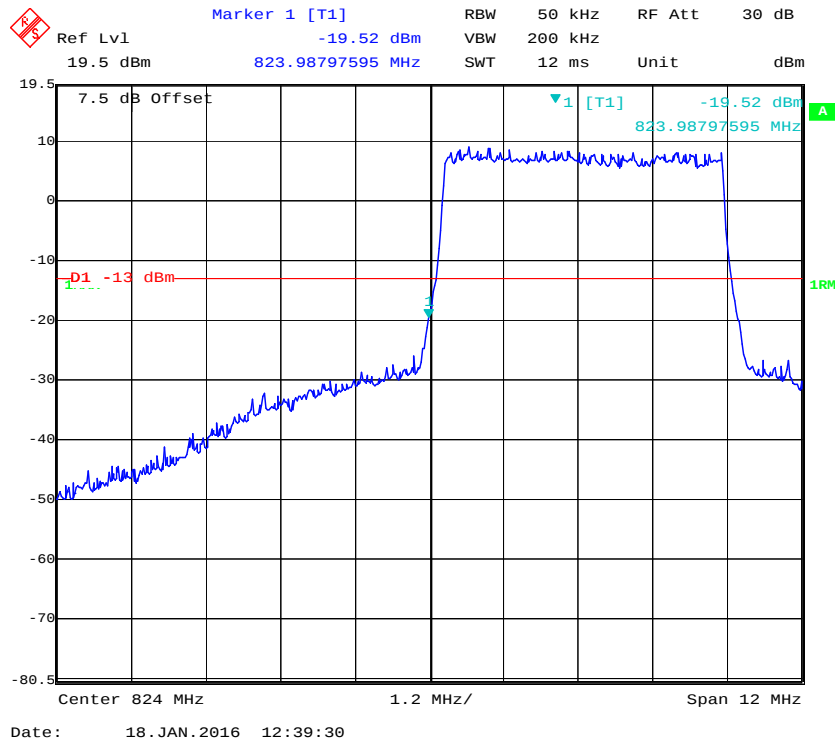


QPSK (5.0 MHz, FULL RB) - Right Band Edge

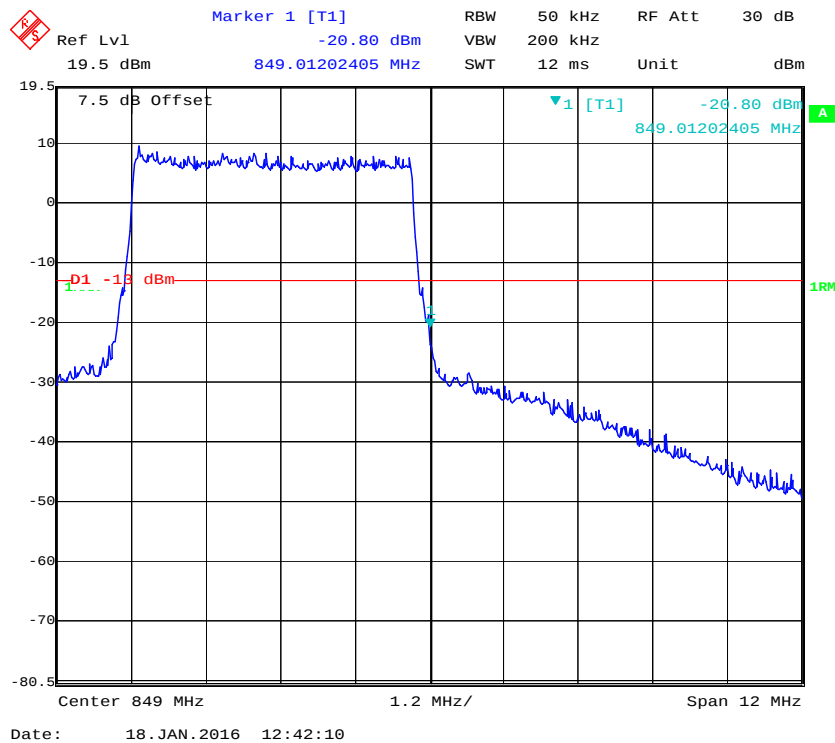


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

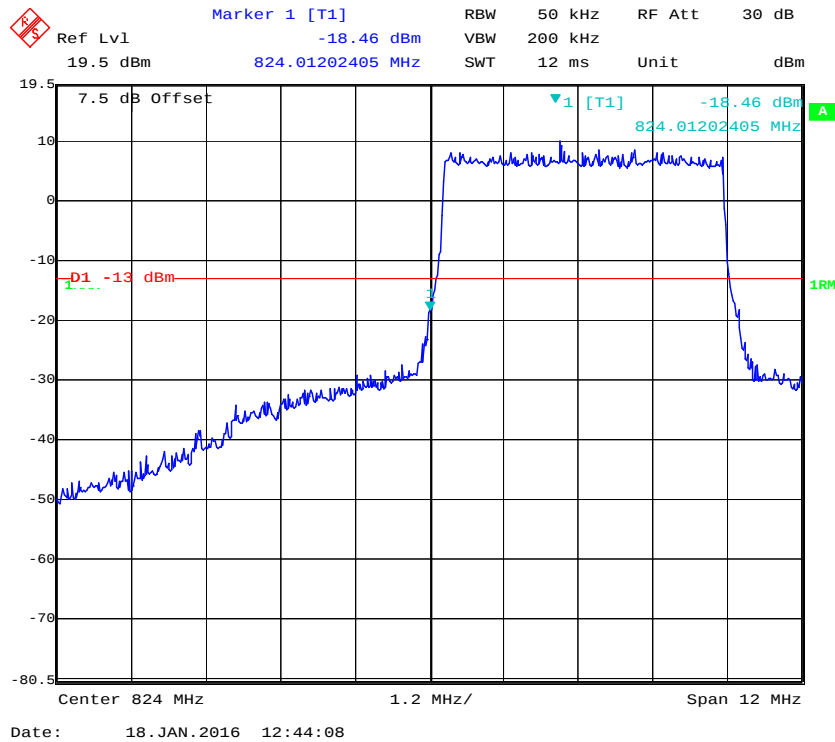


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

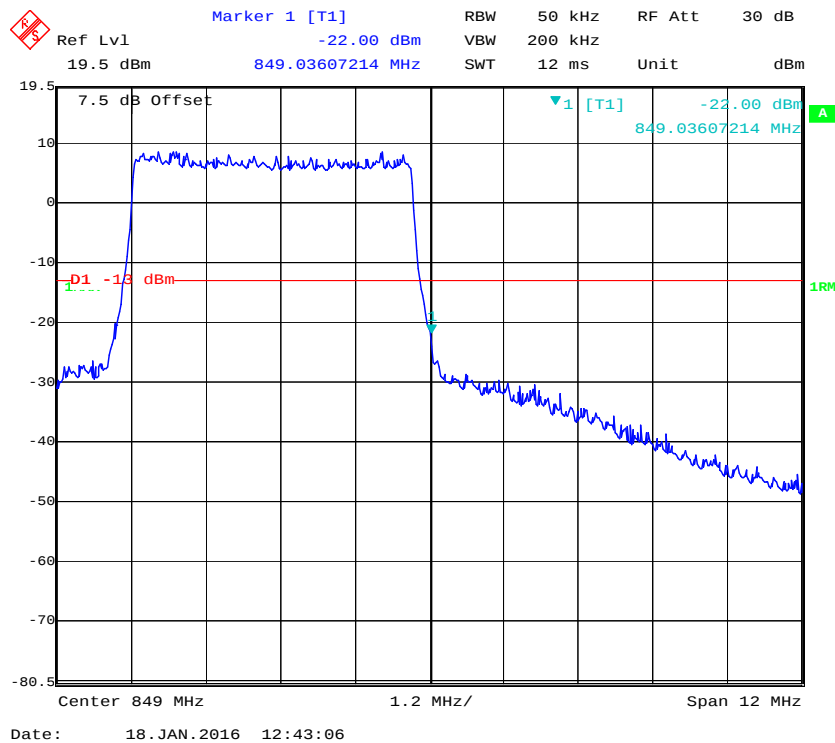


QPSK (10.0 MHz, FULL RB) - Left Band Edge

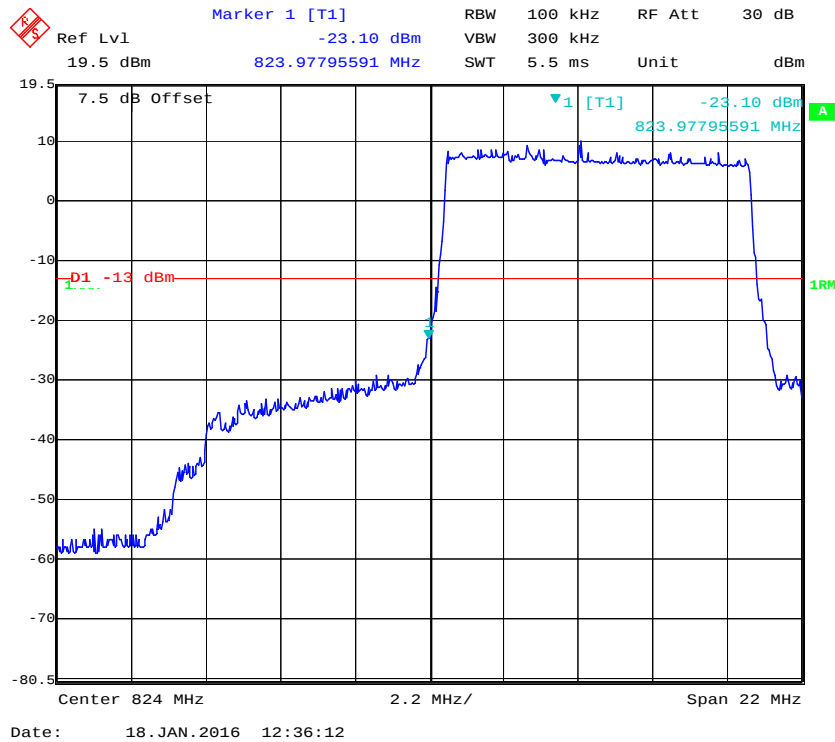


QPSK (10.0 MHz, FULL RB) - Right Band Edge

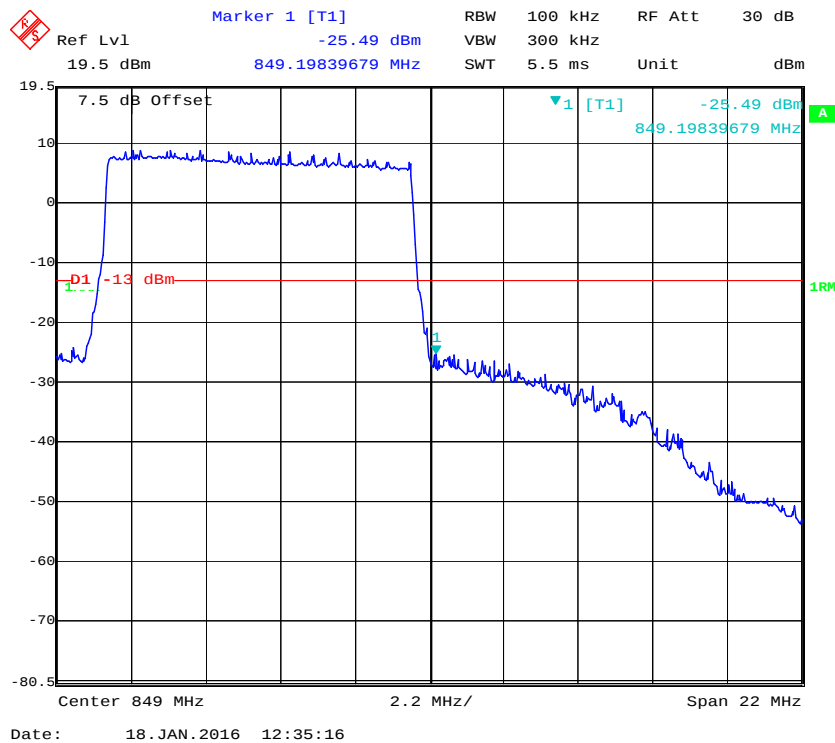

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

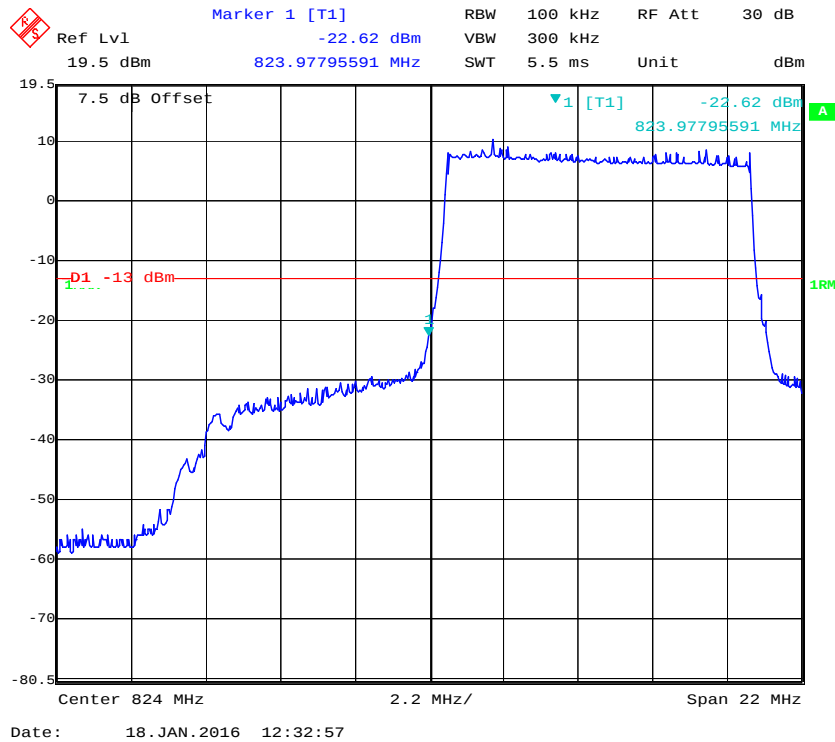


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

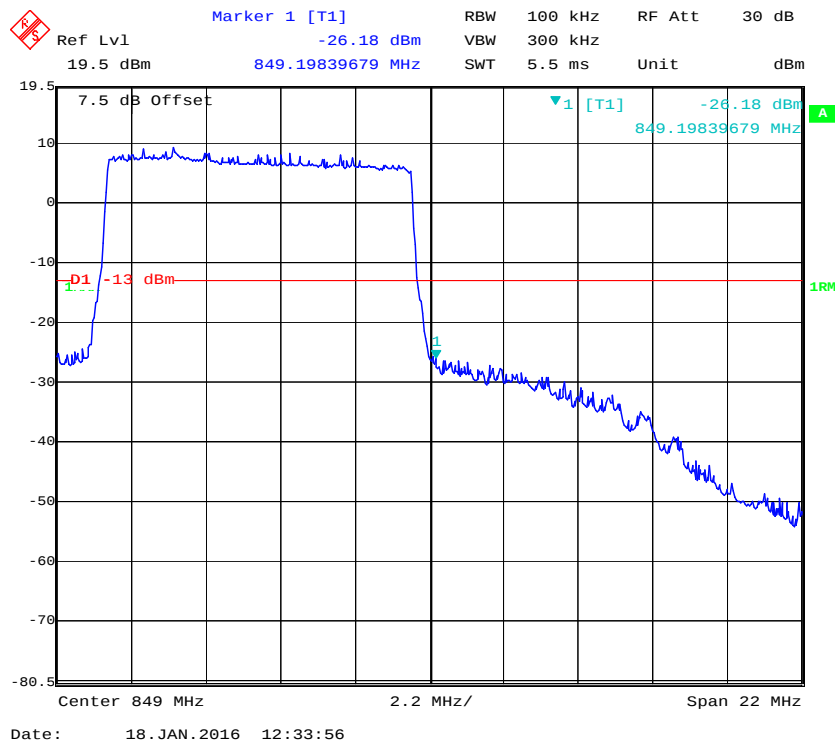




Band 7:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

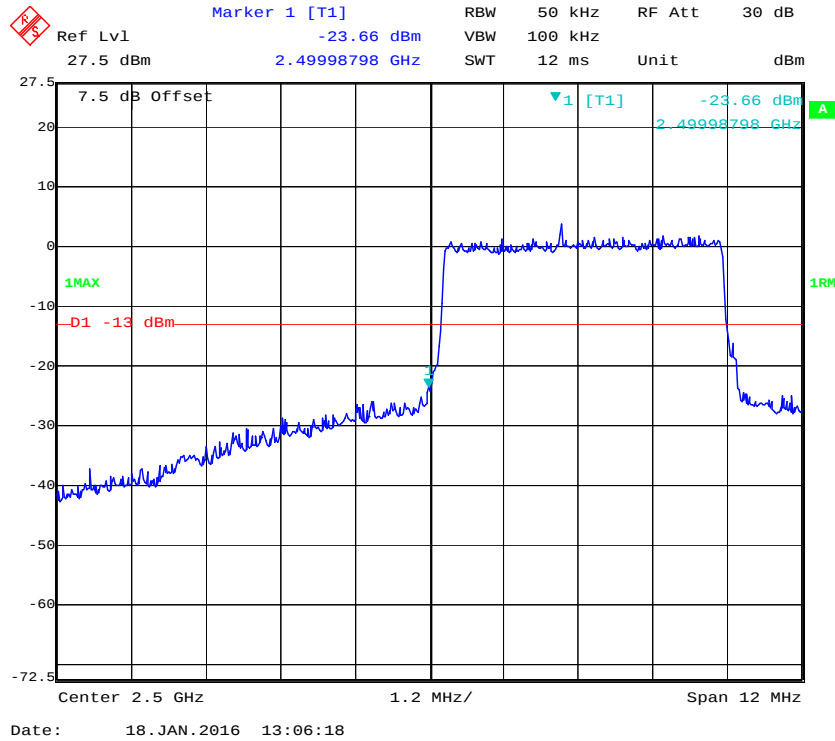


QPSK (5.0 MHz, FULL RB) - Right Band Edge

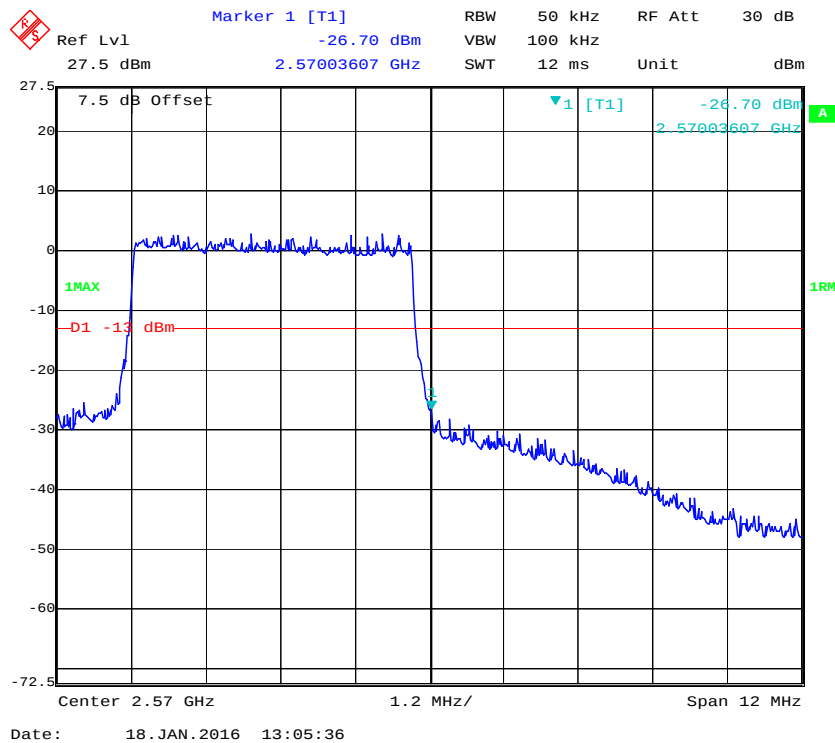


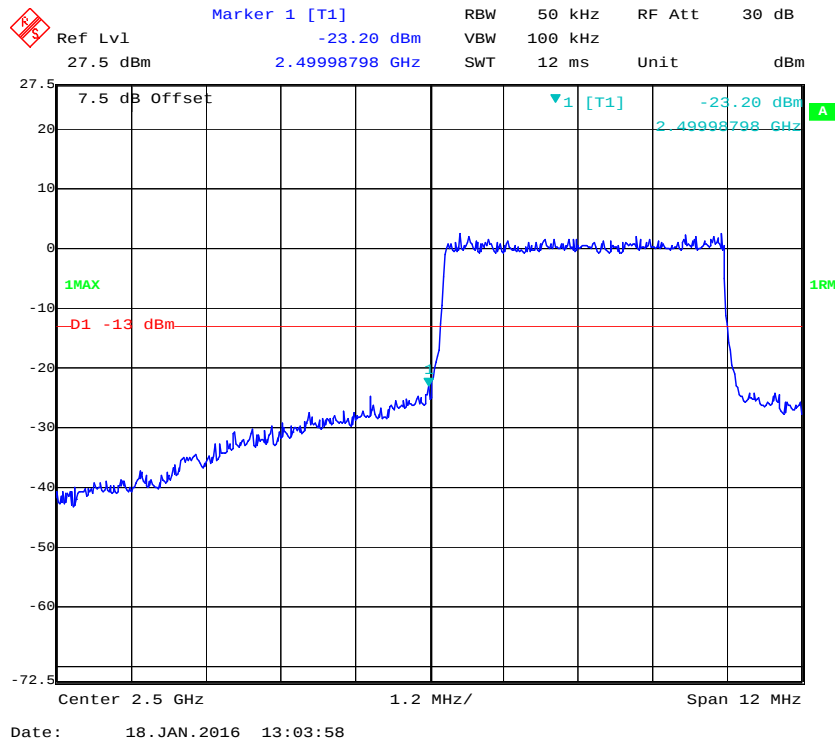
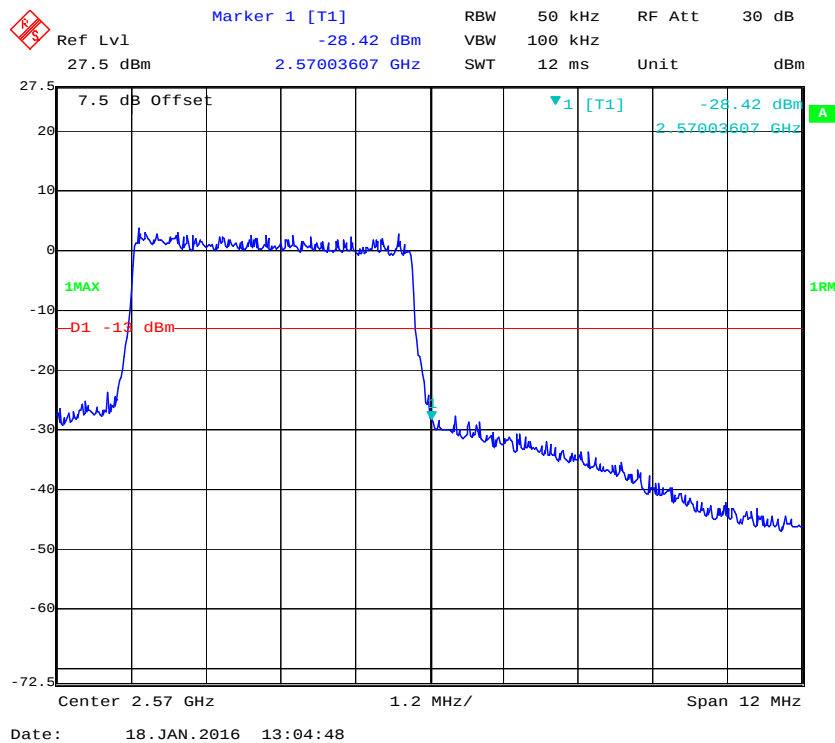
16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**

QPSK (10.0 MHz, FULL RB) - Left Band Edge

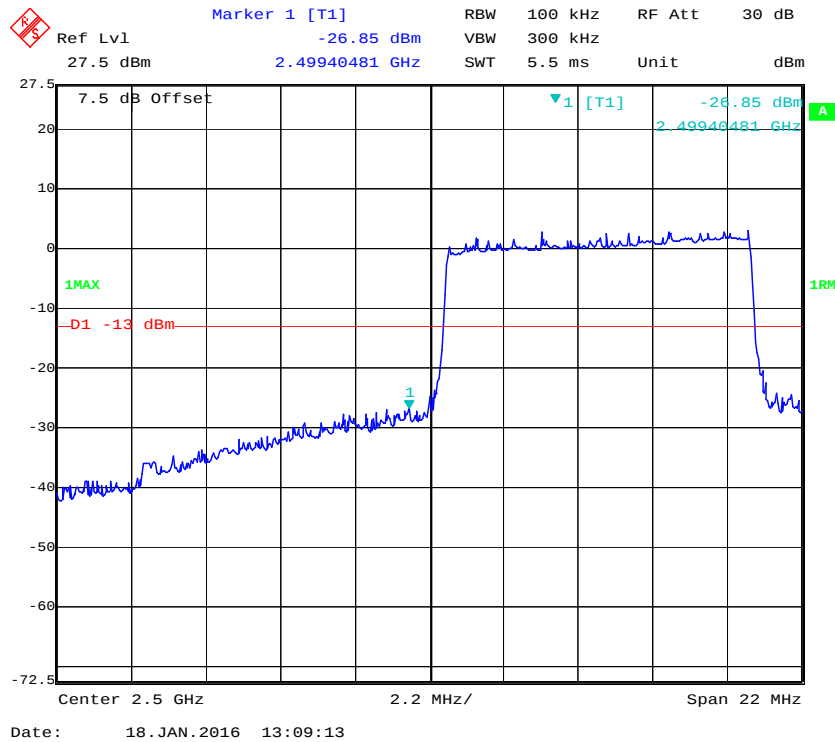


QPSK (10.0 MHz, FULL RB) - Right Band Edge

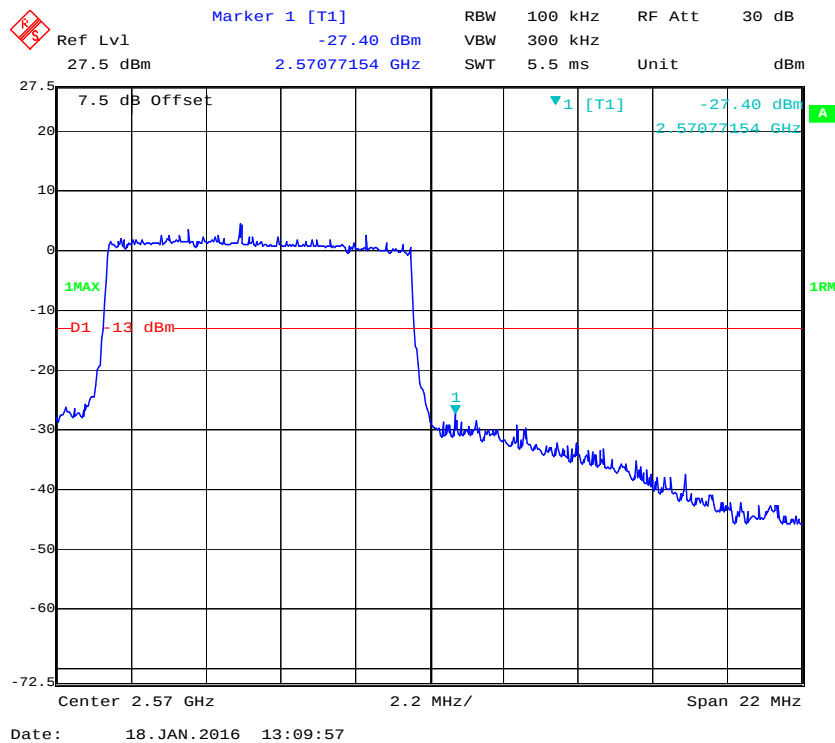


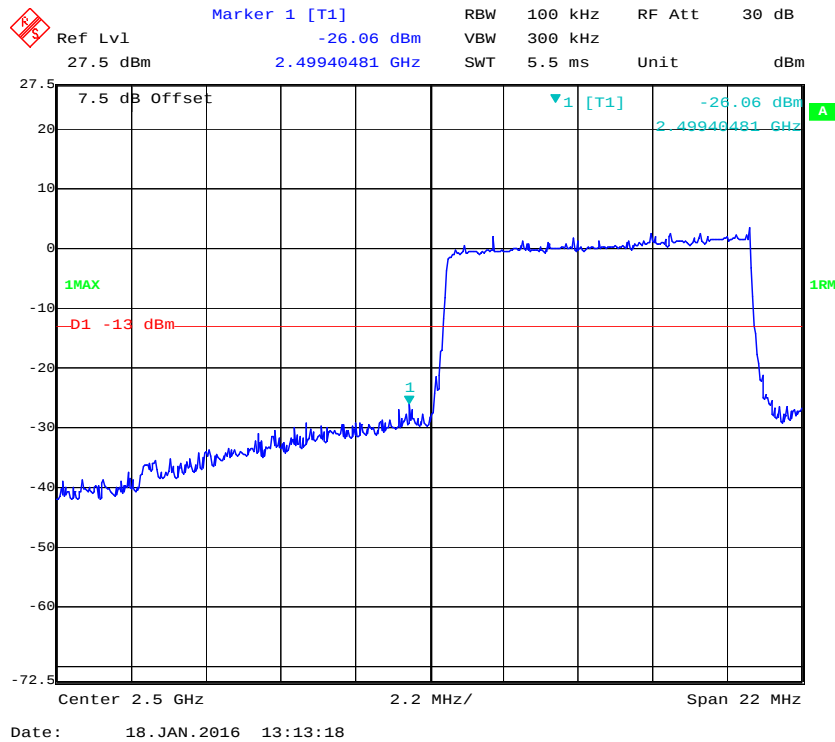
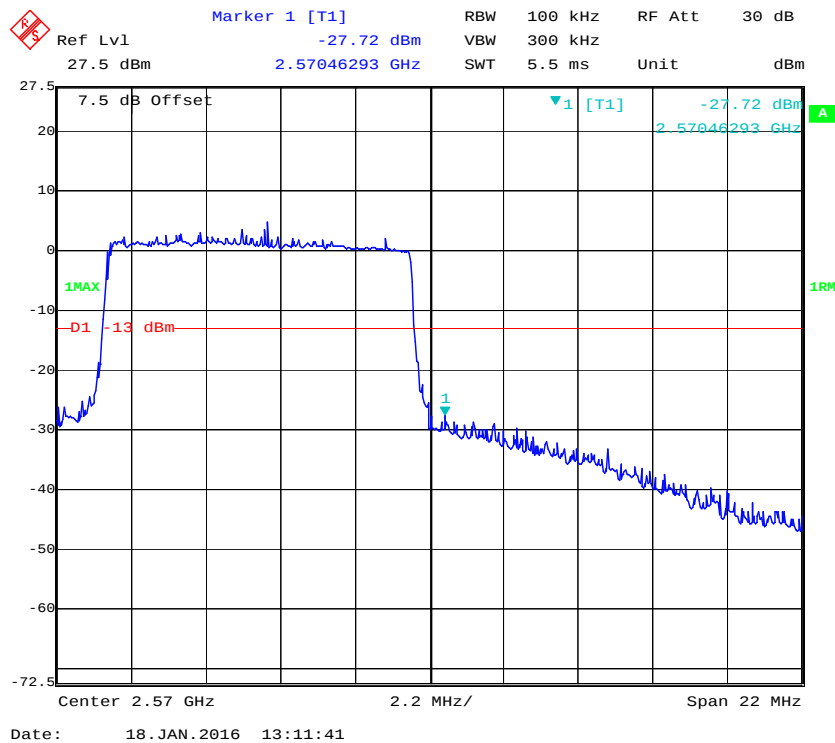
16-QAM (10.0 MHz, FULL RB) - Left Band Edge**16-QAM (10.0 MHz, FULL RB) - Right Band Edge**

QPSK (15 MHz, FULL RB) - Left Band Edge

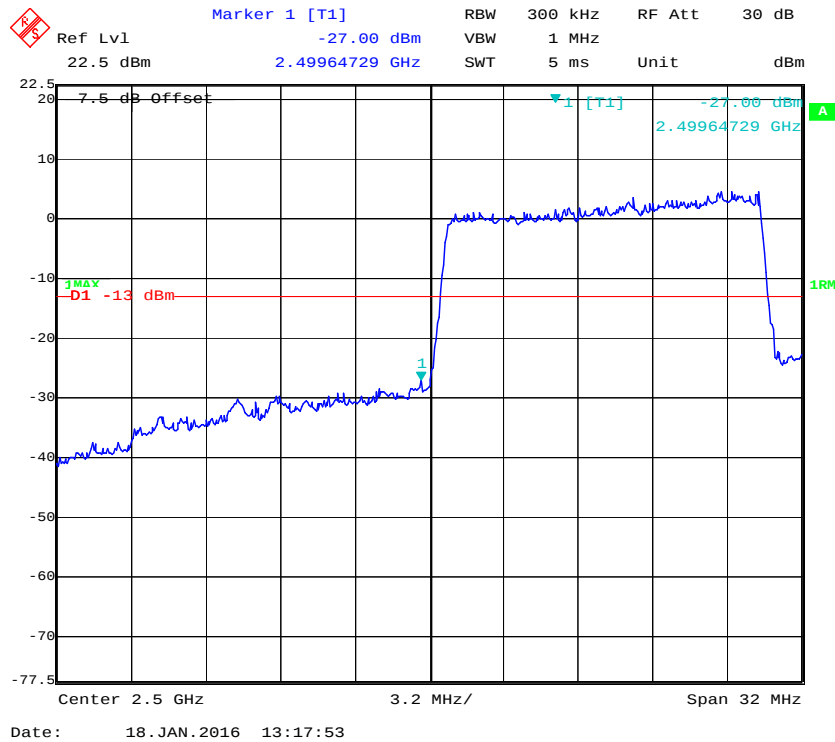


QPSK (15 MHz, FULL RB) - Right Band Edge

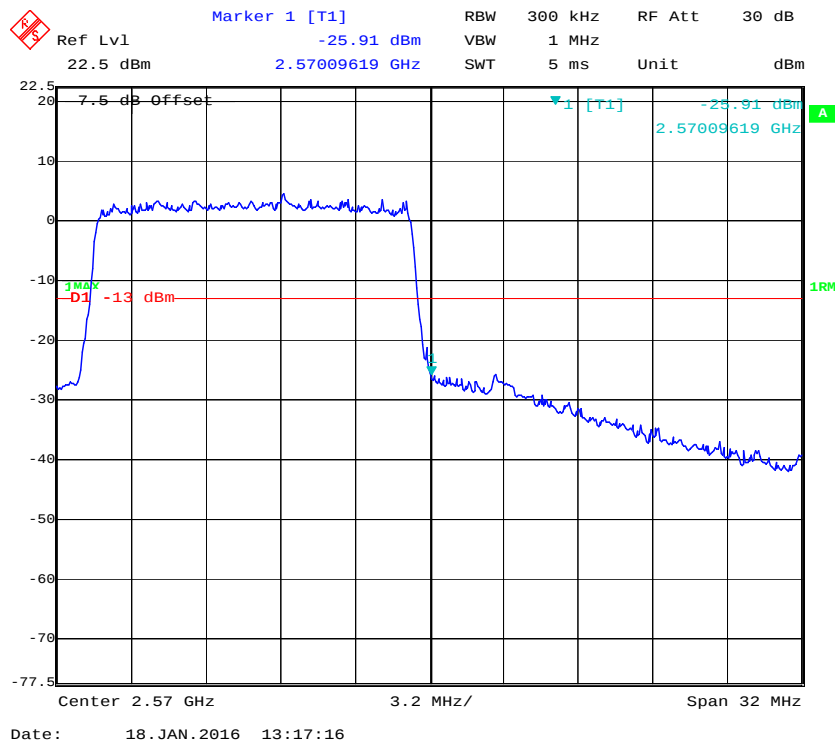


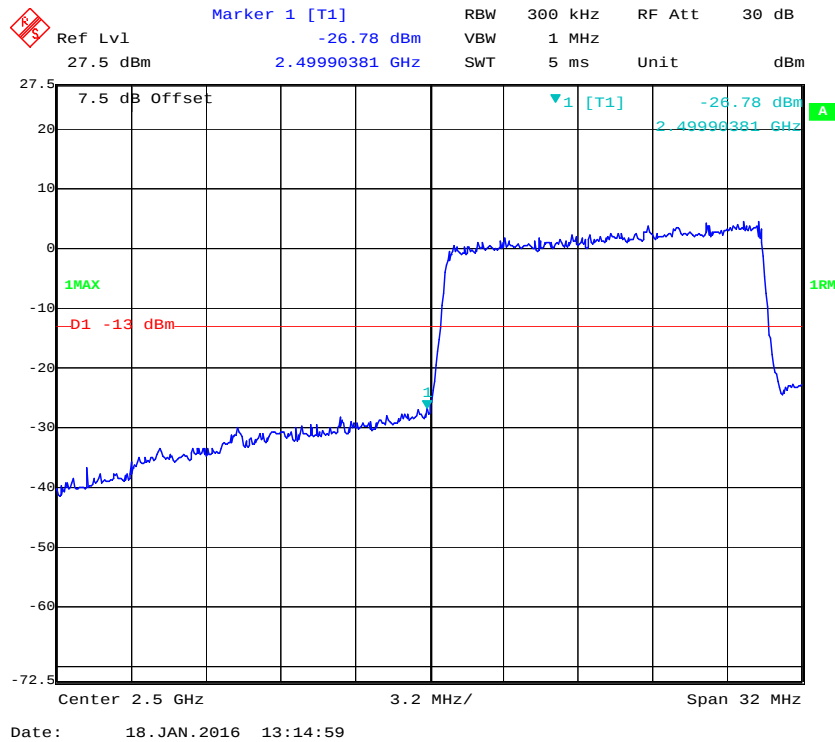
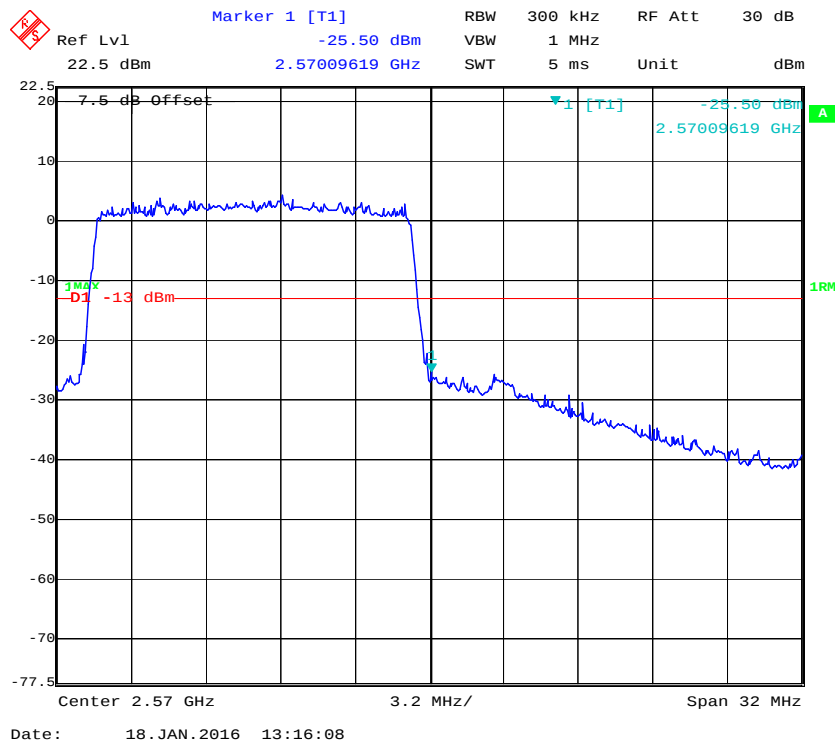
16-QAM (15 MHz, FULL RB) - Left Band Edge**16-QAM (15 MHz, FULL RB) - Right Band Edge**



QPSK (20 MHz, FULL RB) - Left Band Edge


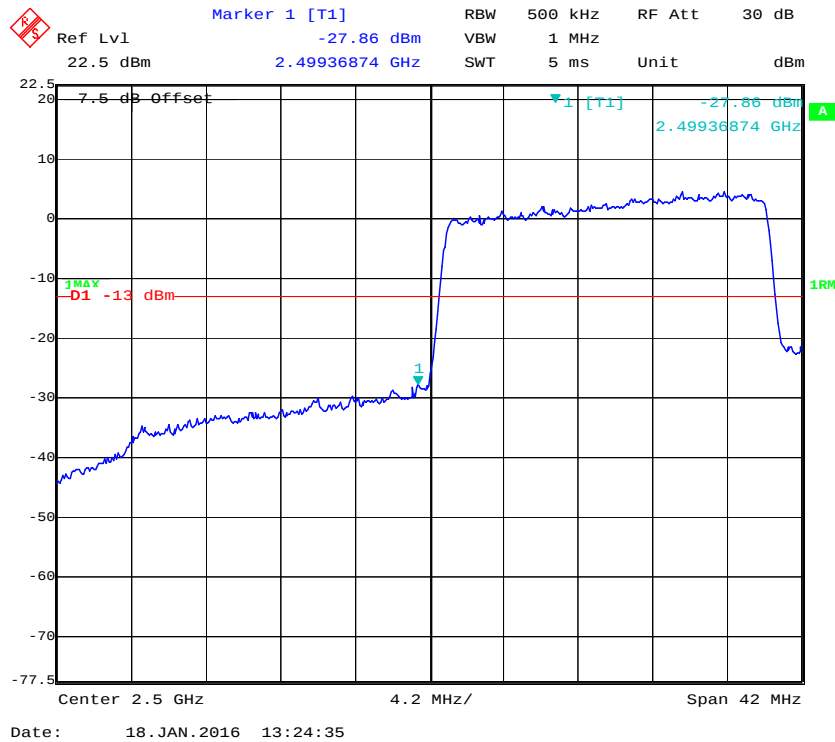


QPSK (20 MHz, FULL RB) - Right Band Edge

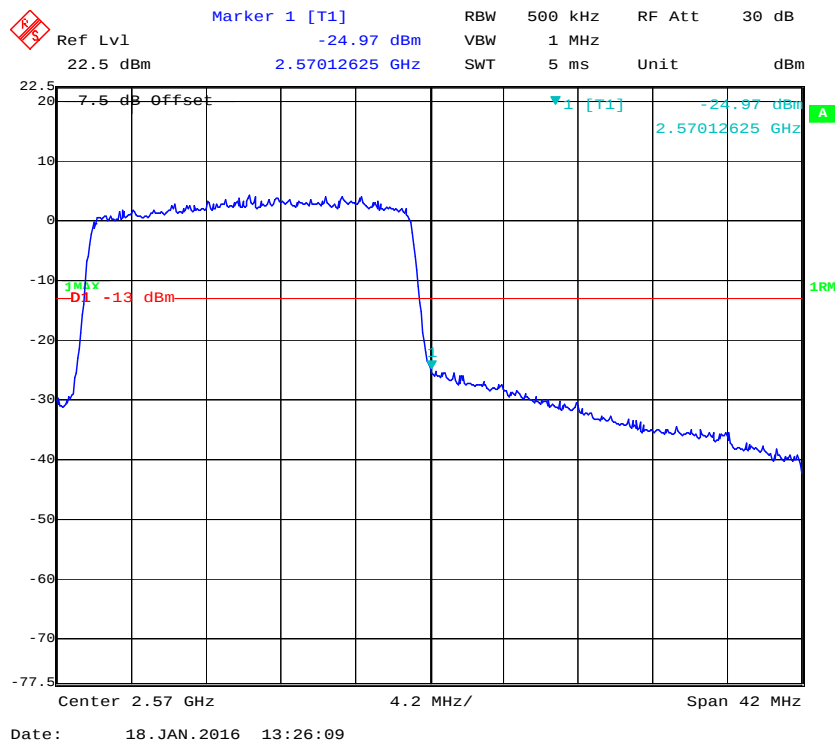


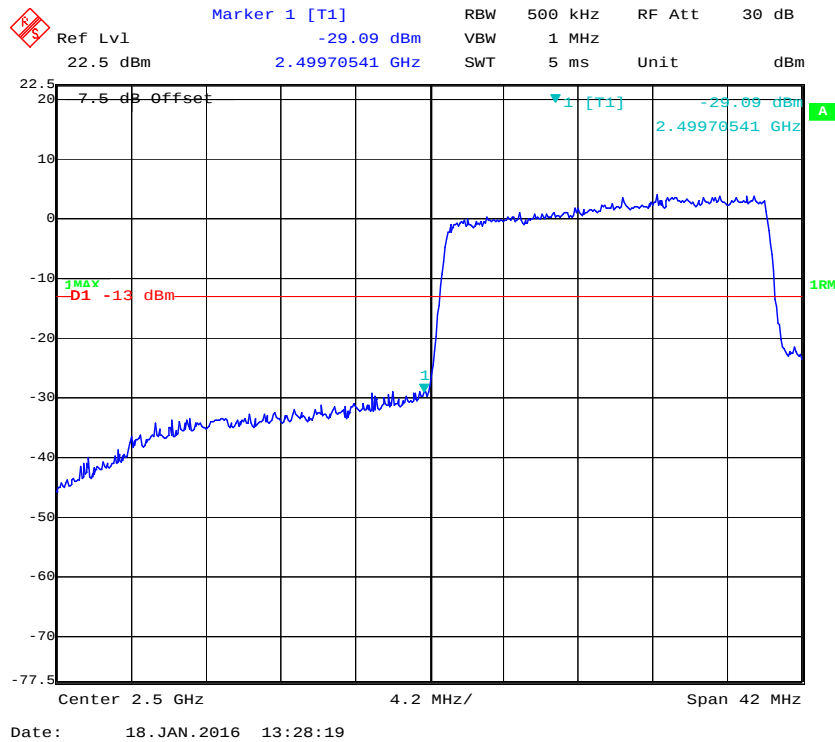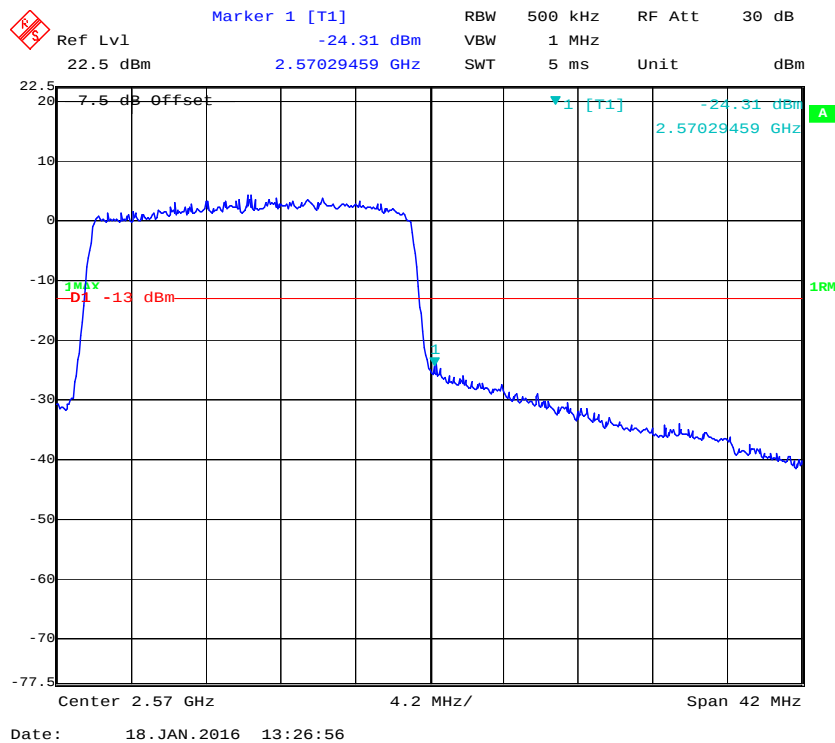16-QAM (20 MHz, FULL RB) - Left Band Edge**16-QAM (20 MHz, FULL RB) - Right Band Edge**

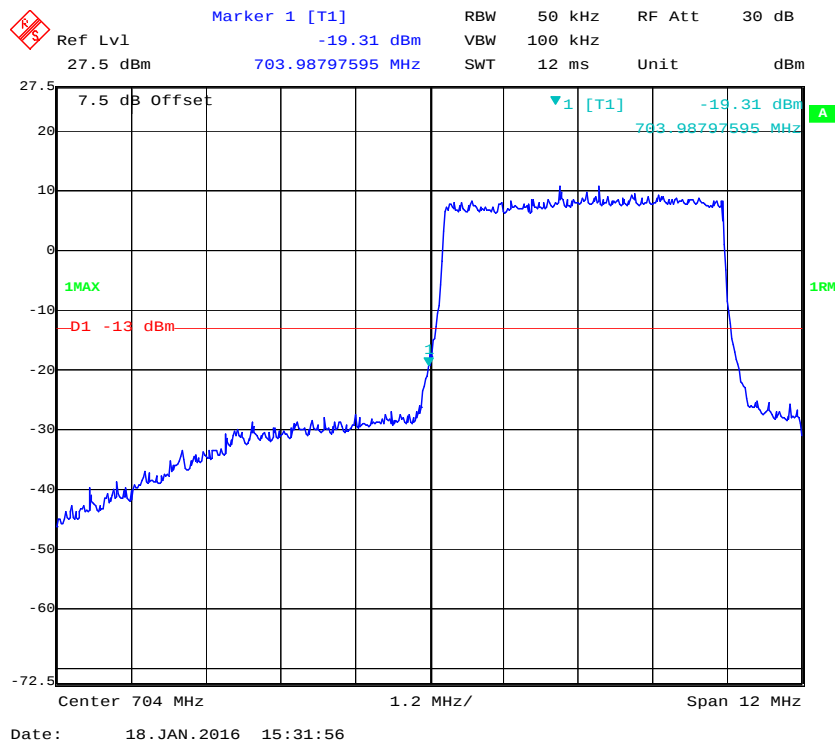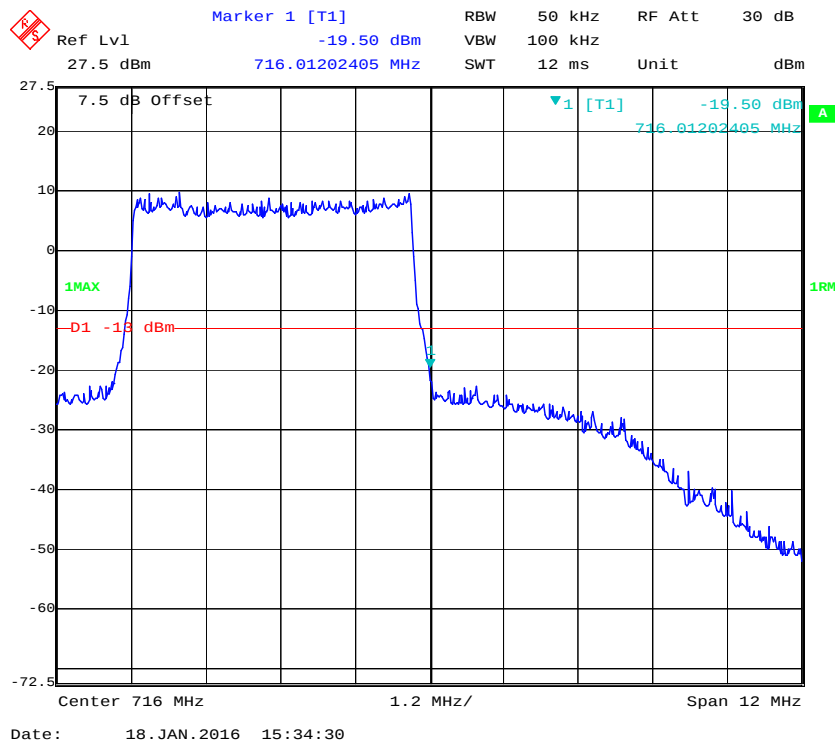
Band 17:**QPSK (5.0 MHz, FULL RB) - Left Band Edge****QPSK (5.0 MHz, FULL RB) - Right Band Edge**

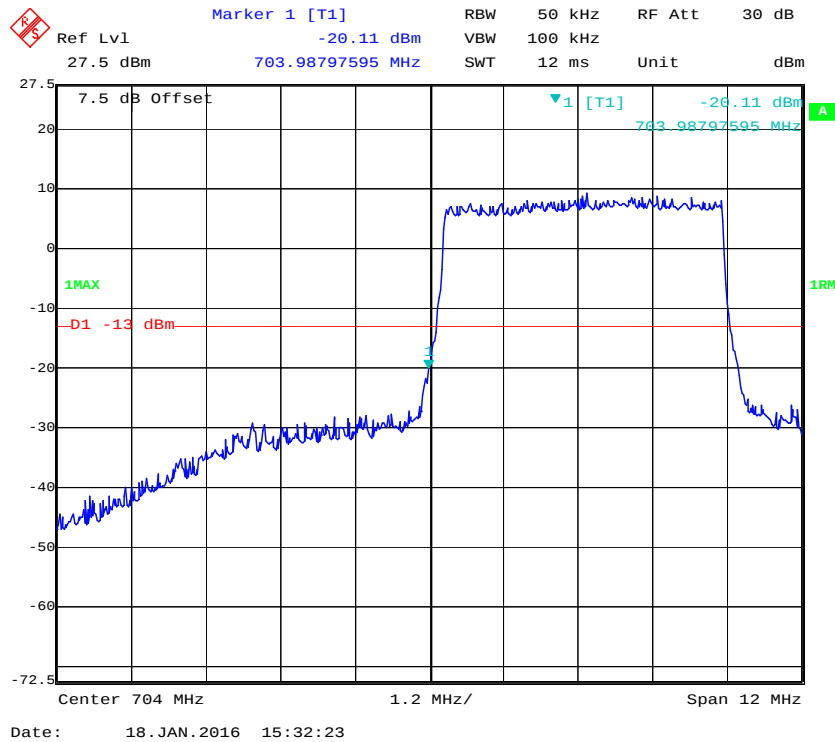
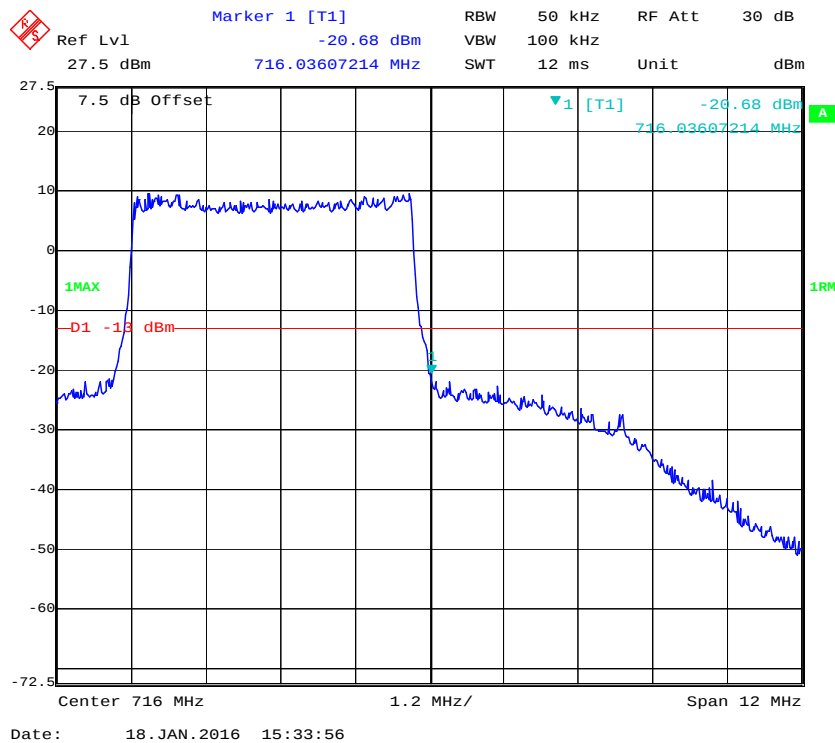
16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**

QPSK (10.0 MHz, FULL RB) - Left Band Edge

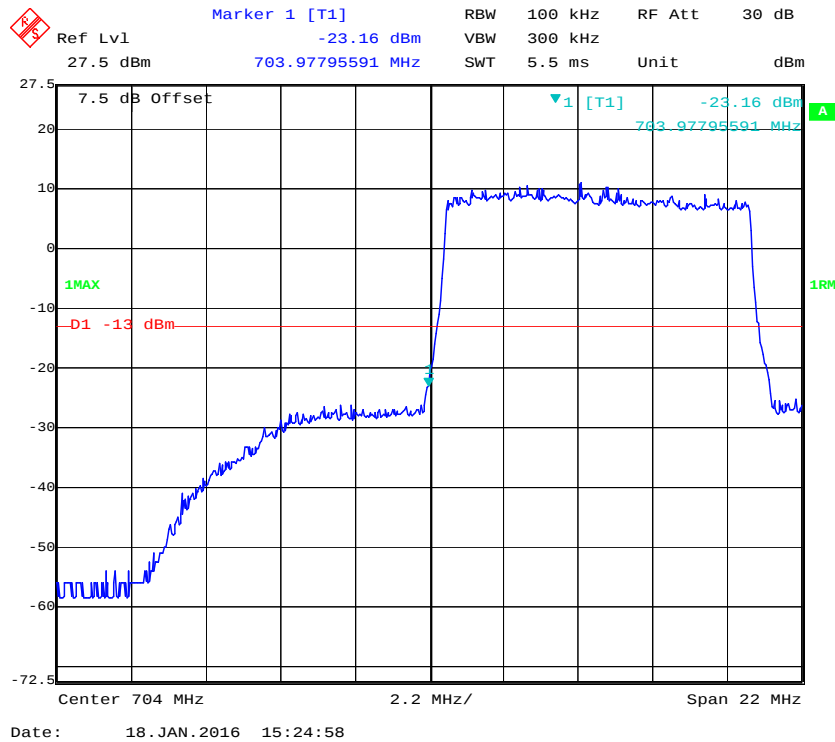

QPSK (10.0 MHz, FULL RB) - Right Band Edge

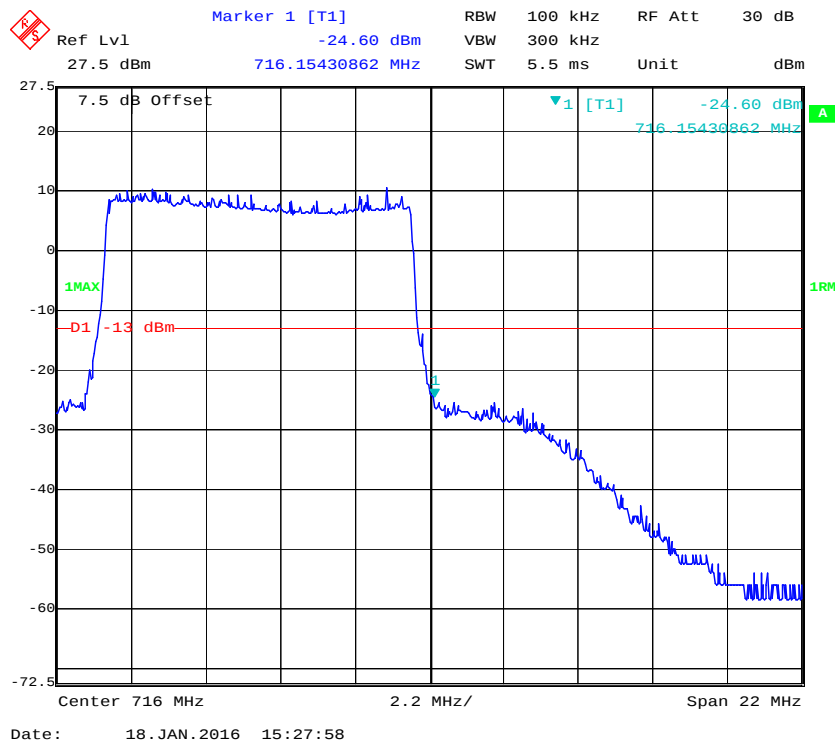

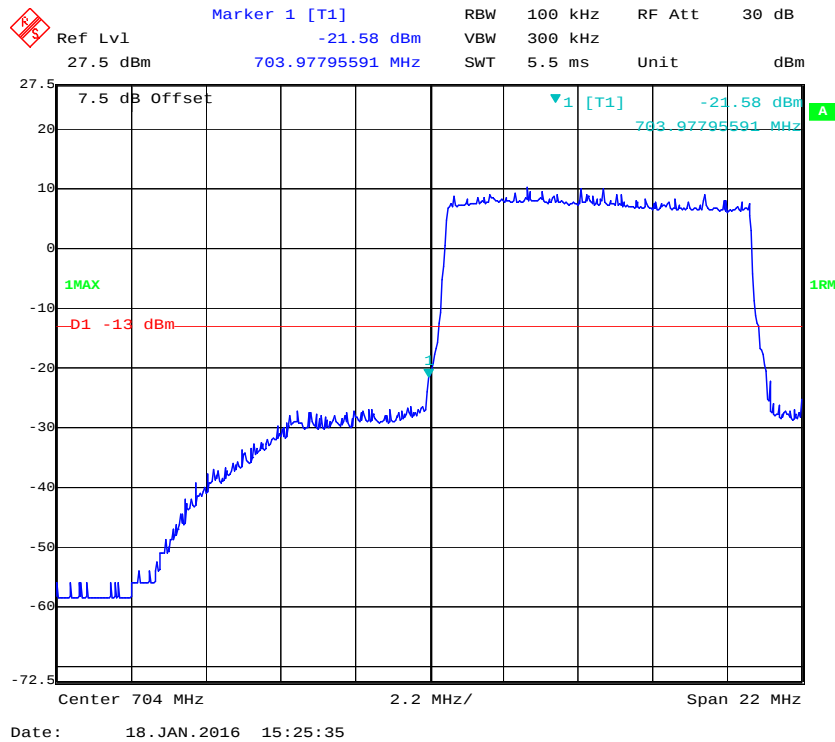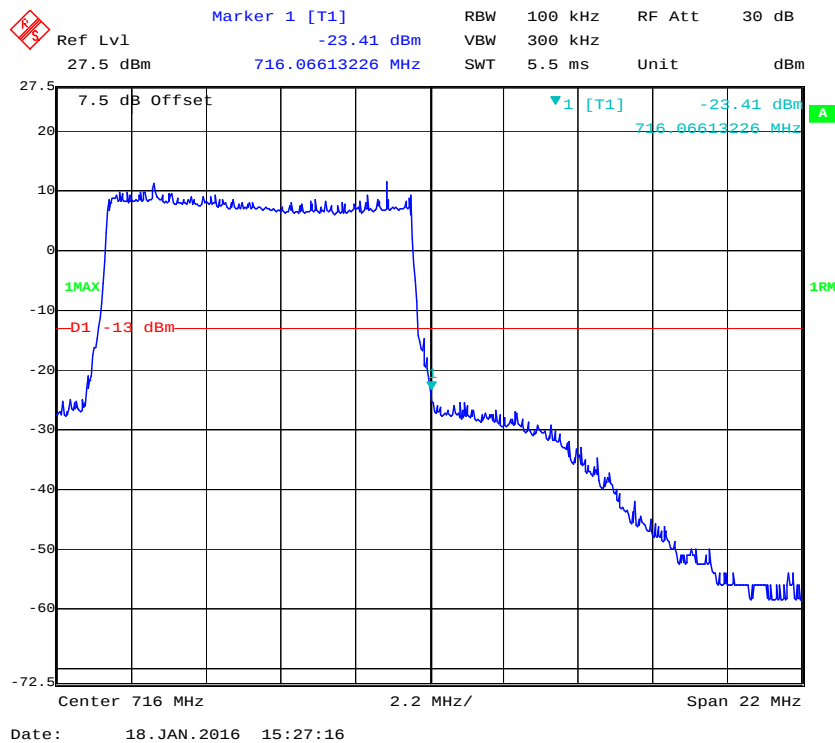16-QAM (10.0 MHz, FULL RB) - Left Band Edge**16-QAM (10.0 MHz, FULL RB) - Right Band Edge**

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY**Applicable Standards**

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

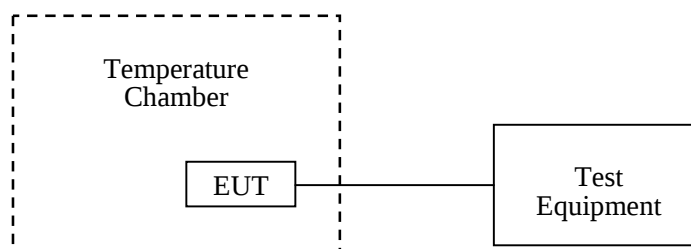

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2015-11-01	2016-11-01
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	20
Relative Humidity:	54 %
ATM Pressure:	101.0kPa

The testing was performed by Simon Wang on 2016-01-20.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0=836.6$ MHz				
Temperature ()	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-20	3.8	-10	-0.012	2.5
-10		-7	-0.008	2.5
0		-6	-0.007	2.5
10		-11	-0.013	2.5
20		-9	-0.011	2.5
30		-8	-0.010	2.5
40		-6	-0.007	2.5
50		-5	-0.006	2.5
25	V min.= 3.5	-3	-0.004	2.5
25	V max.= 4.2	-4	-0.005	2.5

EDGE Mode

Middle Channel, $f_0=836.6$ MHz				
Temperature ()	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-20	3.8	4	0.005	2.5
-10		3	0.004	2.5
0		1	0.001	2.5
10		-4	-0.005	2.5
20		2	0.002	2.5
30		-5	-0.006	2.5
40		-4	-0.005	2.5
50		0	0.000	2.5
25	V min.= 3.5	3	0.004	2.5
25	V max.= 4.2	4	0.005	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature ()	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-20	3.8	-4	-0.005	2.5
-10		-3	-0.004	2.5
0		-9	-0.011	2.5
10		-5	-0.006	2.5
20		1	0.001	2.5
30		-2	-0.002	2.5
40		3	0.004	2.5
50		2	0.002	2.5
25	V min.= 3.5	4	0.005	2.5
25	V max.= 4.2	5	0.006	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature ()	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-20	3.8	8	0.00426	pass
-10		9	0.00479	pass
0		10	0.00532	pass
10		12	0.00638	pass
20		7	0.00372	pass
30		6	0.00319	pass
40		8	0.00426	pass
50		5	0.00266	pass
25	V min.= 3.5	2	0.00106	pass
25	V max.= 4.2	3	0.00160	pass

EDGE Mode

Middle Channel, $f_0=1880.0$ MHz				
Temperature ()	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-20	3.8	6	0.00319	pass
-10		11	0.00585	pass
0		7	0.00372	pass
10		10	0.00532	pass
20		8	0.00426	pass
30		6	0.00319	pass
40		4	0.00213	pass
50		5	0.00266	pass
25	V min.= 3.5	2	0.00106	pass
25	V max.= 4.2	3	0.00160	pass

WCDMA Mode

Middle Channel, $f_0=1880.0$ MHz				
Temperature ()	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-20	3.8	8	0.0043	pass
-10		4	0.0021	pass
0		5	0.0027	pass
10		9	0.0048	pass
20		0	0.0000	pass
30		2	0.0011	pass
40		6	0.0032	pass
50		7	0.0037	pass
25	V min.= 3.5	3	0.0016	pass
25	V max.= 4.2	-1	-0.0005	pass

AWS Band

Middle Channel, $f_0=1732.6$ MHz				
Temperature ()	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-20	3.8	5	0.0029	pass
-10		3	0.0017	pass
0		8	0.0046	pass
10		7	0.0040	pass
20		6	0.0035	pass
30		2	0.0012	pass
40		8	0.0046	pass
50		7	0.0040	pass
25		2	0.0012	pass
25	V min.= 3.5	3	0.0017	pass
25	V max.= 4.2	23	0.01327	pass

Band 2:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	-21	-0.011	Pass
	-20	-18	-0.010	Pass
	-10	-17	-0.009	Pass
	0	-15	-0.008	Pass
	10	-14	-0.007	Pass
	20	-19	-0.010	Pass
	30	-16	-0.009	Pass
	40	-25	-0.013	Pass
	50	-21	-0.011	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	-23	-0.012	Pass
	3.5	-21	-0.011	Pass
	4.2	-17	-0.009	Pass

Band 4:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	-19	-0.01097	Pass
	-20	-17	-0.00981	Pass
	-10	-16	-0.00924	Pass
	0	-24	-0.01385	Pass
	10	-18	-0.01039	Pass
	20	-16	-0.00924	Pass
	30	-17	-0.00981	Pass
	40	-15	-0.00866	Pass
	50	-14	-0.00808	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	-21	-0.01212	Pass
	3.5	-18	-0.01039	Pass
	4.2	-15	-0.00866	Pass

Band 5:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	-22	-0.026	Pass
	-20	-24	-0.029	Pass
	-10	-27	-0.032	Pass
	0	-15	-0.018	Pass
	10	-17	-0.020	Pass
	20	-20	-0.024	Pass
	30	-28	-0.033	Pass
	40	-27	-0.032	Pass
	50	-26	-0.031	Pass
	Voltage (V _{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	-19	-0.023	Pass
	3.5	-23	-0.027	Pass
	4.2	-21	-0.025	Pass

Band 7:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	-20	-0.0079	Pass
	-20	-10	-0.0039	Pass
	-10	-11	-0.0043	Pass
	0	-19	-0.0075	Pass
	10	-17	-0.0067	Pass
	20	-13	-0.0051	Pass
	30	-12	-0.0047	Pass
	40	-16	-0.0063	Pass
	50	-17	-0.0067	Pass
	Voltage (V _{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	-9	-0.0036	Pass
	3.5	-14	-0.0055	Pass
	4.2	-15	-0.0059	Pass

Band 17:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	-10	-0.014	Pass
	-20	-14	-0.020	Pass
	-10	-15	-0.021	Pass
	0	-12	-0.017	Pass
	10	-17	-0.024	Pass
	20	-9	-0.013	Pass
	30	-8	-0.011	Pass
	40	-6	-0.008	Pass
	50	-13	-0.018	Pass
	Voltage (V _{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	-19	-0.027	Pass
	3.5	-11	-0.015	Pass
	4.2	-14	-0.020	Pass

PRODUCT SIMILARITY DECLARATION LETTER

Shenzhen Jingwah Information Technology Co., Ltd.
ADD: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Shenzhen, China
TEL: 0755-83975295 FAX: 0755-83204874

Product Similarity Declaration

To Whom It May Concern,

We, Shenzhen Jingwah Information Technology Co., Ltd. , hereby declare that we have a product named as Smart Phone(Model no.: S50L) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series model (S50) on reports and certificate, all the models are identical schematics, except for the different Model No.

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Signature:

Sun MingXue



Manager

2016/1/22

******* END OF REPORT *******