




Appendix B Test Result and Data (30MHz ~ 1GHz)

MIMO

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC240V/60Hz)
Pol : Vertical

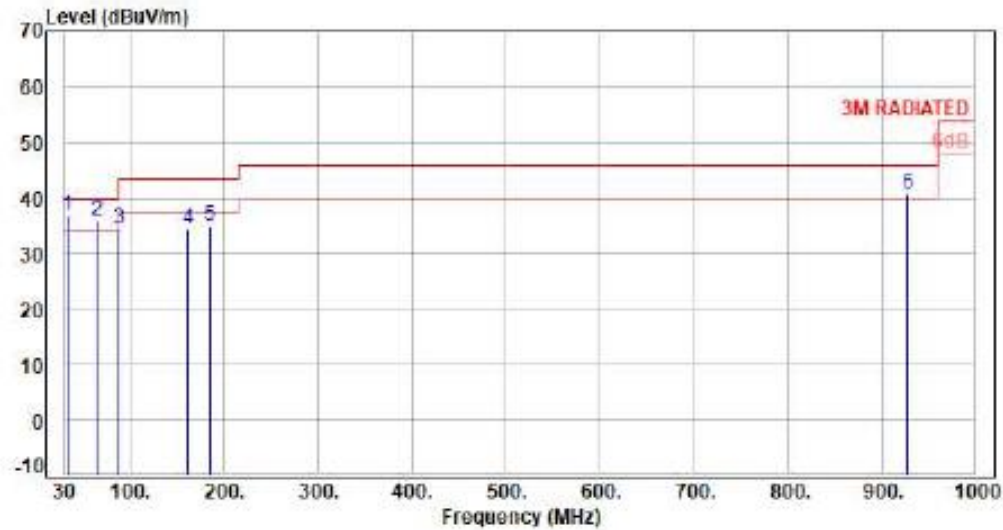

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azinuth (deg)	P/F
1	34.85	-10.07	46.79	36.72	40.00	-3.28	Peak	100	0	P
2	64.92	-10.48	46.53	36.05	40.00	-3.95	QP	100	213	P
3	88.20	-15.96	50.24	34.28	43.50	-9.22	Peak	100	0	P
4	161.92	-9.47	43.96	34.49	43.50	-9.01	Peak	100	0	P
5	185.20	-11.17	46.34	35.17	43.50	-8.33	Peak	100	0	P
6	928.22	4.41	36.32	40.73	46.00	-5.27	Peak	100	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC240V/60Hz)
Pol : Horizontal

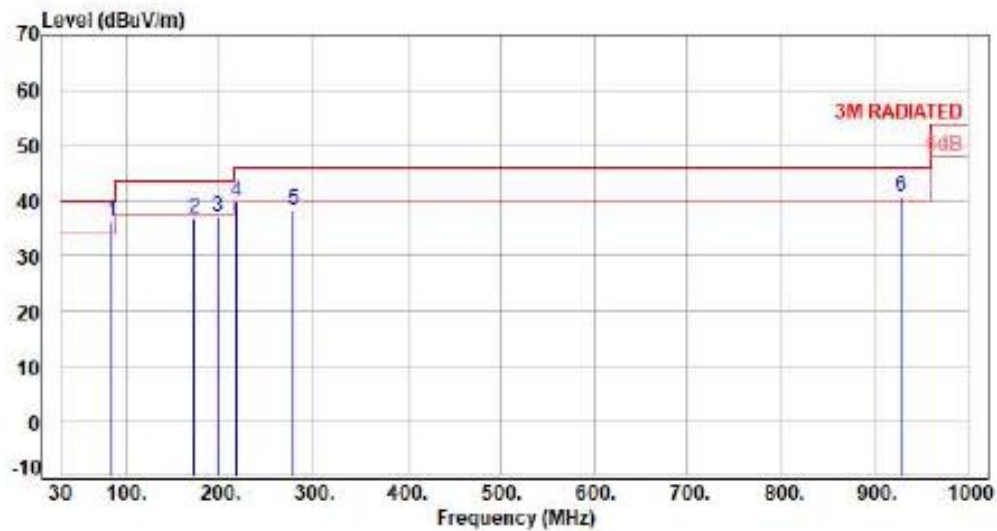

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	84.32	-15.52	51.84	36.32	40.00	-3.68	Peak	400	360	P
2	171.62	-9.79	46.59	36.80	43.50	-6.70	Peak	400	360	P
3	196.84	-11.93	48.99	37.06	43.50	-6.44	Peak	400	360	P
4	218.18	-11.92	51.95	40.03	46.00	-5.97	Peak	400	360	P
5	278.32	-9.27	47.77	38.50	46.00	-7.50	Peak	400	360	P
6	928.22	4.41	36.39	40.80	46.00	-5.20	Peak	400	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor