




Test Mode : 1TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

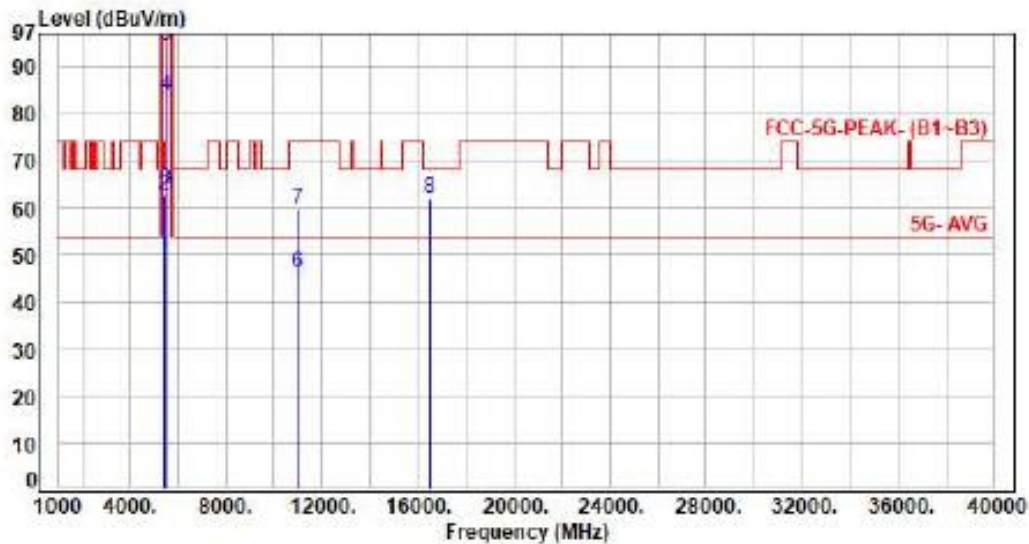

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.44	49.99	54.00	-4.01	Average	100	56	P
2	5460.00	7.55	55.29	62.84	74.00	-11.16	Peak	100	56	P
3	5470.00	7.58	56.14	63.72	68.20	-4.48	Peak	100	56	P
4	5500.00	7.68	75.86	83.54	200.00	-116.46	Average	100	56	P
5	5500.00	7.68	86.77	94.45	200.00	-105.55	Peak	100	56	P
6	11000.00	17.78	28.36	46.14	54.00	-7.86	Average	100	104	P
7	11000.00	17.78	42.06	59.84	74.00	-14.16	Peak	100	104	P
8	16500.00	20.78	41.23	62.01	68.20	-6.19	Peak	100	88	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

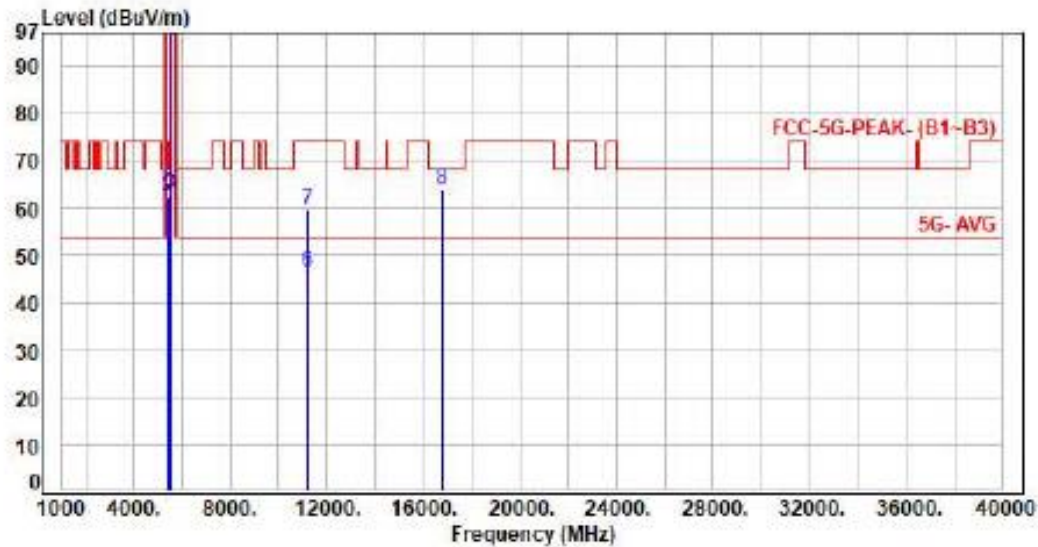

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.59	50.14	54.00	-3.86	Average	279	317	P
2	5460.00	7.55	54.61	62.36	74.00	-11.64	Peak	279	317	P
3	5470.00	7.58	55.44	63.02	68.20	-5.18	Peak	279	317	P
4	5600.00	7.51	87.54	95.05	200.00	-104.95	Average	279	317	P
5	5600.00	7.51	98.44	105.95	200.00	-94.05	Peak	279	317	P
6	11200.00	17.89	28.57	46.46	54.00	-7.54	Average	100	226	P
7	11200.00	17.89	41.70	59.59	74.00	-14.41	Peak	100	226	P
8	16800.00	22.29	41.35	63.64	68.20	-4.56	Peak	100	304	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH12@ 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

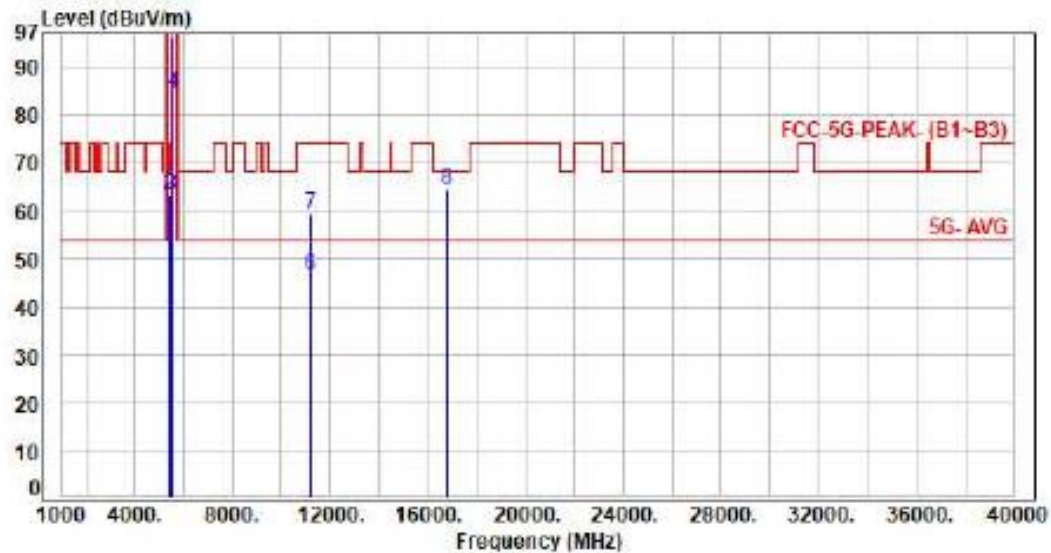

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.63	50.18	54.00	-3.82	Average	138	126	P
2	5460.00	7.55	55.89	63.44	74.00	-10.56	Peak	138	126	P
3	5470.00	7.58	55.86	63.44	68.20	-4.76	Peak	138	126	P
4	5600.00	7.51	77.12	84.63	200.00	-115.37	Average	138	126	P
5	5600.00	7.51	88.89	96.40	200.00	-103.60	Peak	138	126	P
6	11200.00	17.89	28.60	46.49	54.00	-7.51	Average	100	100	P
7	11200.00	17.89	41.39	59.28	74.00	-14.72	Peak	100	100	P
8	16800.00	22.29	42.40	64.69	68.20	-3.51	Peak	100	86	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

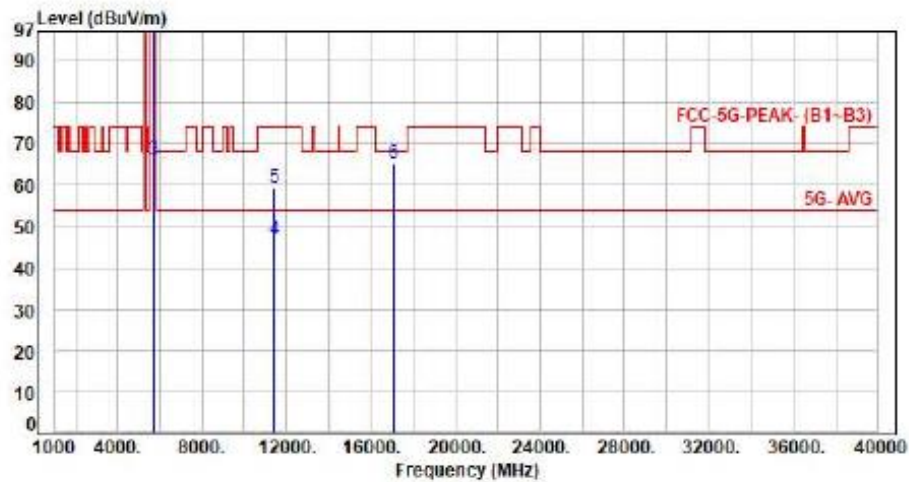

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	89.42	96.85	200.00	-103.15	Average	315	83	P
2	5700.00	7.43	100.31	107.74	200.00	-92.26	Peak	315	83	P
3	5725.00	7.43	58.50	65.93	68.20	-2.27	Peak	315	83	P
4	11400.00	18.08	28.81	46.89	54.00	-7.11	Average	100	224	P
5	11400.00	18.08	41.22	59.30	74.00	-14.70	Peak	100	224	P
6	17100.00	24.04	41.42	65.46	68.20	-2.74	Peak	100	305	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

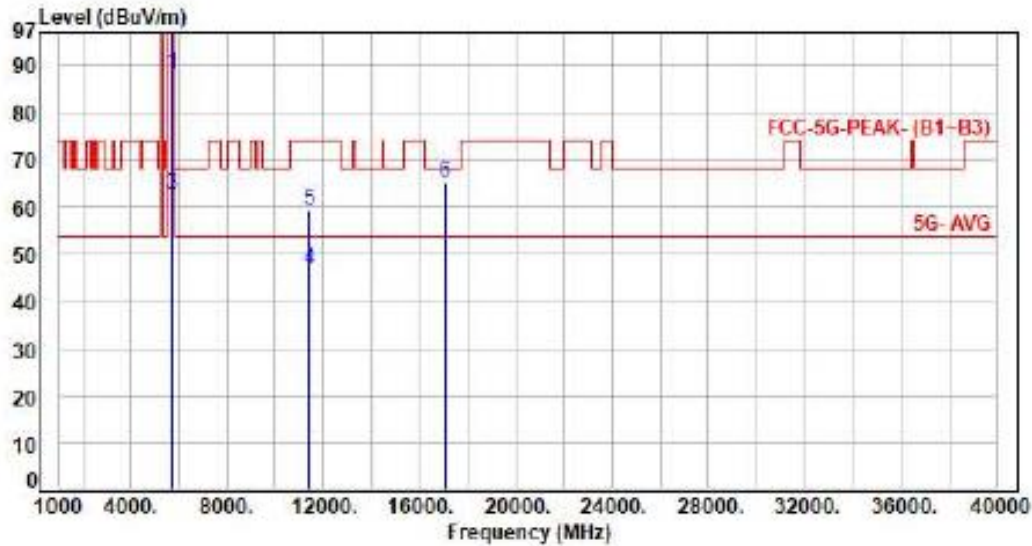

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	80.79	88.22	200.00	-111.78	Average	100	128	P
2	5700.00	7.43	92.06	99.49	200.00	-100.51	Peak	100	128	P
3	5725.00	7.43	55.37	62.80	68.20	-5.40	Peak	100	128	P
4	11400.00	18.08	28.93	47.01	54.00	-6.99	Average	100	104	P
5	11400.00	18.08	41.36	59.44	74.00	-14.56	Peak	100	104	P
6	17100.00	24.04	41.15	65.19	68.20	-3.01	Peak	100	85	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

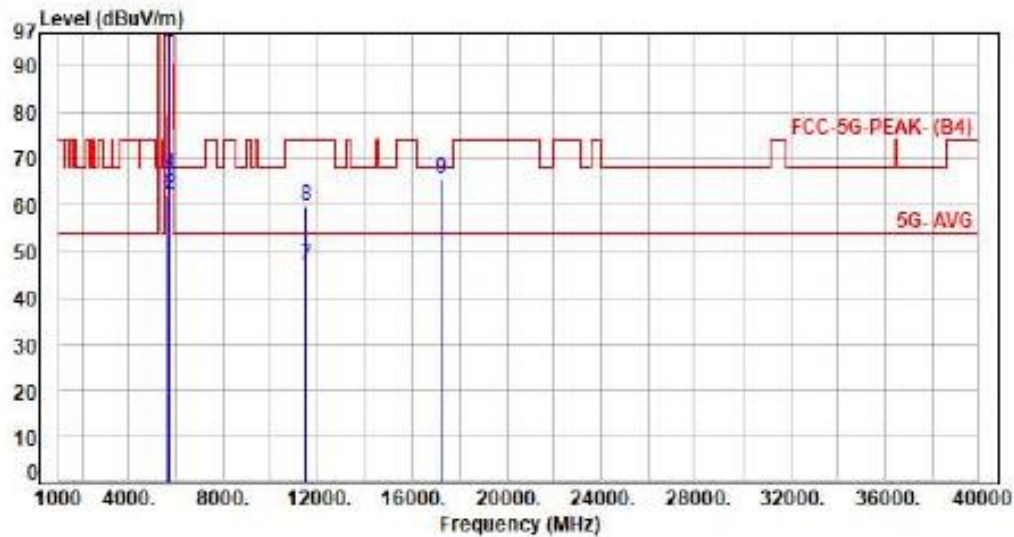

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.79	62.30	68.20	-5.90	Peak	310	332	P
2	5700.00	7.43	54.85	62.28	105.20	-42.92	Peak	310	332	P
3	5720.00	7.43	56.23	63.66	110.80	-47.14	Peak	310	332	P
4	5725.00	7.43	59.44	66.87	122.20	-55.33	Peak	310	332	P
5	5745.00	7.44	87.66	95.10	200.00	-104.90	Average	310	332	P
6	5745.00	7.44	98.75	106.19	200.00	-93.81	Peak	310	332	P
7	11490.00	18.33	28.48	46.81	54.00	-7.19	Average	100	220	P
8	11490.00	18.33	41.60	59.93	74.00	-14.07	Peak	100	220	P
9	17235.00	24.37	41.36	65.73	68.20	-2.47	Peak	100	301	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

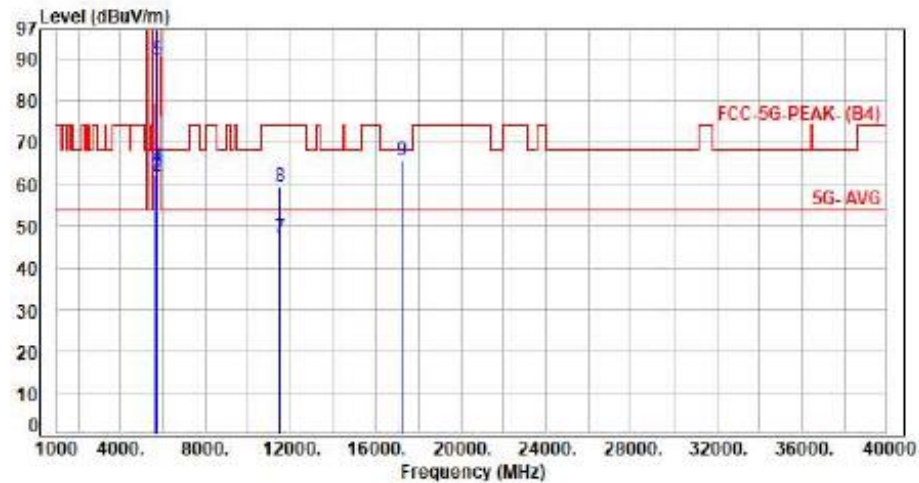


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.65	62.16	68.20	-6.04	Peak	100	129	P
2	5700.00	7.43	54.60	62.03	105.20	-43.17	Peak	100	129	P
3	5720.00	7.43	55.62	63.05	110.00	-46.95	Peak	100	129	P
4	5725.00	7.43	56.78	64.21	122.20	-57.99	Peak	100	129	P
5	5745.00	7.44	82.10	89.54	200.00	-110.46	Average	100	129	P
6	5745.00	7.44	93.04	100.48	200.00	-99.52	Peak	100	129	P
7	11490.00	18.33	28.77	47.10	54.00	-6.90	Average	100	103	P
8	11490.00	18.33	41.06	59.39	74.00	-14.61	Peak	100	103	P
9	17235.00	24.37	41.26	65.63	68.20	-2.57	Peak	100	82	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

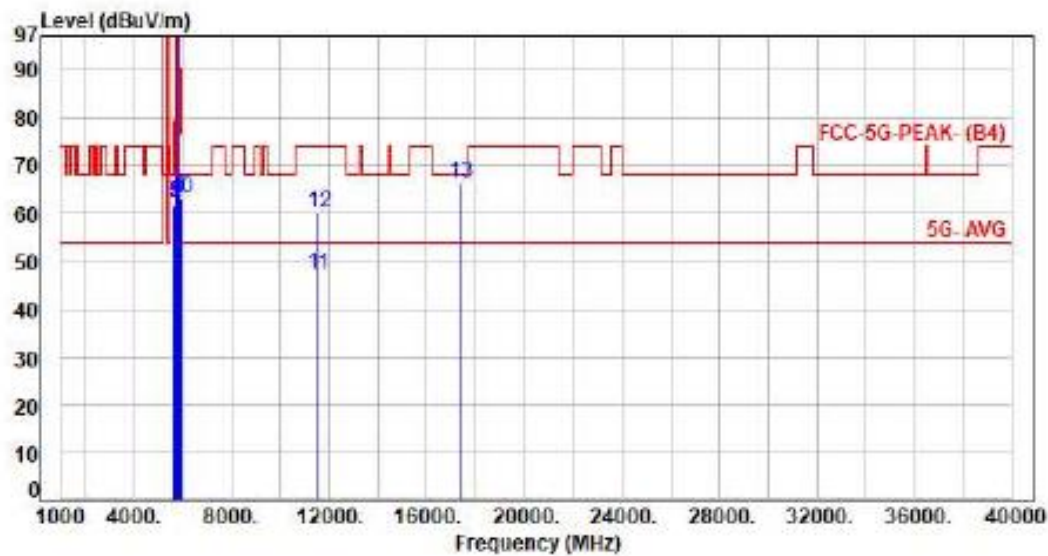

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.23	61.74	68.20	-6.46	Peak	297	265	P
2	5700.00	7.43	54.92	62.35	105.20	-42.85	Peak	297	265	P
3	5720.00	7.43	55.02	62.45	110.00	-48.35	Peak	297	265	P
4	5725.00	7.43	55.50	62.93	122.20	-59.27	Peak	297	265	P
5	5785.00	7.45	90.17	97.62	200.00	-102.38	Average	297	265	P
6	5785.00	7.45	100.39	107.84	200.00	-92.16	Peak	297	265	P
7	5850.00	7.47	55.56	63.03	122.20	-59.17	Peak	297	265	P
8	5855.00	7.49	56.49	63.98	110.00	-46.02	Peak	297	265	P
9	5875.00	7.57	55.43	63.00	105.20	-42.20	Peak	297	265	P
10	5925.00	7.73	55.32	63.05	68.20	-5.15	Peak	297	265	P
11	11570.00	10.58	28.66	47.24	54.00	-6.76	Average	100	227	P
12	11570.00	10.58	41.50	60.08	74.00	-13.92	Peak	100	227	P
13	17355.00	25.24	41.13	66.37	68.20	-1.83	Peak	100	303	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

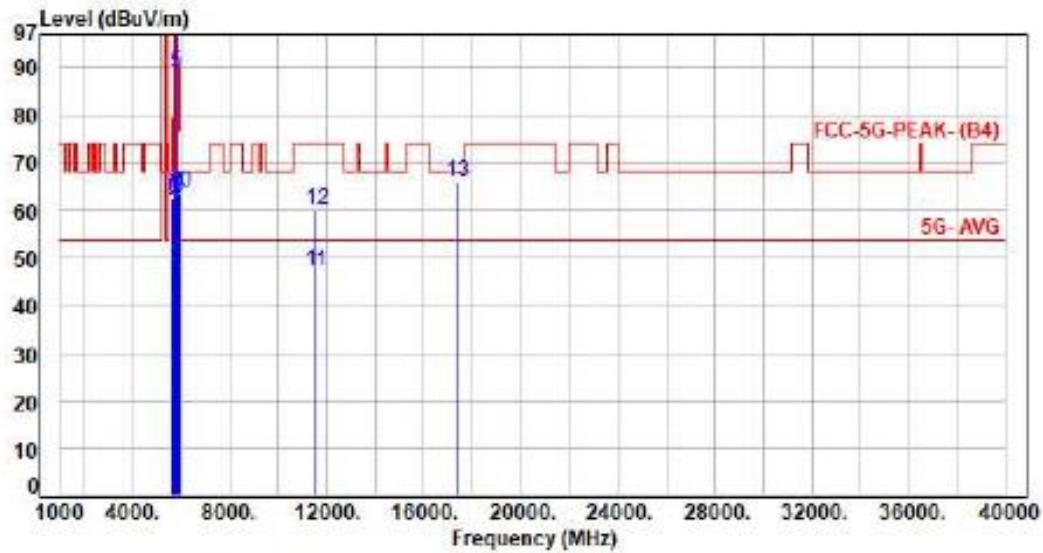

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.14	62.65	68.20	-5.55	Peak	101	129	P
2	5700.00	7.43	54.38	61.81	105.20	-43.39	Peak	101	129	P
3	5720.00	7.43	55.28	62.71	110.80	-48.09	Peak	101	129	P
4	5725.00	7.43	55.22	62.65	122.20	-59.55	Peak	101	129	P
5	5785.00	7.45	81.42	88.87	200.00	-111.13	Average	101	129	P
6	5785.00	7.45	91.63	99.08	200.00	-100.92	Peak	101	129	P
7	5850.00	7.47	55.78	63.25	122.20	-58.95	Peak	101	129	P
8	5855.00	7.49	55.39	62.88	110.80	-47.92	Peak	101	129	P
9	5875.00	7.57	55.39	62.96	105.20	-42.24	Peak	101	129	P
10	5925.00	7.73	55.91	63.64	68.20	-4.56	Peak	101	129	P
11	11570.00	18.58	28.59	47.17	54.00	-6.83	Average	100	104	P
12	11570.00	18.58	41.60	60.18	74.00	-13.82	Peak	100	104	P
13	17355.00	25.24	40.80	66.04	68.20	-2.16	Peak	100	86	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

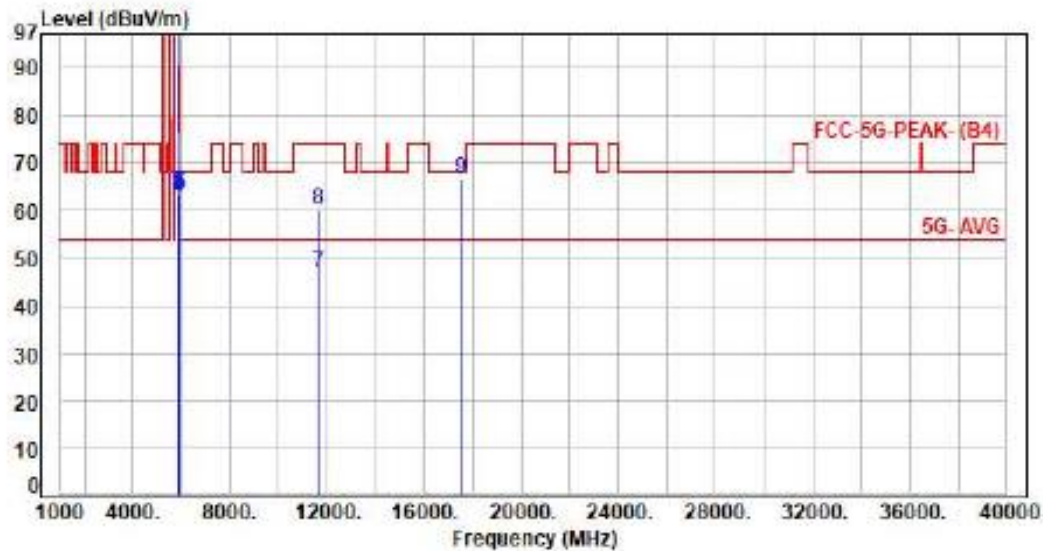

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	88.05	95.51	200.00	-104.49	Average	305	342	P
2	5825.00	7.46	98.10	105.56	200.00	-94.44	Peak	305	342	P
3	5850.00	7.47	55.75	63.22	122.20	-58.98	Peak	305	342	P
4	5855.00	7.49	55.23	62.72	110.80	-48.08	Peak	305	342	P
5	5875.00	7.57	56.38	63.95	105.20	-41.25	Peak	305	342	P
6	5925.00	7.73	55.65	63.38	68.20	-4.82	Peak	305	342	P
7	11650.00	18.67	28.15	46.82	54.00	-7.18	Average	100	225	P
8	11650.00	18.67	41.37	60.04	74.00	-13.96	Peak	100	225	P
9	17475.00	25.92	40.69	66.61	68.20	-1.59	Peak	100	305	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

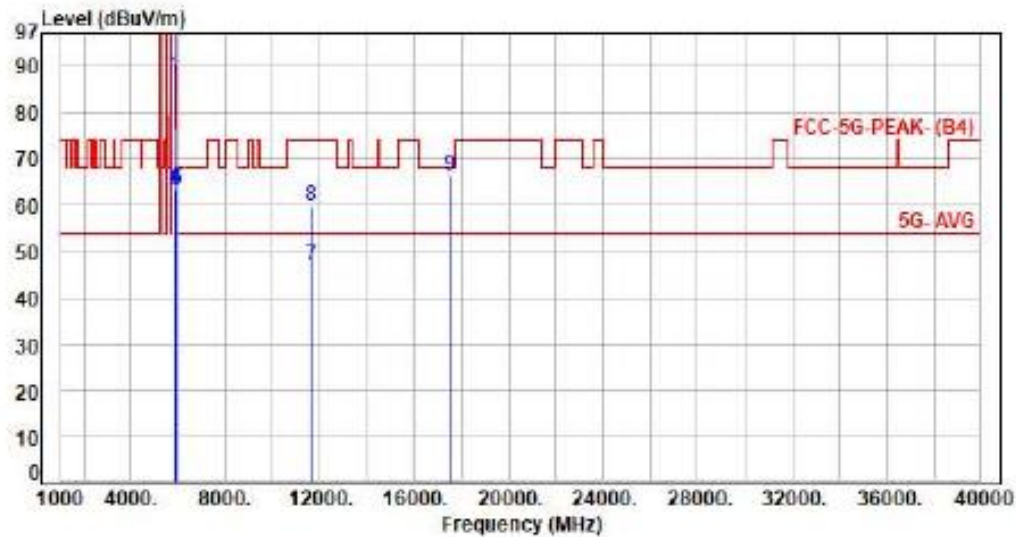

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	80.40	87.86	200.00	-112.14	Average	100	71	P
2	5825.00	7.46	91.02	98.48	200.00	-101.52	Peak	100	71	P
3	5850.00	7.47	55.46	62.93	122.20	-59.27	Peak	100	71	P
4	5855.00	7.49	55.79	63.28	110.80	-47.52	Peak	100	71	P
5	5875.00	7.57	55.55	63.12	105.20	-42.08	Peak	100	71	P
6	5925.00	7.73	55.65	63.38	68.20	-4.82	Peak	100	71	P
7	11650.00	18.67	28.33	47.00	54.00	-7.00	Average	100	102	P
8	11650.00	18.67	41.24	59.91	74.00	-14.09	Peak	100	102	P
9	17475.00	25.92	40.33	66.25	68.20	-1.95	Peak	100	86	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

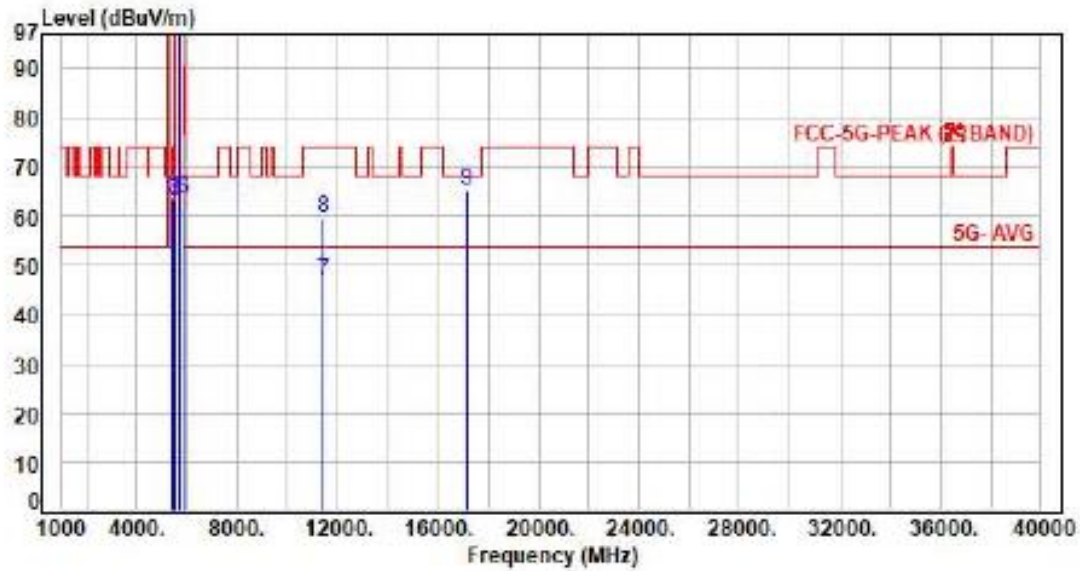

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.54	50.09	54.00	-3.91	Average	278	212	P
2	5460.00	7.55	56.32	63.87	74.00	-10.13	Peak	278	212	P
3	5470.00	7.58	55.36	62.94	68.20	-5.26	Peak	278	212	P
4	5720.00	7.43	89.06	96.49	200.00	-103.51	Average	278	212	P
5	5720.00	7.43	99.71	107.14	200.00	-92.86	Peak	278	212	P
6	5850.00	7.47	55.87	63.34	68.20	-4.86	Peak	278	212	P
7	11440.00	18.20	28.54	46.74	54.00	-7.26	Average	100	225	P
8	11440.00	18.20	41.62	59.82	74.00	-14.18	Peak	100	225	P
9	17160.00	24.13	41.32	65.45	68.20	-2.75	Peak	100	307	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

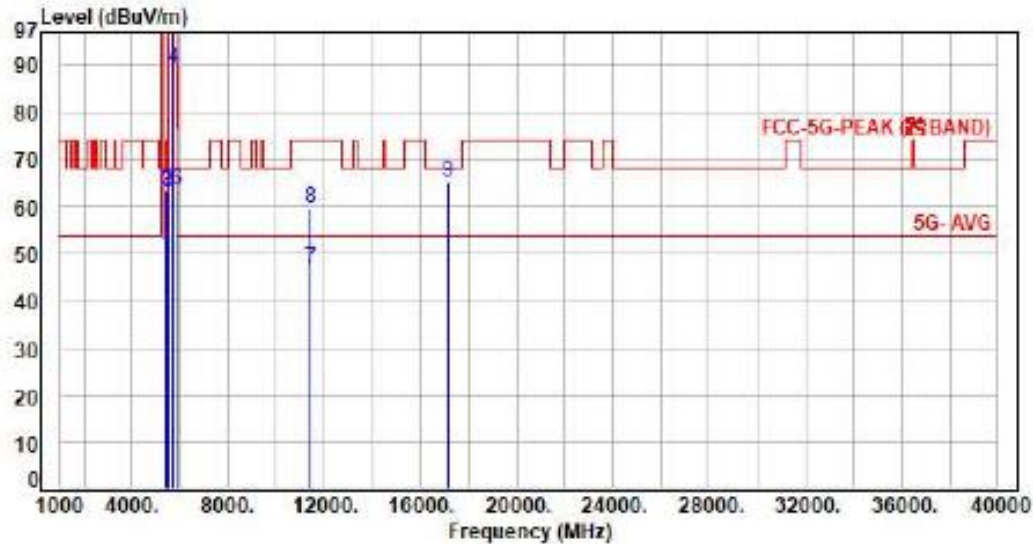

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	41.74	49.29	54.00	-4.71	Average	100	127	P
2	5460.00	7.55	55.86	63.41	74.00	-10.59	Peak	100	127	P
3	5470.00	7.58	55.62	63.20	68.20	-5.00	Peak	100	127	P
4	5720.00	7.43	81.94	89.37	200.00	-110.63	Average	100	127	P
5	5720.00	7.43	92.80	100.23	200.00	-99.77	Peak	100	127	P
6	5850.00	7.47	55.95	63.42	68.20	-4.78	Peak	100	127	P
7	11440.00	18.20	28.69	46.89	54.00	-7.11	Average	100	104	P
8	11440.00	18.20	41.59	59.79	74.00	-14.21	Peak	100	104	P
9	17160.00	24.13	41.31	65.44	68.20	-2.76	Peak	100	84	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

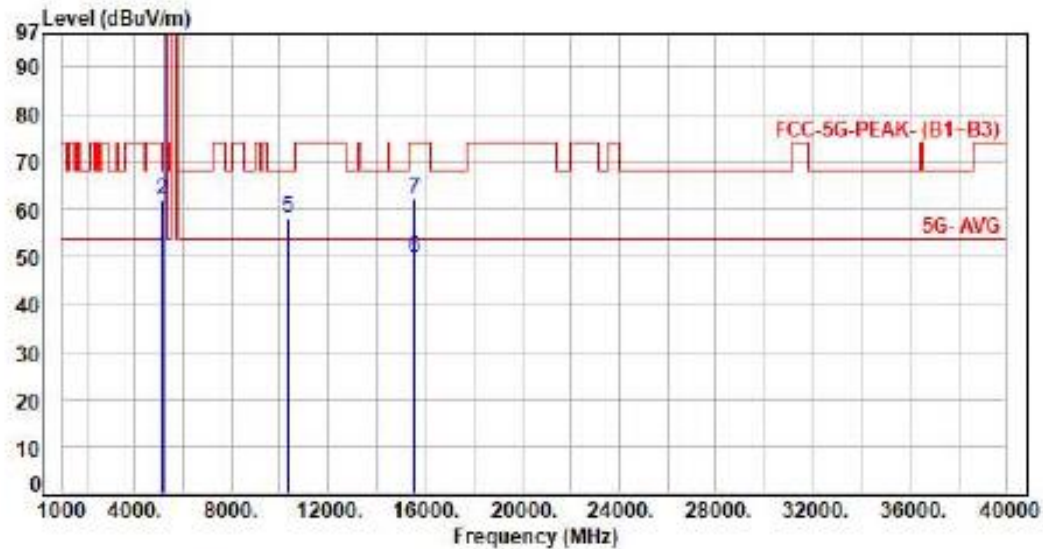

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.38	50.07	54.00	-3.93	Average	385	269	P
2	5150.00	6.69	55.23	61.92	74.00	-12.08	Peak	385	269	P
3	5180.00	6.79	91.99	98.78	200.00	-101.22	Average	385	269	P
4	5180.00	6.79	104.48	111.27	200.00	-88.73	Peak	385	269	P
5	10360.00	16.31	41.79	58.10	68.20	-10.10	Peak	100	278	P
6	15540.00	20.54	29.11	49.65	54.00	-4.35	Average	100	115	P
7	15540.00	20.54	41.93	62.47	74.00	-11.53	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x20 CH36 NSS1 MC50
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

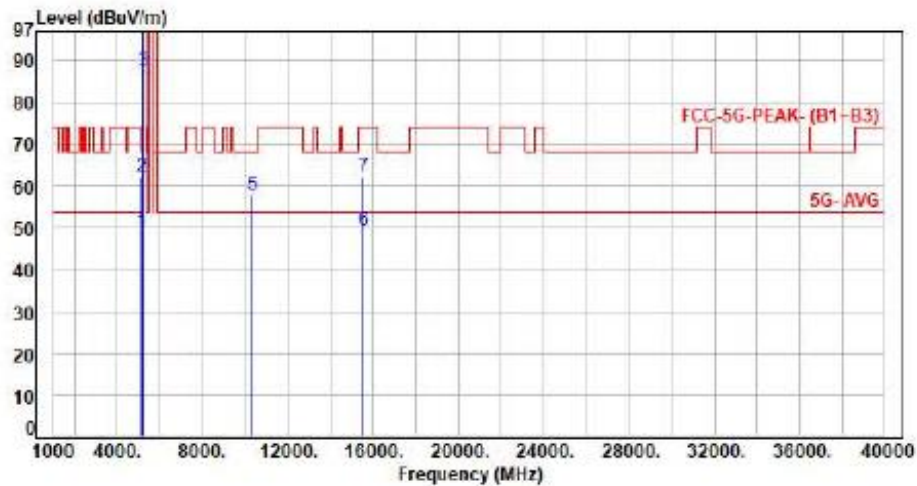

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.20	48.89	54.00	-5.11	Average	148	54	P
2	5150.00	6.69	55.55	62.24	74.00	-11.76	Peak	148	54	P
3	5180.00	6.79	80.48	87.27	200.00	-112.73	Average	148	54	P
4	5180.00	6.79	92.45	99.24	200.00	-100.76	Peak	148	54	P
5	10360.00	16.31	41.57	57.88	68.20	-10.32	Peak	100	59	P
6	15540.00	20.54	28.74	49.28	54.00	-4.72	Average	100	157	P
7	15540.00	20.54	41.64	62.18	74.00	-11.82	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

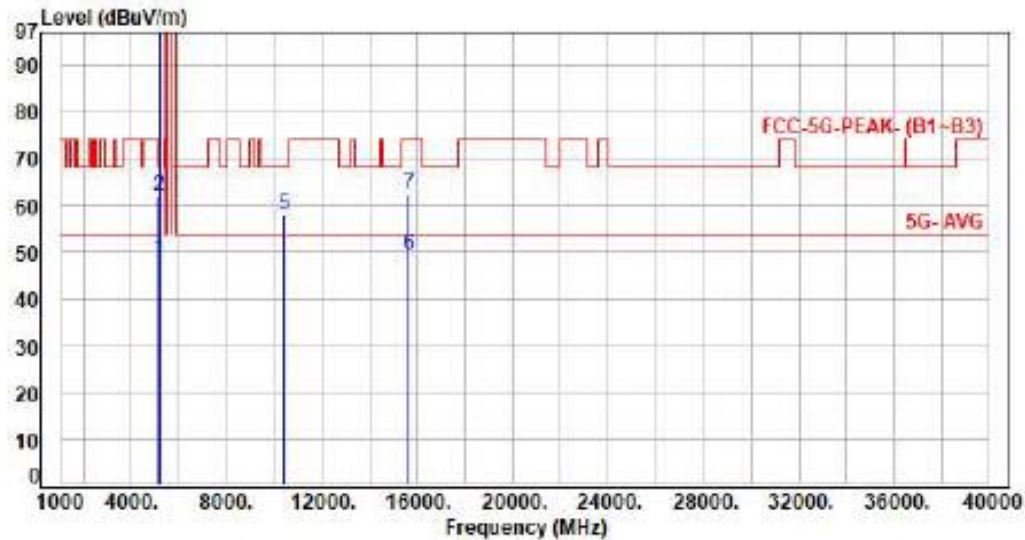

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.74	48.43	54.00	-5.57	Average	344	299	P
2	5150.00	6.69	55.32	62.01	74.00	-11.99	Peak	344	299	P
3	5200.00	6.86	93.32	100.18	200.00	-99.82	Average	344	299	P
4	5200.00	6.86	106.59	113.45	200.00	-86.55	Peak	344	299	P
5	10400.00	16.35	41.65	58.00	68.20	-10.20	Peak	100	277	P
6	15600.00	20.35	28.94	49.29	54.00	-4.71	Average	100	112	P
7	15600.00	20.35	41.85	62.20	74.00	-11.80	Peak	100	112	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

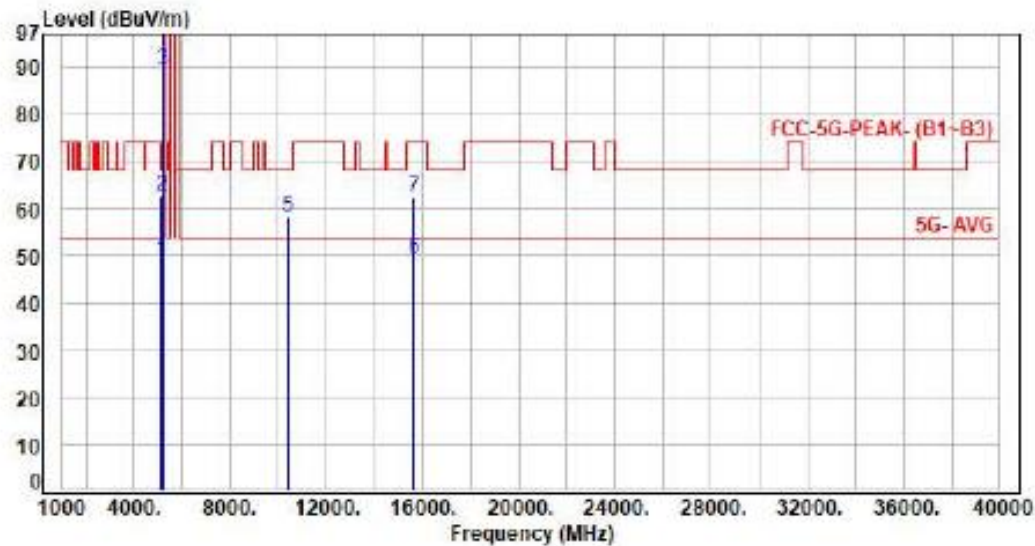

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.21	48.90	54.00	-5.10	Average	125	233	P
2	5150.00	6.69	56.10	62.79	74.00	-11.21	Peak	125	233	P
3	5200.00	6.86	82.32	89.18	200.00	-110.82	Average	125	233	P
4	5200.00	6.86	95.60	102.46	200.00	-97.54	Peak	125	233	P
5	10400.00	16.35	41.92	58.27	68.20	-9.93	Peak	100	58	P
6	15600.00	20.35	29.14	49.49	54.00	-4.51	Average	100	155	P
7	15600.00	20.35	41.83	62.18	74.00	-11.82	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

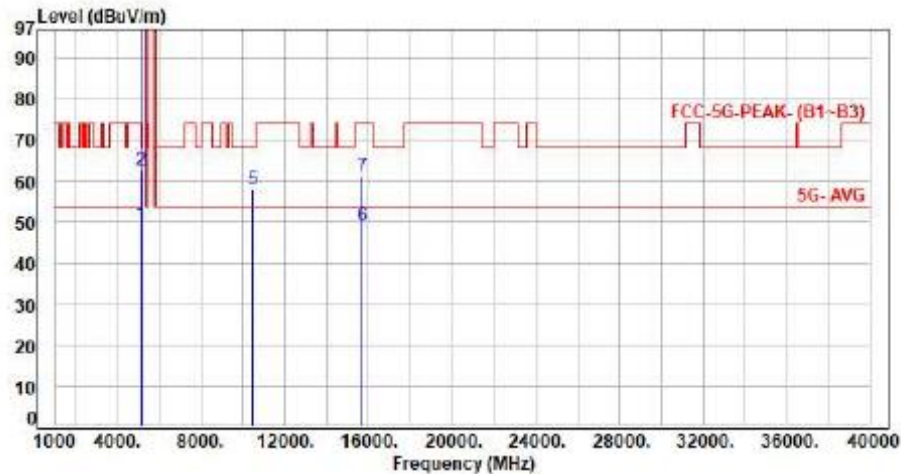

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.79	49.48	54.00	-4.52	Average	356	301	P
2	5150.00	6.69	56.03	62.72	74.00	-11.28	Peak	356	301	P
3	5240.00	6.91	94.72	101.63	200.00	-98.37	Average	356	301	P
4	5240.00	6.91	106.81	113.72	200.00	-86.28	Peak	356	301	P
5	10480.00	16.43	41.38	57.81	68.20	-10.39	Peak	100	277	P
6	15720.00	19.84	29.34	49.18	54.00	-4.82	Average	100	116	P
7	15720.00	19.84	41.53	61.37	74.00	-12.63	Peak	100	116	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

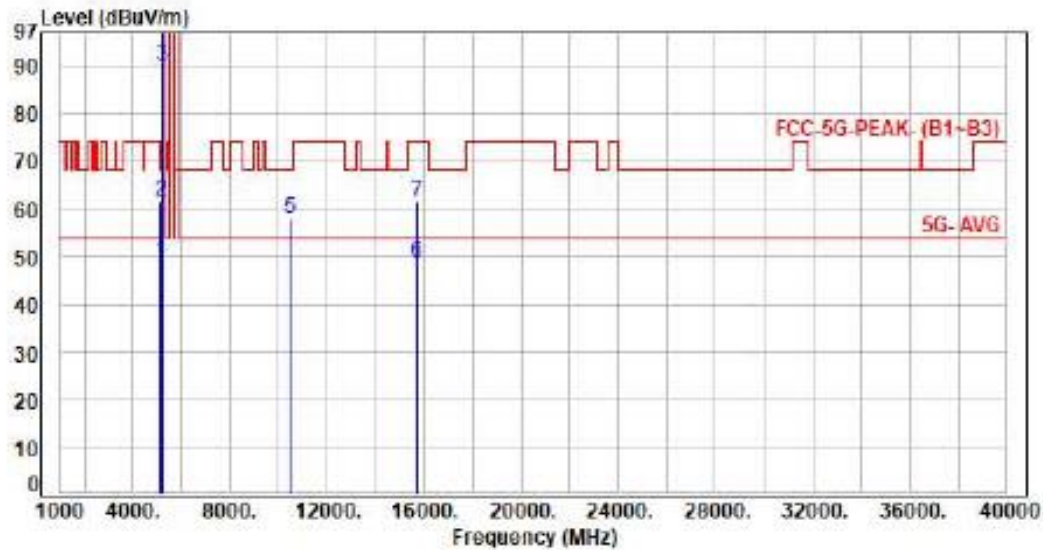

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.29	48.98	54.00	-5.02	Average	110	55	P
2	5150.00	6.69	54.92	61.61	74.00	-12.39	Peak	110	55	P
3	5240.00	6.91	83.05	89.96	200.00	-110.04	Average	110	55	P
4	5240.00	6.91	96.40	103.31	200.00	-96.69	Peak	110	55	P
5	10480.00	16.43	41.51	57.94	68.20	-10.26	Peak	100	53	P
6	15720.00	19.84	28.95	48.79	54.00	-5.21	Average	100	154	P
7	15720.00	19.84	41.88	61.72	74.00	-12.28	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

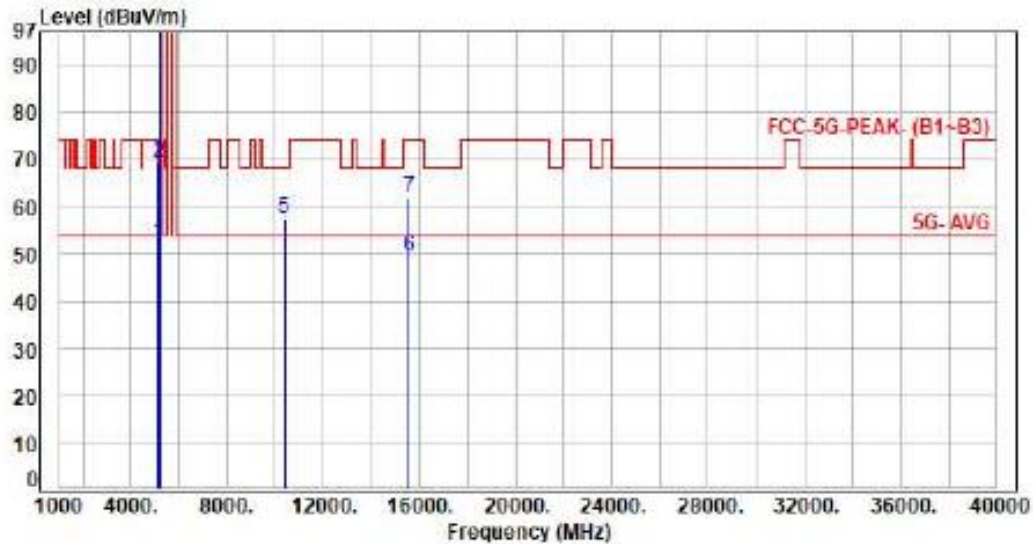

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.82	52.51	54.00	-1.49	Average	382	302	P
2	5150.00	6.69	62.72	69.41	74.00	-4.59	Peak	382	302	P
3	5190.00	6.82	89.43	96.25	200.00	-103.75	Average	382	302	P
4	5190.00	6.82	101.16	107.98	200.00	-92.02	Peak	382	302	P
5	10380.00	16.33	41.38	57.71	68.20	-10.49	Peak	100	275	P
6	15570.00	20.45	28.95	49.40	54.00	-4.60	Average	100	113	P
7	15570.00	20.45	41.63	62.08	74.00	-11.92	Peak	100	113	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

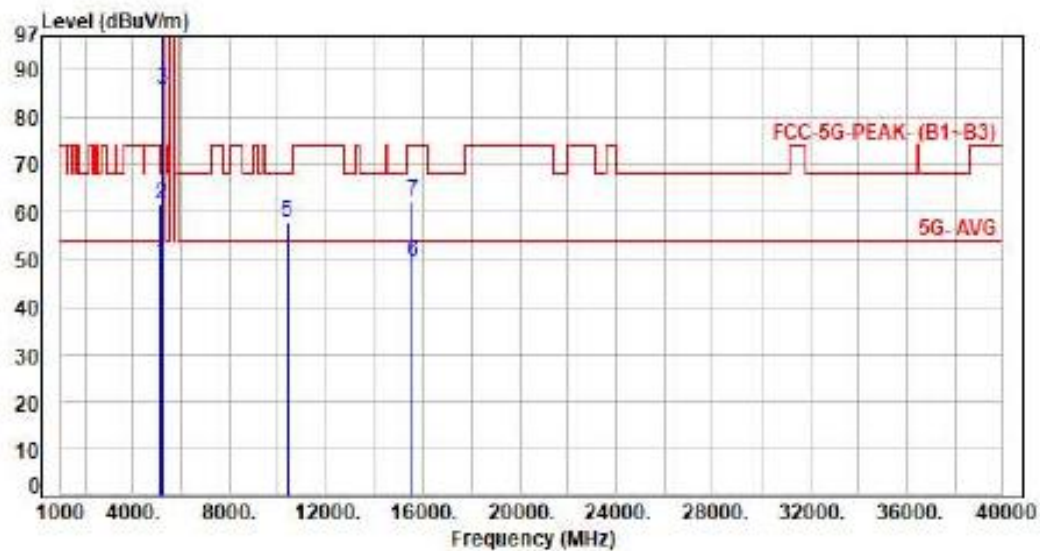

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.29	48.98	54.00	-5.02	Average	102	237	P
2	5150.00	6.69	55.00	61.69	74.00	-12.31	Peak	102	237	P
3	5190.00	6.82	79.14	85.96	200.00	-114.04	Average	102	237	P
4	5190.00	6.82	90.65	97.47	200.00	-102.53	Peak	102	237	P
5	10380.00	16.33	41.76	58.09	68.20	-10.11	Peak	100	59	P
6	15570.00	20.45	28.94	49.39	54.00	-4.61	Average	100	158	P
7	15570.00	20.45	42.04	62.49	74.00	-11.51	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

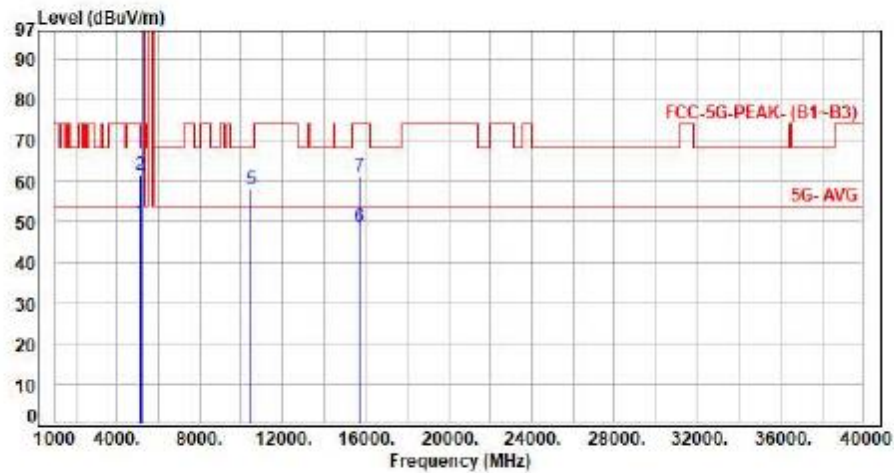

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.02	49.71	54.00	-4.29	Average	358	302	P
2	5150.00	6.69	55.07	61.76	74.00	-12.24	Peak	358	302	P
3	5230.00	6.90	91.12	98.02	200.00	-101.98	Average	358	302	P
4	5230.00	6.90	102.95	109.85	200.00	-90.15	Peak	358	302	P
5	10460.00	16.38	41.53	57.91	68.20	-10.29	Peak	100	275	P
6	15690.00	19.94	28.84	48.78	54.00	-5.22	Average	100	117	P
7	15690.00	19.94	41.39	61.33	74.00	-12.67	Peak	100	117	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

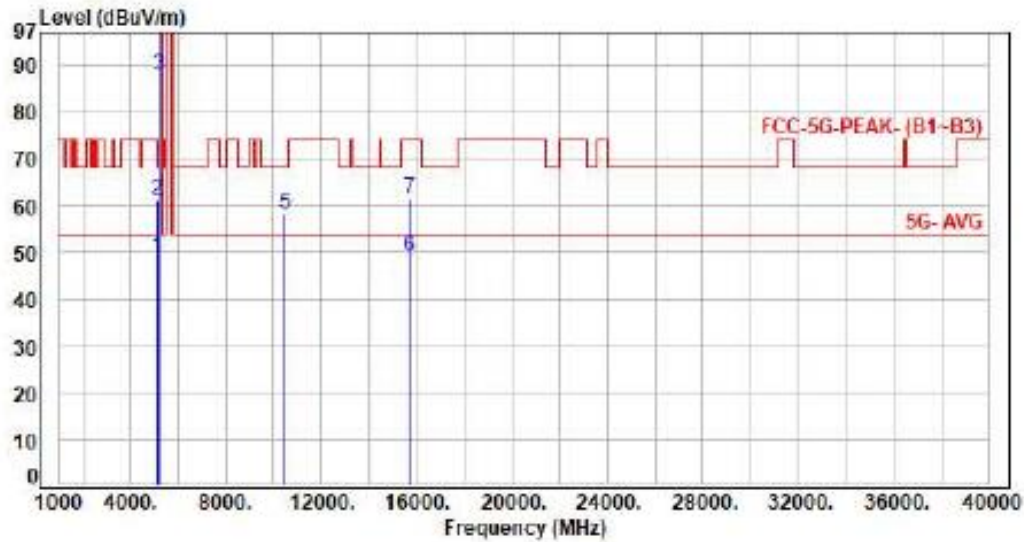

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.36	49.05	54.00	-4.95	Average	104	235	P
2	5150.00	6.69	54.59	61.28	74.00	-12.72	Peak	104	235	P
3	5230.00	6.90	80.89	87.79	200.00	-112.21	Average	104	235	P
4	5230.00	6.90	93.60	100.50	200.00	-99.50	Peak	104	235	P
5	10460.00	16.38	41.93	58.31	68.20	-9.89	Peak	100	64	P
6	15690.00	19.94	29.11	49.05	54.00	-4.95	Average	100	152	P
7	15690.00	19.94	41.55	61.49	74.00	-12.51	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter (AC120V/60Hz)
Pol : Vertical

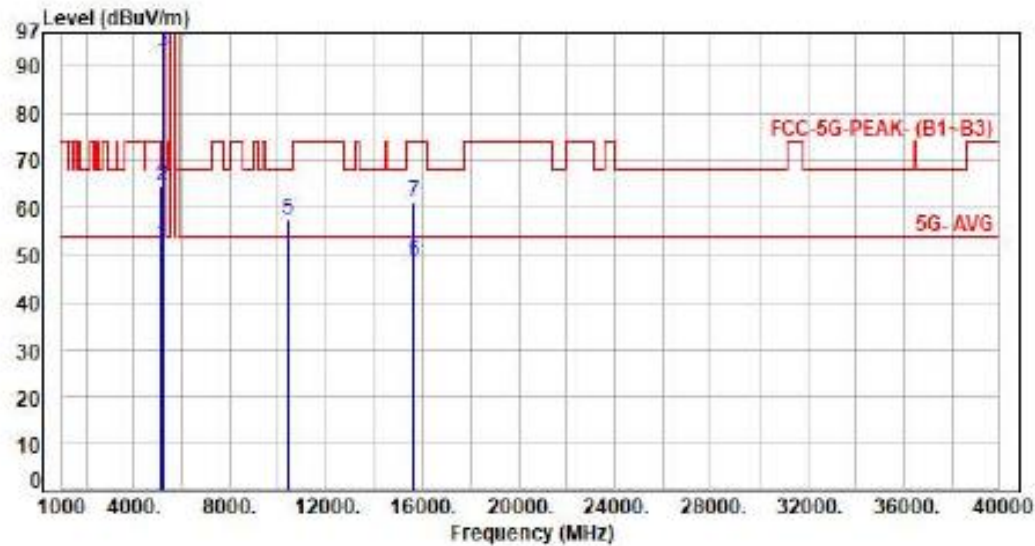

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.78	52.47	54.00	-1.53	Average	333	128	P
2	5150.00	6.69	57.89	64.58	74.00	-9.42	Peak	333	128	P
3	5210.00	6.87	86.10	92.97	200.00	-107.03	Average	333	128	P
4	5210.00	6.87	97.13	104.00	200.00	-96.00	Peak	333	128	P
5	10420.00	16.35	41.32	57.67	68.20	-10.53	Peak	100	275	P
6	15630.00	20.18	28.40	48.58	54.00	-5.42	Average	100	115	P
7	15630.00	20.18	41.15	61.33	74.00	-12.67	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

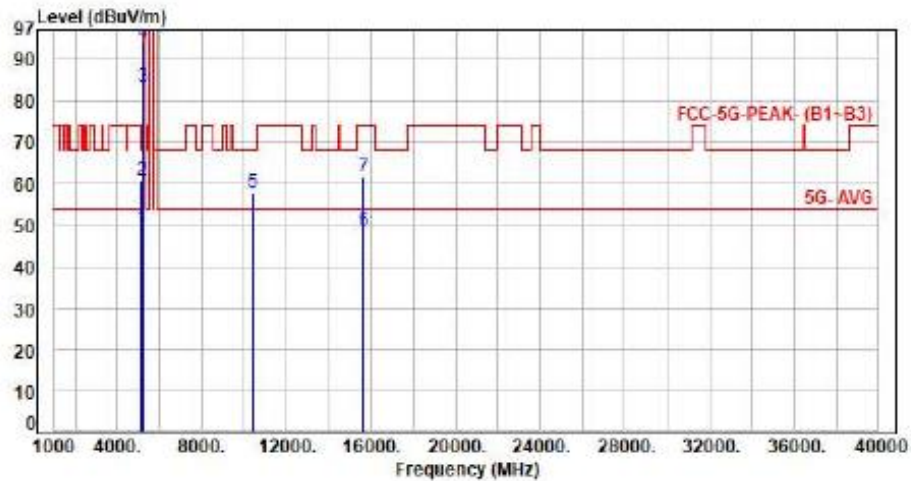

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.37	49.06	54.00	-4.94	Average	111	235	P
2	5150.00	6.69	54.02	60.71	74.00	-13.29	Peak	111	235	P
3	5210.00	6.87	76.40	83.27	200.00	-116.73	Average	111	235	P
4	5210.00	6.87	87.33	94.20	200.00	-105.80	Peak	111	235	P
5	10420.00	16.35	41.65	58.00	68.20	-10.20	Peak	100	63	P
6	15630.00	20.18	28.37	48.55	54.00	-5.45	Average	100	157	P
7	15630.00	20.18	41.58	61.76	74.00	-12.24	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

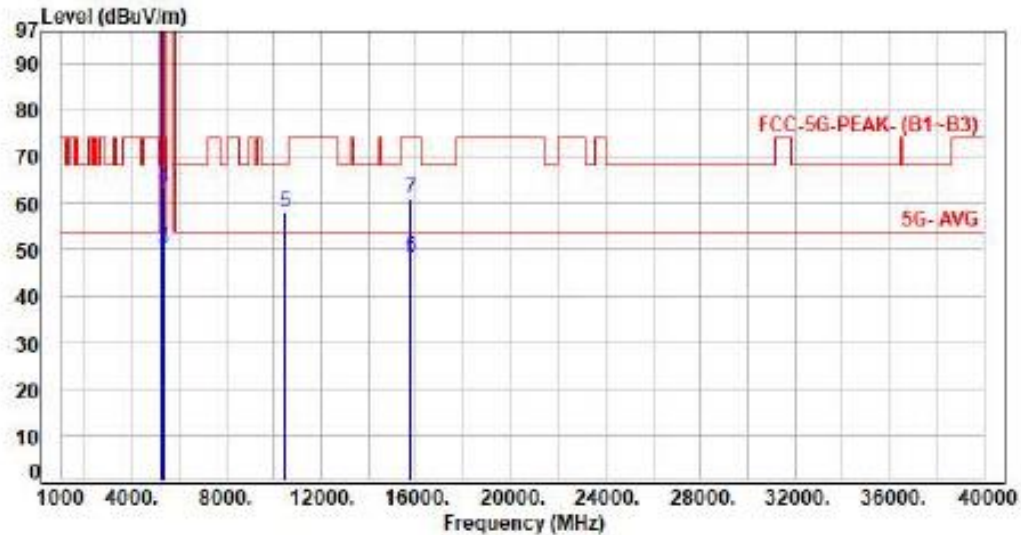

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	93.57	100.56	200.00	-99.44	Average	300	360	P
2	5260.00	6.99	105.40	112.39	200.00	-87.61	Peak	300	360	P
3	5350.00	7.27	42.91	50.18	54.00	-3.82	Average	300	360	P
4	5350.00	7.27	56.23	63.50	74.00	-10.50	Peak	300	360	P
5	10520.00	16.55	41.52	58.07	68.20	-10.13	Peak	100	277	P
6	15780.00	19.61	28.57	48.18	54.00	-5.82	Average	100	116	P
7	15780.00	19.61	41.39	61.00	74.00	-13.00	Peak	100	116	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NS51 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

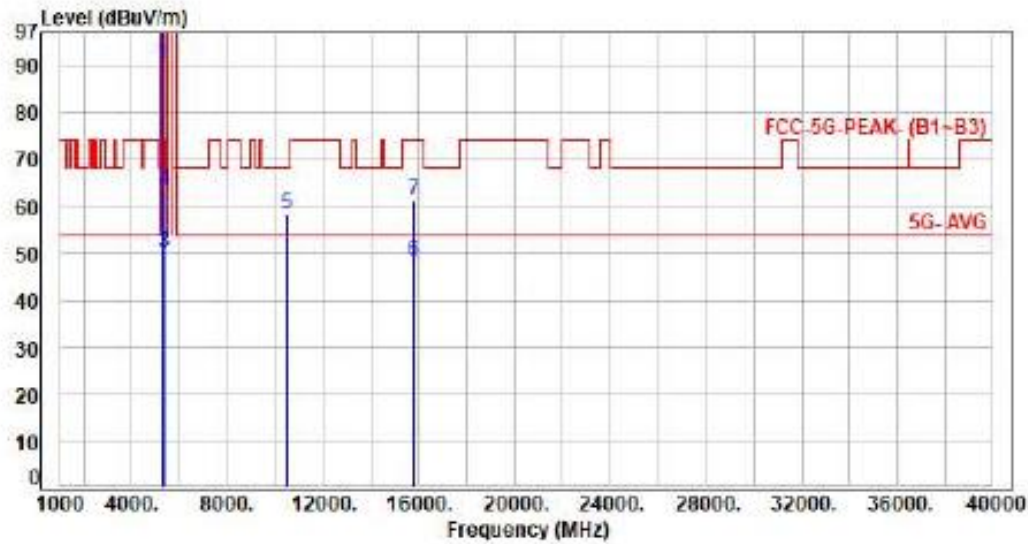

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	83.47	90.46	200.00	-109.54	Average	114	57	P
2	5260.00	6.99	95.38	102.37	200.00	-97.63	Peak	114	57	P
3	5350.00	7.27	42.73	50.00	54.00	-4.00	Average	114	57	P
4	5350.00	7.27	56.33	63.60	74.00	-10.40	Peak	114	57	P
5	10520.00	16.55	41.66	58.21	68.20	-9.99	Peak	100	55	P
6	15780.00	19.61	28.74	48.35	54.00	-5.65	Average	100	158	P
7	15780.00	19.61	41.50	61.11	74.00	-12.89	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

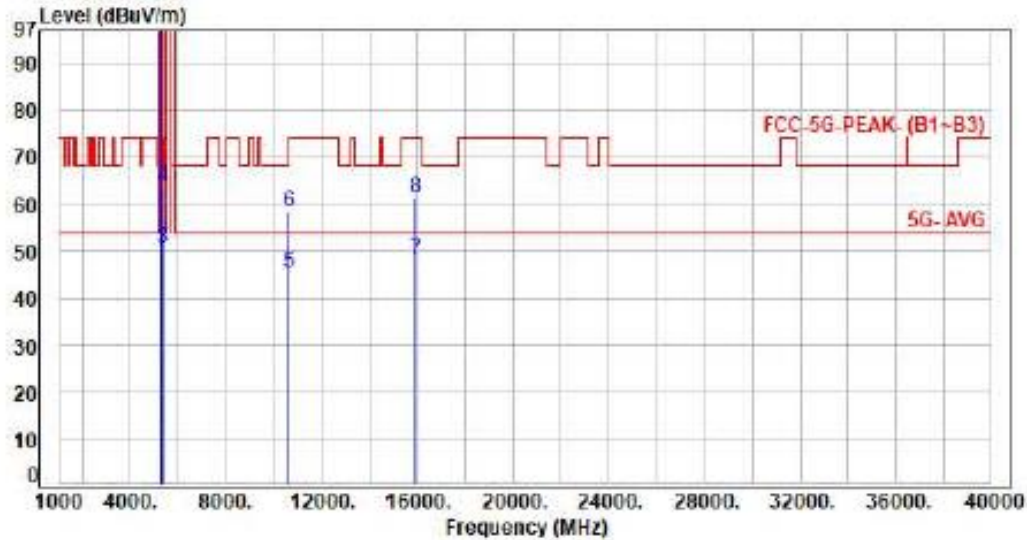

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	94.10	101.30	200.00	-98.70	Average	384	359	P
2	5300.00	7.20	105.61	112.81	200.00	-87.19	Peak	384	359	P
3	5350.00	7.27	43.11	50.38	54.00	-3.62	Average	384	359	P
4	5350.00	7.27	56.41	63.68	74.00	-10.32	Peak	384	359	P
5	10600.00	16.78	28.63	45.41	54.00	-8.59	Average	384	359	P
6	10600.00	16.78	41.40	58.18	74.00	-15.82	Peak	100	274	P
7	15900.00	19.54	28.46	48.00	54.00	-6.00	Average	100	113	P
8	15900.00	19.54	41.55	61.09	74.00	-12.91	Peak	100	113	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

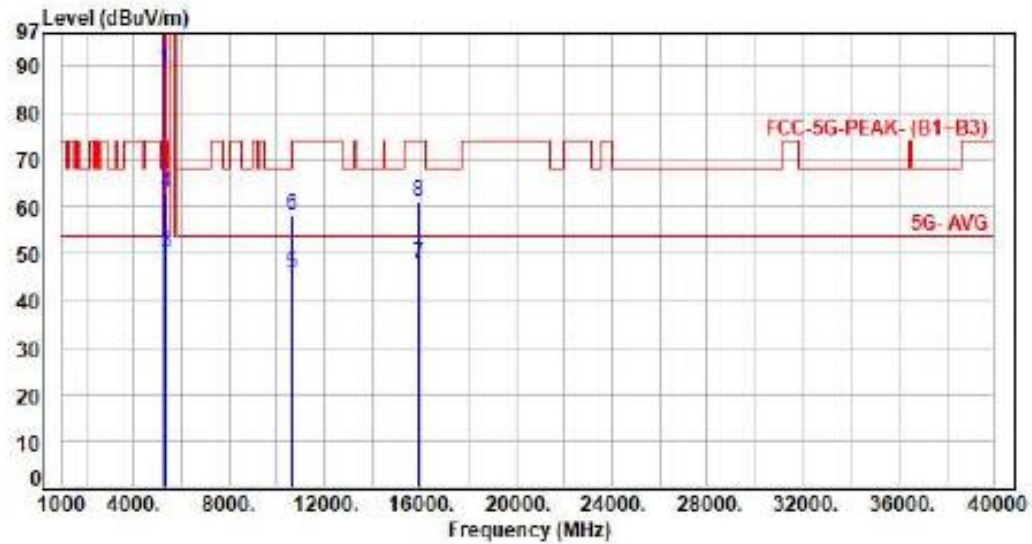

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	81.90	89.10	200.00	-110.90	Average	100	54	P
2	5300.00	7.20	95.03	102.23	200.00	-97.77	Peak	100	54	P
3	5350.00	7.27	42.79	50.06	54.00	-3.94	Average	100	54	P
4	5350.00	7.27	55.75	63.02	74.00	-10.98	Peak	100	54	P
5	10600.00	16.78	28.87	45.65	54.00	-8.35	Average	100	59	P
6	10600.00	16.78	41.43	58.21	74.00	-15.79	Peak	100	59	P
7	15900.00	19.54	28.48	48.02	54.00	-5.98	Average	100	160	P
8	15900.00	19.54	41.56	61.10	74.00	-12.90	Peak	100	160	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex28 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

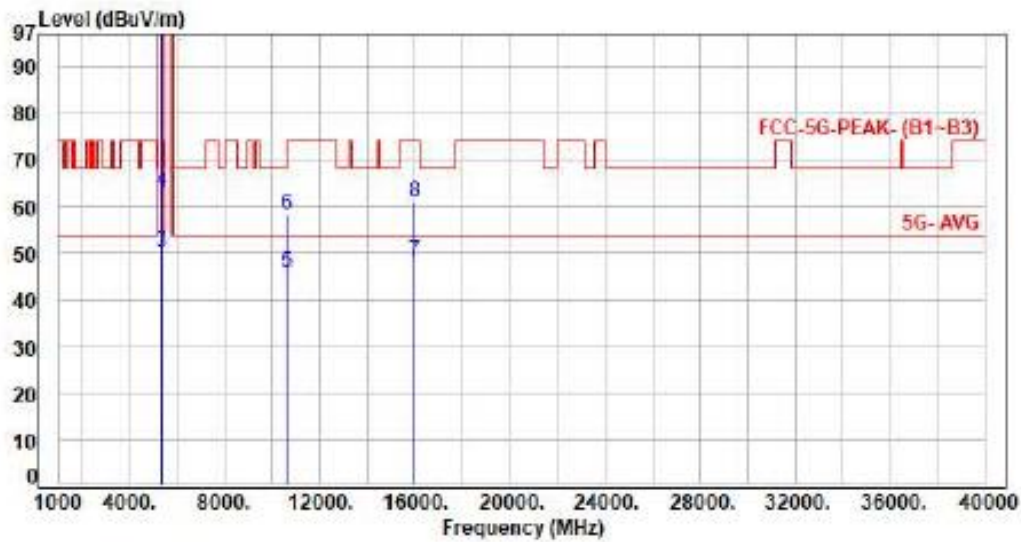

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	93.04	100.27	200.00	-99.73	Average	329	184	P
2	5320.00	7.23	104.66	111.89	200.00	-88.11	Peak	329	184	P
3	5350.00	7.27	43.06	50.33	54.00	-3.67	Average	329	184	P
4	5350.00	7.27	55.68	62.95	74.00	-11.05	Peak	329	184	P
5	10640.00	16.96	28.93	45.89	54.00	-8.11	Average	100	278	P
6	10640.00	16.96	41.37	58.33	74.00	-15.67	Peak	100	278	P
7	15960.00	19.50	28.88	48.38	54.00	-5.62	Average	100	118	P
8	15960.00	19.50	41.54	61.04	74.00	-12.96	Peak	100	118	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

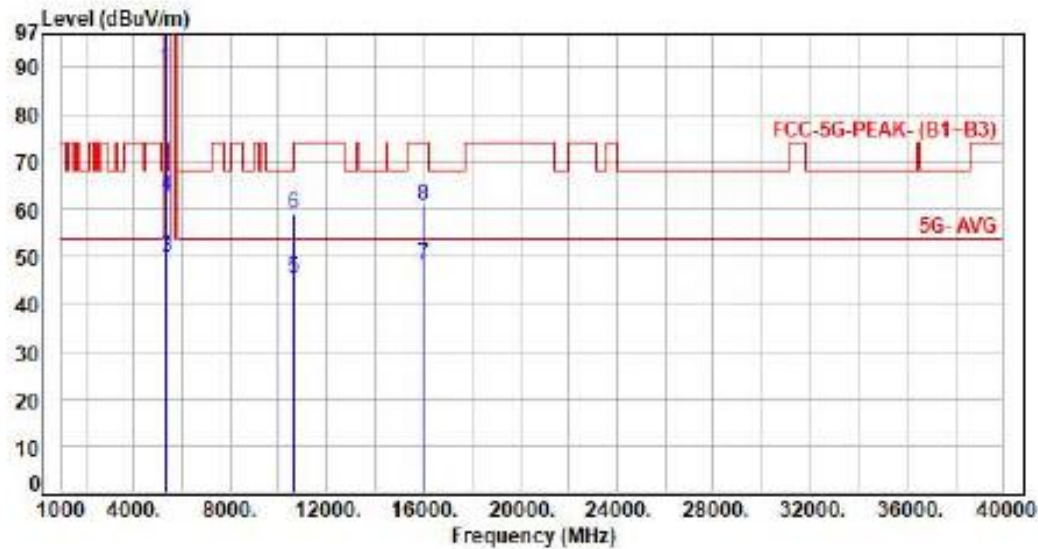

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	82.52	89.75	200.00	-110.25	Average	105	233	P
2	5320.00	7.23	95.91	103.14	200.00	-96.86	Peak	105	233	P
3	5350.00	7.27	42.70	49.97	54.00	-4.03	Average	105	233	P
4	5350.00	7.27	55.31	62.58	74.00	-11.42	Peak	105	233	P
5	10640.00	16.96	28.56	45.52	54.00	-8.48	Average	100	63	P
6	10640.00	16.96	41.95	58.91	74.00	-15.09	Peak	100	63	P
7	15960.00	19.50	28.66	48.16	54.00	-5.84	Average	100	159	P
8	15960.00	19.50	41.42	60.92	74.00	-13.08	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

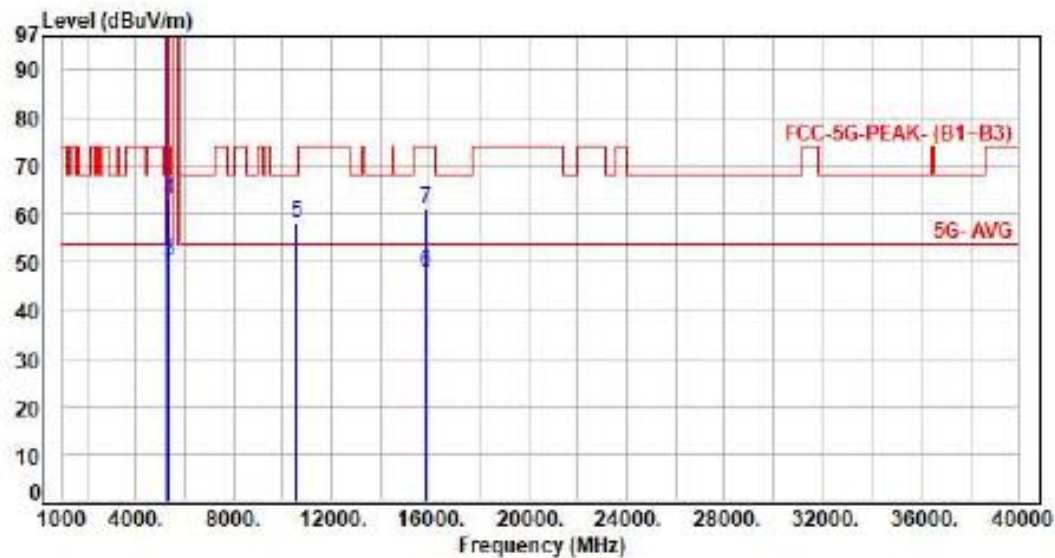

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	89.87	96.91	200.00	-103.09	Average	387	360	P
2	5270.00	7.04	101.83	108.87	200.00	-91.13	Peak	387	360	P
3	5350.00	7.27	42.71	49.98	54.00	-4.02	Average	387	360	P
4	5350.00	7.27	55.78	63.05	74.00	-10.95	Peak	387	360	P
5	10540.00	16.65	41.45	58.10	68.20	-10.10	Peak	100	275	P
6	15810.00	19.51	28.28	47.79	54.00	-6.21	Average	100	117	P
7	15810.00	19.51	41.85	61.36	74.00	-12.64	Peak	100	117	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

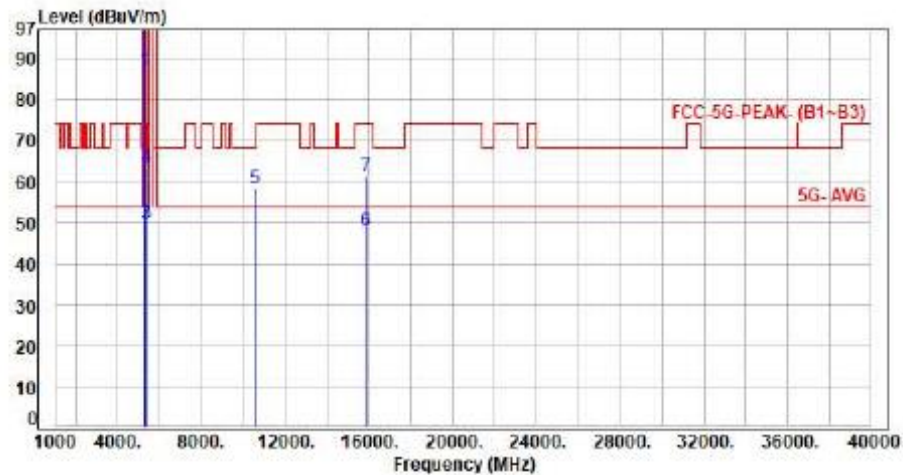

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	79.97	87.01	200.00	-112.99	Average	111	234	P
2	5270.00	7.04	92.40	99.44	200.00	-100.56	Peak	111	234	P
3	5350.00	7.27	42.64	49.91	54.00	-4.09	Average	111	234	P
4	5350.00	7.27	56.20	63.47	74.00	-10.53	Peak	111	234	P
5	10540.00	16.65	41.50	58.15	68.20	-10.05	Peak	100	61	P
6	15810.00	19.51	28.59	48.10	54.00	-5.90	Average	100	155	P
7	15810.00	19.51	41.60	61.11	74.00	-12.89	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

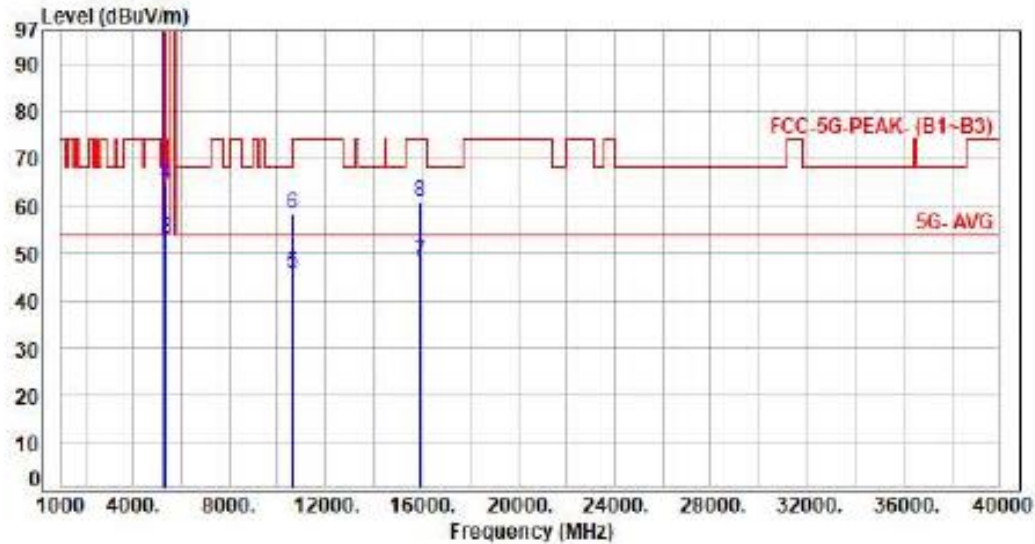

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	89.22	96.44	200.00	-103.56	Average	369	360	P
2	5310.00	7.22	101.70	108.92	200.00	-91.08	Peak	369	360	P
3	5350.00	7.27	45.67	52.94	54.00	-1.06	Average	369	360	P
4	5350.00	7.27	57.33	64.60	74.00	-9.40	Peak	369	360	P
5	10620.00	16.87	28.79	45.66	54.00	-8.34	Average	100	276	P
6	10620.00	16.87	41.44	58.31	74.00	-15.69	Peak	100	276	P
7	15930.00	19.51	28.64	48.15	54.00	-5.85	Average	100	118	P
8	15930.00	19.51	41.24	60.75	74.00	-13.25	Peak	100	118	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

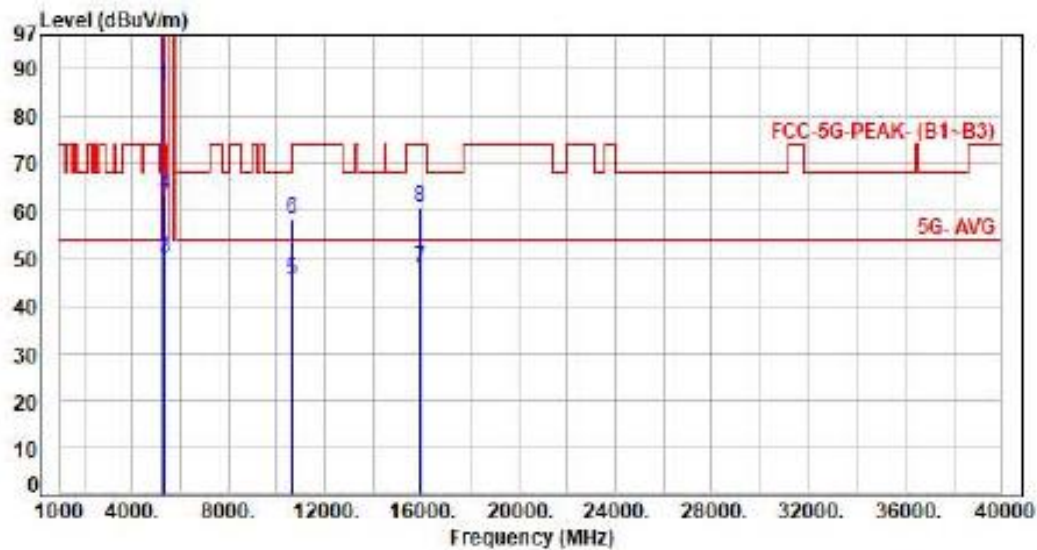

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	79.15	86.37	200.00	-113.63	Average	113	236	P
2	5310.00	7.22	90.07	97.29	200.00	-102.71	Peak	113	236	P
3	5350.00	7.27	43.01	50.28	54.00	-3.72	Average	113	236	P
4	5350.00	7.27	56.15	63.42	74.00	-10.58	Peak	113	236	P
5	10620.00	16.87	28.38	45.25	54.00	-8.75	Average	100	58	P
6	10620.00	16.87	41.51	58.38	74.00	-15.62	Peak	100	58	P
7	15930.00	19.51	28.34	47.85	54.00	-6.15	Average	100	153	P
8	15930.00	19.51	41.17	60.68	74.00	-13.32	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MC50
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

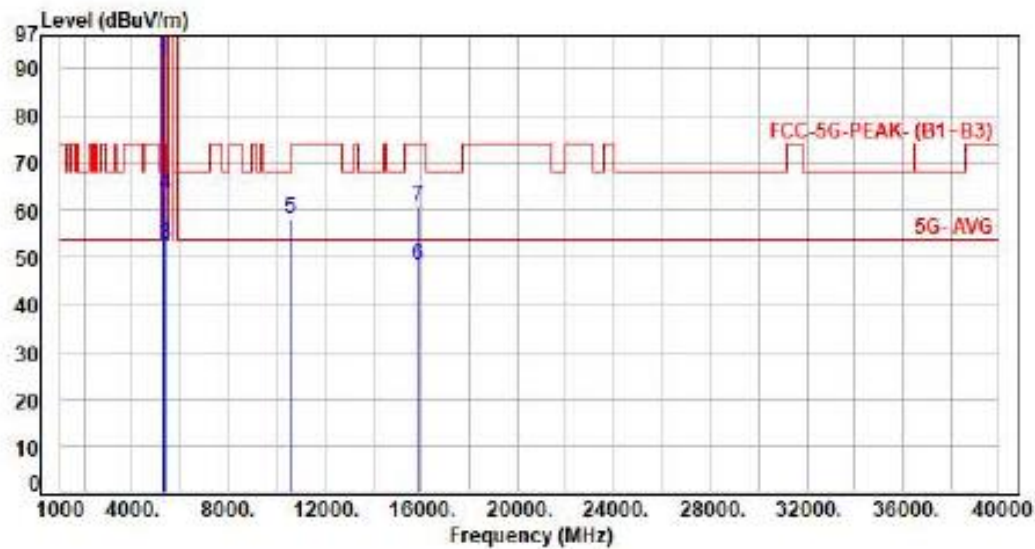

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	84.18	91.33	200.00	-108.67	Average	374	236	P
2	5290.00	7.15	96.30	103.45	200.00	-96.55	Peak	374	236	P
3	5350.00	7.27	45.34	52.61	54.00	-1.39	Average	374	236	P
4	5350.00	7.27	56.29	63.56	74.00	-10.44	Peak	374	236	P
5	10580.00	16.74	41.67	58.41	68.20	-9.79	Peak	100	276	P
6	15870.00	19.54	28.84	48.38	54.00	-5.62	Average	100	118	P
7	15870.00	19.54	41.48	61.02	74.00	-12.98	Peak	100	118	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

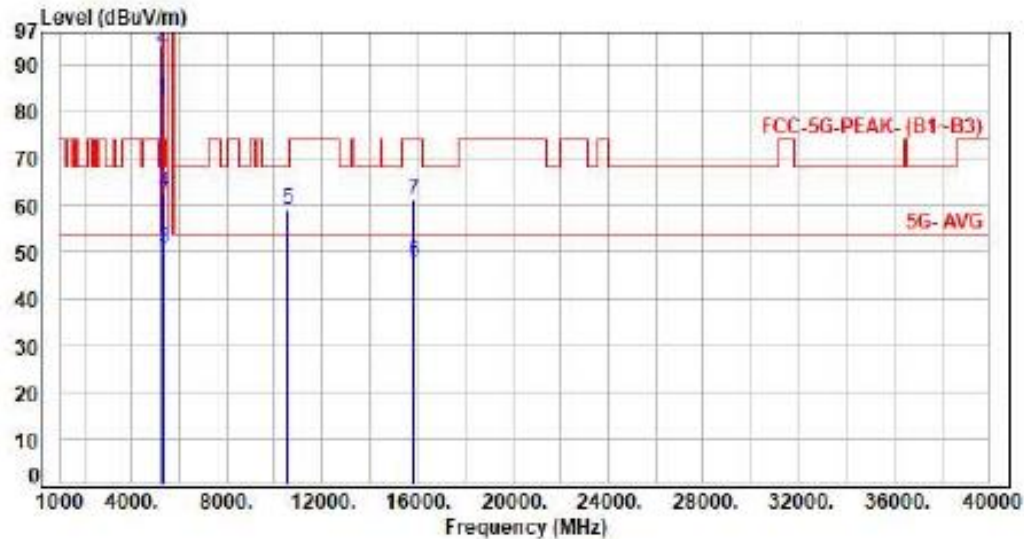

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	75.37	82.52	200.00	-117.48	Average	100	233	P
2	5290.00	7.15	87.03	94.18	200.00	-105.82	Peak	100	233	P
3	5350.00	7.27	43.55	50.82	54.00	-3.18	Average	100	233	P
4	5350.00	7.27	55.54	62.81	74.00	-11.19	Peak	100	233	P
5	10580.00	16.74	42.15	58.89	68.20	-9.31	Peak	100	62	P
6	15870.00	19.54	28.35	47.89	54.00	-6.11	Average	100	158	P
7	15870.00	19.54	41.68	61.22	74.00	-12.78	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH100 NS51 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

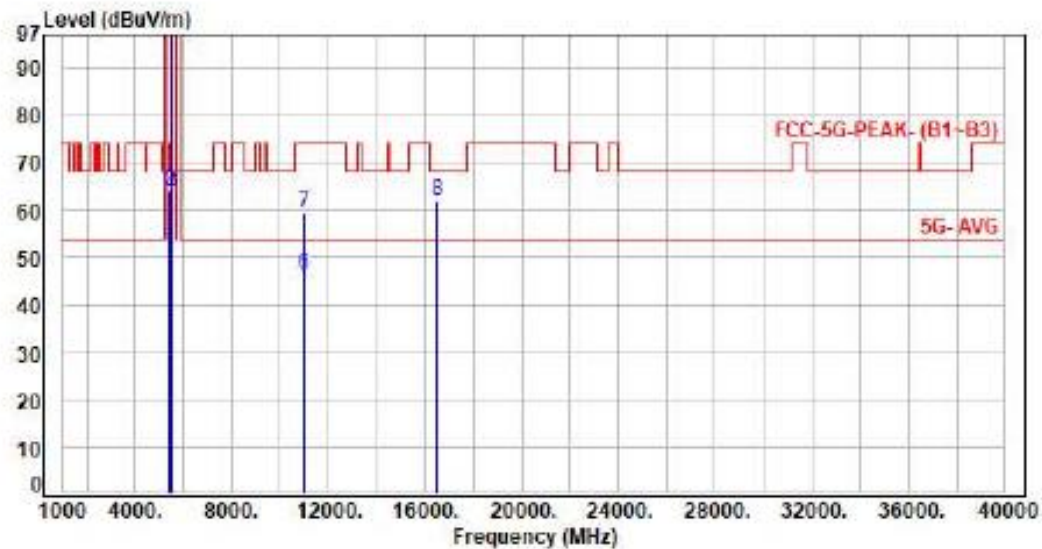

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.57	51.12	54.00	-2.88	Average	312	307	P
2	5460.00	7.55	56.44	63.99	74.00	-10.01	Peak	312	307	P
3	5470.00	7.58	56.12	63.70	68.20	-4.50	Peak	312	307	P
4	5500.00	7.68	93.12	100.80	200.00	-99.20	Average	312	307	P
5	5500.00	7.68	105.06	112.74	200.00	-87.26	Peak	312	307	P
6	11000.00	17.78	28.67	46.45	54.00	-7.55	Average	100	277	P
7	11000.00	17.78	41.63	59.41	74.00	-14.59	Peak	100	277	P
8	16500.00	20.78	41.29	62.07	68.20	-6.13	Peak	100	114	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

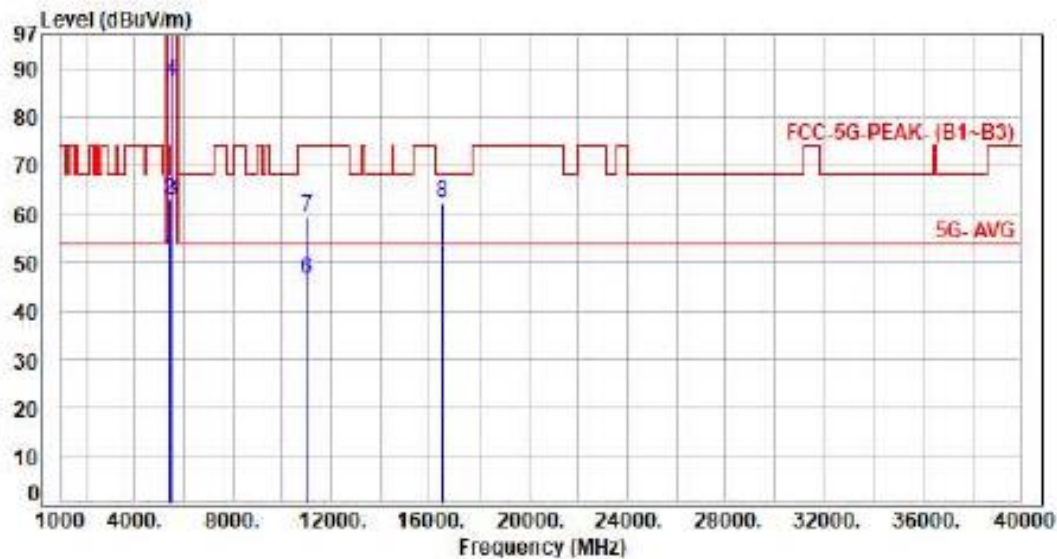


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.46	51.01	54.00	-2.99	Average	110	57	P
2	5460.00	7.55	55.42	62.97	74.00	-11.03	Peak	110	57	P
3	5470.00	7.58	55.23	62.81	68.20	-5.39	Peak	110	57	P
4	5500.00	7.68	79.56	87.24	200.00	-112.76	Average	110	57	P
5	5500.00	7.68	91.29	98.97	200.00	-101.03	Peak	110	57	P
6	11000.00	17.78	28.66	46.44	54.00	-7.56	Average	100	60	P
7	11000.00	17.78	41.46	59.24	74.00	-14.76	Peak	100	60	P
8	16500.00	20.78	41.38	62.16	68.20	-6.04	Peak	100	159	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

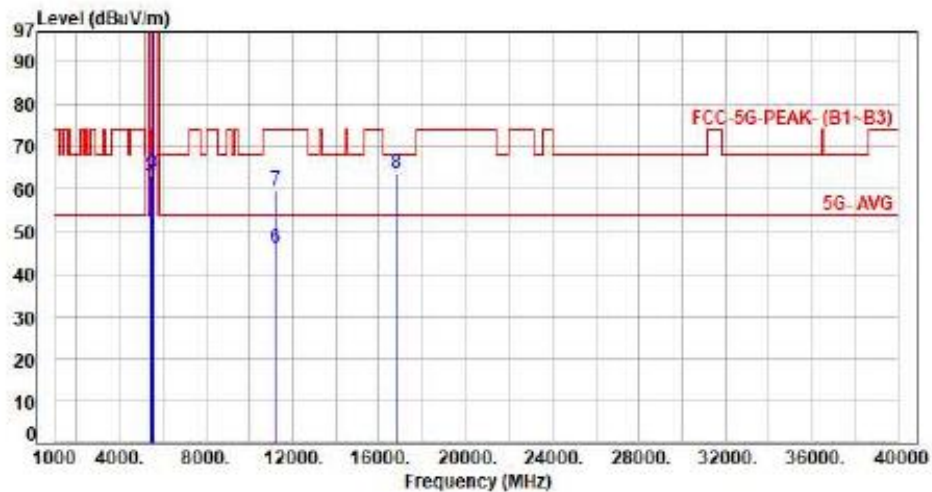

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.60	50.15	54.00	-3.85	Average	305	185	P
2	5460.00	7.55	55.63	63.18	74.00	-10.82	Peak	305	185	P
3	5470.00	7.58	56.11	63.69	68.20	-4.51	Peak	305	185	P
4	5600.00	7.51	93.30	100.81	200.00	-99.19	Average	305	185	P
5	5600.00	7.51	104.48	111.99	200.00	-88.01	Peak	305	185	P
6	11200.00	17.89	28.26	46.15	54.00	-7.85	Average	100	279	P
7	11200.00	17.89	41.88	59.77	74.00	-14.23	Peak	100	279	P
8	15800.00	22.29	41.57	63.86	68.20	-4.34	Peak	100	113	P


Note: Level=Reading+Factor

Margin-Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

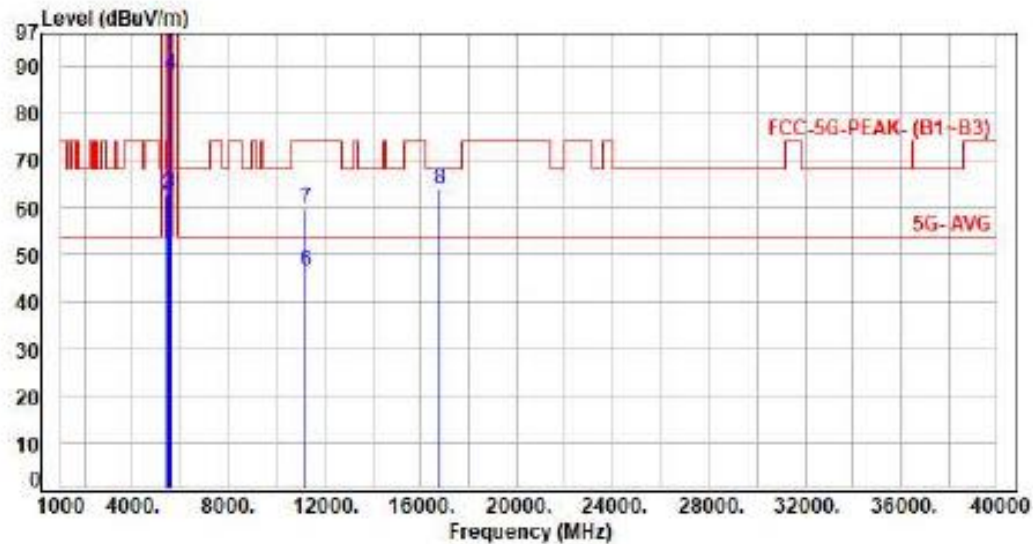

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.63	50.18	54.00	-3.82	Average	114	126	P
2	5460.00	7.55	55.27	62.82	74.00	-11.18	Peak	114	126	P
3	5470.00	7.58	55.60	63.18	68.20	-5.02	Peak	114	126	P
4	5600.00	7.51	80.60	88.11	200.00	-111.89	Average	114	126	P
5	5600.00	7.51	93.33	100.84	200.00	-99.16	Peak	114	126	P
6	11200.00	17.89	28.60	46.49	54.00	-7.51	Average	100	63	P
7	11200.00	17.89	42.02	59.91	74.00	-14.09	Peak	100	63	P
8	16800.00	22.29	41.55	63.84	68.20	-4.36	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax28 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

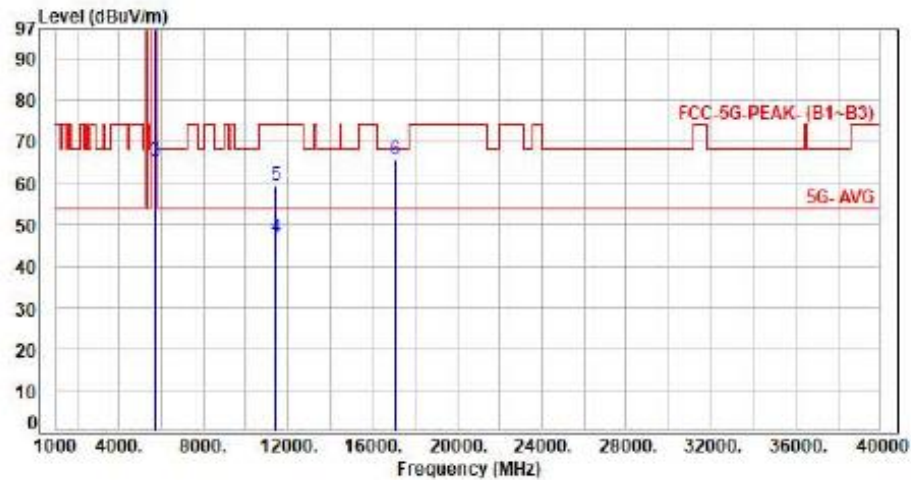

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	92.22	99.65	200.00	-100.35	Average	347	32	P
2	5700.00	7.43	105.54	112.97	200.00	-87.03	Peak	347	32	P
3	5725.00	7.43	57.96	65.39	68.20	-2.81	Peak	347	32	P
4	11400.00	18.08	28.73	46.81	54.00	-7.19	Average	100	274	P
5	11400.00	18.08	41.29	59.37	74.00	-14.63	Peak	100	274	P
6	17100.00	24.04	41.73	65.77	68.20	-2.43	Peak	100	116	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor