




Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

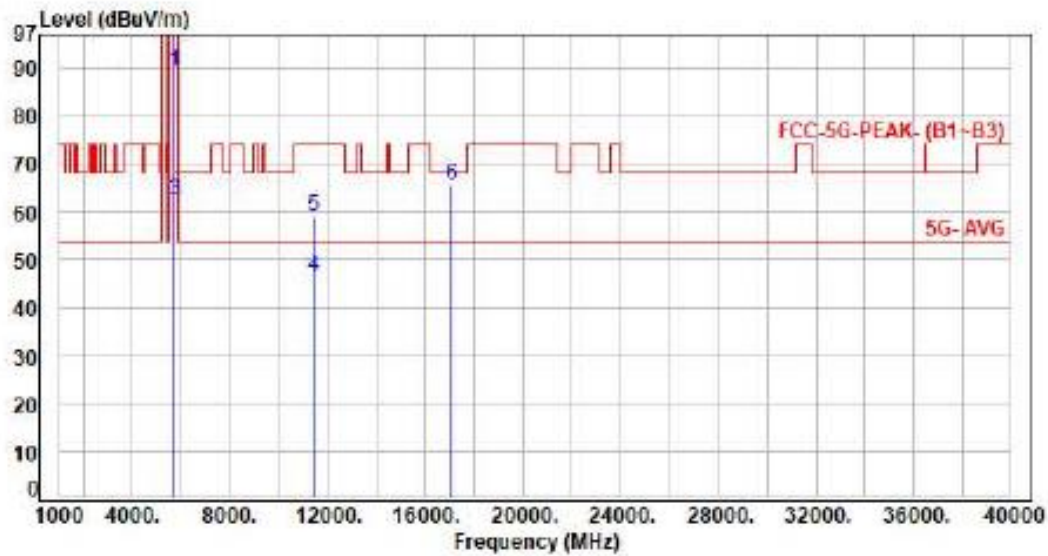

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	81.93	89.36	200.00	-110.64	Average	100	125	P
2	5700.00	7.43	94.26	101.69	200.00	-98.31	Peak	100	125	P
3	5725.00	7.43	54.90	62.33	68.20	-5.87	Peak	100	125	P
4	11400.00	18.08	28.26	46.34	54.00	-7.66	Average	100	58	P
5	11400.00	18.08	40.87	58.95	74.00	-15.05	Peak	100	58	P
6	17100.00	24.04	41.53	65.57	68.20	-2.63	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

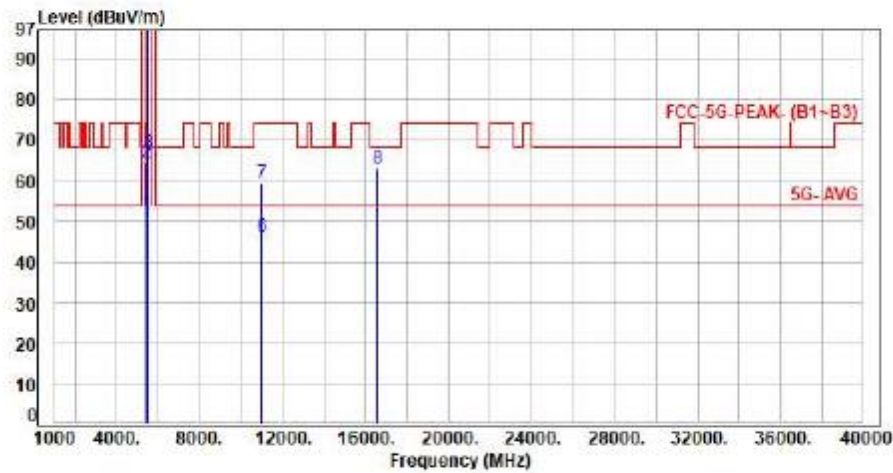

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.15	51.70	54.00	-2.30	Average	299	183	P
2	5460.00	7.55	56.83	64.38	74.00	-9.62	Peak	299	183	P
3	5470.00	7.58	59.19	66.77	68.20	-1.43	Peak	299	183	P
4	5510.00	7.66	90.03	97.69	200.00	-102.31	Average	299	183	P
5	5510.00	7.66	100.60	108.26	200.00	-91.74	Peak	299	183	P
6	11020.00	17.81	28.47	46.28	54.00	-7.72	Average	100	279	P
7	11020.00	17.81	41.39	59.20	74.00	-14.80	Peak	100	279	P
8	16530.00	21.02	42.02	63.04	68.20	-5.16	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

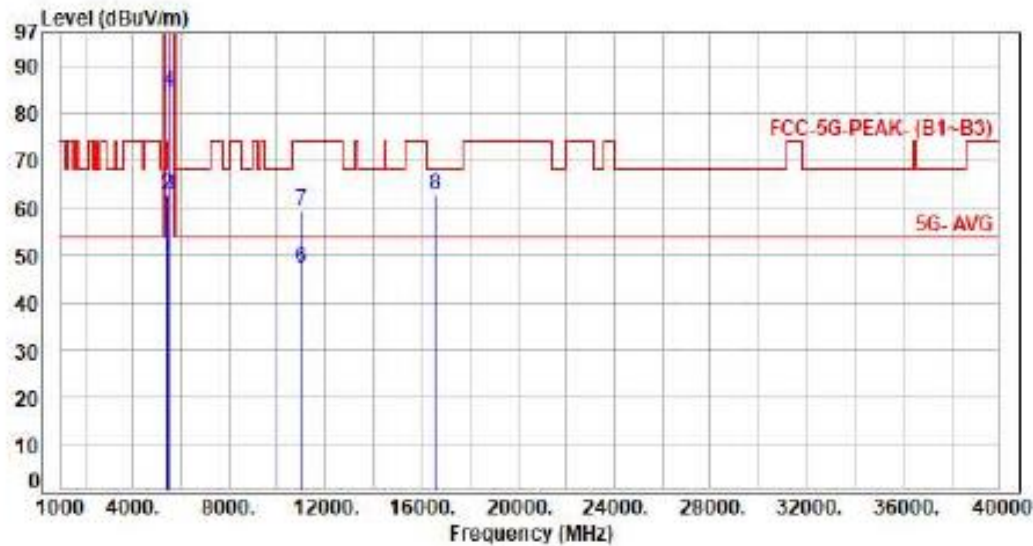

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.64	50.19	54.00	-3.81	Average	102	57	P
2	5460.00	7.55	55.26	62.81	74.00	-11.19	Peak	101	57	P
3	5470.00	7.58	55.02	62.60	68.20	-5.60	Peak	102	57	P
4	5510.00	7.66	76.65	84.31	200.00	-115.69	Average	102	57	P
5	5510.00	7.66	88.61	96.27	200.00	-103.73	Peak	102	57	P
6	11020.00	17.81	29.57	47.38	54.00	-6.62	Average	100	58	P
7	11020.00	17.81	41.63	59.44	74.00	-14.56	Peak	100	58	P
8	16530.00	21.02	41.64	62.66	68.20	-5.54	Peak	100	160	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

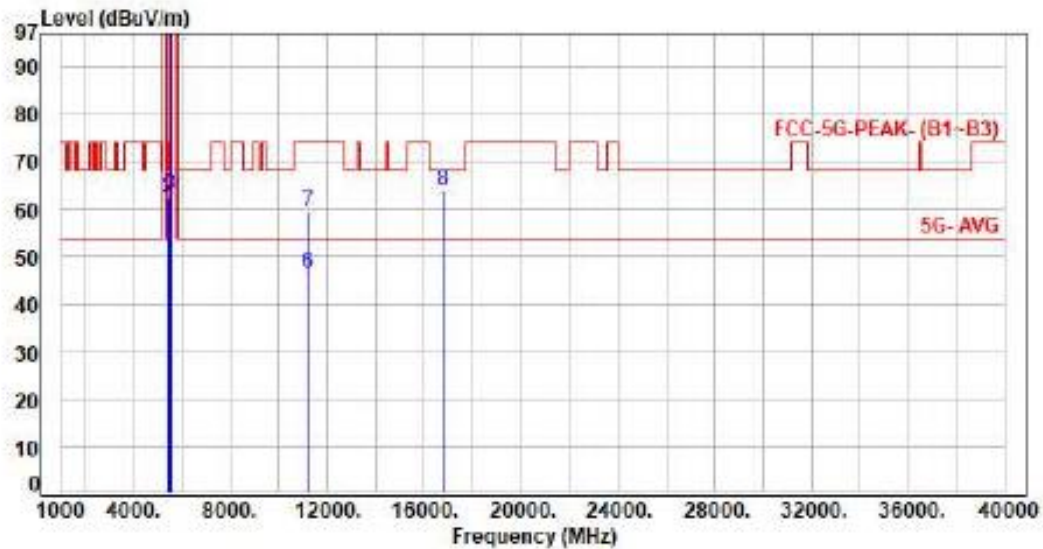

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.52	50.07	54.00	-3.93	Average	296	180	P
2	5460.00	7.55	54.90	62.45	74.00	-11.55	Peak	296	180	P
3	5470.00	7.58	55.59	63.17	68.20	-5.03	Peak	296	180	P
4	5590.00	7.53	90.20	97.73	200.00	-102.27	Average	296	180	P
5	5590.00	7.53	102.10	109.63	200.00	-90.37	Peak	296	180	P
6	11180.00	17.87	28.75	46.62	54.00	-7.38	Average	100	270	P
7	11180.00	17.87	41.46	59.33	74.00	-14.67	Peak	100	270	P
8	16770.00	22.21	41.53	63.74	68.20	-4.46	Peak	100	113	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH118 NS51 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

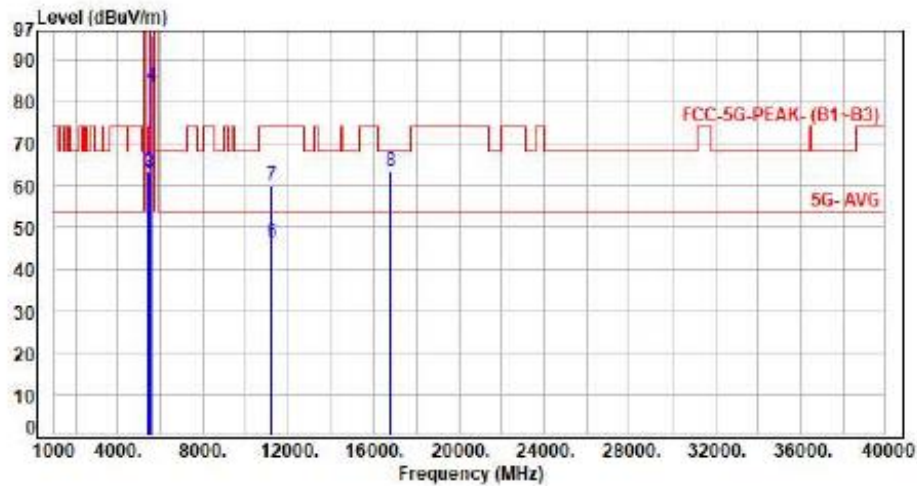

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.50	50.05	54.00	-3.95	Average	284	58	P
2	5460.00	7.55	55.85	63.40	74.00	-10.60	Peak	284	58	P
3	5470.00	7.58	55.47	63.05	68.20	-5.15	Peak	284	58	P
4	5590.00	7.53	76.36	83.89	200.00	-116.11	Average	284	58	P
5	5590.00	7.53	88.48	96.01	200.00	-103.99	Peak	284	58	P
6	11180.00	17.87	28.44	46.31	54.00	-7.69	Average	100	57	P
7	11180.00	17.87	42.09	59.96	74.00	-14.04	Peak	100	57	P
8	16770.00	22.21	41.37	63.58	68.20	-4.62	Peak	100	161	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax48 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

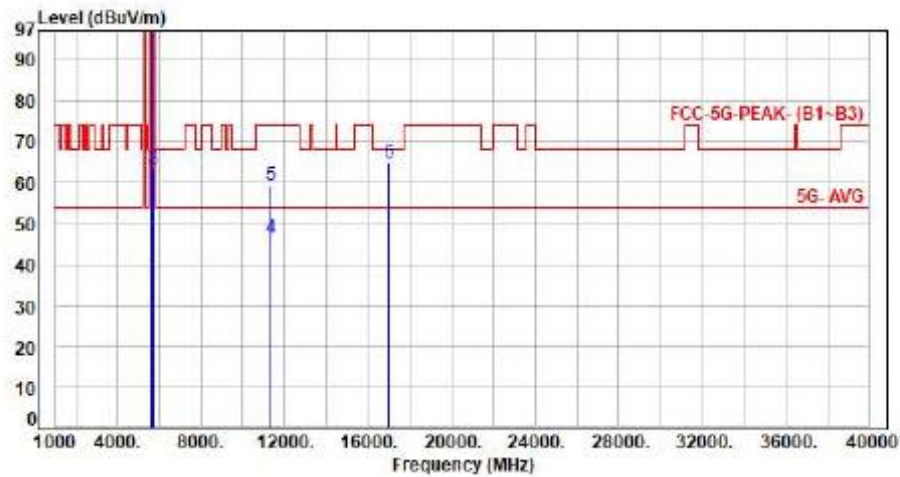

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	88.99	96.47	200.00	-103.53	Average	312	1	P
2	5670.00	7.48	100.82	108.30	200.00	-91.70	Peak	312	1	P
3	5725.00	7.43	55.93	63.36	68.20	-4.84	Peak	312	1	P
4	11340.00	17.96	28.39	46.35	54.00	-7.65	Average	100	277	P
5	11340.00	17.96	41.43	59.39	74.00	-14.61	Peak	100	277	P
6	17010.00	23.47	41.28	64.75	68.20	-3.45	Peak	100	112	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Voltage : From Adapter (AC120V/60Hz)
Pol : Horizontal

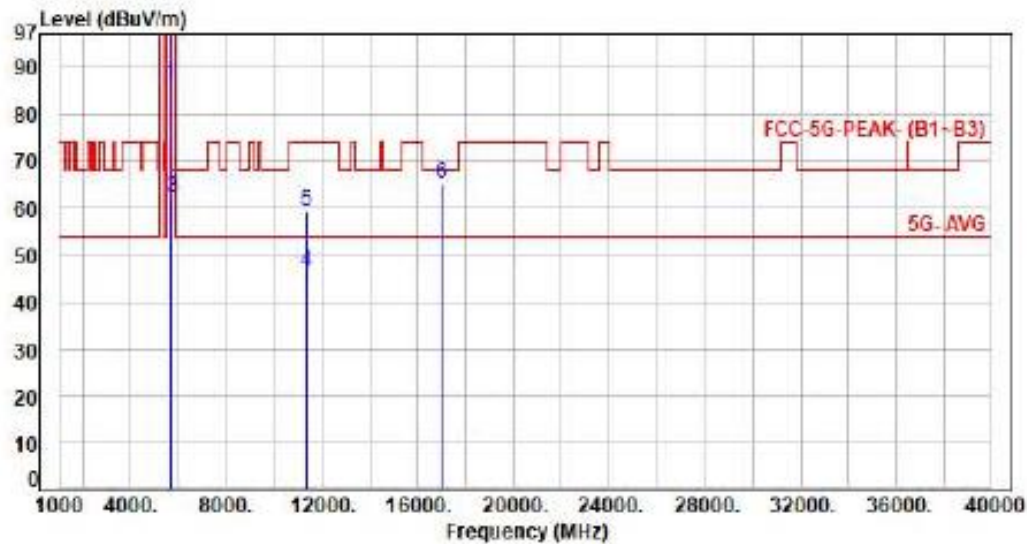

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	78.92	86.40	200.00	-113.60	Average	100	75	P
2	5670.00	7.48	90.28	97.76	200.00	-102.24	Peak	100	75	P
3	5725.00	7.43	54.78	62.21	68.20	-5.99	Peak	100	75	P
4	11340.00	17.96	28.65	46.61	54.00	-7.39	Average	100	62	P
5	11340.00	17.96	41.39	59.35	74.00	-14.65	Peak	100	62	P
6	17010.00	23.47	41.87	65.34	68.20	-2.86	Peak	100	163	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

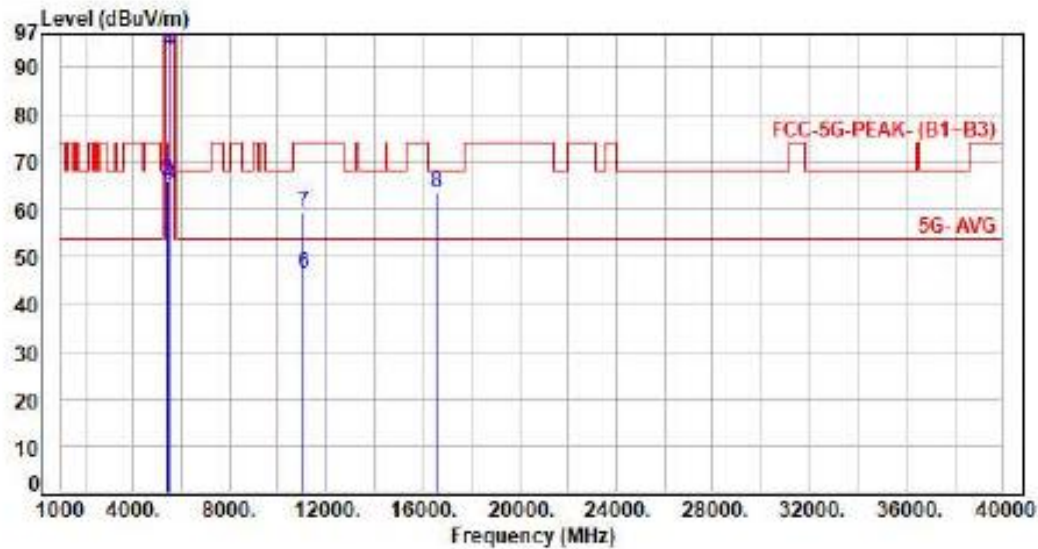

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.36	52.91	54.00	-1.09	Average	321	360	P
2	5460.00	7.55	58.44	65.99	74.00	-8.01	Peak	321	360	P
3	5470.00	7.58	57.54	65.12	68.20	-3.08	Peak	321	360	P
4	5530.00	7.63	85.77	93.40	200.00	-106.60	Average	321	360	P
5	5530.00	7.63	96.54	104.17	200.00	-95.83	Peak	321	360	P
6	11060.00	17.87	28.56	46.43	54.00	-7.57	Average	100	278	P
7	11060.00	17.87	41.48	59.35	74.00	-14.65	Peak	100	278	P
8	16590.00	21.59	41.79	63.38	68.20	-4.82	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

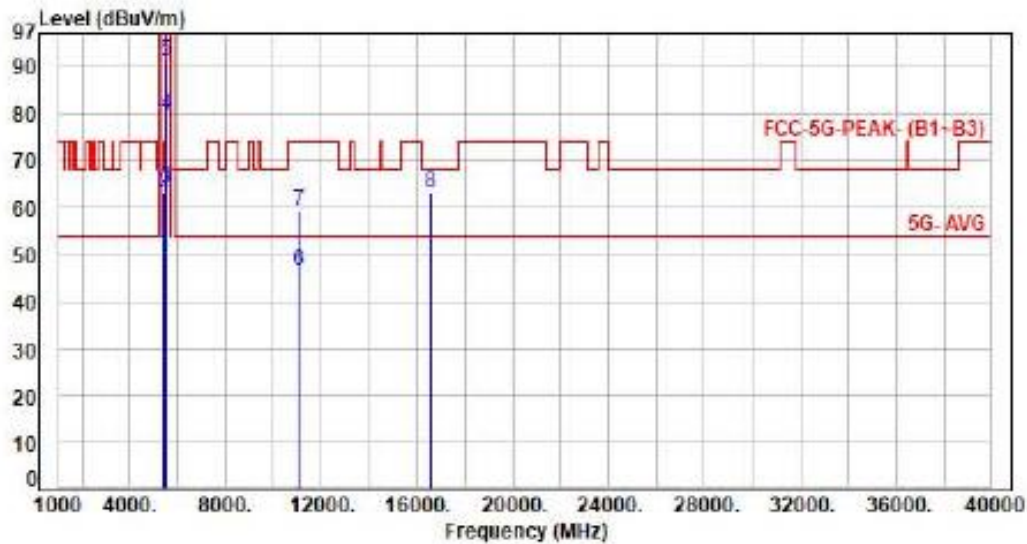

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.50	50.05	54.00	-3.95	Average	100	57	P
2	5460.00	7.55	55.66	63.21	74.00	-10.79	Peak	100	57	P
3	5470.00	7.58	56.57	64.15	68.20	-4.05	Peak	100	57	P
4	5530.00	7.63	72.12	79.75	200.00	-120.25	Average	100	57	P
5	5530.00	7.63	83.54	91.17	200.00	-108.83	Peak	100	57	P
6	11060.00	17.87	28.42	46.29	54.00	-7.71	Average	100	59	P
7	11060.00	17.87	41.47	59.34	74.00	-14.66	Peak	100	59	P
8	16590.00	21.59	41.38	62.97	68.20	-5.23	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

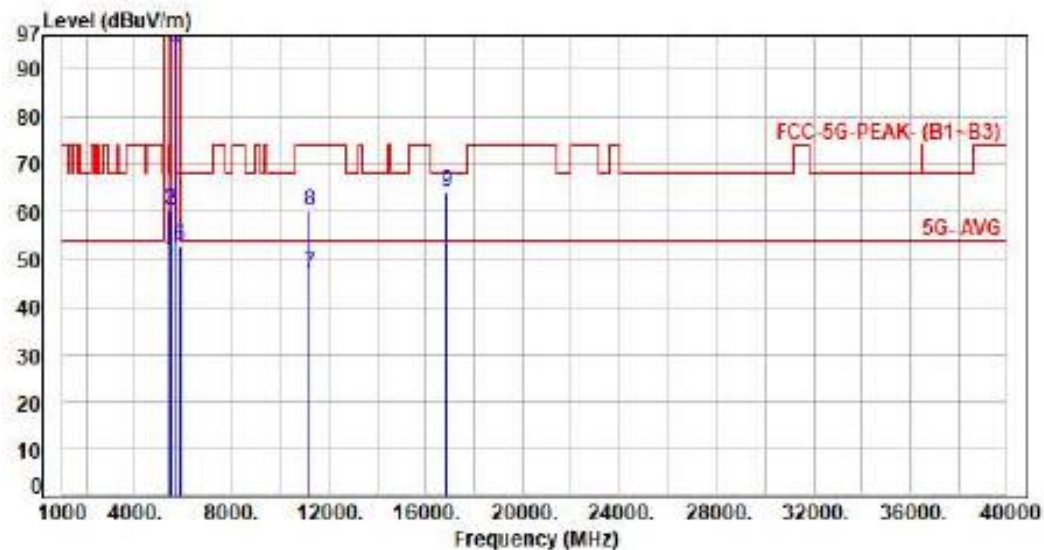

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.29	49.84	54.00	-4.16	Average	307	180	P
2	5460.00	7.55	52.76	60.31	74.00	-13.69	Peak	307	180	P
3	5478.00	7.58	52.69	60.27	68.20	-7.93	Peak	307	180	P
4	5610.00	7.51	86.67	94.18	200.00	-105.82	Average	307	180	P
5	5618.00	7.51	98.43	105.94	200.00	-94.06	Peak	307	180	P
6	5850.00	7.47	45.37	52.84	68.20	-15.36	Peak	307	180	P
7	11220.00	17.88	28.96	46.84	54.00	-7.16	Average	100	276	P
8	11220.00	17.88	42.31	60.19	74.00	-13.81	Peak	100	276	P
9	16830.00	22.58	41.64	64.22	68.20	-3.98	Peak	100	114	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH122 NSS1 NC50
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

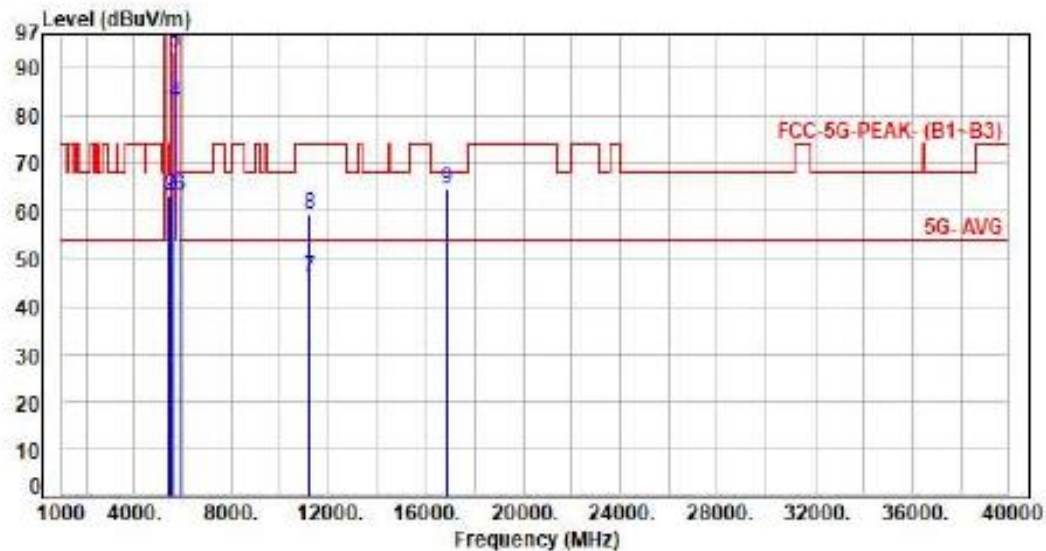

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.70	50.25	54.00	-3.75	Average	116	210	P
2	5460.00	7.55	55.57	63.12	74.00	-10.88	Peak	116	210	P
3	5470.00	7.58	55.75	63.33	68.20	-4.87	Peak	116	210	P
4	5610.00	7.51	74.99	82.50	200.00	-117.50	Average	116	210	P
5	5610.00	7.51	85.65	93.16	200.00	-106.84	Peak	116	210	P
6	5850.00	7.47	55.46	62.93	68.20	-5.27	Peak	116	210	P
7	11220.00	17.88	28.36	46.24	54.00	-7.76	Average	100	58	P
8	11220.00	17.88	41.42	59.30	74.00	-14.70	Peak	100	58	P
9	16830.00	22.58	41.95	64.53	68.20	-3.67	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

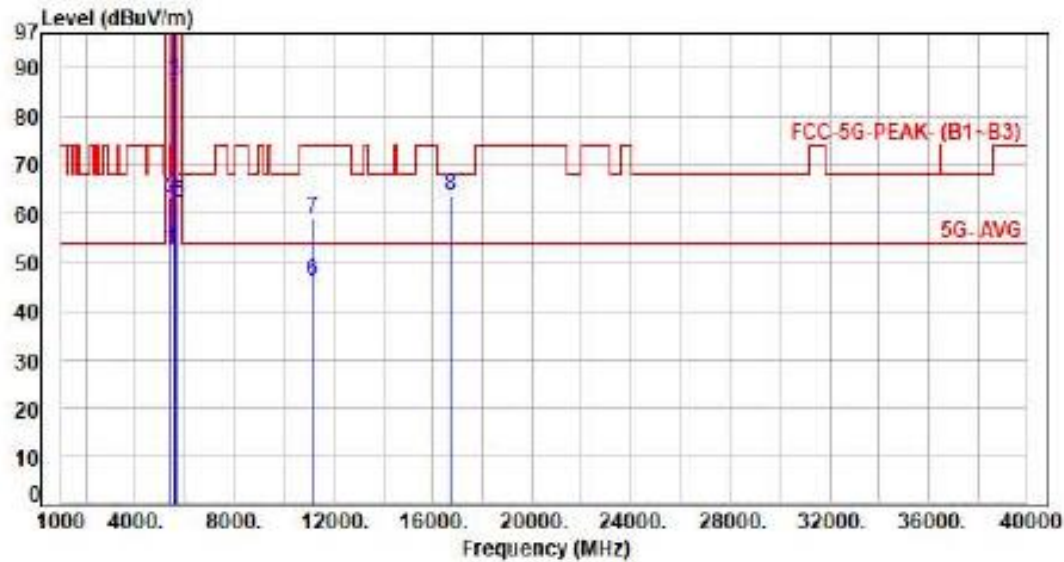

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.14	52.69	54.00	-1.31	Average	336	360	P
2	5460.00	7.55	55.53	63.08	74.00	-10.92	Peak	336	360	P
3	5570.00	7.56	79.59	87.15	200.00	-112.85	Average	336	360	P
4	5570.00	7.56	92.97	100.53	200.00	-99.47	Peak	336	360	P
5	5725.00	7.43	54.77	62.20	68.20	-6.00	Peak	336	360	P
6	11140.00	17.88	28.27	46.15	54.00	-7.85	Average	100	278	P
7	11140.00	17.88	41.03	58.91	74.00	-15.09	Peak	100	278	P
8	16710.00	22.17	41.67	63.84	68.20	-4.36	Peak	100	114	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

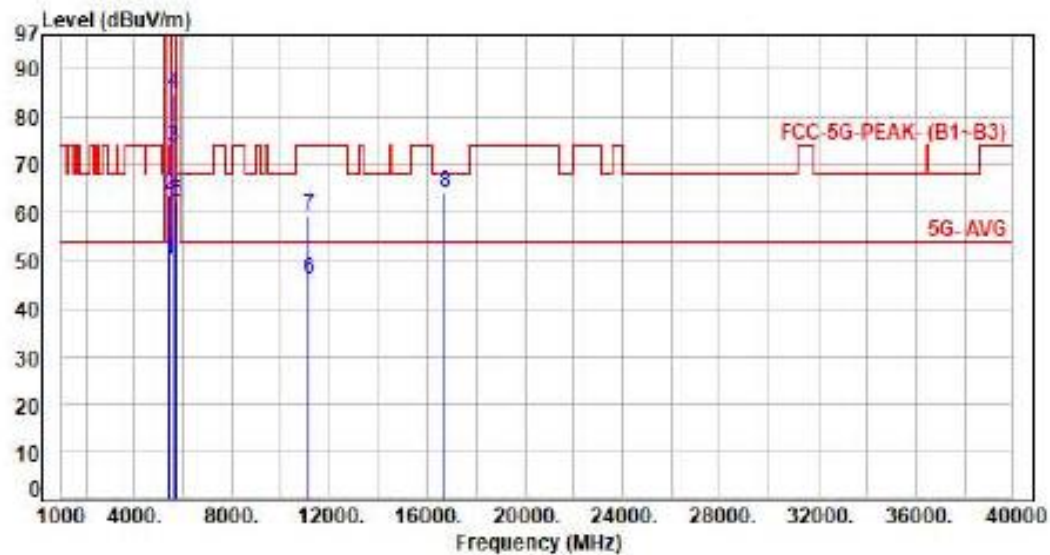

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.56	50.11	54.00	-3.89	Average	349	213	P
2	5460.00	7.55	56.12	63.67	74.00	-10.33	Peak	349	213	P
3	5570.00	7.56	66.08	73.64	200.00	-126.36	Average	349	213	P
4	5570.00	7.56	77.44	85.00	200.00	-115.00	Peak	349	213	P
5	5725.00	7.43	54.75	62.18	68.20	-6.02	Peak	349	213	P
6	11140.00	17.88	28.30	46.18	54.00	-7.82	Average	100	59	P
7	11140.00	17.88	41.46	59.34	74.00	-14.66	Peak	100	59	P
8	16710.00	22.17	42.01	64.18	68.20	-4.02	Peak	100	161	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH149 NS51 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

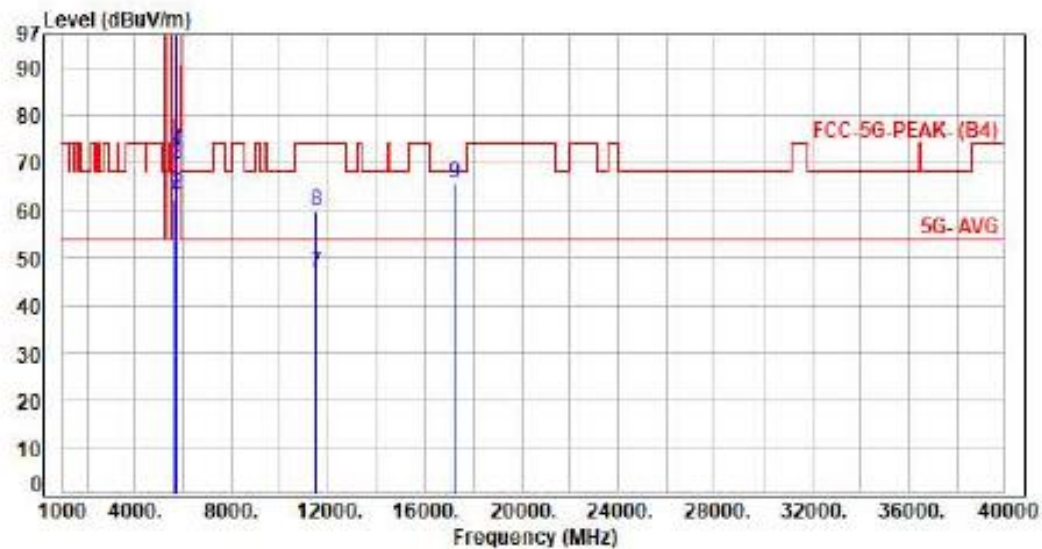

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.77	62.28	68.20	-5.92	Peak	313	32	P
2	5700.00	7.43	56.13	63.56	105.20	-41.64	Peak	313	32	P
3	5720.00	7.43	62.41	69.84	110.00	-40.96	Peak	313	32	P
4	5725.00	7.43	65.19	72.62	122.20	-49.58	Peak	313	32	P
5	5745.00	7.44	94.78	102.22	200.00	-97.78	Average	313	32	P
6	5745.00	7.44	107.11	114.55	200.00	-85.45	Peak	313	32	P
7	11490.00	18.33	28.64	46.97	54.00	-7.03	Average	100	275	P
8	11490.00	18.33	41.52	59.85	74.00	-14.15	Peak	100	275	P
9	17235.00	24.37	41.16	65.53	68.20	-2.67	Peak	100	114	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH149 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

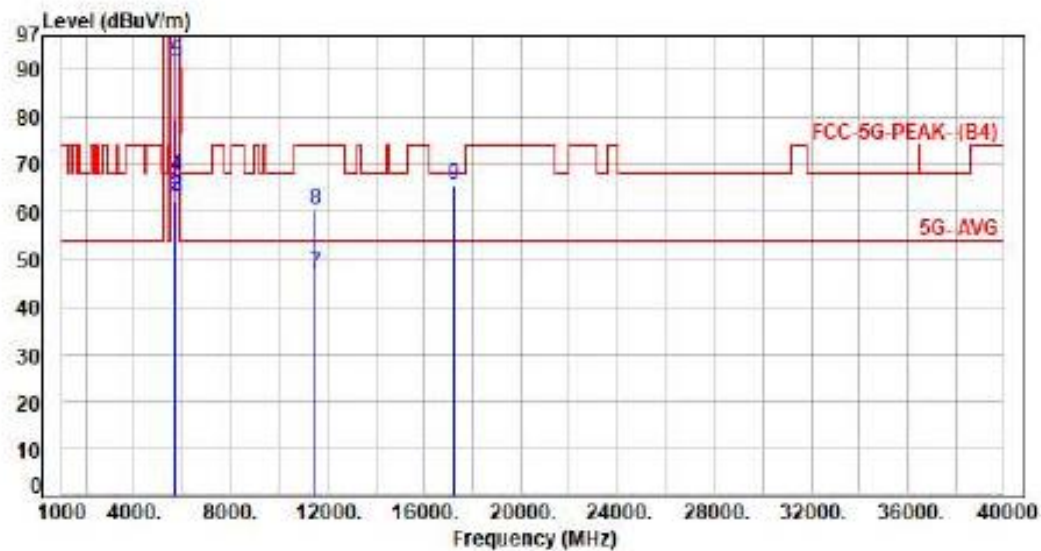

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.91	62.42	68.20	-5.78	Peak	117	120	P
2	5700.00	7.43	56.02	63.45	105.20	-41.75	Peak	117	120	P
3	5720.00	7.43	55.71	63.14	110.80	-47.66	Peak	117	120	P
4	5725.00	7.43	59.93	67.36	122.20	-54.84	Peak	117	120	P
5	5745.00	7.44	84.16	91.60	200.00	-108.40	Average	117	120	P
6	5745.00	7.44	97.40	104.84	200.00	-95.16	Peak	117	120	P
7	11490.00	18.33	28.58	46.91	54.00	-7.09	Average	100	58	P
8	11490.00	18.33	42.23	60.56	74.00	-13.44	Peak	100	58	P
9	17235.00	24.37	41.46	65.83	68.20	-2.37	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex28 CH157 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

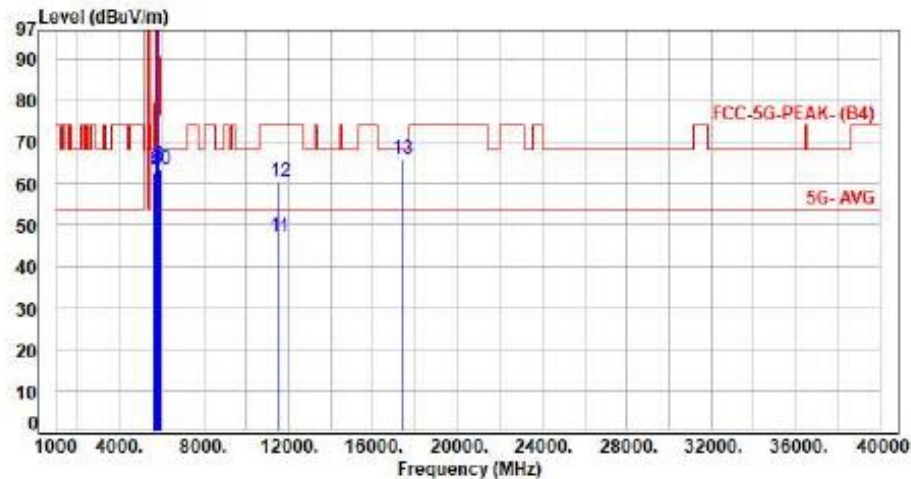

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.13	62.64	68.20	-5.56	Peak	305	96	P
2	5700.00	7.43	56.02	63.45	105.20	-41.75	Peak	305	96	P
3	5720.00	7.43	56.03	63.46	110.80	-47.34	Peak	305	96	P
4	5725.00	7.43	55.73	63.16	122.20	-59.04	Peak	305	96	P
5	5795.00	7.45	94.23	101.68	200.00	-98.32	Average	305	96	P
6	5795.00	7.45	106.66	114.11	200.00	-85.89	Peak	305	96	P
7	5850.00	7.47	56.40	63.87	122.20	-58.33	Peak	305	96	P
8	5855.00	7.49	56.88	64.37	110.80	-46.43	Peak	305	96	P
9	5875.00	7.57	56.36	63.93	105.20	-41.27	Peak	305	96	P
10	5925.00	7.73	55.69	63.42	68.20	-4.78	Peak	305	96	P
11	11570.00	18.58	28.65	47.23	54.00	-6.77	Average	100	279	P
12	11570.00	18.58	41.94	60.52	74.00	-13.48	Peak	100	279	P
13	17355.00	25.24	40.83	66.07	68.20	-2.13	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

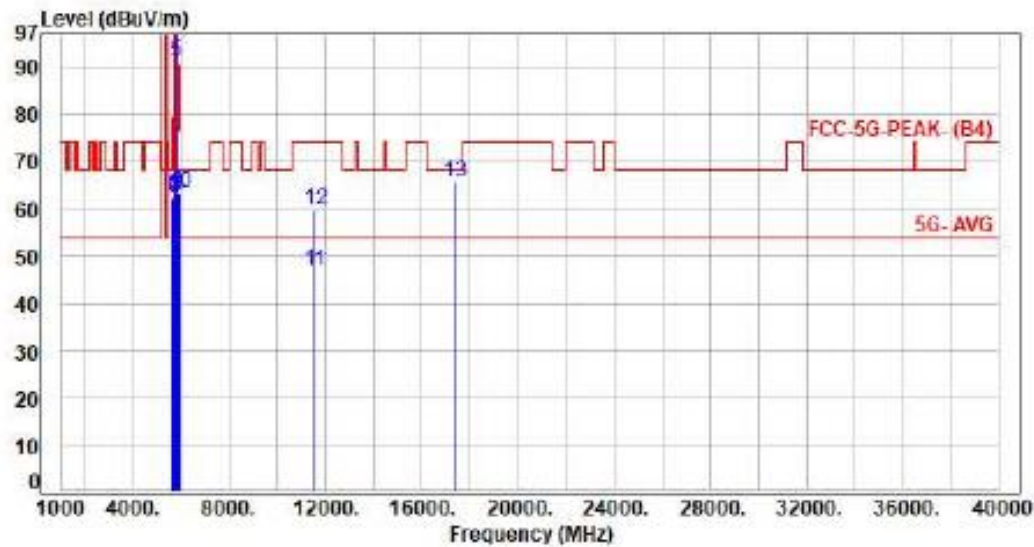

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.88	62.39	68.20	-5.81	Peak	228	118	P
2	5700.00	7.43	55.33	62.76	105.20	-42.44	Peak	228	118	P
3	5720.00	7.43	55.01	62.44	110.80	-48.36	Peak	228	118	P
4	5725.00	7.43	55.09	62.52	122.20	-59.68	Peak	228	118	P
5	5795.00	7.45	83.69	91.14	200.00	-108.86	Average	228	118	P
6	5795.00	7.45	97.00	104.45	200.00	-95.55	Peak	228	118	P
7	5850.00	7.47	54.91	62.38	122.20	-59.82	Peak	228	118	P
8	5855.00	7.49	55.39	62.88	110.80	-47.92	Peak	228	118	P
9	5875.00	7.57	55.92	63.49	105.20	-41.71	Peak	228	118	P
10	5925.00	7.73	55.62	63.35	68.20	-4.85	Peak	228	118	P
11	11570.00	18.58	28.36	46.94	54.00	-7.06	Average	100	60	P
12	11570.00	18.58	41.16	59.74	74.00	-14.26	Peak	100	60	P
13	17355.00	25.24	40.52	65.76	68.20	-2.44	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

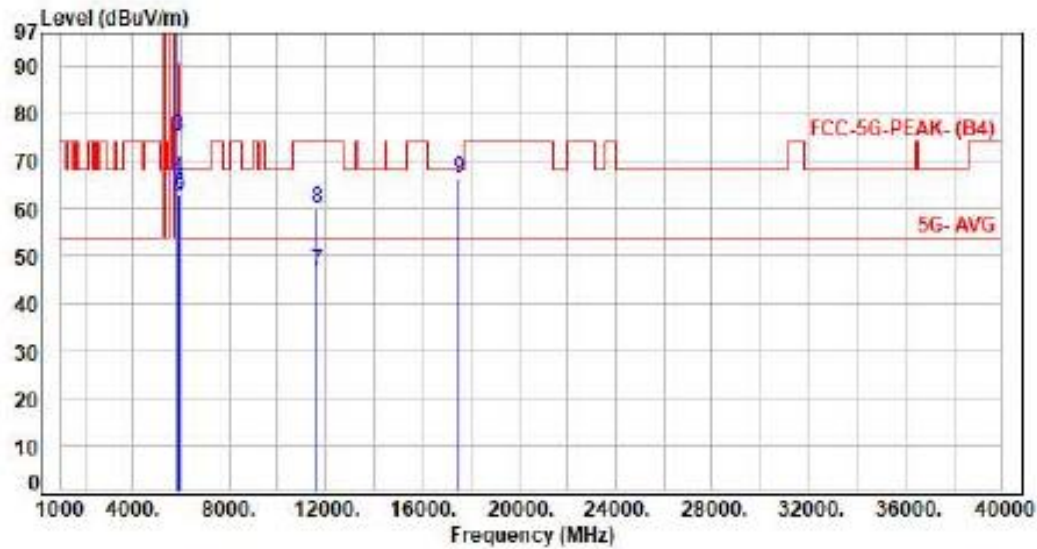

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	93.07	100.53	200.00	-99.47	Average	312	351	P
2	5825.00	7.46	105.00	112.46	200.00	-87.54	Peak	312	351	P
3	5850.00	7.47	67.76	75.23	122.20	-46.97	Peak	312	351	P
4	5855.00	7.49	58.92	66.41	110.00	-44.39	Peak	312	351	P
5	5875.00	7.57	54.93	62.50	105.20	-42.70	Peak	312	351	P
6	5925.00	7.73	55.18	62.91	68.20	-5.29	Peak	312	351	P
7	11650.00	18.67	28.28	46.95	54.00	-7.05	Average	100	279	P
8	11650.00	18.67	41.46	60.13	74.00	-13.87	Peak	100	279	P
9	17475.00	25.92	40.35	66.27	68.20	-1.93	Peak	100	114	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

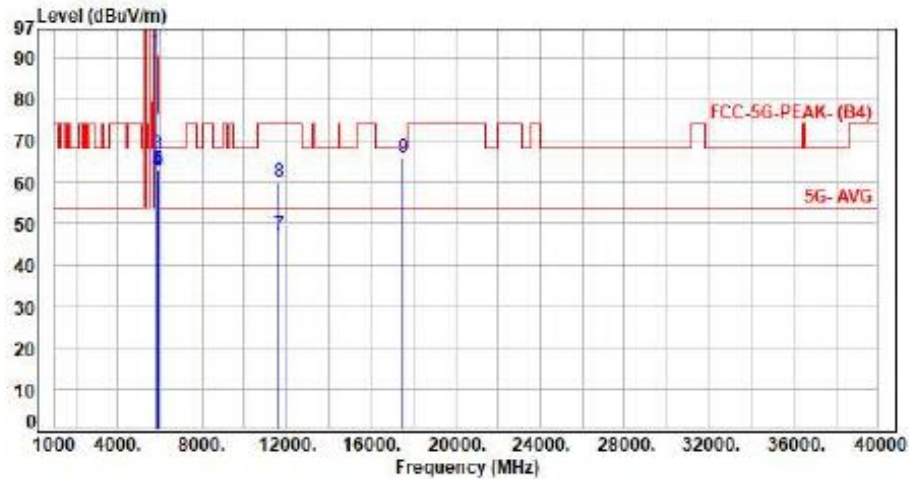

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	84.05	91.51	200.00	-108.49	Average	124	117	P
2	5825.00	7.46	95.13	102.59	200.00	-97.41	Peak	124	117	P
3	5850.00	7.47	59.20	66.67	122.20	-55.53	Peak	124	117	P
4	5855.00	7.49	55.29	62.78	110.00	-48.02	Peak	124	117	P
5	5875.00	7.57	55.41	62.98	105.20	-42.22	Peak	124	117	P
6	5925.00	7.73	55.48	63.21	68.20	-4.99	Peak	124	117	P
7	11650.00	18.67	28.40	47.07	54.00	-6.93	Average	100	58	P
8	11650.00	18.67	41.36	60.03	74.00	-13.97	Peak	100	58	P
9	17475.00	25.92	40.18	66.10	68.20	-2.10	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

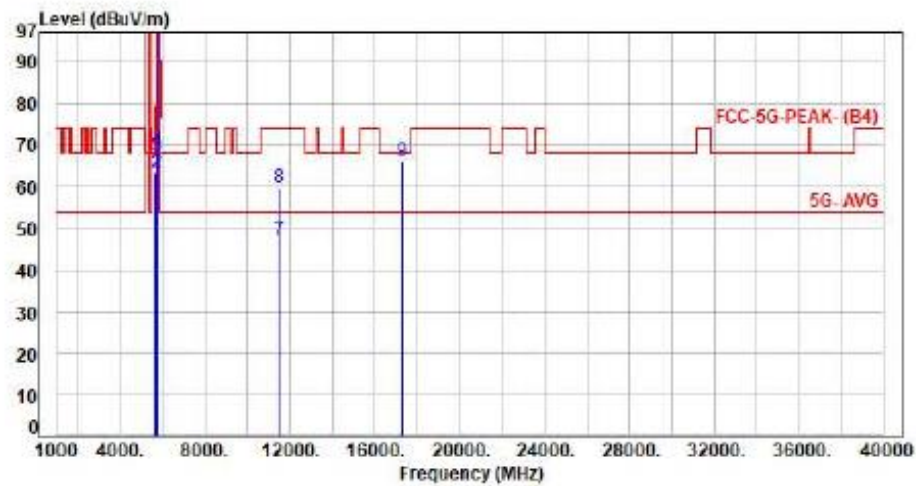

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.86	63.37	68.20	-4.83	Peak	306	99	P
2	5700.00	7.43	55.85	63.28	105.20	-41.92	Peak	306	99	P
3	5720.00	7.43	60.23	67.66	110.00	-43.14	Peak	306	99	P
4	5725.00	7.43	61.08	68.51	122.20	-53.69	Peak	306	99	P
5	5755.00	7.44	90.66	98.10	200.00	-101.90	Average	306	99	P
6	5755.00	7.44	102.11	109.55	200.00	-90.45	Peak	306	99	P
7	11510.00	18.39	28.77	47.16	54.00	-6.84	Average	100	274	P
8	11510.00	18.39	41.47	59.86	74.00	-14.14	Peak	100	274	P
9	17265.00	24.63	41.32	65.95	68.20	-2.25	Peak	100	117	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

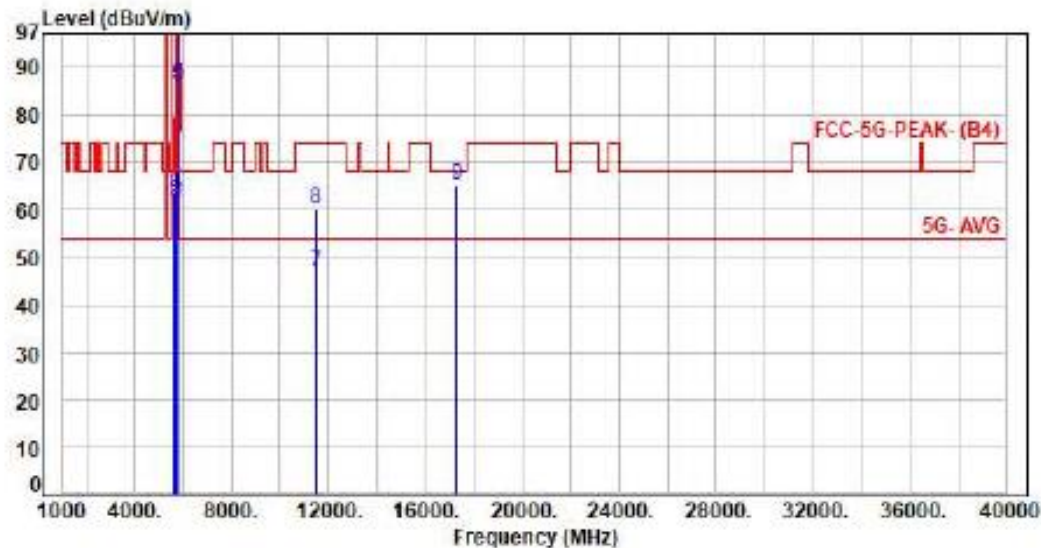

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.76	63.27	68.20	-4.93	Peak	238	244	P
2	5700.00	7.43	54.70	62.13	105.20	-43.07	Peak	238	244	P
3	5720.00	7.43	54.46	61.89	110.00	-48.91	Peak	238	244	P
4	5725.00	7.43	55.80	63.23	122.20	-58.97	Peak	238	244	P
5	5755.00	7.44	78.80	86.24	200.00	-113.76	Average	238	244	P
6	5755.00	7.44	92.35	99.79	200.00	-100.21	Peak	238	244	P
7	11510.00	18.39	28.54	46.93	54.00	-7.07	Average	100	62	P
8	11510.00	18.39	41.73	60.12	74.00	-13.88	Peak	100	52	P
9	17265.00	24.63	40.48	65.11	68.20	-3.09	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

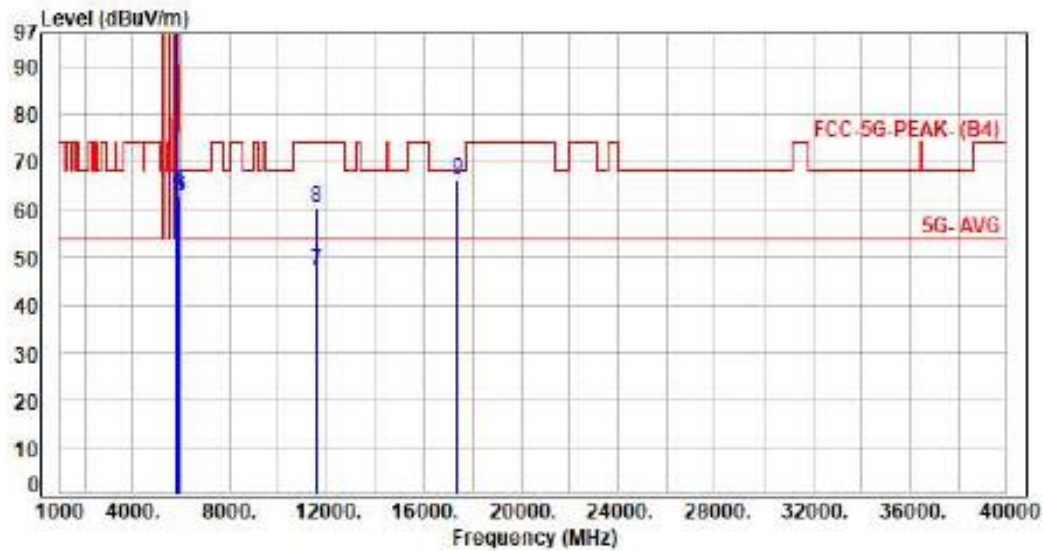

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.45	91.07	98.52	200.00	-101.48	Average	307	88	P
2	5795.00	7.45	102.98	110.43	200.00	-89.57	Peak	307	88	P
3	5850.00	7.47	55.31	62.78	122.20	-59.42	Peak	307	88	P
4	5855.00	7.49	56.20	63.69	110.80	-47.11	Peak	307	88	P
5	5875.00	7.57	55.29	62.86	105.20	-42.34	Peak	307	88	P
6	5925.00	7.73	54.88	62.61	68.20	-5.59	Peak	307	88	P
7	11590.00	18.62	28.47	47.09	54.00	-6.91	Average	100	275	P
8	11590.00	18.62	41.83	60.45	74.00	-13.55	Peak	100	275	P
9	17385.00	25.34	41.13	66.47	68.20	-1.73	Peak	100	118	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

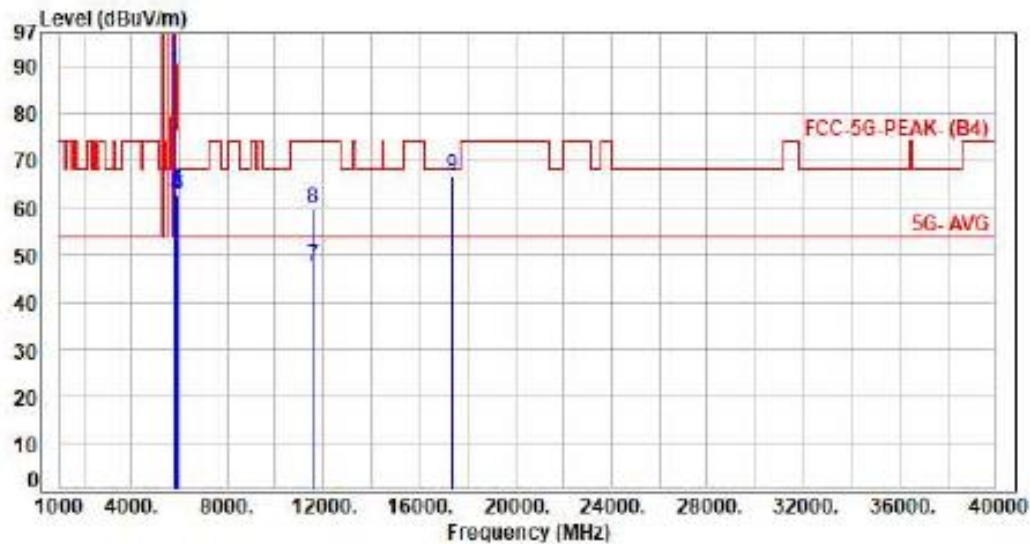

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.45	81.70	89.15	200.00	-110.85	Average	126	117	P
2	5795.00	7.45	95.03	102.48	200.00	-97.52	Peak	126	117	P
3	5850.00	7.47	55.74	63.21	122.20	-58.99	Peak	126	117	P
4	5855.00	7.49	55.22	62.71	110.80	-48.09	Peak	126	117	P
5	5875.00	7.57	55.00	63.37	105.20	-41.83	Peak	126	117	P
6	5925.00	7.73	55.09	62.82	68.20	-5.38	Peak	126	117	P
7	11590.00	18.62	28.79	47.41	54.00	-6.59	Average	100	55	P
8	11590.00	18.62	41.30	59.92	74.00	-14.08	Peak	100	55	P
9	17385.00	25.34	41.25	66.59	68.20	-1.61	Peak	100	156	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

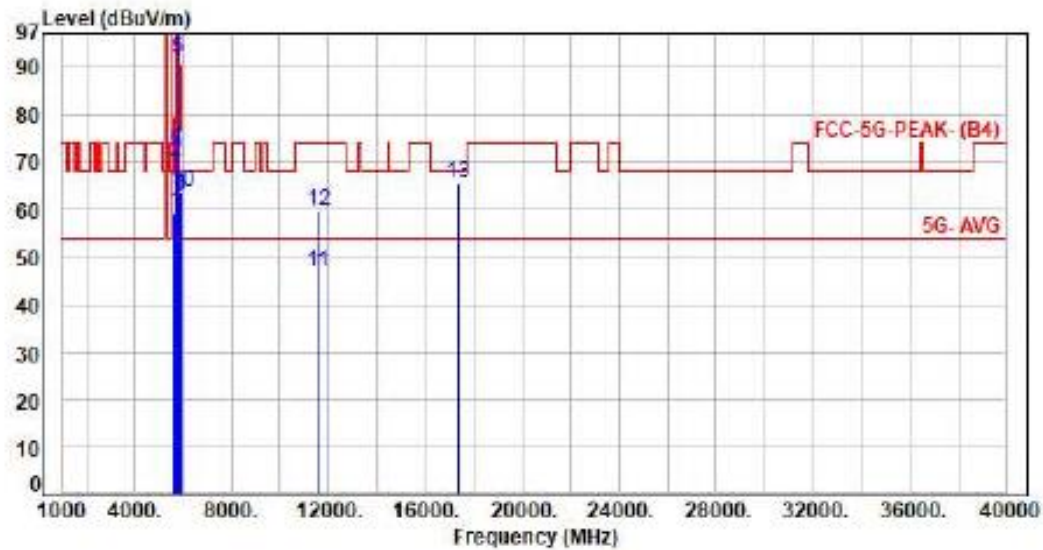

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	51.96	59.47	68.20	-8.73	Peak	322	33	P
2	5700.00	7.43	62.60	70.03	105.20	-35.17	Peak	322	33	P
3	5720.00	7.43	64.04	72.27	110.00	-38.53	Peak	322	33	P
4	5725.00	7.43	65.59	73.02	122.20	-49.18	Peak	322	33	P
5	5775.00	7.45	84.51	91.96	200.00	-108.04	Average	322	33	P
6	5775.00	7.45	96.74	104.19	200.00	-95.81	Peak	322	33	P
7	5850.00	7.47	55.09	62.56	122.20	-59.64	Peak	322	33	P
8	5855.00	7.49	55.87	63.36	110.00	-47.44	Peak	322	33	P
9	5875.00	7.57	55.08	62.65	105.20	-42.55	Peak	322	33	P
10	5925.00	7.73	55.97	63.70	68.20	-4.50	Peak	322	33	P
11	11550.00	18.54	28.47	47.01	54.00	-6.99	Average	100	279	P
12	11550.00	18.54	41.06	59.60	74.00	-14.40	Peak	100	279	P
13	17325.00	25.10	40.68	65.78	68.20	-2.42	Peak	100	112	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

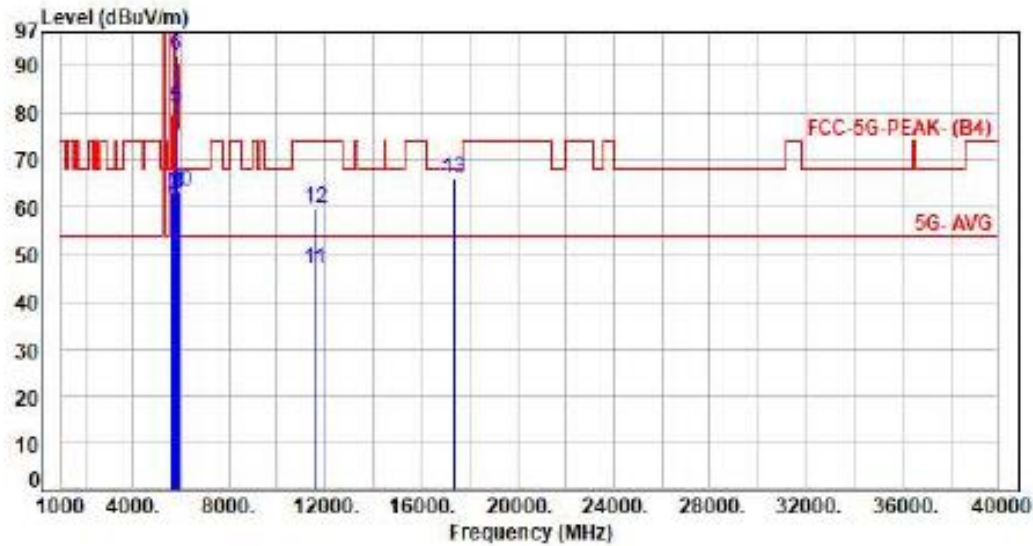

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.38	62.89	68.20	-5.31	Peak	100	71	P
2	5700.00	7.43	54.62	62.05	105.20	-43.15	Peak	100	71	P
3	5720.00	7.43	55.29	62.72	110.80	-48.08	Peak	100	71	P
4	5725.00	7.43	54.68	62.11	122.20	-60.09	Peak	100	71	P
5	5775.00	7.45	73.78	81.23	200.00	-118.77	Average	100	71	P
6	5775.00	7.45	84.82	92.27	200.00	-107.73	Peak	100	71	P
7	5850.00	7.47	55.71	63.18	122.20	-59.02	Peak	100	71	P
8	5855.00	7.49	55.17	62.66	110.80	-48.14	Peak	100	71	P
9	5875.00	7.57	55.60	63.17	105.20	-42.03	Peak	100	71	P
10	5925.00	7.73	55.62	63.35	68.20	-4.85	Peak	100	71	P
11	11550.00	18.54	28.44	46.98	54.00	-7.02	Average	100	58	P
12	11550.00	18.54	41.28	59.82	74.00	-14.18	Peak	100	58	P
13	17325.00	25.10	41.09	66.19	68.20	-2.01	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

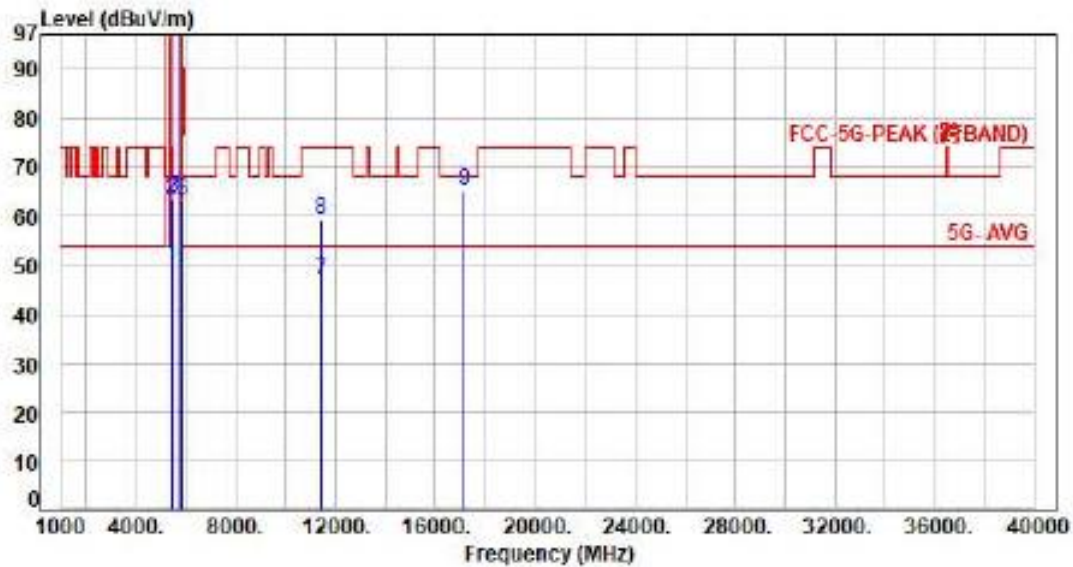

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.50	50.05	54.00	-3.95	Average	314	91	P
2	5460.00	7.55	55.74	63.29	74.00	-10.71	Peak	314	91	P
3	5470.00	7.58	56.29	63.87	68.20	-4.33	Peak	314	91	P
4	5720.00	7.43	93.53	100.96	200.00	-99.04	Average	314	91	P
5	5720.00	7.43	105.72	113.15	200.00	-86.85	Peak	314	91	P
6	5850.00	7.47	55.62	63.09	68.20	-5.11	Peak	314	91	P
7	11440.00	18.20	28.62	46.82	54.00	-7.18	Average	100	275	P
8	11440.00	18.20	41.03	59.23	74.00	-14.77	Peak	100	275	P
9	17160.00	24.13	41.30	65.43	68.20	-2.77	Peak	100	116	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

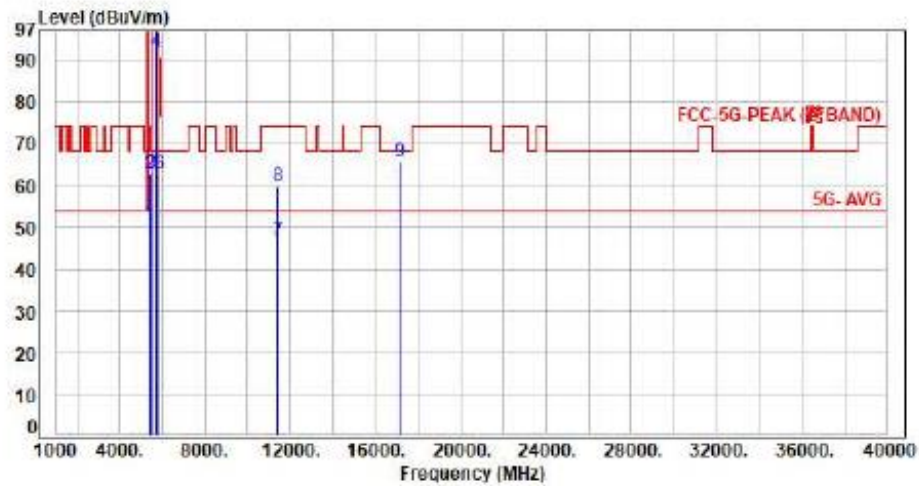

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.47	51.02	54.00	-2.98	Average	129	116	P
2	5460.00	7.55	55.09	62.64	74.00	-11.36	Peak	129	116	P
3	5470.00	7.58	55.48	63.06	68.20	-5.14	Peak	129	116	P
4	5720.00	7.43	84.42	91.85	200.00	-108.15	Average	129	116	P
5	5720.00	7.43	97.24	104.67	200.00	-95.33	Peak	129	116	P
6	5850.00	7.47	55.13	62.60	68.20	-5.60	Peak	129	116	P
7	11440.00	18.20	28.68	46.88	54.00	-7.12	Average	100	58	P
8	11440.00	18.20	41.57	59.77	74.00	-14.23	Peak	100	58	P
9	17160.00	24.13	41.44	65.57	68.20	-2.63	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

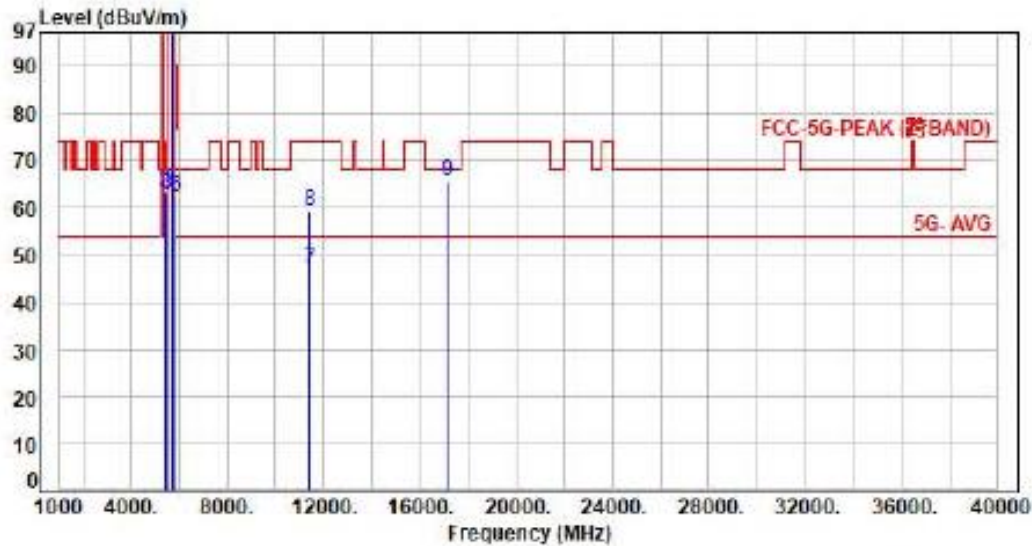

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.46	51.01	54.00	-2.99	Average	330	93	P
2	5460.00	7.55	55.73	63.28	74.00	-10.72	Peak	330	93	P
3	5470.00	7.58	55.06	62.64	68.20	-5.56	Peak	330	93	P
4	5710.00	7.43	89.97	97.40	200.00	-102.60	Average	330	93	P
5	5710.00	7.43	100.71	108.14	200.00	-91.86	Peak	330	93	P
6	5850.00	7.47	55.03	62.50	68.20	-5.70	Peak	330	93	P
7	11420.00	18.14	28.74	46.88	54.00	-7.12	Average	100	279	P
8	11420.00	18.14	41.38	59.52	74.00	-14.48	Peak	100	279	P
9	17130.00	24.09	41.42	65.51	68.20	-2.69	Peak	100	118	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH142 NSS1 MC50
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

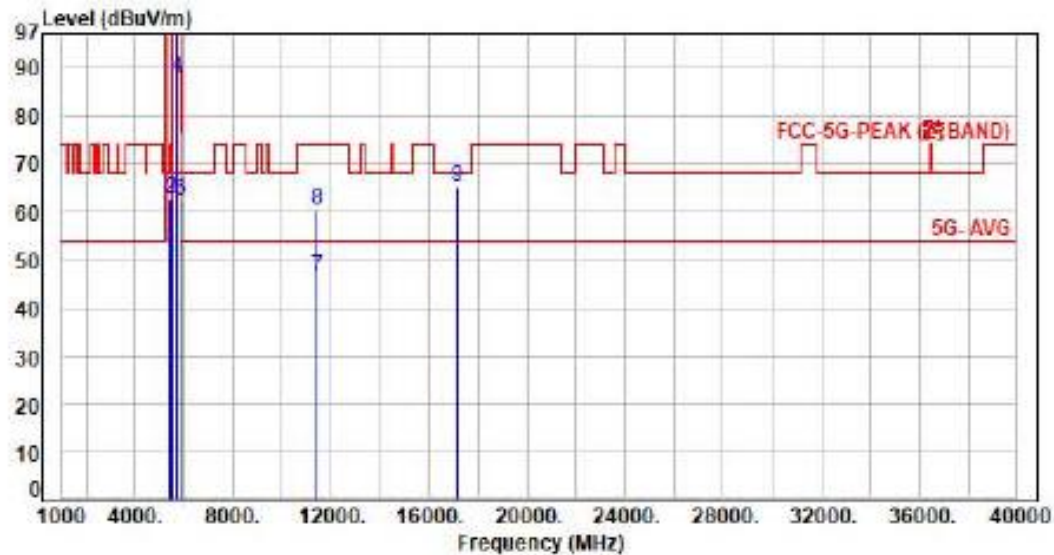

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.51	51.06	54.00	-2.94	Average	113	119	P
2	5460.00	7.55	55.28	62.83	74.00	-11.17	Peak	113	119	P
3	5470.00	7.58	55.29	62.87	68.20	-5.33	Peak	113	119	P
4	5710.00	7.43	80.45	87.88	200.00	-112.12	Average	113	119	P
5	5710.00	7.43	91.70	99.13	200.00	-100.87	Peak	113	119	P
6	5850.00	7.47	54.99	62.46	68.20	-5.74	Peak	113	119	P
7	11420.00	18.14	28.28	46.42	54.00	-7.58	Average	100	57	P
8	11420.00	18.14	42.37	60.51	74.00	-13.49	Peak	100	57	P
9	17130.00	24.09	41.29	65.38	68.20	-2.82	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

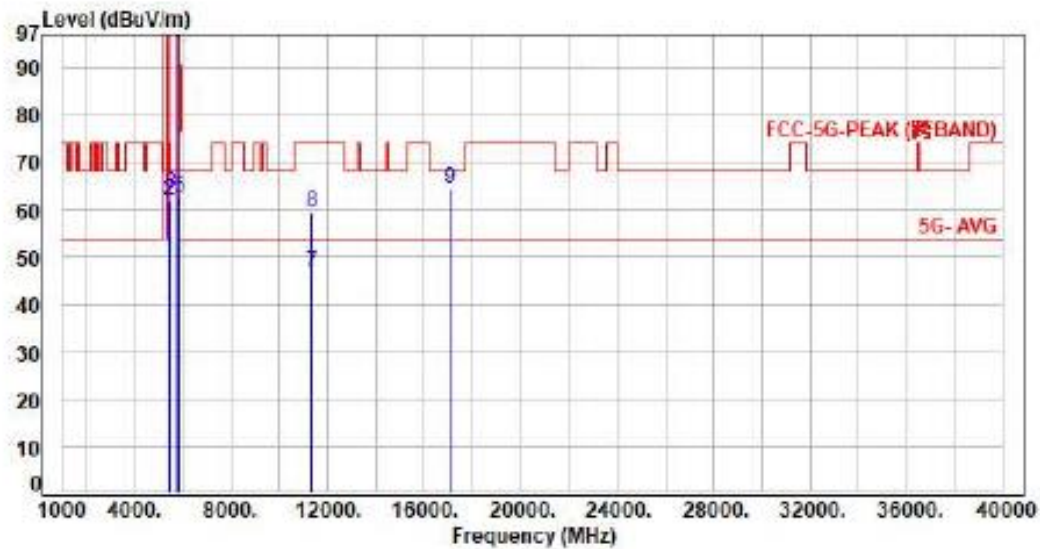

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.57	50.12	54.00	-3.88	Average	321	353	P
2	5460.00	7.55	54.27	61.82	74.00	-12.18	Peak	321	353	P
3	5470.00	7.58	55.73	63.31	68.20	-4.89	Peak	321	353	P
4	5690.00	7.44	87.75	95.19	200.00	-104.81	Average	321	353	P
5	5690.00	7.44	99.20	106.64	200.00	-93.36	Peak	321	353	P
6	5850.00	7.47	55.14	62.61	68.20	-5.59	Peak	321	353	P
7	11380.00	18.06	28.63	46.69	54.00	-7.31	Average	100	275	P
8	11380.00	18.06	41.45	59.51	74.00	-14.49	Peak	100	275	P
9	17070.00	23.85	40.82	64.67	68.20	-3.53	Peak	100	113	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH130 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

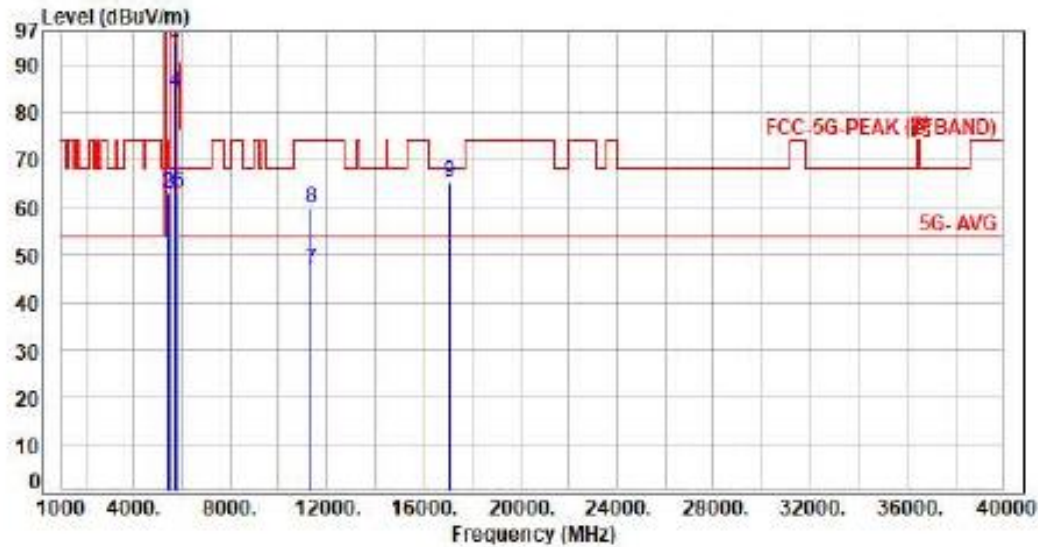

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.62	50.17	54.00	-3.83	Average	115	70	P
2	5460.00	7.55	55.66	63.21	74.00	-10.79	Peak	115	70	P
3	5470.00	7.58	55.29	62.87	68.20	-5.33	Peak	115	70	P
4	5690.00	7.44	76.66	84.10	200.00	-115.90	Average	115	70	P
5	5690.00	7.44	87.17	94.61	200.00	-105.39	Peak	115	70	P
6	5850.00	7.47	55.67	63.14	68.20	-5.06	Peak	115	70	P
7	11380.00	18.06	28.75	46.81	54.00	-7.19	Average	100	58	P
8	11380.00	18.06	41.52	59.58	74.00	-14.42	Peak	100	58	P
9	17070.00	23.85	41.26	65.11	68.20	-3.09	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

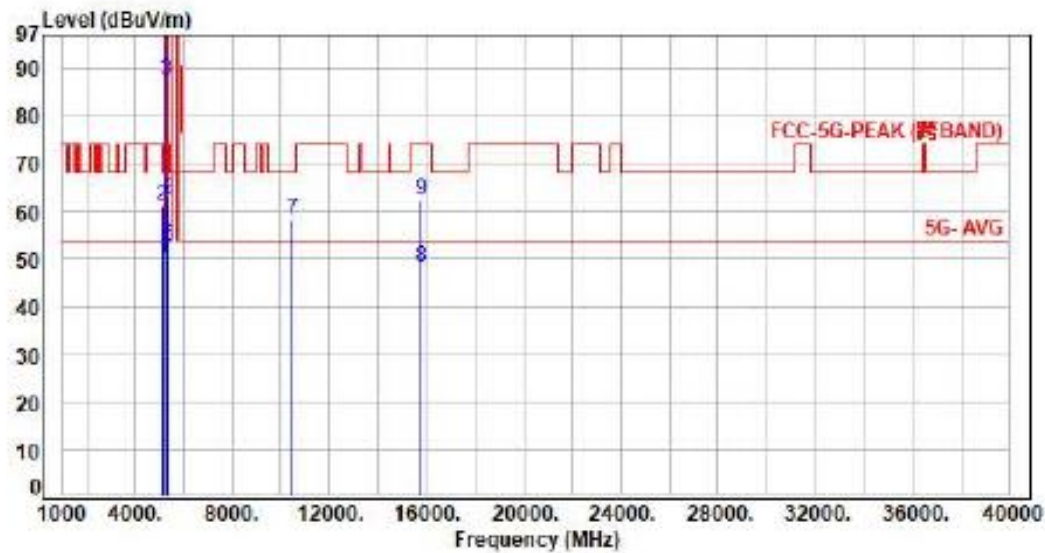

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.52	50.21	54.00	-3.79	Average	328	127	P
2	5150.00	6.69	54.69	61.38	74.00	-12.62	Peak	328	127	P
3	5250.00	6.92	80.53	87.45	200.00	-112.55	Average	328	127	P
4	5250.00	6.92	90.74	97.66	200.00	-102.34	Peak	328	127	P
5	5350.00	7.27	45.49	52.76	54.00	-1.24	Average	328	127	P
6	5350.00	7.27	55.10	62.37	74.00	-11.63	Peak	328	127	P
7	10500.00	16.48	41.72	58.20	68.20	-10.00	Peak	100	275	P
8	15750.00	19.75	28.69	48.44	54.00	-5.56	Average	100	275	P
9	15750.00	19.75	42.53	62.28	74.00	-11.72	Peak	100	118	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

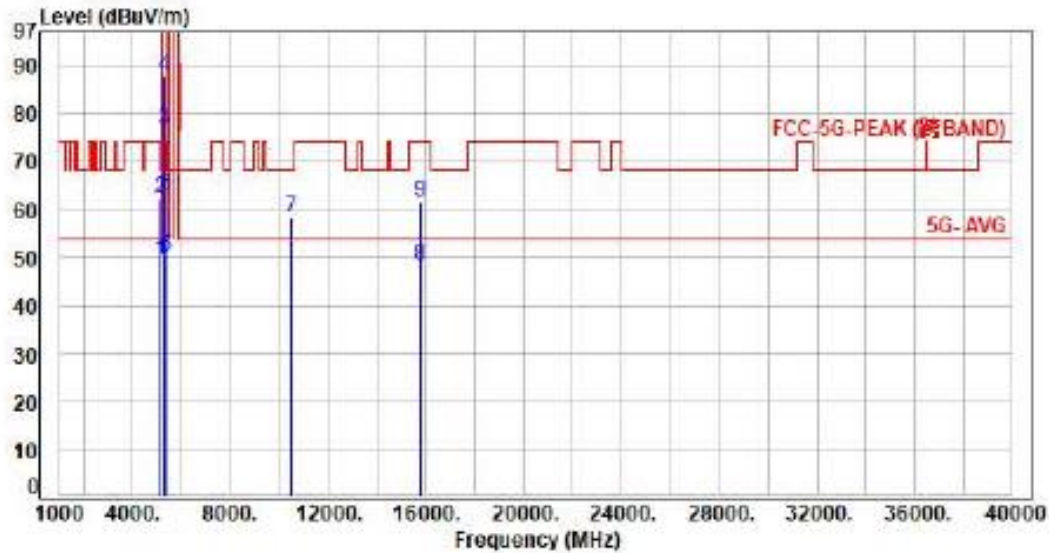

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.66	49.35	54.00	-4.65	Average	100	236	P
2	5150.00	6.69	55.58	62.27	74.00	-11.73	Peak	100	236	P
3	5250.00	6.92	69.77	76.69	200.00	-123.31	Average	100	236	P
4	5250.00	6.92	80.85	87.77	200.00	-112.23	Peak	100	236	P
5	5350.00	7.27	42.73	50.00	54.00	-4.00	Average	100	236	P
6	5350.00	7.27	55.64	62.91	74.00	-11.09	Peak	100	236	P
7	10500.00	16.48	41.65	58.13	68.20	-10.07	Peak	100	58	P
8	15750.00	19.75	28.67	48.42	54.00	-5.58	Average	100	154	P
9	15750.00	19.75	41.83	61.58	74.00	-12.42	Peak	100	154	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout





7.4. Test Result and Data

SISO

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	2.106	2.116	99.53%

MIMO

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11ax HE20	5.376	5.380	99.93%
802.11ax HE40	4.836	4.840	99.92%
802.11ax HE80	2.566	2.571	99.81%
802.11ax HE160	2.217	2.226	99.60%


7.5. Measurement Methods

26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H




SISO

Modulation Type: 802.11a

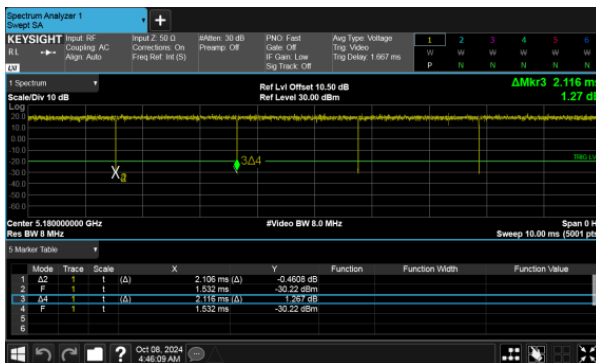


MIMO


Modulation Type: 802.11ax20

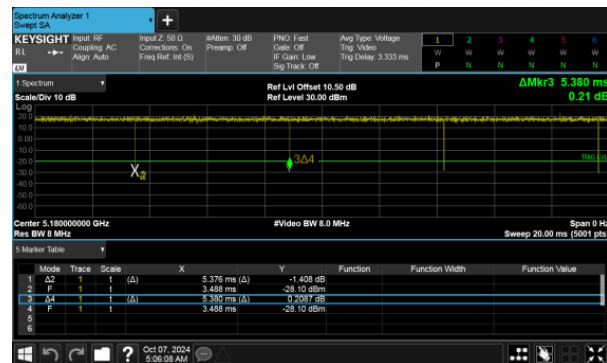

Modulation Type: 802.11ax40

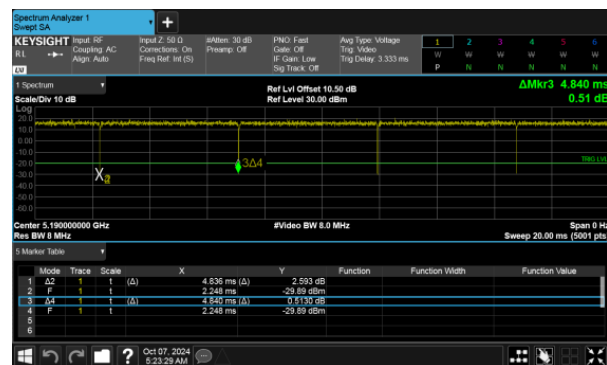


Modulation Type: 802.11ax80

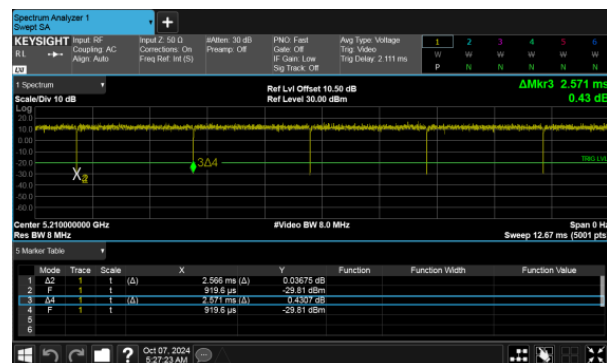



MIMO

Modulation Type: 802.11ax160

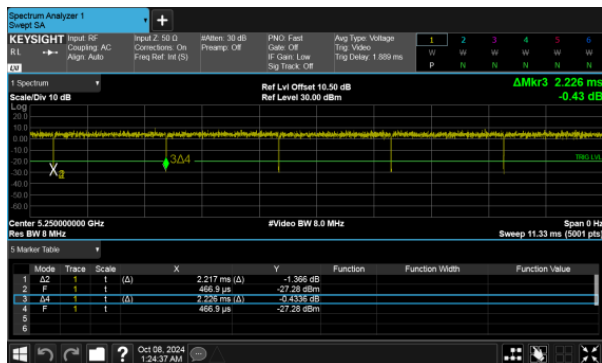



8. 6dB Bandwidth & 99% Occupied Bandwidth

8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout





8.4. Test Result and Data

SISO ANT A

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
			ANT A	
11a	149	5745	15.03	0.50
11a	157	5785	15.14	0.50
11a	165	5825	15.07	0.50

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth (MHz)
			ANT A
11a	149	5745	16.34
11a	157	5785	16.34
11a	165	5825	16.33

UNII Emission Bandwidth Result (Extends across 5725MHz band)

Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
			ANT A	ANT A
11a	6 Mbps	5720	3.19	5.21



MIMO

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)
			ANT A	ANT B	
11ax HE20	149	5745	16.38	15.93	0.50
11ax HE20	157	5785	15.10	16.42	0.50
11ax HE20	165	5825	18.43	17.32	0.50
11ax HE40	151	5755	35.93	35.25	0.50
11ax HE40	159	5795	32.72	33.23	0.50
11ax HE80	155	5775	71.33	72.50	0.50

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth (MHz)	
			ANT A	ANT B
11ax HE20	149	5745	18.91	18.90
11ax HE20	157	5785	18.91	18.89
11ax HE20	165	5825	18.90	18.91
11ax HE40	151	5755	37.76	37.82
11ax HE40	159	5795	37.76	37.78
11ax HE80	155	5775	76.85	76.85

UNII Emission Bandwidth Result (Extends across 5725MHz band)

Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth (MHz)		99% Bandwidth (MHz)	
			ANT A	ANT B	ANT A	ANT B
11ax HE20	NSS1-MCS0	5720	4.52	4.29	5.44	4.93
11ax HE40	NSS1-MCS0	5710	4.02	4.09	5.16	4.95
11ax HE80	NSS1-MCS0	5690	3.94	4.14	5.56	5.45




6dB Bandwidth
SISO ANT A
Modulation Type: 802.11a


CH149



SISO ANT A
Modulation Type: 802.11a
Extends across 5725MHz band
CH144

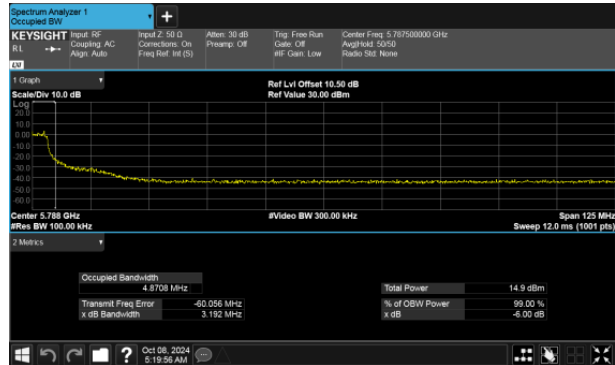

CH157

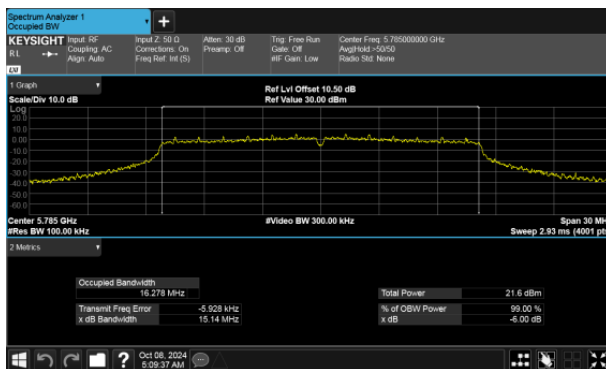

CH165

