




MIMO

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

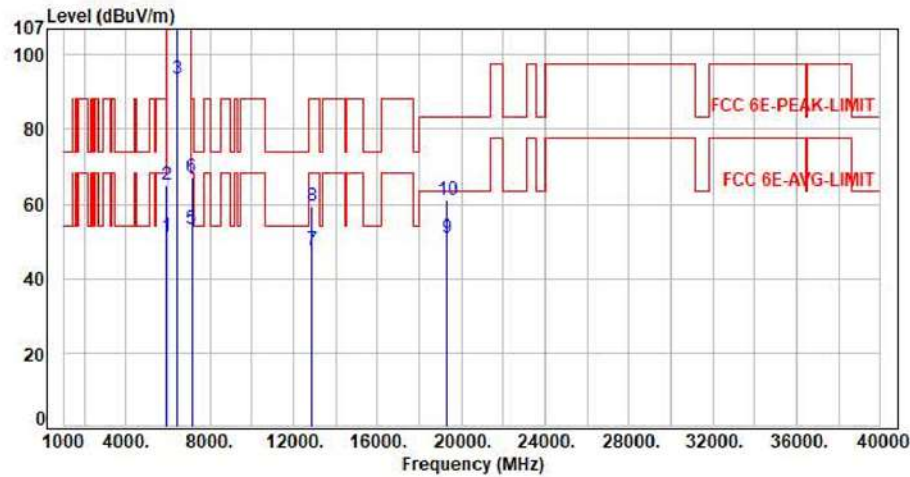


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.46	51.19	68.20	-17.01	Average	100	356	P
2	5925.00	7.73	57.19	64.92	88.20	-23.28	Peak	100	356	P
3	6445.00	8.33	85.44	93.77	200.00	-106.23	Average	100	356	P
4	6445.00	8.33	99.05	107.38	200.00	-92.62	Peak	100	356	P
5	7125.00	9.92	43.55	53.47	68.20	-14.73	Average	100	356	P
6	7125.00	9.92	57.05	66.97	88.20	-21.23	Peak	100	356	P
7	12890.00	18.06	29.34	47.40	68.20	-20.80	Average	100	200	P
8	12890.00	18.06	41.38	59.44	88.20	-28.76	Peak	100	200	P
9	19335.00	9.70	41.29	50.99	63.54	-12.55	Average	150	360	P
10	19335.00	9.70	51.38	61.08	83.54	-22.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

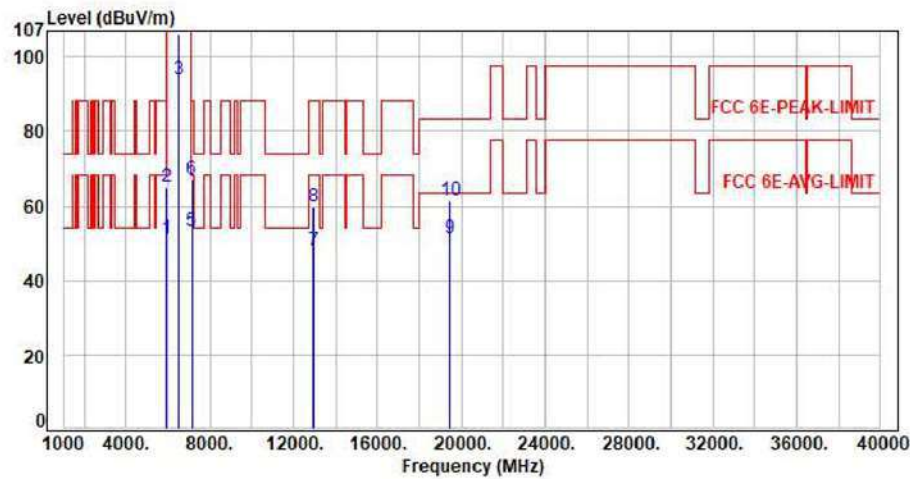

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.42	51.15	68.20	-17.05	Average	137	325	P
2	5925.00	7.73	57.16	64.89	88.20	-23.31	Peak	137	325	P
3	6485.00	8.35	85.47	93.82	200.00	-106.18	Average	137	325	P
4	6485.00	8.35	97.74	106.09	200.00	-93.91	Peak	137	325	P
5	7125.00	9.92	43.45	53.37	68.20	-14.83	Average	137	325	P
6	7125.00	9.92	57.41	67.33	88.20	-20.87	Peak	137	325	P
7	12970.00	18.48	29.46	47.94	68.20	-20.26	Average	100	229	P
8	12970.00	18.48	41.37	59.85	88.20	-28.35	Peak	100	229	P
9	19455.00	10.08	41.38	51.46	63.54	-12.08	Average	150	360	P
10	19455.00	10.08	51.34	61.42	83.54	-22.12	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

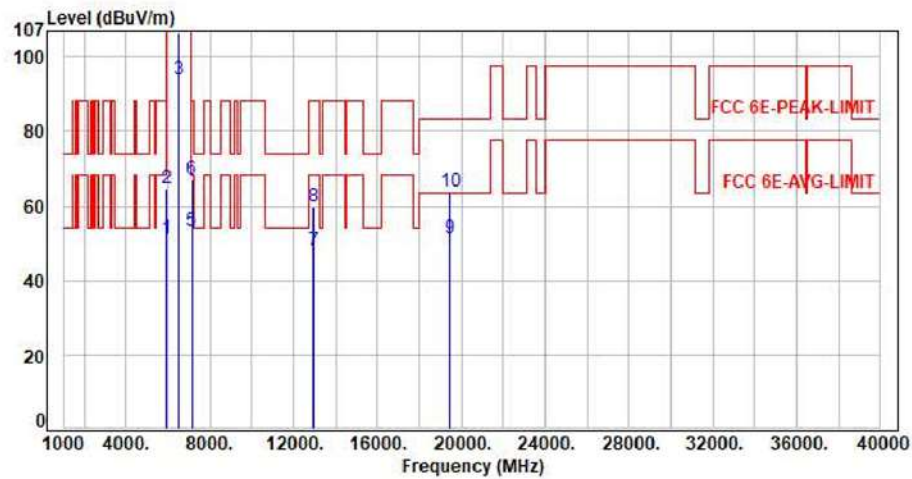


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.42	51.15	68.20	-17.05	Average	100	248	P
2	5925.00	7.73	56.95	64.68	88.20	-23.52	Peak	100	248	P
3	6485.00	8.35	85.74	94.09	200.00	-105.91	Average	100	248	P
4	6485.00	8.35	98.23	106.58	200.00	-93.42	Peak	100	248	P
5	7125.00	9.92	43.50	53.42	68.20	-14.78	Average	100	248	P
6	7125.00	9.92	57.07	66.99	88.20	-21.21	Peak	100	248	P
7	12970.00	18.48	29.33	47.81	68.20	-20.39	Average	100	152	P
8	12970.00	18.48	41.38	59.86	88.20	-28.34	Peak	100	152	P
9	19455.00	10.08	41.38	51.46	63.54	-12.08	Average	150	360	P
10	19455.00	10.08	53.71	63.79	83.54	-19.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

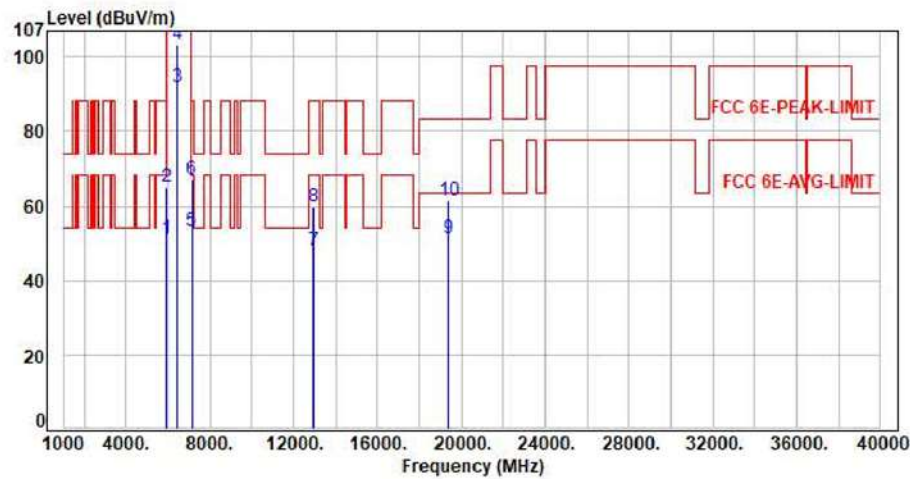


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.42	51.15	68.20	-17.05	Average	100	325	P
2	5925.00	7.73	57.48	65.21	88.20	-22.99	Peak	100	325	P
3	6465.00	8.33	83.52	91.85	200.00	-108.15	Average	100	325	P
4	6465.00	8.33	95.18	103.51	200.00	-96.49	Peak	100	325	P
5	7125.00	9.92	43.47	53.39	68.20	-14.81	Average	100	325	P
6	7125.00	9.92	57.25	67.17	88.20	-21.03	Peak	100	325	P
7	12930.00	18.27	29.89	48.16	68.20	-20.04	Average	100	224	P
8	12930.00	18.27	41.39	59.66	88.20	-28.54	Peak	100	224	P
9	19395.00	10.02	41.39	51.41	63.54	-12.13	Average	150	360	P
10	19395.00	10.02	51.34	61.36	83.54	-22.18	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

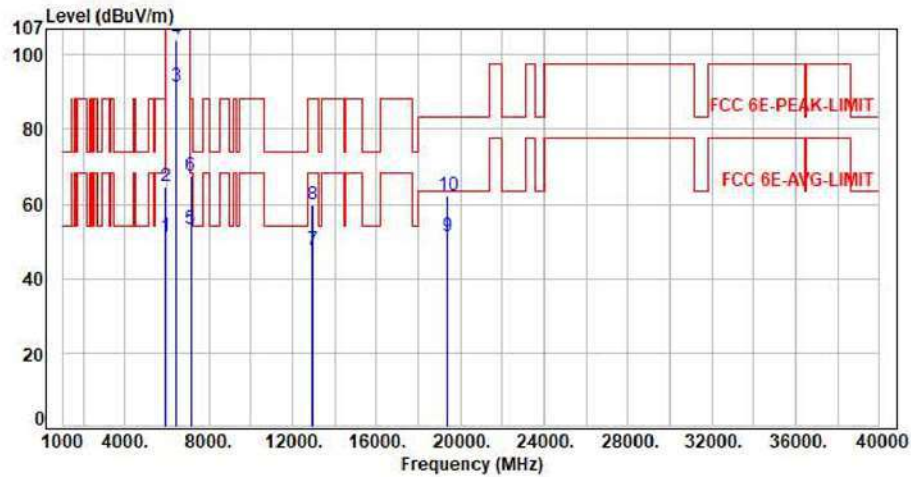


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.37	51.10	68.20	-17.10	Average	100	355	P
2	5925.00	7.73	56.92	64.65	88.20	-23.55	Peak	100	355	P
3	6465.00	8.33	83.18	91.51	200.00	-108.49	Average	100	355	P
4	6465.00	8.33	95.67	104.00	200.00	-96.00	Peak	100	355	P
5	7125.00	9.92	43.53	53.45	68.20	-14.75	Average	100	355	P
6	7125.00	9.92	57.55	67.47	88.20	-20.73	Peak	100	355	P
7	12930.00	18.27	29.39	47.66	68.20	-20.54	Average	100	189	P
8	12930.00	18.27	41.39	59.66	88.20	-28.54	Peak	100	189	P
9	19395.00	10.02	41.38	51.40	63.54	-12.14	Average	150	360	P
10	19395.00	10.02	52.17	62.19	83.54	-21.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

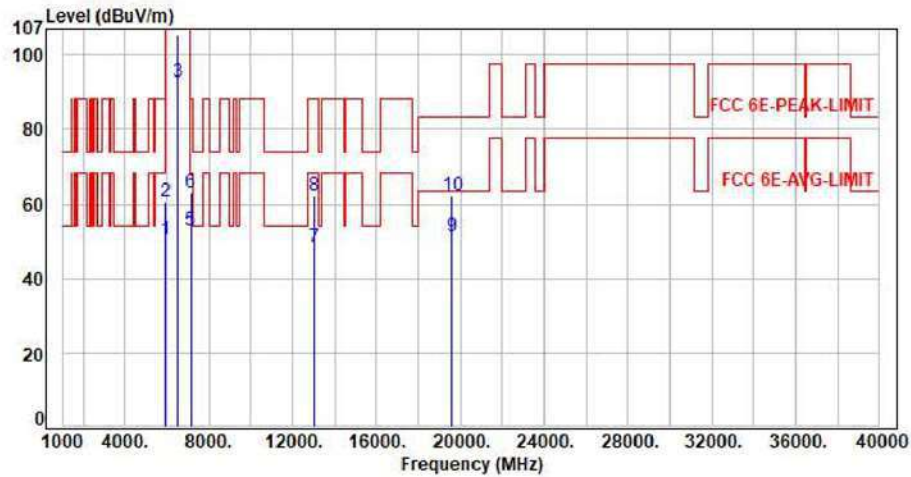


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.77	50.50	68.20	-17.70	Average	100	310	P
2	5925.00	7.73	52.82	60.55	88.20	-27.65	Peak	100	310	P
3	6525.00	8.52	84.29	92.81	200.00	-107.19	Average	100	310	P
4	6525.00	8.52	96.87	105.39	200.00	-94.61	Peak	100	310	P
5	7125.00	9.92	43.02	52.94	68.20	-15.26	Average	100	310	P
6	7125.00	9.92	53.00	62.92	88.20	-25.28	Peak	100	310	P
7	13050.00	18.79	29.74	48.53	68.20	-19.67	Average	100	118	P
8	13050.00	18.79	43.27	62.06	88.20	-26.14	Peak	100	118	P
9	19575.00	10.24	40.88	51.12	63.54	-12.42	Average	150	360	P
10	19575.00	10.24	51.82	62.06	83.54	-21.48	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

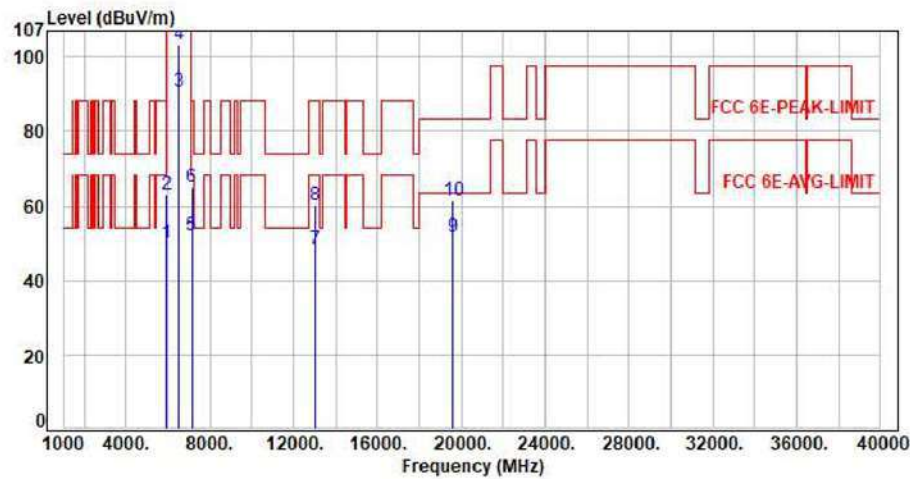


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.21	49.94	68.20	-18.26	Average	100	53	P
2	5925.00	7.73	55.28	63.01	88.20	-25.19	Peak	100	53	P
3	6525.00	8.52	82.22	90.74	200.00	-109.26	Average	100	53	P
4	6525.00	8.52	94.66	103.18	200.00	-96.82	Peak	100	53	P
5	7125.00	9.92	42.28	52.20	68.20	-16.00	Average	100	53	P
6	7125.00	9.92	55.09	65.01	88.20	-23.19	Peak	100	53	P
7	13050.00	18.79	29.74	48.53	68.20	-19.67	Average	100	118	P
8	13050.00	18.79	41.38	60.17	88.20	-28.03	Peak	100	118	P
9	19575.00	10.24	41.29	51.53	63.54	-12.01	Average	150	360	P
10	19575.00	10.24	51.38	61.62	83.54	-21.92	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

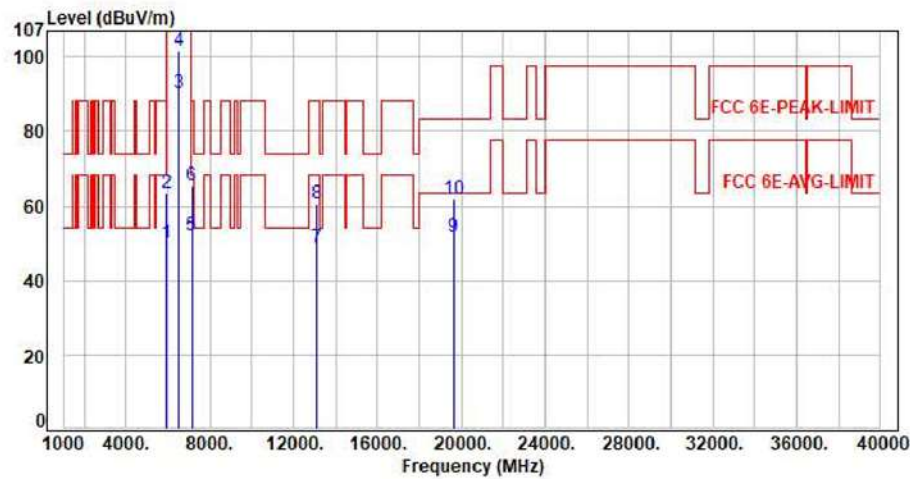


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.18	49.91	68.20	-18.29	Average	100	311	P
2	5925.00	7.73	55.86	63.59	88.20	-24.61	Peak	100	311	P
3	6545.00	8.63	81.63	90.26	200.00	-109.74	Average	100	311	P
4	6545.00	8.63	92.94	101.57	200.00	-98.43	Peak	100	311	P
5	7125.00	9.92	42.23	52.15	68.20	-16.05	Average	100	311	P
6	7125.00	9.92	55.45	65.37	88.20	-22.83	Peak	100	311	P
7	13090.00	19.04	29.77	48.81	68.20	-19.39	Average	100	297	P
8	13090.00	19.04	41.44	60.48	88.20	-27.72	Peak	100	297	P
9	19635.00	10.48	41.38	51.86	63.54	-11.68	Average	150	360	P
10	19635.00	10.48	51.38	61.86	83.54	-21.68	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

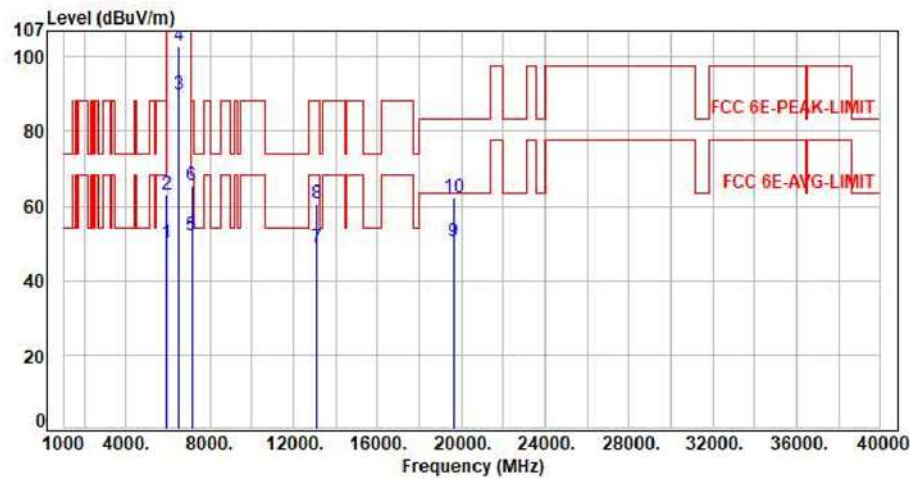


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.19	49.92	68.20	-18.28	Average	100	8	P
2	5925.00	7.73	55.21	62.94	88.20	-25.26	Peak	100	8	P
3	6545.00	8.63	81.36	89.99	200.00	-110.01	Average	100	8	P
4	6545.00	8.63	94.24	102.87	200.00	-97.13	Peak	100	8	P
5	7125.00	9.92	42.21	52.13	68.20	-16.07	Average	100	8	P
6	7125.00	9.92	55.64	65.56	88.20	-22.64	Peak	100	8	P
7	13090.00	19.04	29.77	48.81	68.20	-19.39	Average	100	274	P
8	13090.00	19.04	41.43	60.47	88.20	-27.73	Peak	100	274	P
9	19635.00	10.48	39.84	50.32	63.54	-13.22	Average	150	360	P
10	19635.00	10.48	51.58	62.06	83.54	-21.48	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

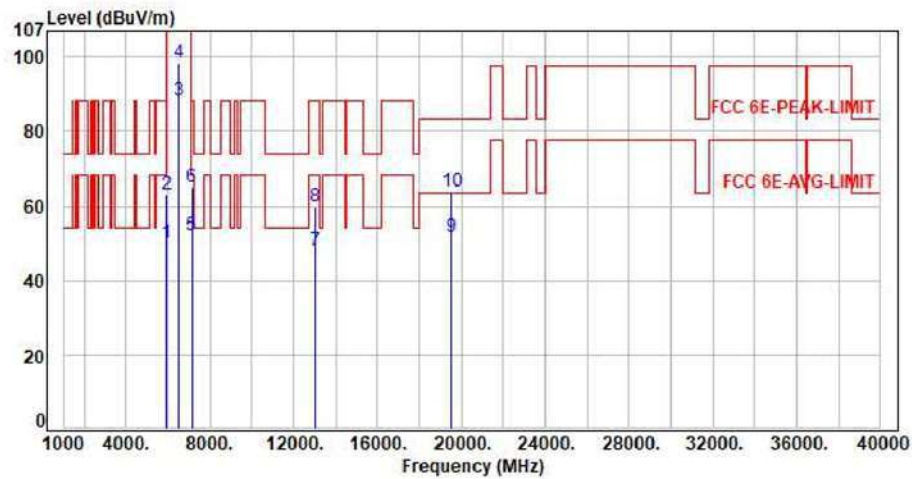


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.21	49.94	68.20	-18.26	Average	107	318	P
2	5925.00	7.73	55.23	62.96	88.20	-25.24	Peak	107	318	P
3	6505.00	8.39	79.71	88.10	200.00	-111.90	Average	107	318	P
4	6505.00	8.39	90.07	98.46	200.00	-101.54	Peak	107	318	P
5	7125.00	9.92	42.30	52.22	68.20	-15.98	Average	107	318	P
6	7125.00	9.92	55.17	65.09	88.20	-23.11	Peak	107	318	P
7	13010.00	18.63	29.47	48.10	68.20	-20.10	Average	100	241	P
8	13010.00	18.63	41.33	59.96	88.20	-28.24	Peak	100	241	P
9	19515.00	10.20	41.33	51.53	63.54	-12.01	Average	150	360	P
10	19515.00	10.20	53.84	64.04	83.54	-19.50	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

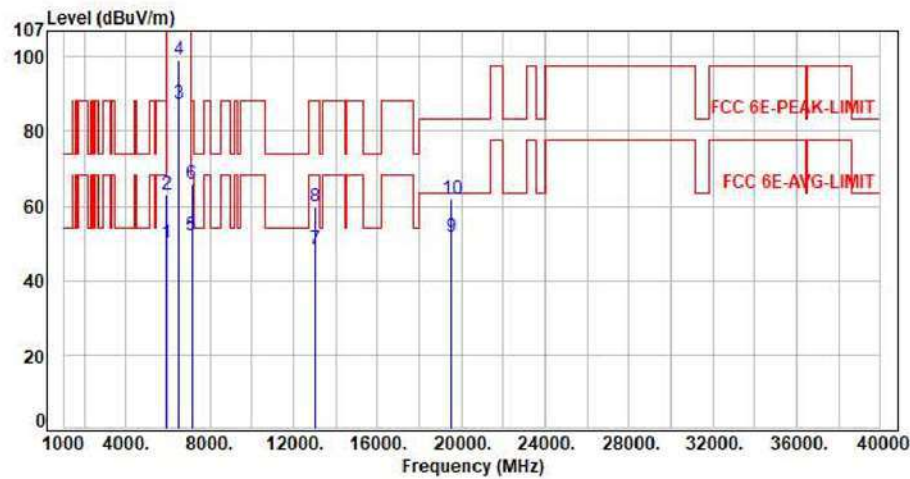


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.20	49.93	68.20	-18.27	Average	100	357	P
2	5925.00	7.73	55.36	63.09	88.20	-25.11	Peak	100	357	P
3	6505.00	8.39	79.15	87.54	200.00	-112.46	Average	100	357	P
4	6505.00	8.39	91.05	99.44	200.00	-100.56	Peak	100	357	P
5	7125.00	9.92	42.25	52.17	68.20	-16.03	Average	100	357	P
6	7125.00	9.92	55.99	65.91	88.20	-22.29	Peak	100	357	P
7	13010.00	18.63	29.87	48.50	68.20	-19.70	Average	100	227	P
8	13010.00	18.63	41.33	59.96	88.20	-28.24	Peak	100	227	P
9	19515.00	10.20	41.29	51.49	63.54	-12.05	Average	150	360	P
10	19515.00	10.20	51.74	61.94	83.54	-21.60	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

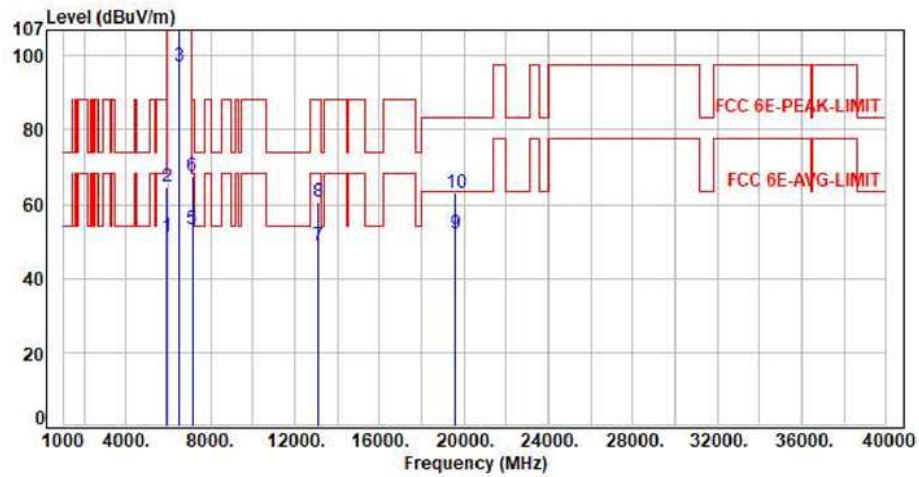

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.38	51.11	68.20	-17.09	Average	100	317	P
2	5925.00	7.73	57.13	64.86	88.20	-23.34	Peak	100	317	P
3	6535.00	8.57	88.56	97.13	200.00	-102.87	Average	100	317	P
4	6535.00	8.57	101.00	109.57	200.00	-90.43	Peak	100	317	P
5	7125.00	9.92	43.50	53.42	68.20	-14.78	Average	100	317	P
6	7125.00	9.92	57.61	67.53	88.20	-20.67	Peak	100	317	P
7	13070.00	18.92	29.70	48.62	68.20	-19.58	Average	100	251	P
8	13070.00	18.92	41.65	60.57	88.20	-27.63	Peak	100	251	P
9	19605.00	10.26	41.63	51.89	63.54	-11.65	Average	150	360	P
10	19605.00	10.26	52.61	62.87	83.54	-20.67	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

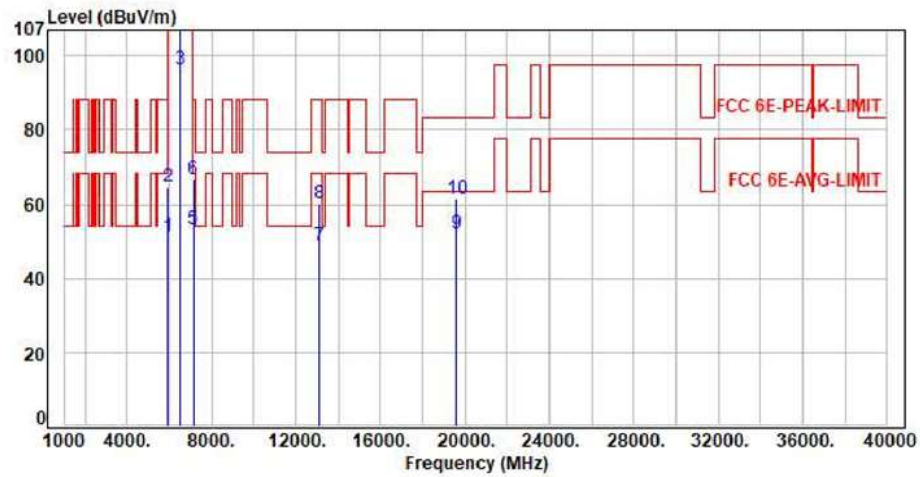

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.44	51.17	68.20	-17.03	Average	100	356	P
2	5925.00	7.73	56.92	64.65	88.20	-23.55	Peak	100	356	P
3	6535.00	8.57	87.95	96.52	200.00	-103.48	Average	100	356	P
4	6535.00	8.57	100.47	109.04	200.00	-90.96	Peak	100	356	P
5	7125.00	9.92	43.51	53.43	68.20	-14.77	Average	100	356	P
6	7125.00	9.92	56.86	66.78	88.20	-21.42	Peak	100	356	P
7	13070.00	18.92	29.73	48.65	68.20	-19.55	Average	100	131	P
8	13070.00	18.92	41.34	60.26	88.20	-27.94	Peak	100	131	P
9	19605.00	10.26	41.66	51.92	63.54	-11.62	Average	150	360	P
10	19605.00	10.26	51.24	61.50	83.54	-22.04	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

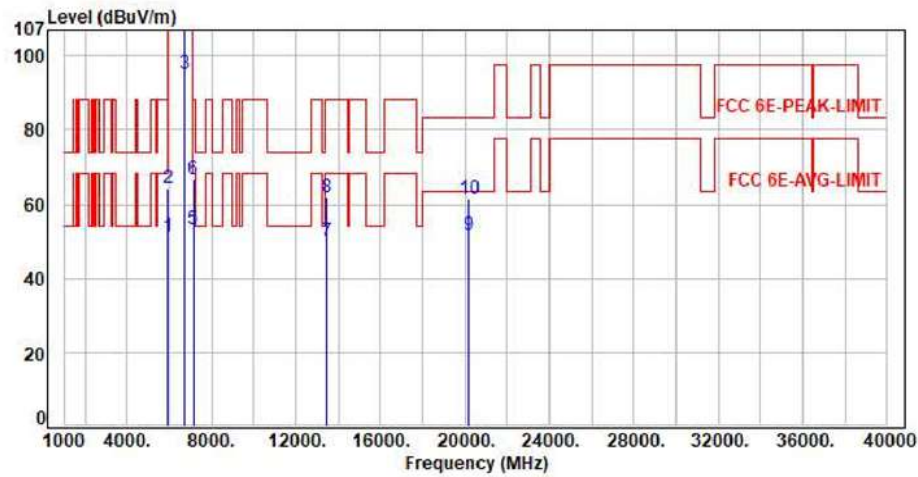

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.47	51.20	68.20	-17.00	Average	119	319	P
2	5925.00	7.73	56.39	64.12	88.20	-24.08	Peak	119	319	P
3	6715.00	9.20	85.83	95.03	200.00	-104.97	Average	119	319	P
4	6715.00	9.20	98.95	108.15	200.00	-91.85	Peak	119	319	P
5	7125.00	9.92	43.57	53.49	68.20	-14.71	Average	119	319	P
6	7125.00	9.92	56.94	66.86	88.20	-21.34	Peak	119	319	P
7	13430.00	20.57	29.42	49.99	68.20	-18.21	Average	100	118	P
8	13430.00	20.57	41.29	61.86	88.20	-26.34	Peak	100	118	P
9	20145.00	10.14	41.38	51.52	63.54	-12.02	Average	150	360	P
10	20145.00	10.14	51.28	61.42	83.54	-22.12	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

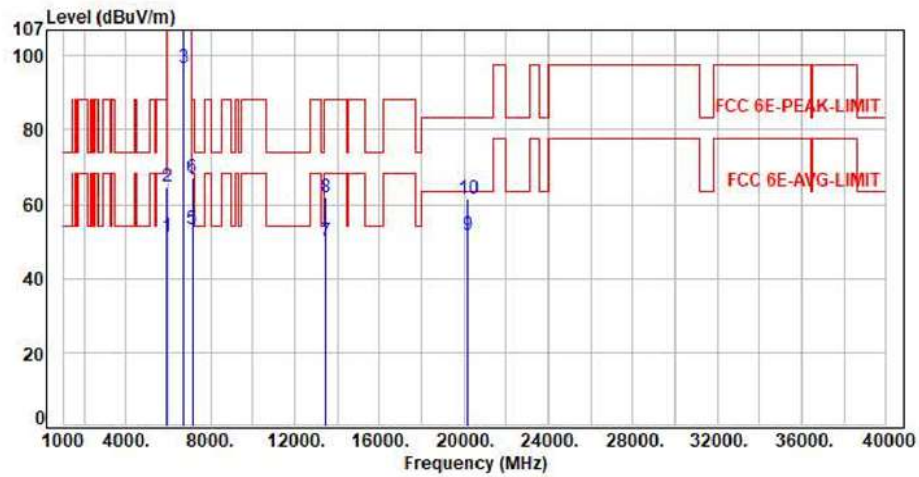

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.44	51.17	68.20	-17.03	Average	100	52	P
2	5925.00	7.73	56.79	64.52	88.20	-23.68	Peak	100	52	P
3	6715.00	9.20	87.45	96.65	200.00	-103.35	Average	100	52	P
4	6715.00	9.20	100.61	109.81	200.00	-90.19	Peak	100	52	P
5	7125.00	9.92	43.57	53.49	68.20	-14.71	Average	100	52	P
6	7125.00	9.92	57.37	67.29	88.20	-20.91	Peak	100	52	P
7	13430.00	20.57	29.42	49.99	68.20	-18.21	Average	100	117	P
8	13430.00	20.57	41.29	61.86	88.20	-26.34	Peak	100	117	P
9	20145.00	10.14	41.44	51.58	63.54	-11.96	Average	150	360	P
10	20145.00	10.14	51.34	61.48	83.54	-22.06	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

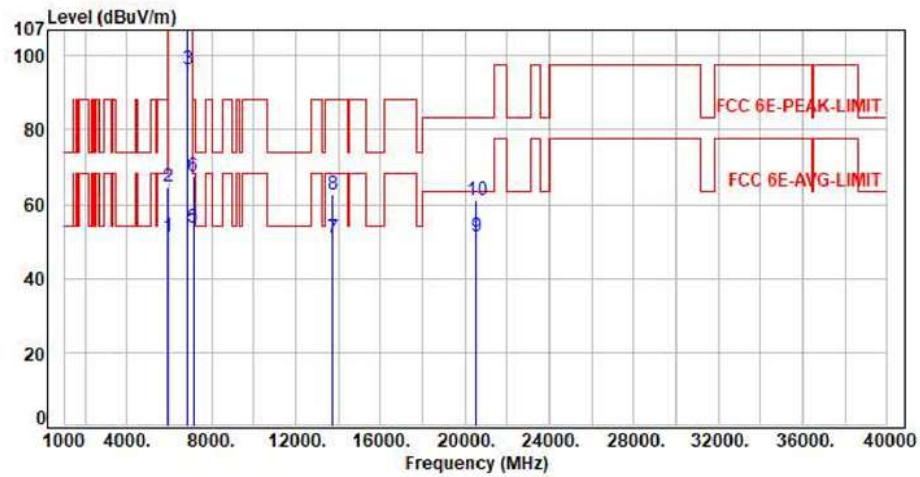

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.45	51.18	68.20	-17.02	Average	100	240	P
2	5925.00	7.73	57.08	64.81	88.20	-23.39	Peak	100	240	P
3	6855.00	9.48	87.11	96.59	200.00	-103.41	Average	100	240	P
4	6855.00	9.48	100.59	110.07	200.00	-89.93	Peak	100	240	P
5	7125.00	9.92	43.59	53.51	68.20	-14.69	Average	100	240	P
6	7125.00	9.92	57.71	67.63	88.20	-20.57	Peak	100	240	P
7	13710.00	21.36	29.42	50.78	68.20	-17.42	Average	100	116	P
8	13710.00	21.36	41.35	62.71	88.20	-25.49	Peak	100	116	P
9	20565.00	9.83	41.38	51.21	63.54	-12.33	Average	150	360	P
10	20565.00	9.83	51.34	61.17	83.54	-22.37	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

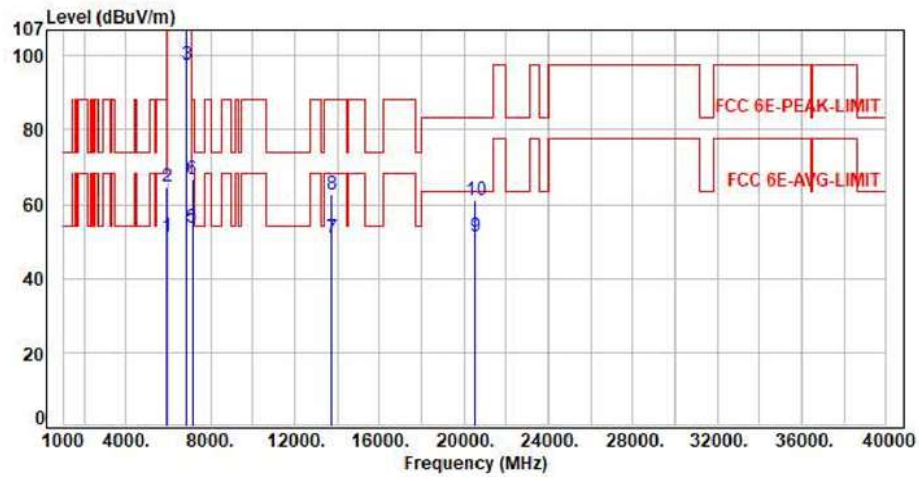

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.48	51.21	68.20	-16.99	Average	100	50	P
2	5925.00	7.73	56.87	64.60	88.20	-23.60	Peak	100	50	P
3	6855.00	9.48	87.99	97.47	200.00	-102.53	Average	100	50	P
4	6855.00	9.48	100.58	110.06	200.00	-89.94	Peak	100	50	P
5	7125.00	9.92	43.62	53.54	68.20	-14.66	Average	100	50	P
6	7125.00	9.92	56.87	66.79	88.20	-21.41	Peak	100	50	P
7	13710.00	21.36	29.42	50.78	68.20	-17.42	Average	100	167	P
8	13710.00	21.36	41.32	62.68	88.20	-25.52	Peak	100	167	P
9	20565.00	9.83	41.28	51.11	63.54	-12.43	Average	150	360	P
10	20565.00	9.83	51.34	61.17	83.54	-22.37	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

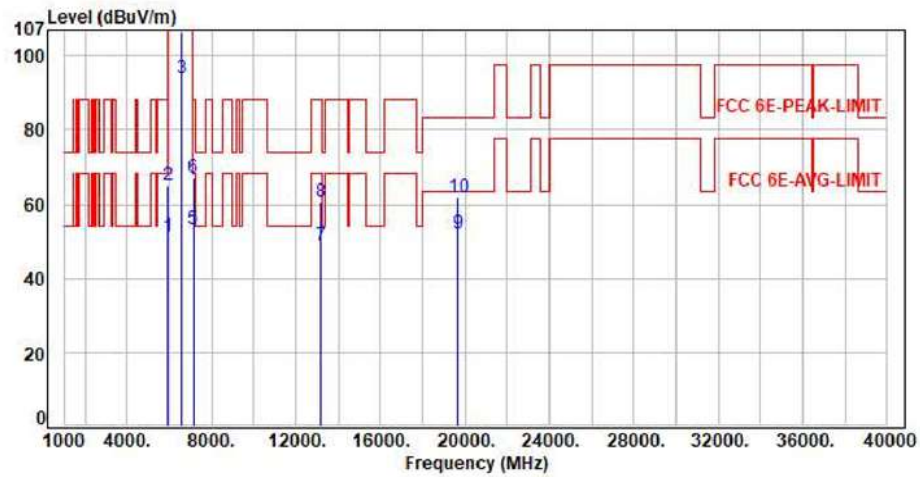

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.45	51.18	68.20	-17.02	Average	100	309	P
2	5925.00	7.73	57.42	65.15	88.20	-23.05	Peak	100	309	P
3	6565.00	8.72	85.23	93.95	200.00	-106.05	Average	100	309	P
4	6565.00	8.72	98.06	106.78	200.00	-93.22	Peak	100	309	P
5	7125.00	9.92	43.57	53.49	68.20	-14.71	Average	100	309	P
6	7125.00	9.92	57.22	67.14	88.20	-21.06	Peak	100	309	P
7	13130.00	19.16	29.47	48.63	68.20	-19.57	Average	100	117	P
8	13130.00	19.16	41.38	60.54	88.20	-27.66	Peak	100	117	P
9	19695.00	10.65	41.28	51.93	63.54	-11.61	Average	150	360	P
10	19695.00	10.65	51.28	61.93	83.54	-21.61	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

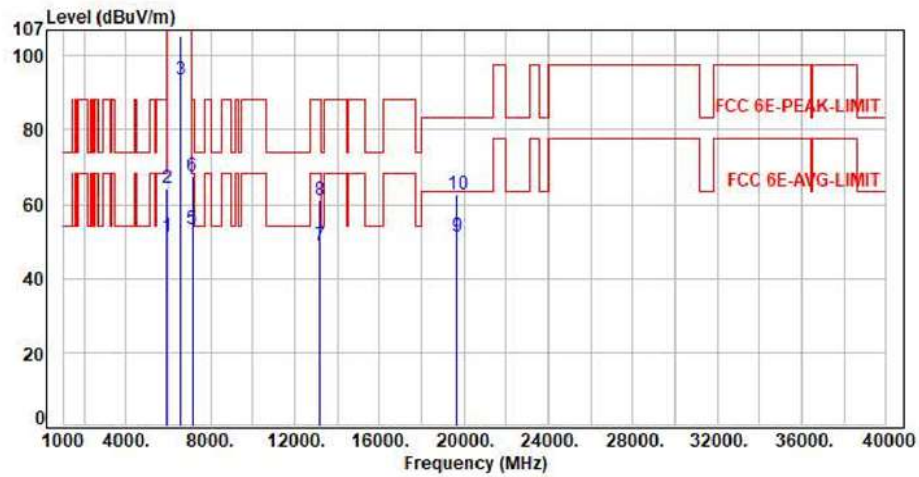

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.44	51.17	68.20	-17.03	Average	100	357	P
2	5925.00	7.73	56.58	64.31	88.20	-23.89	Peak	100	357	P
3	6565.00	8.72	84.79	93.51	200.00	-106.49	Average	100	357	P
4	6565.00	8.72	96.68	105.40	200.00	-94.60	Peak	100	357	P
5	7125.00	9.92	43.56	53.48	68.20	-14.72	Average	100	357	P
6	7125.00	9.92	57.44	67.36	88.20	-20.84	Peak	100	357	P
7	13130.00	19.16	29.47	48.63	68.20	-19.57	Average	100	195	P
8	13130.00	19.16	41.92	61.08	88.20	-27.12	Peak	100	195	P
9	19695.00	10.65	40.52	51.17	63.54	-12.37	Average	150	360	P
10	19695.00	10.65	51.82	62.47	83.54	-21.07	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

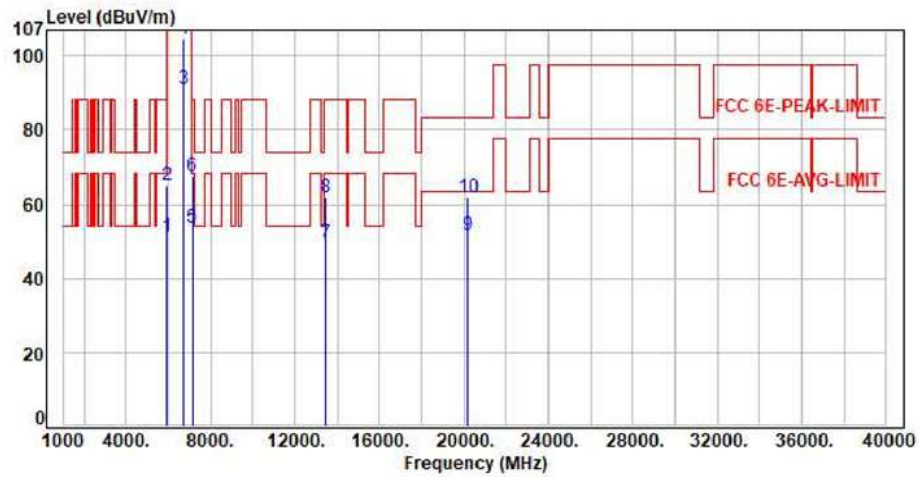

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.45	51.18	68.20	-17.02	Average	100	320	P
2	5925.00	7.73	57.27	65.00	88.20	-23.20	Peak	100	320	P
3	6725.00	9.22	82.05	91.27	200.00	-108.73	Average	100	320	P
4	6725.00	9.22	95.29	104.51	200.00	-95.49	Peak	100	320	P
5	7125.00	9.92	43.61	53.53	68.20	-14.67	Average	100	320	P
6	7125.00	9.92	57.50	67.42	88.20	-20.78	Peak	100	320	P
7	13450.00	20.62	29.13	49.75	68.20	-18.45	Average	100	196	P
8	13450.00	20.62	41.31	61.93	88.20	-26.27	Peak	100	196	P
9	20175.00	10.28	41.38	51.66	63.54	-11.88	Average	150	360	P
10	20175.00	10.28	51.47	61.75	83.54	-21.79	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

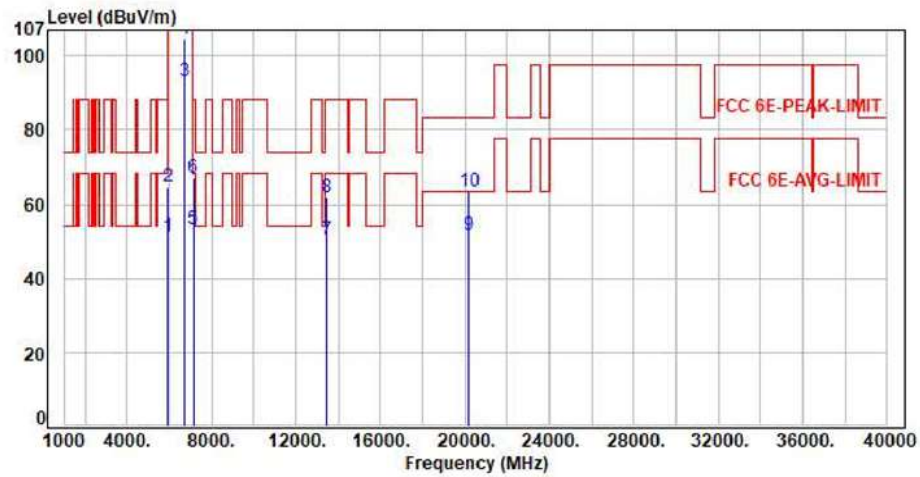

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.45	51.18	68.20	-17.02	Average	100	55	P
2	5925.00	7.73	56.98	64.71	88.20	-23.49	Peak	100	55	P
3	6725.00	9.22	83.91	93.13	200.00	-106.87	Average	100	55	P
4	6725.00	9.22	95.45	104.67	200.00	-95.33	Peak	100	55	P
5	7125.00	9.92	43.56	53.48	68.20	-14.72	Average	100	55	P
6	7125.00	9.92	57.01	66.93	88.20	-21.27	Peak	100	55	P
7	13450.00	20.62	29.76	50.38	68.20	-17.82	Average	100	111	P
8	13450.00	20.62	41.28	61.90	88.20	-26.30	Peak	100	111	P
9	20175.00	10.28	41.38	51.66	63.54	-11.88	Average	150	360	P
10	20175.00	10.28	53.10	63.38	83.54	-20.16	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

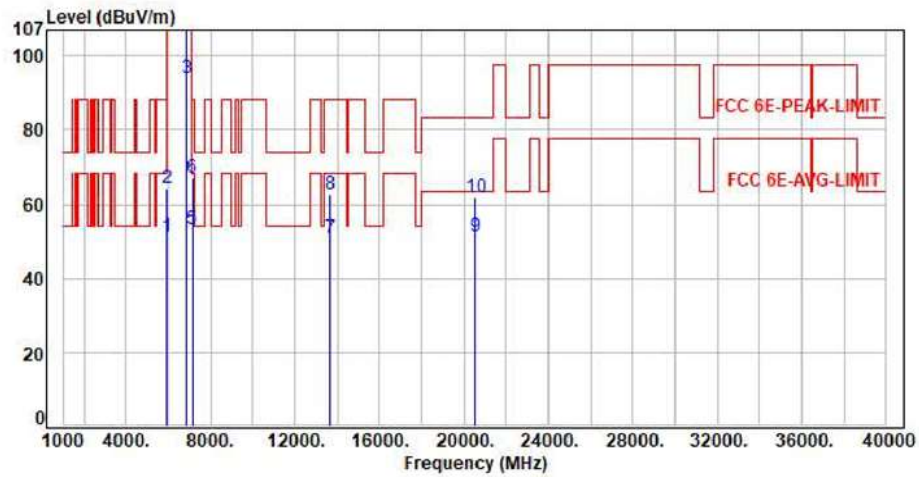

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.49	51.22	68.20	-16.98	Average	100	237	P
2	5925.00	7.73	56.75	64.48	88.20	-23.72	Peak	100	237	P
3	6845.00	9.48	84.47	93.95	200.00	-106.05	Average	100	237	P
4	6845.00	9.48	97.41	106.89	200.00	-93.11	Peak	100	237	P
5	7125.00	9.92	43.54	53.46	68.20	-14.74	Average	100	237	P
6	7125.00	9.92	57.08	67.00	88.20	-21.20	Peak	100	237	P
7	13690.00	21.28	29.40	50.68	68.20	-17.52	Average	100	139	P
8	13690.00	21.28	41.38	62.66	88.20	-25.54	Peak	100	139	P
9	20535.00	9.90	41.31	51.21	63.54	-12.33	Average	150	360	P
10	20535.00	9.90	51.74	61.64	83.54	-21.90	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

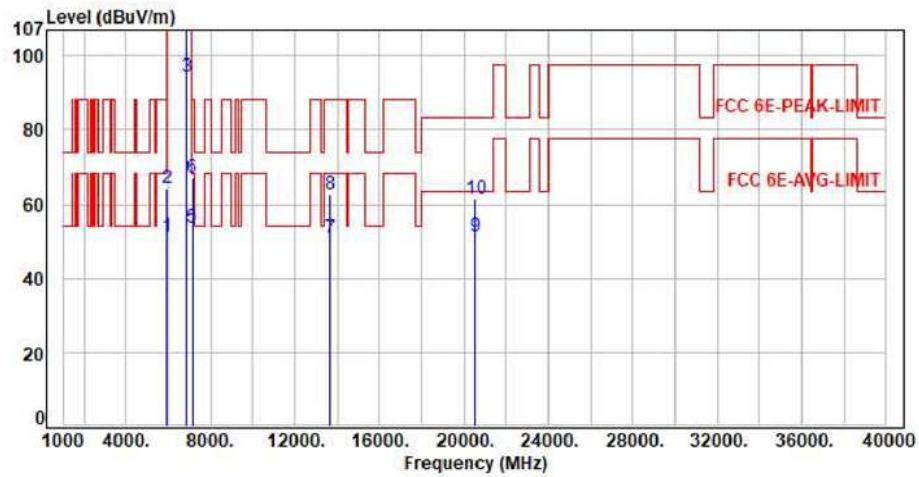

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.50	51.23	68.20	-16.97	Average	100	49	P
2	5925.00	7.73	56.72	64.45	88.20	-23.75	Peak	100	49	P
3	6845.00	9.48	85.03	94.51	200.00	-105.49	Average	100	49	P
4	6845.00	9.48	97.32	106.80	200.00	-93.20	Peak	100	49	P
5	7125.00	9.92	43.62	53.54	68.20	-14.66	Average	100	49	P
6	7125.00	9.92	57.06	66.98	88.20	-21.22	Peak	100	49	P
7	13690.00	21.28	29.40	50.68	68.20	-17.52	Average	100	119	P
8	13690.00	21.28	41.37	62.65	88.20	-25.55	Peak	100	119	P
9	20535.00	9.90	41.33	51.23	63.54	-12.31	Average	150	360	P
10	20535.00	9.90	51.38	61.28	83.54	-22.26	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

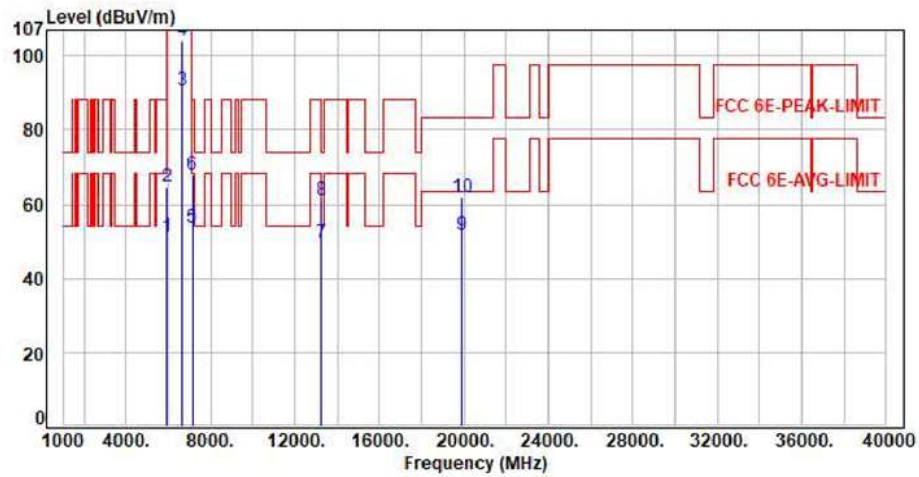

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.46	51.19	68.20	-17.01	Average	100	326	P
2	5925.00	7.73	56.87	64.60	88.20	-23.60	Peak	100	326	P
3	6625.00	8.97	81.81	90.78	200.00	-109.22	Average	100	326	P
4	6625.00	8.97	95.12	104.09	200.00	-95.91	Peak	100	326	P
5	7125.00	9.92	43.59	53.51	68.20	-14.69	Average	100	326	P
6	7125.00	9.92	57.82	67.74	88.20	-20.46	Peak	100	326	P
7	13250.00	19.81	29.62	49.43	54.00	-4.57	Average	100	131	P
8	13250.00	19.81	41.38	61.19	74.00	-12.81	Peak	100	131	P
9	19875.00	10.41	41.29	51.70	63.54	-11.84	Average	150	360	P
10	19875.00	10.41	51.33	61.74	83.54	-21.80	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

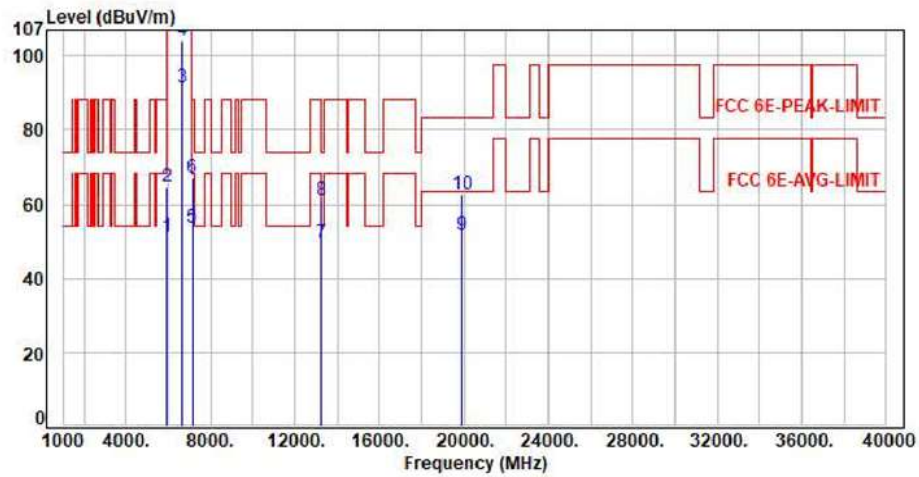

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.51	51.24	68.20	-16.96	Average	100	55	P
2	5925.00	7.73	57.12	64.85	88.20	-23.35	Peak	100	55	P
3	6625.00	8.97	82.42	91.39	200.00	-108.61	Average	100	55	P
4	6625.00	8.97	95.25	104.22	200.00	-95.78	Peak	100	55	P
5	7125.00	9.92	43.59	53.51	68.20	-14.69	Average	100	55	P
6	7125.00	9.92	57.04	66.96	88.20	-21.24	Peak	100	55	P
7	13250.00	19.81	29.73	49.54	54.00	-4.46	Average	100	131	P
8	13250.00	19.81	41.31	61.12	74.00	-12.88	Peak	100	131	P
9	19875.00	10.41	41.39	51.80	63.54	-11.74	Average	150	360	P
10	19875.00	10.41	52.17	62.58	83.54	-20.96	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

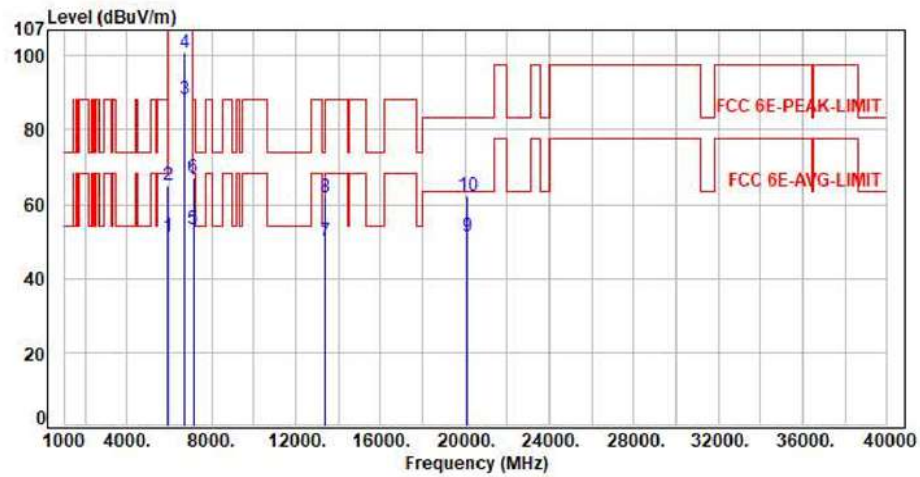

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.42	51.15	68.20	-17.05	Average	100	308	P
2	5925.00	7.73	57.53	65.26	88.20	-22.94	Peak	100	308	P
3	6705.00	9.18	79.30	88.48	200.00	-111.52	Average	100	308	P
4	6705.00	9.18	91.81	100.99	200.00	-99.01	Peak	100	308	P
5	7125.00	9.92	43.53	53.45	68.20	-14.75	Average	100	308	P
6	7125.00	9.92	57.35	67.27	88.20	-20.93	Peak	100	308	P
7	13410.00	20.53	29.63	50.16	68.20	-18.04	Average	100	113	P
8	13410.00	20.53	41.28	61.81	88.20	-26.39	Peak	100	113	P
9	20115.00	10.11	41.33	51.44	63.54	-12.10	Average	150	360	P
10	20115.00	10.11	52.13	62.24	83.54	-21.30	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

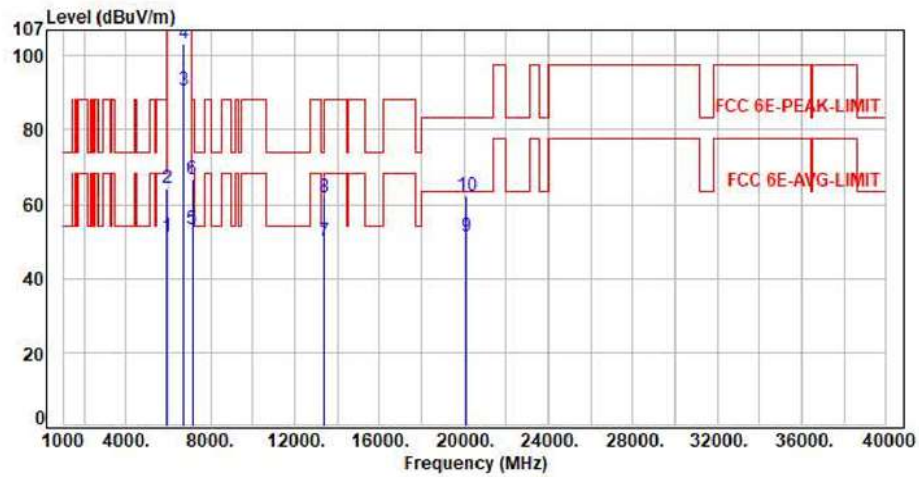

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.48	51.21	68.20	-16.99	Average	100	49	P
2	5925.00	7.73	56.59	64.32	88.20	-23.88	Peak	100	49	P
3	6705.00	9.18	81.55	90.73	200.00	-109.27	Average	100	49	P
4	6705.00	9.18	94.00	103.18	200.00	-96.82	Peak	100	49	P
5	7125.00	9.92	43.55	53.47	68.20	-14.73	Average	100	49	P
6	7125.00	9.92	56.84	66.76	88.20	-21.44	Peak	100	49	P
7	13410.00	20.53	29.64	50.17	68.20	-18.03	Average	100	163	P
8	13410.00	20.53	41.39	61.92	88.20	-26.28	Peak	100	163	P
9	20115.00	10.11	41.30	51.41	63.54	-12.13	Average	150	360	P
10	20115.00	10.11	52.11	62.22	83.54	-21.32	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

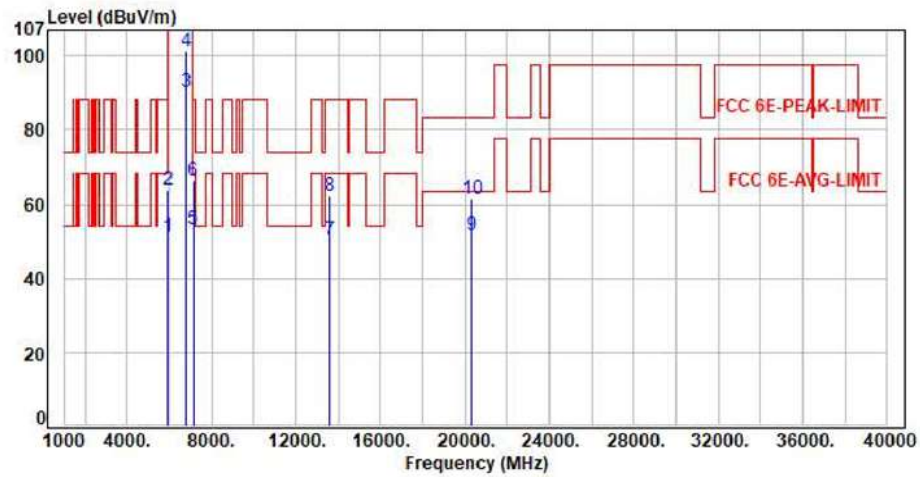

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.53	51.26	68.20	-16.94	Average	100	241	P
2	5925.00	7.73	56.26	63.99	88.20	-24.21	Peak	100	241	P
3	6785.00	9.41	80.80	90.21	200.00	-109.79	Average	100	241	P
4	6785.00	9.41	92.06	101.47	200.00	-98.53	Peak	100	241	P
5	7125.00	9.92	43.56	53.48	68.20	-14.72	Average	100	241	P
6	7125.00	9.92	56.45	66.37	88.20	-21.83	Peak	100	241	P
7	13570.00	20.80	29.66	50.46	68.20	-17.74	Average	100	212	P
8	13570.00	20.80	41.36	62.16	88.20	-26.04	Peak	100	212	P
9	20355.00	9.98	41.69	51.67	63.54	-11.87	Average	100	212	P
10	20355.00	9.98	51.38	61.36	83.54	-22.18	Peak	100	212	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

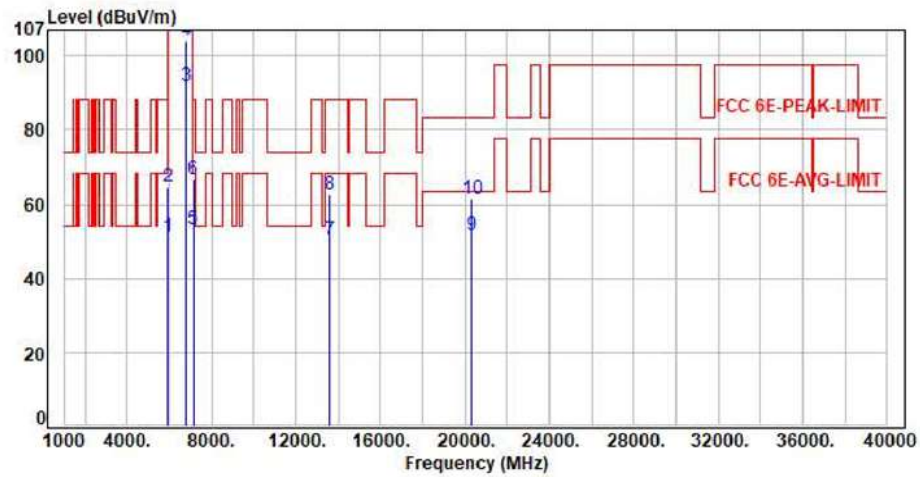

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.41	51.14	68.20	-17.06	Average	100	49	P
2	5925.00	7.73	56.81	64.54	88.20	-23.66	Peak	100	49	P
3	6785.00	9.41	82.66	92.07	200.00	-107.93	Average	100	49	P
4	6785.00	9.41	94.70	104.11	200.00	-95.89	Peak	100	49	P
5	7125.00	9.92	43.52	53.44	68.20	-14.76	Average	100	49	P
6	7125.00	9.92	56.83	66.75	88.20	-21.45	Peak	100	49	P
7	13570.00	20.80	29.64	50.44	68.20	-17.76	Average	100	152	P
8	13570.00	20.80	41.95	62.75	88.20	-25.45	Peak	100	152	P
9	20355.00	9.98	41.71	51.69	63.54	-11.85	Average	150	360	P
10	20355.00	9.98	51.32	61.30	83.54	-22.24	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

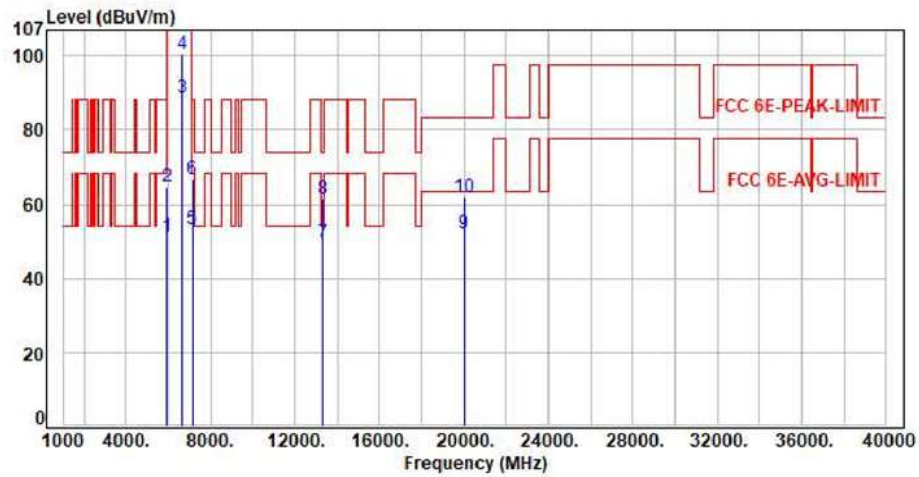

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.42	51.15	68.20	-17.05	Average	100	320	P
2	5925.00	7.73	56.90	64.63	88.20	-23.57	Peak	100	320	P
3	6665.00	9.10	79.79	88.89	200.00	-111.11	Average	100	320	P
4	6665.00	9.10	91.33	100.43	200.00	-99.57	Peak	100	320	P
5	7125.00	9.92	43.57	53.49	68.20	-14.71	Average	100	320	P
6	7125.00	9.92	56.94	66.86	88.20	-21.34	Peak	100	320	P
7	13330.00	20.17	29.61	49.78	54.00	-4.22	Average	100	131	P
8	13330.00	20.17	41.39	61.56	74.00	-12.44	Peak	100	131	P
9	19995.00	10.55	41.38	51.93	63.54	-11.61	Average	150	360	P
10	19995.00	10.55	51.38	61.93	83.54	-21.61	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

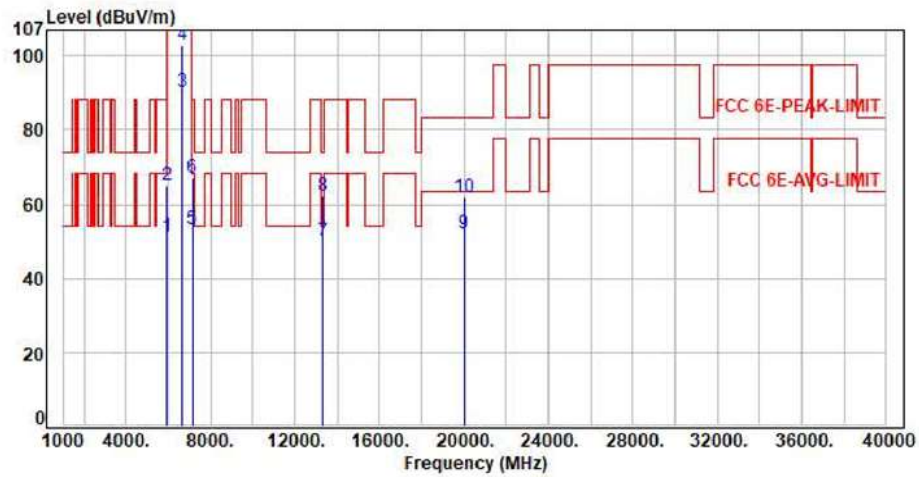

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.38	51.11	68.20	-17.09	Average	109	56	P
2	5925.00	7.73	57.28	65.01	88.20	-23.19	Peak	109	56	P
3	6665.00	9.10	81.06	90.16	200.00	-109.84	Average	109	56	P
4	6665.00	9.10	93.66	102.76	200.00	-97.24	Peak	109	56	P
5	7125.00	9.92	43.55	53.47	68.20	-14.73	Average	109	56	P
6	7125.00	9.92	57.02	66.94	88.20	-21.26	Peak	109	56	P
7	13330.00	20.17	29.67	49.84	54.00	-4.16	Average	100	188	P
8	13330.00	20.17	41.90	62.07	74.00	-11.93	Peak	100	188	P
9	19995.00	10.55	41.39	51.94	63.54	-11.60	Average	150	360	P
10	19995.00	10.55	51.34	61.89	83.54	-21.65	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

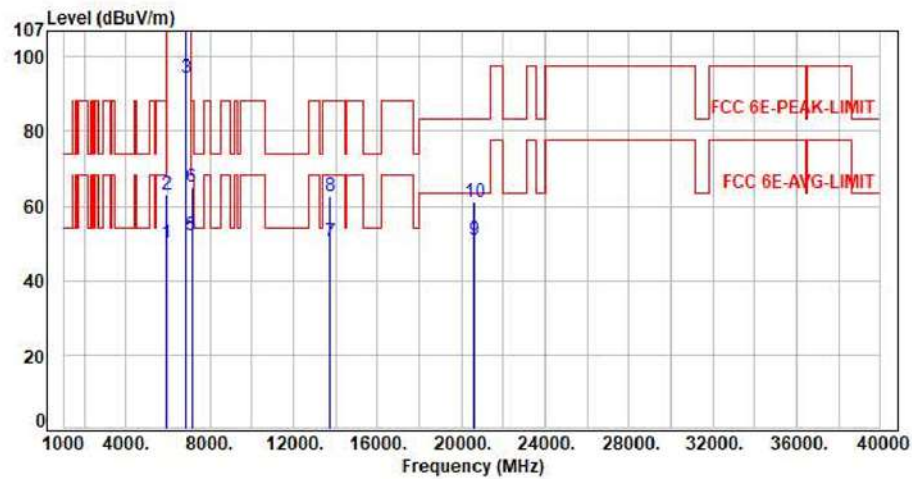


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.21	49.94	68.20	-18.26	Average	100	238	P
2	5925.00	7.73	55.42	63.15	88.20	-25.05	Peak	100	238	P
3	6875.00	9.47	84.99	94.46	200.00	-105.54	Average	100	238	P
4	6875.00	9.47	98.24	107.71	200.00	-92.29	Peak	100	238	P
5	7125.00	9.92	42.21	52.13	68.20	-16.07	Average	100	238	P
6	7125.00	9.92	55.33	65.25	88.20	-22.95	Peak	100	238	P
7	13750.00	21.47	29.18	50.65	68.20	-17.55	Average	100	193	P
8	13750.00	21.47	41.38	62.85	88.20	-25.35	Peak	100	193	P
9	20625.00	9.65	41.38	51.03	63.54	-12.51	Average	150	360	P
10	20625.00	9.65	51.28	60.93	83.54	-22.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

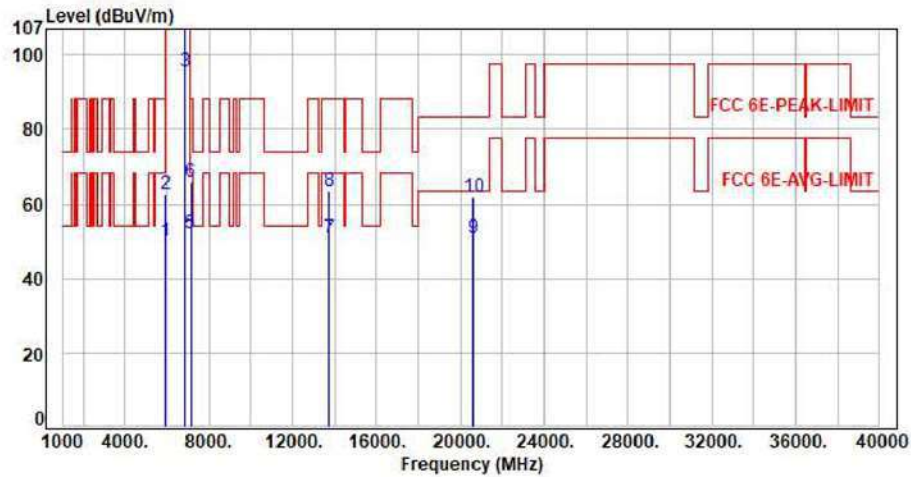


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.35	50.08	68.20	-18.12	Average	100	300	P
2	5925.00	7.73	55.07	62.80	88.20	-25.40	Peak	100	300	P
3	6875.00	9.47	86.04	95.51	200.00	-104.49	Average	100	300	P
4	6875.00	9.47	98.93	108.40	200.00	-91.60	Peak	100	300	P
5	7125.00	9.92	42.27	52.19	68.20	-16.01	Average	100	300	P
6	7125.00	9.92	56.00	65.92	88.20	-22.28	Peak	100	300	P
7	13750.00	21.47	29.34	50.81	68.20	-17.39	Average	100	175	P
8	13750.00	21.47	41.90	63.37	88.20	-24.83	Peak	100	175	P
9	20625.00	9.65	41.39	51.04	63.54	-12.50	Average	150	360	P
10	20625.00	9.65	52.18	61.83	83.54	-21.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

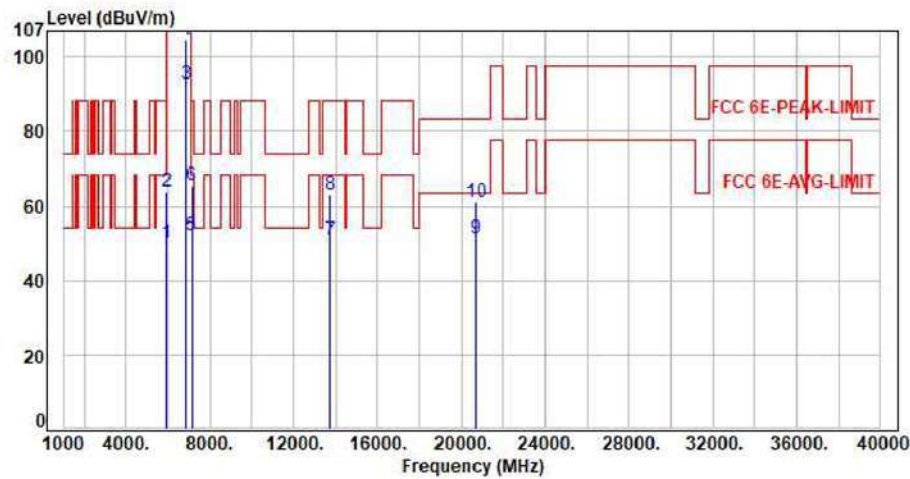


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.21	49.94	68.20	-18.26	Average	100	238	P
2	5925.00	7.73	56.18	63.91	88.20	-24.29	Peak	100	238	P
3	6885.00	9.47	83.15	92.62	200.00	-107.38	Average	100	238	P
4	6885.00	9.47	95.02	104.49	200.00	-95.51	Peak	100	238	P
5	7125.00	9.92	42.15	52.07	68.20	-16.13	Average	100	238	P
6	7125.00	9.92	55.46	65.38	88.20	-22.82	Peak	100	238	P
7	13770.00	21.56	29.37	50.93	68.20	-17.27	Average	100	119	P
8	13770.00	21.56	41.38	62.94	88.20	-25.26	Peak	100	119	P
9	20655.00	9.71	41.38	51.09	63.54	-12.45	Average	150	360	P
10	20655.00	9.71	51.38	61.09	83.54	-22.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

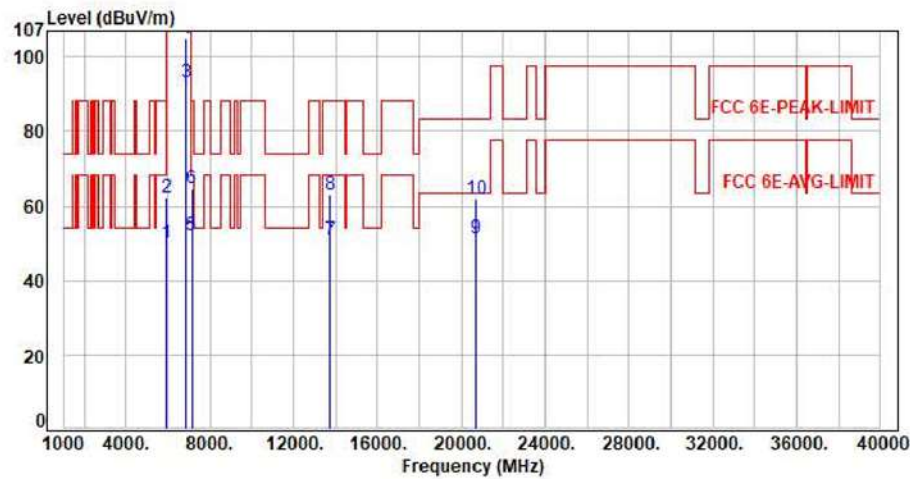


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.33	50.06	68.20	-18.14	Average	100	300	P
2	5925.00	7.73	54.56	62.29	88.20	-25.91	Peak	100	300	P
3	6885.00	9.47	83.82	93.29	200.00	-106.71	Average	100	300	P
4	6885.00	9.47	95.39	104.86	200.00	-95.14	Peak	100	300	P
5	7125.00	9.92	42.15	52.07	68.20	-16.13	Average	100	300	P
6	7125.00	9.92	54.97	64.89	88.20	-23.31	Peak	100	300	P
7	13770.00	21.56	29.47	51.03	68.20	-17.17	Average	100	256	P
8	13770.00	21.56	41.33	62.89	88.20	-25.31	Peak	100	256	P
9	20655.00	9.71	41.38	51.09	63.54	-12.45	Average	150	360	P
10	20655.00	9.71	52.18	61.89	83.54	-21.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

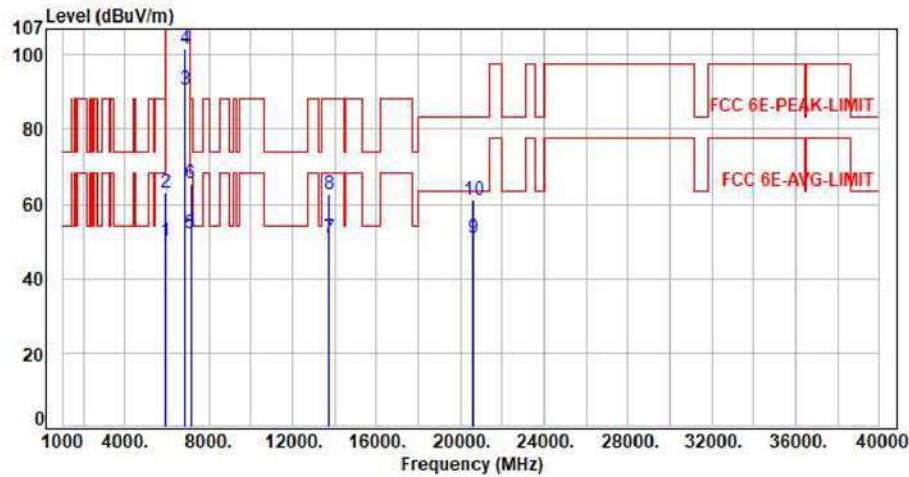


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.23	49.96	68.20	-18.24	Average	100	240	P
2	5925.00	7.73	55.15	62.88	88.20	-25.32	Peak	100	240	P
3	6865.00	9.47	81.06	90.53	200.00	-109.47	Average	100	240	P
4	6865.00	9.47	92.24	101.71	200.00	-98.29	Peak	100	240	P
5	7125.00	9.92	42.15	52.07	68.20	-16.13	Average	100	240	P
6	7125.00	9.92	55.52	65.44	88.20	-22.76	Peak	100	240	P
7	13730.00	21.42	29.47	50.89	68.20	-17.31	Average	100	115	P
8	13730.00	21.42	41.28	62.70	88.20	-25.50	Peak	100	115	P
9	20595.00	9.64	41.38	51.02	63.54	-12.52	Average	150	360	P
10	20595.00	9.64	51.34	60.98	83.54	-22.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

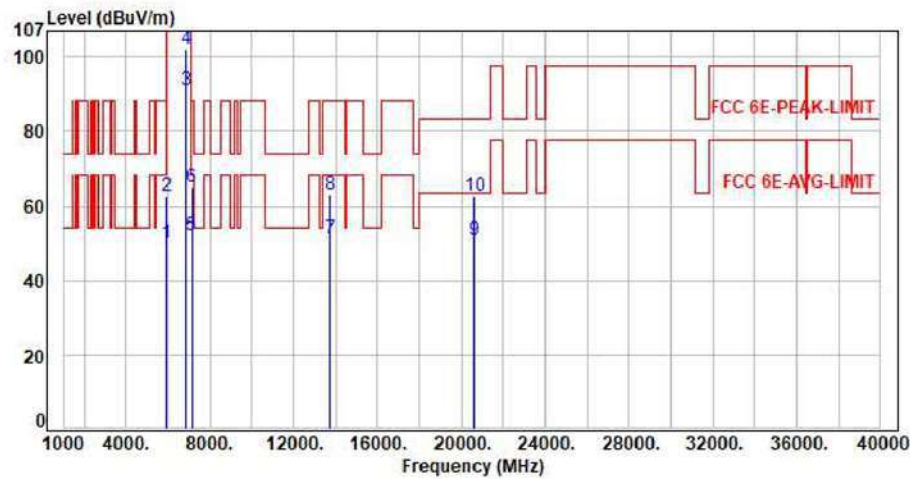


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.35	50.08	68.20	-18.12	Average	100	308	P
2	5925.00	7.73	54.99	62.72	88.20	-25.48	Peak	100	308	P
3	6865.00	9.47	81.79	91.26	200.00	-108.74	Average	100	308	P
4	6865.00	9.47	92.59	102.06	200.00	-97.94	Peak	100	308	P
5	7125.00	9.92	42.20	52.12	68.20	-16.08	Average	100	308	P
6	7125.00	9.92	55.16	65.08	88.20	-23.12	Peak	100	308	P
7	13730.00	21.42	29.74	51.16	68.20	-17.04	Average	100	114	P
8	13730.00	21.42	41.62	63.04	88.20	-25.16	Peak	100	114	P
9	20595.00	9.64	41.38	51.02	63.54	-12.52	Average	150	360	P
10	20595.00	9.64	53.18	62.82	83.54	-20.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

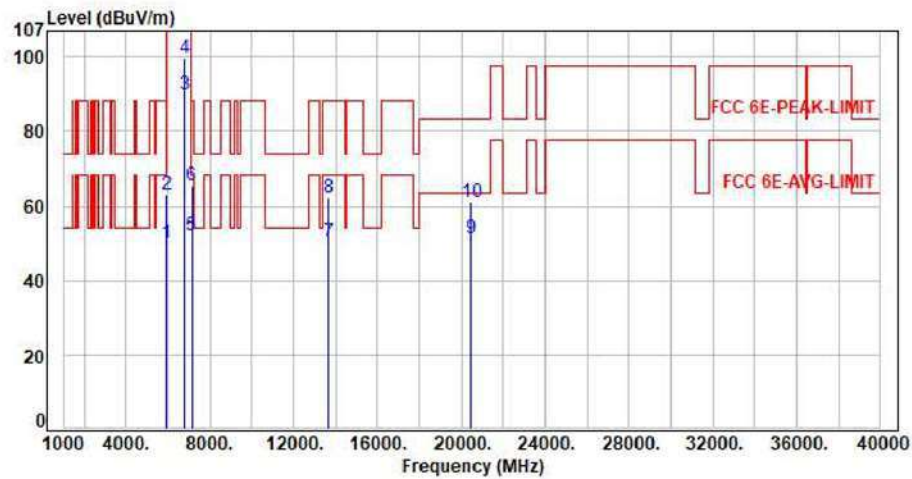


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.36	50.09	68.20	-18.11	Average	100	241	P
2	5925.00	7.73	55.47	63.20	88.20	-25.00	Peak	100	241	P
3	6825.00	9.47	80.54	90.01	200.00	-109.99	Average	100	241	P
4	6825.00	9.47	90.38	99.85	200.00	-100.15	Peak	100	241	P
5	7125.00	9.92	42.19	52.11	68.20	-16.09	Average	100	241	P
6	7125.00	9.92	55.55	65.47	88.20	-22.73	Peak	100	241	P
7	13650.00	21.01	29.41	50.42	68.20	-17.78	Average	100	116	P
8	13650.00	21.01	41.30	62.31	88.20	-25.89	Peak	100	116	P
9	20475.00	9.81	41.38	51.19	63.54	-12.35	Average	150	360	P
10	20475.00	9.81	51.34	61.15	83.54	-22.39	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

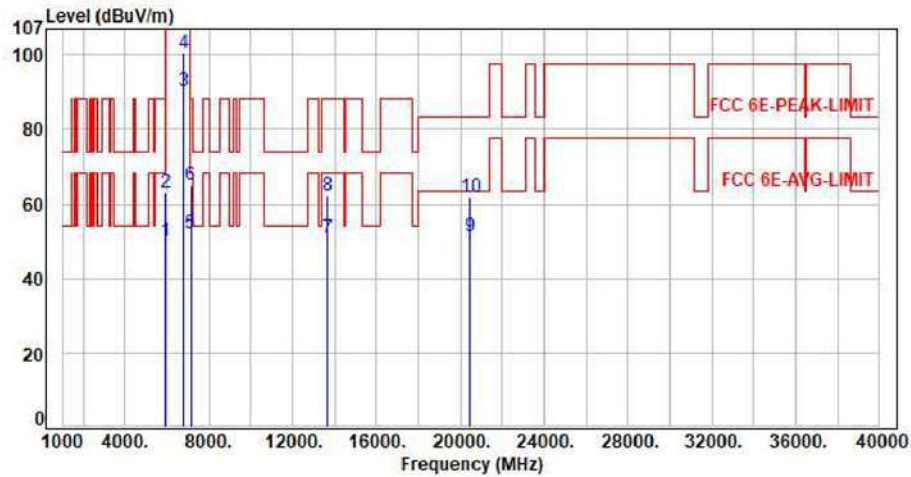


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.16	49.89	68.20	-18.31	Average	100	5	P
2	5925.00	7.73	55.25	62.98	88.20	-25.22	Peak	100	5	P
3	6825.00	9.47	81.02	90.49	200.00	-109.51	Average	100	5	P
4	6825.00	9.47	91.13	100.60	200.00	-99.40	Peak	100	5	P
5	7125.00	9.92	42.23	52.15	68.20	-16.05	Average	100	5	P
6	7125.00	9.92	55.21	65.13	88.20	-23.07	Peak	100	5	P
7	13650.00	21.01	29.74	50.75	68.20	-17.45	Average	100	323	P
8	13650.00	21.01	41.44	62.45	88.20	-25.75	Peak	100	323	P
9	20475.00	9.81	41.38	51.19	63.54	-12.35	Average	150	360	P
10	20475.00	9.81	51.94	61.75	83.54	-21.79	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

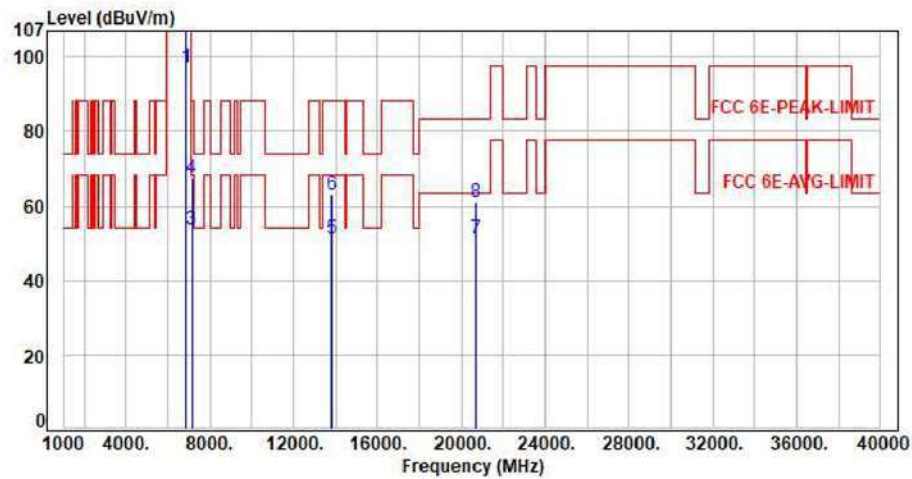

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	87.70	97.18	200.00	-102.82	Average	100	304	P
2	6895.00	9.48	98.91	108.39	200.00	-91.61	Peak	100	304	P
3	7125.00	9.92	43.65	53.57	68.20	-14.63	Average	100	304	P
4	7125.00	9.92	57.42	67.34	88.20	-20.86	Peak	100	304	P
5	13790.00	21.66	29.62	51.28	68.20	-16.92	Average	100	225	P
6	13790.00	21.66	41.31	62.97	88.20	-25.23	Peak	100	225	P
7	20685.00	9.82	41.32	51.14	63.54	-12.40	Average	150	360	P
8	20685.00	9.82	51.38	61.20	83.54	-22.34	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

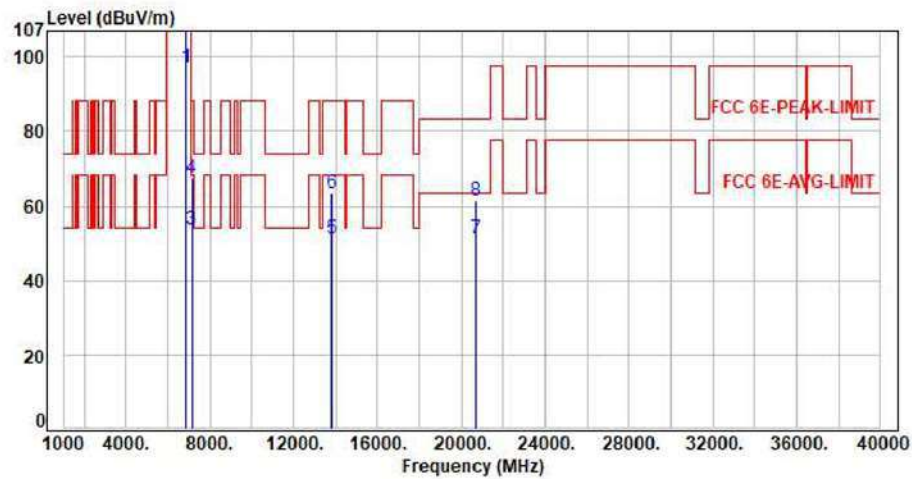

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	87.76	97.24	200.00	-102.76	Average	100	301	P
2	6895.00	9.48	100.26	109.74	200.00	-90.26	Peak	100	301	P
3	7125.00	9.92	43.64	53.56	68.20	-14.64	Average	100	301	P
4	7125.00	9.92	57.45	67.37	88.20	-20.83	Peak	100	301	P
5	13790.00	21.66	29.73	51.39	68.20	-16.81	Average	100	189	P
6	13790.00	21.66	41.94	63.60	88.20	-24.60	Peak	100	189	P
7	20685.00	9.82	41.30	51.12	63.54	-12.42	Average	150	360	P
8	20685.00	9.82	51.69	61.51	83.54	-22.03	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

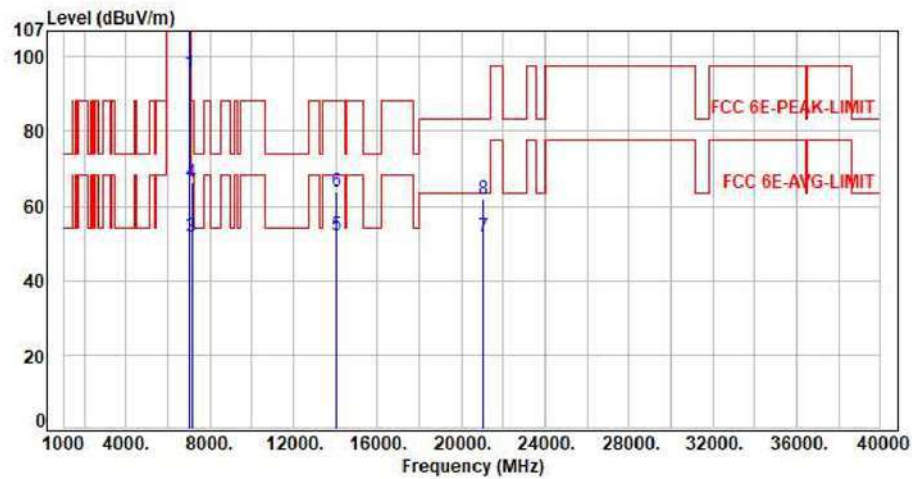


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	86.02	95.61	200.00	-104.39	Average	100	149	P
2	7015.00	9.59	99.23	108.82	200.00	-91.18	Peak	100	149	P
3	7125.00	9.92	41.84	51.76	68.20	-16.44	Average	100	149	P
4	7125.00	9.92	56.41	66.33	88.20	-21.87	Peak	100	149	P
5	14030.00	22.33	29.66	51.99	68.20	-16.21	Average	100	185	P
6	14030.00	22.33	41.37	63.70	88.20	-24.50	Peak	100	185	P
7	21045.00	10.28	41.39	51.67	63.54	-11.87	Average	150	360	P
8	21045.00	10.28	51.39	61.67	83.54	-21.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

MIMO



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

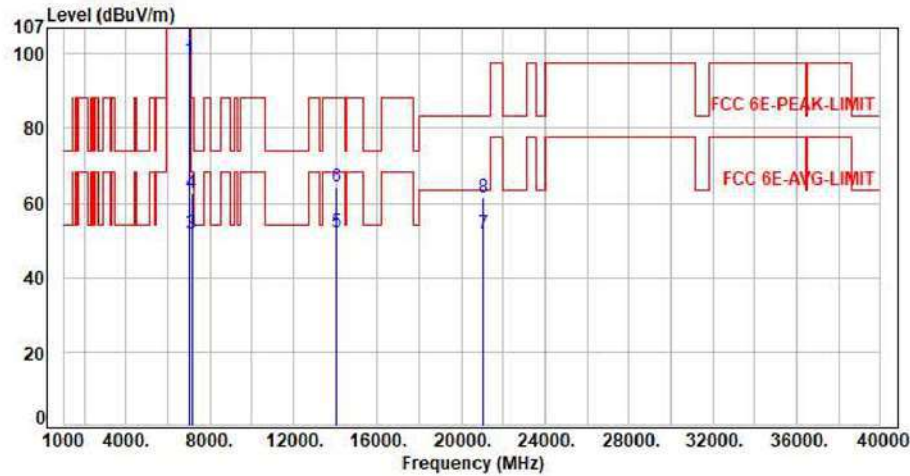

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	88.85	98.44	200.00	-101.56	Average	100	30	P
2	7015.00	9.59	102.37	111.96	200.00	-88.04	Peak	100	30	P
3	7125.00	9.92	41.65	51.57	68.20	-16.63	Average	100	30	P
4	7125.00	9.92	52.61	62.53	88.20	-25.67	Peak	100	30	P
5	14030.00	22.33	29.66	51.99	68.20	-16.21	Average	100	157	P
6	14030.00	22.33	41.94	64.27	88.20	-23.93	Peak	100	157	P
7	21045.00	10.28	41.39	51.67	63.54	-11.87	Average	150	360	P
8	21045.00	10.28	51.34	61.62	83.54	-21.92	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

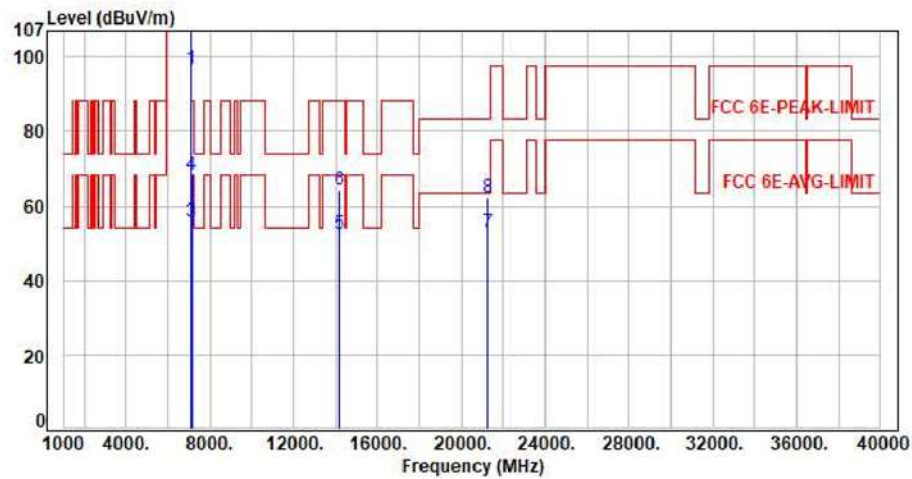

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	87.01	96.80	200.00	-103.20	Average	112	317	P
2	7095.00	9.79	100.62	110.41	200.00	-89.59	Peak	112	317	P
3	7125.00	9.92	46.02	55.94	68.20	-12.26	Average	112	317	P
4	7125.00	9.92	58.23	68.15	88.20	-20.05	Peak	112	317	P
5	14190.00	22.77	29.67	52.44	68.20	-15.76	Average	100	150	P
6	14190.00	22.77	41.62	64.39	88.20	-23.81	Peak	100	150	P
7	21285.00	10.94	41.96	52.90	63.54	-10.64	Average	150	360	P
8	21285.00	10.94	51.39	62.33	83.54	-21.21	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

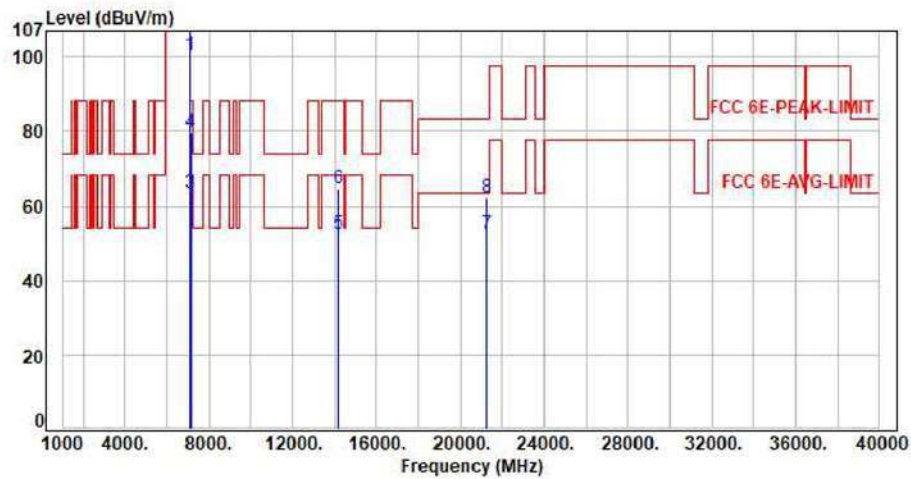

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	90.59	100.38	200.00	-99.62	Average	107	35	P
2	7095.00	9.79	105.03	114.82	200.00	-85.18	Peak	107	35	P
3	7125.00	9.92	53.43	63.35	68.20	-4.85	Average	107	35	P
4	7125.00	9.92	69.92	79.84	88.20	-8.36	Peak	107	35	P
5	14190.00	22.77	29.68	52.45	68.20	-15.75	Average	100	192	P
6	14190.00	22.77	41.95	64.72	88.20	-23.48	Peak	100	192	P
7	21285.00	10.94	41.38	52.32	63.54	-11.22	Average	150	360	P
8	21285.00	10.94	51.39	62.33	83.54	-21.21	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

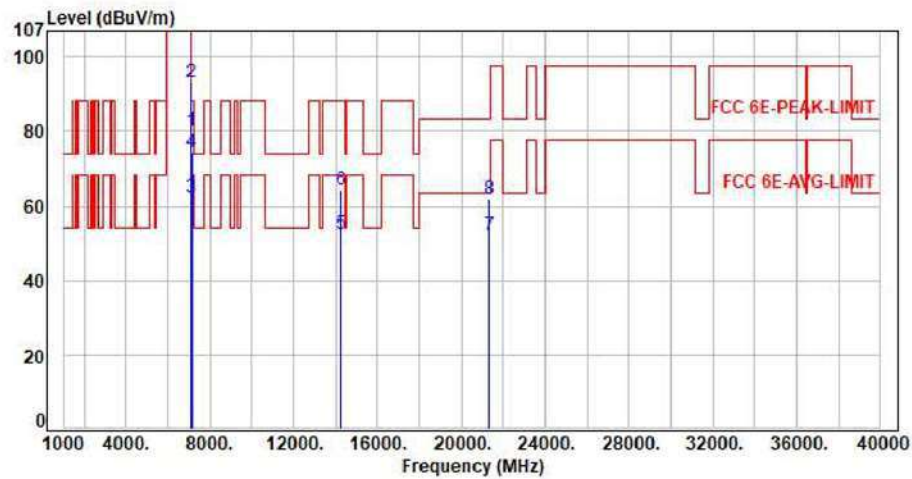


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	70.40	80.27	200.00	-119.73	Average	115	229	P
2	7115.00	9.87	83.32	93.19	200.00	-106.81	Peak	115	229	P
3	7125.00	9.92	52.42	62.34	68.20	-5.86	Average	115	229	P
4	7125.00	9.92	64.71	74.63	88.20	-13.57	Peak	115	229	P
5	14230.00	22.90	29.69	52.59	68.20	-15.61	Average	100	164	P
6	14230.00	22.90	41.39	64.29	88.20	-23.91	Peak	100	164	P
7	21345.00	10.74	41.39	52.13	63.54	-11.41	Average	150	360	P
8	21345.00	10.74	51.29	62.03	83.54	-21.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

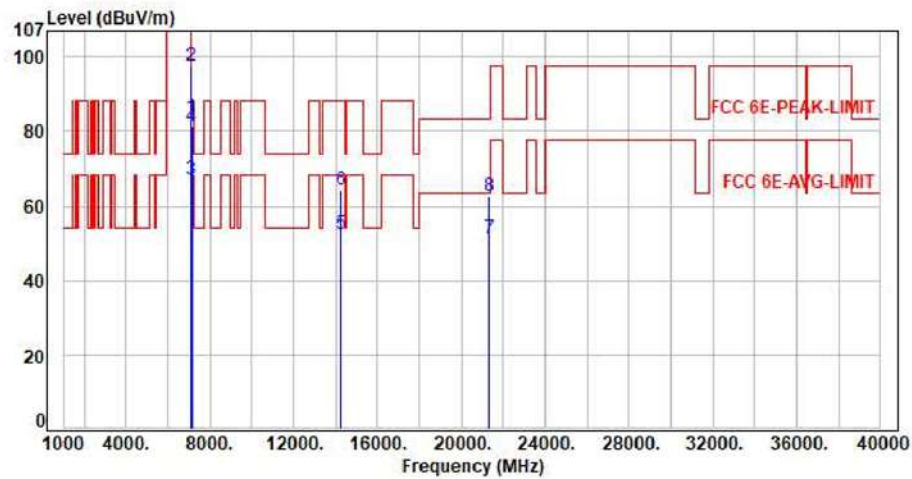

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	74.03	83.90	200.00	-116.10	Average	100	35	P
2	7115.00	9.87	87.83	97.70	200.00	-102.30	Peak	100	35	P
3	7125.00	9.92	57.12	67.04	68.20	-1.16	Average	100	35	P
4	7125.00	9.92	71.54	81.46	88.20	-6.74	Peak	100	35	P
5	14230.00	22.90	29.69	52.59	68.20	-15.61	Average	100	194	P
6	14230.00	22.90	41.38	64.28	88.20	-23.92	Peak	100	194	P
7	21345.00	10.74	40.62	51.36	63.54	-12.18	Average	150	360	P
8	21345.00	10.74	51.92	62.66	83.54	-20.88	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

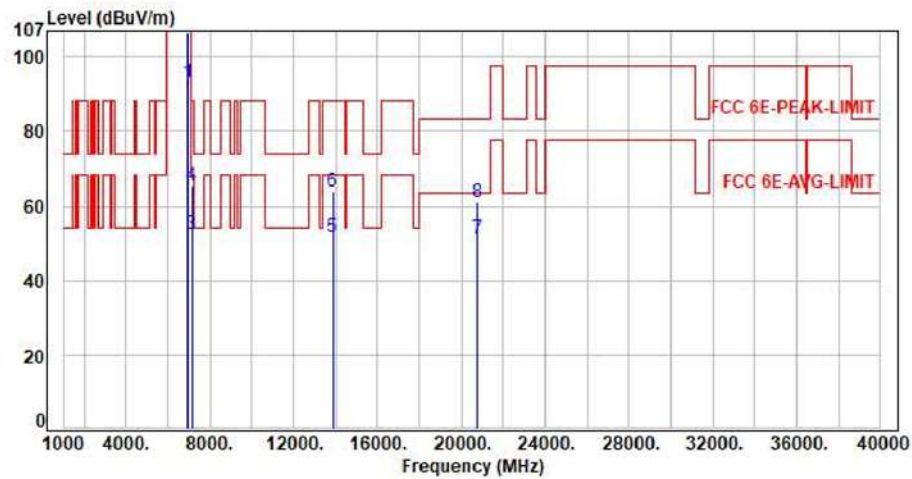

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	83.75	93.27	200.00	-106.73	Average	100	303	P
2	6925.00	9.52	96.88	106.40	200.00	-93.60	Peak	100	303	P
3	7125.00	9.92	42.67	52.59	68.20	-15.61	Average	100	303	P
4	7125.00	9.92	55.49	65.41	88.20	-22.79	Peak	100	303	P
5	13850.00	21.83	29.88	51.71	68.20	-16.49	Average	100	207	P
6	13850.00	21.83	41.96	63.79	88.20	-24.41	Peak	100	207	P
7	20775.00	9.75	41.63	51.38	63.54	-12.16	Average	150	360	P
8	20775.00	9.75	51.34	61.09	83.54	-22.45	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

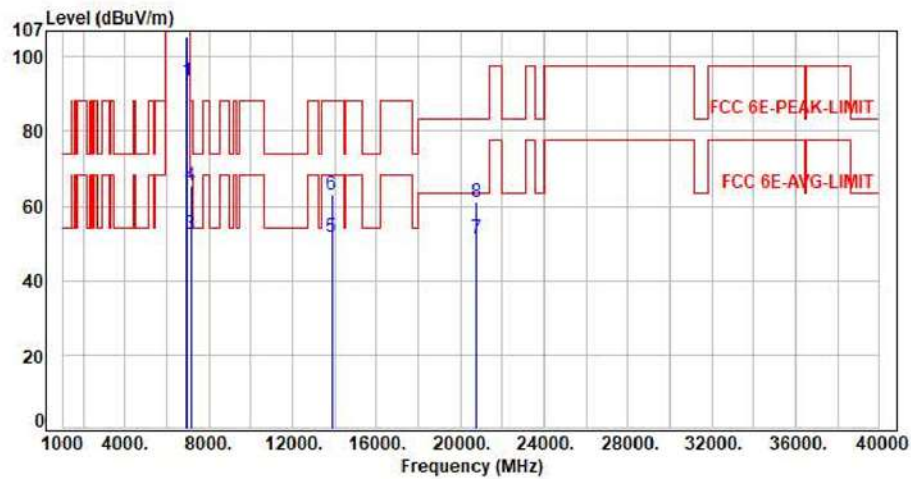

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	84.19	93.71	200.00	-106.29	Average	100	300	P
2	6925.00	9.52	96.00	105.52	200.00	-94.48	Peak	100	300	P
3	7125.00	9.92	42.52	52.44	68.20	-15.76	Average	100	300	P
4	7125.00	9.92	55.43	65.35	88.20	-22.85	Peak	100	300	P
5	13850.00	21.83	29.74	51.57	68.20	-16.63	Average	100	196	P
6	13850.00	21.83	41.37	63.20	88.20	-25.00	Peak	100	196	P
7	20775.00	9.75	41.39	51.14	63.54	-12.40	Average	150	360	P
8	20775.00	9.75	51.38	61.13	83.54	-22.41	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

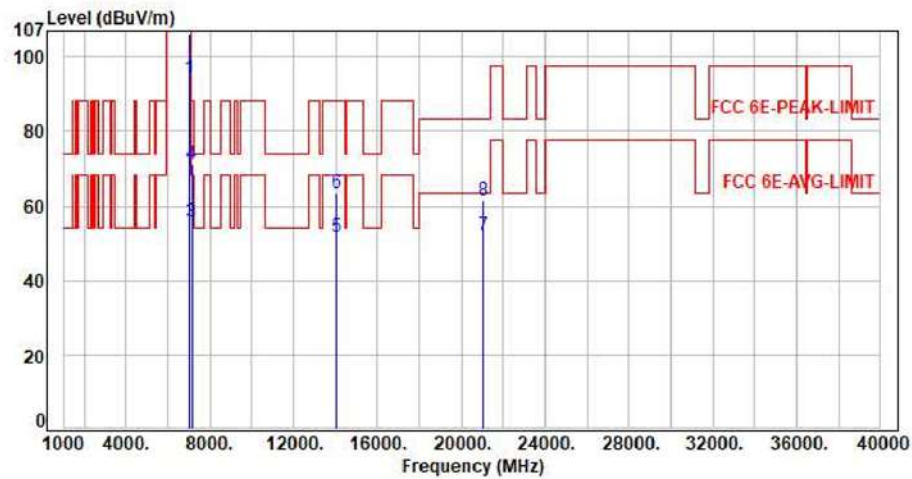

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.58	84.72	94.30	200.00	-105.70	Average	391	236	P
2	7005.00	9.58	96.77	106.35	200.00	-93.65	Peak	391	236	P
3	7125.00	9.92	45.90	55.82	68.20	-12.38	Average	391	236	P
4	7125.00	9.92	61.37	71.29	88.20	-16.91	Peak	391	236	P
5	14010.00	22.26	29.46	51.72	68.20	-16.48	Average	100	269	P
6	14010.00	22.26	41.33	63.59	88.20	-24.61	Peak	100	269	P
7	21015.00	10.08	41.88	51.96	63.54	-11.58	Average	150	360	P
8	21015.00	10.08	51.34	61.42	83.54	-22.12	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

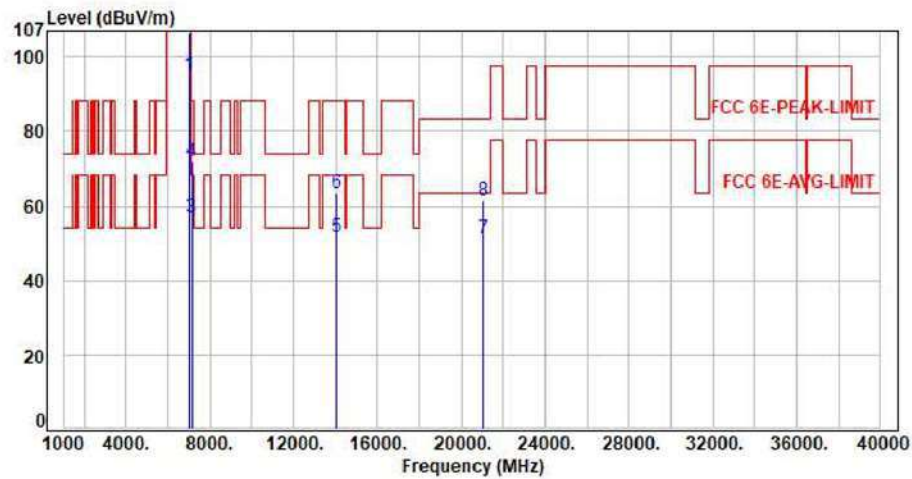

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.58	85.69	95.27	200.00	-104.73	Average	100	35	P
2	7005.00	9.58	97.06	106.64	200.00	-93.36	Peak	100	35	P
3	7125.00	9.92	47.19	57.11	68.20	-11.09	Average	100	35	P
4	7125.00	9.92	62.06	71.98	88.20	-16.22	Peak	100	35	P
5	14010.00	22.26	29.40	51.66	68.20	-16.54	Average	100	128	P
6	14010.00	22.26	41.38	63.64	88.20	-24.56	Peak	100	128	P
7	21015.00	10.08	41.38	51.46	63.54	-12.08	Average	150	360	P
8	21015.00	10.08	51.38	61.46	83.54	-22.08	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

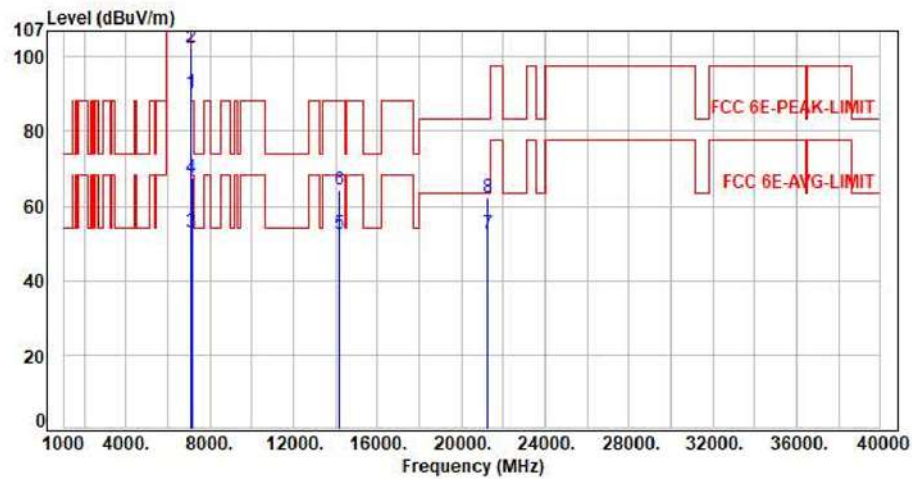

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.75	80.74	90.49	200.00	-109.51	Average	100	317	P
2	7085.00	9.75	92.91	102.66	200.00	-97.34	Peak	100	317	P
3	7125.00	9.92	43.01	52.93	68.20	-15.27	Average	100	317	P
4	7125.00	9.92	57.56	67.48	88.20	-20.72	Peak	100	317	P
5	14170.00	22.70	29.61	52.31	68.20	-15.89	Average	100	116	P
6	14170.00	22.70	41.38	64.08	88.20	-24.12	Peak	100	116	P
7	21255.00	11.04	41.39	52.43	63.54	-11.11	Average	150	360	P
8	21255.00	11.04	51.34	62.38	83.54	-21.16	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

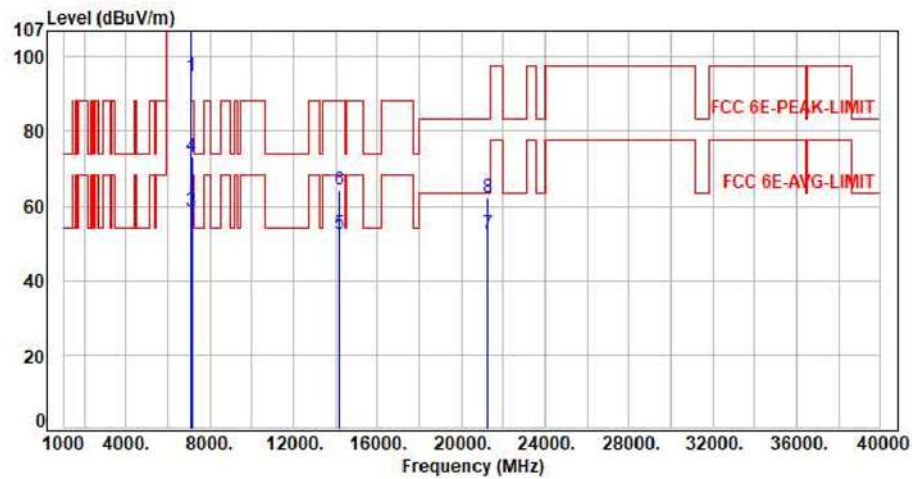


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.75	85.06	94.81	200.00	-105.19	Average	100	36	P
2	7085.00	9.75	97.21	106.96	200.00	-93.04	Peak	100	36	P
3	7125.00	9.92	48.51	58.43	68.20	-9.77	Average	100	36	P
4	7125.00	9.92	63.50	73.42	88.20	-14.78	Peak	100	36	P
5	14170.00	22.70	29.64	52.34	68.20	-15.86	Average	100	115	P
6	14170.00	22.70	41.39	64.09	88.20	-24.11	Peak	100	115	P
7	21255.00	11.04	41.39	52.43	63.54	-11.11	Average	150	360	P
8	21255.00	11.04	51.36	62.40	83.54	-21.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

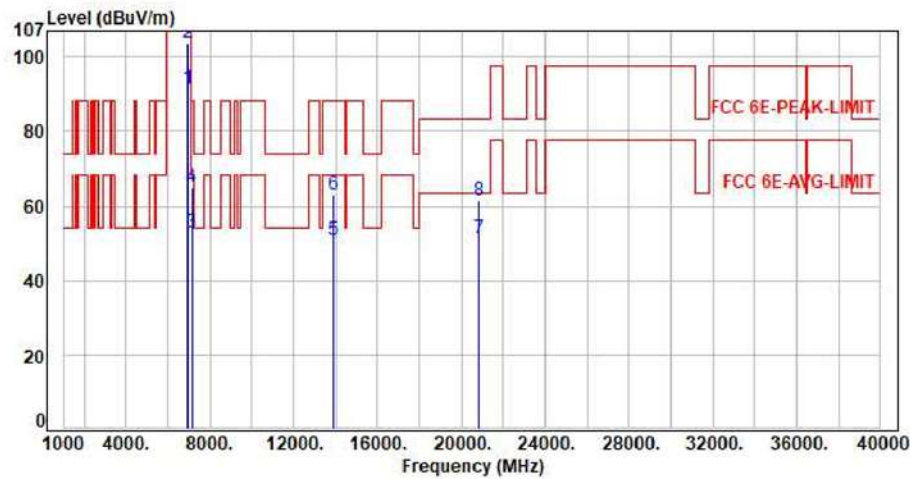


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	81.96	91.53	200.00	-108.47	Average	100	303	P
2	6945.00	9.57	94.11	103.68	200.00	-96.32	Peak	100	303	P
3	7125.00	9.92	42.83	52.75	68.20	-15.45	Average	100	303	P
4	7125.00	9.92	55.00	64.92	88.20	-23.28	Peak	100	303	P
5	13890.00	21.85	29.17	51.02	68.20	-17.18	Average	100	183	P
6	13890.00	21.85	41.39	63.24	88.20	-24.96	Peak	100	183	P
7	20835.00	9.94	41.36	51.30	63.54	-12.24	Average	150	360	P
8	20835.00	9.94	51.39	61.33	83.54	-22.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

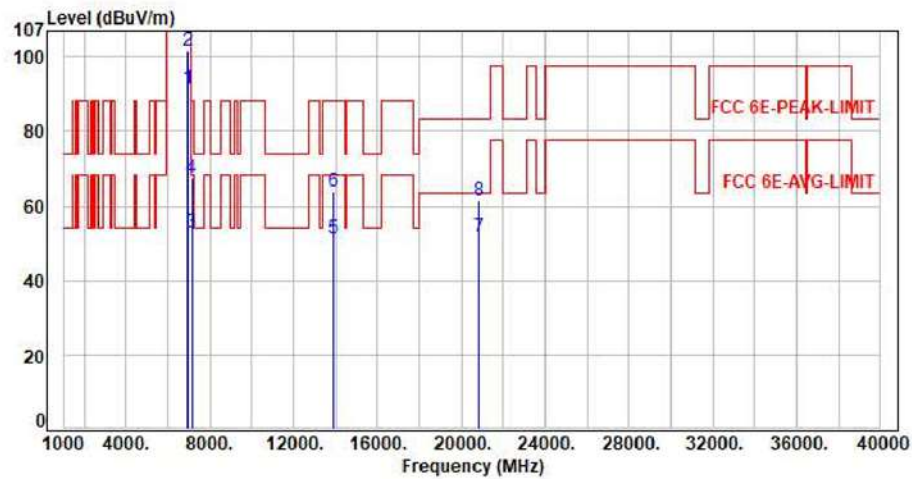

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	81.98	91.55	200.00	-108.45	Average	100	299	P
2	6945.00	9.57	92.10	101.67	200.00	-98.33	Peak	100	299	P
3	7125.00	9.92	43.17	53.09	68.20	-15.11	Average	100	299	P
4	7125.00	9.92	57.50	67.42	88.20	-20.78	Peak	100	299	P
5	13890.00	21.85	29.61	51.46	68.20	-16.74	Average	100	164	P
6	13890.00	21.85	41.96	63.81	88.20	-24.39	Peak	100	164	P
7	20835.00	9.94	41.69	51.63	63.54	-11.91	Average	150	360	P
8	20835.00	9.94	51.39	61.33	83.54	-22.21	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

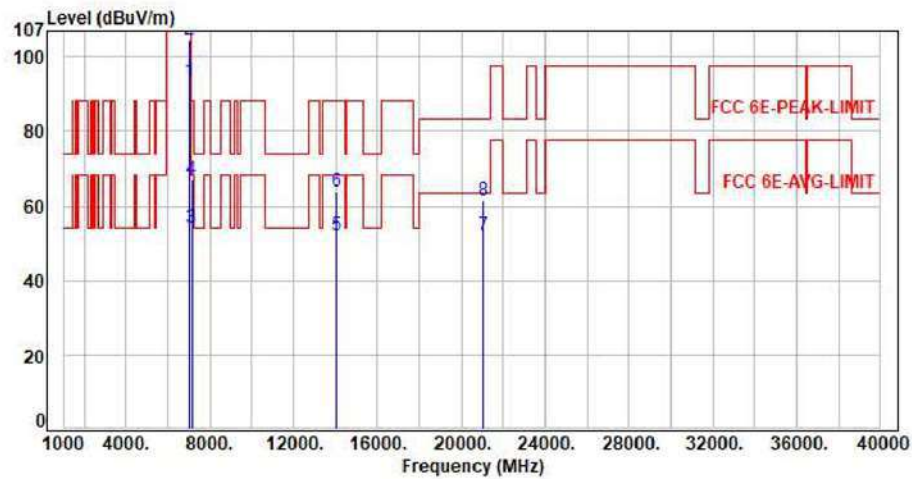

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.58	84.01	93.59	200.00	-106.41	Average	100	96	P
2	7025.00	9.58	94.78	104.36	200.00	-95.64	Peak	100	96	P
3	7125.00	9.92	44.13	54.05	68.20	-14.15	Average	100	96	P
4	7125.00	9.92	57.07	66.99	88.20	-21.21	Peak	100	96	P
5	14050.00	22.39	29.67	52.06	68.20	-16.14	Average	100	192	P
6	14050.00	22.39	41.39	63.78	88.20	-24.42	Peak	100	192	P
7	21075.00	10.28	41.62	51.90	63.54	-11.64	Average	150	360	P
8	21075.00	10.28	51.33	61.61	83.54	-21.93	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

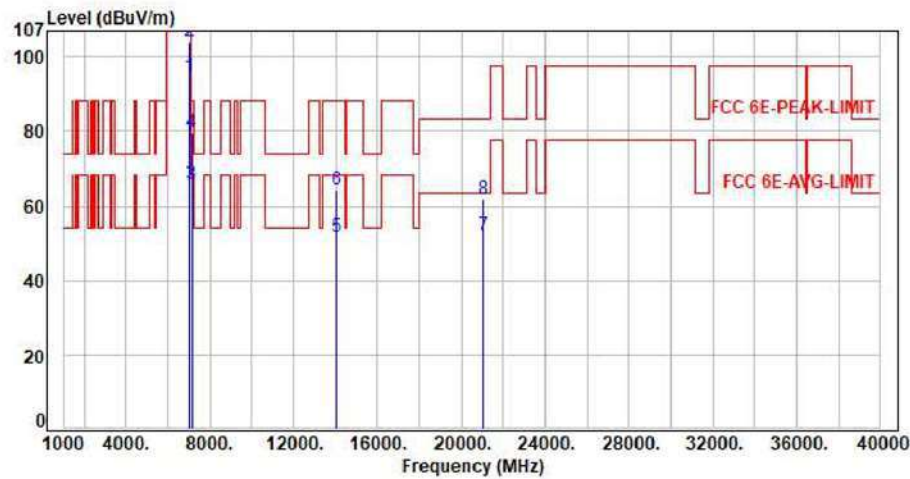

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.58	85.10	94.68	200.00	-105.32	Average	100	12	P
2	7025.00	9.58	94.63	104.21	200.00	-95.79	Peak	100	12	P
3	7125.00	9.92	55.81	65.73	68.20	-2.47	Average	100	12	P
4	7125.00	9.92	69.65	79.57	88.20	-8.63	Peak	100	12	P
5	14050.00	22.39	29.47	51.86	68.20	-16.34	Average	100	191	P
6	14050.00	22.39	41.95	64.34	88.20	-23.86	Peak	100	191	P
7	21075.00	10.28	41.69	51.97	63.54	-11.57	Average	150	360	P
8	21075.00	10.28	51.39	61.67	83.54	-21.87	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

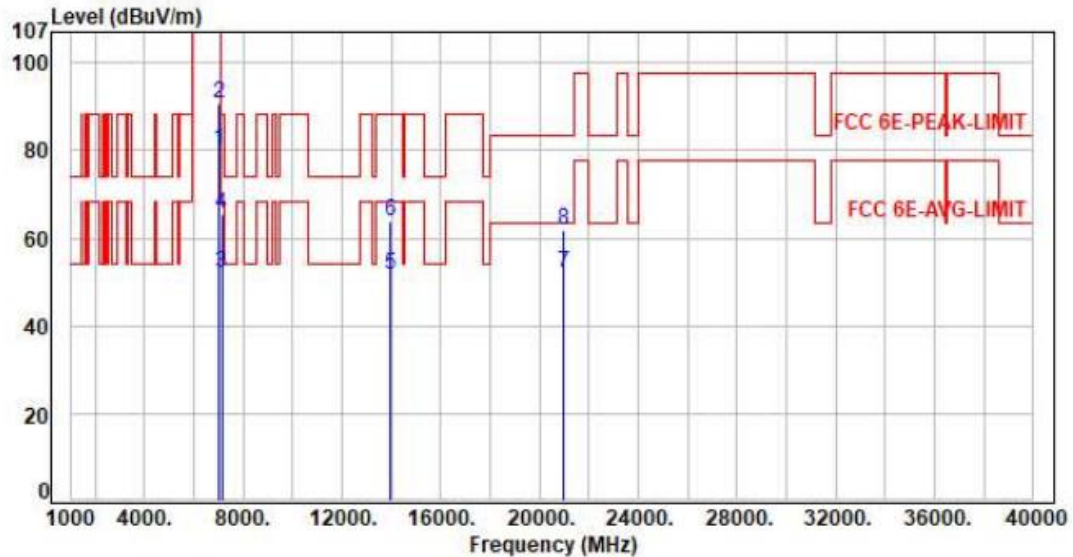

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	70.44	80.02	200.00	-119.98	Average	100	144	P
2	6985.00	9.58	81.19	90.77	200.00	-109.23	Peak	100	144	P
3	7125.00	9.92	42.10	52.02	68.20	-16.18	Average	100	144	P
4	7125.00	9.92	55.51	65.43	88.20	-22.77	Peak	100	144	P
5	13970.00	22.09	29.73	51.82	68.20	-16.38	Average	100	164	P
6	13970.00	22.09	41.68	63.77	88.20	-24.43	Peak	100	164	P
7	20955.00	9.99	41.94	51.93	63.54	-11.61	Average	150	360	P
8	20955.00	9.99	51.96	61.95	83.54	-21.59	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

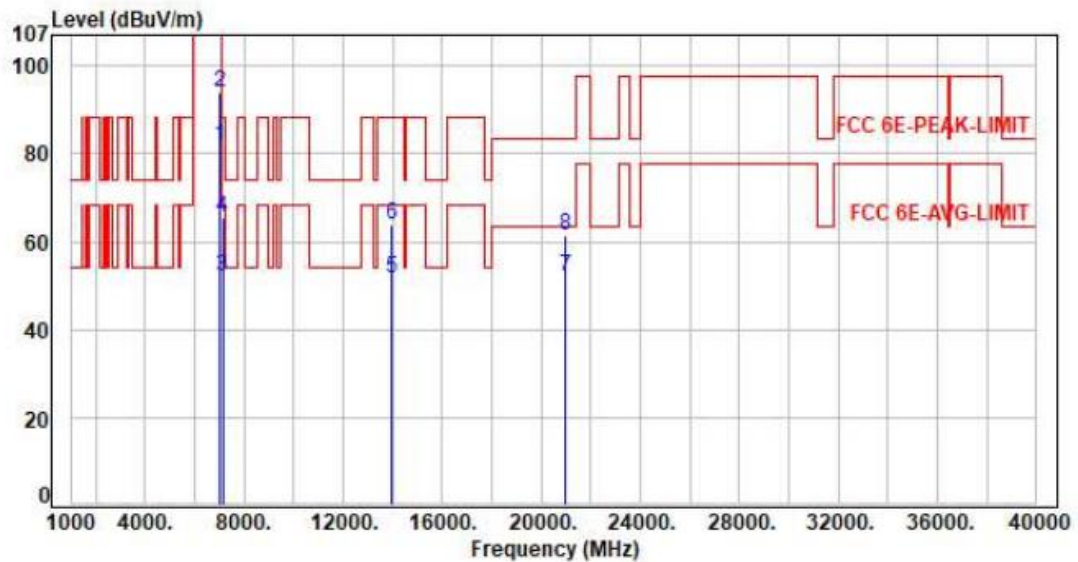

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	72.36	81.94	200.00	-118.06	Average	100	324	P
2	6985.00	9.58	84.30	93.88	200.00	-106.12	Peak	100	324	P
3	7125.00	9.92	42.02	51.94	68.20	-16.26	Average	100	324	P
4	7125.00	9.92	55.73	65.65	88.20	-22.55	Peak	100	324	P
5	13970.00	22.09	29.66	51.75	68.20	-16.45	Average	100	118	P
6	13970.00	22.09	41.89	63.98	88.20	-24.22	Peak	100	118	P
7	20955.00	9.99	41.96	51.95	63.54	-11.59	Average	150	360	P
8	20955.00	9.99	51.52	61.51	83.54	-22.03	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor