



FCC RADIO TEST REPORT

Applicant : ELO TOUCH SOLUTIONS, INC.

Address : 670 N. McCarthy Blvd., Suite 100 Milpitas, CA
95035 USA

Equipment : Touch All-in-One Computer

Model No. : ESY10I1E, ESY15I1E , ESY22I1E


Trade Name : Elo or 

FCC ID : RBWESYQC5

I HEREBY CERTIFY THAT :

The sample was received on Jul. 19, 2024 and the testing was completed on Oct. 25, 2024 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

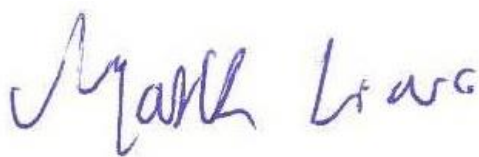

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channes.....	9
2.3 Test Mode & Test Software	10
2.4 Description of Test System.....	13
2.5 General Information of Test.....	14
2.6 Measurement Uncertainty	15
3. Test Equipment and Ancillaries Used for Tests	16
4. Antenna Requirements.....	18
4.1 Standard Applicable	18
4.2 Antenna Construction and Directional Gain.....	18
5. Frequency Hopping System Requirements	19
5.1 Frequency Hopping Requirement	19
5.2 EUT Hopping System.....	20
5.3 Pseudorandom Frequency Hopping Sequence	20
6. Test of AC Power Line Conducted Emission	21
6.1 Test Limit	21
6.2 Test Procedures	21
6.3 Typical Test Setup	22
6.4 Test Result and Data.....	23
6.5 Test Photographs	29
7. Test of Radiated Spurious Emission.....	32
7.1 Test Limit	32
7.2 Test Procedures.....	33
7.3 Typical Test Setup	34
7.4 Test Result and Data (9kHz ~ 30MHz)	35
7.5 Test Result and Data (30MHz ~ 1GHz)	35
7.6 Test Result and Data (1GHz ~ 25GHz).....	41
7.7 Restricted Bands of Operation.....	53
7.8 Test Photographs (30MHz ~ 1GHz).....	54
7.9 Test Photographs (1GHz ~ 25GHz)	57
8. Test of Conducted Spurious Emission	59
8.1 Test Limit	59
8.2 Test Procedure	59
8.3 Test Setup Layout	59
8.4 Test Result and Data.....	59
9. 20dB Bandwidth Measurement Data.....	67
9.1 Test Limit	67
9.2 Test Procedures	67
9.3 Test Setup Layout	67



9.4	Test Result and Data	67
10.	Carrier Frequency Separation	70
10.1	Test Limit	70
10.2	Test Procedures	70
10.3	Test Setup Layout	70
10.4	Test Result and Data	70
11.	Dwell Time on each channel	73
11.1	Test Limit	73
11.2	Test Procedures	73
11.3	Test Setup Layout	73
11.4	Test Result and Data	73
12.	Number of Hopping Channels	76
12.1	Test Limit	76
12.2	Test Procedures	76
12.3	Test Setup Layout	76
12.4	Test Result and Data	76
13.	Maximum Average Output Power	78
13.1	Test Limit	78
13.2	Test Procedures	78
13.3	Test Setup Layout	78
13.4	Test Result and Data	78
14.	Radio Frequency Exposure	80
14.1	Applicable Standards	80
14.2	EUT Specification	81
14.3	Result	81



History of this test report

Report No.	Issued Date	Description
24070407-TRFCC01	Nov. 18, 2024	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.247(a)(1)	.Pseudorandom Frequency Hopping Sequence	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(1)	. Channel Carrier Frequencies Separation	PASS
15.247(a)(1)	. 20dB Bandwidth	PASS
15.247(a)(1)	. Dwell Time	PASS
15.247(b)	. Number of Hopping Channels	PASS
15.247(b)	. Output Power	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	BT / BLE: 2400-2483.5MHz WLAN:802.11b/g/n/ax: 2400-2483.5MHz 5GHz:802.11a/n/ac/ax:5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5875MHz 6GHz: 802.11a/ax: 5925MHz~6425MHz, 6425MHz~6525MHz 6525MHz~6875MHz, 6875MHz~7125MHz
Center Frequency Range	BT / BLE: 2402MHz-2480MHz WLAN:802.11b/g/n/ax: 2412MHz-2462MHz 5GHz:802.11a/n/ac/ax:5180-5240MHz, 5260-5320MHz, 5500-5720MHz, 5745-5825MHz 6GHz: 802.11a/ax: 5955MHz~6415MHz, 6435MHz~6515MHz 6535MHz~6855MHz, 6875MHz~7115MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz: 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 6GHz 802.11a: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS, OFDMA
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, 2Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ax: MCS0 – MCS11, HE20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80/160 802.11ax: MCS0 – MCS11, HE20/40/80/160 6GHz 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ax: MCS0 – MCS11, HE20/40/80/160
Antenna Type	PIFA Antenna



Antenna Gain (ESY10I1E)	For BT / BLE: 2400-2500MHz: ANT A: 2.01dBi For WLAN: 2400-2500MHz: ANT A: 2.01dBi, ANT B: 2.91dBi 5150-5250MHz: ANT A: 2.46dBi, ANT B: 2.22dBi 5250-5350MHz: ANT A: 2.19dBi, ANT B: 2.44dBi 5470-5725MHz: ANT A: 2.70dBi, ANT B: 2.38dBi 5725-5850MHz: ANT A: 2.70dBi, ANT B: 2.56dBi 5925-6425MHz: ANT A: 2.86dBi, ANT B: 2.54dBi 6425-6525MHz: ANT A: 2.72dBi, ANT B: 2.84dBi 6525-6875MHz: ANT A: 2.72dBi, ANT B: 2.84dBi 6875-7125MHz: ANT A: 2.46dBi, ANT B: 2.28dBi
Antenna Gain (ESY15I1E)	For BT / BLE: 2400-2500MHz: ANT A: 2.72dBi For WLAN: 2400-2500MHz: ANT A: 2.72dBi, ANT B: 2.42dBi 5150-5250MHz: ANT A: 2.44dBi, ANT B: 2.65dBi 5250-5350MHz: ANT A: 1.86dBi, ANT B: 2.69dBi 5470-5725MHz: ANT A: 2.83dBi, ANT B: 2.79dBi 5725-5850MHz: ANT A: 2.63dBi, ANT B: 2.79dBi 5925-6425MHz: ANT A: 2.53dBi, ANT B: 2.48dBi 6425-6525MHz: ANT A: 2.42dBi, ANT B: 2.44dBi 6525-6875MHz: ANT A: 2.42dBi, ANT B: 2.44dBi 6875-7125MHz: ANT A: 2.59dBi, ANT B: 2.44dBi
Antenna Gain (ESY22I1E)	For BT / BLE: 2400-2500MHz: ANT A: 2.32dBi For WLAN: 2400-2500MHz: ANT A: 2.32dBi, ANT B: 2.25dBi 5150-5250MHz: ANT A: 1.75dBi, ANT B: 2.17dBi 5250-5350MHz: ANT A: 2.34dBi, ANT B: 2.17dBi 5470-5725MHz: ANT A: 2.25dBi, ANT B: 2.35dBi 5725-5850MHz: ANT A: 2.65dBi, ANT B: 2.42dBi 5925-6425MHz: ANT A: 2.36dBi, ANT B: 2.58dBi 6425-6525MHz: ANT A: 2.38dBi, ANT B: 2.05dBi 6525-6875MHz: ANT A: 2.38dBi, ANT B: 2.47dBi 6875-7125MHz: ANT A: 2.28dBi, ANT B: 2.25dBi

EUT powered by

Adapter	ESY10I1E	ESY15I1E	ESY22I1E
Brand: Billion Model: BA090-190474MBX	☒	☒	☒
Brand: Billion Model: BA070-190342MBX	☒	☒	☒
Brand: Delta Model: ADP-65JH HB	☒	☒	☒

Flip Stand Without Panel powered by

Adapter	ESY10I1E	ESY15I1E	ESY22I1E
Brand: Billion Model: BS180-240625MBX	☒	☒	☐
Brand: Delta Model: ADP-150EH B	☒	☒	☐
Brand: Billion Model: BA090-240375MBX	☒	☐	☐



Power Cable(EU)*2	Brand: I-SHENG Model: CAB-PWR-EU-3 LOBE-1.8M-BLK-R
Power Cable(US)*2	Brand: I-SHENG Model: CAB-PWR-US-3 LOBE-1.8M-BLK-R
Flip Stand Without Panel (For ESY10I1E)	Brand: ELO Model: E554932 KIT, Z20-POS-STAND-GEN2-10
Flip Stand Without Panel (For ESY15I1E)	Brand: ELO Model: E767356 KIT, Z20-POS-STAND-GEN2-15
Type-C Cable	Brand: Hotron Model: E113033 CAB, USB-C TO USB-C, Z20 Gen2 15,330mm,HT
Poe Module	Brand: ELO Model: E669163, ELO-KIT-POE-ADAPTER-5.0
Panel (ESY10I1E)	Brand: BOE Model: TV101WUM-NH3 Brand: AUO Model: G101UAN4.0
Panel (ESY15I1E)	Brand: BOE Model: BOE PV156FHM-N20 Brand: LG Model: LP156WFC-SPDZ
Panel (ESY22I1E)	Brand: LG Model: M215WF3-SLS2 Brand: AUO Model: M215HAN01.2

Note:

1. EUT support TPC Function.
2. EUT supports DFS Client Mode, without radar detection.
3. WLAN and BT can simultaneously transmission.
4. The device not support Channel Puncturing or Bandwidth Reduction mechanisms supported
5. 802.11ax EUT Only Support Full RU
6. EUT Operating mode : Indoor Client.
7. For more details, please refer to the User's manual of the EUT.

Difference description:

Model No.	Remark
ESY10I1E	Only different sizes, other circuits, layout, product specifications are all the same.
ESY15I1E	
ESY22I1E	

Note: After engineering evaluation ,Model: ESY22I1E is worst case.



2.2 Carrier Frequency of Channes

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	2480
19	2421	*39	2441	59	2461	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode & Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- The complete test system included Notebook and EUT for RF test.
- An executive program, "QRCT V4.0-00189" under Windows OS system was executed to transmit and receive data via Bluetooth.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps), From Adapter
2	$\pi/4$ -DQPSK (2Mbps), From Adapter
3	8DPSK (3Mbps), From Adapter
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (9KHz ~ 30MHz and 30MHz ~ 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps), From Adapter
2	$\pi/4$ -DQPSK (2Mbps), From Adapter
3	8DPSK (3Mbps), From Adapter
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps), From Adapter
2	$\pi/4$ -DQPSK (2Mbps), From Adapter
3	8DPSK (3Mbps), From Adapter
caused "Test Mode 1&3" generated the worst case, they were reported as the final data.	

Note:1. There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.

For ESY10I1E

worst case (V)

Test Item /test voltage	AC 120V / 60Hz	AC 240V / 60Hz.
AC Power Line Conducted Emission	V	
Radiation Emissions (Below 1GHz)		V

For ESY15I1E

worst case (V)

Test Item /test voltage	AC 120V / 60Hz	AC 240V / 60Hz.
AC Power Line Conducted Emission	V	
Radiation Emissions (Below 1GHz)	V	

For ESY22I1E

worst case (V)

Test Item /test voltage	AC 120V / 60Hz	AC 240V / 60Hz.
AC Power Line Conducted Emission	V	
Radiation Emissions (Below 1GHz)		V

**For ESY10I1E**

There are six types of Adapters + one PoE power supply mode .After engineering evaluation:

For Radiated Spurious Emission(Below 1G), BS180-240625MBX 10 inch without Docking is worst case.

For Radiated Spurious Emission(Above 1G),BA070-190342MBX 22 inch without Docking is worst case.

For AC Power Line Conducted Emission, BS180-240625MBX 10 inch with Docking is worst case.

Adapter	Brand: Billion Model: BS180-240625MBX
Adapter	Brand: Billion Model: BA090-190474MBX
Adapter	Brand: Billion Model: BA070-190342MBX
Adapter	Brand: Delta Model: ADP-65JH HB
Adapter	Brand: Delta Model: ADP-150EH B
Adapter	Brand: Billion Model: BA090-240375MBX
POE	Brand: Bluewave Model: JS-100GT

For ESY15I1E

There are six types of Adapters + one PoE power supply mode .After engineering evaluation:

For Radiated Spurious Emission(Below 1G), ADP-65JH HB 15 inch with Docking is worst case.

For Radiated Spurious Emission(Above 1G), BA070-190342MBX 22 inch without Docking is worst case.

For AC Power Line Conducted Emission, BS180-240625MBX 15 inch with Docking is worst case.

Adapter	Brand: Billion Model: BS180-240625MBX
Adapter	Brand: Billion Model: BA090-190474MBX
Adapter	Brand: Billion Model: BA070-190342MBX
Adapter	Brand: Delta Model: ADP-65JH HB
Adapter	Brand: Delta Model: ADP-150EH B
Adapter	Brand: Billion Model: BA090-240375MBX
POE	Brand: Bluewave Model: JS-100GT

For ESY22I1E

There are three types of Adapters + one PoE power supply mode .After engineering evaluation:

For Radiated Spurious Emission(Below 1G), ADP-65JH HB 22 inch without Docking is worst case.

For Radiated Spurious Emission(Above 1G),BA070-190342MBX 22 inch without Docking is worst case.

For AC Power Line Conducted Emission, BA070-190342MBX 22 inch without Docking is worst case.

Adapter	Brand: Delta Model: ADP-65JH HB
Adapter	Brand: Billion Model: BA090-190474MBX
Adapter	Brand: Billion Model: BA070-190342MBX
POE	Brand: Bluewave Model: JS-100GT



For ESY10I1E

There are two types of Panels: AUO&BOE. After engineering evaluation, BOE is worst case, hence, is used at test report.

Panel	Brand: BOE Model: TV101WUM-NH3 Brand: AUO Model: G101UAN4.0
-------	--

For ESY15I1E

There are two types of Panels: LG&BOE. After engineering evaluation, LG is worst case, hence, is used at test report.

Panel	Brand: BOE Model: BOE PV156FHM-N20 Brand: LG Model: LP156WFC-SPDZ
-------	--

For ESY22I1E

There are two types of Panels: LG&AUO. After engineering evaluation, LG is worst case, hence, is used at test report.

Panel (ESY22I1E)	Brand: LG Model: M215WF3-SLS2 Brand: AUO Model: M215HAN01.2
---------------------	--

Modulation Type	TX CONFIGURATION
GFSK	1TX
$\pi/4$ -DQPSK	1TX
8DPSK	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
USB Cable (A to A)	BENEVO	E210567AWM	1m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5450	N/A	Adapter / 1.8m / NS
USB Cable (A to A)	BENEVO	E210567AWM	1m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
HDD	TOSHIBA	TS1TSJ25M3S	N/A	N/A
Type-C Cable	DXDC	C8A1M3A02G1M0	0.4m/NA	N/A
POE	Bluewave	JS-100GT	N/A	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
USB Cable (A to A)	BENEVO	E210567AWM	1m / NS	N/A
Flash*4	TranScend	USB3.0 16GB	N/A	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
HDD	TOSHIBA	TS1TSJ25M3S	N/A	N/A
Cash Drawer	EBN	EB-35064S-F1	N/A	1.8m / NS
POE	Bluewave	JS-100GT	N/A	N/A



2.5 General Information of Test

☒ Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9kHz to 25,000MHz	
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.	

For ESY10I1E

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/09/24	25.5°C / 44%	Leon Huang
RF Conducted	RFCON01-NK	2024/09/25	25.9°C / 41%	Leon Huang
Radiated Emissions	3M02-NK	2024/10/09	21.6°C / 49%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2024/10/25	24.4°C / 48%	Park Chen

For ESY15I1E

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/09/24	25.5°C / 44%	Leon Huang
RF Conducted	RFCON01-NK	2024/09/25	25.9°C / 41%	Leon Huang
Radiated Emissions	3M02-NK	2024/10/09	21.6°C / 49%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2024/10/24	25.1°C / 55%	Park Chen

For ESY22I1E

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/09/24	25.5°C / 44%	Leon Huang
RF Conducted	RFCON01-NK	2024/09/25	25.9°C / 41%	Leon Huang
Radiated Emissions	3M02-NK	2024/09/19	26.2°C / 47%	Leon Huang
Radiated Emissions	3M02-NK	2024/10/08	22.1°C / 53%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2024/10/25	24.4°C / 48%	Park Chen



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	$\pm 3.12\text{dB}$
Radiated Spurious Emission(9KHz~30MHz)	$\pm 3.5\text{dB}$
Radiated Spurious Emission(30MHz~1GHz)	$\pm 5.1\text{dB}$
Radiated Spurious Emission(1GHz~40GHz)	$\pm 5.2\text{dB}$
Conducted Spurious Emission	$\pm 2.1\text{dB}$
6dB Bandwidth	$\pm 5.4\%$
20dB Bandwidth	$\pm 4.4\%$
Occupied Bandwidth	$\pm 4.5\%$
Peak Output Power(Conducted Power Meter)	$\pm 1.1\text{dB}$
Dwell Time / Deactivation Time	$\pm 7.6\%$
Power Spectral Density	$\pm 2.0\text{dB}$
Duty Cycle	$\pm 3.5\%$



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2024/02/19	2025/02/18
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2024/01/16	2025/01/15
Horn Antenna	EMCO	3115	31589	2024/02/26	2025/02/25
Horn Antenna	EMCO	3116	31974	2023/10/16	2024/10/15
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2024/07/16	2025/07/15
Preamplifier	Agilent	8449B	3008A01954	2024/03/01	2025/02/28
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2023/10/13	2024/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2024/02/17	2025/02/16
Cable-6m(9k~300M)	N/A	EMC5D-BM-BM-6	130606	2024/03/13	2025/03/12
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2024/02/23	2025/02/22
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2024/03/05	2025/03/04
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2024/03/05	2025/03/04
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2024/03/05	2025/03/04
Cable-1m(1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	804398/2	2023/10/12	2024/10/11
Cable-3m(1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	804619/2	2023/10/12	2024/10/11
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
Highpass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC2J1	2024/07/03	2025/07/02
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2024/03/11	2025/03/10
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2024/03/11	2025/03/10

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2023/11/06	2024/11/05
Power Meter	Anritsu	ML2495A	1224005	2024/02/17	2025/02/16
Power Sensor	Anritsu	MA2411B	1207295	2024/02/17	2025/02/16
Attenuator	KEYSIGHT	8491B	MY39250703	2024/02/20	2025/02/19



Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	102185	2024/08/27	2025/08/26
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127740	2024/08/27	2025/08/26
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain (ESY10I1E)	For BT: 2400-2500MHz: ANT A: 2.01dBi
Antenna Gain (ESY15I1E)	For BT: 2400-2500MHz: ANT A: 2.72dBi
Antenna Gain (ESY22I1E)	For BT: 2400-2500MHz: ANT A: 2.32dBi



5. Frequency Hopping System Requirements

5.1 Frequency Hopping Requirement

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.



5.2 EUT Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

5.3 Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel number:

26	12	20	46	65	30	22	29	66	56
61	53	68	64	66	55	76	33	7	16
10	13	74	70	47	39	60	45	69	60
65	53	62	6	71	21	12	14	24	9

etc.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



6. Test of AC Power Line Conducted Emission

6.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

6.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



6.3 Typical Test Setup

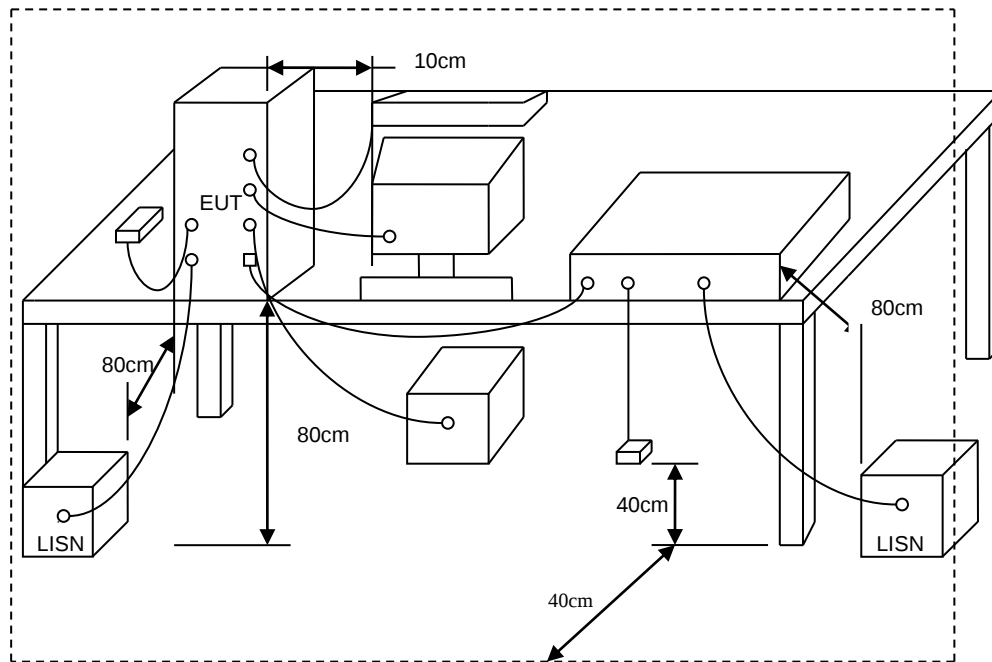




6.4 Test Result and Data

For ESY10I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Line

Data: 29

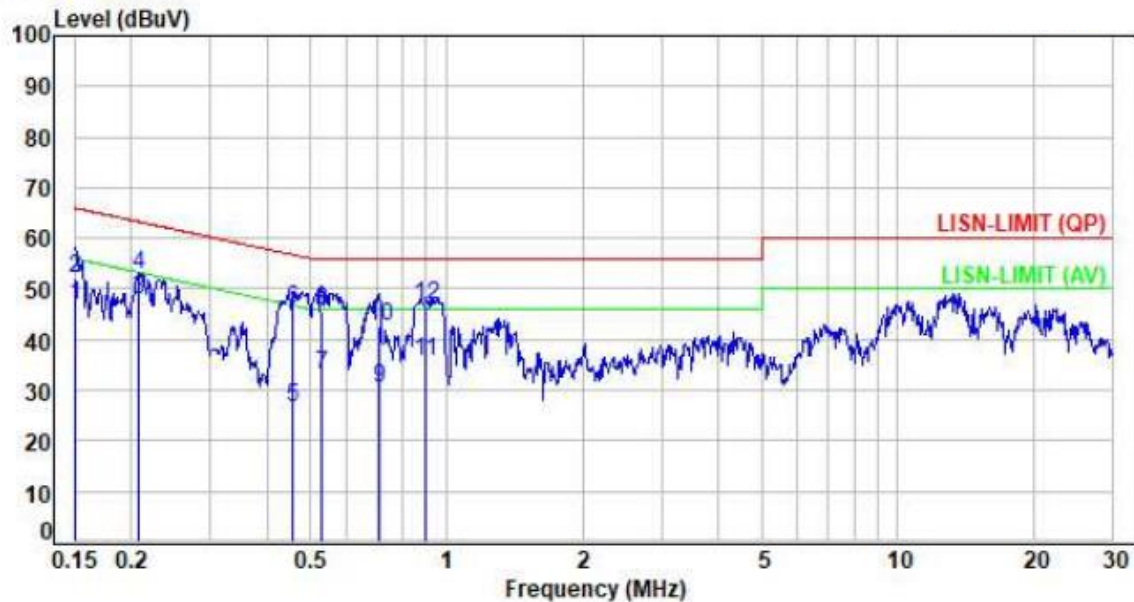

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1508	9.63	37.00	46.63	55.96	-9.33	Average	P
2	0.1508	9.63	42.55	52.18	65.96	-13.78	QP	P
3	0.2083	9.63	38.29	47.92	53.27	-5.35	Average	P
4	0.2083	9.63	43.21	52.84	63.27	-10.43	QP	P
5	0.4564	9.65	17.12	26.77	46.76	-19.99	Average	P
6	0.4564	9.65	36.48	46.13	56.76	-10.63	QP	P
7	0.5265	9.65	23.55	33.20	46.00	-12.80	Average	P
8	0.5265	9.65	36.15	45.80	56.00	-10.20	QP	P
9	0.7126	9.65	20.75	30.40	46.00	-15.60	Average	P
10	0.7126	9.65	32.83	42.48	56.00	-13.52	QP	P
11	0.8992	9.66	26.24	35.90	46.00	-10.10	Average	P
12	0.8992	9.66	37.21	46.87	56.00	-9.13	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



For ESY1011E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 30

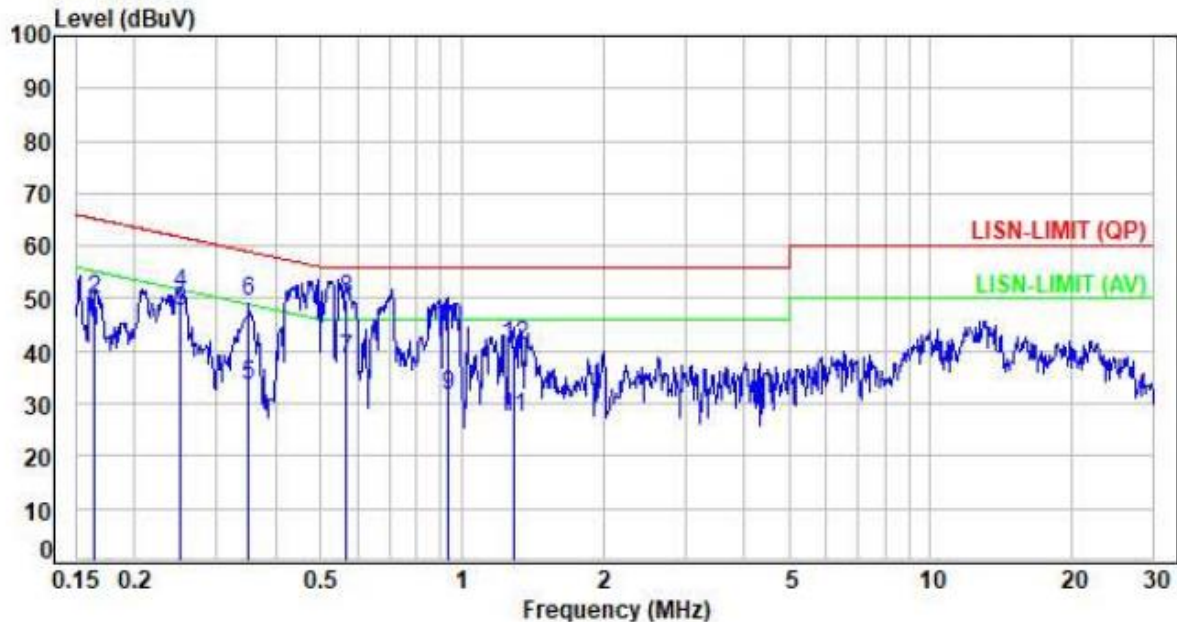

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.1650	9.61	34.24	43.85	55.21	-11.36	Average	P
2	0.1650	9.61	40.25	49.86	65.21	-15.35	QP	P
3	0.2512	9.61	37.89	47.50	51.72	-4.22	Average	P
4	0.2512	9.61	41.37	50.98	61.72	-10.74	QP	P
5	0.3502	9.62	24.01	33.63	48.96	-15.33	Average	P
6	0.3502	9.62	39.84	49.46	58.96	-9.50	QP	P
7	0.5671	9.62	28.71	38.33	46.00	-7.67	Average	P
8	0.5671	9.62	40.16	49.78	56.00	-6.22	QP	P
9	0.9381	9.65	21.79	31.44	46.00	-14.56	Average	P
10	0.9381	9.65	34.94	44.59	56.00	-11.41	QP	P
11	1.2892	9.66	17.78	27.44	46.00	-18.56	Average	P
12	1.2892	9.66	31.52	41.18	56.00	-14.82	QP	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



For ESY15I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Line

Data: 48

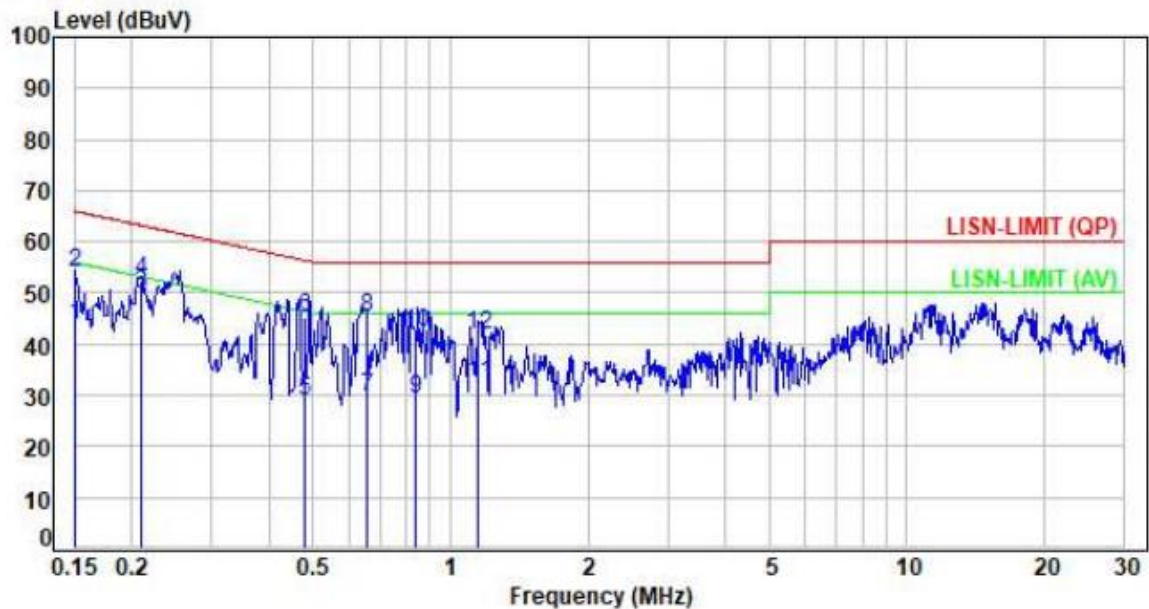

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1504	9.63	33.97	43.60	55.98	-12.38	Average	P
2	0.1504	9.63	44.26	53.89	65.98	-12.09	QP	P
3	0.2091	9.63	40.05	49.68	53.24	-3.56	Average	P
4	0.2091	9.63	43.01	52.64	63.24	-10.60	QP	P
5	0.4773	9.65	19.20	28.85	46.39	-17.54	Average	P
6	0.4773	9.65	35.59	45.24	56.39	-11.15	QP	P
7	0.6537	9.65	19.89	29.54	46.00	-16.46	Average	P
8	0.6537	9.65	35.77	45.42	56.00	-10.58	QP	P
9	0.8375	9.65	19.81	29.46	46.00	-16.54	Average	P
10	0.8375	9.65	32.67	42.32	56.00	-13.68	QP	P
11	1.1522	9.67	22.70	32.37	46.00	-13.63	Average	P
12	1.1522	9.67	32.21	41.88	56.00	-14.12	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



For ESY15I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 49

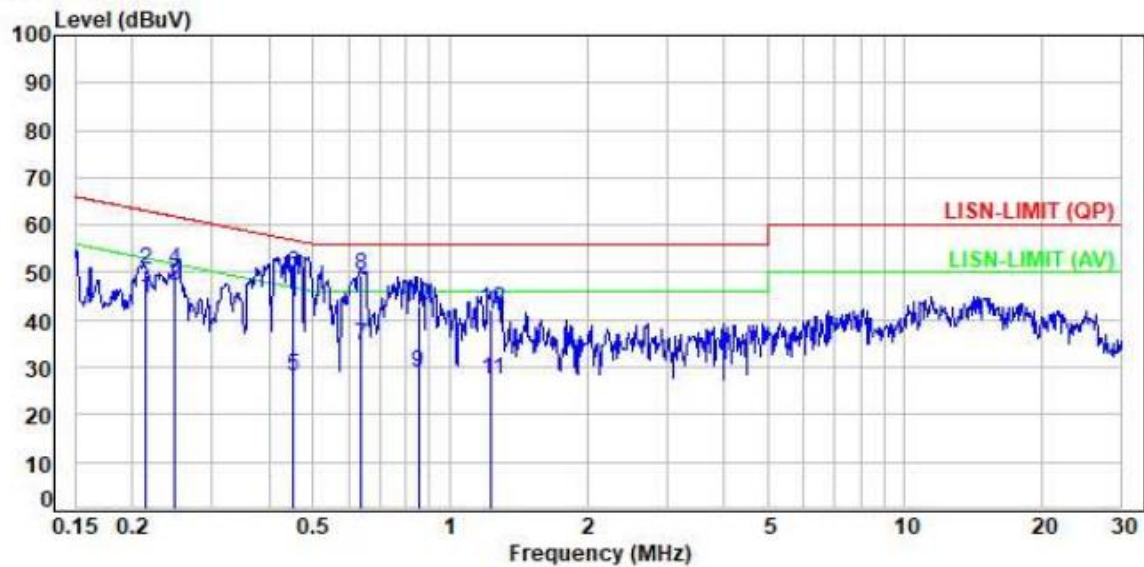

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2133	9.61	34.82	44.43	53.07	-8.64	Average	P
2	0.2133	9.61	40.89	50.50	63.07	-12.57	QP	P
3	0.2478	9.61	37.61	47.22	51.83	-4.61	Average	P
4	0.2478	9.61	41.14	50.75	61.83	-11.08	QP	P
5	0.4528	9.62	18.60	28.22	46.82	-18.60	Average	P
6	0.4528	9.62	40.05	49.67	56.82	-7.15	QP	P
7	0.6396	9.64	25.14	34.78	46.00	-11.22	Average	P
8	0.6396	9.64	39.90	49.54	56.00	-6.46	QP	P
9	0.8510	9.65	19.29	28.94	46.00	-17.06	Average	P
10	0.8510	9.65	33.47	43.12	56.00	-12.88	QP	P
11	1.2317	9.66	17.79	27.45	46.00	-18.55	Average	P
12	1.2317	9.66	32.57	42.23	56.00	-13.77	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



For ESY22I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Line

Data: 22

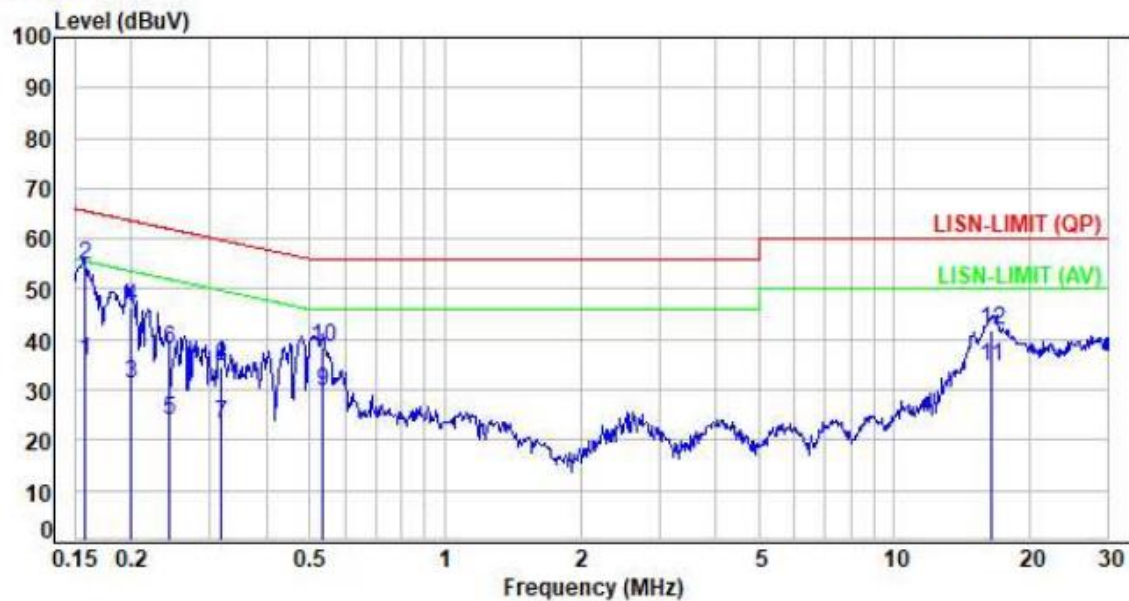

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1585	9.63	25.94	35.57	55.54	-19.97	Average	P
2	0.1585	9.63	45.08	54.71	65.54	-10.83	QP	P
3	0.2002	9.63	21.61	31.24	53.60	-22.36	Average	P
4	0.2002	9.63	36.89	46.52	63.60	-17.08	QP	P
5	0.2424	9.63	14.26	23.89	52.01	-28.12	Average	P
6	0.2424	9.63	28.53	38.16	62.01	-23.85	QP	P
7	0.3178	9.64	13.38	23.02	49.76	-26.74	Average	P
8	0.3178	9.64	25.15	34.79	59.76	-24.97	QP	P
9	0.5353	9.65	20.16	29.81	46.00	-16.19	Average	P
10	0.5353	9.65	28.90	38.55	56.00	-17.45	QP	P
11	16.4218	9.87	24.92	34.79	50.00	-15.21	Average	P
12	16.4218	9.87	32.02	41.89	60.00	-18.11	QP	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



For ESY22I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 23

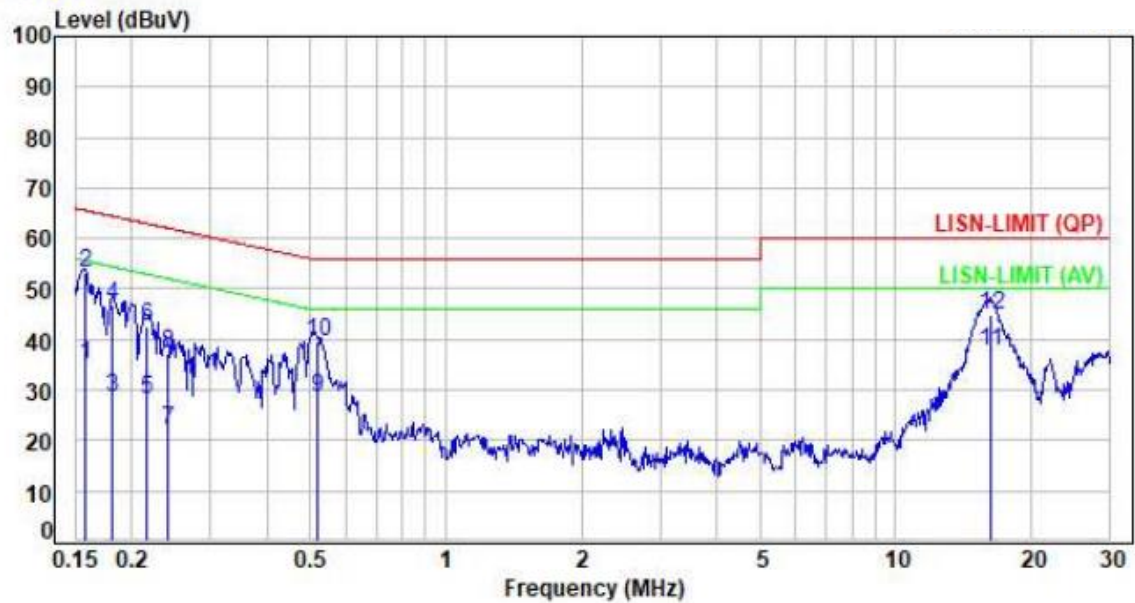

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1584	9.61	25.31	34.92	55.55	-20.63	Average	P
2	0.1584	9.61	43.57	53.18	65.55	-12.37	QP	P
3	0.1820	9.61	19.05	28.66	54.40	-25.74	Average	P
4	0.1820	9.61	37.32	46.93	64.40	-17.47	QP	P
5	0.2170	9.61	18.62	28.23	52.93	-24.70	Average	P
6	0.2170	9.61	32.91	42.52	62.93	-20.41	QP	P
7	0.2412	9.61	12.49	22.10	52.05	-29.95	Average	P
8	0.2412	9.61	27.51	37.12	62.05	-24.93	QP	P
9	0.5180	9.62	18.73	28.35	46.00	-17.65	Average	P
10	0.5180	9.62	29.75	39.37	56.00	-16.63	QP	P
11	16.2229	9.93	27.77	37.70	50.00	-12.30	Average	P
12	16.2229	9.93	34.90	44.83	60.00	-15.17	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



7. Test of Radiated Spurious Emission

7.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



7.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

Note:

1. The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.

Below 1G-

For ESY10I1E -with Docking

For ESY15I1E & For ESY22I1 (Z-AXIS is the worst.)

Above 1G-


For ESY22I1 (Z-AXIS is the worst.)

2. Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




7.3 Typical Test Setup


Below 30MHz test setup

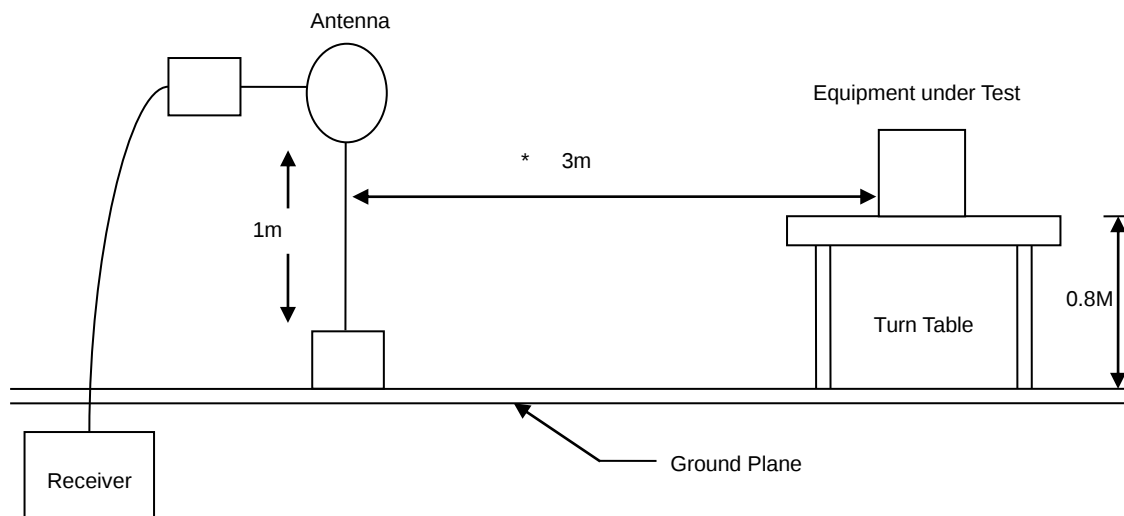

30MHz- 1GHz Test Setup

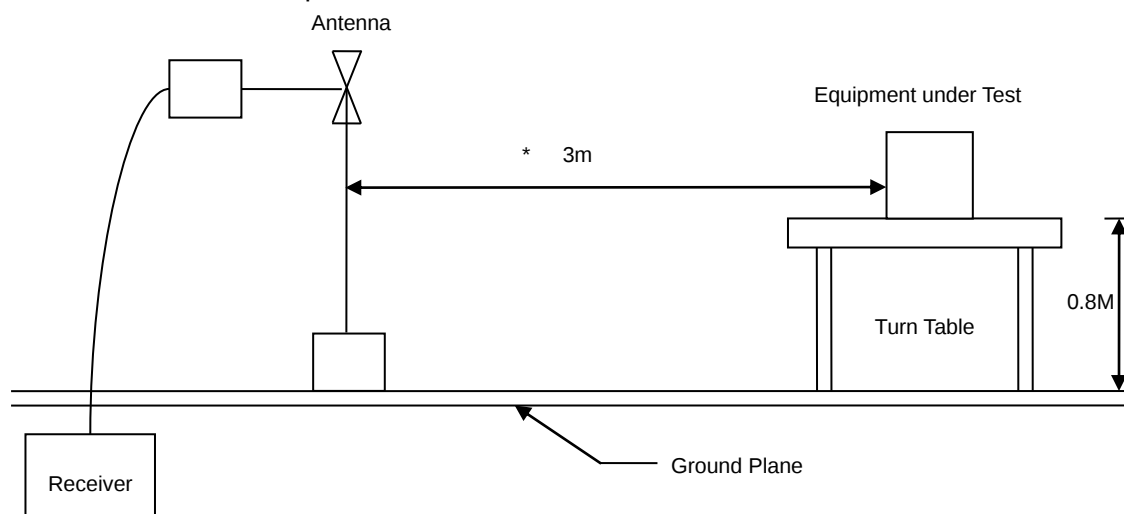

Above 1GHz Test Setup

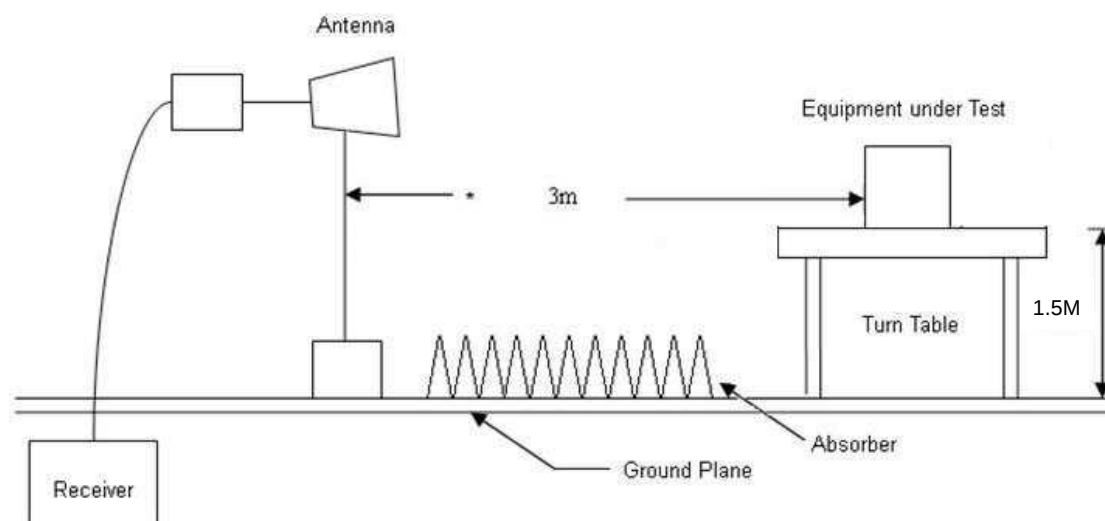




7.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

7.5 Test Result and Data (30MHz ~ 1GHz)

For ESY10I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC240V/60Hz)
Pol : Vertical

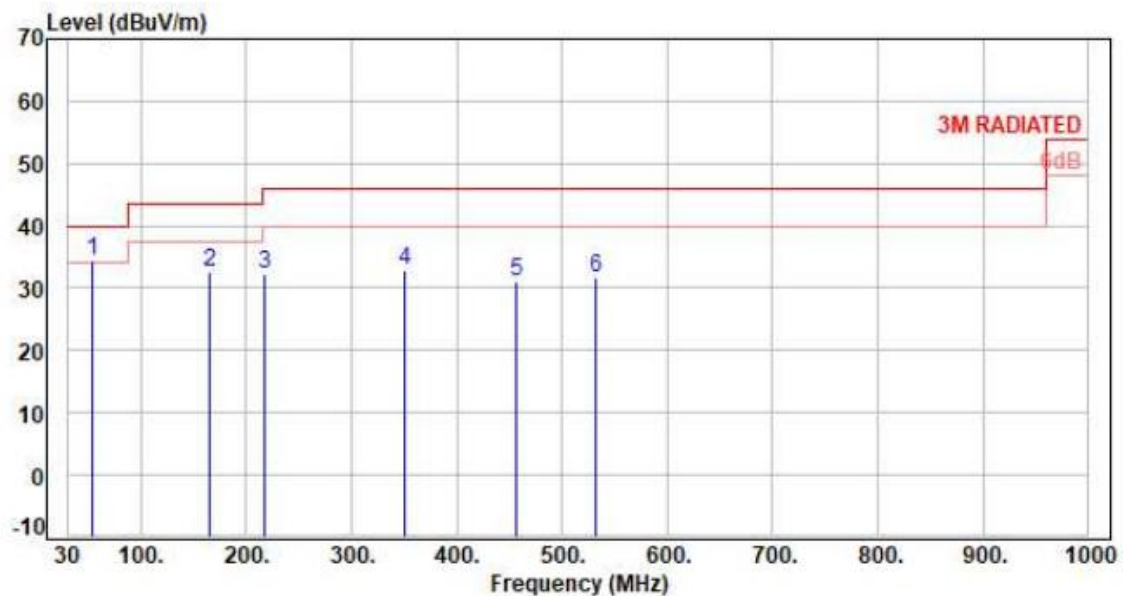

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	54.36	-9.11	43.52	34.41	40.00	-5.59	Peak	400	0	P
2	166.00	-9.46	42.19	32.73	43.50	-10.77	Peak	400	0	P
3	216.67	-11.95	44.12	32.17	46.00	-13.83	Peak	400	0	P
4	350.97	-7.27	40.06	32.79	46.00	-13.21	Peak	400	0	P
5	456.19	-4.28	35.44	31.16	46.00	-14.84	Peak	400	0	P
6	531.88	-2.37	34.13	31.76	46.00	-14.24	Peak	400	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For ESY10I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC240V/60Hz)
Pol : Horizontal

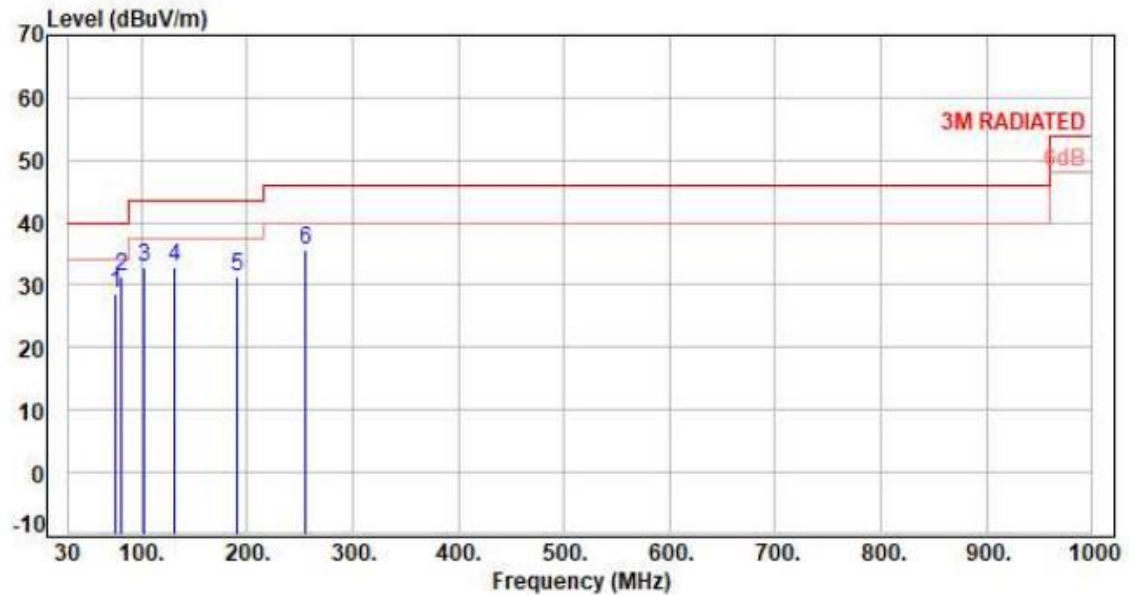

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	74.60	-13.20	41.72	28.52	40.00	-11.48	Peak	400	360	P
2	80.44	-14.70	46.17	31.47	40.00	-8.53	Peak	400	360	P
3	101.67	-14.02	46.88	32.86	43.50	-10.64	Peak	400	360	P
4	131.77	-10.95	43.80	32.85	43.50	-10.65	Peak	400	360	P
5	190.74	-11.57	42.95	31.38	43.50	-12.12	Peak	400	360	P
6	254.47	-9.97	45.56	35.59	46.00	-10.41	Peak	400	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For ESY15I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

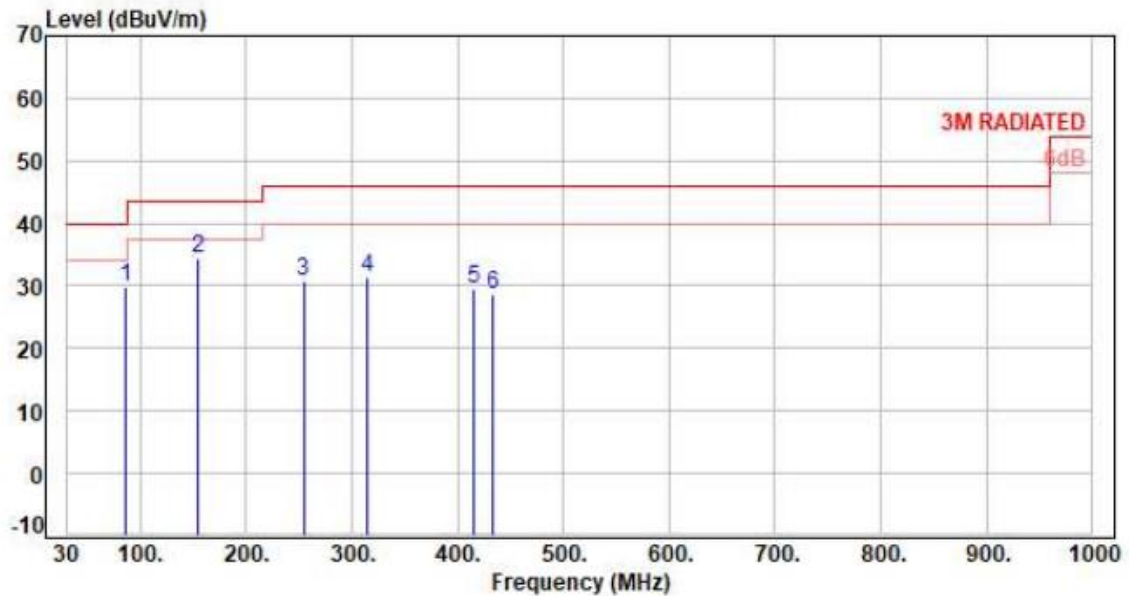

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	85.62	-15.77	45.61	29.84	40.00	-10.16	Peak	400	360	P
2	154.62	-9.45	43.98	34.53	43.50	-8.97	Peak	400	360	P
3	254.33	-9.98	40.76	30.78	46.00	-15.22	Peak	400	360	P
4	314.62	-8.08	39.44	31.36	46.00	-14.64	Peak	400	360	P
5	414.95	-5.36	34.85	29.49	46.00	-16.51	Peak	400	360	P
6	432.65	-4.87	33.42	28.55	46.00	-17.45	Peak	400	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For ESY1511E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

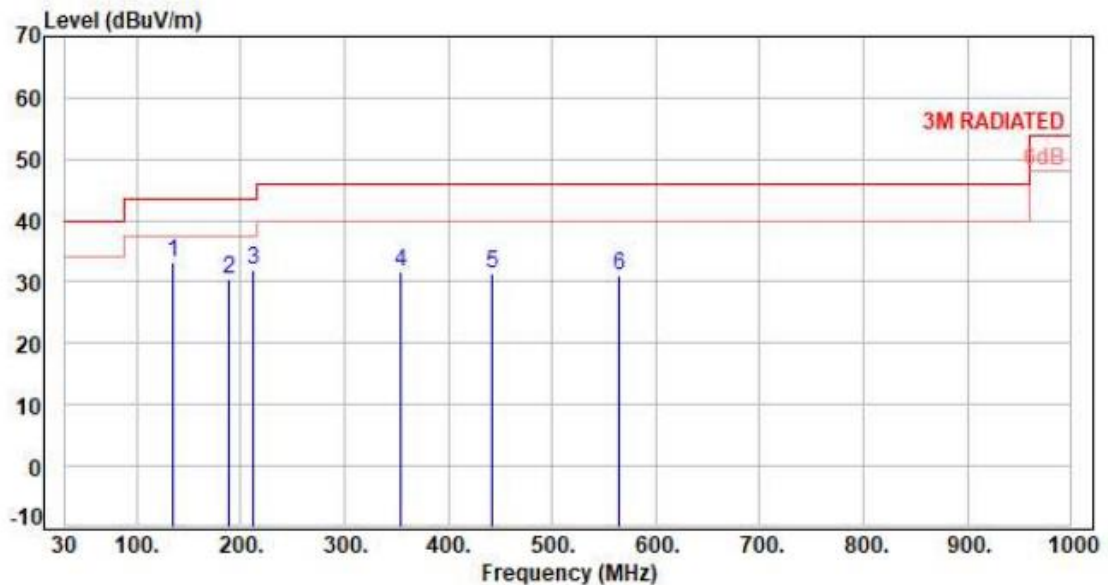

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	134.85	-10.61	43.94	33.33	43.50	-10.17	Peak	400	360	P
2	188.65	-11.48	41.93	30.45	43.50	-13.05	Peak	400	360	P
3	212.65	-12.10	44.22	32.12	43.50	-11.38	Peak	400	360	P
4	354.95	-7.16	38.85	31.69	46.00	-14.31	Peak	400	360	P
5	441.85	-4.56	36.04	31.48	46.00	-14.52	Peak	400	360	P
6	564.85	-1.76	32.73	30.97	46.00	-15.03	Peak	400	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For ESY22I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC240V/60Hz)
Pol : Vertical

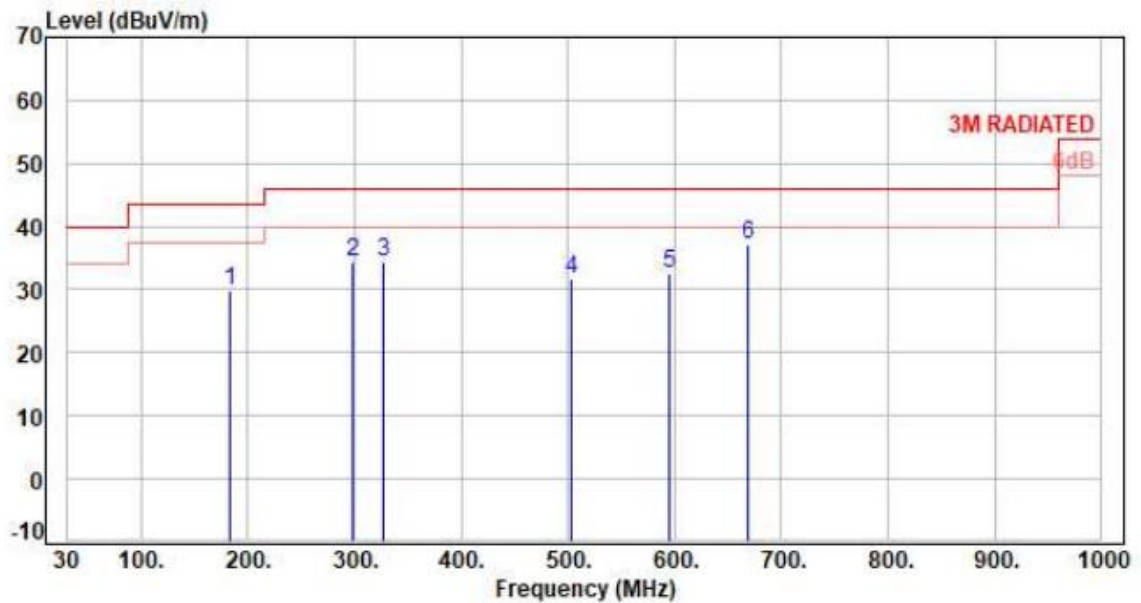

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	183.26	-10.97	40.87	29.90	43.50	-13.60	Peak	400	0	P
2	297.72	-8.63	43.01	34.38	46.00	-11.62	Peak	400	0	P
3	326.82	-7.73	42.00	34.27	46.00	-11.73	Peak	400	0	P
4	503.36	-3.36	35.08	31.72	46.00	-14.28	Peak	400	0	P
5	594.54	-1.09	33.72	32.63	46.00	-13.37	Peak	400	0	P
6	668.26	0.00	37.24	37.24	46.00	-8.76	Peak	400	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For ESY22I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC240V/60Hz)
Pol : Horizontal

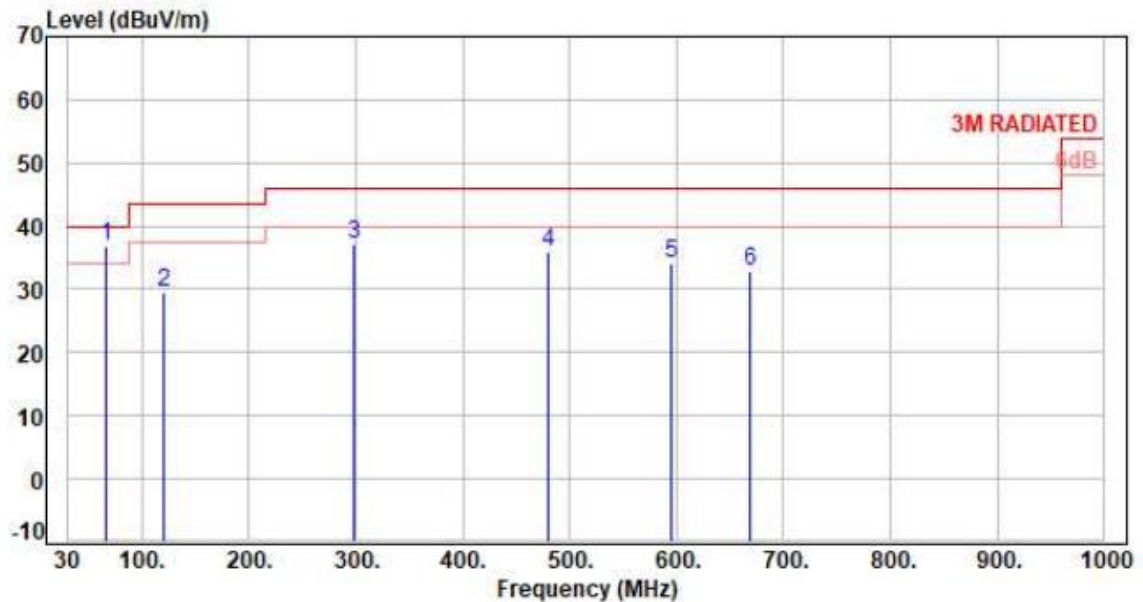

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	66.86	-10.99	47.81	36.82	40.00	-3.18	Peak	400	360	P
2	121.18	-12.16	41.84	29.68	43.50	-13.82	Peak	400	360	P
3	297.72	-8.63	45.73	37.10	46.00	-8.90	Peak	400	360	P
4	480.08	-3.73	39.72	35.99	46.00	-10.01	Peak	400	360	P
5	594.54	-1.09	35.30	34.21	46.00	-11.79	Peak	400	360	P
6	668.26	0.00	32.84	32.84	46.00	-13.16	Peak	400	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



7.6 Test Result and Data (1GHz ~ 25GHz)

For ESY22I1E

Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

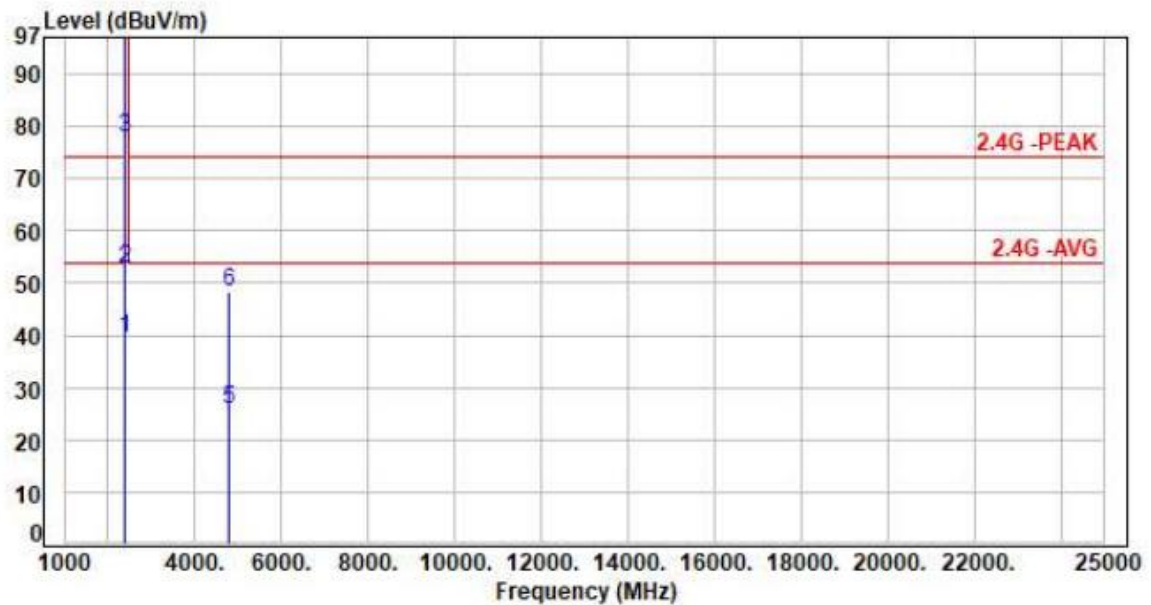

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	41.67	39.34	54.00	-14.66	Average	100	19	P
2	2390.00	-2.33	55.18	52.85	74.00	-21.15	Peak	100	19	P
3	2402.00	-2.32	80.29	77.97	200.00	-122.03	Average	100	19	P
4	2402.00	-2.32	102.79	100.47	200.00	-99.53	Peak	100	19	P
5	4804.00	5.89	19.82	25.71	54.00	-28.29	Average	100	195	P
6	4804.00	5.89	42.32	48.21	74.00	-25.79	Peak	100	195	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH00 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

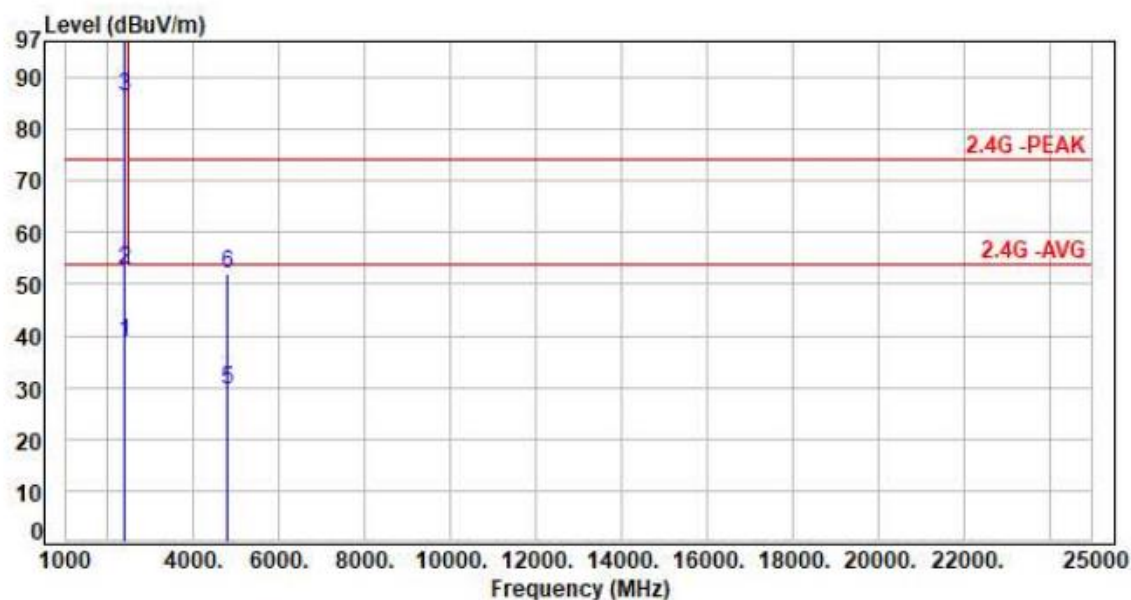

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	41.08	38.75	54.00	-15.25	Average	100	279	P
2	2390.00	-2.33	54.89	52.56	74.00	-21.44	Peak	100	279	P
3	2402.00	-2.32	88.58	86.26	200.00	-113.74	Average	100	279	P
4	2402.00	-2.32	111.08	108.76	200.00	-91.24	Peak	100	279	P
5	4804.00	5.89	23.77	29.66	54.00	-24.34	Average	100	117	P
6	4804.00	5.89	46.27	52.16	74.00	-21.84	Peak	100	117	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH39 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

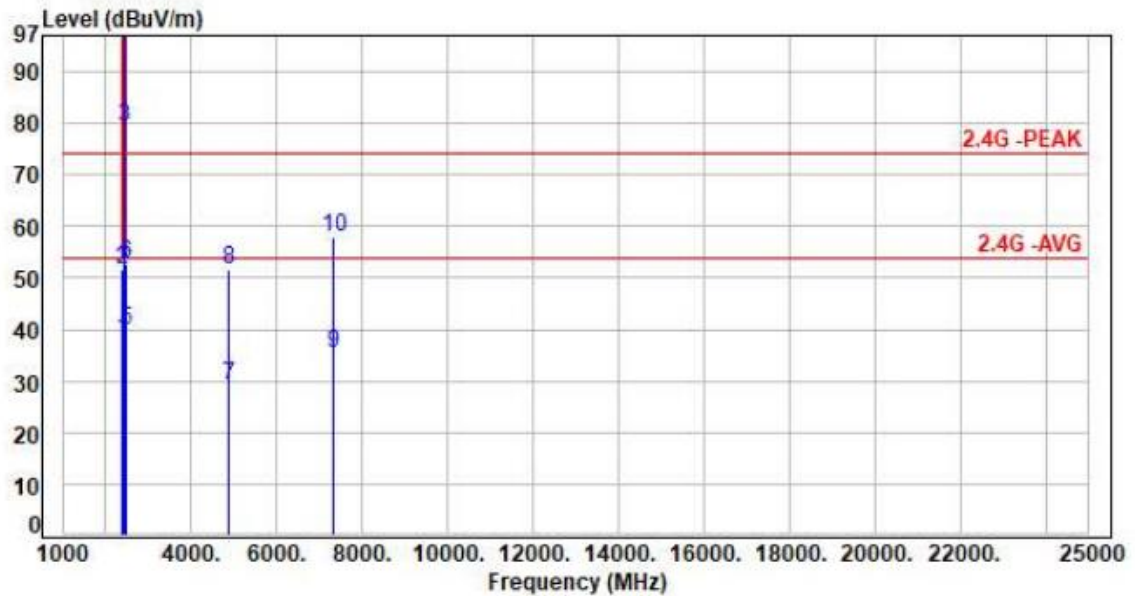

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	40.49	38.16	54.00	-15.84	Average	100	17	P
2	2390.00	-2.33	54.11	51.78	74.00	-22.22	Peak	100	17	P
3	2441.00	-2.16	81.34	79.18	200.00	-120.82	Average	100	17	P
4	2441.00	-2.16	103.84	101.68	200.00	-98.32	Peak	100	17	P
5	2483.50	-2.01	41.86	39.85	54.00	-14.15	Average	100	17	P
6	2483.50	-2.01	54.86	52.85	74.00	-21.15	Peak	100	17	P
7	4882.00	6.13	22.88	29.01	54.00	-24.99	Average	100	113	P
8	4882.00	6.13	45.38	51.51	74.00	-22.49	Peak	100	113	P
9	7323.00	11.37	24.10	35.47	54.00	-18.53	Average	100	192	P
10	7323.00	11.37	46.60	57.97	74.00	-16.03	Peak	100	192	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH39 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

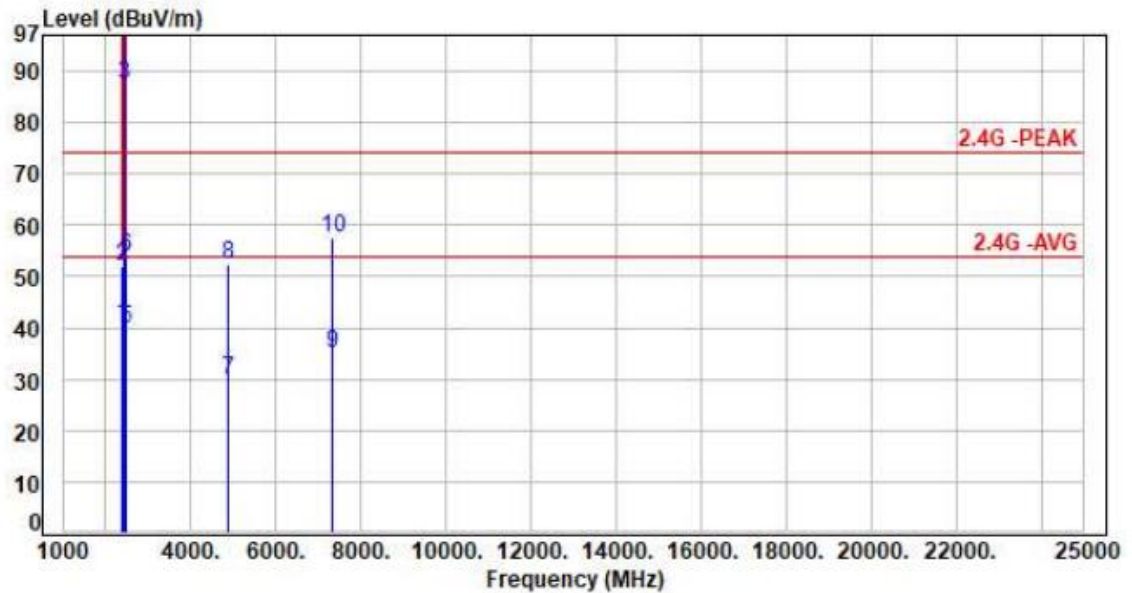

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	42.95	40.62	54.00	-13.38	Average	100	277	P
2	2390.00	-2.33	54.26	51.93	74.00	-22.07	Peak	100	277	P
3	2441.00	-2.16	89.72	87.56	200.00	-112.44	Average	100	277	P
4	2441.00	-2.16	112.22	110.06	200.00	-89.94	Peak	100	277	P
5	2483.50	-2.01	41.90	39.89	54.00	-14.11	Average	100	277	P
6	2483.50	-2.01	56.02	54.01	74.00	-19.99	Peak	100	277	P
7	4882.00	6.13	23.77	29.90	54.00	-24.10	Average	100	184	P
8	4882.00	6.13	46.27	52.40	74.00	-21.60	Peak	100	184	P
9	7323.00	11.37	23.68	35.05	54.00	-18.95	Average	100	229	P
10	7323.00	11.37	46.18	57.55	74.00	-16.45	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH78 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

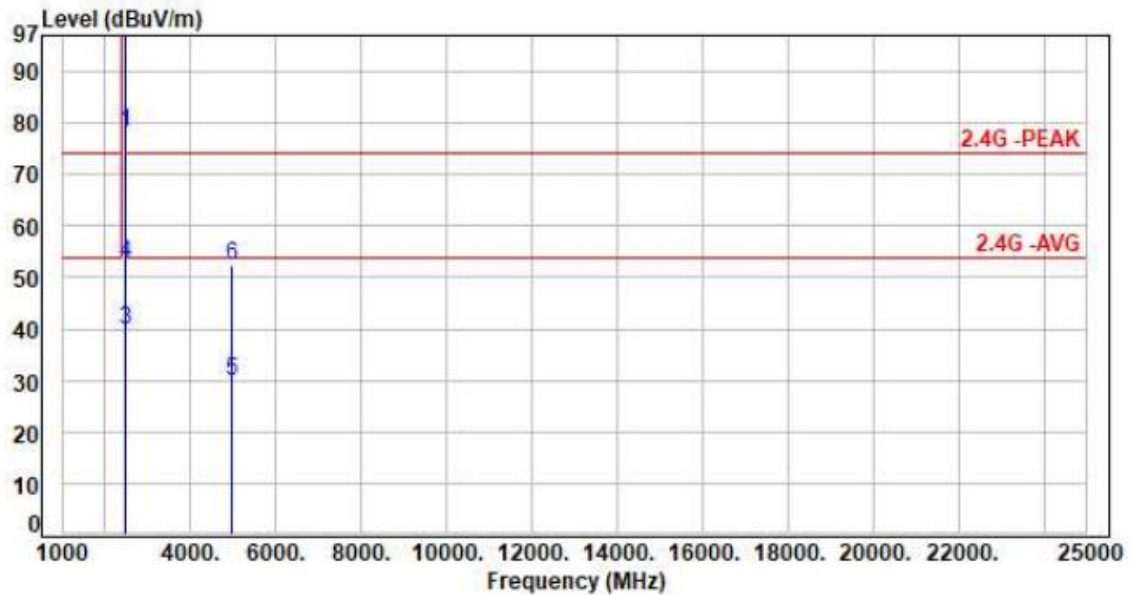

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.01	80.02	78.01	200.00	-121.99	Average	100	11	P
2	2480.00	-2.01	102.52	100.51	200.00	-99.49	Peak	100	11	P
3	2483.50	-2.01	41.90	39.89	54.00	-14.11	Average	100	11	P
4	2483.50	-2.01	54.87	52.86	74.00	-21.14	Peak	100	11	P
5	4960.00	6.37	23.68	30.05	54.00	-23.95	Average	100	119	P
6	4960.00	6.37	46.18	52.55	74.00	-21.45	Peak	100	119	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH78 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

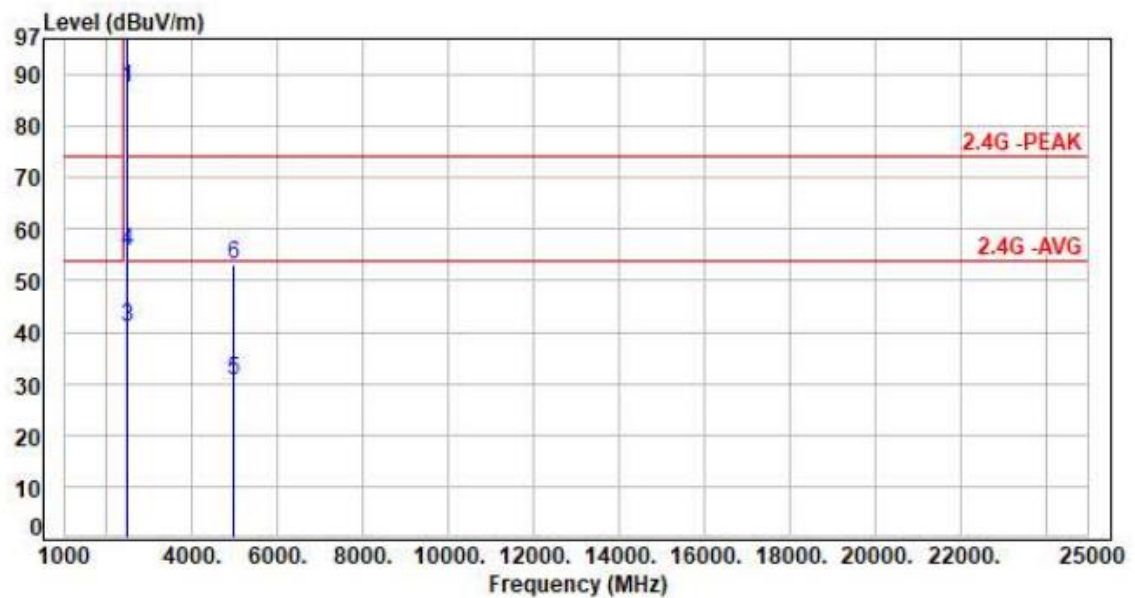

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.01	89.27	87.26	200.00	-112.74	Average	109	277	P
2	2480.00	-2.01	111.77	109.76	200.00	-90.24	Peak	109	277	P
3	2483.50	-2.01	42.89	40.88	54.00	-13.12	Average	109	277	P
4	2483.50	-2.01	57.52	55.51	74.00	-18.49	Peak	109	277	P
5	4960.00	6.37	24.32	30.69	54.00	-23.31	Average	100	138	P
6	4960.00	6.37	46.82	53.19	74.00	-20.81	Peak	100	138	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH00 3Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

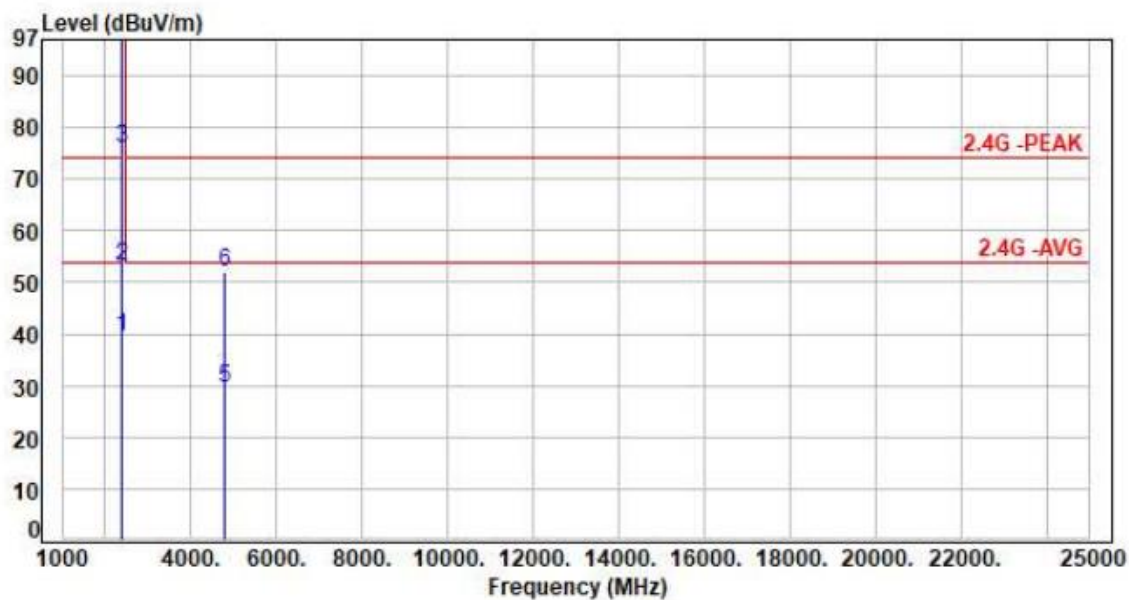

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	41.70	39.37	54.00	-14.63	Average	100	18	P
2	2390.00	-2.33	55.56	53.23	74.00	-20.77	Peak	100	18	P
3	2402.00	-2.32	78.29	75.97	200.00	-124.03	Average	100	18	P
4	2402.00	-2.32	100.79	98.47	200.00	-101.53	Peak	100	18	P
5	4804.00	5.89	23.67	29.56	54.00	-24.44	Average	100	199	P
6	4804.00	5.89	46.17	52.06	74.00	-21.94	Peak	100	199	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH00 3Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

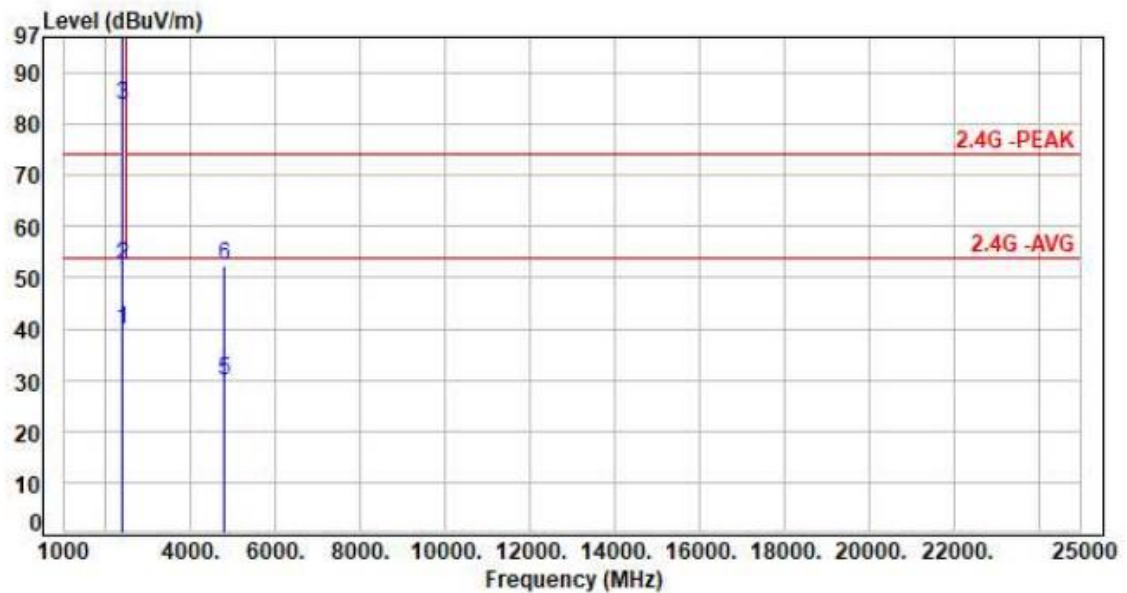

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	41.99	39.66	54.00	-14.34	Average	100	281	P
2	2390.00	-2.33	54.52	52.19	74.00	-21.81	Peak	100	281	P
3	2402.00	-2.32	86.01	83.69	200.00	-116.31	Average	100	281	P
4	2402.00	-2.32	108.51	106.19	200.00	-93.81	Peak	100	281	P
5	4804.00	5.89	23.82	29.71	54.00	-24.29	Average	100	225	P
6	4804.00	5.89	46.32	52.21	74.00	-21.79	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH39 3Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

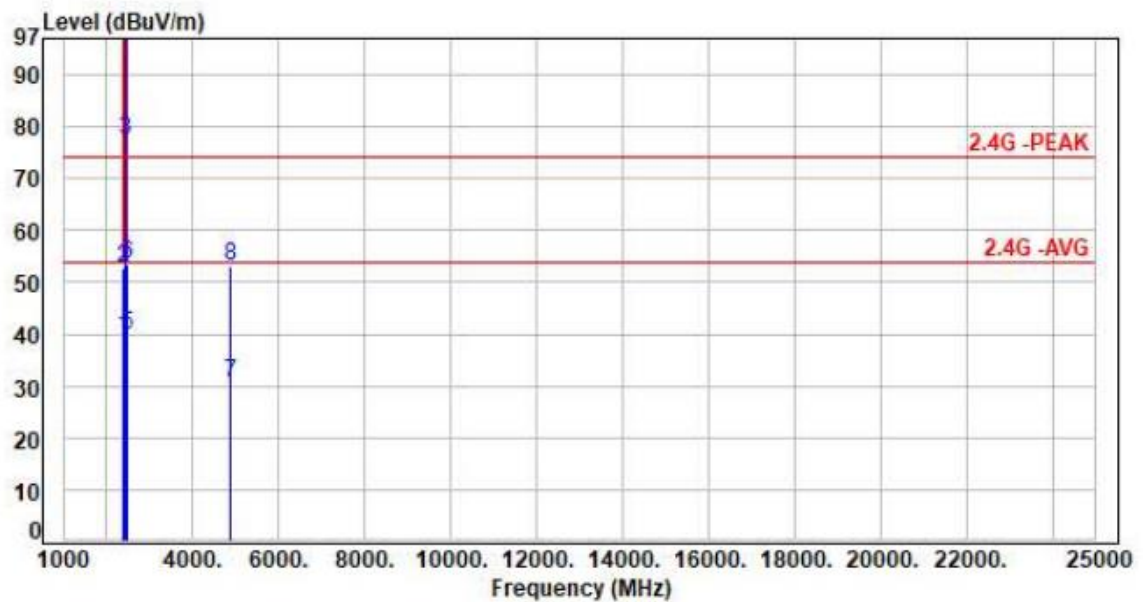

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	41.74	39.41	54.00	-14.59	Average	100	15	P
2	2390.00	-2.33	54.92	52.59	74.00	-21.41	Peak	100	15	P
3	2441.00	-2.16	79.48	77.32	200.00	-122.68	Average	100	15	P
4	2441.00	-2.16	101.98	99.82	200.00	-100.18	Peak	100	15	P
5	2483.50	-2.01	41.76	39.75	54.00	-14.25	Average	100	15	P
6	2483.50	-2.01	55.37	53.36	74.00	-20.64	Peak	100	15	P
7	4882.00	6.13	24.41	30.54	54.00	-23.46	Average	100	185	P
8	4882.00	6.13	46.91	53.04	74.00	-20.96	Peak	100	185	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH39 3Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

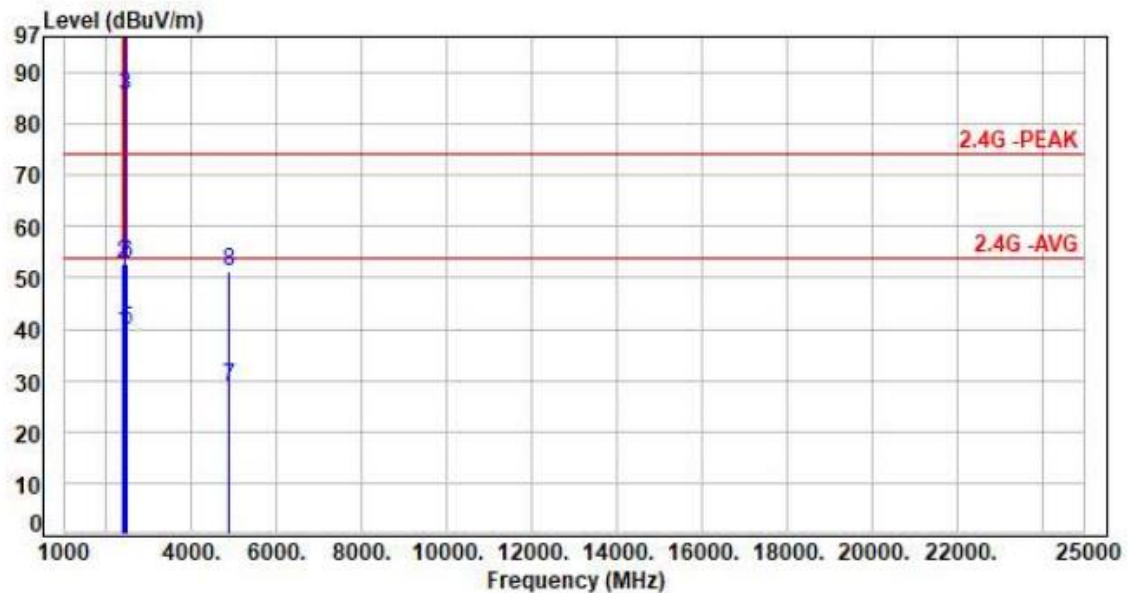

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	41.78	39.45	54.00	-14.55	Average	113	278	P
2	2390.00	-2.33	55.09	52.76	74.00	-21.24	Peak	113	278	P
3	2441.00	-2.16	87.90	85.74	200.00	-114.26	Average	113	278	P
4	2441.00	-2.16	110.40	108.24	200.00	-91.76	Peak	113	278	P
5	2483.50	-2.01	41.97	39.96	54.00	-14.04	Average	113	278	P
6	2483.50	-2.01	54.68	52.67	74.00	-21.33	Peak	113	278	P
7	4882.00	6.13	22.78	28.91	54.00	-25.09	Average	100	115	P
8	4882.00	6.13	45.28	51.41	74.00	-22.59	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH78 3Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

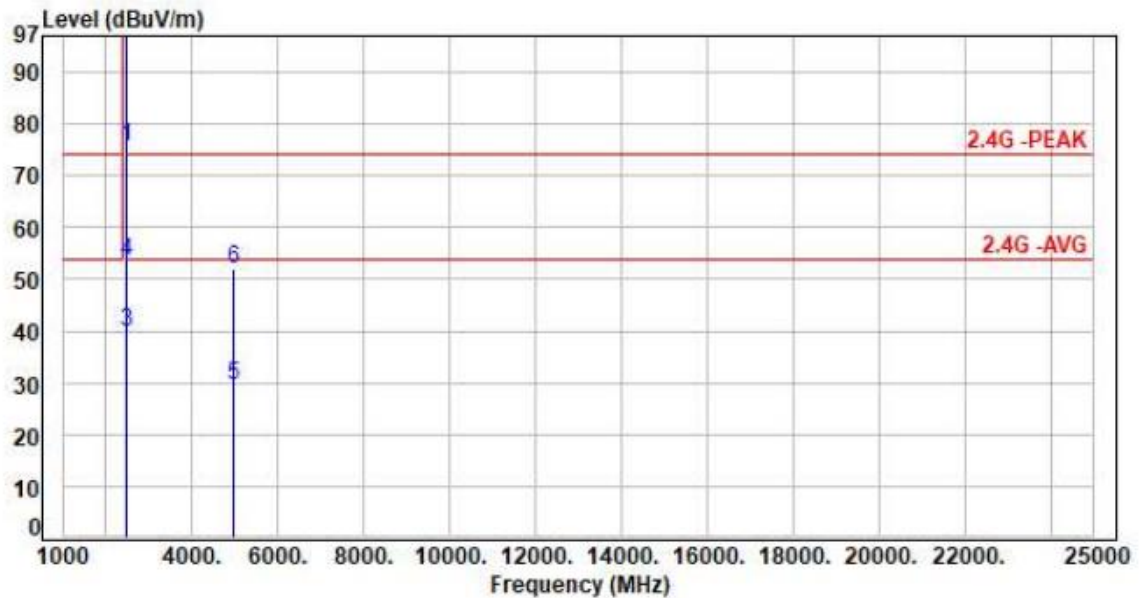

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.01	77.58	75.57	200.00	-124.43	Average	100	13	P
2	2480.00	-2.01	100.08	98.07	200.00	-101.93	Peak	100	13	P
3	2483.50	-2.01	41.91	39.90	54.00	-14.10	Average	100	13	P
4	2483.50	-2.01	55.32	53.31	74.00	-20.69	Peak	100	13	P
5	4960.00	6.37	23.16	29.53	54.00	-24.47	Average	100	152	P
6	4960.00	6.37	45.66	52.03	74.00	-21.97	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : BT 1TX CH78 3Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

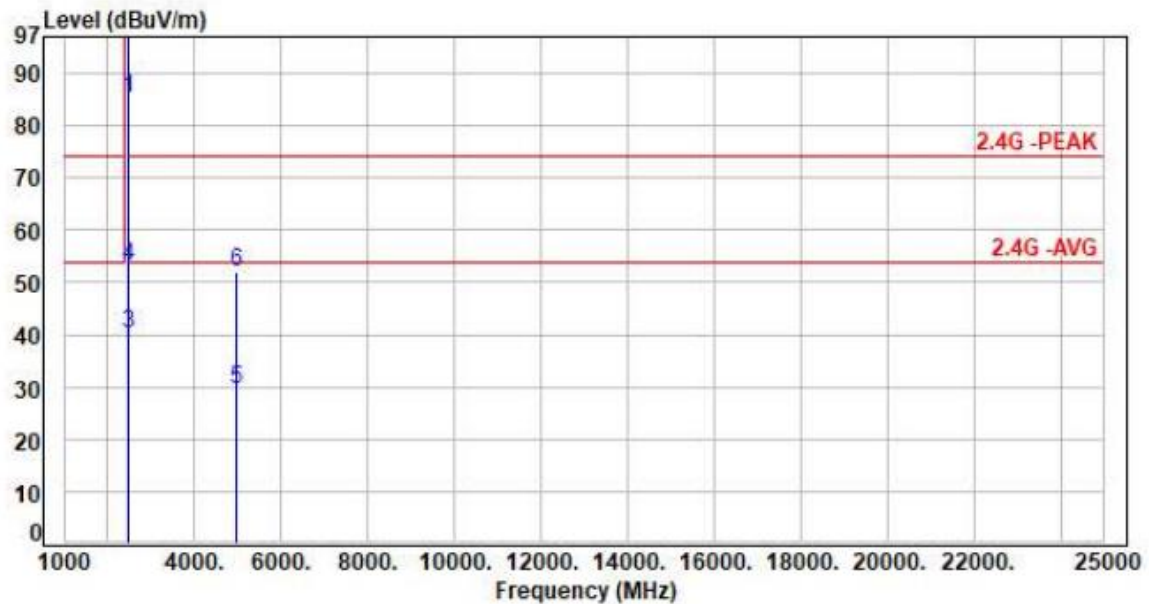

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.01	87.19	85.18	200.00	-114.82	Average	100	277	P
2	2480.00	-2.01	109.69	107.68	200.00	-92.32	Peak	100	277	P
3	2483.50	-2.01	42.32	40.31	54.00	-13.69	Average	100	277	P
4	2483.50	-2.01	55.30	53.29	74.00	-20.71	Peak	100	277	P
5	4960.00	6.37	23.32	29.69	54.00	-24.31	Average	100	117	P
6	4960.00	6.37	45.82	52.19	74.00	-21.81	Peak	100	117	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



7.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



8. Test of Conducted Spurious Emission

8.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 7.8.8


Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

8.3 Test Setup Layout



8.4 Test Result and Data

Note: Test plots refer to the following pages.



For ESY22I1E




Modulation Type: GFSK (1Mbps)

Channel: 00




Modulation Type: GFSK (1Mbps)

Channel: 39

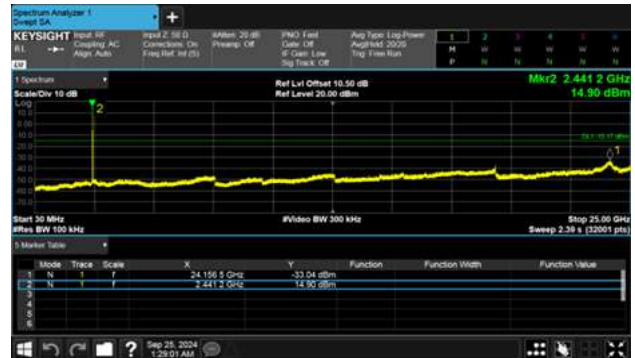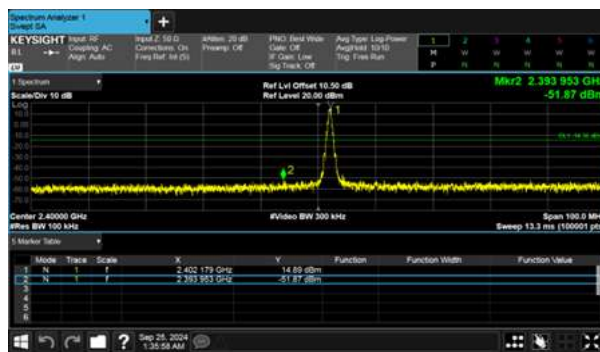
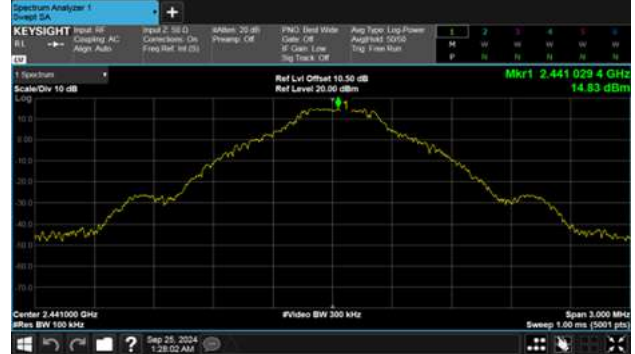




Modulation Type: GFSK (1Mbps)
Channel: 78

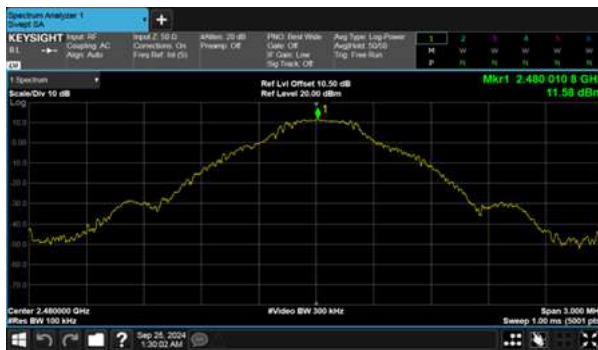


Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 00



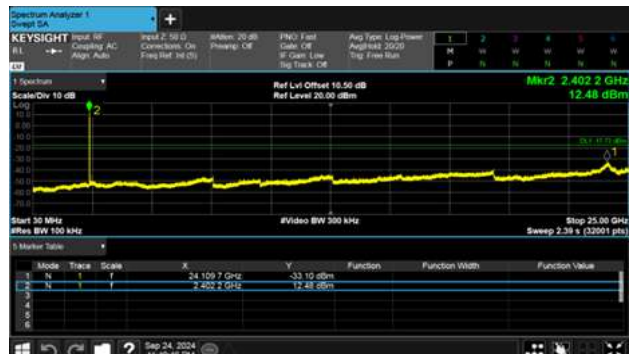
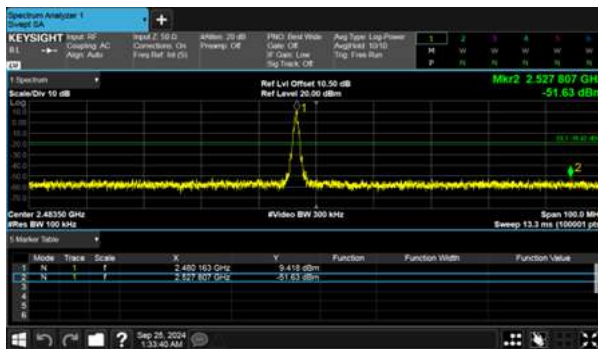




Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

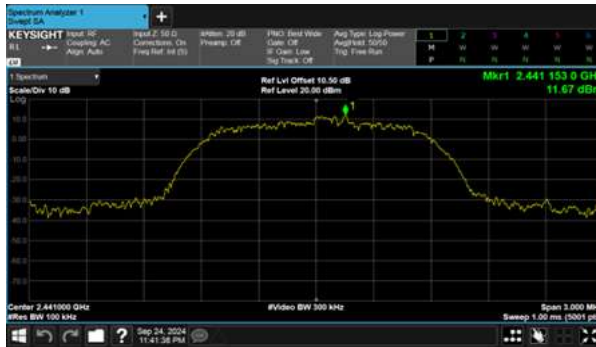


Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

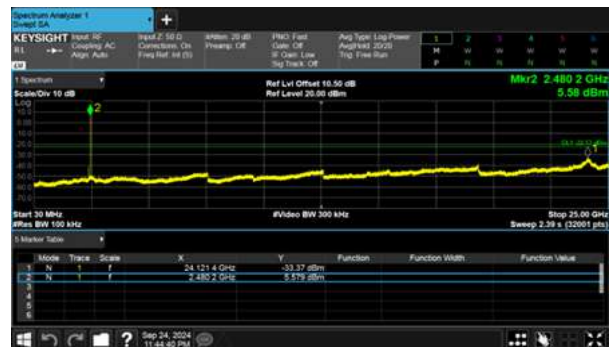
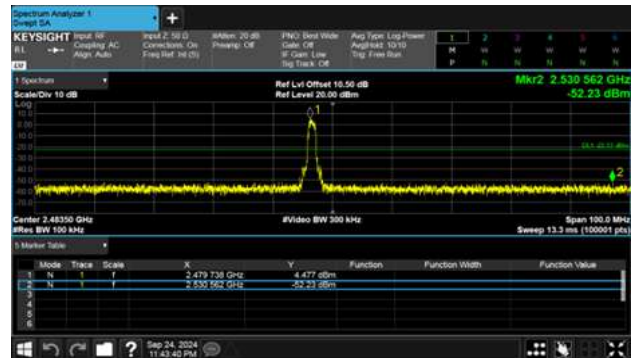
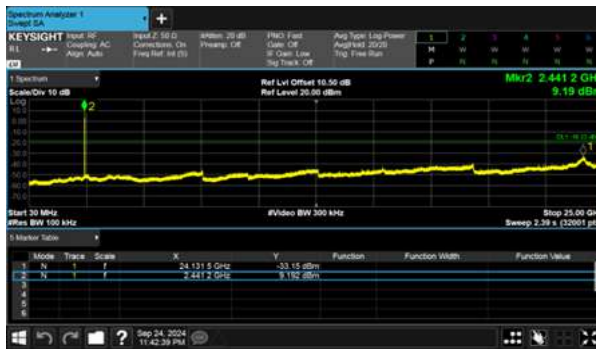
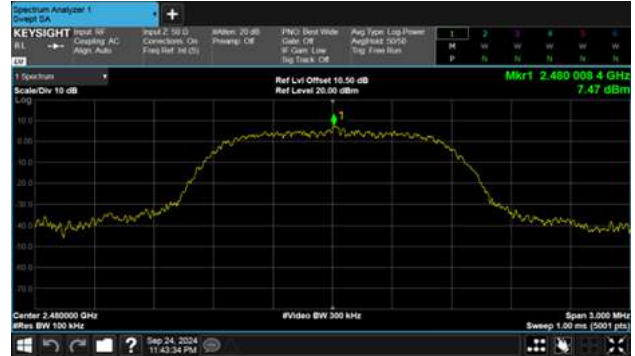




Modulation Type: 8DPSK (3Mbps)
Channel: 00


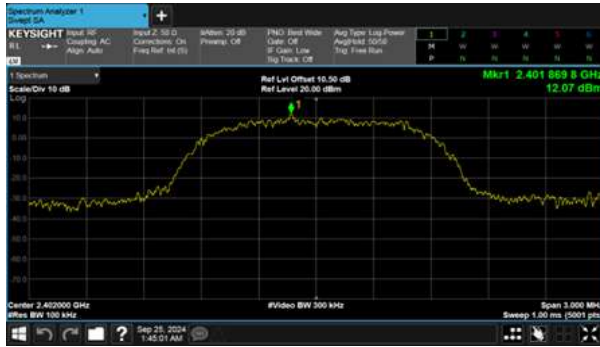


Modulation Type: 8DPSK (3Mbps)
Channel: 39

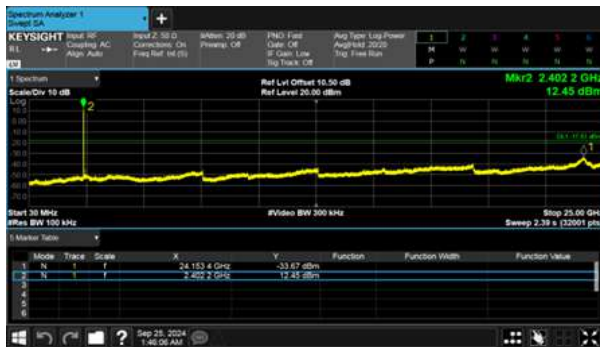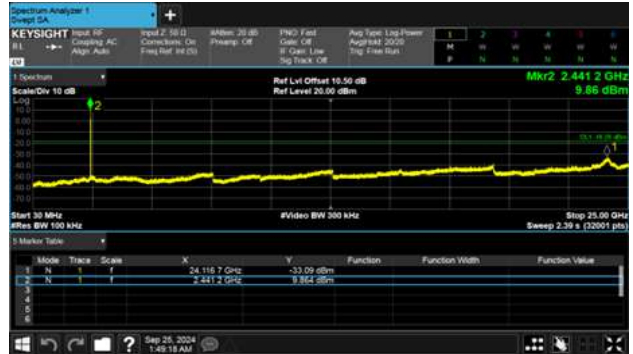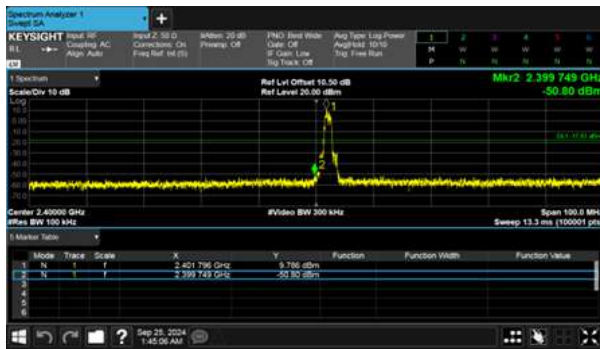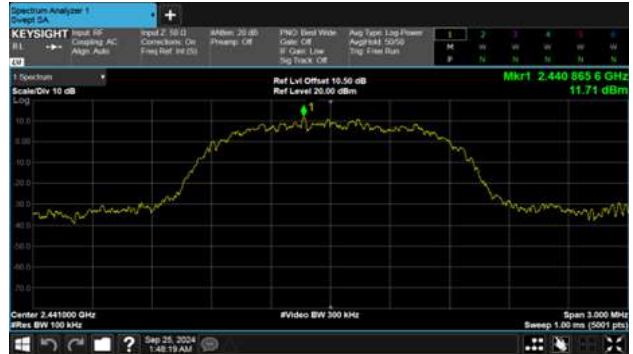



Modulation Type: 8DPSK (3Mbps)
Channel: 78




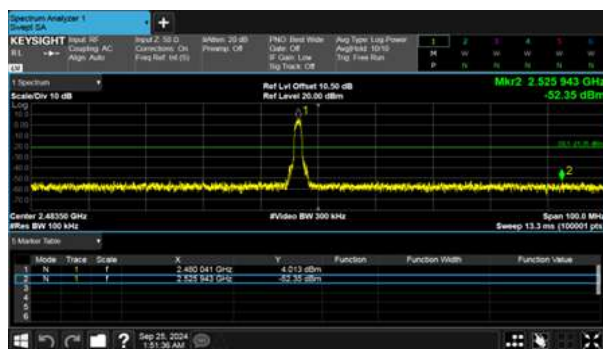
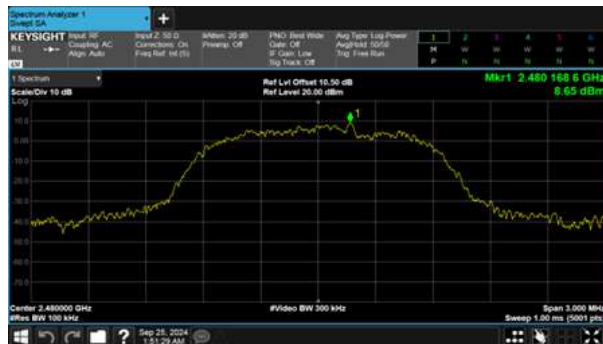





Hopping Mode:
Modulation Type: GFSK



Modulation Type: $\pi/4$ -DQPSK

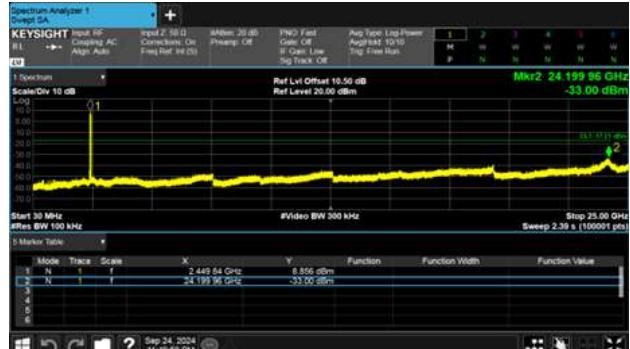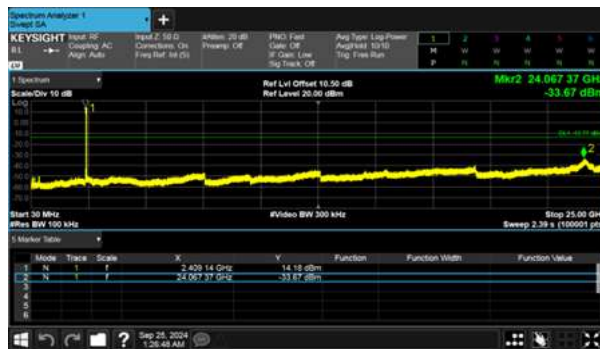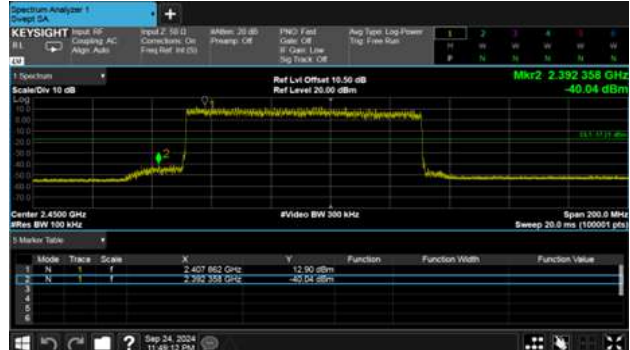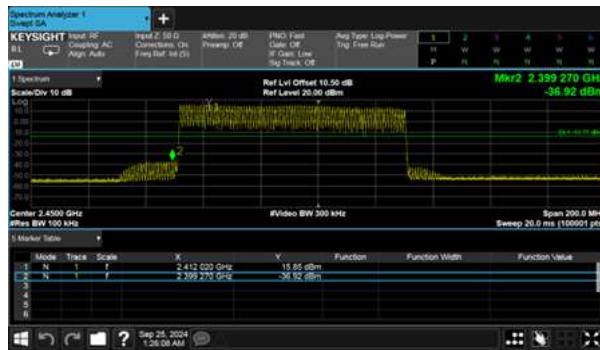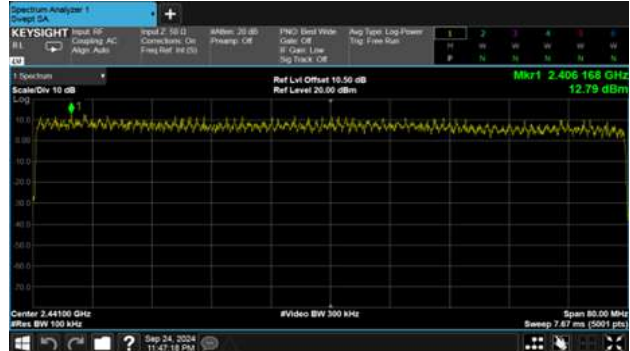

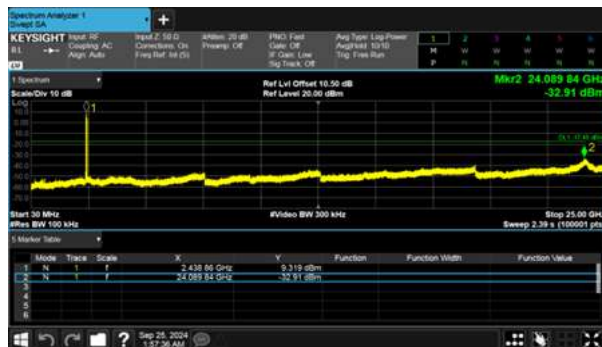



9. 20dB Bandwidth Measurement Data

9.1 Test Limit


For reference data.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 6.9

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1% to 5% of the 20dB Bandwidth and VBW to approximately three times RBW.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

9.3 Test Setup Layout



9.4 Test Result and Data

For ESY22I1E

Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 20dB Bandwidth (MHz)
GFSK	0	2402	0.938	0.625
	39	2441	0.936	0.624
	78	2480	0.937	0.624
$\pi/4$ -DQPSK	0	2402	1.319	0.879
	39	2441	1.310	0.873
	78	2480	1.314	0.876
8DPSK	0	2402	1.306	0.871
	39	2441	1.307	0.871
	78	2480	1.300	0.867



For ESY22I1E

Modulation Type: GFSK (1Mbps)

Channel: 00



CH39

Modulation Type: $\pi/4$ -DQPSK (2Mbps)

Channel: 00



CH39



CH78



CH78





Modulation Type: 8DPSK (3Mbps)
Channel: 00



CH39



CH78





10. Carrier Frequency Separation

10.1 Test Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.2

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 300 KHz and VBW to 1000 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

10.3 Test Setup Layout



10.4 Test Result and Data

For ESY22I1E

Modulation Type	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
GFSK	0	2402	1.002	0.625
	39	2441	1.002	0.624
	78	2480	1.002	0.624
$\pi/4$ -DQPSK	0	2402	1.002	0.879
	39	2441	1.002	0.873
	78	2480	1.002	0.876
8DPSK	0	2402	1.002	0.871
	39	2441	1.002	0.871
	78	2480	1.002	0.867




For ESY22I1E

Modulation Type: GFSK (1Mbps)

Channel: 00

Modulation Type: $\pi/4$ -DQPSK (2Mbps)

Channel: 00

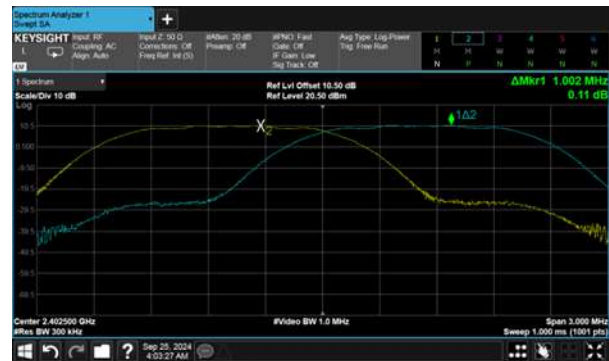

CH39



CH39



CH78




CH78






Modulation Type: 8DPSK (3Mbps)
Channel: 00

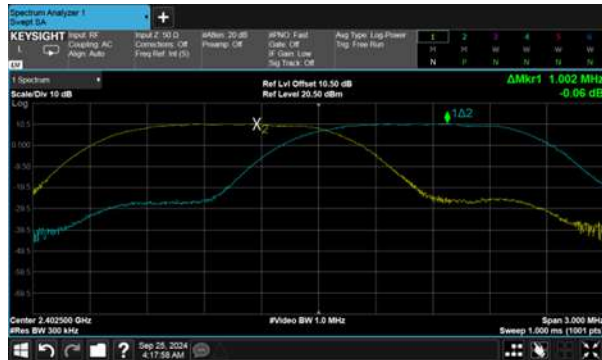

CH39

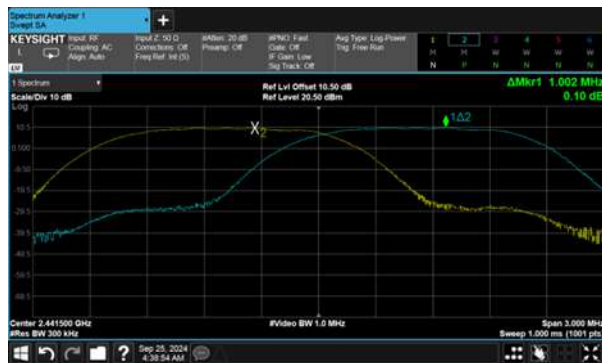

CH78





11. Dwell Time on each channel

11.1 Test Limit


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.4

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
3. Set RBW of spectrum analyzer to 300KHz and VBW to 1MHz.
4. Measure the time duration of one transmission on the measured frequency.

11.3 Test Setup Layout



11.4 Test Result and Data






For ESY22I1E

Modulation Type	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 31.6 (79 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
GFSK-DH1	2402	0.395	320.00	126.40	400
GFSK-DH3	2402	1.659	160.00	265.44	400
GFSK-DH5	2402	2.901	106.67	309.44	400
$\pi/4$ -DQPSK-DH1	2402	0.401	320.00	128.32	400
$\pi/4$ -DQPSK-DH3	2402	1.665	160.00	266.40	400
$\pi/4$ -DQPSK-DH5	2402	2.904	106.67	309.76	400
8DPSK-DH1	2402	0.397	320.00	127.04	400
8DPSK-DH3	2402	1.656	160.00	264.96	400
8DPSK-DH5	2402	2.904	106.67	309.76	400

Modulation Type	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 8 (20 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
AFH-DH1	2402-2421	0.392	160.00	62.72	400
AFH-DH3	2402-2421	1.662	80.00	132.96	400
AFH-DH5	2402-2421	2.901	53.33	154.71	400



Modulation Type: GFSK-DH1
Channel: 00







12. Number of Hopping Channels

12.1 Test Limit


Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

12.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.3

- The transmitter output was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

12.3 Test Setup Layout



12.4 Test Result and Data

For ESY2211E

Modulation Type	Hopping Channels
GFSK	79
$\pi/4$ -DQPSK	79
8DPSK	79




For ESY2211E


Modulation Type: GFSK (1Mbps)



Modulation Type: $\pi/4$ -DQPSK (2Mbps)

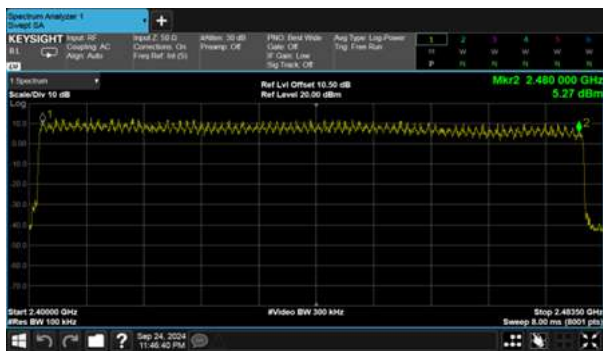

Modulation Type: 8DPSK (3Mbps)

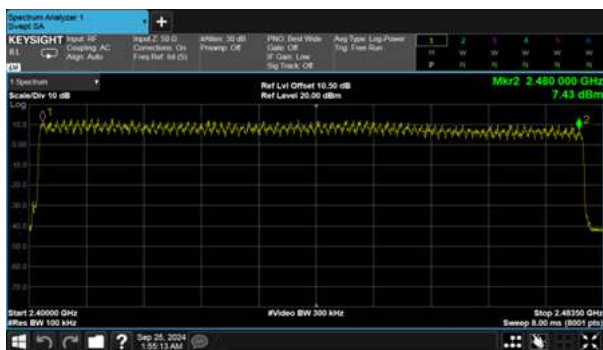



13. Maximum Average Output Power

13.1 Test Limit

The Maximum Average Output Power Measurement is 30dBm.


13.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.5

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter.

Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

13.3 Test Setup Layout



13.4 Test Result and Data

For ESY10I1E

Setting	Modulation Type	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
10	GFSK	0	2402	15.37	34.435
		39	2441	15.01	31.696
		78	2480	11.56	14.322
10	$\pi/4$ -DQPSK	0	2402	11.66	14.655
		39	2441	11.23	13.274
		78	2480	7.63	5.794
10	8DPSK	0	2402	11.81	15.171
		39	2441	11.39	13.772
		78	2480	7.95	6.237

AFH Mode

Setting	Modulation Type	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
10	GFSK	0-19	2402-2421	15.35	34.277
10	$\pi/4$ -DQPSK	0-19	2402-2421	11.63	14.555
10	8DPSK	0-19	2402-2421	11.77	15.031



For ESY15I1E

Setting	Modulation Type	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
10	GFSK	0	2402	15.51	35.563
		39	2441	15.16	32.810
		78	2480	11.73	14.894
10	$\pi/4$ -DQPSK	0	2402	11.80	15.136
		39	2441	11.45	13.964
		78	2480	7.81	6.039
10	8DPSK	0	2402	11.93	15.596
		39	2441	11.53	14.223
		78	2480	8.12	6.486

AFH Mode

Setting	Modulation Type	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
10	GFSK	0-19	2402-2421	15.45	35.075
10	$\pi/4$ -DQPSK	0-19	2402-2421	11.76	14.997
10	8DPSK	0-19	2402-2421	11.88	15.417

For ESY22I1E

Setting	Modulation Type	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
10	GFSK	0	2402	15.69	37.068
		39	2441	15.34	34.198
		78	2480	11.89	15.453
10	$\pi/4$ -DQPSK	0	2402	11.98	15.776
		39	2441	11.59	14.421
		78	2480	7.97	6.266
10	8DPSK	0	2402	12.14	16.368
		39	2441	11.72	14.859
		78	2480	8.28	6.730

AFH Mode

Setting	Modulation Type	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
10	GFSK	0-19	2402-2421	15.63	36.559
10	$\pi/4$ -DQPSK	0-19	2402-2421	11.94	15.631
10	8DPSK	0-19	2402-2421	12.09	16.181