




SISO

Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

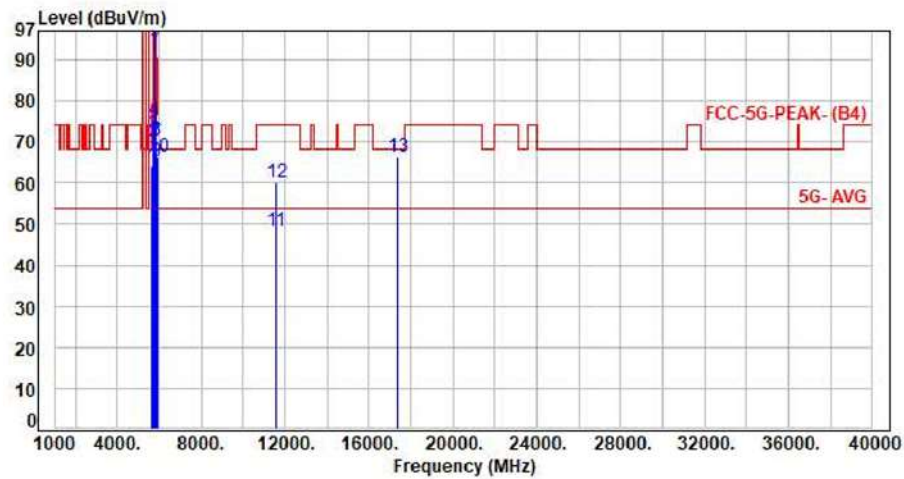


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.75	64.26	68.20	-3.94	Peak	100	334	P
2	5700.00	7.43	62.54	69.97	105.20	-35.23	Peak	100	334	P
3	5720.00	7.43	64.42	71.85	110.80	-38.95	Peak	100	334	P
4	5725.00	7.43	67.64	75.07	122.20	-47.13	Peak	100	334	P
5	5785.00	7.45	86.97	94.42	200.00	-105.58	Average	100	334	P
6	5785.00	7.45	97.56	105.01	200.00	-94.99	Peak	100	334	P
7	5850.00	7.47	62.78	70.25	122.20	-51.95	Peak	100	334	P
8	5855.00	7.49	62.93	70.42	110.80	-40.38	Peak	100	334	P
9	5875.00	7.57	57.66	65.23	105.20	-39.97	Peak	100	334	P
10	5925.00	7.73	58.69	66.42	68.20	-1.78	Peak	100	334	P
11	11570.00	18.58	29.61	48.19	54.00	-5.81	Average	100	193	P
12	11570.00	18.58	41.66	60.24	74.00	-13.76	Peak	100	193	P
13	17355.00	25.24	41.14	66.38	68.20	-1.82	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO

Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

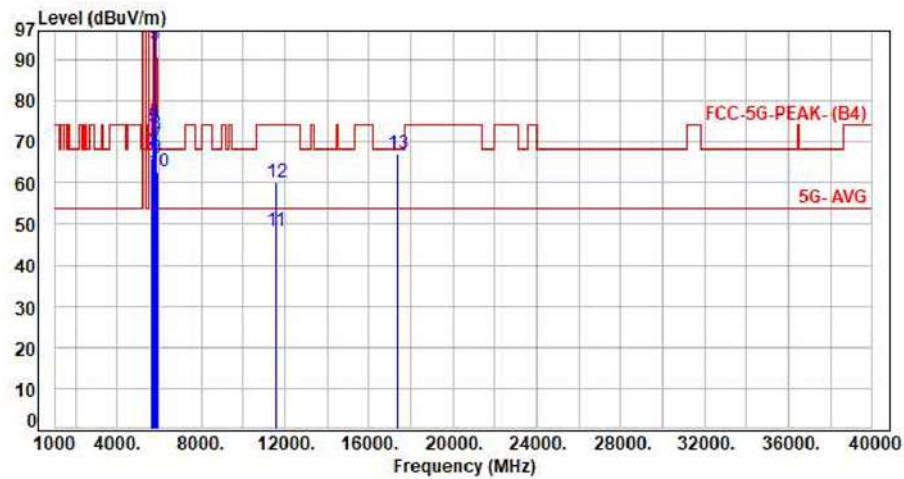


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	58.43	65.94	68.20	-2.26	Peak	100	320	P
2	5700.00	7.43	60.55	67.98	105.20	-37.22	Peak	100	320	P
3	5720.00	7.43	66.17	73.60	110.80	-37.20	Peak	100	320	P
4	5725.00	7.43	66.95	74.38	122.20	-47.82	Peak	100	320	P
5	5785.00	7.45	86.37	93.82	200.00	-106.18	Average	100	320	P
6	5785.00	7.45	97.01	104.46	200.00	-95.54	Peak	100	320	P
7	5850.00	7.47	61.39	68.86	122.20	-53.34	Peak	100	320	P
8	5855.00	7.49	64.31	71.80	110.80	-39.00	Peak	100	320	P
9	5875.00	7.57	58.40	65.97	105.20	-39.23	Peak	100	320	P
10	5925.00	7.73	54.91	62.64	68.20	-5.56	Peak	100	320	P
11	11570.00	18.58	29.63	48.21	54.00	-5.79	Average	100	185	P
12	11570.00	18.58	41.39	59.97	74.00	-14.03	Peak	100	185	P
13	17355.00	25.24	41.83	67.07	68.20	-1.13	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO

Test Mode : 1TX 11a CH16S 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

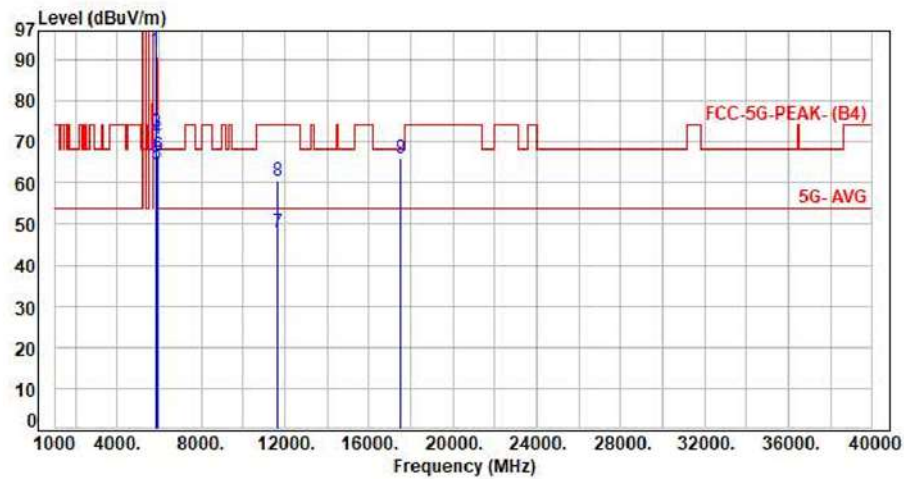


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	84.71	92.17	200.00	-107.83	Average	100	332	P
2	5825.00	7.46	95.10	102.56	200.00	-97.44	Peak	100	332	P
3	5850.00	7.47	64.91	72.38	122.20	-49.82	Peak	100	332	P
4	5855.00	7.49	63.30	70.79	110.80	-40.01	Peak	100	332	P
5	5875.00	7.57	56.88	64.45	105.20	-40.75	Peak	100	332	P
6	5925.00	7.73	58.88	66.61	68.20	-1.59	Peak	100	332	P
7	11650.00	18.67	29.32	47.99	54.00	-6.01	Average	100	147	P
8	11650.00	18.67	41.83	60.50	74.00	-13.50	Peak	100	147	P
9	17475.00	25.92	40.21	66.13	68.20	-2.07	Peak	100	256	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO

Test Mode : 1TX 11a CH16S 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

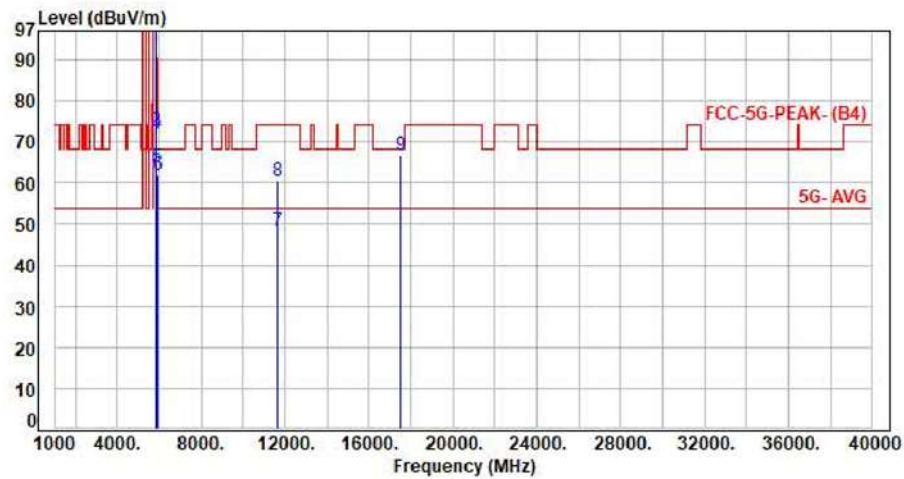


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	85.85	93.31	200.00	-106.69	Average	100	325	P
2	5825.00	7.46	95.93	103.39	200.00	-96.61	Peak	100	325	P
3	5850.00	7.47	65.16	72.63	122.20	-49.57	Peak	100	325	P
4	5855.00	7.49	64.37	71.86	110.80	-38.94	Peak	100	325	P
5	5875.00	7.57	56.08	63.65	105.20	-41.55	Peak	100	325	P
6	5925.00	7.73	54.13	61.86	68.20	-6.34	Peak	100	325	P
7	11650.00	18.67	29.64	48.31	54.00	-5.69	Average	100	154	P
8	11650.00	18.67	41.96	60.63	74.00	-13.37	Peak	100	154	P
9	17475.00	25.92	40.95	66.87	68.20	-1.33	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO

Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

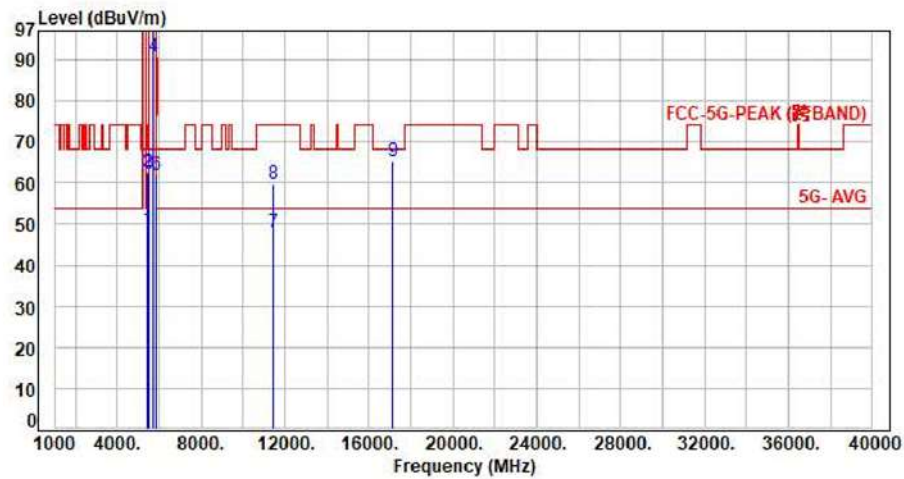


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	41.19	48.74	54.00	-5.26	Average	100	315	P
2	5460.00	7.55	55.08	62.63	74.00	-11.37	Peak	100	315	P
3	5470.00	7.58	54.68	62.26	68.20	-5.94	Peak	100	315	P
4	5720.00	7.43	83.12	90.55	200.00	-109.45	Average	100	315	P
5	5720.00	7.43	92.56	99.99	200.00	-100.01	Peak	100	315	P
6	5850.00	7.47	54.61	62.08	68.20	-6.12	Peak	100	315	P
7	11440.00	18.20	29.61	47.81	54.00	-6.19	Average	100	174	P
8	11440.00	18.20	41.64	59.84	74.00	-14.16	Peak	100	174	P
9	17160.00	24.13	41.33	65.46	68.20	-2.74	Peak	100	214	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO

Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

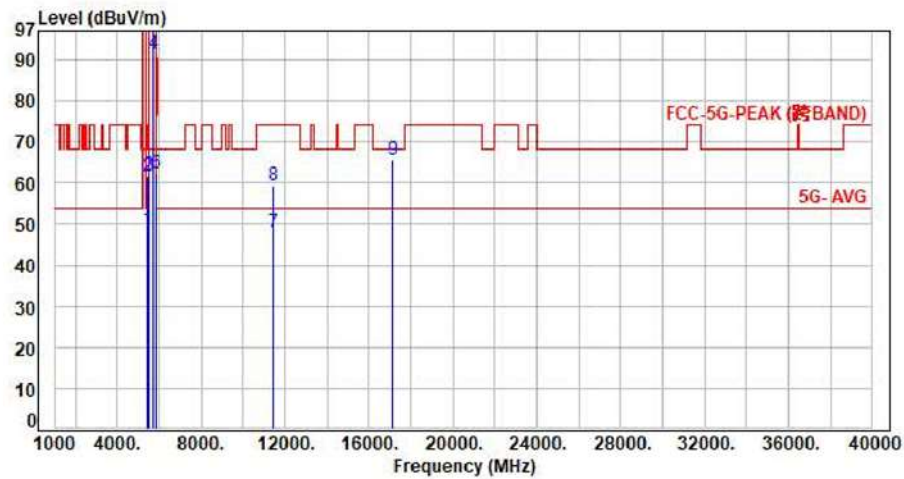


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	41.21	48.76	54.00	-5.24	Average	100	326	P
2	5460.00	7.55	54.13	61.68	74.00	-12.32	Peak	100	326	P
3	5470.00	7.58	54.54	62.12	68.20	-6.08	Peak	100	326	P
4	5720.00	7.43	84.00	91.43	200.00	-108.57	Average	100	326	P
5	5720.00	7.43	93.99	101.42	200.00	-98.58	Peak	100	326	P
6	5850.00	7.47	54.81	62.28	68.20	-5.92	Peak	100	326	P
7	11440.00	18.20	29.81	48.01	54.00	-5.99	Average	100	147	P
8	11440.00	18.20	41.31	59.51	74.00	-14.49	Peak	100	147	P
9	17160.00	24.13	41.35	65.48	68.20	-2.72	Peak	100	125	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

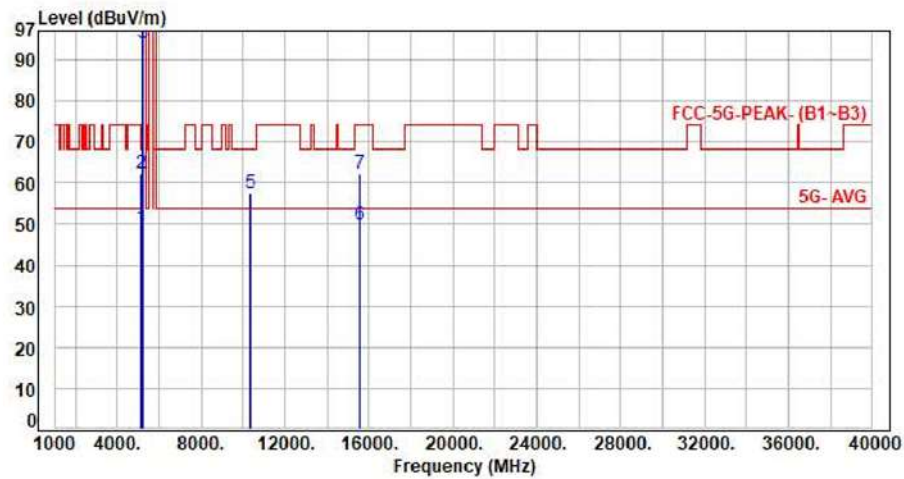


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.40	49.09	54.00	-4.91	Average	100	194	P
2	5150.00	6.69	55.81	62.50	74.00	-11.50	Peak	100	194	P
3	5180.00	6.79	87.31	94.10	200.00	-105.90	Average	100	194	P
4	5180.00	6.79	99.52	106.31	200.00	-93.69	Peak	100	194	P
5	10360.00	16.31	41.38	57.69	68.20	-10.51	Peak	100	221	P
6	15540.00	20.54	29.42	49.96	54.00	-4.04	Average	100	114	P
7	15540.00	20.54	41.61	62.15	74.00	-11.85	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

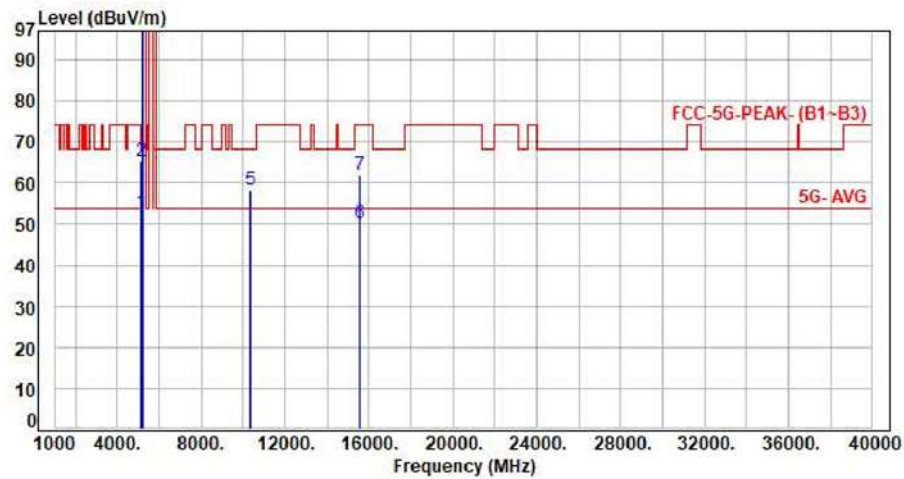


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.98	52.67	54.00	-1.33	Average	142	58	P
2	5150.00	6.69	58.66	65.35	74.00	-8.65	Peak	142	58	P
3	5180.00	6.79	91.43	98.22	200.00	-101.78	Average	142	58	P
4	5180.00	6.79	103.10	109.89	200.00	-90.11	Peak	142	58	P
5	10360.00	16.31	41.82	58.13	68.20	-10.07	Peak	100	228	P
6	15540.00	20.54	29.62	50.16	54.00	-3.84	Average	100	61	P
7	15540.00	20.54	41.29	61.83	74.00	-12.17	Peak	100	61	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

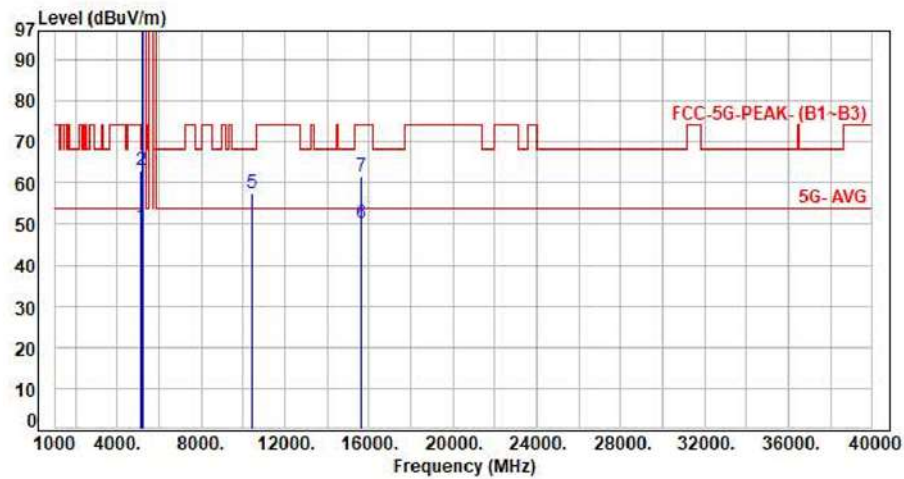


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.56	49.25	54.00	-4.75	Average	100	194	P
2	5150.00	6.69	56.21	62.90	74.00	-11.10	Peak	100	194	P
3	5200.00	6.86	89.11	95.97	200.00	-104.03	Average	100	194	P
4	5200.00	6.86	102.45	109.31	200.00	-90.69	Peak	100	194	P
5	10400.00	16.35	41.33	57.68	68.20	-10.52	Peak	100	146	P
6	15600.00	20.35	29.77	50.12	54.00	-3.88	Average	100	114	P
7	15600.00	20.35	41.38	61.73	74.00	-12.27	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

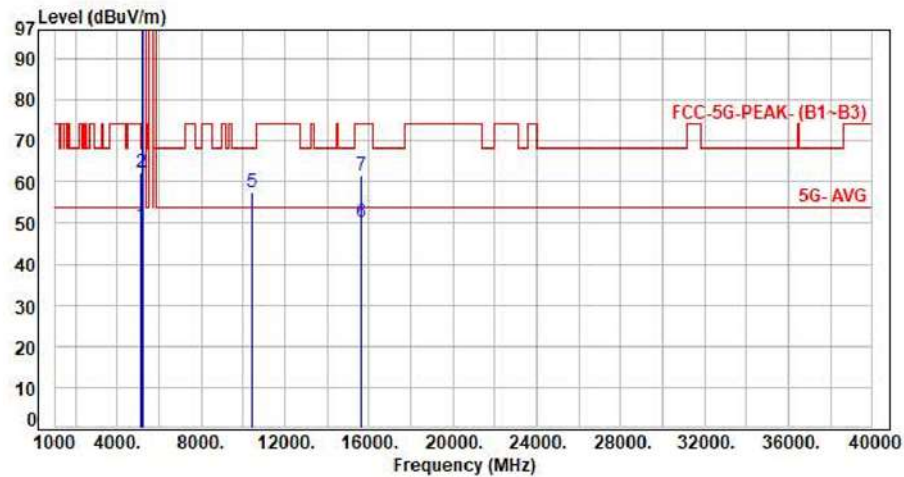


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.71	49.40	54.00	-4.60	Average	158	330	P
2	5150.00	6.69	55.77	62.46	74.00	-11.54	Peak	158	330	P
3	5200.00	6.86	91.66	98.52	200.00	-101.48	Average	158	330	P
4	5200.00	6.86	104.07	110.93	200.00	-89.07	Peak	158	330	P
5	10400.00	16.35	41.22	57.57	68.20	-10.63	Peak	100	135	P
6	15600.00	20.35	29.64	49.99	54.00	-4.01	Average	100	251	P
7	15600.00	20.35	41.33	61.68	74.00	-12.32	Peak	100	251	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

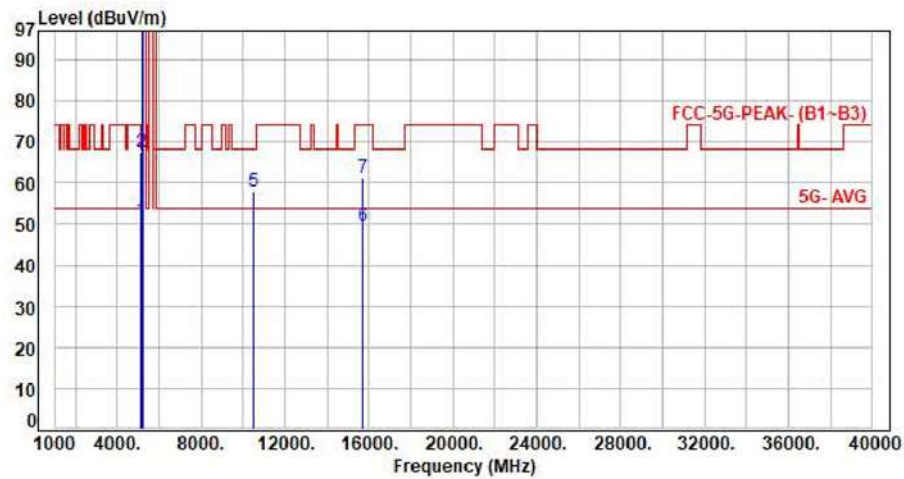


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.29	50.98	54.00	-3.02	Average	100	171	P
2	5150.00	6.69	60.64	67.33	74.00	-6.67	Peak	100	171	P
3	5240.00	6.91	90.46	97.37	200.00	-102.63	Average	100	171	P
4	5240.00	6.91	102.42	109.33	200.00	-90.67	Peak	100	171	P
5	10480.00	16.43	41.36	57.79	68.20	-10.41	Peak	100	114	P
6	15720.00	19.84	29.61	49.45	54.00	-4.55	Average	100	114	P
7	15720.00	19.84	41.35	61.19	74.00	-12.81	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

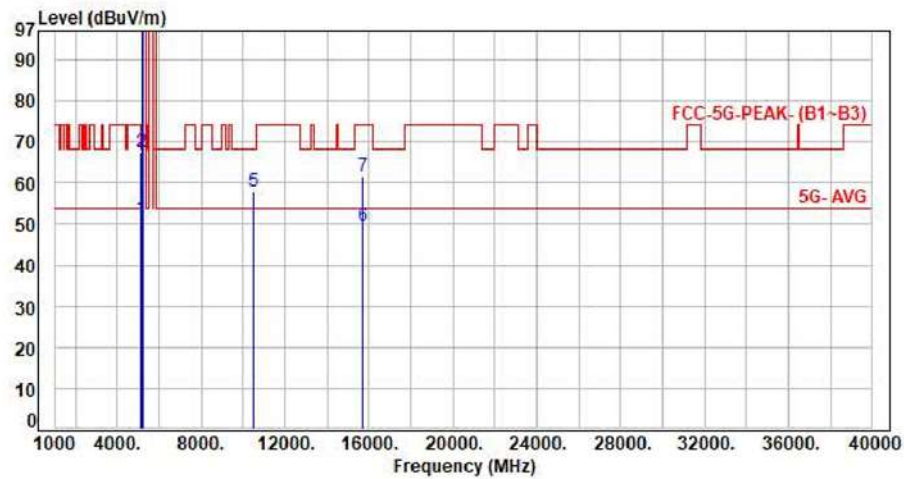


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.63	51.32	54.00	-2.68	Average	100	329	P
2	5150.00	6.69	60.80	67.49	74.00	-6.51	Peak	100	329	P
3	5240.00	6.91	93.48	100.39	200.00	-99.61	Average	100	329	P
4	5240.00	6.91	104.58	111.49	200.00	-88.51	Peak	100	329	P
5	10480.00	16.43	41.38	57.81	68.20	-10.39	Peak	100	167	P
6	15720.00	19.84	29.47	49.31	54.00	-4.69	Average	100	117	P
7	15720.00	19.84	41.63	61.47	74.00	-12.53	Peak	100	117	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

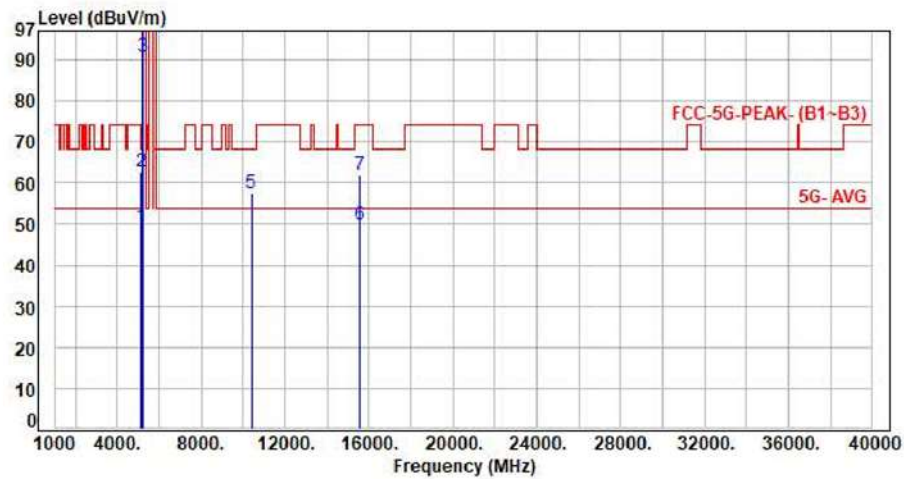


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.71	49.40	54.00	-4.60	Average	100	171	P
2	5150.00	6.69	55.96	62.65	74.00	-11.35	Peak	100	171	P
3	5190.00	6.82	83.91	90.73	200.00	-109.27	Average	100	171	P
4	5190.00	6.82	96.17	102.99	200.00	-97.01	Peak	100	171	P
5	10380.00	16.33	41.29	57.62	68.20	-10.58	Peak	100	114	P
6	15570.00	20.45	29.41	49.86	54.00	-4.14	Average	100	164	P
7	15570.00	20.45	41.62	62.07	74.00	-11.93	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

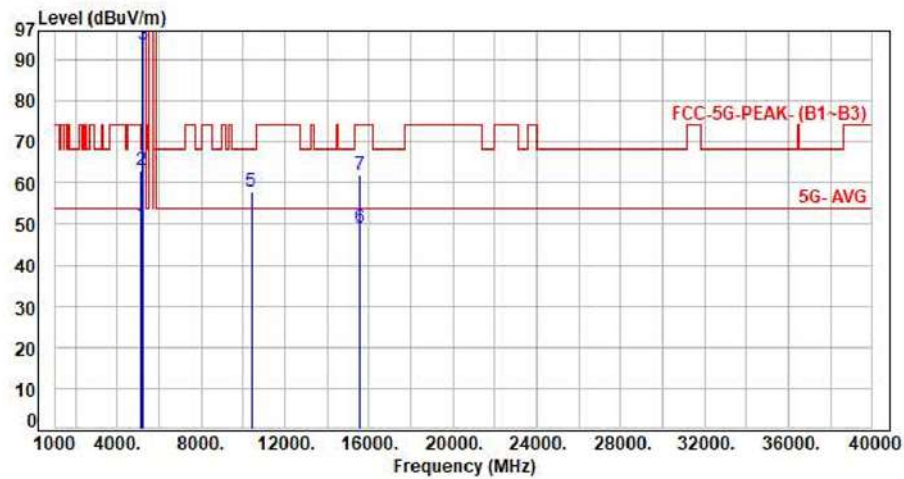


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.02	49.71	54.00	-4.29	Average	100	330	P
2	5150.00	6.69	56.21	62.90	74.00	-11.10	Peak	100	330	P
3	5190.00	6.82	86.82	93.64	200.00	-106.36	Average	100	330	P
4	5190.00	6.82	99.15	105.97	200.00	-94.03	Peak	100	330	P
5	10380.00	16.33	41.70	58.03	68.20	-10.17	Peak	100	195	P
6	15570.00	20.45	28.61	49.06	54.00	-4.94	Average	100	296	P
7	15570.00	20.45	41.62	62.07	74.00	-11.93	Peak	100	296	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

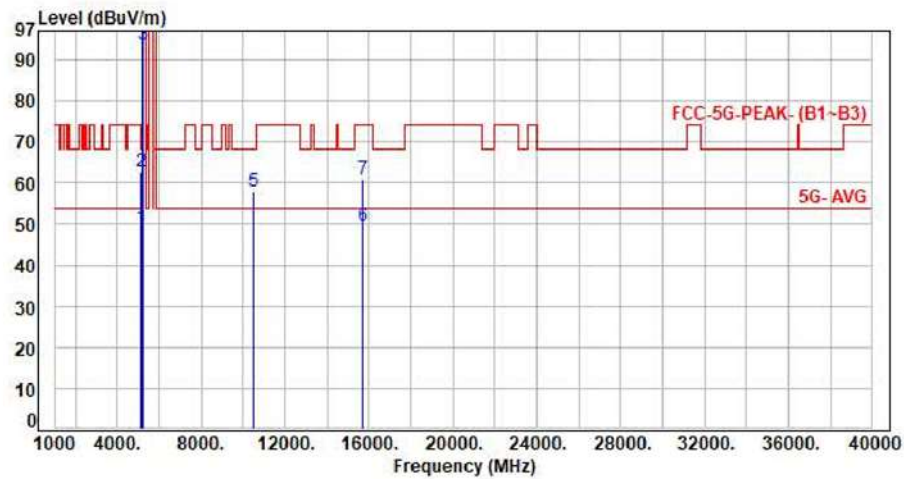


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.45	49.14	54.00	-4.86	Average	100	170	P
2	5150.00	6.69	56.08	62.77	74.00	-11.23	Peak	100	170	P
3	5230.00	6.90	86.69	93.59	200.00	-106.41	Average	100	170	P
4	5230.00	6.90	98.88	105.78	200.00	-94.22	Peak	100	170	P
5	10460.00	16.38	41.42	57.80	68.20	-10.40	Peak	100	225	P
6	15690.00	19.94	29.41	49.35	54.00	-4.65	Average	100	131	P
7	15690.00	19.94	41.03	60.97	74.00	-13.03	Peak	100	131	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

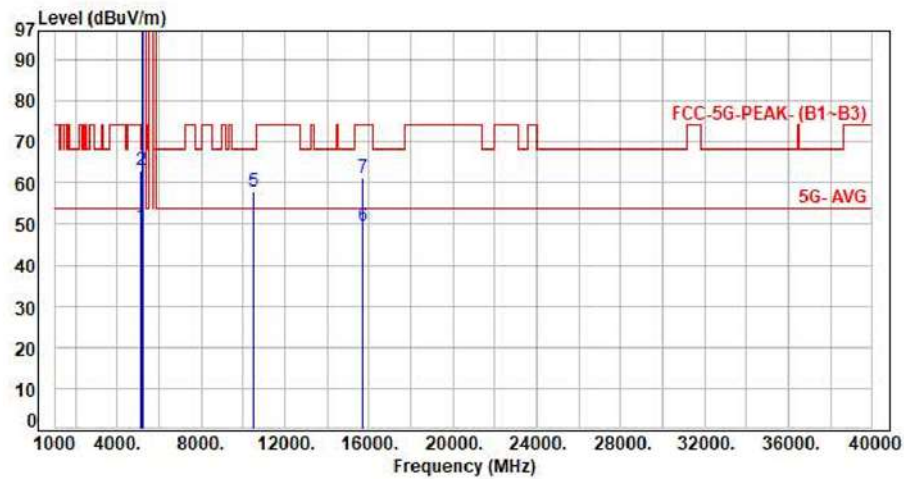


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.67	49.36	54.00	-4.64	Average	181	330	P
2	5150.00	6.69	56.26	62.95	74.00	-11.05	Peak	181	330	P
3	5230.00	6.90	88.46	95.36	200.00	-104.64	Average	181	330	P
4	5230.00	6.90	100.51	107.41	200.00	-92.59	Peak	181	330	P
5	10460.00	16.38	41.63	58.01	68.20	-10.19	Peak	100	184	P
6	15690.00	19.94	29.41	49.35	54.00	-4.65	Average	100	166	P
7	15690.00	19.94	41.38	61.32	74.00	-12.68	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

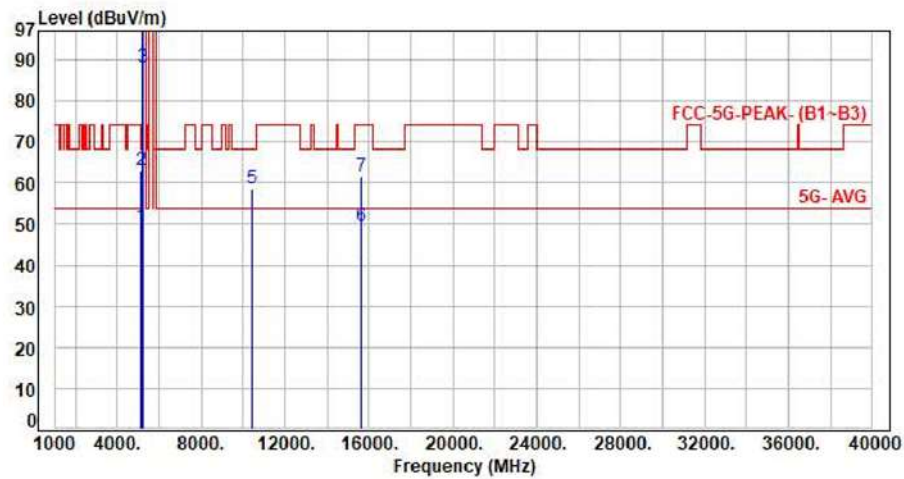


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.79	49.48	54.00	-4.52	Average	100	170	P
2	5150.00	6.69	56.21	62.90	74.00	-11.10	Peak	100	170	P
3	5210.00	6.87	81.31	88.18	200.00	-111.82	Average	100	170	P
4	5210.00	6.87	91.28	98.15	200.00	-101.85	Peak	100	170	P
5	10420.00	16.35	42.14	58.49	68.20	-9.71	Peak	100	114	P
6	15630.00	20.18	29.41	49.59	54.00	-4.41	Average	100	131	P
7	15630.00	20.18	41.51	61.69	74.00	-12.31	Peak	100	131	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

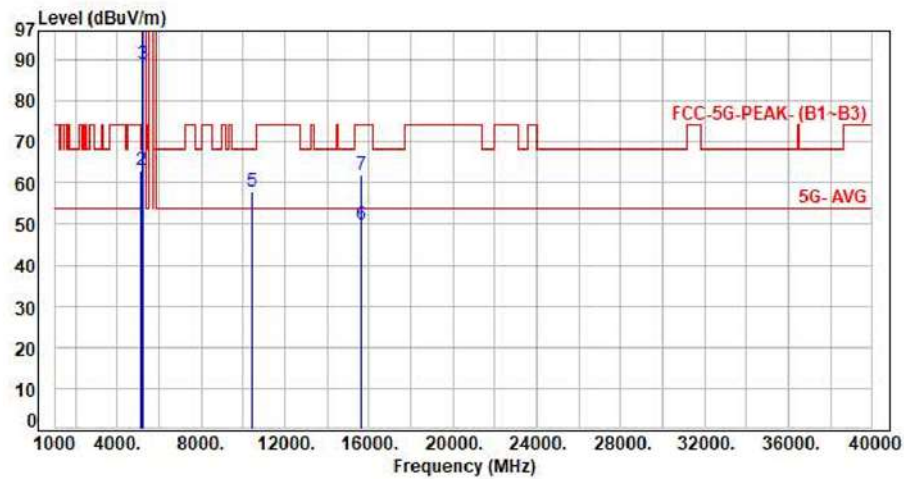


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.32	50.01	54.00	-3.99	Average	100	27	P
2	5150.00	6.69	56.25	62.94	74.00	-11.06	Peak	100	27	P
3	5210.00	6.87	81.93	88.80	200.00	-111.20	Average	100	27	P
4	5210.00	6.87	92.97	99.84	200.00	-100.16	Peak	100	27	P
5	10420.00	16.35	41.53	57.88	68.20	-10.32	Peak	100	196	P
6	15630.00	20.18	29.74	49.92	54.00	-4.08	Average	100	174	P
7	15630.00	20.18	41.82	62.00	74.00	-12.00	Peak	100	174	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

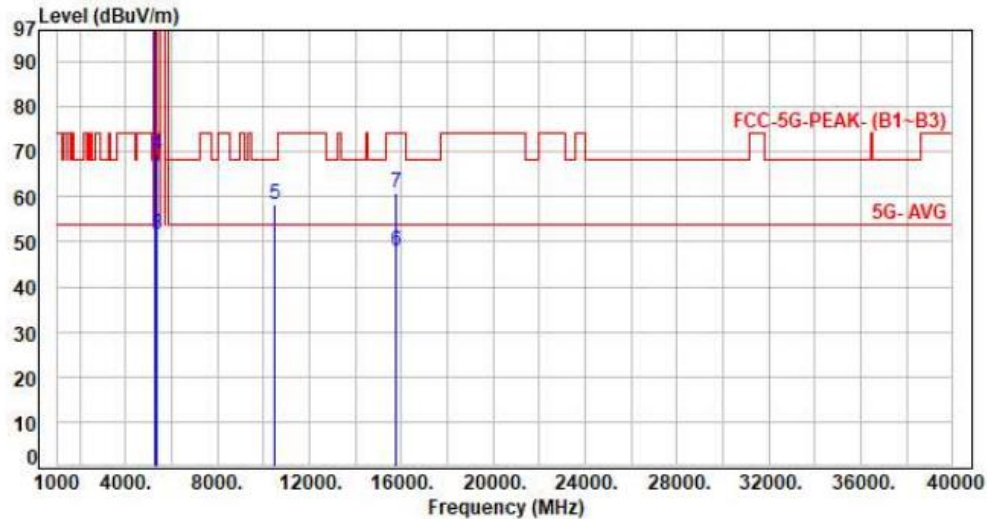

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	89.29	96.28	200.00	-103.72	Average	100	240	P
2	5260.00	6.99	102.62	109.61	200.00	-90.39	Peak	100	240	P
3	5350.00	7.27	44.23	51.50	54.00	-2.50	Average	100	240	P
4	5350.00	7.27	62.19	69.46	74.00	-4.54	Peak	100	240	P
5	10520.00	16.55	41.78	58.33	68.20	-9.87	Peak	100	144	P
6	15780.00	19.61	28.41	48.02	54.00	-5.98	Average	100	194	P
7	15780.00	19.61	41.20	60.81	74.00	-13.19	Peak	100	194	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

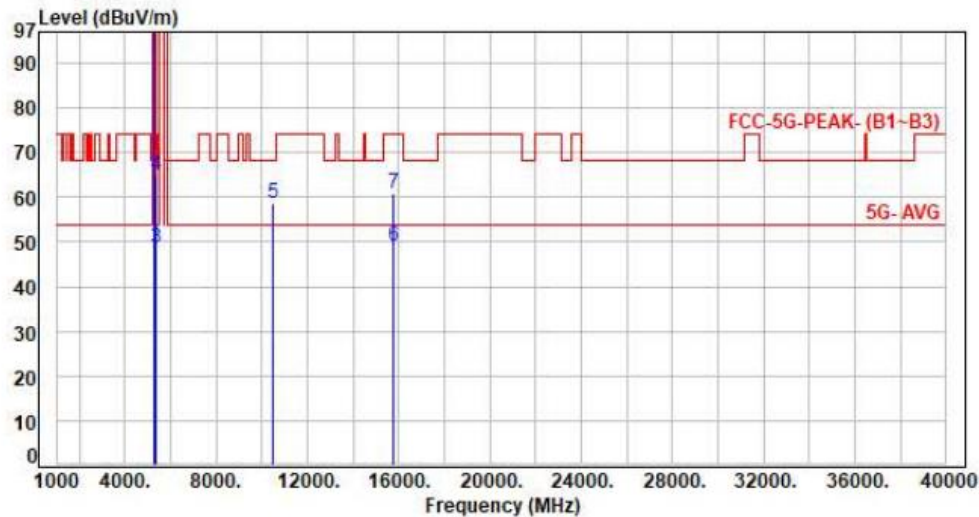

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	91.60	98.59	200.00	-101.41	Average	100	327	P
2	5260.00	6.99	103.25	110.24	200.00	-89.76	Peak	100	327	P
3	5350.00	7.27	41.48	48.75	54.00	-5.25	Average	100	327	P
4	5350.00	7.27	57.62	64.89	74.00	-9.11	Peak	100	327	P
5	10520.00	16.55	41.96	58.51	68.20	-9.69	Peak	100	167	P
6	15780.00	19.61	29.41	49.02	54.00	-4.98	Average	100	119	P
7	15780.00	19.61	41.38	60.99	74.00	-13.01	Peak	100	119	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

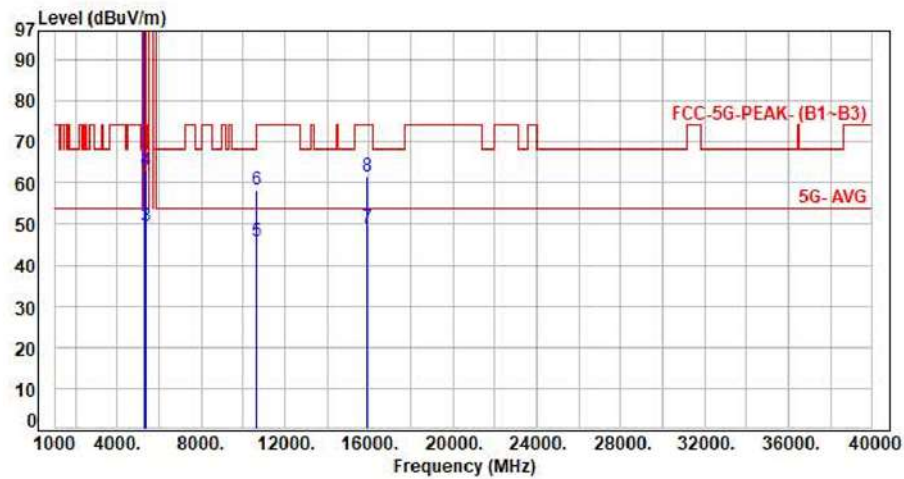

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	90.36	97.56	200.00	-102.44	Average	100	241	P
2	5300.00	7.20	102.30	109.50	200.00	-90.50	Peak	100	241	P
3	5350.00	7.27	42.19	49.46	54.00	-4.54	Average	100	241	P
4	5350.00	7.27	55.88	63.15	74.00	-10.85	Peak	100	241	P
5	10600.00	16.78	28.96	45.74	54.00	-8.26	Average	100	169	P
6	10600.00	16.78	41.47	58.25	74.00	-15.75	Peak	100	169	P
7	15900.00	19.54	29.42	48.96	54.00	-5.04	Average	100	146	P
8	15900.00	19.54	41.92	61.46	74.00	-12.54	Peak	100	146	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

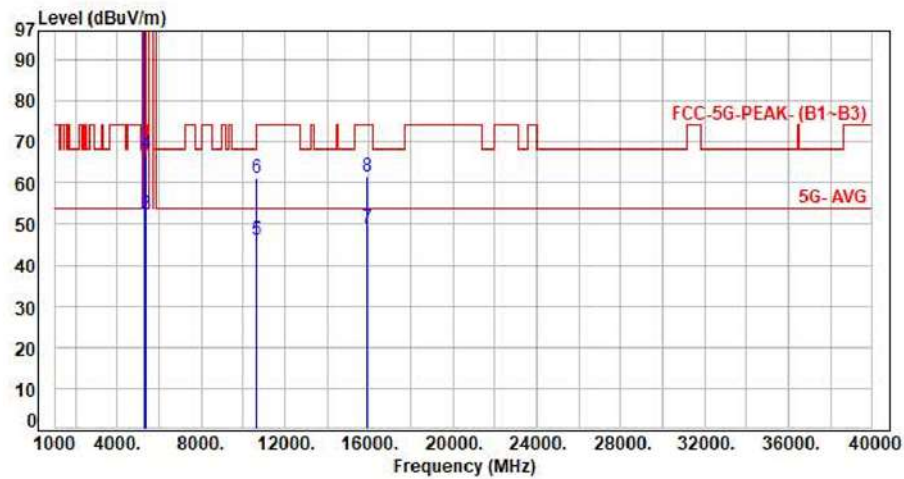

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	91.20	98.40	200.00	-101.60	Average	249	29	P
2	5300.00	7.20	104.40	111.60	200.00	-88.40	Peak	249	29	P
3	5350.00	7.27	45.25	52.52	54.00	-1.48	Average	249	29	P
4	5350.00	7.27	59.69	66.96	74.00	-7.04	Peak	249	29	P
5	10600.00	16.78	29.47	46.25	54.00	-7.75	Average	100	139	P
6	10600.00	16.78	44.30	61.08	74.00	-12.92	Peak	100	139	P
7	15900.00	19.54	29.47	49.01	54.00	-4.99	Average	100	115	P
8	15900.00	19.54	41.92	61.46	74.00	-12.54	Peak	100	115	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

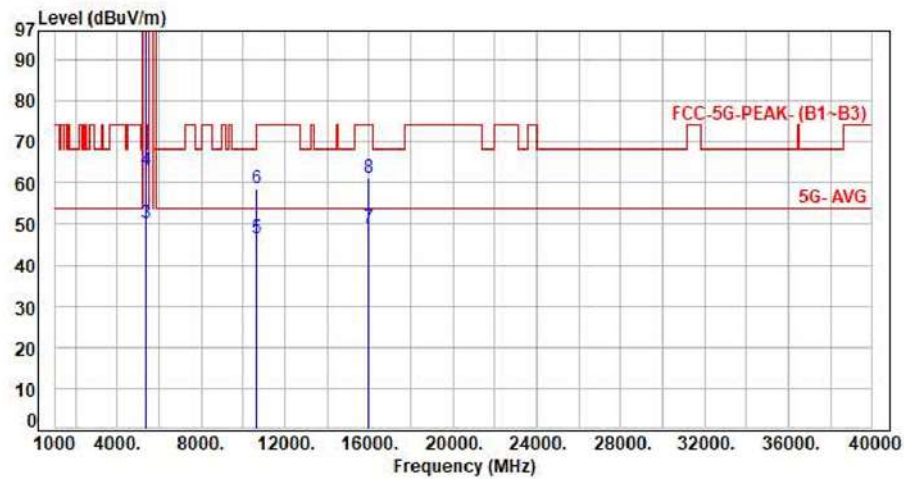

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	88.40	95.63	200.00	-104.37	Average	100	236	P
2	5320.00	7.23	101.94	109.17	200.00	-90.83	Peak	100	236	P
3	5350.00	7.27	42.90	50.17	54.00	-3.83	Average	100	236	P
4	5350.00	7.27	55.83	63.10	74.00	-10.90	Peak	100	236	P
5	10640.00	16.96	29.64	46.60	54.00	-7.40	Average	100	174	P
6	10640.00	16.96	41.81	58.77	74.00	-15.23	Peak	100	174	P
7	15960.00	19.50	29.64	49.14	54.00	-4.86	Average	100	199	P
8	15960.00	19.50	41.82	61.32	74.00	-12.68	Peak	100	199	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

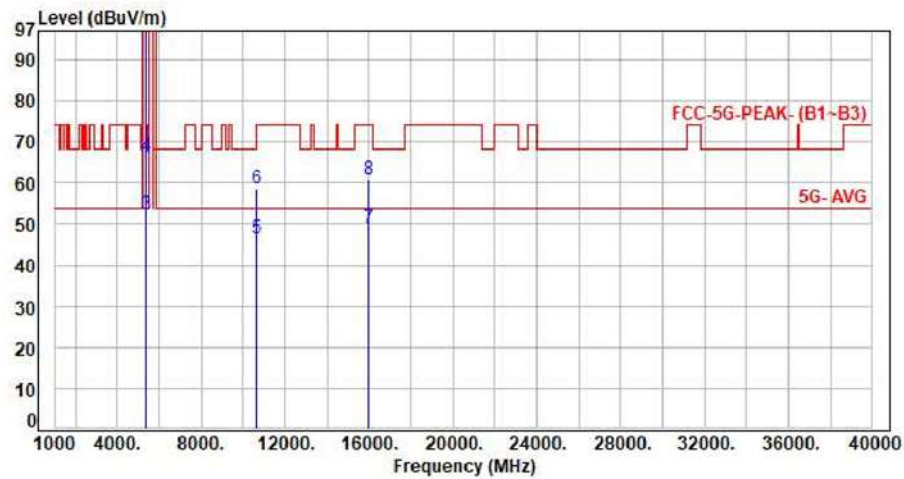


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	89.21	96.44	200.00	-103.56	Average	100	37	P
2	5320.00	7.23	102.51	109.74	200.00	-90.26	Peak	100	37	P
3	5350.00	7.27	45.15	52.42	54.00	-1.58	Average	100	37	P
4	5350.00	7.27	59.23	66.50	74.00	-7.50	Peak	100	37	P
5	10640.00	16.96	29.45	46.41	54.00	-7.59	Average	100	166	P
6	10640.00	16.96	41.81	58.77	74.00	-15.23	Peak	100	166	P
7	15960.00	19.50	29.41	48.91	54.00	-5.09	Average	100	254	P
8	15960.00	19.50	41.38	60.88	74.00	-13.12	Peak	100	254	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

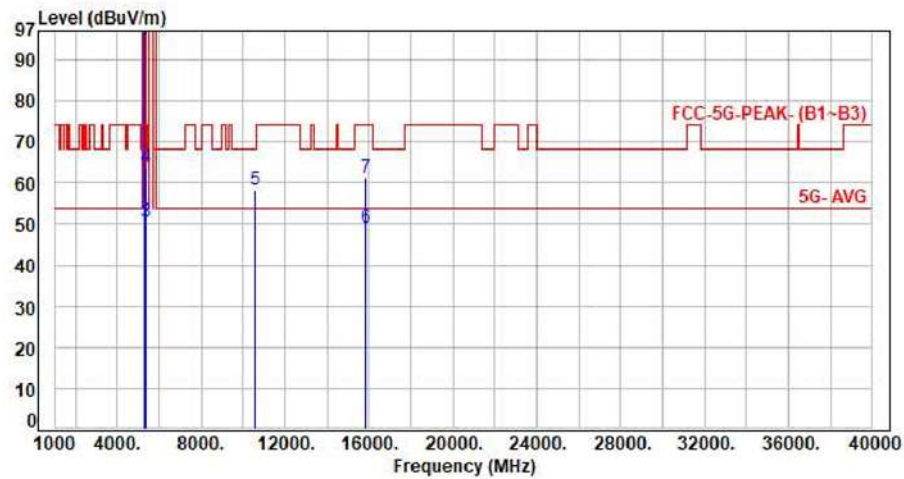


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	87.90	94.94	200.00	-105.06	Average	100	171	P
2	5270.00	7.04	100.66	107.70	200.00	-92.30	Peak	100	171	P
3	5350.00	7.27	43.14	50.41	54.00	-3.59	Average	100	171	P
4	5350.00	7.27	56.55	63.82	74.00	-10.18	Peak	100	171	P
5	10540.00	16.65	41.50	58.15	68.20	-10.05	Peak	100	214	P
6	15810.00	19.51	29.41	48.92	54.00	-5.08	Average	100	155	P
7	15810.00	19.51	41.60	61.11	74.00	-12.89	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

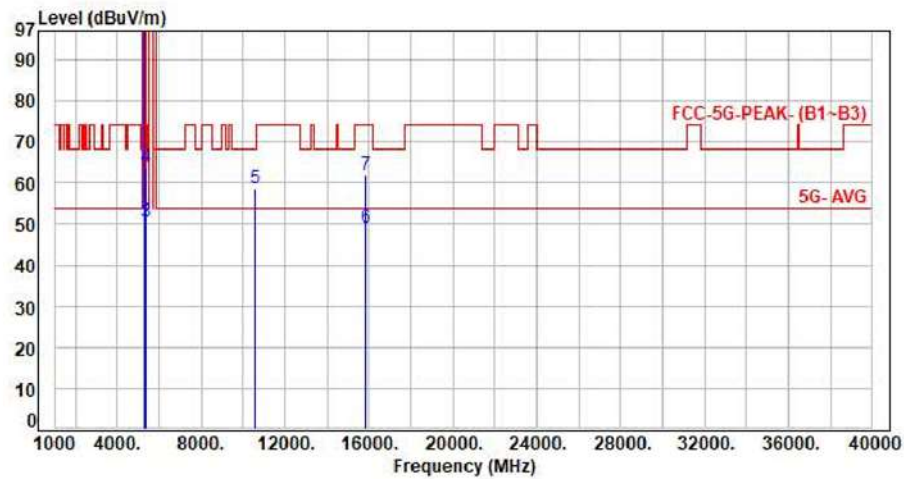


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	88.83	95.87	200.00	-104.13	Average	100	330	P
2	5270.00	7.04	99.90	106.94	200.00	-93.06	Peak	100	330	P
3	5350.00	7.27	43.21	50.48	54.00	-3.52	Average	100	330	P
4	5350.00	7.27	56.39	63.66	74.00	-10.34	Peak	100	330	P
5	10540.00	16.65	41.91	58.56	68.20	-9.64	Peak	100	193	P
6	15810.00	19.51	29.64	49.15	54.00	-4.85	Average	100	164	P
7	15810.00	19.51	42.51	62.02	74.00	-11.98	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

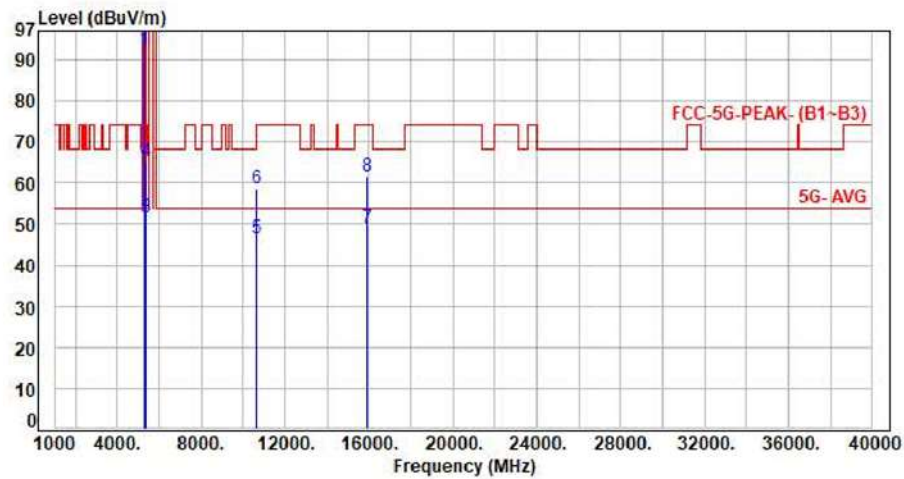


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	85.35	92.57	200.00	-107.43	Average	100	170	P
2	5310.00	7.22	96.52	103.74	200.00	-96.26	Peak	100	170	P
3	5350.00	7.27	44.35	51.62	54.00	-2.38	Average	100	170	P
4	5350.00	7.27	57.99	65.26	74.00	-8.74	Peak	100	170	P
5	10620.00	16.87	29.47	46.34	54.00	-7.66	Average	100	131	P
6	10620.00	16.87	41.86	58.73	74.00	-15.27	Peak	100	131	P
7	15930.00	19.51	29.41	48.92	54.00	-5.08	Average	100	241	P
8	15930.00	19.51	41.92	61.43	74.00	-12.57	Peak	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

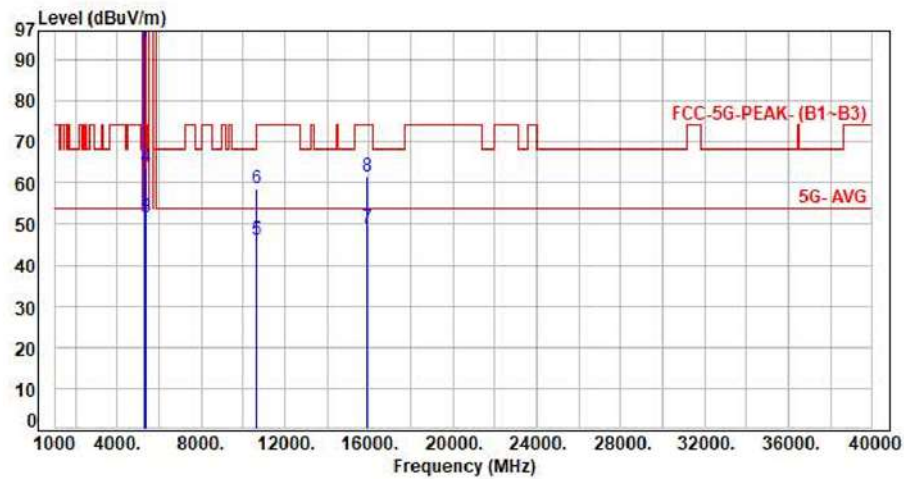

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	86.95	94.17	200.00	-105.83	Average	226	331	P
2	5310.00	7.22	98.71	105.93	200.00	-94.07	Peak	226	331	P
3	5350.00	7.27	44.31	51.58	54.00	-2.42	Average	226	331	P
4	5350.00	7.27	56.46	63.73	74.00	-10.27	Peak	226	331	P
5	10620.00	16.87	29.29	46.16	54.00	-7.84	Average	100	131	P
6	10620.00	16.87	41.88	58.75	74.00	-15.25	Peak	100	131	P
7	15930.00	19.51	29.41	48.92	54.00	-5.08	Average	100	218	P
8	15930.00	19.51	41.95	61.46	74.00	-12.54	Peak	100	218	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

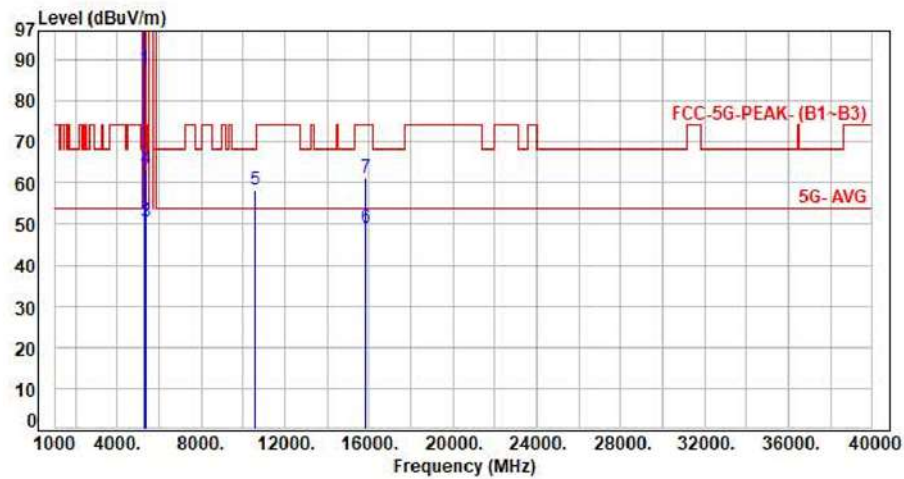


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	80.53	87.68	200.00	-112.32	Average	100	239	P
2	5290.00	7.15	94.42	101.57	200.00	-98.43	Peak	100	239	P
3	5350.00	7.27	43.16	50.43	54.00	-3.57	Average	100	239	P
4	5350.00	7.27	56.27	63.54	74.00	-10.46	Peak	100	239	P
5	10580.00	16.74	41.61	58.35	68.20	-9.85	Peak	100	164	P
6	15870.00	19.54	29.40	48.94	54.00	-5.06	Average	100	174	P
7	15870.00	19.54	41.65	61.19	74.00	-12.81	Peak	100	174	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

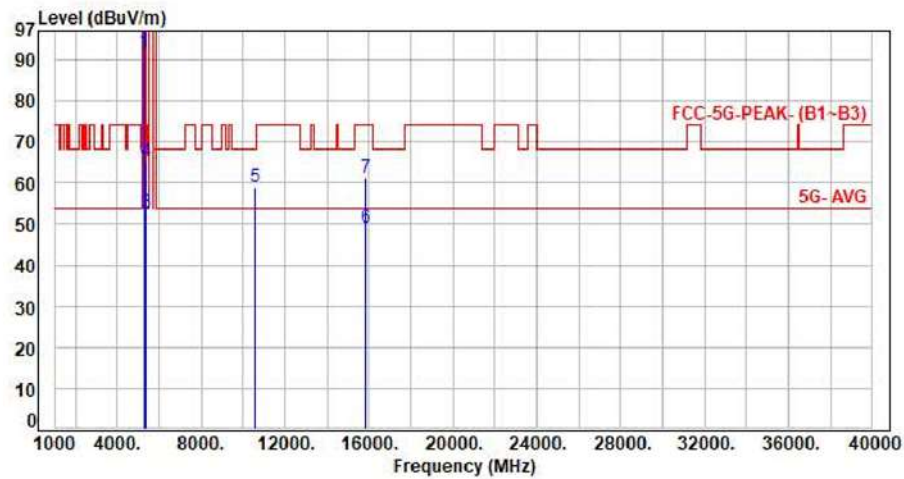


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	84.72	91.87	200.00	-108.13	Average	119	27	P
2	5290.00	7.15	95.77	102.92	200.00	-97.08	Peak	119	27	P
3	5350.00	7.27	45.48	52.75	54.00	-1.25	Average	119	27	P
4	5350.00	7.27	58.08	65.35	74.00	-8.65	Peak	119	27	P
5	10580.00	16.74	42.18	58.92	68.20	-9.28	Peak	100	159	P
6	15870.00	19.54	29.40	48.94	54.00	-5.06	Average	100	152	P
7	15870.00	19.54	41.80	61.34	74.00	-12.66	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

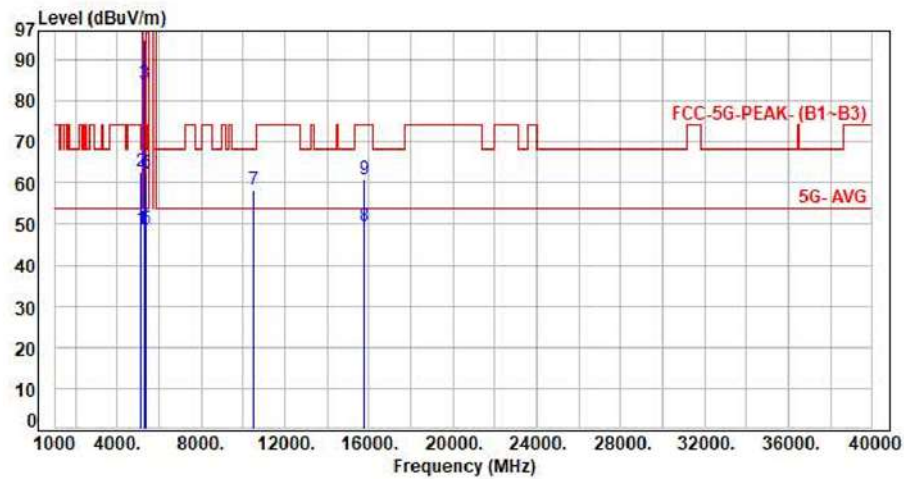


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.82	48.51	54.00	-5.49	Average	100	168	P
2	5150.00	6.69	56.09	62.78	74.00	-11.22	Peak	100	168	P
3	5250.00	6.92	77.32	84.24	200.00	-115.76	Average	100	168	P
4	5250.00	6.92	87.88	94.80	200.00	-105.20	Peak	100	168	P
5	5350.00	7.27	41.55	48.82	54.00	-5.18	Average	100	168	P
6	5350.00	7.27	55.15	62.42	74.00	-11.58	Peak	100	168	P
7	10500.00	16.48	41.69	58.17	68.20	-10.03	Peak	100	118	P
8	15750.00	19.75	29.68	49.43	54.00	-4.57	Average	100	226	P
9	15750.00	19.75	41.29	61.04	74.00	-12.96	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

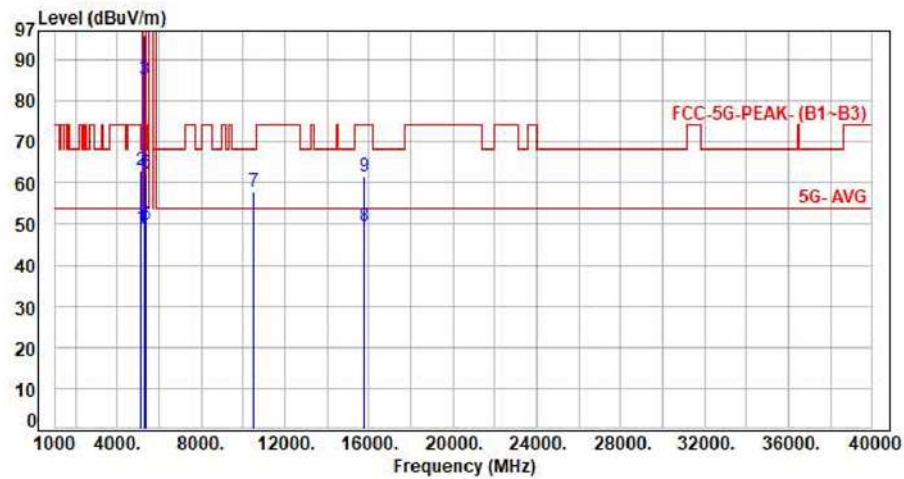


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.48	49.17	54.00	-4.83	Average	100	303	P
2	5150.00	6.69	56.27	62.96	74.00	-11.04	Peak	100	303	P
3	5250.00	6.92	78.22	85.14	200.00	-114.86	Average	100	303	P
4	5250.00	6.92	89.01	95.93	200.00	-104.07	Peak	100	303	P
5	5350.00	7.27	42.61	49.88	54.00	-4.12	Average	100	303	P
6	5350.00	7.27	55.19	62.46	74.00	-11.54	Peak	100	303	P
7	10500.00	16.48	41.39	57.87	68.20	-10.33	Peak	100	138	P
8	15750.00	19.75	29.77	49.52	54.00	-4.48	Average	100	118	P
9	15750.00	19.75	41.70	61.45	74.00	-12.55	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

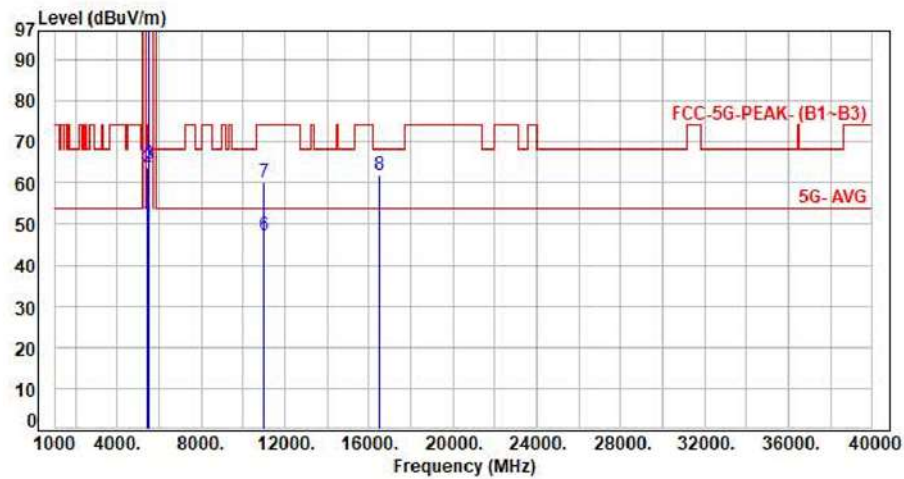


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.07	50.62	54.00	-3.38	Average	100	236	P
2	5460.00	7.55	56.13	63.68	74.00	-10.32	Peak	100	236	P
3	5470.00	7.58	56.86	64.44	68.20	-3.76	Peak	100	236	P
4	5500.00	7.68	89.02	96.70	200.00	-103.30	Average	100	236	P
5	5500.00	7.68	102.24	109.92	200.00	-90.08	Peak	100	236	P
6	11000.00	17.78	29.61	47.39	54.00	-6.61	Average	100	165	P
7	11000.00	17.78	42.19	59.97	74.00	-14.03	Peak	100	165	P
8	16500.00	20.78	41.28	62.06	68.20	-6.14	Peak	100	117	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

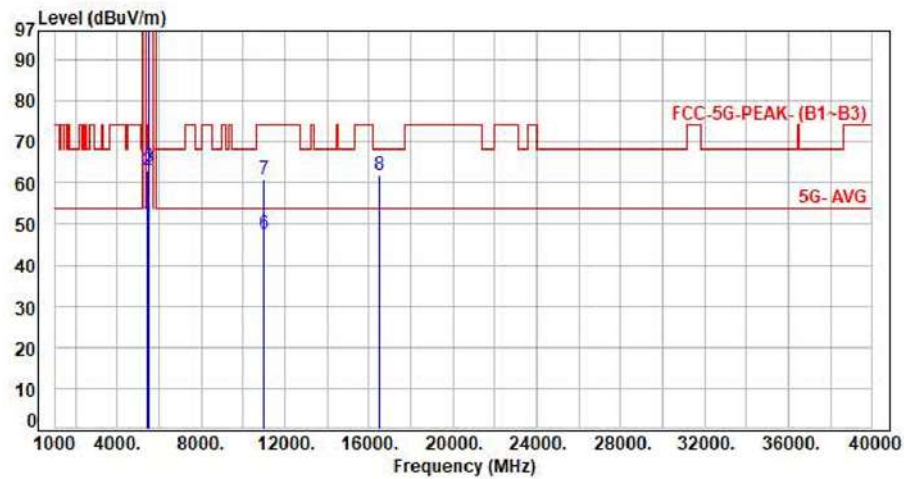


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.93	50.48	54.00	-3.52	Average	168	41	P
2	5460.00	7.55	55.66	63.21	74.00	-10.79	Peak	168	41	P
3	5470.00	7.58	56.23	63.81	68.20	-4.39	Peak	168	41	P
4	5500.00	7.68	90.41	98.09	200.00	-101.91	Average	168	41	P
5	5500.00	7.68	102.91	110.59	200.00	-89.41	Peak	168	41	P
6	11000.00	17.78	29.64	47.42	54.00	-6.58	Average	100	156	P
7	11000.00	17.78	43.05	60.83	74.00	-13.17	Peak	100	156	P
8	16500.00	20.78	41.01	61.79	68.20	-6.41	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

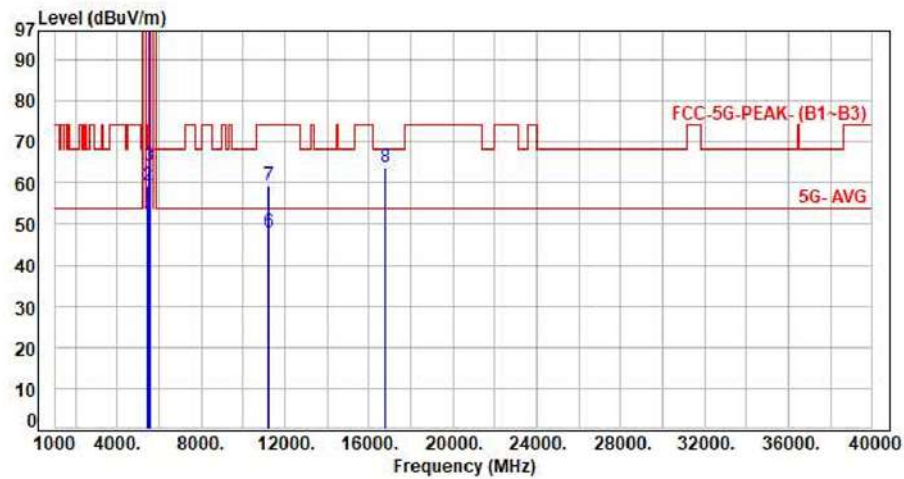

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.92	50.47	54.00	-3.53	Average	100	128	P
2	5460.00	7.55	52.01	59.56	74.00	-14.44	Peak	100	128	P
3	5470.00	7.58	56.64	64.22	68.20	-3.98	Peak	100	128	P
4	5600.00	7.51	90.88	98.39	200.00	-101.61	Average	100	128	P
5	5600.00	7.51	101.29	108.80	200.00	-91.20	Peak	100	128	P
6	11200.00	17.89	29.88	47.77	54.00	-6.23	Average	100	156	P
7	11200.00	17.89	41.35	59.24	74.00	-14.76	Peak	100	156	P
8	16800.00	22.29	41.62	63.91	68.20	-4.29	Peak	100	196	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

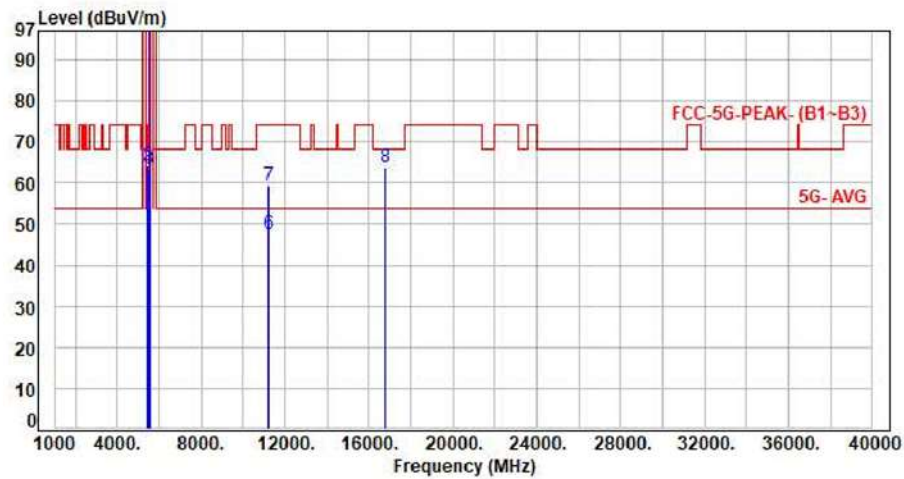

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.75	50.30	54.00	-3.70	Average	100	43	P
2	5460.00	7.55	56.58	64.13	74.00	-9.87	Peak	100	43	P
3	5470.00	7.58	55.83	63.41	68.20	-4.79	Peak	100	43	P
4	5600.00	7.51	91.79	99.30	200.00	-100.70	Average	100	43	P
5	5600.00	7.51	103.83	111.34	200.00	-88.66	Peak	100	43	P
6	11200.00	17.89	29.66	47.55	54.00	-6.45	Average	100	186	P
7	11200.00	17.89	41.34	59.23	74.00	-14.77	Peak	100	186	P
8	16800.00	22.29	41.61	63.90	68.20	-4.30	Peak	100	199	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

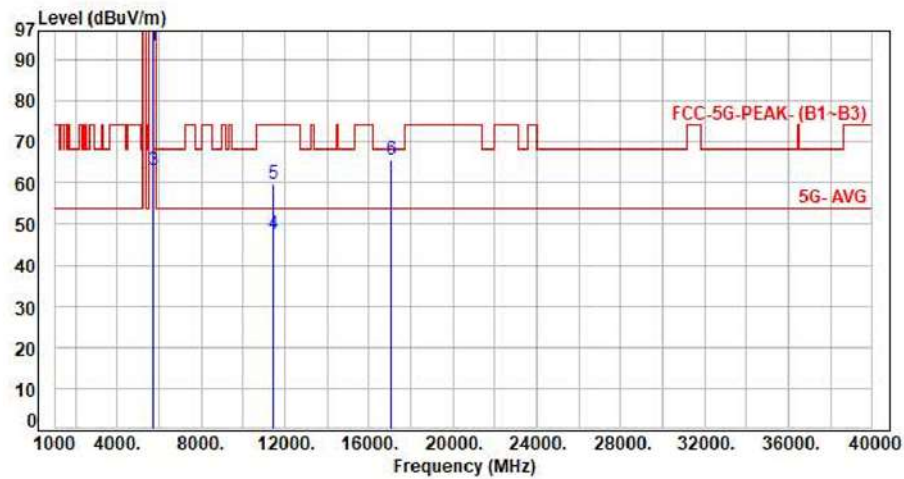


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	85.83	93.26	200.00	-106.74	Average	100	5	P
2	5700.00	7.43	98.40	105.83	200.00	-94.17	Peak	100	5	P
3	5725.00	7.43	55.81	63.24	68.20	-4.96	Peak	100	5	P
4	11400.00	18.08	29.64	47.72	54.00	-6.28	Average	100	162	P
5	11400.00	18.08	41.71	59.79	74.00	-14.21	Peak	100	162	P
6	17100.00	24.04	41.62	65.66	68.20	-2.54	Peak	100	213	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

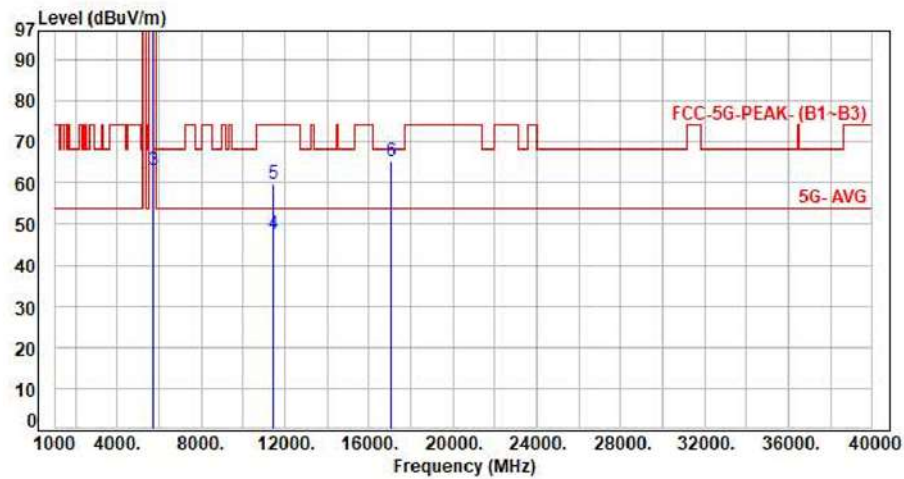


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	88.15	95.58	200.00	-104.42	Average	100	309	P
2	5700.00	7.43	100.86	108.29	200.00	-91.71	Peak	100	309	P
3	5725.00	7.43	55.64	63.07	68.20	-5.13	Peak	100	309	P
4	11400.00	18.08	29.62	47.70	54.00	-6.30	Average	100	123	P
5	11400.00	18.08	41.67	59.75	74.00	-14.25	Peak	100	123	P
6	17100.00	24.04	41.30	65.34	68.20	-2.86	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

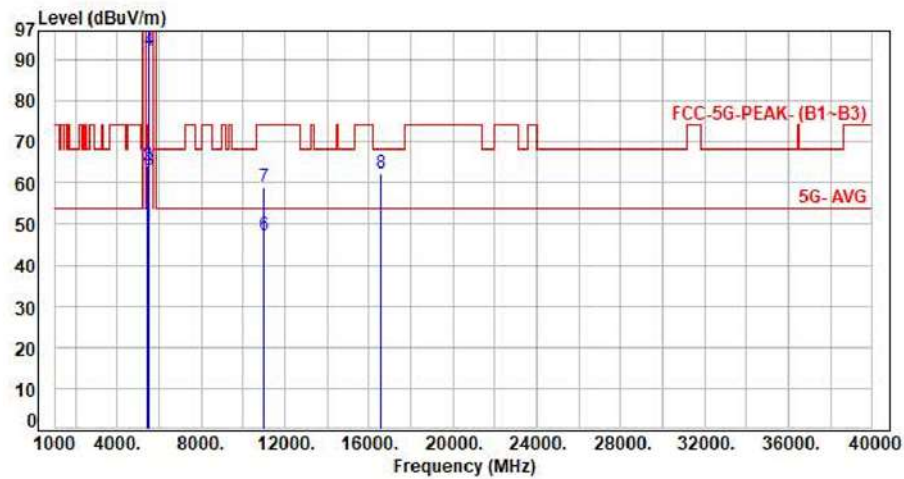

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.43	49.98	54.00	-4.02	Average	100	238	P
2	5460.00	7.55	56.66	64.21	74.00	-9.79	Peak	100	238	P
3	5470.00	7.58	55.36	62.94	68.20	-5.26	Peak	100	238	P
4	5510.00	7.66	84.46	92.12	200.00	-107.88	Average	100	238	P
5	5510.00	7.66	97.06	104.72	200.00	-95.28	Peak	100	238	P
6	11020.00	17.81	29.40	47.21	54.00	-6.79	Average	100	152	P
7	11020.00	17.81	41.33	59.14	74.00	-14.86	Peak	100	152	P
8	16530.00	21.02	41.31	62.33	68.20	-5.87	Peak	100	148	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

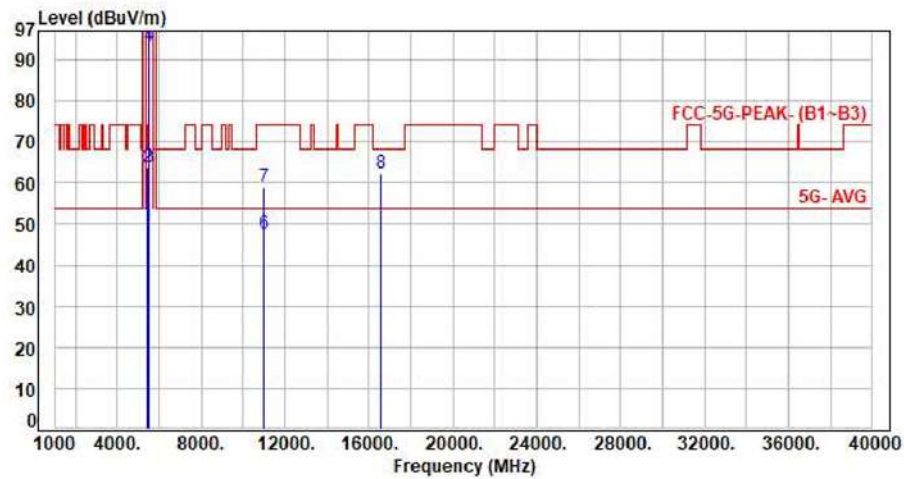

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.45	50.00	54.00	-4.00	Average	100	327	P
2	5460.00	7.55	56.20	63.75	74.00	-10.25	Peak	100	327	P
3	5470.00	7.58	56.37	63.95	68.20	-4.25	Peak	100	327	P
4	5510.00	7.66	85.68	93.34	200.00	-106.66	Average	100	327	P
5	5510.00	7.66	98.11	105.77	200.00	-94.23	Peak	100	327	P
6	11020.00	17.81	29.73	47.54	54.00	-6.46	Average	100	205	P
7	11020.00	17.81	41.08	58.89	74.00	-15.11	Peak	100	205	P
8	16530.00	21.02	41.41	62.43	68.20	-5.77	Peak	100	199	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

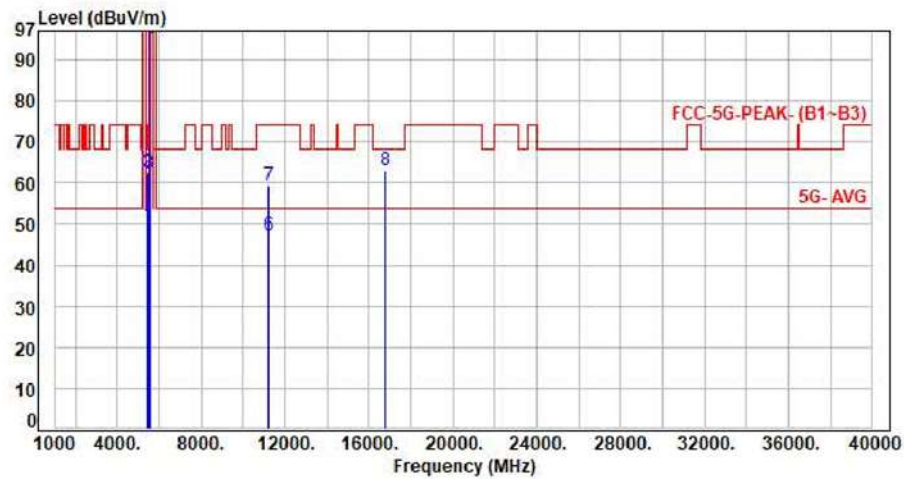

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.28	49.83	54.00	-4.17	Average	100	236	P
2	5460.00	7.55	55.17	62.72	74.00	-11.28	Peak	100	236	P
3	5470.00	7.58	54.76	62.34	68.20	-5.86	Peak	100	236	P
4	5590.00	7.53	87.70	95.23	200.00	-104.77	Average	100	236	P
5	5590.00	7.53	99.08	106.61	200.00	-93.39	Peak	100	236	P
6	11180.00	17.87	29.34	47.21	54.00	-6.79	Average	100	206	P
7	11180.00	17.87	41.50	59.37	74.00	-14.63	Peak	100	206	P
8	16770.00	22.21	40.80	63.01	68.20	-5.19	Peak	100	128	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

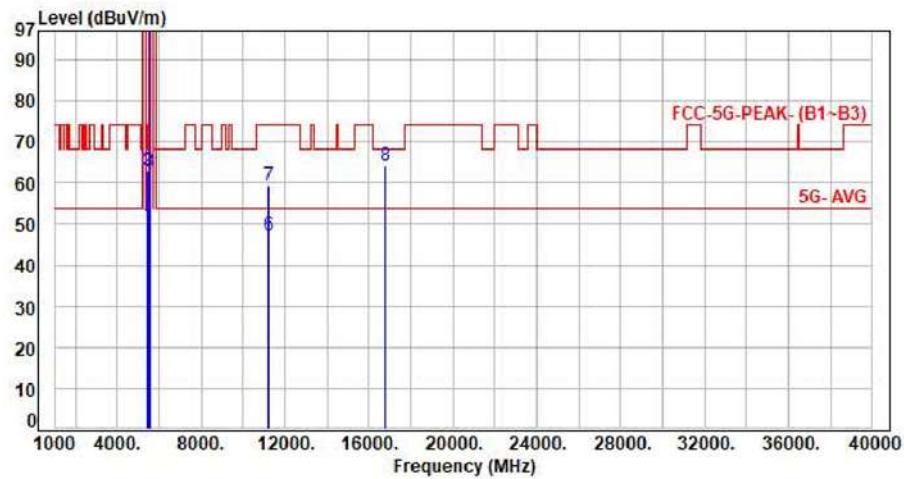


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.25	49.80	54.00	-4.20	Average	100	318	P
2	5460.00	7.55	55.49	63.04	74.00	-10.96	Peak	100	318	P
3	5470.00	7.58	55.25	62.83	68.20	-5.37	Peak	100	318	P
4	5590.00	7.53	88.39	95.92	200.00	-104.08	Average	100	318	P
5	5590.00	7.53	99.81	107.34	200.00	-92.66	Peak	100	318	P
6	11180.00	17.87	29.36	47.23	54.00	-6.77	Average	100	162	P
7	11180.00	17.87	41.68	59.55	74.00	-14.45	Peak	100	162	P
8	16770.00	22.21	41.81	64.02	68.20	-4.18	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

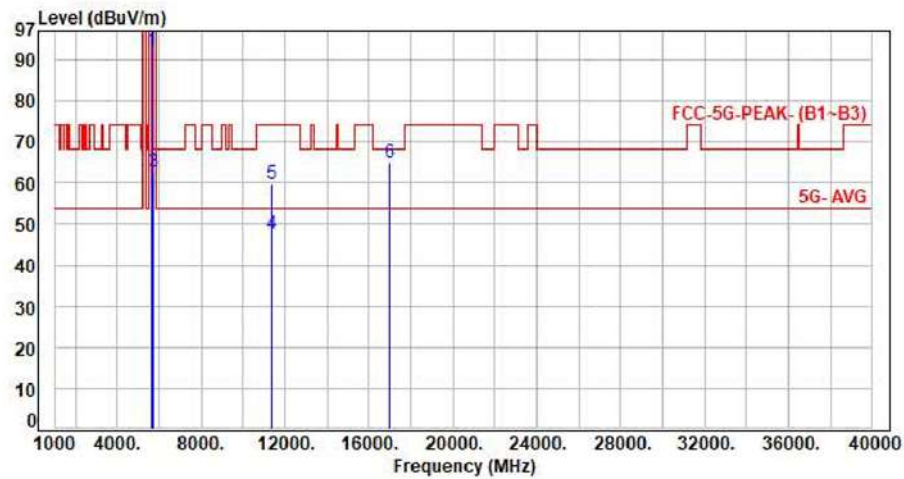


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	84.79	92.27	200.00	-107.73	Average	100	4	P
2	5670.00	7.48	95.36	102.84	200.00	-97.16	Peak	100	4	P
3	5725.00	7.43	55.35	62.78	68.20	-5.42	Peak	100	4	P
4	11340.00	17.96	29.67	47.63	54.00	-6.37	Average	100	115	P
5	11340.00	17.96	41.62	59.58	74.00	-14.42	Peak	100	115	P
6	17010.00	23.47	41.62	65.09	68.20	-3.11	Peak	100	147	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

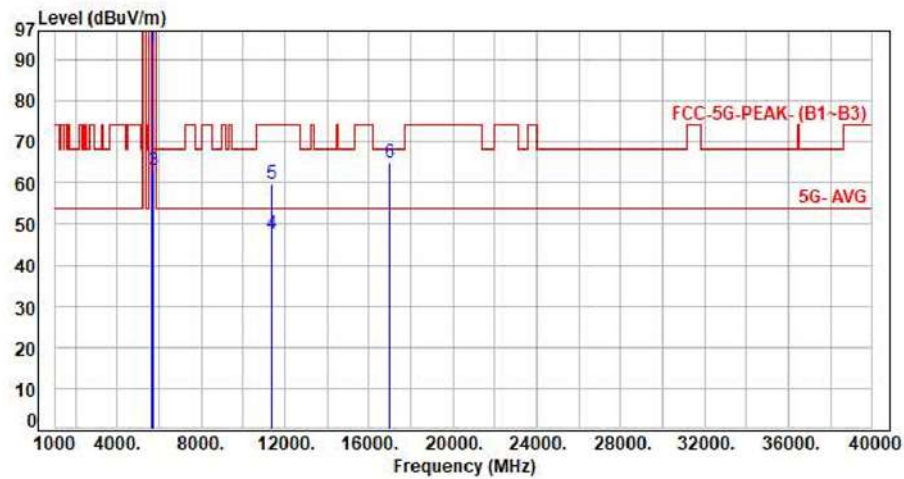


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	85.83	93.31	200.00	-106.69	Average	100	320	P
2	5670.00	7.48	96.89	104.37	200.00	-95.63	Peak	100	320	P
3	5725.00	7.43	55.73	63.16	68.20	-5.04	Peak	100	320	P
4	11340.00	17.96	29.75	47.71	54.00	-6.29	Average	100	195	P
5	11340.00	17.96	41.66	59.62	74.00	-14.38	Peak	100	195	P
6	17010.00	23.47	41.39	64.86	68.20	-3.34	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

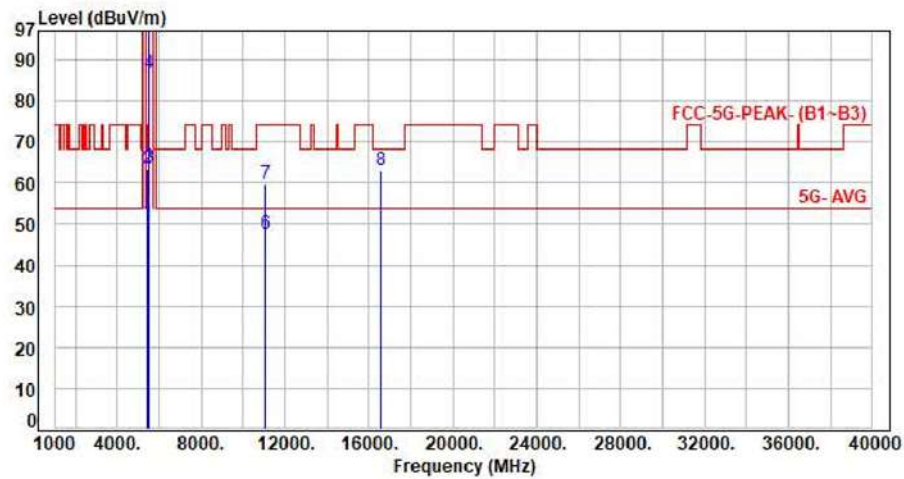


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.91	50.46	54.00	-3.54	Average	102	246	P
2	5460.00	7.55	56.01	63.56	74.00	-10.44	Peak	102	246	P
3	5470.00	7.58	56.06	63.64	68.20	-4.56	Peak	102	246	P
4	5530.00	7.63	79.23	86.86	200.00	-113.14	Average	102	246	P
5	5530.00	7.63	91.33	98.96	200.00	-101.04	Peak	102	246	P
6	11060.00	17.87	29.74	47.61	54.00	-6.39	Average	100	196	P
7	11060.00	17.87	41.93	59.80	74.00	-14.20	Peak	100	196	P
8	16590.00	21.59	41.62	63.21	68.20	-4.99	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

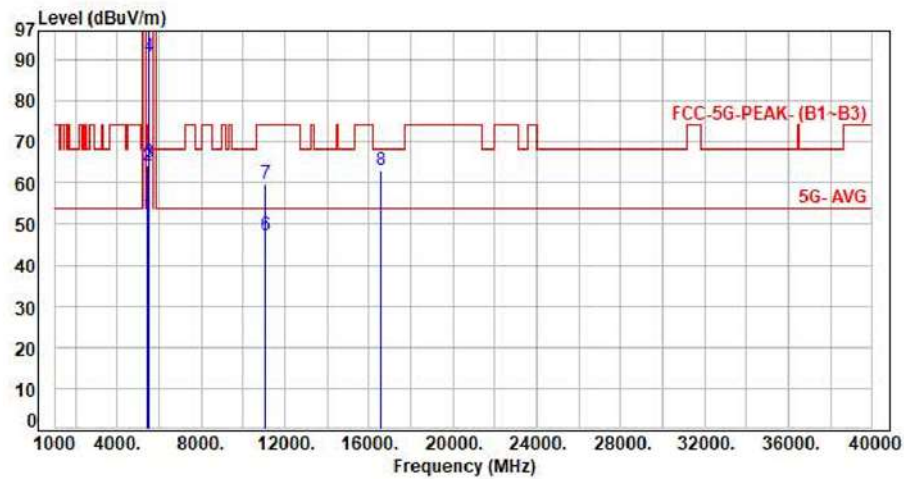

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.45	52.00	54.00	-2.00	Average	137	41	P
2	5460.00	7.55	56.75	64.30	74.00	-9.70	Peak	137	41	P
3	5470.00	7.58	57.28	64.86	68.20	-3.34	Peak	137	41	P
4	5530.00	7.63	83.07	90.70	200.00	-109.30	Average	137	41	P
5	5530.00	7.63	94.21	101.84	200.00	-98.16	Peak	137	41	P
6	11060.00	17.87	29.47	47.34	54.00	-6.66	Average	100	188	P
7	11060.00	17.87	41.92	59.79	74.00	-14.21	Peak	100	188	P
8	16590.00	21.59	41.31	62.90	68.20	-5.30	Peak	100	164	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

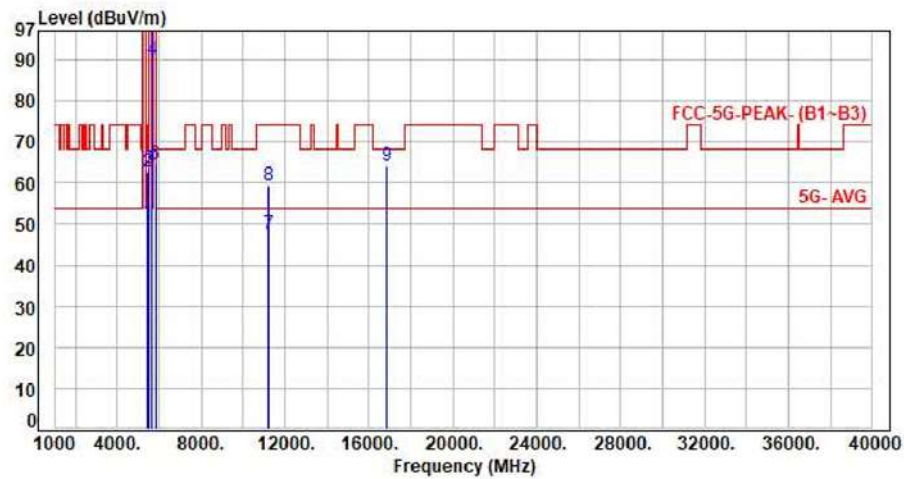


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.80	50.35	54.00	-3.65	Average	100	234	P
2	5460.00	7.55	55.32	62.87	74.00	-11.13	Peak	100	234	P
3	5470.00	7.58	56.01	63.59	68.20	-4.61	Peak	100	234	P
4	5610.00	7.51	82.44	89.95	200.00	-110.05	Average	100	234	P
5	5610.00	7.51	94.38	101.89	200.00	-98.11	Peak	100	234	P
6	5825.00	7.46	57.21	64.67	68.20	-3.53	Peak	100	234	P
7	11220.00	17.88	29.61	47.49	54.00	-6.51	Average	100	285	P
8	11220.00	17.88	41.52	59.40	74.00	-14.60	Peak	100	285	P
9	16830.00	22.58	41.49	64.07	68.20	-4.13	Peak	100	163	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

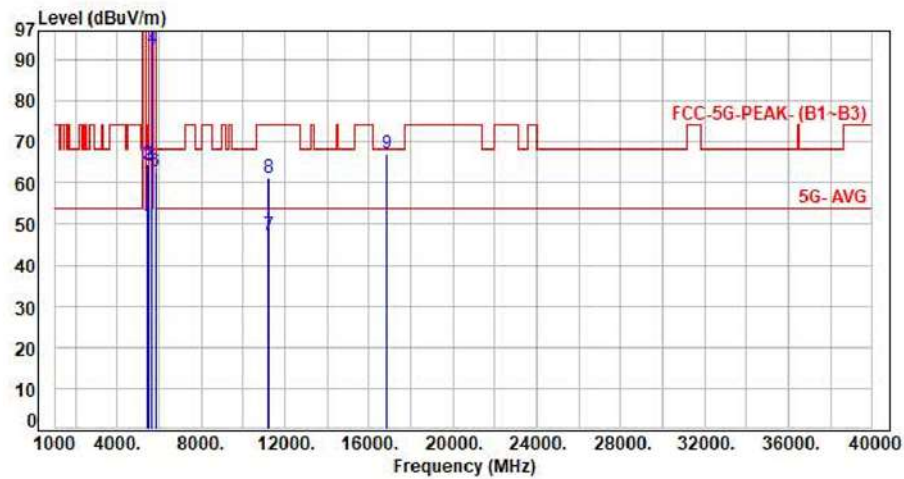


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.36	49.91	54.00	-4.09	Average	100	38	P
2	5460.00	7.55	57.15	64.70	74.00	-9.30	Peak	100	38	P
3	5470.00	7.58	56.77	64.35	68.20	-3.85	Peak	100	38	P
4	5610.00	7.51	84.98	92.49	200.00	-107.51	Average	100	38	P
5	5610.00	7.51	96.39	103.90	200.00	-96.10	Peak	100	38	P
6	5825.00	7.46	55.30	62.76	68.20	-5.44	Peak	100	38	P
7	11220.00	17.88	29.41	47.29	54.00	-6.71	Average	100	196	P
8	11220.00	17.88	43.52	61.40	74.00	-12.60	Peak	100	196	P
9	16830.00	22.58	44.41	66.99	68.20	-1.21	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

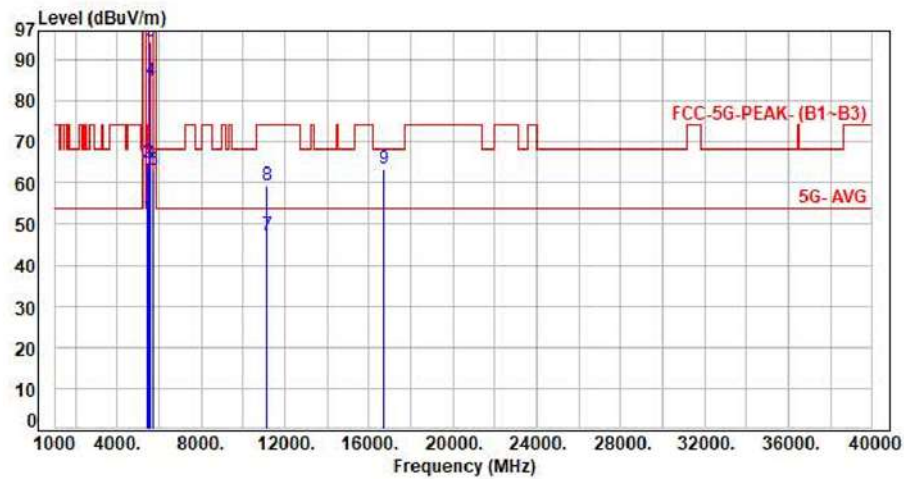


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.26	51.81	54.00	-2.19	Average	100	241	P
2	5460.00	7.55	57.39	64.94	74.00	-9.06	Peak	100	241	P
3	5470.00	7.58	57.27	64.85	68.20	-3.35	Peak	100	241	P
4	5570.00	7.56	77.10	84.66	200.00	-115.34	Average	100	241	P
5	5570.00	7.56	87.02	94.58	200.00	-105.42	Peak	100	241	P
6	5725.00	7.43	55.64	63.07	68.20	-5.13	Peak	100	241	P
7	11140.00	17.88	29.41	47.29	54.00	-6.71	Average	100	162	P
8	11140.00	17.88	41.59	59.47	74.00	-14.53	Peak	100	162	P
9	16710.00	22.17	41.36	63.53	68.20	-4.67	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

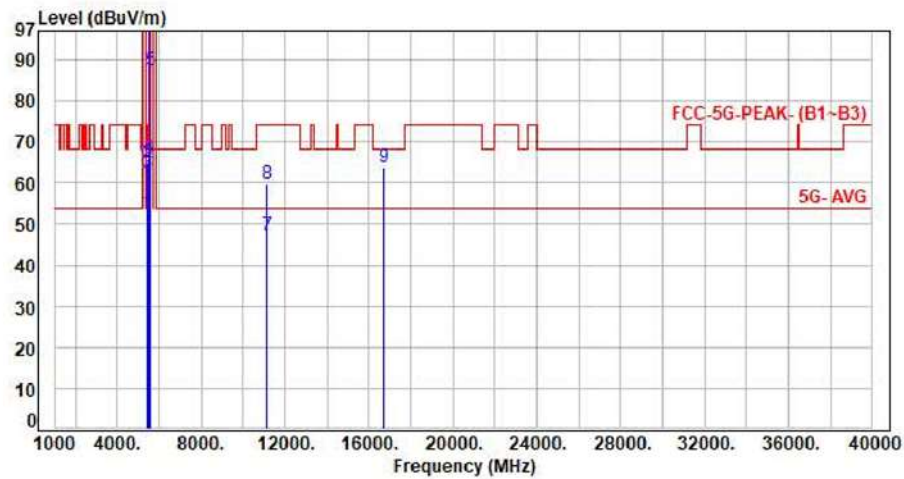


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.23	52.78	54.00	-1.22	Average	100	40	P
2	5460.00	7.55	57.28	64.83	74.00	-9.17	Peak	100	40	P
3	5460.00	7.55	54.91	62.46	74.00	-11.54	Peak	100	40	P
4	5470.00	7.58	58.45	66.03	68.20	-2.17	Peak	100	40	P
5	5570.00	7.56	79.74	87.30	200.00	-112.70	Average	100	40	P
6	5570.00	7.56	90.47	98.03	200.00	-101.97	Peak	100	40	P
7	11140.00	17.88	29.16	47.04	54.00	-6.96	Average	100	113	P
8	11140.00	17.88	41.85	59.73	74.00	-14.27	Peak	100	113	P
9	16710.00	22.17	41.62	63.79	68.20	-4.41	Peak	100	113	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

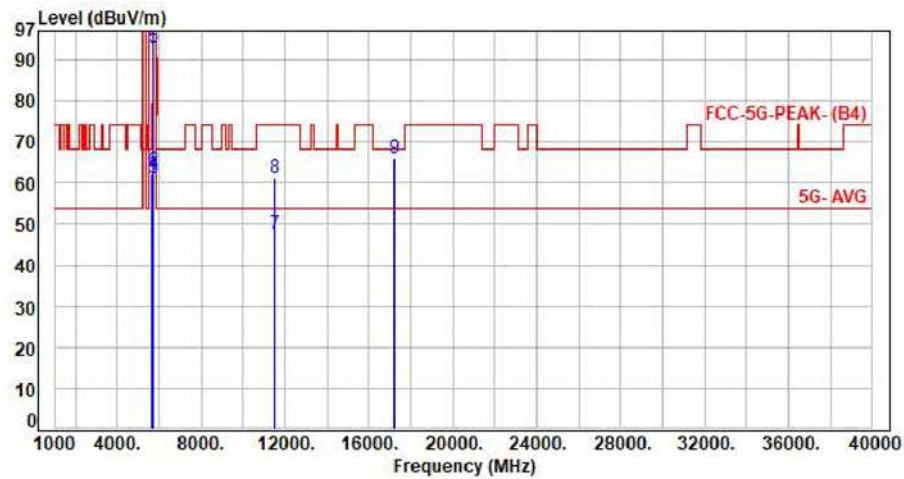


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.71	62.22	68.20	-5.98	Peak	107	3	P
2	5700.00	7.43	55.46	62.89	105.20	-42.31	Peak	107	3	P
3	5720.00	7.43	53.84	61.27	110.80	-49.53	Peak	107	3	P
4	5725.00	7.43	54.61	62.04	122.20	-60.16	Peak	107	3	P
5	5745.00	7.44	85.33	92.77	200.00	-107.23	Average	107	3	P
6	5745.00	7.44	99.65	107.09	200.00	-92.91	Peak	107	3	P
7	11490.00	18.33	29.42	47.75	54.00	-6.25	Average	100	131	P
8	11490.00	18.33	42.82	61.15	74.00	-12.85	Peak	100	131	P
9	17235.00	24.37	41.62	65.99	68.20	-2.21	Peak	100	277	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

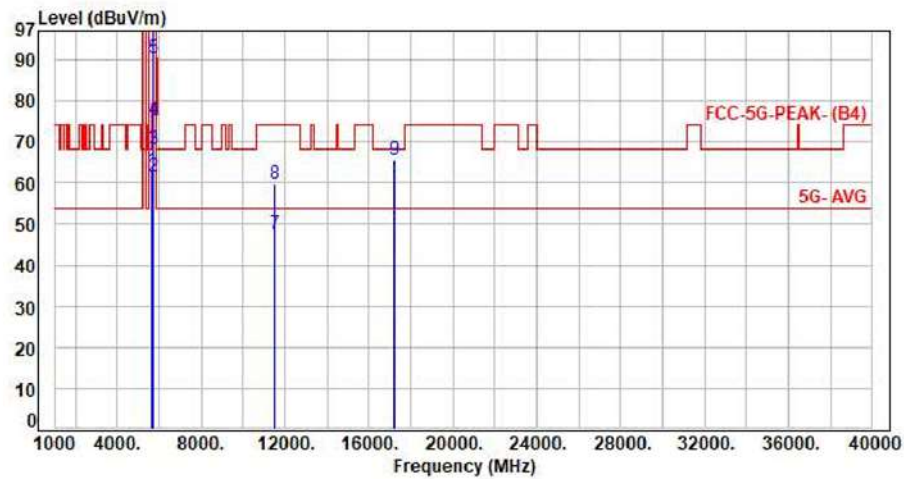


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.72	63.23	68.20	-4.97	Peak	100	33	P
2	5700.00	7.43	54.31	61.74	105.20	-43.46	Peak	100	33	P
3	5720.00	7.43	60.70	68.13	110.80	-42.67	Peak	100	33	P
4	5725.00	7.43	67.83	75.26	122.20	-46.94	Peak	100	33	P
5	5745.00	7.44	82.99	90.43	200.00	-109.57	Average	100	33	P
6	5745.00	7.44	95.33	102.77	200.00	-97.23	Peak	100	33	P
7	11490.00	18.33	29.43	47.76	54.00	-6.24	Average	100	195	P
8	11490.00	18.33	41.28	59.61	74.00	-14.39	Peak	100	195	P
9	17235.00	24.37	41.28	65.65	68.20	-2.55	Peak	100	194	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

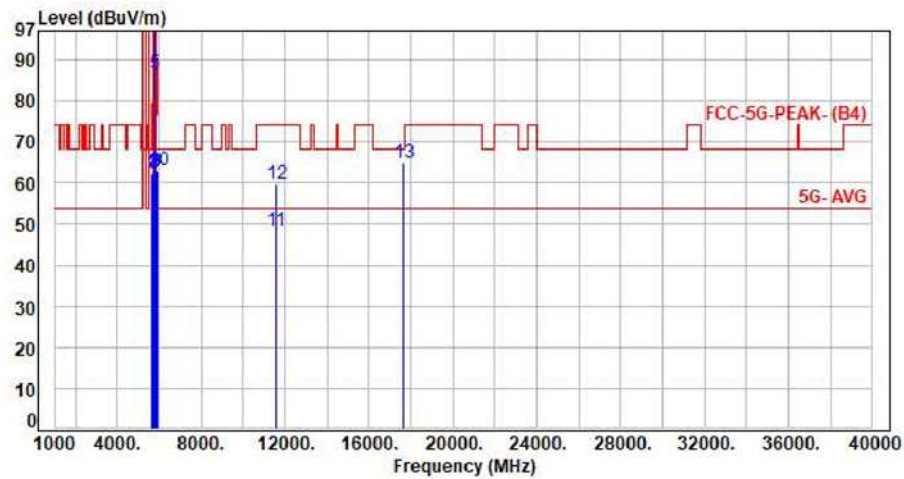


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.94	62.45	68.20	-5.75	Peak	100	356	P
2	5700.00	7.43	55.32	62.75	105.20	-42.45	Peak	100	356	P
3	5720.00	7.43	55.03	62.46	110.80	-48.34	Peak	100	356	P
4	5725.00	7.43	54.84	62.27	122.20	-59.93	Peak	100	356	P
5	5785.00	7.45	79.17	86.62	200.00	-113.38	Average	100	356	P
6	5785.00	7.45	91.50	98.95	200.00	-101.05	Peak	100	356	P
7	5850.00	7.47	54.96	62.43	122.20	-59.77	Peak	100	356	P
8	5855.00	7.49	55.24	62.73	110.80	-48.07	Peak	100	356	P
9	5875.00	7.57	55.16	62.73	105.20	-42.47	Peak	100	356	P
10	5925.00	7.73	55.29	63.02	68.20	-5.18	Peak	100	356	P
11	11570.00	18.58	29.87	48.45	54.00	-5.55	Average	100	136	P
12	11570.00	18.58	41.25	59.83	74.00	-14.17	Peak	100	136	P
13	17625.00	27.23	37.80	65.03	68.20	-3.17	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

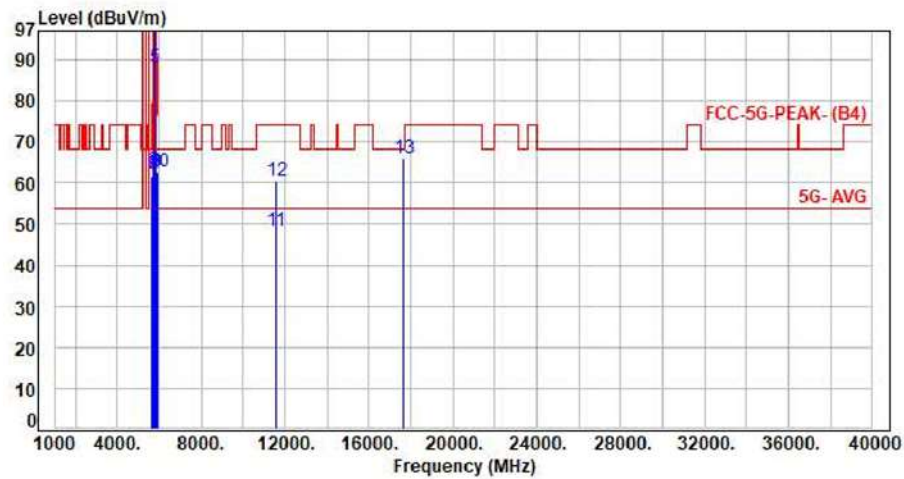


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.16	61.67	68.20	-6.53	Peak	100	44	P
2	5700.00	7.43	55.01	62.44	105.20	-42.76	Peak	100	44	P
3	5720.00	7.43	55.54	62.97	110.80	-47.83	Peak	100	44	P
4	5725.00	7.43	55.35	62.78	122.20	-59.42	Peak	100	44	P
5	5785.00	7.45	80.55	88.00	200.00	-112.00	Average	100	44	P
6	5785.00	7.45	92.23	99.68	200.00	-100.32	Peak	100	44	P
7	5850.00	7.47	55.00	62.47	122.20	-59.73	Peak	100	44	P
8	5855.00	7.49	55.07	62.56	110.80	-48.24	Peak	100	44	P
9	5875.00	7.57	55.17	62.74	105.20	-42.46	Peak	100	44	P
10	5925.00	7.73	55.02	62.75	68.20	-5.45	Peak	100	44	P
11	11570.00	18.58	29.74	48.32	54.00	-5.68	Average	100	321	P
12	11570.00	18.58	41.82	60.40	74.00	-13.60	Peak	100	321	P
13	17625.00	27.23	38.61	65.84	68.20	-2.36	Peak	100	135	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

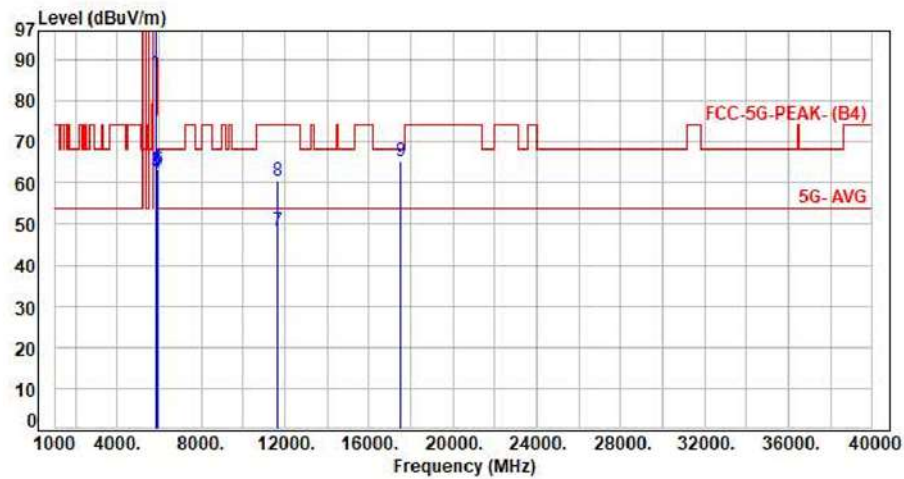


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	79.18	86.64	200.00	-113.36	Average	100	349	P
2	5825.00	7.46	92.09	99.55	200.00	-100.45	Peak	100	349	P
3	5850.00	7.47	55.66	63.13	122.20	-59.07	Peak	100	349	P
4	5855.00	7.49	54.96	62.45	110.80	-48.35	Peak	100	349	P
5	5875.00	7.57	55.08	62.65	105.20	-42.55	Peak	100	349	P
6	5925.00	7.73	55.62	63.35	68.20	-4.85	Peak	100	349	P
7	11650.00	18.67	29.47	48.14	54.00	-5.86	Average	100	199	P
8	11650.00	18.67	41.82	60.49	74.00	-13.51	Peak	100	199	P
9	17475.00	25.92	39.35	65.27	68.20	-2.93	Peak	100	294	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

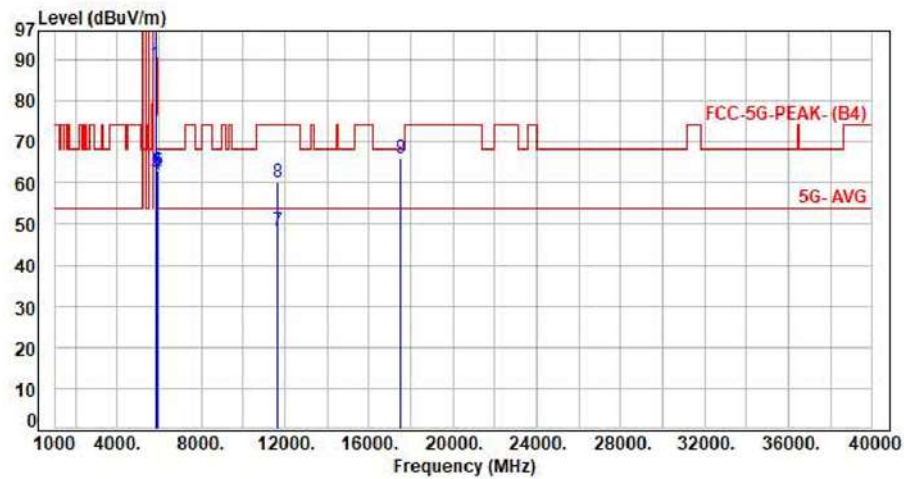


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	81.36	88.82	200.00	-111.18	Average	381	42	P
2	5825.00	7.46	94.49	101.95	200.00	-98.05	Peak	381	42	P
3	5850.00	7.47	55.06	62.53	122.20	-59.67	Peak	381	42	P
4	5855.00	7.49	54.66	62.15	110.80	-48.65	Peak	381	42	P
5	5875.00	7.57	54.97	62.54	105.20	-42.66	Peak	381	42	P
6	5925.00	7.73	55.31	63.04	68.20	-5.16	Peak	381	42	P
7	11650.00	18.67	29.64	48.31	54.00	-5.69	Average	100	247	P
8	11650.00	18.67	41.28	59.95	74.00	-14.05	Peak	100	247	P
9	17475.00	25.92	40.21	66.13	68.20	-2.07	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

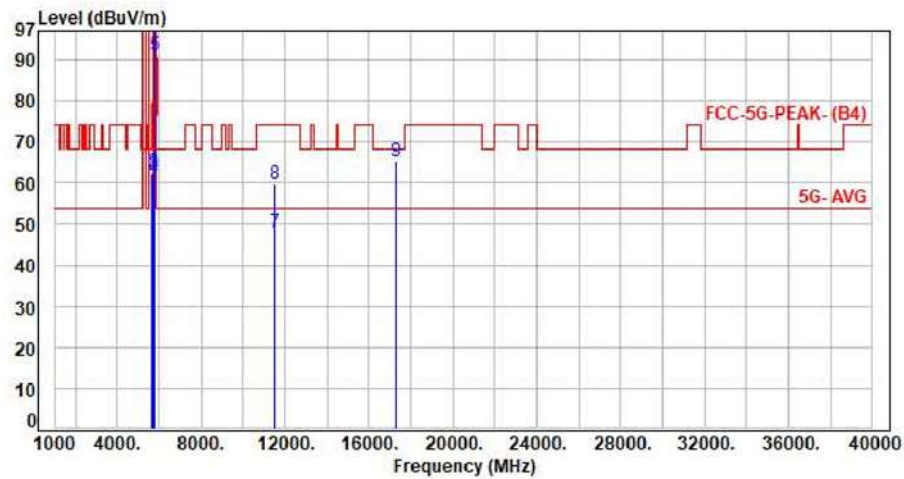


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.82	62.33	68.20	-5.87	Peak	100	3	P
2	5700.00	7.43	54.59	62.02	105.20	-43.18	Peak	100	3	P
3	5720.00	7.43	55.13	62.56	110.80	-48.24	Peak	100	3	P
4	5725.00	7.43	54.59	62.02	122.20	-60.18	Peak	100	3	P
5	5755.00	7.44	83.61	91.05	200.00	-108.95	Average	100	3	P
6	5755.00	7.44	96.63	104.07	200.00	-95.93	Peak	100	3	P
7	11510.00	18.39	29.65	48.04	54.00	-5.96	Average	100	229	P
8	11510.00	18.39	41.35	59.74	74.00	-14.26	Peak	100	229	P
9	17265.00	24.63	40.60	65.23	68.20	-2.97	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

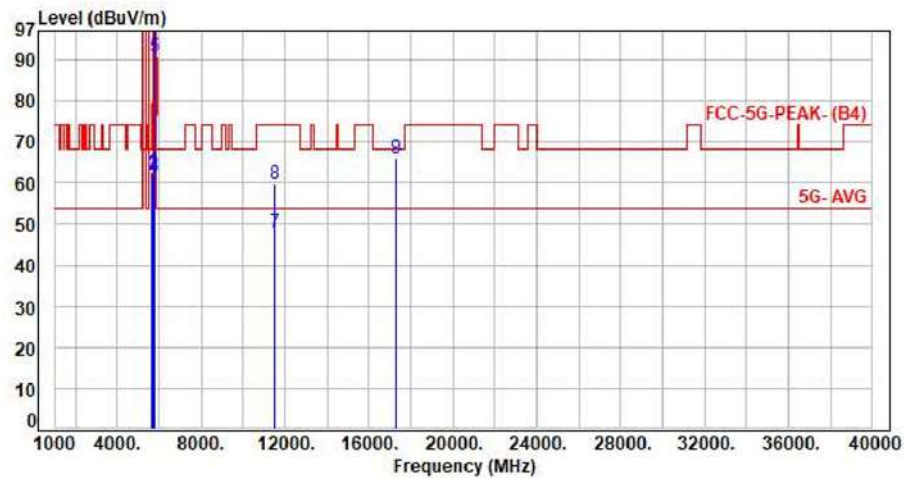


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.05	62.56	68.20	-5.64	Peak	100	340	P
2	5700.00	7.43	54.65	62.08	105.20	-43.12	Peak	100	340	P
3	5720.00	7.43	54.36	61.79	110.80	-49.01	Peak	100	340	P
4	5725.00	7.43	54.33	61.76	122.20	-60.44	Peak	100	340	P
5	5755.00	7.44	83.39	90.83	200.00	-109.17	Average	100	340	P
6	5755.00	7.44	94.94	102.38	200.00	-97.62	Peak	100	340	P
7	11510.00	18.39	29.42	47.81	54.00	-6.19	Average	100	182	P
8	11510.00	18.39	41.40	59.79	74.00	-14.21	Peak	100	182	P
9	17265.00	24.63	41.39	66.02	68.20	-2.18	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

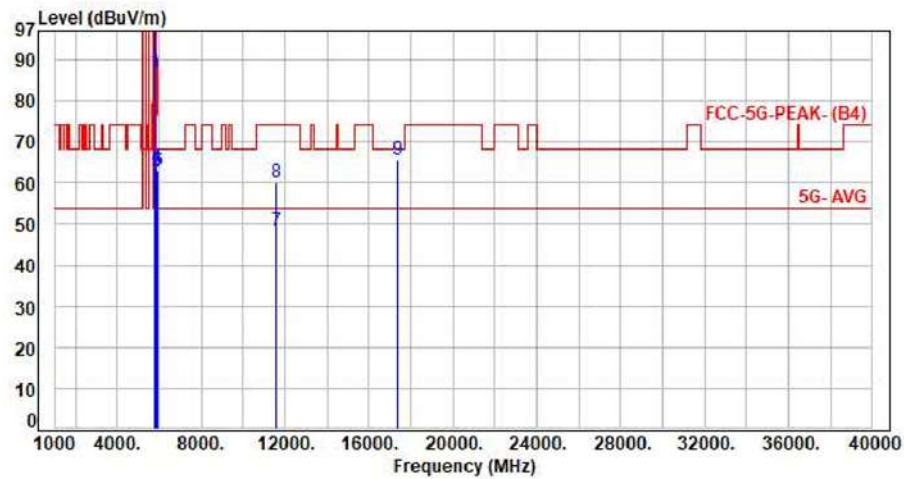


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.45	79.42	86.87	200.00	-113.13	Average	100	184	P
2	5795.00	7.45	90.88	98.33	200.00	-101.67	Peak	100	184	P
3	5850.00	7.47	55.32	62.79	122.20	-59.41	Peak	100	184	P
4	5855.00	7.49	56.38	63.87	110.80	-46.93	Peak	100	184	P
5	5875.00	7.57	55.25	62.82	105.20	-42.38	Peak	100	184	P
6	5925.00	7.73	55.18	62.91	68.20	-5.29	Peak	100	184	P
7	11590.00	18.62	29.64	48.26	54.00	-5.74	Average	100	177	P
8	11590.00	18.62	41.59	60.21	74.00	-13.79	Peak	100	177	P
9	17385.00	25.34	40.31	65.65	68.20	-2.55	Peak	100	158	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

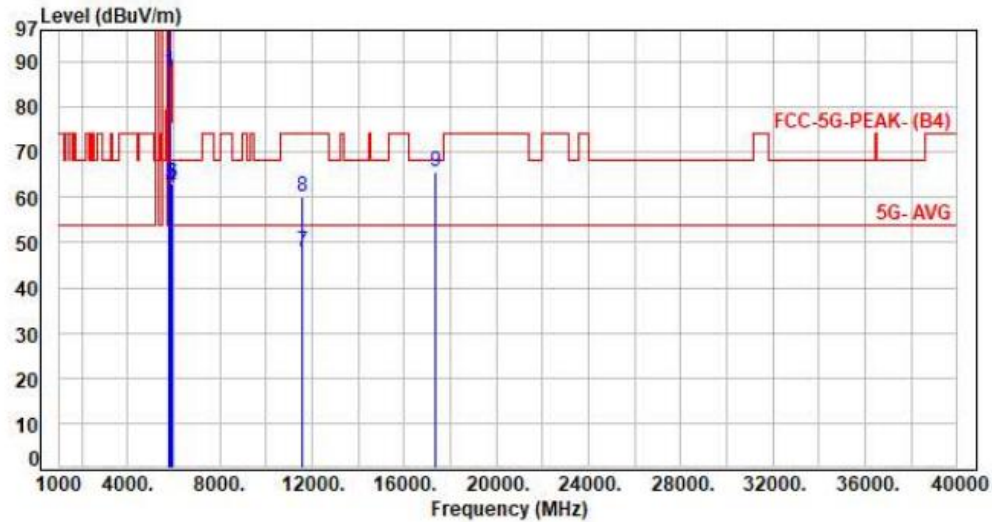

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.45	80.51	87.96	200.00	-112.04	Average	100	306	P
2	5795.00	7.45	92.41	99.86	200.00	-100.14	Peak	100	306	P
3	5850.00	7.47	55.57	63.04	122.20	-59.16	Peak	100	306	P
4	5855.00	7.49	54.63	62.12	110.80	-48.68	Peak	100	306	P
5	5875.00	7.57	55.46	63.03	105.20	-42.17	Peak	100	306	P
6	5925.00	7.73	55.46	63.19	68.20	-5.01	Peak	100	306	P
7	11590.00	18.62	29.47	48.09	54.00	-5.91	Average	100	197	P
8	11590.00	18.62	41.39	60.01	74.00	-13.99	Peak	100	197	P
9	17385.00	25.34	40.22	65.56	68.20	-2.64	Peak	100	166	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor