




Test Mode : 1TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

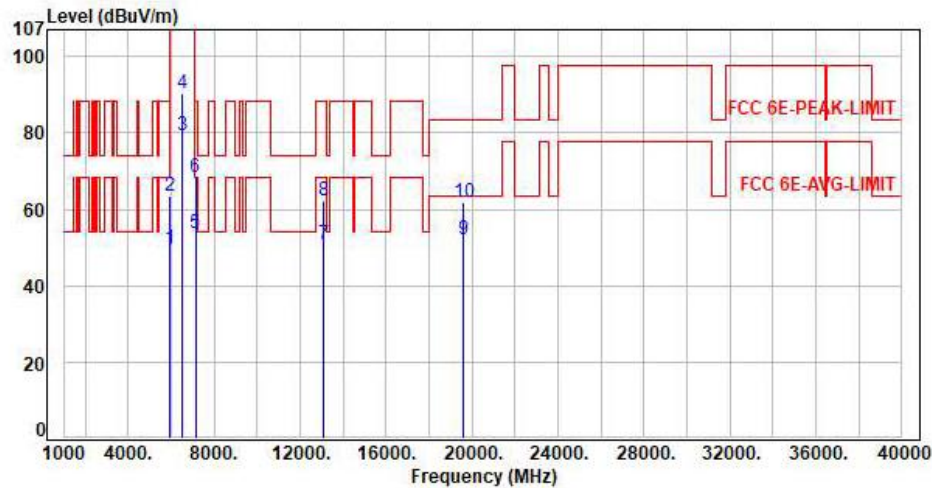

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.23	49.74	68.20	-18.46	Average	109	145	P
2	5925.00	7.51	55.83	63.34	88.20	-24.86	Peak	109	145	P
3	6535.00	9.90	69.51	79.41	200.00	-120.59	Average	109	145	P
4	6535.00	9.90	80.43	90.33	200.00	-109.67	Peak	109	145	P
5	7125.00	11.56	42.17	53.73	68.20	-14.47	Average	109	145	P
6	7125.00	11.56	56.87	68.43	88.20	-19.77	Peak	109	145	P
7	13070.00	19.57	31.43	51.00	68.20	-17.20	Average	100	19	P
8	13070.00	19.57	42.64	62.21	88.20	-25.99	Peak	100	19	P
9	19605.00	10.53	41.68	52.21	63.54	-11.33	Average	150	360	P
10	19605.00	10.53	51.50	62.03	83.54	-21.51	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

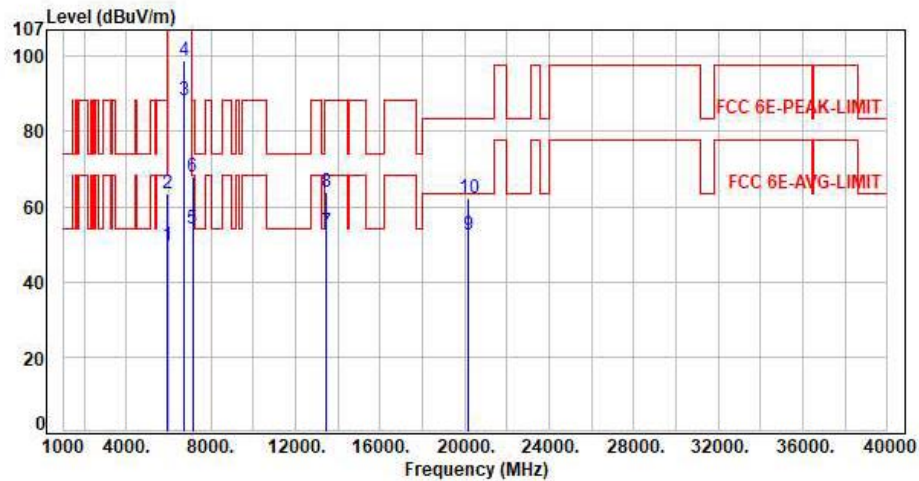

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.29	49.80	68.20	-18.40	Average	131	179	P
2	5925.00	7.51	55.79	63.30	88.20	-24.90	Peak	131	179	P
3	6715.00	10.64	77.52	88.16	200.00	-111.84	Average	131	179	P
4	6715.00	10.64	88.37	99.01	200.00	-100.99	Peak	131	179	P
5	7125.00	11.56	42.38	53.94	68.20	-14.26	Average	131	179	P
6	7125.00	11.56	56.30	67.86	88.20	-20.34	Peak	131	179	P
7	13430.00	21.22	32.00	53.22	68.20	-14.98	Average	100	172	P
8	13430.00	21.22	42.81	64.03	88.20	-24.17	Peak	100	172	P
9	20145.00	10.35	41.96	52.31	63.54	-11.23	Average	150	360	P
10	20145.00	10.35	51.78	62.13	83.54	-21.41	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

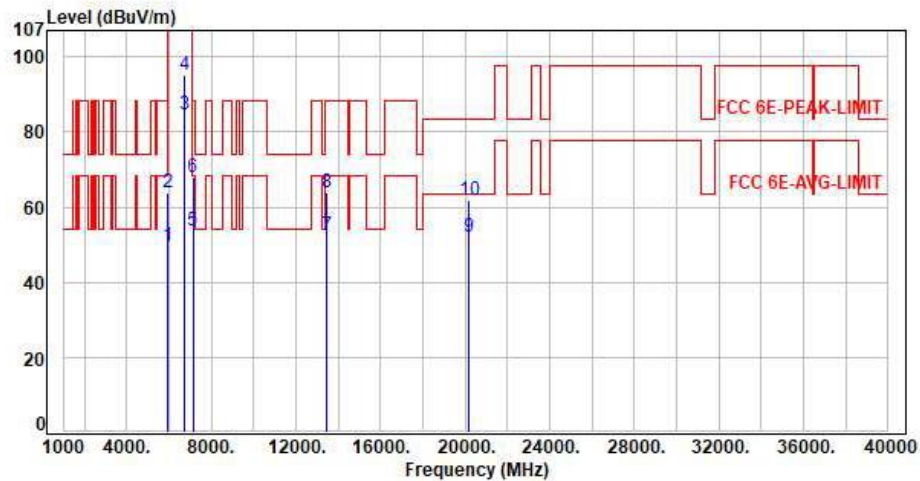

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.21	49.72	68.20	-18.48	Average	297	147	P
2	5925.00	7.51	56.53	64.04	88.20	-24.16	Peak	297	147	P
3	6715.00	10.64	73.87	84.51	200.00	-115.49	Average	297	147	P
4	6715.00	10.64	84.72	95.36	200.00	-104.64	Peak	297	147	P
5	7125.00	11.56	42.31	53.87	68.20	-14.33	Average	297	147	P
6	7125.00	11.56	56.40	67.96	88.20	-20.24	Peak	297	147	P
7	13430.00	21.22	31.18	52.40	68.20	-15.80	Average	100	12	P
8	13430.00	21.22	42.82	64.04	88.20	-24.16	Peak	100	12	P
9	20145.00	10.35	41.56	51.91	63.54	-11.63	Average	150	360	P
10	20145.00	10.35	51.40	61.75	83.54	-21.79	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

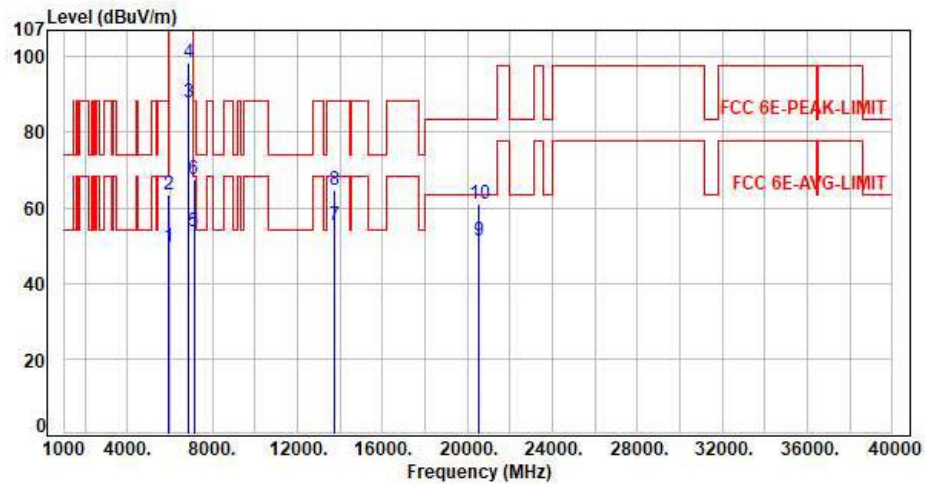

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.22	49.73	68.20	-18.47	Average	120	180	P
2	5925.00	7.51	55.88	63.39	88.20	-24.81	Peak	120	180	P
3	6855.00	11.02	77.06	88.08	200.00	-111.92	Average	120	180	P
4	6855.00	11.02	87.51	98.53	200.00	-101.47	Peak	120	180	P
5	7125.00	11.56	42.22	53.78	68.20	-14.42	Average	120	180	P
6	7125.00	11.56	56.01	67.57	88.20	-20.63	Peak	120	180	P
7	13710.00	22.30	33.09	55.39	68.20	-12.81	Average	100	182	P
8	13710.00	22.30	42.51	64.81	88.20	-23.39	Peak	100	182	P
9	20565.00	9.99	41.45	51.44	63.54	-12.10	Average	150	360	P
10	20565.00	9.99	51.23	61.22	83.54	-22.32	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

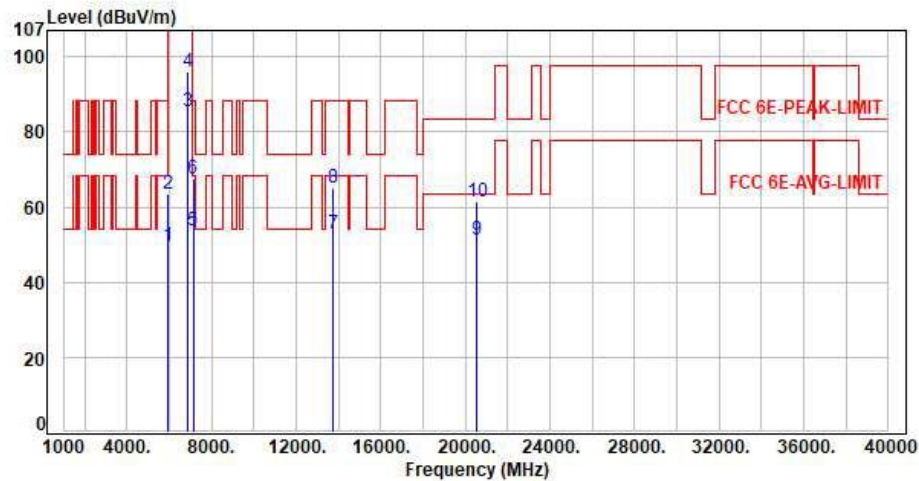

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.16	49.67	68.20	-18.53	Average	239	136	P
2	5925.00	7.51	56.04	63.55	88.20	-24.65	Peak	239	136	P
3	6855.00	11.02	74.41	85.43	200.00	-114.57	Average	239	136	P
4	6855.00	11.02	85.12	96.14	200.00	-103.86	Peak	239	136	P
5	7125.00	11.56	42.17	53.73	68.20	-14.47	Average	239	136	P
6	7125.00	11.56	55.85	67.41	88.20	-20.79	Peak	239	136	P
7	13710.00	22.30	30.49	52.79	68.20	-15.41	Average	100	14	P
8	13710.00	22.30	42.76	65.06	88.20	-23.14	Peak	100	14	P
9	20565.00	9.99	41.31	51.30	63.54	-12.24	Average	150	360	P
10	20565.00	9.99	51.32	61.31	83.54	-22.23	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT A / B8

Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

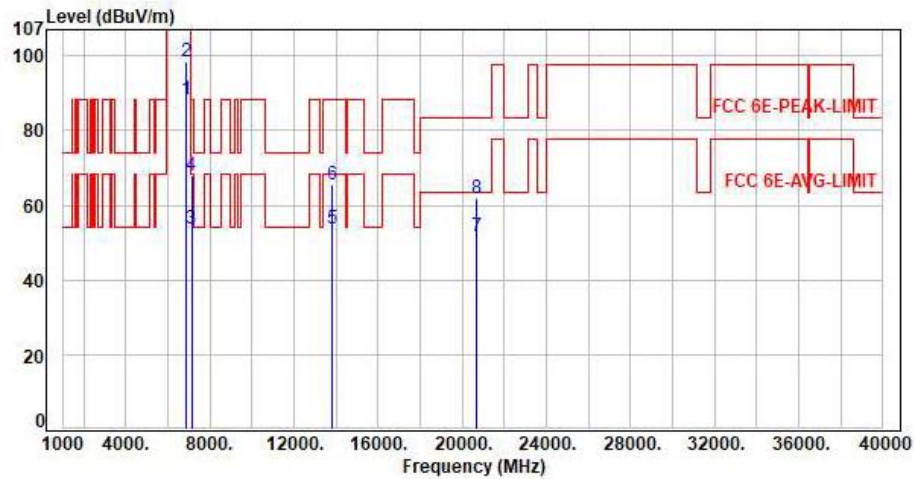

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	11.06	77.09	88.15	200.00	-111.85	Average	119	179	P
2	6895.00	11.06	87.26	98.32	200.00	-101.68	Peak	119	179	P
3	7125.00	11.56	42.17	53.73	68.20	-14.47	Average	119	179	P
4	7125.00	11.56	56.27	67.83	88.20	-20.37	Peak	119	179	P
5	13790.00	22.71	31.13	53.84	68.20	-14.36	Average	100	183	P
6	13790.00	22.71	42.86	65.57	88.20	-22.63	Peak	100	183	P
7	20685.00	10.09	41.78	51.87	63.54	-11.67	Average	150	360	P
8	20685.00	10.09	51.90	61.99	83.54	-21.55	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

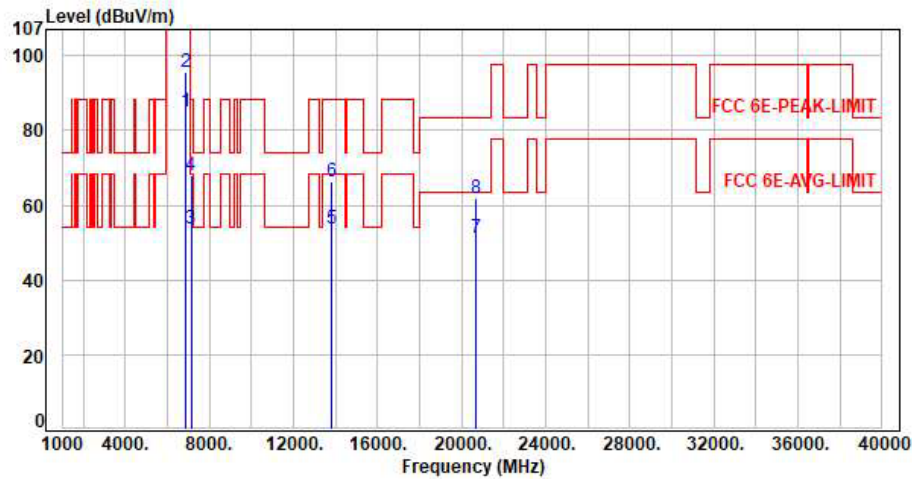

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	11.06	74.01	85.07	200.00	-114.93	Average	100	110	P
2	6895.00	11.06	84.53	95.59	200.00	-104.41	Peak	100	110	P
3	7125.00	11.56	42.31	53.87	68.20	-14.33	Average	100	110	P
4	7125.00	11.56	56.49	68.05	88.20	-20.15	Peak	100	110	P
5	13790.00	22.71	30.84	53.55	68.20	-14.65	Average	100	16	P
6	13790.00	22.71	43.47	66.18	88.20	-22.02	Peak	100	16	P
7	20685.00	10.09	41.13	51.22	63.54	-12.32	Average	150	360	P
8	20685.00	10.09	51.85	61.94	83.54	-21.60	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

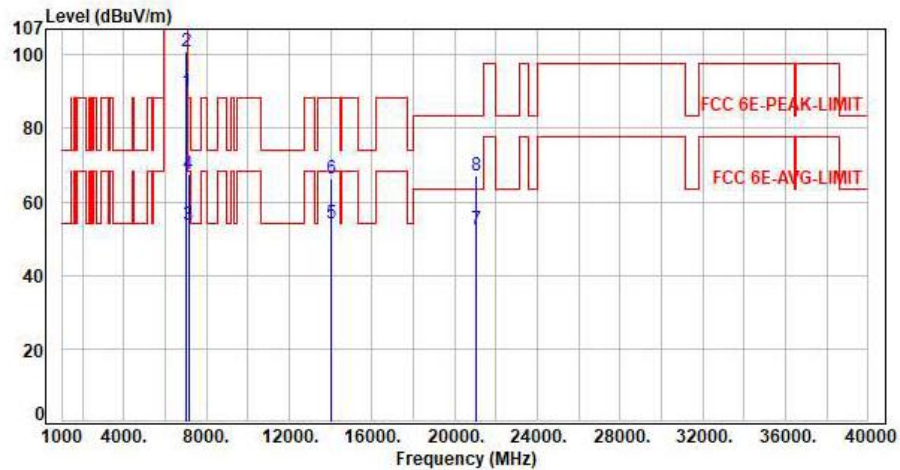

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	11.19	78.61	89.80	200.00	-110.20	Average	158	177	P
2	7015.00	11.19	89.57	100.76	200.00	-99.24	Peak	158	177	P
3	7125.00	11.56	42.21	53.77	68.20	-14.43	Average	158	177	P
4	7125.00	11.56	55.84	67.40	88.20	-20.80	Peak	158	177	P
5	14030.00	23.59	30.49	54.08	68.20	-14.12	Average	100	174	P
6	14030.00	23.59	42.67	66.26	88.20	-21.94	Peak	100	174	P
7	21045.00	10.53	41.94	52.47	63.54	-11.07	Average	150	360	P
8	21045.00	10.53	56.69	67.22	83.54	-16.32	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

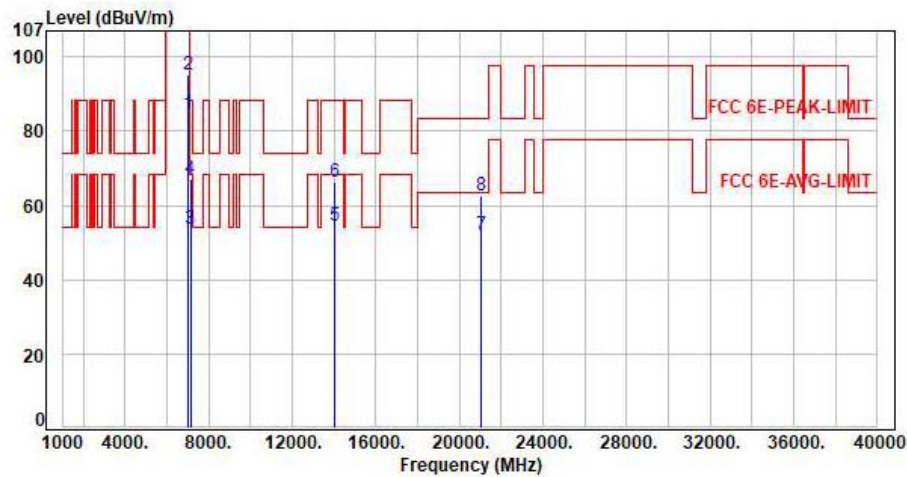

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	11.19	73.44	84.63	200.00	-115.37	Average	102	239	P
2	7015.00	11.19	84.07	95.26	200.00	-104.74	Peak	102	239	P
3	7125.00	11.56	42.09	53.65	68.20	-14.55	Average	102	239	P
4	7125.00	11.56	55.76	67.32	88.20	-20.88	Peak	102	239	P
5	14030.00	23.59	30.79	54.38	68.20	-13.82	Average	100	13	P
6	14030.00	23.59	42.77	66.36	88.20	-21.84	Peak	100	13	P
7	21045.00	10.53	41.52	52.05	63.54	-11.49	Average	150	360	P
8	21045.00	10.53	51.96	62.49	83.54	-21.05	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

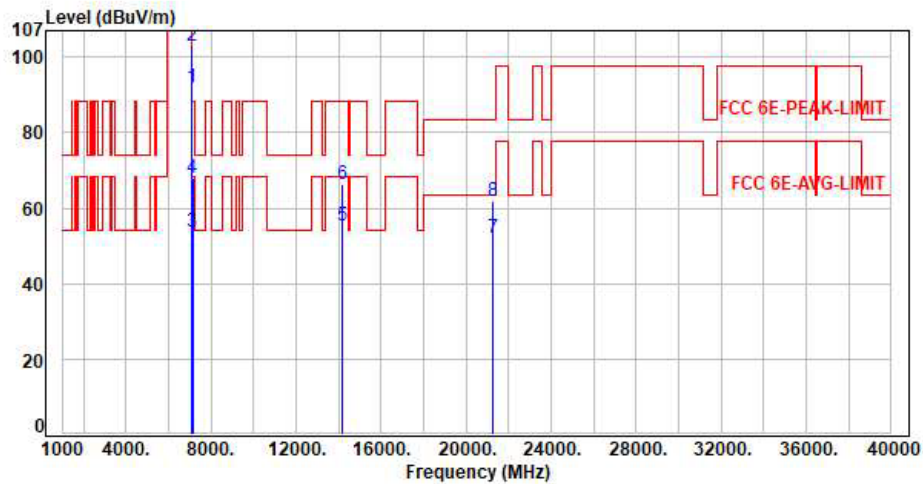

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	11.42	80.53	91.95	200.00	-108.05	Average	110	5	P
2	7095.00	11.42	91.47	102.89	200.00	-97.11	Peak	110	5	P
3	7125.00	11.56	42.27	53.83	68.20	-14.37	Average	110	5	P
4	7125.00	11.56	56.34	67.90	88.20	-20.30	Peak	110	5	P
5	14190.00	24.00	31.48	55.48	68.20	-12.72	Average	100	178	P
6	14190.00	24.00	42.42	66.42	88.20	-21.78	Peak	100	178	P
7	21285.00	10.65	41.60	52.25	63.54	-11.29	Average	150	360	P
8	21285.00	10.65	51.24	61.89	83.54	-21.65	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

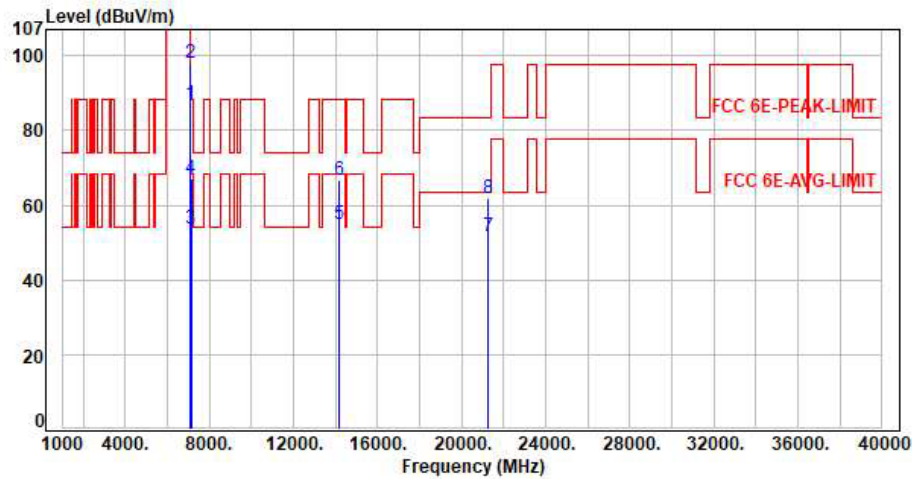

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	11.42	75.72	87.14	200.00	-112.86	Average	100	238	P
2	7095.00	11.42	86.53	97.95	200.00	-102.05	Peak	100	238	P
3	7125.00	11.56	42.34	53.90	68.20	-14.30	Average	100	238	P
4	7125.00	11.56	55.76	67.32	88.20	-20.88	Peak	100	238	P
5	14190.00	24.00	31.12	55.12	68.20	-13.08	Average	100	15	P
6	14190.00	24.00	42.71	66.71	88.20	-21.49	Peak	100	15	P
7	21285.00	10.65	41.18	51.83	63.54	-11.71	Average	150	360	P
8	21285.00	10.65	51.26	61.91	83.54	-21.63	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

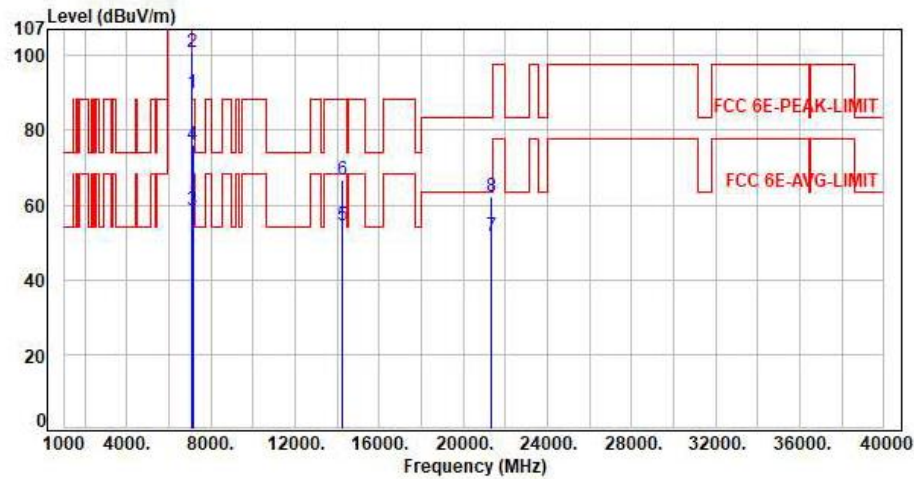

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	11.51	78.53	90.04	200.00	-109.96	Average	127	185	P
2	7115.00	11.51	89.46	100.97	200.00	-99.03	Peak	127	185	P
3	7125.00	11.56	47.00	58.56	68.20	-9.64	Average	127	185	P
4	7125.00	11.56	64.32	75.88	88.20	-12.32	Peak	127	185	P
5	14230.00	24.11	30.47	54.58	68.20	-13.62	Average	100	177	P
6	14230.00	24.11	42.81	66.92	88.20	-21.28	Peak	100	177	P
7	21345.00	10.62	41.12	51.74	63.54	-11.80	Average	150	360	P
8	21345.00	10.62	51.48	62.10	83.54	-21.44	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

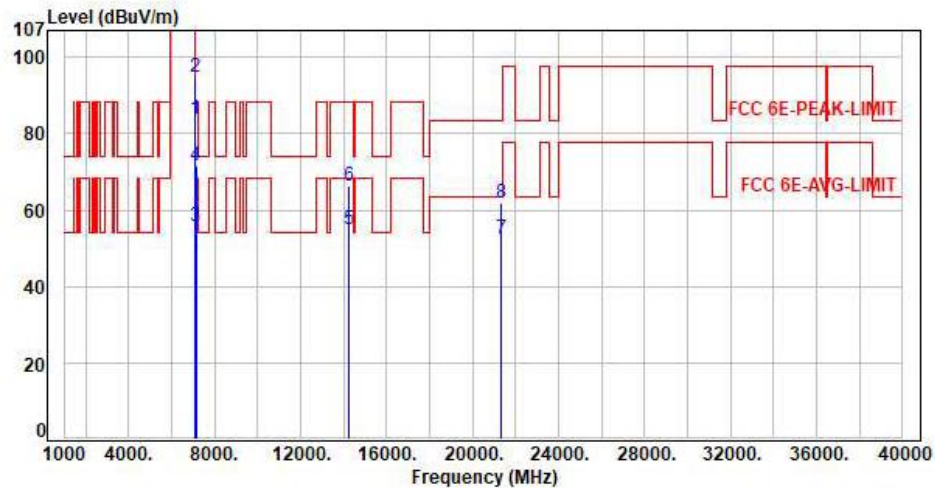

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	11.51	72.49	84.00	200.00	-116.00	Average	100	22	P
2	7115.00	11.51	83.40	94.91	200.00	-105.09	Peak	100	22	P
3	7125.00	11.56	44.27	55.83	68.20	-12.37	Average	100	22	P
4	7125.00	11.56	59.93	71.49	88.20	-16.71	Peak	100	22	P
5	14230.00	24.11	30.92	55.03	68.20	-13.17	Average	100	12	P
6	14230.00	24.11	42.37	66.48	88.20	-21.72	Peak	100	12	P
7	21345.00	10.62	41.75	52.37	63.54	-11.17	Average	150	360	P
8	21345.00	10.62	51.18	61.80	83.54	-21.74	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

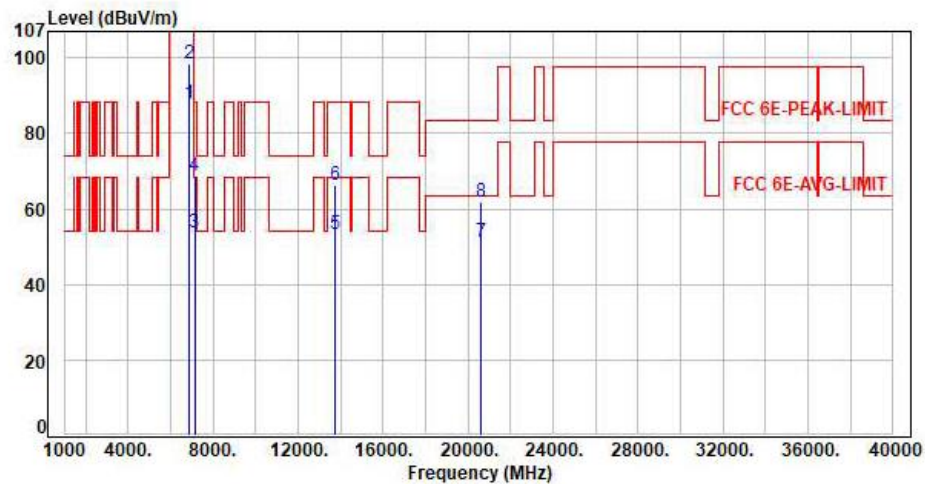


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6875.00	11.04	76.65	87.69	200.00	-112.31	Average	133	178	P
2	6875.00	11.04	87.33	98.37	200.00	-101.63	Peak	133	178	P
3	7125.00	11.56	42.32	53.88	68.20	-14.32	Average	133	178	P
4	7125.00	11.56	57.34	68.90	88.20	-19.30	Peak	133	178	P
5	13750.00	22.63	30.78	53.41	68.20	-14.79	Average	100	179	P
6	13750.00	22.63	43.59	66.22	88.20	-21.98	Peak	100	179	P
7	20625.00	10.00	41.15	51.15	63.54	-12.39	Average	150	360	P
8	20625.00	10.00	51.83	61.83	83.54	-21.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

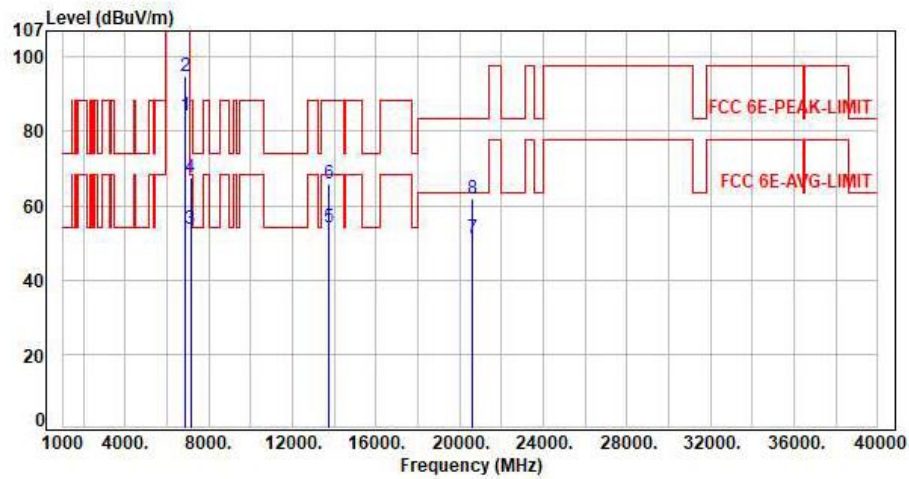

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6875.00	11.04	73.04	84.08	200.00	-115.92	Average	100	154	P
2	6875.00	11.04	83.78	94.82	200.00	-105.18	Peak	100	154	P
3	7125.00	11.56	42.27	53.83	68.20	-14.37	Average	100	154	P
4	7125.00	11.56	56.06	67.62	88.20	-20.58	Peak	100	154	P
5	13750.00	22.63	31.43	54.06	68.20	-14.14	Average	100	15	P
6	13750.00	22.63	43.12	65.75	88.20	-22.45	Peak	100	15	P
7	20625.00	10.00	41.32	51.32	63.54	-12.22	Average	150	360	P
8	20625.00	10.00	51.69	61.69	83.54	-21.85	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT B / B5

Test Mode : 1TX 11a CH1 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

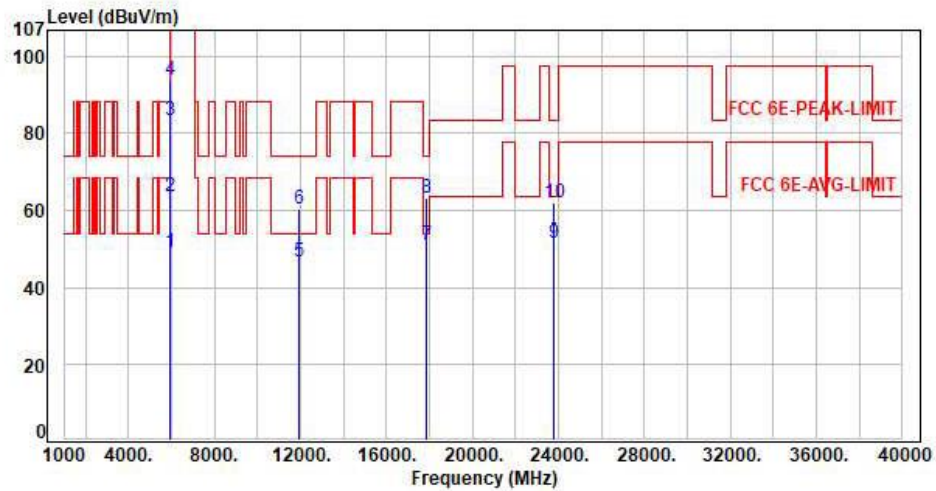

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.75	49.26	68.20	-18.94	Average	137	164	P
2	5925.00	7.51	55.78	63.29	88.20	-24.91	Peak	137	164	P
3	5955.00	7.54	75.69	83.23	200.00	-116.77	Average	137	164	P
4	5955.00	7.54	86.25	93.79	200.00	-106.21	Peak	137	164	P
5	11910.00	17.96	28.81	46.77	54.00	-7.23	Average	100	174	P
6	11910.00	17.96	42.38	60.34	74.00	-13.66	Peak	100	174	P
7	17865.00	29.59	21.74	51.33	54.00	-2.67	Average	100	262	P
8	17865.00	29.59	33.43	63.02	74.00	-10.98	Peak	100	262	P
9	23820.00	10.06	41.43	51.49	63.54	-12.05	Average	150	360	P
10	23820.00	10.06	51.95	62.01	83.54	-21.53	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH1 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

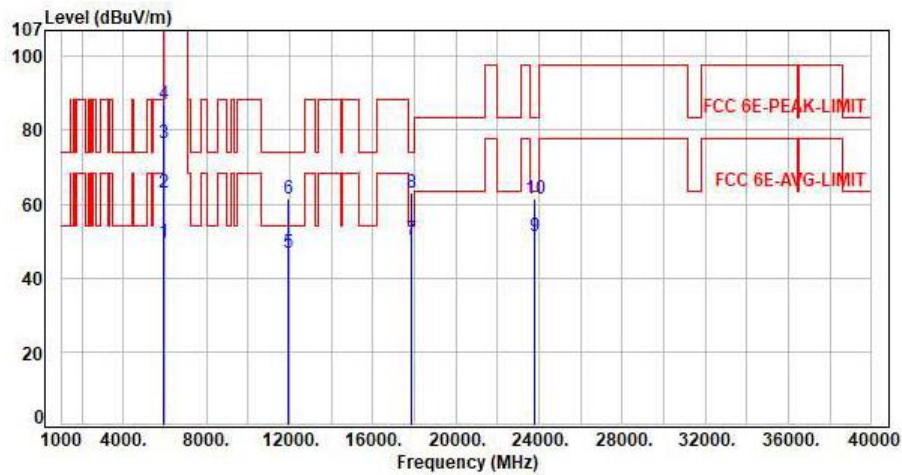

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.93	49.44	68.20	-18.76	Average	100	311	P
2	5925.00	7.51	55.42	62.93	88.20	-25.27	Peak	100	311	P
3	5955.00	7.54	69.10	76.64	200.00	-123.36	Average	100	311	P
4	5955.00	7.54	79.66	87.20	200.00	-112.80	Peak	100	311	P
5	11910.00	17.96	28.86	46.82	54.00	-7.18	Average	100	94	P
6	11910.00	17.96	43.67	61.63	74.00	-12.37	Peak	100	94	P
7	17865.00	29.59	20.79	50.38	54.00	-3.62	Average	100	135	P
8	17865.00	29.59	33.35	62.94	74.00	-11.06	Peak	100	135	P
9	23820.00	10.06	41.10	51.16	63.54	-12.38	Average	150	360	P
10	23820.00	10.06	51.46	61.52	83.54	-22.02	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH45 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

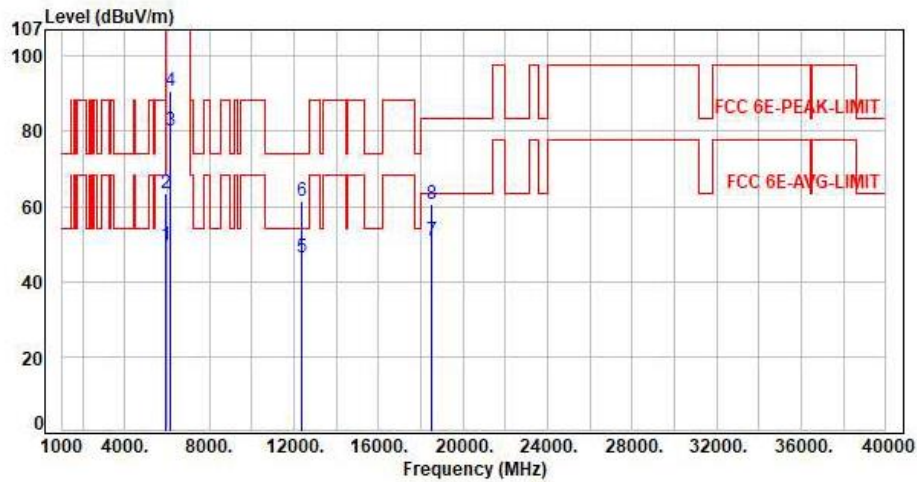

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.97	49.48	68.20	-18.72	Average	102	184	P
2	5925.00	7.51	55.78	63.29	88.20	-24.91	Peak	102	184	P
3	6175.00	8.57	71.72	80.29	200.00	-119.71	Average	102	184	P
4	6175.00	8.57	82.35	90.92	200.00	-109.08	Peak	102	184	P
5	12350.00	17.83	28.72	46.55	54.00	-7.45	Average	100	170	P
6	12350.00	17.83	43.49	61.32	74.00	-12.68	Peak	100	170	P
7	18525.00	9.06	41.65	50.71	63.54	-12.83	Average	150	360	P
8	18525.00	9.06	51.65	60.71	83.54	-22.83	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH45 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

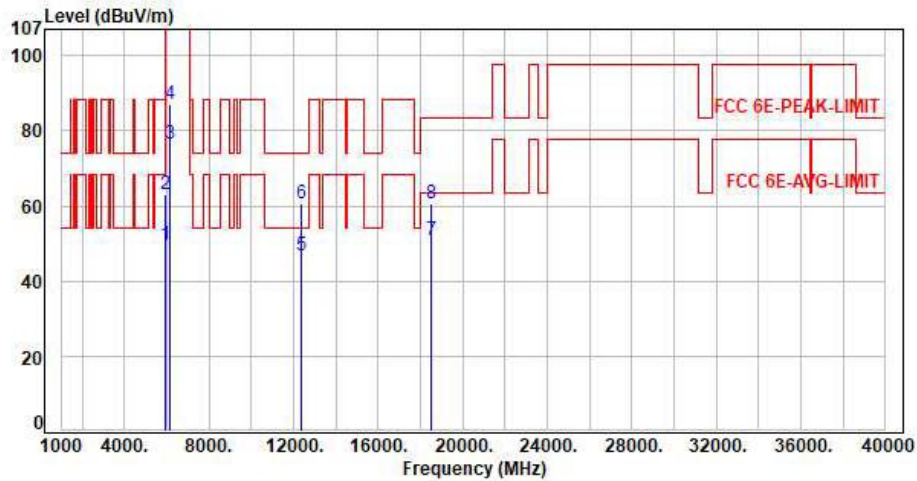


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.93	49.44	68.20	-18.76	Average	100	328	P
2	5925.00	7.51	55.43	62.94	88.20	-25.26	Peak	100	328	P
3	6175.00	8.57	67.72	76.29	200.00	-123.71	Average	100	328	P
4	6175.00	8.57	78.42	86.99	200.00	-113.01	Peak	100	328	P
5	12350.00	17.83	28.80	46.63	54.00	-7.37	Average	100	90	P
6	12350.00	17.83	42.84	60.67	74.00	-13.33	Peak	100	90	P
7	18525.00	9.06	41.66	50.72	63.54	-12.82	Average	150	360	P
8	18525.00	9.06	51.75	60.81	83.54	-22.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH93 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

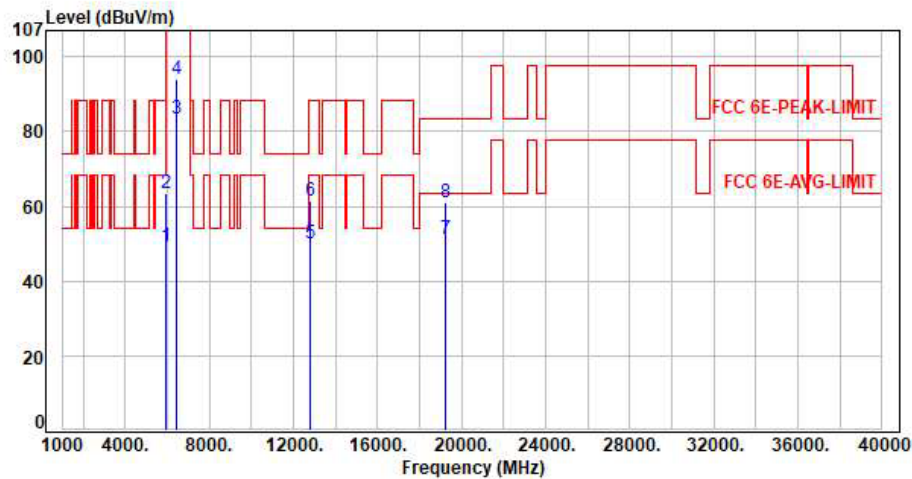

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.90	49.41	68.20	-18.79	Average	172	189	P
2	5925.00	7.51	55.81	63.32	88.20	-24.88	Peak	172	189	P
3	6415.00	9.46	74.03	83.49	200.00	-116.51	Average	172	189	P
4	6415.00	9.46	84.48	93.94	200.00	-106.06	Peak	172	189	P
5	12830.00	18.56	31.46	50.02	68.20	-18.18	Average	100	165	P
6	12830.00	18.56	42.81	61.37	88.20	-26.83	Peak	100	165	P
7	19245.00	9.93	41.43	51.36	63.54	-12.18	Average	150	360	P
8	19245.00	9.93	51.21	61.14	83.54	-22.40	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH93 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

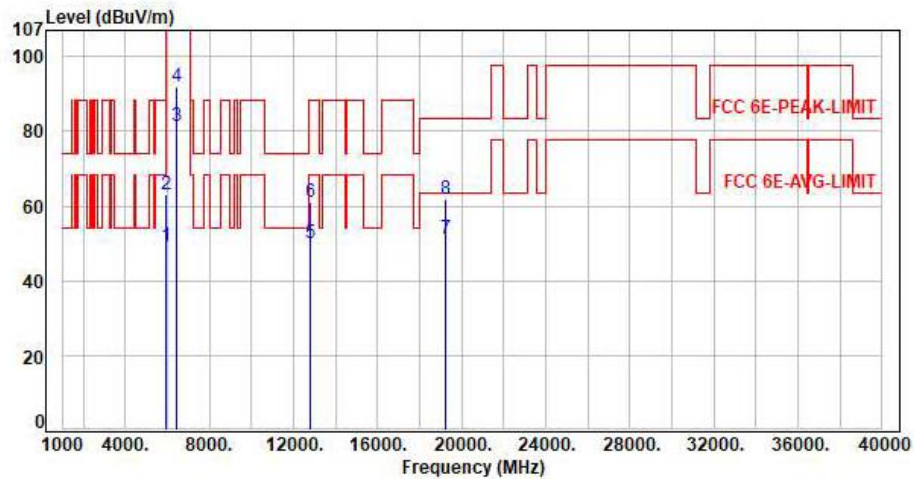

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.88	49.39	68.20	-18.81	Average	188	212	P
2	5925.00	7.51	55.36	62.87	88.20	-25.33	Peak	188	212	P
3	6415.00	9.46	71.75	81.21	200.00	-118.79	Average	188	212	P
4	6415.00	9.46	82.60	92.06	200.00	-107.94	Peak	188	212	P
5	12830.00	18.56	31.48	50.04	68.20	-18.16	Average	100	98	P
6	12830.00	18.56	42.49	61.05	88.20	-27.15	Peak	100	98	P
7	19245.00	9.93	41.46	51.39	63.54	-12.15	Average	150	360	P
8	19245.00	9.93	51.88	61.81	83.54	-21.73	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT B / B6

Test Mode : 1TX 11a CH97 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

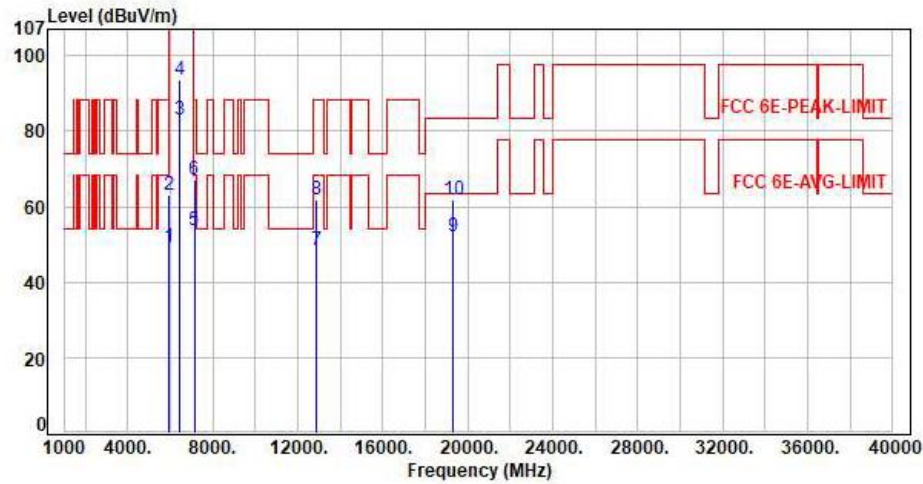

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.88	49.39	68.20	-18.81	Average	147	190	P
2	5925.00	7.51	55.37	62.88	88.20	-25.32	Peak	147	190	P
3	6435.00	9.50	73.44	82.94	200.00	-117.06	Average	147	190	P
4	6435.00	9.50	83.92	93.42	200.00	-106.58	Peak	147	190	P
5	7125.00	11.56	41.99	53.55	68.20	-14.65	Average	147	190	P
6	7125.00	11.56	55.44	67.00	88.20	-21.20	Peak	147	190	P
7	12870.00	18.75	29.69	48.44	68.20	-19.76	Average	100	175	P
8	12870.00	18.75	42.91	61.66	88.20	-26.54	Peak	100	175	P
9	19305.00	10.05	41.99	52.04	63.54	-11.50	Average	150	360	P
10	19305.00	10.05	51.93	61.98	83.54	-21.56	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH97 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

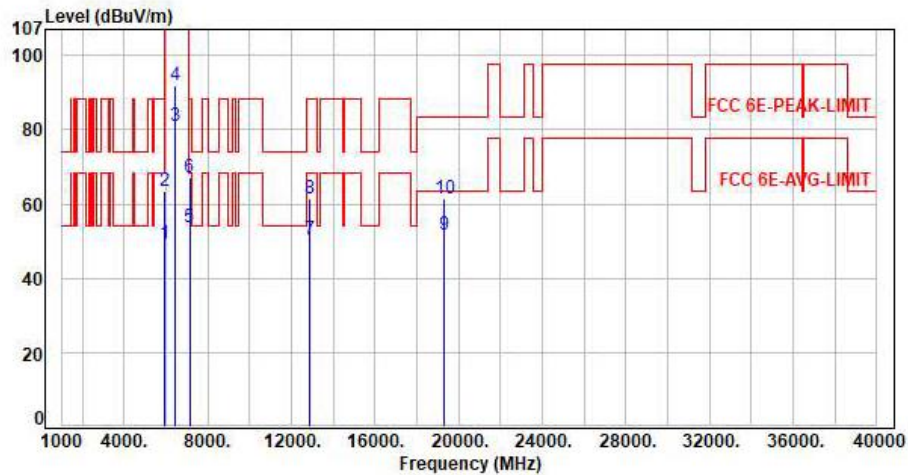

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.88	49.39	68.20	-18.81	Average	181	213	P
2	5925.00	7.51	55.79	63.30	88.20	-24.90	Peak	181	213	P
3	6435.00	9.50	71.30	80.80	200.00	-119.20	Average	181	213	P
4	6435.00	9.50	82.42	91.92	200.00	-108.08	Peak	181	213	P
5	7125.00	11.56	41.99	53.55	68.20	-14.65	Average	181	213	P
6	7125.00	11.56	55.60	67.16	88.20	-21.04	Peak	181	213	P
7	12870.00	18.75	31.79	50.54	68.20	-17.66	Average	100	93	P
8	12870.00	18.75	42.82	61.57	88.20	-26.63	Peak	100	93	P
9	19305.00	10.05	41.59	51.64	63.54	-11.90	Average	150	360	P
10	19305.00	10.05	51.34	61.39	83.54	-22.15	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

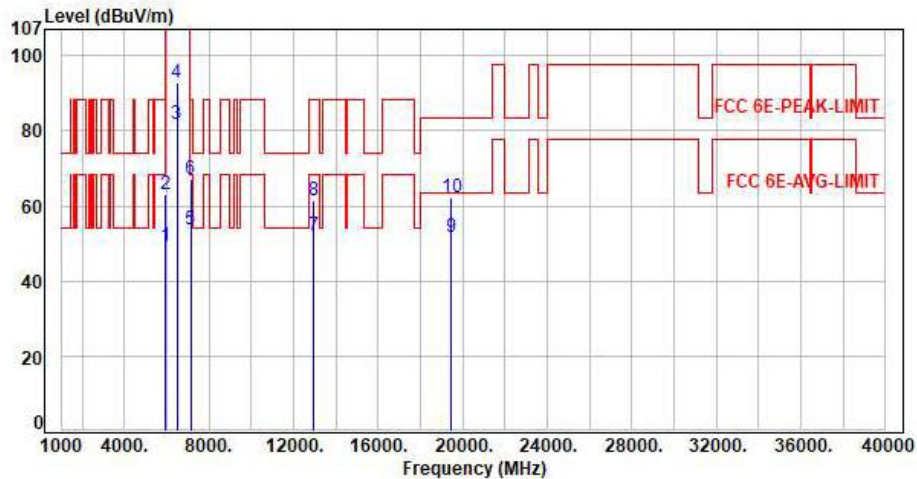


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.86	49.37	68.20	-18.83	Average	105	192	P
2	5925.00	7.51	55.64	63.15	88.20	-25.05	Peak	105	192	P
3	6475.00	9.63	72.28	81.91	200.00	-118.09	Average	105	192	P
4	6475.00	9.63	82.95	92.58	200.00	-107.42	Peak	105	192	P
5	7125.00	11.56	41.99	53.55	68.20	-14.65	Average	105	192	P
6	7125.00	11.56	55.44	67.00	88.20	-21.20	Peak	105	192	P
7	12950.00	19.06	33.02	52.08	68.20	-16.12	Average	100	174	P
8	12950.00	19.06	42.23	61.29	88.20	-26.91	Peak	100	174	P
9	19425.00	10.18	41.43	51.61	63.54	-11.93	Average	150	360	P
10	19425.00	10.18	51.98	62.16	83.54	-21.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

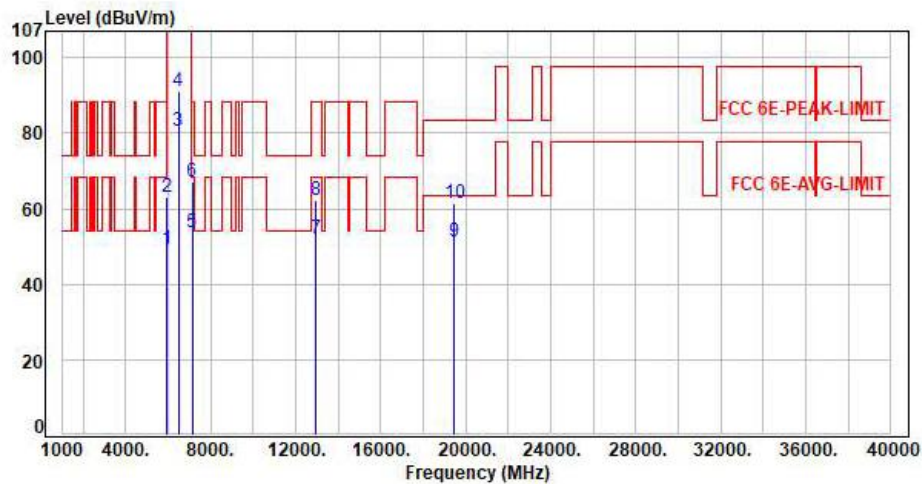

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.88	49.39	68.20	-18.81	Average	171	212	P
2	5925.00	7.51	55.49	63.00	88.20	-25.20	Peak	171	212	P
3	6475.00	9.63	70.98	80.61	200.00	-119.39	Average	171	212	P
4	6475.00	9.63	81.66	91.29	200.00	-108.71	Peak	171	212	P
5	7125.00	11.56	41.97	53.53	68.20	-14.67	Average	171	212	P
6	7125.00	11.56	55.48	67.04	88.20	-21.16	Peak	171	212	P
7	12950.00	19.06	32.92	51.98	68.20	-16.22	Average	100	95	P
8	12950.00	19.06	43.12	62.18	88.20	-26.02	Peak	100	95	P
9	19425.00	10.18	41.24	51.42	63.54	-12.12	Average	150	360	P
10	19425.00	10.18	51.33	61.51	83.54	-22.03	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

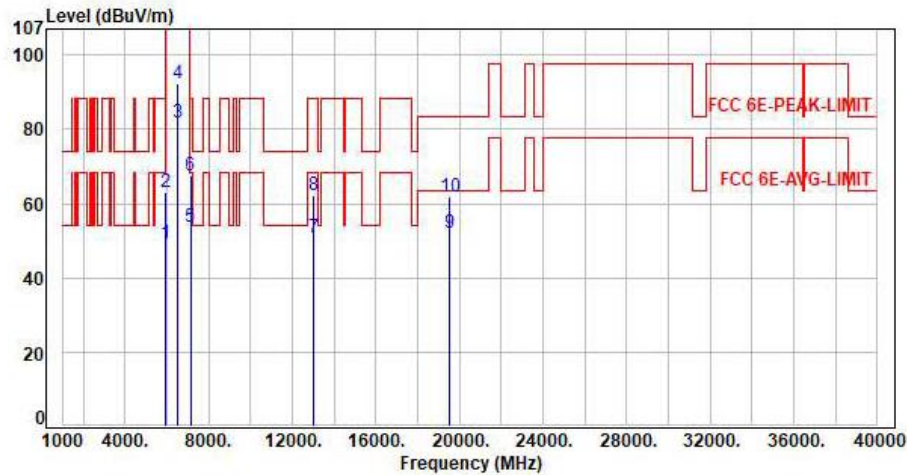

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.92	49.43	68.20	-18.77	Average	171	189	P
2	5925.00	7.51	55.55	63.06	88.20	-25.14	Peak	171	189	P
3	6515.00	9.81	71.89	81.70	200.00	-118.30	Average	171	189	P
4	6515.00	9.81	82.73	92.54	200.00	-107.46	Peak	171	189	P
5	7125.00	11.56	41.95	53.51	68.20	-14.69	Average	171	189	P
6	7125.00	11.56	55.80	67.36	88.20	-20.84	Peak	171	189	P
7	13030.00	19.39	31.44	50.83	68.20	-17.37	Average	100	177	P
8	13030.00	19.39	42.79	62.18	88.20	-26.02	Peak	100	177	P
9	19545.00	10.28	41.71	51.99	63.54	-11.55	Average	150	360	P
10	19545.00	10.28	51.63	61.91	83.54	-21.63	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

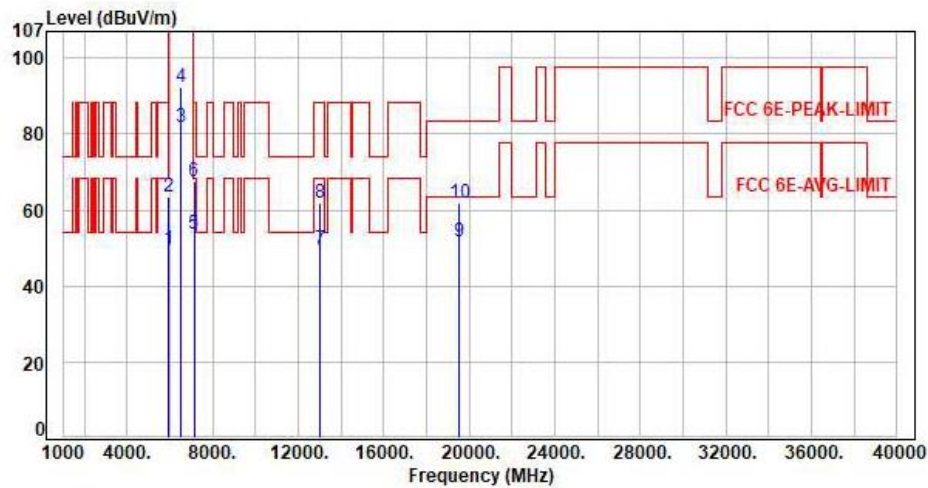

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.16	49.67	68.20	-18.53	Average	167	216	P
2	5925.00	7.51	55.84	63.35	88.20	-24.85	Peak	167	216	P
3	6515.00	9.81	71.95	81.76	200.00	-118.24	Average	167	216	P
4	6515.00	9.81	82.59	92.40	200.00	-107.60	Peak	167	216	P
5	7125.00	11.56	42.24	53.80	68.20	-14.40	Average	167	216	P
6	7125.00	11.56	55.79	67.35	88.20	-20.85	Peak	167	216	P
7	13030.00	19.39	30.10	49.49	68.20	-18.71	Average	100	91	P
8	13030.00	19.39	42.44	61.83	88.20	-26.37	Peak	100	91	P
9	19545.00	10.28	41.58	51.86	63.54	-11.68	Average	150	360	P
10	19545.00	10.28	51.64	61.92	83.54	-21.62	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT B / B7

Test Mode : 1TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

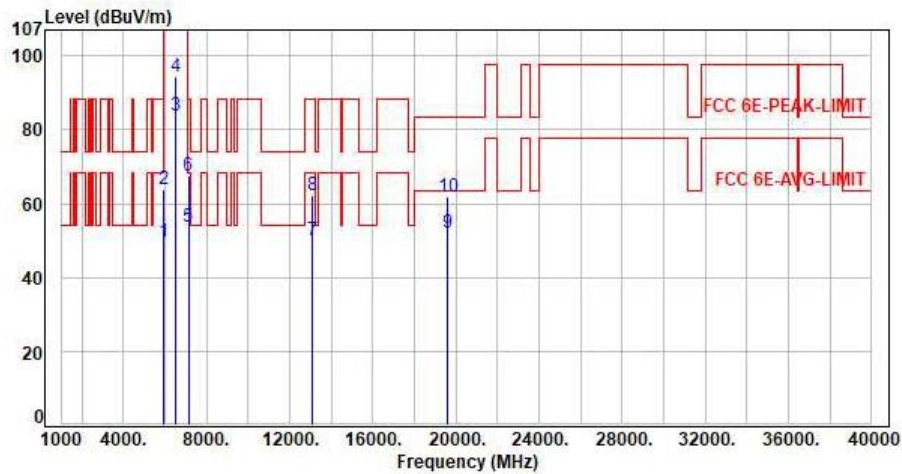

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.26	49.77	68.20	-18.43	Average	161	189	P
2	5925.00	7.51	56.52	64.03	88.20	-24.17	Peak	161	189	P
3	6535.00	9.90	73.76	83.66	200.00	-116.34	Average	161	189	P
4	6535.00	9.90	84.49	94.39	200.00	-105.61	Peak	161	189	P
5	7125.00	11.56	42.17	53.73	68.20	-14.47	Average	161	189	P
6	7125.00	11.56	55.96	67.52	88.20	-20.68	Peak	161	189	P
7	13070.00	19.57	30.50	50.07	68.20	-18.13	Average	100	175	P
8	13070.00	19.57	42.54	62.11	88.20	-26.09	Peak	100	175	P
9	19605.00	10.53	41.53	52.06	63.54	-11.48	Average	150	360	P
10	19605.00	10.53	51.37	61.90	83.54	-21.64	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

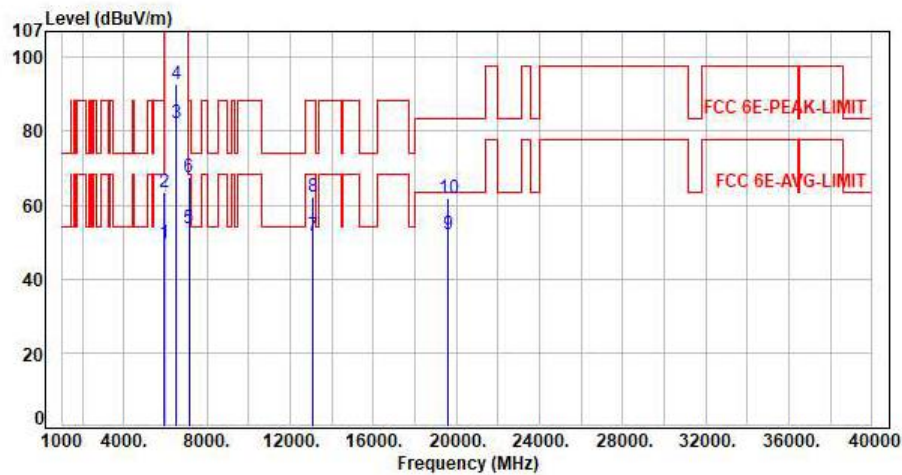

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.24	49.75	68.20	-18.45	Average	231	215	P
2	5925.00	7.51	56.12	63.63	88.20	-24.57	Peak	231	215	P
3	6535.00	9.90	72.32	82.22	200.00	-117.78	Average	231	215	P
4	6535.00	9.90	82.86	92.76	200.00	-107.24	Peak	231	215	P
5	7125.00	11.56	42.22	53.78	68.20	-14.42	Average	231	215	P
6	7125.00	11.56	56.10	67.66	88.20	-20.54	Peak	231	215	P
7	13070.00	19.57	31.92	51.49	68.20	-16.71	Average	100	96	P
8	13070.00	19.57	42.77	62.34	88.20	-25.86	Peak	100	96	P
9	19605.00	10.53	41.42	51.95	63.54	-11.59	Average	150	360	P
10	19605.00	10.53	51.49	62.02	83.54	-21.52	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

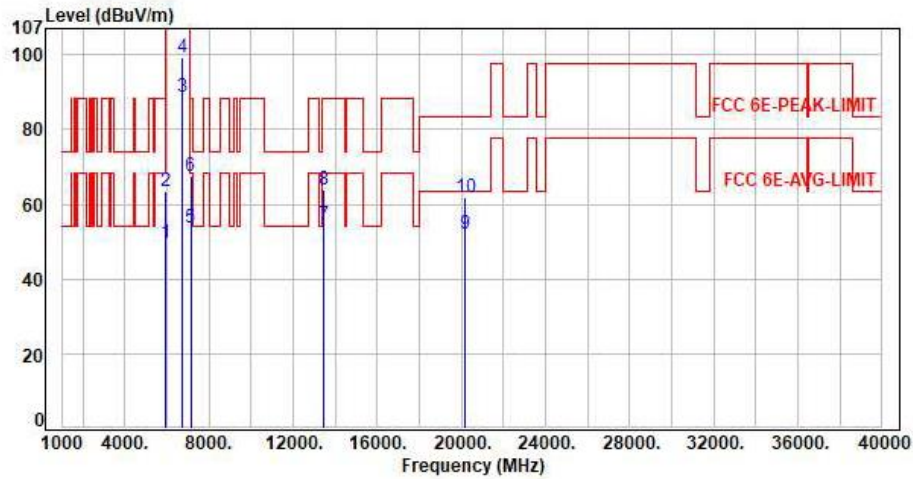


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.28	49.79	68.20	-18.41	Average	222	180	P
2	5925.00	7.51	55.79	63.30	88.20	-24.90	Peak	222	180	P
3	6715.00	10.64	77.90	88.54	200.00	-111.46	Average	222	180	P
4	6715.00	10.64	88.45	99.09	200.00	-100.91	Peak	222	180	P
5	7125.00	11.56	42.22	53.78	68.20	-14.42	Average	222	180	P
6	7125.00	11.56	55.77	67.33	88.20	-20.87	Peak	222	180	P
7	13430.00	21.22	33.16	54.38	68.20	-13.82	Average	100	174	P
8	13430.00	21.22	42.63	63.85	88.20	-24.35	Peak	100	174	P
9	20145.00	10.35	41.83	52.18	63.54	-11.36	Average	150	360	P
10	20145.00	10.35	51.49	61.84	83.54	-21.70	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

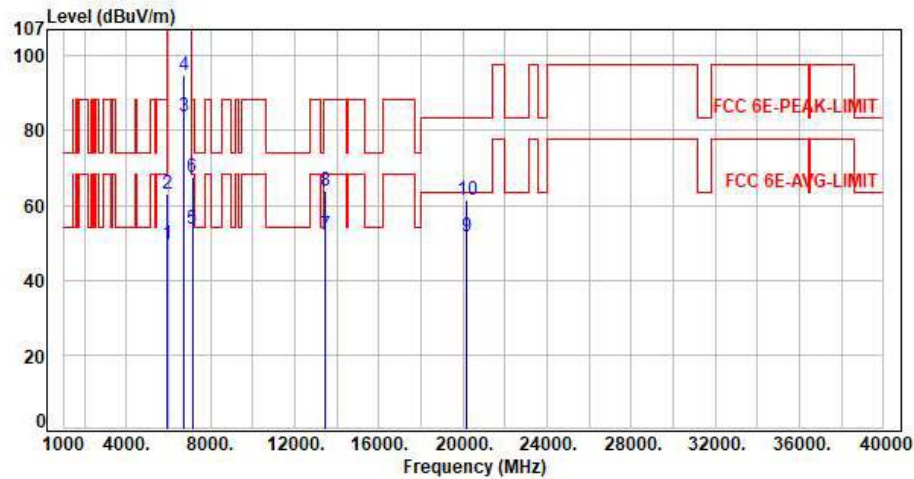

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.14	49.65	68.20	-18.55	Average	169	148	P
2	5925.00	7.51	55.61	63.12	88.20	-25.08	Peak	169	148	P
3	6715.00	10.64	73.11	83.75	200.00	-116.25	Average	169	148	P
4	6715.00	10.64	84.07	94.71	200.00	-105.29	Peak	169	148	P
5	7125.00	11.56	42.16	53.72	68.20	-14.48	Average	169	148	P
6	7125.00	11.56	56.05	67.61	88.20	-20.59	Peak	169	148	P
7	13430.00	21.22	30.81	52.03	68.20	-16.17	Average	100	91	P
8	13430.00	21.22	42.77	63.99	88.20	-24.21	Peak	100	91	P
9	20145.00	10.35	41.42	51.77	63.54	-11.77	Average	150	360	P
10	20145.00	10.35	51.10	61.45	83.54	-22.09	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

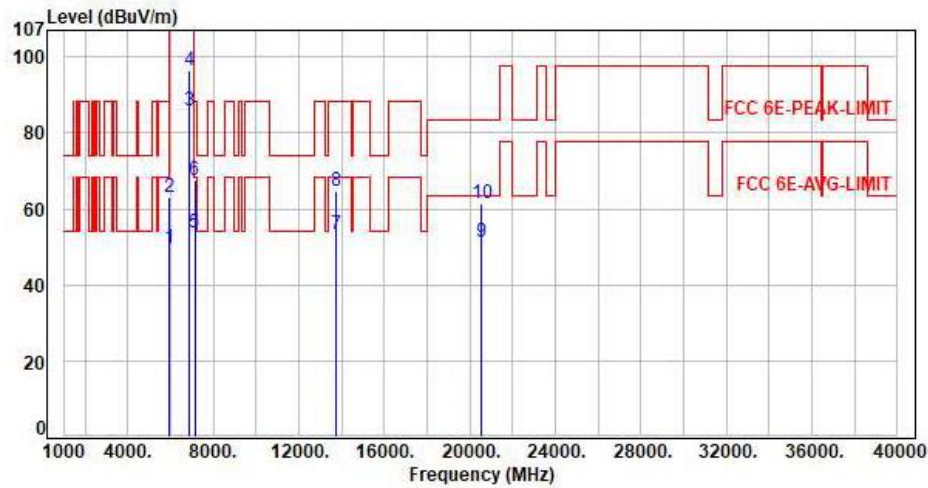

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.22	49.73	68.20	-18.47	Average	178	164	P
2	5925.00	7.51	55.53	63.04	88.20	-25.16	Peak	178	164	P
3	6855.00	11.02	74.73	85.75	200.00	-114.25	Average	178	164	P
4	6855.00	11.02	85.37	96.39	200.00	-103.61	Peak	178	164	P
5	7125.00	11.56	42.18	53.74	68.20	-14.46	Average	178	164	P
6	7125.00	11.56	55.85	67.41	88.20	-20.79	Peak	178	164	P
7	13710.00	22.30	30.94	53.24	68.20	-14.96	Average	100	172	P
8	13710.00	22.30	42.56	64.86	88.20	-23.34	Peak	100	172	P
9	20565.00	9.99	41.30	51.29	63.54	-12.25	Average	150	360	P
10	20565.00	9.99	51.35	61.34	83.54	-22.20	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

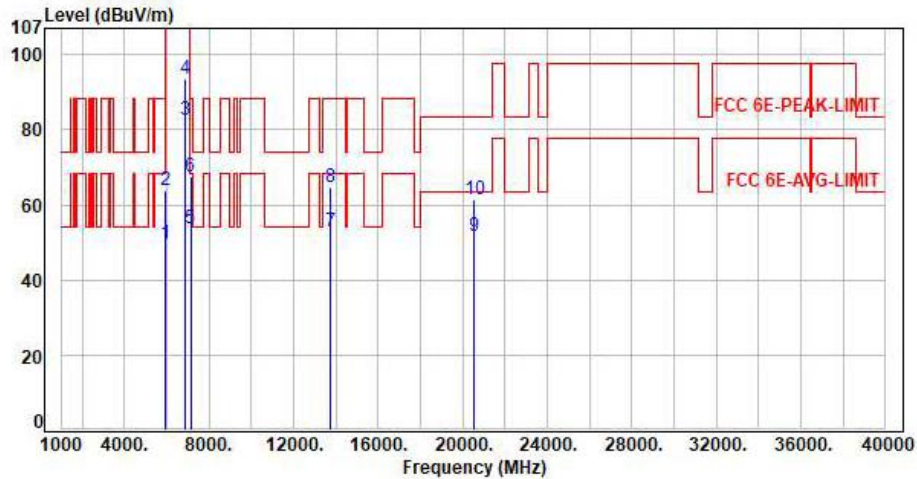

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.16	49.67	68.20	-18.53	Average	166	156	P
2	5925.00	7.51	56.25	63.76	88.20	-24.44	Peak	166	156	P
3	6855.00	11.02	71.62	82.64	200.00	-117.36	Average	166	156	P
4	6855.00	11.02	82.35	93.37	200.00	-106.63	Peak	166	156	P
5	7125.00	11.56	42.21	53.77	68.20	-14.43	Average	166	156	P
6	7125.00	11.56	56.05	67.61	88.20	-20.59	Peak	166	156	P
7	13710.00	22.30	30.68	52.98	68.20	-15.22	Average	100	94	P
8	13710.00	22.30	42.34	64.64	88.20	-23.56	Peak	100	94	P
9	20565.00	9.99	41.58	51.57	63.54	-11.97	Average	150	360	P
10	20565.00	9.99	51.51	61.50	83.54	-22.04	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT B / B8

Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

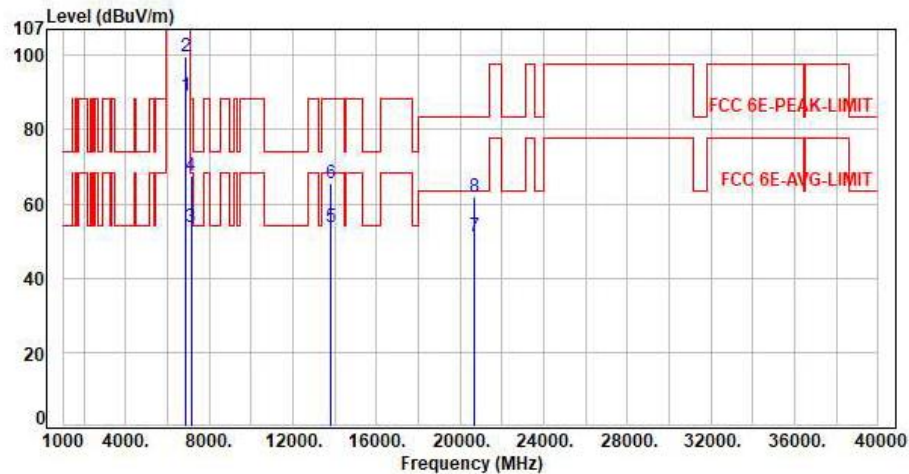


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	11.06	78.13	89.19	200.00	-110.81	Average	217	181	P
2	6895.00	11.06	88.81	99.87	200.00	-100.13	Peak	217	181	P
3	7125.00	11.56	42.17	53.73	68.20	-14.47	Average	217	181	P
4	7125.00	11.56	56.04	67.60	88.20	-20.60	Peak	217	181	P
5	13790.00	22.71	31.11	53.82	68.20	-14.38	Average	100	172	P
6	13790.00	22.71	42.81	65.52	88.20	-22.68	Peak	100	172	P
7	20685.00	10.09	41.15	51.24	63.54	-12.30	Average	150	360	P
8	20685.00	10.09	51.69	61.78	83.54	-21.76	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

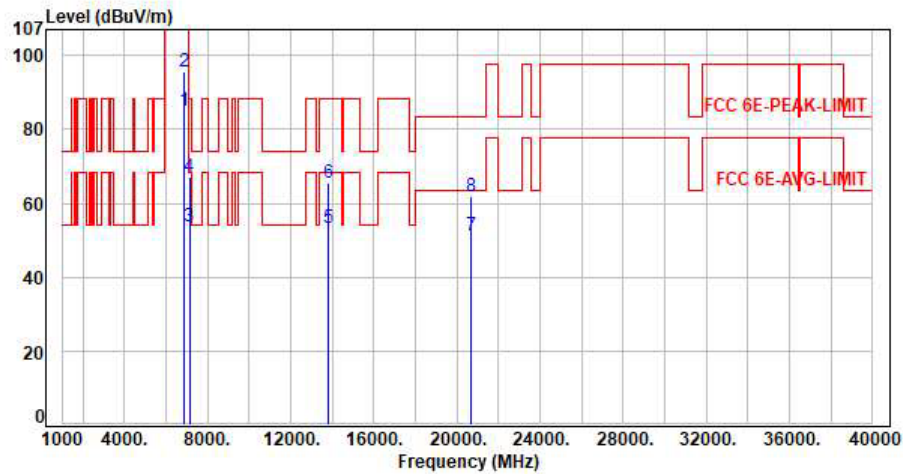

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	11.06	73.98	85.04	200.00	-114.96	Average	346	201	P
2	6895.00	11.06	84.67	95.73	200.00	-104.27	Peak	346	201	P
3	7125.00	11.56	42.24	53.80	68.20	-14.40	Average	346	201	P
4	7125.00	11.56	55.54	67.10	88.20	-21.10	Peak	346	201	P
5	13790.00	22.71	30.78	53.49	68.20	-14.71	Average	100	96	P
6	13790.00	22.71	42.97	65.68	88.20	-22.52	Peak	100	96	P
7	20685.00	10.09	41.31	51.40	63.54	-12.14	Average	150	360	P
8	20685.00	10.09	51.63	61.72	83.54	-21.82	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

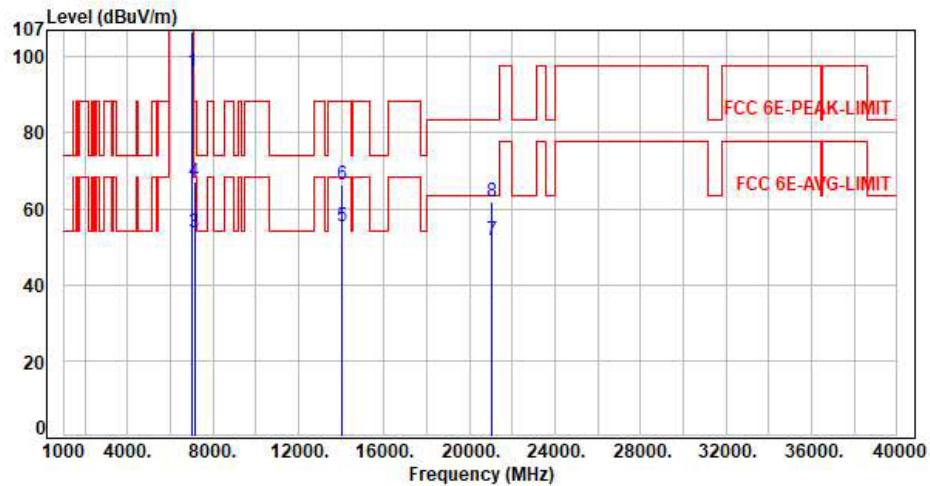

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	11.19	84.67	95.86	200.00	-104.14	Average	200	181	P
2	7015.00	11.19	95.54	106.73	200.00	-93.27	Peak	200	181	P
3	7125.00	11.56	42.20	53.76	68.20	-14.44	Average	200	181	P
4	7125.00	11.56	55.40	66.96	88.20	-21.24	Peak	200	181	P
5	14030.00	23.59	31.88	55.47	68.20	-12.73	Average	100	175	P
6	14030.00	23.59	42.62	66.21	88.20	-21.99	Peak	100	175	P
7	21045.00	10.53	41.33	51.86	63.54	-11.68	Average	150	360	P
8	21045.00	10.53	51.46	61.99	83.54	-21.55	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

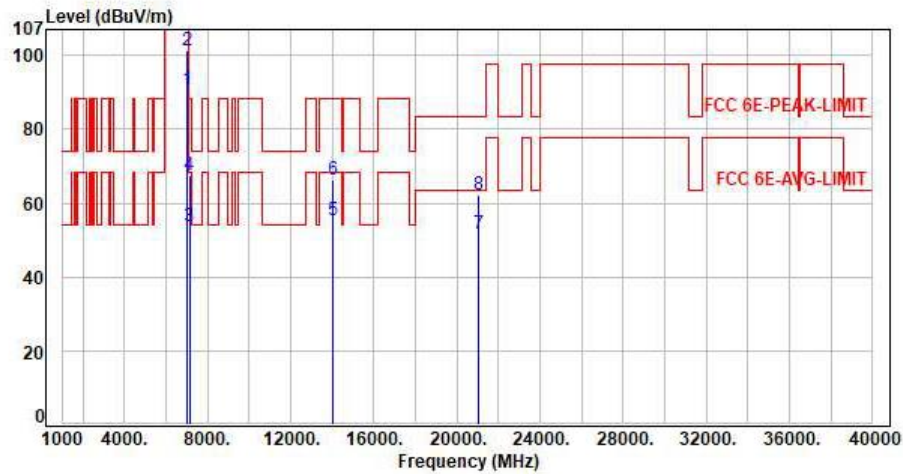

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	11.19	79.52	90.71	200.00	-109.29	Average	232	200	P
2	7015.00	11.19	90.12	101.31	200.00	-98.69	Peak	232	200	P
3	7125.00	11.56	42.07	53.63	68.20	-14.57	Average	232	200	P
4	7125.00	11.56	56.15	67.71	88.20	-20.49	Peak	232	200	P
5	14030.00	23.59	31.92	55.51	68.20	-12.69	Average	100	94	P
6	14030.00	23.59	42.61	66.20	88.20	-22.00	Peak	100	94	P
7	21045.00	10.53	41.33	51.86	63.54	-11.68	Average	150	360	P
8	21045.00	10.53	51.76	62.29	83.54	-21.25	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

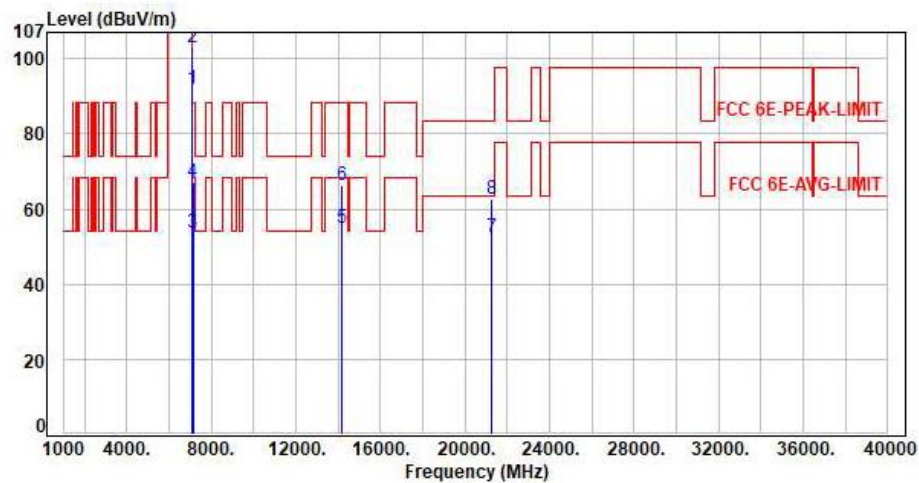

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	11.42	80.73	92.15	200.00	-107.85	Average	100	185	P
2	7095.00	11.42	91.36	102.78	200.00	-97.22	Peak	100	185	P
3	7125.00	11.56	42.18	53.74	68.20	-14.46	Average	100	185	P
4	7125.00	11.56	55.45	67.01	88.20	-21.19	Peak	100	185	P
5	14190.00	24.00	30.89	54.89	68.20	-13.31	Average	100	175	P
6	14190.00	24.00	42.49	66.49	88.20	-21.71	Peak	100	175	P
7	21285.00	10.65	41.66	52.31	63.54	-11.23	Average	150	360	P
8	21285.00	10.65	52.06	62.71	83.54	-20.83	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

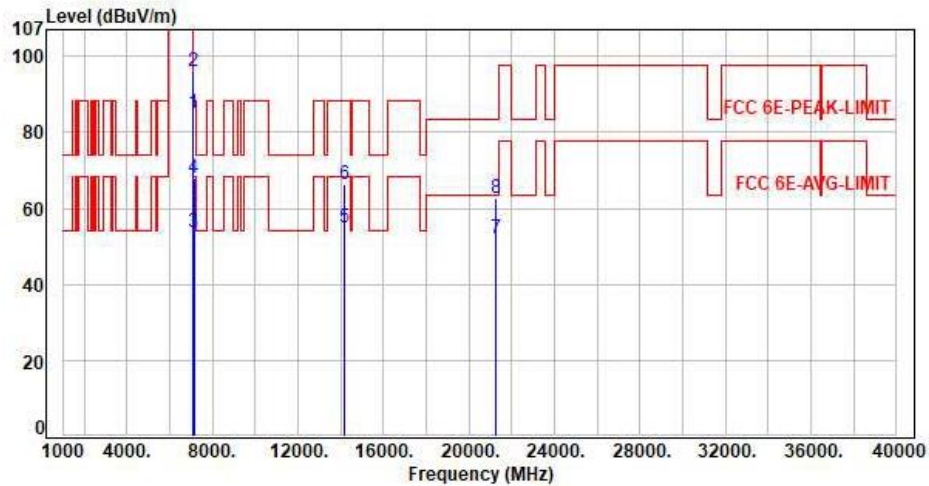

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	11.42	73.78	85.20	200.00	-114.80	Average	151	125	P
2	7095.00	11.42	84.43	95.85	200.00	-104.15	Peak	151	125	P
3	7125.00	11.56	42.17	53.73	68.20	-14.47	Average	151	125	P
4	7125.00	11.56	56.26	67.82	88.20	-20.38	Peak	151	125	P
5	14190.00	24.00	30.96	54.96	68.20	-13.24	Average	100	91	P
6	14190.00	24.00	42.46	66.46	88.20	-21.74	Peak	100	91	P
7	21285.00	10.65	41.52	52.17	63.54	-11.37	Average	150	360	P
8	21285.00	10.65	51.94	62.59	83.54	-20.95	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

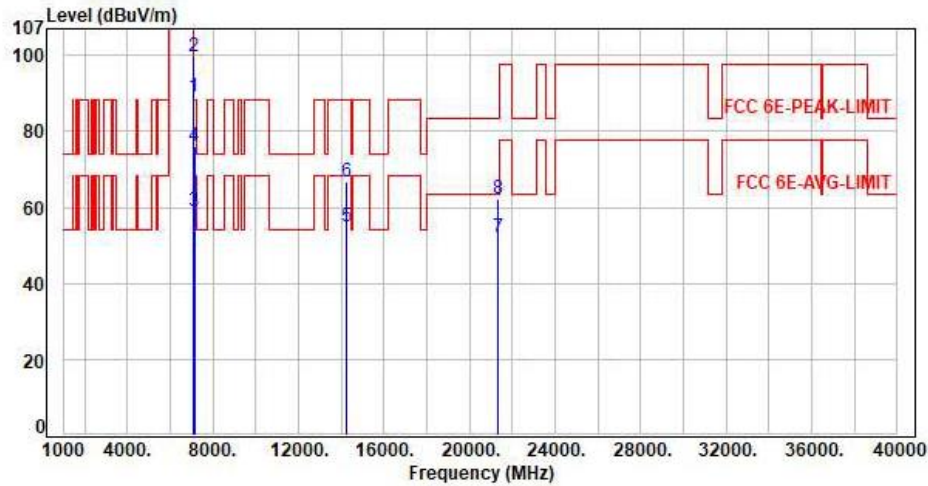

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	11.51	77.63	89.14	200.00	-110.86	Average	219	179	P
2	7115.00	11.51	88.34	99.85	200.00	-100.15	Peak	219	179	P
3	7125.00	11.56	47.53	59.09	68.20	-9.11	Average	219	179	P
4	7125.00	11.56	64.68	76.24	88.20	-11.96	Peak	219	179	P
5	14230.00	24.11	30.70	54.81	68.20	-13.39	Average	100	173	P
6	14230.00	24.11	42.75	66.86	88.20	-21.34	Peak	100	173	P
7	21345.00	10.62	41.38	52.00	63.54	-11.54	Average	150	360	P
8	21345.00	10.62	51.62	62.24	83.54	-21.30	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

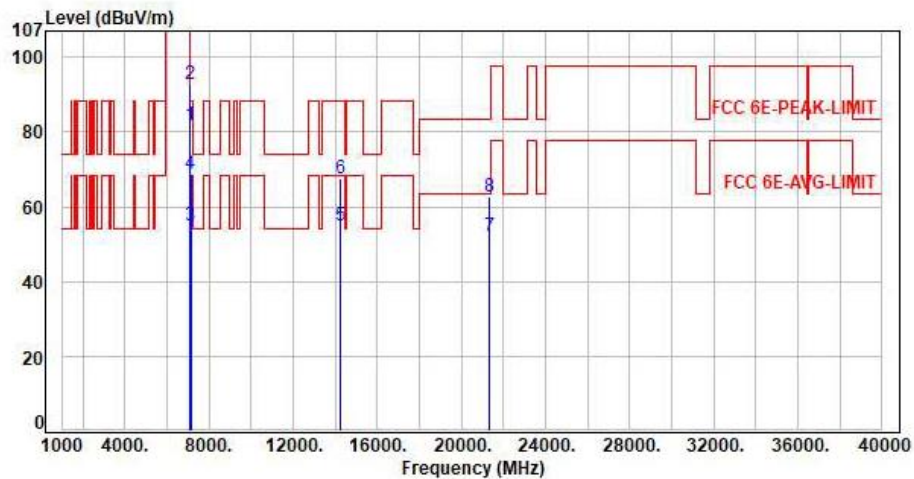


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	11.51	70.18	81.69	200.00	-118.31	Average	185	147	P
2	7115.00	11.51	81.11	92.62	200.00	-107.38	Peak	185	147	P
3	7125.00	11.56	43.52	55.08	68.20	-13.12	Average	185	147	P
4	7125.00	11.56	57.19	68.75	88.20	-19.45	Peak	185	147	P
5	14230.00	24.11	30.82	54.93	68.20	-13.27	Average	100	96	P
6	14230.00	24.11	43.40	67.51	88.20	-20.69	Peak	100	96	P
7	21345.00	10.62	41.62	52.24	63.54	-11.30	Average	150	360	P
8	21345.00	10.62	51.97	62.59	83.54	-20.95	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

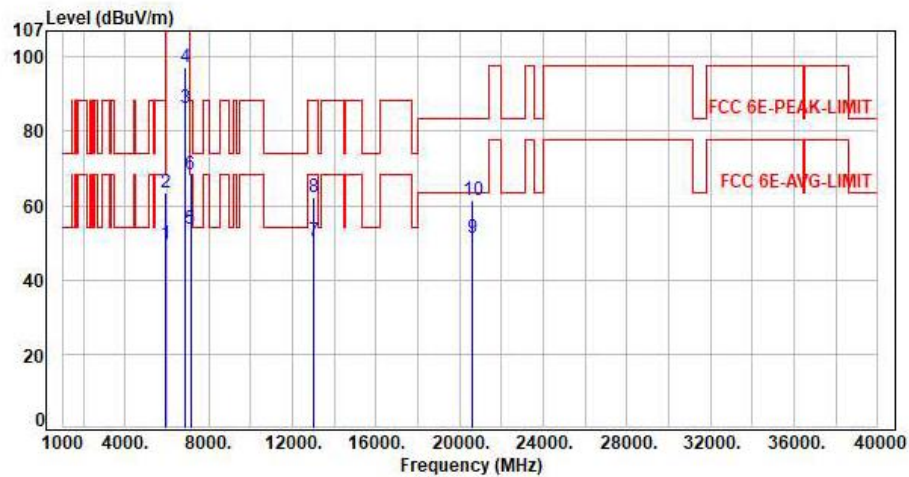

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.19	49.70	68.20	-18.50	Average	160	181	P
2	5925.00	7.51	55.80	63.31	88.20	-24.89	Peak	160	181	P
3	6875.00	11.04	75.36	86.40	200.00	-113.60	Average	160	181	P
4	6875.00	11.04	86.39	97.43	200.00	-102.57	Peak	160	181	P
5	7125.00	11.56	42.13	53.69	68.20	-14.51	Average	160	181	P
6	7125.00	11.56	56.76	68.32	88.20	-19.88	Peak	160	181	P
7	13030.00	19.39	31.18	50.57	68.20	-17.63	Average	100	168	P
8	13030.00	19.39	43.02	62.41	88.20	-25.79	Peak	100	168	P
9	20625.00	10.00	41.12	51.12	63.54	-12.42	Average	150	360	P
10	20625.00	10.00	51.44	61.44	83.54	-22.10	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

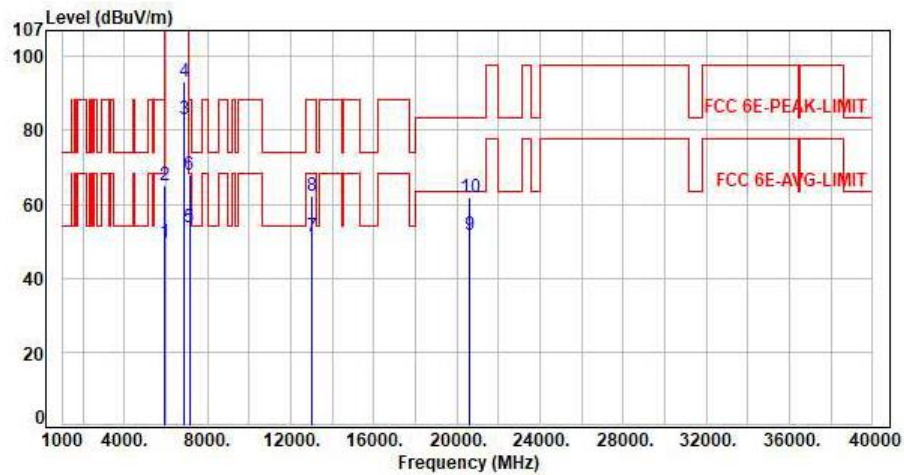

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.18	49.69	68.20	-18.51	Average	100	157	P
2	5925.00	7.51	57.46	64.97	88.20	-23.23	Peak	100	157	P
3	6875.00	11.04	71.77	82.81	200.00	-117.19	Average	100	157	P
4	6875.00	11.04	82.32	93.36	200.00	-106.64	Peak	100	157	P
5	7125.00	11.56	42.16	53.72	68.20	-14.48	Average	100	157	P
6	7125.00	11.56	56.30	67.86	88.20	-20.34	Peak	100	157	P
7	13030.00	19.39	31.93	51.32	68.20	-16.88	Average	100	98	P
8	13030.00	19.39	42.76	62.15	88.20	-26.05	Peak	100	98	P
9	20625.00	10.00	41.52	51.52	63.54	-12.02	Average	150	360	P
10	20625.00	10.00	51.74	61.74	83.54	-21.80	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO B5

Test Mode : 2TX 11ax20 CH1 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

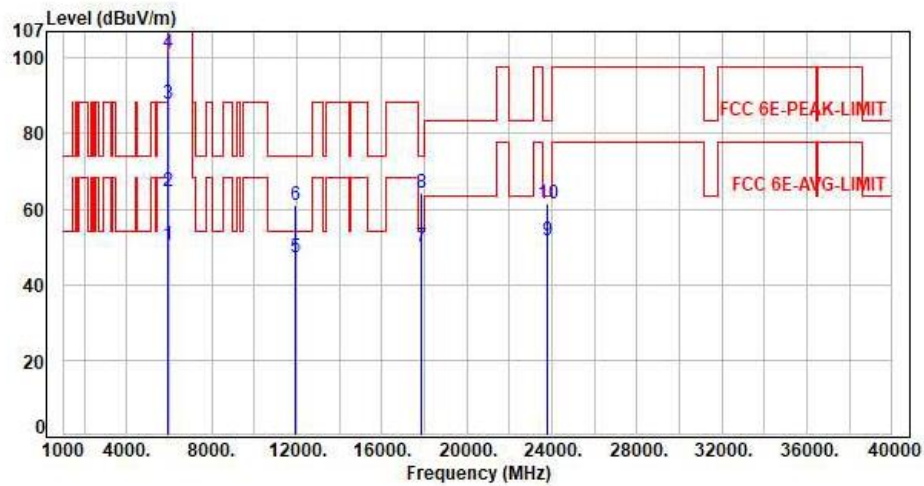

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.11	50.62	68.20	-17.58	Average	147	167	P
2	5925.00	7.51	57.09	64.60	88.20	-23.60	Peak	147	167	P
3	5955.00	7.54	80.46	88.00	200.00	-112.00	Average	147	167	P
4	5955.00	7.54	93.96	101.50	200.00	-98.50	Peak	147	167	P
5	11910.00	17.96	29.04	47.00	54.00	-7.00	Average	100	54	P
6	11910.00	17.96	43.22	61.18	74.00	-12.82	Peak	100	54	P
7	17865.00	29.59	20.63	50.22	54.00	-3.78	Average	100	226	P
8	17865.00	29.59	34.78	64.37	74.00	-9.63	Peak	100	226	P
9	23820.00	10.06	41.51	51.57	63.54	-11.97	Average	150	360	P
10	23820.00	10.06	51.55	61.61	83.54	-21.93	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor