




Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

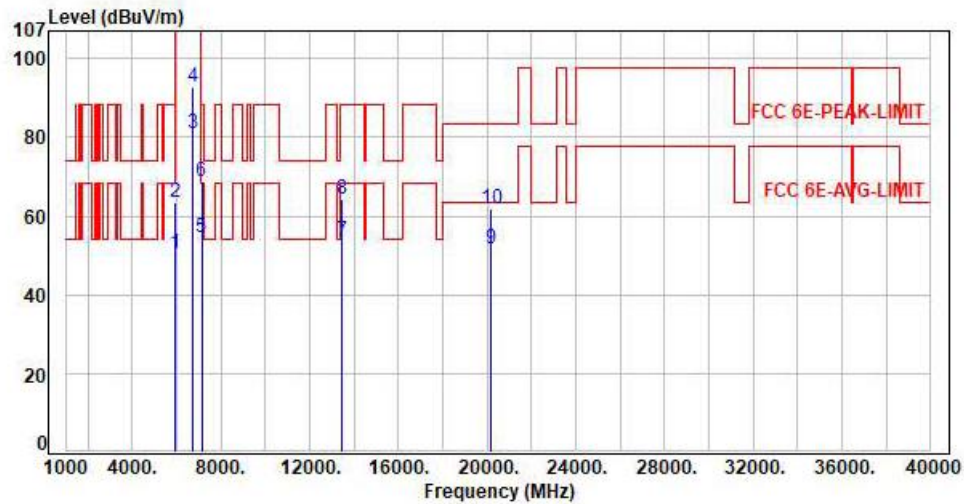

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.83	50.34	68.20	-17.86	Average	100	147	P
2	5925.00	7.51	56.12	63.63	88.20	-24.57	Peak	100	147	P
3	6725.00	10.67	70.42	81.09	200.00	-118.91	Average	100	147	P
4	6725.00	10.67	81.93	92.60	200.00	-107.40	Peak	100	147	P
5	7125.00	11.56	42.81	54.37	68.20	-13.83	Average	100	147	P
6	7125.00	11.56	57.40	68.96	88.20	-19.24	Peak	100	147	P
7	13450.00	21.26	32.63	53.89	68.20	-14.31	Average	100	125	P
8	13450.00	21.26	43.06	64.32	88.20	-23.88	Peak	100	125	P
9	20175.00	10.27	41.43	51.70	63.54	-11.84	Average	150	360	P
10	20175.00	10.27	51.49	61.76	83.54	-21.78	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

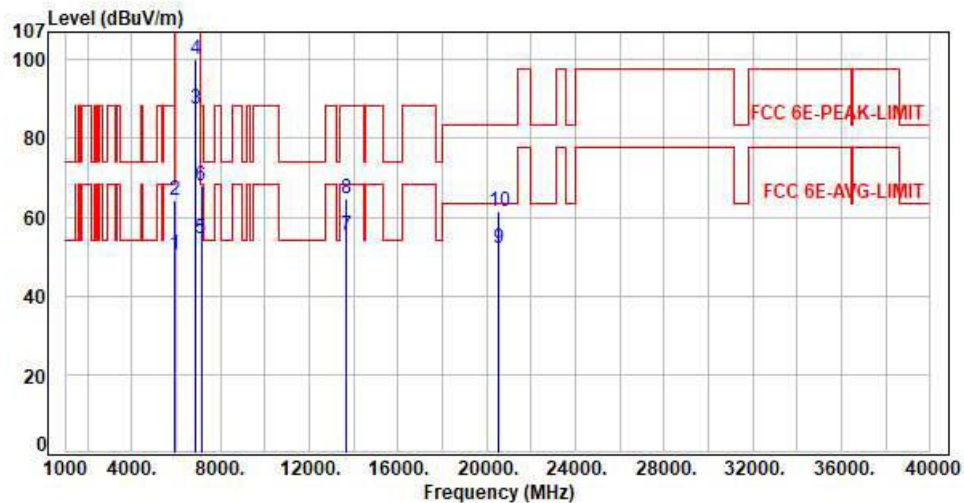

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.98	50.49	68.20	-17.71	Average	192	181	P
2	5925.00	7.51	56.86	64.37	88.20	-23.83	Peak	192	181	P
3	6845.00	11.02	76.65	87.67	200.00	-112.33	Average	192	181	P
4	6845.00	11.02	88.92	99.94	200.00	-100.06	Peak	192	181	P
5	7125.00	11.56	42.86	54.42	68.20	-13.78	Average	192	181	P
6	7125.00	11.56	56.30	67.86	88.20	-20.34	Peak	192	181	P
7	13690.00	22.16	32.97	55.13	68.20	-13.07	Average	100	64	P
8	13690.00	22.16	42.49	64.65	88.20	-23.55	Peak	100	64	P
9	20535.00	9.99	41.94	51.93	63.54	-11.61	Average	150	360	P
10	20535.00	9.99	51.57	61.56	83.54	-21.98	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

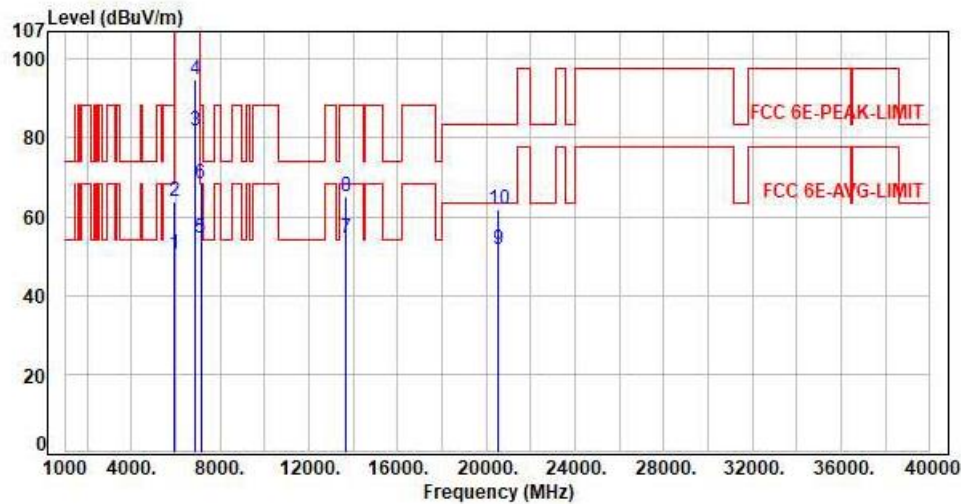

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.98	50.49	68.20	-17.71	Average	105	209	P
2	5925.00	7.51	56.51	64.02	88.20	-24.18	Peak	105	209	P
3	6845.00	11.02	70.92	81.94	200.00	-118.06	Average	105	209	P
4	6845.00	11.02	83.78	94.80	200.00	-105.20	Peak	105	209	P
5	7125.00	11.56	42.96	54.52	68.20	-13.68	Average	105	209	P
6	7125.00	11.56	56.96	68.52	88.20	-19.68	Peak	105	209	P
7	13690.00	22.16	32.43	54.59	68.20	-13.61	Average	100	127	P
8	13690.00	22.16	43.13	65.29	88.20	-22.91	Peak	100	127	P
9	20535.00	9.99	41.53	51.52	63.54	-12.02	Average	150	360	P
10	20535.00	9.99	51.89	61.88	83.54	-21.66	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

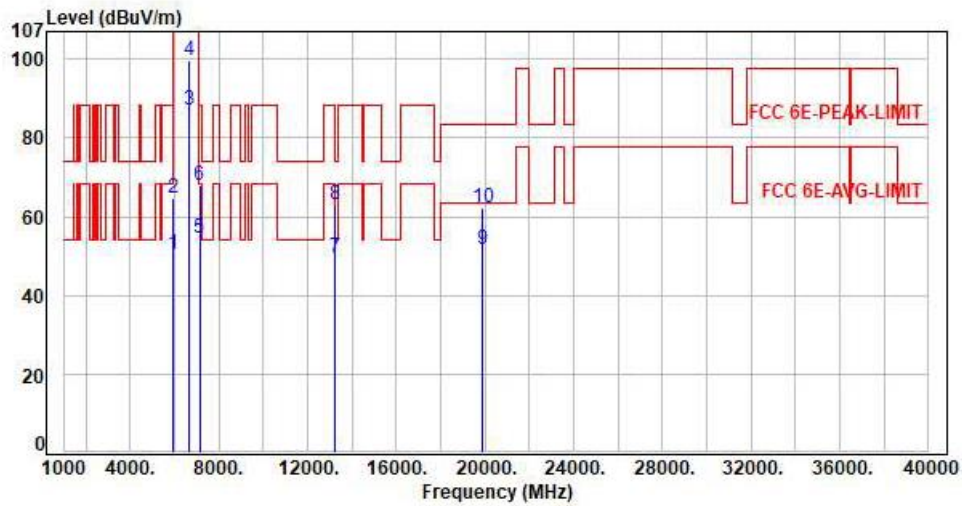

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.96	50.47	68.20	-17.73	Average	100	158	P
2	5925.00	7.51	57.30	64.81	88.20	-23.39	Peak	100	158	P
3	6625.00	10.28	76.87	87.15	200.00	-112.85	Average	100	158	P
4	6625.00	10.28	89.31	99.59	200.00	-100.41	Peak	100	158	P
5	7125.00	11.56	43.00	54.56	68.20	-13.64	Average	100	158	P
6	7125.00	11.56	56.49	68.05	88.20	-20.15	Peak	100	158	P
7	13250.00	20.56	28.88	49.44	54.00	-4.56	Average	100	57	P
8	13250.00	20.56	42.60	63.16	74.00	-10.84	Peak	100	57	P
9	19875.00	10.51	41.24	51.75	63.54	-11.79	Average	150	360	P
10	19875.00	10.51	51.81	62.32	83.54	-21.22	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

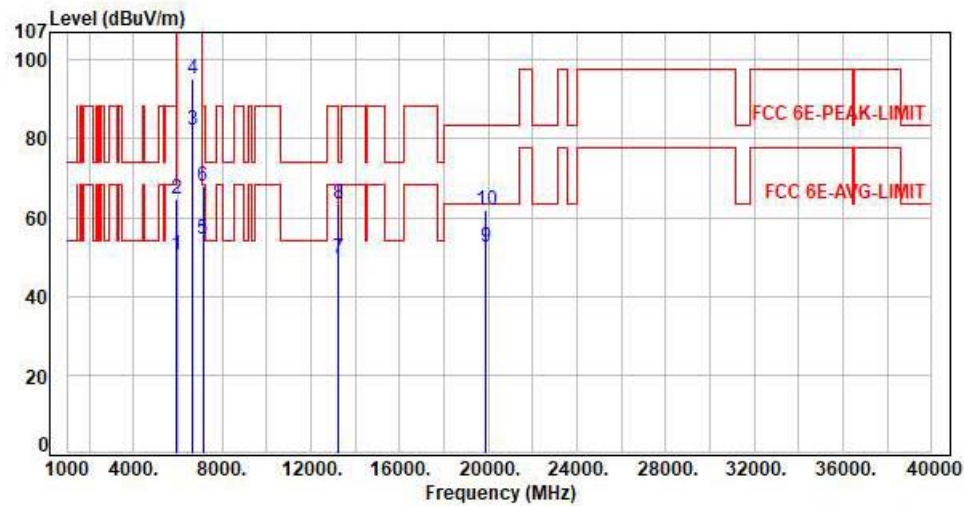

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.13	50.64	68.20	-17.56	Average	188	125	P
2	5925.00	7.51	57.00	64.51	88.20	-23.69	Peak	188	125	P
3	6625.00	10.28	71.88	82.16	200.00	-117.84	Average	188	125	P
4	6625.00	10.28	84.81	95.09	200.00	-104.91	Peak	188	125	P
5	7125.00	11.56	43.11	54.67	68.20	-13.53	Average	188	125	P
6	7125.00	11.56	56.56	68.12	88.20	-20.08	Peak	188	125	P
7	13250.00	20.56	29.02	49.58	54.00	-4.42	Average	100	126	P
8	13250.00	20.56	43.07	63.63	74.00	-10.37	Peak	100	126	P
9	19875.00	10.51	41.79	52.30	63.54	-11.24	Average	150	360	P
10	19875.00	10.51	51.23	61.74	83.54	-21.80	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

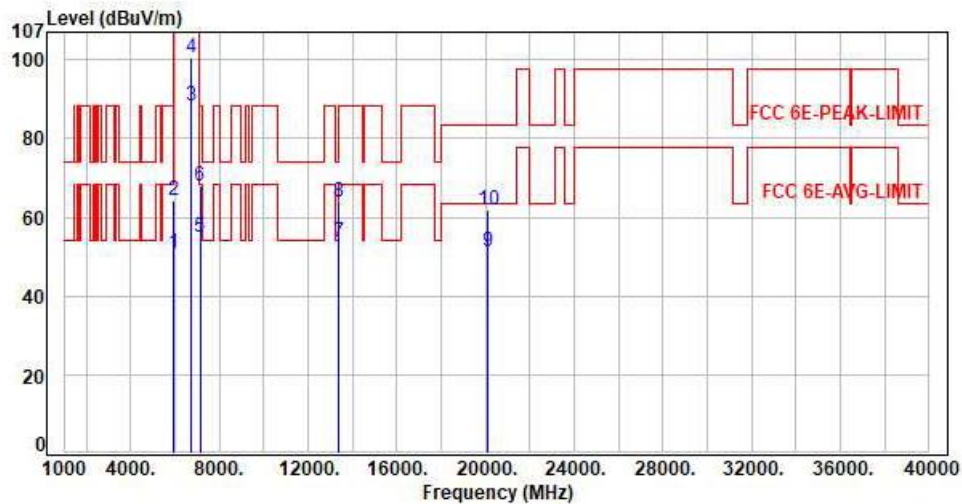

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.27	50.78	68.20	-17.42	Average	147	179	P
2	5925.00	7.51	56.76	64.27	88.20	-23.93	Peak	147	179	P
3	6705.00	10.61	77.70	88.31	200.00	-111.69	Average	147	179	P
4	6705.00	10.61	89.68	100.29	200.00	-99.71	Peak	147	179	P
5	7125.00	11.56	43.17	54.73	68.20	-13.47	Average	147	179	P
6	7125.00	11.56	56.56	68.12	88.20	-20.08	Peak	147	179	P
7	13410.00	21.17	32.46	53.63	68.20	-14.57	Average	100	58	P
8	13410.00	21.17	42.63	63.80	88.20	-24.40	Peak	100	58	P
9	20115.00	10.38	41.04	51.42	63.54	-12.12	Average	150	360	P
10	20115.00	10.38	51.51	61.89	83.54	-21.65	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

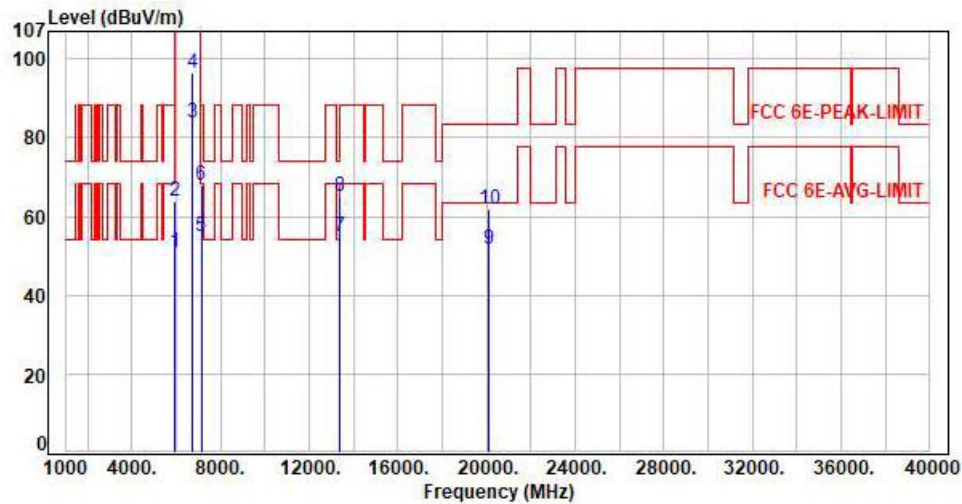

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.23	50.74	68.20	-17.46	Average	114	224	P
2	5925.00	7.51	56.42	63.93	88.20	-24.27	Peak	114	224	P
3	6705.00	10.61	73.19	83.80	200.00	-116.20	Average	114	224	P
4	6705.00	10.61	85.66	96.27	200.00	-103.73	Peak	114	224	P
5	7125.00	11.56	43.17	54.73	68.20	-13.47	Average	114	224	P
6	7125.00	11.56	56.38	67.94	88.20	-20.26	Peak	114	224	P
7	13410.00	21.17	33.79	54.96	68.20	-13.24	Average	100	126	P
8	13410.00	21.17	43.76	64.93	88.20	-23.27	Peak	100	126	P
9	20115.00	10.38	41.18	51.56	63.54	-11.98	Average	150	360	P
10	20115.00	10.38	51.42	61.80	83.54	-21.74	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

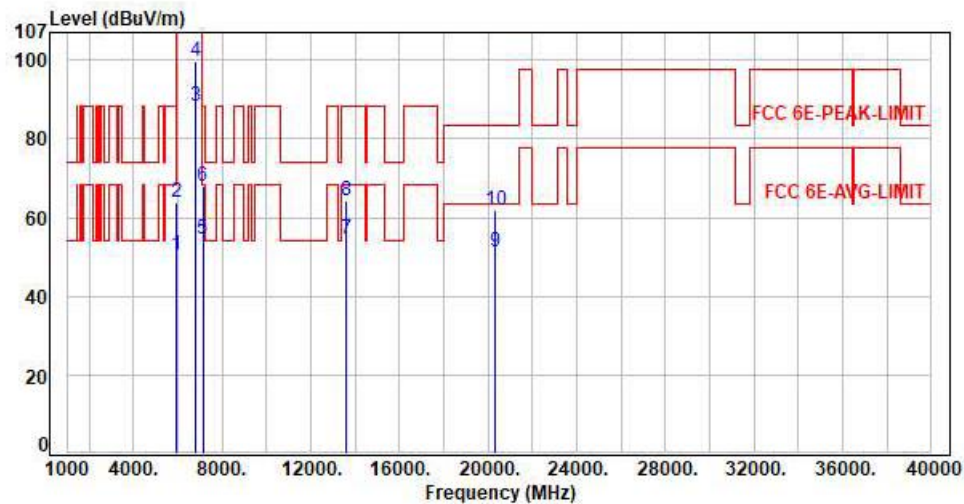

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.10	50.61	68.20	-17.59	Average	136	164	P
2	5925.00	7.51	56.39	63.90	88.20	-24.30	Peak	136	164	P
3	6785.00	10.90	77.28	88.18	200.00	-111.82	Average	136	164	P
4	6785.00	10.90	88.93	99.83	200.00	-100.17	Peak	136	164	P
5	7125.00	11.56	43.04	54.60	68.20	-13.60	Average	136	164	P
6	7125.00	11.56	56.35	67.91	88.20	-20.29	Peak	136	164	P
7	13570.00	21.62	32.94	54.56	68.20	-13.64	Average	100	54	P
8	13570.00	21.62	42.59	64.21	88.20	-23.99	Peak	100	54	P
9	20355.00	9.97	41.46	51.43	63.54	-12.11	Average	150	360	P
10	20355.00	9.97	51.86	61.83	83.54	-21.71	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

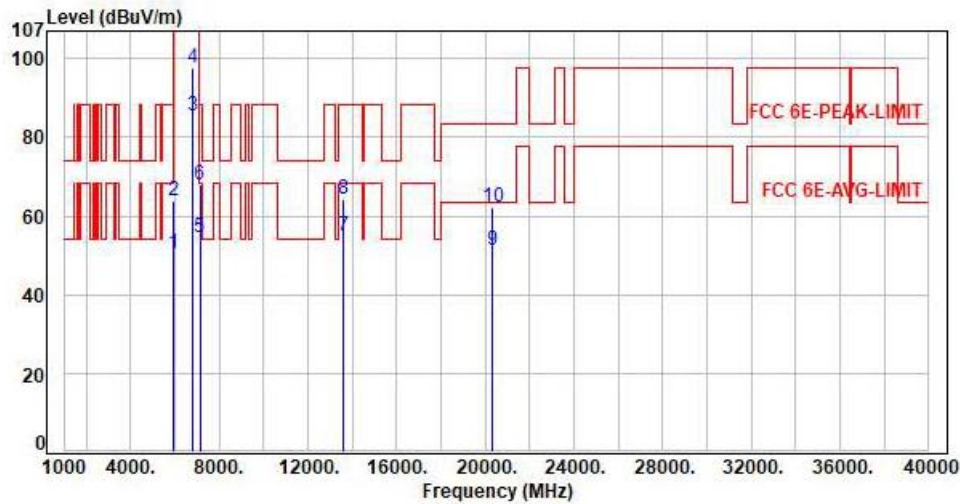

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.11	50.62	68.20	-17.58	Average	248	222	P
2	5925.00	7.51	56.42	63.93	88.20	-24.27	Peak	248	222	P
3	6785.00	10.90	74.45	85.35	200.00	-114.65	Average	248	222	P
4	6785.00	10.90	86.80	97.70	200.00	-102.30	Peak	248	222	P
5	7125.00	11.56	43.09	54.65	68.20	-13.55	Average	248	222	P
6	7125.00	11.56	56.59	68.15	88.20	-20.05	Peak	248	222	P
7	13570.00	21.62	33.42	55.04	68.20	-13.16	Average	100	131	P
8	13570.00	21.62	42.69	64.31	88.20	-23.89	Peak	100	131	P
9	20355.00	9.97	41.31	51.28	63.54	-12.26	Average	150	360	P
10	20355.00	9.97	52.10	62.07	83.54	-21.47	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

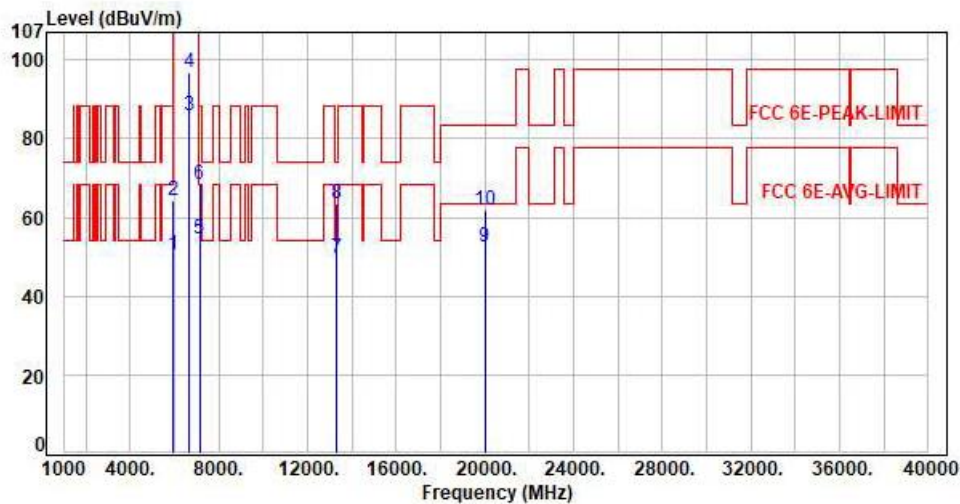

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.08	50.59	68.20	-17.61	Average	176	161	P
2	5925.00	7.51	56.91	64.42	88.20	-23.78	Peak	176	161	P
3	6665.00	10.42	75.26	85.68	200.00	-114.32	Average	176	161	P
4	6665.00	10.42	86.30	96.72	200.00	-103.28	Peak	176	161	P
5	7125.00	11.56	43.06	54.62	68.20	-13.58	Average	176	161	P
6	7125.00	11.56	56.76	68.32	88.20	-19.88	Peak	176	161	P
7	13330.00	20.82	28.93	49.75	54.00	-4.25	Average	100	54	P
8	13330.00	20.82	42.45	63.27	74.00	-10.73	Peak	100	54	P
9	19995.00	10.48	41.83	52.31	63.54	-11.23	Average	150	360	P
10	19995.00	10.48	51.29	61.77	83.54	-21.77	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

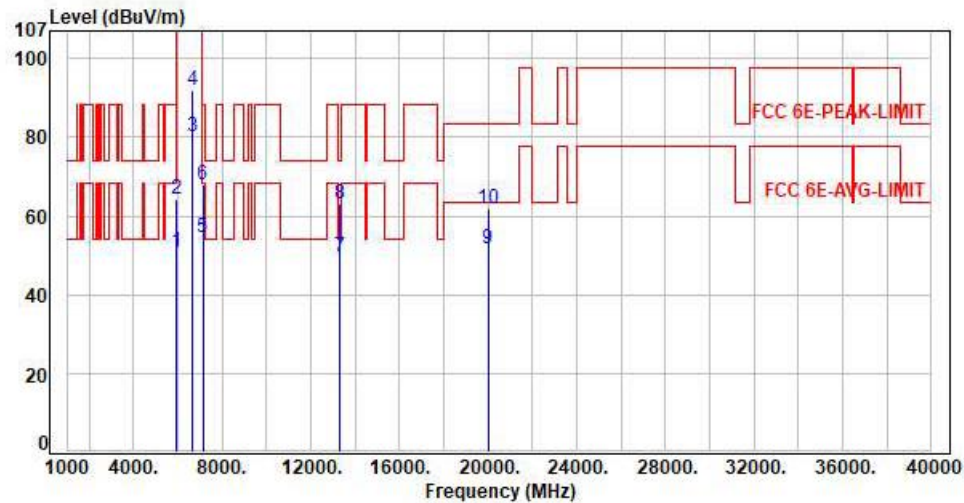

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.18	50.69	68.20	-17.51	Average	165	145	P
2	5925.00	7.51	56.58	64.09	88.20	-24.11	Peak	165	145	P
3	6665.00	10.42	69.81	80.23	200.00	-119.77	Average	165	145	P
4	6665.00	10.42	81.73	92.15	200.00	-107.85	Peak	165	145	P
5	7125.00	11.56	43.07	54.63	68.20	-13.57	Average	165	145	P
6	7125.00	11.56	56.48	68.04	88.20	-20.16	Peak	165	145	P
7	13330.00	20.82	29.01	49.83	54.00	-4.17	Average	100	129	P
8	13330.00	20.82	42.27	63.09	74.00	-10.91	Peak	100	129	P
9	19995.00	10.48	41.11	51.59	63.54	-11.95	Average	150	360	P
10	19995.00	10.48	51.17	61.65	83.54	-21.89	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO B8

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

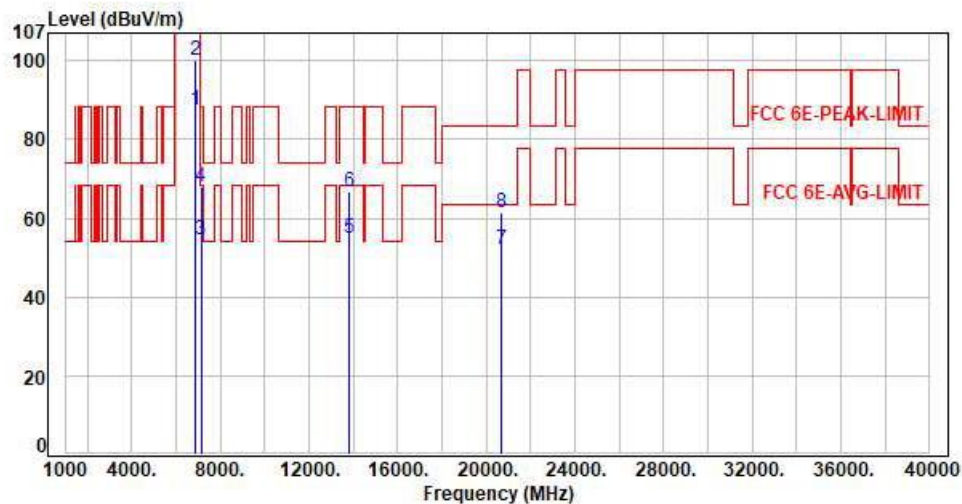

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	11.06	76.48	87.54	200.00	-112.46	Average	177	166	P
2	6895.00	11.06	89.04	100.10	200.00	-99.90	Peak	177	166	P
3	7125.00	11.56	42.85	54.41	68.20	-13.79	Average	177	166	P
4	7125.00	11.56	56.48	68.04	88.20	-20.16	Peak	177	166	P
5	13790.00	22.71	32.32	55.03	68.20	-13.17	Average	100	61	P
6	13790.00	22.71	43.81	66.52	88.20	-21.68	Peak	100	61	P
7	20685.00	10.09	41.95	52.04	63.54	-11.50	Average	150	360	P
8	20685.00	10.09	51.47	61.56	83.54	-21.98	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

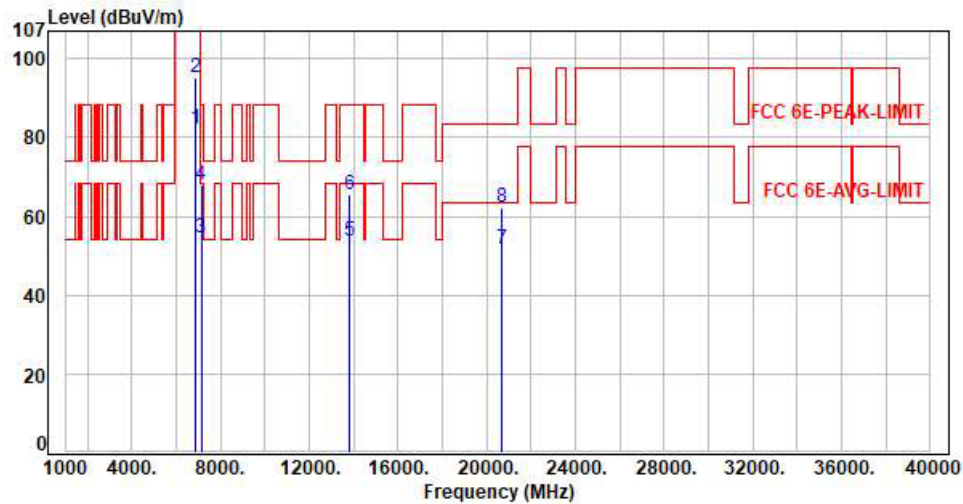

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	11.06	71.07	82.13	200.00	-117.87	Average	108	153	P
2	6895.00	11.06	84.11	95.17	200.00	-104.83	Peak	108	153	P
3	7125.00	11.56	42.77	54.33	68.20	-13.87	Average	108	153	P
4	7125.00	11.56	56.44	68.00	88.20	-20.20	Peak	108	153	P
5	13790.00	22.71	31.13	53.84	68.20	-14.36	Average	100	128	P
6	13790.00	22.71	42.82	65.53	88.20	-22.67	Peak	100	128	P
7	20685.00	10.09	41.44	51.53	63.54	-12.01	Average	150	360	P
8	20685.00	10.09	51.99	62.08	83.54	-21.46	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

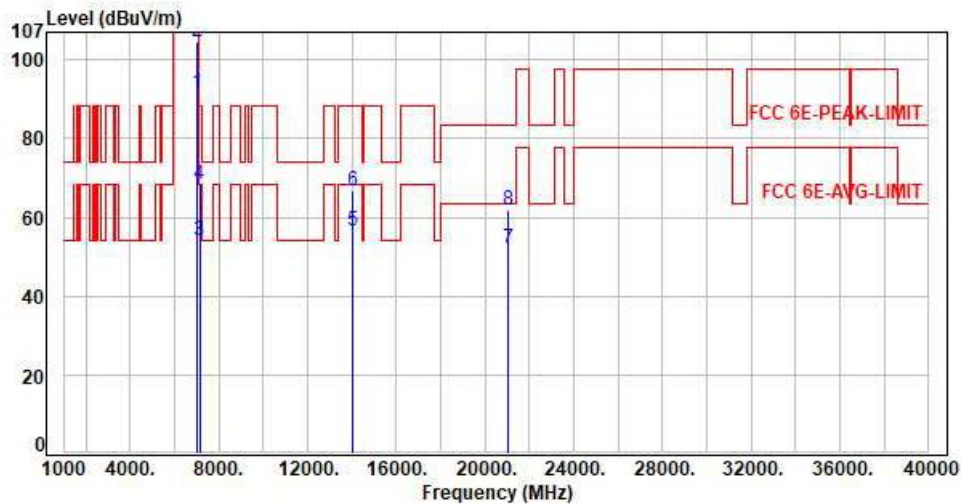

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	11.19	80.38	91.57	200.00	-108.43	Average	181	179	P
2	7015.00	11.19	93.56	104.75	200.00	-95.25	Peak	181	179	P
3	7125.00	11.56	42.67	54.23	68.20	-13.97	Average	181	179	P
4	7125.00	11.56	56.98	68.54	88.20	-19.66	Peak	181	179	P
5	14030.00	23.59	32.95	56.54	68.20	-11.66	Average	100	57	P
6	14030.00	23.59	43.03	66.62	88.20	-21.58	Peak	100	57	P
7	21045.00	10.53	41.49	52.02	63.54	-11.52	Average	150	360	P
8	21045.00	10.53	51.24	61.77	83.54	-21.77	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

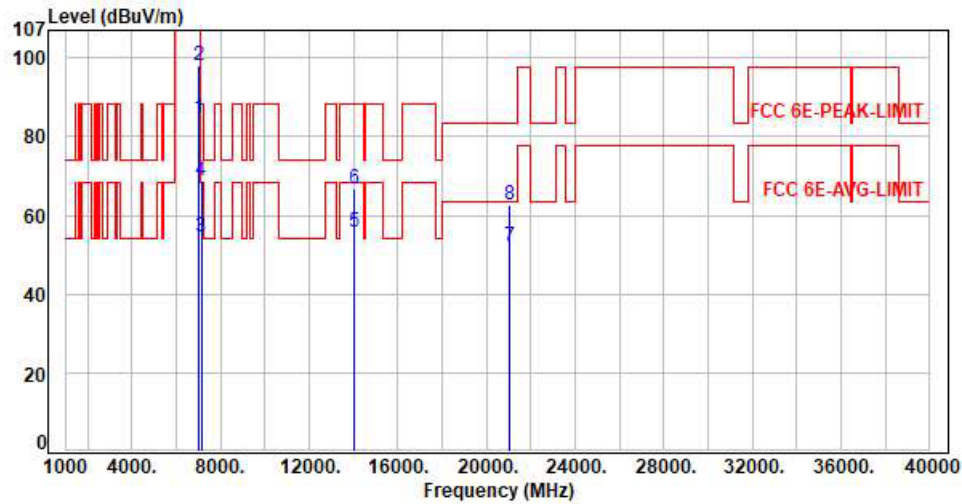

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	11.19	73.63	84.82	200.00	-115.18	Average	104	112	P
2	7015.00	11.19	86.74	97.93	200.00	-102.07	Peak	104	112	P
3	7125.00	11.56	43.07	54.63	68.20	-13.57	Average	104	112	P
4	7125.00	11.56	57.01	68.57	88.20	-19.63	Peak	104	112	P
5	14030.00	23.59	32.14	55.73	68.20	-12.47	Average	100	126	P
6	14030.00	23.59	43.06	66.65	88.20	-21.55	Peak	100	126	P
7	21045.00	10.53	41.42	51.95	63.54	-11.59	Average	150	360	P
8	21045.00	10.53	51.93	62.46	83.54	-21.08	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

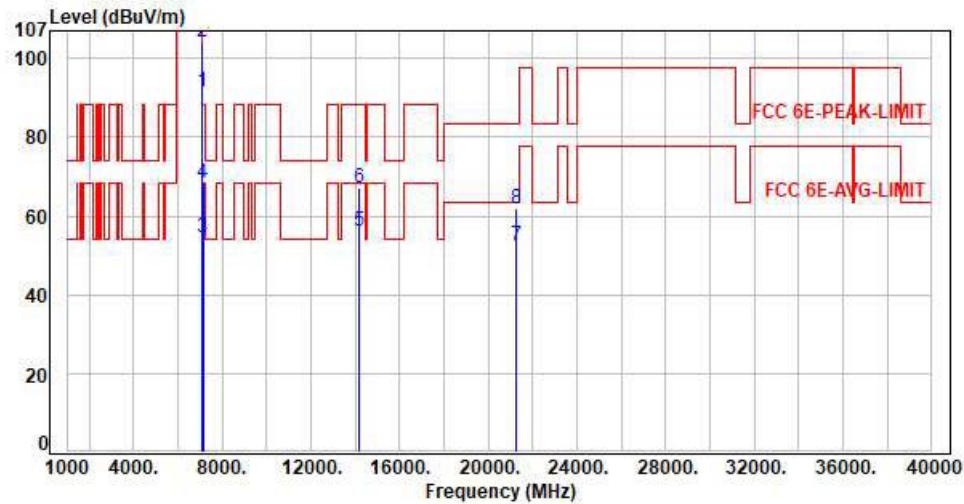

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	11.42	80.08	91.50	200.00	-108.50	Average	171	186	P
2	7095.00	11.42	92.64	104.06	200.00	-95.94	Peak	171	186	P
3	7125.00	11.56	42.81	54.37	68.20	-13.83	Average	171	186	P
4	7125.00	11.56	56.80	68.36	88.20	-19.84	Peak	171	186	P
5	14190.00	24.00	32.14	56.14	68.20	-12.06	Average	100	57	P
6	14190.00	24.00	43.08	67.08	88.20	-21.12	Peak	100	57	P
7	21285.00	10.65	41.92	52.57	63.54	-10.97	Average	150	360	P
8	21285.00	10.65	51.31	61.96	83.54	-21.58	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

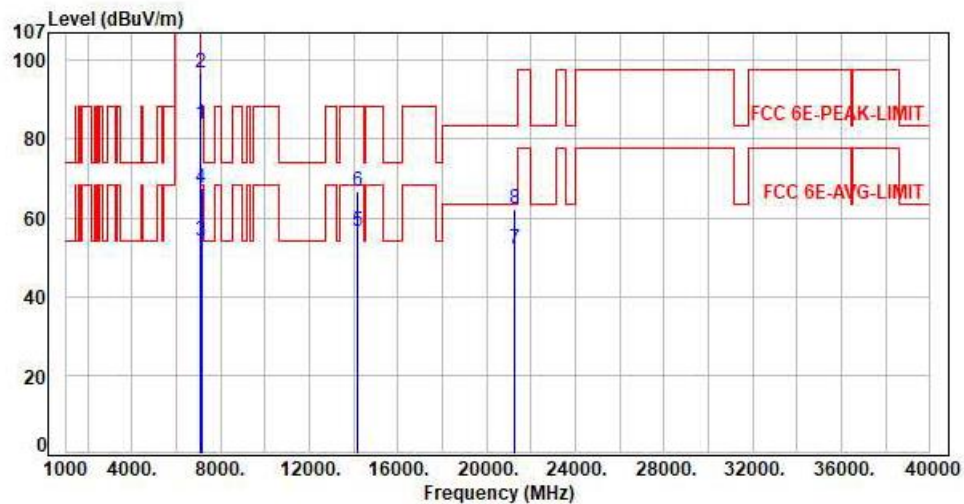

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	11.42	72.51	83.93	200.00	-116.07	Average	103	114	P
2	7095.00	11.42	85.43	96.85	200.00	-103.15	Peak	103	114	P
3	7125.00	11.56	42.74	54.30	68.20	-13.90	Average	103	114	P
4	7125.00	11.56	55.85	67.41	88.20	-20.79	Peak	103	114	P
5	14190.00	24.00	32.66	56.66	68.20	-11.54	Average	100	126	P
6	14190.00	24.00	42.82	66.82	88.20	-21.38	Peak	100	126	P
7	21285.00	10.65	41.23	51.88	63.54	-11.66	Average	150	360	P
8	21285.00	10.65	51.60	62.25	83.54	-21.29	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

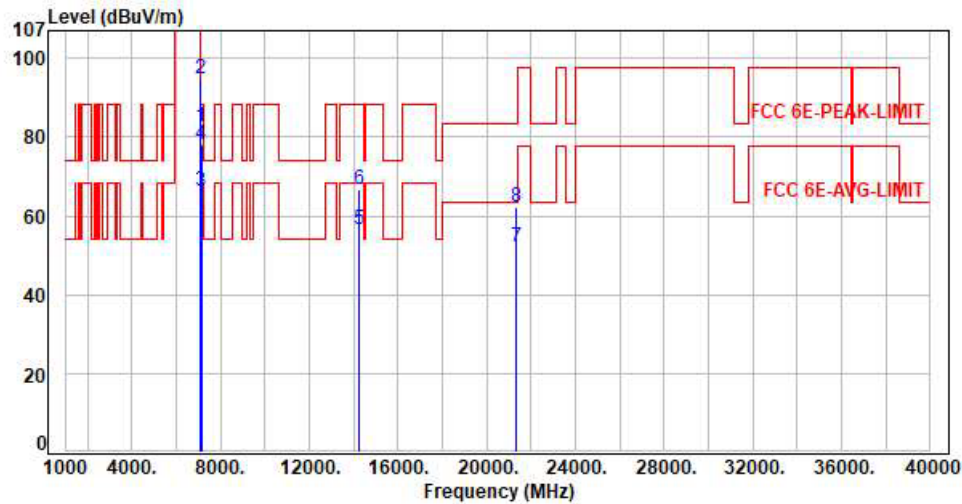

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	11.51	70.93	82.44	200.00	-117.56	Average	173	184	P
2	7115.00	11.51	83.28	94.79	200.00	-105.21	Peak	173	184	P
3	7125.00	11.56	54.93	66.49	68.20	-1.71	Average	173	184	P
4	7125.00	11.56	66.57	78.13	88.20	-10.07	Peak	173	184	P
5	14230.00	24.11	32.43	56.54	68.20	-11.66	Average	100	59	P
6	14230.00	24.11	42.51	66.62	88.20	-21.58	Peak	100	59	P
7	21345.00	10.62	41.61	52.23	63.54	-11.31	Average	150	360	P
8	21345.00	10.62	51.46	62.08	83.54	-21.46	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

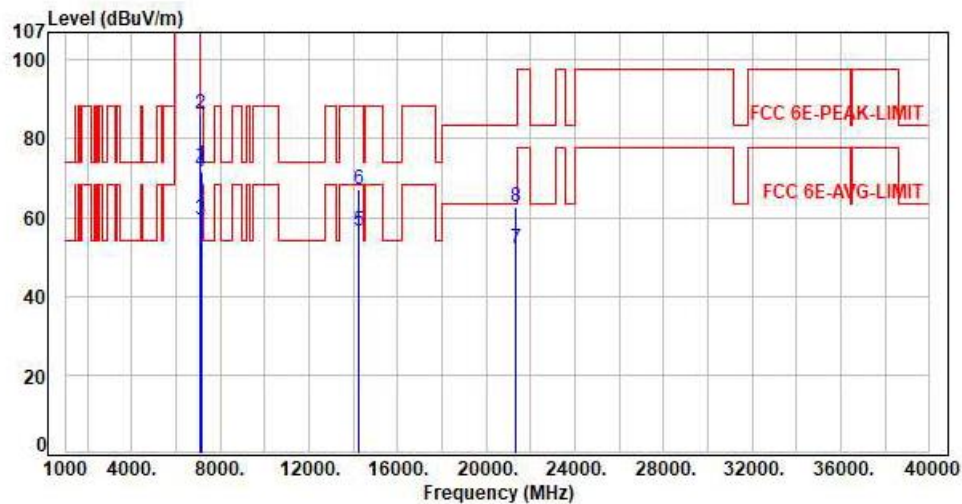

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	11.51	61.61	73.12	200.00	-126.88	Average	129	238	P
2	7115.00	11.51	74.76	86.27	200.00	-113.73	Peak	129	238	P
3	7125.00	11.56	47.70	59.26	68.20	-8.94	Average	129	238	P
4	7125.00	11.56	59.93	71.49	88.20	-16.71	Peak	129	238	P
5	14230.00	24.11	32.48	56.59	68.20	-11.61	Average	100	123	P
6	14230.00	24.11	42.84	66.95	88.20	-21.25	Peak	100	123	P
7	21345.00	10.62	41.48	52.10	63.54	-11.44	Average	150	360	P
8	21345.00	10.62	51.92	62.54	83.54	-21.00	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

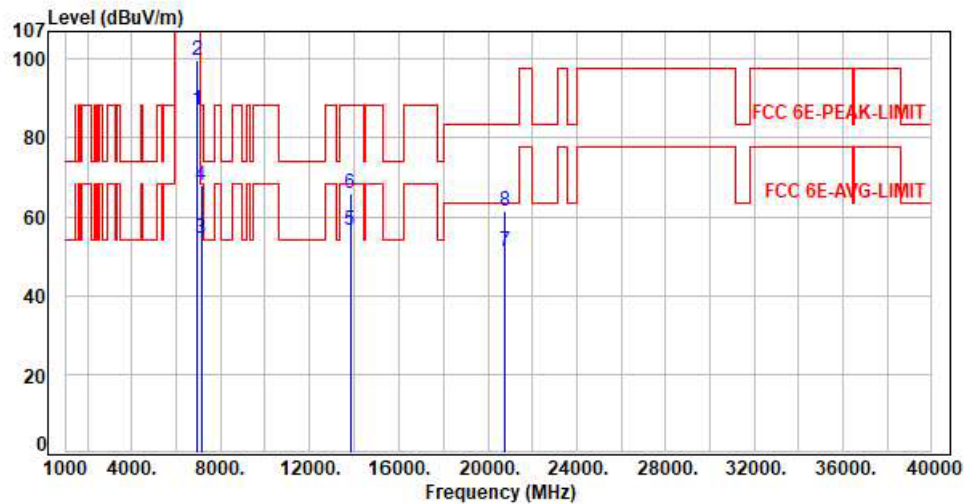

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	11.08	76.00	87.08	200.00	-112.92	Average	249	178	P
2	6925.00	11.08	88.68	99.76	200.00	-100.24	Peak	249	178	P
3	7125.00	11.56	42.95	54.51	68.20	-13.69	Average	249	178	P
4	7125.00	11.56	56.35	67.91	88.20	-20.29	Peak	249	178	P
5	13850.00	22.90	33.49	56.39	68.20	-11.81	Average	100	58	P
6	13850.00	22.90	43.06	65.96	88.20	-22.24	Peak	100	58	P
7	20775.00	10.17	41.07	51.24	63.54	-12.30	Average	150	360	P
8	20775.00	10.17	51.40	61.57	83.54	-21.97	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

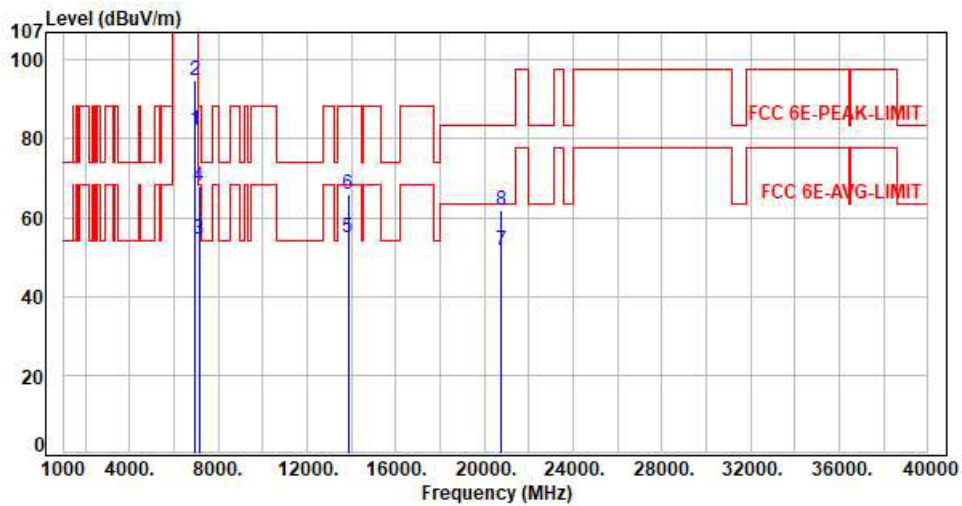

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	11.08	71.13	82.21	200.00	-117.79	Average	102	153	P
2	6925.00	11.08	83.71	94.79	200.00	-105.21	Peak	102	153	P
3	7125.00	11.56	42.92	54.48	68.20	-13.72	Average	102	153	P
4	7125.00	11.56	56.54	68.10	88.20	-20.10	Peak	102	153	P
5	13850.00	22.90	32.19	55.09	68.20	-13.11	Average	100	130	P
6	13850.00	22.90	42.85	65.75	88.20	-22.45	Peak	100	130	P
7	20775.00	10.17	41.34	51.51	63.54	-12.03	Average	150	360	P
8	20775.00	10.17	51.77	61.94	83.54	-21.60	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

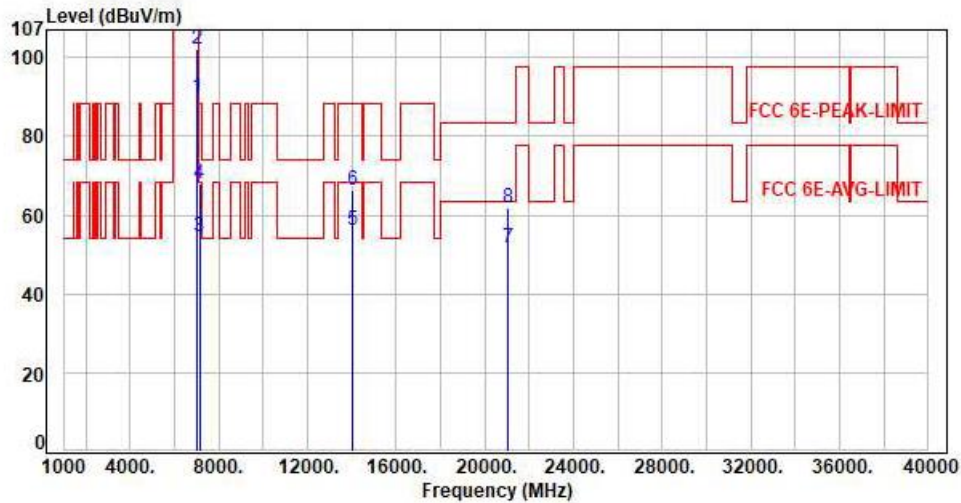

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	11.16	78.94	90.10	200.00	-109.90	Average	111	173	P
2	7005.00	11.16	91.05	102.21	200.00	-97.79	Peak	111	173	P
3	7125.00	11.56	42.77	54.33	68.20	-13.87	Average	111	173	P
4	7125.00	11.56	56.54	68.10	88.20	-20.10	Peak	111	173	P
5	14010.00	23.52	32.49	56.01	68.20	-12.19	Average	100	54	P
6	14010.00	23.52	42.99	66.51	88.20	-21.69	Peak	100	54	P
7	21015.00	10.39	41.09	51.48	63.54	-12.06	Average	150	360	P
8	21015.00	10.39	51.63	62.02	83.54	-21.52	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

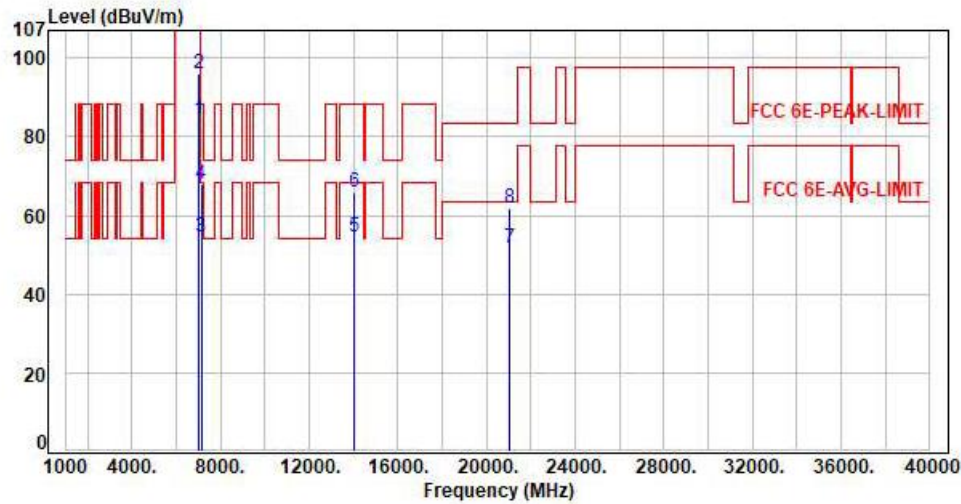

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	11.16	72.94	84.10	200.00	-115.90	Average	104	113	P
2	7005.00	11.16	84.71	95.87	200.00	-104.13	Peak	104	113	P
3	7125.00	11.56	42.82	54.38	68.20	-13.82	Average	104	113	P
4	7125.00	11.56	56.29	67.85	88.20	-20.35	Peak	104	113	P
5	14010.00	23.52	31.14	54.66	68.20	-13.54	Average	100	125	P
6	14010.00	23.52	42.36	65.88	88.20	-22.32	Peak	100	125	P
7	21015.00	10.39	41.34	51.73	63.54	-11.81	Average	150	360	P
8	21015.00	10.39	51.64	62.03	83.54	-21.51	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

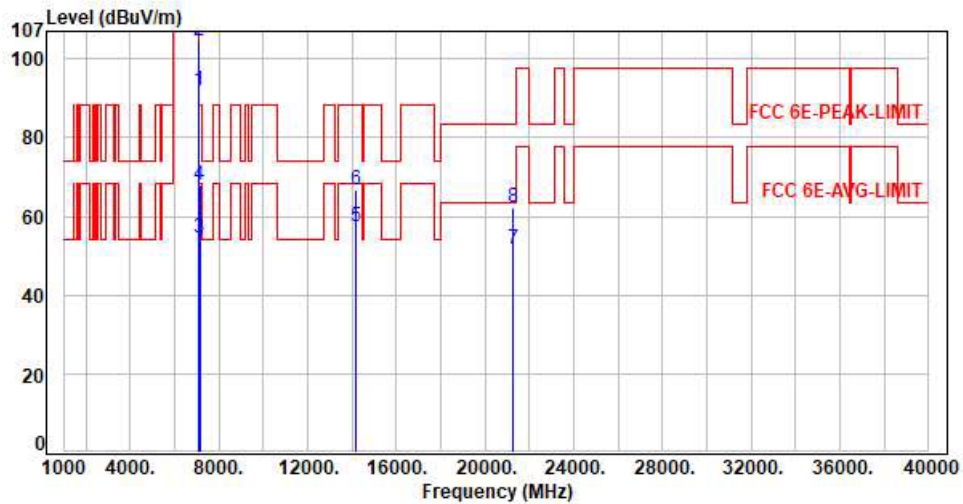

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	11.39	80.46	91.85	200.00	-108.15	Average	175	185	P
2	7085.00	11.39	93.18	104.57	200.00	-95.43	Peak	175	185	P
3	7125.00	11.56	42.81	54.37	68.20	-13.83	Average	175	185	P
4	7125.00	11.56	56.30	67.86	88.20	-20.34	Peak	175	185	P
5	14170.00	23.92	33.43	57.35	68.20	-10.85	Average	100	62	P
6	14170.00	23.92	42.96	66.88	88.20	-21.32	Peak	100	62	P
7	21255.00	10.57	41.28	51.85	63.54	-11.69	Average	150	360	P
8	21255.00	10.57	51.48	62.05	83.54	-21.49	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

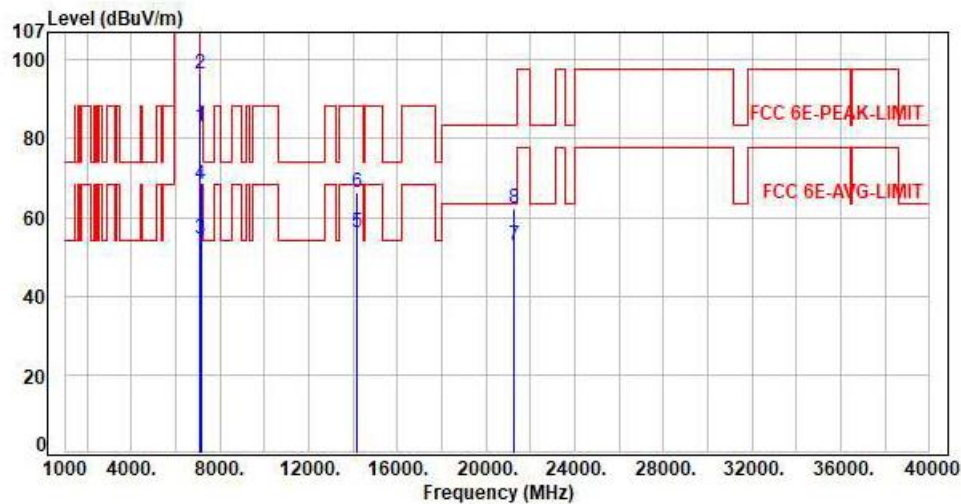

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	11.39	71.71	83.10	200.00	-116.90	Average	100	113	P
2	7085.00	11.39	84.89	96.28	200.00	-103.72	Peak	100	113	P
3	7125.00	11.56	42.81	54.37	68.20	-13.83	Average	100	113	P
4	7125.00	11.56	56.70	68.26	88.20	-19.94	Peak	100	113	P
5	14170.00	23.92	32.16	56.08	68.20	-12.12	Average	100	128	P
6	14170.00	23.92	42.44	66.36	88.20	-21.84	Peak	100	128	P
7	21255.00	10.57	42.13	52.70	63.54	-10.84	Average	150	360	P
8	21255.00	10.57	51.62	62.19	83.54	-21.35	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

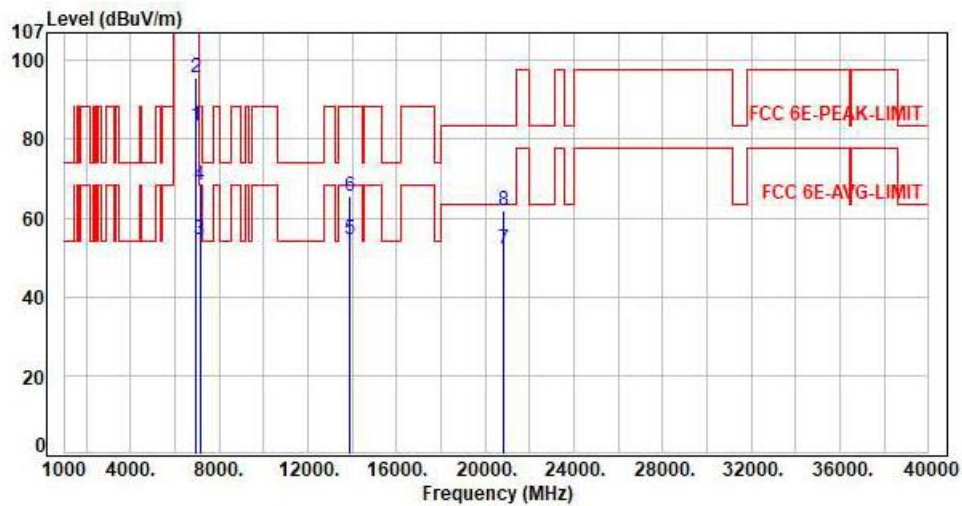

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	11.09	72.12	83.21	200.00	-116.79	Average	180	181	P
2	6945.00	11.09	84.45	95.54	200.00	-104.46	Peak	180	181	P
3	7125.00	11.56	43.02	54.58	68.20	-13.62	Average	180	181	P
4	7125.00	11.56	56.93	68.49	88.20	-19.71	Peak	180	181	P
5	13890.00	22.97	31.49	54.46	68.20	-13.74	Average	100	59	P
6	13890.00	22.97	42.54	65.51	88.20	-22.69	Peak	100	59	P
7	20835.00	10.26	41.93	52.19	63.54	-11.35	Average	150	360	P
8	20835.00	10.26	51.45	61.71	83.54	-21.83	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

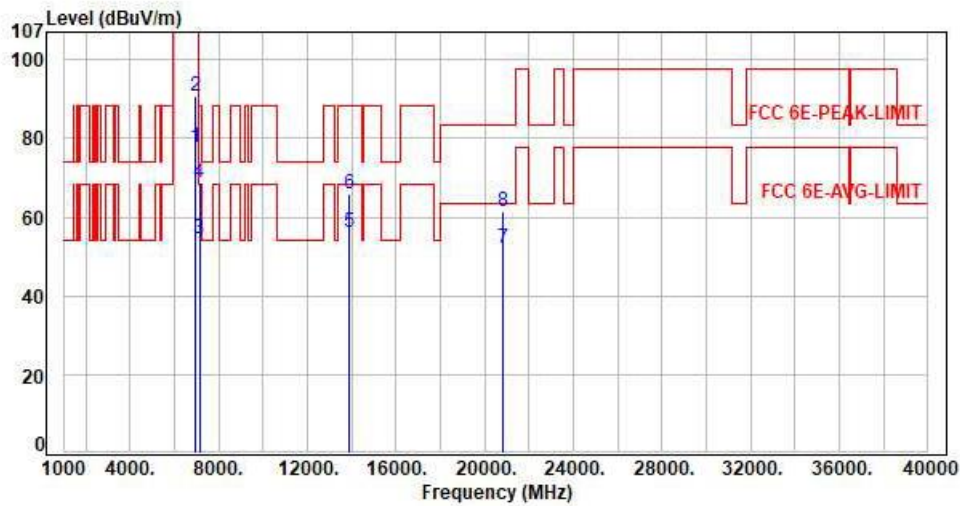

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	11.09	66.59	77.68	200.00	-122.32	Average	100	154	P
2	6945.00	11.09	79.59	90.68	200.00	-109.32	Peak	100	154	P
3	7125.00	11.56	42.99	54.55	68.20	-13.65	Average	100	154	P
4	7125.00	11.56	57.15	68.71	88.20	-19.49	Peak	100	154	P
5	13890.00	22.97	33.12	56.09	68.20	-12.11	Average	100	134	P
6	13890.00	22.97	42.79	65.76	88.20	-22.44	Peak	100	134	P
7	20835.00	10.26	41.96	52.22	63.54	-11.32	Average	150	360	P
8	20835.00	10.26	51.26	61.52	83.54	-22.02	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

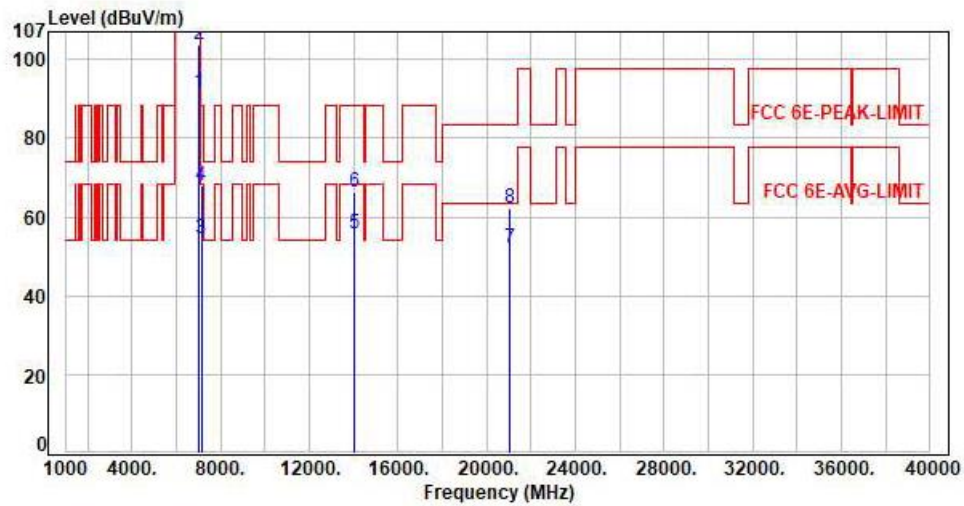

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	11.22	80.22	91.44	200.00	-108.56	Average	139	172	P
2	7025.00	11.22	92.65	103.87	200.00	-96.13	Peak	139	172	P
3	7125.00	11.56	42.95	54.51	68.20	-13.69	Average	139	172	P
4	7125.00	11.56	56.24	67.80	88.20	-20.40	Peak	139	172	P
5	14050.00	23.65	32.19	55.84	68.20	-12.36	Average	100	55	P
6	14050.00	23.65	42.85	66.50	88.20	-21.70	Peak	100	55	P
7	21075.00	10.51	41.38	51.89	63.54	-11.65	Average	150	360	P
8	21075.00	10.51	51.54	62.05	83.54	-21.49	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

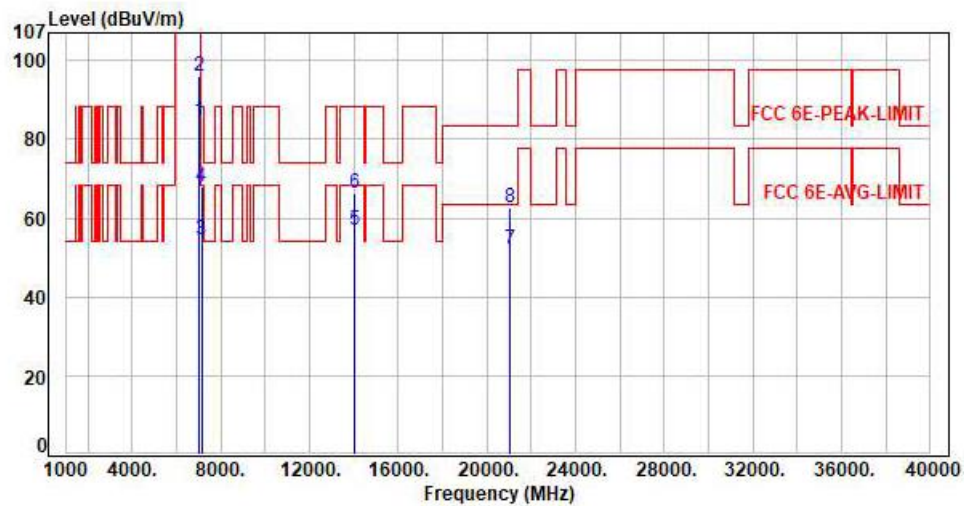

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	11.22	73.53	84.75	200.00	-115.25	Average	100	112	P
2	7025.00	11.22	84.71	95.93	200.00	-104.07	Peak	100	112	P
3	7125.00	11.56	42.95	54.51	68.20	-13.69	Average	100	112	P
4	7125.00	11.56	56.37	67.93	88.20	-20.27	Peak	100	112	P
5	14050.00	23.65	33.43	57.08	68.20	-11.12	Average	100	129	P
6	14050.00	23.65	42.58	66.23	88.20	-21.97	Peak	100	129	P
7	21075.00	10.51	41.46	51.97	63.54	-11.57	Average	150	360	P
8	21075.00	10.51	51.99	62.50	83.54	-21.04	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

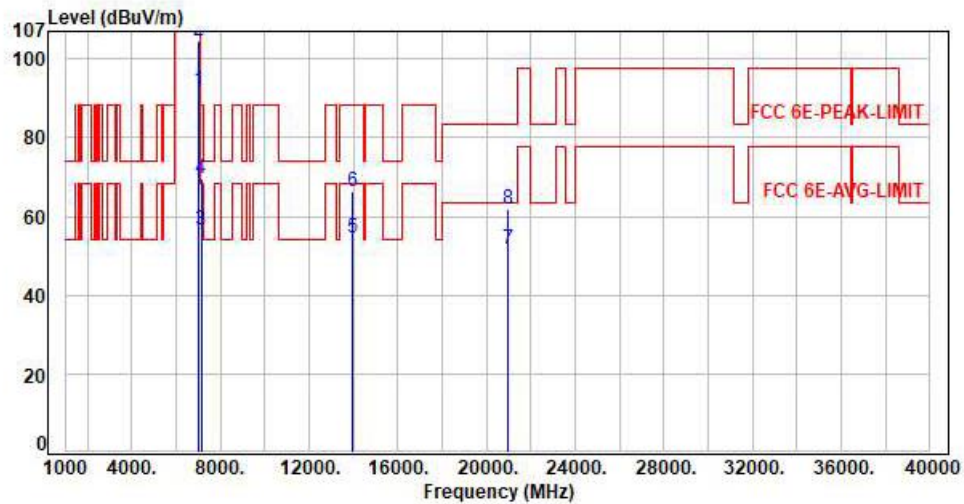

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	11.12	80.67	91.79	200.00	-108.21	Average	182	178	P
2	6985.00	11.12	93.59	104.71	200.00	-95.29	Peak	182	178	P
3	7125.00	11.56	44.89	56.45	68.20	-11.75	Average	182	178	P
4	7125.00	11.56	58.04	69.60	88.20	-18.60	Peak	182	178	P
5	13970.00	23.34	31.24	54.58	68.20	-13.62	Average	100	56	P
6	13970.00	23.34	42.82	66.16	88.20	-22.04	Peak	100	56	P
7	20955.00	10.42	41.28	51.70	63.54	-11.84	Average	150	360	P
8	20955.00	10.42	51.47	61.89	83.54	-21.65	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

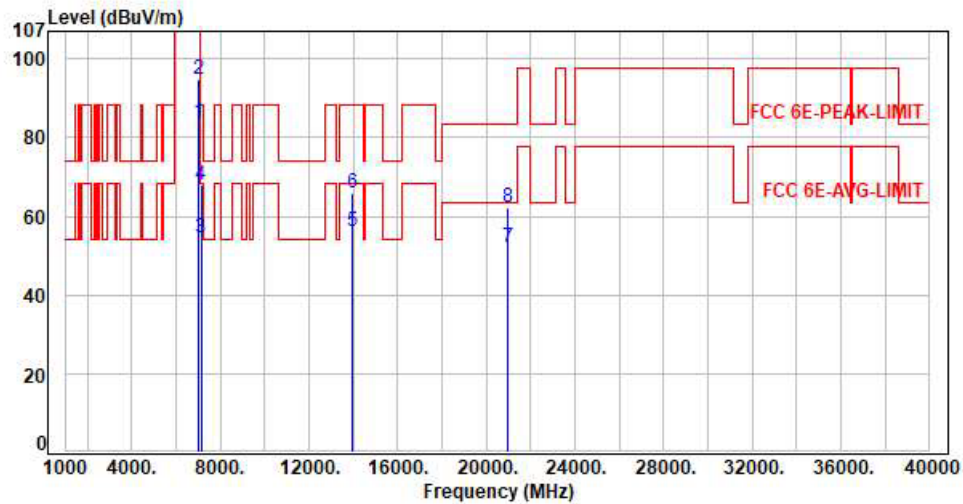

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	11.12	72.83	83.95	200.00	-116.05	Average	103	111	P
2	6985.00	11.12	83.84	94.96	200.00	-105.04	Peak	103	111	P
3	7125.00	11.56	43.06	54.62	68.20	-13.58	Average	103	111	P
4	7125.00	11.56	56.43	67.99	88.20	-20.21	Peak	103	111	P
5	13970.00	23.34	32.61	55.95	68.20	-12.25	Average	100	129	P
6	13970.00	23.34	42.60	65.94	88.20	-22.26	Peak	100	129	P
7	20955.00	10.42	41.46	51.88	63.54	-11.66	Average	150	360	P
8	20955.00	10.42	51.85	62.27	83.54	-21.27	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

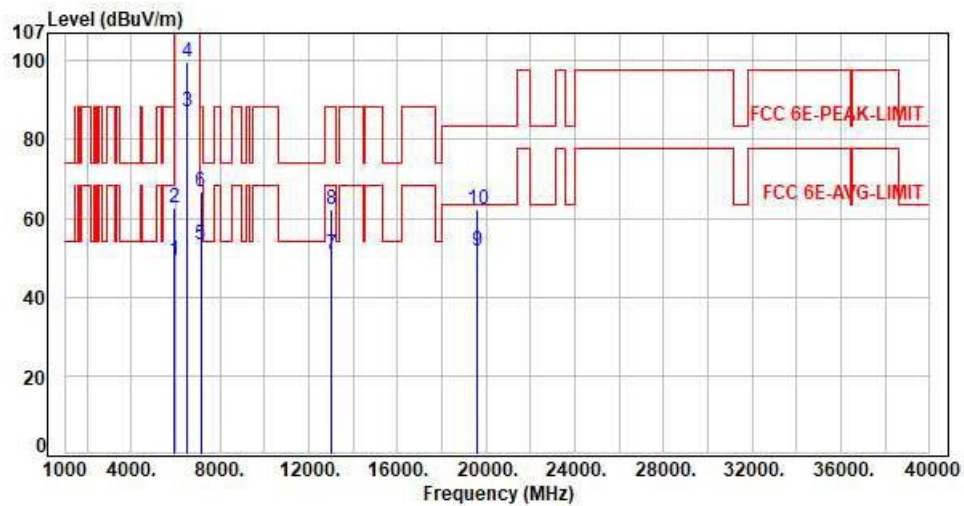


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.92	49.43	68.20	-18.77	Average	159	180	P
2	5925.00	7.51	55.10	62.61	88.20	-25.59	Peak	159	180	P
3	6525.00	9.85	77.12	86.97	200.00	-113.03	Average	159	180	P
4	6525.00	9.85	89.71	99.56	200.00	-100.44	Peak	159	180	P
5	7125.00	11.56	41.92	53.48	68.20	-14.72	Average	159	180	P
6	7125.00	11.56	55.18	66.74	88.20	-21.46	Peak	159	180	P
7	13050.00	19.48	31.44	50.92	68.20	-17.28	Average	100	64	P
8	13050.00	19.48	42.69	62.17	88.20	-26.03	Peak	100	64	P
9	19575.00	10.40	41.07	51.47	63.54	-12.07	Average	150	360	P
10	19575.00	10.40	51.76	62.16	83.54	-21.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

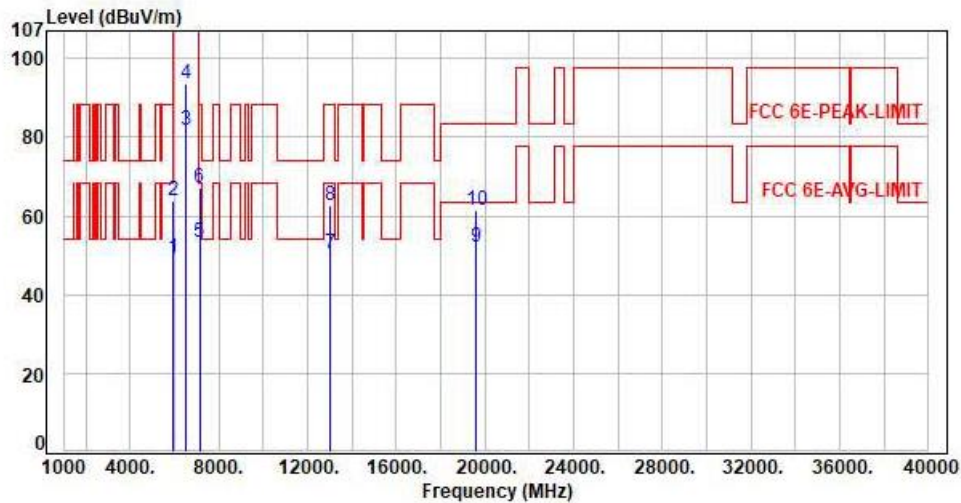

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.87	49.38	68.20	-18.82	Average	101	126	P
2	5925.00	7.51	56.26	63.77	88.20	-24.43	Peak	101	126	P
3	6525.00	9.85	71.81	81.66	200.00	-118.34	Average	101	126	P
4	6525.00	9.85	83.79	93.64	200.00	-106.36	Peak	101	126	P
5	7125.00	11.56	41.88	53.44	68.20	-14.76	Average	101	126	P
6	7125.00	11.56	55.62	67.18	88.20	-21.02	Peak	101	126	P
7	13050.00	19.48	31.10	50.58	68.20	-17.62	Average	100	126	P
8	13050.00	19.48	43.20	62.68	88.20	-25.52	Peak	100	126	P
9	19575.00	10.40	41.78	52.18	63.54	-11.36	Average	150	360	P
10	19575.00	10.40	51.21	61.61	83.54	-21.93	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

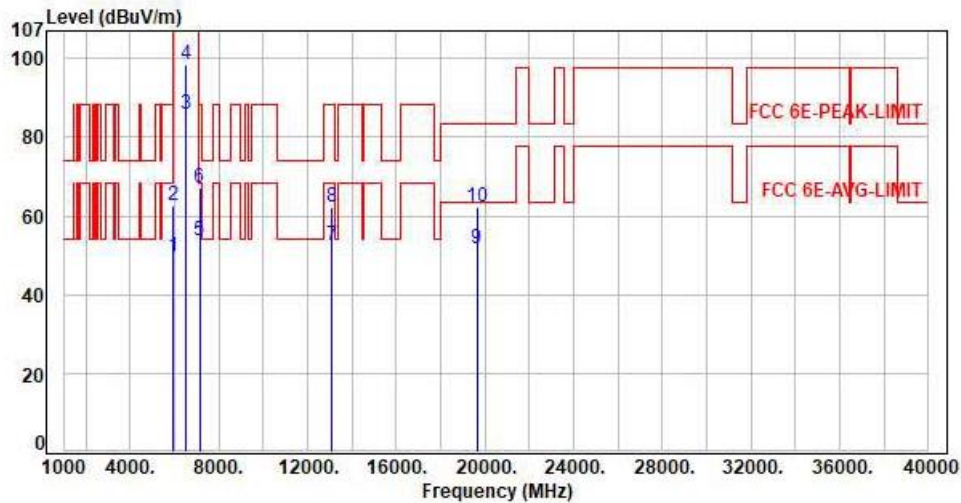

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.03	49.54	68.20	-18.66	Average	172	174	P
2	5925.00	7.51	55.06	62.57	88.20	-25.63	Peak	172	174	P
3	6545.00	9.95	76.04	85.99	200.00	-114.01	Average	172	174	P
4	6545.00	9.95	88.64	98.59	200.00	-101.41	Peak	172	174	P
5	7125.00	11.56	41.99	53.55	68.20	-14.65	Average	172	174	P
6	7125.00	11.56	55.74	67.30	88.20	-20.90	Peak	172	174	P
7	13090.00	19.67	32.64	52.31	68.20	-15.89	Average	100	58	P
8	13090.00	19.67	42.61	62.28	88.20	-25.92	Peak	100	58	P
9	19635.00	10.51	41.32	51.83	63.54	-11.71	Average	150	360	P
10	19635.00	10.51	51.61	62.12	83.54	-21.42	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

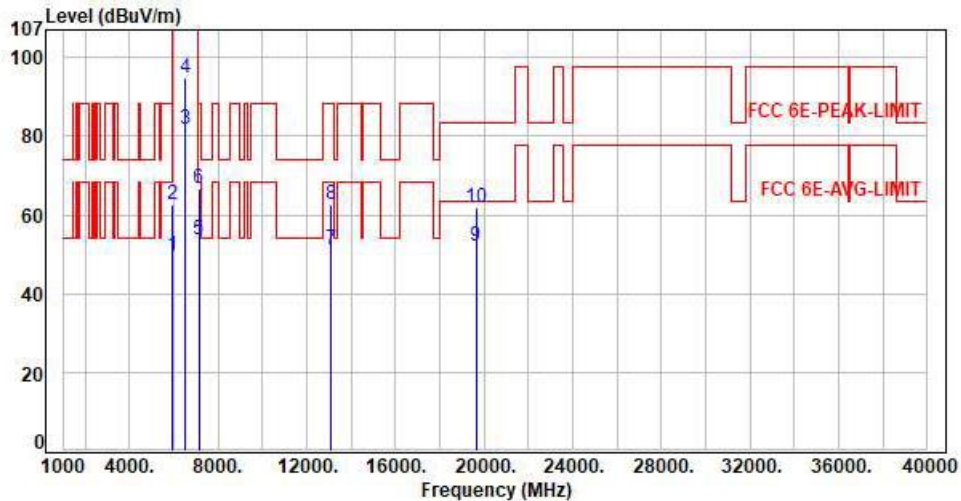

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.96	49.47	68.20	-18.73	Average	106	125	P
2	5925.00	7.51	55.27	62.78	88.20	-25.42	Peak	106	125	P
3	6545.00	9.95	71.97	81.92	200.00	-118.08	Average	106	125	P
4	6545.00	9.95	84.76	94.71	200.00	-105.29	Peak	106	125	P
5	7125.00	11.56	42.02	53.58	68.20	-14.62	Average	106	125	P
6	7125.00	11.56	55.09	66.65	88.20	-21.55	Peak	106	125	P
7	13090.00	19.67	31.76	51.43	68.20	-16.77	Average	100	124	P
8	13090.00	19.67	42.99	62.66	88.20	-25.54	Peak	100	124	P
9	19635.00	10.51	41.57	52.08	63.54	-11.46	Average	150	360	P
10	19635.00	10.51	51.51	62.02	83.54	-21.52	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

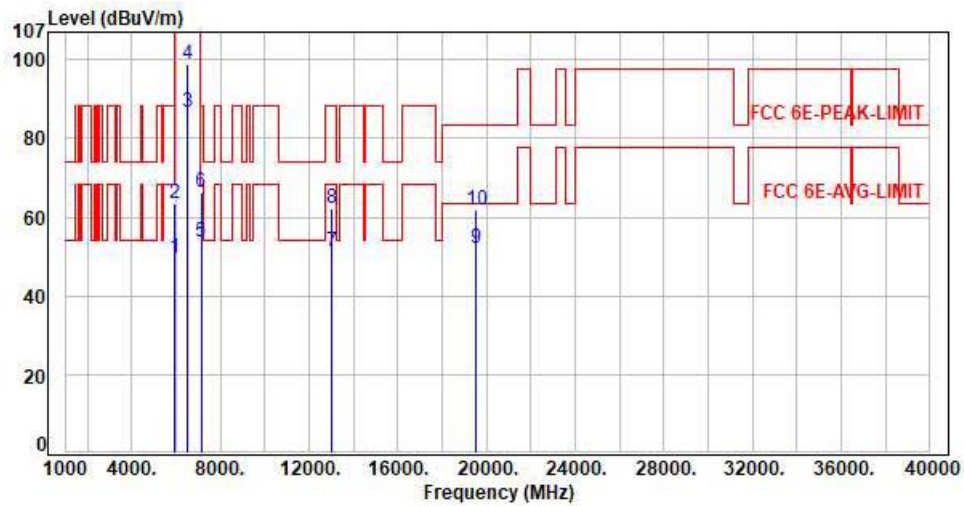

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.10	49.61	68.20	-18.59	Average	168	179	P
2	5925.00	7.51	55.84	63.35	88.20	-24.85	Peak	168	179	P
3	6505.00	9.76	76.96	86.72	200.00	-113.28	Average	168	179	P
4	6505.00	9.76	89.08	98.84	200.00	-101.16	Peak	168	179	P
5	7125.00	11.56	42.00	53.56	68.20	-14.64	Average	168	179	P
6	7125.00	11.56	54.84	66.40	88.20	-21.80	Peak	168	179	P
7	13010.00	19.30	31.86	51.16	68.20	-17.04	Average	100	63	P
8	13010.00	19.30	43.06	62.36	88.20	-25.84	Peak	100	63	P
9	19515.00	10.36	41.77	52.13	63.54	-11.41	Average	150	360	P
10	19515.00	10.36	51.65	62.01	83.54	-21.53	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

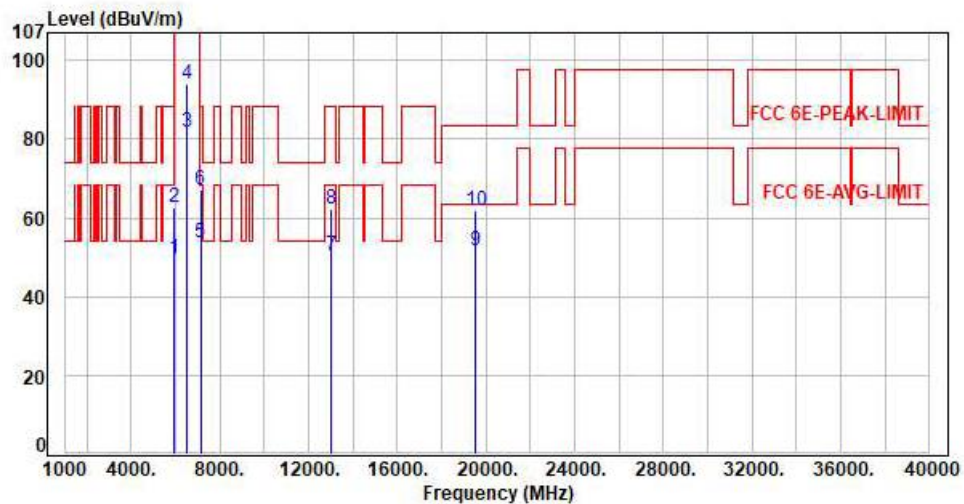

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.00	49.51	68.20	-18.69	Average	106	117	P
2	5925.00	7.51	55.09	62.60	88.20	-25.60	Peak	106	117	P
3	6505.00	9.76	72.00	81.76	200.00	-118.24	Average	106	117	P
4	6505.00	9.76	84.12	93.88	200.00	-106.12	Peak	106	117	P
5	7125.00	11.56	41.96	53.52	68.20	-14.68	Average	106	117	P
6	7125.00	11.56	55.51	67.07	88.20	-21.13	Peak	106	117	P
7	13010.00	19.30	31.19	50.49	68.20	-17.71	Average	100	131	P
8	13010.00	19.30	42.97	62.27	88.20	-25.93	Peak	100	131	P
9	19515.00	10.36	41.18	51.54	63.54	-12.00	Average	150	360	P
10	19515.00	10.36	51.44	61.80	83.54	-21.74	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

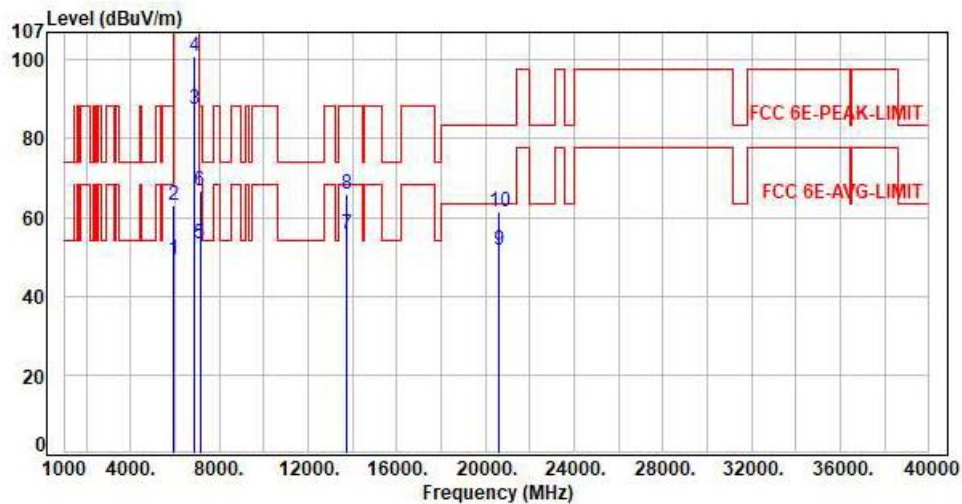

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.69	49.20	68.20	-19.00	Average	190	182	P
2	5925.00	7.51	55.35	62.86	88.20	-25.34	Peak	190	182	P
3	6875.00	11.04	76.55	87.59	200.00	-112.41	Average	190	182	P
4	6875.00	11.04	89.95	100.99	200.00	-99.01	Peak	190	182	P
5	7125.00	11.56	41.59	53.15	68.20	-15.05	Average	190	182	P
6	7125.00	11.56	55.10	66.66	88.20	-21.54	Peak	190	182	P
7	13750.00	22.63	33.17	55.80	68.20	-12.40	Average	100	54	P
8	13750.00	22.63	43.15	65.78	88.20	-22.42	Peak	100	54	P
9	20625.00	10.00	41.62	51.62	63.54	-11.92	Average	150	360	P
10	20625.00	10.00	51.32	61.32	83.54	-22.22	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

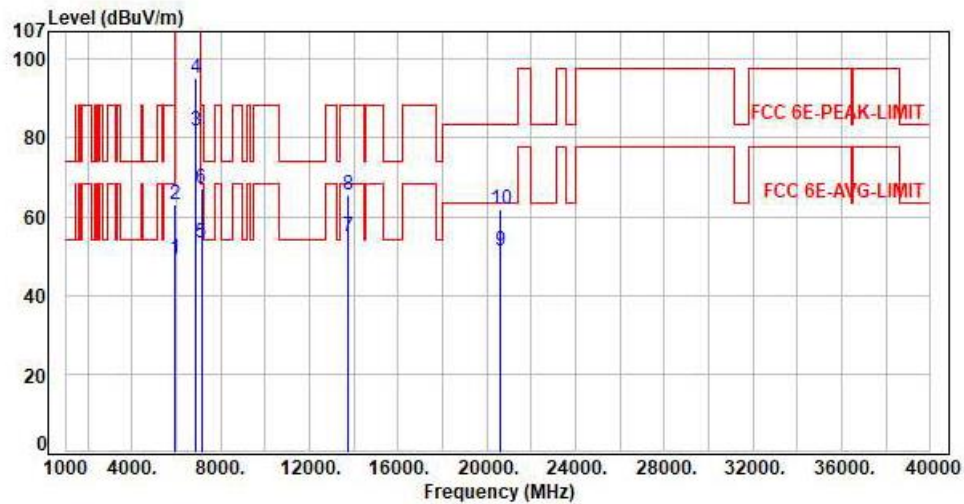

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.71	49.22	68.20	-18.98	Average	100	134	P
2	5925.00	7.51	55.52	63.03	88.20	-25.17	Peak	100	134	P
3	6875.00	11.04	70.55	81.59	200.00	-118.41	Average	100	134	P
4	6875.00	11.04	84.22	95.26	200.00	-104.74	Peak	100	134	P
5	7125.00	11.56	41.60	53.16	68.20	-15.04	Average	100	134	P
6	7125.00	11.56	55.76	67.32	88.20	-20.88	Peak	100	134	P
7	13750.00	22.63	32.45	55.08	68.20	-13.12	Average	100	125	P
8	13750.00	22.63	42.76	65.39	88.20	-22.81	Peak	100	125	P
9	20625.00	10.00	41.44	51.44	63.54	-12.10	Average	150	360	P
10	20625.00	10.00	51.73	61.73	83.54	-21.81	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

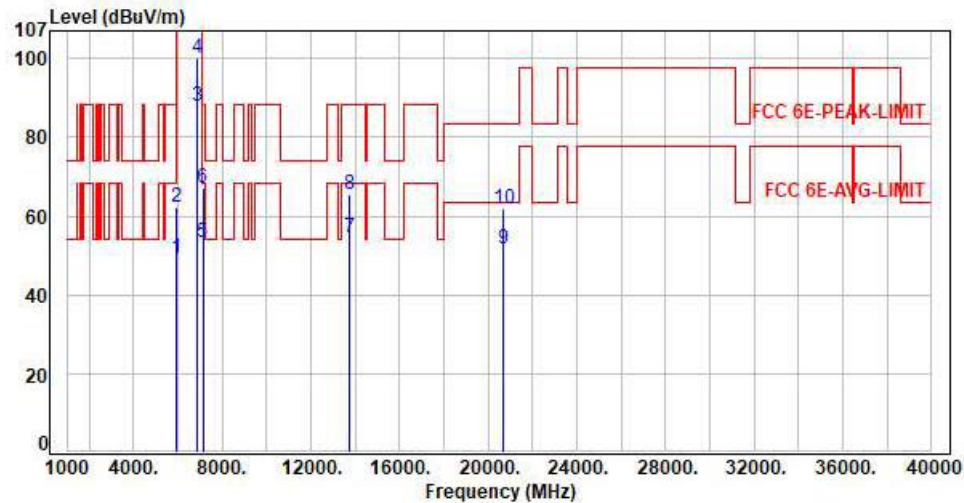

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.77	49.28	68.20	-18.92	Average	186	180	P
2	5925.00	7.51	54.89	62.40	88.20	-25.80	Peak	186	180	P
3	6885.00	11.05	76.79	87.84	200.00	-112.16	Average	186	180	P
4	6885.00	11.05	88.95	100.00	200.00	-100.00	Peak	186	180	P
5	7125.00	11.56	41.70	53.26	68.20	-14.94	Average	186	180	P
6	7125.00	11.56	55.44	67.00	88.20	-21.20	Peak	186	180	P
7	13770.00	22.37	32.11	54.48	68.20	-13.72	Average	100	62	P
8	13770.00	22.37	42.95	65.32	88.20	-22.88	Peak	100	62	P
9	20655.00	10.10	41.42	51.52	63.54	-12.02	Average	150	360	P
10	20655.00	10.10	51.65	61.75	83.54	-21.79	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

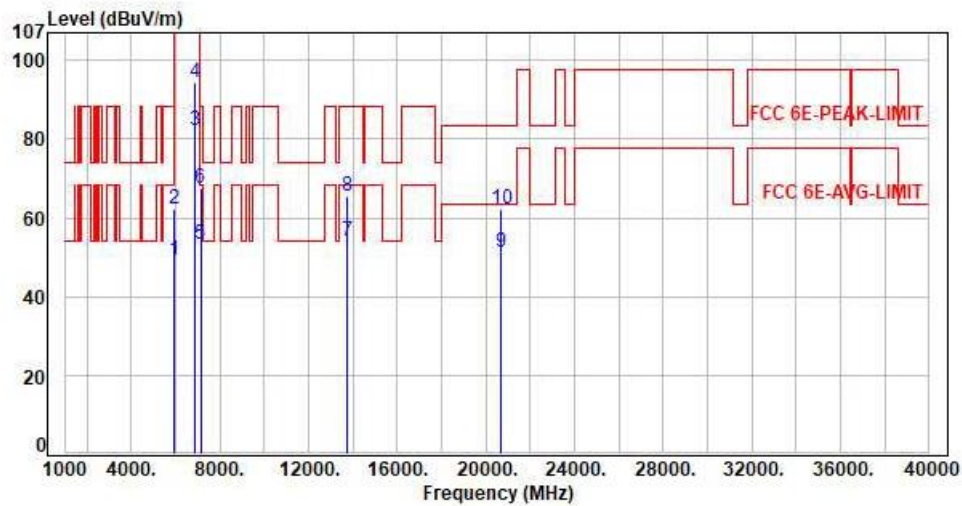


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.78	49.29	68.20	-18.91	Average	100	135	P
2	5925.00	7.51	54.93	62.44	88.20	-25.76	Peak	100	135	P
3	6885.00	11.05	71.07	82.12	200.00	-117.88	Average	100	135	P
4	6885.00	11.05	83.46	94.51	200.00	-105.49	Peak	100	135	P
5	7125.00	11.56	41.70	53.26	68.20	-14.94	Average	100	135	P
6	7125.00	11.56	55.88	67.44	88.20	-20.76	Peak	100	135	P
7	13770.00	22.67	31.48	54.15	68.20	-14.05	Average	100	129	P
8	13770.00	22.67	42.87	65.54	88.20	-22.66	Peak	100	129	P
9	20655.00	10.10	41.28	51.38	63.54	-12.16	Average	150	360	P
10	20655.00	10.10	51.96	62.06	83.54	-21.48	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

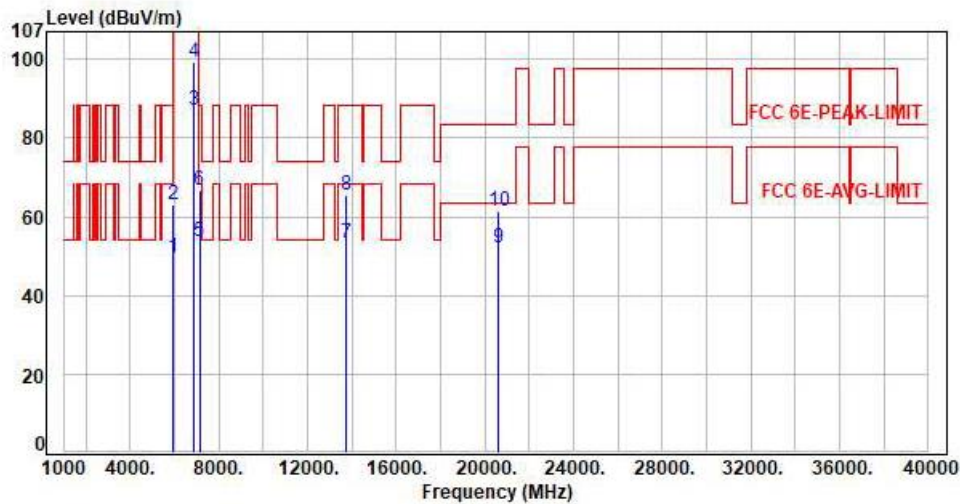

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.99	49.50	68.20	-18.70	Average	190	180	P
2	5925.00	7.51	55.51	63.02	88.20	-25.18	Peak	190	180	P
3	6865.00	11.03	76.06	87.09	200.00	-112.91	Average	190	180	P
4	6865.00	11.03	88.25	99.28	200.00	-100.72	Peak	190	180	P
5	7125.00	11.56	41.95	53.51	68.20	-14.69	Average	190	180	P
6	7125.00	11.56	55.01	66.57	88.20	-21.63	Peak	190	180	P
7	13730.00	22.46	30.98	53.44	68.20	-14.76	Average	100	60	P
8	13730.00	22.46	42.97	65.43	88.20	-22.77	Peak	100	60	P
9	20595.00	9.92	41.96	51.88	63.54	-11.66	Average	150	360	P
10	20595.00	9.92	51.66	61.58	83.54	-21.96	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

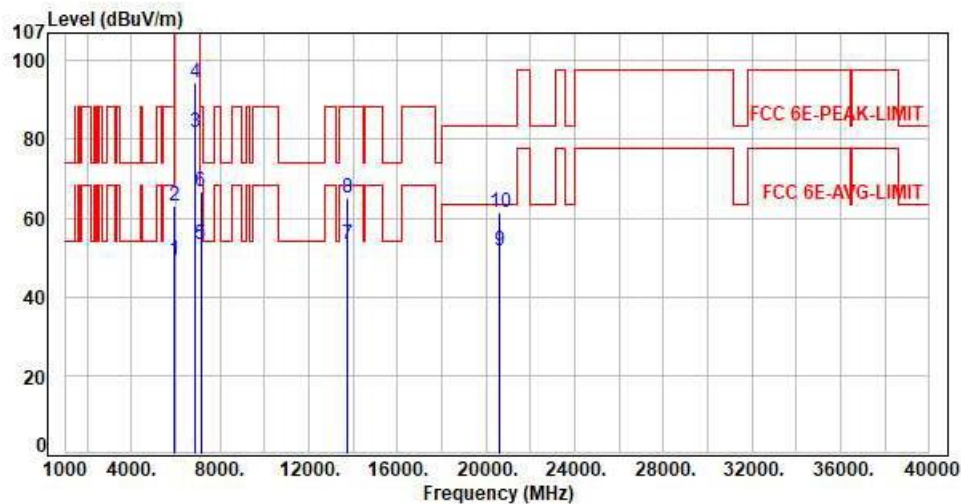

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.90	49.41	68.20	-18.79	Average	104	133	P
2	5925.00	7.51	55.35	62.86	88.20	-25.34	Peak	104	133	P
3	6865.00	11.03	70.72	81.75	200.00	-118.25	Average	104	133	P
4	6865.00	11.03	83.36	94.39	200.00	-105.61	Peak	104	133	P
5	7125.00	11.56	41.78	53.34	68.20	-14.86	Average	104	133	P
6	7125.00	11.56	54.98	66.54	88.20	-21.66	Peak	104	133	P
7	13730.00	22.46	30.86	53.32	68.20	-14.88	Average	100	122	P
8	13730.00	22.46	42.80	65.26	88.20	-22.94	Peak	100	122	P
9	20595.00	9.92	41.64	51.56	63.54	-11.98	Average	150	360	P
10	20595.00	9.92	51.32	61.24	83.54	-22.30	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

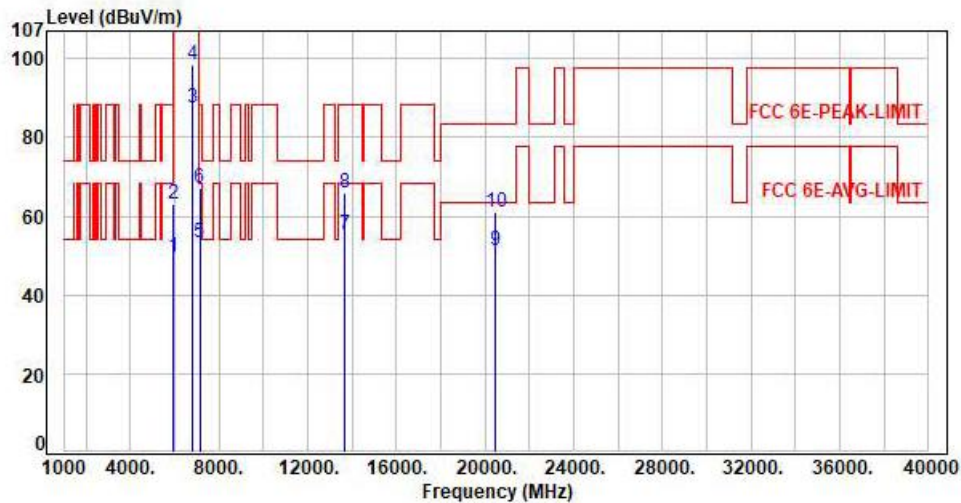

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.95	49.46	68.20	-18.74	Average	130	178	P
2	5925.00	7.51	55.62	63.13	88.20	-25.07	Peak	130	178	P
3	6825.00	10.99	76.52	87.51	200.00	-112.49	Average	130	178	P
4	6825.00	10.99	87.47	98.46	200.00	-101.54	Peak	130	178	P
5	7125.00	11.56	41.89	53.45	68.20	-14.75	Average	130	178	P
6	7125.00	11.56	55.38	66.94	88.20	-21.26	Peak	130	178	P
7	13650.00	21.89	33.52	55.41	68.20	-12.79	Average	100	62	P
8	13650.00	21.89	43.98	65.87	88.20	-22.33	Peak	100	62	P
9	20475.00	9.95	41.16	51.11	63.54	-12.43	Average	150	360	P
10	20475.00	9.95	51.16	61.11	83.54	-22.43	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

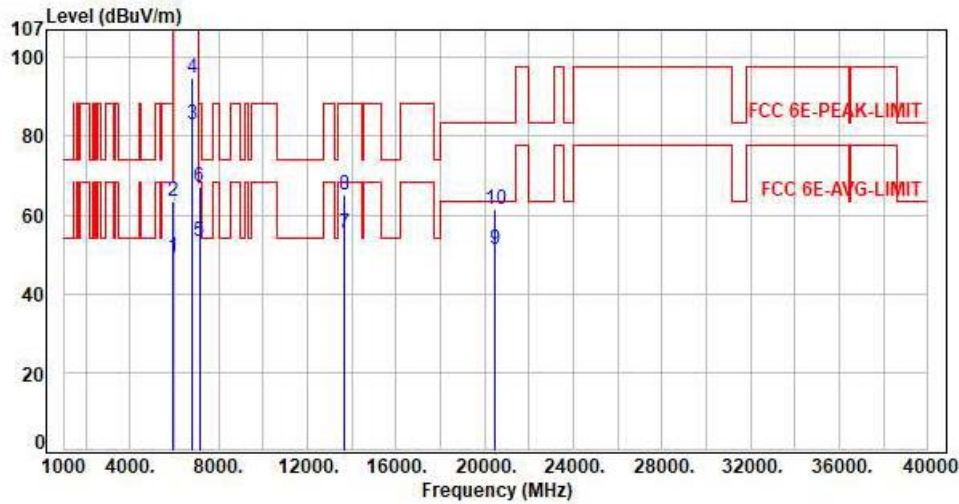

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	41.90	49.41	68.20	-18.79	Average	100	133	P
2	5925.00	7.51	55.90	63.41	88.20	-24.79	Peak	100	133	P
3	6825.00	10.99	71.81	82.80	200.00	-117.20	Average	100	133	P
4	6825.00	10.99	83.89	94.88	200.00	-105.12	Peak	100	133	P
5	7125.00	11.56	41.77	53.33	68.20	-14.87	Average	100	133	P
6	7125.00	11.56	55.48	67.04	88.20	-21.16	Peak	100	133	P
7	13650.00	21.89	33.41	55.30	68.20	-12.90	Average	100	128	P
8	13650.00	21.89	43.20	65.09	88.20	-23.11	Peak	100	128	P
9	20475.00	9.95	41.43	51.38	63.54	-12.16	Average	150	360	P
10	20475.00	9.95	51.44	61.39	83.54	-22.15	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor