




Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

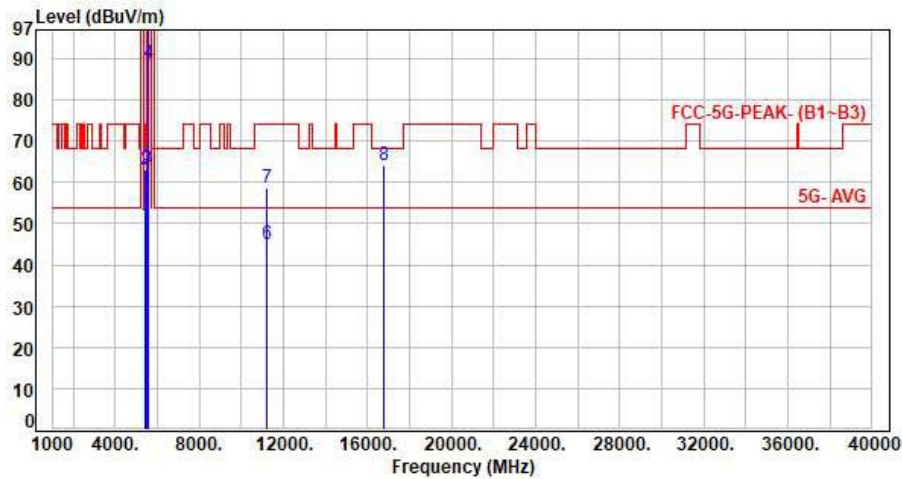

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.05	49.77	54.00	-4.23	Average	100	120	P
2	5460.00	7.72	55.24	62.96	74.00	-11.04	Peak	100	120	P
3	5470.00	7.72	55.90	63.62	68.20	-4.58	Peak	100	120	P
4	5600.00	7.47	81.45	88.92	200.00	-111.08	Average	100	120	P
5	5600.00	7.47	92.34	99.81	200.00	-100.19	Peak	100	120	P
6	11200.00	16.18	28.82	45.00	54.00	-9.00	Average	100	94	P
7	11200.00	16.18	42.56	58.74	74.00	-15.26	Peak	100	94	P
8	16800.00	22.69	41.41	64.10	68.20	-4.10	Peak	100	135	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

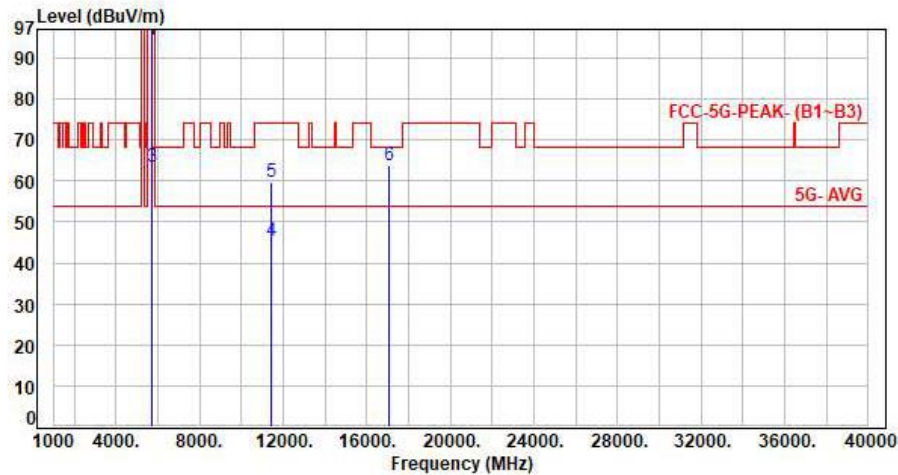

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	86.94	94.35	200.00	-105.65	Average	151	182	P
2	5700.00	7.41	97.67	105.08	200.00	-94.92	Peak	151	182	P
3	5725.00	7.39	56.06	63.45	68.20	-4.75	Peak	151	182	P
4	11400.00	16.59	28.75	45.34	54.00	-8.66	Average	100	172	P
5	11400.00	16.59	43.09	59.68	74.00	-14.32	Peak	100	172	P
6	17100.00	23.97	39.70	63.67	68.20	-4.53	Peak	100	268	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

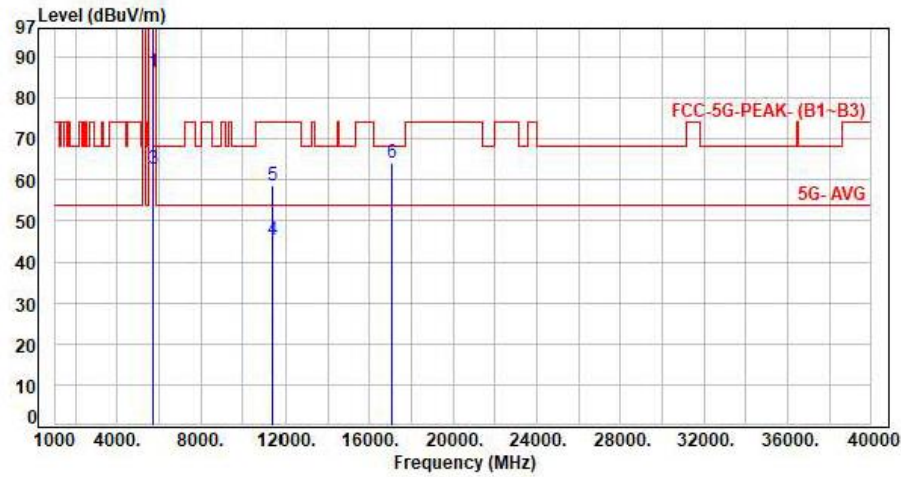

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	78.72	86.13	200.00	-113.87	Average	100	116	P
2	5700.00	7.41	89.64	97.05	200.00	-102.95	Peak	100	116	P
3	5725.00	7.39	55.45	62.84	68.20	-5.36	Peak	100	116	P
4	11400.00	16.59	28.78	45.37	54.00	-8.63	Average	100	92	P
5	11400.00	16.59	42.05	58.64	74.00	-15.36	Peak	100	92	P
6	17100.00	23.97	40.19	64.16	68.20	-4.04	Peak	100	135	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT B / B4

Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

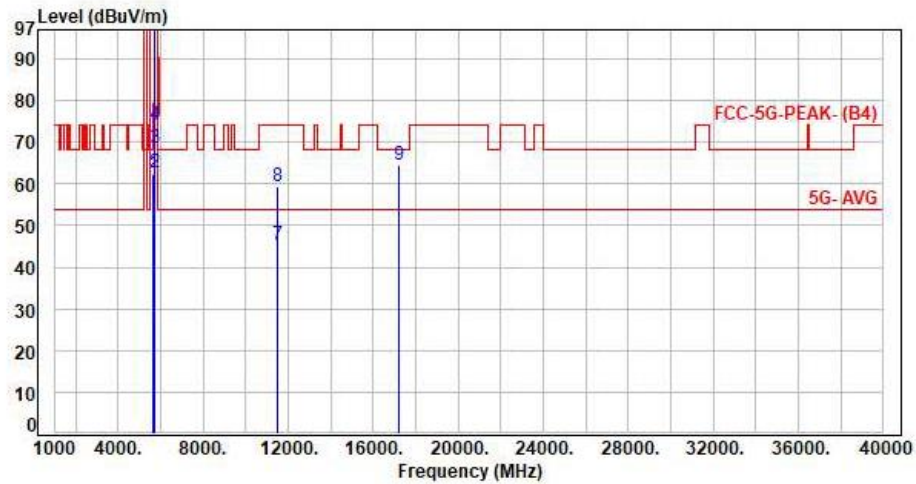

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	54.61	62.15	68.20	-6.05	Peak	146	184	P
2	5700.00	7.41	55.12	62.53	105.20	-42.67	Peak	146	184	P
3	5720.00	7.39	61.33	68.72	110.80	-42.08	Peak	146	184	P
4	5725.00	7.39	66.58	73.97	122.20	-48.23	Peak	146	184	P
5	5745.00	7.38	89.17	96.55	200.00	-103.45	Average	146	184	P
6	5745.00	7.38	99.82	107.20	200.00	-92.80	Peak	146	184	P
7	11490.00	16.75	28.75	45.50	54.00	-8.50	Average	100	169	P
8	11490.00	16.75	42.50	59.25	74.00	-14.75	Peak	100	169	P
9	17235.00	24.83	39.64	64.47	68.20	-3.73	Peak	100	258	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

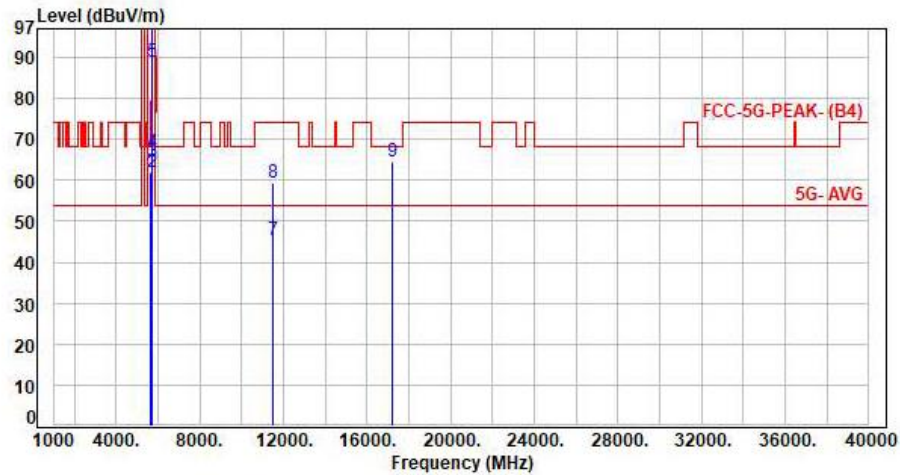

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	54.55	62.09	68.20	-6.11	Peak	100	123	P
2	5700.00	7.41	54.71	62.12	105.20	-43.08	Peak	100	123	P
3	5720.00	7.39	57.17	64.56	110.80	-46.24	Peak	100	123	P
4	5725.00	7.39	59.44	66.83	122.20	-55.37	Peak	100	123	P
5	5745.00	7.38	81.41	88.79	200.00	-111.21	Average	100	123	P
6	5745.00	7.38	92.28	99.66	200.00	-100.34	Peak	100	123	P
7	11490.00	16.75	28.78	45.53	54.00	-8.47	Average	100	94	P
8	11490.00	16.75	42.61	59.36	74.00	-14.64	Peak	100	94	P
9	17235.00	24.83	39.88	64.71	68.20	-3.49	Peak	100	138	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

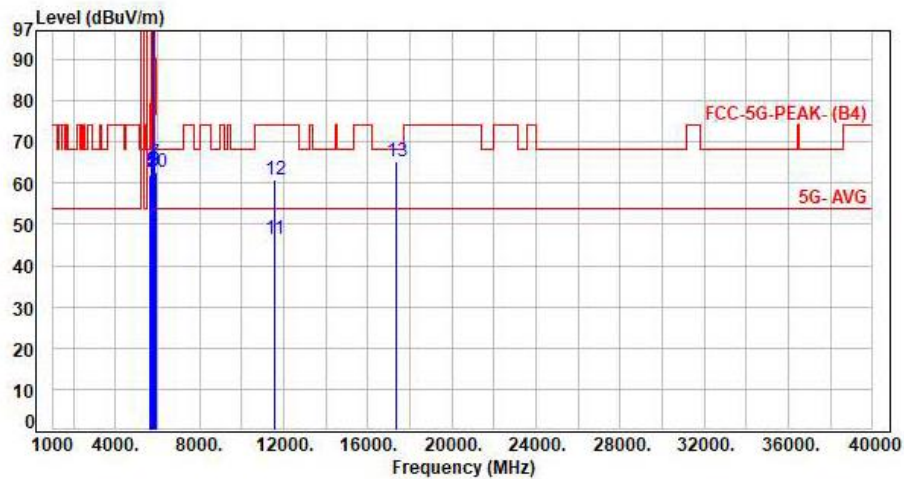

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	54.29	61.83	68.20	-6.37	Peak	100	171	P
2	5700.00	7.41	55.18	62.59	105.20	-42.61	Peak	100	171	P
3	5720.00	7.39	55.70	63.09	110.80	-47.71	Peak	100	171	P
4	5725.00	7.39	56.50	63.89	122.20	-58.31	Peak	100	171	P
5	5785.00	7.34	88.41	95.75	200.00	-104.25	Average	100	171	P
6	5785.00	7.34	99.12	106.46	200.00	-93.54	Peak	100	171	P
7	5850.00	7.30	57.70	65.00	122.20	-57.20	Peak	100	171	P
8	5855.00	7.32	55.85	63.17	110.80	-47.63	Peak	100	171	P
9	5875.00	7.39	55.68	63.07	105.20	-42.13	Peak	100	171	P
10	5925.00	7.51	55.26	62.77	68.20	-5.43	Peak	100	171	P
11	11570.00	17.65	28.75	46.40	54.00	-7.60	Average	100	171	P
12	11570.00	17.65	43.29	60.94	74.00	-13.06	Peak	100	171	P
13	17355.00	25.69	39.54	65.23	68.20	-2.97	Peak	100	262	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

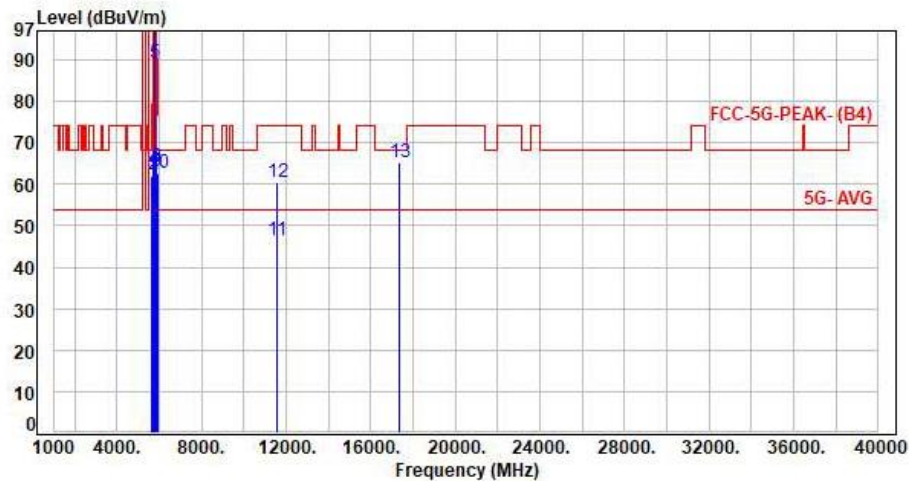

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	54.45	61.99	68.20	-6.21	Peak	100	122	P
2	5700.00	7.41	54.83	62.24	105.20	-42.96	Peak	100	122	P
3	5720.00	7.39	54.88	62.27	110.80	-48.53	Peak	100	122	P
4	5725.00	7.39	55.98	63.37	122.20	-58.83	Peak	100	122	P
5	5785.00	7.34	81.78	89.12	200.00	-110.88	Average	100	122	P
6	5785.00	7.34	92.44	99.78	200.00	-100.22	Peak	100	122	P
7	5850.00	7.30	55.49	62.79	122.20	-59.41	Peak	100	122	P
8	5855.00	7.32	56.70	64.02	110.80	-46.78	Peak	100	122	P
9	5875.00	7.39	55.69	63.08	105.20	-42.12	Peak	100	122	P
10	5925.00	7.51	55.24	62.75	68.20	-5.45	Peak	100	122	P
11	11570.00	17.65	28.88	46.53	54.00	-7.47	Average	100	92	P
12	11570.00	17.65	42.89	60.54	74.00	-13.46	Peak	100	92	P
13	17355.00	25.69	39.63	65.32	68.20	-2.88	Peak	100	134	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

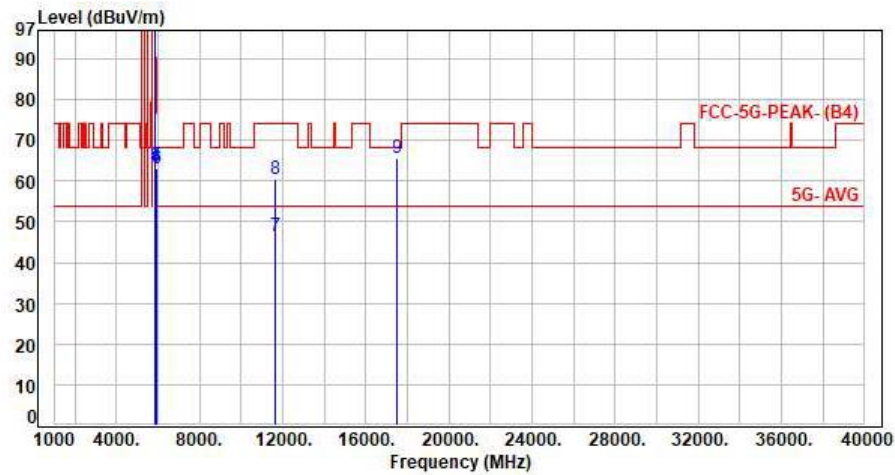

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	86.57	93.89	200.00	-106.11	Average	140	170	P
2	5825.00	7.32	97.19	104.51	200.00	-95.49	Peak	140	170	P
3	5850.00	7.30	56.56	63.86	122.20	-58.34	Peak	140	170	P
4	5855.00	7.32	56.16	63.48	110.80	-47.32	Peak	140	170	P
5	5875.00	7.39	56.25	63.64	105.20	-41.56	Peak	140	170	P
6	5925.00	7.51	55.60	63.11	68.20	-5.09	Peak	140	170	P
7	11650.00	17.74	28.74	46.48	54.00	-7.52	Average	100	173	P
8	11650.00	17.74	42.78	60.52	74.00	-13.48	Peak	100	173	P
9	17475.00	26.42	39.41	65.83	68.20	-2.37	Peak	100	264	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

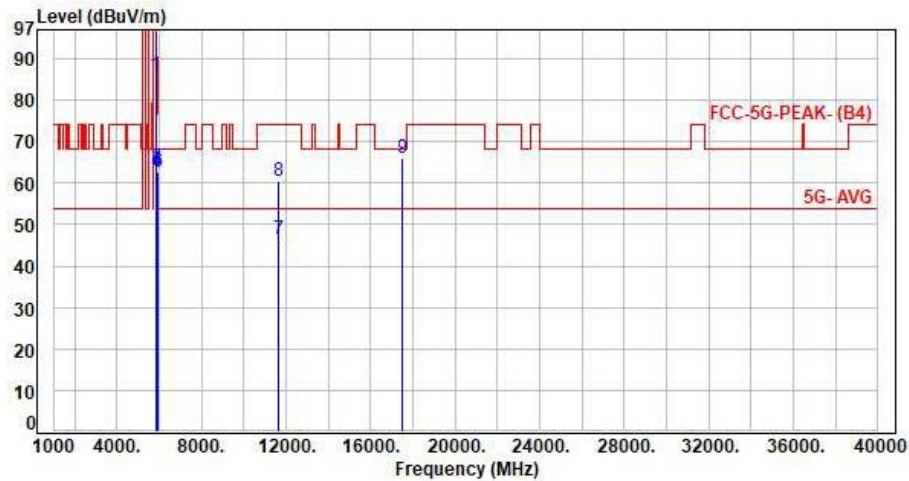


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	78.53	85.85	200.00	-114.15	Average	100	122	P
2	5825.00	7.32	88.83	96.15	200.00	-103.85	Peak	100	122	P
3	5850.00	7.30	56.66	63.96	122.20	-58.24	Peak	100	122	P
4	5855.00	7.32	55.33	62.65	110.80	-48.15	Peak	100	122	P
5	5875.00	7.39	55.59	62.98	105.20	-42.22	Peak	100	122	P
6	5925.00	7.51	55.07	62.58	68.20	-5.62	Peak	100	122	P
7	11650.00	17.74	28.82	46.56	54.00	-7.44	Average	100	94	P
8	11650.00	17.74	42.57	60.31	74.00	-13.69	Peak	100	94	P
9	17475.00	26.42	39.48	65.90	68.20	-2.30	Peak	100	133	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

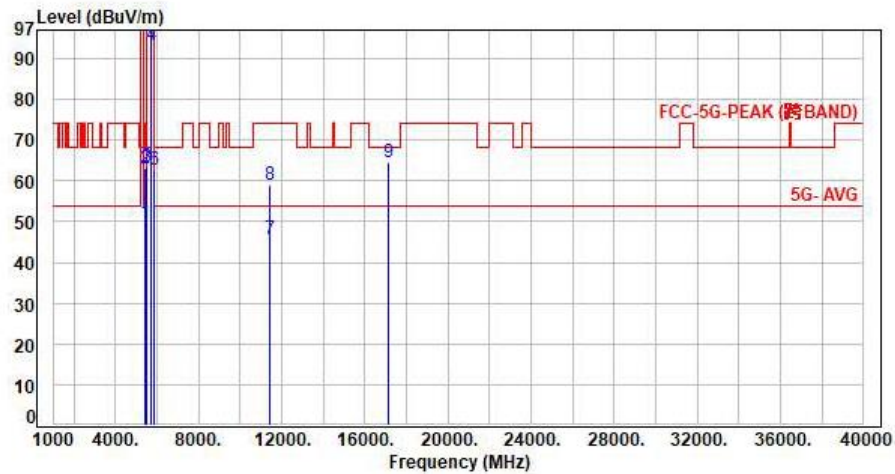

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.04	49.76	54.00	-4.24	Average	153	185	P
2	5460.00	7.72	55.48	63.20	74.00	-10.80	Peak	153	185	P
3	5470.00	7.72	55.84	63.56	68.20	-4.64	Peak	153	185	P
4	5720.00	7.39	85.90	93.29	200.00	-106.71	Average	153	185	P
5	5720.00	7.39	96.80	104.19	200.00	-95.81	Peak	153	185	P
6	5850.00	7.30	55.55	62.85	68.20	-5.35	Peak	153	185	P
7	11440.00	16.63	29.01	45.64	54.00	-8.36	Average	100	169	P
8	11440.00	16.63	42.45	59.08	74.00	-14.92	Peak	100	169	P
9	17160.00	24.42	39.97	64.39	68.20	-3.81	Peak	100	266	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

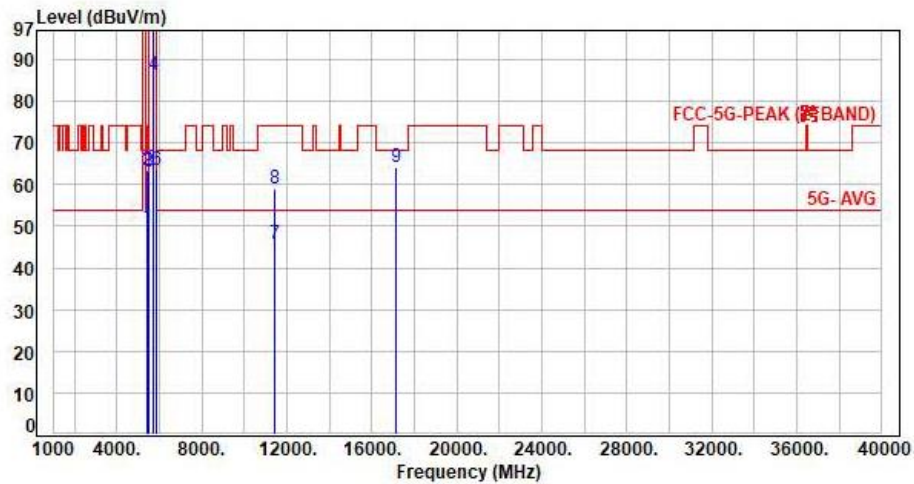

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.03	49.75	54.00	-4.25	Average	100	123	P
2	5460.00	7.72	55.64	63.36	74.00	-10.64	Peak	100	123	P
3	5470.00	7.72	55.36	63.08	68.20	-5.12	Peak	100	123	P
4	5720.00	7.39	79.07	86.46	200.00	-113.54	Average	100	123	P
5	5720.00	7.39	89.84	97.23	200.00	-102.77	Peak	100	123	P
6	5850.00	7.30	56.30	63.60	68.20	-4.60	Peak	100	123	P
7	11440.00	16.63	28.95	45.58	54.00	-8.42	Average	100	92	P
8	11440.00	16.63	42.30	58.93	74.00	-15.07	Peak	100	92	P
9	17160.00	24.42	39.87	64.29	68.20	-3.91	Peak	100	135	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO B1

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

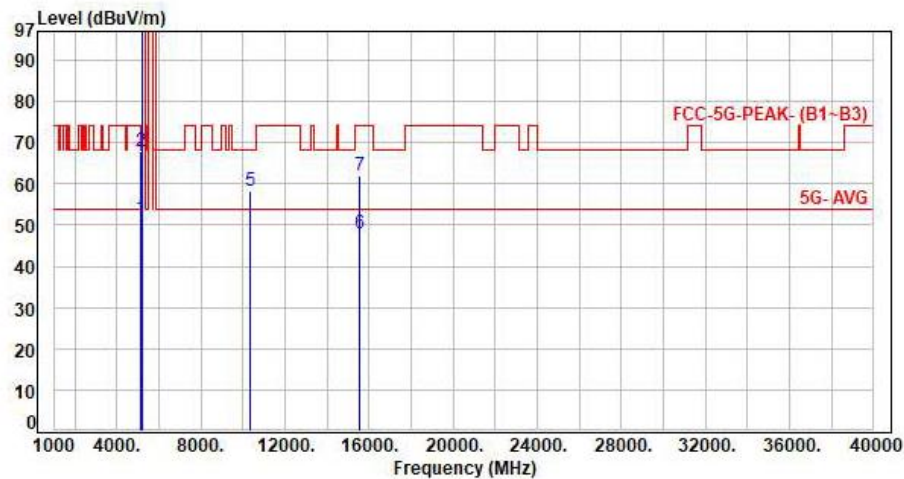

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	44.33	51.51	54.00	-2.49	Average	119	192	P
2	5150.00	7.18	60.67	67.85	74.00	-6.15	Peak	119	192	P
3	5180.00	7.25	91.25	98.50	200.00	-101.50	Average	119	192	P
4	5180.00	7.25	104.54	111.79	200.00	-88.21	Peak	119	192	P
5	10360.00	15.21	43.20	58.41	68.20	-9.79	Peak	100	58	P
6	15540.00	19.80	28.13	47.93	54.00	-6.07	Average	100	226	P
7	15540.00	19.80	42.01	61.81	74.00	-12.19	Peak	100	226	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

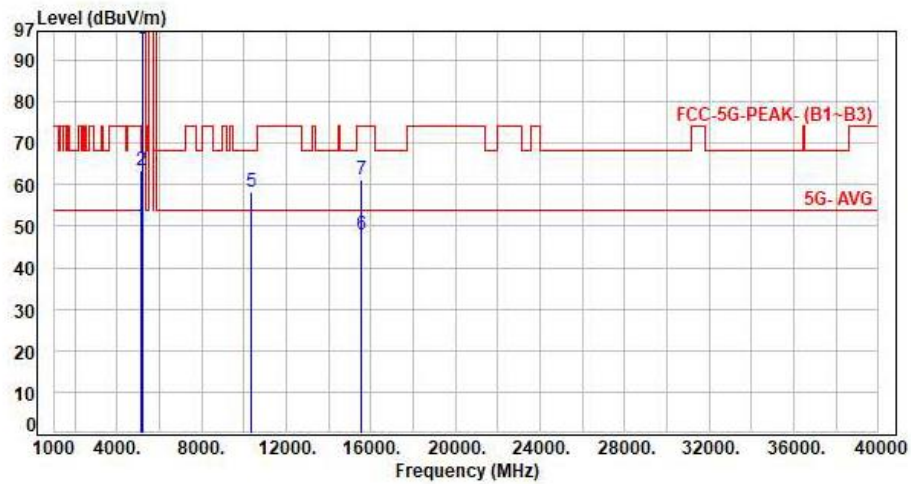

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	42.92	50.10	54.00	-3.90	Average	283	202	P
2	5150.00	7.18	56.42	63.60	74.00	-10.40	Peak	283	202	P
3	5180.00	7.25	87.97	95.22	200.00	-104.78	Average	283	202	P
4	5180.00	7.25	100.61	107.86	200.00	-92.14	Peak	283	202	P
5	10360.00	15.21	43.08	58.29	68.20	-9.91	Peak	100	127	P
6	15540.00	19.80	28.23	48.03	54.00	-5.97	Average	100	155	P
7	15540.00	19.80	41.59	61.39	74.00	-12.61	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

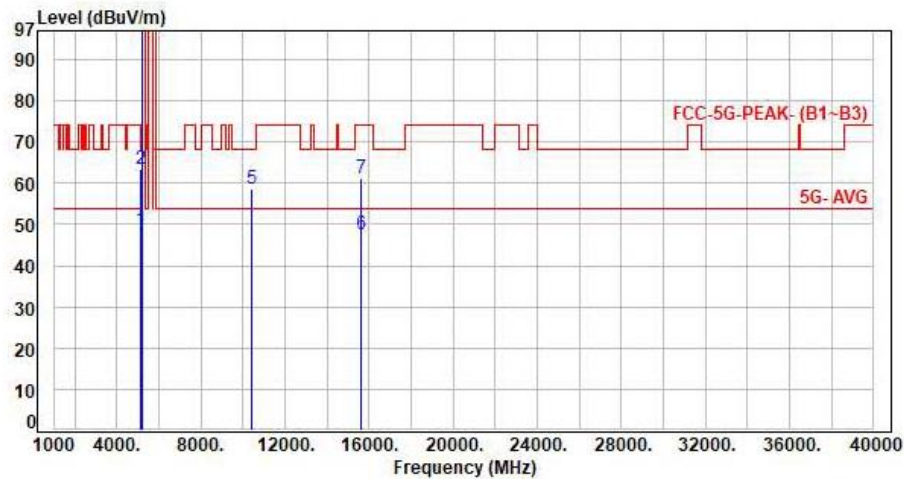

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	41.33	48.51	54.00	-5.49	Average	288	193	P
2	5150.00	7.18	56.28	63.46	74.00	-10.54	Peak	288	193	P
3	5200.00	7.30	92.03	99.33	200.00	-100.67	Average	288	193	P
4	5200.00	7.30	104.52	111.82	200.00	-88.18	Peak	288	193	P
5	10400.00	15.16	43.31	58.47	68.20	-9.73	Peak	100	57	P
6	15600.00	19.45	28.19	47.64	54.00	-6.36	Average	100	227	P
7	15600.00	19.45	41.72	61.17	74.00	-12.83	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

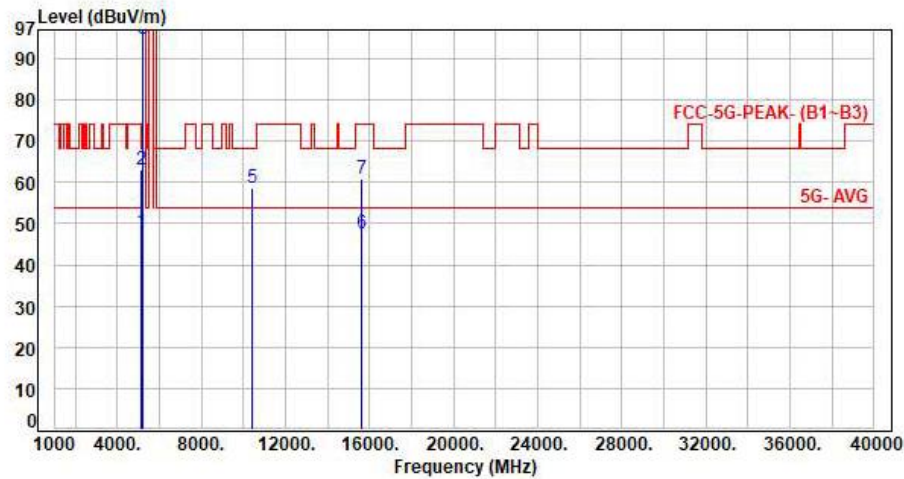

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	40.76	47.94	54.00	-6.06	Average	100	129	P
2	5150.00	7.18	56.03	63.21	74.00	-10.79	Peak	100	129	P
3	5200.00	7.30	87.46	94.76	200.00	-105.24	Average	100	129	P
4	5200.00	7.30	100.44	107.74	200.00	-92.26	Peak	100	129	P
5	10400.00	15.16	43.42	58.58	68.20	-9.62	Peak	100	128	P
6	15600.00	19.45	28.23	47.68	54.00	-6.32	Average	100	157	P
7	15600.00	19.45	41.27	60.72	74.00	-13.28	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

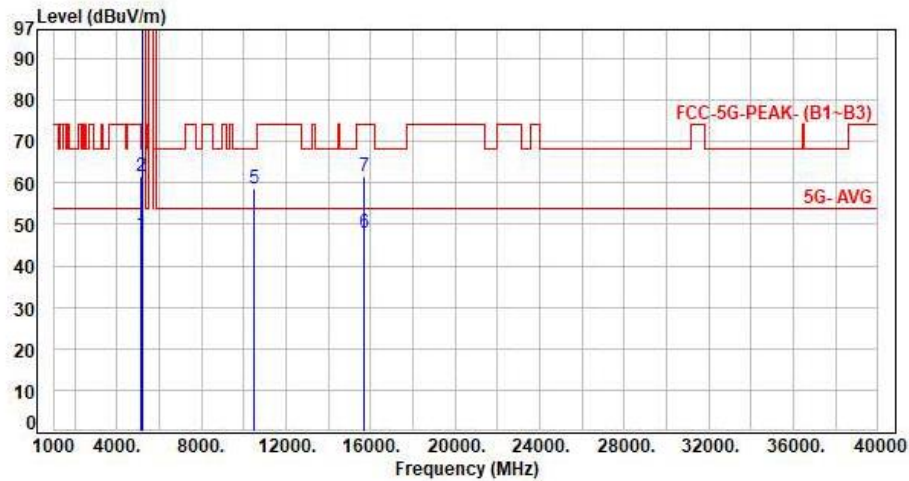

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	40.44	47.62	54.00	-6.38	Average	192	194	P
2	5150.00	7.18	54.53	61.71	74.00	-12.29	Peak	192	194	P
3	5240.00	7.32	91.81	99.13	200.00	-100.87	Average	192	194	P
4	5240.00	7.32	106.01	113.33	200.00	-86.67	Peak	192	194	P
5	10480.00	15.44	43.16	58.60	68.20	-9.60	Peak	100	59	P
6	15720.00	19.61	28.18	47.79	54.00	-6.21	Average	100	224	P
7	15720.00	19.61	41.81	61.42	74.00	-12.58	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

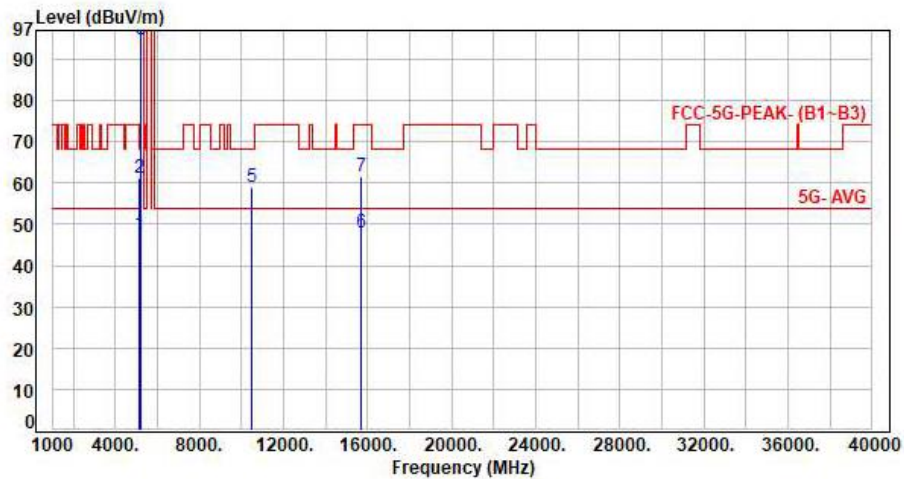

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	40.34	47.52	54.00	-6.48	Average	136	129	P
2	5150.00	7.18	53.91	61.09	74.00	-12.91	Peak	136	129	P
3	5240.00	7.32	87.57	94.89	200.00	-105.11	Average	136	129	P
4	5240.00	7.32	99.46	106.78	200.00	-93.22	Peak	136	129	P
5	10480.00	15.44	43.65	59.09	68.20	-9.11	Peak	100	129	P
6	15720.00	19.61	28.19	47.80	54.00	-6.20	Average	100	157	P
7	15720.00	19.61	41.87	61.48	74.00	-12.52	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

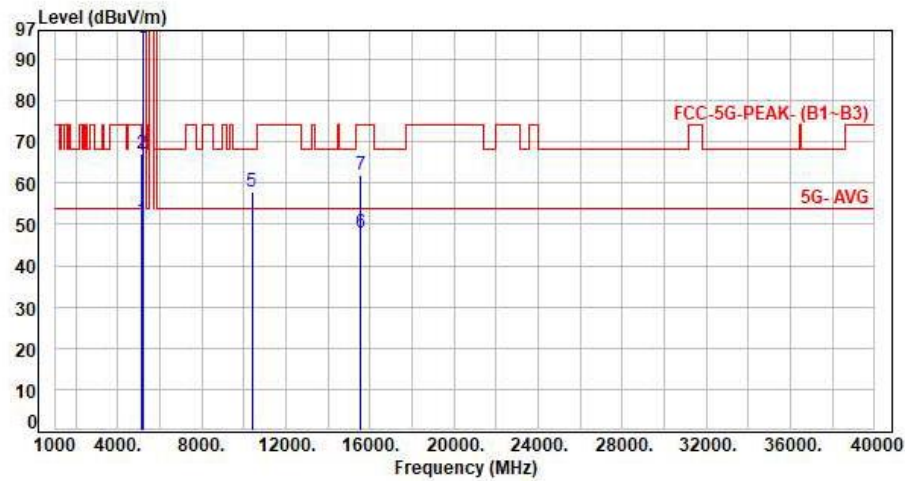

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	43.76	50.94	54.00	-3.06	Average	105	191	P
2	5150.00	7.18	60.01	67.19	74.00	-6.81	Peak	105	191	P
3	5190.00	7.28	87.94	95.22	200.00	-104.78	Average	105	191	P
4	5190.00	7.28	100.57	107.85	200.00	-92.15	Peak	105	191	P
5	10380.00	15.19	42.86	58.05	68.20	-10.15	Peak	100	55	P
6	15570.00	19.60	28.16	47.76	54.00	-6.24	Average	100	228	P
7	15570.00	19.60	42.35	61.95	74.00	-12.05	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

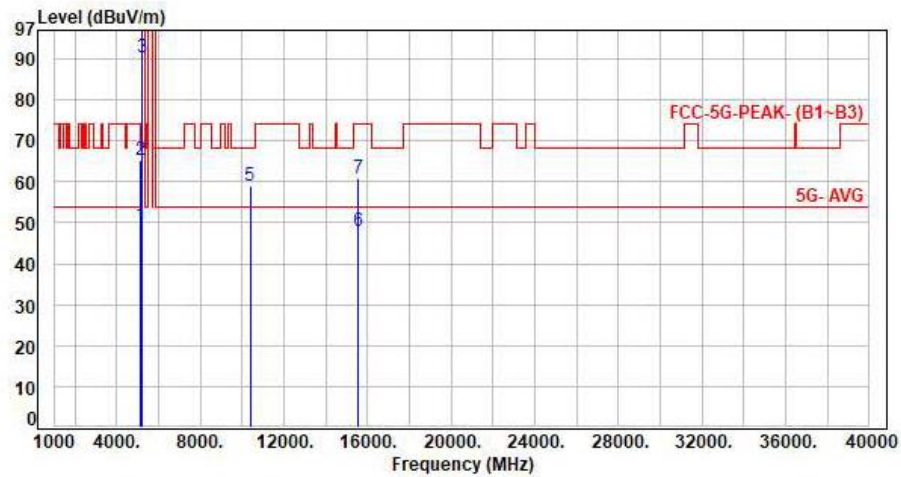

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	42.26	49.44	54.00	-4.56	Average	100	130	P
2	5150.00	7.18	58.02	65.20	74.00	-8.80	Peak	100	130	P
3	5190.00	7.28	83.16	90.44	200.00	-109.56	Average	100	130	P
4	5190.00	7.28	95.81	103.09	200.00	-96.91	Peak	100	130	P
5	10380.00	15.19	43.82	59.01	68.20	-9.19	Peak	100	127	P
6	15570.00	19.60	28.23	47.83	54.00	-6.17	Average	100	158	P
7	15570.00	19.60	41.43	61.03	74.00	-12.97	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

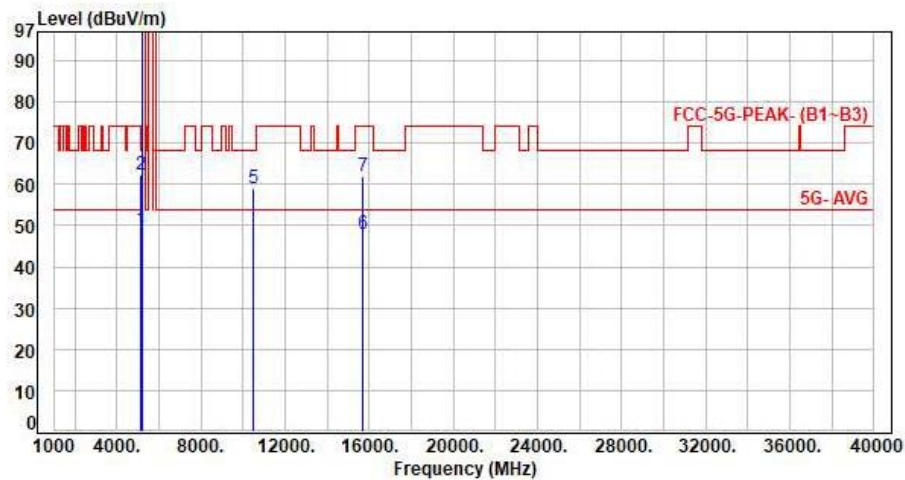

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	41.97	49.15	54.00	-4.85	Average	112	191	P
2	5150.00	7.18	55.19	62.37	74.00	-11.63	Peak	112	191	P
3	5230.00	7.31	88.86	96.17	200.00	-103.83	Average	112	191	P
4	5230.00	7.31	100.94	108.25	200.00	-91.75	Peak	112	191	P
5	10460.00	15.32	43.81	59.13	68.20	-9.07	Peak	100	58	P
6	15690.00	19.60	28.22	47.82	54.00	-6.18	Average	100	224	P
7	15690.00	19.60	42.39	61.99	74.00	-12.01	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

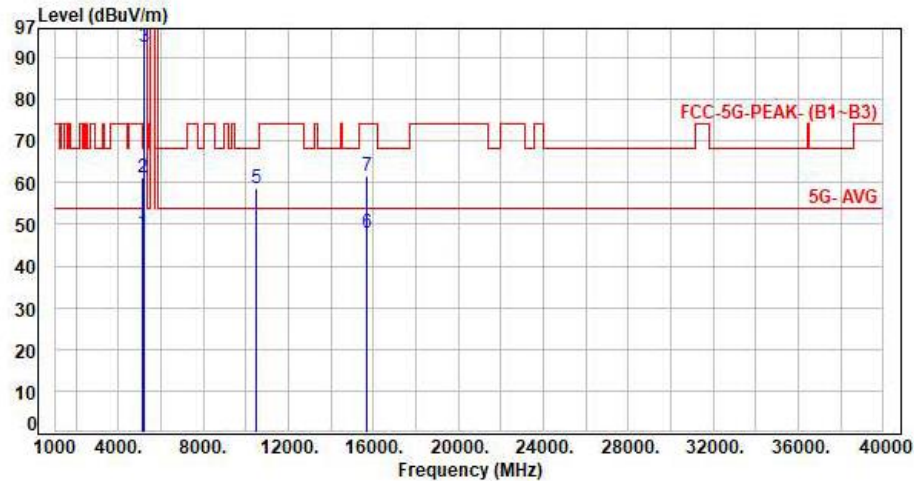

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	40.58	47.76	54.00	-6.24	Average	100	127	P
2	5150.00	7.18	53.91	61.09	74.00	-12.91	Peak	100	127	P
3	5230.00	7.31	85.44	92.75	200.00	-107.25	Average	100	127	P
4	5230.00	7.31	97.63	104.94	200.00	-95.06	Peak	100	127	P
5	10460.00	15.32	43.19	58.51	68.20	-9.69	Peak	100	127	P
6	15690.00	19.60	28.17	47.77	54.00	-6.23	Average	100	158	P
7	15690.00	19.60	42.10	61.70	74.00	-12.30	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

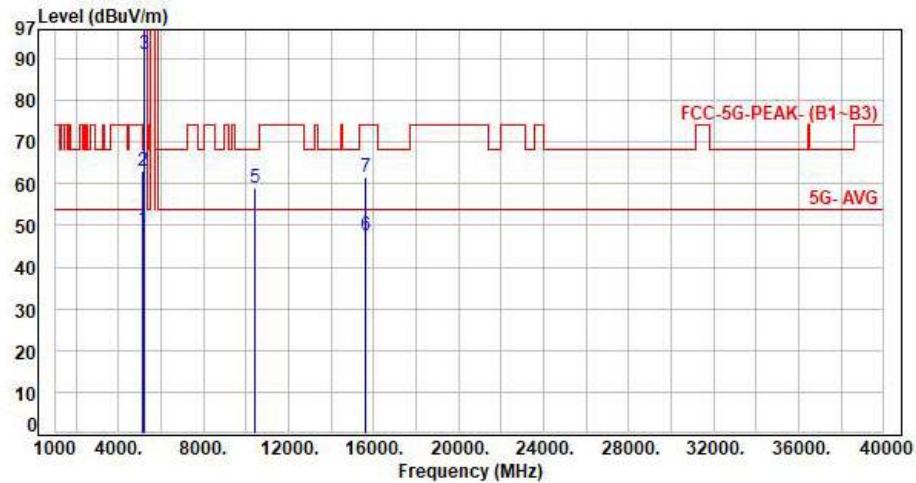

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	42.05	49.23	54.00	-4.77	Average	218	190	P
2	5150.00	7.18	55.74	62.92	74.00	-11.08	Peak	218	190	P
3	5210.00	7.31	83.78	91.09	200.00	-108.91	Average	218	190	P
4	5210.00	7.31	96.55	103.86	200.00	-96.14	Peak	218	190	P
5	10420.00	15.19	43.73	58.92	68.20	-9.28	Peak	100	54	P
6	15630.00	19.44	28.19	47.63	54.00	-6.37	Average	100	227	P
7	15630.00	19.44	42.22	61.66	74.00	-12.34	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

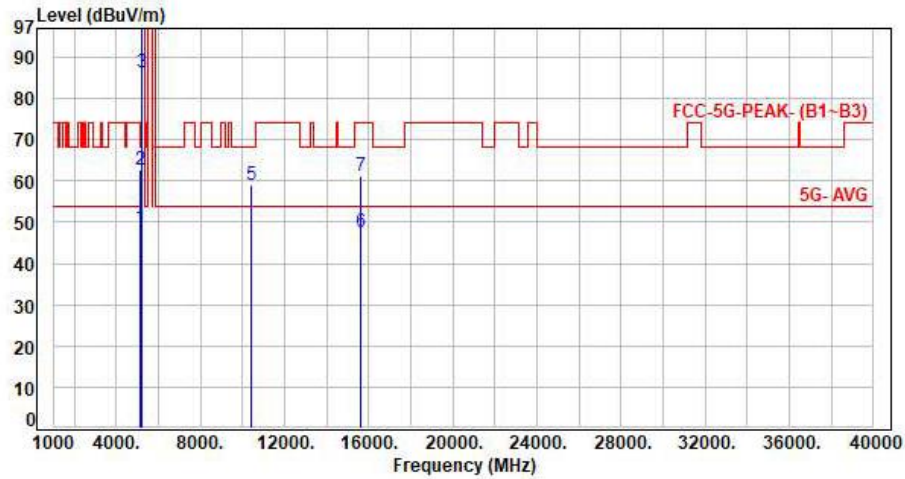

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	41.36	48.54	54.00	-5.46	Average	100	350	P
2	5150.00	7.18	55.58	62.76	74.00	-11.24	Peak	100	350	P
3	5210.00	7.31	78.88	86.19	200.00	-113.81	Average	100	350	P
4	5210.00	7.31	91.65	98.96	200.00	-101.04	Peak	100	350	P
5	10420.00	15.19	43.81	59.00	68.20	-9.20	Peak	100	127	P
6	15630.00	19.44	28.20	47.64	54.00	-6.36	Average	100	154	P
7	15630.00	19.44	41.81	61.25	74.00	-12.75	Peak	100	154	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO B2

Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

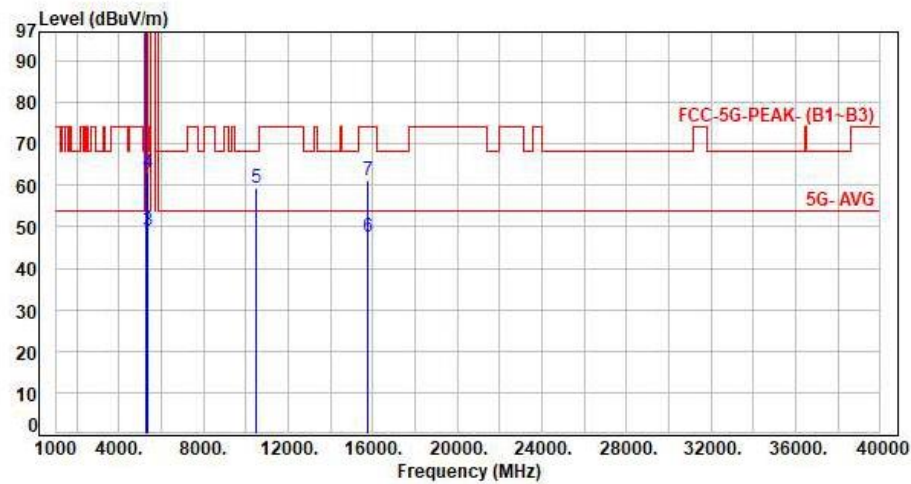


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	91.26	98.63	200.00	-101.37	Average	180	194	P
2	5260.00	7.37	104.63	112.00	200.00	-88.00	Peak	180	194	P
3	5350.00	7.67	41.35	49.02	54.00	-4.98	Average	180	194	P
4	5350.00	7.67	55.43	63.10	74.00	-10.90	Peak	180	194	P
5	10520.00	15.59	43.62	59.21	68.20	-8.99	Peak	100	55	P
6	15780.00	19.34	28.19	47.53	54.00	-6.47	Average	100	227	P
7	15780.00	19.34	41.88	61.22	74.00	-12.78	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

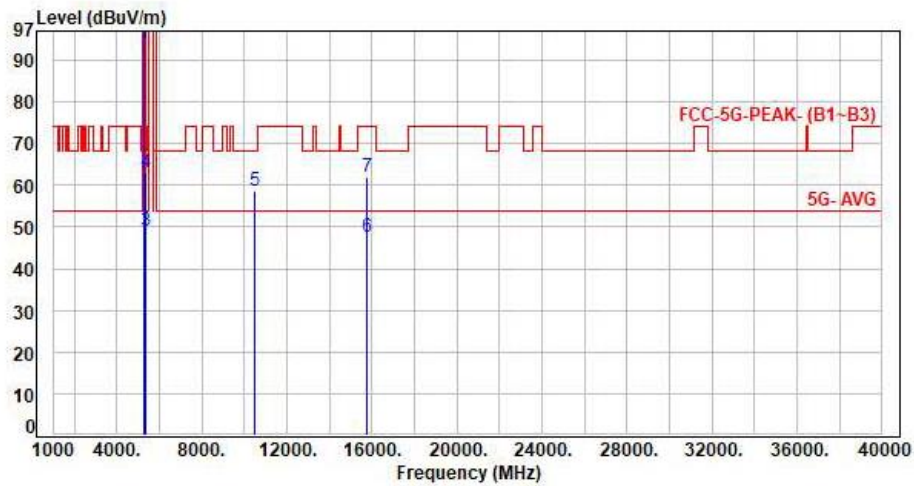

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	86.84	94.21	200.00	-105.79	Average	100	129	P
2	5260.00	7.37	100.28	107.65	200.00	-92.35	Peak	100	129	P
3	5350.00	7.67	41.29	48.96	54.00	-5.04	Average	100	129	P
4	5350.00	7.67	55.37	63.04	74.00	-10.96	Peak	100	129	P
5	10520.00	15.59	43.21	58.80	68.20	-9.40	Peak	100	125	P
6	15780.00	19.34	28.26	47.60	54.00	-6.40	Average	100	159	P
7	15780.00	19.34	42.63	61.97	74.00	-12.03	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

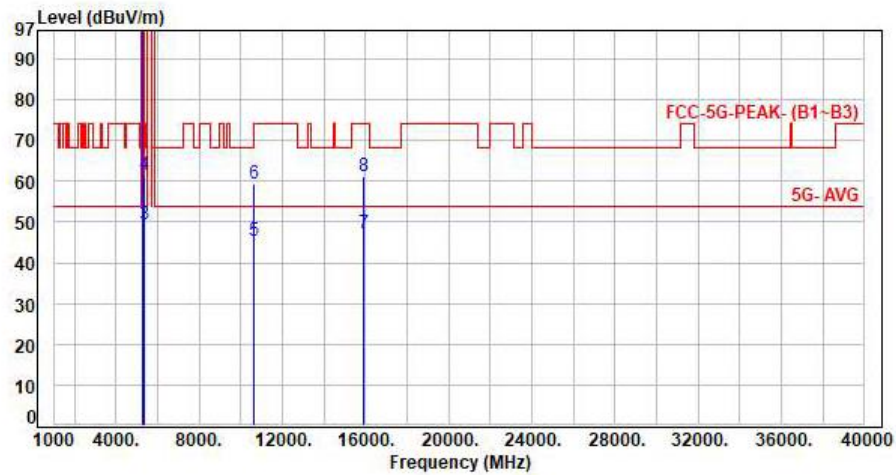

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	92.67	100.22	200.00	-99.78	Average	178	195	P
2	5300.00	7.55	105.40	112.95	200.00	-87.05	Peak	178	195	P
3	5350.00	7.67	41.74	49.41	54.00	-4.59	Average	178	195	P
4	5350.00	7.67	54.02	61.69	74.00	-12.31	Peak	178	195	P
5	10600.00	15.69	29.70	45.39	54.00	-8.61	Average	100	55	P
6	10600.00	15.69	43.63	59.32	74.00	-14.68	Peak	100	55	P
7	15900.00	19.12	28.16	47.28	54.00	-6.72	Average	100	228	P
8	15900.00	19.12	41.94	61.06	74.00	-12.94	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

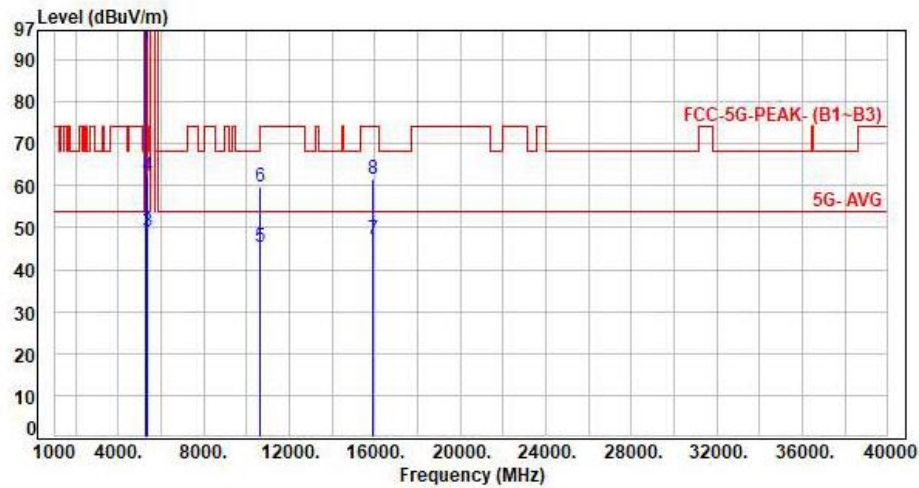

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	86.22	93.77	200.00	-106.23	Average	100	129	P
2	5300.00	7.55	99.05	106.60	200.00	-93.40	Peak	100	129	P
3	5350.00	7.67	41.26	48.93	54.00	-5.07	Average	100	129	P
4	5350.00	7.67	54.66	62.33	74.00	-11.67	Peak	100	129	P
5	10600.00	15.69	29.70	45.39	54.00	-8.61	Average	100	126	P
6	10600.00	15.69	43.91	59.60	74.00	-14.40	Peak	100	126	P
7	15900.00	19.12	28.12	47.24	54.00	-6.76	Average	100	158	P
8	15900.00	19.12	42.48	61.60	74.00	-12.40	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

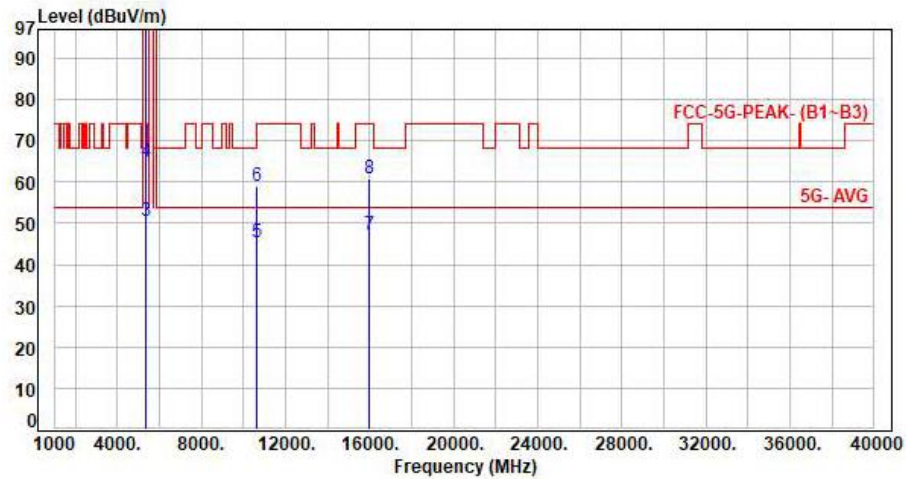


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	91.61	99.21	200.00	-100.79	Average	124	198	P
2	5320.00	7.60	104.93	112.53	200.00	-87.47	Peak	124	198	P
3	5350.00	7.67	42.96	50.63	54.00	-3.37	Average	124	198	P
4	5350.00	7.67	57.35	65.02	74.00	-8.98	Peak	124	198	P
5	10640.00	15.73	29.67	45.40	54.00	-8.60	Average	100	57	P
6	10640.00	15.73	43.25	58.98	74.00	-15.02	Peak	100	57	P
7	15960.00	19.05	28.17	47.22	54.00	-6.78	Average	100	224	P
8	15960.00	19.05	41.66	60.71	74.00	-13.29	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

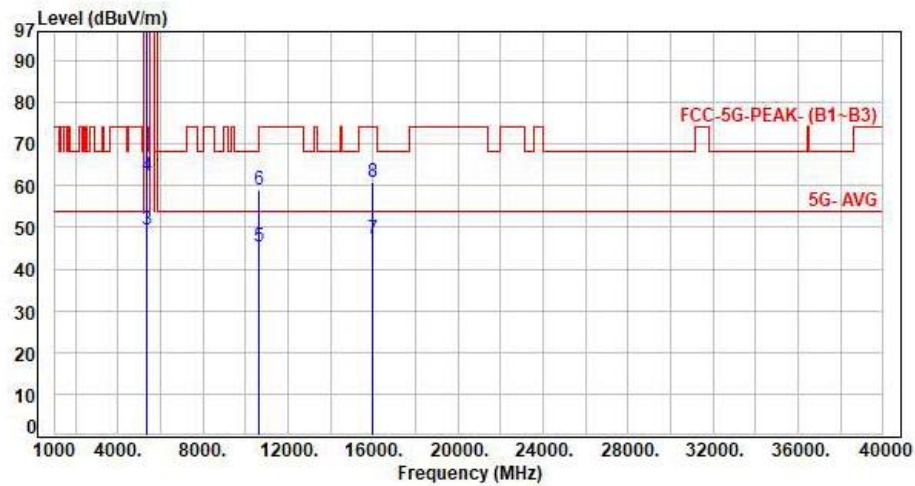

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	86.66	94.26	200.00	-105.74	Average	117	95	P
2	5320.00	7.60	99.78	107.38	200.00	-92.62	Peak	117	95	P
3	5350.00	7.67	41.77	49.44	54.00	-4.56	Average	117	95	P
4	5350.00	7.67	54.70	62.37	74.00	-11.63	Peak	117	95	P
5	10640.00	15.73	29.81	45.54	54.00	-8.46	Average	100	127	P
6	10640.00	15.73	43.23	58.96	74.00	-15.04	Peak	100	127	P
7	15960.00	19.05	28.22	47.27	54.00	-6.73	Average	100	155	P
8	15960.00	19.05	41.85	60.90	74.00	-13.10	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

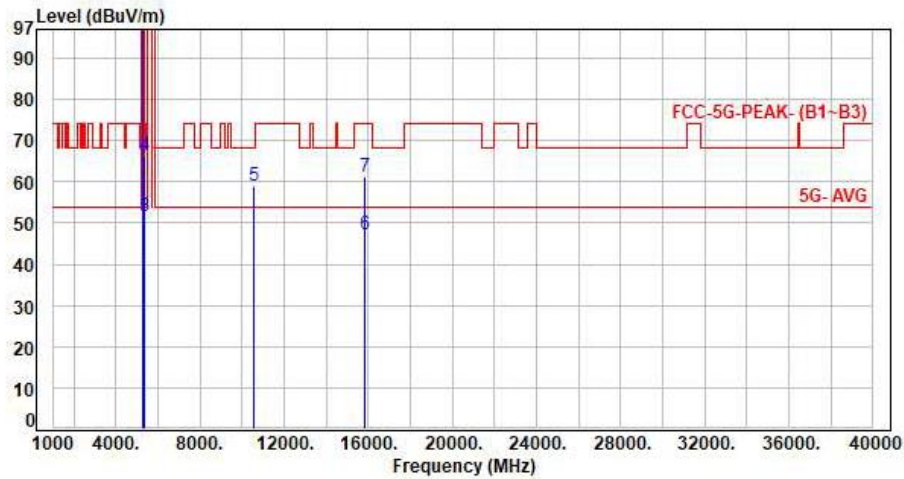


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.42	89.50	96.92	200.00	-103.08	Average	189	193	P
2	5270.00	7.42	101.99	109.41	200.00	-90.59	Peak	189	193	P
3	5350.00	7.67	43.95	51.62	54.00	-2.38	Average	189	193	P
4	5350.00	7.67	58.67	66.34	74.00	-7.66	Peak	189	193	P
5	10540.00	15.61	43.29	58.90	68.20	-9.30	Peak	100	55	P
6	15810.00	19.17	28.11	47.28	54.00	-6.72	Average	100	228	P
7	15810.00	19.17	41.96	61.13	74.00	-12.87	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

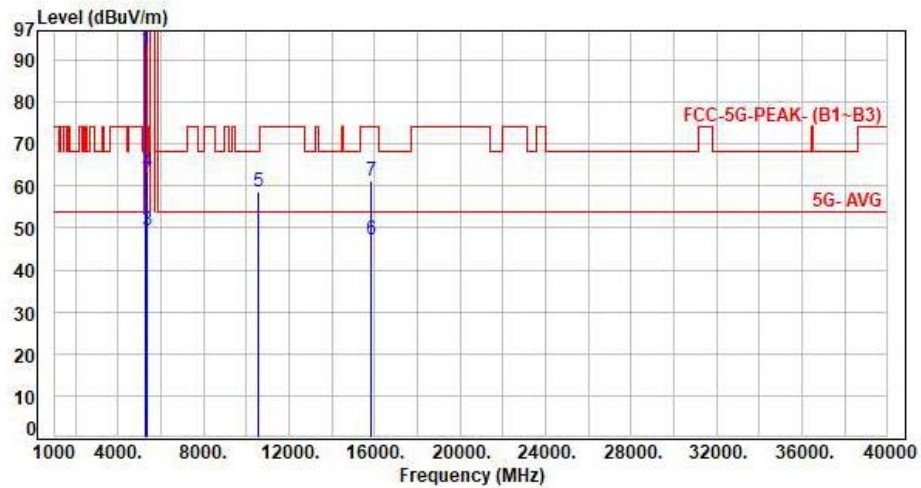


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.42	85.20	92.62	200.00	-107.38	Average	100	129	P
2	5270.00	7.42	98.10	105.52	200.00	-94.48	Peak	100	129	P
3	5350.00	7.67	41.90	49.57	54.00	-4.43	Average	100	129	P
4	5350.00	7.67	55.72	63.39	74.00	-10.61	Peak	100	129	P
5	10540.00	15.61	43.02	58.63	68.20	-9.57	Peak	100	126	P
6	15810.00	19.17	28.15	47.32	54.00	-6.68	Average	100	159	P
7	15810.00	19.17	41.94	61.11	74.00	-12.89	Peak	100	159	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

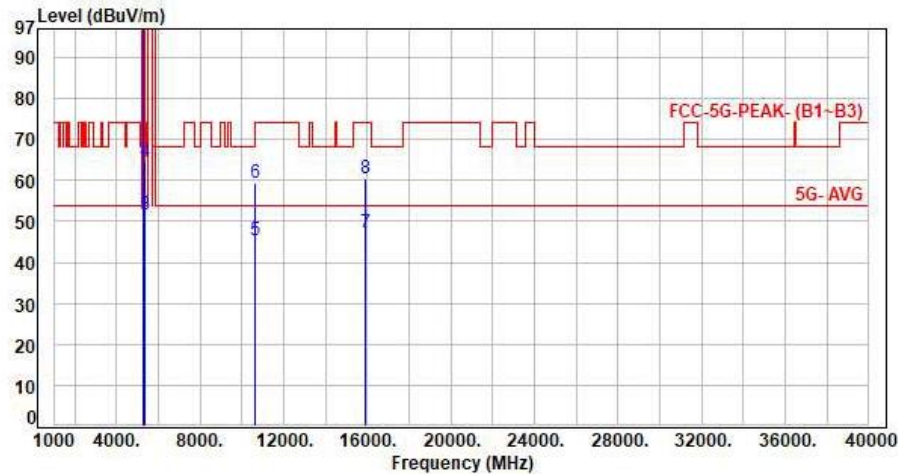

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.57	88.07	95.64	200.00	-104.36	Average	168	194	P
2	5310.00	7.57	101.03	108.60	200.00	-91.40	Peak	168	194	P
3	5350.00	7.67	43.93	51.60	54.00	-2.40	Average	168	194	P
4	5350.00	7.67	56.94	64.61	74.00	-9.39	Peak	168	194	P
5	10620.00	15.70	29.66	45.36	54.00	-8.64	Average	100	58	P
6	10620.00	15.70	43.81	59.51	74.00	-14.49	Peak	100	58	P
7	15930.00	19.08	28.16	47.24	54.00	-6.76	Average	100	224	P
8	15930.00	19.08	41.34	60.42	74.00	-13.58	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

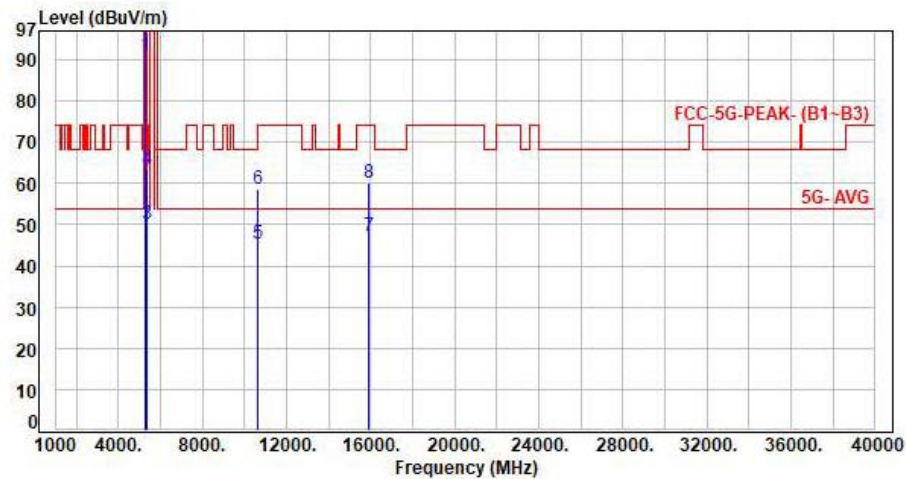

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.57	83.42	90.99	200.00	-109.01	Average	120	95	P
2	5310.00	7.57	96.72	104.29	200.00	-95.71	Peak	120	95	P
3	5350.00	7.67	42.61	50.28	54.00	-3.72	Average	120	95	P
4	5350.00	7.67	55.72	63.39	74.00	-10.61	Peak	120	95	P
5	10620.00	15.70	29.71	45.41	54.00	-8.59	Average	100	125	P
6	10620.00	15.70	42.95	58.65	74.00	-15.35	Peak	100	125	P
7	15930.00	19.08	28.14	47.22	54.00	-6.78	Average	100	159	P
8	15930.00	19.08	41.16	60.24	74.00	-13.76	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

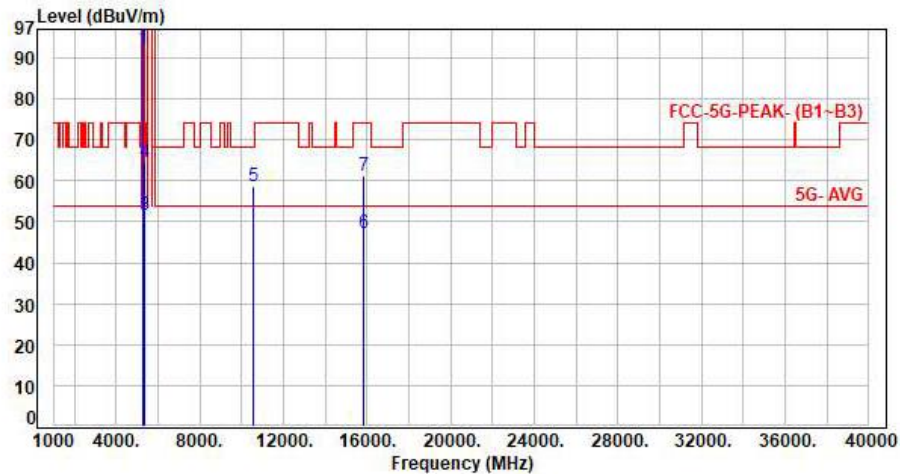


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.50	84.76	92.26	200.00	-107.74	Average	101	195	P
2	5290.00	7.50	96.05	103.55	200.00	-96.45	Peak	101	195	P
3	5350.00	7.67	43.91	51.58	54.00	-2.42	Average	101	195	P
4	5350.00	7.67	56.84	64.51	74.00	-9.49	Peak	101	195	P
5	10580.00	15.66	43.05	58.71	68.20	-9.49	Peak	100	54	P
6	15870.00	19.12	28.22	47.34	54.00	-6.66	Average	100	223	P
7	15870.00	19.12	41.92	61.04	74.00	-12.96	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

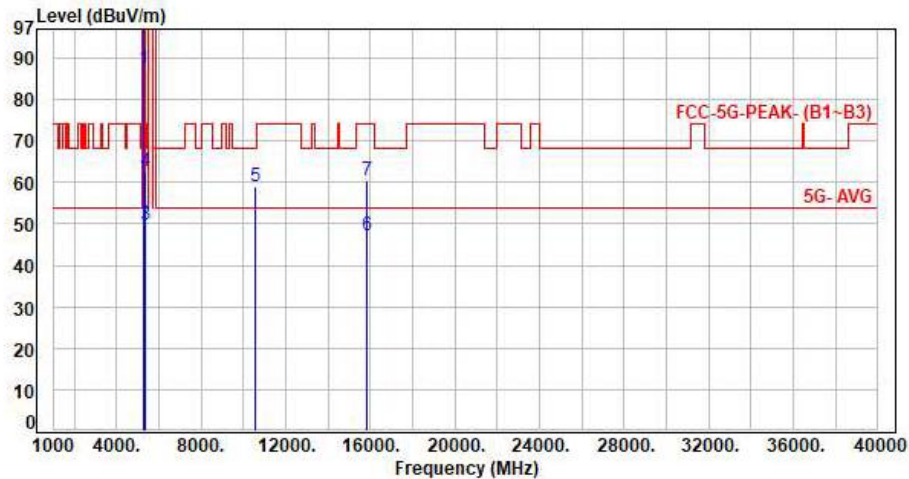

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.50	79.92	87.42	200.00	-112.58	Average	102	128	P
2	5290.00	7.50	92.38	99.88	200.00	-100.12	Peak	102	128	P
3	5350.00	7.67	42.06	49.73	54.00	-4.27	Average	102	128	P
4	5350.00	7.67	55.11	62.78	74.00	-11.22	Peak	102	128	P
5	10580.00	15.66	43.40	59.06	68.20	-9.14	Peak	100	125	P
6	15870.00	19.12	28.19	47.31	54.00	-6.69	Average	100	158	P
7	15870.00	19.12	41.36	60.48	74.00	-13.52	Peak	100	158	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO B3

Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

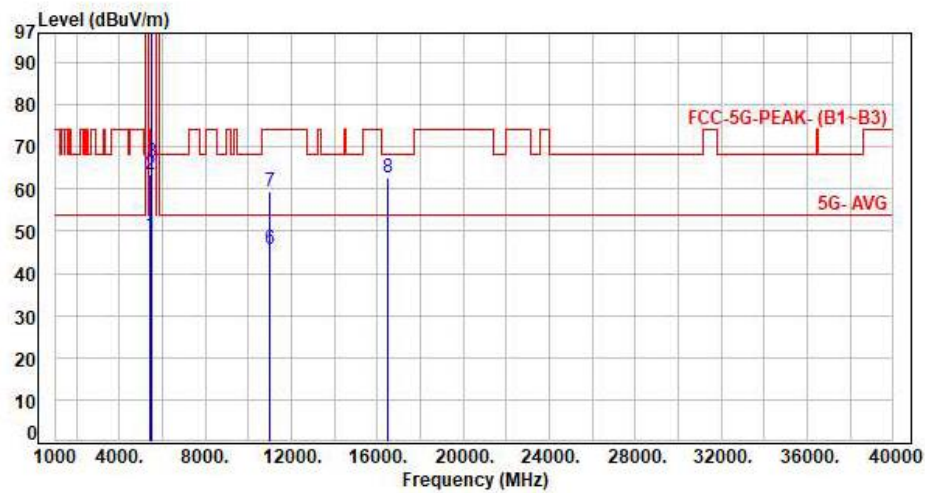

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.47	49.19	54.00	-4.81	Average	233	180	P
2	5460.00	7.72	55.78	63.50	74.00	-10.50	Peak	233	180	P
3	5470.00	7.72	58.65	66.37	68.20	-1.83	Peak	233	180	P
4	5500.00	7.73	90.95	98.68	200.00	-101.32	Average	233	180	P
5	5500.00	7.73	103.31	111.04	200.00	-88.96	Peak	233	180	P
6	11000.00	15.79	29.90	45.69	54.00	-8.31	Average	100	58	P
7	11000.00	15.79	43.58	59.37	74.00	-14.63	Peak	100	58	P
8	16500.00	20.93	41.84	62.77	68.20	-5.43	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

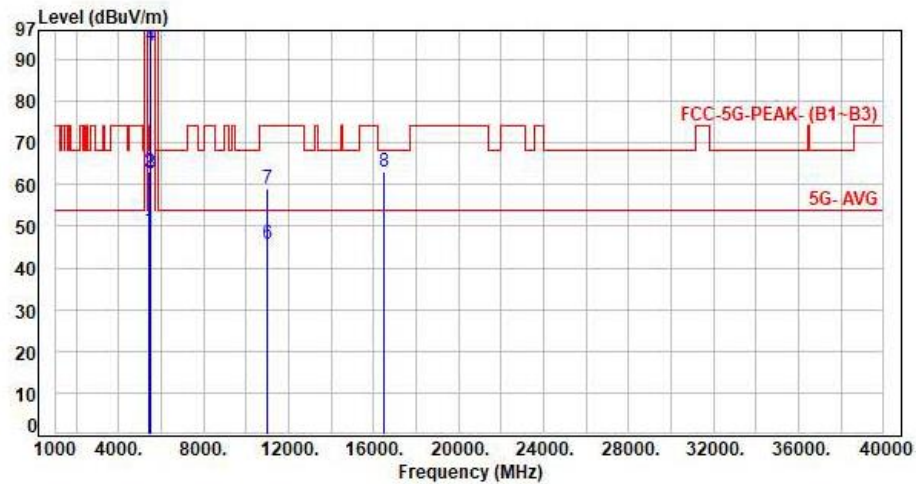

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.51	49.23	54.00	-4.77	Average	100	353	P
2	5460.00	7.72	55.33	63.05	74.00	-10.95	Peak	100	353	P
3	5470.00	7.72	55.07	62.79	68.20	-5.41	Peak	100	353	P
4	5500.00	7.73	85.56	93.29	200.00	-106.71	Average	100	353	P
5	5500.00	7.73	98.63	106.36	200.00	-93.64	Peak	100	353	P
6	11000.00	15.79	29.82	45.61	54.00	-8.39	Average	100	125	P
7	11000.00	15.79	43.25	59.04	74.00	-14.96	Peak	100	125	P
8	16500.00	20.93	42.21	63.14	68.20	-5.06	Peak	100	155	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor