




Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

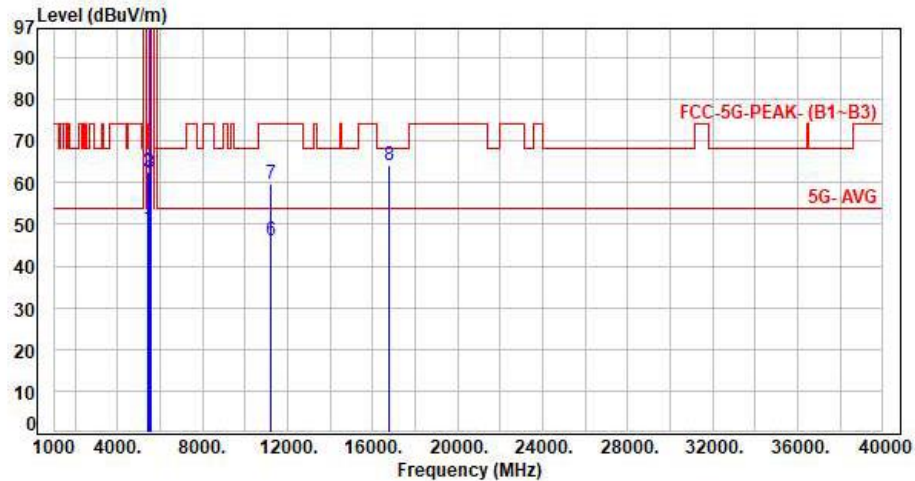

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.37	49.09	54.00	-4.91	Average	137	185	P
2	5460.00	7.72	54.90	62.62	74.00	-11.38	Peak	137	185	P
3	5470.00	7.72	54.63	62.35	68.20	-5.85	Peak	137	185	P
4	5600.00	7.47	93.61	101.08	200.00	-98.92	Average	137	185	P
5	5600.00	7.47	106.01	113.48	200.00	-86.52	Peak	137	185	P
6	11200.00	16.18	29.87	46.05	54.00	-7.95	Average	100	63	P
7	11200.00	16.18	43.43	59.61	74.00	-14.39	Peak	100	63	P
8	16800.00	22.69	41.32	64.01	68.20	-4.19	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

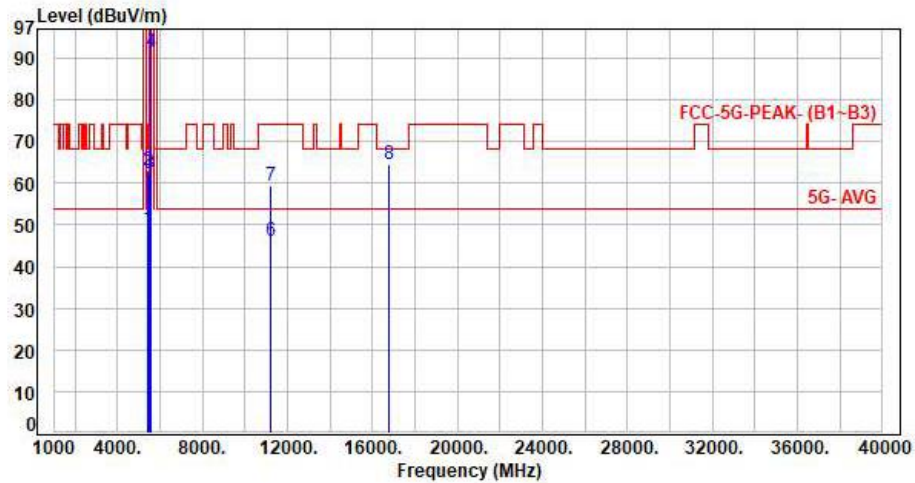

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.39	49.11	54.00	-4.89	Average	100	87	P
2	5460.00	7.72	55.45	63.17	74.00	-10.83	Peak	100	87	P
3	5470.00	7.72	54.53	62.25	68.20	-5.95	Peak	100	87	P
4	5600.00	7.47	84.09	91.56	200.00	-108.44	Average	100	87	P
5	5600.00	7.47	97.56	105.03	200.00	-94.97	Peak	100	87	P
6	11200.00	16.18	29.95	46.13	54.00	-7.87	Average	100	128	P
7	11200.00	16.18	43.07	59.25	74.00	-14.75	Peak	100	128	P
8	16800.00	22.69	41.84	64.53	68.20	-3.67	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

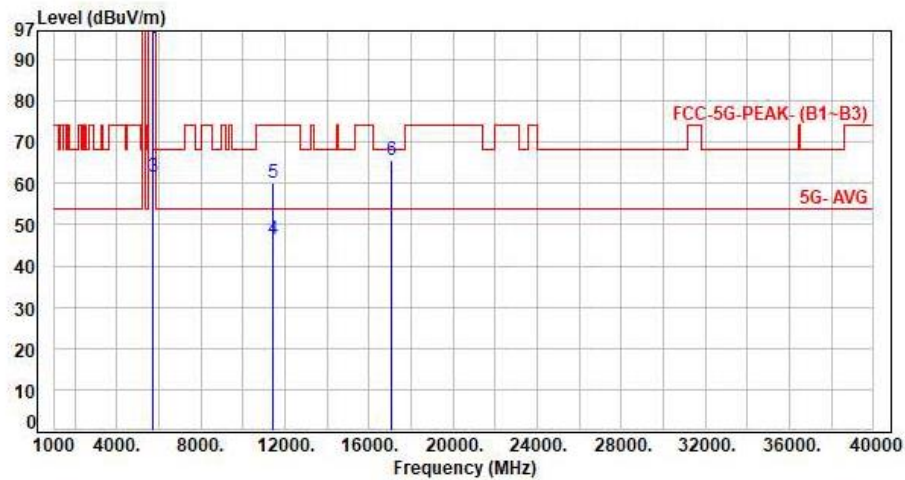

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	87.65	95.06	200.00	-104.94	Average	122	188	P
2	5700.00	7.41	100.47	107.88	200.00	-92.12	Peak	122	188	P
3	5725.00	7.39	54.25	61.64	68.20	-6.56	Peak	122	188	P
4	11400.00	16.59	29.79	46.38	54.00	-7.62	Average	100	59	P
5	11400.00	16.59	43.64	60.23	74.00	-13.77	Peak	100	59	P
6	17100.00	23.97	41.58	65.55	68.20	-2.65	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

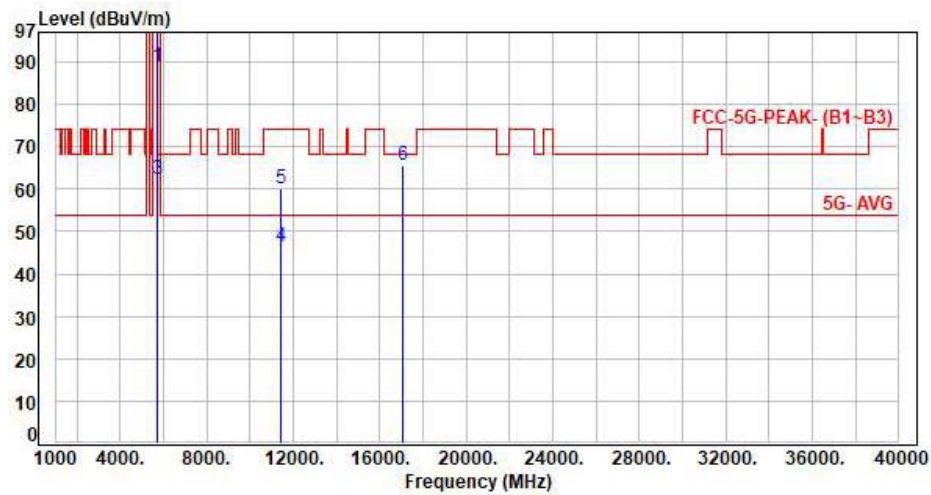

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	81.62	89.03	200.00	-110.97	Average	396	96	P
2	5700.00	7.41	93.67	101.08	200.00	-98.92	Peak	396	96	P
3	5725.00	7.39	54.86	62.25	68.20	-5.95	Peak	396	96	P
4	11400.00	16.59	29.84	46.43	54.00	-7.57	Average	100	125	P
5	11400.00	16.59	43.38	59.97	74.00	-14.03	Peak	100	125	P
6	17100.00	23.97	41.66	65.63	68.20	-2.57	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

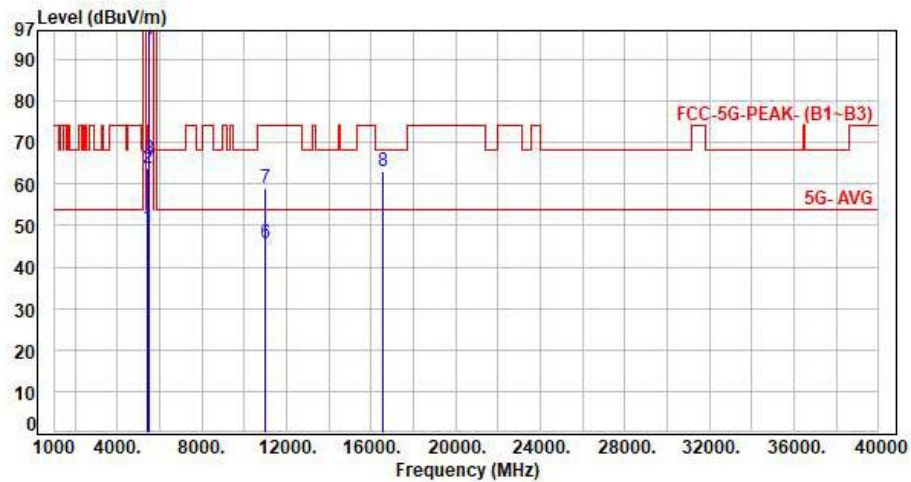

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.79	49.51	54.00	-4.49	Average	176	202	P
2	5460.00	7.72	56.02	63.74	74.00	-10.26	Peak	176	202	P
3	5470.00	7.72	58.35	66.07	68.20	-2.13	Peak	176	202	P
4	5510.00	7.70	87.13	94.83	200.00	-105.17	Average	176	202	P
5	5510.00	7.70	99.63	107.33	200.00	-92.67	Peak	176	202	P
6	11020.00	15.82	29.79	45.61	54.00	-8.39	Average	100	56	P
7	11020.00	15.82	43.18	59.00	74.00	-15.00	Peak	100	56	P
8	16530.00	20.97	41.93	62.90	68.20	-5.30	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

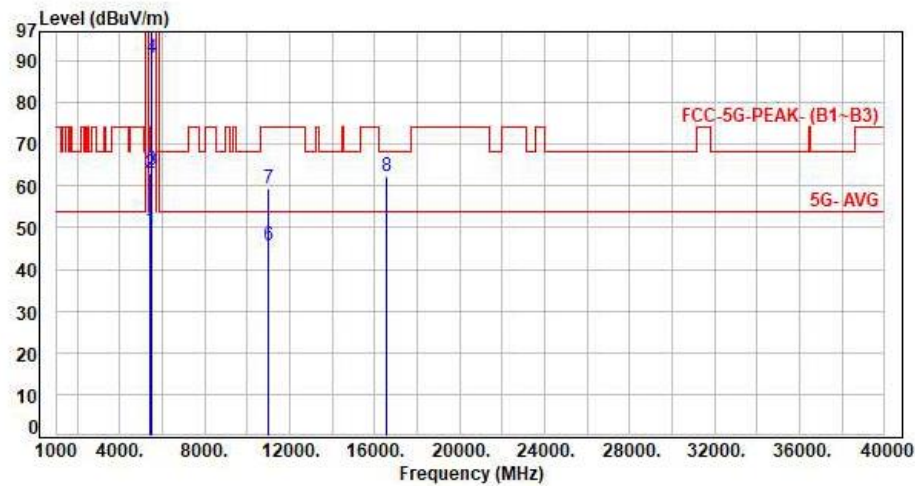

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.72	49.44	54.00	-4.56	Average	100	347	P
2	5460.00	7.72	55.41	63.13	74.00	-10.87	Peak	100	347	P
3	5470.00	7.72	56.04	63.76	68.20	-4.44	Peak	100	347	P
4	5510.00	7.70	82.99	90.69	200.00	-109.31	Average	100	347	P
5	5510.00	7.70	95.71	103.41	200.00	-96.59	Peak	100	347	P
6	11020.00	15.82	29.82	45.64	54.00	-8.36	Average	100	126	P
7	11020.00	15.82	43.42	59.24	74.00	-14.76	Peak	100	126	P
8	16530.00	20.97	41.50	62.47	68.20	-5.73	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

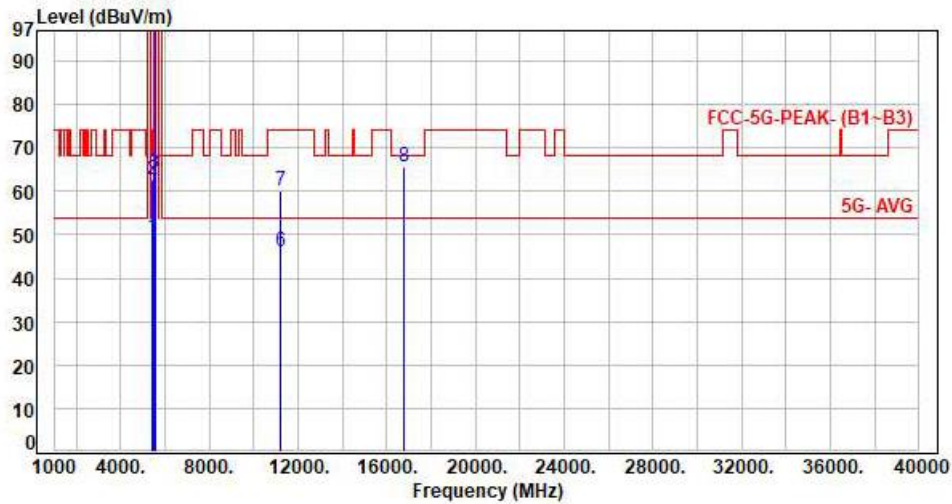

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.68	49.40	54.00	-4.60	Average	138	188	P
2	5460.00	7.72	55.09	62.81	74.00	-11.19	Peak	138	188	P
3	5470.00	7.72	56.42	64.14	68.20	-4.06	Peak	138	188	P
4	5590.00	7.49	91.55	99.04	200.00	-100.96	Average	138	188	P
5	5590.00	7.49	104.67	112.16	200.00	-87.84	Peak	138	188	P
6	11180.00	16.11	29.87	45.98	54.00	-8.02	Average	100	57	P
7	11180.00	16.11	44.09	60.20	74.00	-13.80	Peak	100	57	P
8	16770.00	22.45	43.13	65.58	68.20	-2.62	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

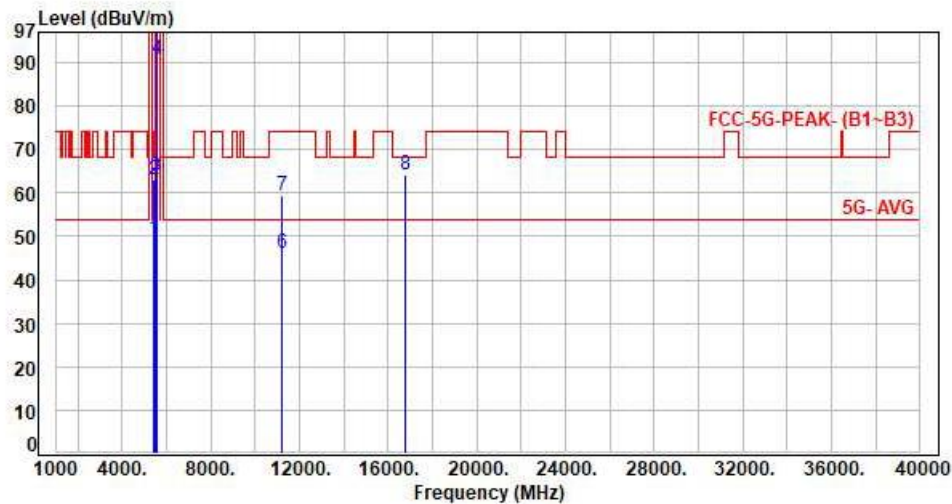

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.59	49.31	54.00	-4.69	Average	100	88	P
2	5460.00	7.72	55.38	63.10	74.00	-10.90	Peak	100	88	P
3	5470.00	7.72	55.98	63.70	68.20	-4.50	Peak	100	88	P
4	5590.00	7.49	83.42	90.91	200.00	-109.09	Average	100	88	P
5	5590.00	7.49	95.76	103.25	200.00	-96.75	Peak	100	88	P
6	11180.00	16.11	29.95	46.06	54.00	-7.94	Average	100	126	P
7	11180.00	16.11	43.41	59.52	74.00	-14.48	Peak	100	126	P
8	16770.00	22.45	41.82	64.27	68.20	-3.93	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

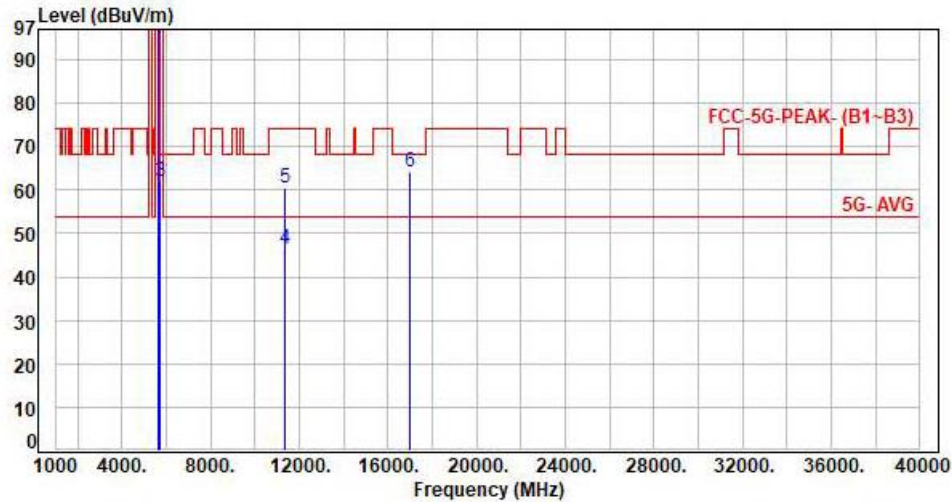

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	87.67	95.15	200.00	-104.85	Average	218	183	P
2	5670.00	7.48	99.57	107.05	200.00	-92.95	Peak	218	183	P
3	5725.00	7.39	54.60	61.99	68.20	-6.21	Peak	218	183	P
4	11340.00	16.42	29.88	46.30	54.00	-7.70	Average	100	57	P
5	11340.00	16.42	44.10	60.52	74.00	-13.48	Peak	100	57	P
6	17010.00	23.73	40.46	64.19	68.20	-4.01	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

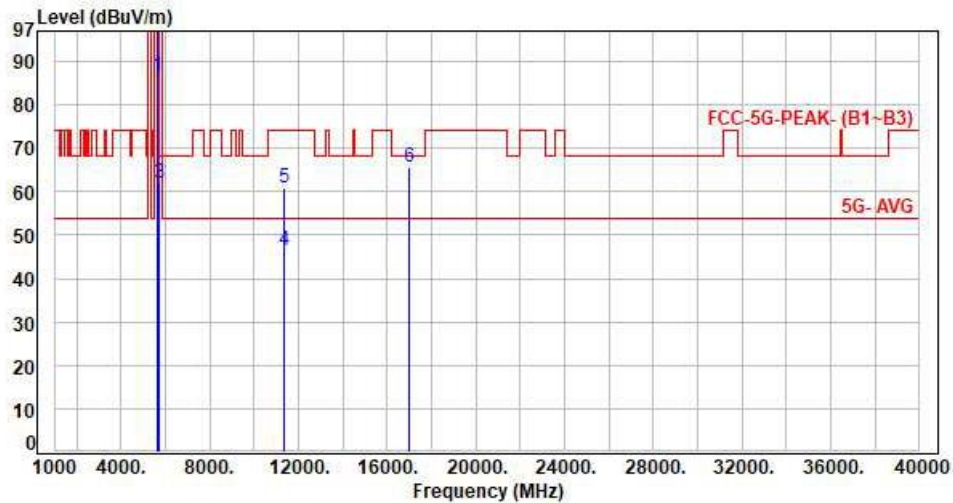

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	79.18	86.66	200.00	-113.34	Average	100	97	P
2	5670.00	7.48	92.36	99.84	200.00	-100.16	Peak	100	97	P
3	5725.00	7.39	54.44	61.83	68.20	-6.37	Peak	100	97	P
4	11340.00	16.42	29.94	46.36	54.00	-7.64	Average	100	126	P
5	11340.00	16.42	44.58	61.00	74.00	-13.00	Peak	100	126	P
6	17010.00	23.73	41.95	65.68	68.20	-2.52	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

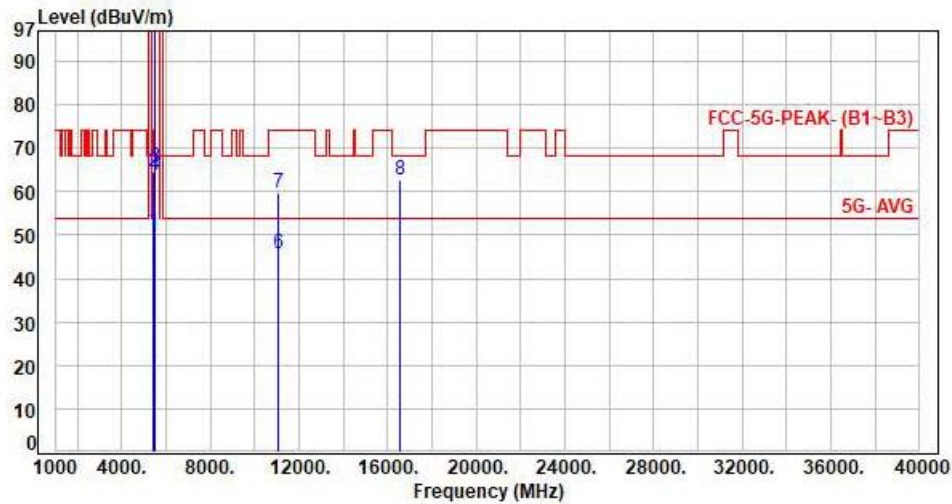

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	43.28	51.00	54.00	-3.00	Average	234	196	P
2	5460.00	7.72	56.98	64.70	74.00	-9.30	Peak	234	196	P
3	5470.00	7.72	58.00	65.72	68.20	-2.48	Peak	234	196	P
4	5530.00	7.65	56.07	63.72	200.00	-136.28	Average	234	196	P
5	5530.00	7.65	97.39	105.04	200.00	-94.96	Peak	234	196	P
6	11060.00	15.92	30.00	45.92	54.00	-8.08	Average	100	58	P
7	11060.00	15.92	43.86	59.78	74.00	-14.22	Peak	100	58	P
8	16590.00	21.06	41.74	62.80	68.20	-5.40	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

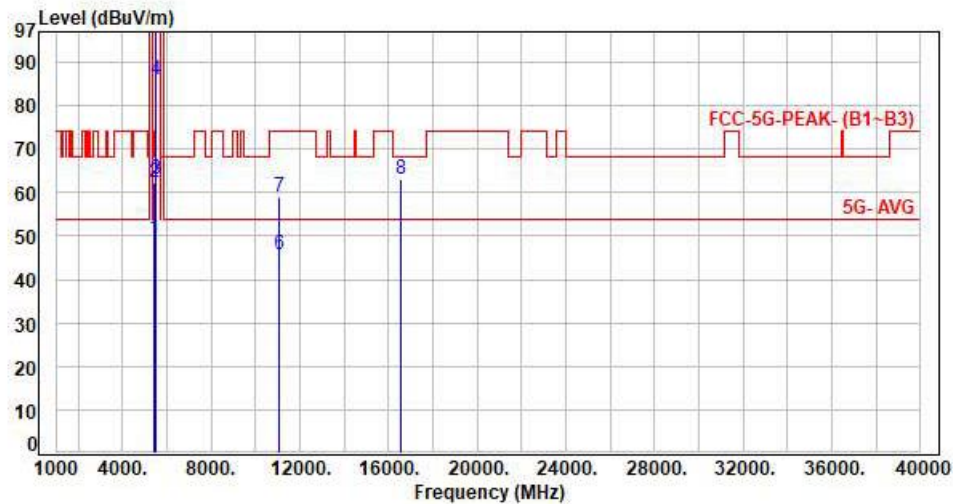

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.83	49.55	54.00	-4.45	Average	100	121	P
2	5460.00	7.72	54.77	62.49	74.00	-11.51	Peak	100	121	P
3	5470.00	7.72	55.20	62.92	68.20	-5.28	Peak	100	121	P
4	5530.00	7.65	78.36	86.01	200.00	-113.99	Average	100	121	P
5	5530.00	7.65	90.88	98.53	200.00	-101.47	Peak	100	121	P
6	11060.00	15.92	29.91	45.83	54.00	-8.17	Average	100	128	P
7	11060.00	15.92	43.17	59.09	74.00	-14.91	Peak	100	128	P
8	16590.00	21.06	42.12	63.18	68.20	-5.02	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

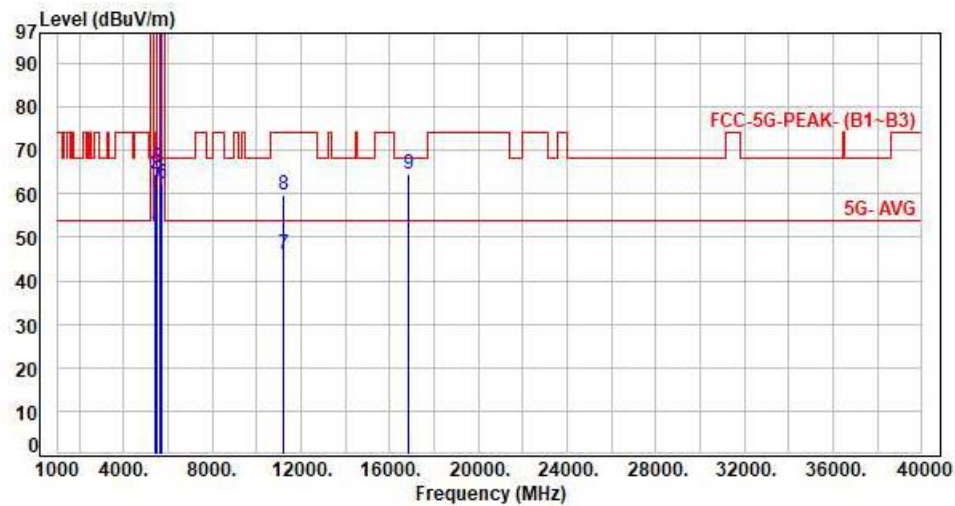

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	43.08	50.80	54.00	-3.20	Average	212	176	P
2	5460.00	7.72	56.75	64.47	74.00	-9.53	Peak	212	176	P
3	5470.00	7.72	58.45	66.17	68.20	-2.03	Peak	212	176	P
4	5610.00	7.48	87.85	95.33	200.00	-104.67	Average	212	176	P
5	5610.00	7.48	100.29	107.77	200.00	-92.23	Peak	212	176	P
6	5725.00	7.39	55.11	62.50	68.20	-5.70	Peak	212	176	P
7	11220.00	16.19	30.07	46.26	54.00	-7.74	Average	100	57	P
8	11220.00	16.19	43.56	59.75	74.00	-14.25	Peak	100	57	P
9	16830.00	22.77	41.73	64.50	68.20	-3.70	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

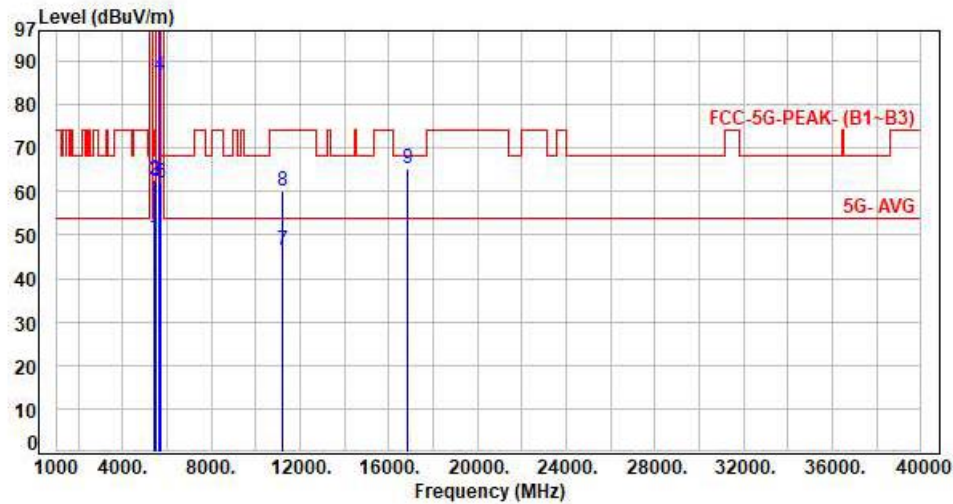

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.84	49.56	54.00	-4.44	Average	100	88	P
2	5460.00	7.72	54.97	62.69	74.00	-11.31	Peak	100	88	P
3	5470.00	7.72	54.49	62.21	68.20	-5.99	Peak	100	88	P
4	5610.00	7.48	79.32	86.80	200.00	-113.20	Average	100	88	P
5	5610.00	7.48	92.62	100.10	200.00	-99.90	Peak	100	88	P
6	5725.00	7.39	54.64	62.03	68.20	-6.17	Peak	100	88	P
7	11220.00	16.19	30.28	46.47	54.00	-7.53	Average	100	124	P
8	11220.00	16.19	43.80	59.99	74.00	-14.01	Peak	100	124	P
9	16830.00	22.77	42.34	65.11	68.20	-3.09	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

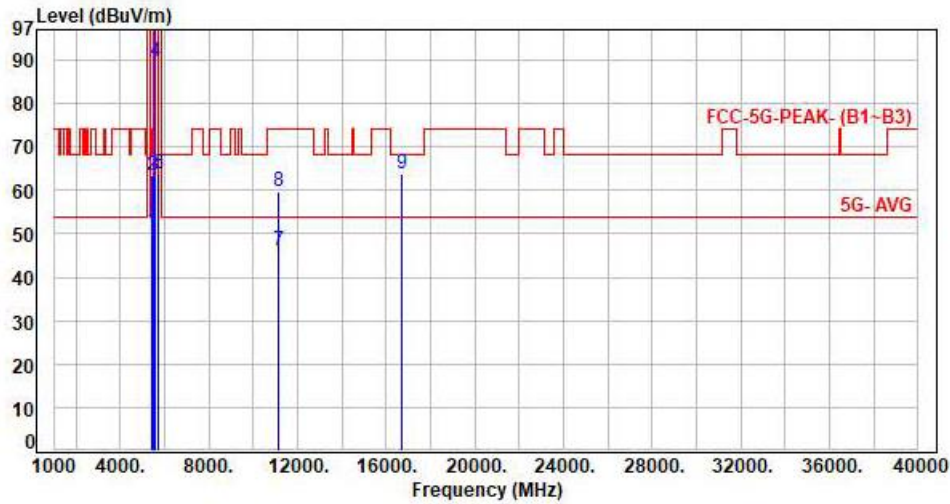

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.69	50.41	54.00	-3.59	Average	161	188	P
2	5460.00	7.72	55.86	63.58	74.00	-10.42	Peak	161	188	P
3	5470.00	7.72	55.63	63.35	68.20	-4.85	Peak	161	188	P
4	5570.00	7.55	82.05	89.60	200.00	-110.40	Average	161	188	P
5	5570.00	7.55	94.39	101.94	200.00	-98.06	Peak	161	188	P
6	5725.00	7.39	56.36	63.75	68.20	-4.45	Peak	161	188	P
7	11140.00	16.04	30.00	46.04	54.00	-7.96	Average	100	58	P
8	11140.00	16.04	43.62	59.66	74.00	-14.34	Peak	100	58	P
9	16710.00	21.94	41.98	63.92	68.20	-4.28	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

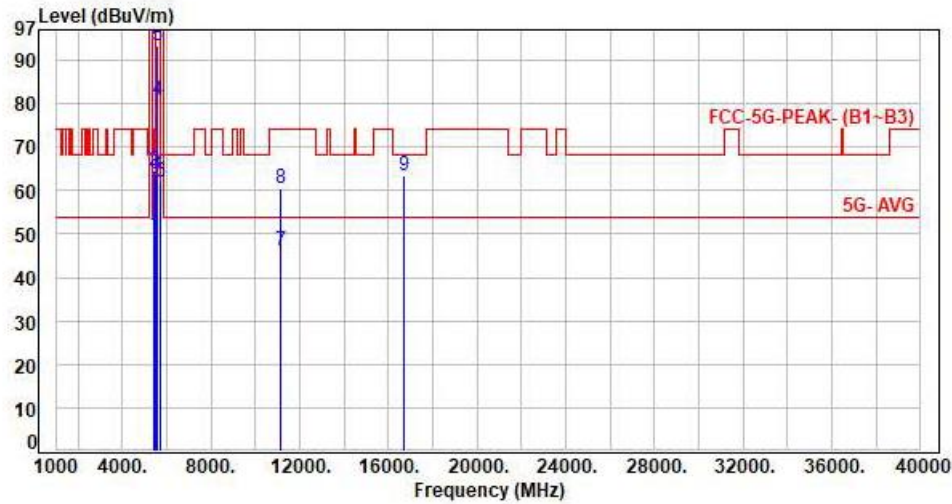

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.91	49.63	54.00	-4.37	Average	368	97	P
2	5460.00	7.72	56.65	64.37	74.00	-9.63	Peak	368	97	P
3	5470.00	7.72	56.10	63.82	68.20	-4.38	Peak	368	97	P
4	5570.00	7.55	73.32	80.87	200.00	-119.13	Average	368	97	P
5	5570.00	7.55	85.80	93.35	200.00	-106.65	Peak	368	97	P
6	5725.00	7.39	54.49	61.88	68.20	-6.32	Peak	368	97	P
7	11140.00	16.04	30.07	46.11	54.00	-7.89	Average	100	126	P
8	11140.00	16.04	44.26	60.30	74.00	-13.70	Peak	100	126	P
9	16710.00	21.94	41.33	63.27	68.20	-4.93	Peak	100	157	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO B4

Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

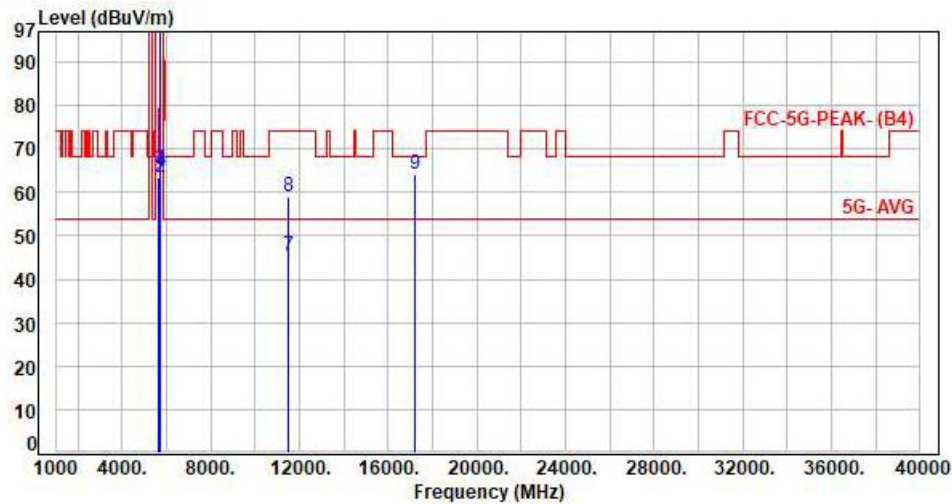

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.88	63.42	68.20	-4.78	Peak	120	191	P
2	5700.00	7.41	55.89	63.30	105.20	-41.90	Peak	120	191	P
3	5720.00	7.39	57.76	65.15	110.80	-45.65	Peak	120	191	P
4	5725.00	7.39	57.45	64.84	122.20	-57.36	Peak	120	191	P
5	5745.00	7.38	88.49	95.87	200.00	-104.13	Average	120	191	P
6	5745.00	7.38	101.37	108.75	200.00	-91.25	Peak	120	191	P
7	11490.00	16.75	28.59	45.34	54.00	-8.66	Average	100	57	P
8	11490.00	16.75	42.10	58.85	74.00	-15.15	Peak	100	57	P
9	17235.00	24.83	39.38	64.21	68.20	-3.99	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

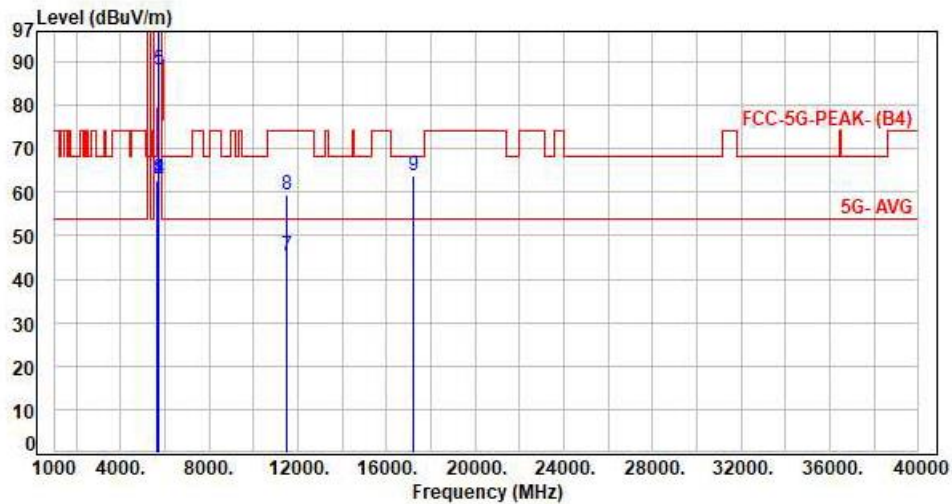

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.27	62.81	68.20	-5.39	Peak	140	125	P
2	5700.00	7.41	55.81	63.22	105.20	-41.98	Peak	140	125	P
3	5720.00	7.39	55.81	63.20	110.80	-47.60	Peak	140	125	P
4	5725.00	7.39	55.53	62.92	122.20	-59.28	Peak	140	125	P
5	5745.00	7.38	80.71	88.09	200.00	-111.91	Average	140	125	P
6	5745.00	7.38	93.53	100.91	200.00	-99.09	Peak	140	125	P
7	11490.00	16.75	28.64	45.39	54.00	-8.61	Average	100	122	P
8	11490.00	16.75	42.69	59.44	74.00	-14.56	Peak	100	122	P
9	17235.00	24.83	39.06	63.89	68.20	-4.31	Peak	100	160	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

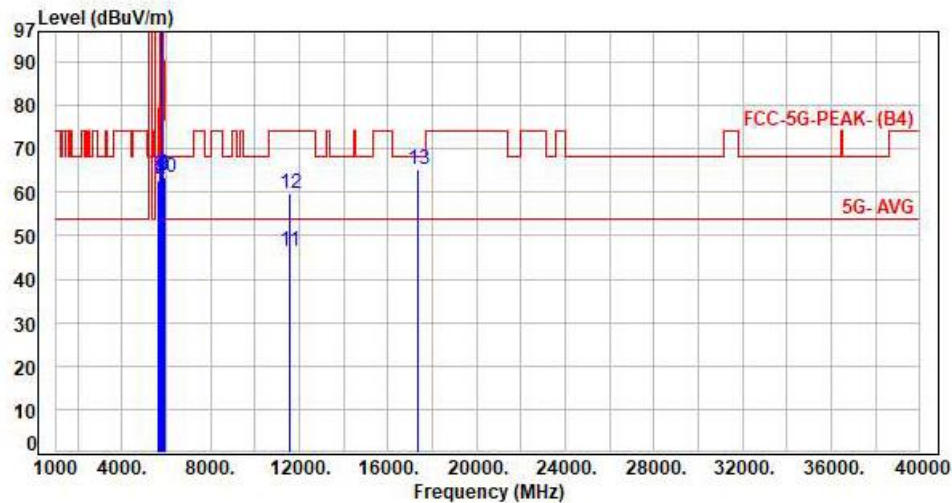

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.23	62.77	68.20	-5.43	Peak	209	171	P
2	5700.00	7.41	55.52	62.93	105.20	-42.27	Peak	209	171	P
3	5720.00	7.39	56.27	63.66	110.80	-47.14	Peak	209	171	P
4	5725.00	7.39	55.82	63.21	122.20	-58.99	Peak	209	171	P
5	5785.00	7.34	89.68	97.02	200.00	-102.98	Average	209	171	P
6	5785.00	7.34	101.69	109.03	200.00	-90.97	Peak	209	171	P
7	5850.00	7.30	56.20	63.50	122.20	-58.70	Peak	209	171	P
8	5855.00	7.32	56.32	63.64	110.80	-47.16	Peak	209	171	P
9	5875.00	7.39	56.75	64.14	105.20	-41.06	Peak	209	171	P
10	5925.00	7.51	55.98	63.49	68.20	-4.71	Peak	209	171	P
11	11570.00	17.65	28.68	46.33	54.00	-7.67	Average	100	54	P
12	11570.00	17.65	42.23	59.88	74.00	-14.12	Peak	100	54	P
13	17355.00	25.69	39.57	65.26	68.20	-2.94	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

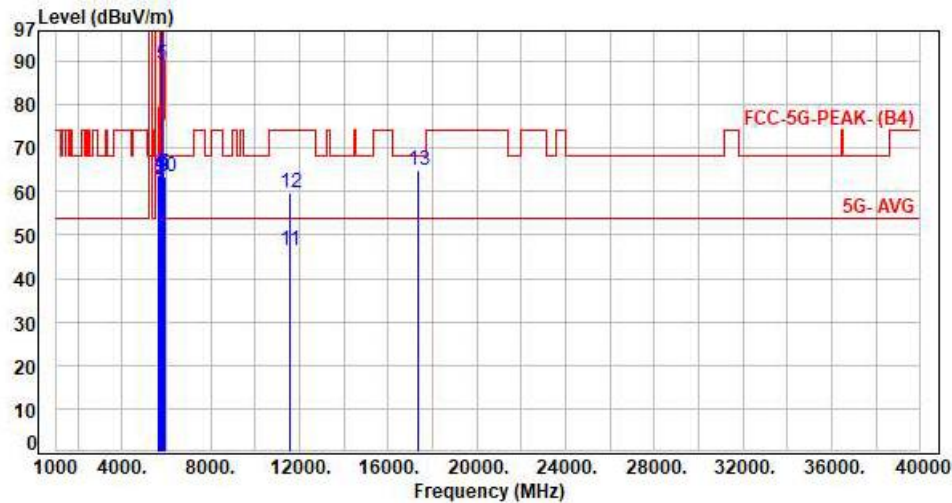

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	56.31	63.85	68.20	-4.35	Peak	100	124	P
2	5700.00	7.41	55.44	62.85	105.20	-42.35	Peak	100	124	P
3	5720.00	7.39	55.57	62.96	110.80	-47.84	Peak	100	124	P
4	5725.00	7.39	56.57	63.96	122.20	-58.24	Peak	100	124	P
5	5785.00	7.34	82.05	89.39	200.00	-110.61	Average	100	124	P
6	5785.00	7.34	95.01	102.35	200.00	-97.65	Peak	100	124	P
7	5850.00	7.30	56.99	64.29	122.20	-57.91	Peak	100	124	P
8	5855.00	7.32	56.02	63.34	110.80	-47.46	Peak	100	124	P
9	5875.00	7.39	55.97	63.36	105.20	-41.84	Peak	100	124	P
10	5925.00	7.51	55.81	63.32	68.20	-4.88	Peak	100	124	P
11	11570.00	17.65	28.67	46.32	54.00	-7.68	Average	100	127	P
12	11570.00	17.65	42.19	59.84	74.00	-14.16	Peak	100	127	P
13	17355.00	25.69	39.16	64.85	68.20	-3.35	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

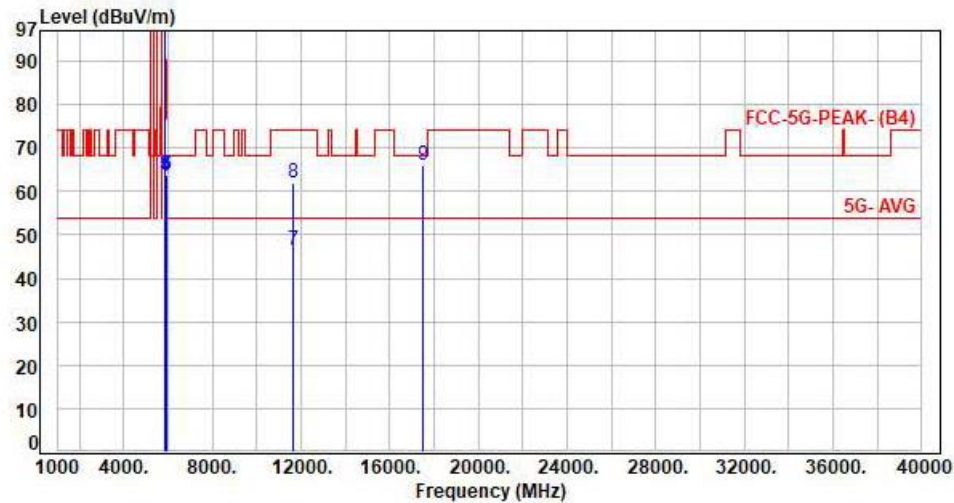

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	87.28	94.60	200.00	-105.40	Average	272	171	P
2	5825.00	7.32	100.45	107.77	200.00	-92.23	Peak	272	171	P
3	5850.00	7.30	56.36	63.66	122.20	-58.54	Peak	272	171	P
4	5855.00	7.32	56.19	63.51	110.80	-47.29	Peak	272	171	P
5	5875.00	7.39	56.28	63.67	105.20	-41.53	Peak	272	171	P
6	5925.00	7.51	56.41	63.92	68.20	-4.28	Peak	272	171	P
7	11650.00	17.74	28.62	46.36	54.00	-7.64	Average	100	57	P
8	11650.00	17.74	44.27	62.01	74.00	-11.99	Peak	100	57	P
9	17475.00	26.42	39.49	65.91	68.20	-2.29	Peak	100	226	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

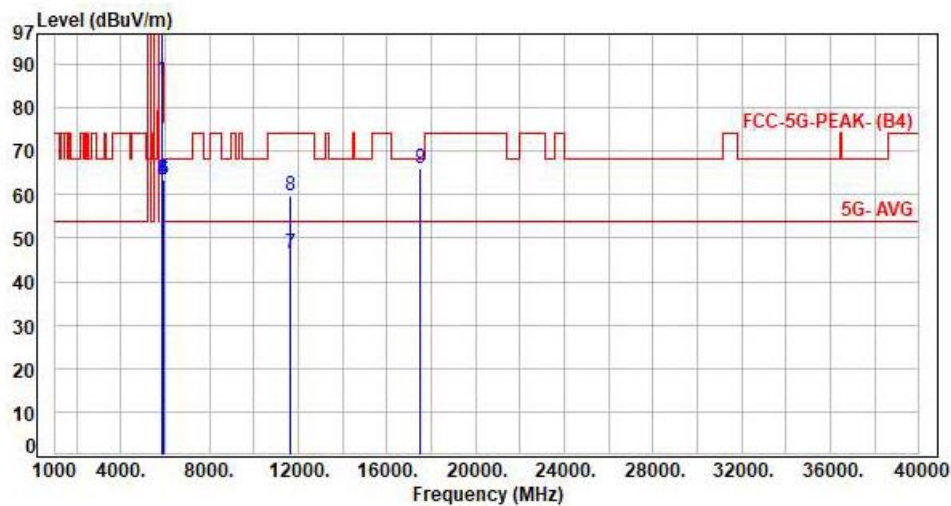

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	78.96	86.28	200.00	-113.72	Average	106	122	P
2	5825.00	7.32	91.85	99.17	200.00	-100.83	Peak	106	122	P
3	5850.00	7.30	56.08	63.38	122.20	-58.82	Peak	106	122	P
4	5855.00	7.32	56.28	63.60	110.80	-47.20	Peak	106	122	P
5	5875.00	7.39	56.02	63.41	105.20	-41.79	Peak	106	122	P
6	5925.00	7.51	55.79	63.30	68.20	-4.90	Peak	106	122	P
7	11650.00	17.74	28.62	46.36	54.00	-7.64	Average	100	124	P
8	11650.00	17.74	42.19	59.93	74.00	-14.07	Peak	100	124	P
9	17475.00	26.42	39.50	65.92	68.20	-2.28	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

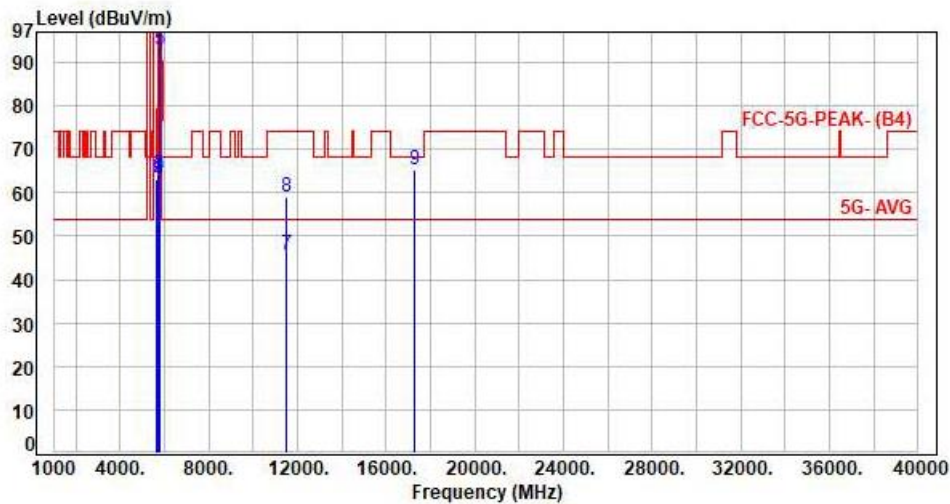

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.38	62.92	68.20	-5.28	Peak	114	190	P
2	5700.00	7.41	56.20	63.61	105.20	-41.59	Peak	114	190	P
3	5720.00	7.39	56.63	64.02	110.80	-46.78	Peak	114	190	P
4	5725.00	7.39	56.50	63.89	122.20	-58.31	Peak	114	190	P
5	5755.00	7.36	85.61	92.97	200.00	-107.03	Average	114	190	P
6	5755.00	7.36	99.14	106.50	200.00	-93.50	Peak	114	190	P
7	11510.00	16.90	28.76	45.66	54.00	-8.34	Average	100	55	P
8	11510.00	16.90	42.04	58.94	74.00	-15.06	Peak	100	55	P
9	17265.00	24.97	40.41	65.38	68.20	-2.82	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

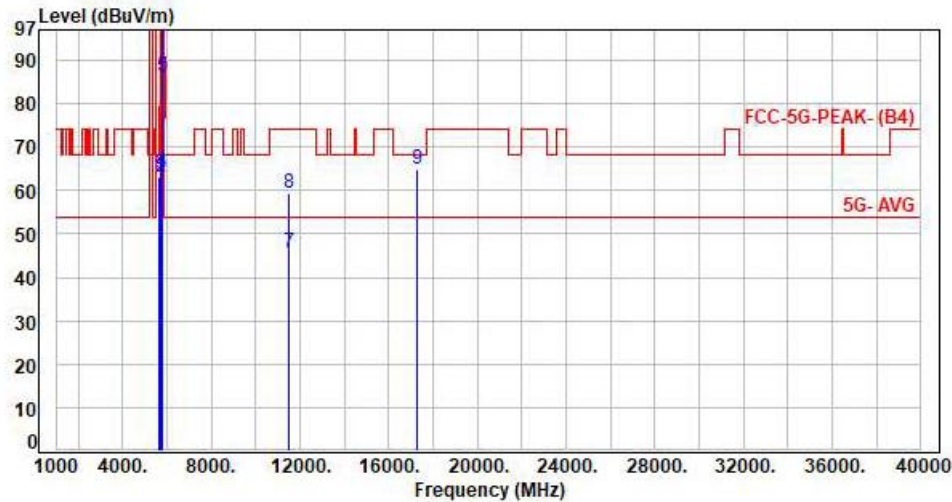

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.51	63.05	68.20	-5.15	Peak	139	125	P
2	5700.00	7.41	55.82	63.23	105.20	-41.97	Peak	139	125	P
3	5720.00	7.39	56.44	63.83	110.80	-46.97	Peak	139	125	P
4	5725.00	7.39	56.64	64.03	122.20	-58.17	Peak	139	125	P
5	5755.00	7.36	78.99	86.35	200.00	-113.65	Average	139	125	P
6	5755.00	7.36	91.58	98.94	200.00	-101.06	Peak	139	125	P
7	11510.00	16.90	28.71	45.61	54.00	-8.39	Average	100	122	P
8	11510.00	16.90	42.42	59.32	74.00	-14.68	Peak	100	122	P
9	17265.00	24.97	39.79	64.76	68.20	-3.44	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

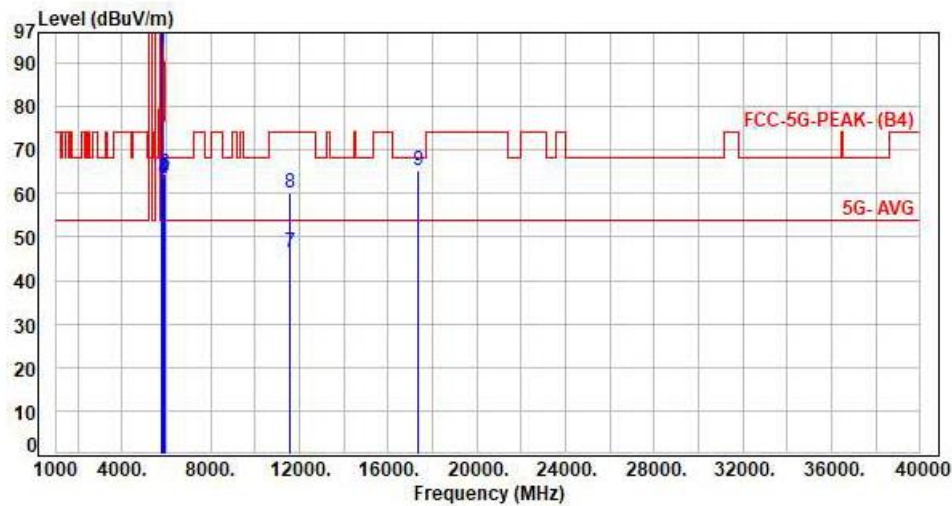

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.34	86.12	93.46	200.00	-106.54	Average	100	172	P
2	5795.00	7.34	98.08	105.42	200.00	-94.58	Peak	100	172	P
3	5850.00	7.30	56.34	63.64	122.20	-58.56	Peak	100	172	P
4	5855.00	7.32	56.25	63.57	110.80	-47.23	Peak	100	172	P
5	5875.00	7.39	56.15	63.54	105.20	-41.66	Peak	100	172	P
6	5925.00	7.51	56.94	64.45	68.20	-3.75	Peak	100	172	P
7	11590.00	17.90	28.66	46.56	54.00	-7.44	Average	100	59	P
8	11590.00	17.90	42.26	60.16	74.00	-13.84	Peak	100	59	P
9	17385.00	25.89	39.52	65.41	68.20	-2.79	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

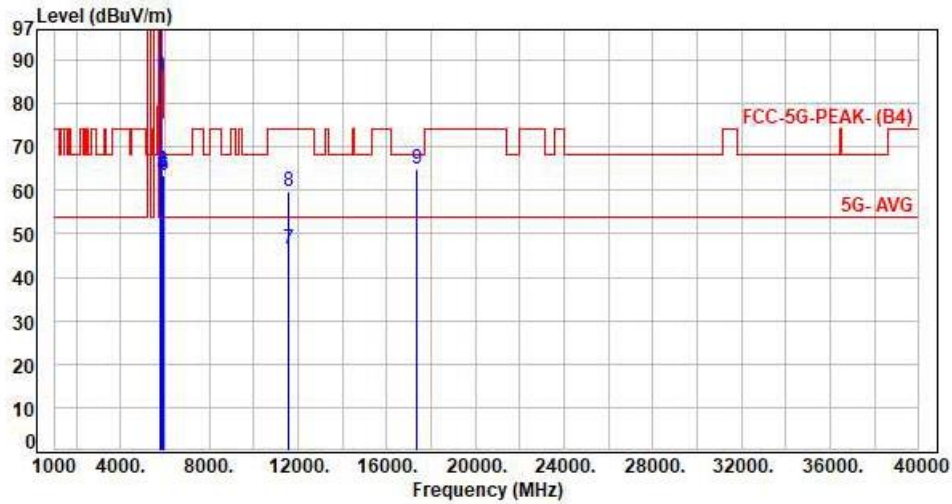

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.34	78.98	86.32	200.00	-113.68	Average	137	124	P
2	5795.00	7.34	90.49	97.83	200.00	-102.17	Peak	137	124	P
3	5850.00	7.34	57.09	64.39	122.20	-57.81	Peak	137	124	P
4	5855.00	7.32	56.17	63.49	110.80	-47.31	Peak	137	124	P
5	5875.00	7.39	56.88	64.27	105.20	-40.93	Peak	137	124	P
6	5925.00	7.51	56.02	63.53	68.20	-4.67	Peak	137	124	P
7	11590.00	17.90	28.74	46.64	54.00	-7.36	Average	100	127	P
8	11590.00	17.90	41.95	59.85	74.00	-14.15	Peak	100	127	P
9	17385.00	25.89	39.15	65.04	68.20	-3.16	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

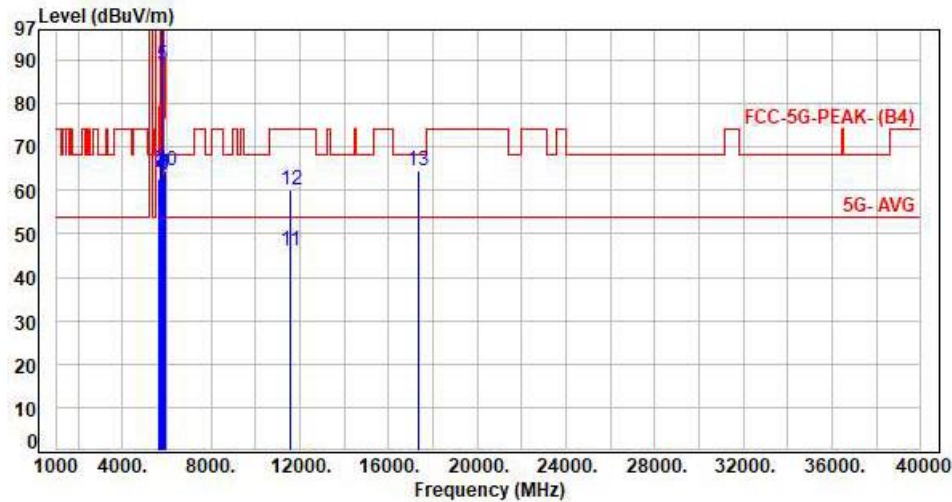

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.18	62.72	68.20	-5.48	Peak	207	171	P
2	5700.00	7.41	56.82	64.23	105.20	-40.97	Peak	207	171	P
3	5720.00	7.39	57.63	65.02	110.80	-45.78	Peak	207	171	P
4	5725.00	7.39	56.59	63.98	122.20	-58.22	Peak	207	171	P
5	5775.00	7.35	81.69	89.04	200.00	-110.96	Average	207	171	P
6	5775.00	7.35	93.46	100.81	200.00	-99.19	Peak	207	171	P
7	5850.00	7.30	56.23	63.53	122.20	-58.67	Peak	207	171	P
8	5855.00	7.32	56.39	63.71	110.80	-47.09	Peak	207	171	P
9	5875.00	7.39	55.96	63.35	105.20	-41.85	Peak	207	171	P
10	5925.00	7.51	56.87	64.38	68.20	-3.82	Peak	207	171	P
11	11550.00	17.40	28.87	46.27	54.00	-7.73	Average	100	58	P
12	11550.00	17.40	42.81	60.21	74.00	-13.79	Peak	100	58	P
13	17325.00	25.39	39.24	64.63	68.20	-3.57	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

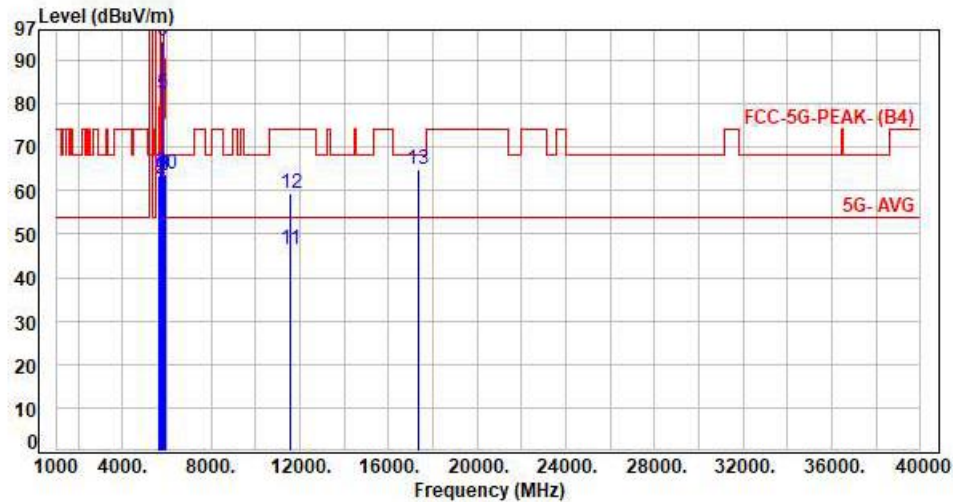

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.97	63.51	68.20	-4.69	Peak	100	123	P
2	5700.00	7.41	55.25	62.66	105.20	-42.54	Peak	100	123	P
3	5720.00	7.39	56.73	64.12	110.80	-46.68	Peak	100	123	P
4	5725.00	7.39	56.10	63.49	122.20	-58.71	Peak	100	123	P
5	5775.00	7.35	74.73	82.08	200.00	-117.92	Average	100	123	P
6	5775.00	7.35	87.15	94.50	200.00	-105.50	Peak	100	123	P
7	5850.00	7.30	56.27	63.57	122.20	-58.63	Peak	100	123	P
8	5855.00	7.32	56.21	63.53	110.80	-47.27	Peak	100	123	P
9	5875.00	7.39	56.10	63.49	105.20	-41.71	Peak	100	123	P
10	5925.00	7.51	56.22	63.73	68.20	-4.47	Peak	100	123	P
11	11550.00	17.40	28.95	46.35	54.00	-7.65	Average	100	128	P
12	11550.00	17.40	42.03	59.43	74.00	-14.57	Peak	100	128	P
13	17325.00	25.39	39.58	64.97	68.20	-3.23	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

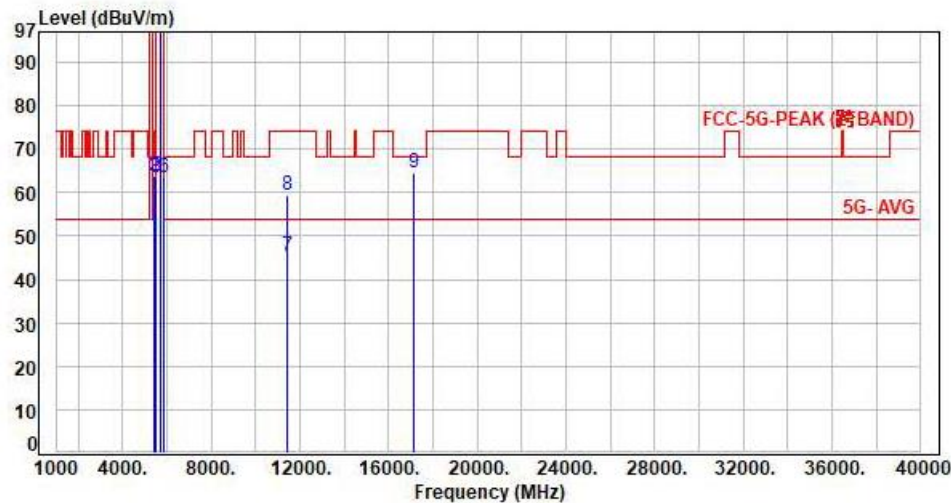

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.57	50.29	54.00	-3.71	Average	158	171	P
2	5460.00	7.72	55.97	63.69	74.00	-10.31	Peak	158	171	P
3	5470.00	7.72	55.79	63.51	68.20	-4.69	Peak	158	171	P
4	5720.00	7.39	89.44	96.83	200.00	-103.17	Average	158	171	P
5	5720.00	7.39	102.74	110.13	200.00	-89.87	Peak	158	171	P
6	5850.00	7.30	56.11	63.41	68.20	-4.79	Peak	158	171	P
7	11440.00	16.63	28.62	45.25	54.00	-8.75	Average	100	54	P
8	11440.00	16.63	42.81	59.44	74.00	-14.56	Peak	100	54	P
9	17160.00	24.42	40.26	64.68	68.20	-3.52	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

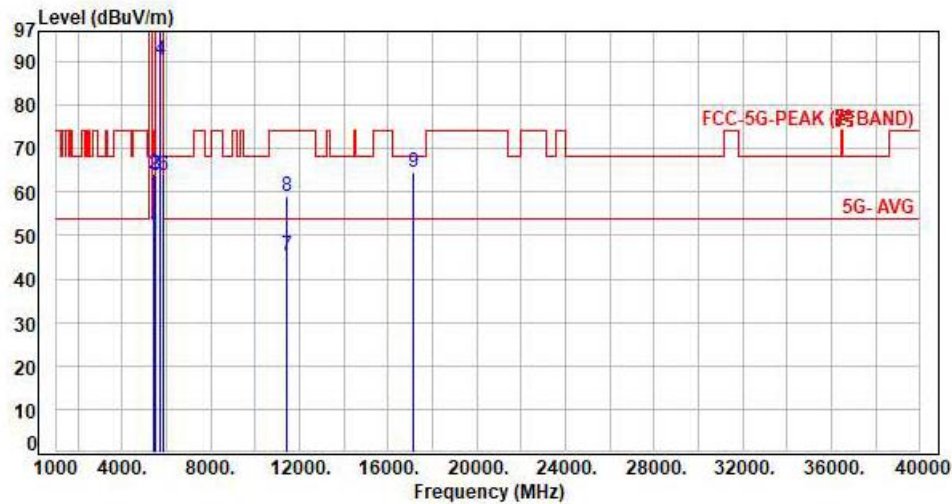

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.63	50.35	54.00	-3.65	Average	106	119	P
2	5460.00	7.72	56.33	64.05	74.00	-9.95	Peak	106	119	P
3	5470.00	7.72	56.22	63.94	68.20	-4.26	Peak	106	119	P
4	5720.00	7.39	83.03	90.42	200.00	-109.58	Average	106	119	P
5	5720.00	7.39	96.68	104.07	200.00	-95.93	Peak	106	119	P
6	5850.00	7.30	56.35	63.65	68.20	-4.55	Peak	106	119	P
7	11440.00	16.63	28.80	45.43	54.00	-8.57	Average	100	124	P
8	11440.00	16.63	42.55	59.18	74.00	-14.82	Peak	100	124	P
9	17160.00	24.42	40.12	64.54	68.20	-3.66	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

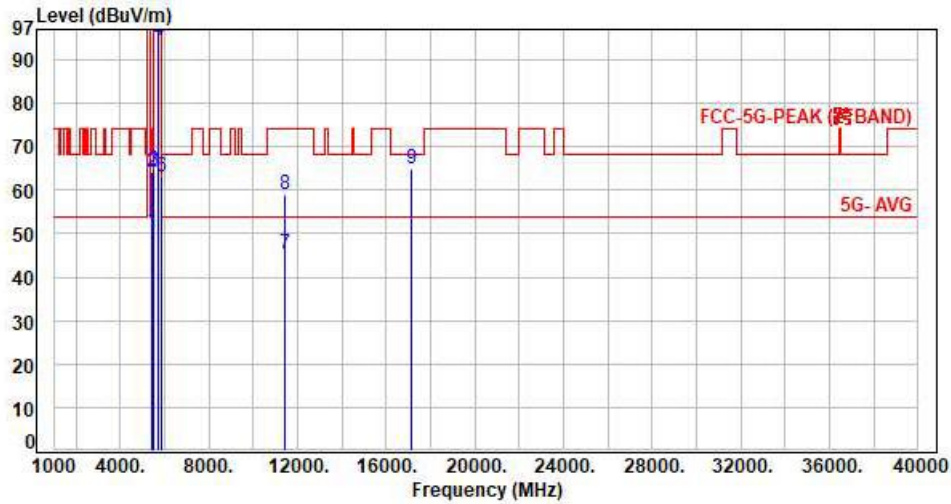

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.65	50.37	54.00	-3.63	Average	283	170	P
2	5460.00	7.72	56.40	64.12	74.00	-9.88	Peak	283	170	P
3	5470.00	7.72	56.73	64.45	68.20	-3.75	Peak	283	170	P
4	5710.00	7.40	86.86	94.26	200.00	-105.74	Average	283	170	P
5	5710.00	7.40	99.87	107.27	200.00	-92.73	Peak	283	170	P
6	5850.00	7.30	55.77	63.07	68.20	-5.13	Peak	283	170	P
7	11420.00	16.61	28.74	45.35	54.00	-8.65	Average	100	56	P
8	11420.00	16.61	42.58	59.19	74.00	-14.81	Peak	100	56	P
9	17130.00	24.21	40.71	64.92	68.20	-3.28	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

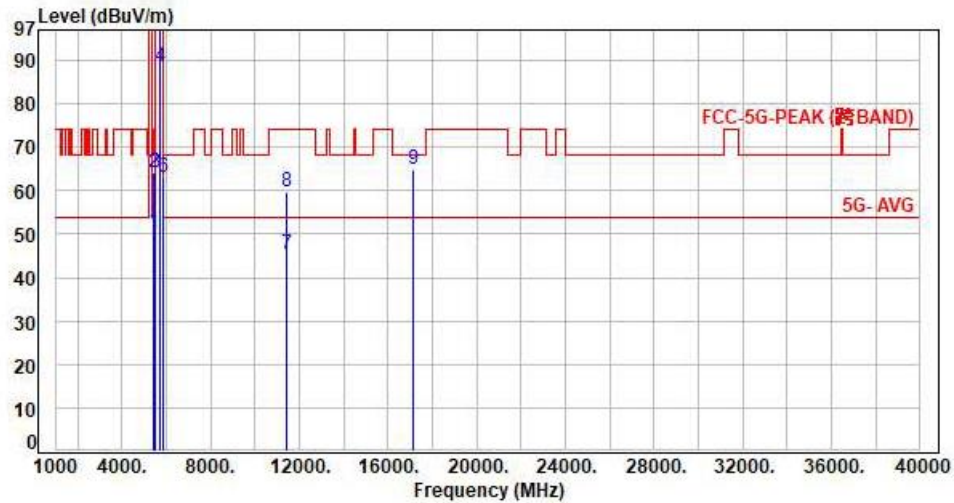

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.67	50.39	54.00	-3.61	Average	113	120	P
2	5460.00	7.72	56.28	64.00	74.00	-10.00	Peak	113	120	P
3	5470.00	7.72	56.60	64.32	68.20	-3.88	Peak	113	120	P
4	5710.00	7.40	81.20	88.60	200.00	-111.40	Average	113	120	P
5	5710.00	7.40	93.49	100.89	200.00	-99.11	Peak	113	120	P
6	5850.00	7.30	55.89	63.19	68.20	-5.01	Peak	113	120	P
7	11420.00	16.61	28.75	45.36	54.00	-8.64	Average	100	123	P
8	11420.00	16.61	43.04	59.65	74.00	-14.35	Peak	100	123	P
9	17130.00	24.21	40.81	65.02	68.20	-3.18	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

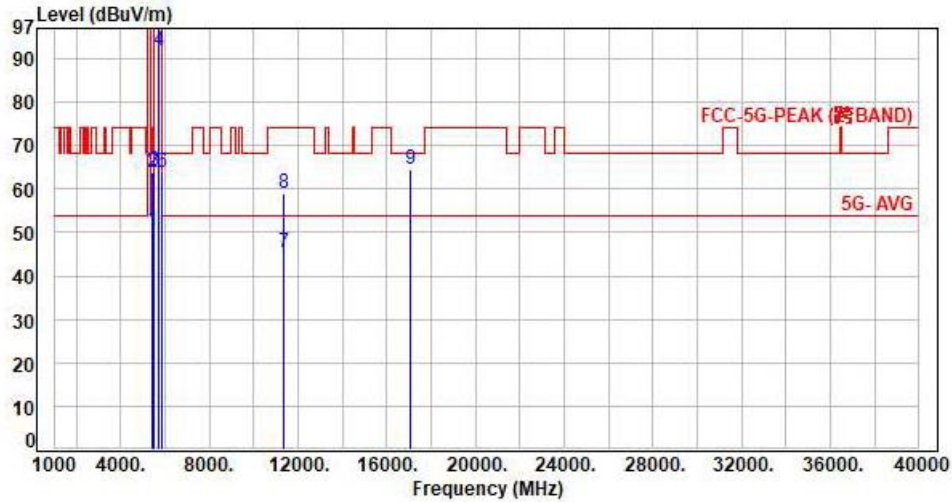

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.85	50.57	54.00	-3.43	Average	235	167	P
2	5460.00	7.72	56.13	63.85	74.00	-10.15	Peak	235	167	P
3	5470.00	7.72	56.30	64.02	68.20	-4.18	Peak	235	167	P
4	5690.00	7.43	84.43	91.86	200.00	-108.14	Average	235	167	P
5	5690.00	7.43	96.42	103.85	200.00	-96.15	Peak	235	167	P
6	5850.00	7.30	56.37	63.67	68.20	-4.53	Peak	235	167	P
7	11380.00	16.53	28.97	45.50	54.00	-8.50	Average	100	61	P
8	11380.00	16.53	42.45	58.98	74.00	-15.02	Peak	100	61	P
9	17070.00	23.92	40.68	64.60	68.20	-3.60	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

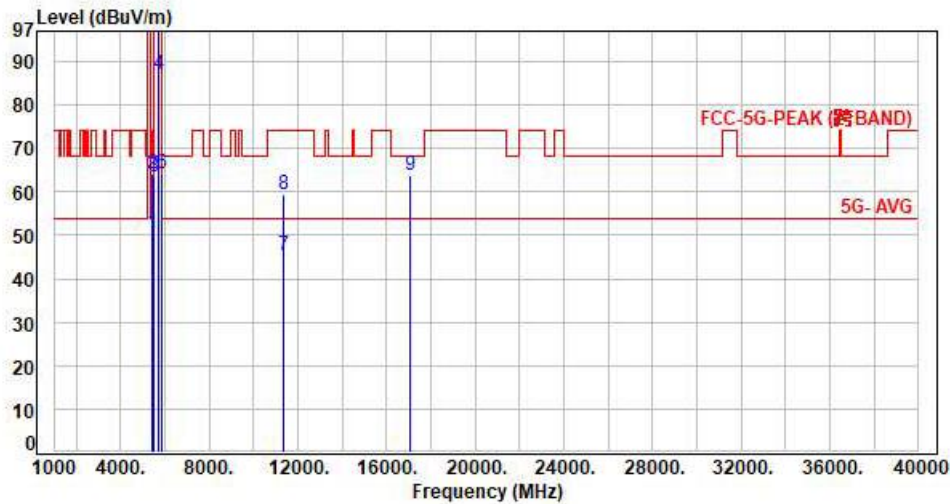

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.81	50.53	54.00	-3.47	Average	111	118	P
2	5460.00	7.72	56.46	64.18	74.00	-9.82	Peak	111	118	P
3	5470.00	7.72	55.69	63.41	68.20	-4.79	Peak	111	118	P
4	5690.00	7.43	79.55	86.98	200.00	-113.02	Average	111	118	P
5	5690.00	7.43	91.58	99.01	200.00	-100.99	Peak	111	118	P
6	5850.00	7.30	56.81	64.11	68.20	-4.09	Peak	111	118	P
7	11380.00	16.53	29.02	45.55	54.00	-8.45	Average	100	122	P
8	11380.00	16.53	42.70	59.23	74.00	-14.77	Peak	100	122	P
9	17070.00	23.92	39.98	63.90	68.20	-4.30	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

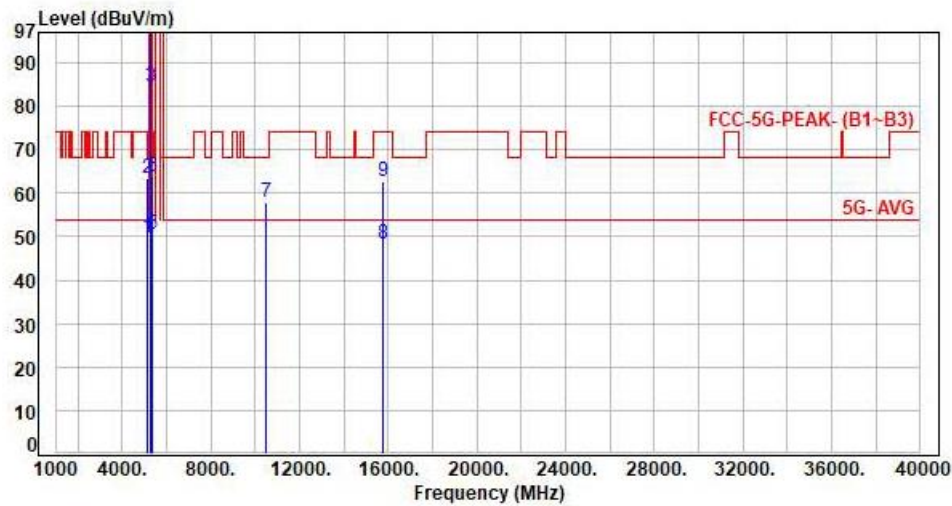

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	42.71	49.89	54.00	-4.11	Average	100	213	P
2	5150.00	7.18	56.10	63.28	74.00	-10.72	Peak	100	213	P
3	5250.00	7.32	76.97	84.29	200.00	-115.71	Average	100	213	P
4	5250.00	7.32	89.57	96.89	200.00	-103.11	Peak	100	213	P
5	5350.00	7.67	42.80	50.47	54.00	-3.53	Average	100	213	P
6	5350.00	7.67	56.08	63.75	74.00	-10.25	Peak	100	213	P
7	10500.00	15.56	42.38	57.94	68.20	-10.26	Peak	100	59	P
8	15750.00	19.56	28.92	48.48	54.00	-5.52	Average	100	227	P
9	15750.00	19.56	42.97	62.53	74.00	-11.47	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

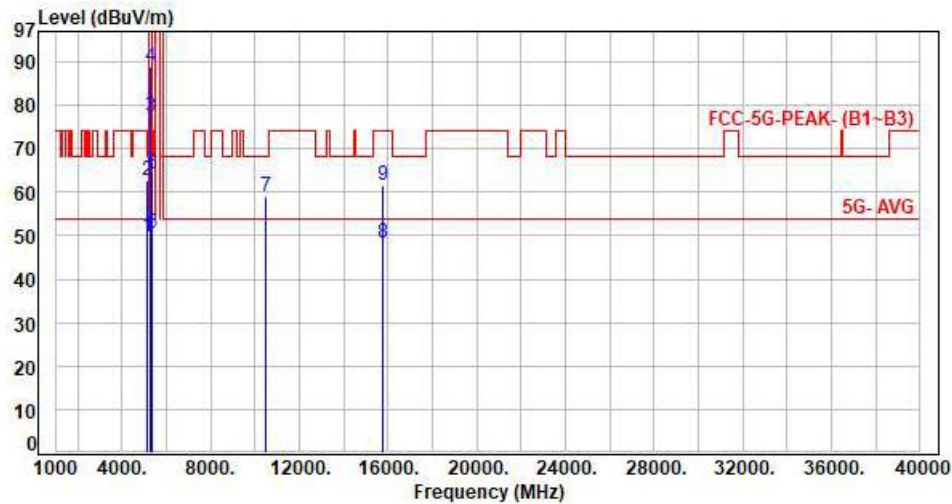

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	42.67	49.85	54.00	-4.15	Average	265	135	P
2	5150.00	7.18	55.48	62.66	74.00	-11.34	Peak	265	135	P
3	5250.00	7.32	70.25	77.57	200.00	-122.43	Average	265	135	P
4	5250.00	7.32	81.43	88.75	200.00	-111.25	Peak	265	135	P
5	5350.00	7.67	42.85	50.52	54.00	-3.48	Average	265	135	P
6	5350.00	7.67	56.53	64.20	74.00	-9.80	Peak	265	135	P
7	10500.00	15.56	43.44	59.00	68.20	-9.20	Peak	100	128	P
8	15750.00	19.56	28.89	48.45	54.00	-5.55	Average	100	153	P
9	15750.00	19.56	41.95	61.51	74.00	-12.49	Peak	100	153	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz