

TEST REPORT

2/F., Garment Centre,
576 Castle Peak Road, Kowloon,
Hong Kong SAR, China.

Telephone: (852) 2173 8888
Facsimile: (852) 2785 5487
www.intertek.com

Report Number: 22100794HKG-001

Kids2, Inc.

Application For Original Grant of 47 CFR Part 15 Certification

Single New of RSS-210 Issue 10 Amendment 1 Equipment Certification

Earl's Sound Explorer™ Day-to-Night Bluetooth® Soother

FCC ID: RBZ-12395

IC: 27249-12395

Transceiver

Prepared and Checked by:

Approved by:

Signed on File

Leung Chun Ning, Peter
Assistant Engineer

Wong Kwok Yeung, Kenneth
Assistant Supervisor
Date: December 23, 2022

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT**GENERAL INFORMATION**

Grantee:	Kids2, Inc.
Grantee Address:	3333 Piedmont Rd NE Suite 1800, Atlanta, GA 30305, United States.
Contact Person:	Emily Contorno
Tel:	(678) 328-4169
Fax:	--
E-mail:	emily.contorno@kidsii.com
Manufacturer:	Kids2, Inc.
Manufacturer Address:	3333 Piedmont Rd NE Suite 1800, Atlanta, GA 30305, United States.
Brand Name:	Earl's Sound Explorer
FCC Model(s):	12395
HVIN:	12395
PMN:	12395
Type of EUT:	Transceiver
Description of EUT:	Earl's Sound Explorer™ Day-to-Night Bluetooth® Soother
Serial Number:	N/A
FCC ID / IC:	RBZ-12395 / 27249-12395
Date of Sample Submitted:	October 21, 2022
Date of Test:	October 21, 2022 to December 12, 2022
Report Date:	December 23, 2022
Environmental Conditions:	Temperature: +10 to 40°C Relative Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-210 Issue 10+ A1 Certification.

TEST REPORT**SUMMARY OF TEST RESULT**

Test Specification	Reference	Results
Transmitter Power Line Conducted Emissions	15.207 / RSS-Gen 8.8	Complied
Radiated Emission	15.249, 15.209 /	Complied
Radiated Emission on the Bandedge	RSS-210 B.10, RSS-Gen 8.9	
Radiated Emission in Restricted Bands	15.205 / RSS-Gen 8.10	Complied

For all technical data, which can be referred to Annex B – Report cover sheet.

For electronic filing, the Annex B – Report cover sheet is saved with filename: Annex B.pdf.

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2021 Edition

RSS-210 Issue 10 Amendment 1, April 2020

RSS-Gen Issue 5 Amendment 2, February 2021

Note:

1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

TEST REPORT**TABLE OF CONTENTS**

1.0	GENERAL DESCRIPTION	5
1.1	Product Description.....	5
1.2	Related Submittal(s) Grants	5
1.3	Test Methodology	5
1.4	Test Facility.....	5
2.0	SYSTEM TEST CONFIGURATION	6
2.1	Justification	6
2.2	EUT Exercising Software	6
2.3	Special Accessories.....	6
2.4	Measurement Uncertainty	6
2.5	Support Equipment List and Description	7
3.0	EMISSION RESULTS	8
3.1	Field Strength Calculation	8
3.2	Radiated Emission Configuration Photograph.....	9
3.3	Radiated Emission Data.....	9
3.4	Conducted Emission Configuration Photograph.....	9
3.5	Conducted Emission Data.....	9
4.0	EQUIPMENT PHOTOGRAPHS	15
5.0	PRODUCT LABELLING	15
6.0	TECHNICAL SPECIFICATIONS	15
7.0	INSTRUCTION MANUAL	15
8.0	MISCELLANEOUS INFORMATION	16
8.1	Measured Bandwidth.....	16
8.2	Emissions Test Procedures	19
8.3	Occupied Bandwidth	22
9.0	CONFIDENTIALITY REQUEST	23
10.0	EQUIPMENT LIST	23

TEST REPORT

1.0 GENERAL DESCRIPTION

1.1 Product Description

The Equipment Under Test (EUT), is a portable 2.4GHz BT Classic Transceiver for a Bluetooth Speaker. The sample supplied operated on 79 channels, normally at 2402 - 2480MHz. The channels are separated with 1MHz spacing.

The EUT is powered by 1 x 3.7V Lithium-ion battery. The EUT can also be charged and powered by a USB Type-C cable from USB port. After switching on the EUT, the EUT, the Speaker can be paired up with a smartphone and will be used to play different sound based on the sound received from the paired smartphone.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC and IC No. 2042H, CABID is “HKAP01”.

TEST REPORT

2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by DC 3.7V (1 x 3.7V Lithium-ion Battery) or USB port by USB Type-C cable.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no accessories for compliance of this product.

2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test, AC line conducted emission test and RF conducted test, frequency stability and timing jitter are \pm 5.3dB, \pm 4.2dB, \pm 1dB, \pm 23Hz, 0.1 μ s respectively.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

TEST REPORT**2.5 Support Equipment List and Description**

Description	Remark
1 x USB cable with length of 1.05m long	Provided by Applicant
1 x HP 820G1 Notebook	Provided by Intertek

TEST REPORT

3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 AF = Antenna Factor in dB
 CF = Cable Attenuation Factor in dB
 AG = Amplifier Gain in dB
 AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain.

An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB μ V/m
 RR = RA - AG - AV in dB μ V
 LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29.0 dB and average factor of 5.0 dB are subtracted, giving a field strength of 27.0 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA	=	52.0 dB μ V/m		
AF	=	7.4 dB	RR	= 18.0 dB μ V
CF	=	1.6 dB	LF	= 9.0 dB
AG	=	29.0 dB		
AV	=	5.0 dB		
FS	=	RR + LF		
FS	=	18 + 9 = 27 dB μ V/m		

Level in μ V/m = Common Antilogarithm [(27 dB μ V/m)/20] = 22.4 μ V/m

TEST REPORT

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 2440 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 9.9 dB margin

3.4 Conducted Emission Configuration Photograph

The worst case in conducted emission was found at 0.1635 MHz

For electronic filing, the worst case conducted emission configuration photographs are saved with filename: conducted photos.pdf.

3.5 Conducted Emission Data

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgement: Passed by 9.8 dB margin

TEST REPORT

RADIATED EMISSIONS

Model: 12395
 Date of Test: December 12, 2022
 Worst-Case Operating Mode: Transmitting

Table 1

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Lowest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	83.7	33	29.4	80.1	94.0	-13.9
V	4804.000	29.6	33	34.9	31.5	54.0	-22.5
V	7206.000	24.9	33	37.9	29.8	54.0	-24.2
H	9608.000	27.9	33	40.4	35.3	54.0	-18.7
H	12010.000	22.3	33	40.5	29.8	54.0	-24.2
V	14412.000	25.1	33	40.0	32.1	54.0	-21.9

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	99.8	33	29.4	96.2	114.0	-17.8
V	4804.000	44.1	33	34.9	46.0	74.0	-28.0
V	7206.000	39.5	33	37.9	44.4	74.0	-29.6
H	9608.000	45.4	33	40.4	52.8	74.0	-21.2
H	12010.000	36.2	33	40.5	43.7	74.0	-30.4
V	14412.000	38.3	33	40.0	45.3	74.0	-28.7

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 12395
 Date of Test: December 12, 2022
 Worst-Case Operating Mode: Transmitting

Table 2

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Middle Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	87.7	33	29.4	84.1	94.0	-9.9
H	4880.000	33.1	33	34.9	35.0	54.0	-19.0
H	7320.000	23.5	33	37.9	28.4	54.0	-25.6
V	9760.000	33.6	33	40.4	41.0	54.0	-13.0
V	12200.000	22.2	33	40.5	29.7	54.0	-24.3
V	14640.000	26.0	33	38.4	31.4	54.0	-22.6

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	100.5	33	29.4	96.9	114.0	-17.1
H	4880.000	47.9	33	34.9	49.8	74.0	-24.3
H	7320.000	39.8	33	37.9	44.7	74.0	-29.3
V	9760.000	50.1	33	40.4	57.5	74.0	-16.5
V	12200.000	36.1	33	40.5	43.6	74.0	-30.4
V	14640.000	39.5	33	38.4	44.9	74.0	-29.1

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 12395
 Date of Test: December 12, 2022
 Worst-Case Operating Mode: Transmitting

Table 3

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Highest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2480.000	83.9	33	29.4	80.3	94.0	-13.7
V	4960.000	35.1	33	34.9	37.0	54.0	-17.0
V	7440.000	23.5	33	37.9	28.4	54.0	-25.6
V	9920.000	29.2	33	40.4	36.6	54.0	-17.5
V	12400.000	22.7	33	40.5	30.2	54.0	-23.8
V	14880.000	25.2	33	38.4	30.6	54.0	-23.4

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2480.000	97.8	33	29.4	94.2	114.0	-19.8
V	4960.000	48.5	33	34.9	50.4	74.0	-23.6
V	7440.000	37.7	33	37.9	42.6	74.0	-31.4
V	9920.000	43.5	33	40.4	50.9	74.0	-23.1
V	12400.000	35.8	33	40.5	43.3	74.0	-30.7
V	14880.000	38.9	33	38.4	44.3	74.0	-29.7

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT**RADIATED EMISSIONS**

Model: 12395
Date of Test: December 12, 2022
Worst-Case Operating Mode: Transmitting

Table 4

Pursuant to FCC Part 15 Section 15.209 / RSS-GEN 8.9 Requirement


Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	30.243	34.8	16	10.0	28.8	40.0	-11.3
V	73.165	28.5	16	6.0	18.5	40.0	-21.5
V	95.960	24.4	16	12.0	20.4	43.5	-23.1
V	131.850	19.7	16	14.0	17.7	43.5	-25.9
H	171.741	17.4	16	18.0	19.4	43.5	-24.1
V	258.314	18.5	16	21.0	23.5	46.0	-22.5

Notes: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

CONDUCTED EMISSION

Model: 12395
 Date of Test: December 12, 2022
 Worst-Case Operating Mode: Transmitting

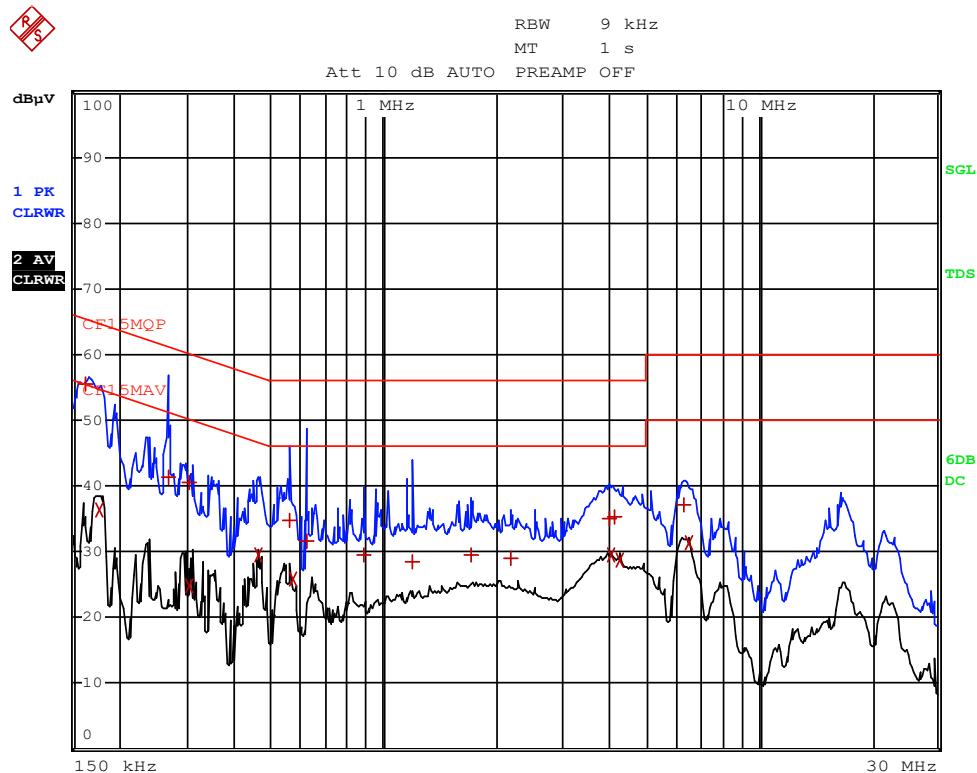

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dBµV	DELTA	LIMIT dB	
1	Quasi Peak 163.5 kHz	55.45 N		-9.82	
2	CISPR Average 177 kHz	36.37 L1		-18.25	
1	Quasi Peak 267 kHz	41.44 N		-19.76	
1	Quasi Peak 307.5 kHz	40.50 N		-19.53	
2	CISPR Average 307.5 kHz	24.73 N		-25.30	
2	CISPR Average 460.5 kHz	29.53 L1		-17.14	
1	Quasi Peak 559.5 kHz	34.76 L1		-21.23	
2	CISPR Average 573 kHz	25.98 L1		-20.01	
1	Quasi Peak 622.5 kHz	31.50 L1		-24.49	
1	Quasi Peak 883.5 kHz	29.62 L1		-26.37	
1	Quasi Peak 1.1895 MHz	28.51 L1		-27.48	
1	Quasi Peak 1.716 MHz	29.54 L1		-26.45	
1	Quasi Peak 2.193 MHz	29.06 L1		-26.94	
1	Quasi Peak 3.9885 MHz	35.11 N		-20.88	
2	CISPR Average 4.0245 MHz	29.48 N		-16.51	
1	Quasi Peak 4.1145 MHz	35.29 N		-20.70	
2	CISPR Average 4.2495 MHz	28.82 N		-17.17	
1	Quasi Peak 6.342 MHz	37.10 N		-22.89	
2	CISPR Average 6.4995 MHz	31.24 L1		-18.75	

NOTE: Measurement Uncertainty is $\pm 4.2\text{dB}$ at a level of confidence of 95%.

TEST REPORT

4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

TEST REPORT

8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure and measured bandwidth.



8.1 Measured Bandwidth

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209 / RSS-Gen 8.9, whichever is the lesser attenuation, which meet the requirement of Part 15.249(d) / RSS-210 B.10.

TEST REPORT

PEAK MEASUREMENT

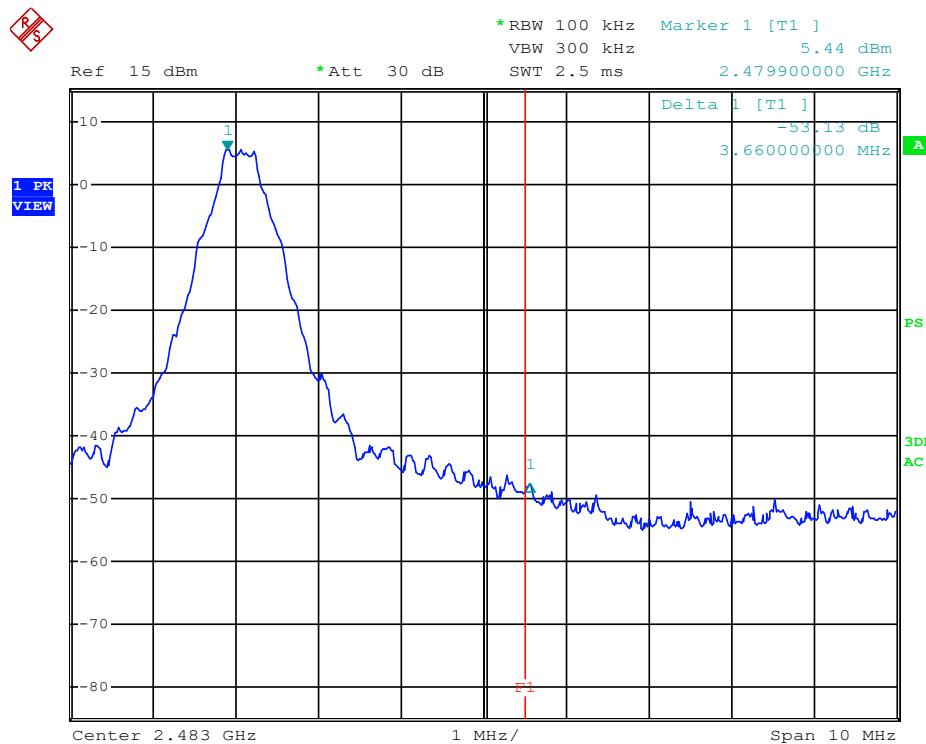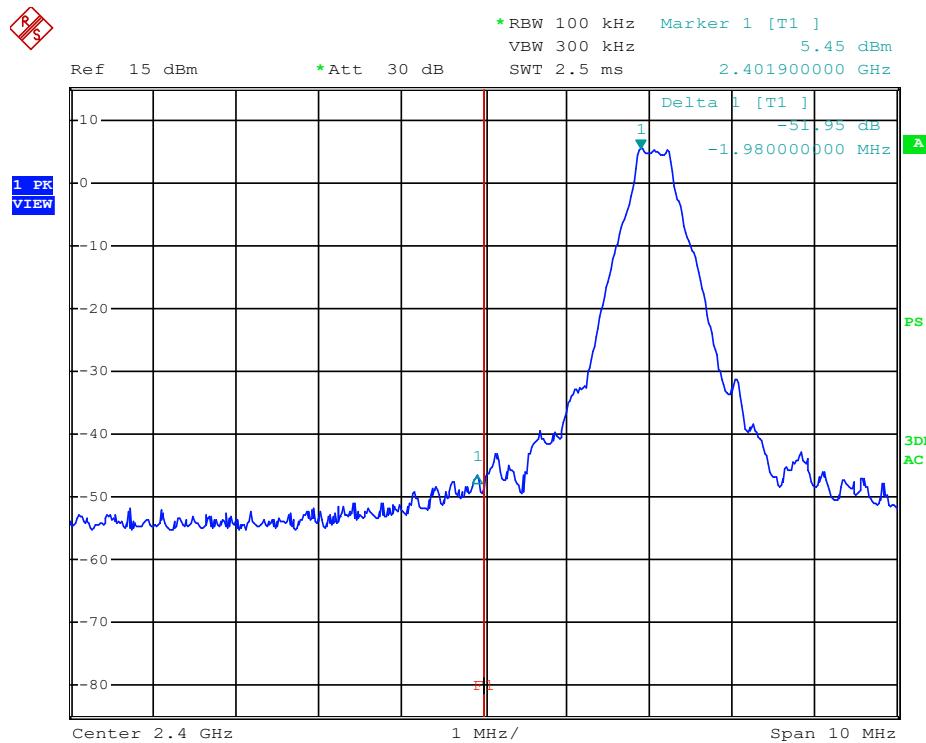

TEST REPORT**PEAK MEASUREMENT**

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$\begin{aligned} &= 96.2 \text{ dB}\mu\text{V/m} - 52.0 \text{ dB} \\ &= 44.2 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$\begin{aligned} &= 80.1 \text{ dB}\mu\text{V/m} - 52.0 \text{ dB} \\ &= 28.1 \text{ dB}\mu\text{V/m} \end{aligned}$$

Upper Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$\begin{aligned} &= 94.2 \text{ dB}\mu\text{V/m} - 53.1 \text{ dB} \\ &= 41.1 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$\begin{aligned} &= 80.3 \text{ dB}\mu\text{V/m} - 53.1 \text{ dB} \\ &= 27.2 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

TEST REPORT

8.2 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).



The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

TEST REPORT

8.2.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

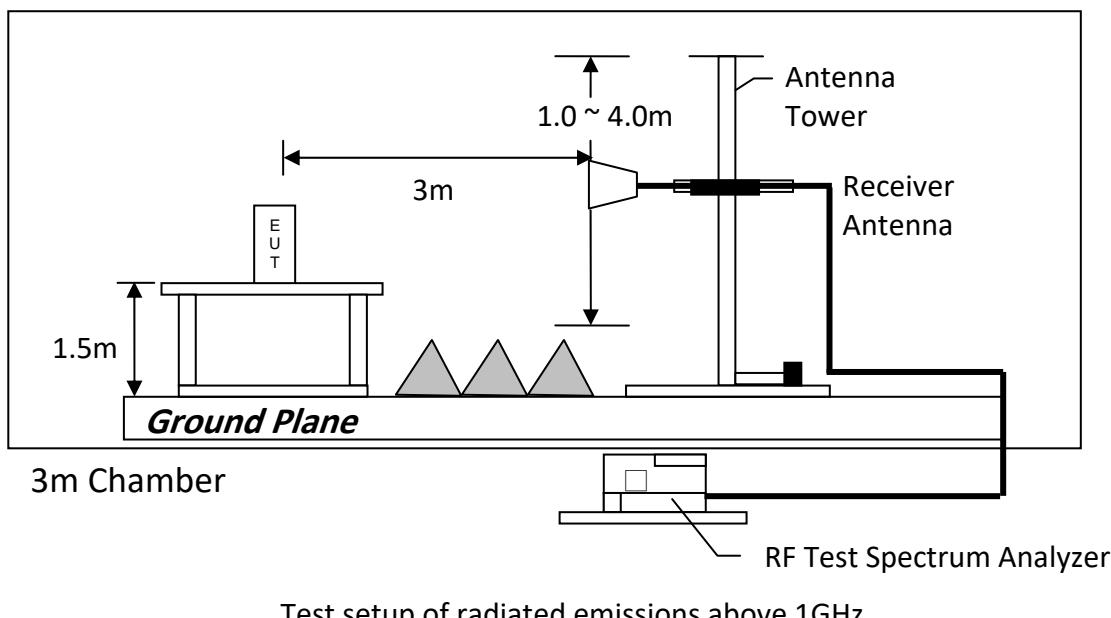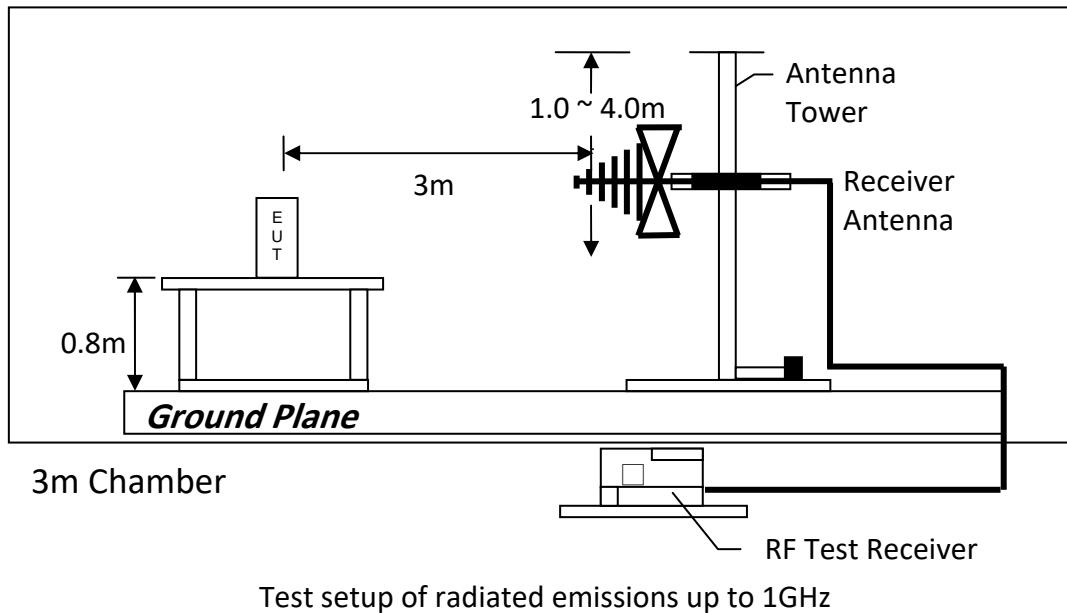


TEST REPORT

8.2.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.2.3 Conducted Emission Test Setup

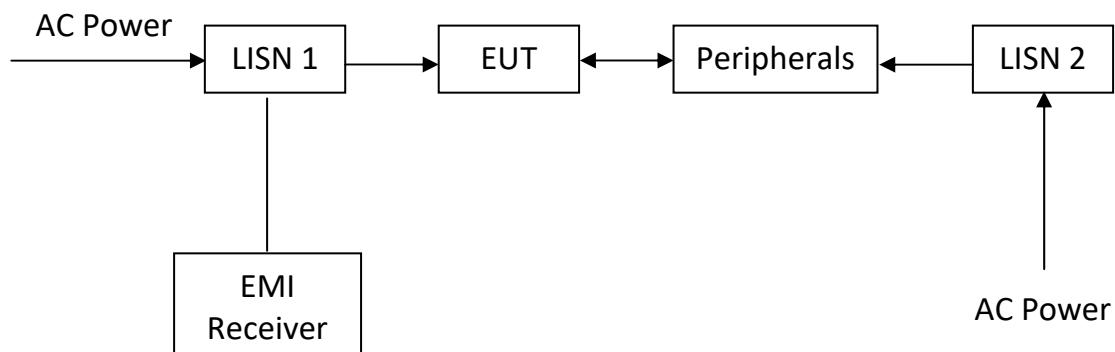


TEST REPORT

8.3 Occupied Bandwidth

Occupied Bandwidth Results:

Frequency (MHz)	Occupied Bandwidth (kHz)
Low Channel: 2402	860
Middle Channel: 2440	860
High Channel: 2480	980

The worst case is shown as below:

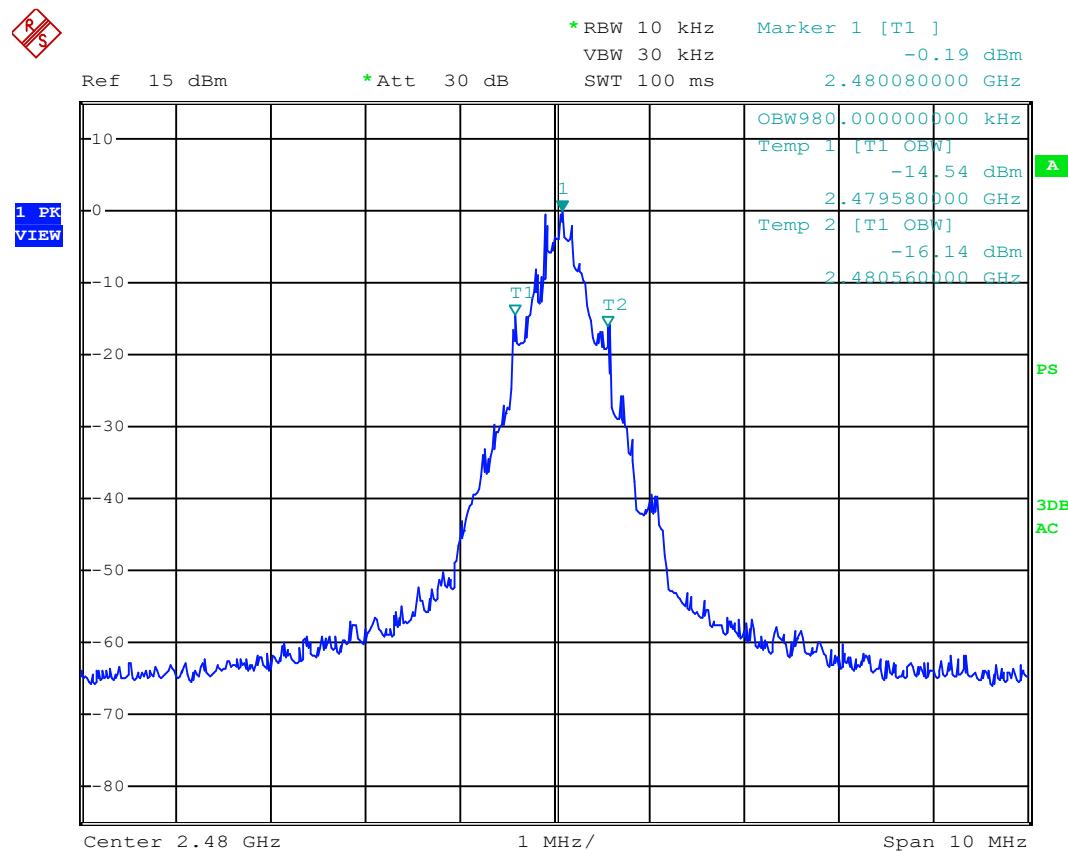

TEST REPORT

9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

10.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	Signal and Spectrum Analyzer (10Hz to 40GHz)	Biconical Antenna (30MHz to 300MHz)	EMI Test Receiver 7GHz
Registration No.	EW-3016	EW-3242	EW-3481
Manufacturer	ROHDESCHWARZ	EMCO	ROHDESCHWARZ
Model No.	FSV40	3110C	ESR7
Calibration Date	January 29, 2022	May 26, 2021	December 21, 2021
Calibration Due Date	January 29, 2023	May 26, 2023	March 21, 2023

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-3243	EW-1133	EW-3302
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148B	3115	6502
Calibration Date	June 03, 2021	May 26, 2021	September 08, 2022
Calibration Due Date	December 30, 2022	February 26, 2023	September 08, 2023

Equipment	RF Preamplifier (9kHz to 6000MHz)	2.4GHz Notch Filter	14m Double Shield RF Cable (9kHz - 6GHz)
Registration No.	EW-3006b	EW-3435	EW-2376
Manufacturer	SCHWARZBECK	MICROWAVE	RADIALL
Model No.	BBV9718	N0324413	n m/br56/bnc m 14m
Calibration Date	February 15, 2022	June 16, 2022	January 26, 2022
Calibration Due Date	February 15, 2023	June 16, 2023	January 26, 2023

Equipment	Pyramidal Horn Antenna
Registration No.	EW-0905
Manufacturer	EMCO
Model No.	3160-09
Calibration Date	July 20, 2021
Calibration Due Date	January 20, 2023

TEST REPORT

2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver 7GHz
Registration No.	EW-2454	EW-2874	EW-3481
Manufacturer	RADIALL	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	Bnc m st / 142 / bnc mra 240cm	ENV-216	ESR7
Calibration Date	January 26, 2022	January 24, 2022	December 21, 2021
Calibration Due Date	January 26, 2023	January 24, 2023	March 21, 2023

3) Bandedge Measurement

Equipment	EMI Test Receiver 7GHz	5m RF Cable (40GHz)
Registration No.	EW-3481	EW-2701
Manufacturer	ROHDE SCHWARZ	RADIALL
Model No.	ESR7	Sma m-m 5m 40G
Calibration Date	December 21, 2021	November 24, 2021
Calibration Due Date	March 21, 2023	February 24, 2023

4) OBW Measurement

Equipment	EMI Test Receiver 7GHz	5m RF Cable (40GHz)
Registration No.	EW-3481	EW-2701
Manufacturer	ROHDE SCHWARZ	RADIALL
Model No.	ESR7	Sma m-m 5m 40G
Calibration Date	December 21, 2021	November 24, 2021
Calibration Due Date	March 21, 2023	February 24, 2023

5) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDE SCHWARZ
Software version	10.50.40

END OF TEST REPORT