



FCC TEST REPORT

REPORT NO.: RF921020R01

MODEL NO.: FROKBT0001

RECEIVED: Oct. 20, 2003

TESTED: Nov. 18 ~ Nov. 21, 2003

APPLICANT: Mega store Co., Ltd.

ADDRESS: 12/90 Room 2-365, 2nd floor, Seri Center Building,
Srinakarin road, Nongbon, Provet, Bangkok 10260.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4	TEST PROCEDURES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS	11
4.1.7	TEST RESULTS	12
4.2	NUMBER OF HOPPING FREQUENCY USED	18
4.2.1	LIMIT OF HOPPING FREQUENCY USED	18
4.2.2	TEST INSTRUMENTS	18
4.2.3	TEST PROCEDURES	19
4.2.4	DEVIATION FROM TEST STANDARD	19
4.2.5	TEST SETUP	19
4.2.6	TEST RESULTS	19
4.3	DWELL TIME ON EACH CHANNEL	22
4.3.1	LIMIT OF DWELL TIME USED	22
4.3.2	TEST INSTRUMENTS	22
4.3.3	TEST PROCEDURES	23
4.3.4	DEVIATION FROM TEST STANDARD	23
4.3.5	TEST SETUP	23
4.3.6	TEST RESULTS	24
4.4	CHANNEL BANDWIDTH	31
4.4.1	LIMITS OF CHANNEL BANDWIDTH	31
4.4.2	TEST INSTRUMENTS	31
4.4.3	TEST PROCEDURE	32
4.4.4	DEVIATION FROM TEST STANDARD	32
4.4.5	TEST SETUP	32
4.4.6	EUT OPERATING CONDITION	32
4.4.7	TEST RESULTS	33

4.5	HOPPING CHANNEL SEPARATION	37
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION	37
4.5.2	TEST INSTRUMENTS	37
4.5.3	TEST PROCEDURES	38
4.5.4	DEVIATION FROM TEST STANDARD	38
4.5.5	TEST SETUP	38
4.5.6	TEST RESULTS	39
4.6	MAXIMUM PEAK OUTPUT POWER	43
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.6.2	INSTRUMENTS	43
4.6.3	TEST PROCEDURES	44
4.6.4	DEVIATION FROM TEST STANDARD	44
4.6.5	TEST SETUP	44
4.6.6	EUT OPERATING CONDITION	45
4.6.7	TEST RESULTS	45
4.7	RADIATED EMISSION MEASUREMENT	46
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	46
4.7.2	TEST INSTRUMENTS	47
4.7.3	TEST PROCEDURES	48
4.7.4	DEVIATION FROM TEST STANDARD	48
4.7.5	TEST SETUP	49
4.7.6	TEST RESULTS	50
4.8	BAND EDGES MEASUREMENT	54
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	54
4.8.2	TEST INSTRUMENTS	54
4.8.3	TEST PROCEDURE	54
4.8.4	DEVIATION FROM TEST STANDARD	54
4.8.5	EUT OPERATING CONDITION	55
4.8.6	TEST RESULTS	55
4.9	ANTENNA REQUIREMENT	58
4.9.1	STANDARD APPLICABLE	58
4.9.2	ANTENNA CONNECTED CONSTRUCTION	58
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	59
6	INFORMATION ON THE TESTING LABORATORIES	62



1 CERTIFICATION

PRODUCT : Class 2 Bluetooth Headset
BRAND NAME : FROK
MODEL NO. : FROKBT0001
TEST ITEM: ENGINEERING SAMPLE
APPLICANT : Mega store Co., Ltd.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Nov. 18 ~ Nov. 21, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Windy Chou, **DATE:** Nov. 24, 2003

Windy Chou

APPROVED BY: Ellis Wu, **DATE:** Nov. 24, 2003

Ellis Wu, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -12.56dB at 0.603 MHz
15.247(a)(1)(I)-(ii)	Number of Hopping Frequency Used Spec.: At least 75 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 30 second	PASS	Meet the requirement of limit
15.247(a)(1)(I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 1 MHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -6.44dB at 55.87MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

Note: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Class 2 Bluetooth Headset
MODEL NO.	FROKBT0001
POWER SUPPLY	3.7VDC from internal Battery 5.0VDC from external Adapter
MODULATION TYPE	GFSK
MODULATION TECHNOLOGY	FHSS
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	-0.65dBm
ANTENNA TYPE	Chip Antenna with 4dBi gain
USB CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was powered by following adapter:

Model:	4701SD-5018-UL
Input:	90~264Vac 50/60Hz
Output:	5.0V, 180mA
2. Bluetooth technology is used for the EUT.
3. For more detailed feature description of the EUT, please refer to user's manual.

3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

NOTE:

1. Below 1 GHz, the channel 0, 39, and 78 were pre-tested in chamber. The channel 78, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 0, 39, and 78 were tested individually.
3. For spurious emission test below 1GHz, there were two test modes provided to the EUT, MODE 1 is EUT powered by the adapter for charger and transferring data, MODE 2 is the EUT powered by batteries.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Class 2 Bluetooth Headset. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)

ANSI C63.4 : 2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-0791UH-12800-123-5423	FCC DOC APPROVED
2	PRINTER	EPSON	LQ-300+	DCGY017070	FCC DOC APPROVED

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For TEST MODE 1

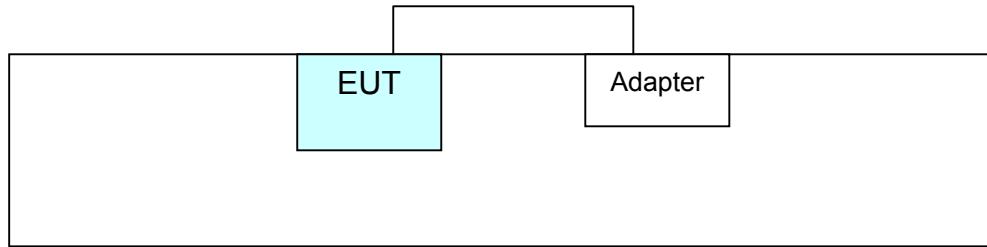

For TEST MODE 2

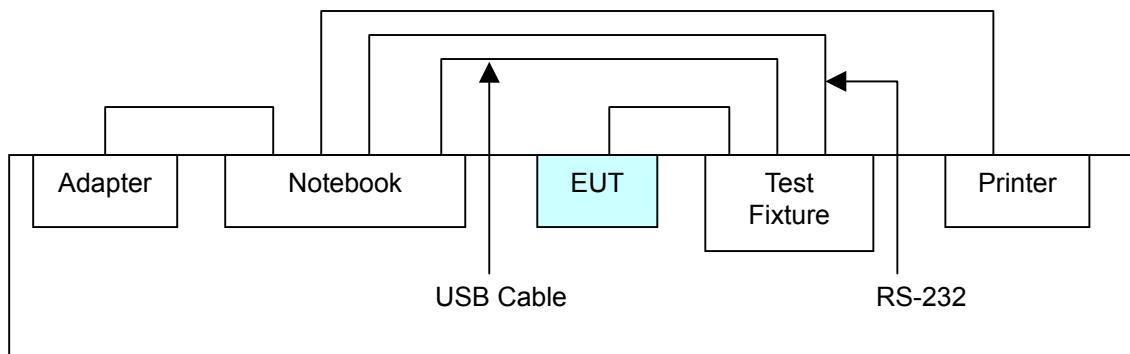

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
1. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
*ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 29 2003
*ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29 2003
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May 01, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. “*”: These equipment are used for conducted telecom port test only (if tested).
3. The test was performed in ADT Shielded Room No. 10.
4. The VCCI Site Registration No. is C-1312.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

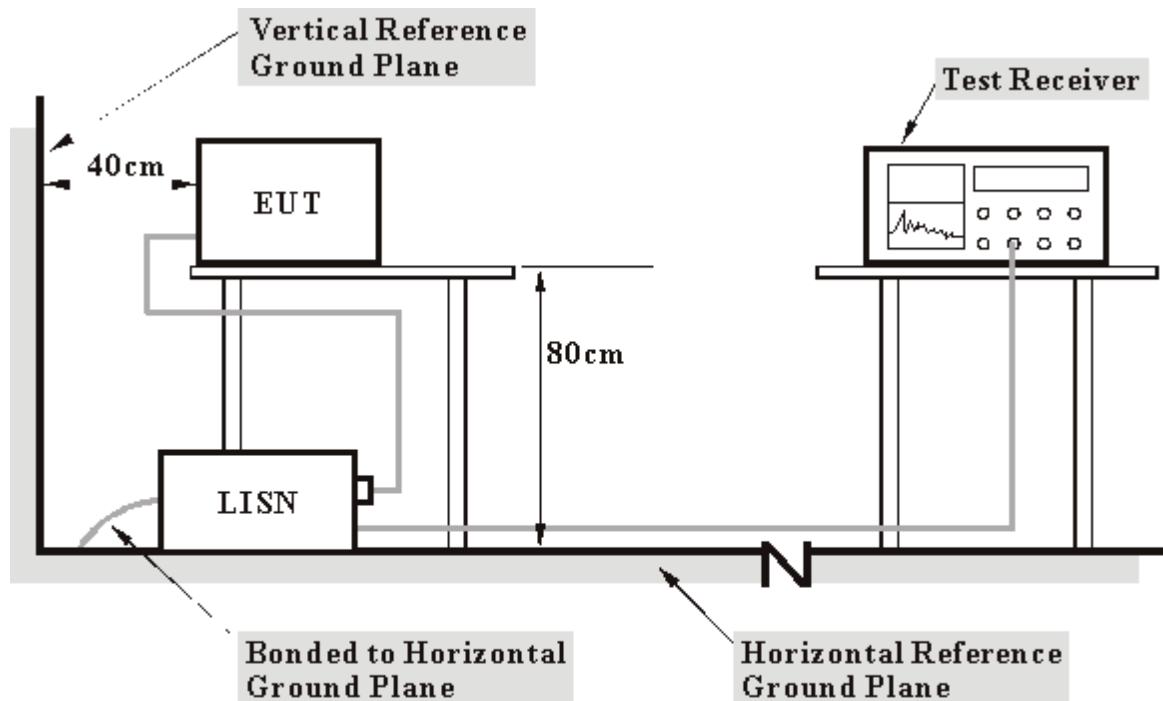

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Test program was provided to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
CHANNEL	0	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa		TESTED BY: Martin Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.06	40.56	-	40.62	-	63.58	53.58	-22.96	-
2	0.400	0.06	36.56	-	36.62	-	57.85	47.85	-21.23	-
3	0.603	0.09	37.03	-	37.12	-	56.00	46.00	-18.88	-
4	0.802	0.13	32.47	-	32.60	-	56.00	46.00	-23.40	-
5	1.404	0.17	27.55	-	27.72	-	56.00	46.00	-28.28	-
6	8.412	0.36	16.12	-	16.48	-	60.00	50.00	-43.52	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

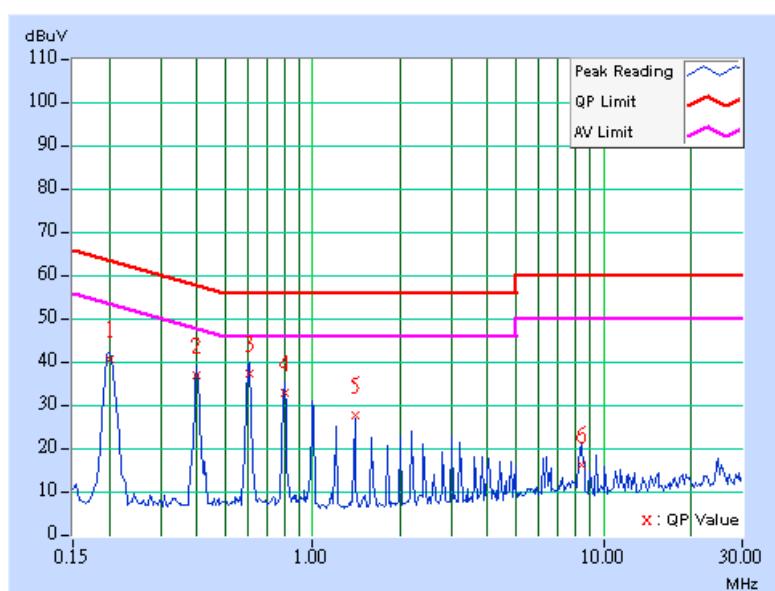


EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
CHANNEL	0	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa		TESTED BY: Martin Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.05	44.74	-	44.79	-	63.58	53.58	-18.79	-
2	0.400	0.05	42.93	-	42.98	-	57.85	47.85	-14.87	-
3	0.599	0.09	41.58	-	41.67	-	56.00	46.00	-14.33	-
4	1.003	0.16	32.97	-	33.13	-	56.00	46.00	-22.87	-
5	2.207	0.18	27.69	-	27.87	-	56.00	46.00	-28.13	-
6	24.973	0.73	25.06	-	25.79	-	60.00	50.00	-34.21	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

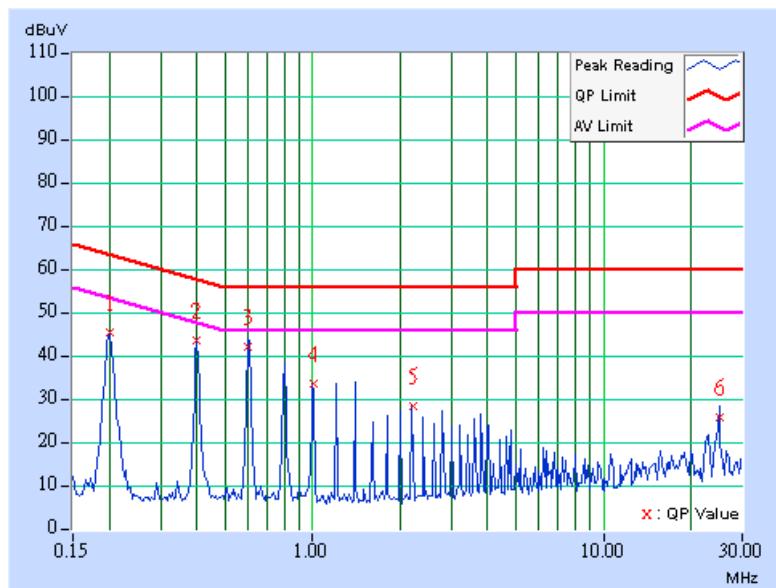

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
CHANNEL	39	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa		TESTED BY: Martin Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.06	44.66	-	44.72	-	63.58	53.58	-18.86	-
2	0.400	0.06	42.95	-	43.01	-	57.85	47.85	-14.84	-
3	0.603	0.09	42.93	-	43.02	-	56.00	46.00	-12.98	-
4	1.203	0.16	32.96	-	33.12	-	56.00	46.00	-22.88	-
5	3.005	0.20	27.86	-	28.06	-	56.00	46.00	-27.94	-
6	24.914	0.89	25.87	-	26.76	-	60.00	50.00	-33.24	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

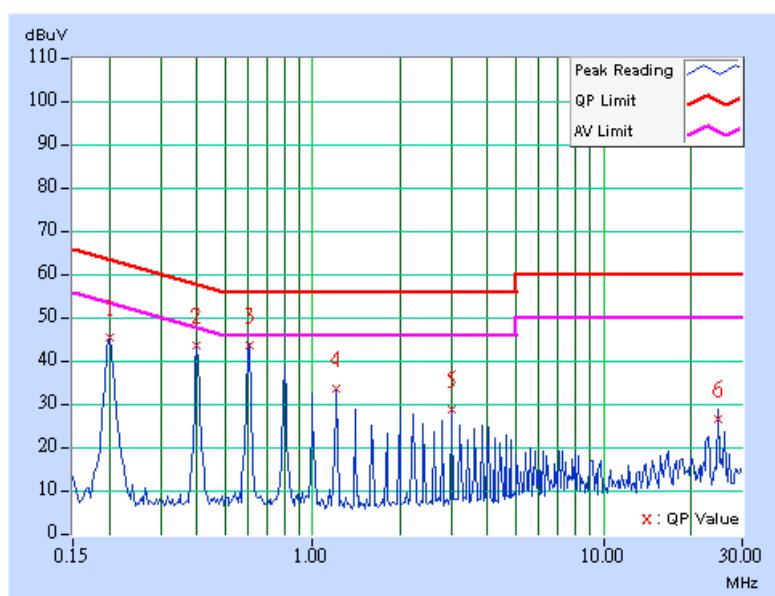

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
CHANNEL	39	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa		TESTED BY: Martin Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.05	44.78	-	44.83	-	63.58	53.58	-18.75	-
2	0.400	0.05	42.89	-	42.94	-	57.85	47.85	-14.91	-
3	0.603	0.09	43.35	-	43.44	-	56.00	46.00	-12.56	-
4	1.004	0.16	33.22	-	33.38	-	56.00	46.00	-22.62	-
5	2.207	0.18	27.63	-	27.81	-	56.00	46.00	-28.19	-
6	24.855	0.72	23.93	-	24.65	-	60.00	50.00	-35.35	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

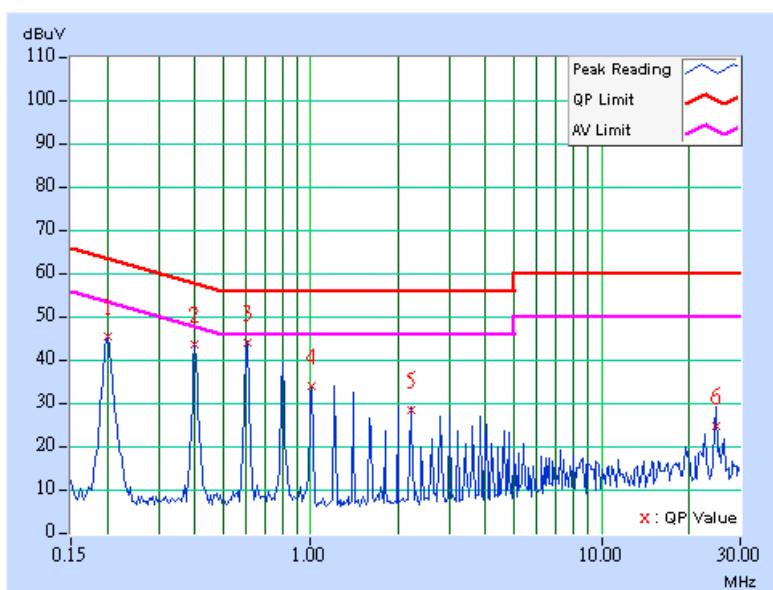

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
CHANNEL	78	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa		TESTED BY: Martin Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.06	44.74	-	44.80	-	63.58	53.58	-18.78	-
2	0.400	0.06	42.95	-	43.01	-	57.85	47.85	-14.84	-
3	0.603	0.09	43.23	-	43.32	-	56.00	46.00	-12.68	-
4	0.802	0.13	37.36	-	37.49	-	56.00	46.00	-18.51	-
5	2.207	0.18	28.41	-	28.59	-	56.00	46.00	-27.41	-
6	24.852	0.88	25.29	-	26.17	-	60.00	50.00	-33.83	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

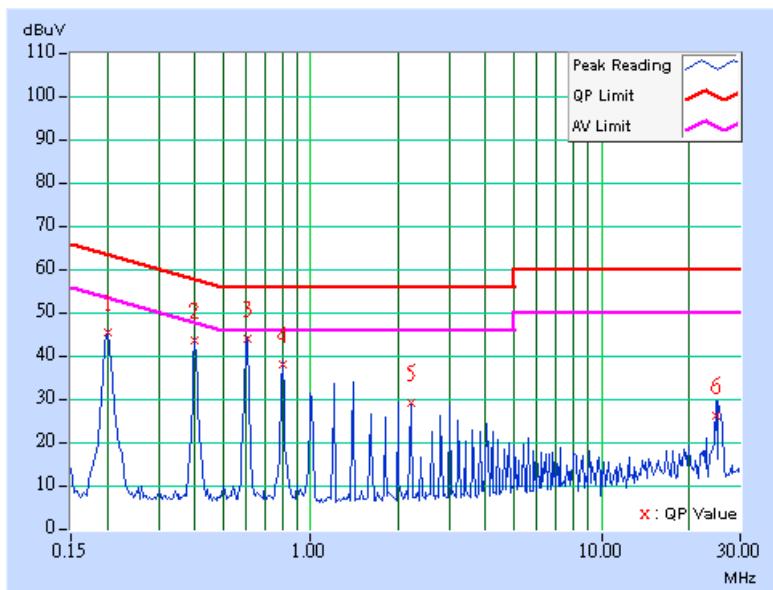

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
CHANNEL	78	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa		TESTED BY: Martin Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.05	40.50	-	40.55	-	63.58	53.58	-23.03	-
2	0.400	0.05	36.56	-	36.61	-	57.85	47.85	-21.24	-
3	0.603	0.09	37.11	-	37.20	-	56.00	46.00	-18.80	-
4	0.802	0.12	32.63	-	32.75	-	56.00	46.00	-23.25	-
5	1.406	0.17	27.30	-	27.47	-	56.00	46.00	-28.53	-
6	25.273	0.73	15.00	-	15.73	-	60.00	50.00	-44.27	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

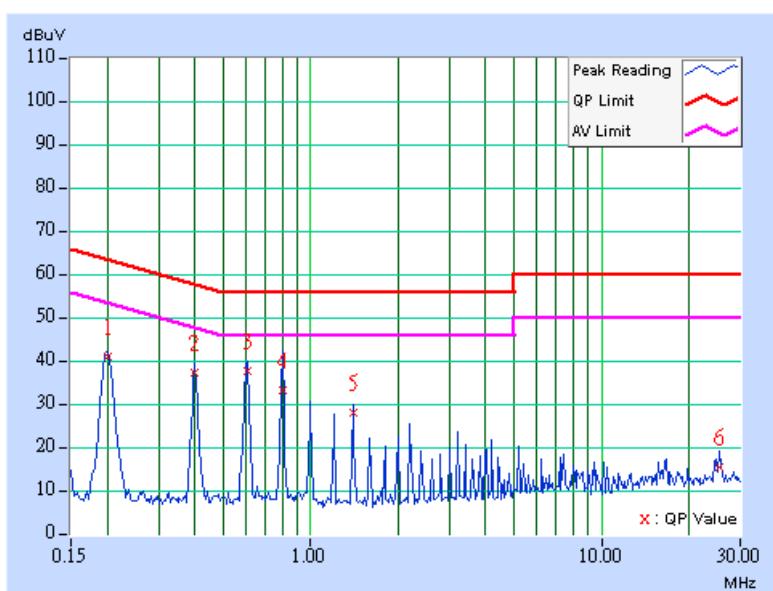

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation


4.2.5 TEST SETUP

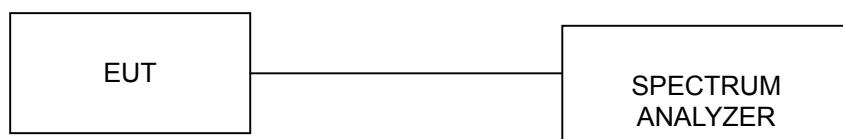

4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

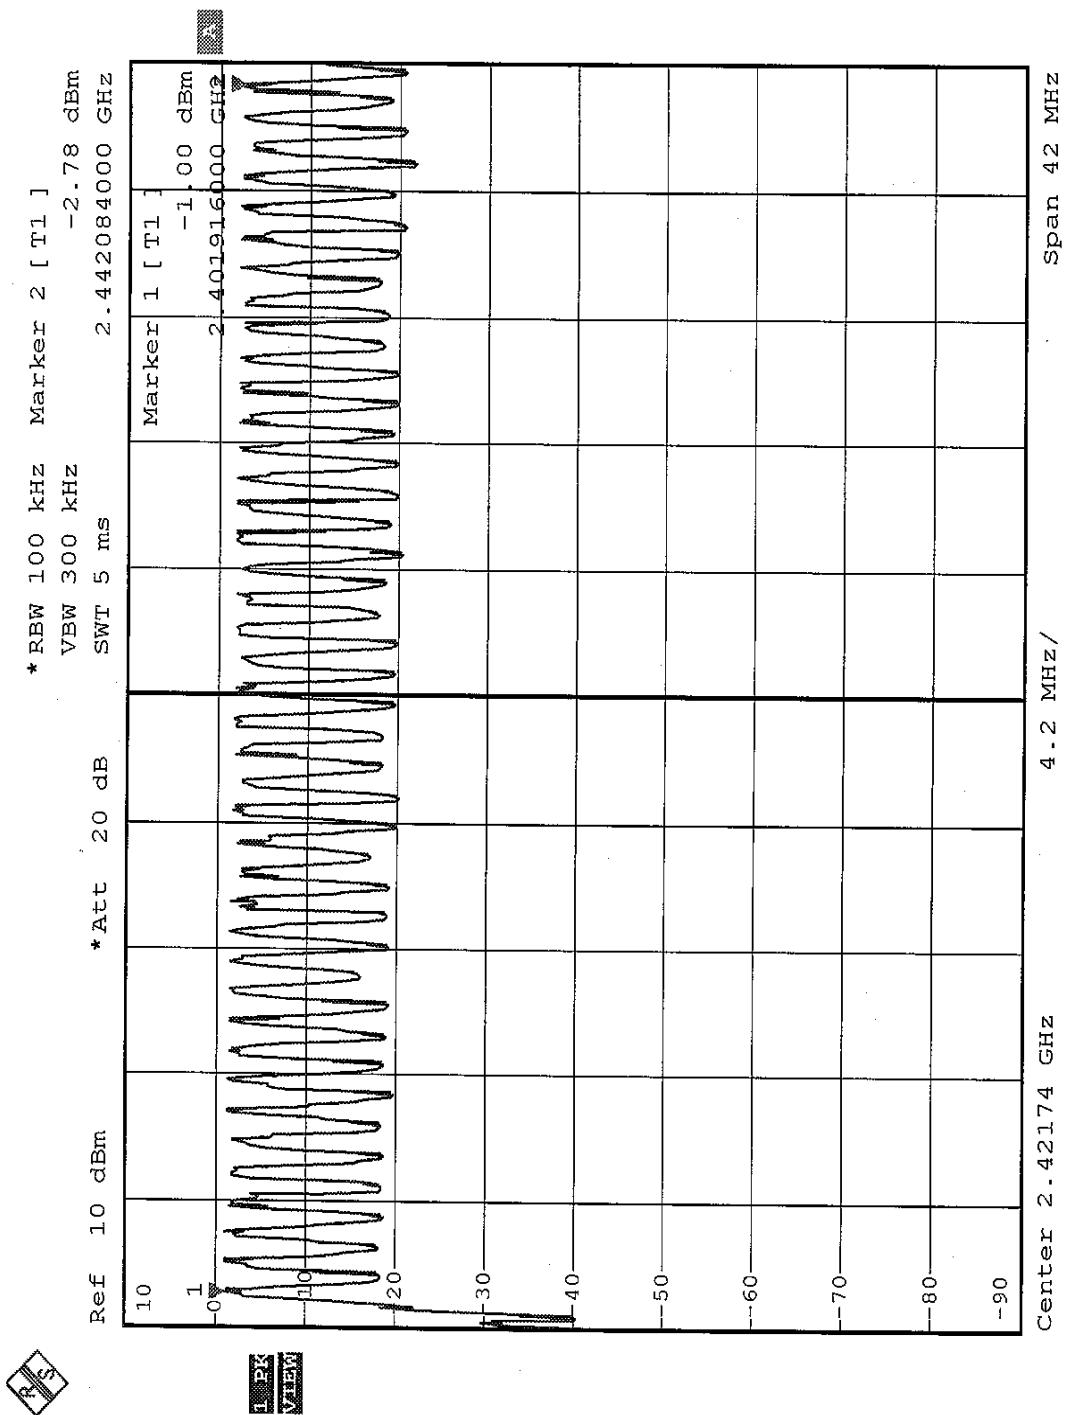

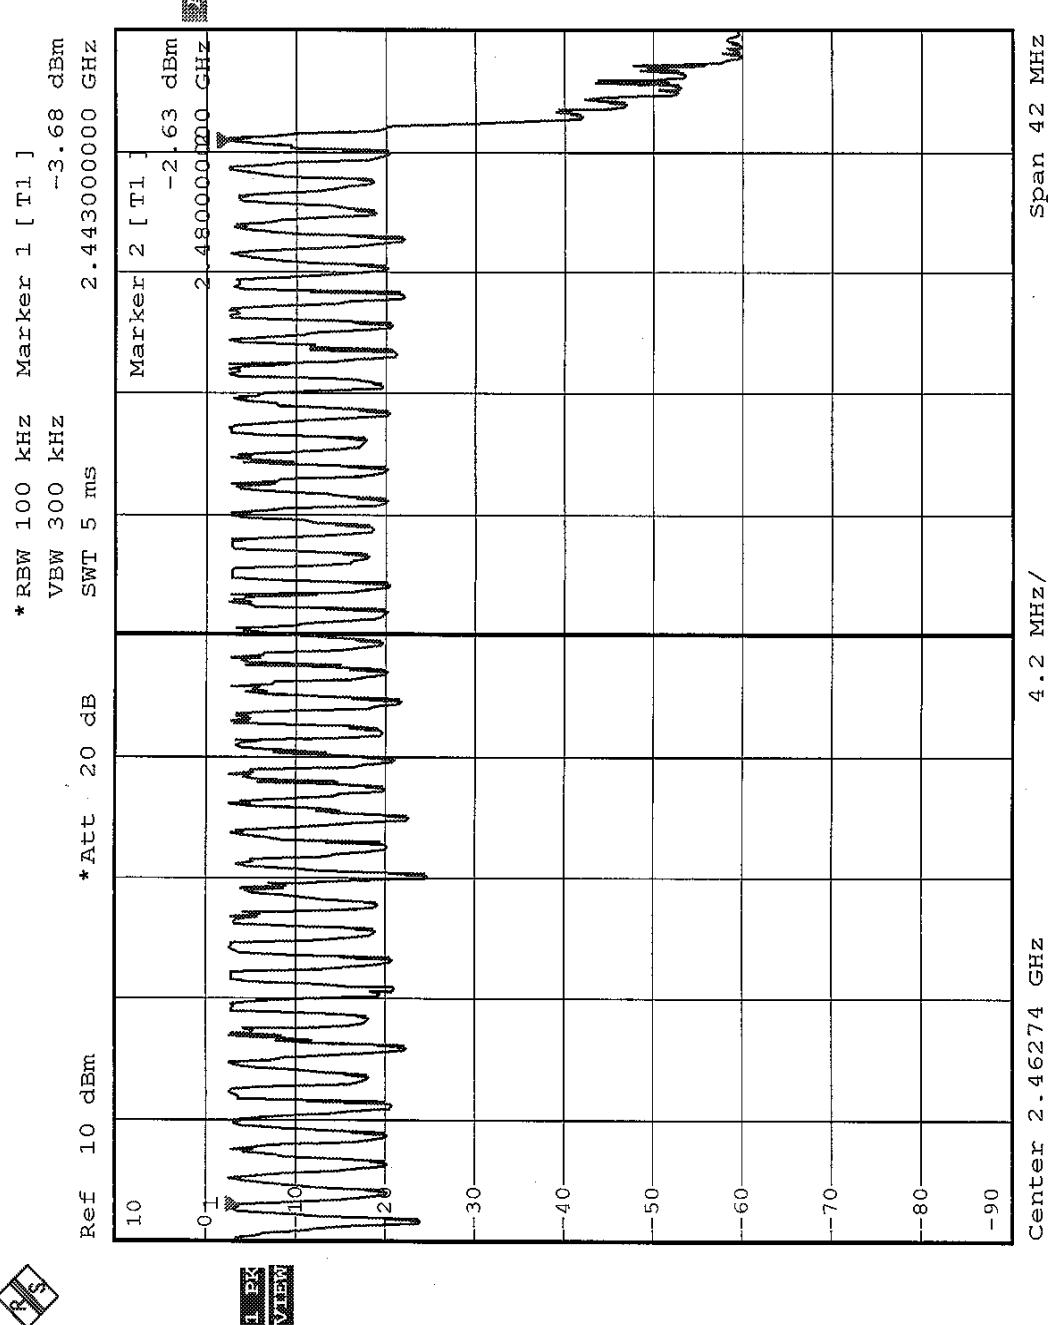

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

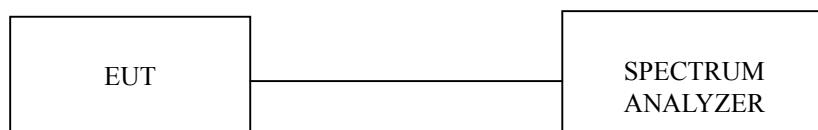



4.3.6 TEST RESULTS

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 times / 5 sec *6.32=322.32 times	0.48	154.71	400
DH3	25 times / 5 sec *6.32=158.00 times	1.76	278.08	400
DH5	17 times / 5 sec *6.32= 107.44 times	3.02	324.47	400


Test plots of the transmitting time slot are shown on next six pages.


DH1

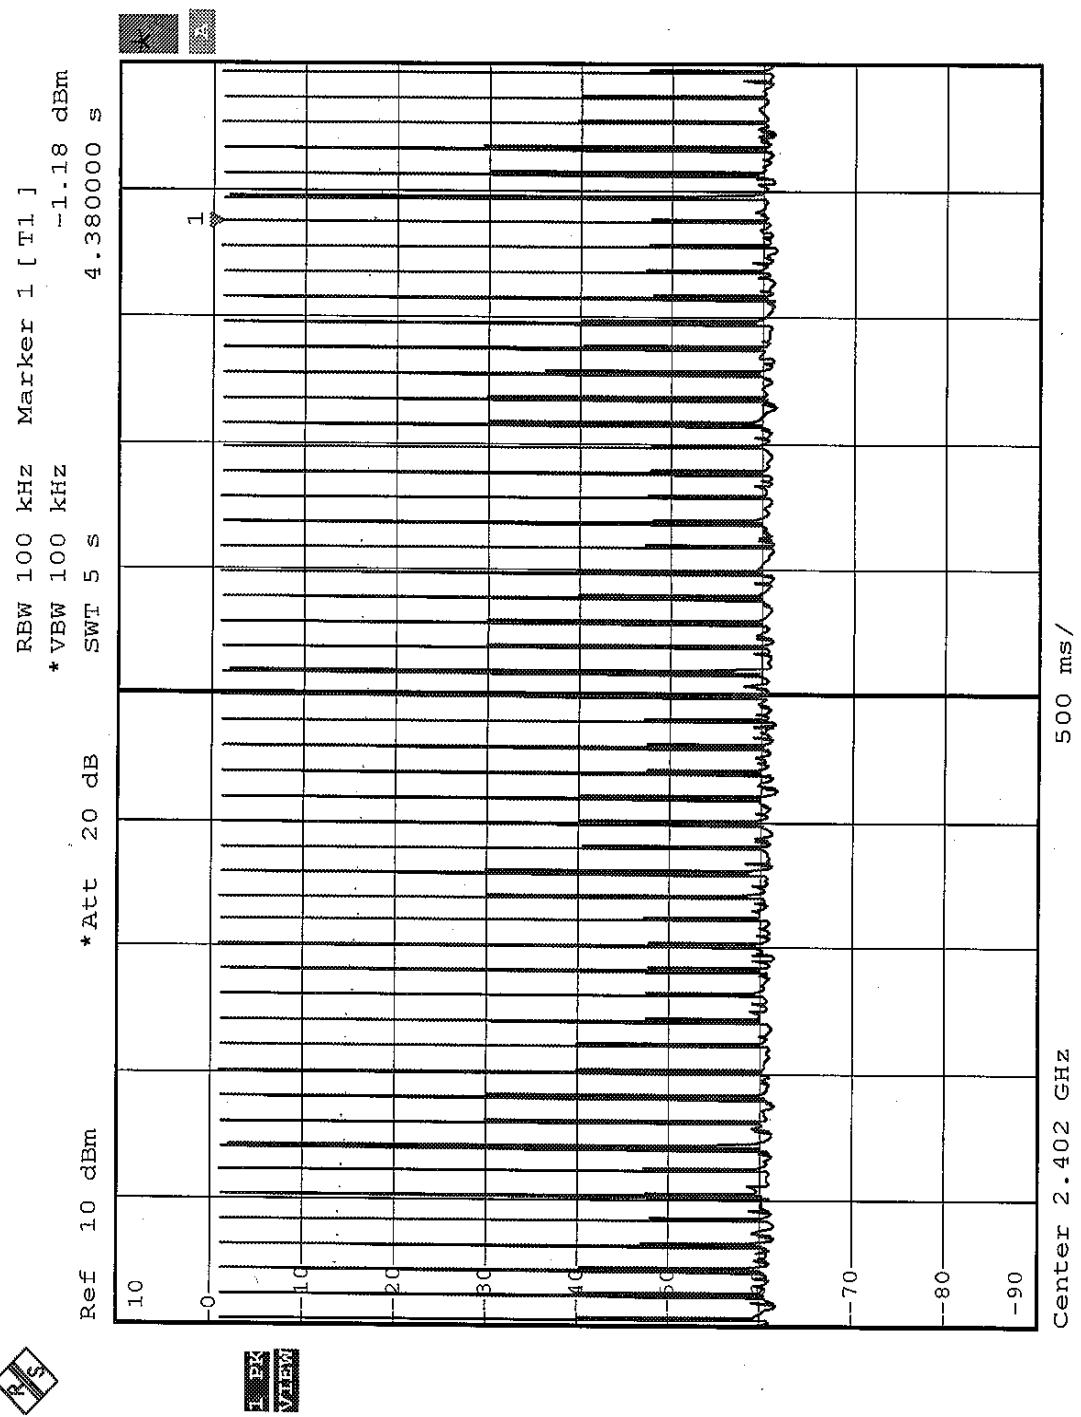

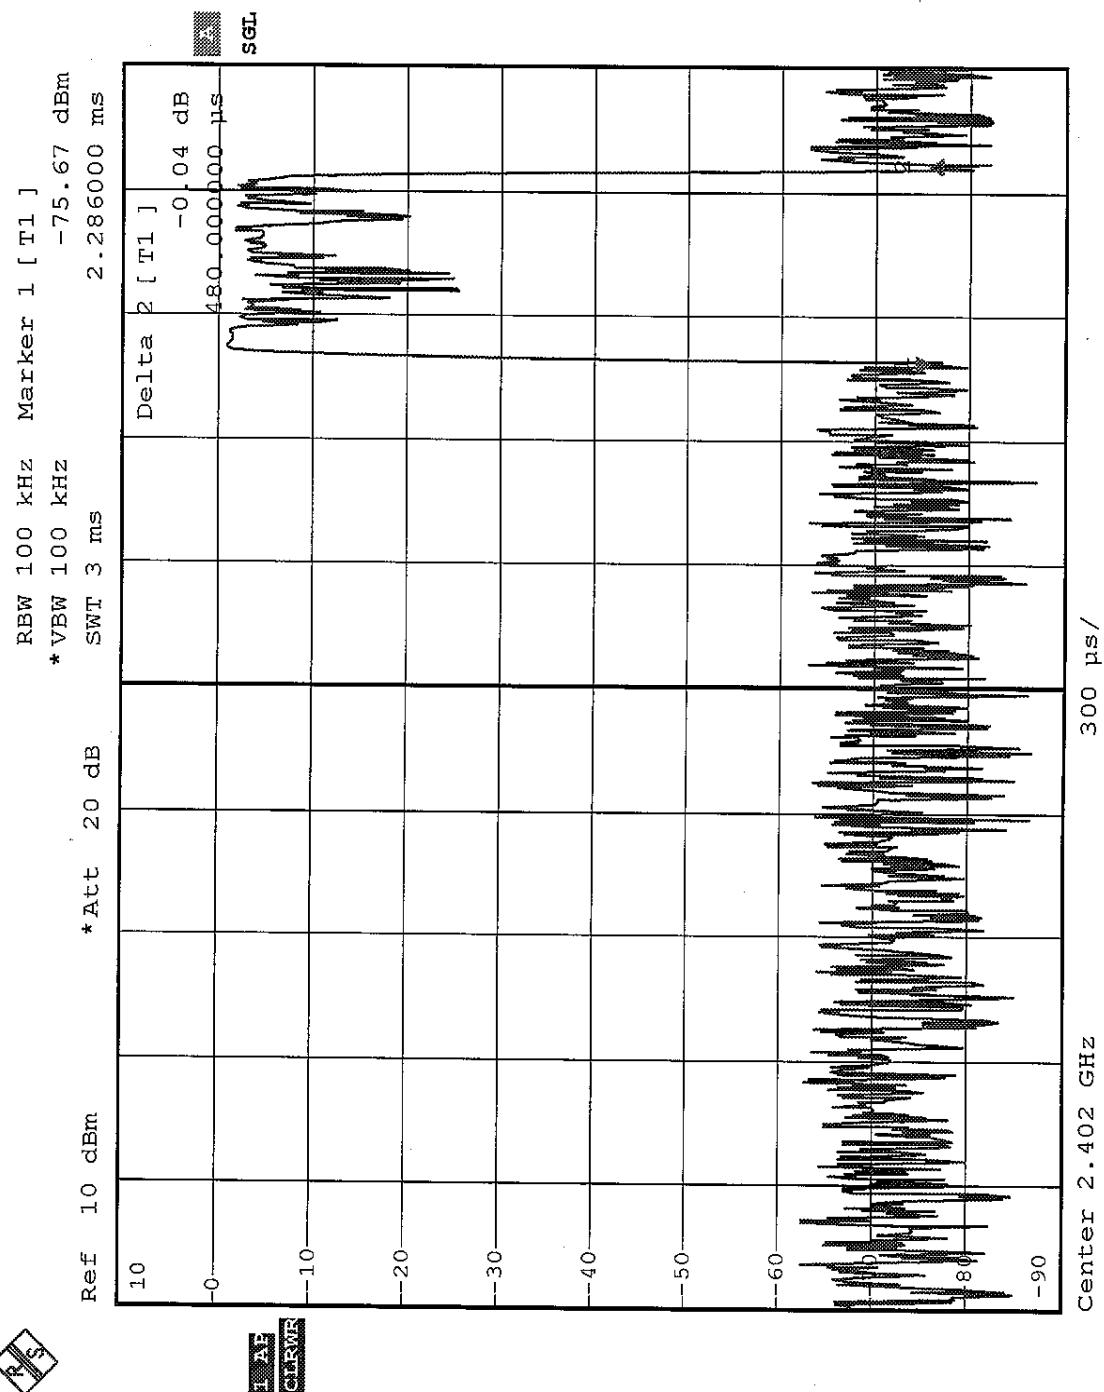



DH3

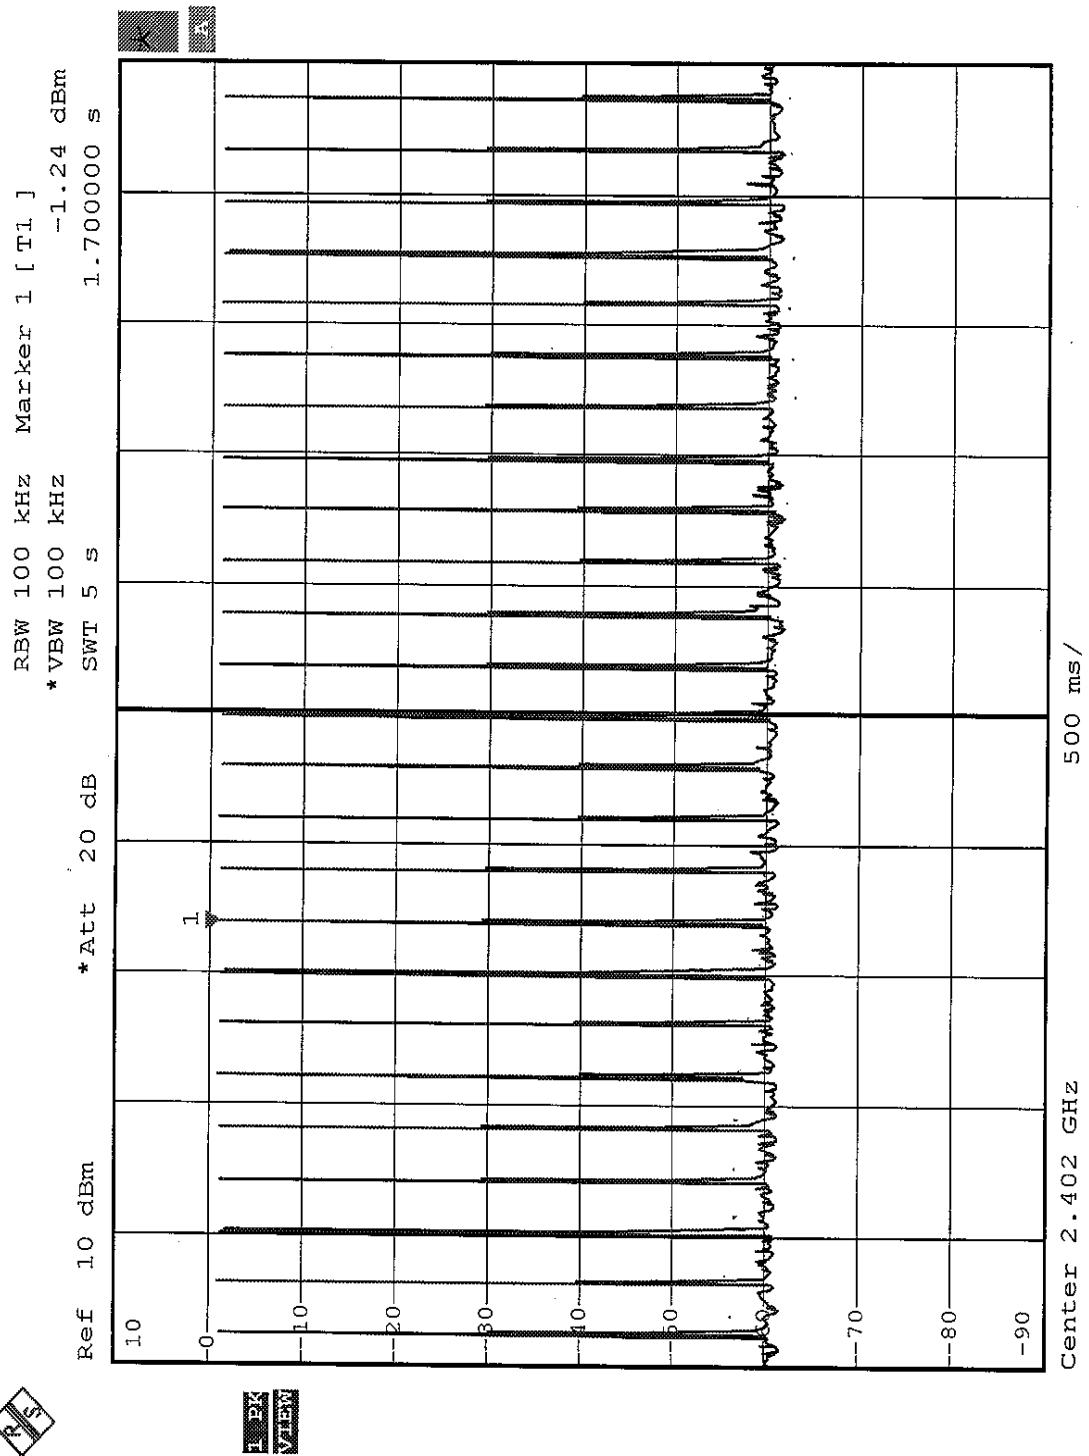

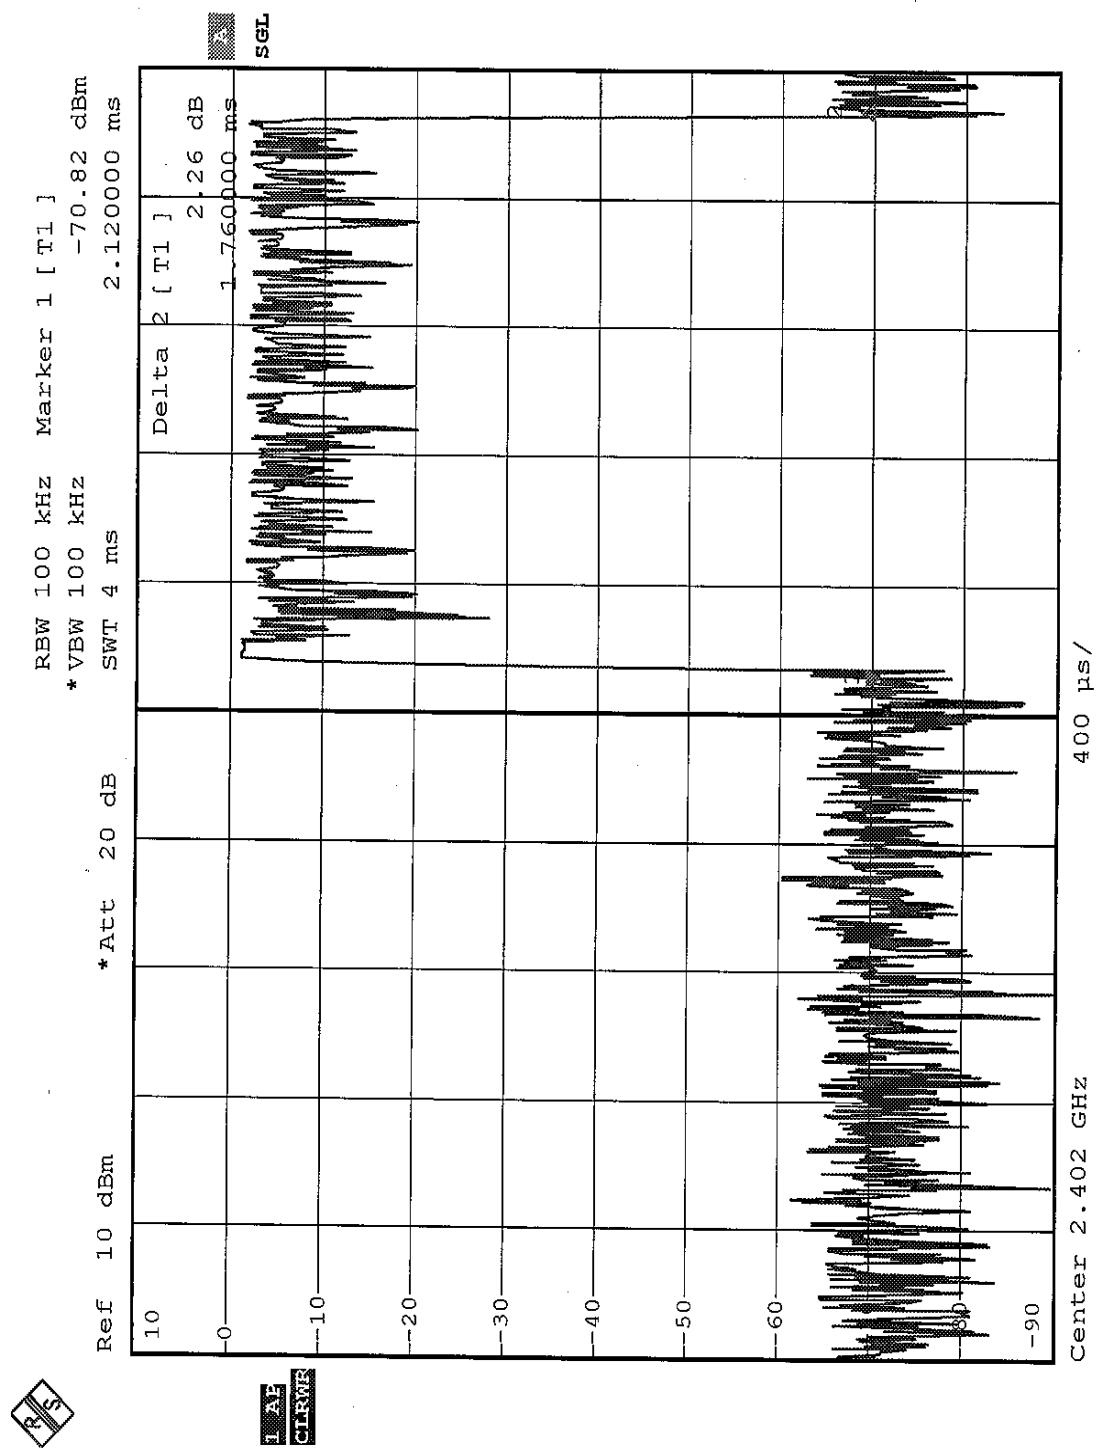

DH5

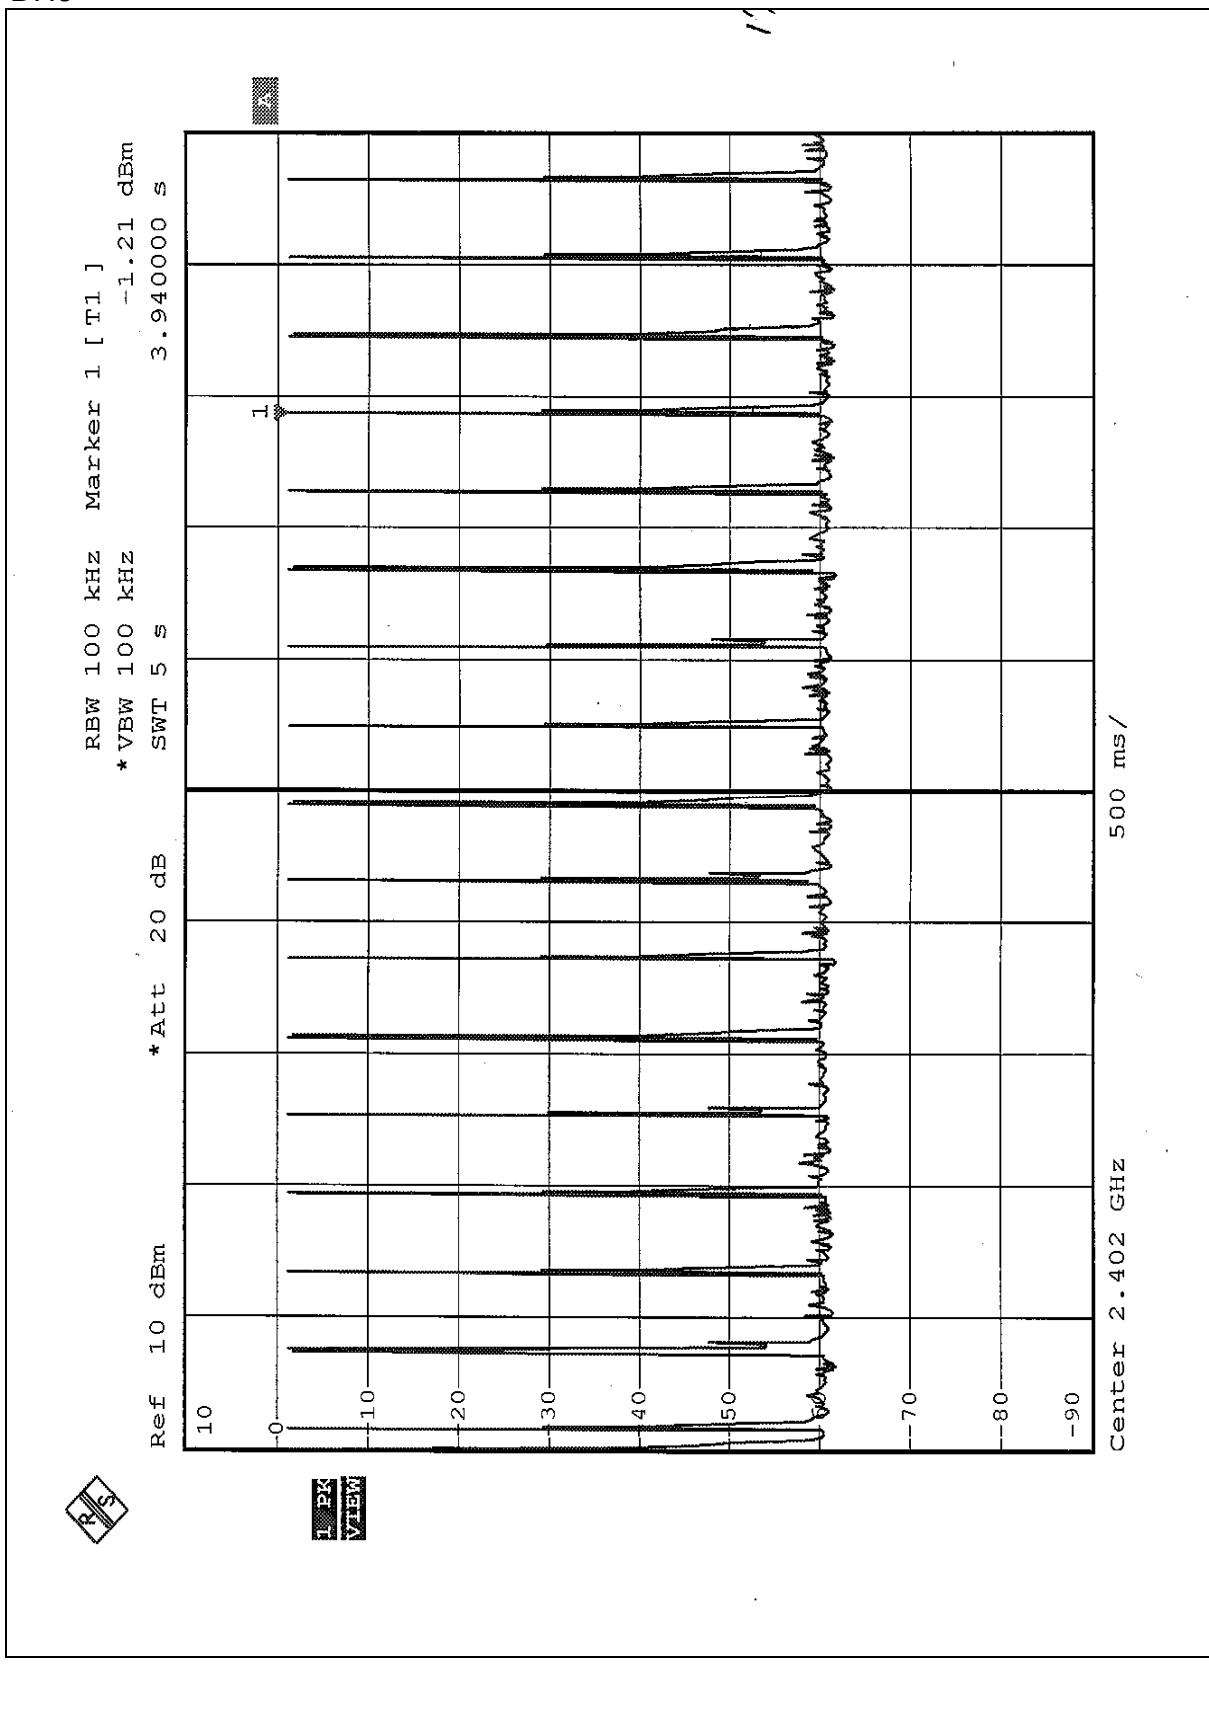

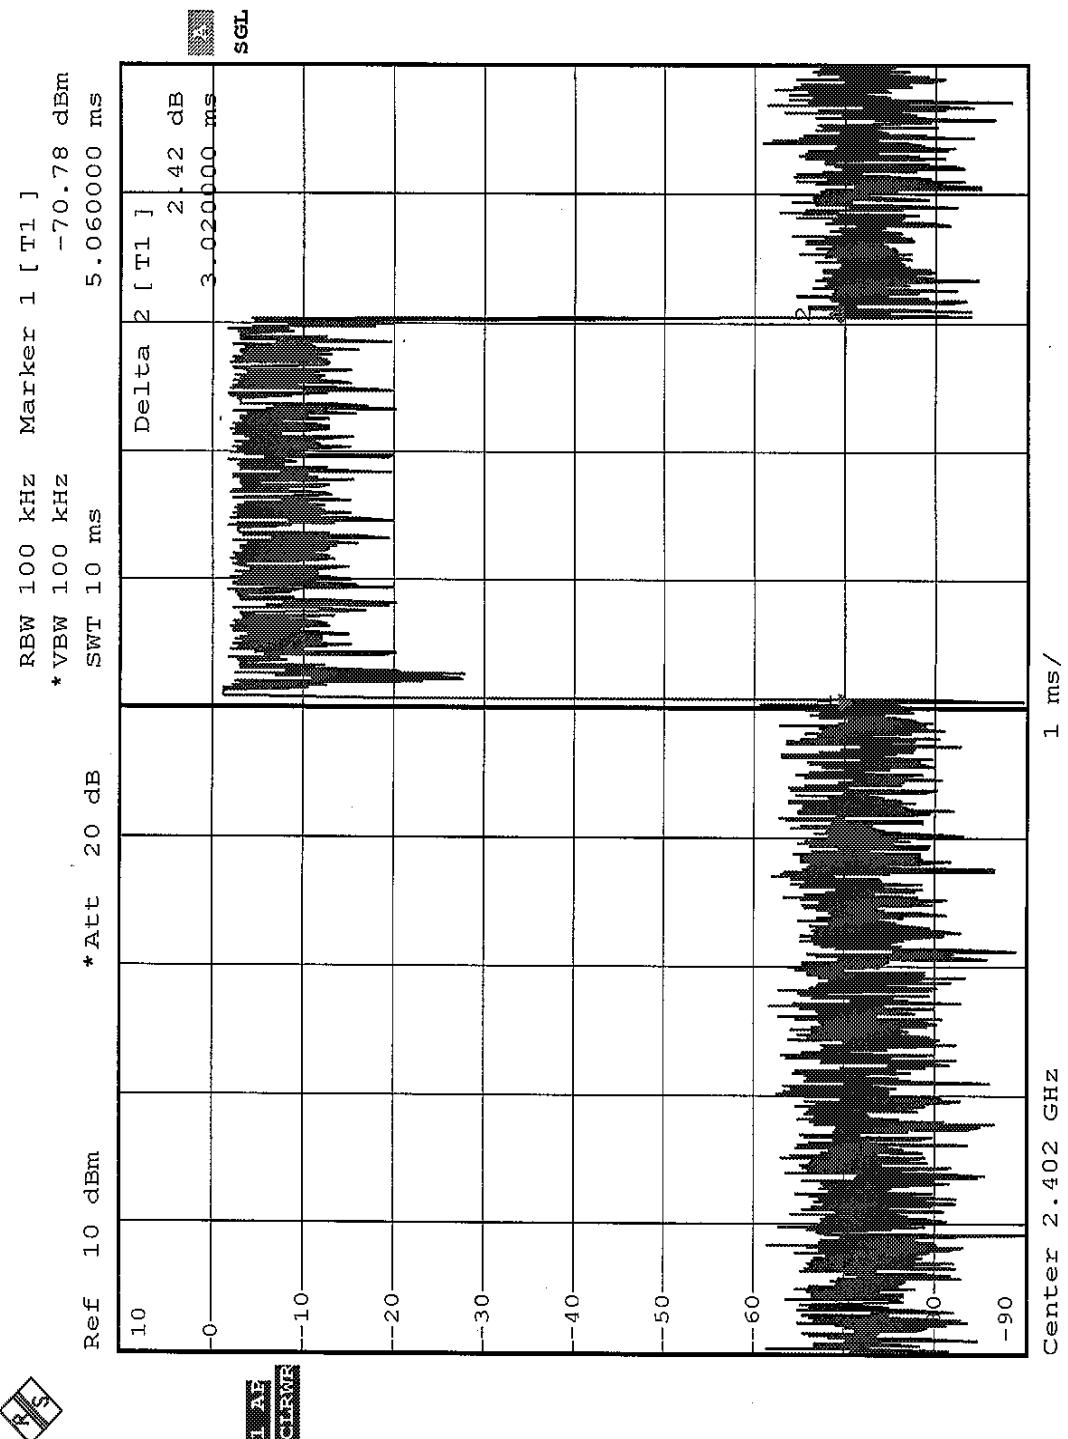

4.4 CHANNEL BANDWIDTH

4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP




4.4.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.4.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20 dB BANDWIDTH (kHz)	MINMUM LIMIT (MHz)	PASS/FAIL
0	2402	780	0.5	PASS
39	2441	792	0.5	PASS
78	2480	789	0.5	PASS


Channel 0

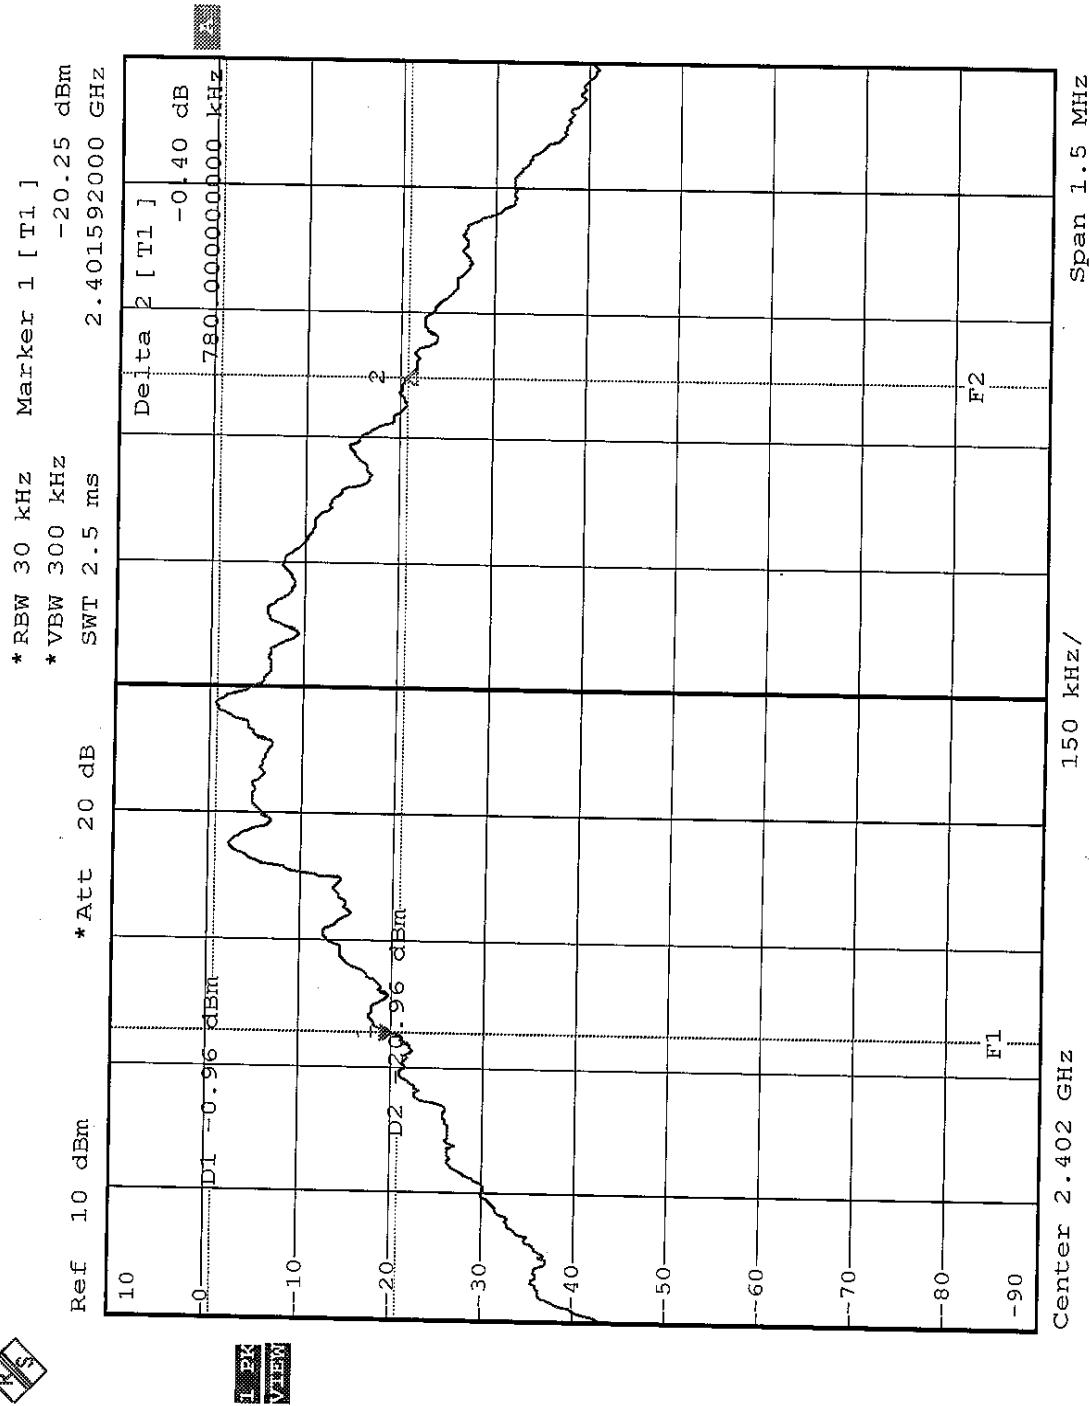

Channel 39

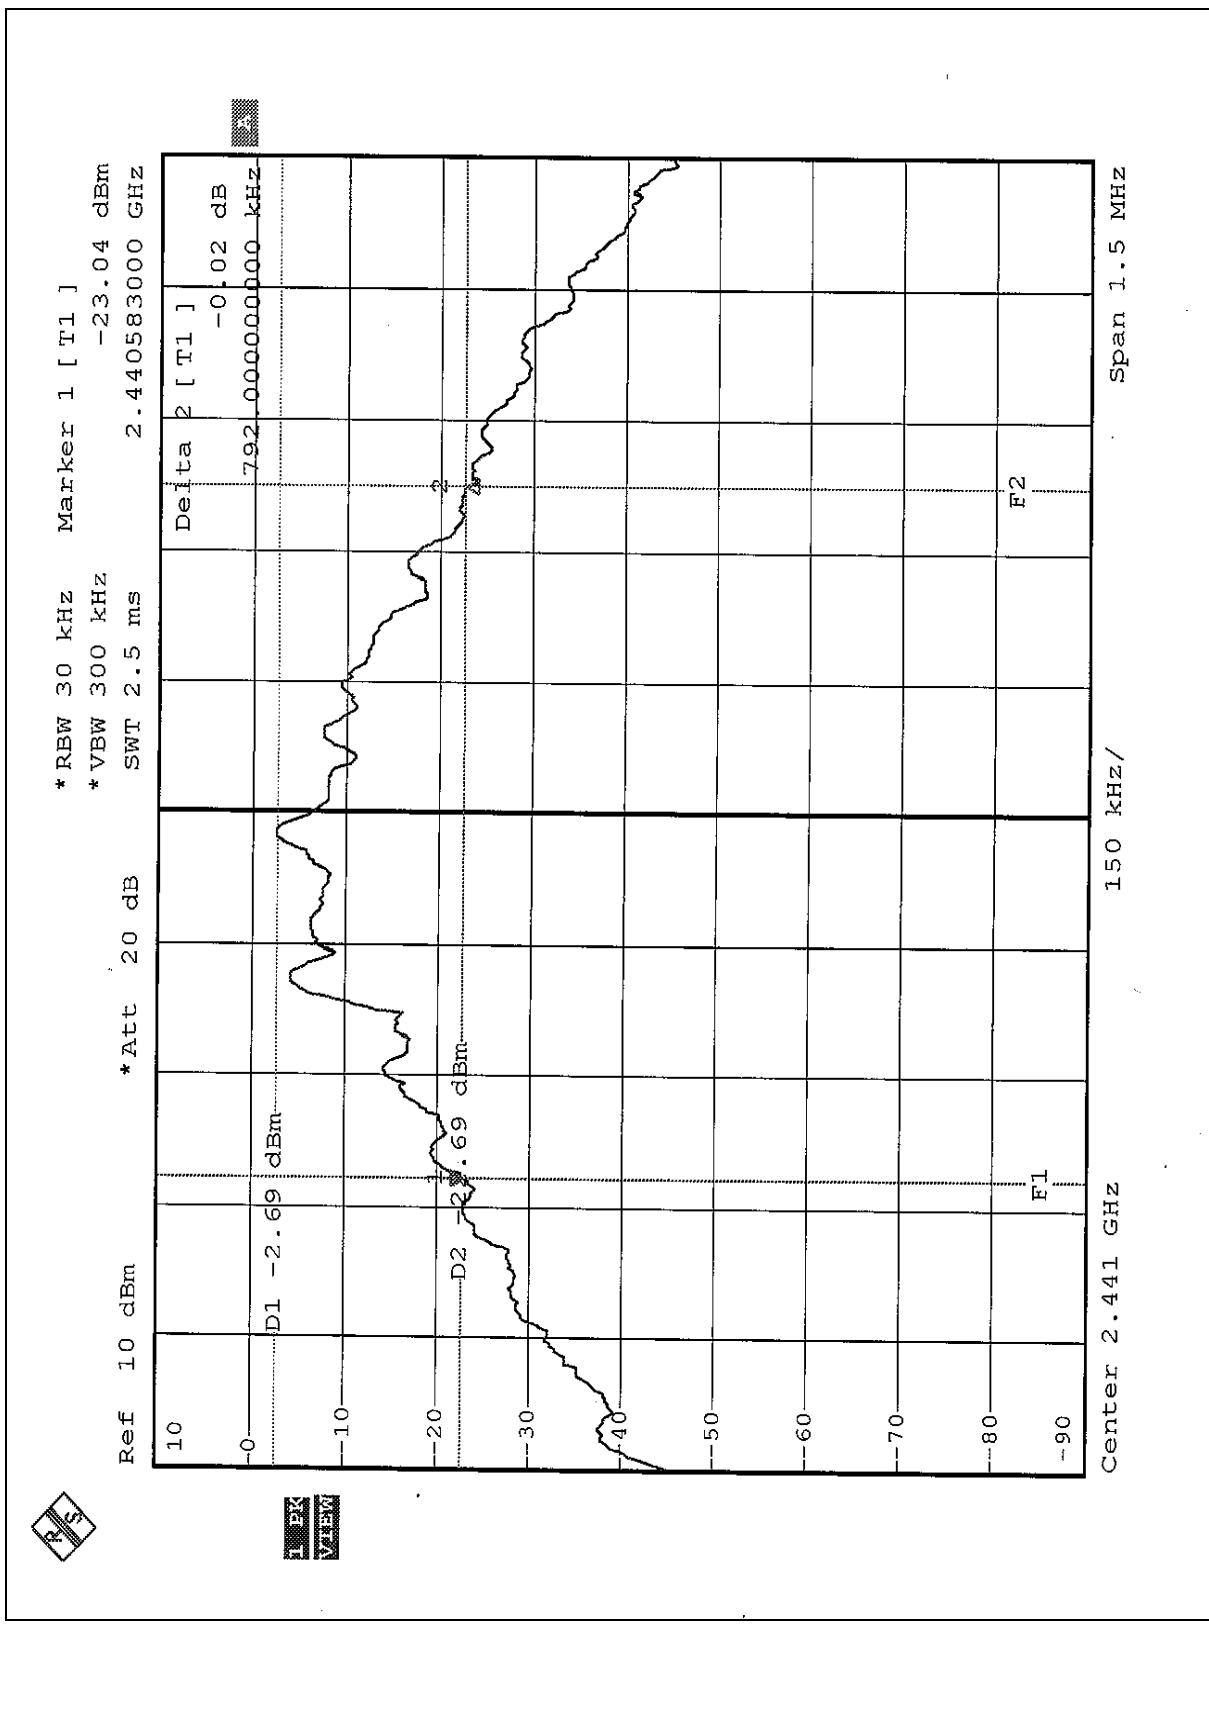

Channel 78

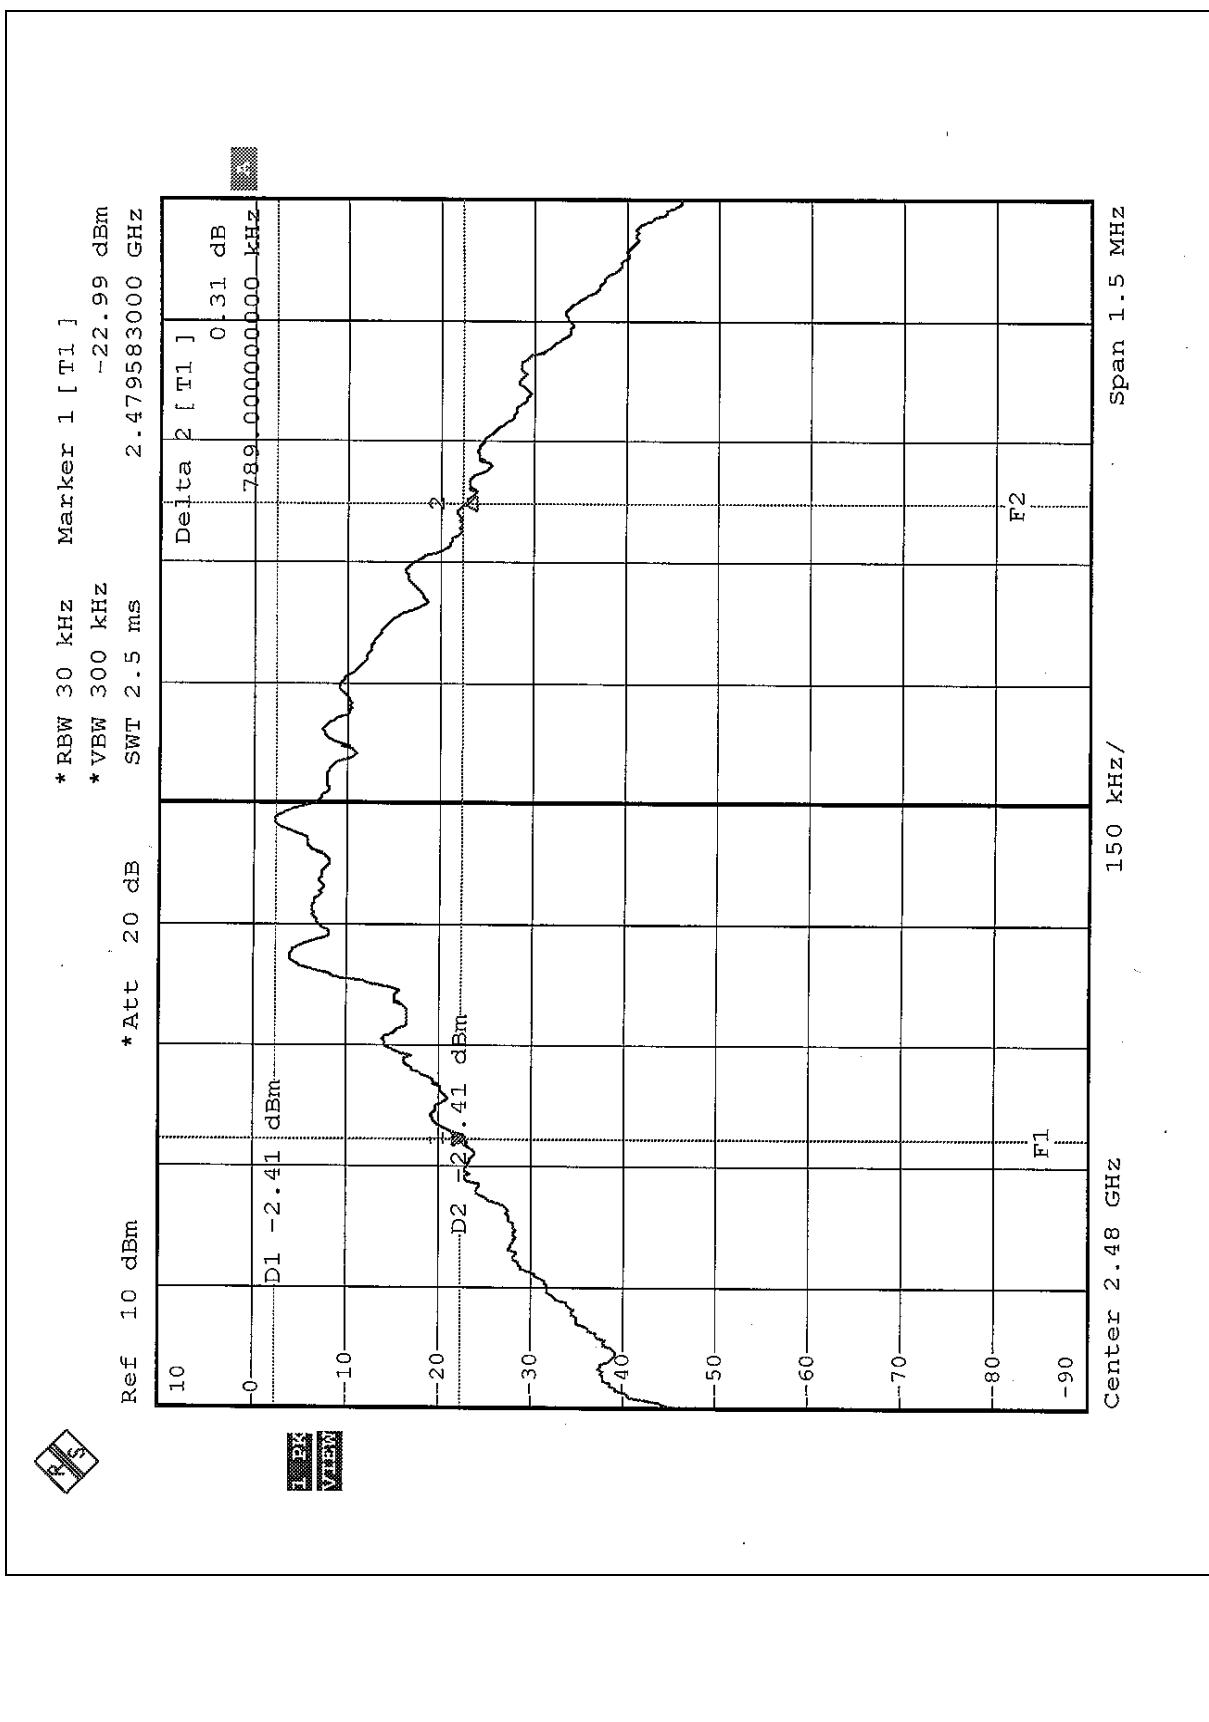

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

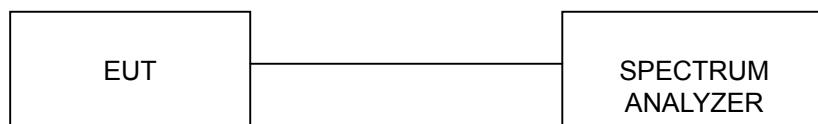


4.5.6 TEST RESULTS


Channel	Frequency (MHz)	Adjacent Channel Separation	Minimum Limit (kHz)	Pass / Fail
0	2402	1MHz	780.00	PASS
39	2441	1MHz	792.00	PASS
78	2480	1MHz	789.00	PASS

The minimum limit is 20dB bandwidth. Test results please refer to next three pages.


Channel 0

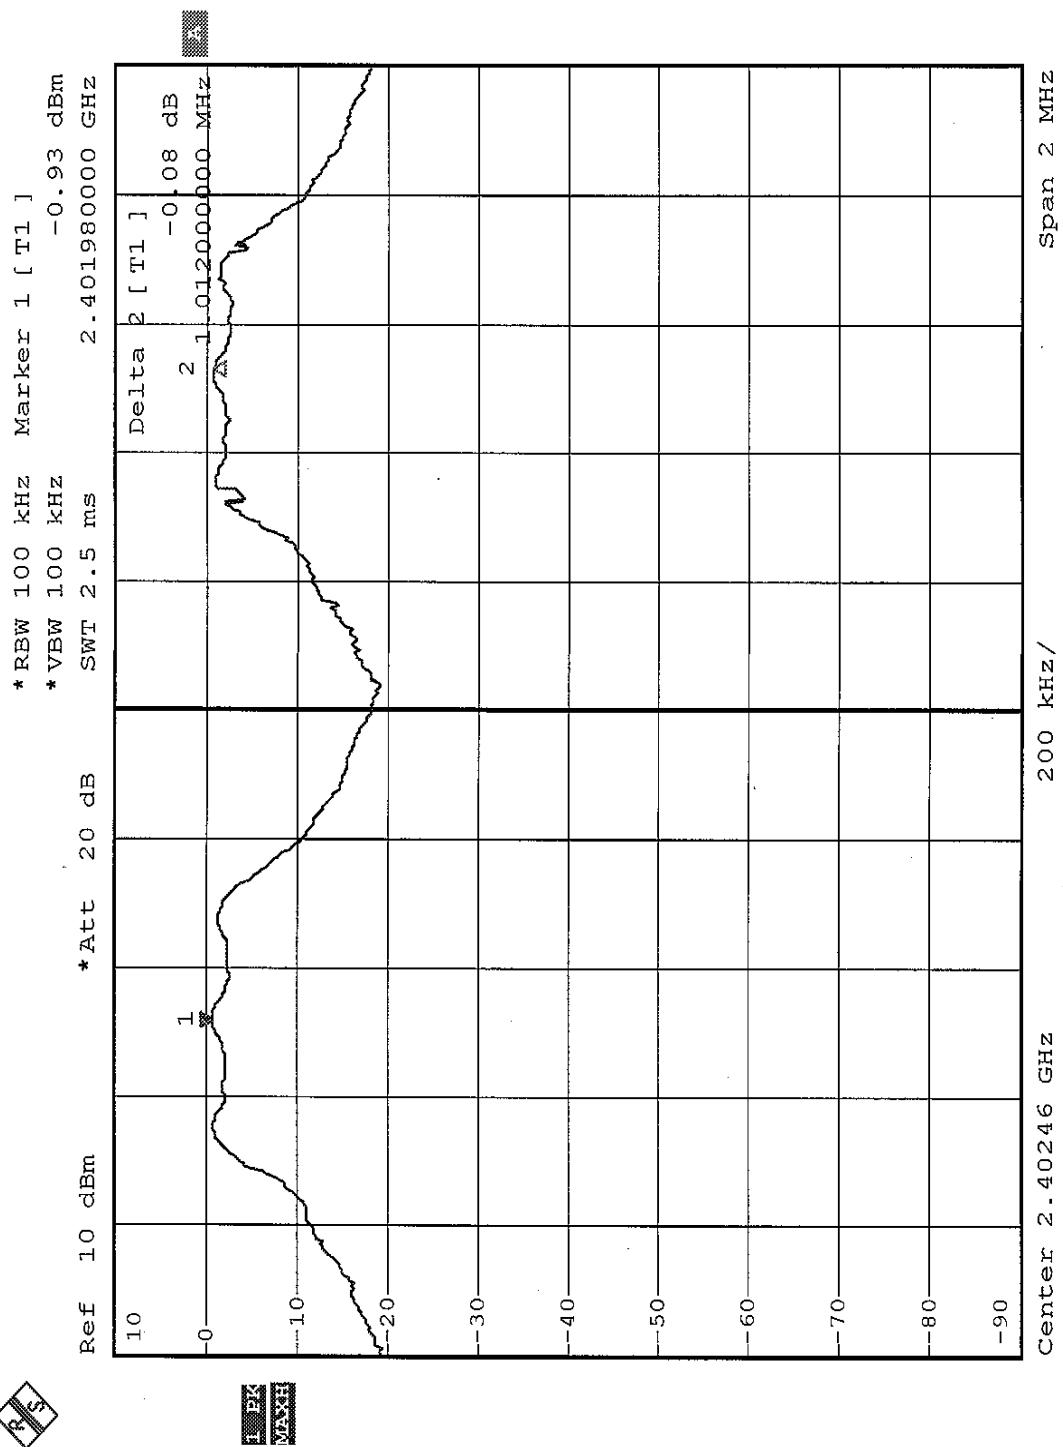

Channel 39

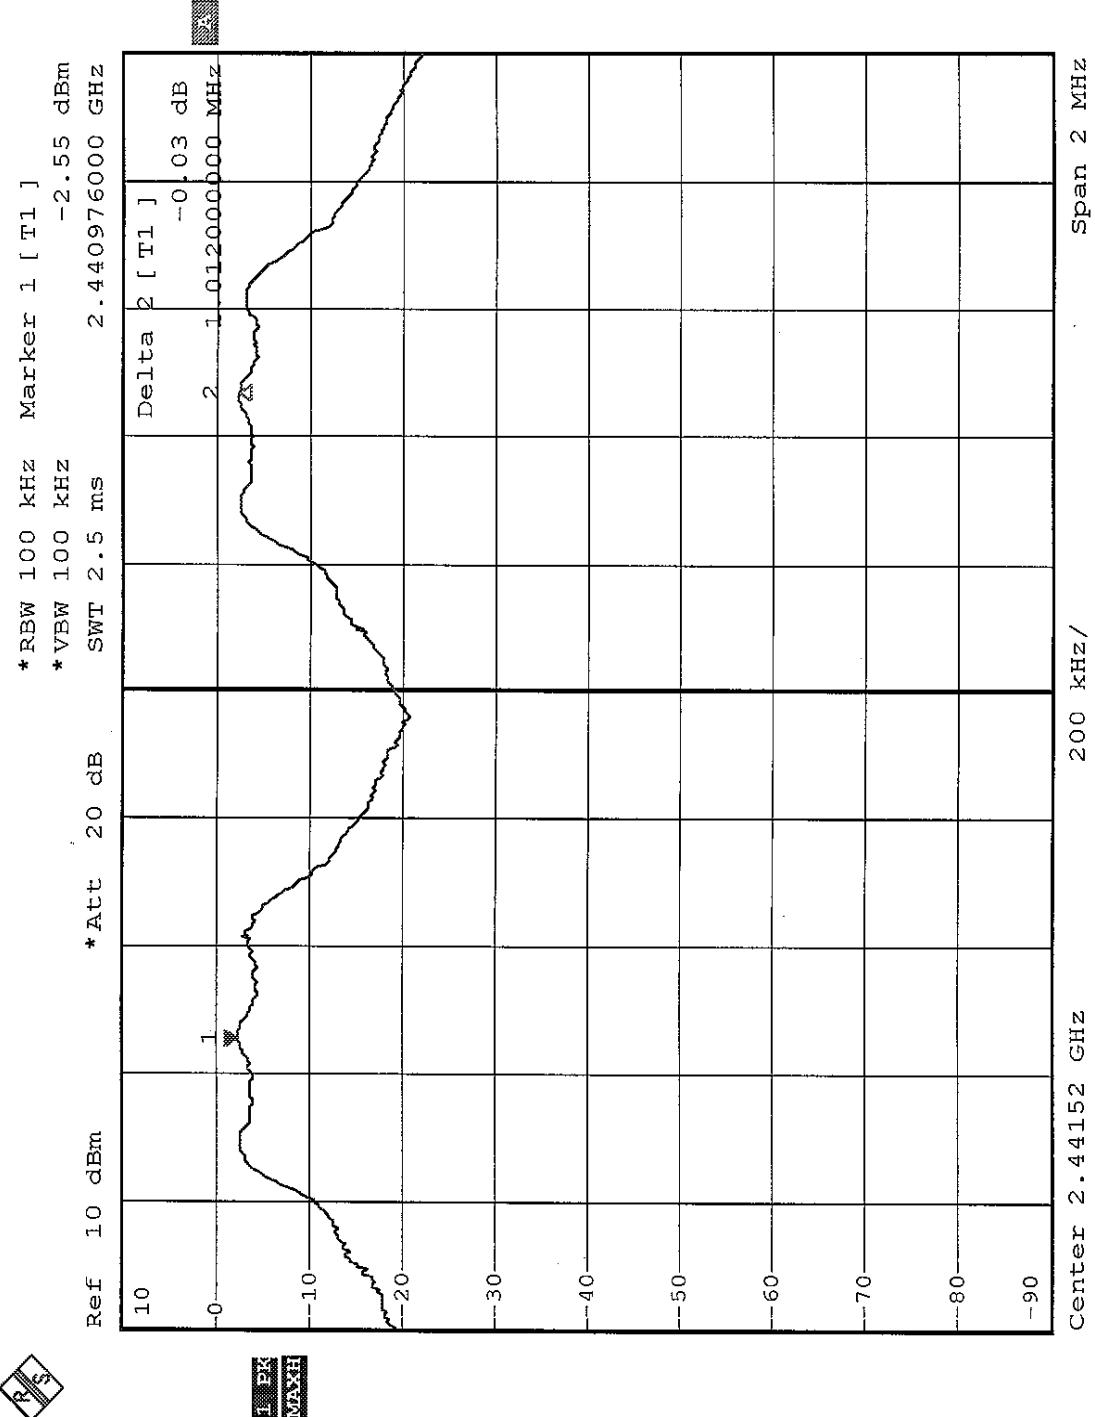

Channel 78

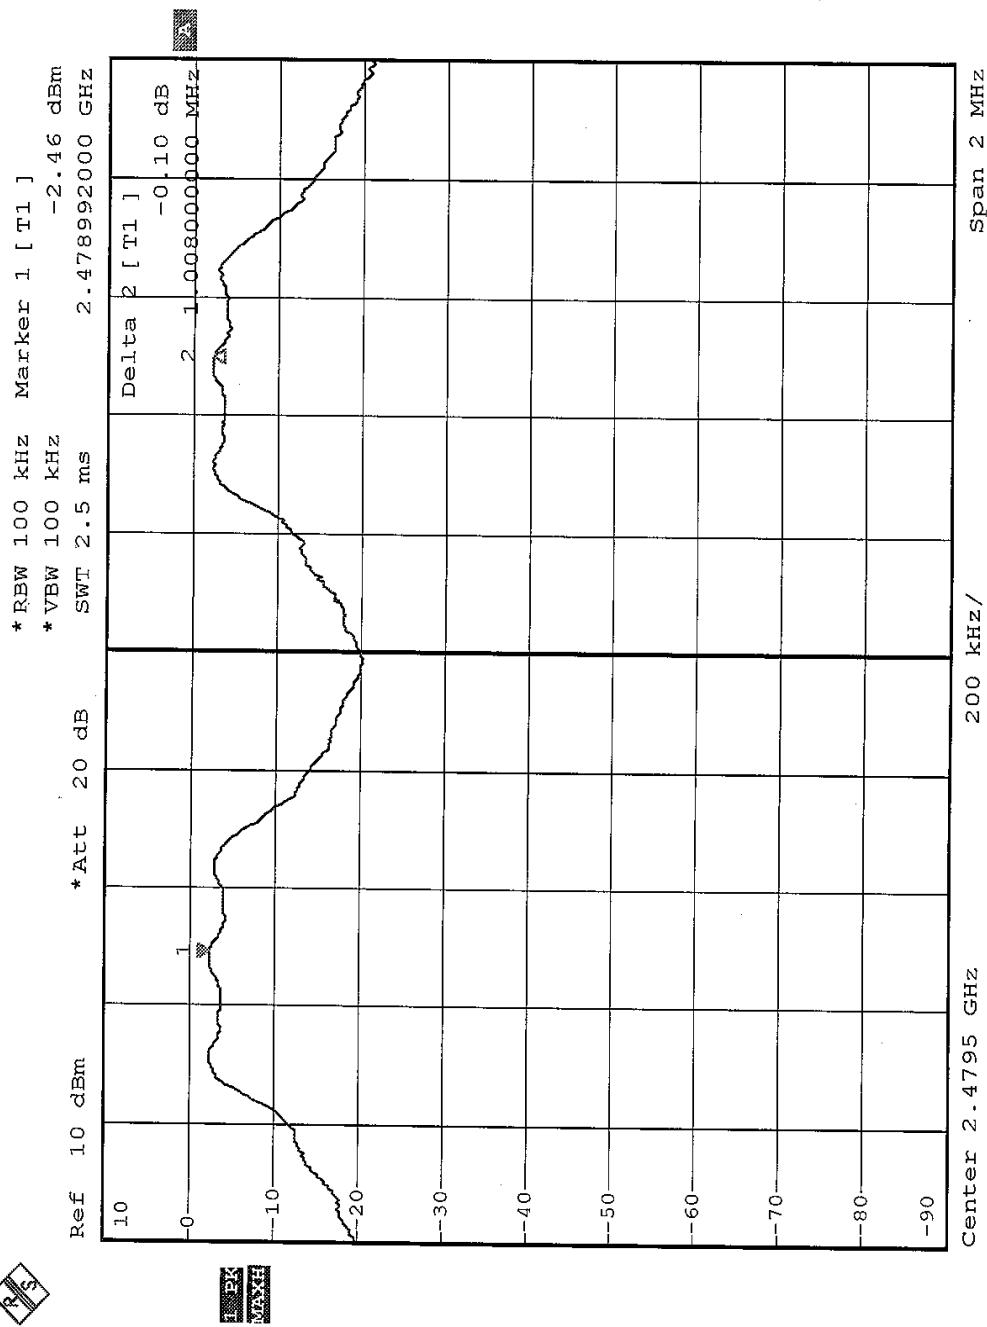

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Limit of Maximum Peak Output Power Measurement is 30dBm.

4.6.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
PK PWR MTR SINGLE	E4416A	GB41291763	July 24, 2004
PEAK AND AVERAGE POWER SENSOR	E9327A	US40441181	June 4, 2004

NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURES

The EUT was connected to the peak power meter, and measured the output power.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

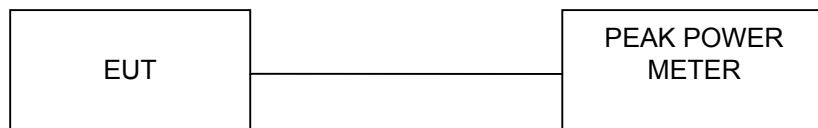

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	-0.65	30	PASS
39	2441	-2.26	30	PASS
78	2480	-2.12	30	PASS

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8594E	3911A07465	July 07, 2004
* HP Preamplifier	8447D	2432A03504	June 10, 2004
HP Preamplifier	8449B	3008A01201	Dec. 11, 2004
* HP Preamplifier	8449B	3008A01292	Aug. 11, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Jun. 26, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
*Schwarzbeck Antenna	VULB9168	137	Apr. 03, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	June 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
*ADT. Turn Table	TT100	0306	NA
*ADT. Tower	AT100	0306	NA
*Software	ADT_Radiated_V5.14	NA	NA
*TIMES RF cable	LL142	CABLE-CH6-01	Apr. 30, 2004

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*” = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Chamber No. 6.

4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

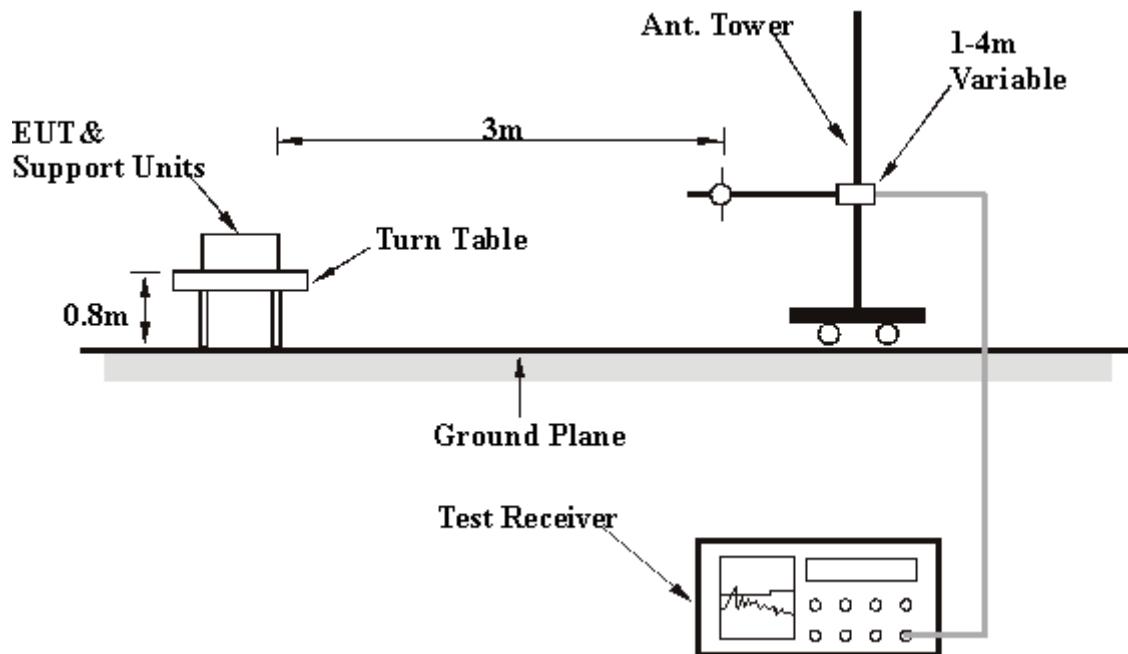

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 TEST RESULTS

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Below1000 MHz
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 991 hPa	DETECTOR FUNCTION	Quasi-Peak
		TEST MODE	2
TESTED BY: Steven Lu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	213.22	32.03 QP	43.50	-11.47	2.00 H	70	20.19	11.85
2	261.72	37.78 QP	46.00	-8.22	1.00 H	46	24.07	13.71
3	301.60	35.04 QP	46.00	-10.96	1.00 H	352	19.91	15.13
4	327.47	34.76 QP	46.00	-11.24	1.00 H	280	18.94	15.82
5	337.17	33.70 QP	46.00	-12.30	1.00 H	226	17.62	16.08
6	394.29	30.38 QP	46.00	-15.62	1.00 H	172	12.82	17.56
7	529.01	30.38 QP	46.00	-15.62	1.50 H	304	9.72	20.65
8	541.94	29.83 QP	46.00	-16.17	1.50 H	262	8.89	20.94
9	577.51	32.09 QP	46.00	-13.91	1.50 H	46	10.16	21.93
10	751.03	33.61 QP	46.00	-12.39	1.00 H	34	8.25	25.36
11	816.78	31.99 QP	46.00	-14.01	1.00 H	262	6.19	25.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.87	33.56 QP	40.00	-6.44	2.00 V	82	20.06	13.50
2	261.72	37.75 QP	46.00	-8.25	1.50 V	352	24.05	13.71
3	283.28	35.58 QP	46.00	-10.42	2.00 V	184	20.87	14.71
4	327.47	36.67 QP	46.00	-9.33	1.50 V	10	20.85	15.82
5	359.80	32.21 QP	46.00	-13.79	1.50 V	28	15.54	16.67
6	541.94	30.28 QP	46.00	-15.72	1.50 V	160	9.34	20.94
7	557.03	31.99 QP	46.00	-14.01	1.50 V	166	10.66	21.33
8	577.51	34.25 QP	46.00	-11.75	1.00 V	46	12.31	21.93
9	816.78	31.91 QP	46.00	-14.09	1.00 V	112	6.12	25.79
10	913.78	33.11 QP	46.00	-12.89	2.00 V	40	5.81	27.30

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor = Ant. Factor + Cable loss
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
MODE	CHANNEL 0	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 991 hPa		TESTED BY: Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1200.00	53.91 PK	74.00	-20.09	1.16 H	32	24.95	28.96
1	1200.00	22.91 AV	54.00	-30.09	1.16 H	32	-5.05	28.96
2	*2402.00	84.72 PK			1.00 H	360	53.23	31.49
2	*2402.00	54.72 AV			1.00 H	360	23.23	31.49
3	4804.00	53.55 PK	74.00	-20.45	1.03 H	312	15.73	37.83
3	4804.00	23.55 AV	54.00	-30.45	1.03 H	312	-14.28	37.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1200.00	51.39 PK	74.00	-22.61	1.06 V	50	22.43	28.96
1	1200.00	21.39 AV	54.00	-32.61	1.06 V	50	-7.57	28.96
2	*2402.00	90.81 PK			1.26 V	8	59.32	31.49
2	*2402.00	60.81 AV			1.26 V	8	29.32	31.49
3	4804.00	54.24 PK	74.00	-19.76	1.06 V	332	16.42	37.83
3	4804.00	24.24 AV	54.00	-29.76	1.06 V	332	-13.59	37.83

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor = Ant. Factor + Cable loss
3. Margin value = Emission level - Limit value
4. “*”: Fundamental frequency
5. The other emission levels were very low against the limit.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625^5 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
MODE	Channel 39	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 991 hPa		TESTED BY: Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1219.95	52.94 PK	74.00	-21.06	1.12 H	30	24.01	28.93
1	1219.95	22.94 AV	54.00	-31.96	1.12 H	30	-6.02	28.93
2	*2441.00	81.49 PK			1.13 H	335	49.95	31.54
2	*2441.00	51.49 AV			1.13 H	335	19.95	31.54
3	4882.00	54.20 PK	74.00	-19.80	1.00 H	44	16.25	37.95
3	4882.00	24.20 AV	54.00	-29.80	1.00 H	44	-13.75	37.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1219.90	50.95 PK	74.00	-23.05	1.13 V	97	22.02	28.93
2	*2441.00	85.27 PK			1.08 V	34	53.73	31.54
2	*2441.00	55.27 AV			1.08 V	34	23.73	31.54
3	4882.00	54.18 PK	74.00	-19.82	1.00 V	300	16.23	37.95
3	4882.00	24.18 AV	54.00	-29.80	1.00 V	300	-13.77	37.95

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor = Ant. Factor + Cable loss
3. Margin value = Emission level - Limit value
4. “*”: Fundamental frequency
5. The other emission levels were very low against the limit.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625^5 per 247 ms per channel.
Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	Class 2 Bluetooth Headset	MODEL	FROKBT0001
MODE	Channel 78	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1239.51	54.22 PK	74.00	-19.78	1.08 H	28	25.32	28.90
1	1239.51	24.22 AV	54.00	-29.78	1.08 H	28	-4.68	28.90
2	*2480.00	78.37 PK			1.27 H	11	46.78	31.59
2	*2480.00	48.37 AV			1.27 H	11	16.78	31.59
3	4960.00	54.16 PK	74.00	-19.84	1.14 H	313	16.08	38.08
3	4960.00	24.16 AV	54.00	-29.84	1.14 H	313	-13.92	38.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1239.50	50.69 PK	74.00	-23.31	1.22 V	103	21.79	28.90
2	*2480.00	83.65 PK			1.10 V	56	52.06	31.59
2	*2480.00	53.65 AV			1.10 V	56	22.06	31.59
3	4960.00	54.66 PK	74.00	-19.34	1.32 V	316	16.58	38.08
3	4960.00	24.66 AV	54.00	-29.34	1.32 V	316	-13.42	38.08

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor = Ant. Factor + Cable loss
3. Margin value = Emission level - Limit value
4. “*”: Fundamental frequency
5. The other emission levels were very low against the limit.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625^*5 per 247 ms per channel.
Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RB).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.8.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE1: The band edge emission plot on the following first page shows 57.27dB delta between carrier maximum power and local maximum emission in restrict band (2.3738Hz). The emission of carrier strength list in the test result of channel 0 at the item 4.7.6 is 60.81dBuV/m, so the maximum field strength in restrict band is $60.81 - 57.27 = 3.54$ dBuV/m which is under 54 dBuV/m limit.

NOTE2: The band edge emission plot on the following second page shows 53.76dB delta between carrier maximum power and local maximum emission in restrict band (2.4840GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.6 is 53.65dBuV/m, so the maximum field strength in restrict band is $53.65 - 53.76 = -0.11$ dBuV/m which is under 54 dBuV/m limit.

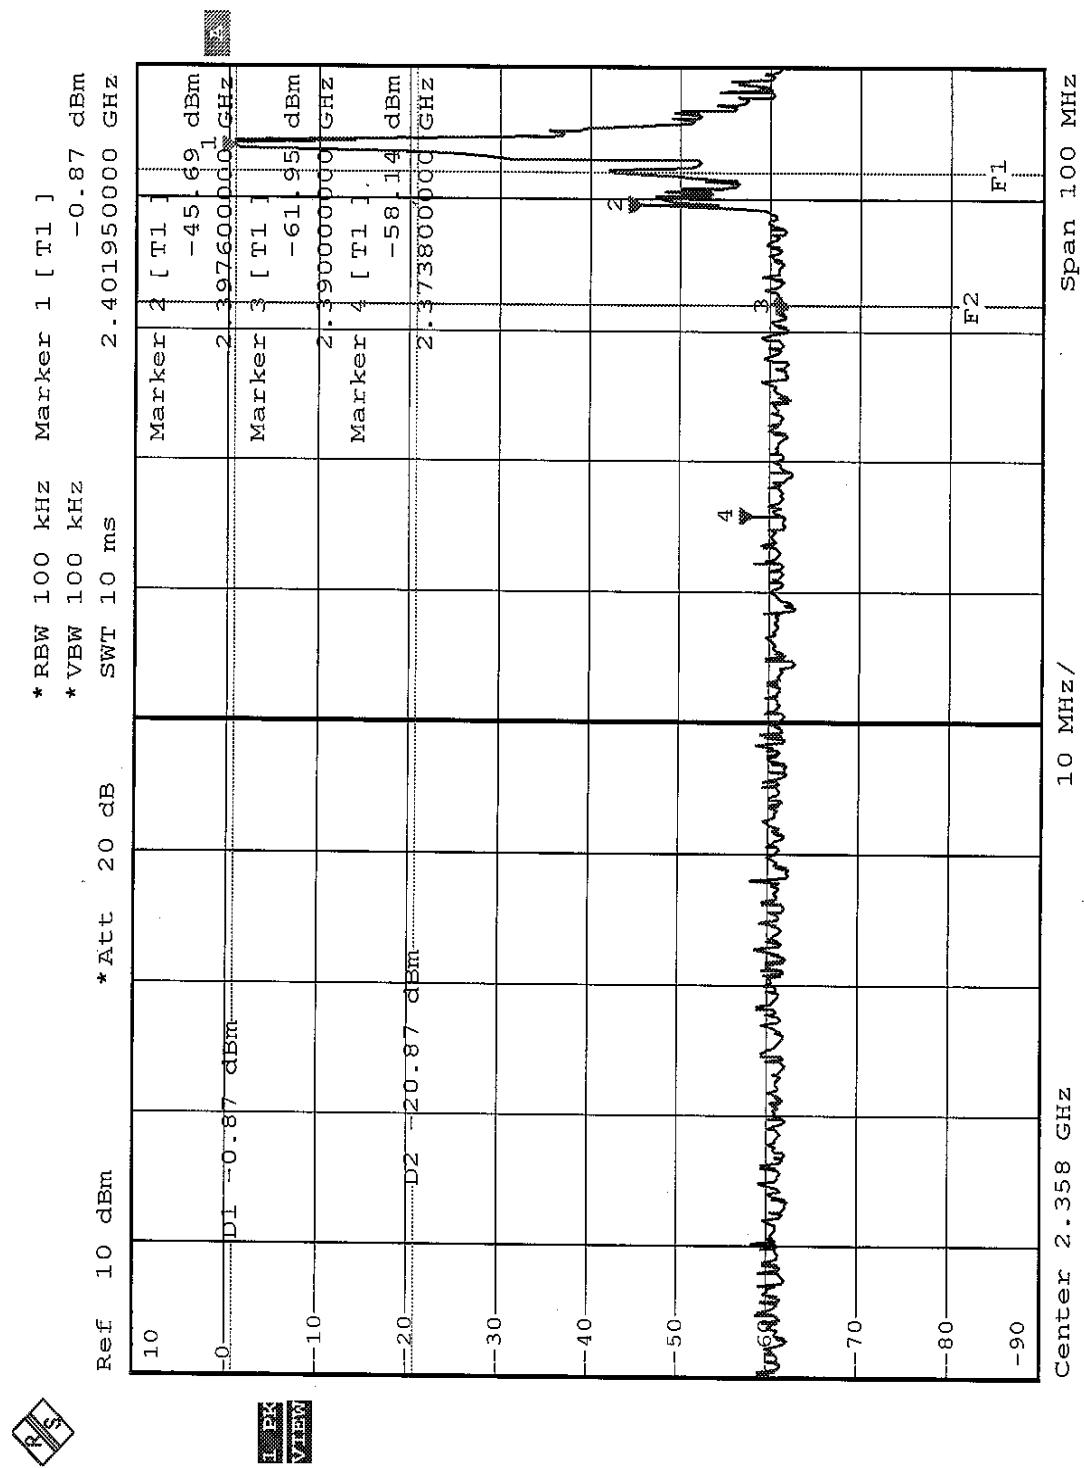

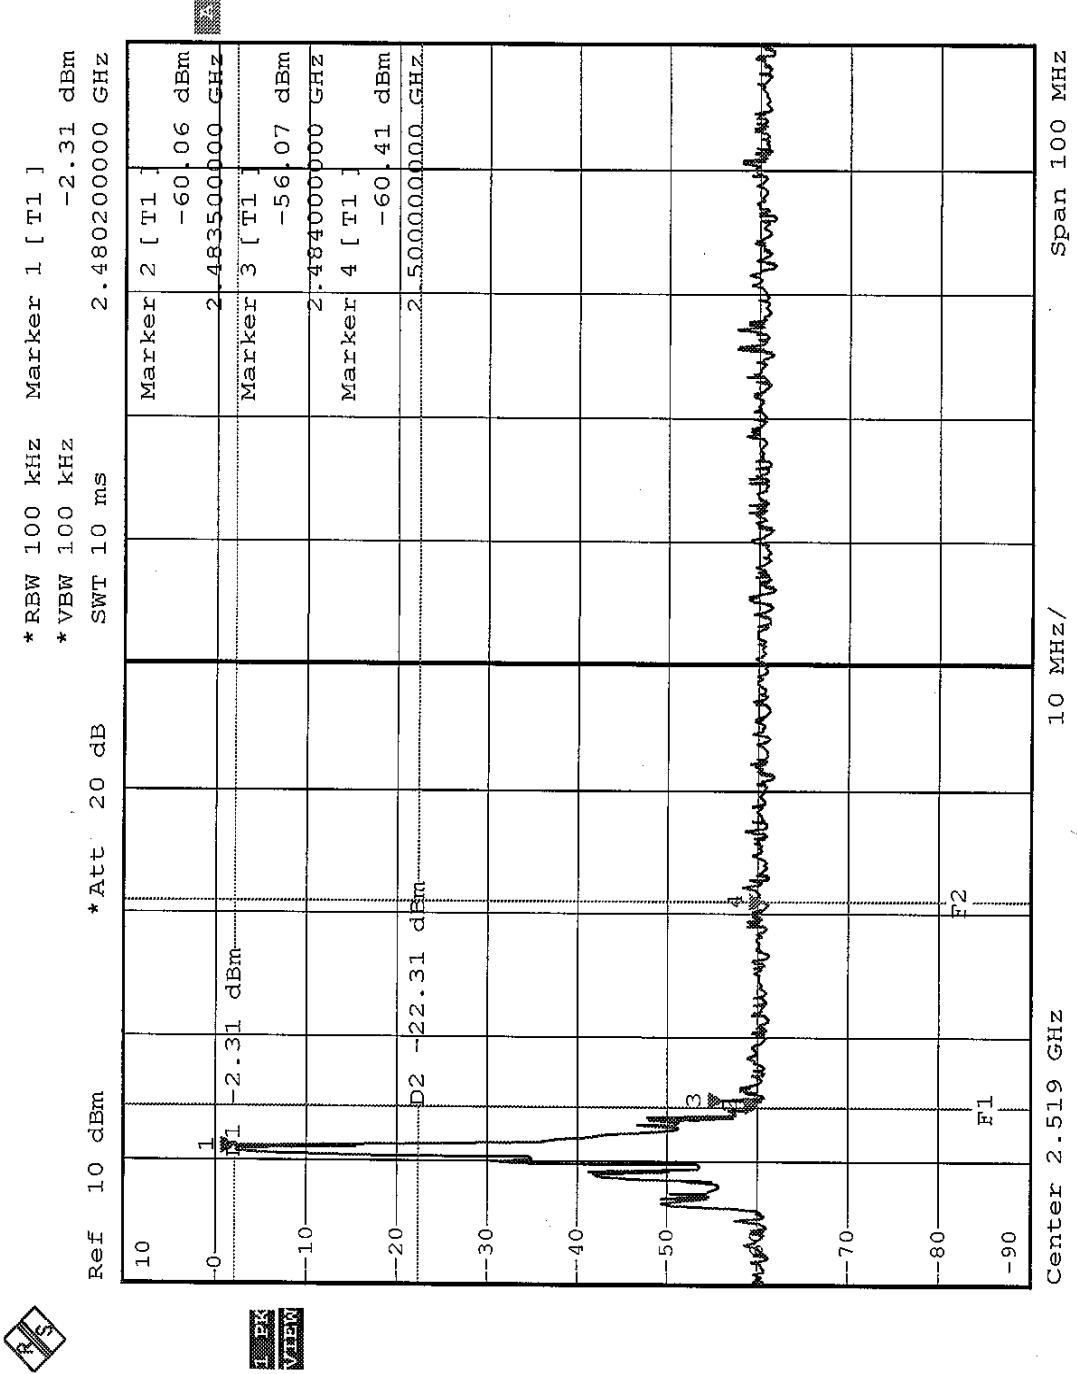



4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Chip Antenna. There is no Antenna connector. The maximum Gain of this antenna is only 4.0dBi.


5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



(Mode 1)



RADIATED EMISSION TEST
(Mode 1)

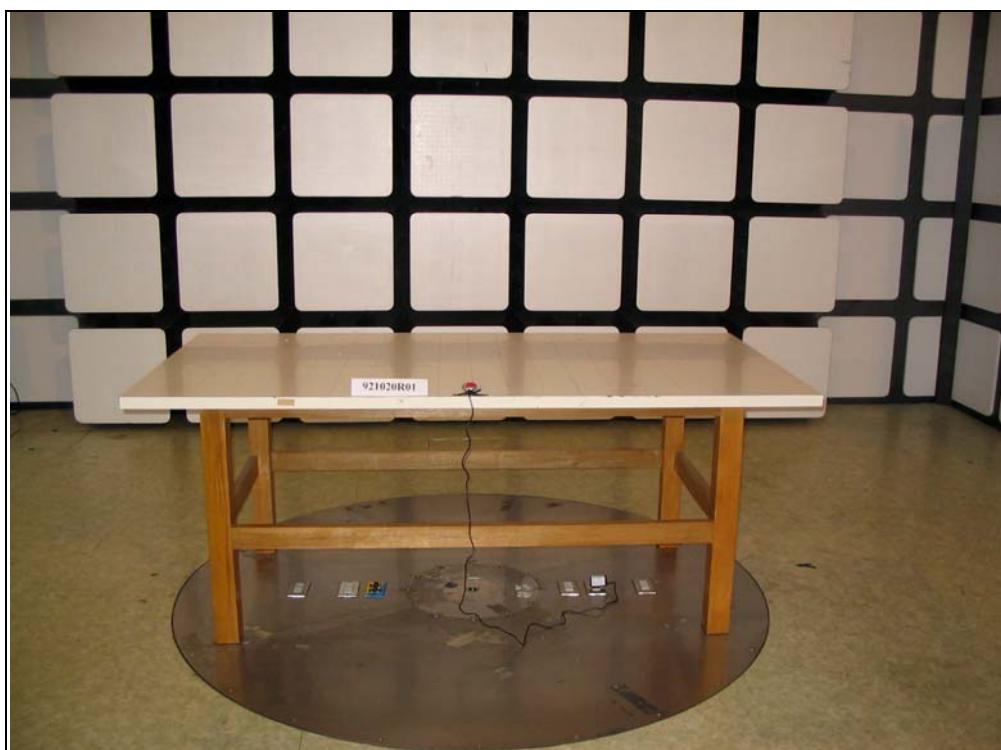

(Mode 2)

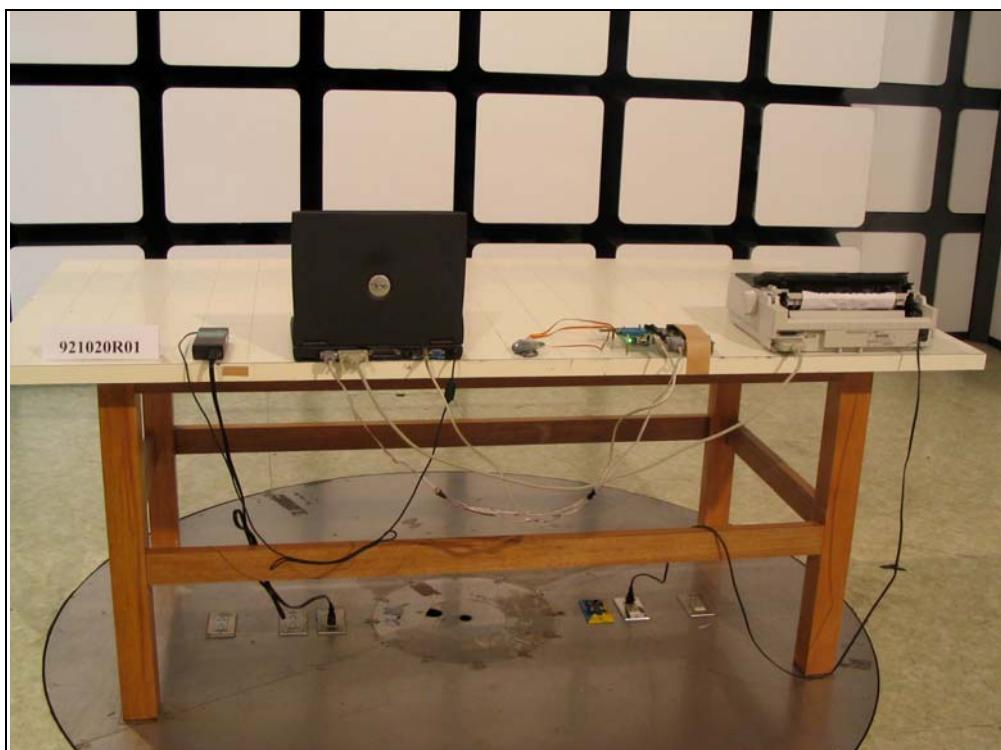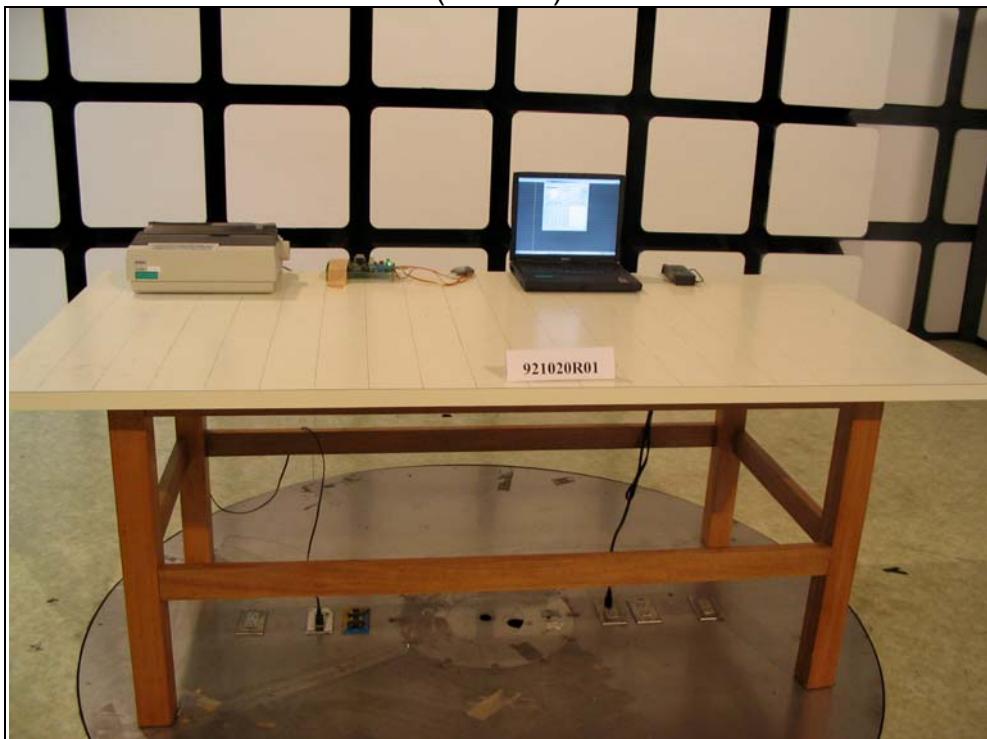



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:
Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.