

**FCC PART 15, SUBPART B and SUBPART E  
TEST REPORT***for***EMULATION ENGINE****MODEL: EE a/b/g**

Prepared for

**COMMUNICATION MACHINERY CORPORATION  
402 E. GUTIERREZ STREET  
SANTA BARBARA, CALIFORNIA 93101**Prepared by: *Kyle Fujimoto***KYLE FUJIMOTO**Approved by: *Scott McCutchan***SCOTT McCUTCHAN****COMPATIBLE ELECTRONICS INC.  
114 OLINDA DRIVE  
BREA, CALIFORNIA 92823  
(714) 579-0500**

DATE: AUGUST 5, 2002

|       | REPORT<br>BODY | APPENDICES |   |   |    |    | TOTAL |
|-------|----------------|------------|---|---|----|----|-------|
|       |                | A          | B | C | D  | E  |       |
| PAGES | 20             | 2          | 2 | 2 | 18 | 18 | 62    |

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

**Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500****Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600****Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700****Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400**

---

**TABLE OF CONTENTS**

| <b>Section / Title</b>                                 | <b>PAGE</b> |
|--------------------------------------------------------|-------------|
| <b>GENERAL REPORT SUMMARY</b>                          | <b>4</b>    |
| <b>SUMMARY OF TEST RESULTS</b>                         | <b>5</b>    |
| <b>1. PURPOSE</b>                                      | <b>6</b>    |
| <b>2. ADMINISTRATIVE DATA</b>                          | <b>7</b>    |
| 2.1 Location of Testing                                | 7           |
| 2.2 Traceability Statement                             | 7           |
| 2.3 Cognizant Personnel                                | 7           |
| 2.4 Date Test Sample was Received                      | 7           |
| 2.5 Disposition of the Test Sample                     | 7           |
| 2.6 Abbreviations and Acronyms                         | 7           |
| <b>3. APPLICABLE DOCUMENTS</b>                         | <b>8</b>    |
| <b>4. Description of Test Configuration</b>            | <b>9</b>    |
| 4.1 Description of Test Configuration - EMI            | 9           |
| 4.1.1 Cable Construction and Termination               | 10          |
| <b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b> | <b>11</b>   |
| 5.1 EUT and Accessory List                             | 11          |
| 5.2 EMI Test Equipment                                 | 12          |
| <b>6. TEST SITE DESCRIPTION</b>                        | <b>13</b>   |
| 6.1 Test Facility Description                          | 13          |
| 6.2 EUT Mounting, Bonding and Grounding                | 13          |
| <b>7. CHARACTERISTICS OF THE TRANSMITTER</b>           | <b>14</b>   |
| 7.1 Antenna Gain                                       | 14          |
| <b>8. Test Procedures</b>                              | <b>15</b>   |
| 8.1 RF Emissions                                       | 15          |
| 8.1.1 Conducted Emissions Test                         | 15          |
| 8.1.2 Radiated Emissions (Spurious and Harmonics) Test | 16          |
| 8.2 Emission Bandwidth – 26 dB for UNII Devices        | 18          |
| 8.3 Peak Power for UNII Devices                        | 18          |
| 8.4 Peak Power Spectral Density for UNII Devices       | 18          |
| 8.5 Peak Excursion for UNII Devices                    | 19          |
| 8.6 Frequency Stability for UNII Devices               | 19          |
| 8.7 RF Band Edges                                      | 19          |
| <b>9. CONCLUSIONS</b>                                  | <b>20</b>   |

**LIST OF APPENDICES**

| APPENDIX | TITLE                                                                                                                                                                               |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A        | Laboratory Recognitions                                                                                                                                                             |
| B        | Modifications to the EUT                                                                                                                                                            |
| C        | Additional Models Covered Under This Report                                                                                                                                         |
| D        | Diagrams, Charts, and Photos <ul style="list-style-type: none"><li>• Test Setup Diagrams</li><li>• Radiated Emissions Photos</li><li>• Antenna and Effective Gain Factors</li></ul> |
| E        | Data Sheets                                                                                                                                                                         |

**LIST OF FIGURES**

| FIGURE | TITLE                            |
|--------|----------------------------------|
| 1      | Conducted Emissions Test Setup   |
| 2      | Plot Map And Layout of Test Site |

## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST, or any other agency of the U.S. Government.

Device Tested: Emulation Engine  
Model: EE a/b/g  
S/N: N/A

Product Description: See Expository Statement.

Modifications: The EUT was not modified during the testing.

Manufacturer: Communication Machinery Corporation  
402 E. Gutierrez Street  
Santa Barbara, California 93101

Test Dates: July 24, 28, and 29, 2003

Test Specifications: EMI requirements  
CFR Title 47, Part 15, Subpart B; and Subpart E

Test Procedure: ANSI C63.4: 2001

Test Deviations: The test procedure was not deviated from during the testing.

## SUMMARY OF TEST RESULTS

| TEST | DESCRIPTION                                                                                             | RESULTS                                                                                                                           |
|------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| 1    | Conducted RF Emissions, 150 kHz – 30 MHz                                                                | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart E   |
| 2    | Spurious Radiated RF Emissions, 30 MHz – 1000 MHz                                                       | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart E   |
| 3    | Spurious Radiated RF Emissions, 10 kHz – 30 MHz and 1000 MHz – 40000 MHz                                | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart E   |
| 4    | Fundamental and Emissions produced by the intentional radiator in non-restricted bands, 10 kHz – 40 GHz | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart E   |
| 5    | Emissions produced by the intentional radiator in restricted bands, 10 kHz – 40 GHz                     | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart E   |
| 6    | Emission Bandwidth – 26 dB for UNII devices                                                             | This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: <b>MCLJ07H06903</b> . |
| 8    | Peak Power for UNII devices                                                                             | This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: <b>MCLJ07H06903</b> . |
| 9    | Peak Power Spectral Density for UNII devices                                                            | This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: <b>MCLJ07H06903</b> . |
| 10   | Peak Excursion for UNII devices                                                                         | This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: <b>MCLJ07H06903</b> . |
| 11   | Frequency Stability                                                                                     | This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: <b>MCLJ07H06903</b> . |

## 1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Emulation Engine Model: EE a/b/g. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 2001. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class B specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart E.

Note: For the unintentional radiator portion of the test, the EUT was within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B.

Note: The 5.15–5.35 GHz band is applicable to this report; other bands of operation (2.4 and 5.8 GHz) are documented in the Compatible Electronics, Inc. report number **B30729D1**.

## **2. ADMINISTRATIVE DATA**

### **2.1 Location of Testing**

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

### **2.2 Traceability Statement**

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### **2.3 Cognizant Personnel**

Communication Machinery Corporation

|               |                      |
|---------------|----------------------|
| Omar F. Tarzi | Senior Test Engineer |
| Larry Green   | President            |

Compatible Electronics, Inc.

|                 |               |
|-----------------|---------------|
| Kyle Fujimoto   | Test Engineer |
| Scott McCutchan | Lab Manager   |

### **2.4 Date Test Sample was Received**

The test sample was received on July 23, 2003.

### **2.5 Disposition of the Test Sample**

The sample was returned to Communication Machinery Corporation on July 29, 2003.

### **2.6 Abbreviations and Acronyms**

The following abbreviations and acronyms may be used in this document.

|      |                                      |
|------|--------------------------------------|
| RF   | Radio Frequency                      |
| EMI  | Electromagnetic Interference         |
| EUT  | Equipment Under Test                 |
| P/N  | Part Number                          |
| S/N  | Serial Number                        |
| HP   | Hewlett Packard                      |
| ITE  | Information Technology Equipment     |
| CML  | Corrected Meter Limit                |
| LISN | Line Impedance Stabilization Network |

### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

| SPEC                                  | TITLE                                                                                                                                   |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| FCC Title 47,<br>Part 15<br>Subpart C | FCC Rules - Radio frequency devices (including digital devices) –<br>Intentional Radiators                                              |
| ANSI C63.4<br>2001                    | Methods of measurement of radio-noise emissions from low-voltage<br>electrical and electronic equipment in the range of 9 kHz to 40 GHz |
| FCC Title 47,<br>Part 15<br>Subpart B | FCC Rules - Radio frequency devices (including digital devices) –<br>Unintentional Radiators                                            |

#### 4. DESCRIPTION OF TEST CONFIGURATION

##### 4.1 Description of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

**For the intentional radiator portion of the test** - The Emulation Engine Model: EE a/b/g (EUT) was connected to the laptop, AC Adapter, and data generator via its serial, power, and Ethernet ports, respectively. The laptop was also connected to a printer and AC Adapter via its parallel and power ports, respectively. The data generator was also connected to the computer via its Ethernet port. The computer was also connected to a keyboard, mouse, monitor, and access point via its keyboard, mouse, monitor, and Ethernet ports, respectively. The EUT was continuously monitoring the access point, which causes the EUT to continuously transmit and receive to and from the access point.

**For the digital portion of the test** - The Emulation Engine Model: EE a/b/g (EUT) was connected to the laptop, AC Adapter, and data generator via its serial, power, and Ethernet ports, respectively. The laptop was also connected to a printer and AC Adapter via its parallel and power ports, respectively. The data generator was also connected to the computer and access point via its Ethernet ports. The computer was also connected to a keyboard, mouse, and monitor via its keyboard, mouse, and monitor ports, respectively. The EUT was continuously transmitting and receiving data packets to and from the access point.

**Note:** The data generator, computer, and access points were located inside the building, approximately 50 feet away from the test site.

The final radiated as well as the conducted data was taken in the mode above. Please see Appendix E for the data sheets.

#### **4.1.1 Cable Construction and Termination**

- Cable 1** (For Tx Mode Only) This is a 3 meter unshielded cable connecting the 802.11 a/b access point to the computer. It has an RJ-45 connector at each end.
- Cable 2** (For Tx Mode Only) This is a 3 meter unshielded cable connecting the 802.11 g access point to the computer. It has an RJ-45 connector at each end.
- Cable 3** This is a 2 meter braid and foil shielded cable connecting the computer to the monitor. It has a D-15 pin metallic connector at the computer end and is hard wired into the monitor. The cable was bundled to a length of 1 meter. The shield of the cable was grounded to the chassis via the connector.
- Cable 4** This is a 4 foot foil shielded cable connecting the computer to the keyboard. It has a 6 pin mini DIN metallic connector at the computer end and is hard wired into the keyboard. The shield of the cable was grounded to the chassis via the connector.
- Cable 5** This is a 6 foot foil shielded cable connecting the computer to the mouse. It has a 6 pin mini DIN metallic connector at the computer end and is hard wired into the mouse. The shield of the cable was grounded to the chassis via the connector.
- Cable 6** This is a 6 foot unshielded cable connecting the 802.11 a/b access point to the AC Adapter. It has a 1/8 inch power connector the 802.11 a/b access point end and is hard wired into the AC Adapter.
- Cable 7** This is a 6 foot unshielded cable connecting the 802.11 g access point to the AC Adapter. It has a 1/8 inch power connector the 802.11 g access point end and is hard wired into the AC Adapter.
- Cable 8** This is a 2 meter unshielded cable connecting the laptop to the AC Adapter. It has a 1/8 inch power connector the laptop end and is hard wired into the AC Adapter. The cable was bundled to a length of 1 meter.
- Cable 9** This is a 2 meter unshielded cable connecting the EUT to the AC Adapter. It has a 1/8 inch power connector the EUT end and is hard wired into the AC Adapter. The cable was bundled to a length of 1 meter.
- Cable 10** This is a 2 meter braid and foil shielded cable connecting the EUT to the computer. It has a D-9 pin metallic connector at each end. The cable was bundled to a length of 1 meter. The shield of the cable was grounded to the chassis via the connectors.
- Cable 11** This is a 50 foot unshielded cable connecting the EUT to the data generator. It has an RJ-45 connector at each end.
- Cable 12** (For Digital Mode Only) This is a 3 meter unshielded cable connecting the 802.11 a/b access point to the data generator. It has an RJ-45 connector at each end.
- Cable 13** This is a 3 meter unshielded cable connecting the computer to the data generator. It has an RJ-45 connector at each end.

## 5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

### 5.1 EUT and Accessory List

| EQUIPMENT                         | MANUFACTURER                        | MODEL NUMBER  | SERIAL NUMBER | FCC ID                |
|-----------------------------------|-------------------------------------|---------------|---------------|-----------------------|
| EMULATION ENGINE (EUT)            | COMMUNICATION MACHINERY CORPORATION | EE a/b/g      | N/A           | <b>RCX-EE11ABG</b>    |
| 802.11g ACCESS POINT              | D-LINK                              | DWL-2000AP    | BN2Q134001624 | <b>KA25212G</b>       |
| 802.11a/b ACCESS POINT            | LINKSYS                             | WAP51AB       | MCG102B03982  | <b>PKW-WAP51AB</b>    |
| AC ADAPTER (for g ACCESS POINT)   | BOTHHAND ENTERPRISE, INC.           | M1-10S05      | N/A           | <b>DoC</b>            |
| AC ADAPTER (for a/b ACCESS POINT) | LINKSYS                             | AD512.5C      | N/A           | <b>DoC</b>            |
| COMPUTER                          | DELL                                | MCM           | CLFHF         | <b>DoC</b>            |
| KEYBOARD                          | HEWLETT PACKARD                     | FDA-104EB     | FDKB8025323   | <b>F4ZFDA-104EB</b>   |
| MOUSE                             | HEWLETT PACKARD                     | M-S34         | LZC83503353   | <b>DZL211029</b>      |
| MONITOR                           | HEWLETT PACKARD                     | D5258A        | N/A           | <b>C57FNFCMC1516X</b> |
| AC ADAPTER FOR EUT                | FSP GROUP, INC.                     | FSP013-1AD201 | H0 0102657    | <b>N/A</b>            |
| AC ADAPTER FOR LAPTOP             | COMPAQ                              | ADP-60BB      | 298297-001    | <b>N/A</b>            |
| LAPTOP                            | COMPAQ                              | 1456VQLIN     | 1V98CLS9A1J1  | <b>DoC</b>            |
| DATA GENERATOR                    | SPIRENT COMMUNICATION S             | SMARTBITS 200 | N/A           | <b>N/A</b>            |

**5.2 EMI Test Equipment**

| <b>EQUIPMENT<br/>TYPE</b>                       | <b>MANU-<br/>FACTURER</b> | <b>MODEL<br/>NUMBER</b> | <b>SERIAL<br/>NUMBER</b> | <b>CAL. DATE</b> | <b>CAL. DUE<br/>DATE</b> |
|-------------------------------------------------|---------------------------|-------------------------|--------------------------|------------------|--------------------------|
| Radiated Emissions<br>Manual Test –<br>Radiated | Compatible<br>Electronics | N/A                     | N/A                      | N/A              | N/A                      |
| Conducted Emissions<br>Test Program             | Compatible<br>Electronics | N/A                     | N/A                      | N/A              | N/A                      |
| Spectrum Analyzer –<br>Main Section             | Hewlett Packard           | 8566B                   | 2727A04757               | Nov. 12, 2002    | Nov. 12, 2003            |
| Spectrum Analyzer –<br>Display Section          | Hewlett Packard           | 85662A                  | 2648A15455               | Nov. 12, 2002    | Nov. 12, 2003            |
| Spectrum Analyzer –<br>Quasi-Peak Adapter       | Hewlett Packard           | 85650A                  | 3303A01688               | Nov. 12, 2002    | Nov. 12, 2003            |
| Preamplifier                                    | Com Power                 | PA-102                  | 1017                     | Jan. 2, 2003     | Jan. 2, 2004             |
| Biconical Antenna                               | Com Power                 | AB-100                  | 1548                     | Sept. 19, 2002   | Sept. 19, 2003           |
| Log Periodic Antenna                            | Com Power                 | AL-100                  | 16089                    | Oct. 4, 2002     | Oct. 4, 2003             |
| Computer                                        | Hewlett Packard           | D5251A 888              | US74458128               | N/A              | N/A                      |
| Harmonic Mixer                                  | Hewlett Packard           | 11970A                  | 3003A05460               | Mar. 14, 2002    | Mar. 14, 2004            |
| Monitor                                         | Hewlett Packard           | D5258A                  | DK74889705               | N/A              | N/A                      |
| Loop Antenna                                    | Com-Power                 | AL-130                  | 17070                    | June 19, 2002    | June 19, 2004            |
| Horn Antenna                                    | Antenna<br>Research       | DRG-118/A               | 1053                     | Jan. 13, 2002    | Jan. 13, 2004            |
| Horn Antenna                                    | Com-Power                 | MWH-2640/B              | 1011                     | Nov. 3, 2001     | Nov. 3, 2003             |
| Microwave<br>Preamplifier                       | Com-Power                 | PA-122                  | 25196                    | Jan. 10, 2003    | Jan. 10, 2004            |
| Amplifier                                       | Hewlett Packard           | 11975A                  | 2403A00202               | Mar. 14, 2002    | Mar. 14, 2004            |
| Harmonic Mixer                                  | Hewlett Packard           | 11970K                  | 3003A05460               | Mar. 14, 2002    | Mar. 14, 2004            |
| Microwave<br>Preamplifier                       | Com-Power                 | PA-840                  | 711013                   | Mar. 6, 2002     | Mar. 6, 2004             |
| Horn Antenna                                    | Com-Power                 | AH826                   | 0071957                  | Nov. 3, 2001     | Nov. 3, 2003             |


**6. TEST SITE DESCRIPTION****6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

**6.2 EUT Mounting, Bonding and Grounding**

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

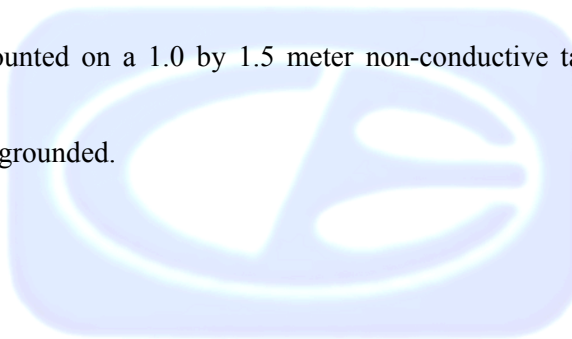

## **7. CHARACTERISTICS OF THE TRANSMITTER**

### **7.1 Antenna Gain**

The antenna has a gain of 5.0 dBi in the 5.15-5.35 GHz range.



## 8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 8.1 RF Emissions

#### 8.1.1 Conducted Emissions Test

The spectrum analyzer was used as a measuring meter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the spectrum analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 2001. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics conducted emissions software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

#### **Test Results:**

The EUT complies with the **Class B** limits of **CFR** Title 47, Part 15, Subpart B; and the limits of **CFR** Title 47, Part 15, Subpart C, Section 15.207 for conducted emissions.

### 8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies above 1 GHz. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps.

The quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets.

The frequencies above 1 GHz were averaged manually by narrowing the video filter down to 10 Hz and putting the sweep time on AUTO on the spectrum analyzer to keep the amplitude reading calibrated.

The measurement bandwidths and transducers used for the radiated emissions test were:

| FREQUENCY RANGE   | EFFECTIVE MEASUREMENT BANDWIDTH | TRANSDUCER           |
|-------------------|---------------------------------|----------------------|
| 10 kHz to 150 kHz | 200 Hz                          | Active Loop Antenna  |
| 150 kHz to 30 MHz | 9 kHz                           | Active Loop Antenna  |
| 30 MHz to 300 MHz | 120 kHz                         | Biconical Antenna    |
| 300 MHz to 1 GHz  | 120 kHz                         | Log Periodic Antenna |
| 1 GHz to 40 GHz   | 1 MHz                           | Horn Antenna         |

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2001. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT by the Radiated Emission Manual Test software. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

### **Radiated Emissions (Spurious and Harmonics) Test (con't)**

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance.

For the 18 GHz – 26.5 GHz span, the Hewlett Packard 11970K Harmonic Mixer and the Hewlett Packard 11975A Amplifier were used to allow the spectrum analyzer to scan from 18 GHz to 26.5 GHz.

For the 26.5 GHz – 40 GHz span, the Hewlett Packard 11970A Harmonic Mixer and the Hewlett Packard 11975A Amplifier were used to allow the spectrum analyzer to scan from 26.5 GHz to 40 GHz.

## 8.2 Emission Bandwidth – 26 dB for UNII Devices

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

### Test Results:

This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: **MCLJ07H06903**.

## 8.3 Peak Power for UNII Devices

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

### Test Results:

This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: **MCLJ07H06903**.

## 8.4 Peak Power Spectral Density for UNII Devices

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

### Test Results:

This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: **MCLJ07H06903**.

## 8.5 Peak Excursion for UNII Devices

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. Since method #1 was used for the peak power measurements, method #1 is used for the second PPSD trace.

### Test Results:

This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: **MCLJ07H06903**.

## 8.6 Frequency Stability for UNII Devices

This test was not performed because the RF Module inside the EUT was approved as a module under the FCC-ID: **MCLJ07H06903**.

## 8.7 RF Band Edges

The RF band edges were taken at the 5150 MHz and 5350 MHz. The readings taken were also averaged manually by narrowing the video filter down to 10 Hz and putting the sweep time on AUTO on the spectrum analyzer to keep the amplitude reading calibrated. Data sheets are included in Appendix E, which compares the reading from the spectrum analyzer to the spec limit.

### Test Results:


The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart E. The RF power at the band edges at 5150 MHz and 5350 MHz meet the limits of section FCC Title 47, Part 15, Subpart C, Section 15.209. Please see the data sheets located in Appendix E.

## 9. CONCLUSIONS

The Emulation Engine meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B and Subpart E.

Note: For the unintentional radiator portion of the test, the EUT was within the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B.

Note: The 5.15–5.35 GHz band is applicable to this report; other bands of operation (2.4 and 5.8 GHz) are documented in the Compatible Electronics, Inc. report number **B30729D1**.

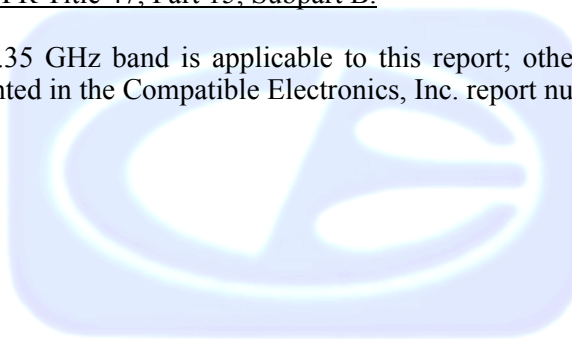



**APPENDIX A**

***LABORATORY RECOGNITIONS***

---

## ***LABORATORY RECOGNITIONS***

**Compatible Electronics has the following agency accreditations:**

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

**Compatible Electronics is recognized or on file with the following agencies:**

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)



**APPENDIX B**


***MODIFICATIONS TO THE EUT***

## MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B and Subpart E specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.

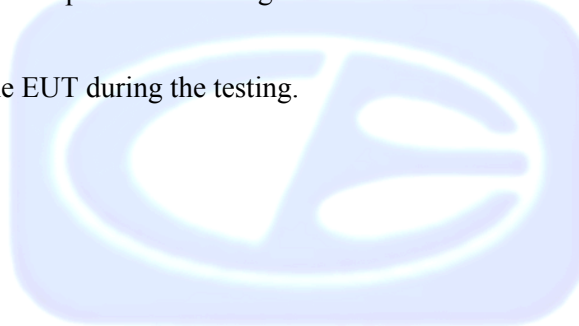



**APPENDIX C**

***ADDITIONAL MODELS COVERED  
UNDER THIS REPORT***


## **ADDITIONAL MODELS COVERED UNDER THIS REPORT**

USED FOR THE PRIMARY TEST

Emulation Engine  
Model: EE a/b/g  
S/N: N/A

There were no additional models covered under this report.




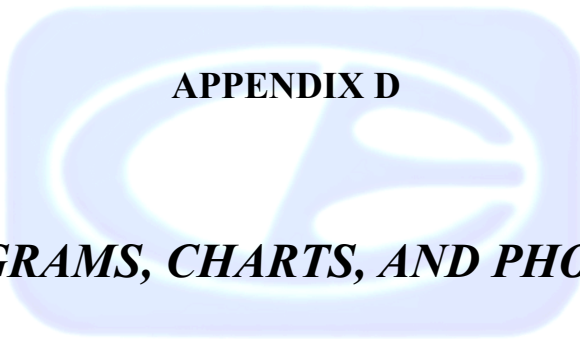

## APPENDIX D


### ***DIAGRAMS, CHARTS, AND PHOTOS***

**FIGURE 1: CONDUCTED EMISSIONS TEST SETUP**

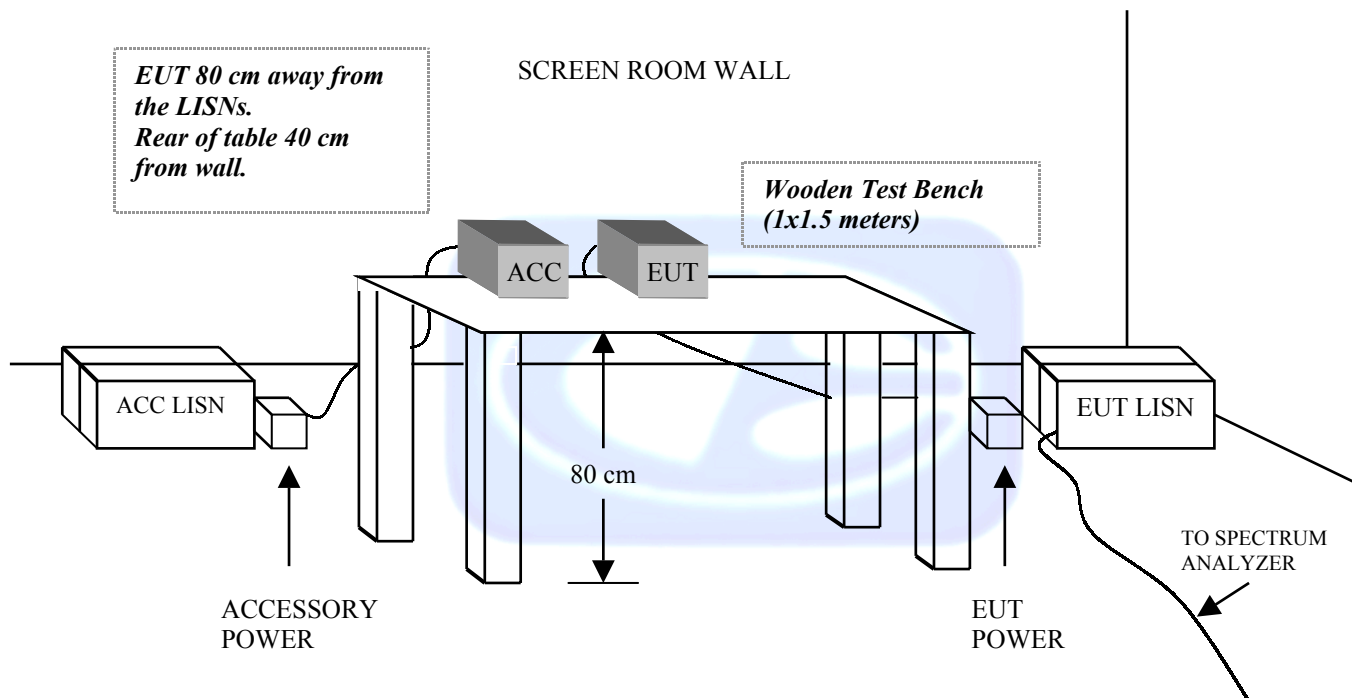

## FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE

### OPEN LAND > 15 METERS

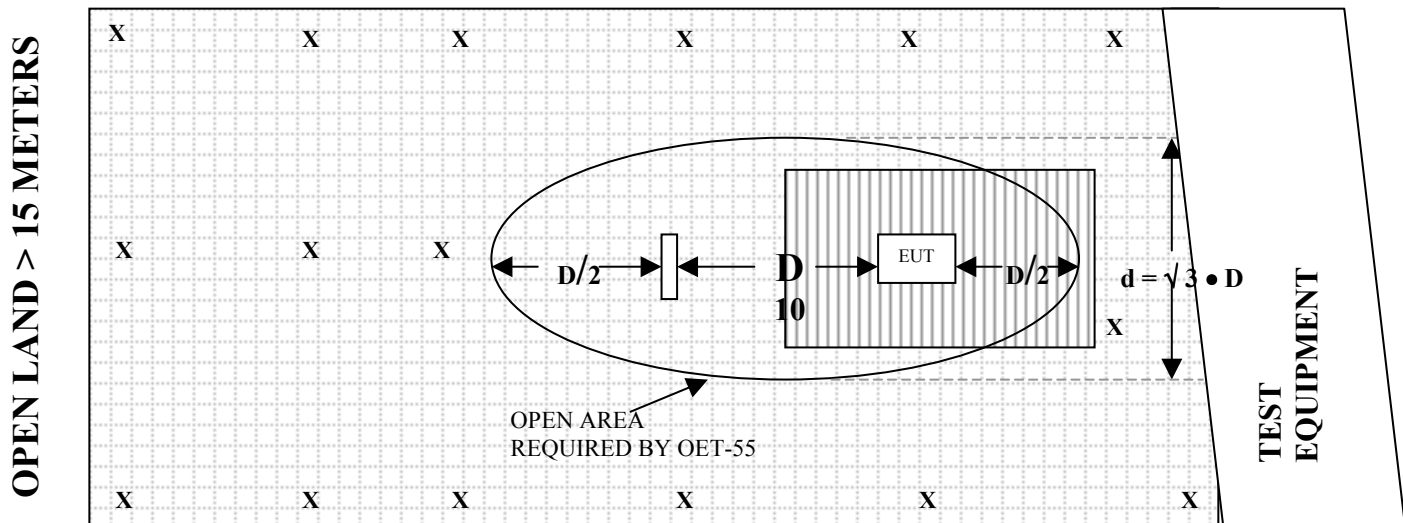

### OPEN LAND > 15 METERS

|          |                          |                                                                                     |                 |
|----------|--------------------------|-------------------------------------------------------------------------------------|-----------------|
| <b>X</b> | = GROUND RODS            |  | = GROUND SCREEN |
| <b>D</b> | = TEST DISTANCE (meters) |  | = WOOD COVER    |

**COM-POWER AB-100****BICONICAL ANTENNA****S/N: 01548****CALIBRATION DATE: SEPTEMBER 19, 2002**

| <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 30                         | 14.30                  | 120                        | 10.70                  |
| 35                         | 14.00                  | 125                        | 11.40                  |
| 40                         | 13.70                  | 140                        | 12.70                  |
| 45                         | 12.00                  | 150                        | 12.50                  |
| 50                         | 11.40                  | 160                        | 12.90                  |
| 60                         | 9.70                   | 175                        | 14.10                  |
| 70                         | 8.30                   | 180                        | 14.70                  |
| 80                         | 7.60                   | 200                        | 15.10                  |
| 90                         | 7.80                   | 250                        | 16.90                  |
| 100                        | 8.60                   | 300                        | 19.10                  |

COM-POWER AL-100

LOG PERIODIC ANTENNA

S/N: 16089

CALIBRATION DATE: OCTOBER 4, 2002

| FREQUENCY<br>(MHz) | FACTOR<br>(dB) | FREQUENCY<br>(MHz) | FACTOR<br>(dB) |
|--------------------|----------------|--------------------|----------------|
| 300                | 13.10          | 700                | 17.70          |
| 350                | 14.40          | 750                | 19.60          |
| 400                | 14.30          | 800                | 20.50          |
| 450                | 15.70          | 850                | 21.20          |
| 500                | 16.60          | 900                | 21.20          |
| 550                | 16.60          | 950                | 22.50          |
| 600                | 17.30          | 1000               | 24.60          |
| 650                | 18.80          |                    |                |

**COM-POWER PA-102****PREAMPLIFIER**

S/N: 1017

CALIBRATION DATE: JANUARY 2, 2003

| <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 30                         | 38.4                   | 300                        | 38.3                   |
| 40                         | 38.4                   | 350                        | 38.3                   |
| 50                         | 38.3                   | 400                        | 38.3                   |
| 60                         | 38.4                   | 450                        | 37.9                   |
| 70                         | 38.4                   | 500                        | 38.1                   |
| 80                         | 38.4                   | 550                        | 38.2                   |
| 90                         | 38.4                   | 600                        | 38.1                   |
| 100                        | 38.3                   | 650                        | 37.9                   |
| 125                        | 38.4                   | 700                        | 37.9                   |
| 150                        | 38.4                   | 750                        | 37.7                   |
| 175                        | 38.2                   | 800                        | 37.4                   |
| 200                        | 38.4                   | 850                        | 37.6                   |
| 225                        | 38.2                   | 900                        | 37.4                   |
| 250                        | 38.3                   | 950                        | 36.7                   |
| 275                        | 38.5                   | 1000                       | 37.0                   |

**COM-POWER PA-122**

**MICROWAVE PREAMPLIFIER**

**S/N: 25196**

**CALIBRATION DATE: JANUARY 10, 2003**

| <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 1.0                        | 32.3                   | 6.0                        | 27.9                   |
| 1.1                        | 32.6                   | 6.5                        | 28.9                   |
| 1.2                        | 32.4                   | 7.0                        | 29.2                   |
| 1.3                        | 32.1                   | 7.5                        | 29.3                   |
| 1.4                        | 31.8                   | 8.0                        | 29.4                   |
| 1.5                        | 31.7                   | 8.5                        | 28.5                   |
| 1.6                        | 31.6                   | 9.0                        | 28.7                   |
| 1.7                        | 31.6                   | 9.5                        | 27.9                   |
| 1.8                        | 31.0                   | 10.0                       | 27.0                   |
| 1.9                        | 32.0                   | 11.0                       | 26.9                   |
| 2.0                        | 31.0                   | 12.0                       | 28.7                   |
| 2.5                        | 30.5                   | 13.0                       | 28.6                   |
| 3.0                        | 30.5                   | 14.0                       | 28.7                   |
| 3.5                        | 30.0                   | 15.0                       | 27.1                   |
| 4.0                        | 30.0                   | 16.0                       | 26.1                   |
| 4.5                        | 29.9                   | 17.0                       | 26.0                   |
| 5.0                        | 29.7                   | 18.0                       | 23.9                   |
| 5.5                        | 30.2                   |                            |                        |

**ANTENNA RESEARCH DRG-118/A****HORN ANTENNA****S/N: 1053****CALIBRATION DATE: JANUARY 13, 2002**

| <b>FREQUENCY (GHz)</b> | <b>FACTOR (dB)</b> | <b>FREQUENCY (GHz)</b> | <b>FACTOR (dB)</b> |
|------------------------|--------------------|------------------------|--------------------|
| 1.0                    | 25.5               | 9.5                    | 39.1               |
| 1.5                    | 26.6               | 10.0                   | 39.7               |
| 2.0                    | 29.4               | 10.5                   | 40.9               |
| 2.5                    | 30.4               | 11.0                   | 40.7               |
| 3.0                    | 31.2               | 11.5                   | 42.4               |
| 3.5                    | 32.3               | 12.0                   | 42.6               |
| 4.0                    | 32.9               | 12.5                   | 42.4               |
| 4.5                    | 33.0               | 13.0                   | 41.5               |
| 5.0                    | 34.8               | 13.5                   | 41.0               |
| 5.5                    | 35.2               | 14.0                   | 40.5               |
| 6.0                    | 36.4               | 14.5                   | 43.6               |
| 6.5                    | 36.6               | 15.0                   | 43.7               |
| 7.0                    | 38.8               | 15.5                   | 43.3               |
| 7.5                    | 38.8               | 16.0                   | 42.8               |
| 8.0                    | 38.0               | 16.5                   | 43.0               |
| 8.5                    | 38.1               | 17.0                   | 42.7               |
| 9.0                    | 39.9               | 17.5                   | 44.0               |
|                        |                    | 18.0                   | 41.8               |

**COM-POWER AL-130****LOOP ANTENNA****S/N: 17070****CALIBRATION DATE: JUNE 19, 2002**

| <b>FREQUENCY<br/>(MHz)</b> | <b>MAGNETIC<br/>(dB/m)</b> | <b>ELECTRIC<br/>(dB/m)</b> |
|----------------------------|----------------------------|----------------------------|
| 0.009                      | -40.4                      | 11.1                       |
| 0.01                       | -40.3                      | 11.2                       |
| 0.02                       | -41.2                      | 10.3                       |
| 0.05                       | -41.6                      | 9.9                        |
| 0.07                       | -41.4                      | 10.1                       |
| 0.1                        | -41.7                      | 9.8                        |
| 0.2                        | -44.0                      | 7.5                        |
| 0.3                        | -41.6                      | 9.9                        |
| 0.5                        | -41.3                      | 10.2                       |
| 0.7                        | -41.4                      | 10.1                       |
| 1                          | -40.9                      | 10.6                       |
| 2                          | -40.6                      | 10.9                       |
| 3                          | -40.5                      | 11.0                       |
| 4                          | -40.8                      | 10.7                       |
| 5                          | -40.2                      | 11.3                       |
| 10                         | -40.7                      | 10.8                       |
| 15                         | -41.4                      | 10.1                       |
| 20                         | -41.6                      | 9.9                        |
| 25                         | -41.7                      | 9.8                        |
| 30                         | -42.9                      | 8.6                        |

COM-POWER AH826

HORN ANTENNA

S/N: 0071957

CALIBRATION DATE: NOVEMBER 03, 2001

| FREQUENCY (GHz) | FACTOR (dB) | FREQUENCY (GHz) | FACTOR (dB) |
|-----------------|-------------|-----------------|-------------|
| 18.0            | 32.3        | 22.5            | 32.5        |
| 18.5            | 32.2        | 23.0            | 32.1        |
| 19.0            | 32.3        | 23.5            | 32.3        |
| 19.5            | 31.9        | 24.0            | 32.3        |
| 20.0            | 32.0        | 24.5            | 32.9        |
| 20.5            | 32.3        | 25.0            | 33.1        |
| 21.0            | 32.0        | 25.5            | 32.9        |
| 21.5            | 32.3        | 26.0            | 33.4        |
| 22.0            | 32.5        | 26.5            | 33.0        |
|                 |             |                 |             |

**COM-POWER MWH-2640/B****HORN ANTENNA**

S/N: 1011

CALIBRATION DATE: NOVEMBER 03, 2001

| FREQUENCY (GHz) | FACTOR (dB) | FREQUENCY (GHz) | FACTOR (dB) |
|-----------------|-------------|-----------------|-------------|
| 26.5            | 35.7        | 33.5            | 36.7        |
| 27.0            | 35.4        | 34.0            | 36.4        |
| 27.5            | 35.7        | 34.5            | 36.8        |
| 28.0            | 35.9        | 35.0            | 36.4        |
| 28.5            | 35.8        | 35.5            | 36.6        |
| 29.0            | 35.7        | 36.0            | 36.7        |
| 29.5            | 35.9        | 36.5            | 37.1        |
| 30.0            | 36.1        | 37.0            | 37.0        |
| 30.5            | 36.5        | 37.5            | 37.2        |
| 31.0            | 36.6        | 38.0            | 37.2        |
| 31.5            | 36.3        | 38.5            | 37.7        |
| 32.0            | 36.5        | 39.0            | 38.0        |
| 32.5            | 36.6        | 39.5            | 37.9        |
| 33.0            | 36.8        | 40.0            | 38.2        |

**COM-POWER PA-840****MICROWAVE PREAMPLIFIER****S/N: 711013****CALIBRATION DATE: MARCH 06, 2002**

| <b>FREQUENCY (GHz)</b> | <b>FACTOR (dB)</b> | <b>FREQUENCY (GHz)</b> | <b>FACTOR (dB)</b> |
|------------------------|--------------------|------------------------|--------------------|
| 18.0                   | 26.4               | 30.0                   | 27.6               |
| 19.0                   | 25.4               | 31.0                   | 27.3               |
| 20.0                   | 24.5               | 32.0                   | 26.9               |
| 21.0                   | 23.9               | 33.0                   | 26.7               |
| 22.0                   | 24.0               | 34.0                   | 27.0               |
| 23.0                   | 24.4               | 35.0                   | 25.9               |
| 24.0                   | 25.2               | 36.0                   | 25.5               |
| 25.0                   | 26.1               | 37.0                   | 26.2               |
| 26.0                   | 26.6               | 38.0                   | 25.6               |
| 27.0                   | 27.2               | 39.0                   | 23.4               |
| 28.0                   | 27.4               | 40.0                   | 24.3               |
| 29.0                   | 27.5               |                        |                    |



**FRONT VIEW**

COMMUNICATION MACHINERY CORPORATION  
EMULATION ENGINE  
MODEL: EE a/b/g  
FCC SUBPART B - RADIATED EMISSIONS – 07-29-03

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

COMMUNICATION MACHINERY CORPORATION  
EMULATION ENGINE  
MODEL: EE a/b/g  
FCC SUBPART B - RADIATED EMISSIONS – 07-29-03

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

COMMUNICATION MACHINERY CORPORATION  
EMULATION ENGINE  
MODEL: EE a/b/g  
FCC SUBPART E - RADIATED EMISSIONS – 07-24-03

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

COMMUNICATION MACHINERY CORPORATION  
EMULATION ENGINE  
MODEL: EE a/b/g  
FCC SUBPART E - RADIATED EMISSIONS – 07-24-03

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

COMMUNICATION MACHINERY CORPORATION  
EMULATION ENGINE  
MODEL: EE a/b/g  
FCC SUBPART B AND E - CONDUCTED EMISSIONS – 07-29-03


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

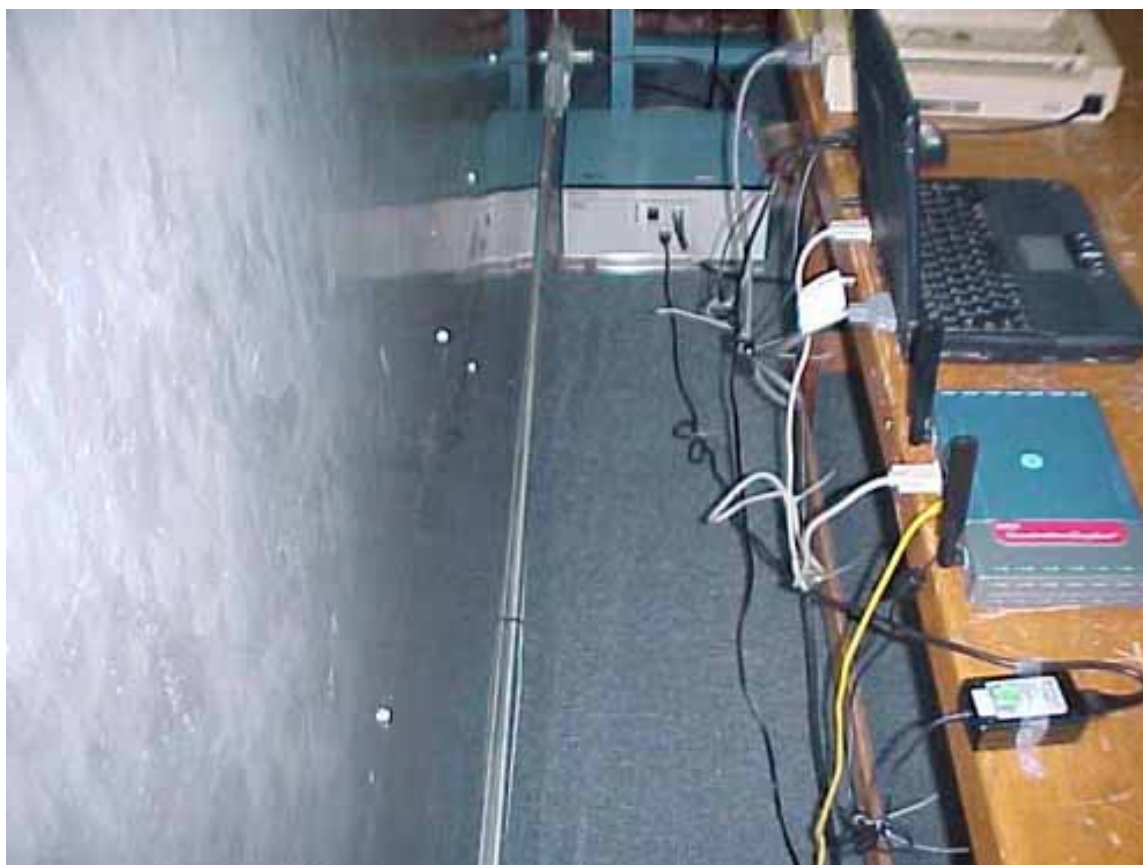

**REAR VIEW**

COMMUNICATION MACHINERY CORPORATION  
EMULATION ENGINE  
MODEL: EE a/b/g  
FCC SUBPART B AND E - CONDUCTED EMISSIONS – 07-29-03

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**APPENDIX E**

***DATA SHEETS***



## ***RADIATED EMISSIONS***

### ***DATA SHEETS for 802.11a MODE***

## RADIATED EMISSIONS (FCC SECTION 15.205 AND SUBPART E)

|               |                                     |             |          |
|---------------|-------------------------------------|-------------|----------|
| COMPANY       | COMMUNICATION MACHINERY CORPORATION | DATE        | 7/24/03  |
| EUT           | EMULATION ENGINE                    | DUTY CYCLE  | N/A %    |
| MODEL         | EE a/b/g                            | PEAK TO AVG | N/A dB   |
| S/N           | N/A                                 | TEST DIST.  | 3 Meters |
| TEST ENGINEER | Kyle Fujimoto                       | LAB         | D        |

| Frequency<br>MHz | Peak<br>Reading<br>(dBuV) | Average (A)<br>or Quasi-<br>Peak (QP) | Antenna<br>Polar.<br>(V or H) | Antenna<br>Height<br>(meters) | EUT<br>Azimuth<br>(degrees) | EUT<br>Axis<br>(X,Y,Z) | EUT<br>Tx<br>Channel | Antenna<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Distance<br>Factor<br>(dB) | Mixer<br>Factor<br>(dB) | *Corrected<br>Reading<br>(dBuV/m) | Delta<br>**<br>(dB) | Spec<br>Limit<br>(dBuV/m) | Comments |
|------------------|---------------------------|---------------------------------------|-------------------------------|-------------------------------|-----------------------------|------------------------|----------------------|---------------------------|-----------------------|---------------------------|----------------------------|-------------------------|-----------------------------------|---------------------|---------------------------|----------|
| 5180.0000        | 96.4                      | A                                     | H                             | 2.0                           | 90                          | Y                      | LOW                  | 35.7                      | 3.9                   | 30.6                      | 0.0                        | 0.0                     | 105.4                             |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
| 5180.0000        | 106.3                     | A                                     | V                             | 1.0                           | 90                          | Y                      | LOW                  | 35.7                      | 3.9                   | 30.6                      | 0.0                        | 0.0                     | 115.3                             |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
| 5240.0000        | 95.8                      |                                       | H                             | 2.0                           | 90                          | Y                      | HIGH                 | 35.7                      | 4.0                   | 30.5                      | 0.0                        | 0.0                     | 104.9                             |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
| 5240.0000        | 105.2                     |                                       | V                             | 1.0                           | 90                          | Y                      | HIGH                 | 35.7                      | 4.0                   | 30.5                      | 0.0                        | 0.0                     | 114.3                             |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

PAGE 1 of PAGE 2

## RADIATED EMISSIONS (FCC SECTION 15.205 AND SUBPART E)

|               |                                     |             |          |
|---------------|-------------------------------------|-------------|----------|
| COMPANY       | COMMUNICATION MACHINERY CORPORATION | DATE        | 7/24/03  |
| EUT           | EMULATION ENGINE                    | DUTY CYCLE  | N/A %    |
| MODEL         | EE a/b/g                            | PEAK TO AVG | N/A dB   |
| S/N           | N/A                                 | TEST DIST.  | 3 Meters |
| TEST ENGINEER | Kyle Fujimoto                       | LAB         | D        |

[illegible]

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

PAGE 2 of PAGE 2

## RADIATED EMISSIONS (FCC SECTION 15.205 AND SUBPART E)

|               |                                     |             |          |
|---------------|-------------------------------------|-------------|----------|
| COMPANY       | COMMUNICATION MACHINERY CORPORATION | DATE        | 7/24/03  |
| EUT           | EMULATION ENGINE                    | DUTY CYCLE  | N/A %    |
| MODEL         | EE a/b/g                            | PEAK TO AVG | N/A dB   |
| S/N           | N/A                                 | TEST DIST.  | 3 Meters |
| TEST ENGINEER | Kyle Fujimoto                       | LAB         | D        |

| Frequency<br>MHz | Peak<br>Reading<br>(dBuV) | Average (A)<br>or Quasi-<br>Peak (QP) | Antenna<br>Polar.<br>(V or H) | Antenna<br>Height<br>(meters) | EUT<br>Azimuth<br>(degrees) | EUT<br>Axis<br>(X,Y,Z) | EUT<br>Tx<br>Channel | Antenna<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Distance<br>Factor<br>(dB) | Mixer<br>Factor<br>(dB) | *Corrected<br>Reading<br>(dBuV/m) | Delta<br>**<br>(dB) | Spec<br>Limit<br>(dBuV/m) | Comments            |
|------------------|---------------------------|---------------------------------------|-------------------------------|-------------------------------|-----------------------------|------------------------|----------------------|---------------------------|-----------------------|---------------------------|----------------------------|-------------------------|-----------------------------------|---------------------|---------------------------|---------------------|
| 5150.0000        | 54.8                      | 39.9 A                                | H                             | 2.0                           | 0                           | Y                      | HIGH                 | 35.7                      | 3.9                   | 29.9                      | 0.0                        | 0.0                     | 49.6                              | -4.4                | 54.0                      | Band Edge - Low Ch. |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           | in UNII Mode        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
| 5150.0000        | 58.9                      | 41.3 A                                | V                             | 2.0                           | 0                           | Y                      | HIGH                 | 35.7                      | 3.9                   | 29.9                      | 0.0                        | 0.0                     | 51.0                              | -3.0                | 54.0                      | Band Edge - Low Ch. |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           | in UNII Mode        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                     |

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

## RADIATED EMISSIONS (FCC SECTION 15.205 AND SUBPART E)

|               |                                     |             |          |
|---------------|-------------------------------------|-------------|----------|
| COMPANY       | COMMUNICATION MACHINERY CORPORATION | DATE        | 7/24/03  |
| EUT           | EMULATION ENGINE                    | DUTY CYCLE  | N/A %    |
| MODEL         | EE a/b/g                            | PEAK TO AVG | N/A dB   |
| S/N           | N/A                                 | TEST DIST.  | 3 Meters |
| TEST ENGINEER | Kyle Fujimoto                       | LAB         | D        |

| Frequency<br>MHz | Peak<br>Reading<br>(dBuV) | Average (A)<br>or Quasi-<br>Peak (QP) | Antenna<br>Polar.<br>(V or H) | Antenna<br>Height<br>(meters) | EUT<br>Azimuth<br>(degrees) | EUT<br>Axis<br>(X,Y,Z) | EUT<br>Tx<br>Channel | Antenna<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Distance<br>Factor<br>(dB) | Mixer<br>Factor<br>(dB) | *Corrected<br>Reading<br>(dBuV/m) | Delta<br>**<br>(dB) | Spec<br>Limit<br>(dBuV/m) | Comments |
|------------------|---------------------------|---------------------------------------|-------------------------------|-------------------------------|-----------------------------|------------------------|----------------------|---------------------------|-----------------------|---------------------------|----------------------------|-------------------------|-----------------------------------|---------------------|---------------------------|----------|
| 5260.0000        | 99.0                      | A                                     | H                             | 2.0                           | 90                          | Y                      | LOW                  | 35.6                      | 4.0                   | 30.6                      | 0.0                        | 0.0                     | 108.1                             |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
| 5260.0000        | 107.3                     | A                                     | V                             | 1.0                           | 90                          | Y                      | LOW                  | 35.6                      | 4.0                   | 30.6                      | 0.0                        | 0.0                     | 116.4                             |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
| 5320.0000        | 99.5                      |                                       | H                             | 2.0                           | 90                          | Y                      | HIGH                 | 35.6                      | 4.0                   | 30.5                      | 0.0                        | 0.0                     | 108.7                             |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
| 5320.0000        | 104.6                     |                                       | V                             | 1.0                           | 90                          | Y                      | HIGH                 | 35.6                      | 4.0                   | 30.5                      | 0.0                        | 0.0                     | 113.8                             |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |          |

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

PAGE 1 of PAGE 2

## RADIATED EMISSIONS (FCC SECTION 15.205 AND SUBPART E)

|               |                                     |             |          |
|---------------|-------------------------------------|-------------|----------|
| COMPANY       | COMMUNICATION MACHINERY CORPORATION | DATE        | 7/24/03  |
| EUT           | EMULATION ENGINE                    | DUTY CYCLE  | N/A %    |
| MODEL         | EE a/b/g                            | PEAK TO AVG | N/A dB   |
| S/N           | N/A                                 | TEST DIST.  | 3 Meters |
| TEST ENGINEER | Kyle Fujimoto                       | LAB         | D        |

| Frequency<br>MHz | Peak<br>Reading<br>(dBuV) | Average (A)<br>or Quasi-<br>Peak (QP) | Antenna<br>Polar.<br>(V or H) | Antenna<br>Height<br>(meters) | EUT<br>Azimuth<br>(degrees) | EUT<br>Axis<br>(X,Y,Z) | EUT<br>Tx<br>Channel | Antenna<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Distance<br>Factor<br>(dB) | Mixer<br>Factor<br>(dB) | *Corrected<br>Reading<br>(dBuV/m) | Delta<br>**<br>(dB) | Spec<br>Limit<br>(dBuV/m) | Comments               |
|------------------|---------------------------|---------------------------------------|-------------------------------|-------------------------------|-----------------------------|------------------------|----------------------|---------------------------|-----------------------|---------------------------|----------------------------|-------------------------|-----------------------------------|---------------------|---------------------------|------------------------|
| 10520.0000       | 34.9                      | 24.6 A                                | H                             | 1.0                           | 90                          | Y                      | LOW                  | 40.6                      | 6.3                   | 26.9                      | 0.0                        | 0.0                     | 44.5                              | -9.5                | 54.0                      | No Harmonics Nor       |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           | Emissions Found        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           | After the 2nd Harmonic |
| 10520.0000       | 35.2                      | 29.0 A                                | V                             | 1.0                           | 90                          | Y                      | LOW                  | 40.6                      | 6.3                   | 26.9                      | 0.0                        | 0.0                     | 49.0                              | -5.0                | 54.0                      |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
| 10640.0000       | 35.5                      | 29.5 A                                | H                             | 1.0                           | 90                          | Y                      | HIGH                 | 40.5                      | 6.3                   | 26.9                      | 0.0                        | 0.0                     | 49.4                              | -4.6                | 54.0                      |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
| 10640.0000       | 36.0                      | 29.9 A                                | V                             | 1.0                           | 90                          | Y                      | HIGH                 | 40.5                      | 6.3                   | 26.9                      | 0.0                        | 0.0                     | 49.8                              | -4.2                | 54.0                      |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                        |

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

PAGE 2 of PAGE 2

## RADIATED EMISSIONS (FCC SECTION 15.205 AND SUBPART E)

|               |                                     |             |          |
|---------------|-------------------------------------|-------------|----------|
| COMPANY       | COMMUNICATION MACHINERY CORPORATION | DATE        | 7/24/03  |
| EUT           | EMULATION ENGINE                    | DUTY CYCLE  | N/A %    |
| MODEL         | EE a/b/g                            | PEAK TO AVG | N/A dB   |
| S/N           | N/A                                 | TEST DIST.  | 3 Meters |
| TEST ENGINEER | Kyle Fujimoto                       | LAB         | D        |

| Frequency<br>MHz | Peak<br>Reading<br>(dBuV) | Average (A)<br>or Quasi-<br>Peak (QP) | Antenna<br>Polar.<br>(V or H) | Antenna<br>Height<br>(meters) | EUT<br>Azimuth<br>(degrees) | EUT<br>Axis<br>(X,Y,Z) | EUT<br>Tx<br>Channel | Antenna<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Distance<br>Factor<br>(dB) | Mixer<br>Factor<br>(dB) | *Corrected<br>Reading<br>(dBuV/m) | Delta<br>**<br>(dB) | Spec<br>Limit<br>(dBuV/m) | Comments                 |
|------------------|---------------------------|---------------------------------------|-------------------------------|-------------------------------|-----------------------------|------------------------|----------------------|---------------------------|-----------------------|---------------------------|----------------------------|-------------------------|-----------------------------------|---------------------|---------------------------|--------------------------|
| 5350.0000        | 55.4                      | 41.6 A                                | H                             | 2.0                           | 0                           | Y                      | HIGH                 | 35.7                      | 3.9                   | 29.9                      | 0.0                        | 0.0                     | 51.3                              | -2.7                | 54.0                      | Band Edge - High Channel |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           | for UNII                 |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
| 5350.0000        | 61.5                      | 43.2 A                                | V                             | 2.0                           | 0                           | Y                      | HIGH                 | 35.7                      | 3.9                   | 29.9                      | 0.0                        | 0.0                     | 52.9                              | -1.1                | 54.0                      | Band Edge - High Channel |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           | for UNII                 |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |
|                  |                           |                                       |                               |                               |                             |                        |                      |                           |                       |                           |                            |                         |                                   |                     |                           |                          |

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING



## ***RADIATED EMISSIONS***

### ***DATA SHEETS for the DIGITAL PORTION***

|                                                         |                                                                                                                                                                                 |                      |              |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------|
| <b>Test Location</b>                                    | : Compatible Electronics                                                                                                                                                        | <b>Page</b>          | : 1/1        |
| <b>Customer</b>                                         | : Communication Machinery Corp.                                                                                                                                                 | <b>Date</b>          | : 7/29/2003  |
| <b>Manufacturer</b>                                     | : Communication Machinery Corp.                                                                                                                                                 | <b>Time</b>          | : 9:53:25    |
| <b>Eut name</b>                                         | : Emulation Engine                                                                                                                                                              | <b>Lab</b>           | : A          |
| <b>Model</b>                                            | : EE a/b/g                                                                                                                                                                      | <b>Test Distance</b> | : 3.0 Meters |
| <b>Serial #</b>                                         | : N/A                                                                                                                                                                           |                      |              |
| <b>Specification</b>                                    | : FCC Class B                                                                                                                                                                   |                      |              |
| <b>Distance correction factor (20 * log(test/spec))</b> |                                                                                                                                                                                 |                      | : 0.00       |
| <b>Test Mode</b>                                        | : Radiated Spurious Emissions 10 kHz to 300 MHz<br>Vertical (V) and Horizontal (H) Polarization<br>Temperature 75 Degrees F., Relative Humidity 55%<br>Tested By: Kyle Fujimoto |                      |              |

| Pol | Freq<br>MHz | Rdng<br>dBuV | Cable<br>loss<br>dB | Ant<br>factor<br>dB | Amp<br>gain<br>dB | Cor'd<br>rdg = R<br>dBuV | Limit<br>= L<br>dBuV/m | Delta<br>R-L<br>dB |
|-----|-------------|--------------|---------------------|---------------------|-------------------|--------------------------|------------------------|--------------------|
| 1V  | 44.155      | 62.70        | 1.00                | 12.27               | 38.36             | 37.62                    | 40.00                  | -2.38              |
| 2V  | 45.194      | 61.70        | 1.00                | 11.98               | 38.35             | 36.33                    | 40.00                  | -3.67              |
| 3H  | 46.617      | 50.80        | 1.00                | 11.80               | 38.33             | 25.27                    | 40.00                  | -14.73             |
| 4V  | 64.853      | 58.90        | 1.50                | 8.99                | 38.40             | 30.99                    | 40.00                  | -9.01              |
| 5H  | 69.130      | 46.80        | 1.58                | 8.41                | 38.40             | 18.40                    | 40.00                  | -21.60             |
| 6V  | 72.611      | 54.70        | 1.63                | 8.11                | 38.40             | 26.04                    | 40.00                  | -13.96             |
| 7V  | 73.960      | 60.10        | 1.64                | 8.01                | 38.40             | 31.35                    | 40.00                  | -8.65              |
| 8V  | 100.091     | 66.10        | 1.90                | 8.61                | 38.30             | 38.31                    | 43.50                  | -5.19              |
| 9H  | 108.833     | 55.90        | 1.94                | 9.57                | 38.34             | 29.07                    | 43.50                  | -14.43             |
| 10V | 114.850     | 60.20        | 1.96                | 10.19               | 38.36             | 33.99                    | 43.50                  | -9.51              |
| 11V | 120.062     | 60.70        | 1.98                | 10.71               | 38.38             | 35.01                    | 43.50                  | -8.49              |
| 12V | 120.341     | 53.60        | 1.98                | 10.75               | 38.38             | 27.95                    | 43.50                  | -15.55             |
| 13V | 127.356     | 58.90        | 2.02                | 11.61               | 38.40             | 34.13                    | 43.50                  | -9.37              |
| 14H | 137.259     | 47.50        | 2.10                | 12.47               | 38.40             | 23.68                    | 43.50                  | -19.82             |
| 15V | 150.337     | 44.20        | 2.21                | 12.51               | 38.40             | 20.52                    | 43.50                  | -22.98             |
| 16H | 160.044     | 51.80        | 2.37                | 12.90               | 38.32             | 28.76                    | 43.50                  | -14.74             |
| 17V | 170.450     | 61.70        | 2.53                | 13.75               | 38.23             | 39.74                    | 43.50                  | -3.76              |
| 18H | 172.113     | 57.90        | 2.56                | 13.88               | 38.22             | 36.11                    | 43.50                  | -7.39              |
| 19H | 186.179     | 55.90        | 2.55                | 14.83               | 38.29             | 34.99                    | 43.50                  | -8.51              |
| 20V | 190.400     | 56.60        | 2.54                | 14.91               | 38.33             | 35.72                    | 43.50                  | -7.78              |
| 21H | 194.094     | 62.97        | 2.52                | 14.99               | 38.36             | 42.12                    | 43.50                  | -1.38              |
| 22H | 194.094     | 64.00        | 2.52                | 14.99               | 38.36             | 43.15                    | 43.50                  | -0.35              |
| 23V | 194.119     | 60.00        | 2.52                | 14.99               | 38.36             | 39.15                    | 43.50                  | -4.35              |
| 24V | 194.180     | 61.40        | 2.52                | 14.99               | 38.36             | 40.55                    | 43.50                  | -2.95              |
| 25H | 200.047     | 59.30        | 2.50                | 15.10               | 38.40             | 38.50                    | 43.50                  | -5.00              |
| 26V | 200.077     | 59.00        | 2.50                | 15.10               | 38.40             | 38.20                    | 43.50                  | -5.30              |
| 27V | 221.700     | 59.50        | 2.67                | 15.93               | 38.23             | 39.88                    | 46.00                  | -6.12              |
| 28V | 225.057     | 56.40        | 2.70                | 16.05               | 38.20             | 36.95                    | 46.00                  | -9.05              |
| 29H | 225.081     | 55.40        | 2.70                | 16.05               | 38.20             | 35.95                    | 46.00                  | -10.05             |
| 30V | 250.077     | 60.00        | 3.00                | 16.90               | 38.30             | 41.60                    | 46.00                  | -4.40              |
| 31H | 250.095     | 59.40        | 3.00                | 16.90               | 38.30             | 41.00                    | 46.00                  | -5.00              |
| 32V | 275.053     | 53.00        | 3.10                | 18.05               | 38.50             | 35.65                    | 46.00                  | -10.35             |
| 33H | 275.085     | 59.00        | 3.10                | 18.05               | 38.50             | 41.66                    | 46.00                  | -4.34              |
| 34H | 286.473     | 48.30        | 3.19                | 18.54               | 38.41             | 31.63                    | 46.00                  | -14.37             |

|                                                         |                                                                                                                                                                                   |                      |              |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------|
| <b>Test Location</b>                                    | : Compatible Electronics                                                                                                                                                          | <b>Page</b>          | : 1/1        |
| <b>Customer</b>                                         | : Communication Machinery Corp.                                                                                                                                                   | <b>Date</b>          | : 7/29/2003  |
| <b>Manufacturer</b>                                     | : Communication Machinery Corp.                                                                                                                                                   | <b>Time</b>          | : 10:44:53   |
| <b>Eut name</b>                                         | : Emulation Engine                                                                                                                                                                | <b>Lab</b>           | : A          |
| <b>Model</b>                                            | : EE a/b/g                                                                                                                                                                        | <b>Test Distance</b> | : 3.0 Meters |
| <b>Serial #</b>                                         | : N/A                                                                                                                                                                             |                      |              |
| <b>Specification</b>                                    | : FCC Class B                                                                                                                                                                     |                      |              |
| <b>Distance correction factor (20 * log(test/spec))</b> |                                                                                                                                                                                   |                      | : 0.00       |
| <b>Test Mode</b>                                        | : Radiated Spurious Emissions 300 MHz to 1000 Mhz<br>Vertical (v) and Horizontal (H) Polarization<br>Temperature 75 Degrees F., Relative Humidity 55%<br>Tested By: Kyle Fujimoto |                      |              |


| Pol | Freq<br>MHz | Rdng<br>dBuV | Cable<br>loss<br>dB | Ant<br>factor<br>dB | Amp<br>gain<br>dB | Cor'd<br>rdg = R<br>dBuV | Limit<br>= L<br>dBuV/m | Delta<br>R-L<br>dB |
|-----|-------------|--------------|---------------------|---------------------|-------------------|--------------------------|------------------------|--------------------|
| 1V  | 300.081     | 55.00        | 3.30                | 13.10               | 38.30             | 33.10                    | 46.00                  | -12.90             |
| 2H  | 302.381     | 44.50        | 3.32                | 13.17               | 38.30             | 22.68                    | 46.00                  | -23.32             |
| 3V  | 320.046     | 60.70        | 3.43                | 13.65               | 38.30             | 39.47                    | 46.00                  | -6.53              |
| 4H  | 325.058     | 58.70        | 3.46                | 13.78               | 38.30             | 37.63                    | 46.00                  | -8.37              |
| 5V  | 325.090     | 59.30        | 3.46                | 13.78               | 38.30             | 38.23                    | 46.00                  | -7.77              |
| 6H  | 350.078     | 61.30        | 3.60                | 14.40               | 38.30             | 41.00                    | 46.00                  | -5.00              |
| 7V  | 350.092     | 61.20        | 3.60                | 14.40               | 38.30             | 40.90                    | 46.00                  | -5.10              |
| 8H  | 375.071     | 58.20        | 3.70                | 14.35               | 38.30             | 37.95                    | 46.00                  | -8.05              |
| 9V  | 375.075     | 55.60        | 3.70                | 14.35               | 38.30             | 35.35                    | 46.00                  | -10.65             |
| 10H | 400.053     | 51.20        | 3.80                | 14.30               | 38.30             | 31.00                    | 46.00                  | -15.00             |
| 11V | 400.060     | 52.20        | 3.80                | 14.30               | 38.30             | 32.00                    | 46.00                  | -14.00             |
| 12H | 425.056     | 52.70        | 3.90                | 15.02               | 38.09             | 33.53                    | 46.00                  | -12.47             |
| 13V | 425.060     | 48.50        | 3.90                | 15.02               | 38.09             | 29.33                    | 46.00                  | -16.67             |
| 14V | 450.060     | 47.10        | 4.00                | 15.70               | 37.90             | 28.90                    | 46.00                  | -17.10             |
| 15H | 450.063     | 54.20        | 4.00                | 15.70               | 37.90             | 36.00                    | 46.00                  | -10.00             |
| 16H | 475.075     | 55.30        | 4.21                | 16.16               | 38.00             | 37.67                    | 46.00                  | -8.33              |
| 17V | 485.379     | 56.90        | 4.29                | 16.35               | 38.04             | 39.49                    | 46.00                  | -6.51              |
| 18H | 485.420     | 56.80        | 4.29                | 16.35               | 38.04             | 39.39                    | 46.00                  | -6.61              |
| 19V | 498.596     | 53.90        | 4.39                | 16.58               | 38.09             | 36.77                    | 46.00                  | -9.23              |
| 20H | 500.059     | 52.20        | 4.40                | 16.60               | 38.10             | 35.10                    | 46.00                  | -10.90             |
| 21H | 525.075     | 47.00        | 4.40                | 16.60               | 38.15             | 29.85                    | 46.00                  | -16.15             |
| 22H | 550.075     | 49.00        | 4.40                | 16.60               | 38.20             | 31.80                    | 46.00                  | -14.20             |
| 23H | 566.747     | 53.50        | 4.47                | 16.84               | 38.17             | 36.64                    | 46.00                  | -9.36              |
| 24H | 569.980     | 58.70        | 4.48                | 16.89               | 38.16             | 41.91                    | 46.00                  | -4.09              |
| 25V | 574.600     | 50.20        | 4.50                | 16.95               | 38.15             | 33.50                    | 46.00                  | -12.50             |
| 26H | 575.007     | 54.50        | 4.50                | 16.96               | 38.15             | 37.81                    | 46.00                  | -8.19              |
| 27H | 585.704     | 50.30        | 4.54                | 17.11               | 38.13             | 33.82                    | 46.00                  | -12.18             |
| 28H | 625.097     | 54.20        | 4.75                | 18.07               | 38.00             | 39.02                    | 46.00                  | -6.98              |
| 29H | 650.111     | 53.60        | 4.90                | 18.80               | 37.90             | 39.40                    | 46.00                  | -6.60              |
| 30H | 668.765     | 50.20        | 4.98                | 18.38               | 37.90             | 35.65                    | 46.00                  | -10.35             |
| 31V | 668.820     | 53.10        | 4.98                | 18.38               | 37.90             | 38.55                    | 46.00                  | -7.45              |
| 32H | 674.760     | 46.50        | 5.00                | 18.25               | 37.90             | 31.85                    | 46.00                  | -14.15             |
| 33V | 716.700     | 34.40        | 5.10                | 18.35               | 37.83             | 20.02                    | 46.00                  | -25.98             |
| 34H | 813.079     | 41.80        | 5.37                | 20.69               | 37.45             | 30.41                    | 46.00                  | -15.59             |
| 35V | 950.440     | 44.50        | 5.86                | 22.52               | 36.70             | 36.18                    | 46.00                  | -9.82              |

  
**CONDUCTED EMISSIONS****DATA SHEETS**



EMISSION LEVEL [dBuV] PEAK  
Graph for Peak & Average

7/28/2003 10:29:40

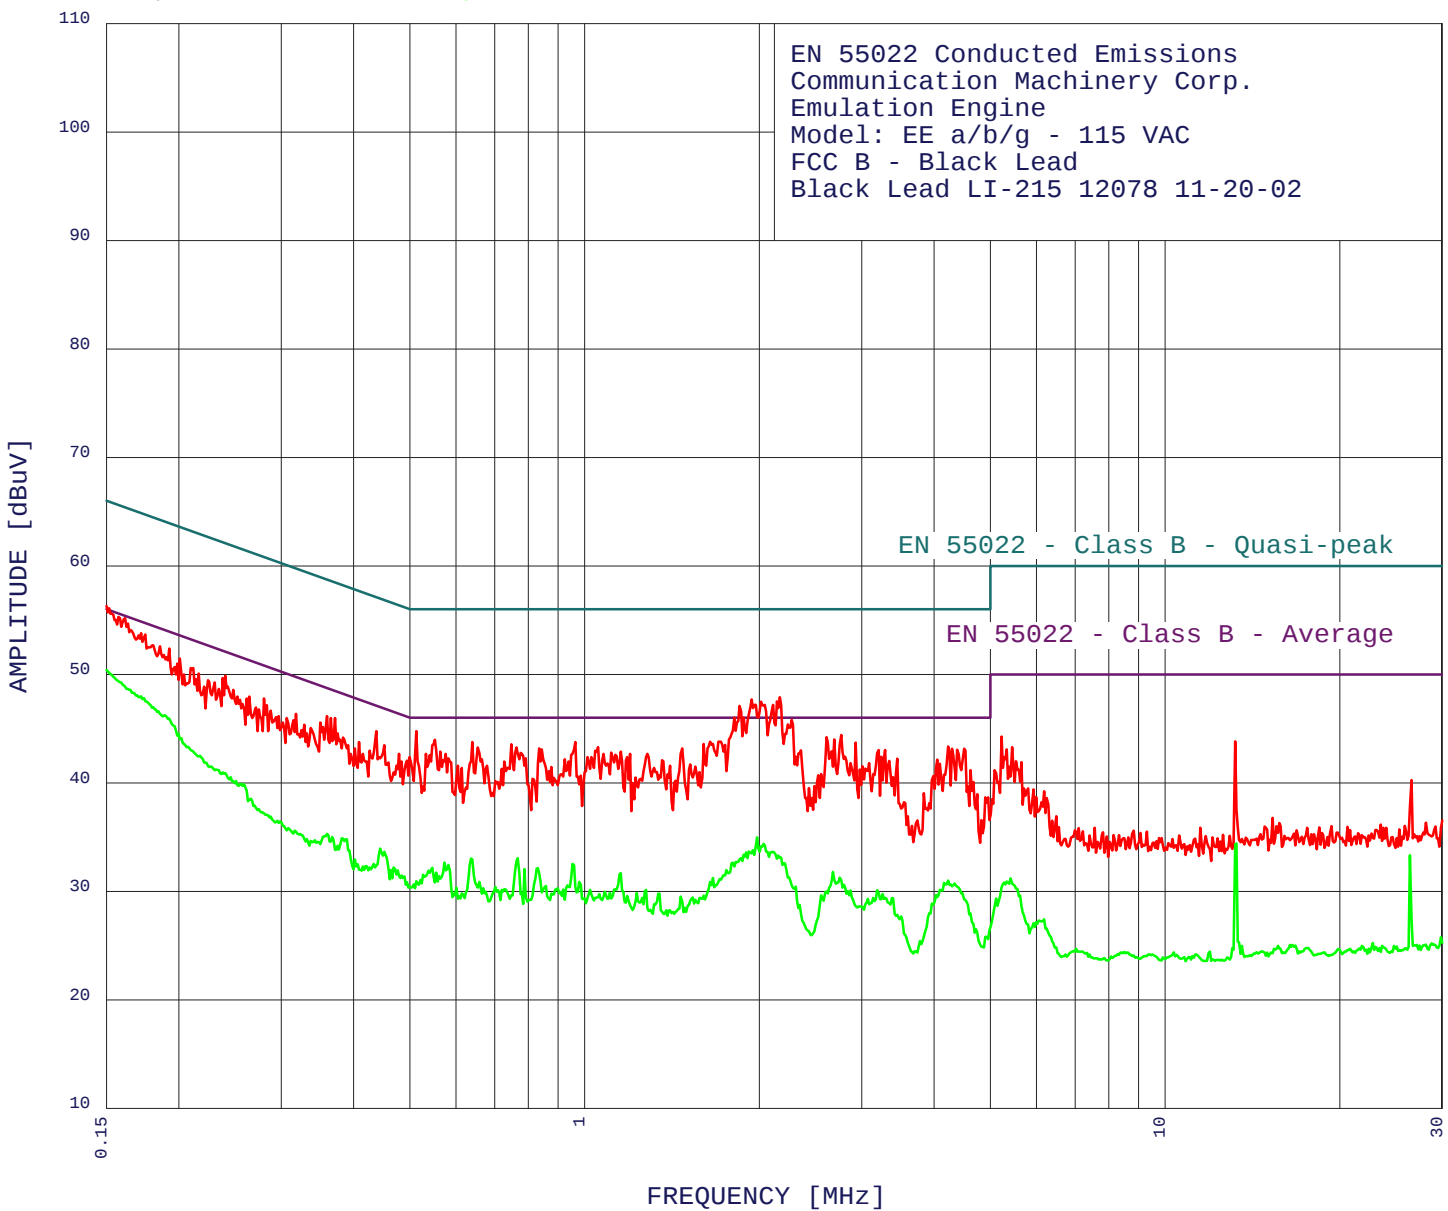

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

EN 55022 Conducted Emissions  
Communication Machinery Corp.  
Emulation Engine  
Model: EE a/b/g - 115 VAC  
FCC B - Black Lead  
Black Lead LI-215 12078 11-20-02  
TEST ENGINEER : Kyle Fujimoto

41 highest peaks above -50.00 dB of EN 55022 - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak  
Peak# Freq(MHz) Amp(dBuV) Limit(dB) Delta(dB)

|    |       |       |       |         |
|----|-------|-------|-------|---------|
| 1  | 2.168 | 47.89 | 46.00 | 1.89**  |
| 2  | 1.939 | 47.69 | 46.00 | 1.69**  |
| 3  | 2.013 | 47.49 | 46.00 | 1.49**  |
| 4  | 2.111 | 47.19 | 46.00 | 1.19**  |
| 5  | 1.849 | 47.09 | 46.00 | 1.09**  |
| 6  | 1.879 | 45.99 | 46.00 | -0.01** |
| 7  | 1.810 | 45.99 | 46.00 | -0.01** |
| 8  | 2.274 | 45.80 | 46.00 | -0.20** |
| 9  | 0.513 | 44.77 | 46.00 | -1.23** |
| 10 | 0.193 | 52.38 | 53.93 | -1.55** |
| 11 | 2.766 | 44.41 | 46.00 | -1.59** |
| 12 | 2.610 | 44.20 | 46.00 | -1.80** |
| 13 | 2.693 | 44.00 | 46.00 | -2.00** |
| 14 | 0.552 | 43.97 | 46.00 | -2.03** |
| 15 | 0.201 | 51.47 | 53.58 | -2.10** |
| 16 | 1.717 | 43.79 | 46.00 | -2.21** |
| 17 | 1.646 | 43.79 | 46.00 | -2.21** |
| 18 | 0.240 | 49.86 | 52.08 | -2.22** |
| 19 | 0.963 | 43.77 | 46.00 | -2.23** |
| 20 | 0.641 | 43.77 | 46.00 | -2.23** |
| 21 | 2.932 | 43.71 | 46.00 | -2.29** |
| 22 | 0.438 | 44.76 | 47.11 | -2.34** |
| 23 | 1.603 | 43.58 | 46.00 | -2.42** |
| 24 | 0.747 | 43.57 | 46.00 | -2.43** |
| 25 | 0.238 | 49.66 | 52.17 | -2.51** |
| 26 | 0.371 | 45.96 | 48.47 | -2.51** |
| 27 | 0.360 | 46.16 | 48.73 | -2.57** |
| 28 | 0.365 | 45.96 | 48.61 | -2.64** |
| 29 | 4.227 | 43.35 | 46.00 | -2.65** |
| 30 | 0.210 | 50.57 | 53.23 | -2.65** |
| 31 | 1.055 | 43.27 | 46.00 | -2.73** |
| 32 | 0.763 | 43.27 | 46.00 | -2.73** |
| 33 | 0.655 | 43.27 | 46.00 | -2.73** |
| 34 | 1.472 | 43.18 | 46.00 | -2.82** |
| 35 | 0.835 | 43.17 | 46.00 | -2.83** |
| 36 | 4.504 | 43.16 | 46.00 | -2.84** |
| 37 | 4.294 | 43.15 | 46.00 | -2.85** |
| 38 | 0.216 | 50.07 | 52.96 | -2.89** |
| 39 | 0.844 | 43.07 | 46.00 | -2.93** |
| 40 | 4.384 | 43.05 | 46.00 | -2.95** |
| 41 | 3.294 | 43.02 | 46.00 | -2.98** |

EN 55022 Conducted Emissions  
Communication Machinery Corp.  
Emulation Engine  
Model: EE a/b/g - 115 VAC  
FCC B - Black Lead  
BlackLead LI-215 12078 11-20-02  
TEST ENGINEER : Kyle Fujimoto

28 highest peaks above -50.00 dB of EN 55022 - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Average

| Peak# | Freq(MHz) | Amp(dBuV) | Limit(dB) | Delta(dB) |
|-------|-----------|-----------|-----------|-----------|
| 1     | 1.981     | 34.96     | 46.00     | -11.04    |
| 2     | 0.767     | 33.05     | 46.00     | -12.95    |
| 3     | 0.637     | 33.03     | 46.00     | -12.97    |
| 4     | 0.445     | 33.93     | 46.98     | -13.04    |
| 5     | 0.573     | 32.65     | 46.00     | -13.35    |
| 6     | 0.381     | 34.89     | 48.25     | -13.36    |
| 7     | 0.360     | 35.28     | 48.73     | -13.45    |
| 8     | 0.953     | 32.52     | 46.00     | -13.48    |
| 9     | 0.547     | 32.17     | 46.00     | -13.83    |
| 10    | 0.831     | 32.15     | 46.00     | -13.85    |
| 11    | 0.788     | 32.06     | 46.00     | -13.94    |
| 12    | 2.679     | 31.79     | 46.00     | -14.21    |
| 13    | 1.154     | 31.68     | 46.00     | -14.32    |
| 14    | 0.469     | 32.19     | 46.53     | -14.34    |
| 15    | 4.227     | 31.00     | 46.00     | -15.00    |
| 16    | 13.269    | 34.42     | 50.00     | -15.58    |
| 17    | 0.701     | 30.40     | 46.00     | -15.60    |
| 18    | 0.899     | 30.27     | 46.00     | -15.73    |
| 19    | 1.276     | 30.14     | 46.00     | -15.86    |
| 20    | 3.192     | 30.11     | 46.00     | -15.89    |
| 21    | 1.230     | 29.83     | 46.00     | -16.17    |
| 22    | 1.345     | 29.79     | 46.00     | -16.21    |
| 23    | 1.464     | 29.50     | 46.00     | -16.50    |
| 24    | 26.422    | 33.33     | 50.00     | -16.67    |
| 25    | 5.420     | 31.18     | 50.00     | -18.82    |
| 26    | 6.186     | 27.41     | 50.00     | -22.59    |
| 27    | 29.851    | 25.74     | 50.00     | -24.26    |
| 28    | 16.582    | 25.06     | 50.00     | -24.94    |



EMISSION LEVEL [dBuV] PEAK  
Graph for Peak & Average

7/28/2003 10:59:28

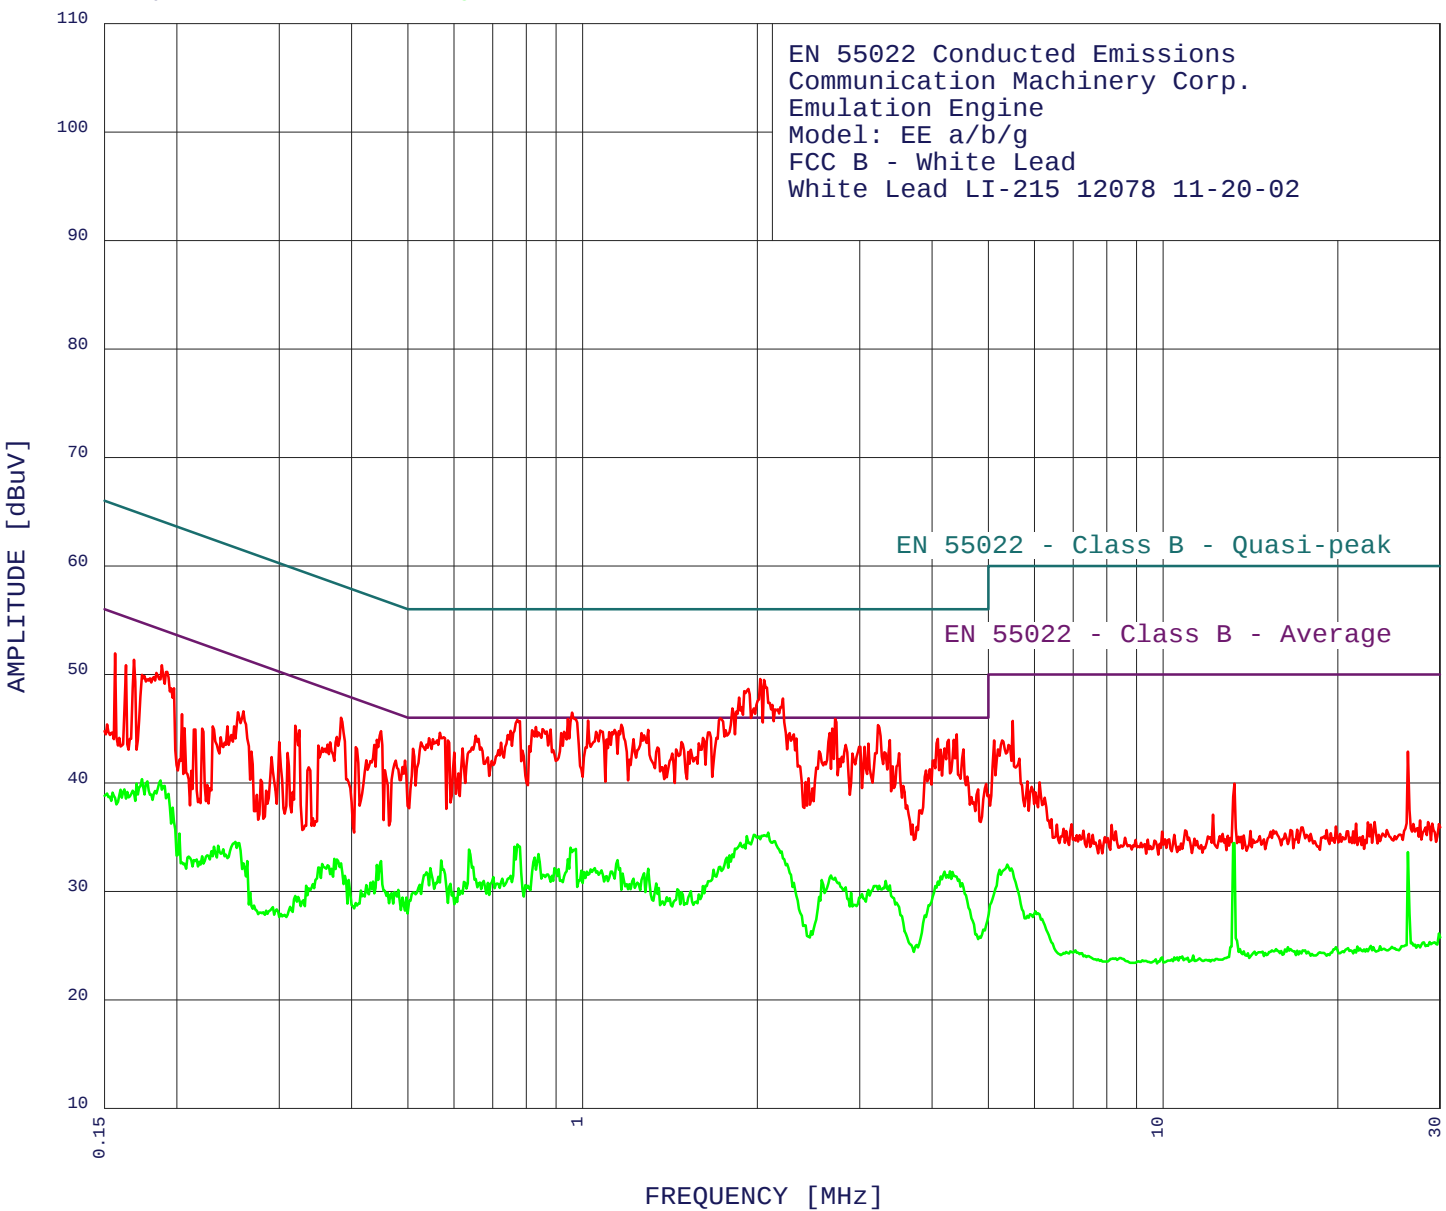

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

EN 55022 Conducted Emissions  
Communication Machinery Corp.  
Emulation Engine  
Model: EE a/b/g  
FCC B - White Lead  
WhiteLead LI-215 12078 11-20-02  
TEST ENGINEER : Kyle Fujimoto

41 highest peaks above -50.00 dB of EN 55022 - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak  
Peak# Freq(MHz) Amp(dBuV) Limit(dB) Delta(dB)

|    |       |       |       |         |
|----|-------|-------|-------|---------|
| 1  | 2.023 | 49.57 | 46.00 | 3.57**  |
| 2  | 2.055 | 49.47 | 46.00 | 3.47**  |
| 3  | 1.929 | 48.67 | 46.00 | 2.67**  |
| 4  | 1.859 | 47.86 | 46.00 | 1.86**  |
| 5  | 2.214 | 47.78 | 46.00 | 1.78**  |
| 6  | 1.810 | 46.86 | 46.00 | 0.86**  |
| 7  | 0.958 | 46.48 | 46.00 | 0.48**  |
| 8  | 1.726 | 45.96 | 46.00 | -0.04** |
| 9  | 2.722 | 45.90 | 46.00 | -0.10** |
| 10 | 0.944 | 45.89 | 46.00 | -0.11** |
| 11 | 0.771 | 45.79 | 46.00 | -0.21** |
| 12 | 1.021 | 45.74 | 46.00 | -0.26** |
| 13 | 1.166 | 45.35 | 46.00 | -0.65** |
| 14 | 3.226 | 45.32 | 46.00 | -0.68** |
| 15 | 0.831 | 45.15 | 46.00 | -0.85** |
| 16 | 2.693 | 45.00 | 46.00 | -1.00** |
| 17 | 0.881 | 44.92 | 46.00 | -1.08** |
| 18 | 1.297 | 44.88 | 46.00 | -1.12** |
| 19 | 1.136 | 44.87 | 46.00 | -1.13** |
| 20 | 1.072 | 44.81 | 46.00 | -1.19** |
| 21 | 0.751 | 44.80 | 46.00 | -1.20** |
| 22 | 1.112 | 44.69 | 46.00 | -1.31** |
| 23 | 1.654 | 44.66 | 46.00 | -1.34** |
| 24 | 0.567 | 44.61 | 46.00 | -1.39** |
| 25 | 0.919 | 44.60 | 46.00 | -1.40** |
| 26 | 2.665 | 44.60 | 46.00 | -1.40** |
| 27 | 2.274 | 44.58 | 46.00 | -1.42** |
| 28 | 4.408 | 44.47 | 46.00 | -1.53** |
| 29 | 0.655 | 44.36 | 46.00 | -1.64** |
| 30 | 1.611 | 44.15 | 46.00 | -1.85** |
| 31 | 0.544 | 44.12 | 46.00 | -1.88** |
| 32 | 2.334 | 44.08 | 46.00 | -1.92** |
| 33 | 4.092 | 44.05 | 46.00 | -1.95** |
| 34 | 1.223 | 44.02 | 46.00 | -1.98** |
| 35 | 4.361 | 43.96 | 46.00 | -2.04** |
| 36 | 4.272 | 43.96 | 46.00 | -2.04** |
| 37 | 3.383 | 43.92 | 46.00 | -2.08** |
| 38 | 0.586 | 43.90 | 46.00 | -2.10** |
| 39 | 0.449 | 44.78 | 46.89 | -2.11** |
| 40 | 0.383 | 46.02 | 48.21 | -2.19** |
| 41 | 1.480 | 43.77 | 46.00 | -2.23** |

EN 55022 Conducted Emissions  
Communication Machinery Corp.  
Emulation Engine  
Model: EE a/b/g  
FCC B - White Lead  
White Lead LI-215 12078 11-20-02  
TEST ENGINEER : Kyle Fujimoto

41 highest peaks above -50.00 dB of EN 55022 - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Average

| Peak# | Freq(MHz) | Amp(dBuV) | Limit(dB) | Delta(dB) |
|-------|-----------|-----------|-----------|-----------|
| 1     | 2.089     | 35.40     | 46.00     | -10.60    |
| 2     | 0.771     | 34.31     | 46.00     | -11.69    |
| 3     | 0.763     | 34.11     | 46.00     | -11.89    |
| 4     | 0.953     | 34.04     | 46.00     | -11.96    |
| 5     | 0.637     | 33.86     | 46.00     | -12.14    |
| 6     | 0.839     | 33.45     | 46.00     | -12.55    |
| 7     | 0.826     | 33.10     | 46.00     | -12.90    |
| 8     | 1.148     | 32.86     | 46.00     | -13.14    |
| 9     | 0.570     | 32.85     | 46.00     | -13.15    |
| 10    | 1.049     | 32.15     | 46.00     | -13.85    |
| 11    | 0.547     | 32.13     | 46.00     | -13.87    |
| 12    | 0.895     | 32.12     | 46.00     | -13.88    |
| 13    | 1.297     | 32.09     | 46.00     | -13.91    |
| 14    | 0.187     | 40.21     | 54.15     | -13.94    |
| 15    | 0.995     | 31.89     | 46.00     | -14.11    |
| 16    | 0.449     | 32.78     | 46.89     | -14.11    |
| 17    | 4.294     | 31.85     | 46.00     | -14.15    |
| 18    | 0.538     | 31.76     | 46.00     | -14.24    |
| 19    | 1.276     | 31.67     | 46.00     | -14.33    |
| 20    | 1.172     | 31.65     | 46.00     | -14.35    |
| 21    | 0.174     | 40.35     | 54.77     | -14.41    |
| 22    | 0.178     | 40.13     | 54.59     | -14.46    |
| 23    | 2.679     | 31.47     | 46.00     | -14.53    |
| 24    | 0.442     | 32.42     | 47.02     | -14.60    |
| 25    | 0.701     | 31.32     | 46.00     | -14.68    |
| 26    | 2.582     | 31.03     | 46.00     | -14.97    |
| 27    | 0.170     | 39.93     | 54.94     | -15.01    |
| 28    | 3.328     | 30.97     | 46.00     | -15.03    |
| 29    | 1.338     | 30.71     | 46.00     | -15.29    |
| 30    | 0.592     | 30.69     | 46.00     | -15.31    |
| 31    | 0.373     | 32.98     | 48.43     | -15.44    |
| 32    | 13.269    | 34.45     | 50.00     | -15.55    |
| 33    | 1.456     | 30.18     | 46.00     | -15.82    |
| 34    | 0.162     | 39.41     | 55.34     | -15.93    |
| 35    | 1.536     | 30.01     | 46.00     | -15.99    |
| 36    | 0.197     | 37.73     | 53.75     | -16.03    |
| 37    | 1.480     | 29.92     | 46.00     | -16.08    |
| 38    | 2.900     | 29.86     | 46.00     | -16.14    |
| 39    | 0.481     | 30.12     | 46.32     | -16.20    |
| 40    | 0.435     | 30.89     | 47.15     | -16.26    |
| 41    | 0.356     | 32.53     | 48.82     | -16.29    |