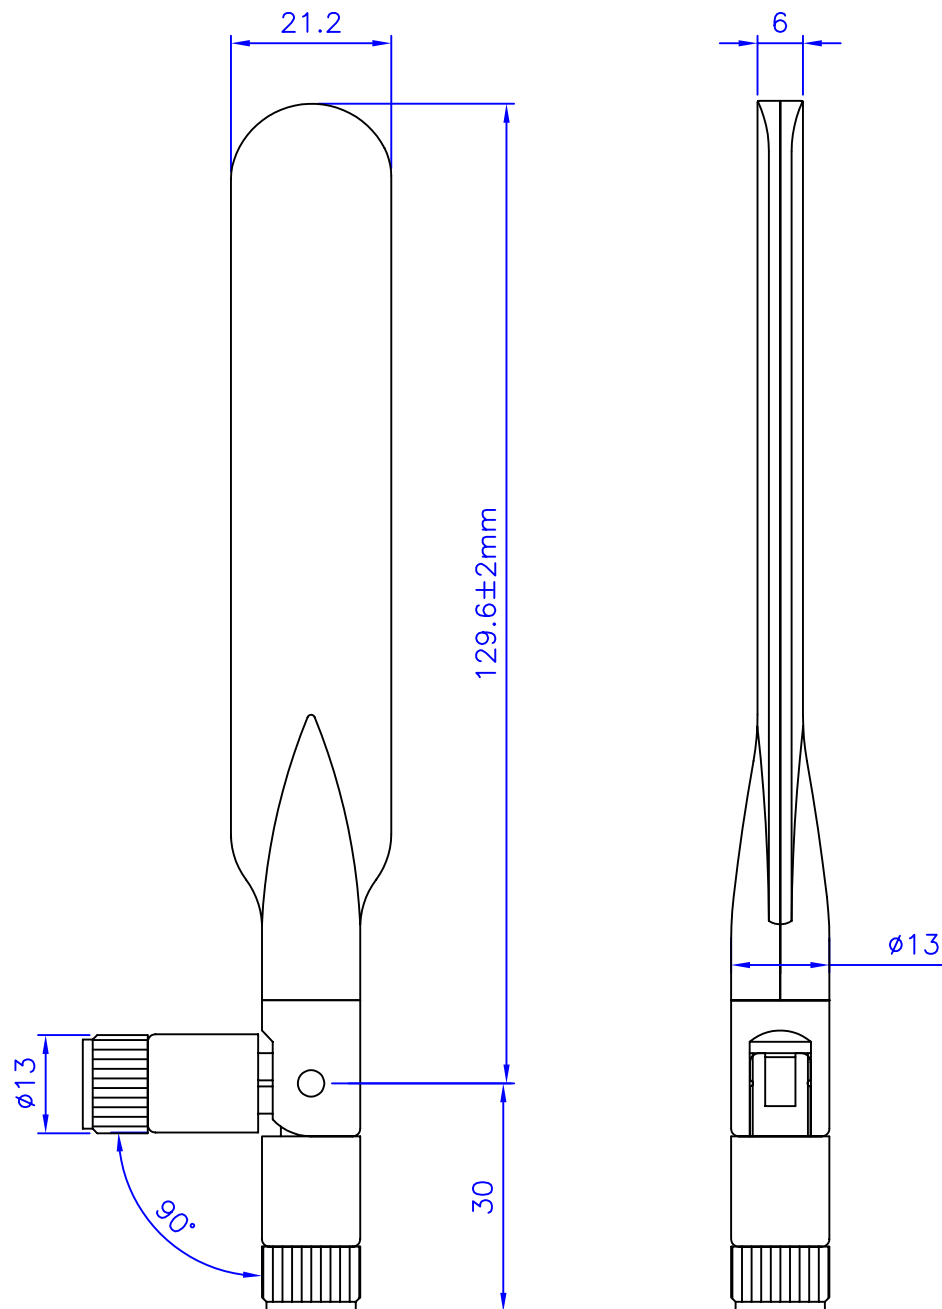


Electrical Properties:

Frequency Range: 2.4~2.5/5.15~5.35/5.725~5.85 GHz
 Impedance: 50W nominal
 VSWR: <2.0:1
 Gain: 4 dBi @ 2.45GHz
 5 dBi @ 5.25GHz
 4.5 dBi @ 5.75GHz
 Radiation: Omni
 Polarization: Vertical


Mechanical Properties:

Connector: SMA Reverse Polarity Plug(female)
 Material:
 Whip: Polycarbonate(Black)
 Swivel Mechanism: Polycarbonate(Black)
 Connector: Brass with black chrome plating
 Operation Temp.: -20°C to +65°C
 Storage Temp.: -30°C to +75°C


807-0043

TITLE	2.4/5.xGHz Swivel Antenna 614 model		VER
			1.0
UNIT	DWG. NO.	T614AH-2.4/5.X-S	
mm			
SCALE			
NONE			
NEARSON			


E-Plane Pattern @ 2.45GHz

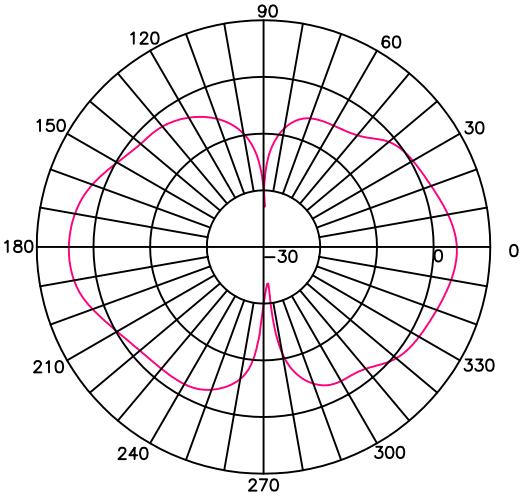


E-Plane Pattern @ 5.25GHz

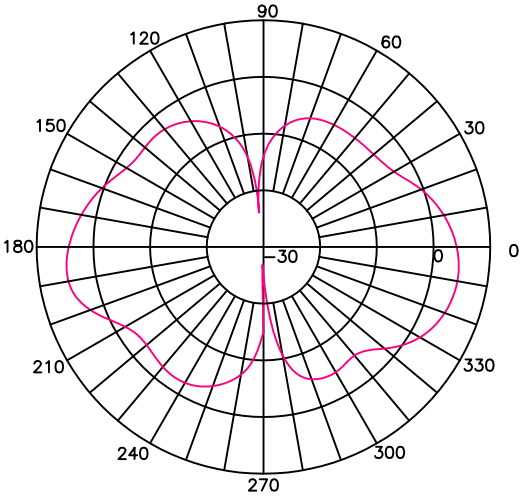


E-Plane Pattern @ 5.75GHz

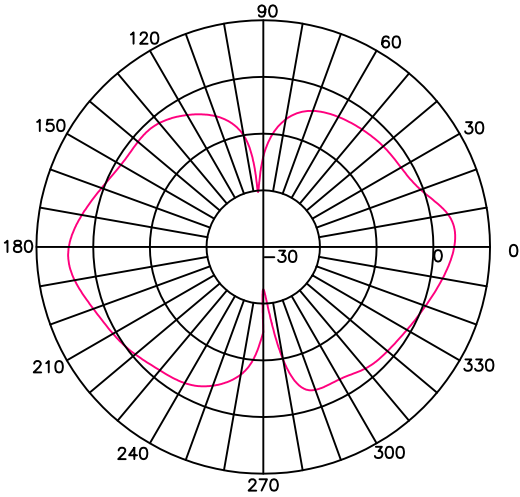


H-Plane Pattern @ 2.45GHz

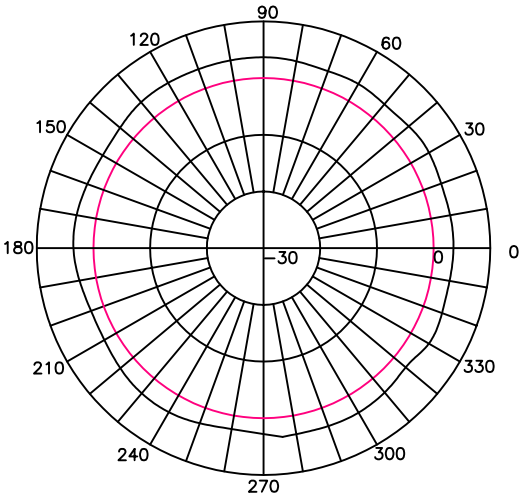

H-Plane Pattern @ 5.25GHz

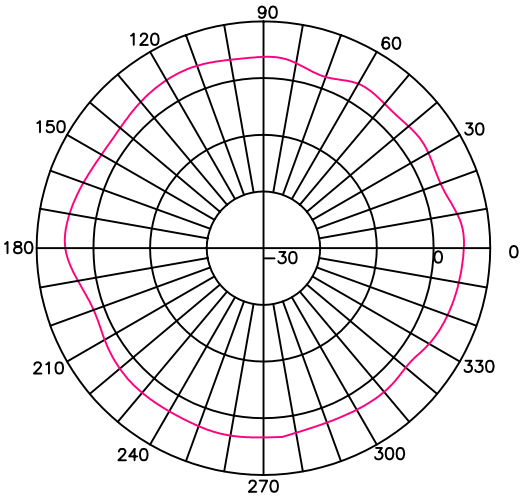

H-Plane Pattern @ 5.75GHz

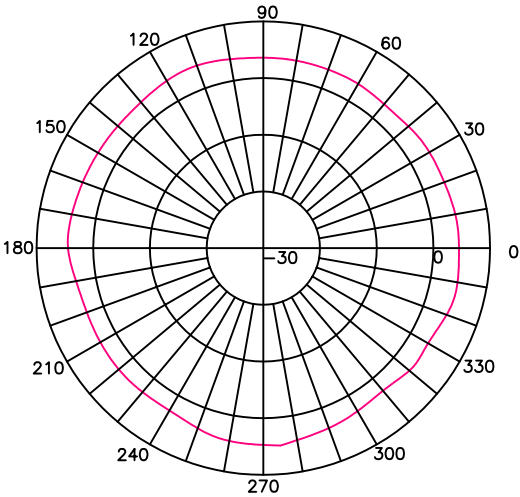

TITLE	2.4/5.xGHz Swivel Antenna		VER
	614 model		1.0
UNIT	DWG. NO. T614AH-2.4/5.X-S		
mm			
SCALE			
NONE	NEARSON		