



**Conducted Emission Limits Test for ADC Inc.**  
**Digivance 800 MHz 50-Watt SDR System**  
**Model Numbers DGVs-112710SYS and DGVs-122710SYS**

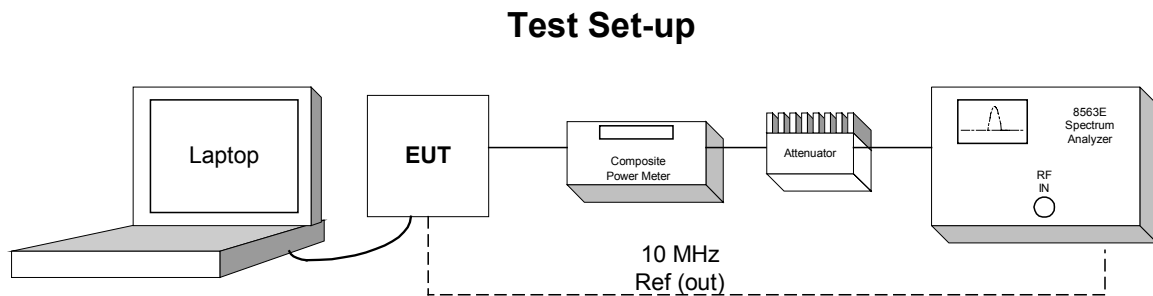


**Effective Isotropic Radiated Power Limit Test for ADC Inc.**  
**Digivance 800 MHz 50-Watt SDR System**  
**Model Numbers DGV5-112710SYS and DGV5-122710SYS**

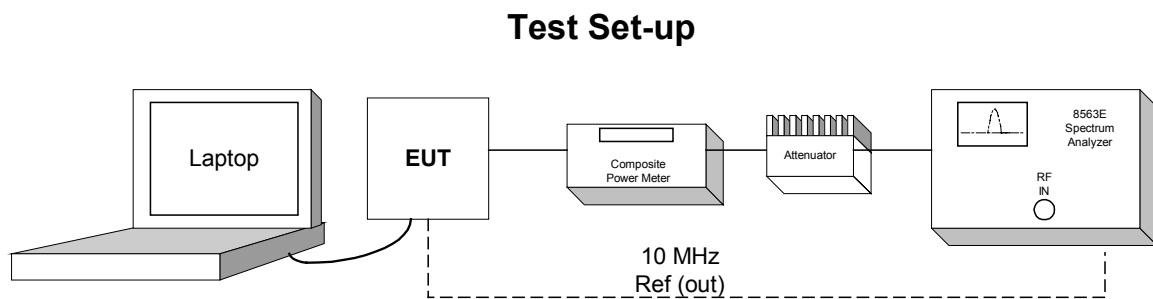

# Frequency Tolerance Test for ADC Inc Digivance 800 MHz 50-Watt SDR System Model Numbers DGV5-112710SYS and DGV5-122710SYS


EUT Server is specified for indoor use only with temperature range of 10° to +35° C, and was tested with its range.  
EUT STM and LPA are specified with a temperature range of -30° to +50° C and were tested with their range.

## Test Set-up

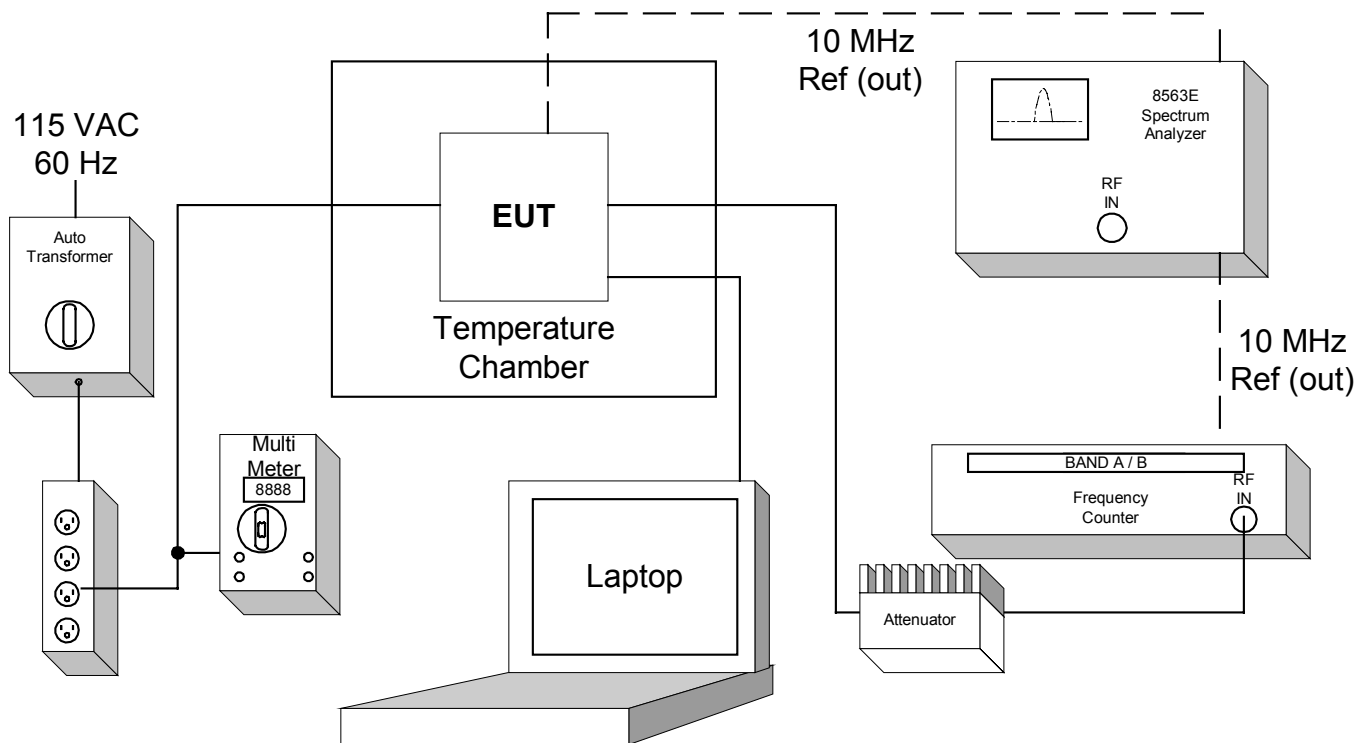


**Inter-Modulation Test for ADC Inc.  
Digivance 800 MHz 50-Watt SDR System  
Model Numbers DGVS-112710SYS and DGVS-122710SYS**

**Test Set-up**

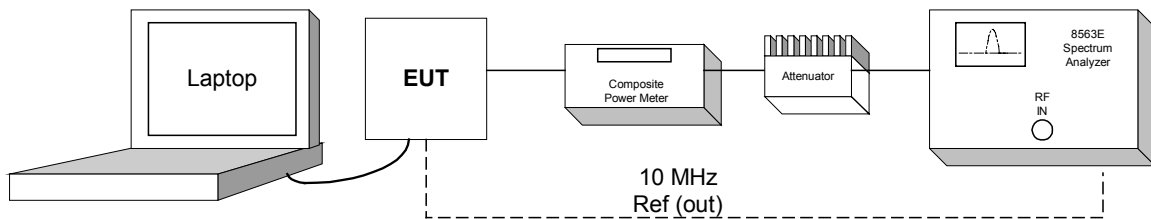

**Occupied Bandwidth Modulation Test for ADC Inc.  
Digivance 800 MHz 50-Watt SDR System  
Model Numbers DGVS-112710SYS and DGVS-122710SYS**

**Test Set-up**

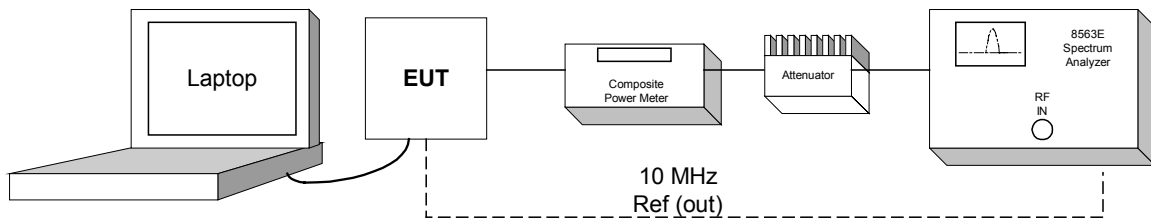

**Software Test for ADC Inc.**  
**Digivance 800 MHz 50-Watt SDR System**  
**Model Numbers DGVS-112710SYS and DGVS-122710SYS**

