

QT35 project antenna material requirements specification

Customer name: QCY

Customer name: QT35

Product name: FPC antenna

Size of product: See the BOM table for more details

Material code: 10.157.000141

Change Content CV:

order number	edition	state	Start and end date	person liable	page number	remarks
1	editio princeps	editio princeps	2024-8-19	Li Jieyi	11	
2						

The Supplier acknowledges the signature of the following documents:

Responsible person / date		IQC/ date	Review / Date	Approval / Date
MD	Close industrv	Su Guanfeng	Chen Kehong	
RF	He poetry Yin			

The Demander acknowledges the signature (please send it back after the confirmation):

The demander's judgment result: ☐ qualified ☐ unqualified			
Development & Design Engineer / Date	SQE Engineer / Date	Purchasing Leader / Date	Development Manager approval / date

catalogue

1. OVERVIEW	3
1.1 SCOPE OF APPLICATION	3
1.2 PROJECT BASIC INFORMATION	3
2. TECHNICAL INDEX REQUIREMENTS	3
2.1 INTRODUCTION OF TEST ITEMS AND EQUIPMENT	3
2.2.1 TEST INSTRUCTIONS	3
2.2.2 ACTIVE AND PASSIVE DATA OF THE RIGHT EAR ANTENNA	4
2.2.3 RIGHT EAR ANTENNA PASSIVE PARAMETER-DIRECTION GRAPH	4
2.2.4 ACTIVE PARAMETERS OF RIGHT EAR ANTENNA-PLAN PLAN	5
2.2.5 ANTENNA ACTIVE PARAMETERS / HEAD EAR 1 #	5
2.2.6 ANTENNA ACTIVE PARAMETERS / HEAD EAR 2 #	5
2.2.7 ANTENNA MATCHING	6
2.2.8 ANTENNA FIELD MEASUREMENT DATA	6
3. ENGINEERING DRAWINGS	7
4. RELIABILITY TEST REPORT	8
5. LIST OF MATERIALS	10
6. PACKAGING DIAGRAM	11

1. Overview

1.1 Scope of application

This requirement, provided QT35 Antenna technical requirements and material requirements specifications.

This requirement applies to QT 35 Antenna selection, testing and acceptance of the product.

1.2 Project basic information

Antenna name:	QT35
Antenna band:	2400MHz-2500MHz
Antenna material:	FPC

2. Technical index requirements

2.1 Introduction of test items and equipment

inventory	test item	equipment
S11 parameter	Standing wave ratio, echo loss	network analyzer
Active test	TRP,TIS	Integrated tester, microwave darkroom
Passive test	Gain, efficiency	network analyzer

2.2.1 Test instructions


Test tools: Agilent8960 instrument, R & S CMW500, full wave far field ETS dark room, high precision positioning system and its controller and computer with automatic test program

Test environment: temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity $50\% \pm 15\%$


Test method: DUT is fixed in the center of the turntable on the same horizontal line as the center of the horn antenna. The positioning system enables the DUT to rotate in the whole sphere to satisfy the high-precision 3 D positioning. Each RF instrument and turntable controller communicate with the PC with automatic test software through the GPIB interface

2.2.2 Active and passive data of the right ear antenna


Freq	Gain (dBi)	Effi (%)
2400.0	-2.68	19.24%
2410.0	-2.80	20.61%
2420.0	-1.74	21.24%
2430.0	-1.59	22.36%
2440.0	-1.34	23.58%
2450.0	-1.48	22.75%
2460.0	-1.35	21.41%
2470.0	-1.77	20.33%
2480.0	-2.69	19.56%
2490.0	-2.55	18.21%
2500.0	-2.84	17.44%

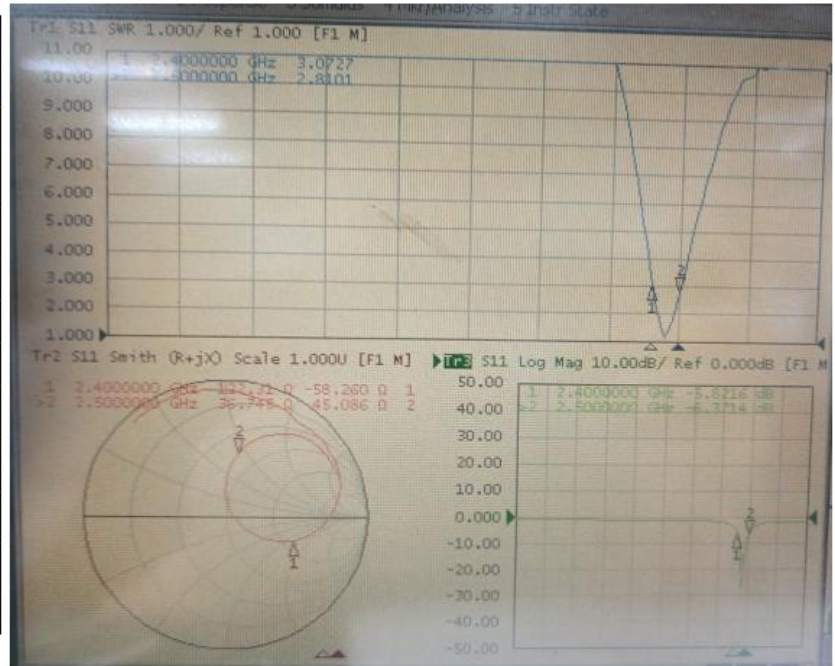

2.2.3 Right ear antenna passive parameter-direction graph

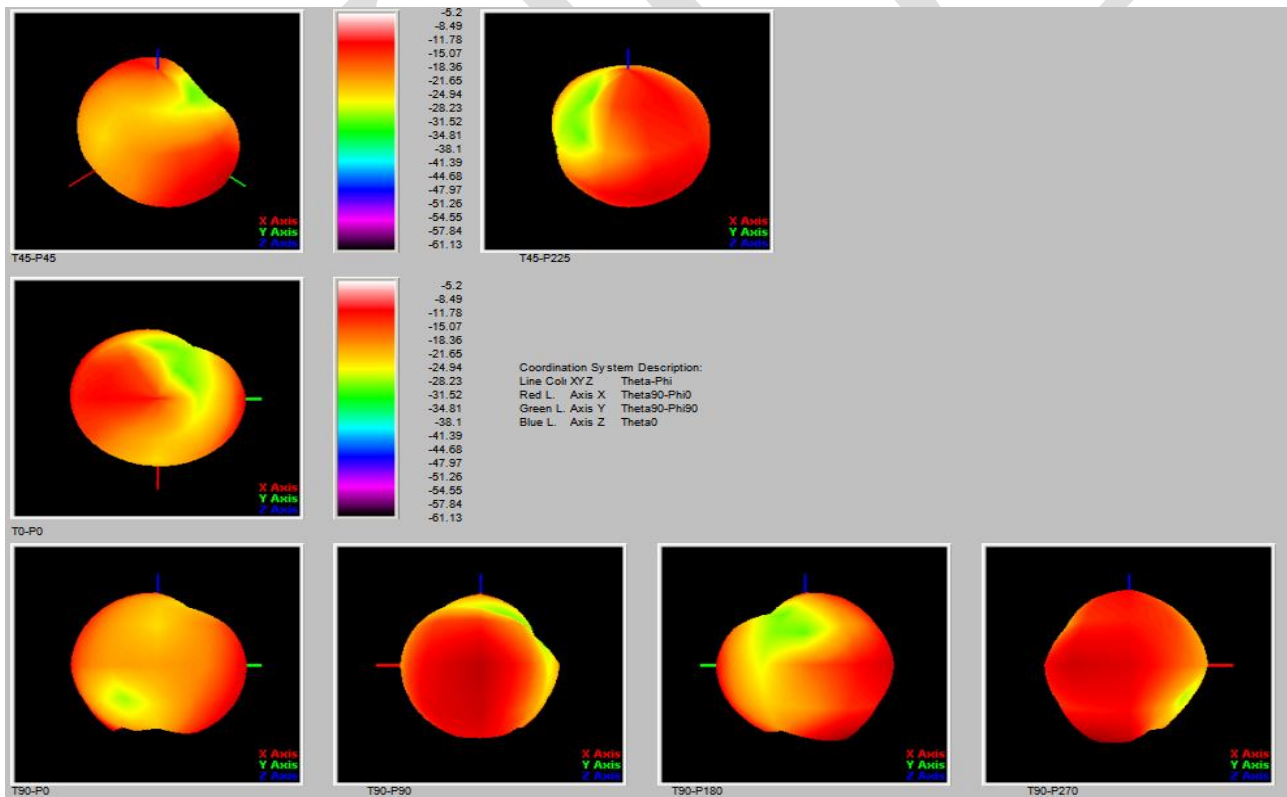

2.2.4 Active parameters of right ear antenna-plan plan

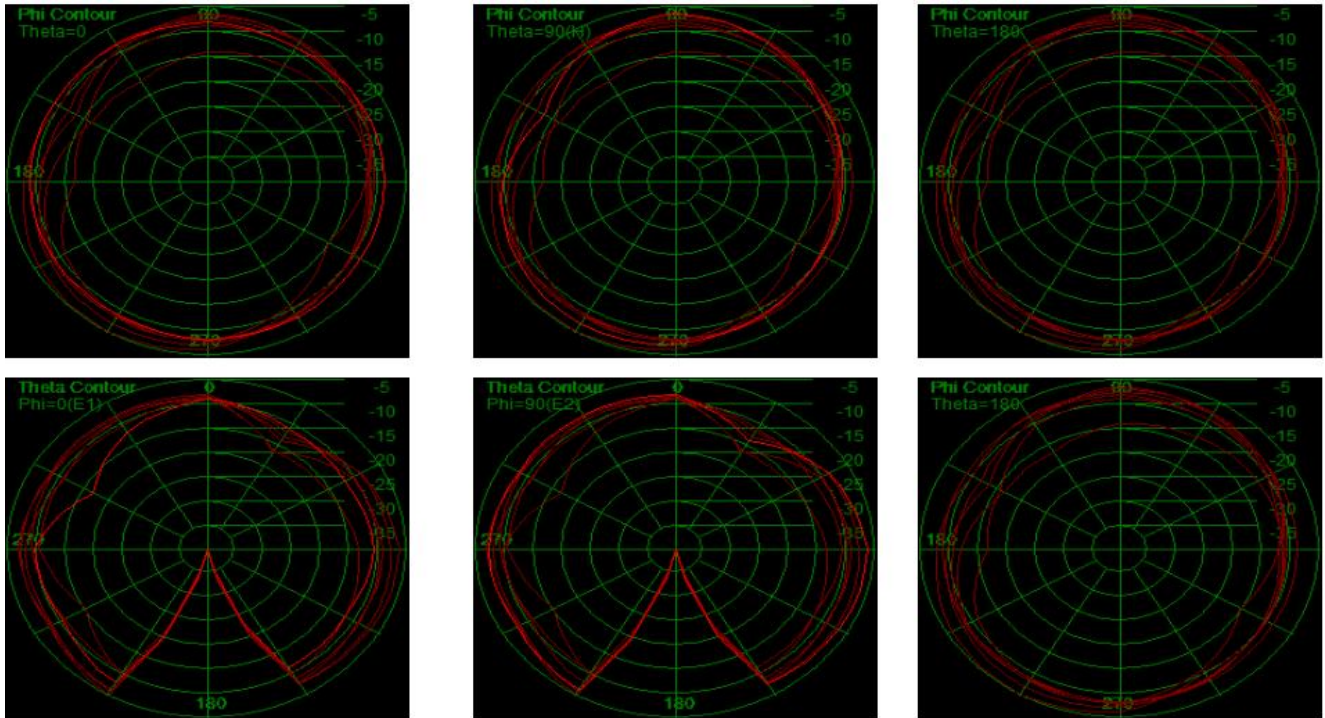


2.2.5 Antenna active parameters / head ear 1

Channel No.	Head and ear test data/R	
	TRP (dBm)	TIS (dBm)
0	-2.82	-81.76
39	-2.55	-82.73
78	-1.37	-82.53

2.2.6 Antenna active parameters / head ear 2

Channel No.	Head and ear test data/R	
	TRP (dBm)	TIS (dBm)
0	-2.87	-81.49
39	-2.67	-81.59
78	-2.59	-82.75

2.2.7 Antenna matching

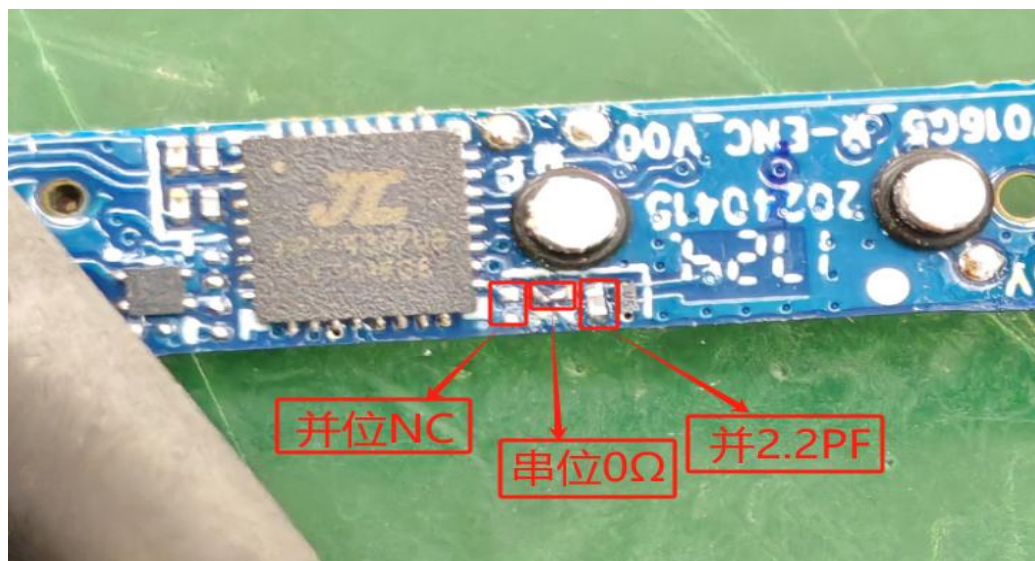


Note: Antenna π -shaped matching changes, and position 2.2 PF / string 0 Ohm-left and right ear matching synchronization- - (as shown in the figure)

2.2.8 antenna field measurement data

test method:	1. Distance test: Connect the Bluetooth headset with the mobile phone, and place the mobile phone on the 60cm high non-metal bracket. The tester wears the headset to walk to the distance, and the tester rotates 360 degrees. Measure the limit distance between the call sound and music sound in the headset, measure the distance.	
	2. Close body test: the tester carries the mobile phone (preferably the back pocket of the pants opposite the main ear of the Bluetooth headset) for the human rotation test whether there is no card.	
	3. Cover the hands test: testers wear headphones and connect with the mobile phone to play music, test two states: 1) fingertip up test, test whether the music is broken; 2) fingertip back test, test whether the music is broken.	
Test location:	In the outdoor open space of our building (see the test environment)	
testing facility:	Apple 6	
test result:	listen to music	1. The left and right ears are the main ear test 12M.
		2. The close proximity has not been tested yet.
		3, cover your ears with both hands and test for 5M. (Apple 5S)

Right antenna

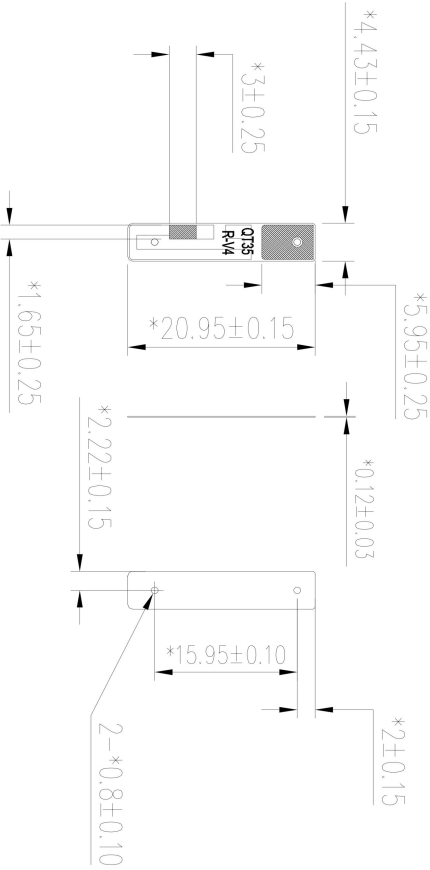A							
skills requirement:							
B		PI substrate:		1.0ml			
1. PFC substrate specifications:		Electrolytic copper:		0.5oz(2D)			
		Double-sided tape:		3M-9471SE			
2. Electroplating specifications:		Nickel plated:		30um		0.025um	
3. Functional test requirements:		Resistance:		≤0.8 ohm pass, >0.8 ohm fail			
		Return loss:		+/-20dBZ/ Set MMR point position loss within +/-20dBZ to pass			
4. Surface ink requirements:		Surface ink color:		27.5um black covering film			
		Printing font color:		White			
		Printing font height:		According to drawings			
C		5. Reliability requirements:		1. Reliability test: salt spray test(rubber friction test)(alcohol resistance test)(100 grid test, 2. The front ink, the surface of the ink is required to be folded in half without cracking, scratching, etc.			
6. Tolerance requirements:		1. Shape tolerance ±0.15;		2. Copper foil circuit tolerance ±0.05;		3. The position of the copper foil to the shape is ±0.15;	
		4. Hole-to-hole position tolerance ±0.10;		hole-to-shape position tolerance ±0.15;		5. The size tolerance of gold finger is ±0.20.	
		6. For other unmarked dimensions, refer to 2D drawings.					
7. Key control size:				The dimensions marked with numbers are regarded as important dimensions, and the others refer to 2D drawings			
8. Environmental requirements:		Parts meet RoHS2.0/REACH/CE environmental protection requirements					
9. Packaging requirements:		Paste full plate release paper for shipment					
DATE		Modify the content		Version		Revise	
1		2		3		4	
5				6			
7				8			
9				10			
11				12			
13				14			
15				16			
17				18			
19				20			
21				22			
23				24			
25				26			
27				28			
29				30			
31				32			
33				34			
35				36			
37				38			
39				40			
41				42			
43				44			
45				46			
47				48			
49				50			
51				52			
53				54			
55				56			
57				58			
59				60			
61				62			
63				64			
65				66			
67				68			
69				70			
71				72			
73				74			
75				76			
77				78			
79				80			
81				82			
83				84			
85				86			
87				88			
89				90			
91				92			
93				94			
95				96			
97				98			
99				100			
101				102			
103				104			
105				106			
107				108			
109				110			
111				112			
113				114			
115				116			
117				118			
119				120			
121				122			
123				124			
125				126			
127				128			
129				130			
131				132			
133				134			
135				136			
137				138			
139				140			
141				142			
143				144			
145				146			
147				148			
149				150			
151				152			
153				154			
155				156			
157				158			
159				160			
161				162			
163				164			
165				166			
167				168			
169				170			
171				172			
173				174			
175				176			
177				178			
179				180			
181				182			
183				184			
185				186			
187				188			
189				190			
191				192			
193				194			
195				196			
197				198			
199				200			
201				202			
203				204			
205				206			
207				208			
209				210			
211				212			
213				214			
215				216			
217				218			
219				220			
221				222			
223				224			
225				226			
227				228			
229				230			
231				232			
233				234			
235				236			
237				238			
239				240			
241				242			
243				244			
245				246			
247				248			
249				250			
251				252			
253				254			
255				256			
257				258			
259				260			
261				262			
263				264			
265				266			
267				268			
269				270			
271				272			
273				274			
275				276			
277				278			
279				280			
281				282			
283				284			
285				286			
287				288			
289				290			
291				292			
293				294			
295				296			
297				298			
299				300			
301				302			
303				304			
305				306			
307				308			
309				310			
311				312			
313				314			
315				316			
317				318			
319				320			
321				322			
323				324			
325				326			
327				328			
329				330			
331				332			
333				334			
335				336			
337				338			
339				340			
341				342			
343				344			
345				346			
347				348			
349				350			
351				352			
353				354			
355				356			
357				358			
359				360			
361				362			
363				364			
365				366			
367				368			
369				370			
371				372			
373				374			
375				376			
377				378			
379				380			
381				382			
383				384			
385				386			
387				388			
389				390			
391				392			
393				394			
395				396			
397				398			
399				400			
401				402			
403				404			
405				406			
407				408			
409				410			
411				412			
413				414			
415				416			
417				418			
419				420			
421				422			
423				424			
425				426			
427				428			
429				430			
431				432			
433				434			
435				436			
437				438			
439				440			
441				442			
443				444			
445				446			
447				448			
449				450			
451				452			
453				454			
455				456			
457				458			
459				460			
461				462			
463				464			
465				466			
467				468			
469				470			
471				472			
473				474			
475				476			
477				478			
479				480			
481				482			
483				484			
485				486			
487				488			
489				490			
491				492			
493				494			
495				496			
497				498			
499				499			

Shenzhen Yu Sheng Communication Equipment Co., Ltd.

Model	Q735	DATE	2024073
Name	RF-R Antenna	Design	BVZ
Part NO	600004-1B-7A	Review	MD
Material quality	Electrolytic copper	RF	BVZ
Build surface treatment		confirm	CKH
Appearance treatment		INIT	
mm	proportion	FIT	Revise
			R.A

4. Reliability test report

Hot and cold shock test report

client	QCY		date	2024-7-12		Factory number	600004	
P / N	QT35		quantity	Each 5PCS		testing time	48H	
material specification	Single side half to half, electrolytic copper gold plating		supplier	Renesola		reference standard	MIL-SDT-202Method017IEC 60749-25 JEDEC JESD22-A104-B IEC68-2-1MIL-STD-2168-85	
Test purpose: To test the reliability of products and coating binding force, coating and oxidation resistance and corrosion resistance.								
Equipment name: high and low temperature test box								
laboratory environment								
temperature	22-26℃		relative humidity	65-75%	atmos		1MPa	
test parameter								
temperature	high temperature		80℃	low temperature	minus forty ℃		Temperature tolerance	2℃
time	constant temperature	high temperature	0.30H	High temperature heating	10min		remarks	1. High temperature heating up rises from room temperature to set high temperature 2. Low temperature cooling refers to the set high temperature to the set low temperature
		low temperature	0.30H	Low temperature cooling	10min			
cycle index	32 Times		else	relative humidity	95%			
visual inspection	lamination	ACC	oxidize	ACC	blister	ACC	The ink fell off	ACC
test	antistripping	≥ 0.8kgf/cm2	spot welding	ACC	Bige test	ACC	Wear-resistance experiment	ACC
test record:								
identification of product		Product test results					judge	
		After the experiment, the product has no warping and no glue overflow.					ACC	

--	--	--

Shenzhen Yusheng Communication Equipment Co., LTD		
Salt mist test report		
client:	QCY	Model number: QT 35
Sample condition	Number of samples: 5 PCS	
	Material: single-sided half-to-half electrolytic copper	Plating layer: gold-plated
Start time of the experiment: 09, July 20,2024 to 09,25, July 12,2024		
Type of experiment	☒ NSS ☐ ASS ☐ CASS	
experiment condition	Salt solution: 5%	PH:7.0
	Box temperature: 35 · C	Relative humidity: 85% °C
	Spray method: ☒ Continuous ☐ interval	Compressed air pressure: 1kg / m 2
	precipitation rate of salt spray:	Fog liquid collection: PH7.0anc
	Experimental period: 1- -cycle	Spray time: 48H
		Hold time: 2H
The results were observed every 16 hours	The test temperature is: 36°C	Pressure barrel temperature: 47.5°C
experimental result	Appearance after the experiment: the appearance is intact and intact, no obvious change	
	Plating: no peeling, no corrosion	
	Surface spraying, screen printing: no falling off, no bubbles	

5. List of materials

600004 (QT35) BOM

edition: T:A


client: 600

Type of aircraft: 600004

et a date: 2024/08/2

Item numb	* Material code	* Material	Material class	*Machine type	Specification and model	colour	*unit.	dosage	remark
2	600004-IB-TA	BT-R-FPC		QT35	BT-R-FPC Electrolytic copper 20.95*4.43*0.12 mm	BLACK	PCS	1	
2.1	600004-IB-01-TA	BT-R-FPC		QT35	BT-R-FPC Electrolytic copper 20.95*4.43*0.12 mm	BLACK	PCS	1	
verify:			examine:			manufacture: BYZ			

6. Packaging diagram

Packaging method diagram		
product name	Antenna components	
P / N	600004	
Project model	QT35	
File details	Carton Size 1: 270*260*200MM Carton Size 2: 260*200*200MM Carton Size 3: Depending on the order quantity / volume	
	Boating method	The minimum package of 100 bags, in turn with waterproof bags, a waterproof bag with up to 1000 materials
	Total number of binning	Packaging by order quantity
labeling requirement	Tag Size 1: Universal use 100 * 100mm Tag Size 2: According to customer requirements	
matters need attention		
1. Due to the limitation of order quantity, the packing method of each material is the size of the box according to the total quantity of the order or the physical volume		
2. Storage temperature: room temperature		
3. Preservation conditions: store them in a cool and dry place		