

FCC TEST REPORT

FOR

Prowess Technology Limited

Portable Stereo Bluetooth Speaker

Model No.: Promini X6

Prepared for
Address

: Prowess Technology Limited
: Rm.511, TianHui Building, Yousong Road, LongHua Town,
Shenzhen, Guangdong, China

Prepared by
Address

: Shenzhen LCS Compliance Testing Laboratory Ltd.
: 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an
District, Shenzhen, Guangdong, China

Date of receipt of test sample : December 06, 2012

Number of tested samples : 1

Serial number : Prototype

Date of Test : December 06, 2012 – December 18, 2012

Date of Report : December 18, 2012

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.247)****Report Reference No. : LCS121206055TF**

Date of Issue : December 18, 2012

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd.,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name : Prowess Technology Limited**Address : Rm.511, TianHui Building, Yousong Road, LongHua Town,
Shenzhen, Guangdong, China**Test Specification**

Standard : FCC CFR 47 PART 15 Subpart C, ANSI C63.4-2003

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


Test Item Description. : Portable Stereo Bluetooth Speaker

Trade Mark : iprowess

Model/ Type reference : Promini X6

Ratings : DC 3.7V (Li-ion Battery)

DC 5V From PC Input AC 120/60Hz

Result : **Positive****Compiled by:**

Ada Liang/ File administrators

Supervised by:

Vito Cao/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS121206055TF

December 18, 2012
Date of issue

Type / Model..... : Promini X6

EUT..... : Portable Stereo Bluetooth Speaker

Applicant..... : Prowess Technology LimitedAddress..... : Rm.511, TianHui Building, Yousong Road, LongHua Town,
Shenzhen, Guangdong, China

Telephone..... : /

Fax..... : /

Manufacturer..... : Prowess Technology LimitedAddress..... : Rm.511, TianHui Building, Yousong Road, LongHua Town,
Shenzhen, Guangdong, China

Telephone..... : /

Fax..... : /

Factory..... : Prowess Technology LimitedAddress..... : Rm.511, TianHui Building, Yousong Road, LongHua Town,
Shenzhen, Guangdong, China

Telephone..... : /

Fax..... : /

Test Result:**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

| Description | Page |
|---|-----------|
| 1. GENERAL INFORMATION | 5 |
| 1.1 Description of Device (EUT)..... | 5 |
| 1.2 Host System Configuration List and Details | 5 |
| 1.3 External I/O Cable | 5 |
| 1.4 Description of Test Facility | 5 |
| 1.5 Statement of The Measurement Uncertainty | 6 |
| 1.6 Measurement Uncertainty..... | 6 |
| 1.7 Description Of Test Modes..... | 6 |
| 2. TEST METHODOLOGY | 7 |
| 2.1 EUT Configuration | 7 |
| 2.2 EUT Exercise | 7 |
| 2.3 General Test Procedures | 7 |
| 3. SYSTEM TEST CONFIGURATION..... | 8 |
| 3.1 Justification..... | 8 |
| 3.2 EUT Exercise Software | 8 |
| 3.3 Special Accessories..... | 8 |
| 3.4 Block Diagram/Schematics..... | 8 |
| 3.5 Equipment Modifications | 8 |
| 3.6 Block Diagram of Test Setup..... | 8 |
| 4. FCC PART 15.247 REQUIREMENTS | 9 |
| 4.1 Peak Power | 9 |
| 4.2 Band Edges Measurement | 10 |
| 4.3 Frequency Separation | 19 |
| 4.5 Time Of Occupancy (Dwell Time)..... | 26 |
| 4.6 Spurious Emissions..... | 29 |
| 5. RADIATED EMISSION MEASUREMENT | 33 |
| 5.1 Test Equipment..... | 33 |
| 5.2 Block Diagram of Test Setup..... | 33 |
| 5.3 Radiated Emission Limit | 34 |
| 5.4 Test Results..... | 34 |
| 6. POWER LINE CONDUCTED EMISSIONS..... | 37 |
| 6.1 Standard Applicable..... | 37 |
| 6.2 Test Equipment..... | 37 |
| 6.3 Block Diagram of Test Setup..... | 37 |
| 6.4 Test Results..... | 37 |
| 7. ANTENNA REQUIREMENT | 39 |
| 7.1 Standard Applicable..... | 39 |
| 8. MANUFACTURER/ APPROVAL HOLDER DECLARATION | 40 |

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : Portable Stereo Bluetooth Speaker
 Model Number : Promini X6
 Power Supply : DC 3.7V (Li-ion Battery)
 DC 5V From PC Input AC 120/60Hz
 Frequency Range : 2402.00-2480.00MHz (Channel Frequency=2402+1(K-1),
 K=1, 2, 379)
 Modulation Technology : GFSK(1Mbps)
 π /4-DQPSK(2Mbps)
 8-DPSK(3Mbps)
 Module Channel : 79
 Channel Spacing : 1MHz
 Bluetooth Version : Bluetooth 2.1 Version with EDR
 Antenna Gain : 2.0dBi (Isotropic)

1.2 Host System Configuration List and Details

| Manufacturer | Description | Model | S/N | Certificate |
|--------------|-------------|-------------|------------|-------------|
| Lenovo | Notebook | Lenovo B470 | WB05067151 | DoC |

1.3 External I/O Cable

| Cable Description | Length (M) | From/Port | To |
|-------------------|------------|-----------|----------|
| Audio Cabel | 1.2 | EUT | PC/Phone |
| USB Cabel | 0.5 | EUT | PC |

1.4 Description of Test Facility

Site Description

EMC Lab. : Accredited by CNAS, June 04, 2010
 The Certificate Registration Number. is L4595.
 Accredited by FCC, July 14, 2011
 The Certificate Registration Number. is 899208.
 Accredited by Industry Canada, May. 02, 2011
 The Certificate Registration Number. is 9642A-1

1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|------------------------|-----------------|-------------|------|
| Radiation Uncertainty | 30MHz~200MHz | ±2.96dB | (1) |
| | 200MHz~1000MHz | ±3.10dB | (1) |
| | 1GHz~26.5GHz | ±3.80dB | (1) |
| Conduction Uncertainty | 150kHz~30MHz | ±1.63dB | (1) |
| Power disturbance | 30MHz~300MHz | ±1.60dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mbp/s. An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using GFSK techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mbp/s EDR packets use a Pi/4-DQPSK modulation and the 3 Mbp/s EDR packets use 8DPSK modulation. The following operating modes were applied for the related test items.

The EUT has been operated in GFSK, $\pi/4$ DQPSK, 8 DPSK modulation. The following operating modes were applied for the related test items. All 3 axis (X, Y and Z) have been tested.

| Mode of Operations | Frequency Range (MHz) | Data Rate (Mbps) |
|------------------------|-----------------------|------------------|
| GFSK | 2402 | 1 |
| | 2441 | 1 |
| | 2480 | 1 |
| $\pi/4$ DQPSK | 2402 | 2 |
| | 2441 | 2 |
| | 2480 | 2 |
| 8 DPSK | 2402 | 3 |
| | 2441 | 3 |
| | 2480 | 3 |
| For Conducted Emission | | |
| Test Mode | Link PC | |
| For Radiated Emission | | |
| Test Mode | TX Mode | |

Note: All the test modes were tested, and only the result of the worst case was recorded in the report.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

3. SYSTEM TEST CONFIGURATION

3.1 Justification

N/A.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.


3.4 Block Diagram/Schematics

Please refer to the report.


3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Block Diagram of Test Setup

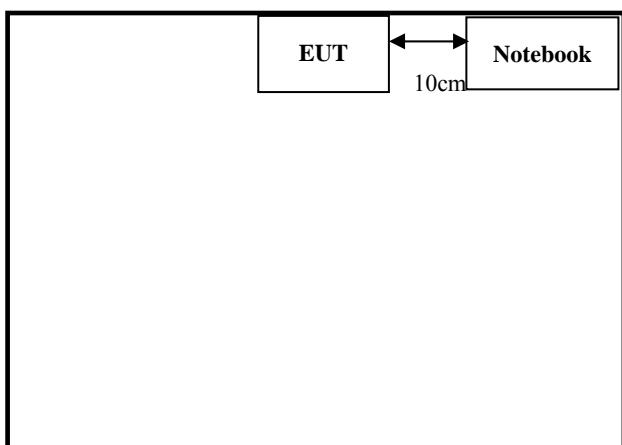

a. Conducted emission

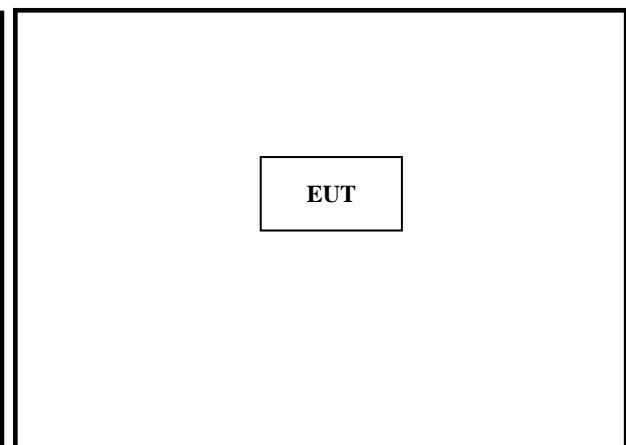

b. Radiated emission


4. FCC PART 15.247 REQUIREMENTS

4.1 Peak Power

4.1.1 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|--------------|--------------|-----------|------------|------------|------------|
| 1 | Power Sensor | Agilent | E9327A | US40441788 | 2012-06-18 | 2013-06-17 |
| 2 | Power Meter | Agilent | E4416A | QB41292714 | 2012-06-18 | 2013-06-17 |
| 3 | DC Filter | MPE | 23872C | N/A | 2012-06-18 | 2013-06-17 |

4.1.2 Block Diagram of Test Setup

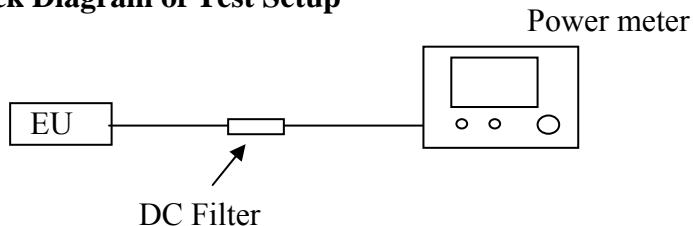

4.1.3 Limit

According to § 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

4.1.4 Test Procedure

The transmitter output is connected to the Power Meter.

4.1.5 Test Results

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (mW) | Limit (mW) | Result |
|------------------|-----------------|--------------------|-------------------|------------|--------|
| GFSK | 2402 | 1.761 | 1.50 | 125 | Pass |
| | 2441 | 3.008 | 2.00 | 125 | Pass |
| | 2480 | 3.467 | 2.22 | 125 | Pass |
| $\pi/4$ DQPSK | 2402 | 0.325 | 1.08 | 125 | Pass |
| | 2441 | 1.645 | 1.46 | 125 | Pass |
| | 2480 | 1.817 | 1.52 | 125 | Pass |
| 8DPSK | 2402 | 0.483 | 1.12 | 125 | Pass |
| | 2441 | 1.647 | 1.46 | 125 | Pass |
| | 2480 | 1.891 | 1.55 | 125 | Pass |

4.2 Band Edges Measurement


4.2.1 Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

4.2.2 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Last Cal. |
|------|-------------------|-----------------|-----------|------------|------------|------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY41440292 | 2012-06-18 | 2012-06-17 |
| 2 | Test Receiver | Rohde & Schwarz | ESCS30 | 828985/018 | 2012-06-18 | 2012-06-17 |
| 3 | Loop antenna | EMCO | 6502 | 0042963 | 2012-06-18 | 2012-06-17 |
| 4 | Log per Antenna | Schwarzbeck | VULB9163 | 142 | 2012-06-18 | 2012-06-17 |
| 5 | Horn-antenna | SCHWARZBECK | BBHA9120D | D:266 | 2012-06-18 | 2012-06-17 |
| 6 | DC Filter | MPE | 23872C | N/A | 2012-06-18 | 2012-06-17 |

4.2.3 Block Diagram of Test Setup

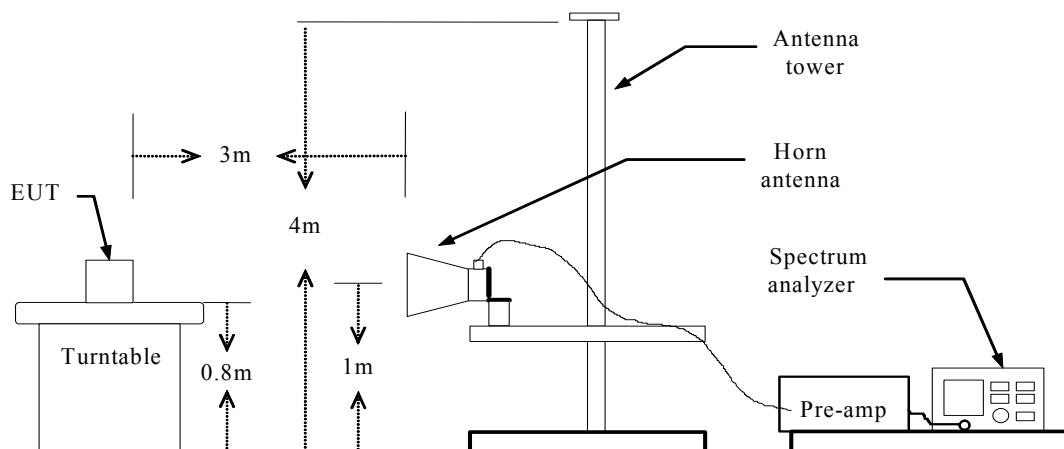


4.2.4 Test Procedure

- Place the EUT on the table and set it in transmitting mode.
- Set center frequency of Spectrum Analyzer = Lower and Upper channel.
- Set the Spectrum Analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
- Max hold trace.

4.2.5 Test Results


Lower Band-edge – Hopping off (GFSK)

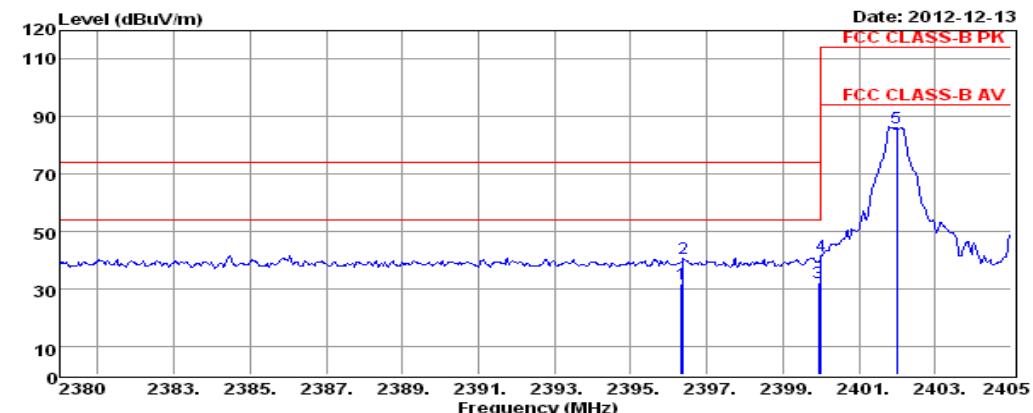

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: TX2402-1Mbps
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| | Freq. | Reading | CabLoss | AntFac | Prefac | Measured | Limit | Over | Remark |
|---|---------|---------|---------|--------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2396.34 | 28.75 | 5.05 | 27.91 | 30.16 | 31.55 | 54.00 | -22.45 | Average |
| 2 | 2396.38 | 37.77 | 5.05 | 27.91 | 30.16 | 40.57 | 74.00 | -33.43 | Peak |
| 3 | 2399.94 | 29.50 | 5.06 | 27.90 | 30.16 | 32.30 | 54.00 | -21.70 | Average |
| 4 | 2400.00 | 38.50 | 5.06 | 27.90 | 30.16 | 41.30 | 74.00 | -32.70 | Peak |
| 5 | 2402.00 | 83.22 | 5.06 | 27.89 | 30.16 | 86.01 | 114.00 | -27.99 | Peak |
| | | | | | | | | | --- |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

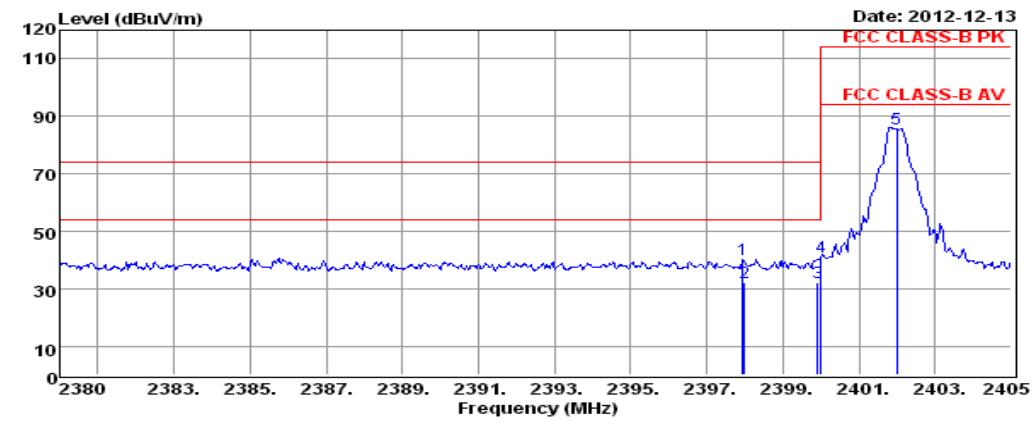


Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: TX2402-1Mbps
 Operator: ANDY
 Memo:
 pol: VERTICAL

| | Freq. | Reading | CabLoss | AntFac | Prefac | Measured | Limit | Over | Remark |
|---|---------|---------|---------|--------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2397.95 | 37.23 | 5.06 | 27.91 | 30.16 | 40.04 | 74.00 | -33.96 | Peak |
| 2 | 2397.99 | 29.18 | 5.06 | 27.91 | 30.16 | 31.99 | 54.00 | -22.01 | Average |
| 3 | 2399.91 | 29.41 | 5.06 | 27.90 | 30.16 | 32.21 | 54.00 | -21.79 | Average |
| 4 | 2400.00 | 38.45 | 5.06 | 27.90 | 30.16 | 41.25 | 74.00 | -32.75 | Peak |
| 5 | 2402.00 | 82.94 | 5.06 | 27.89 | 30.16 | 85.73 | 114.00 | -28.27 | Peak |
| | | | | | | | | | --- |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Upper Band-edge – Hopping off (GFSK)

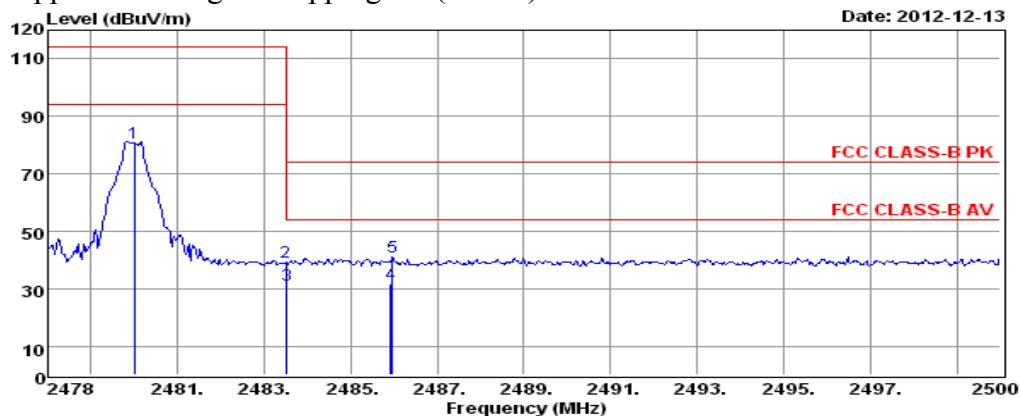

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: TX2480-1Mbps
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| | Freq. | Reading | CabLoss | AntFac | PreFac | Measured | Limit | Over | Remark |
|---|---------|---------|---------|--------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2480.00 | 77.92 | 5.17 | 27.66 | 30.16 | 80.59 | 114.00 | -33.41 | Peak |
| 2 | 2483.50 | 36.43 | 5.18 | 27.65 | 30.16 | 39.10 | 74.00 | -34.90 | Peak |
| 3 | 2483.51 | 28.39 | 5.18 | 27.65 | 30.16 | 31.06 | 54.00 | -22.94 | Average |
| 4 | 2485.93 | 29.19 | 5.18 | 27.64 | 30.16 | 31.85 | 54.00 | -22.15 | Average |
| 5 | 2485.96 | 38.22 | 5.18 | 27.64 | 30.16 | 40.88 | 74.00 | -33.12 | Peak |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that ate 20dB below the official limit are not reported.

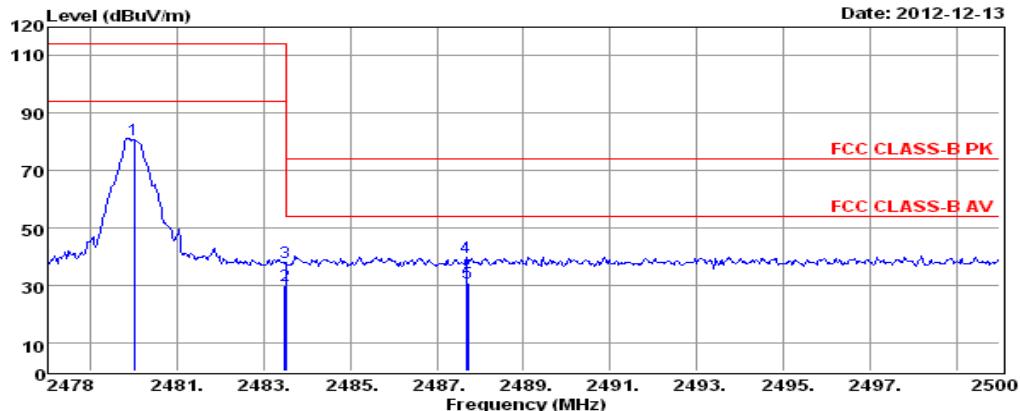


Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: TX2480-1Mbps
 Operator: ANDY
 Memo:
 pol: VERTICAL

| | Freq. | Reading | CabLoss | AntFac | PreFac | Measured | Limit | Over | Remark |
|---|---------|---------|---------|--------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2480.00 | 77.86 | 5.17 | 27.66 | 30.16 | 80.53 | 114.00 | -33.47 | Peak |
| 2 | 2483.49 | 27.10 | 5.18 | 27.65 | 30.16 | 29.77 | 94.00 | -64.23 | Average |
| 3 | 2483.50 | 35.19 | 5.18 | 27.65 | 30.16 | 37.86 | 74.00 | -36.14 | Peak |
| 4 | 2487.68 | 37.09 | 5.18 | 27.64 | 30.16 | 39.75 | 74.00 | -34.25 | Peak |
| 5 | 2487.71 | 28.01 | 5.18 | 27.64 | 30.16 | 30.67 | 54.00 | -23.33 | Average |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that ate 20dB below the official limit are not reported.


Lower Band-edge – Hopping on (GFSK)

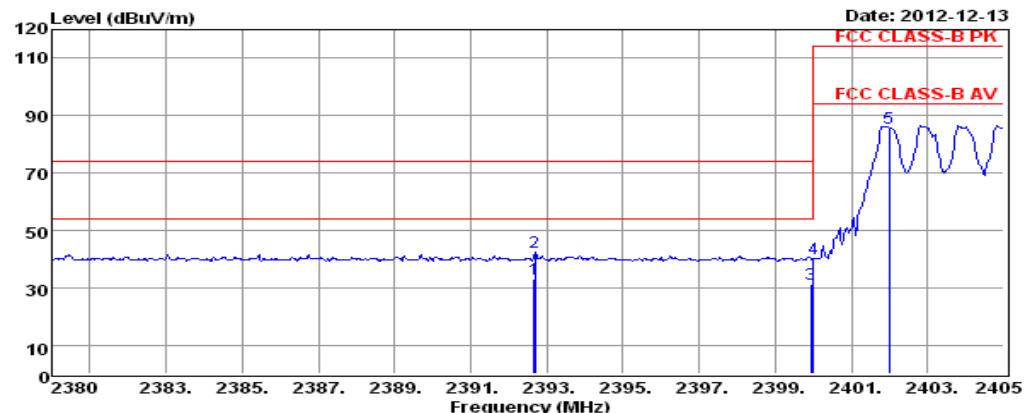

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: 2402MHz Hopping On-1Mbps
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| Freq. | Reading | CabLos | | AntFac | Prefac | Measured | Limit | Over | Remark |
|-------|---------|--------|------|--------|--------|----------|--------|--------|---------|
| | | MHz | dBuV | dB | dB/m | | | | |
| 1 | 2392.67 | 30.34 | 5.05 | 27.92 | 30.16 | 33.15 | 54.00 | -20.85 | Average |
| 2 | 2392.70 | 39.38 | 5.05 | 27.92 | 30.16 | 42.19 | 74.00 | -31.81 | Peak |
| 3 | 2399.93 | 28.21 | 5.06 | 27.90 | 30.16 | 31.01 | 54.00 | -22.99 | Average |
| 4 | 2400.00 | 37.25 | 5.06 | 27.90 | 30.16 | 40.05 | 74.00 | -33.95 | Peak |
| 5 | 2402.00 | 83.08 | 5.06 | 27.89 | 30.16 | 85.87 | 114.00 | -28.13 | Peak |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that ate 20dB below the official limit are not reported.

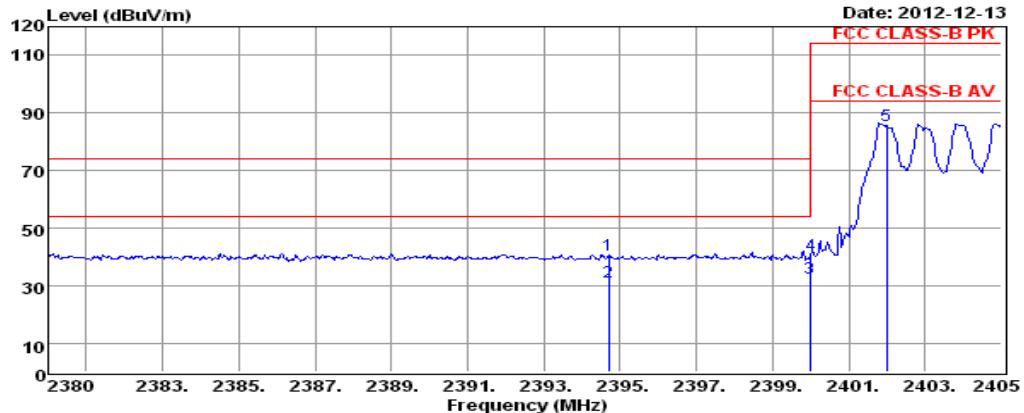


Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: 2402MHz Hopping On-1Mbps
 Operator: ANDY
 Memo:
 pol: VERTICAL

| Freq. | Reading | CabLos | | AntFac | Prefac | Measured | Limit | Over | Remark |
|-------|---------|--------|------|--------|--------|----------|--------|--------|---------|
| | | MHz | dBuV | dB | dB/m | | | | |
| 1 | 2394.70 | 37.71 | 5.05 | 27.92 | 30.16 | 40.52 | 74.00 | -33.48 | Peak |
| 2 | 2394.71 | 28.56 | 5.05 | 27.92 | 30.16 | 31.37 | 54.00 | -22.63 | Average |
| 3 | 2399.97 | 29.67 | 5.06 | 27.90 | 30.16 | 32.47 | 54.00 | -21.53 | Average |
| 4 | 2400.00 | 37.74 | 5.06 | 27.90 | 30.16 | 40.54 | 74.00 | -33.46 | Peak |
| 5 | 2402.00 | 83.05 | 5.06 | 27.89 | 30.16 | 85.84 | 114.00 | -28.16 | Peak |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that ate 20dB below the official limit are not reported.


Upper Band-edge – Hopping on (GFSK)

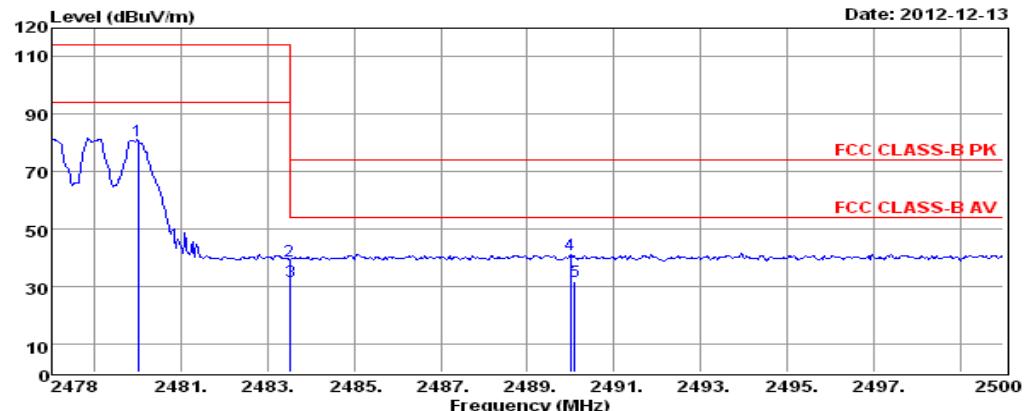

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: 2480MHz Hopping On-1Mbps
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| | Freq. | Reading | CabLoss | AntFac | PreFac | Measured | Limit | Over | Remark |
|---|---------|---------|---------|--------|--------|----------|--------|--------|----------------|
| | MHz | dBuV | | dB | | dBuV/m | dBuV/m | | |
| 1 | 2480.00 | 77.89 | | 5.17 | 27.66 | 30.16 | 80.56 | 114.00 | -33.44 Peak |
| 2 | 2483.50 | 36.19 | | 5.18 | 27.65 | 30.16 | 38.86 | 74.00 | -35.14 Peak |
| 3 | 2483.51 | 29.12 | | 5.18 | 27.65 | 30.16 | 31.79 | 54.00 | -22.21 Average |
| 4 | 2489.99 | 38.25 | | 5.19 | 27.63 | 30.16 | 40.91 | 74.00 | -33.09 Peak |
| 5 | 2490.10 | 29.20 | | 5.19 | 27.63 | 30.16 | 31.86 | 54.00 | -22.14 Average |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that ate 20dB below the official limit are not reported.

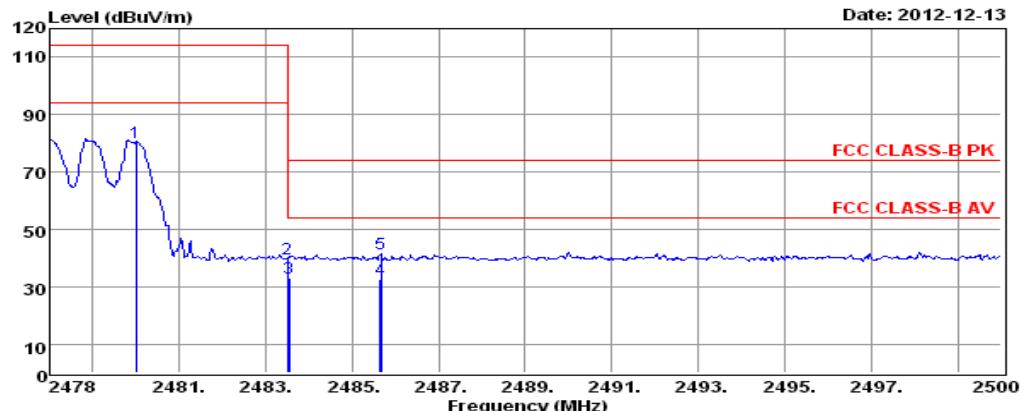


Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: 2480MHz Hopping On-1Mbps
 Operator: ANDY
 Memo:
 pol: VERTICAL

| | Freq. | Reading | CabLoss | AntFac | PreFac | Measured | Limit | Over | Remark |
|---|---------|---------|---------|--------|--------|----------|--------|--------|----------------|
| | MHz | dBuV | | dB | | dBuV/m | dBuV/m | | |
| 1 | 2480.00 | 77.60 | | 5.17 | 27.66 | 30.16 | 80.27 | 114.00 | -33.73 Peak |
| 2 | 2483.50 | 37.24 | | 5.18 | 27.65 | 30.16 | 39.91 | 74.00 | -34.09 Peak |
| 3 | 2483.53 | 30.20 | | 5.18 | 27.65 | 30.16 | 32.87 | 54.00 | -21.13 Average |
| 4 | 2485.64 | 29.91 | | 5.18 | 27.64 | 30.16 | 32.57 | 54.00 | -21.43 Average |
| 5 | 2485.66 | 38.93 | | 5.18 | 27.64 | 30.16 | 41.59 | 74.00 | -32.41 Peak |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that ate 20dB below the official limit are not reported.


Lower Band-edge – Hopping off (8DPSK)

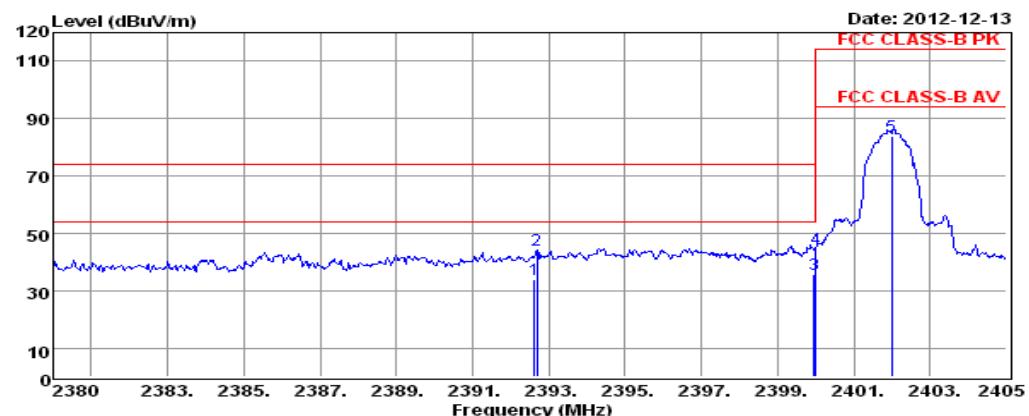

Env. /Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: TX2402-3Mbps
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| | Freq. | Reading | CabLos | AntFac | Prefac | Measured | Limit | Over | Remark |
|---|---------|---------|--------|--------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2392.63 | 31.23 | 5.05 | 27.92 | 30.16 | 34.04 | 54.00 | -19.96 | Average |
| 2 | 2392.70 | 41.21 | 5.05 | 27.92 | 30.16 | 44.02 | 74.00 | -29.98 | Peak |
| 3 | 2399.96 | 32.74 | 5.06 | 27.90 | 30.16 | 35.54 | 54.00 | -18.46 | Average |
| 4 | 2400.00 | 41.78 | 5.06 | 27.90 | 30.16 | 44.58 | 74.00 | -29.42 | Peak |
| 5 | 2402.00 | 81.02 | 5.06 | 27.89 | 30.16 | 83.81 | 114.00 | -30.19 | Peak |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that ate 20dB below the official limit are not reported.

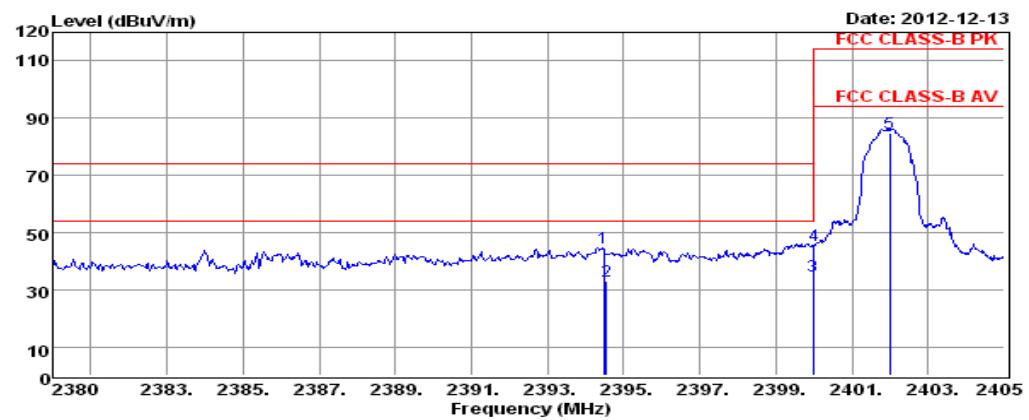


Env. /Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: TX2402-3Mbps
 Operator: ANDY
 Memo:
 pol: VERTICAL

| | Freq. | Reading | CabLos | AntFac | Prefac | Measured | Limit | Over | Remark |
|---|---------|---------|--------|--------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2394.48 | 41.94 | 5.05 | 27.92 | 30.16 | 44.75 | 74.00 | -29.25 | Peak |
| 2 | 2394.55 | 30.35 | 5.05 | 27.92 | 30.16 | 33.16 | 54.00 | -20.84 | Average |
| 3 | 2399.97 | 31.79 | 5.06 | 27.90 | 30.16 | 34.59 | 54.00 | -19.41 | Average |
| 4 | 2400.00 | 42.78 | 5.06 | 27.90 | 30.16 | 45.58 | 74.00 | -28.42 | Peak |
| 5 | 2402.00 | 82.02 | 5.06 | 27.89 | 30.16 | 84.81 | 114.00 | -29.19 | Peak |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that ate 20dB below the official limit are not reported.


Upper Band-edge – Hopping off (8DPSK)

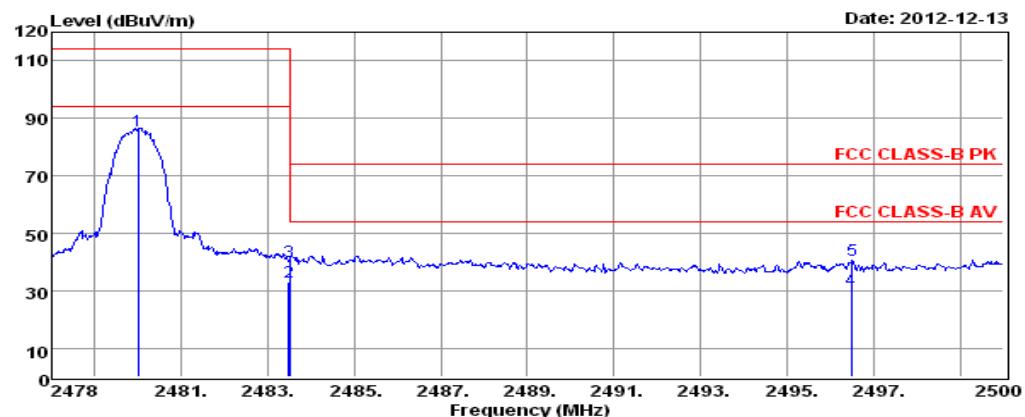

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: TX2480-3Mbps
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| | Freq. | Reading | CabLoss | AntFac | PreFac | Measured | Limit | Over | Remark |
|---|---------|---------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | | dB | dB/m | dB | dBuV/m | dBuV/m | dB |
| 1 | 2480.00 | 82.84 | | 5.17 | 27.66 | 30.16 | 85.51 | 114.00 | -28.49 |
| 2 | 2483.49 | 30.52 | | 5.18 | 27.65 | 30.16 | 33.19 | 94.00 | -60.81 |
| 3 | 2483.50 | 37.52 | | 5.18 | 27.65 | 30.16 | 40.19 | 74.00 | -33.81 |
| 4 | 2496.49 | 27.86 | | 5.20 | 27.61 | 30.16 | 30.51 | 54.00 | -23.49 |
| 5 | 2496.50 | 37.93 | | 5.20 | 27.61 | 30.16 | 40.58 | 74.00 | -33.42 |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

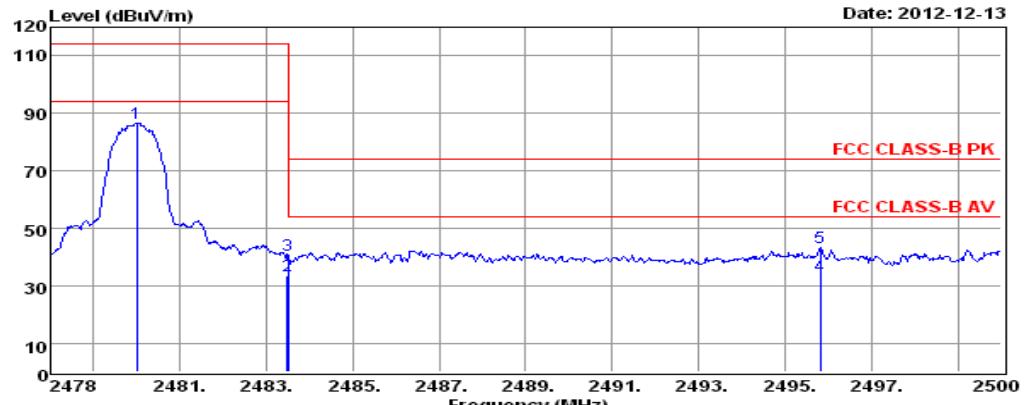


Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: TX2480-3Mbps
 Operator: ANDY
 Memo:
 pol: VERTICAL

| | Freq. | Reading | CabLoss | AntFac | PreFac | Measured | Limit | Over | Remark |
|---|---------|---------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | | dB | dB/m | dB | dBuV/m | dBuV/m | dB |
| 1 | 2480.00 | 83.83 | | 5.17 | 27.66 | 30.16 | 86.50 | 114.00 | -27.50 |
| 2 | 2483.48 | 30.89 | | 5.18 | 27.65 | 30.16 | 33.56 | 94.00 | -60.44 |
| 3 | 2483.50 | 37.92 | | 5.18 | 27.65 | 30.16 | 40.59 | 74.00 | -33.41 |
| 4 | 2495.82 | 30.69 | | 5.19 | 27.61 | 30.16 | 33.33 | 54.00 | -20.67 |
| 5 | 2495.82 | 40.73 | | 5.19 | 27.61 | 30.16 | 43.37 | 74.00 | -30.63 |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Lower Band-edge – Hopping on (8DPSK)

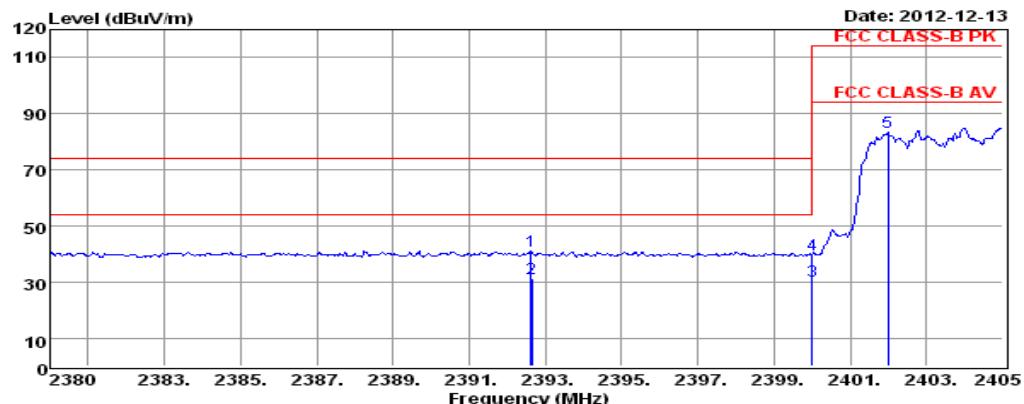

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: 2402MHz Hopping On-3Mbps
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| Freq. | Reading | CabLos | | Prefac | Measured | Limit | Over | Remark |
|-------|---------|--------|------|--------|----------|-------|--------|----------------|
| | | MHz | dBuV | dB | dB/m | | | |
| 1 | 2392.63 | 38.28 | 5.05 | 27.92 | 30.16 | 41.09 | 74.00 | -32.91 Peak |
| 2 | 2392.64 | 28.21 | 5.05 | 27.92 | 30.16 | 31.02 | 54.00 | -22.98 Average |
| 3 | 2400.00 | 27.71 | 5.06 | 27.90 | 30.16 | 30.51 | 54.00 | -23.49 Average |
| 4 | 2400.00 | 36.78 | 5.06 | 27.90 | 30.16 | 39.58 | 74.00 | -34.42 Peak |
| 5 | 2402.00 | 80.78 | 5.06 | 27.89 | 30.16 | 83.57 | 114.00 | -30.43 Peak |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

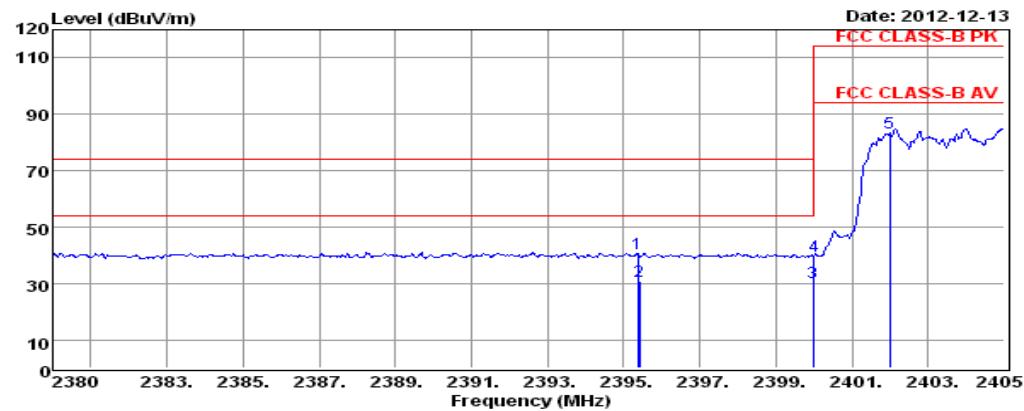


Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: 2402MHz Hopping On-3Mbps
 Operator: ANDY
 Memo:
 pol: VERTICAL

| Freq. | Reading | CabLos | | Prefac | Measured | Limit | Over | Remark |
|-------|---------|--------|------|--------|----------|-------|--------|----------------|
| | | MHz | dBuV | dB | dB/m | | | |
| 1 | 2395.38 | 43.06 | 0.00 | 27.91 | 30.16 | 40.81 | 74.00 | -33.19 Peak |
| 2 | 2395.41 | 33.01 | 0.00 | 27.91 | 30.16 | 30.76 | 54.00 | -23.24 Average |
| 3 | 2399.98 | 32.77 | 0.00 | 27.90 | 30.16 | 30.51 | 54.00 | -23.49 Average |
| 4 | 2400.00 | 41.84 | 0.00 | 27.90 | 30.16 | 39.58 | 74.00 | -34.42 Peak |
| 5 | 2402.00 | 85.84 | 0.00 | 27.89 | 30.16 | 83.57 | 114.00 | -30.43 Peak |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Upper Band-edge – Hopping on (8DPSK)

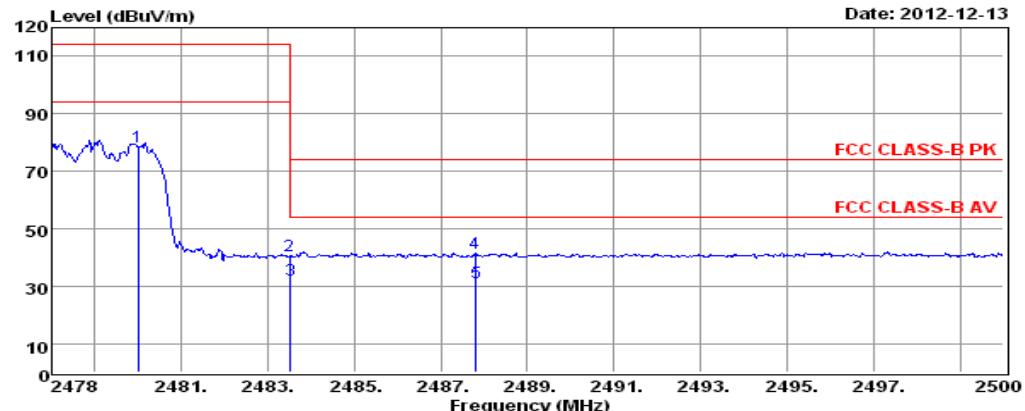

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: 2480MHz Hopping On-3Mbps
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| | Freq. | Reading | CabLos | AntFac | Prefac | Measured | Limit | Over | Remark |
|---|---------|---------|--------|--------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2480.00 | 75.91 | 5.17 | 27.66 | 30.16 | 78.58 | 114.00 | -35.42 | Peak |
| 2 | 2483.50 | 37.74 | 5.18 | 27.65 | 30.16 | 40.41 | 74.00 | -33.59 | Peak |
| 3 | 2483.51 | 29.65 | 5.18 | 27.65 | 30.16 | 32.32 | 54.00 | -21.68 | Average |
| 4 | 2487.79 | 38.70 | 5.18 | 27.64 | 30.16 | 41.36 | 74.00 | -32.64 | Peak |
| 5 | 2487.81 | 28.67 | 5.18 | 27.64 | 30.16 | 31.33 | 54.00 | -22.67 | Average |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

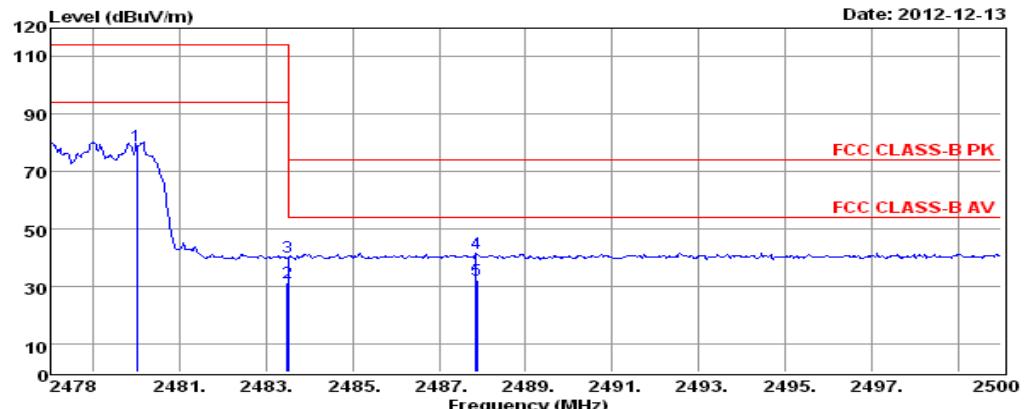

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 3.7V
 Test Mode: 2480MHz Hopping On-3Mbps
 Operator: ANDY
 Memo:
 pol: VERTICAL

| | Freq. | Reading | CabLos | AntFac | Prefac | Measured | Limit | Over | Remark |
|---|---------|---------|--------|--------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2480.00 | 76.36 | 5.17 | 27.66 | 30.16 | 79.03 | 114.00 | -34.97 | Peak |
| 2 | 2483.49 | 28.42 | 5.18 | 27.65 | 30.16 | 31.09 | 94.00 | -62.91 | Average |
| 3 | 2483.50 | 37.46 | 5.18 | 27.65 | 30.16 | 40.13 | 74.00 | -33.87 | Peak |
| 4 | 2487.86 | 38.79 | 5.18 | 27.64 | 30.16 | 41.45 | 74.00 | -32.55 | Peak |
| 5 | 2487.87 | 29.66 | 5.18 | 27.64 | 30.16 | 32.32 | 54.00 | -21.68 | Average |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

4.3 Frequency Separation


4.3.1 Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.3.2 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|-------------|------------|------------|------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY41440292 | 2012-06-18 | 2013-06-17 |
| 2 | RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | 2012-06-18 | 2013-06-17 |
| 3 | DC Filter | MPE | 23872C | N/A | 2012-06-18 | 2013-06-17 |

4.3.3 Block Diagram of Test Setup

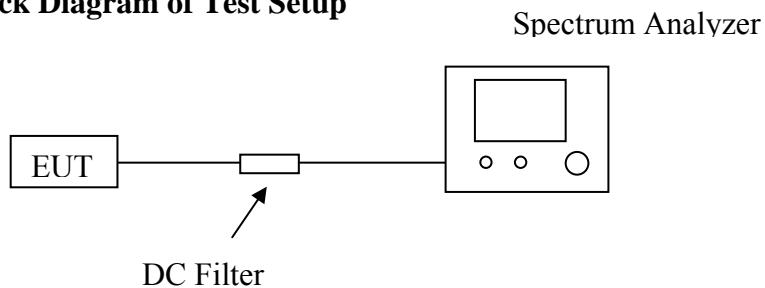

4.3.4 Test Procedure


- E. Place the EUT on the table and set it in transmitting mode.
- F. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- G. Set center frequency of Spectrum Analyzer = middle of hopping channel.
- H. Set the Spectrum Analyzer as RBW = 100kHz, VBW = 100kHz, Span = 5MHz, Sweep = auto.
- I. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

4.3.5 Test Results


| The Measurement Result With The Worst Case of GFSK And 8DQPSK Modulation | | | | | |
|--|-------------------------------------|---------------------------------------|-----------------------------------|---|--------|
| CH | GFSK Channel Separation (MHz) | 8DQPSK Channel Separation (MHz) | 8DQPSK 20dB Bandwidth (MHz) | Limit (MHz) | Result |
| Low | 1.000 | 1.000 | 1.264 | two-thirds of the 20 dB bandwidth | Pass |
| Middle | 1.000 | 1.000 | 1.265 | | Pass |
| High | 1.000 | 1.000 | 1.262 | | Pass |

The test data graph please refer to the following page.

Carrier Frequency Separation GFSK Mode


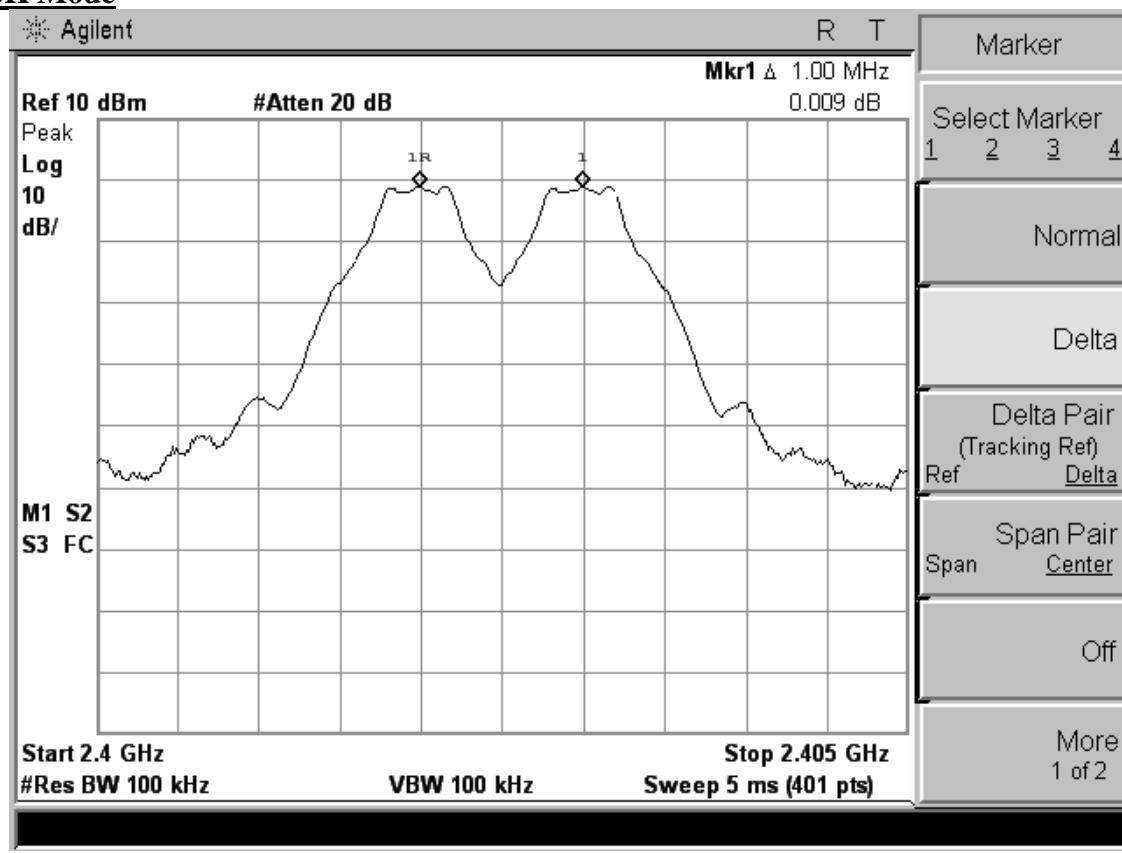



8DPSK Mode

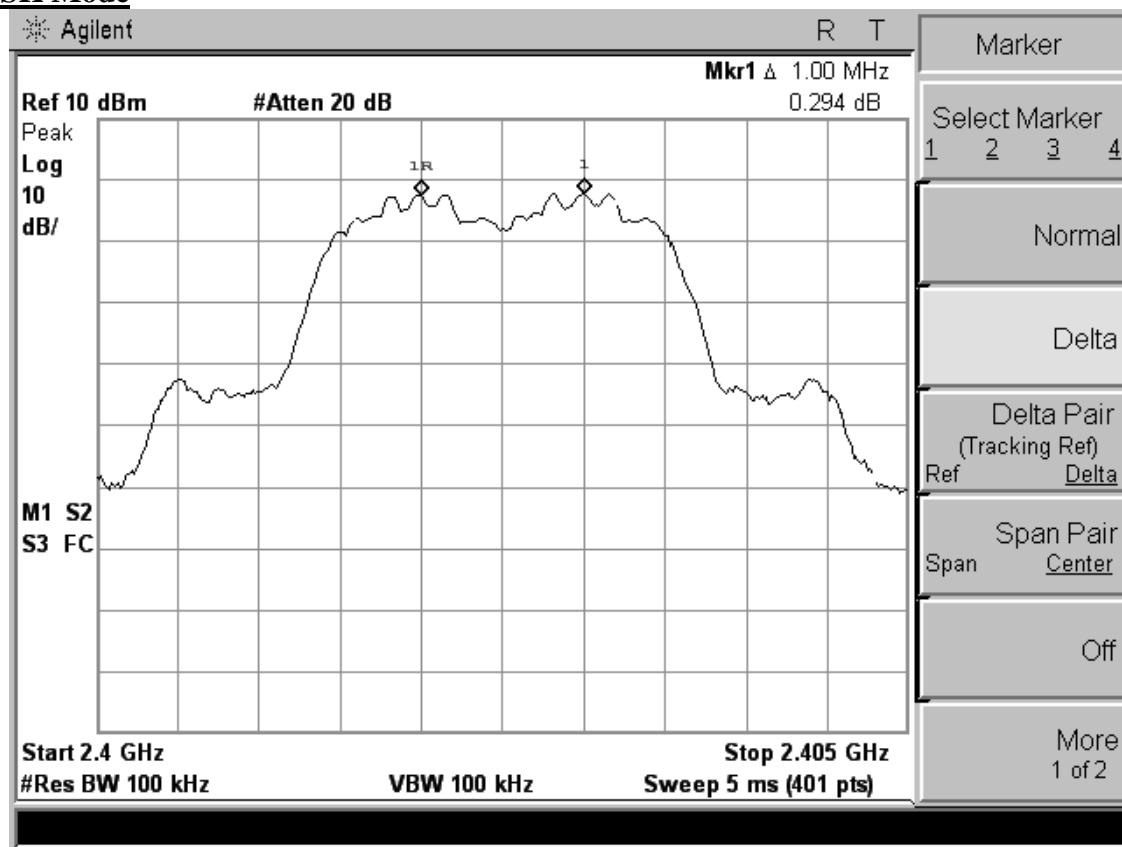


Measurement of 20dB Bandwidth



GFSK Mode

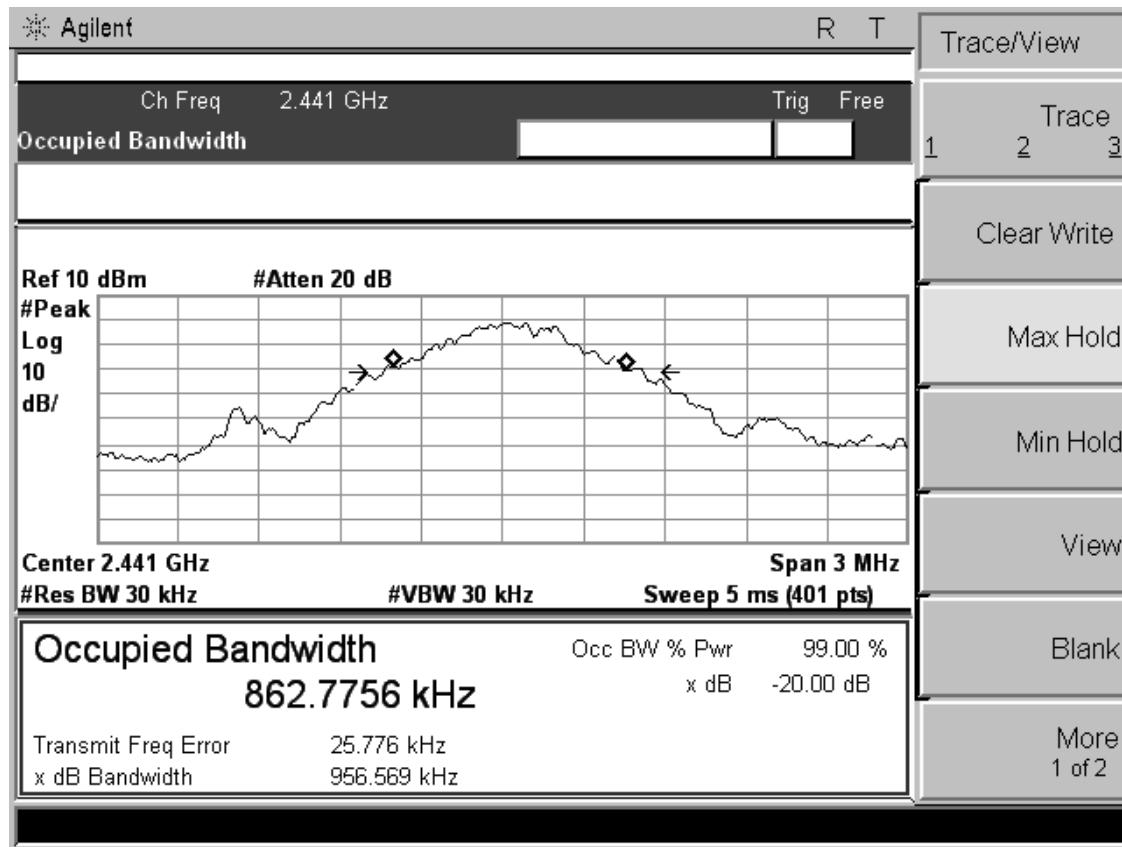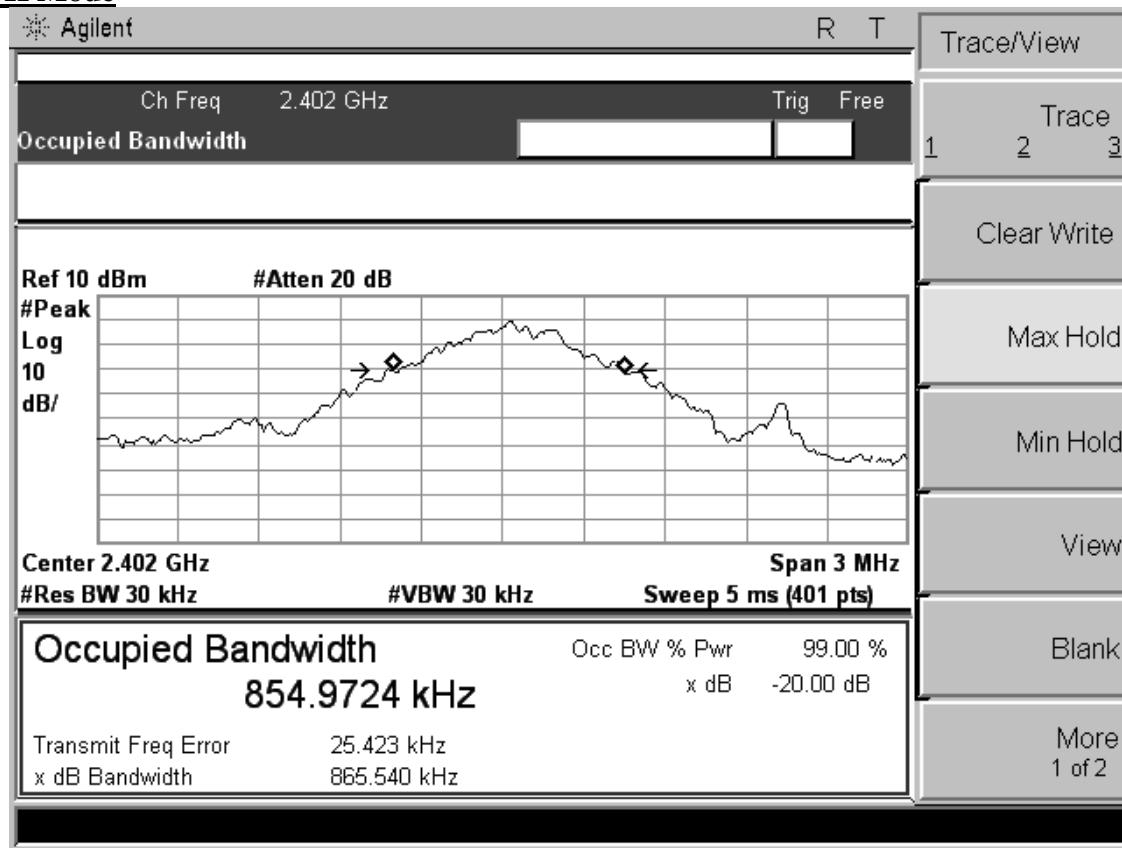

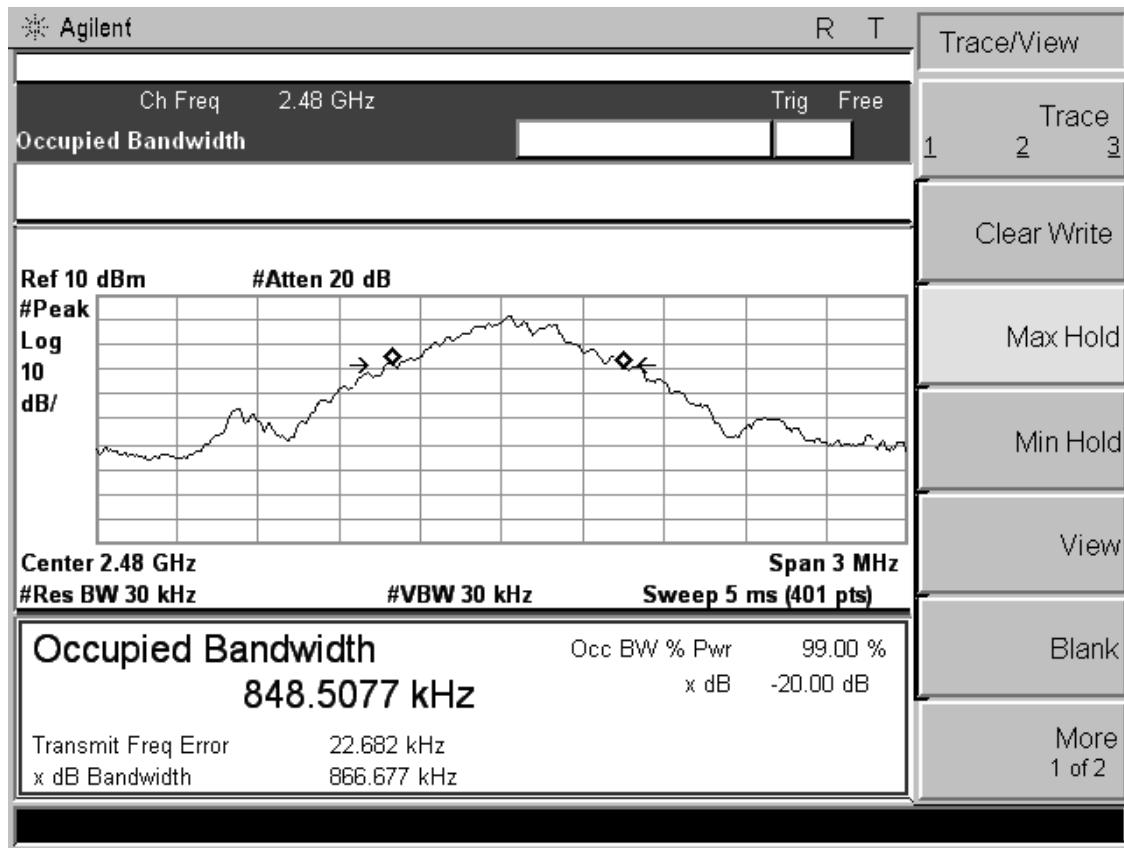

8DPSK Mode

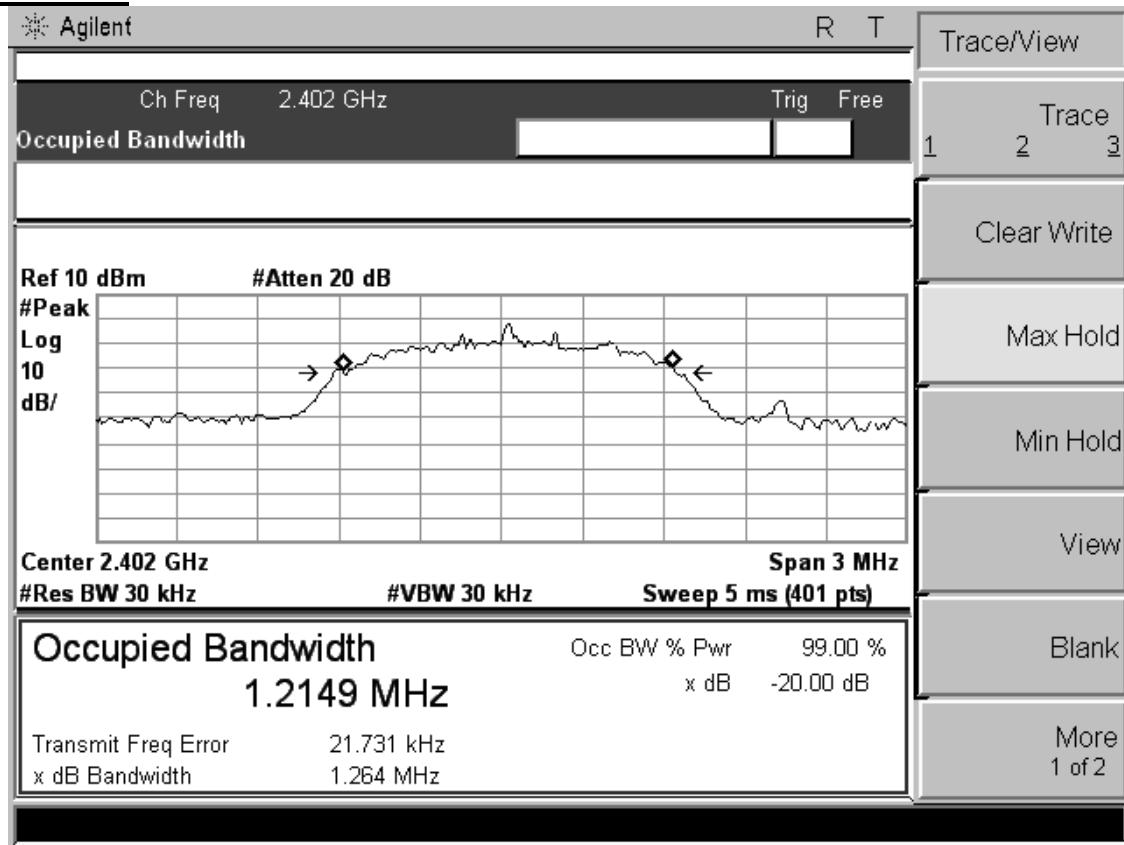

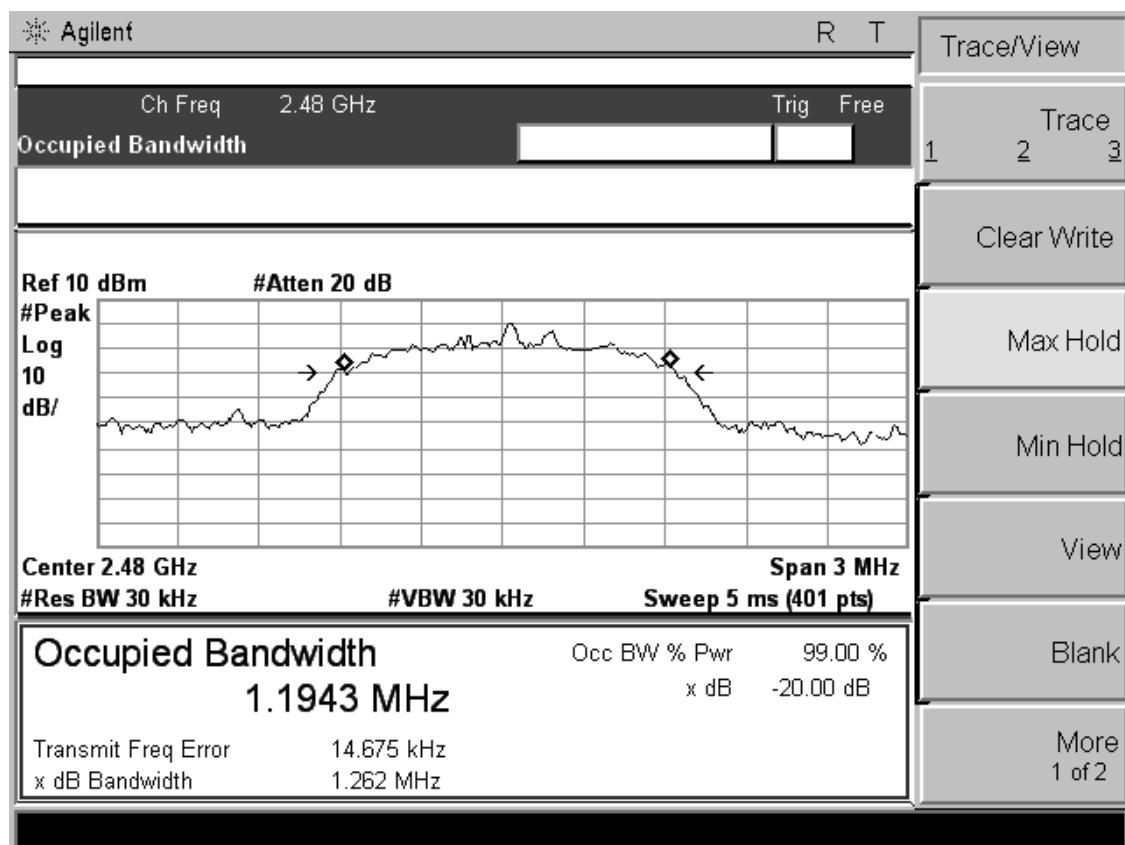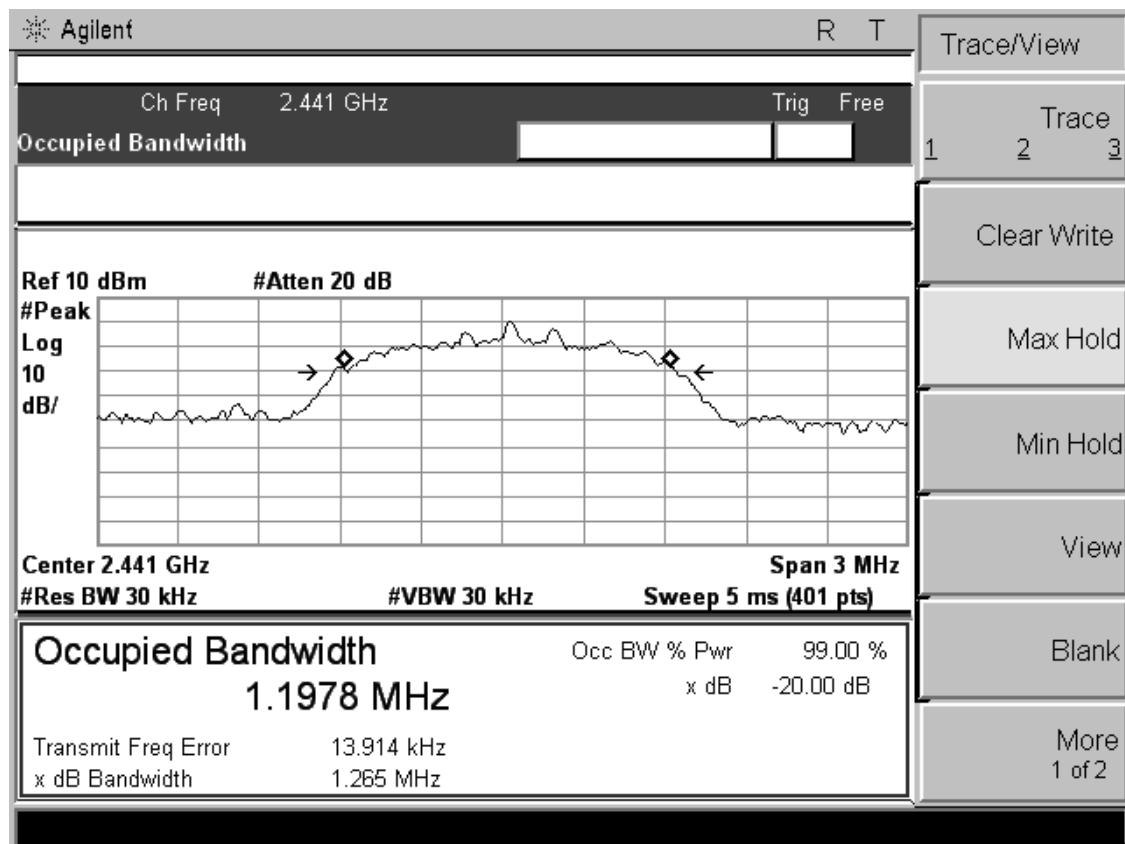

4.4 Number Of Hopping Frequency


4.4.1 Limit

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

4.4.2 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|-------------|------------|------------|------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY41440292 | 2012/06/18 | 2013/06/17 |
| 2 | RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | 2012/06/18 | 2013/06/17 |
| 3 | DC Filter | MPE | 23872C | N/A | 2012/06/18 | 2013/06/17 |

4.4.3 Block Diagram of Test Setup

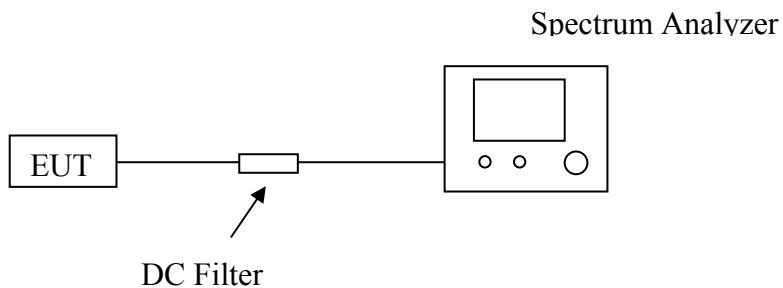



4.4.4 Test Procedure

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- Set the Spectrum Analyzer as RBW, VBW=100KHz.
- Max hold, view and count how many channel in the band.

4.4.5 Test Results

| The Measurement Result With The Worst Case of 3Mbps For 8DPSK Modulation | | | |
|--|--------------------------------|-------------|--------|
| Total No. of Hopping Channel | Measurement Result (No. of Ch) | Limit (MHz) | Result |
| | 79 | ≥15 | Pass |

The test data graph please refer to the following page.

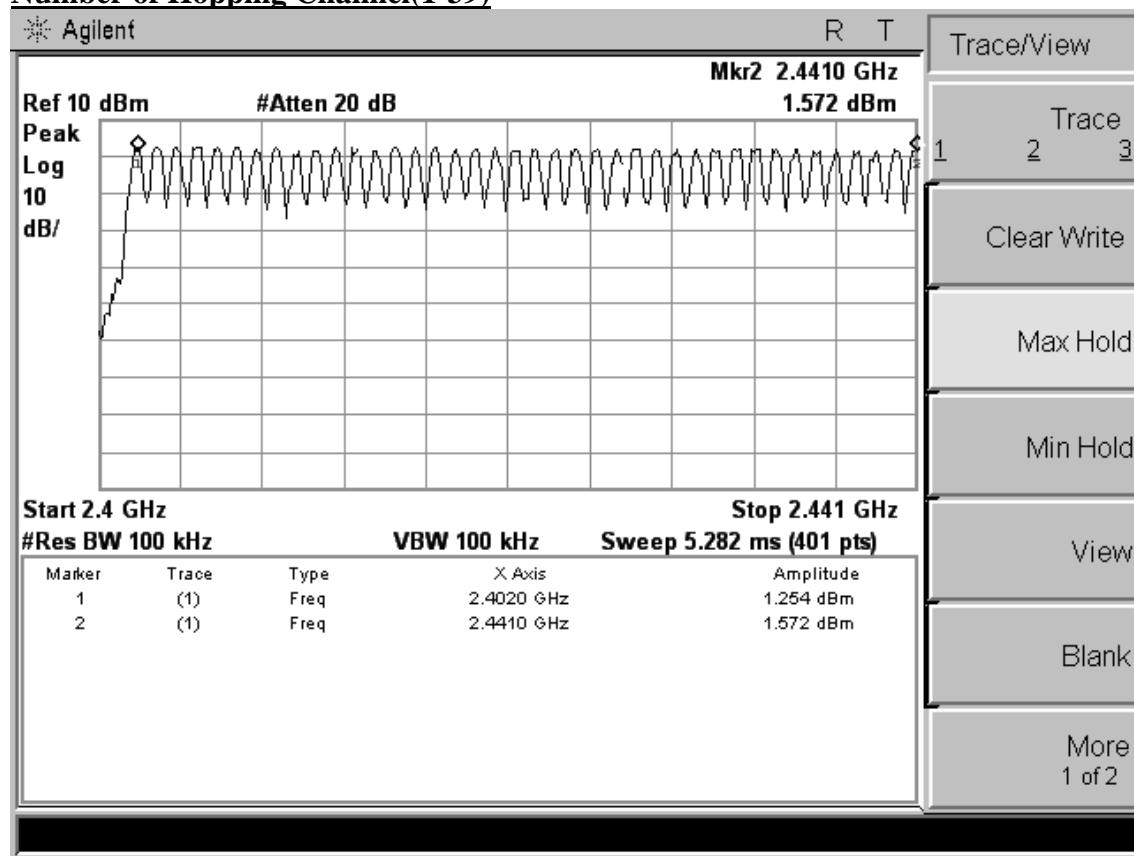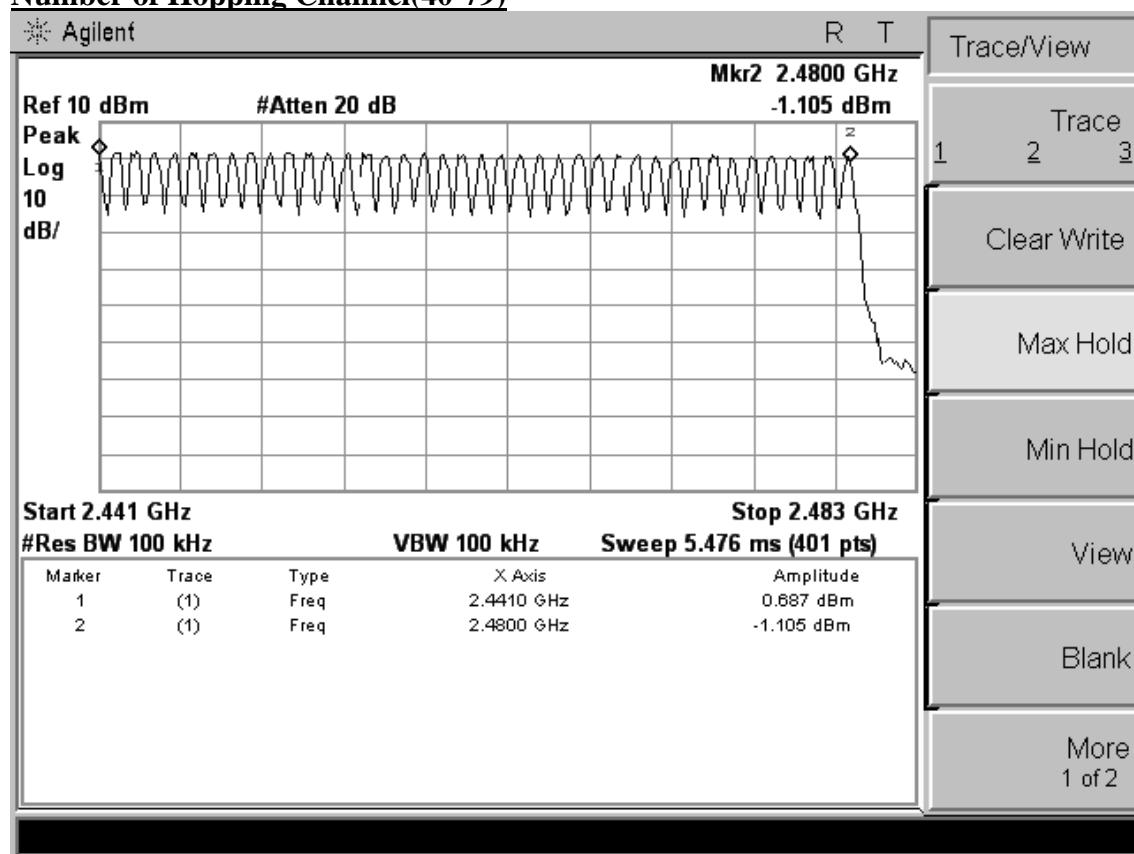Number of Hopping Channel(1-39)**Number of Hopping Channel(40-79)**

4.5 Time Of Occupancy (Dwell Time)


4.5.1 Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

4.5.2 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|-------------|------------|------------|------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY41440292 | 2012-06-18 | 2013-06-17 |
| 2 | RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | 2012-06-18 | 2013-06-17 |
| 3 | DC Filter | MPE | 23872C | N/A | 2012-06-18 | 2013-06-17 |

4.5.3 Block Diagram of Test Setup

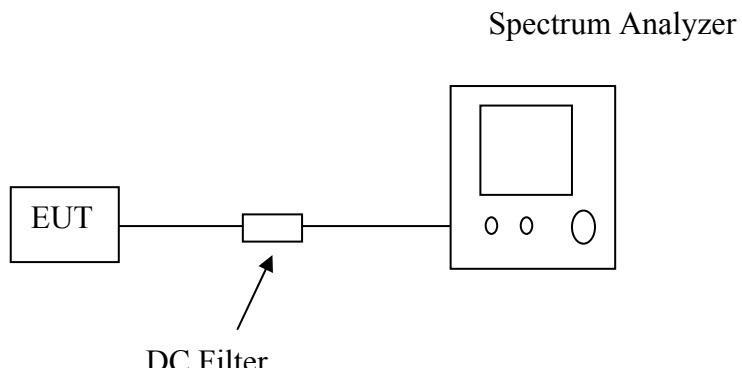

4.5.4 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = operating frequency.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- E. Repeat above procedures until all frequency measured were complete.

4.5.5 Test Results

| The Measurement Result With The Worst Case of 3Mbps For 8DPSK Modulation | | | | |
|--|----------------------------|-----------------|-----------------|------------|
| Channel | Time of Pulse for DH5 (ms) | Period Time (s) | Sweep Time (ms) | Limit (ms) |
| Low | 2.880 | 31.6 | 307.2 | 400 |
| Middle | 2.925 | 31.6 | 312.0 | 400 |
| High | 2.910 | 31.6 | 310.4 | 400 |

Low Channel

$$2.880 * (1600/6) / 79 * 31.6 = 307.2 \text{ ms}$$

Middle Channel


$$2.925 * (1600/6) / 79 * 31.6 = 312.0 \text{ ms}$$



High Channel

$$2.910 * (1600/6) / 79 * 31.6 = 310.4 \text{ ms}$$

The test data graph please refer to the following:

Low Channel

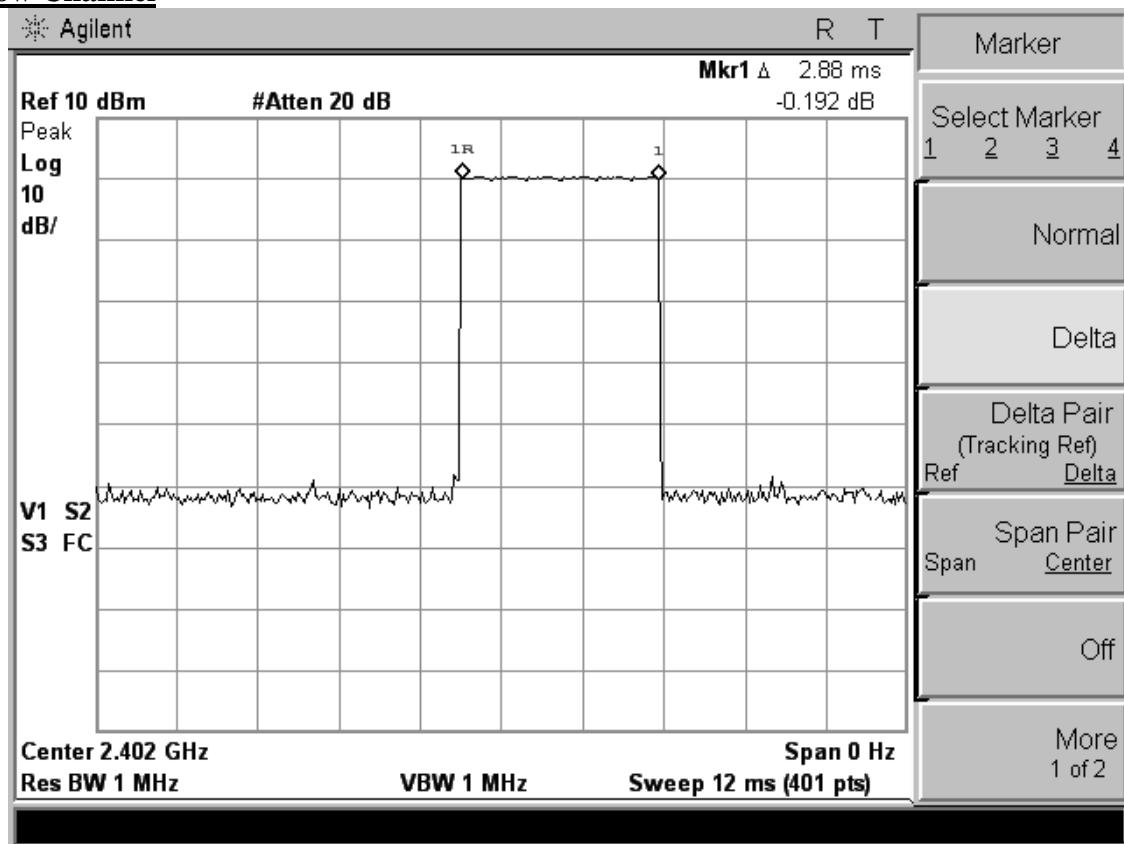

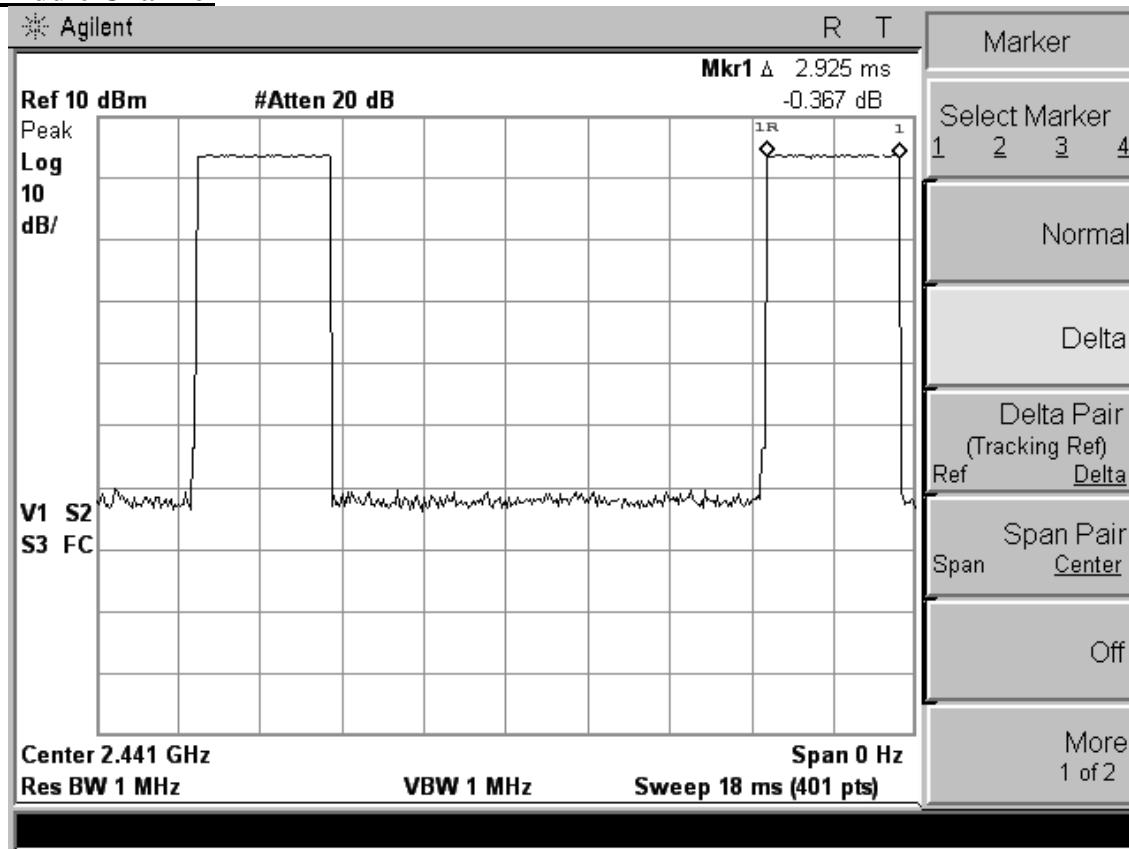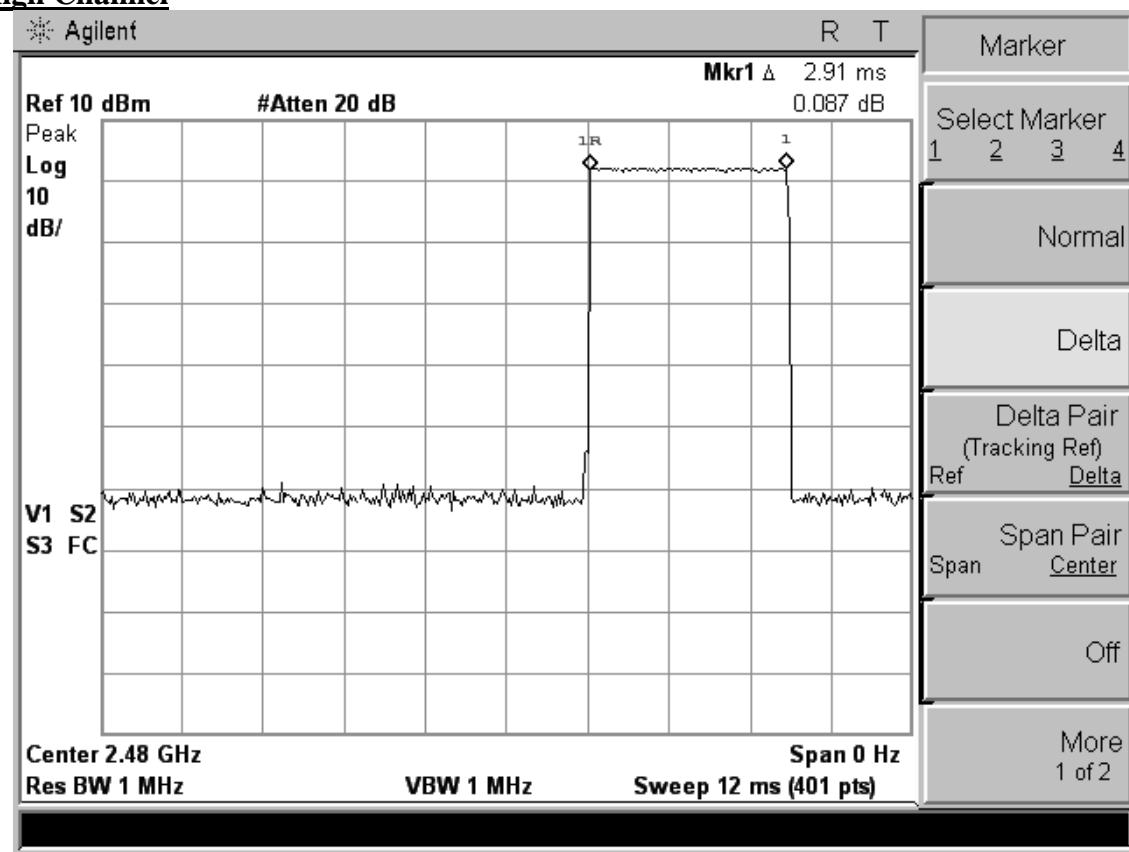Middle Channel**High Channel**

4.6 Spurious Emissions


4.6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.6.2 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|-------------|------------|------------|------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY41440292 | 2012-06-18 | 2013-06-17 |
| 2 | RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | 2012-06-18 | 2013-06-17 |
| 3 | DC Filter | MPE | 23872C | N/A | 2012-06-18 | 2013-06-17 |

4.6.3 Block Diagram of Test Setup

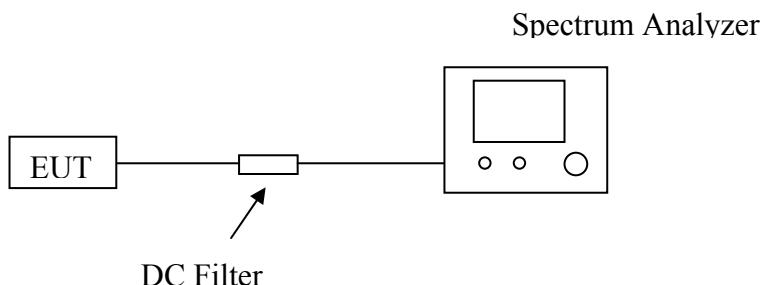

4.6.4 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.



Measurements are made over the 9kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels.



4.6.5 Test Results

No non-compliance noted

The test data graph please refer to the following page.

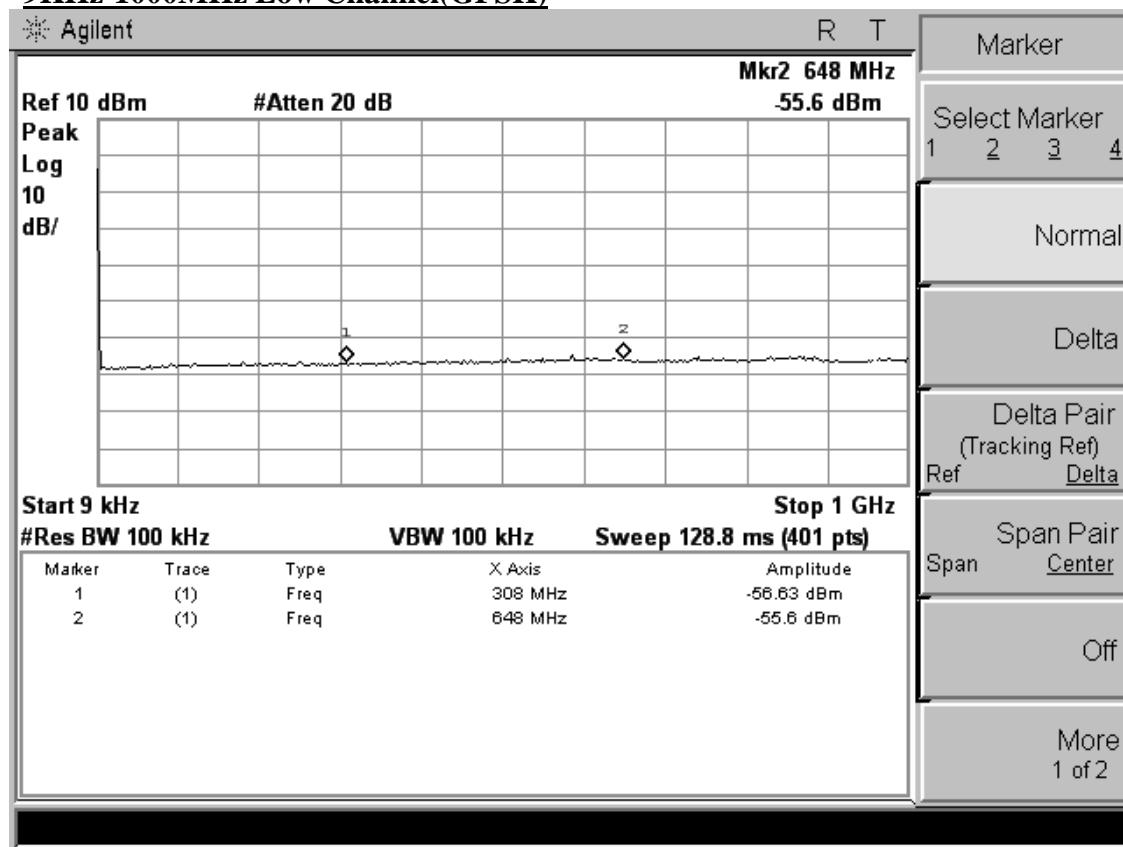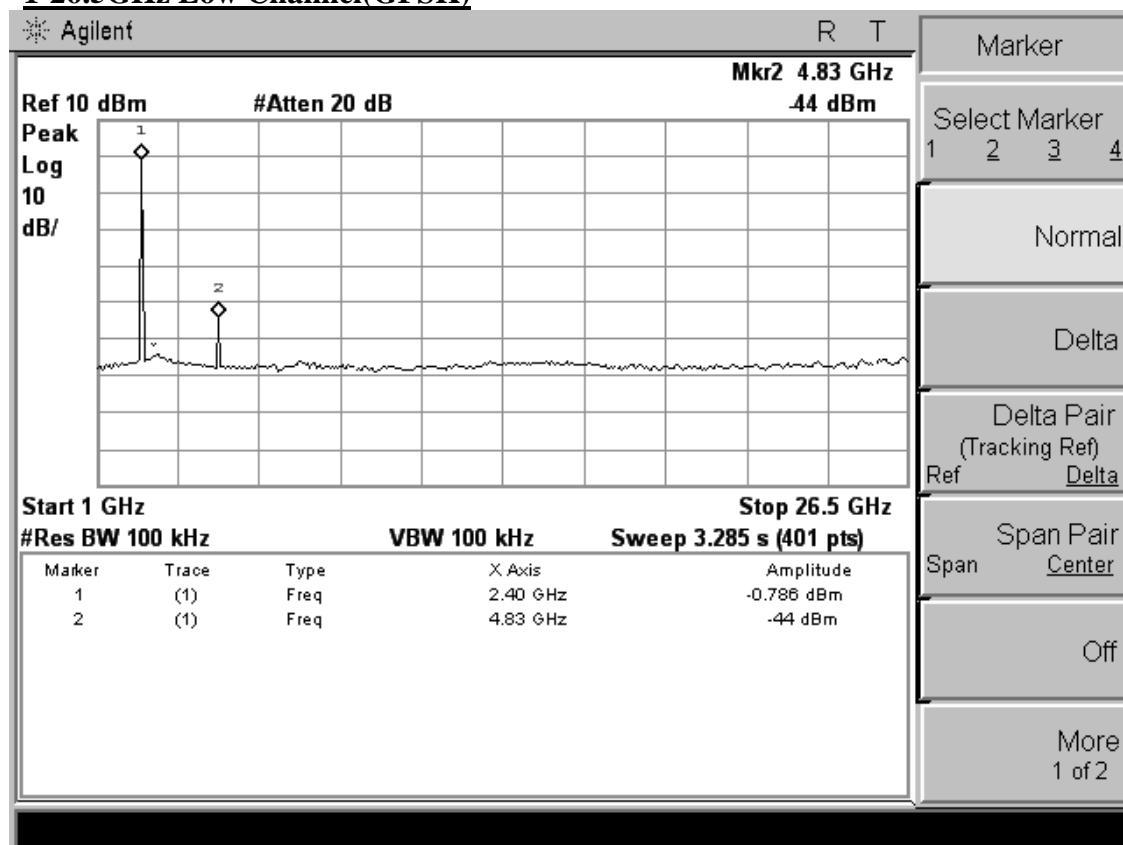Test Plot**9KHz-1000MHz Low Channel(GFSK)****1-26.5GHz Low Channel(GFSK)**

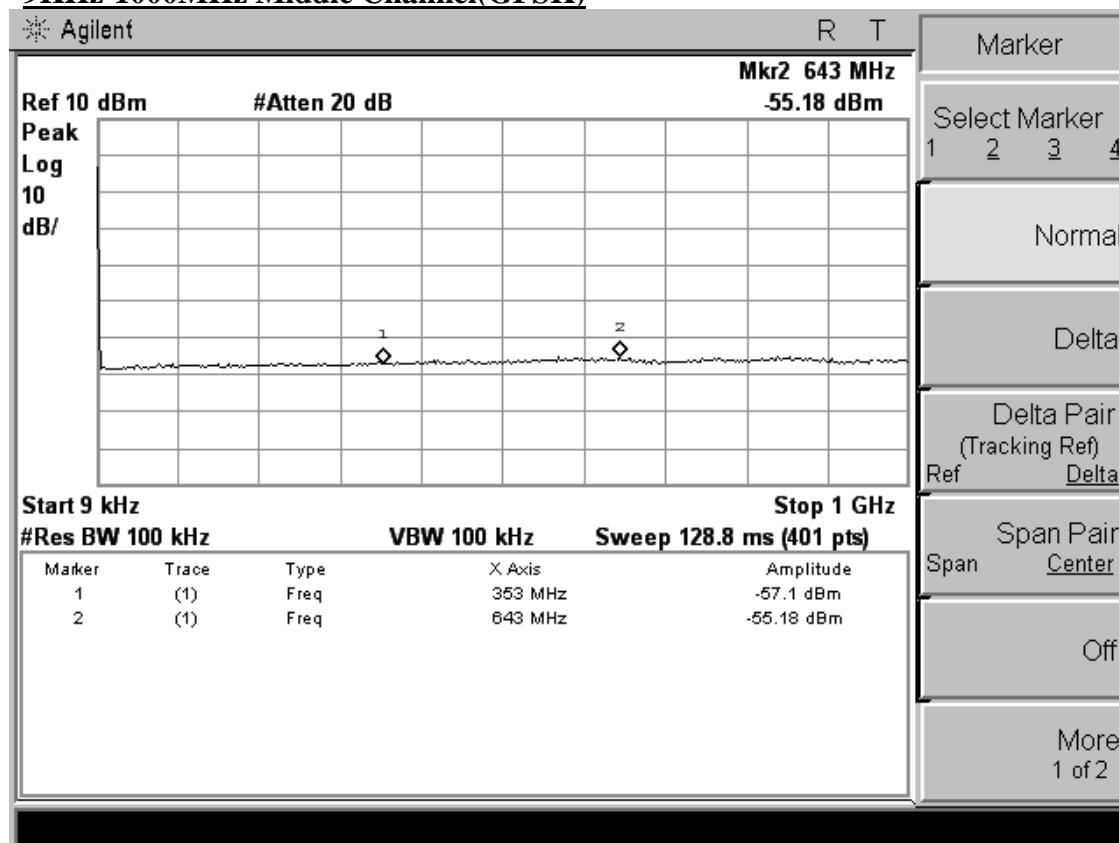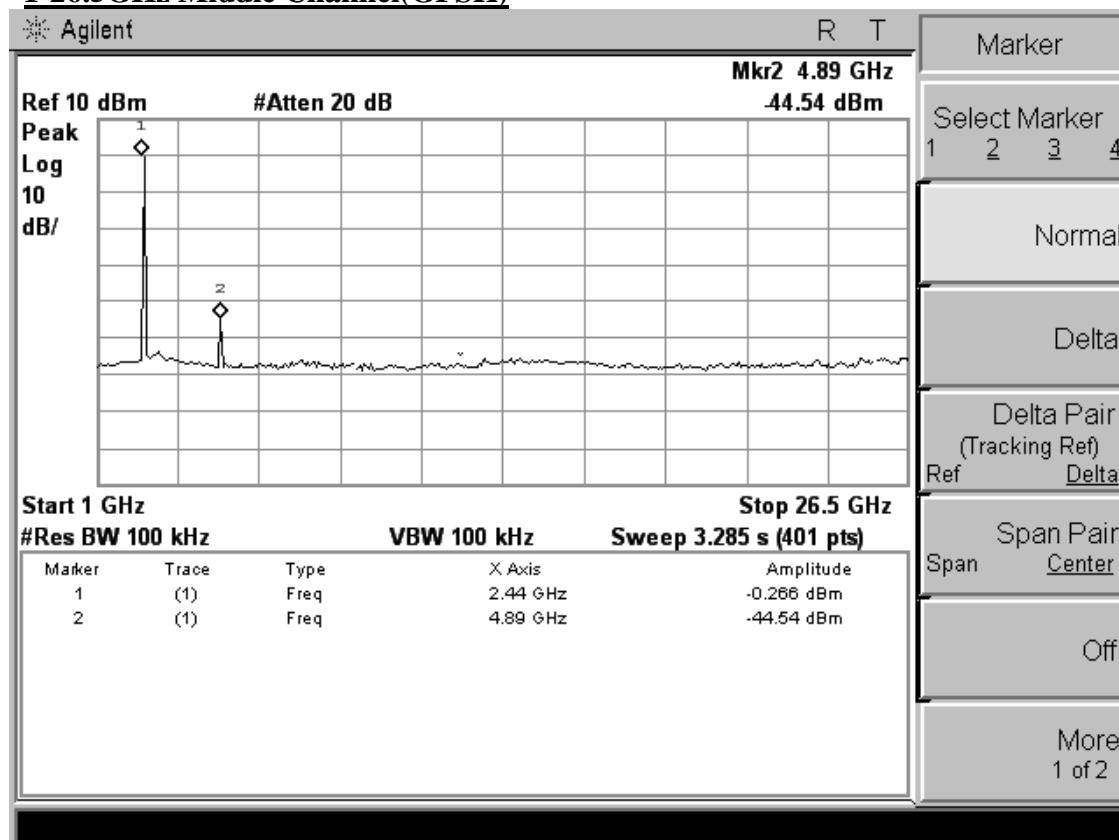9KHz-1000MHz Middle Channel(GFSK)**1-26.5GHz Middle Channel(GFSK)**

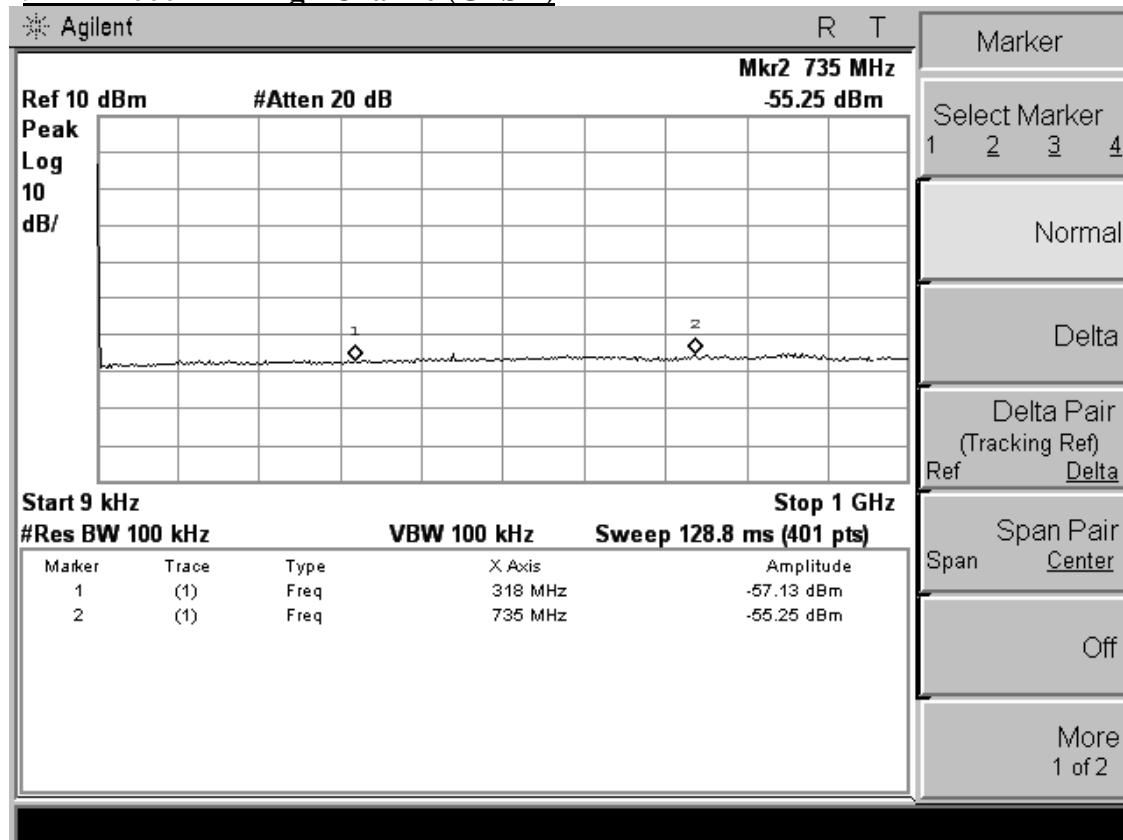
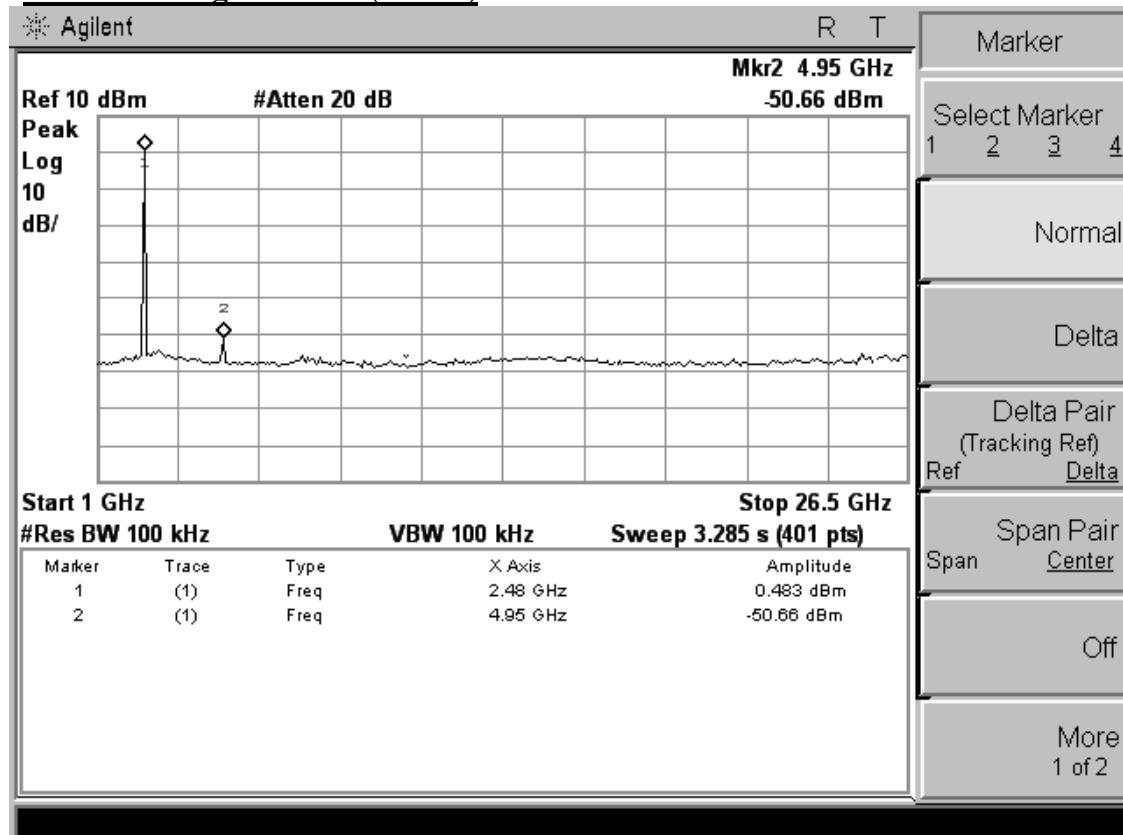
9KHz-1000MHz High Channel(GFSK)**1-26.5GHz High Channel(GFSK)**

5. RADIATED EMISSION MEASUREMENT

5.1 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Last Cal. |
|------|-------------------|-----------------|-----------|------------|------------|------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY41440292 | 2012-06-18 | 2012-06-17 |
| 2 | Test Receiver | Rohde & Schwarz | ESCS30 | 828985/018 | 2012-06-18 | 2012-06-17 |
| 3 | Loop antenna | EMCO | 6502 | 0042963 | 2012-06-18 | 2012-06-17 |
| 4 | Log per Antenna | Schwarzbeck | VULB9163 | 142 | 2012-06-18 | 2012-06-17 |
| 5 | Horn-antenna | SCHWARZBECK | BBHA9120D | D:266 | 2012-06-18 | 2012-06-17 |
| 6 | Horn-antenna | SCHWARZBECK | BBHA9170 | 297 | 2012-06-18 | 2012-06-17 |
| 7 | DC Filter | MPE | 23872C | N/A | 2012-06-18 | 2012-06-17 |

5.2 Block Diagram of Test Setup

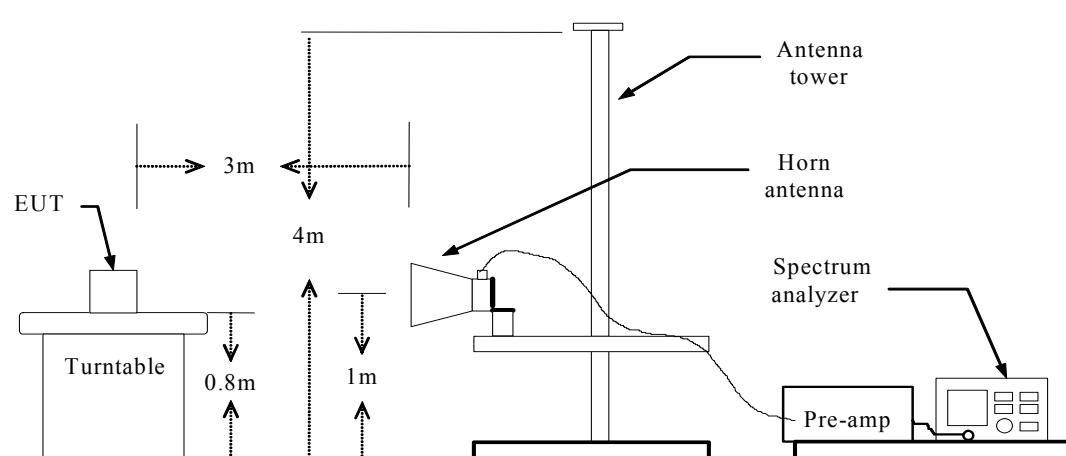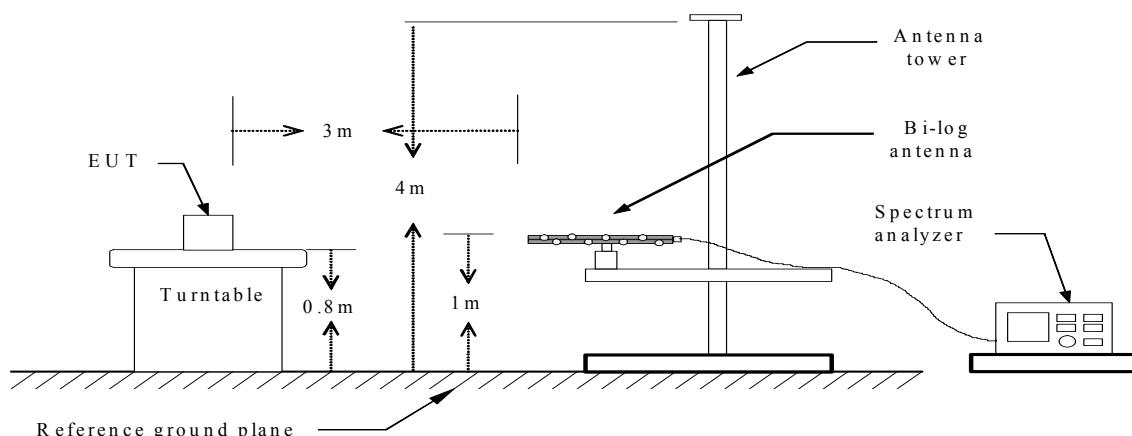

5.3 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293. | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (\2) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.


Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |

5.4 Test Results

PASS.


The test data please refer to following page.

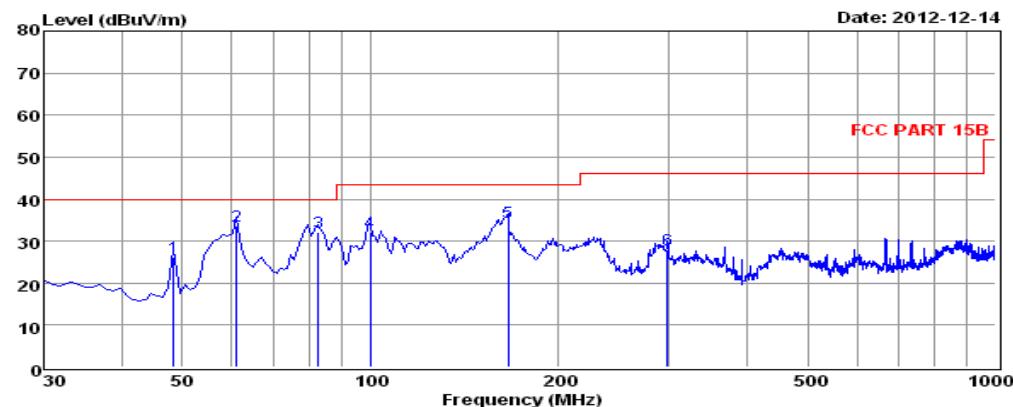Below 1GHz

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 5V
 Test Mode: Charging And Playing Music
 Operator: ANDY
 Memo:
 pol: VERTICAL

| Freq. | Reading | CabLoss | AntFac | PreFac | Measured | Limit | Over | Remark |
|-------|---------|---------|--------|--------|----------|--------|-------|-----------|
| MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 48.43 | 12.57 | 0.35 | 13.34 | 0.00 | 26.26 | 40.00 | -13.74 QP |
| 2 | 61.04 | 20.92 | 0.49 | 12.28 | 0.00 | 33.69 | 40.00 | -6.31 QP |
| 3 | 82.38 | 22.08 | 0.54 | 9.38 | 0.00 | 32.00 | 40.00 | -8.00 QP |
| 4 | 99.84 | 18.32 | 0.60 | 13.15 | 0.00 | 32.07 | 43.50 | -11.43 QP |
| 5 | 165.80 | 24.89 | 0.77 | 8.84 | 0.00 | 34.50 | 43.50 | -9.00 QP |
| 6 | 298.69 | 13.77 | 1.12 | 13.03 | 0.00 | 27.92 | 46.00 | -18.08 QP |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

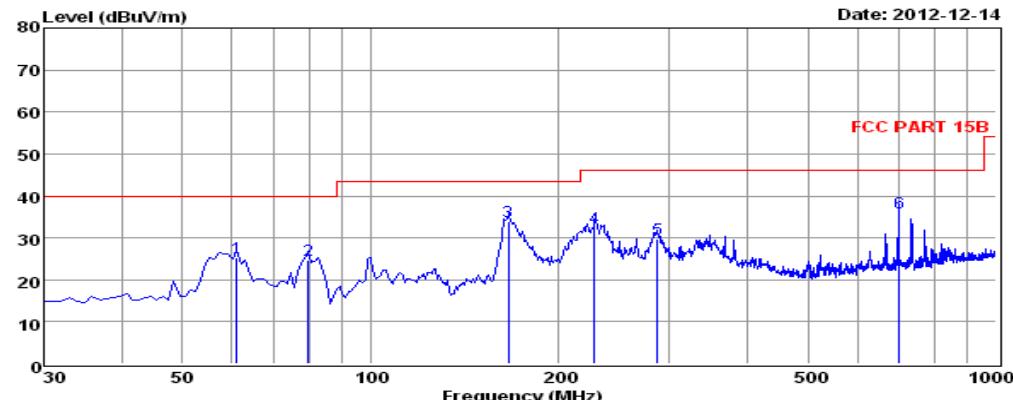

Env. / Ins: 24°C/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 5V
 Test Mode: Charging And Playing Music
 Operator: ANDY
 Memo:
 pol: HORIZONTAL

| Freq. | Reading | CabLoss | AntFac | PreFac | Measured | Limit | Over | Remark |
|-------|---------|---------|--------|--------|----------|--------|-------|-----------|
| MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 61.04 | 12.38 | 0.49 | 12.28 | 0.00 | 25.15 | 40.00 | -14.85 QP |
| 2 | 79.47 | 15.68 | 0.65 | 8.46 | 0.00 | 24.79 | 40.00 | -15.21 QP |
| 3 | 165.80 | 24.26 | 0.77 | 8.84 | 0.00 | 33.87 | 43.50 | -9.63 QP |
| 4 | 227.88 | 19.94 | 0.93 | 11.55 | 0.00 | 32.42 | 46.00 | -13.58 QP |
| 5 | 287.05 | 15.94 | 1.05 | 12.81 | 0.00 | 29.80 | 46.00 | -16.20 QP |
| 6 | 700.27 | 15.61 | 1.70 | 18.81 | 0.00 | 36.12 | 46.00 | -9.88 QP |

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

Above 1GHz

| Operation Mode: | | TX/ CH Low(GFSK) | | | | Test Date: | | 2012-12-14 | | |
|-----------------|-----------------|-------------------|-------------------|----------------------------|------------------|----------------|-------------------|-------------------|----------------------|----------------------|
| Temperature: | | 23°C | | | | Humidity: | | 50 % RH | | |
| Freq. (MHz) | Ant. Pol H/V | Peak | AV | Ant. / CL CF (dB) | Actual Fs | | Peak | AV | PK Margin (dB) | AV Margin (dB) |
| | | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | | |
| 4804.56 | V | 40.68 | 28.84 | 10.98 | 51.67 | 39.82 | 74 | 54 | 22.33 | 14.18 |
| 7207.39 | V | 32.13 | 19.64 | 18.54 | 50.67 | 38.18 | 74 | 54 | 23.33 | 15.82 |
| 4804.67 | H | 40.4 | 29.28 | 10.98 | 51.38 | 40.26 | 74 | 54 | 22.62 | 13.74 |
| 7206.00 | H | 33.09 | 21.44 | 18.53 | 51.62 | 39.97 | 74 | 54 | 22.38 | 14.03 |

| Operation Mode: | | TX/ CH Mid(GFSK) | | | | Test Date: | | 2012-12-14 | | |
|-----------------|-----------------|-------------------|-------------------|----------------------------|------------------|----------------|-------------------|-------------------|----------------------|----------------------|
| Temperature: | | 23°C | | | | Humidity: | | 50 % RH | | |
| Freq. (MHz) | Ant. Pol H/V | Peak | AV | Ant. / CL CF (dB) | Actual Fs | | Peak | AV | PK Margin (dB) | AV Margin (dB) |
| | | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | | |
| 4882.10 | V | 40.69 | 28.88 | 10.98 | 51.67 | 39.82 | 74 | 54 | 22.33 | 14.14 |
| 7324.33 | V | 32.89 | 21.58 | 18.54 | 51.43 | 40.12 | 74 | 54 | 22.57 | 13.88 |
| 4882.67 | H | 39.46 | 28.83 | 10.98 | 50.44 | 39.81 | 74 | 54 | 23.56 | 14.19 |
| 7324.25 | H | 33.19 | 20.52 | 18.53 | 51.72 | 39.05 | 74 | 54 | 22.23 | 14.95 |

| Operation Mode: | | TX/ CH High(GFSK) | | | | Test Date: | | 2012-12-14 | | |
|-----------------|--------------------|-------------------|-------------------|----------------------------|------------------|----------------|-------------------|-------------------|----------------------|----------------------|
| Temperature: | | 23°C | | | | Humidity: | | 50 % RH | | |
| Freq. (MHz) | Ant. Pol H/V | Peak | AV | Ant. / CL CF (dB) | Actual Fs | | Peak | AV | PK Margin (dB) | AV Margin (dB) |
| | | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | | |
| 4960.10 | V | 40.04 | 28.83 | 10.98 | 51.02 | 39.81 | 74 | 54 | 22.98 | 14.19 |
| 7441.69 | V | 31.59 | 21.33 | 18.54 | 50.13 | 39.87 | 74 | 54 | 23.87 | 14.13 |
| 4960.25 | H | 38.25 | 27.53 | 10.98 | 49.23 | 38.51 | 74 | 54 | 24.77 | 15.49 |
| 7440.00 | H | 31.59 | 20.24 | 18.53 | 50.12 | 38.77 | 74 | 54 | 23.88 | 15.23 |

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6. POWER LINE CONDUCTED EMISSIONS

6.1 Standard Applicable


According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

6.2 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|---------------|-----------------|-----------|------------|------------|------------|
| 1 | Test Receiver | Manufacturer | ESCS30 | 828985/018 | 2012-06-18 | 2013-06-17 |
| 2 | L.I.S.N | Rohde & Schwarz | ESH2-Z5 | 834549/005 | 2012-06-18 | 2013-06-17 |
| 3 | Pulse Limiter | Anritsu | ESH3-Z2 | 100006 | 2012-06-18 | 2013-06-17 |


6.3 Block Diagram of Test Setup

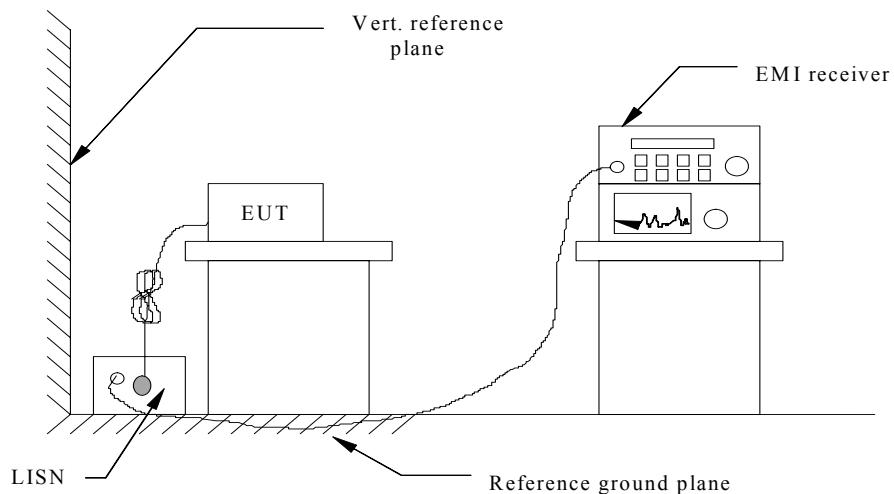

6.4 Test Results

PASS.


The test data please refer to following page.

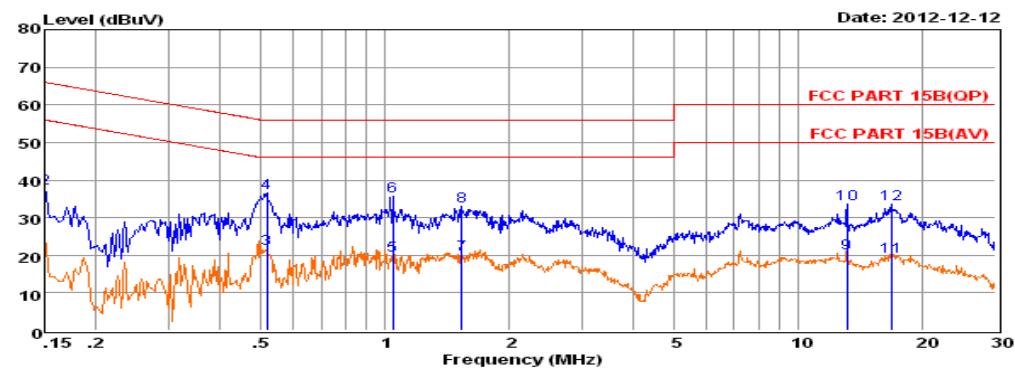

Env. Ins: 24*/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 5V
 Test Mode: Charging And Playing Music
 Operator: Fox
 Memo:
 Pol: LINE

| Freq | Reading | LisnFac | CabLos | Measured | Limit | Over | Remark | |
|------|---------|---------|--------|----------|-------|-------|--------|---------|
| MHz | dBuV | dB | dB | dBuV | dBuV | dB | | |
| 1 | 0.15 | 13.27 | 9.57 | 0.02 | 22.86 | 56.00 | -33.14 | Average |
| 2 | 0.15 | 28.06 | 9.57 | 0.02 | 37.65 | 66.00 | -28.35 | QP |
| 3 | 0.52 | 12.05 | 9.62 | 0.04 | 21.71 | 46.00 | -24.29 | Average |
| 4 | 0.52 | 27.01 | 9.62 | 0.04 | 36.67 | 56.00 | -19.33 | QP |
| 5 | 1.04 | 10.30 | 9.63 | 0.05 | 19.98 | 46.00 | -26.02 | Average |
| 6 | 1.04 | 26.11 | 9.63 | 0.05 | 35.79 | 56.00 | -20.21 | QP |
| 7 | 1.54 | 18.56 | 9.64 | 0.05 | 20.25 | 46.00 | -25.75 | Average |
| 8 | 1.54 | 23.44 | 9.64 | 0.05 | 33.13 | 56.00 | -22.87 | QP |
| 9 | 13.13 | 10.66 | 9.70 | 0.09 | 20.45 | 50.00 | -29.55 | Average |
| 10 | 13.13 | 23.92 | 9.70 | 0.09 | 33.71 | 60.00 | -26.29 | QP |
| 11 | 16.75 | 9.65 | 9.73 | 0.11 | 19.49 | 50.00 | -30.51 | Average |
| 12 | 16.75 | 23.85 | 9.73 | 0.11 | 33.69 | 60.00 | -26.31 | QP |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

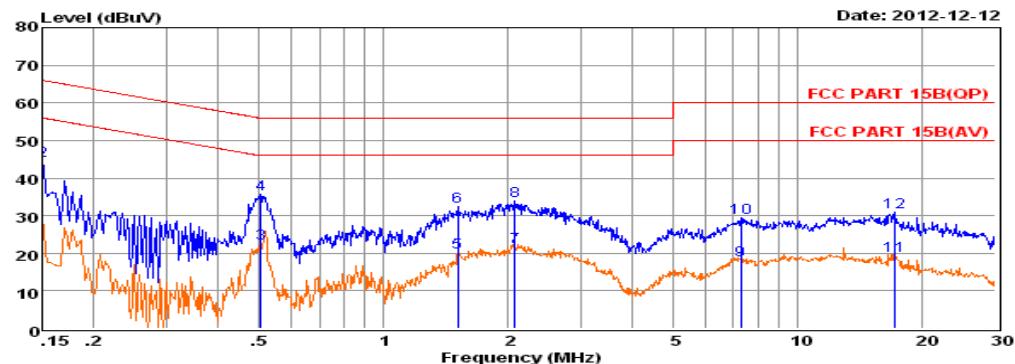

Env. Ins: 24*/56%
 EUT: Portable Stereo Bluetooth Speaker
 M/N: Promini X6
 Power Rating: DC 5V
 Test Mode: Charging And Playing Music
 Operator: Fox
 Memo:
 Pol: NEUTRAL

| Freq | Reading | LisnFac | CabLos | Measured | Limit | Over | Remark | |
|------|---------|---------|--------|----------|-------|-------|--------|---------|
| MHz | dBuV | dB | dB | dBuV | dBuV | dB | | |
| 1 | 0.15 | 18.09 | 9.70 | 0.02 | 27.81 | 56.00 | -28.19 | Average |
| 2 | 0.15 | 34.89 | 9.70 | 0.02 | 44.61 | 66.00 | -21.39 | QP |
| 3 | 0.50 | 12.92 | 9.62 | 0.04 | 22.58 | 46.00 | -23.42 | Average |
| 4 | 0.50 | 26.07 | 9.62 | 0.04 | 35.73 | 56.00 | -20.27 | QP |
| 5 | 1.51 | 10.48 | 9.63 | 0.05 | 20.16 | 46.00 | -25.84 | Average |
| 6 | 1.51 | 22.82 | 9.63 | 0.05 | 32.50 | 56.00 | -23.50 | QP |
| 7 | 2.08 | 11.99 | 9.63 | 0.05 | 21.67 | 46.00 | -24.33 | Average |
| 8 | 2.08 | 24.32 | 9.63 | 0.05 | 34.00 | 56.00 | -22.00 | QP |
| 9 | 7.29 | 8.51 | 9.69 | 0.07 | 18.27 | 50.00 | -31.73 | Average |
| 10 | 7.29 | 19.68 | 9.69 | 0.07 | 29.44 | 60.00 | -30.56 | QP |
| 11 | 17.20 | 9.30 | 9.77 | 0.11 | 19.18 | 50.00 | -30.82 | Average |
| 12 | 17.20 | 21.03 | 9.77 | 0.11 | 30.91 | 60.00 | -29.09 | QP |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all mode and recorded the worst case results in this report (Charging And Playing)

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

7.1.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.1.2. Antenna Construction

Section 15.203 of the rules states that the subject device must meet at least one of the following criteria:

- (a) Antenna must be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.
- (c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

7.1.3. Results

EUT uses a PCB antenna with 2dBi gain.

Compliance.

8. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

| | | | |
|-------------|-------------|-------------|-------------|
| ISOUND-5302 | ISOUND-5303 | ISOUND-5304 | ISOUND-5305 |
|-------------|-------------|-------------|-------------|

Belong to the tested device:

Product description : Portable Stereo Bluetooth Speaker

Model name : Promini X6

Remark: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.

-----THE END OF REPORT-----