

FCC PART 15.407
RSS-210, ISSUE 8, DEC 2010
TEST AND MEASUREMENT REPORT

For

Meru Networks Inc.

894 Ross Drive,
Sunnyvale, CA 94089, USA

FCC ID: RE7-AP1010
IC: 6749A-AP1010
Model: AP1010i/AP1010e

Report Type: CIIPC	Product Type: 802.11a/b/g/n Access Point
Test Engineers: Ning Ma 	
Report Number: R1108081-407-2	
Report Date: 2012-01-18	
Reviewed By: Victor Zhang  EMC/RF Lead	
Prepared By: Bay Area Compliance Laboratories Corp. (84) 1274 Anvilwood Ave., Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (800-2)

TABLE OF CONTENTS

1	GENERAL DESCRIPTION.....	6
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	6
1.2	MECHANICAL DESCRIPTION OF EUT	6
1.3	OBJECTIVE.....	6
1.4	RELATED SUBMITTAL(S)/GRANT(S)	6
1.5	TEST METHODOLOGY	6
1.6	TEST FACILITY	7
2	EUT TEST CONFIGURATION.....	8
2.1	JUSTIFICATION	8
2.2	EUT EXERCISE SOFTWARE.....	8
2.3	EQUIPMENT MODIFICATIONS	8
2.4	SPECIAL EQUIPMENT	8
2.5	LOCAL SUPPORT EQUIPMENT	8
2.6	EUT INTERNAL CONFIGURATION DETAILS.....	8
2.7	EXTERNAL I/O CABLING LIST AND DETAILS	8
2.8	POWER SUPPLY LIST AND DETAILS	9
3	SUMMARY OF TEST RESULTS.....	10
4	FCC §15.207 & IC RSS-GEN §7.2.2 - CONDUCTED EMISSIONS.....	11
4.1	APPLICABLE STANDARDS	11
4.2	TEST SETUP	11
4.3	TEST PROCEDURE	11
4.4	TEST SETUP BLOCK DIAGRAM.....	12
4.5	CORRECTED AMPLITUDE & MARGIN CALCULATION	12
4.6	TEST EQUIPMENT LIST AND DETAILS	13
4.7	TEST ENVIRONMENTAL CONDITIONS.....	13
4.8	SUMMARY OF TEST RESULTS.....	13
4.9	CONDUCTED EMISSIONS TEST PLOTS AND DATA	14
5	FCC §15.209 (A), §15.407(B) & IC RSS-210 §A9.2 - SPURIOUS RADIATED EMISSIONS.....	16
5.1	APPLICABLE STANDARD	16
5.2	EUT SETUP.....	17
5.3	TEST PROCEDURE	17
5.4	CORRECTED AMPLITUDE & MARGIN CALCULATION	17
5.5	TEST EQUIPMENT LIST AND DETAILS	18
5.6	TEST ENVIRONMENTAL CONDITIONS.....	18
5.7	TEST RESULTS	18
6	FCC §15.407(A) & IC RSS-210 §A9.2 – 26 DB AND 99% EMISSION BANDWIDTH.....	33
6.1	APPLICABLE STANDARD	33
6.2	MEASUREMENT PROCEDURE	33
6.3	TEST EQUIPMENT LIST AND DETAILS	33
6.4	TEST ENVIRONMENTAL CONDITIONS.....	33
6.5	TEST RESULTS	34
7	FCC §407(A) & IC RSS-210 §A9.2 - PEAK OUTPUT POWER MEASUREMENT.....	54
7.1	APPLICABLE STANDARD	54
7.2	MEASUREMENT PROCEDURE	54
7.3	TEST EQUIPMENT LIST AND DETAILS	55

7.4	TEST ENVIRONMENTAL CONDITIONS.....	55
7.5	TEST RESULTS	55
8	FCC §15.407(B) & IC RSS-210 §A9.2 – OUT OF BAND EMISSIONS	57
8.1	APPLICABLE STANDARD	57
8.2	MEASUREMENT PROCEDURE	57
8.3	TEST EQUIPMENT LIST AND DETAILS	57
8.4	TEST ENVIRONMENTAL CONDITIONS.....	57
8.5	TEST RESULTS	57
9	FCC §15.407(A) & IC RSS-210 §A9.2 - POWER SPECTRAL DENSITY	70
9.1	APPLICABLE STANDARD	70
9.2	MEASUREMENT PROCEDURE	70
9.3	TEST EQUIPMENT LIST AND DETAILS	70
9.4	TEST ENVIRONMENTAL CONDITIONS.....	70
9.5	TEST RESULTS	71
10	IC RSS-210 §2.6 & RSS-GEN §6 - RECEIVER SPURIOUS RADIATED EMISSIONS	90
10.1	APPLICABLE STANDARD	90
10.2	EUT SETUP.....	91
10.3	TEST PROCEDURE	91
10.4	CORRECTED AMPLITUDE & MARGIN CALCULATION	91
10.5	TEST EQUIPMENT LISTS AND DETAILS	92
10.6	TEST ENVIRONMENTAL CONDITIONS.....	92
10.7	TEST RESULTS	92
11	FCC §15.407(B) & IC RSS-210 §A9.2 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	99
11.1	APPLICABLE STANDARD	99
11.2	MEASUREMENT PROCEDURE	99
11.3	TEST EQUIPMENT LIST AND DETAILS	99
11.4	TEST ENVIRONMENTAL CONDITIONS.....	99
11.5	TEST RESULTS	99
12	FCC §407(A)(6) - PEAK EXCURSION RATIO.....	152
12.1	APPLICABLE STANDARD	152
12.2	TEST PROCEDURE	152
12.3	TEST EQUIPMENT LIST AND DETAILS	152
12.4	TEST ENVIRONMENTAL CONDITIONS.....	152
12.5	TEST RESULTS	153
13	FCC §15.407(F), §2.1091 & IC RSS-102 - RF EXPOSURE	154
13.1	APPLICABLE STANDARD	154
13.2	MPE PREDICTION	155
13.3	MPE RESULTS	155
14	EXHIBIT A - FCC & IC EQUIPMENT LABELING REQUIREMENTS.....	156
14.1	FCC ID LABEL REQUIREMENTS	156
14.2	IC LABEL REQUIREMENTS	156
14.3	FCC ID & IC LABEL CONTENTS.....	157
14.4	FCC ID & IC LABEL LOCATION	158
15	EXHIBIT B - TEST SETUP PHOTOGRAPHS	159
15.1	CONDUCTED EMISSION FRONT VIEW (AP1010E)	159
15.2	CONDUCTED EMISSION SIDE VIEW (AP1010E)	159
15.3	RADIATED EMISSION FRONT VIEW (AP1010E)	160
15.4	RADIATED EMISSION REAR VIEW (AP1010E)	160
15.5	RADIATED EMISSION FRONT VIEW (AP1010i)	161
15.6	RADIATED EMISSION REAR VIEW (AP1010i)	161

16	EXHIBIT C - EUT PHOTOGRAPHS.....	162
16.1	EUT AP1010I – TOP VIEW	162
16.2	EUT AP1010I – REAR SIDE VIEW	162
16.3	EUT AP1010E – TOP VIEW	163
16.4	EUT 1010E - BOTTOM VIEW	163
16.5	EUT – ADAPTER FOR POE	164
16.6	EUT – AC/DC POWER ADAPTER	164
16.7	EUT AP1010I - COVER OFF VIEW	165
16.8	EUT AP1010I - BOARD VIEW 1.....	165
16.9	EUT AP1010E - COVER OFF VIEW	166
16.10	EUT - BOARD VIEW 1	166
16.11	EUT - BOARD VIEW 2	167

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1108081-407-2	Original Report	2012-01-18

1 General Description

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Meru Networks Inc.*, and their product FCC ID: *RE7-AP1010*, IC: *6749A-AP1010*, model: *AP1010i and AP1010e* or the “EUT” as referred on this report is a dual band Wireless 802.11ab/g/n outdoor access point. The EUT’s DFS operating frequency bands are 5250-5350 MHz and 5470-5725 MHz (802.11 a/n mode)

1.2 Mechanical Description of EUT

AP1010i

The EUT measures approximately 172 mm L x 172 mm W x 41 mm H

The test data gathered are from typical production sample, serial number: 4310A102i000CE60997F3 provided by the manufacturer

AP1010e

The EUT has measured approximately 154 mm L x 116 mm W x 36 mm H

The test data gathered are from typical production sample, serial number: 3911A101e0A125D provided by the manufacturer.

1.3 Objective

This report is prepared on behalf of *Meru Networks, Inc.* in accordance with FCC §15.407 And IC RSS-210 Issue 8, Dec 2010.

The objective is to determine compliance with FCC rules.

1.4 Related Submittal(s)/Grant(s)

FCC ID: RE7-AP1010, FCC Part 15.247 and FCC Part 15.407 submission of Non-DFS bands.

1.5 Test Methodology

ANSI C63.4-2003, FCC Part 2, Part 15.407 and RSS-210 Issue 8, Dec 2010.

1.6 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2005 + A1:2005 + A2:2006 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz. The facility also complies with the test methods and procedures set forth in ANSI C63.4-2003 & TIA/EIA-603.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: R-3729, C-4176, G-469, and T-1206. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is a National Institute of Standards and Technology (NIST) accredited laboratory under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2001670.htm>

2 EUT Test Configuration

2.1 Justification

The EUT was configured for testing according to FCC Part 15.407 and RSS-210 Standards.

2.2 EUT Exercise Software

The software used, SCRT5.5.1, was provided by customer and verified by Ning Ma to comply with the standard requirements being tested against.

2.3 Equipment Modifications

N/A

2.4 Special Equipment

N/A

2.5 Local Support Equipment

Manufacturers	Description	Models	Serial Number
DELL	Laptop	1XDRM A00	4SD2LQ1
NETGEAR	Router	GS605 v2	1FE1715K02A42

2.6 EUT Internal Configuration Details

Objects/Parts	Manufacturers	Models	Series Number
Wi-Fi Module	Broadcom	LOG-M11	E150630
Main Board	Meru Network, Inc	MVT1.0	40AB103V 8501-6000386-01

2.7 External I/O Cabling List and Details

Cable Description	Length (M)	From	To
RJ 45	< 1.0	Power Adapter	Router
RJ 45	< 1.0	Power Adapter	EUT
RJ 45	< 1.0	Router	Laptop

2.8 Power Supply List and Details

Manufacturer	Description	Model Number	Serial Number
Power Dsine	Power Adapter	PD-7001G/AC	D0844644000023FA01
Delta Electronics	Power Adapter	ADP-15KB	DNW0517000319

3 Summary of Test Results

FCC/IC Rules	Description of Test	Result
FCC §15.207 IC RSS-Gen §7.2.2	Conducted Emissions	Compliance
FCC §15.209(a), 15.407(b) IC RSS-210 §A9.2	Spurious Radiated Emissions	Compliance
FCC §15.407(a) IC RSS-210 §A9.2	26 dB and 99% Emission Bandwidth	Compliance
FCC §407(a) IC RSS-210 §A9.2	Peak Output Power Measurement	Compliance
FCC §15.407(b) IC RSS-210 §A9.2	Out of Band Emissions	Compliance
FCC §15.407(a) IC RSS-5210 §A9.2	Power Spectral Density	Compliance
IC RSS-210 §2.6 & RSS-Gen §6	Receiver Spurious Radiated Emissions	Compliance
FCC §15.407(b) IC RSS-210 §A9.2	Spurious Emissions at Antenna Terminals	Compliance
FCC §15.407(a)(6)	Peak Excursion Ratio	Compliance
FCC §15.407(f), §2.1091 IC RSS-102	RF Exposure	Compliance

4 FCC §15.207 & IC RSS-Gen §7.2.2 - Conducted Emissions

4.1 Applicable Standards

As per FCC §15.207 and IC RSS-Gen §7.2.2 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 Note 1	56 to 46 Note 1
0.5-5	56	46
5-30	60	50

Note 1 Decreases with the logarithm of the frequency.

4.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.4-2003 measurement procedure. The specification used was FCC §15.207 and IC RSS-Gen §7.2.2 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.


4.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

4.4 Test Setup Block Diagram

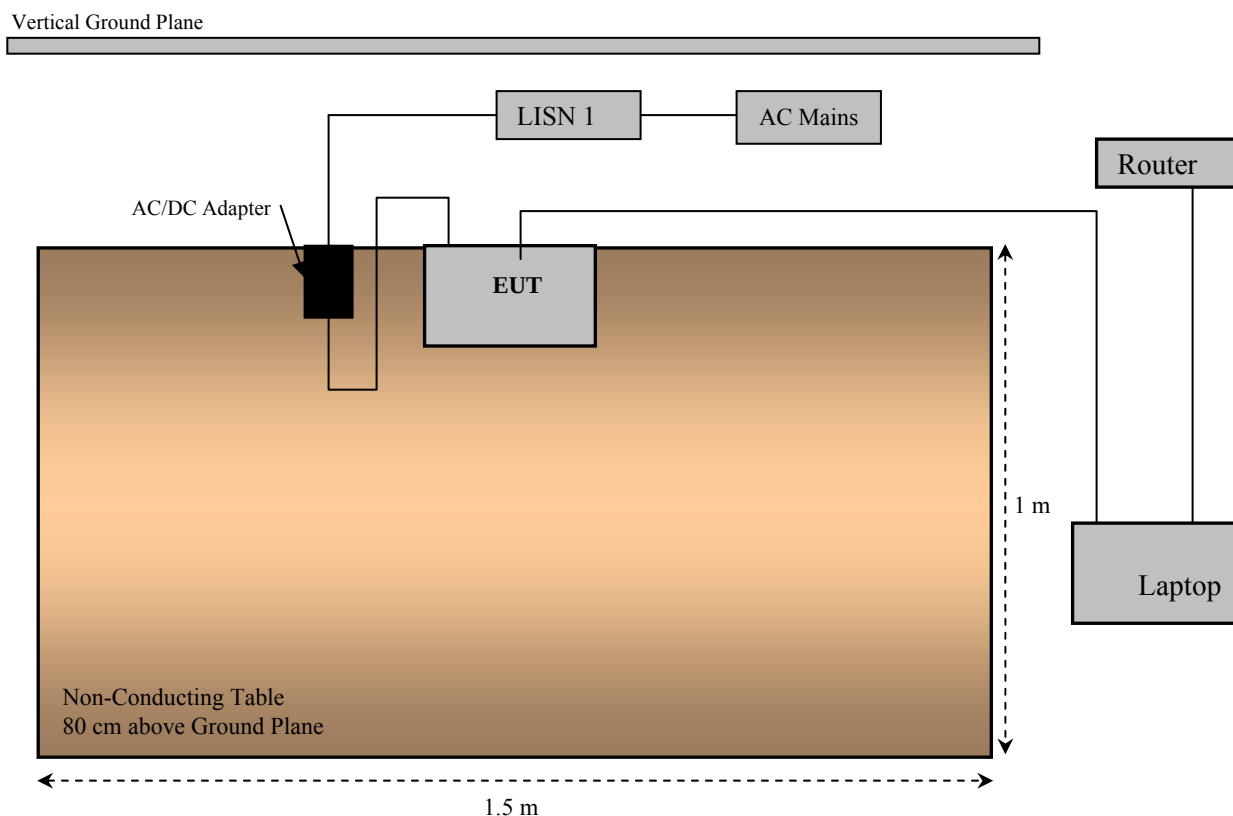

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

4.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2011-04-14
Solar Electronics	LISN	9252-R-24-BNC	511205	2011-06-25
TTE	Filter, High Pass	H9962-150K-50-21378	K7133	2011-06-10

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

4.7 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	49%
ATM Pressure:	101.3kPa

The testing was performed Ning Ma from 2011-10-21 at 5meter chamber3.

4.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC standard's conducted emissions limits, with the margin reading of:

AP1010e:


Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-1.41	20.05833	Neutral	0.15 to 30

AP1010i:

Please refer to the original FCC ID: RE7-AP1010/IC: 6749A-AP1010

4.9 Conducted Emissions Test Plots and Data

AP1010e, 120 V, 60 Hz – Line

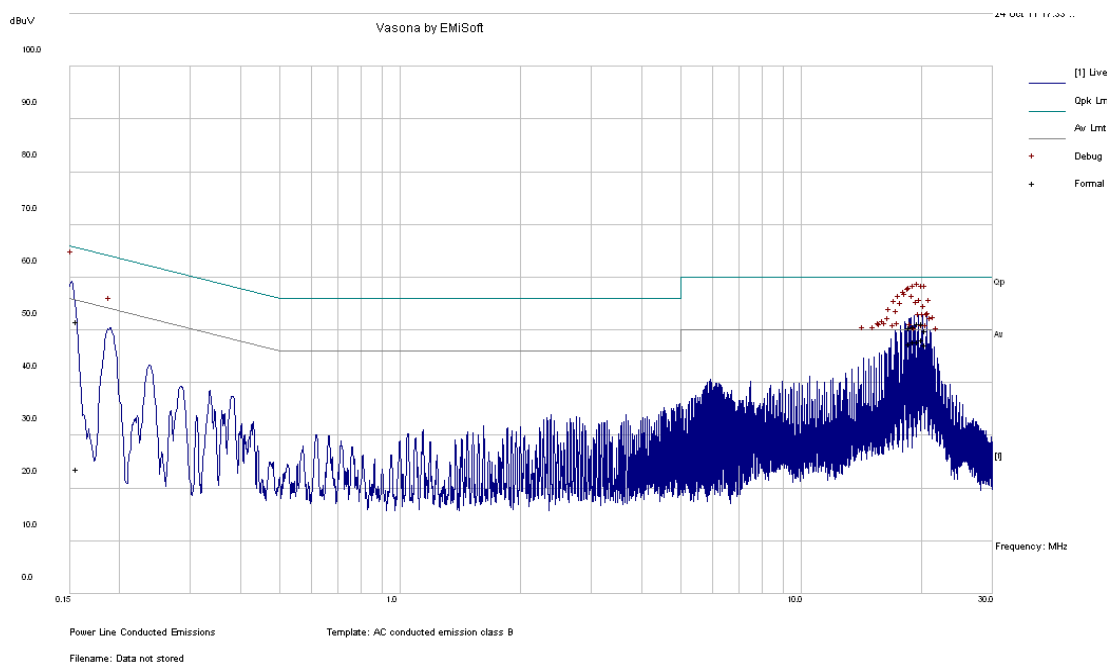


Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
20.06902	51.3	Line	60	-8.70
19.61408	51.18	Line	60	-8.82
19.1567	50.6	Line	60	-9.40
18.69832	50.46	Line	60	-9.54
20.51983	49.99	Line	60	-10.01
0.1566	51.68	Line	65.64	-13.96

Average Measurements

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
20.06902	48.24	Line	50	-1.76
19.61408	47.76	Line	50	-2.24
19.1567	47.73	Line	50	-2.27
18.69832	47.38	Line	50	-2.62
20.51983	47.26	Line	50	-2.74
0.1566	23.73	Line	55.64	-31.91

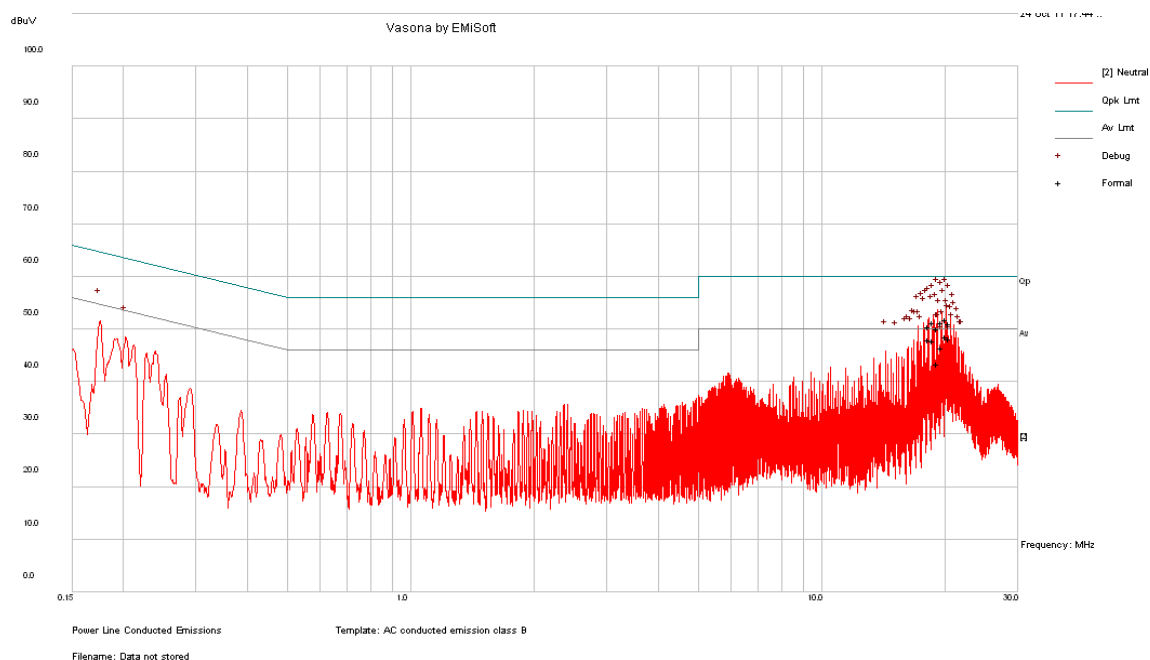AP1010e, 120 V, 60 Hz – Neutral**Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
20.05833	51.84	Neutral	60	-8.16
19.59431	51.3	Neutral	60	-8.70
18.69524	51.18	Neutral	60	-8.82
20.51647	51.05	Neutral	60	-8.95
18.23056	50.53	Neutral	60	-9.47
19.13967	50.14	Neutral	60	-9.86

Average Measurements

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
20.05833	48.59	Neutral	50	-1.41
20.51647	48.26	Neutral	50	-1.74
18.23056	47.96	Neutral	50	-2.04
18.69524	47.8	Neutral	50	-2.20
19.59431	46.47	Neutral	50	-3.53
19.13967	43.35	Neutral	50	-6.65

5 FCC §15.209 (a), §15.407(b) & IC RSS-210 §A9.2 - Spurious Radiated Emissions

5.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a) and IC RSS-Gen §7.2.2, Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 Note 2	3
88 - 216	150 Note 2	3
216 - 960	200 Note 2	3
Above 960	500	3

Note 2: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) and IC RSS-Gen §7.2.2, except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

5.2 EUT Setup

The radiated emissions tests were performed using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15E and IC RSS-210 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

5.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to the indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, the Corrected Amplitude (CA) of 36.6 dBuV/m = indicated Amplitude reading (Ai) 32.5 dBuV + Antenna Factor (AF) 23.5 dB + Cable Loss (CL) 3.7 dB + Attenuator (Atten) 10 dB - Amplifier Gain (Ga) 29.4 dB

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

5.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A0020106-3	2011-06-29
A.R.A Inc	Horn antenna	DRG-1181A	1132	2010-11-29
Hewlett Packard	Pre amplifier	8447D	2944A06639	2011-06-09
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2011-05-09

Statement of Traceability: BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

5.6 Test Environmental Conditions

Temperature:	18~21 °C
Relative Humidity:	30~35 %
ATM Pressure:	101.2-102.2kPa

The testing was performed by Ning Ma from 2011-09-28 to 2011-09-29.

5.7 Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15, Subpart E, section 15.205, 15.209 and IC RSS-210, RSS-Gen standard's radiated emissions limits, and had the worst margin of:

AP1010i

Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel, Range
802.11a, 5250-5350 MHz			
-11.39	105.6418	Vertical	30 MHz-1 GHz
802.11a, 5470-5725 MHz			
-10.93	105.6998	Vertical	30 MHz-1 GHz
802.11n HT40, 5250-5350 MHz			
-8.48	105.6193	Vertical	30 MHz-1 GHz
802.11n HT40, 5470-5725 MHz			
-7.84	105.6263	Vertical	30 MHz-1 GHz

Note: A mode 20 MHz and N mode 40 MHz is worst case.

AP1010e


Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel, Range
802.11a, 5250-5350 MHz			
-27.06	40.173	Vertical	30MHz-1GHz
802.11a, 5470-5725 MHz			
-11.45	105.6645	Vertical	30MHz-1GHz
802.11n HT40, 5250-5350 MHz			
-10.74	105.6428	Vertical	30MHz-1GHz
802.11n HT40, 5470-5725 MHz			
-13.21	105.6248	Vertical	30MHz-1GHz

Note: A mode 20MHz and N mode 40MHz is worst case.

Please refer to the following table and plots for specific test result details

AP1010i


5250-5350 MHz, 802.11a mode POE

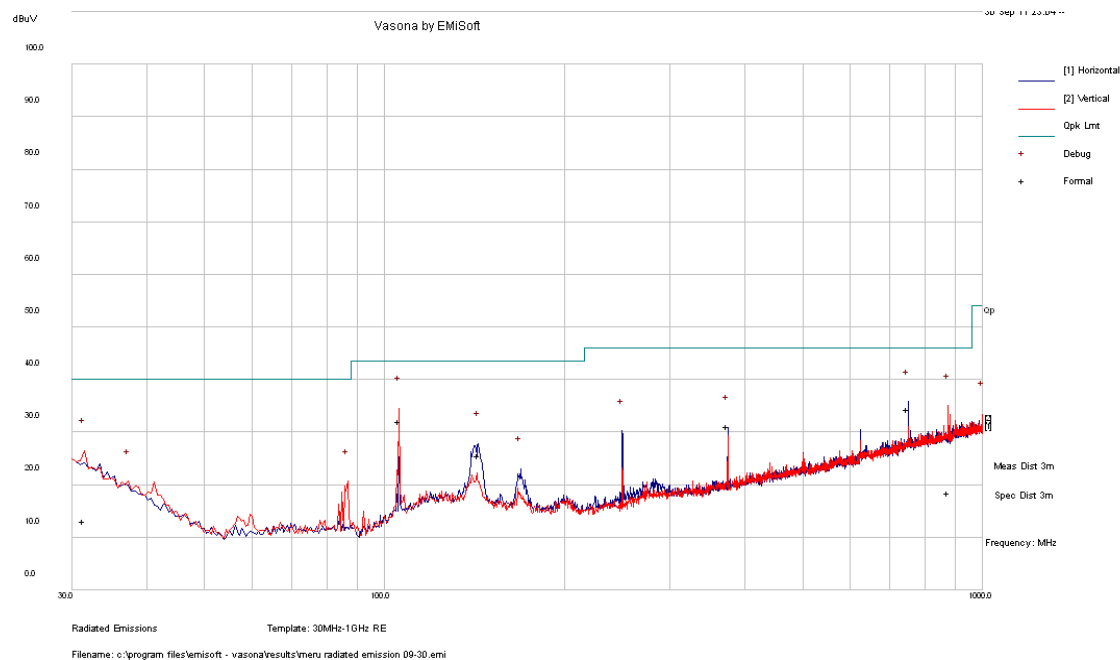

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)
105.6418	32.11	165	V	281	43.5	-11.39
750.0245	34.36	296	H	176	46	-11.64
375.001	31.13	136	H	145	46	-14.87
143.603	25.59	110	H	259	43.5	-17.91
31.363	13.22	256	V	234	40	-26.78
875.1685	18.59	181	V	69	46	-27.41


5470-5725 MHz, 802.11a mode POE

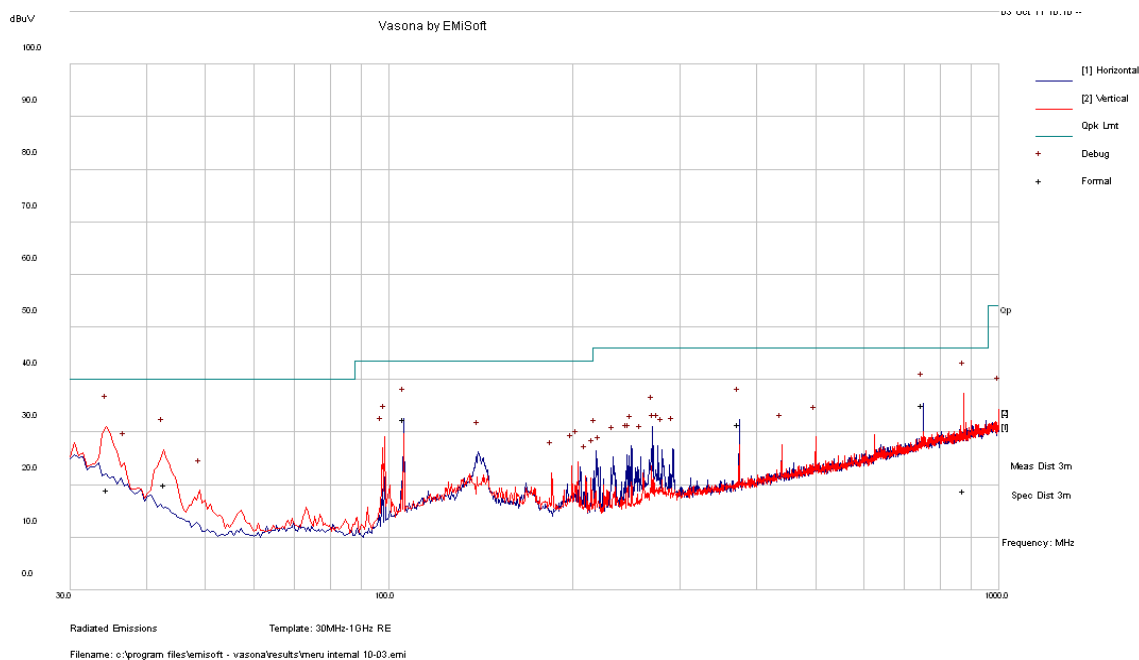

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
750.0113	35.16	110	H	217	46	-10.84
375.0183	31.61	99	H	146	46	-14.39
105.6998	32.57	166	H	94	43.5	-19.93
42.85825	19.98	100	V	143	40	-20.02
34.56775	19.14	203	V	180	40	-20.86
875.3173	18.81	160	V	281	46	-27.19


5250-5350 MHz, 802.11 n HT20 mode POE

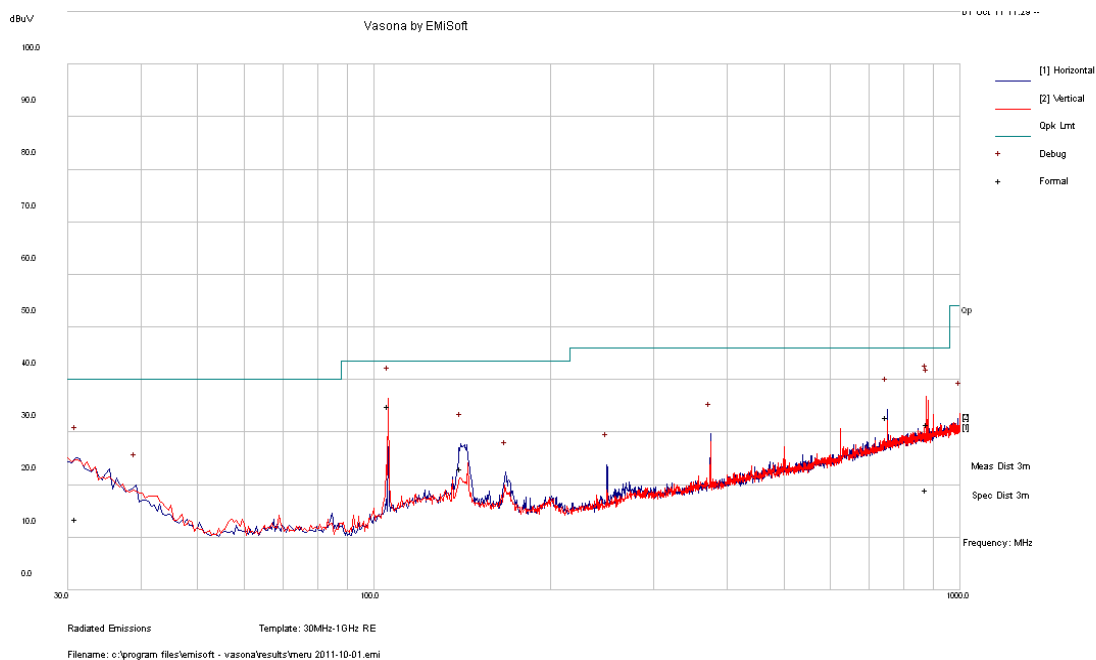

Quasi-Peak Measurements


Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
105.6193	35.02	100	V	138	43.5	-8.48
750.023	32.85	109	H	215	46	-13.15
879.988	31.61	120	V	5	46	-14.39
140.49	23.18	201	H	250	43.5	-20.32
31.00175	13.45	187	H	296	40	-26.55
875.2303	19.15	130	V	174	46	-26.85

5470-5725MHz, 802.11 n HT20 Mode POE

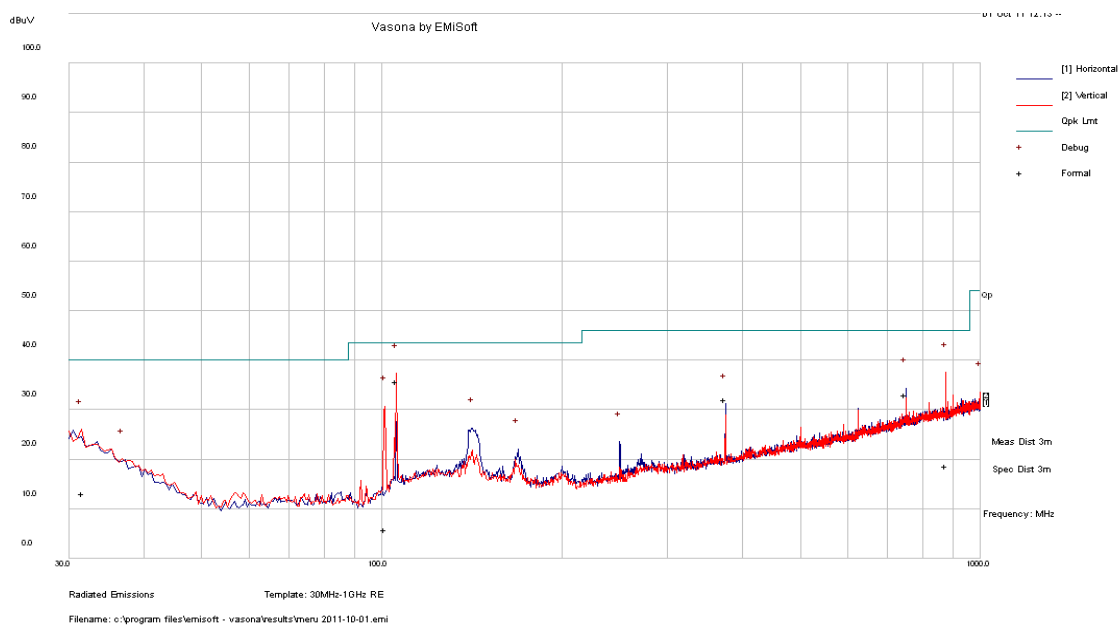


Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
105.6263	35.66	99	V	151	43.5	-7.84
750.0193	33.06	100	H	211	46	-12.94
375.0213	32.01	99	H	146	46	-13.99
31.594	13.1	179	V	228	40	-26.90
875.4928	18.65	270	V	107	46	-27.35
101.245	5.85	102	V	242	43.5	-37.65

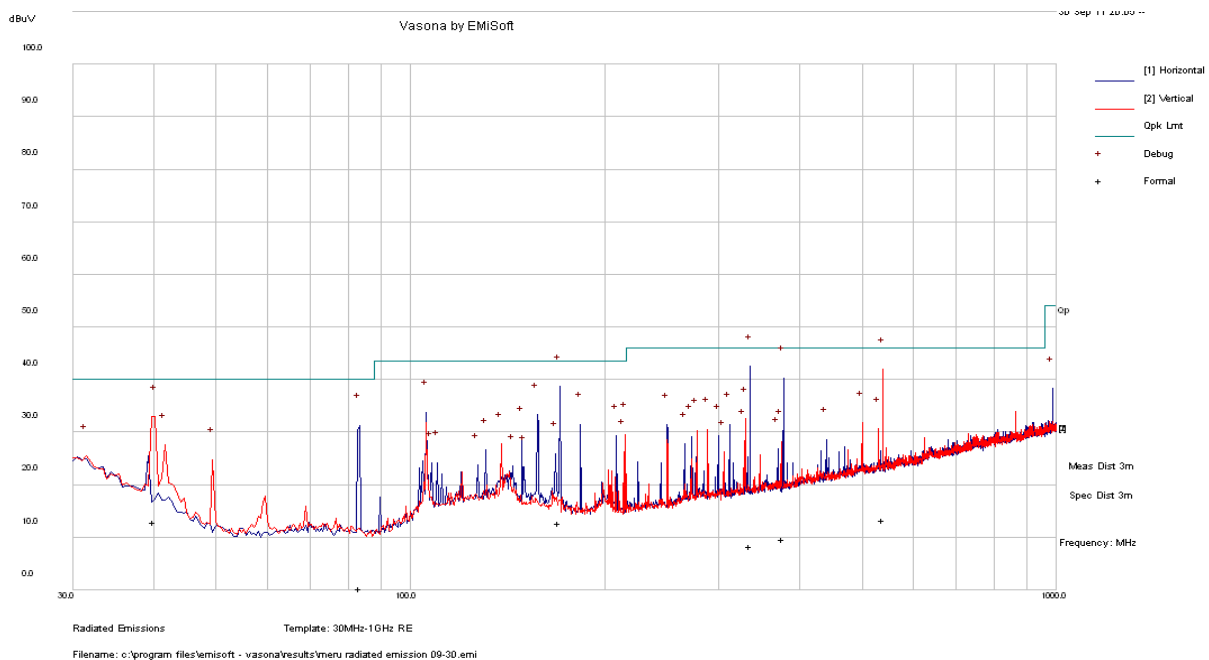AP1010e**802.11 a20 Mode POE****Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
10.173	12.94	136	V	112	40	-27.06
170.1633	12.8	181	H	250	43.5	-30.70
538.133	13.33	296	V	172	46	-32.67
377.7908	9.73	256	H	51	46	-36.27
335.5645	8.41	165	H	122	46	-37.59
83.41575	0.22	110	H	176	40	-39.78


802.11 a20 Mode POE

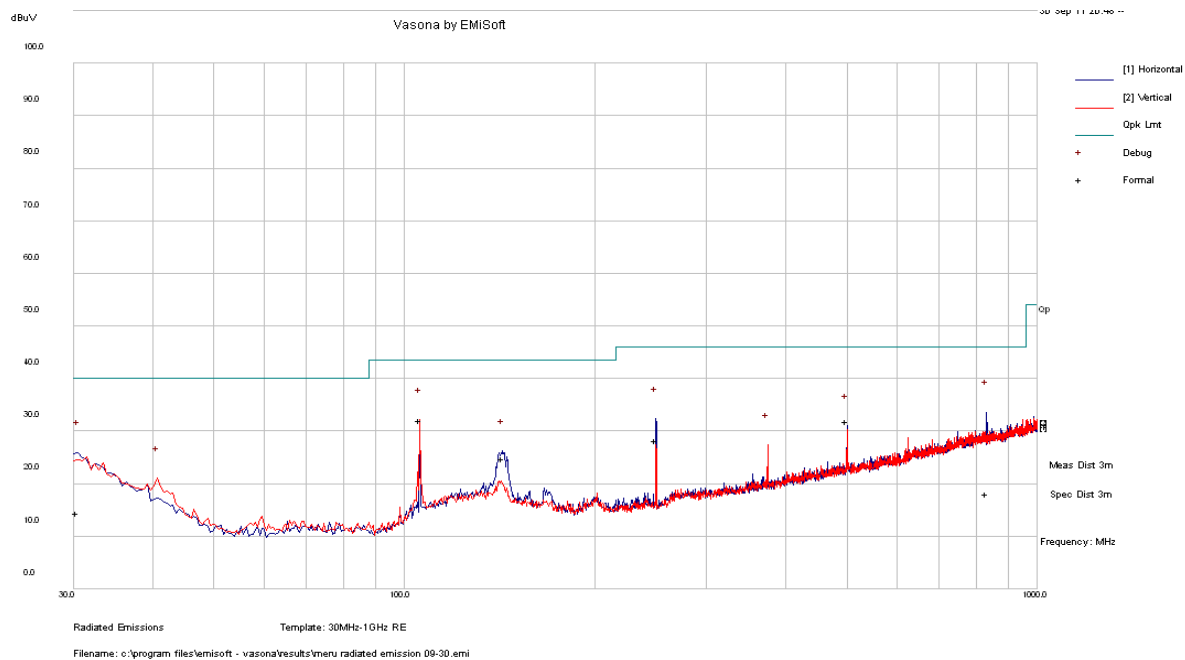

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
105.6645	32.05	99	V	291	43.5	-11.45
499.9818	31.82	156	H	228	46	-14.18
249.955	28.3	102	H	243	46	-17.70
143.0133	24.79	200	H	288	43.5	-18.71
30.429	14.47	235	H	56	40	-25.53
830.466	18.01	195	H	10	46	-27.99


802.11 n 40 Mode POE

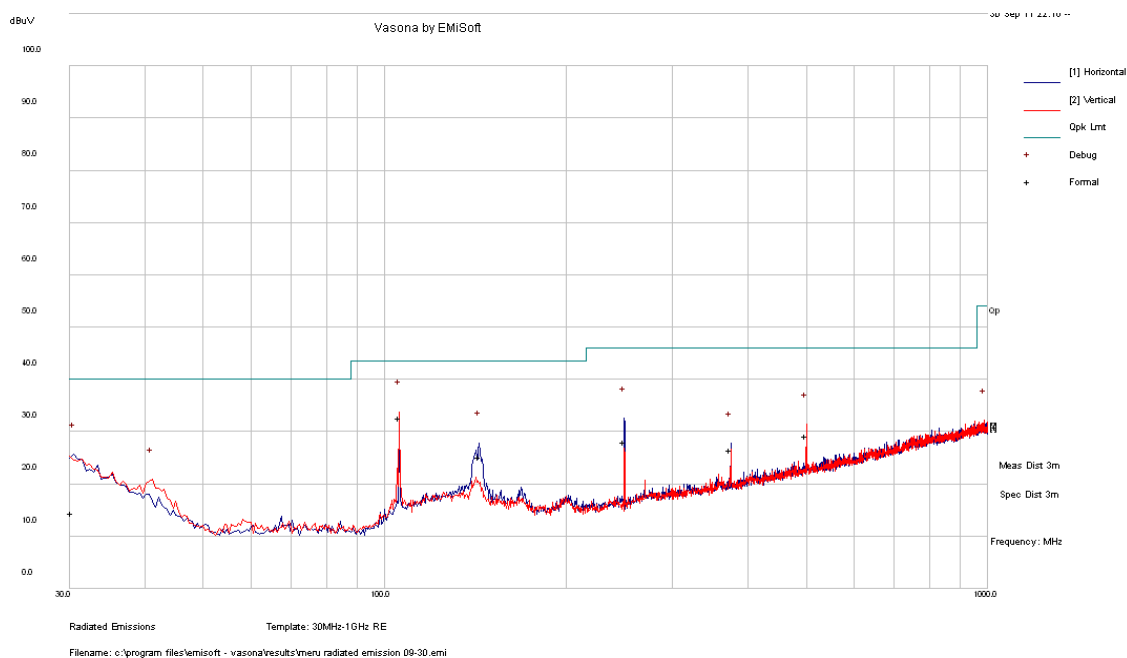

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
105.6428	32.76	121	V	317	43.5	-10.74
500.006	29.26	209	V	194	46	-16.74
249.9523	28.16	100	H	249	46	-17.84
143.5503	25.21	202	H	284	43.5	-18.29
374.993	26.46	99	H	135	46	-19.54
30.24725	14.54	214	H	183	40	-25.46

802.11 n 40 Mode POE

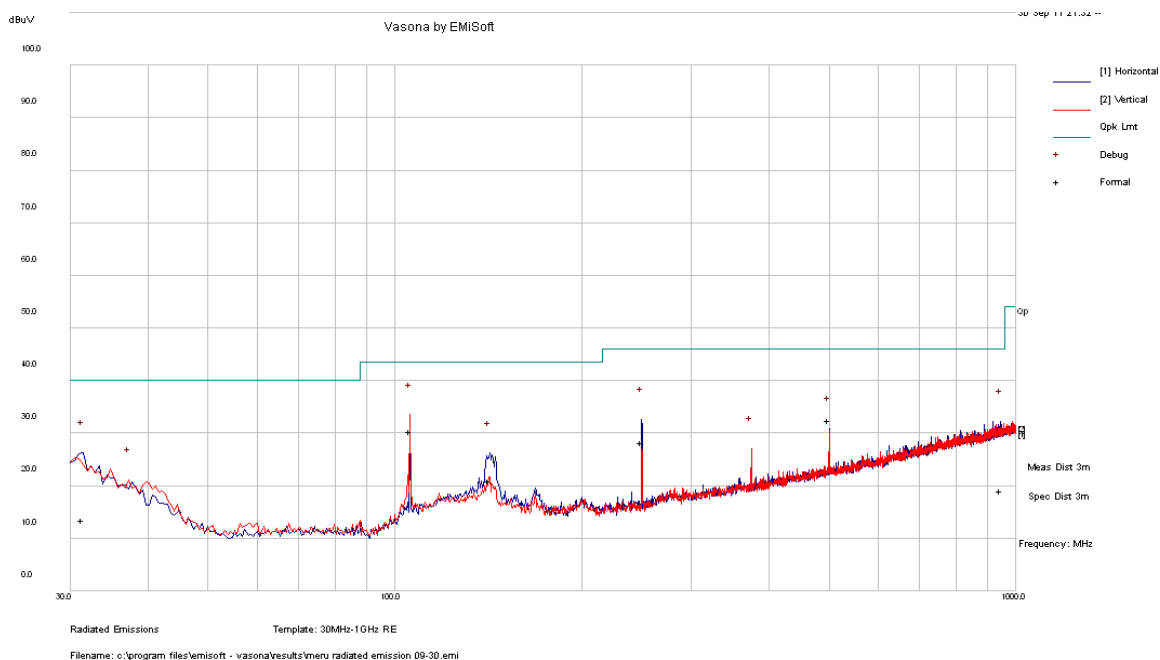

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
105.6428	30.29	99	V	298	43.5	-13.21
499.9968	32.43	170	H	221	46	-13.57
249.955	28.25	107	H	243	46	-17.75
141.8608	20.95	227	H	264	43.5	-22.55
31.4395	13.47	248	H	244	40	-26.53
945.8638	19.13	258	H	329	46	-26.87

Above 1 GHz:**AP1010i****802.11a Mode 5250-5350 MHz**

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5260 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5280 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5320 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

Note: - All spurious emissions including the restrict bands are below 20 dB of the limit.

802.11a Mode 5470-5725 MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5500 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5580 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5700 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

Note: - All spurious emissions including the restrict bands are below 20 dB of the limit.

802.11 n HT20 Mode 5250-5350 MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5260 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5280 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5320 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

802.11 n HT40 Mode 5250-5350 MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5270 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5310 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

Note: - All spurious emissions including the restrict bands are below 20 dB of the limit.

802.11 n20 Mode 5470MHz-5725MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5500 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5680 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5700 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

802.11 n40 Mode 5470MHz-5725MHz

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBµV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 5510 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5590 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5670 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

Note: - All spurious emissions including the restrict bands are below 20 dB of the limit.

AP1010e

802.11a Mode 5250-5350 MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5260 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5280 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5320 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

Note: - All spurious emissions including the restrict bands are below 20 dB of the limit.

802.11a Mode 5470-5725 MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5500 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5580 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5700 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

Note: - All spurious emissions including the restrict bands are below 20 dB of the limit.

802.11 n HT20 Mode 5250-5350 MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5260 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5280 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5320 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

802.11 n HT40 Mode 5250-5350 MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5270 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5310 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

Note: - All spurious emissions including the restrict bands are below 20 dB of the limit.

802.11 n20 Mode 5470MHz-5725MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5500 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5680 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5700 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

802.11 n40 Mode 5470MHz-5725MHz

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 5510 MHz, measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
Middle Channel 5590 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-
High Channel 5670 MHz measured at 3 meters											
-	-	-	-	-	-	-	-	-	-	-	-

Note: - All spurious emissions including the restrict bands are below 20 dB of the limit.

6 FCC §15.407(a) & IC RSS-210 §A9.2 – 26 dB and 99% Emission Bandwidth

6.1 Applicable Standard

FCC §15.407(a) and RSS-210 A9.2.

6.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 26 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

6.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.4 Test Environmental Conditions

Temperature:	23-25 °C
Relative Humidity:	35-50 %
ATM Pressure:	101-103kPa

The testing was performed by Ning Ma on 2011-09-07~ 2011-09-11 at RF Site.

6.5 Test Results

TX Chain 1

Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)	Results
802.11a, 5250-5350 MHz				
Low	5260	16.5927	28.253	Compliance
Middle	5280	16.4539	25.330	Compliance
High	5320	16.5449	27.307	Compliance
802.11a, 5470-5725 MHz				
Low	5500	16.5122	26.963	Compliance
Middle	5580	16.5048	27.261	Compliance
High	5700	16.5130	27.251	Compliance
802.11n HT20, 5250-5350 MHz				
Low	5260	17.6764	30.099	Compliance
Middle	5280	17.6582	28.527	Compliance
High	5320	17.6288	28.553	Compliance
802.11n HT20, 5470-5725 MHz				
Low	5500	17.6446	26.294	Compliance
Middle	5580	17.6281	25.471	Compliance
High	5700	17.6444	25.123	Compliance
802.11n HT40, 5250-5350 MHz				
Low	5270	36.2042	47.610	Compliance
High	5310	36.5646	42.251	Compliance
802.11n HT40, 5470-5725 MHz				
Low	5510	36.1614	42.077	Compliance
Middle	5590	36.0971	45.723	Compliance
High	5670	36.0754	41.982	Compliance

TX Chain 2


Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)	Results
802.11a, 5250-5350 MHz				
Low	5260	16.4427	25.357	Compliance
Middle	5280	16.4349	25.060	Compliance
High	5320	16.4394	25.364	Compliance
802.11a, 5470-5725 MHz				
Low	5500	16.6109	25.452	Compliance
Middle	5580	16.6018	25.504	Compliant
High	5700	16.6147	25.461	Compliance
802.11n HT20, 5250-5350 MHz				
Low	5260	17.5897	25.072	Compliance
Middle	5280	17.5890	22.305	Compliance
High	5320	17.5528	22.455	Compliance
802.11n HT20, 5470-5725 MHz				
Low	5500	17.5626	22.321	Compliance
Middle	5580	17.5973	25.095	Compliance
High	5700	17.5917	25.053	Compliance
802.11n HT40, 5250-5350 MHz				
Low	5270	36.0229	37.992	Compliance
High	5310	36.3160	41.368	Compliance
802.11n HT40, 5470-5725 MHz				
Low	5510	36.1662	41.430	Compliance
Middle	5590	36.0953	37.808	Compliance
High	5670	36.1828	47.019	Compliance

Please refer to the following plots for detailed test results.


TX Chain 1

5250-5350 MHz


802.11a, Low Channel

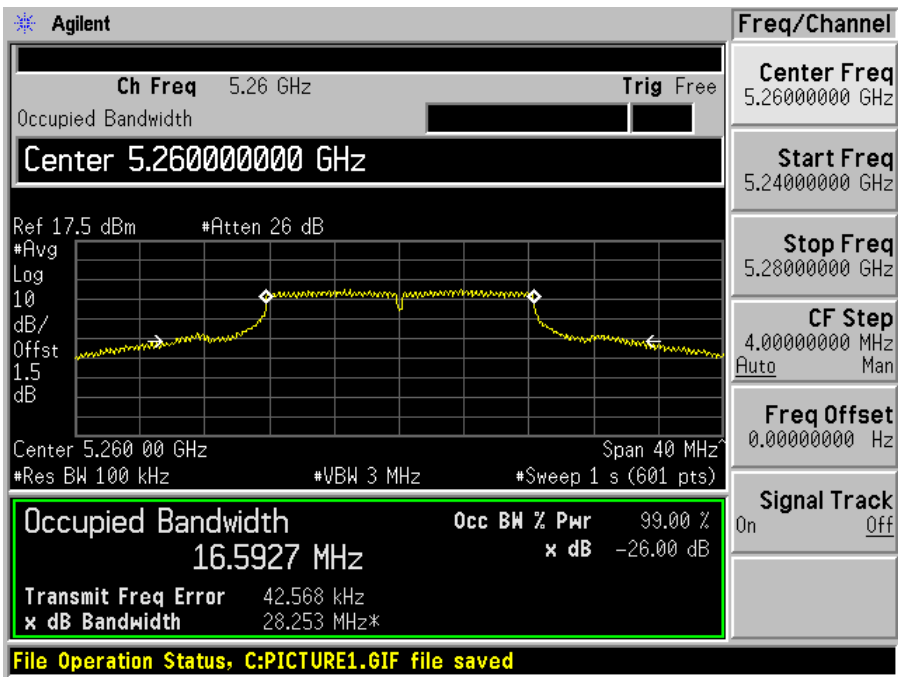

802.11a, Middle Channel

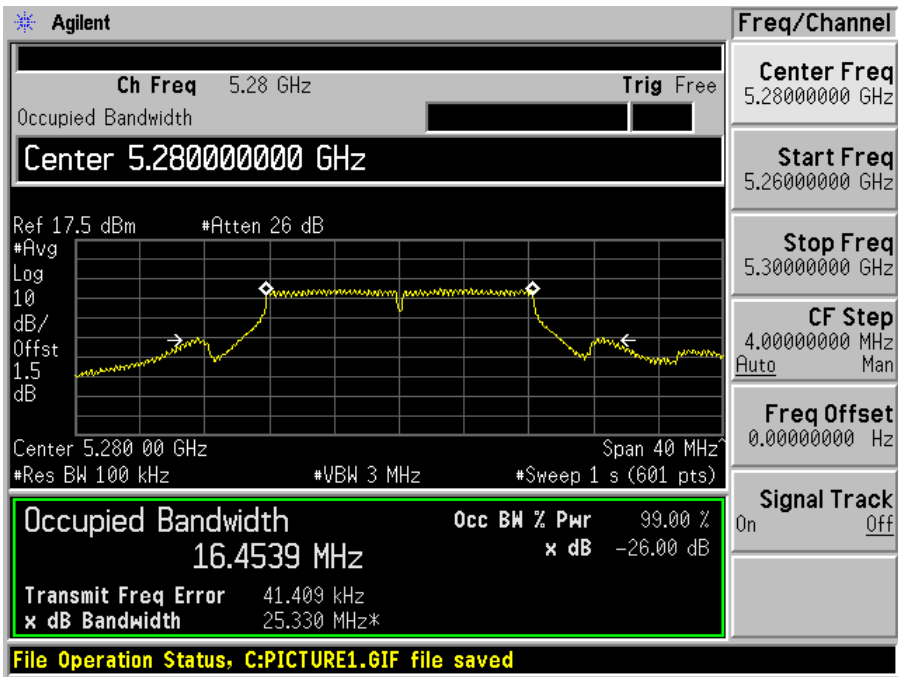


802.11a, High Channel

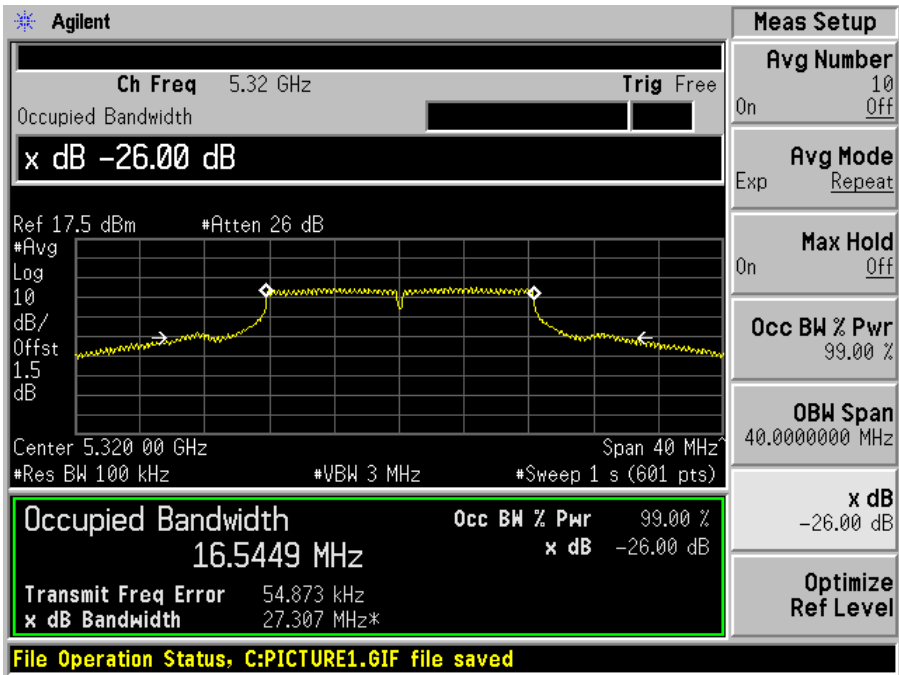


5470-5725 MHz


802.11a, Low Channel

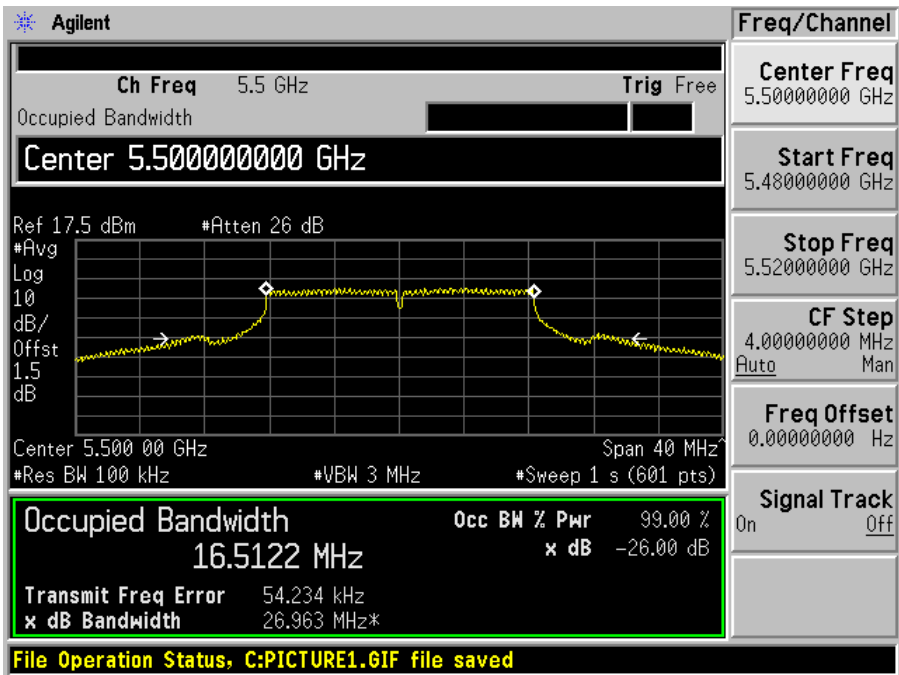

802.11a, Middle Channel

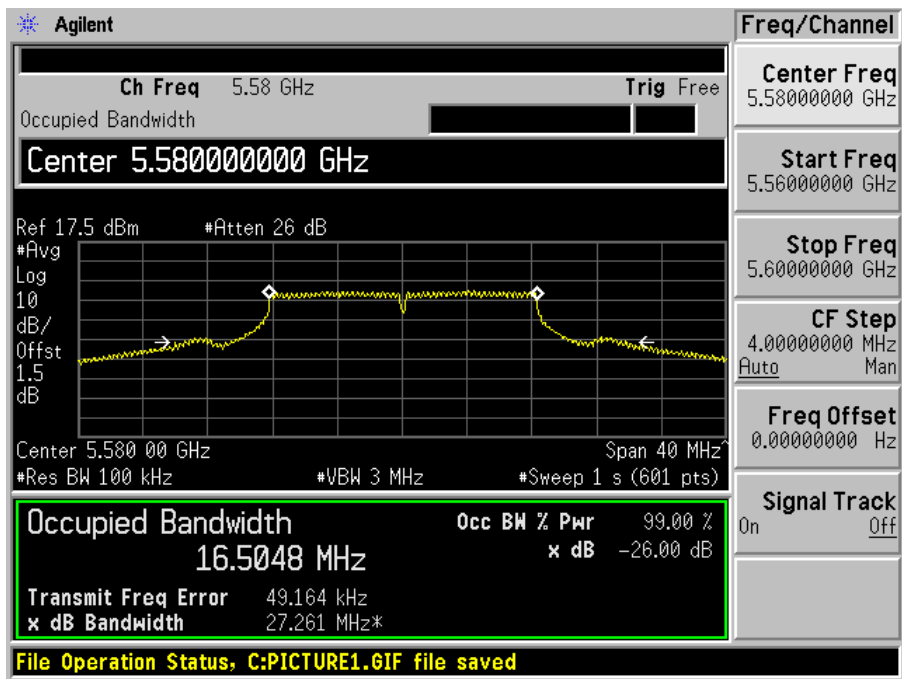


802.11a, High Channel

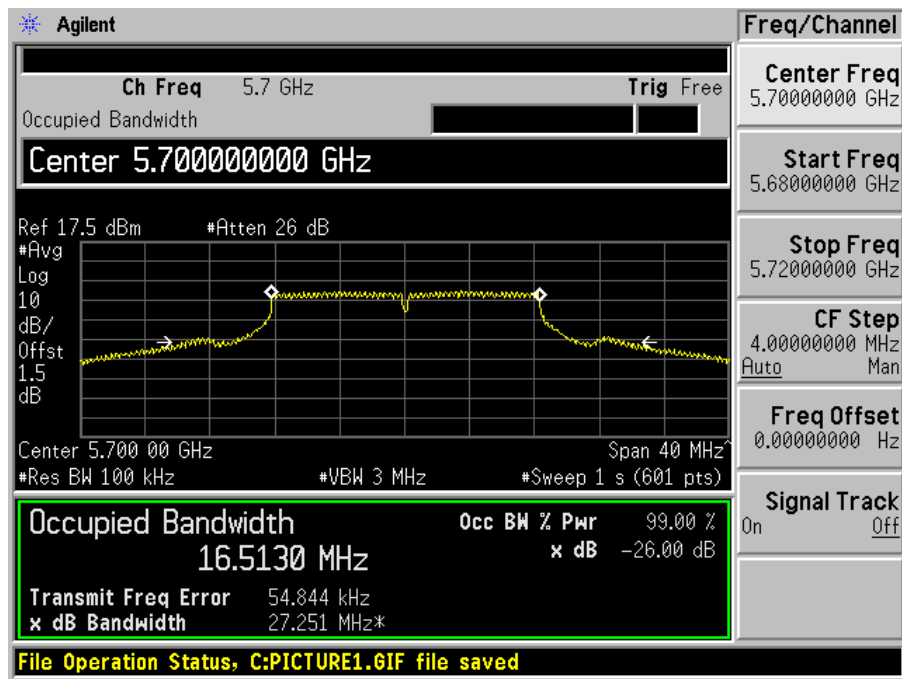


5250-5350 MHz


802.11n HT20, Low Channel

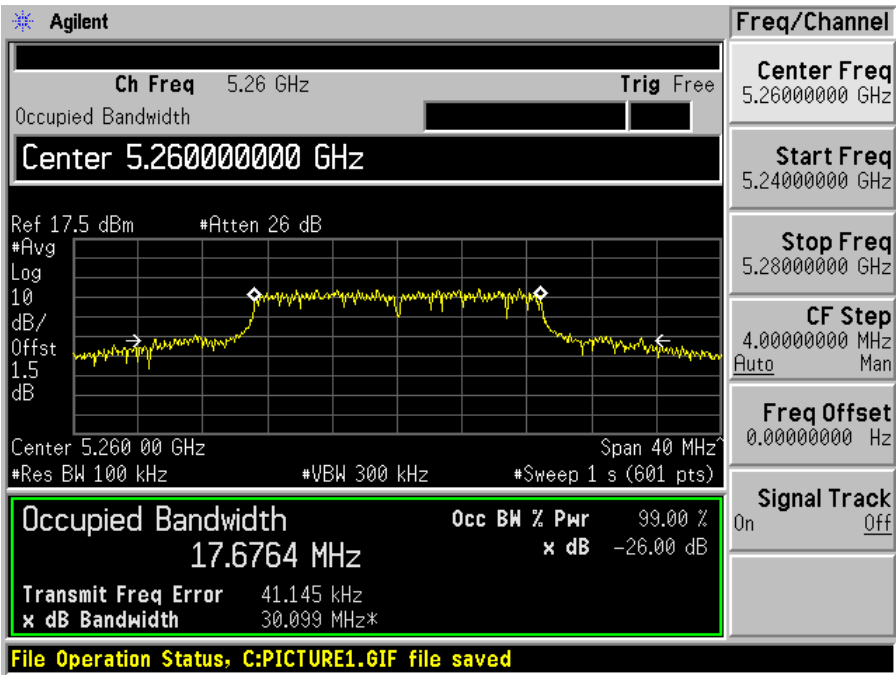

802.11n HT20, Middle Channel

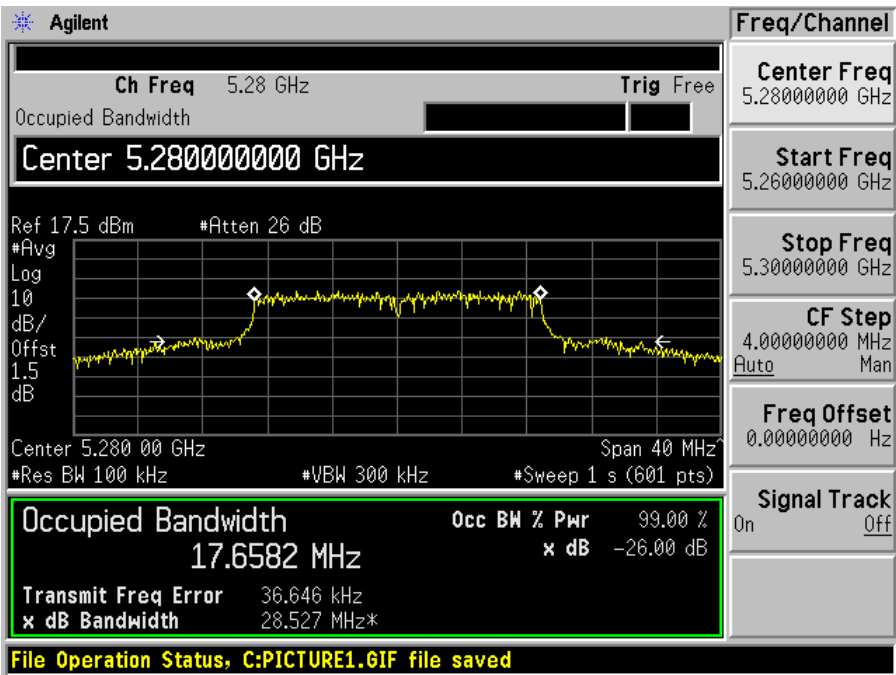


802.11n HT20, High Channel

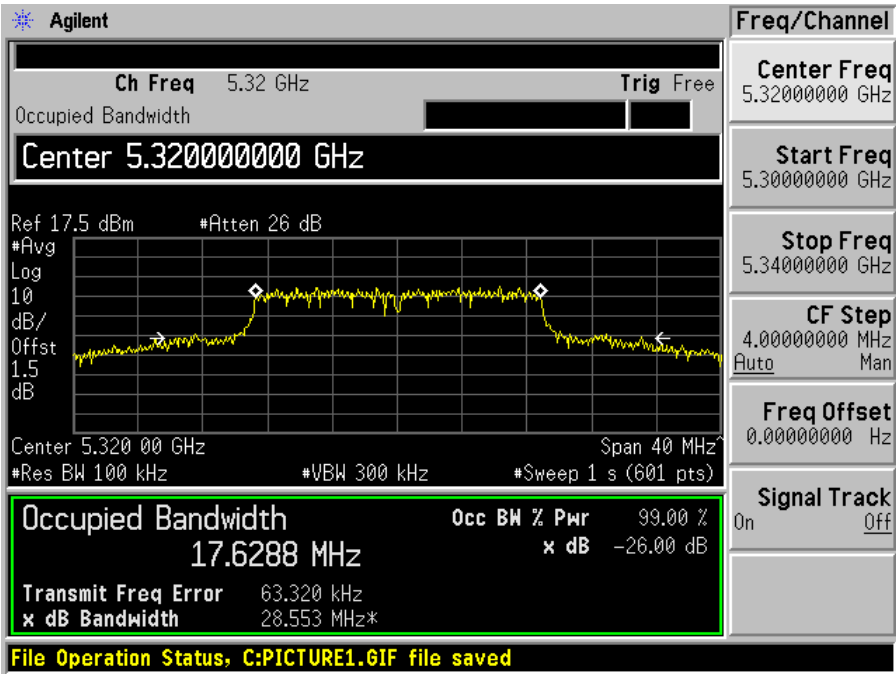


5470-5725 MHz


802.11n HT20, Low Channel

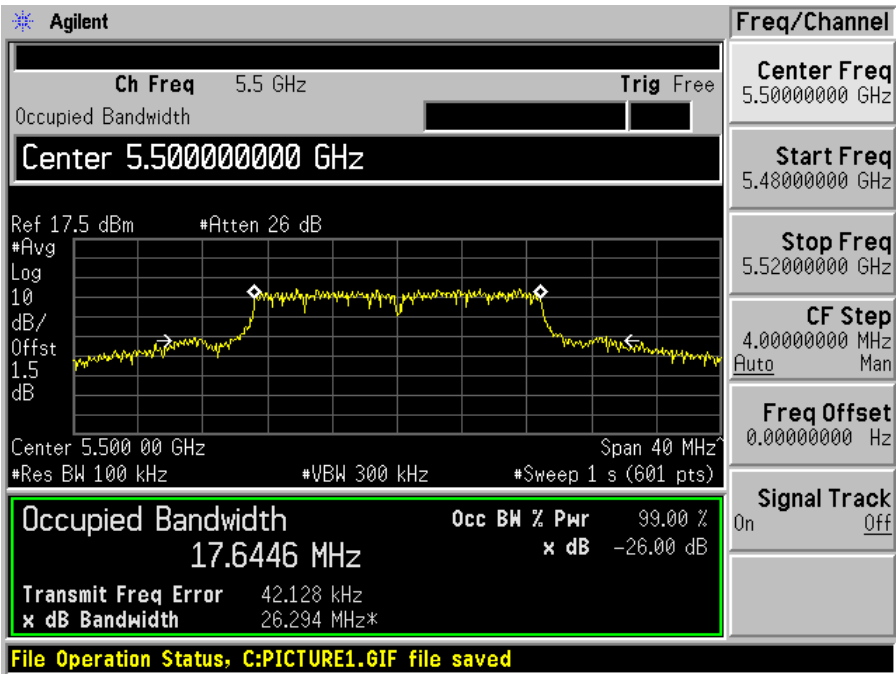

802.11n HT20, Middle Channel

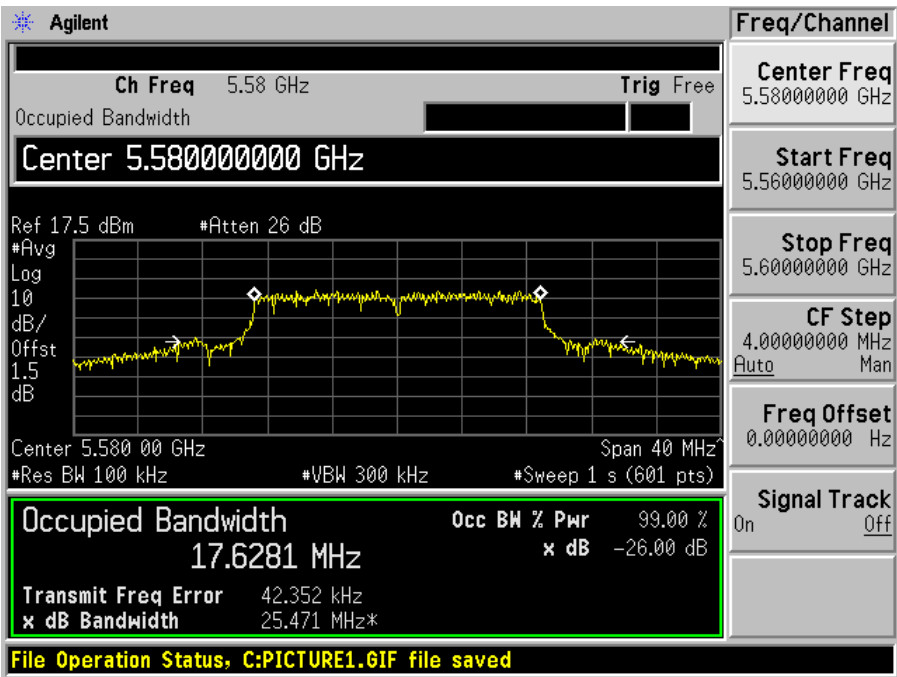


802.11n HT20, High Channel

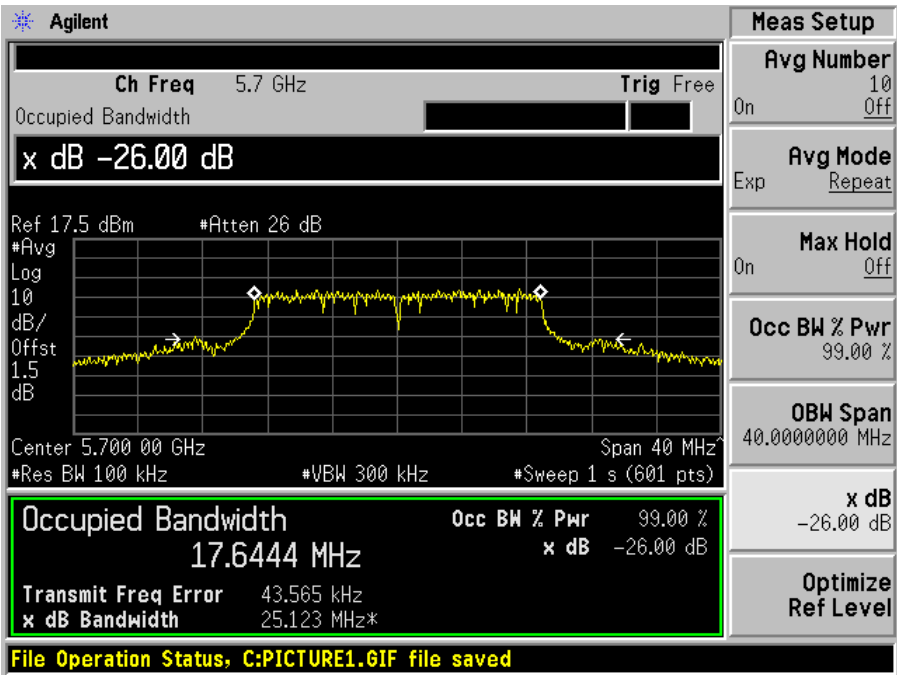


5250-5350 MHz:

802.11n HT40, Low Channel

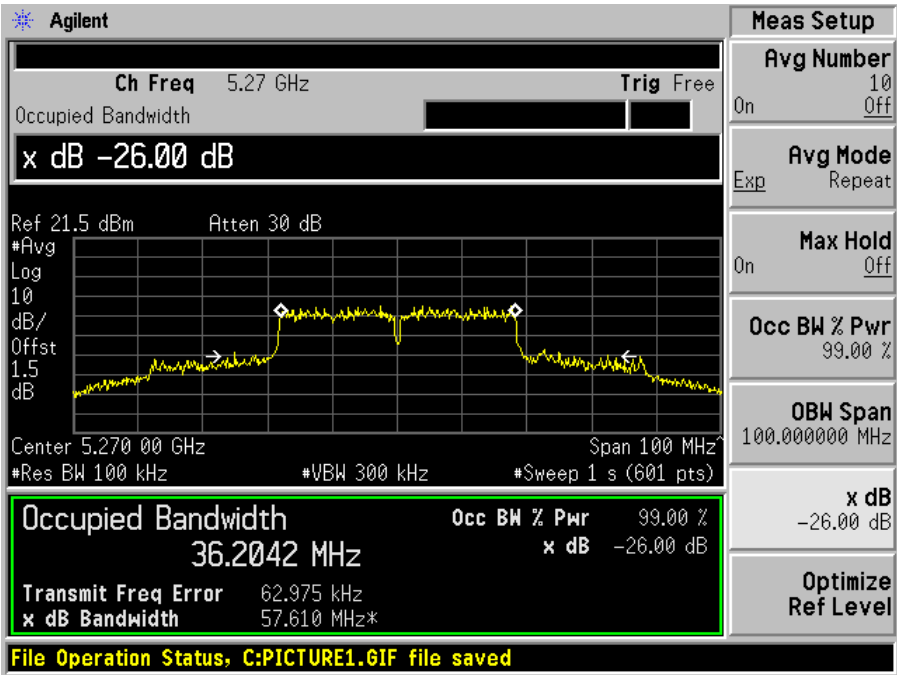


802.11n HT40, High Channel

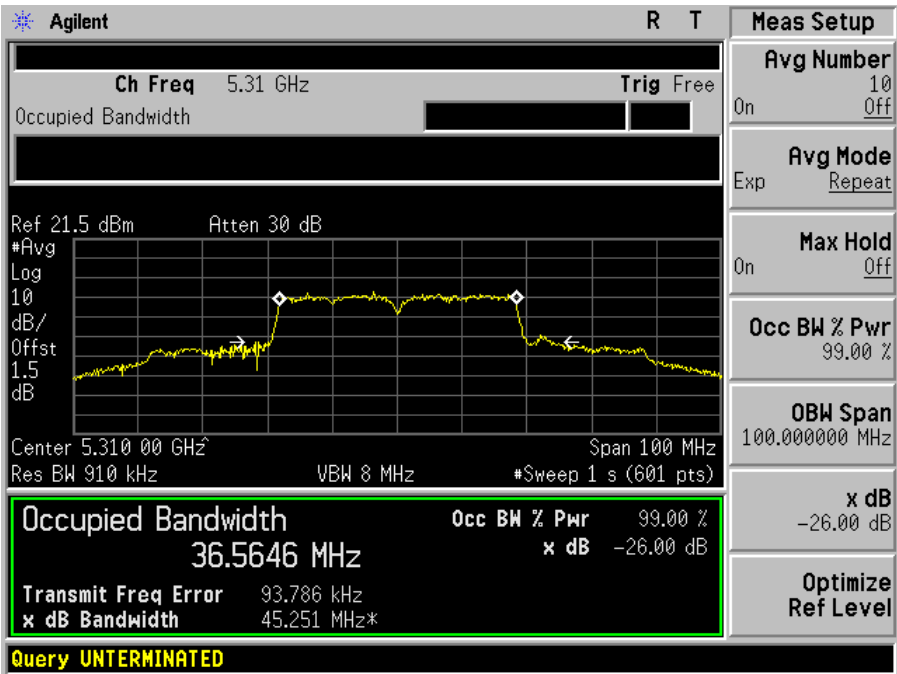


5470-5725 MHz:


802.11n HT40, Low Channel

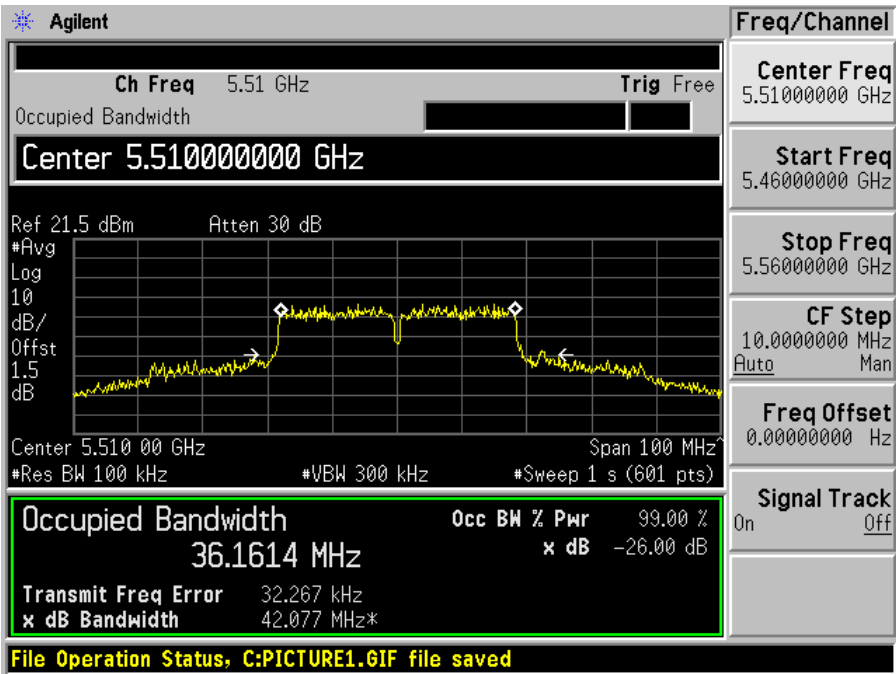

802.11n HT40, Middle Channel

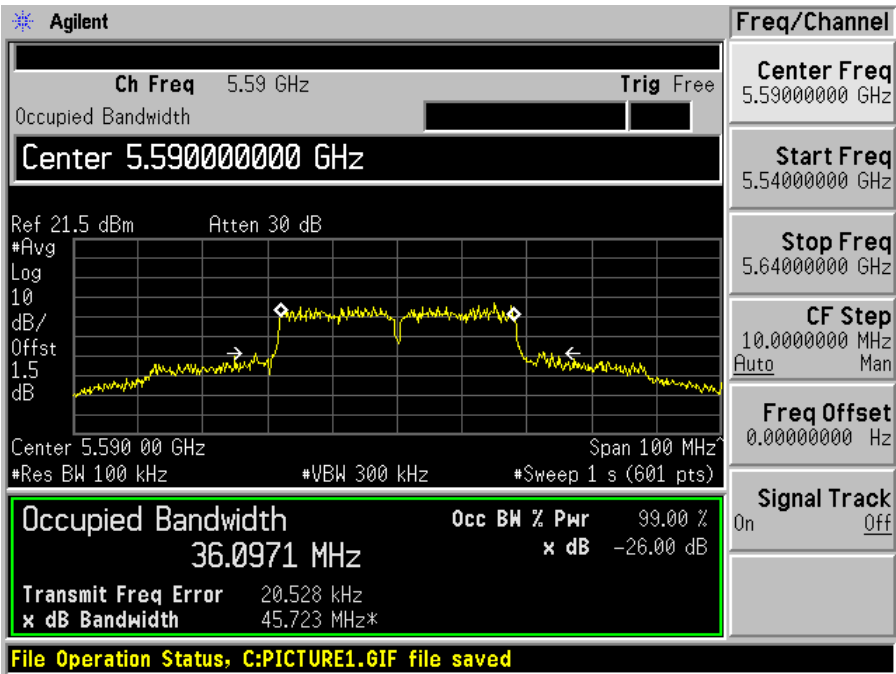


802.11n HT40, High Channel

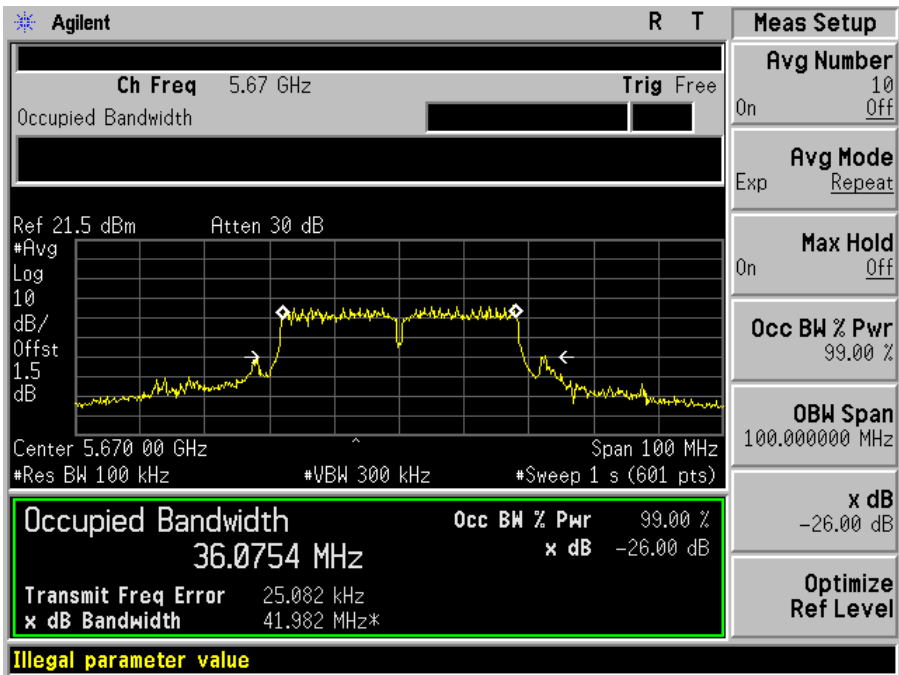


TX Chain 2

5250-5350 MHz


802.11a, Low Channel

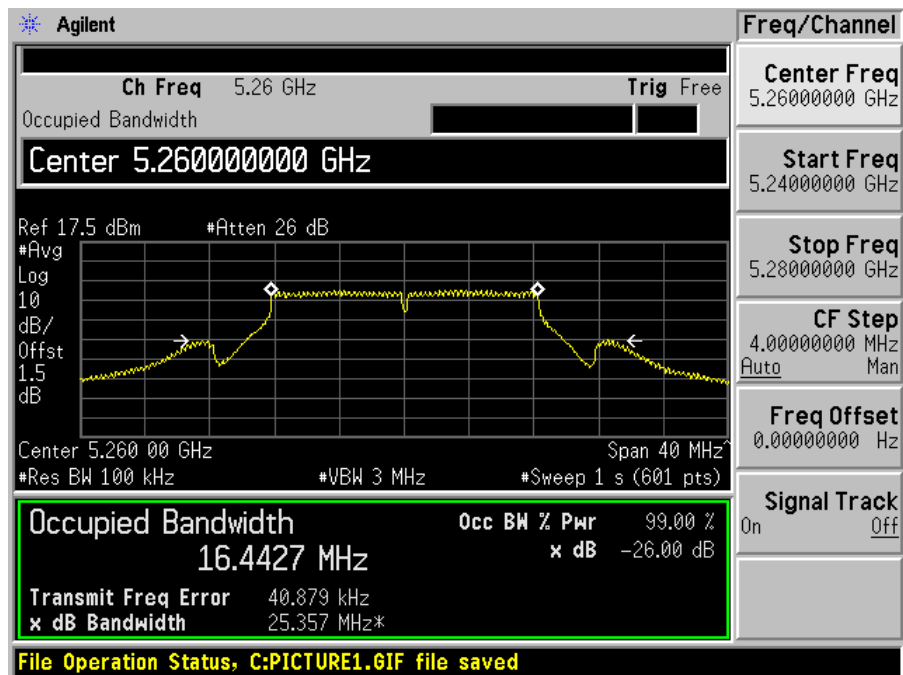

802.11a, Middle Channel

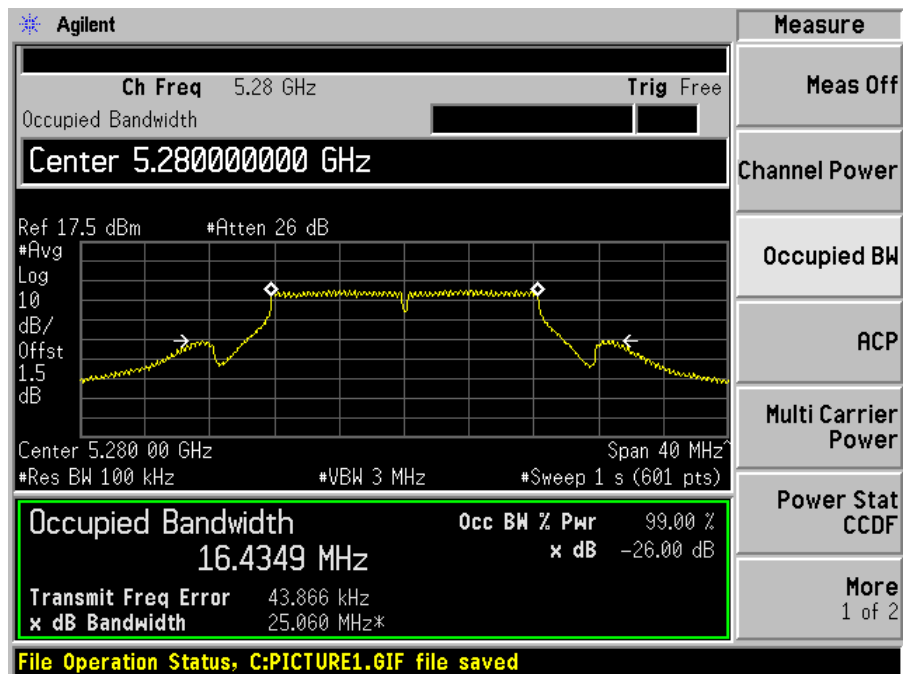


802.11a, High Channel

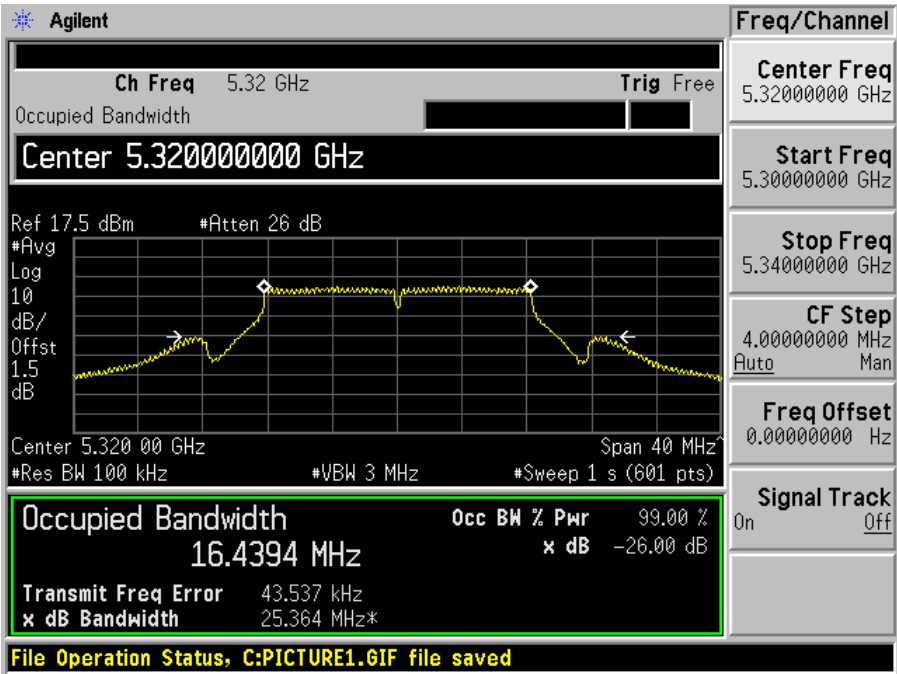


5470-5725 MHz


802.11a, Low Channel

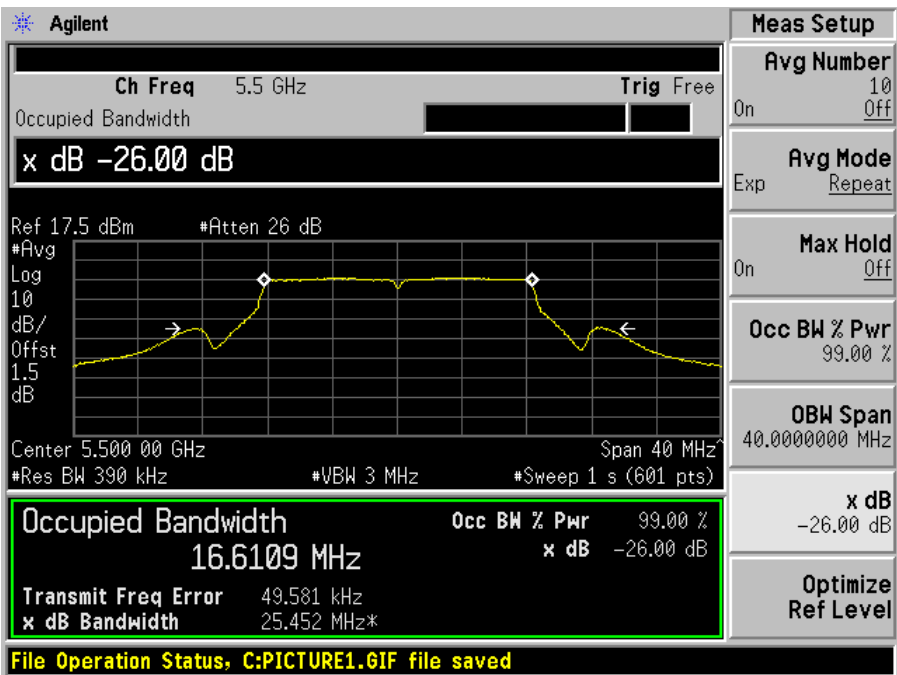

802.11a, Middle Channel

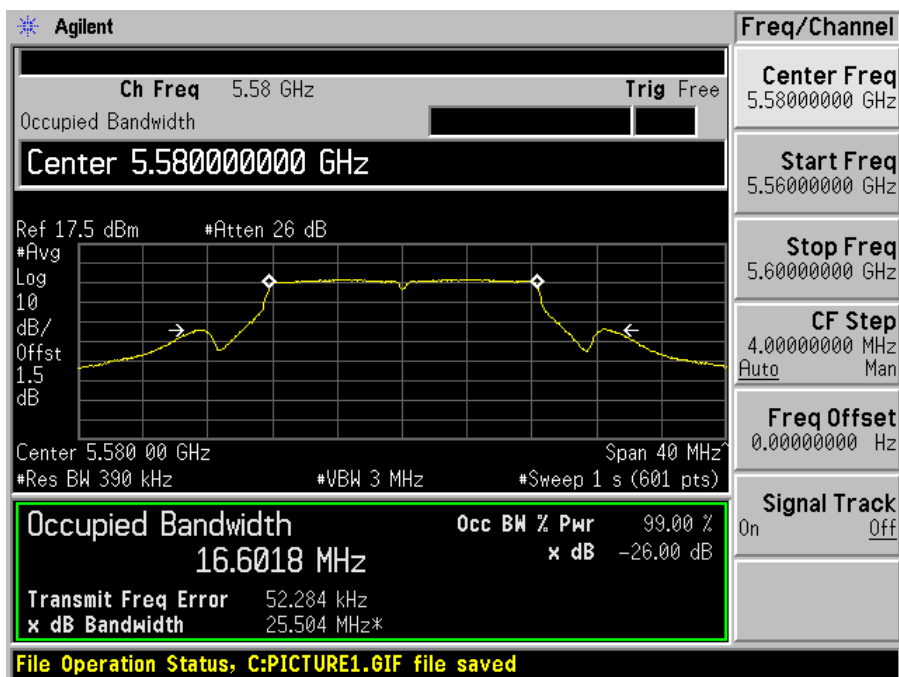


802.11a, High Channel

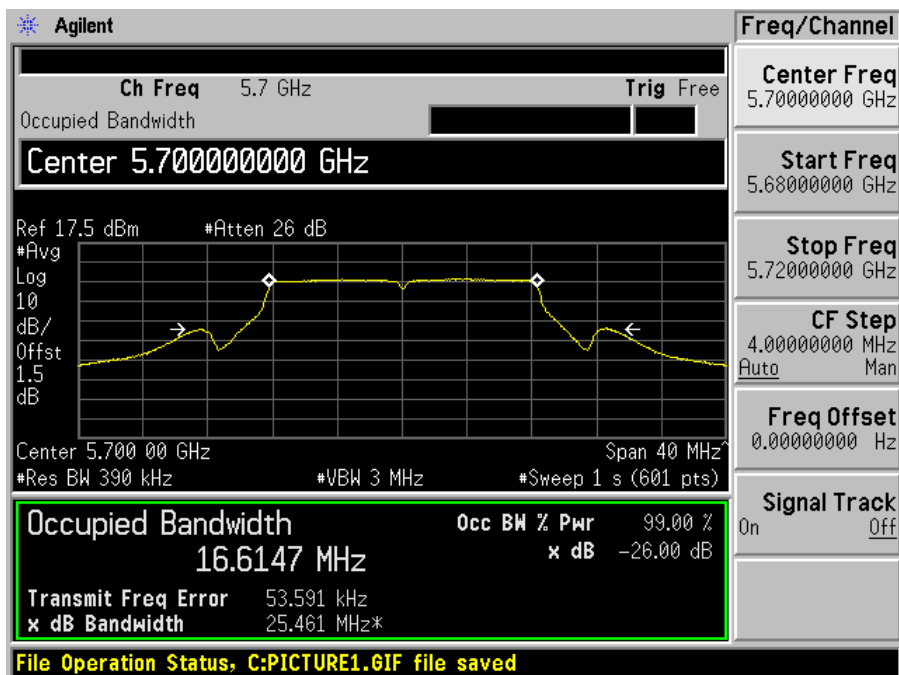


5250-5350 MHz


802.11n HT20, Low Channel

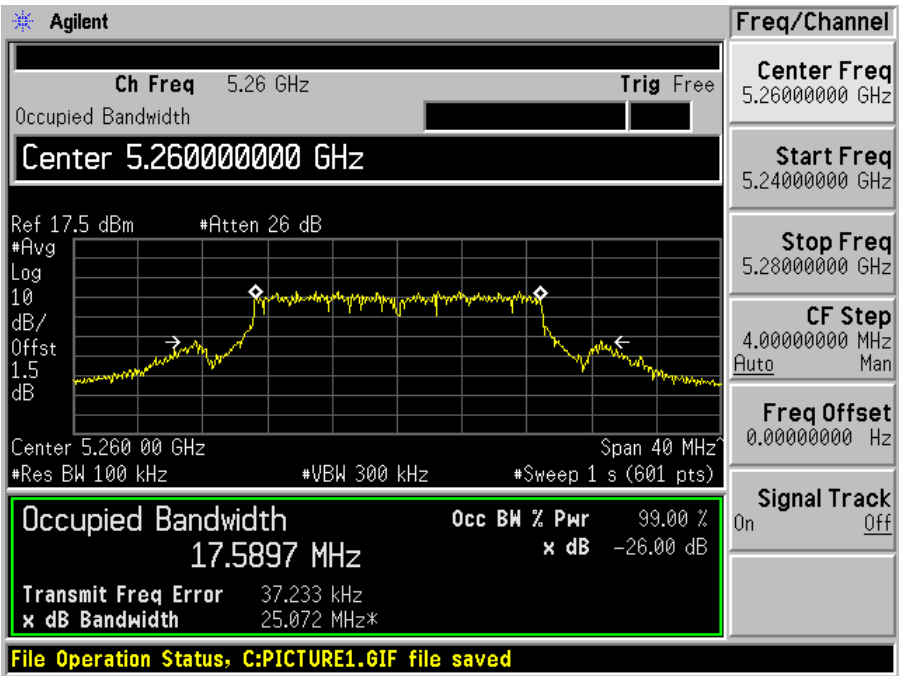

802.11n HT20, Middle Channel

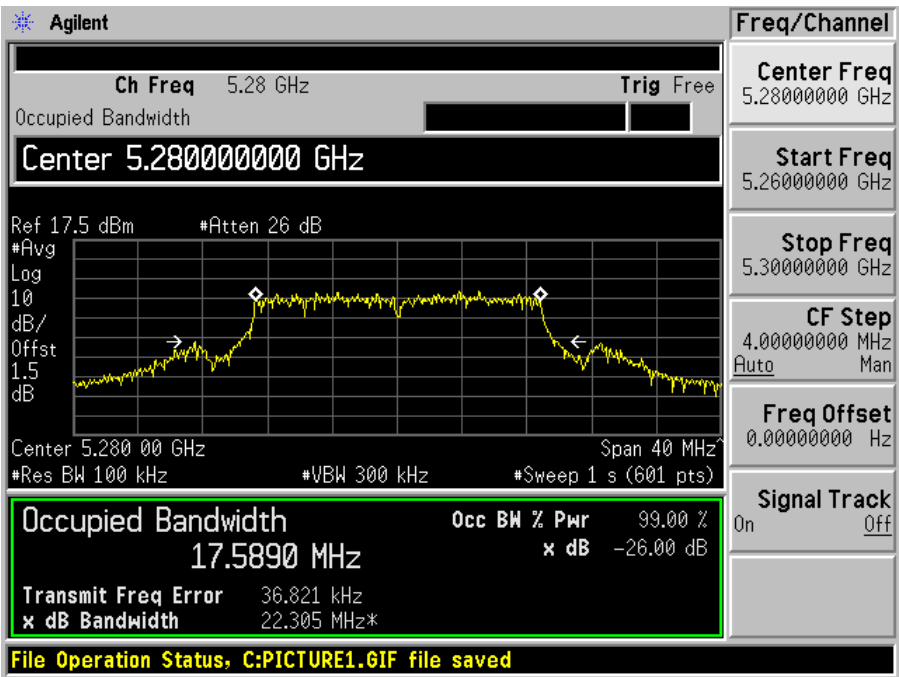


802.11n HT20, High Channel

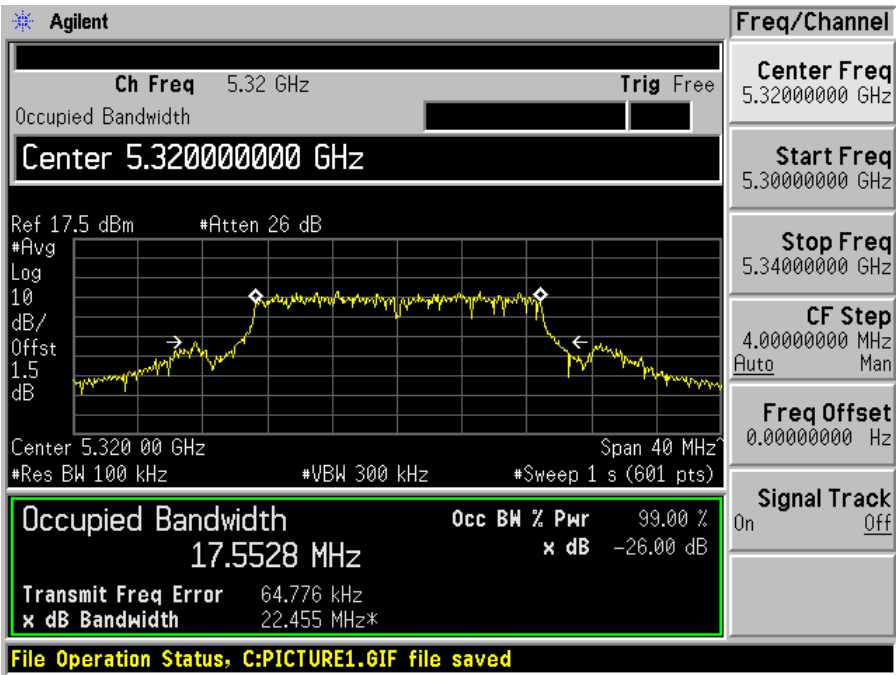


5470-5725 MHz:


802.11n HT20, Low Channel

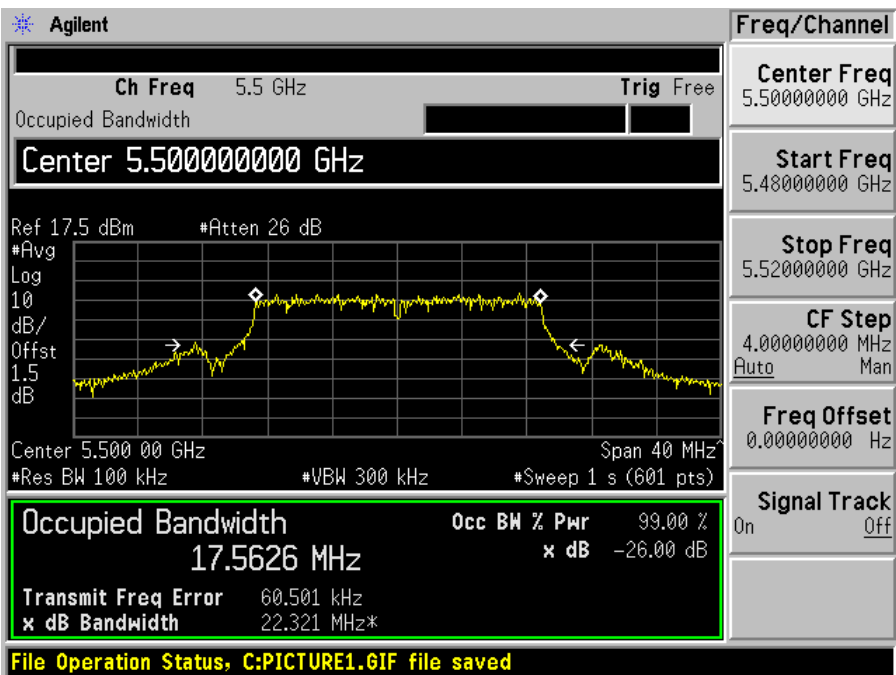

802.11n HT20, Middle Channel

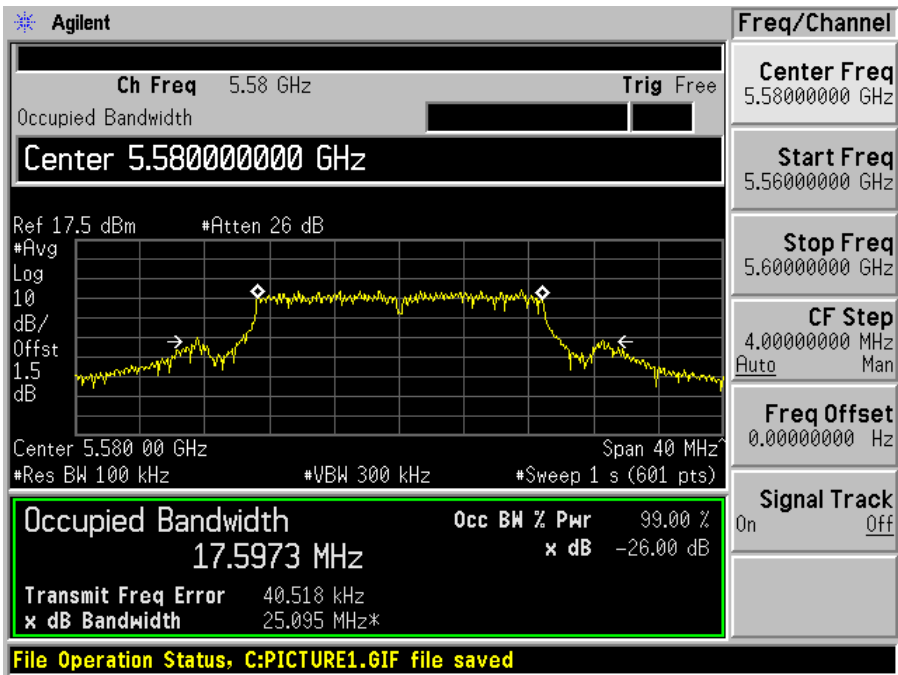


802.11n HT20, High Channel

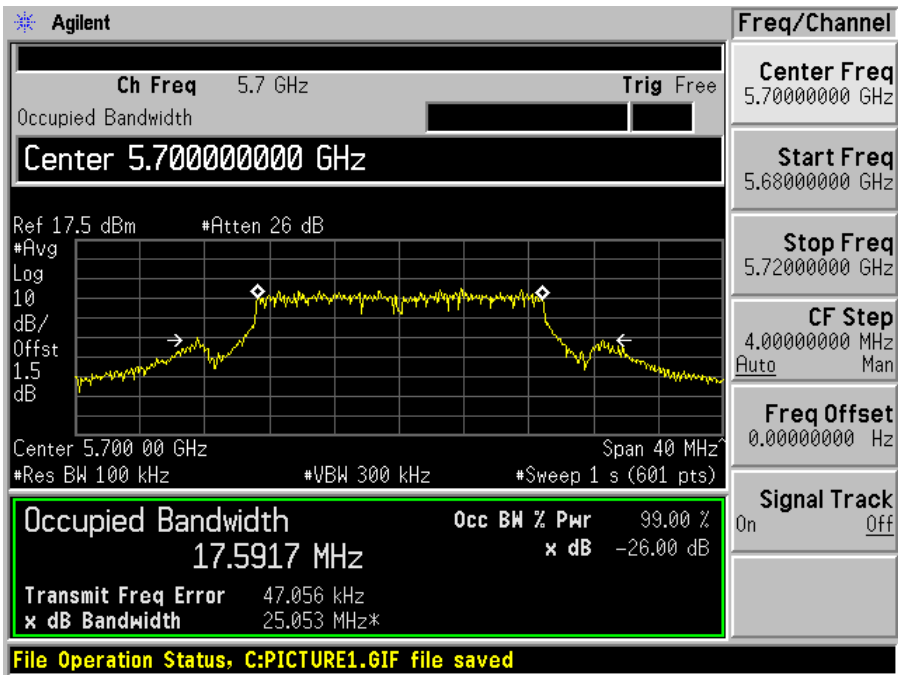


5250-5350 MHz:

802.11n HT40, Low Channel

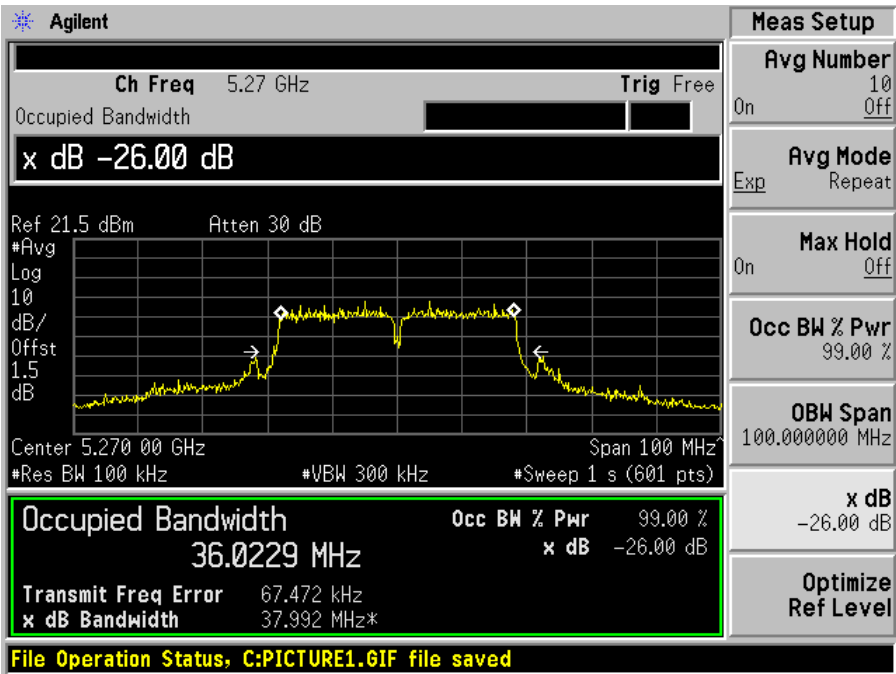


802.11n HT40, High Channel

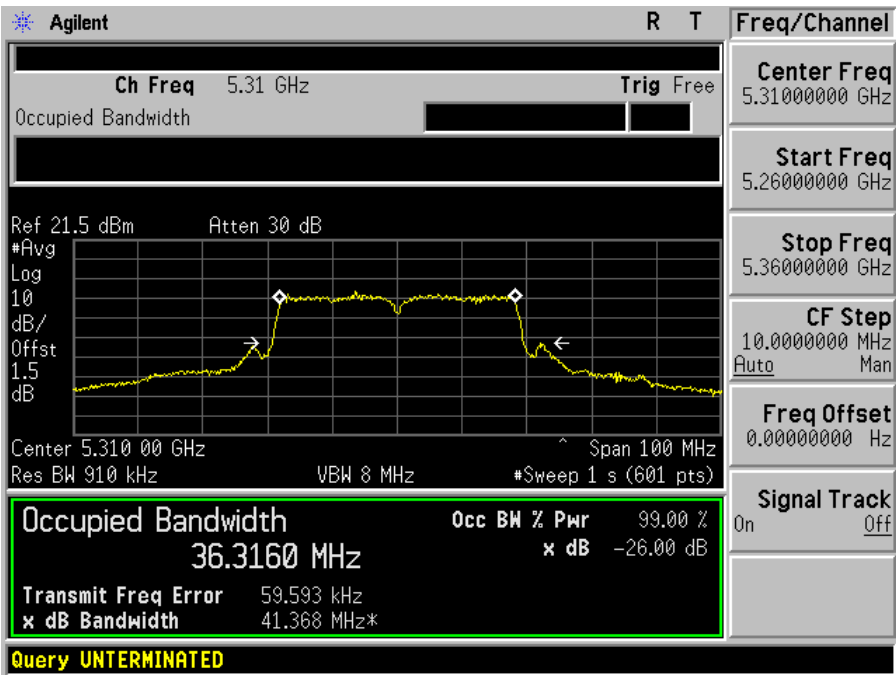


5470-5725 MHz:


802.11n HT40, Low Channel

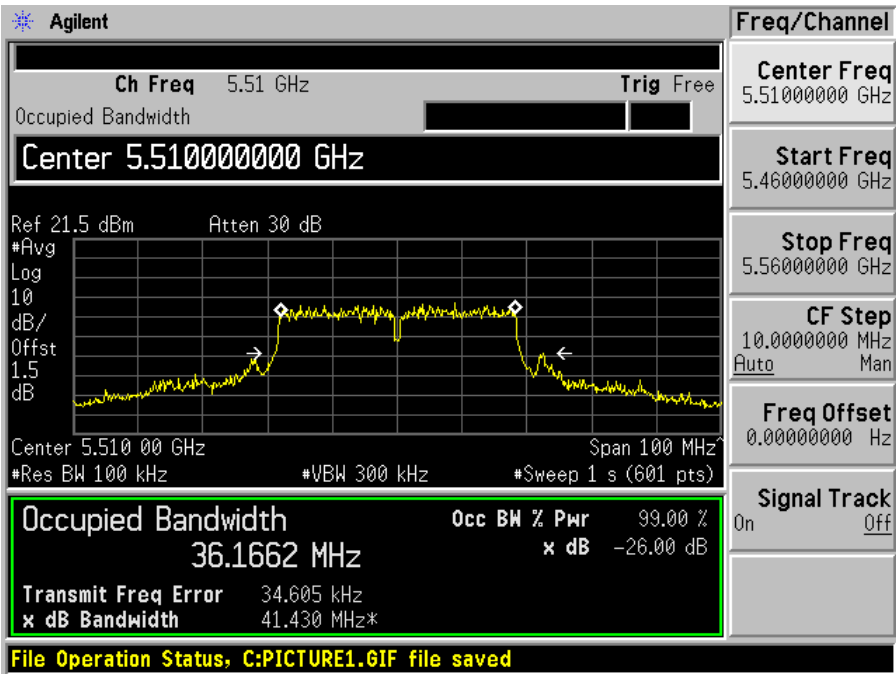

802.11n HT40, Middle Channel

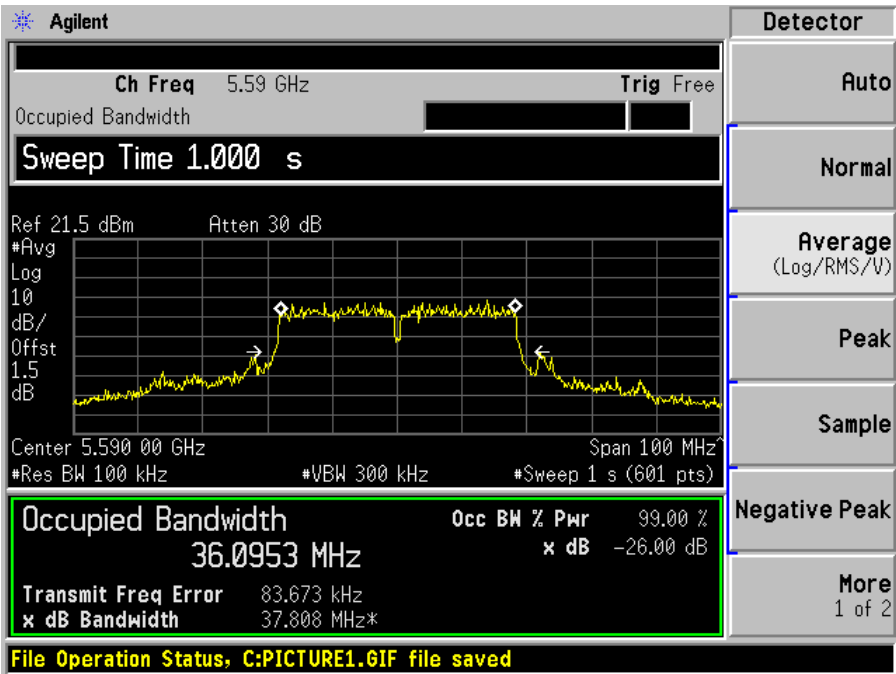

802.11n HT40, High Channel

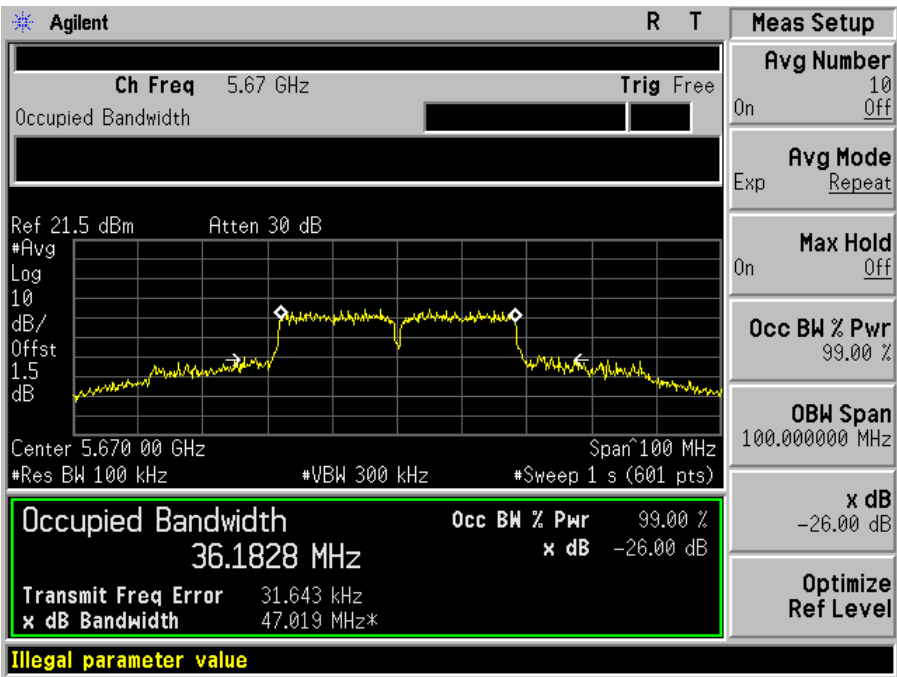

7 FCC §407(a) & IC RSS-210 §A9.2 - Peak Output Power Measurement

7.1 Applicable Standard

According to FCC §15.407(a)(1)


(1) For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2) For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to IC RSS-210 §9.2: (1) For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band

7.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

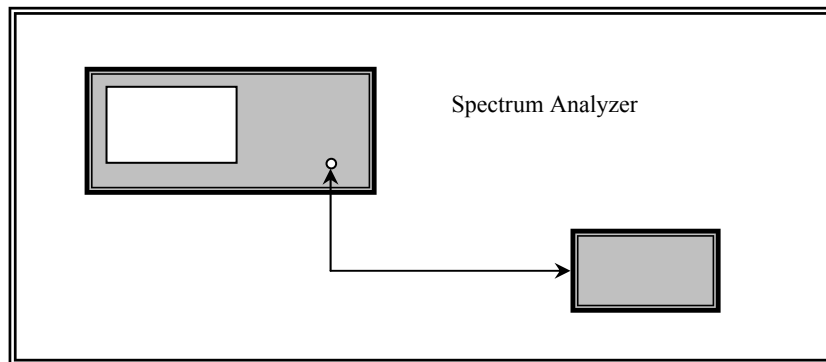

7.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	23-25 °C
Relative Humidity:	35-50 %
ATM Pressure:	101-103kPa

The testing was performed by Ning Ma on 2011-09-07~ 2011-09-11 at RF Site.

7.5 Test Results

Channel	Frequency (MHz)	TX Chain 1 Output Power (dBm)	TX Chain 2 Output Power (dBm)	Worst Antenna Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a, 5250-5350 MHz						
Low	5260	10.21	10.59	10.59	23	-14.41
Middle	5280	10.53	10.54	10.54	23	-14.46
High	5320	10.57	10.91	10.91	23	-12.09
802.11a, 5470-5725 MHz						
Low	5500	10.79	11.42	11.42	23	-11.58
Middle	5580	10.69	11.89	11.89	23	-11.58
High	5700	10.58	11.93	11.93	23	-11.07

Channel	Frequency (MHz)	TX Chain 1 Output Power (dBm)	TX Chain 2 Output Power (dBm)	Total Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n HT20, 5250-5350 MHz						
Low	5260	7.82	8.11	10.97	23	-12.03
Middle	5280	7.71	7.98	10.85	23	-12.15
High	5320	7.8	8.4	11.12	23	-11.88
802.11n HT20, 5470-5725 MHz						
Low	5500	8.01	9.01	11.54	23	-11.46
Middle	5580	8.35	9.47	11.95	23	-11.05
High	5700	8.16	8.20	11.19	23	-11.81
802.11n HT40, 5250-5350 MHz						
Low	5270	5.41	6.28	8.87	23	-14.13
High	5310	5.83	6.32	9.09	23	-13.91
802.11n HT40, 5470-5725 MHz						
Low	5510	5.88	6.39	9.15	23	-13.85
Middle	5590	5.90	6.69	9.32	23	-13.68
High	5670	5.79	6.58	9.21	23	-13.79

8 FCC §15.407(b) & IC RSS-210 §A9.2 – Out of Band Emissions

8.1 Applicable Standard

According to FCC §15.407(b) & IC RSS-210 §A9.2, for transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz. Devices operating in the 5.25–5.35 GHz band that generate emissions in the 5.15–5.25 GHz band must meet all applicable technical requirements for operation in the 5.15–5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of –27 dBm/MHz in the 5.15–5.25 GHz band. For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	23-25 °C
Relative Humidity:	35-50 %
ATM Pressure:	101-103kPa

The testing was performed by Ning Ma on 2011-09-07~ 2011-09-11 at RF Site.


8.5 Test Results

Please refer to following pages for plots of band edge.


TX Chain 1

5250-5350 MHz

802.11a, Low Band Edge

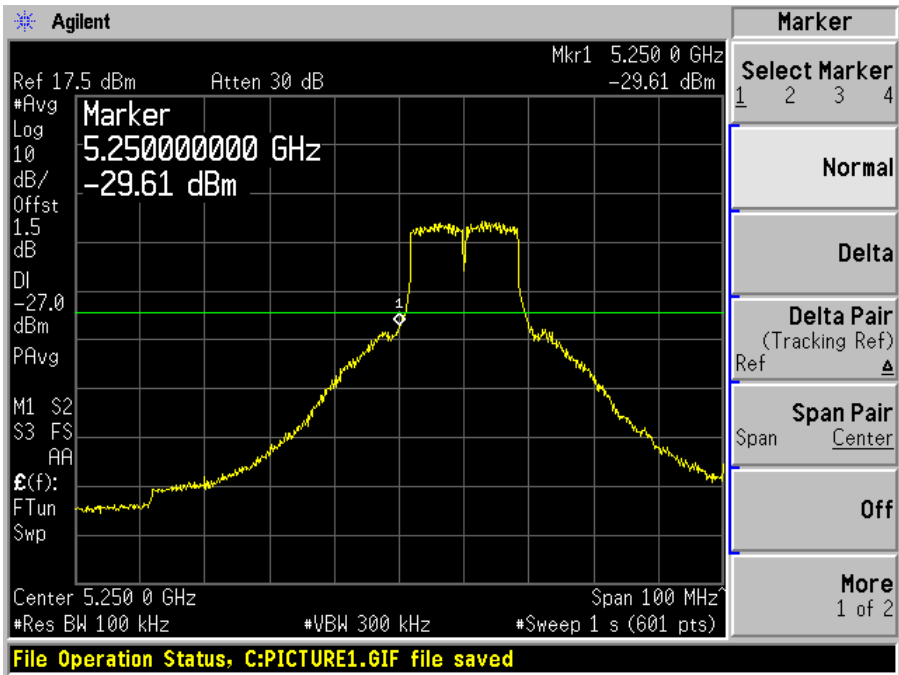


802.11a, High Band Edge

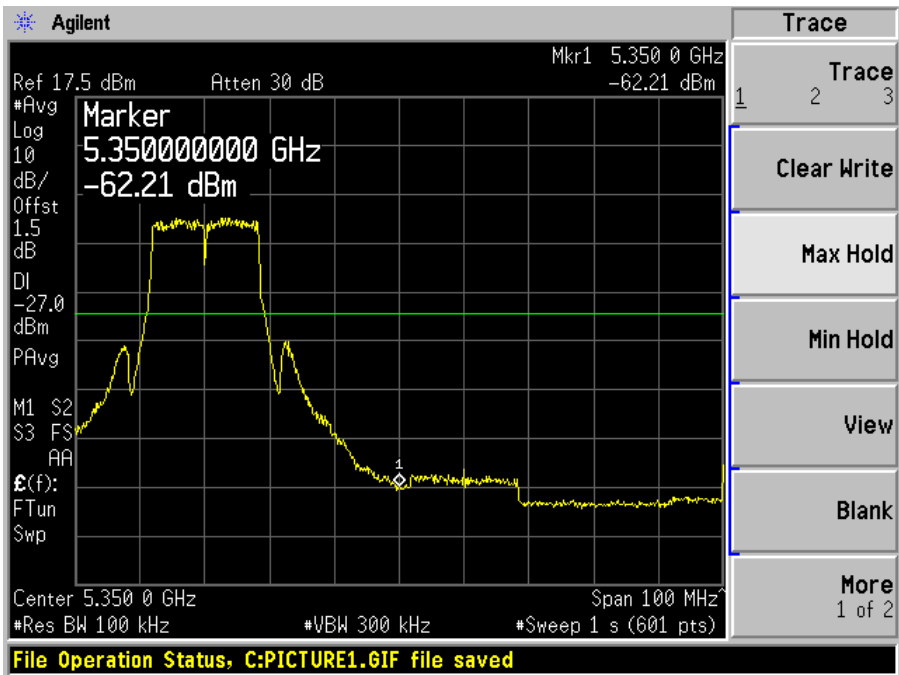


5470-5725 MHz

802.11a, Low Band Edge

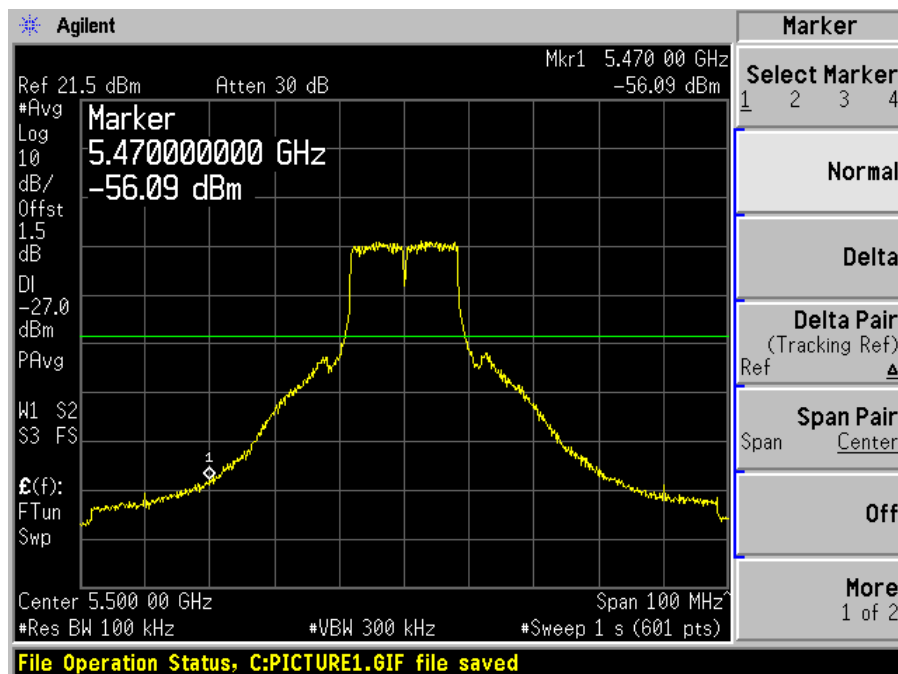


802.11a, High Band Edge

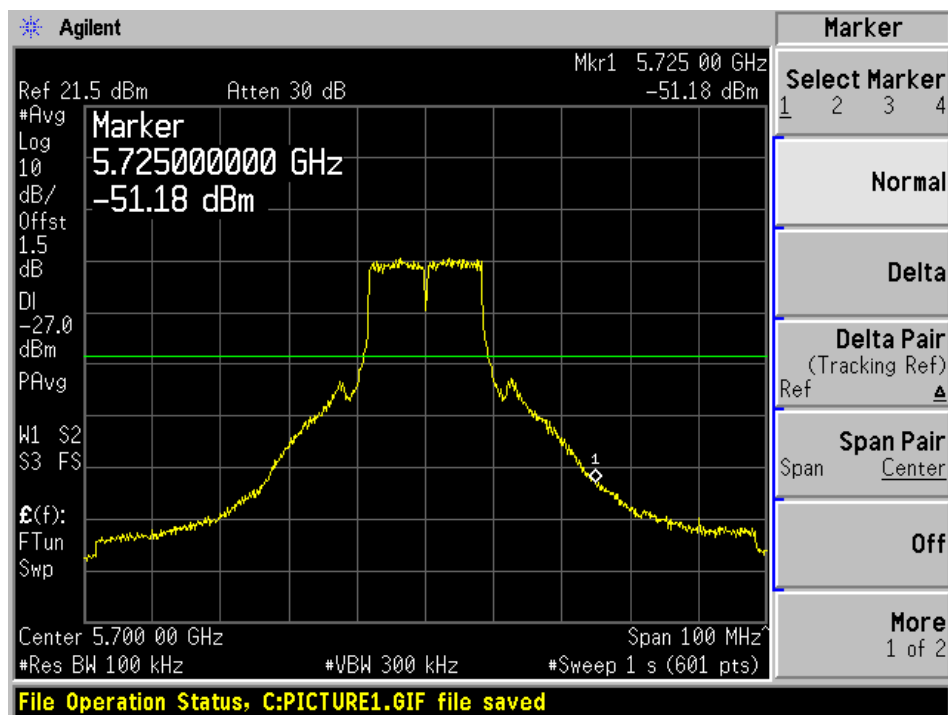


5250-5350 MHz

802.11n HT20, Low Band Edge

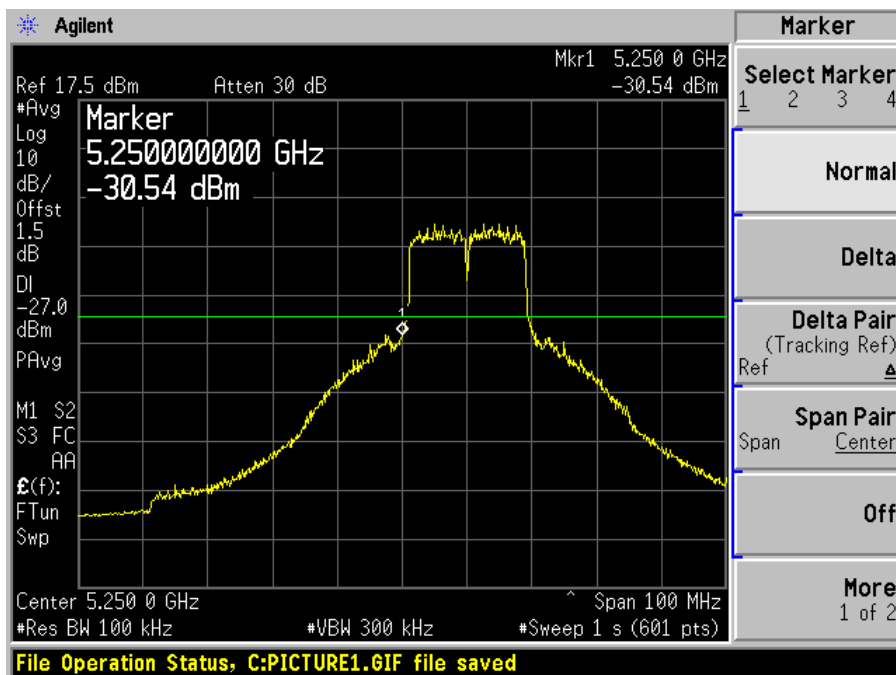


802.11n HT20, High Band Edge

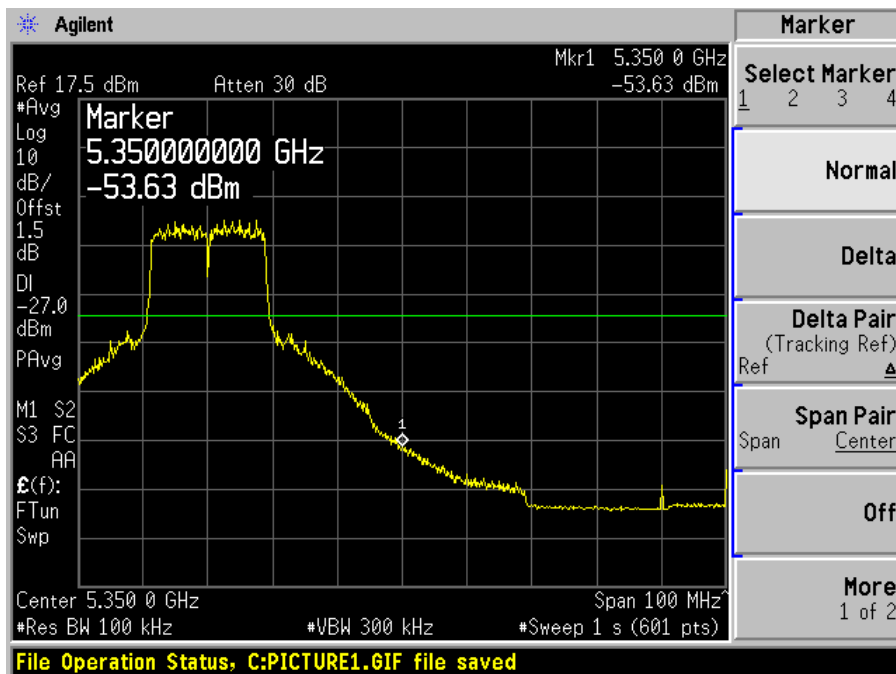


5470-5725 MHz

802.11n HT20, Low Band Edge

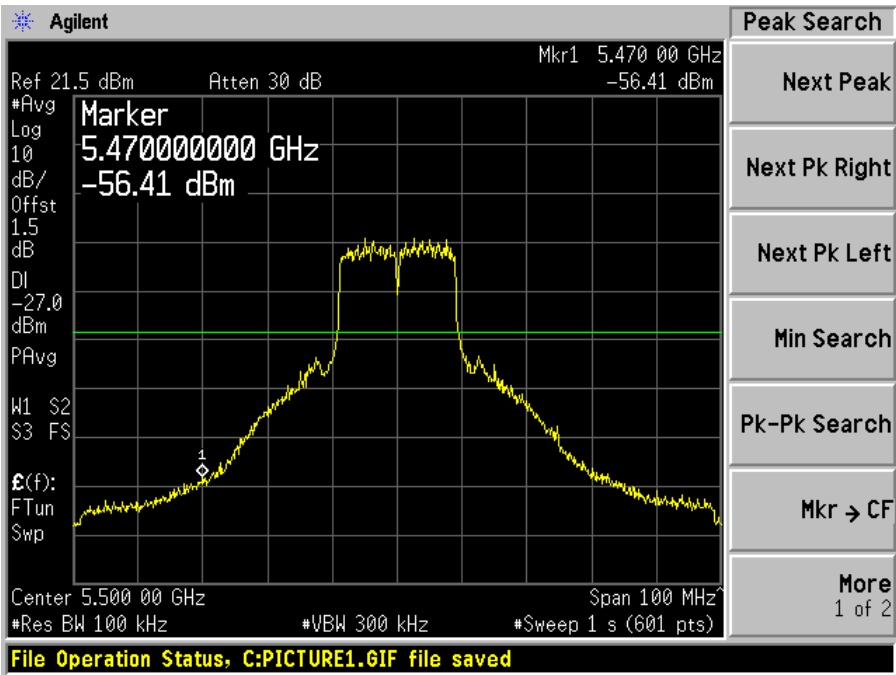


802.11n HT20, High Band Edge

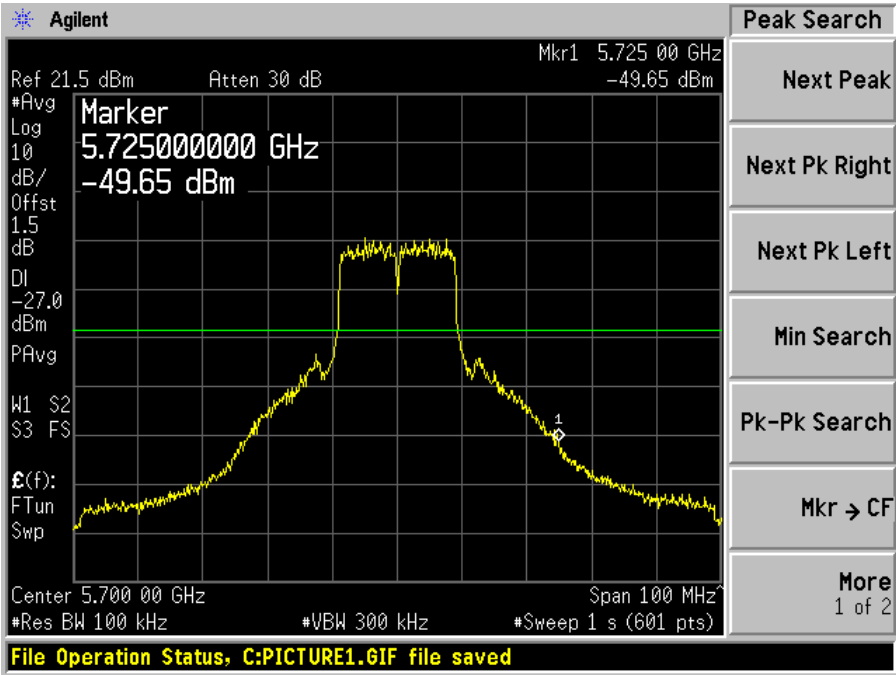


5250-5350 MHz

802.11n HT40, Low Band Edge

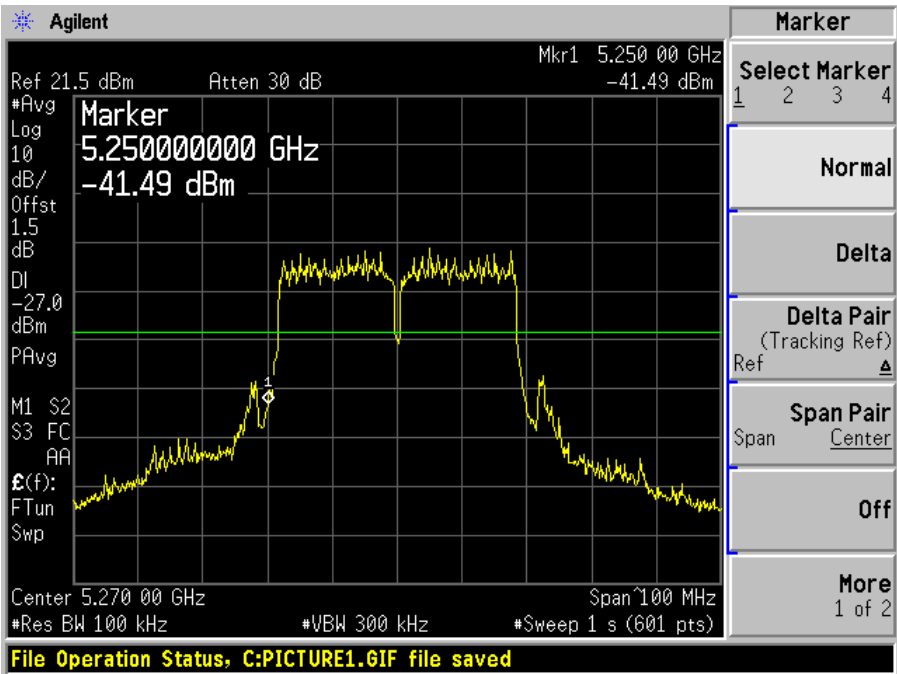


802.11n HT40, High Band Edge

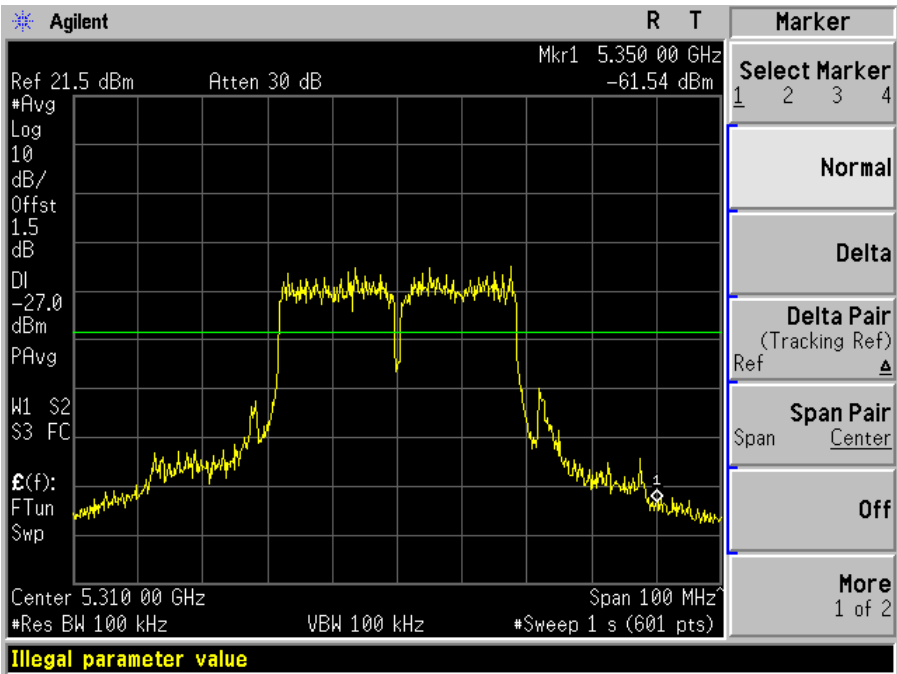


5470-5725 MHz

802.11n HT40, Low Band Edge

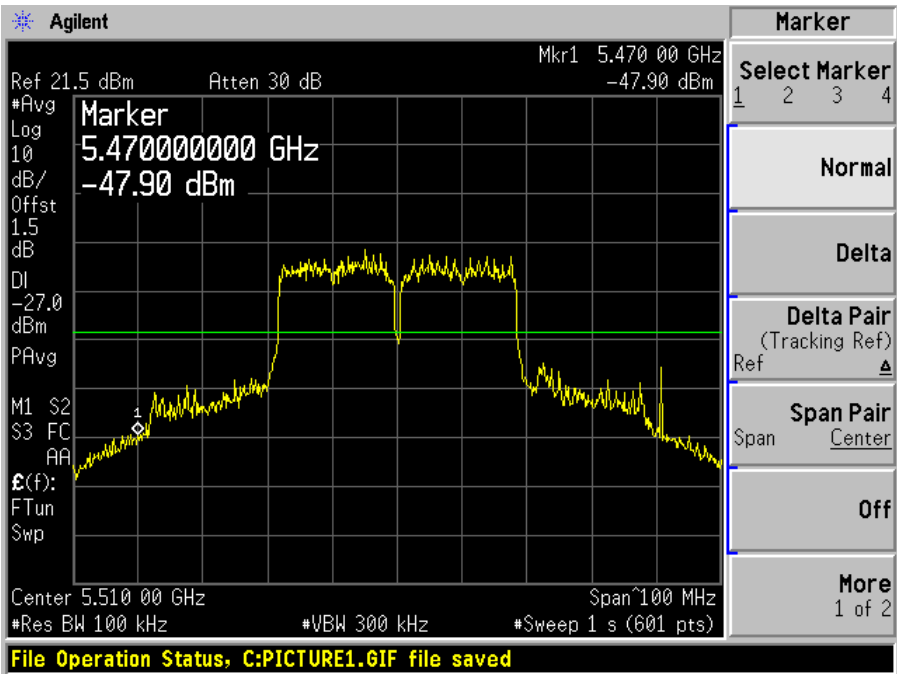


802.11n HT40, High Band Edge

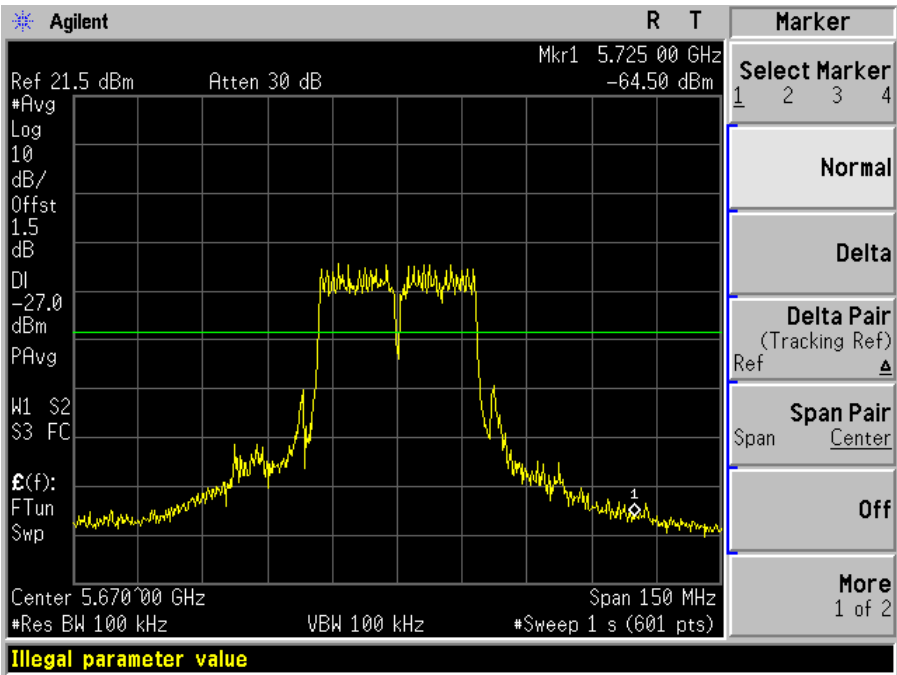


TX Chain 2

5250-5350 MHz

802.11a, Low Band Edge

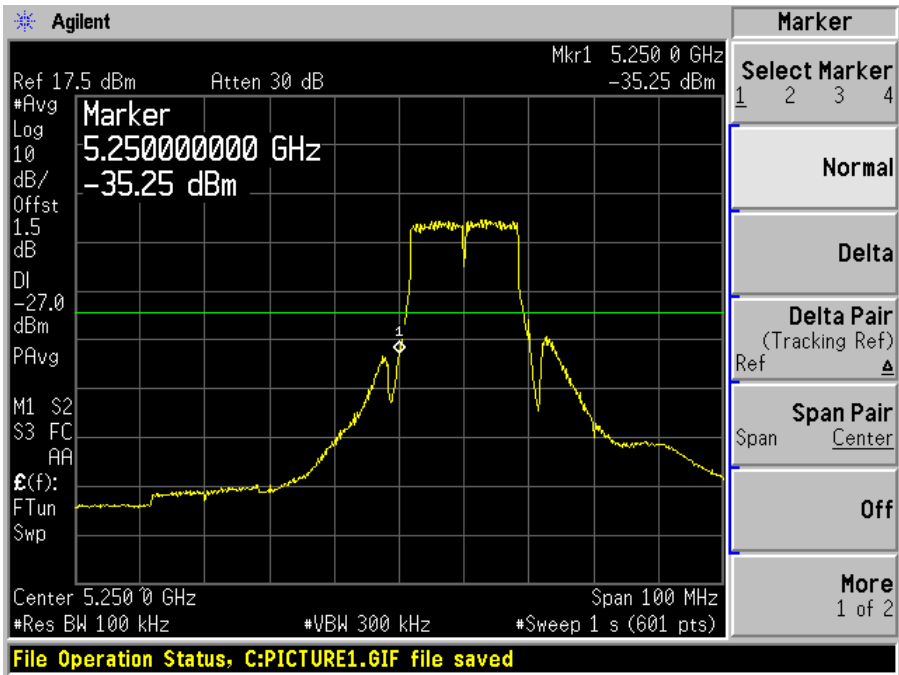


802.11a, High Band Edge

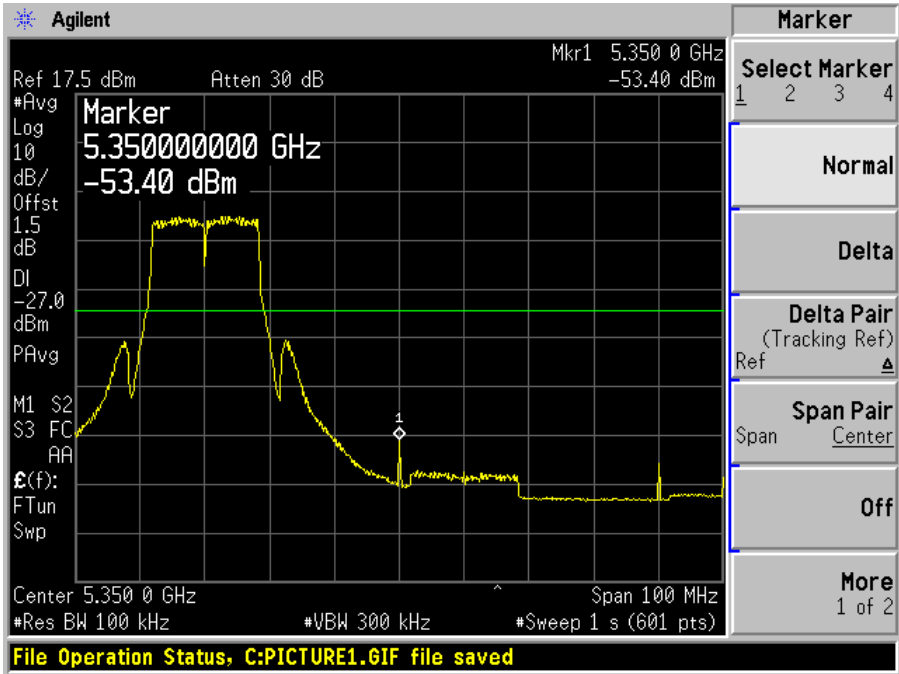


5470-5725 MHz

802.11a, Low Band Edge

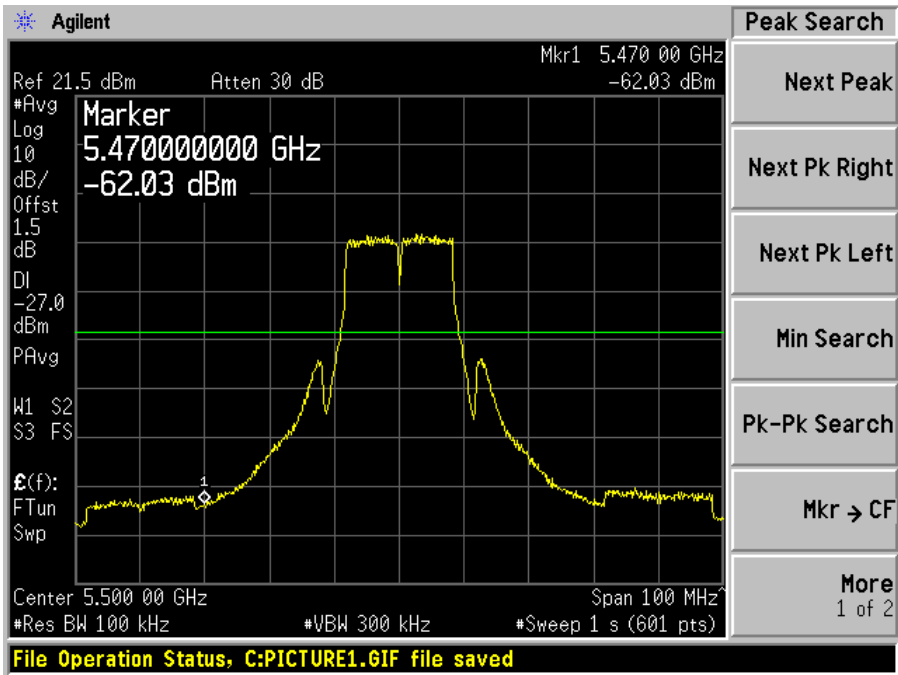


802.11a, High Band Edge

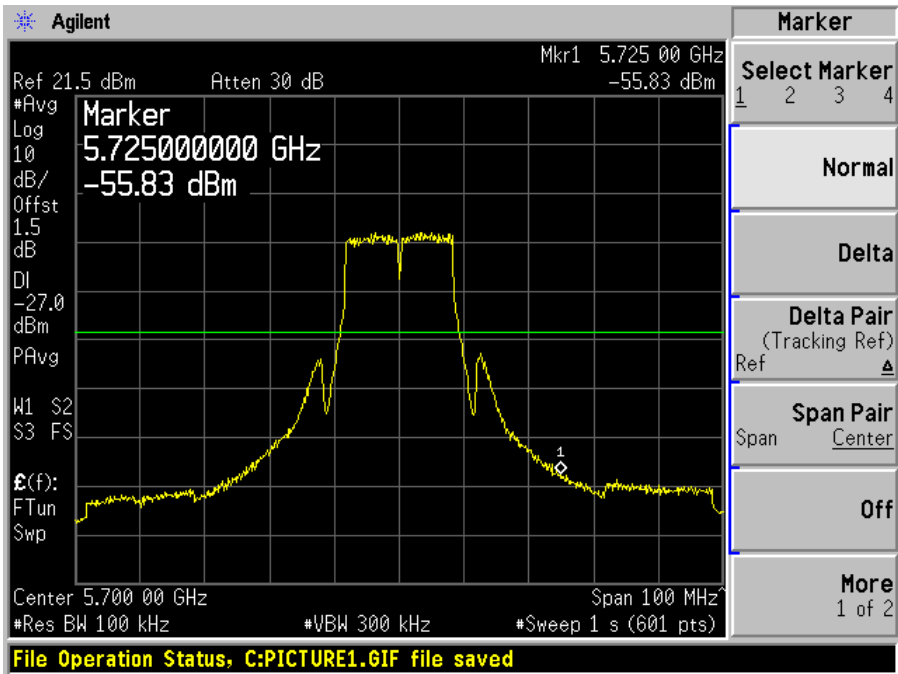


5250-5350 MHz

802.11n HT20, Low Band Edge

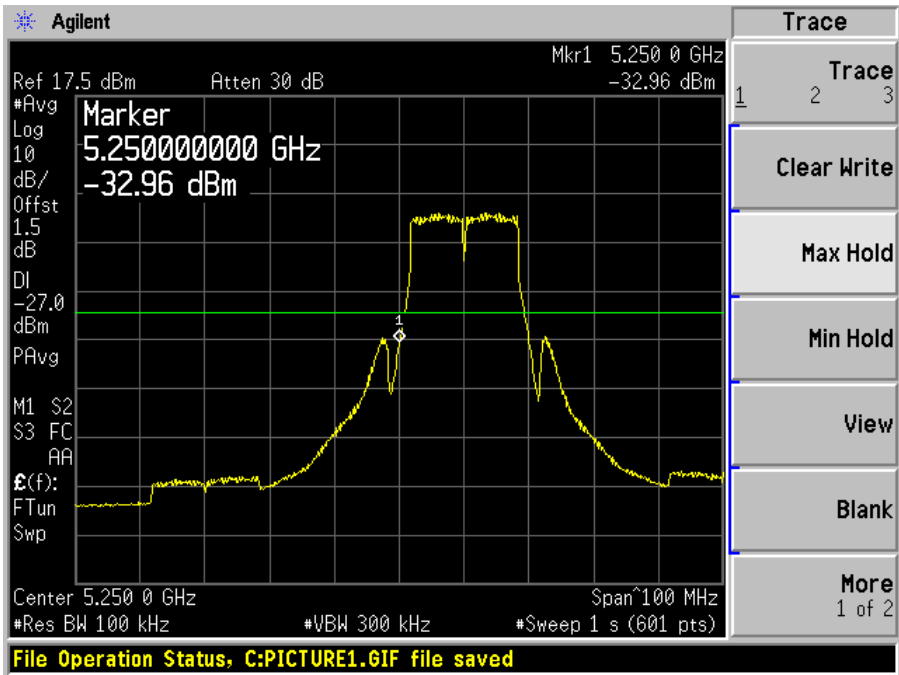


802.11n HT20, High Band Edge

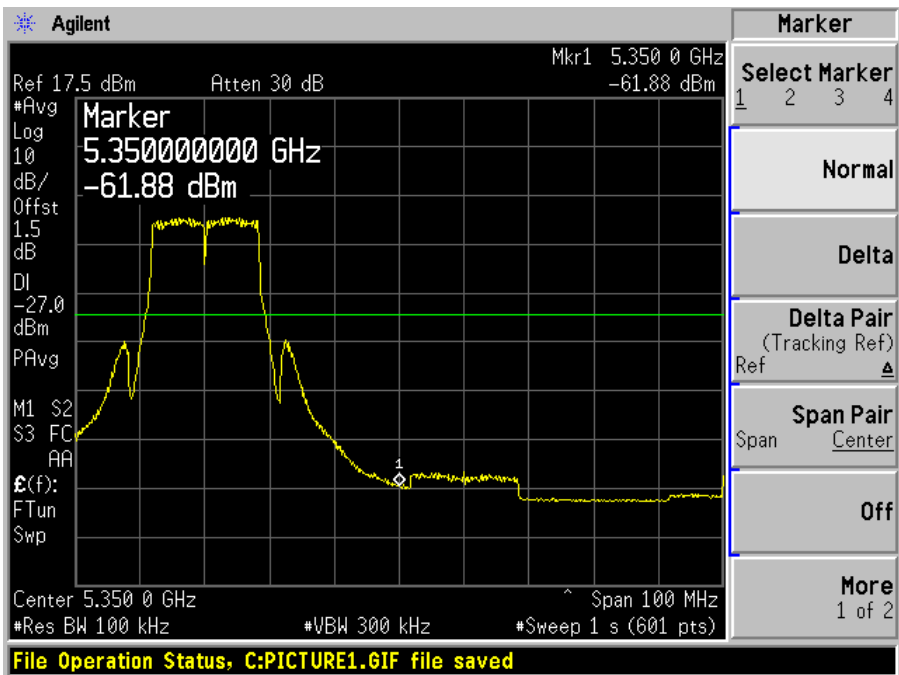


5470-5725 MHz

802.11n HT20, Low Band Edge

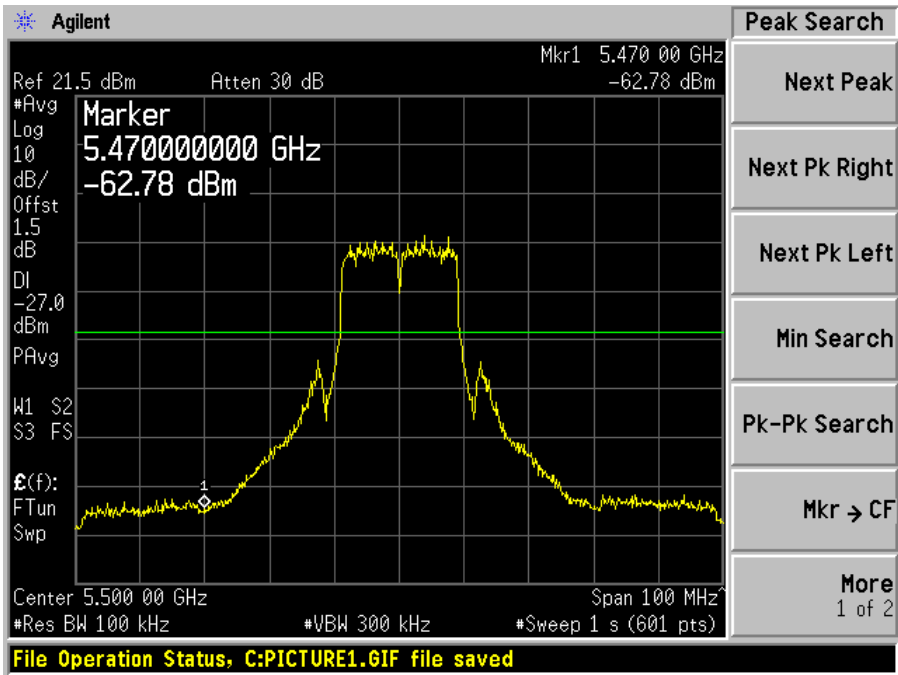


802.11n HT20, High Band Edge

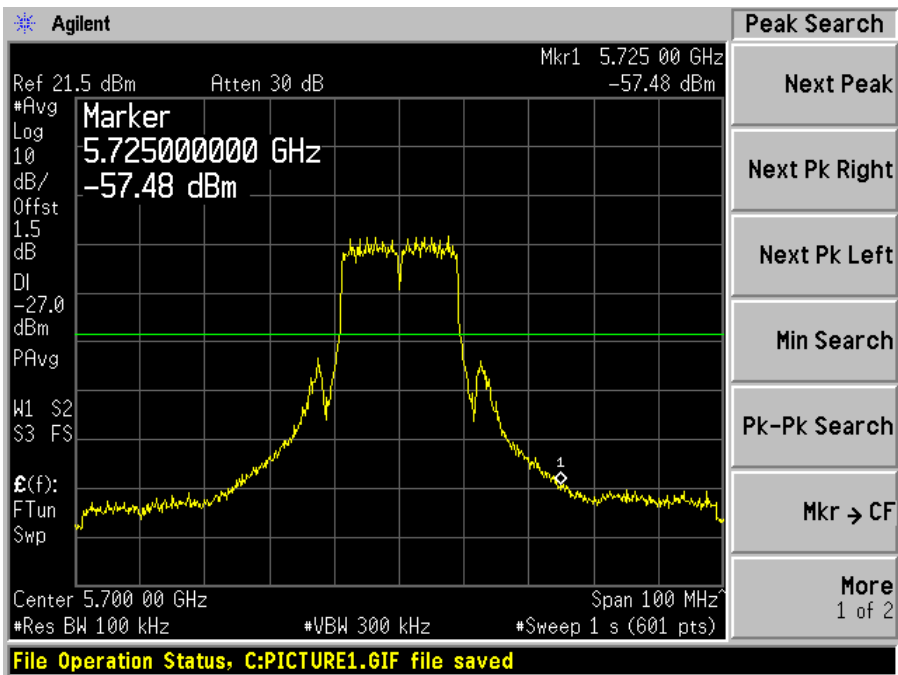


5250-5350 MHz

802.11n HT40, Low Band Edge

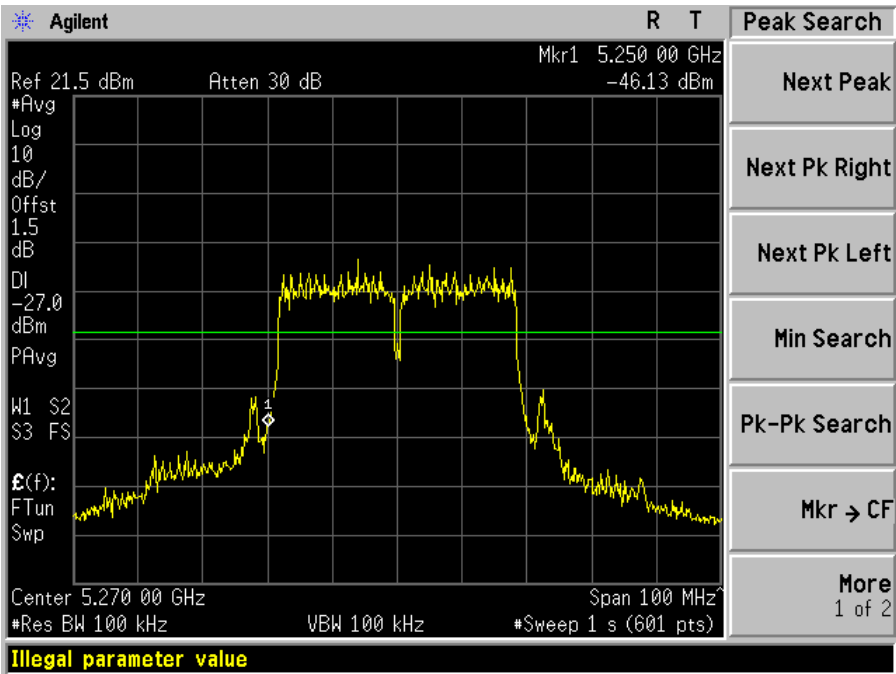


802.11n HT40, High Band Edge

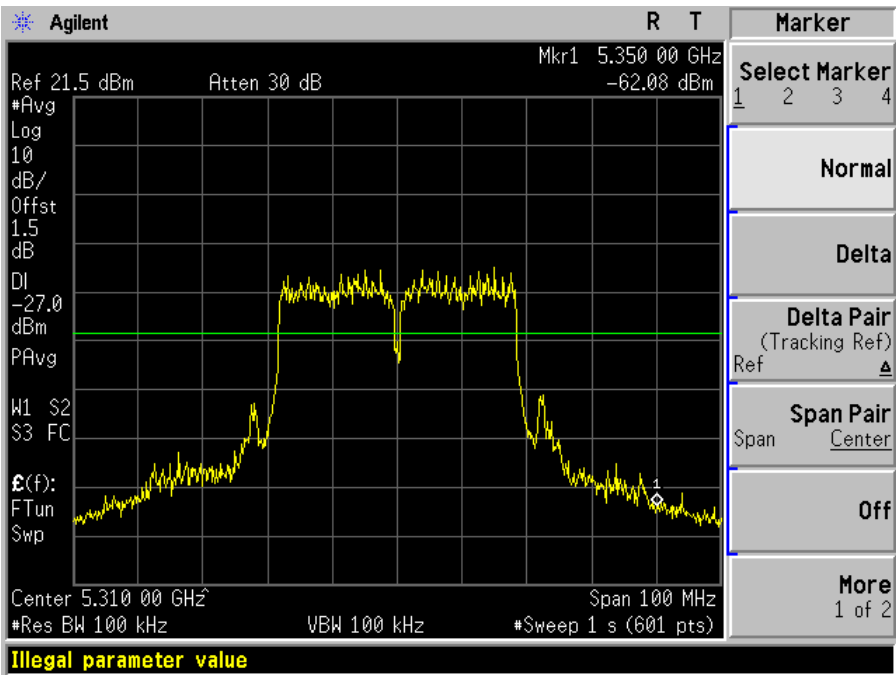


5470-5725 MHz

802.11n HT40, Low Band Edge

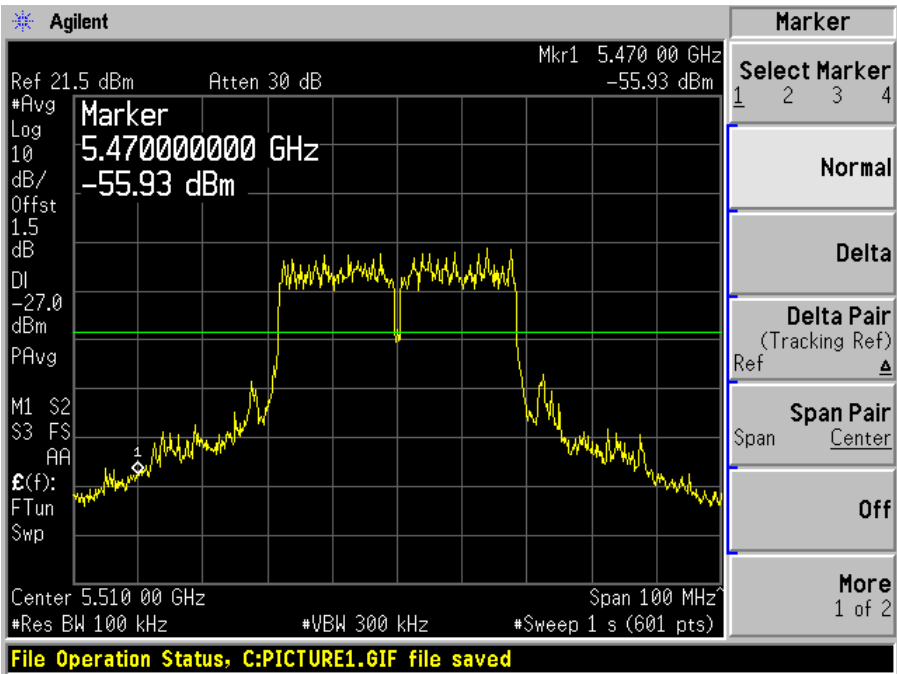

802.11n HT40, High Band Edge

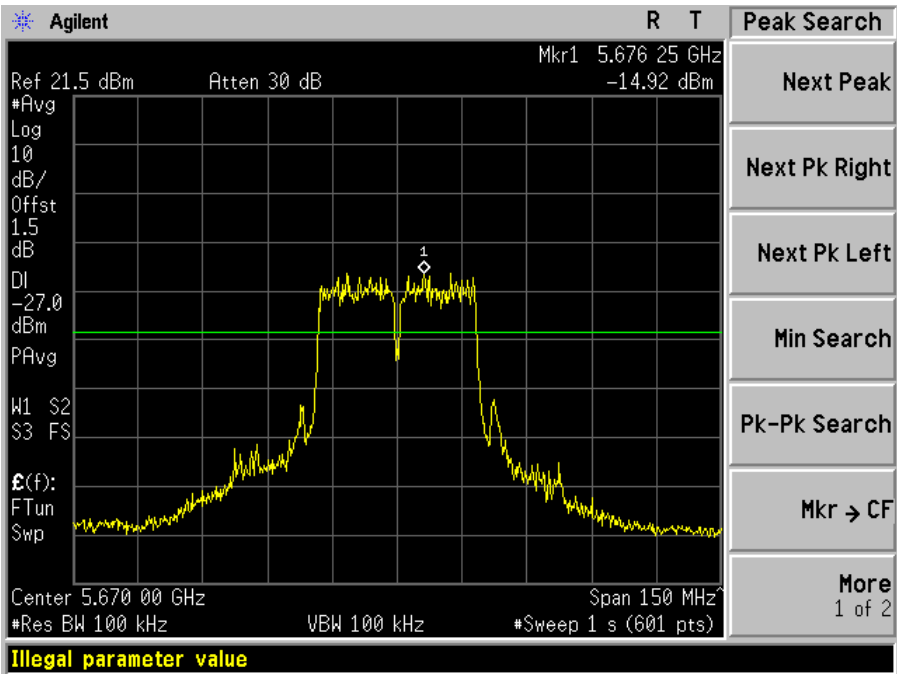

9 FCC §15.407(a) & IC RSS-210 §A9.2 - Power Spectral Density

9.1 Applicable Standard

According to FCC §15.407(a)(2) and IC RSS-210 §A9.2:

2) For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	23-25 °C
Relative Humidity:	35-50 %
ATM Pressure:	101-103kPa

The testing was performed by Ning Ma on 2011-09-07~ 2011-09-11 at RF Site.

9.5 Test Results

Channel	Frequency (MHz)	TX Chain 1 PSD (dBm)	TX Chain 2 PSD (dBm)	Worst Case PSD (dBm)	Limit (dBm/MHz)	Margin (dB)
802.11a, 5250-5350 MHz						
Low	5260	1.4	1.185	1.4	11	-9.6
Middle	5280	1.103	1.148	1.148	11	-9.852
High	5320	1.882	1.33	1.882	11	-9.118
802.11a, 5470-5725 MHz						
Low	5500	1.939	2.106	2.106	11	-8.894
Middle	5580	2.396	1.466	2.396	11	-8.604
High	5700	1.86	2.861	2.861	11	-8.139

Channel	Frequency (MHz)	TX Chain 1 PSD (dBm)	TX Chain 2 PSD (dBm)	Total PSD (dBm)	Limit (dBm/MHz)	Margin (dB)
802.112 HT20, 5250-5350 MHz						
Low	5260	-0.303	-0.874	2.431	11	-8.569
Middle	5280	-1.155	-0.846	2.013	11	-8.987
High	5320	-0.830	-0.816	2.187	11	-8.813
802.11n HT20, 5470-5725 MHz						
Low	5500	-0.392	0.127	2.886	11	-8.114
Middle	5580	0.068	-0.504	2.802	11	-8.198
High	5700	-0.261	0.835	3.332	11	-7.668


Channel	Frequency (MHz)	TX Chain 1 PSD (dBm)	TX Chain 2 PSD (dBm)	Total PSD (dBm)	Limit (dBm/MHz)	Margin (dB)
802.112 HT40, 5250-5350 MHz						
Low	5270	-6.028	-5.162	-2.563	11	-13.563
High	5310	-6.376	-5.252	-2.767	11	-13.767
802.11n HT40, 5470-5725 MHz						
Low	5510	-5.199	-4.285	-1.708	11	-12.708
Middle	5590	-5.601	-5.24	-2.406	11	-13.406
High	5670	-5.008	-4.772	-1.878	11	-12.878

Please refer to the following plots.


TX Chain 1

5250-5350 MHz


802.11a, Low Channel

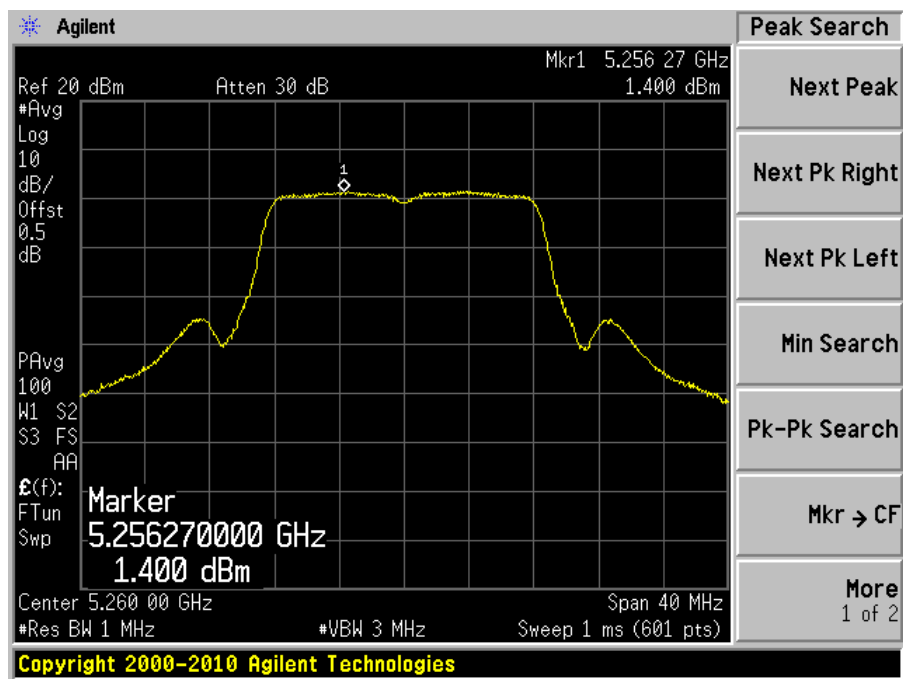

802.11a, Middle Channel

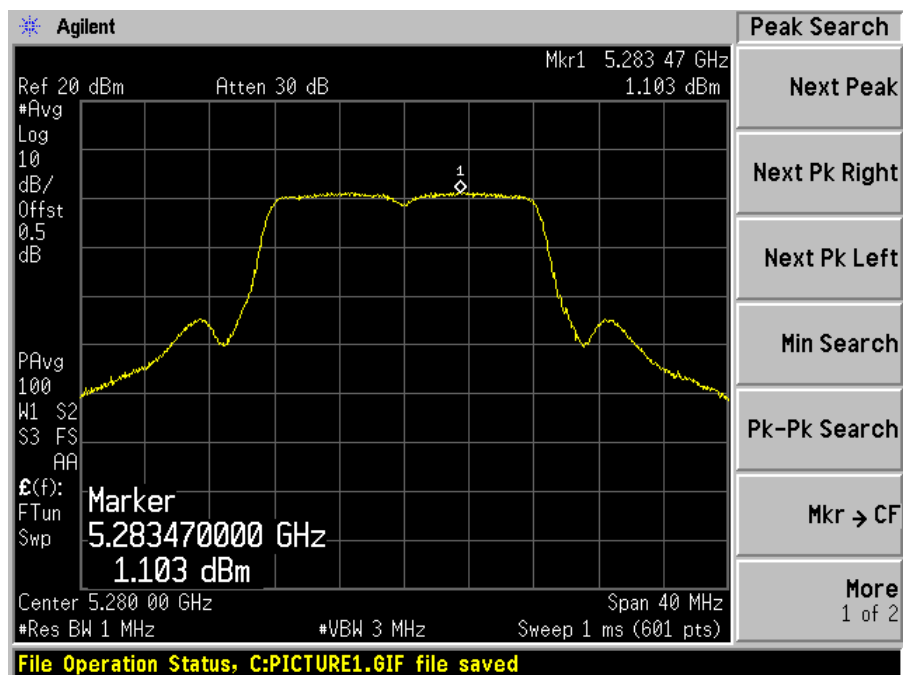


802.11a, High Channel

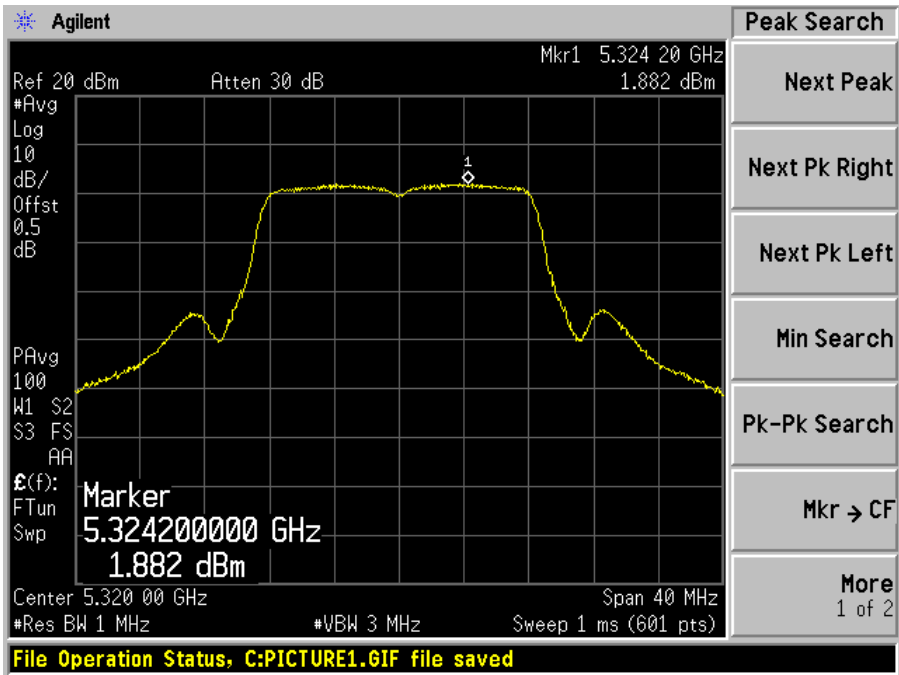


5470-5725 MHz


802.11a, Low Channel

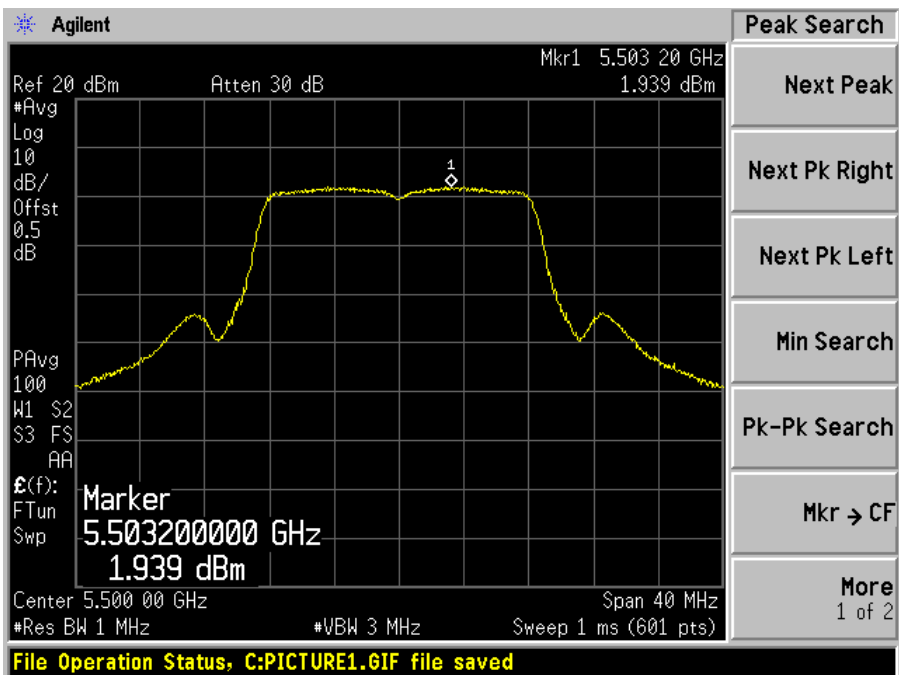

802.11a, Middle Channel

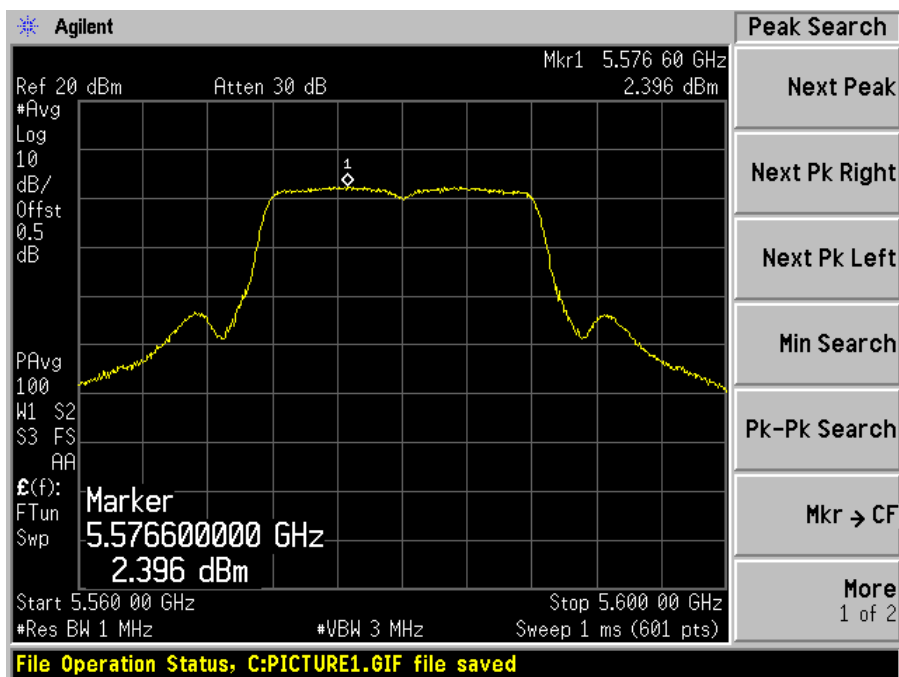


802.11a, High Channel

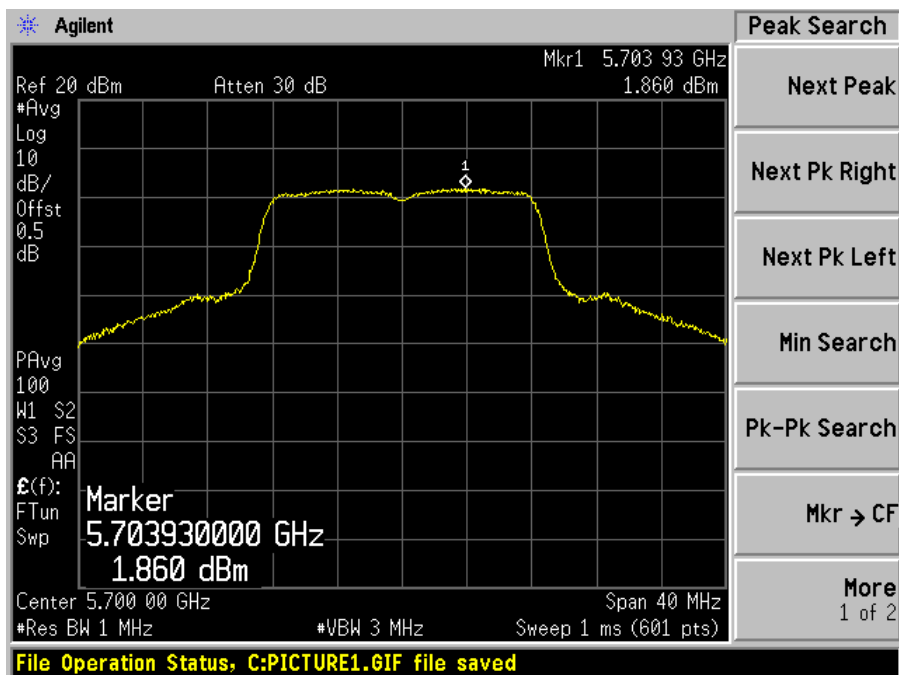


5250-5350 MHz


802.11n HT20, Low Channel

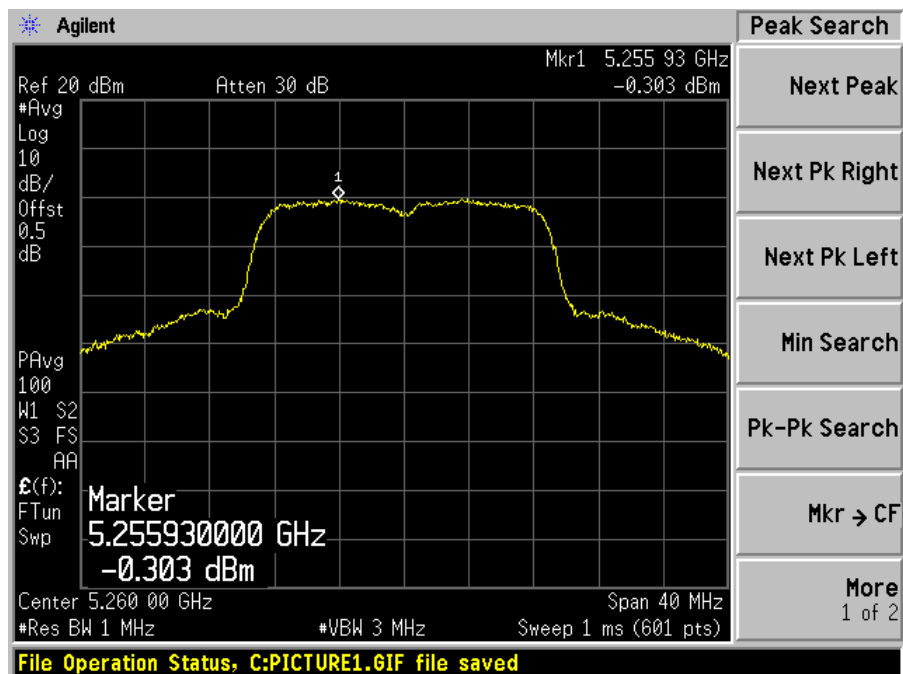

802.11n HT20, Middle Channel

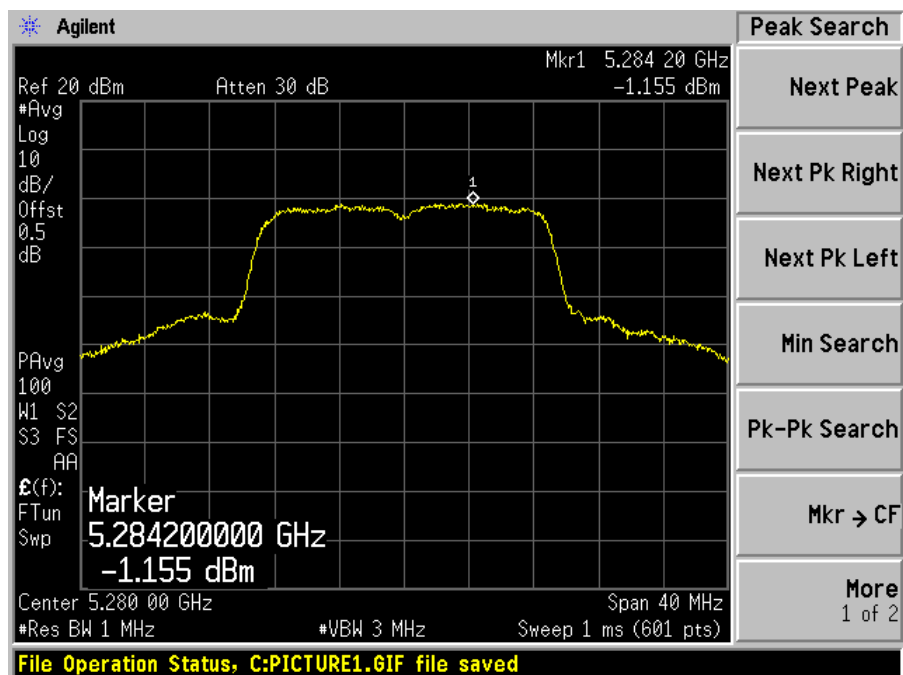


802.11n HT20, High Channel

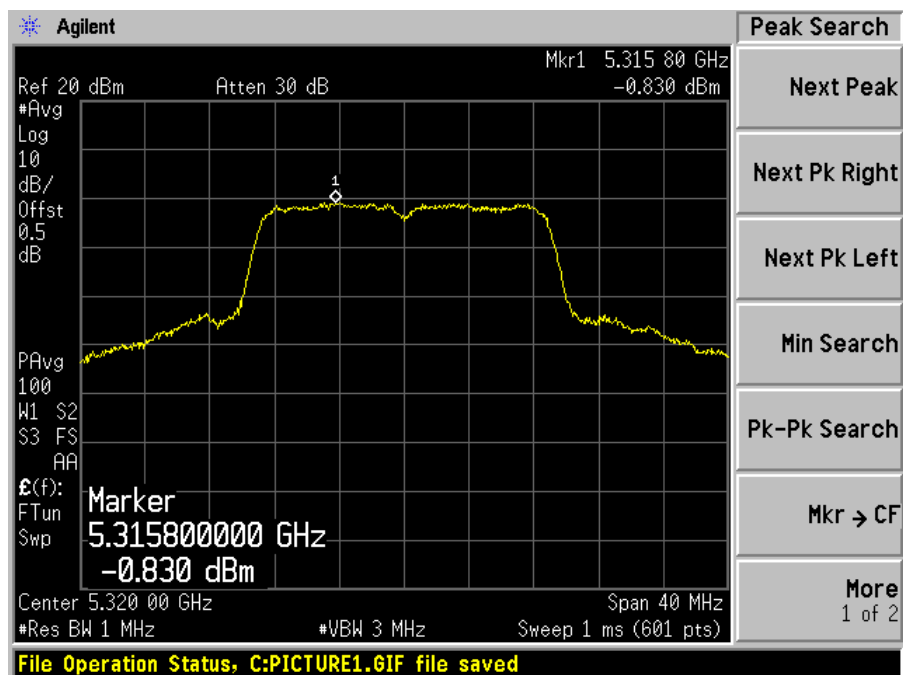


5470-5725 MHz


802.11n HT20, Low Channel

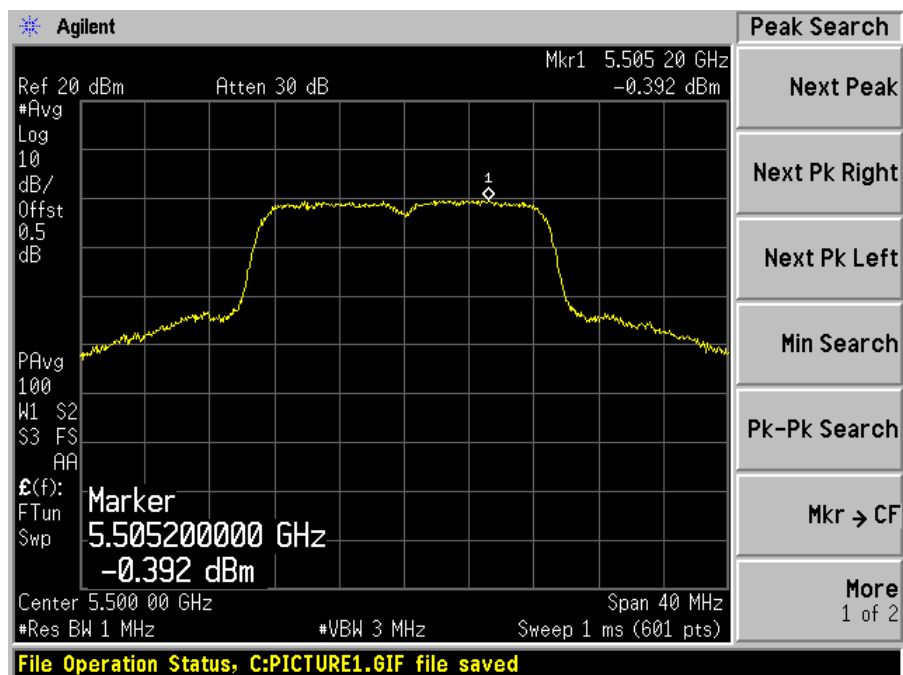

802.11n HT20, Middle Channel

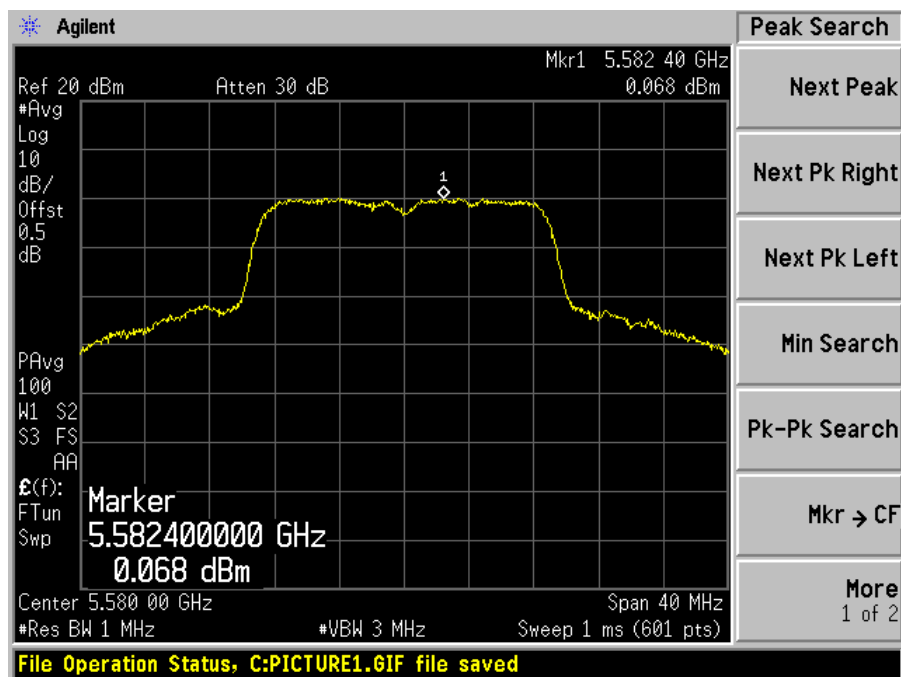


802.11n HT20, High Channel

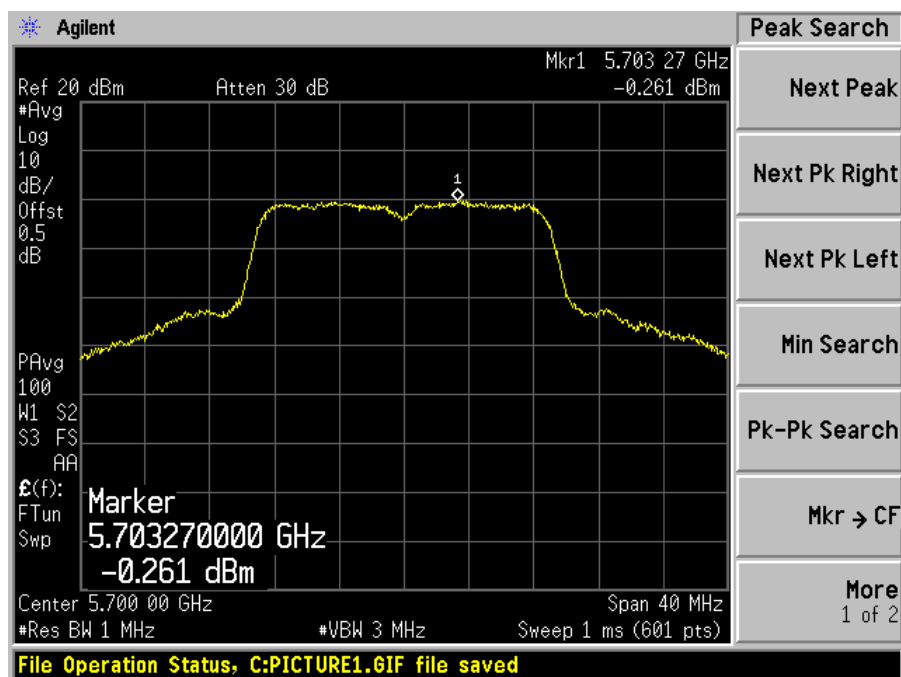


5250-5350 MHz

802.11n HT40, Low Channel

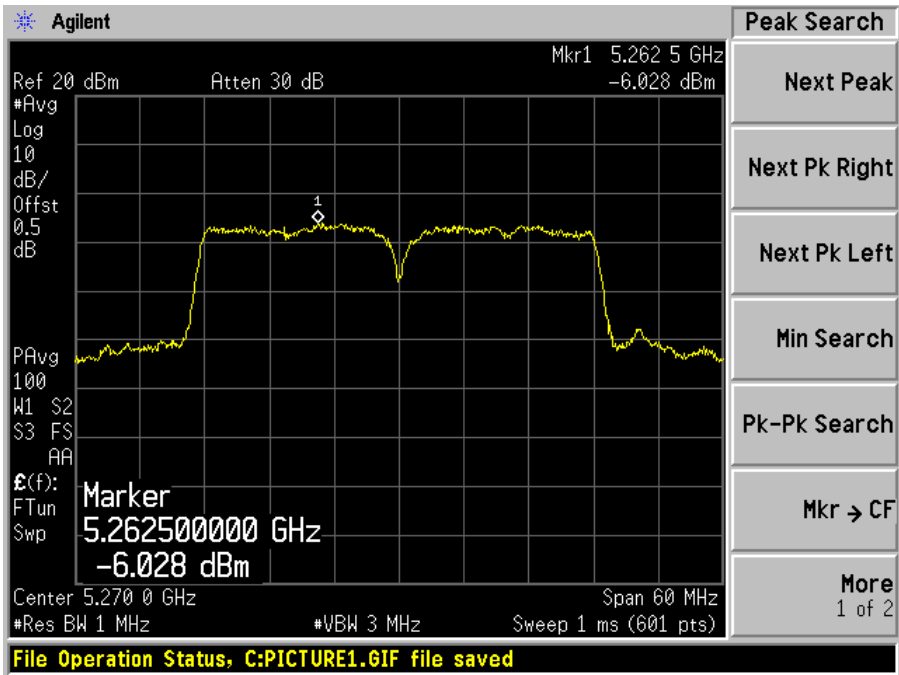


802.11n HT40, High Channel

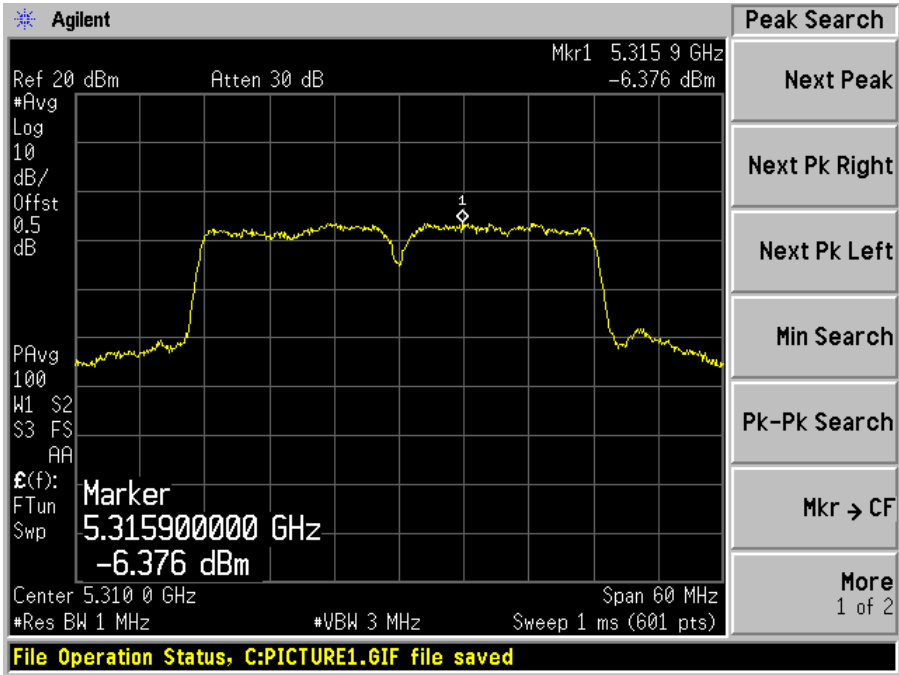


5470-5725 MHz


802.11n HT40, Low Channel

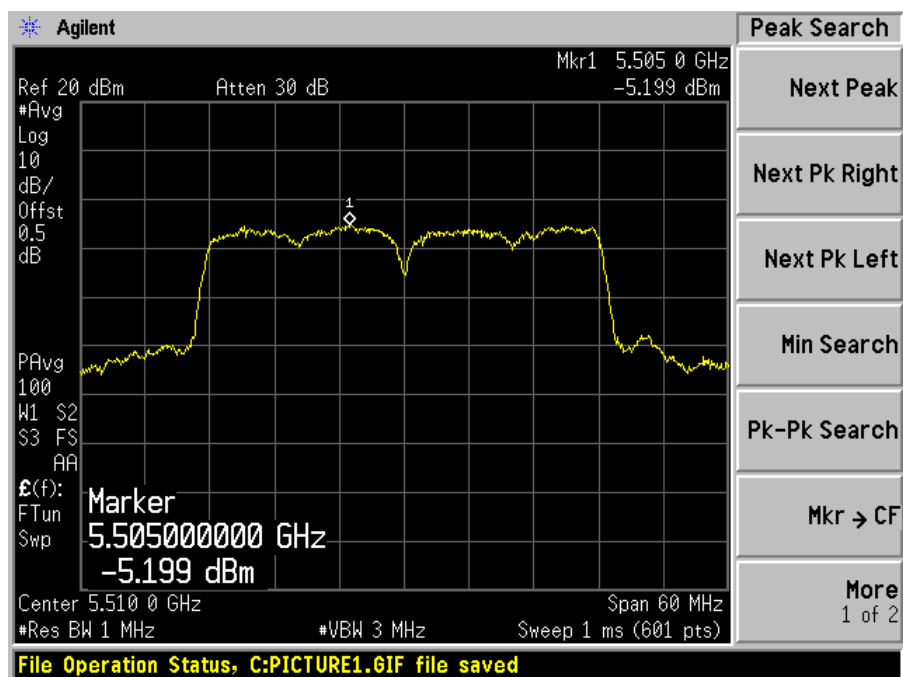

802.11n HT40, Middle Channel

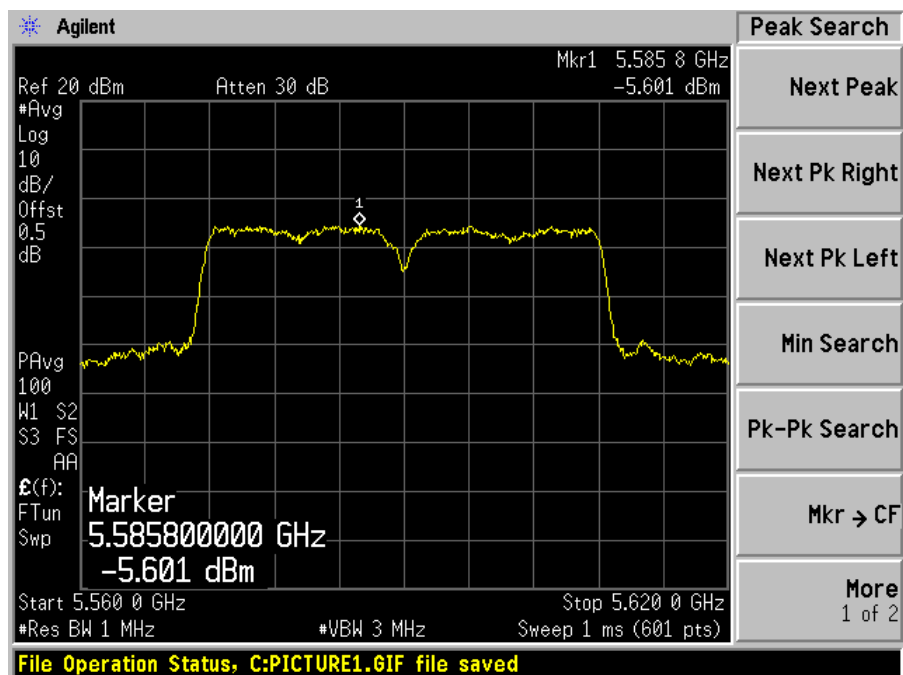


802.11n HT40, High Channel

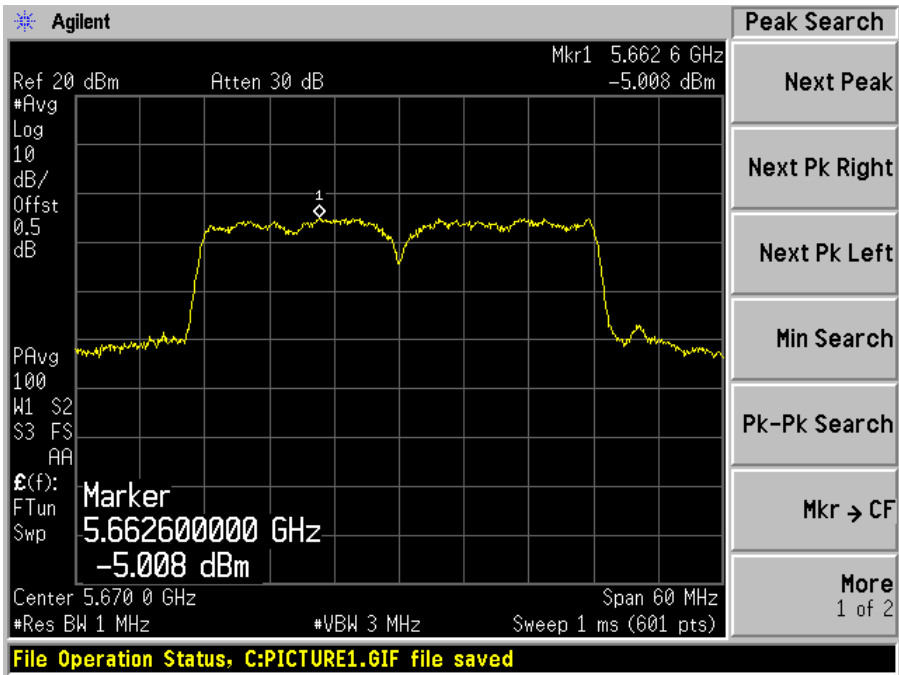


TX Chain 2

5250-5350 MHz


802.11a, Low Channel

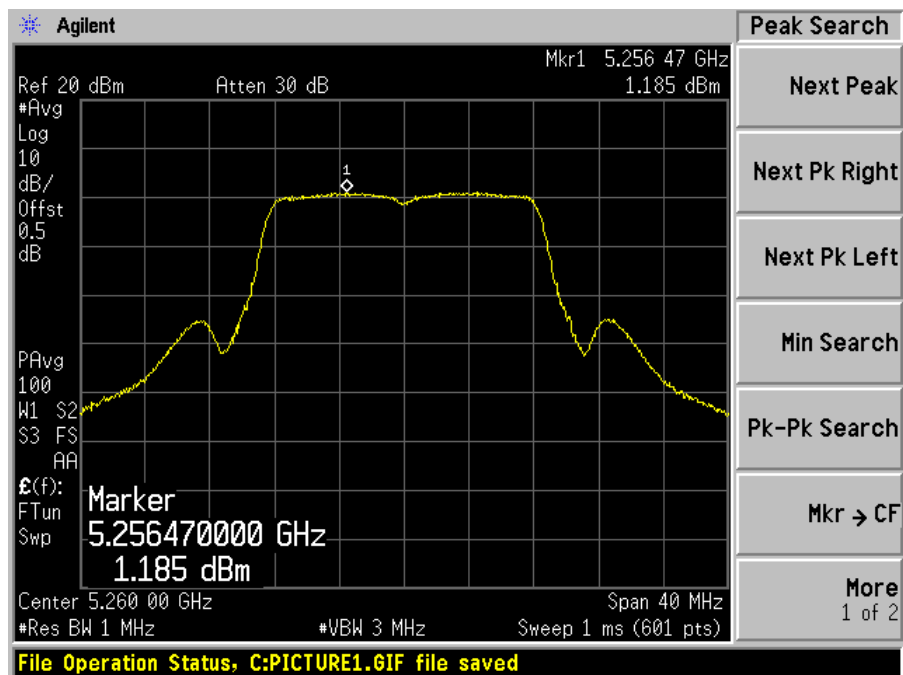

802.11a, Middle Channel

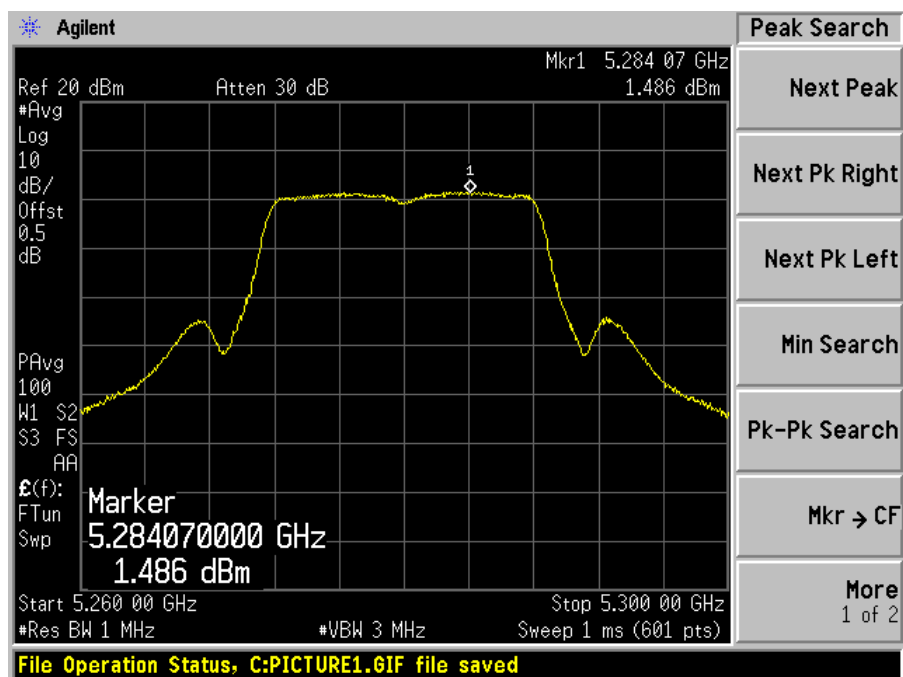


802.11a, High Channel

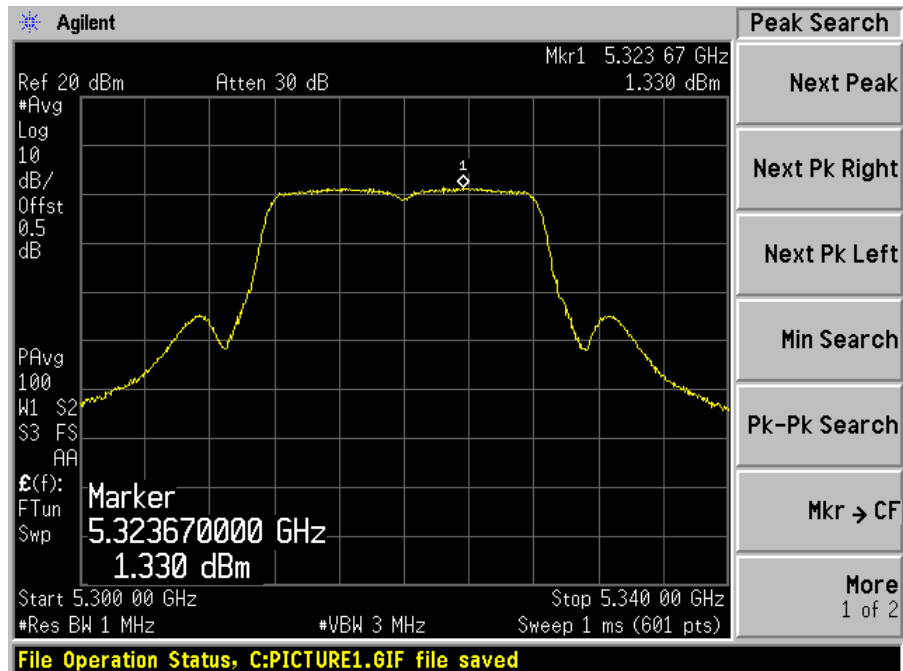


5470-5725 MHz


802.11a, Low Channel

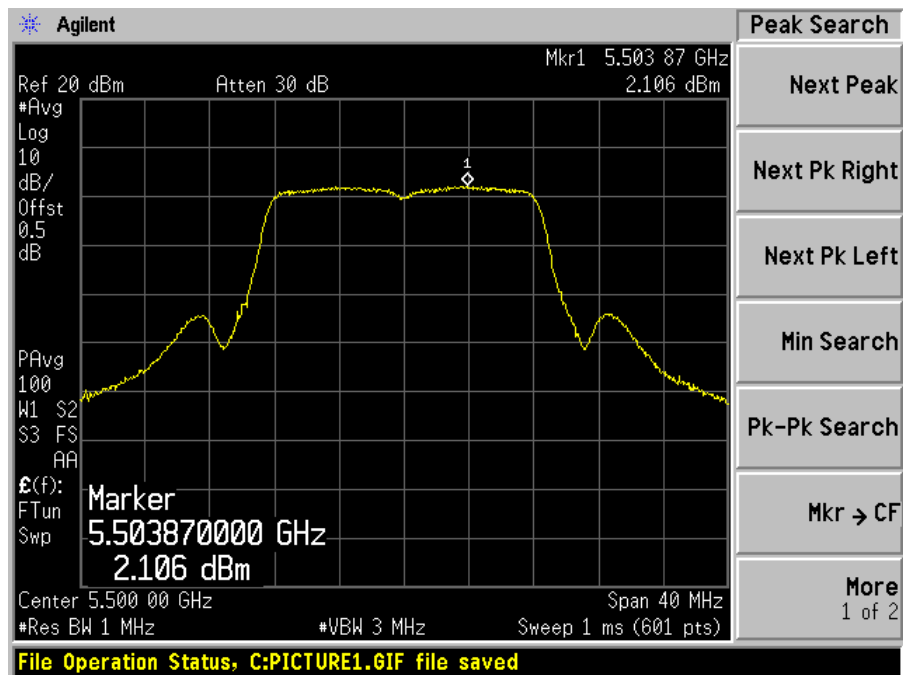

802.11a, Middle Channel

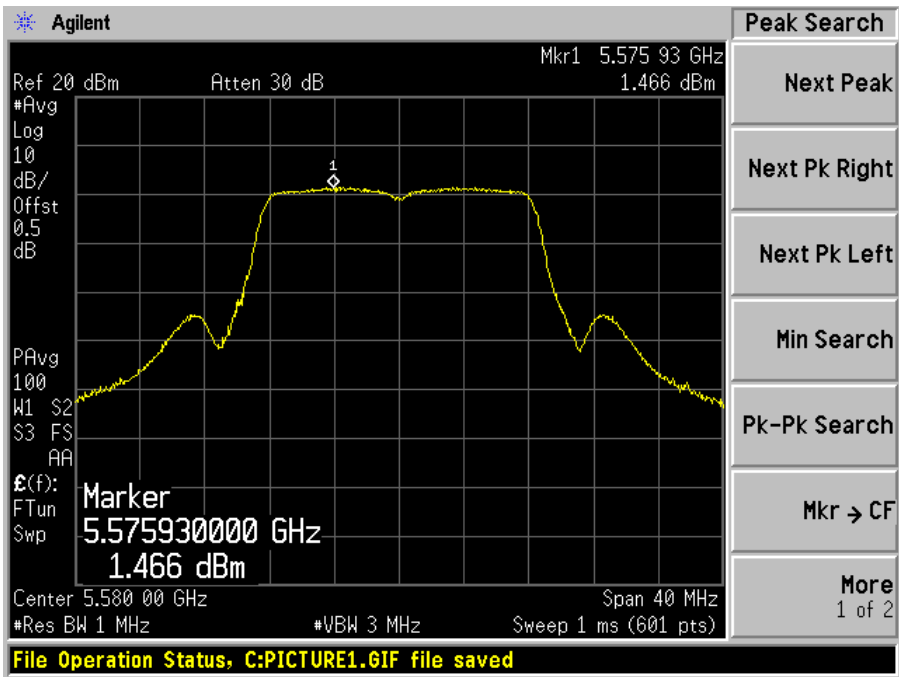


802.11a, High Channel

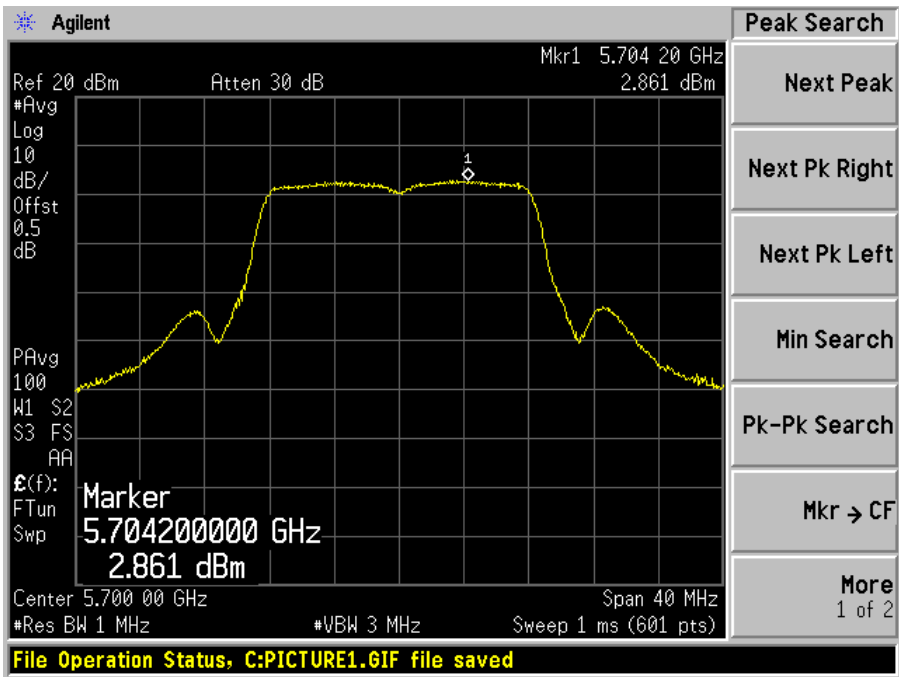


5250-5350 MHz


802.11n HT20, Low Channel

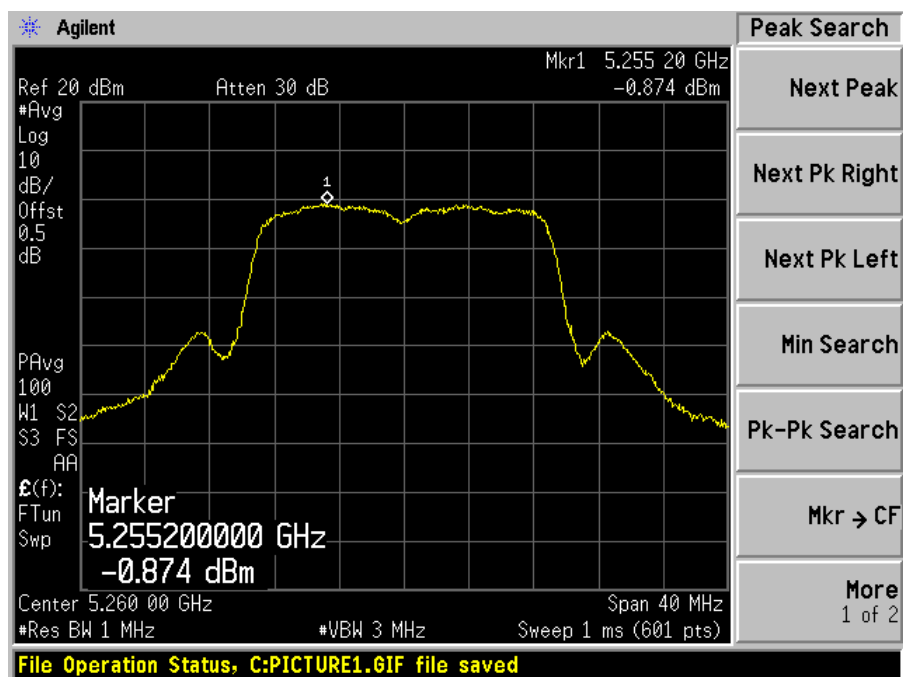

802.11n HT20, Middle Channel

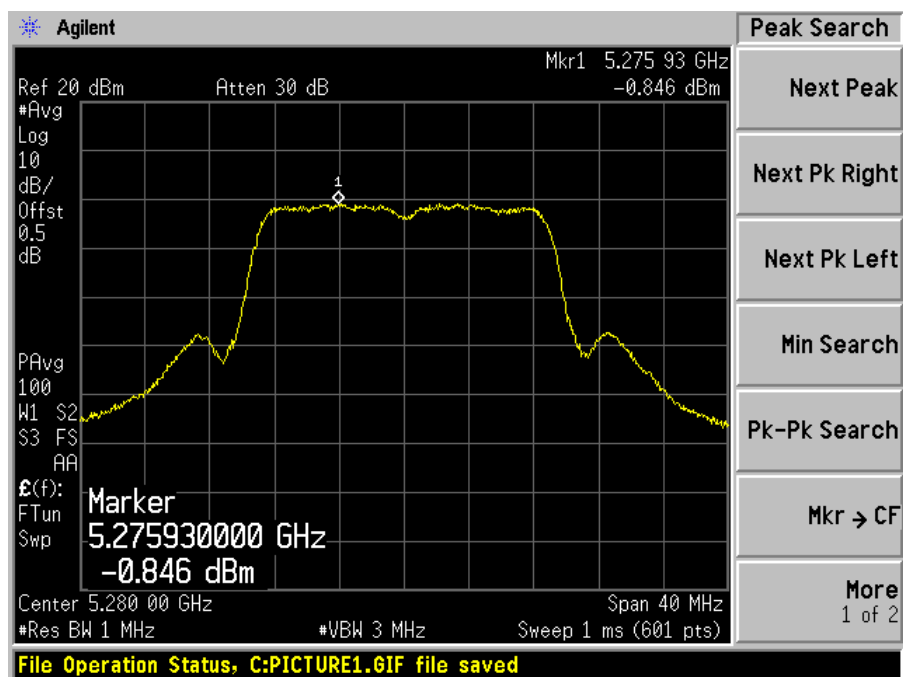


802.11n HT20, High Channel

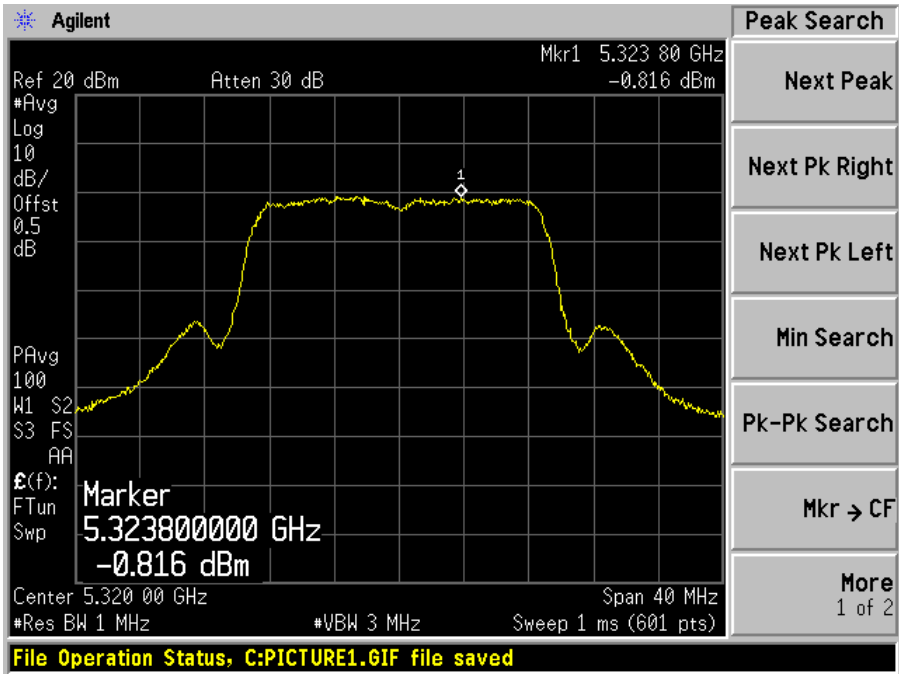


5470-5725 MHz


802.11n HT20, Low Channel

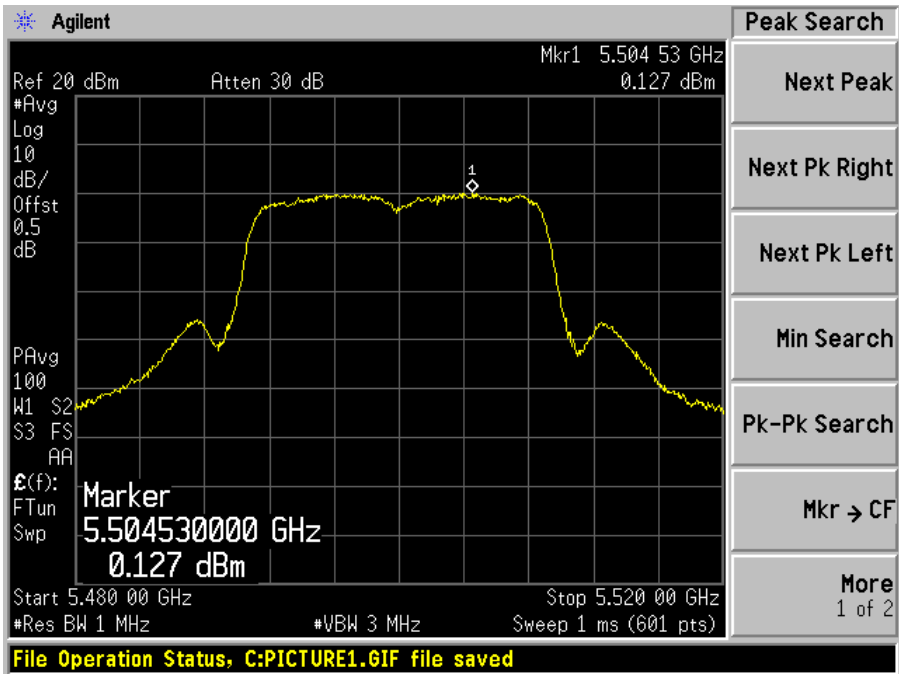

802.11n HT20, Middle Channel

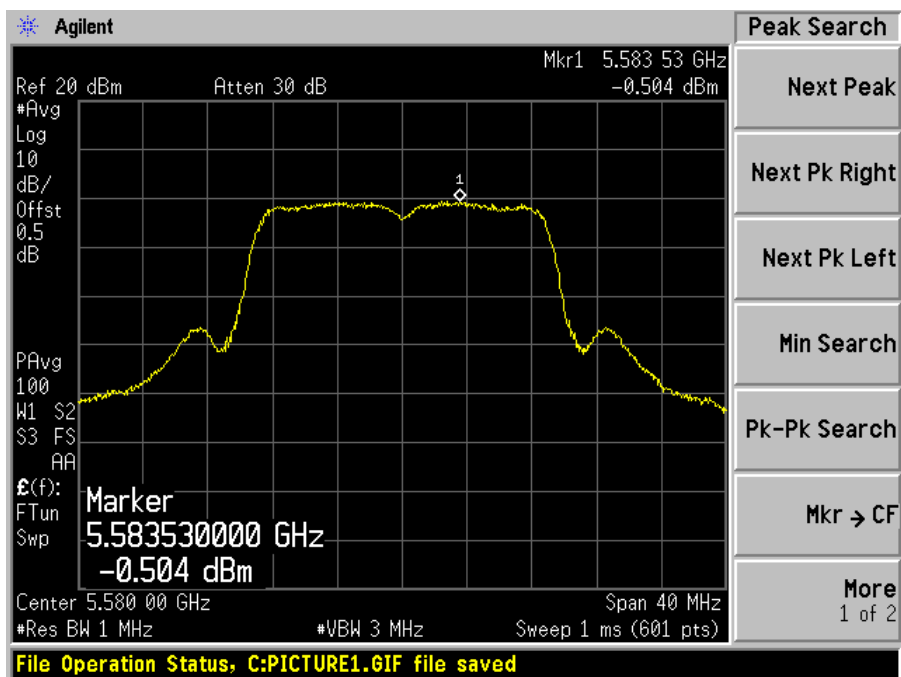


802.11n HT20, High Channel

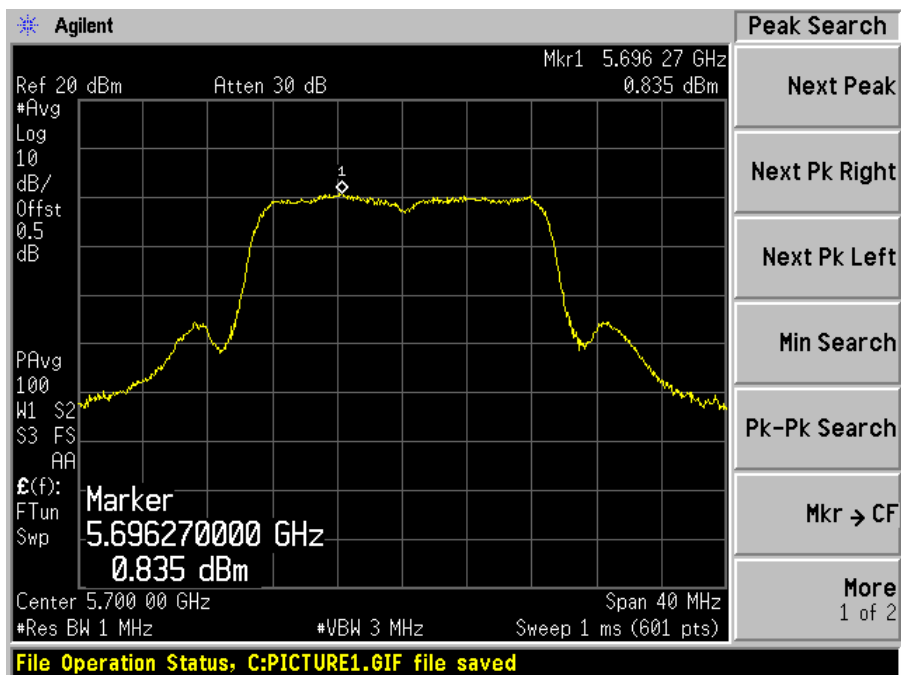


5250-5350 MHz

802.11n HT40, Low Channel

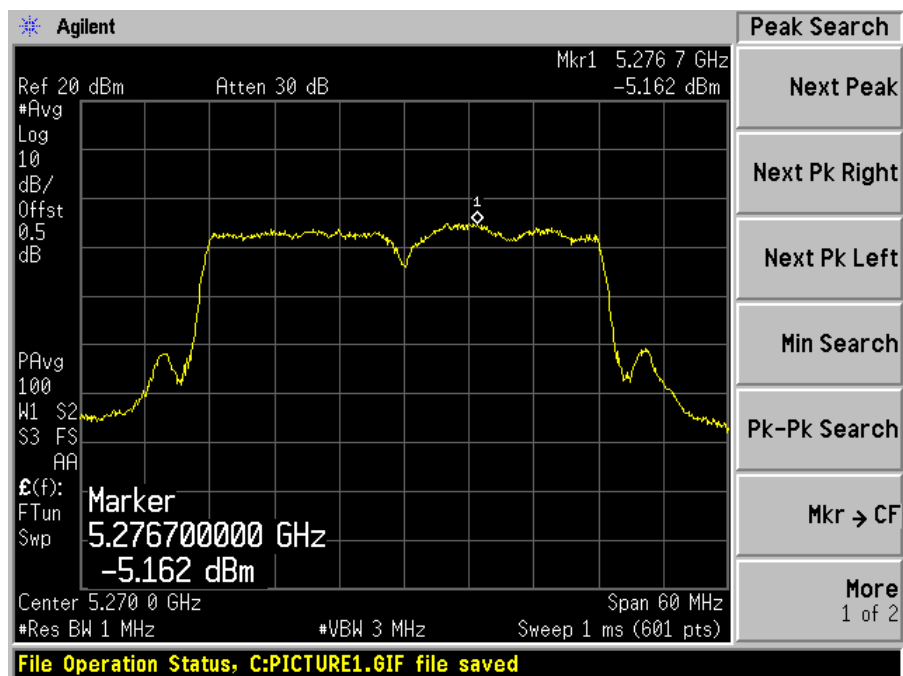


802.11n HT40, High Channel

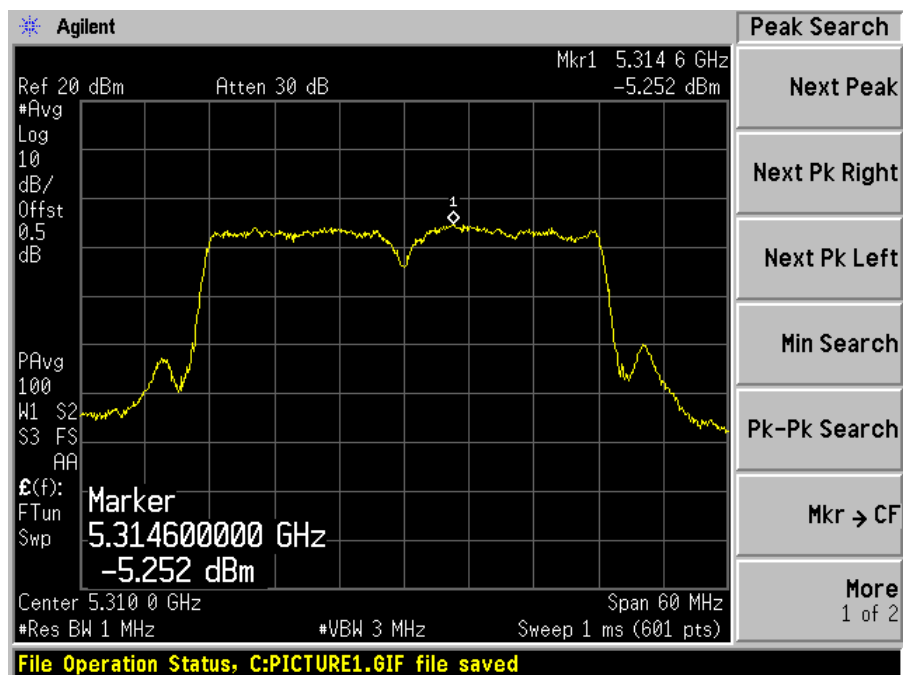


5470-5725 MHz


802.11n HT40, Low Channel

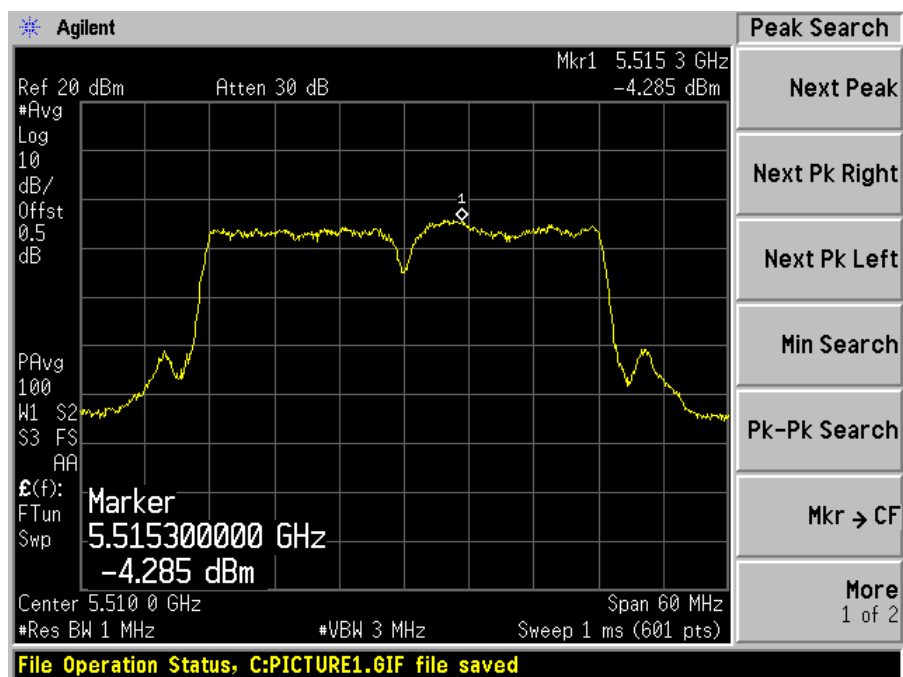

802.11n HT40, Middle Channel

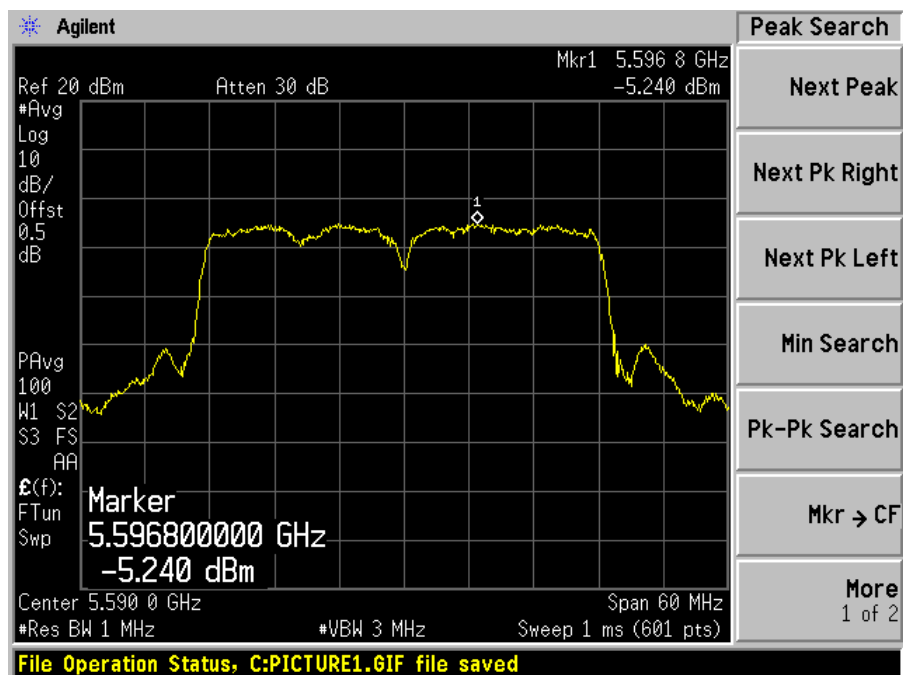

802.11n HT40, High Channel

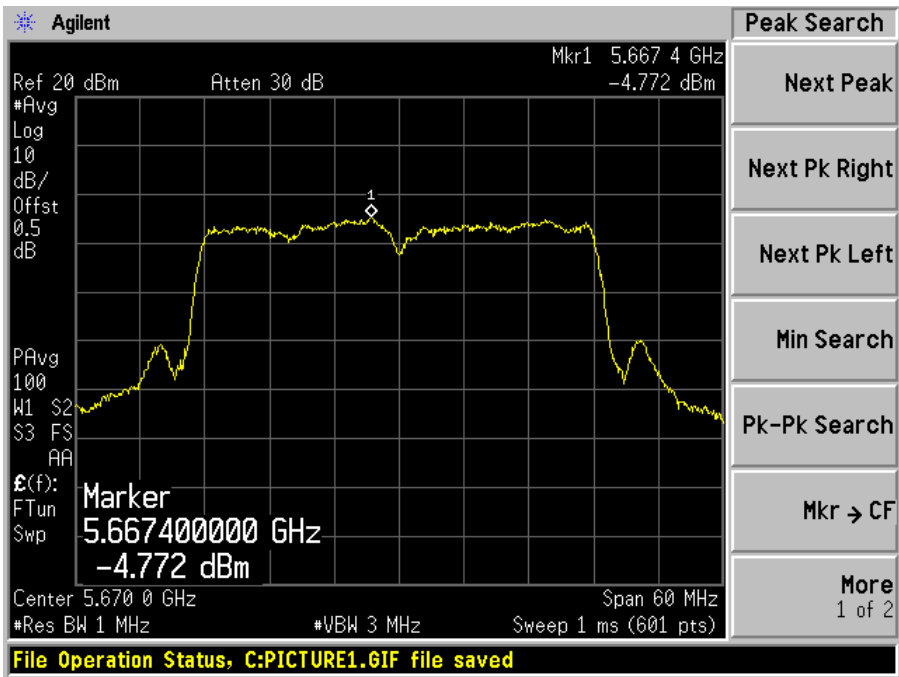

10 IC RSS-210 §2.6 & RSS-Gen §6 - Receiver Spurious Radiated Emissions

10.1 Applicable Standard

According to RSS-Gen §4.10, The receiver shall be operated in the normal receive mode near the mid-point of the band over which the receiver is designed to operate.

Unless otherwise specified in the applicable RSS, the radiated emission measurement is the standard measurement method (with the device's antenna in place) to measure receiver spurious emissions.

Radiated emission measurements are to be performed using a calibrated open-area test site.

For either method, the search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tuneable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

For emissions below 1 GHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limit can be demonstrated using measuring equipment employing a peak detector with the same measurement bandwidth as that for CISPR quasi-peak measurements. Above 1 GHz, measurements shall be performed using an average detector and a resolution bandwidth of 300 kHz to 1 MHz.

According to RSS-210 §2.6, Tables 2 and 3 show the general field strength limits of unwanted emissions, where applicable, for transmitters and receivers operating in accordance with the provisions specified in this RSS. Transmitters whose wanted emissions are also within the limits shown in Tables 2 and 3 may operate in any of the frequency bands of Tables 2 and 3, other than the restricted bands of Table 1 and the TV bands, and shall be certified under RSS-210.

Table 2: General Field Strength Limits for Transmitters and Receivers at Frequencies above 30 MHz ^(Note)

Frequency (MHz)	Field Strength Microvolts/m at 3 meters (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: Transmitting devices are not permitted in Table 1 bands or in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz, and 614-806 MHz). Prohibition of operation in TV bands does not apply to momentary devices, or to medical telemetry devices in the band 174-216 MHz, and to perimeter protection systems in the bands 54-72 and 76-88 MHz. The perimeter protection devices are to meet Table 3 field strengths limits.

Table 3: General Field Strength Limits for Transmitters at Frequencies below 30 MHz (Transmit)

Frequency (fundamental or spurious)	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.

10.2 EUT Setup

The radiated emissions tests were performed in the 3 meter chamber, using the setup in accordance with ANSI C63.4-2003.

10.3 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data were recorded in the peak detection mode. Quasi-peak readings was performed only when an emissions was found to be marginal (within -4 dB of specification limits), and are distinguished with a "QP" in the data table.

10.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to the indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, the Corrected Amplitude (CA) of 40.3 dBuV/m = indicated Amplitude reading (Ai) 32.5 dBuV + Antenna Factor (AF) 23.5dB + Cable Loss (CL) 3.7 dB + Attenuator (Atten) 10 dB - Amplifier Gain (Ga) 29.4 dB

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

10.5 Test Equipment Lists and Details

Manufacturer	Description	Model Number	Serial Number	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A0020106-3	2011-06-29
A.R.A Inc	Horn antenna	DRG-1181A	1132	2010-11-29
Hewlett Packard	Pre amplifier	8447D	2944A06639	2011-06-09
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2011-05-09

Statement of Traceability: BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

10.6 Test Environmental Conditions

Temperature:	18~21 °C
Relative Humidity:	30~35 %
ATM Pressure:	101.2-102.2kPa

The testing was performed by Ning Ma from 2011-09-10 to 2011-09-22.

10.7 Test Results

According to the test data,, the EUT complied with the with the RSS-210/RSS-Gen., with the closest margins from the limit listed below:

1) Radiated Emission at 3 meters, 30 MHz -1GHz

AP1010e, 5250-5350 MHz

Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-5.91	105.6735	V	30 to 1000 MHz

AP1010e, 5470-5725 MHz


Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-16.13	42.65775	V	30 to 1000 MHz

AP1010i, 5250-5350 MHz


Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-11.18	750.0265	V	30 to 1000 MHz

AP1010i, 5470-5725 MHz


Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-5.92	105.634	V	30 to 1000 MHz

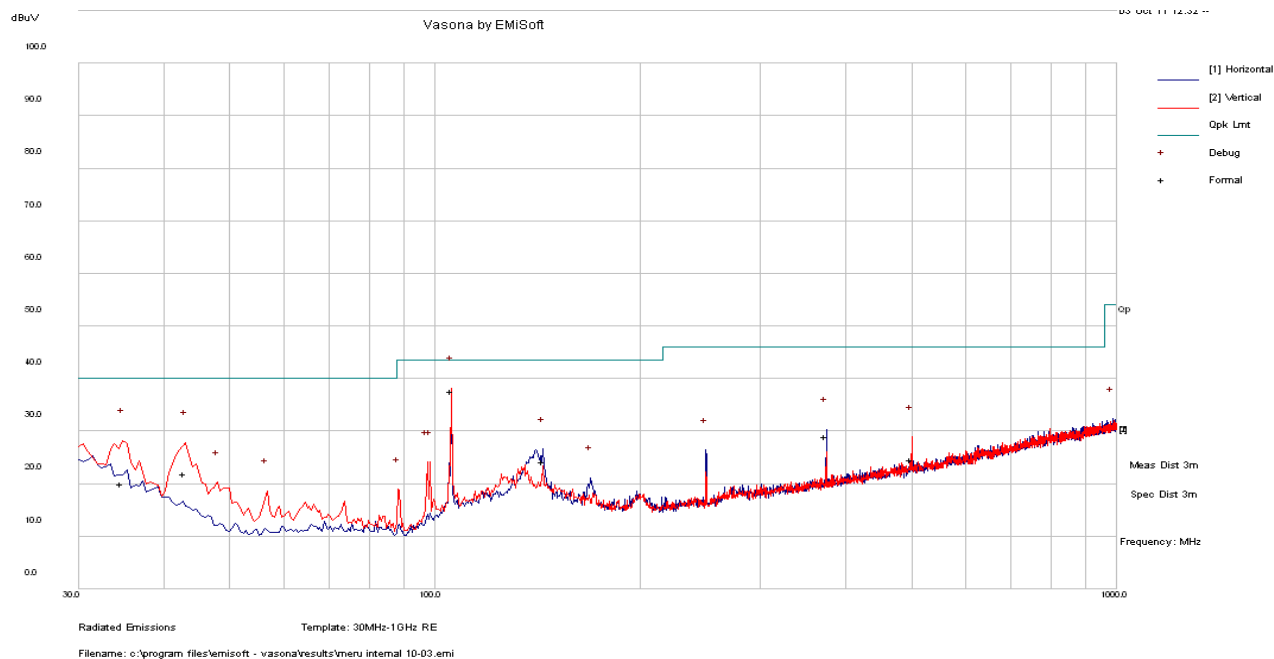AP1010e, 5250-5350 MHz, Middle channel**Quasi-Peak Measurements**


Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
105.6735	37.59	119	V	287	43.5	-5.91
375.007	28.96	99	H	137	46	-17.04
42.96825	21.92	130	V	295	40	-18.08
144.034	24.23	199	H	272	43.5	-19.27
34.68875	20.02	100	V	199	40	-19.98
500.0043	24.63	101	V	6	46	-21.37

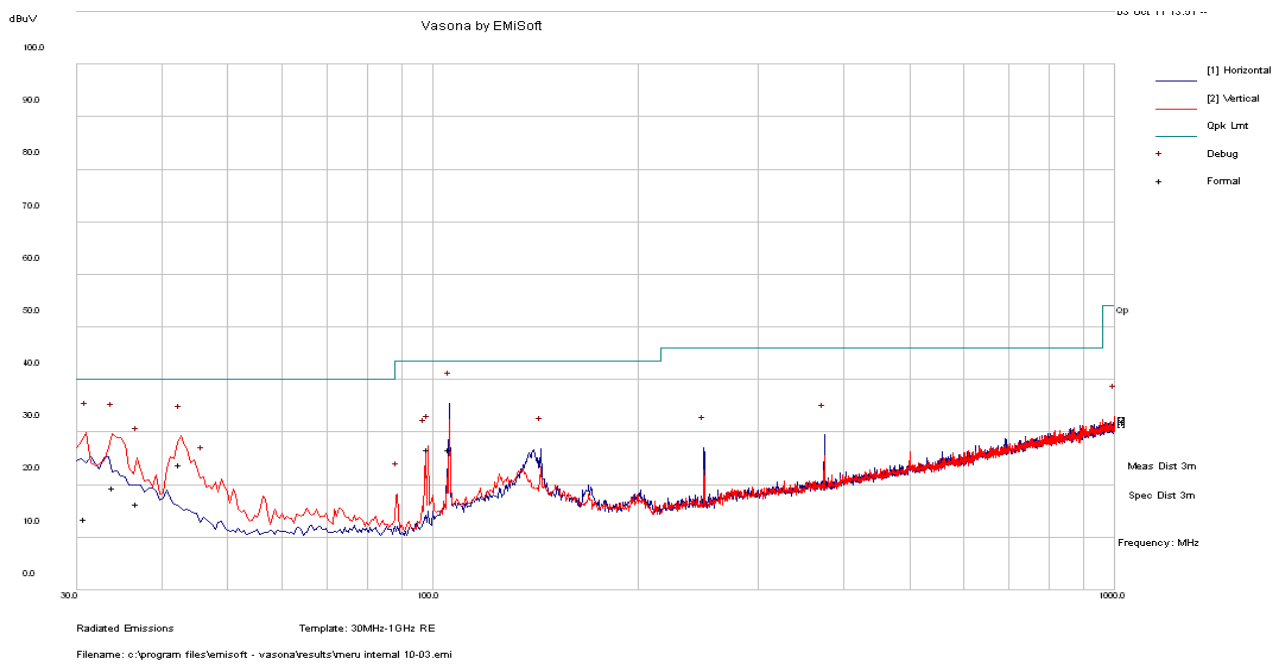AP1010e, 5470-5725 MHz, Middle channel (5190 MHz)**Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
42.65775	23.87	114	V	103	40	-16.13
105.6678	26.78	199	H	238	43.5	-16.72
98.5175	26.69	123	V	299	43.5	-16.81
33.99875	19.36	116	V	86	40	-20.64
36.92225	16.33	209	V	351	40	-23.67
30.87225	13.56	267	V	67	40	-26.44

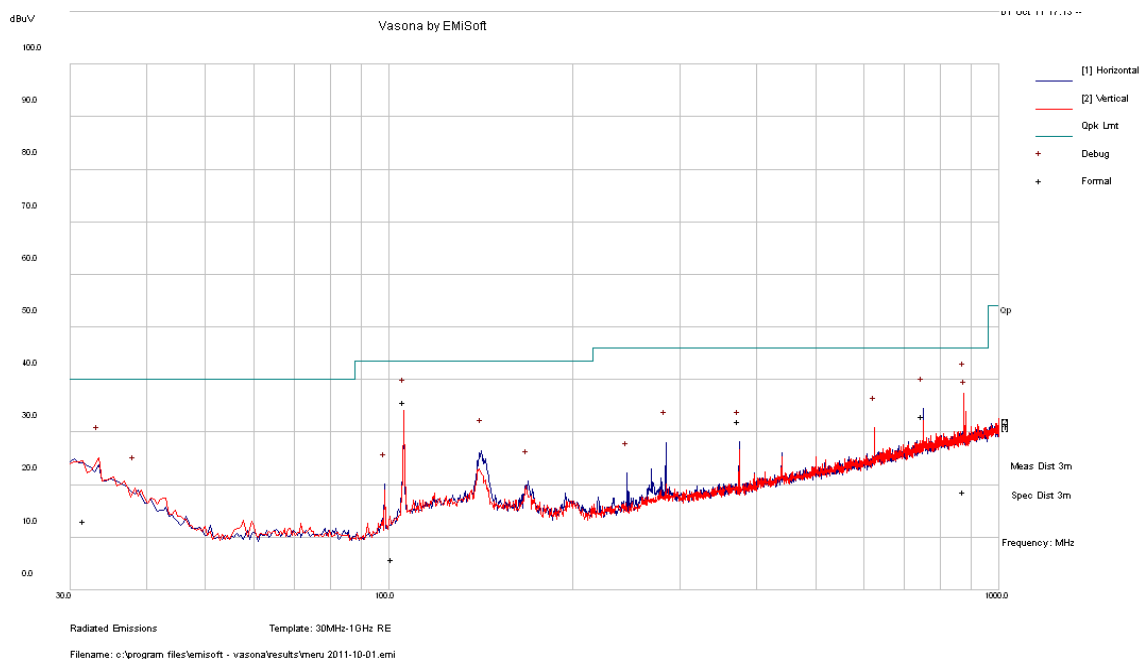AP1010i, 5250-5350 MHz, Middle channel**Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
750.0265	34.82	113	H	219	46	-11.18
880.0313	29.98	104	V	0	46	-16.02
625.007	29.57	99	V	227	46	-16.43
105.645	17.63	99	V	208	43.5	-25.87
875.1208	18.65	248	V	0	46	-27.35
33.42975	11.79	184	V	286	40	-28.21

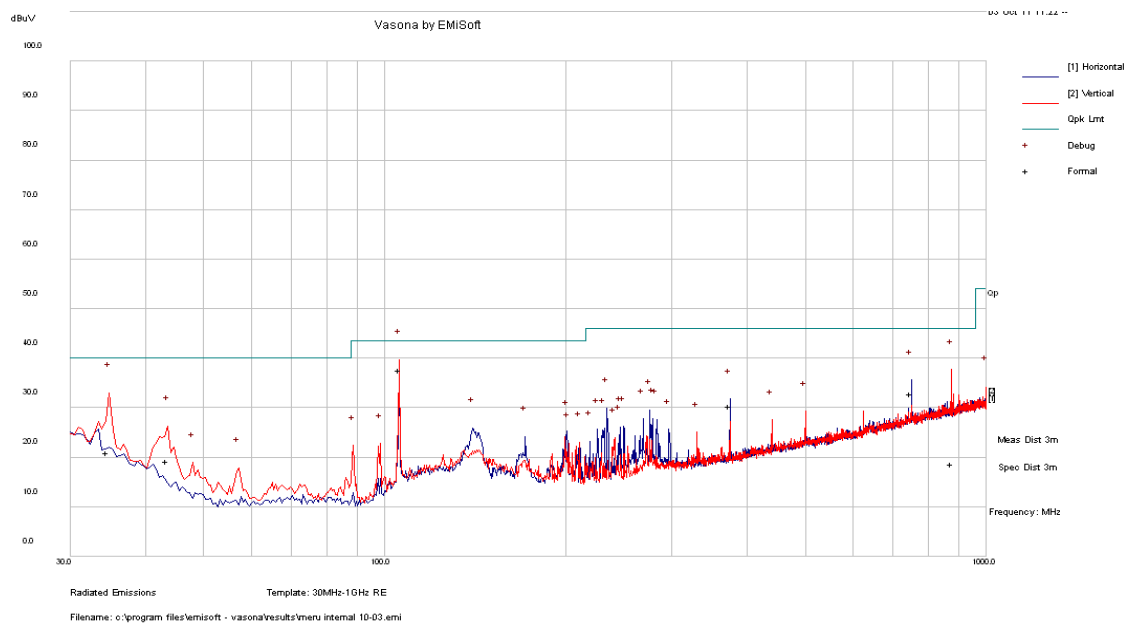AP1010i, 5470-5725 MHz, Middle channel**Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
105.634	37.58	112	V	279	43.5	-5.92
750.028	32.87	119	H	190	46	-13.13
374.9843	30.41	101	H	142	46	-15.59
34.61025	20.97	99	V	177	40	-19.03
43.4985	19.27	118	V	21	40	-20.73
875.155	18.7	119	V	106	46	-27.30

2) Radiated Emission at 3 meters, above 1 GHz**AP1010e, 5250-5350 MHz**

Middle channel measured at 3 meters

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
-	-	-	-	-	-	-	-	-	-	-	-

Note: - all emissions are below 20 dB of the limit.

AP1010e, 5470-5725 MHz

Middle channel measured at 3 meters

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	Part 15C		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
-	-	-	-	-	-	-	-	-	-	-	-

Note: - all emissions are below 20 dB of the limit.

AP1010i, 5250-5350 MHz

Middle channel measured at 3 meters

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	IC		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
-	-	-	-	-	-	-	-	-	-	-	-

Note: - all emissions are below 20 dB of the limit.

AP1010i, 5470-5725 MHz

Middle channel measured at 3 meters

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	Part 15C		Comments
			Height (m)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
-	-	-	-	-	-	-	-	-	-	-	-

Note: - all emissions are below 20 dB of the limit.

11 FCC §15.407(b) & IC RSS-210 §A9.2 - Spurious Emissions at Antenna Terminals

11.1 Applicable Standard

For FCC §15.407(b) and IC RSS-210 §A9.2, For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz. Devices operating in the 5.25–5.35 GHz band that generate emissions in the 5.15–5.25 GHz band must meet all applicable technical requirements for operation in the 5.15–5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of –27 dBm/MHz in the 5.15–5.25 GHz band. For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

11.2 Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

11.4 Test Environmental Conditions

Temperature:	23-25 °C
Relative Humidity:	35-50 %
ATM Pressure:	101-103kPa

The testing was performed by Ning Ma on 2011-10-11~ 2011-10-12 at RF Site.

11.5 Test Results


Please refer to following plots of spurious emissions.

TX Chain 1


5250-5350 MHz

802.11a, Low Channel


30MHz---1GHz

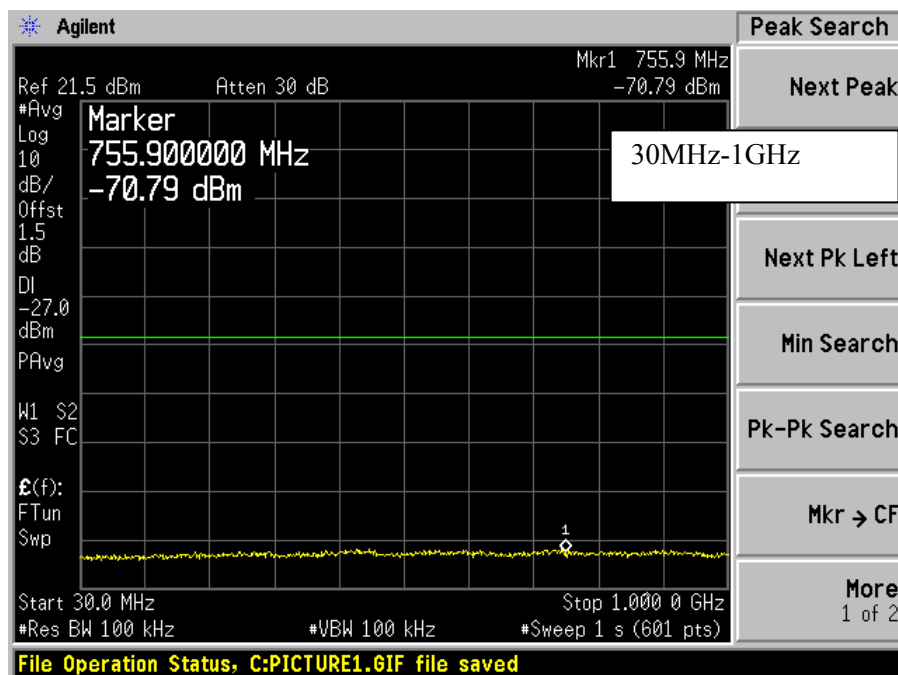

1GHz---18GHz

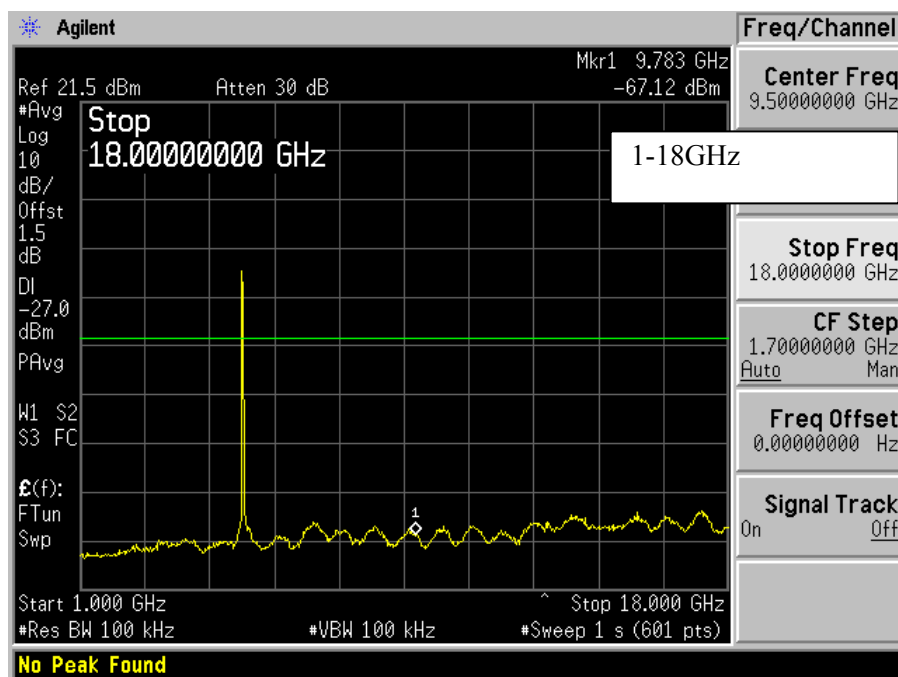


18GHz----40GHz

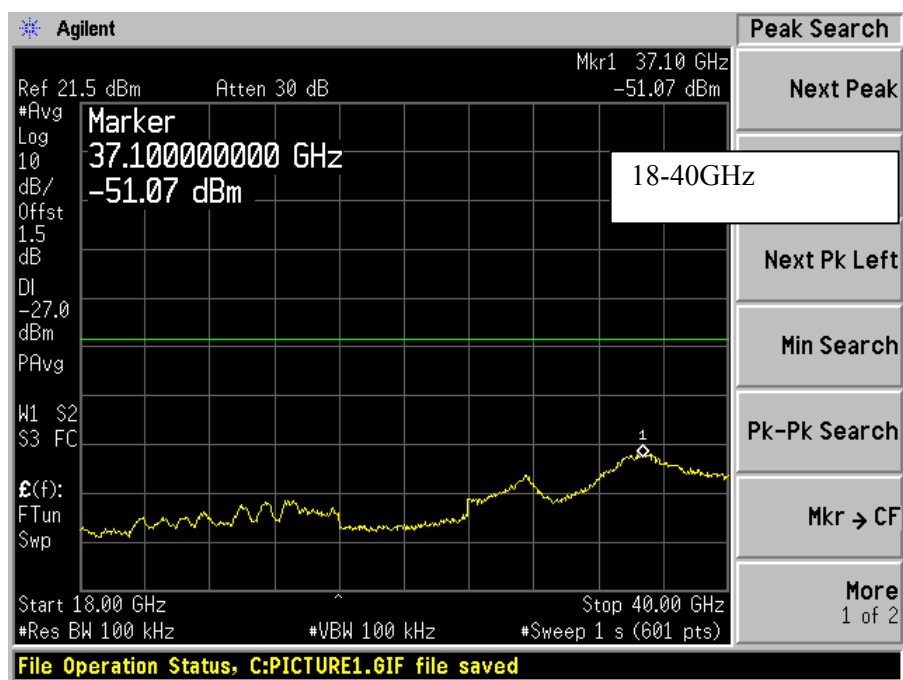


802.11a, Middle Channel


30MHz----1GHz

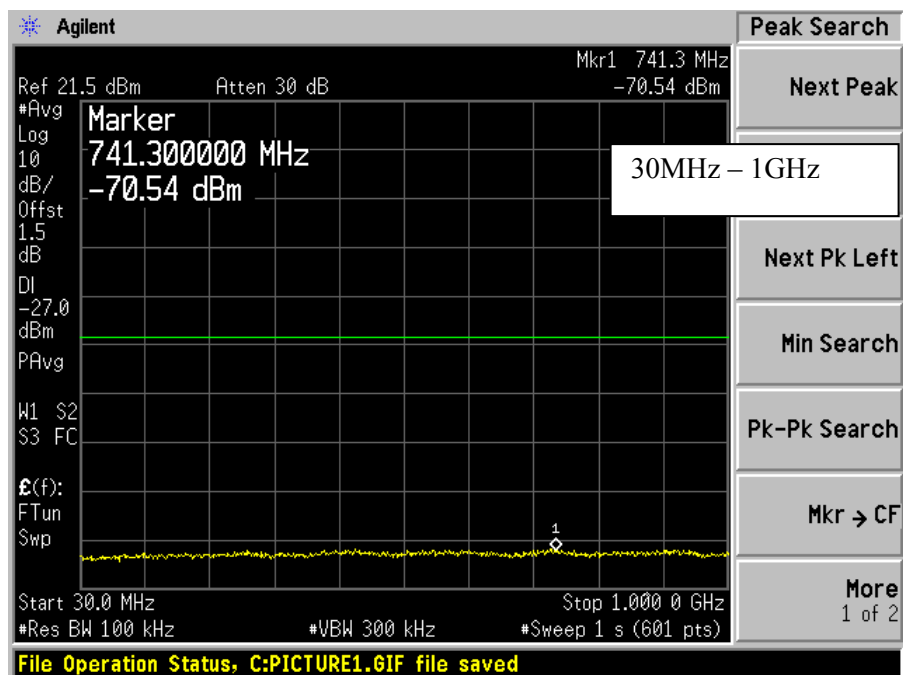

1GHz----18GHz

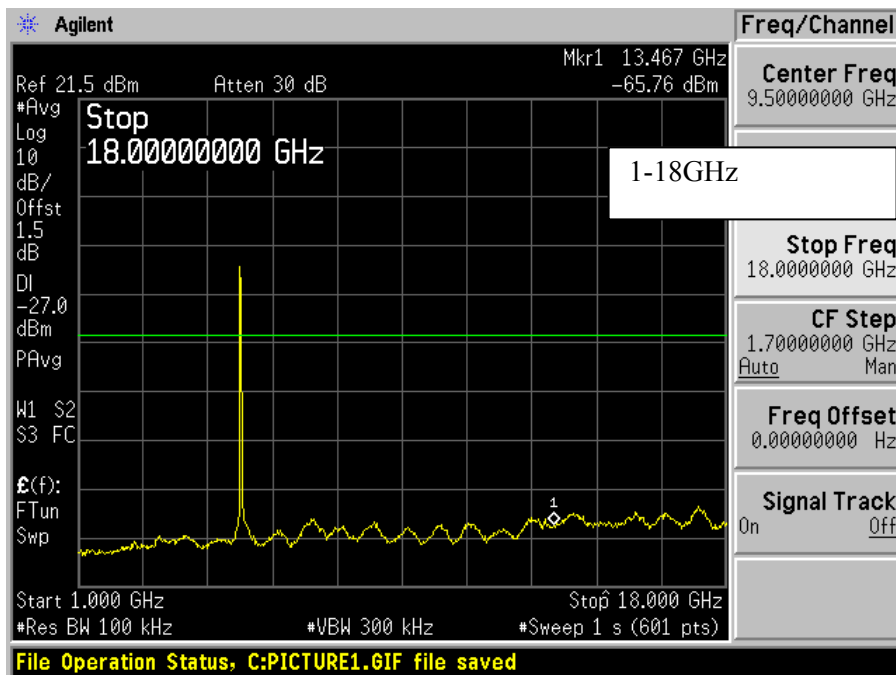


18GHz----40GHz

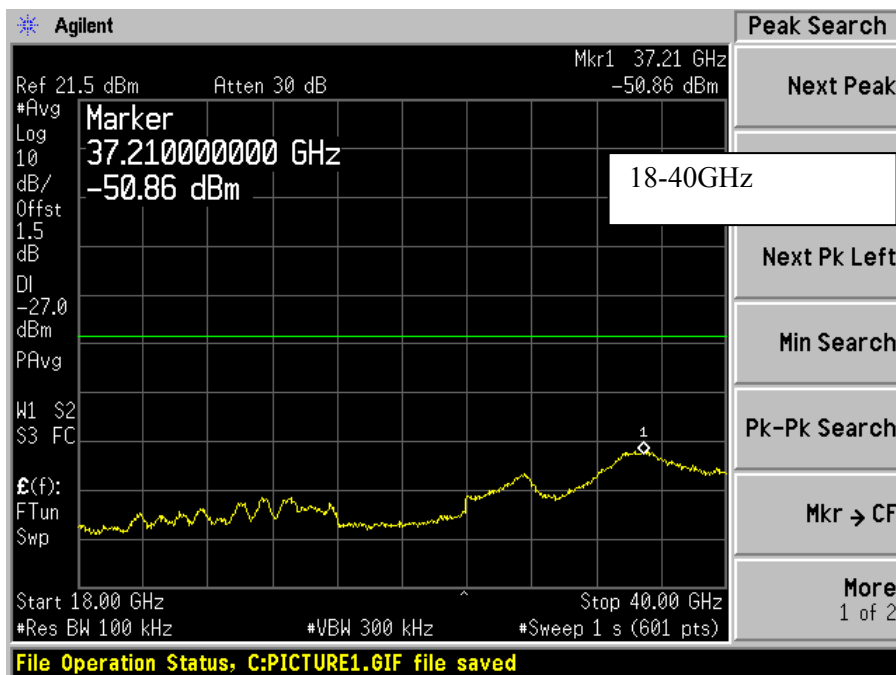


802.11a, High Channel


30MHz----1GHz

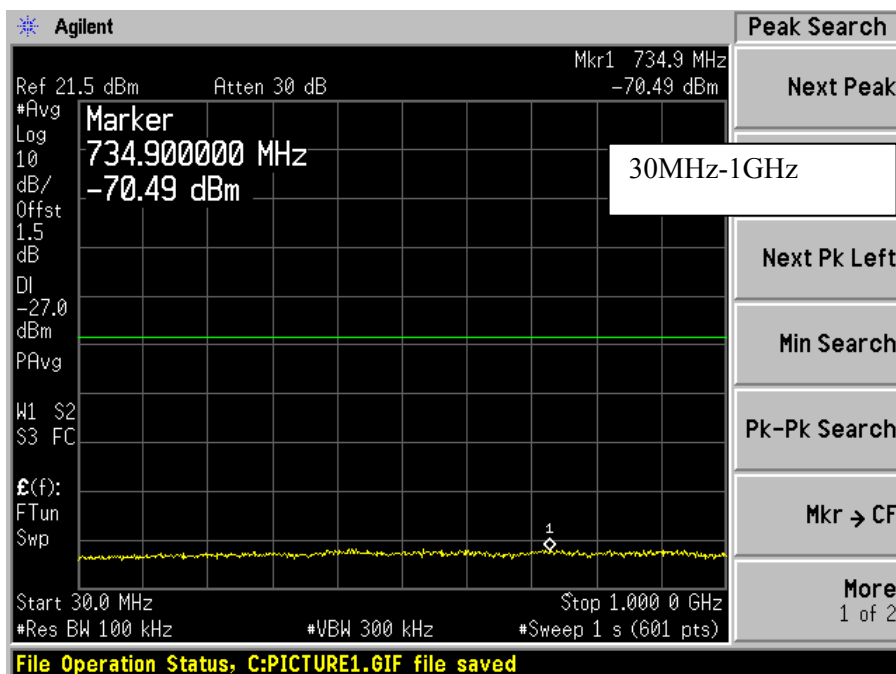

1GHz----18GHz

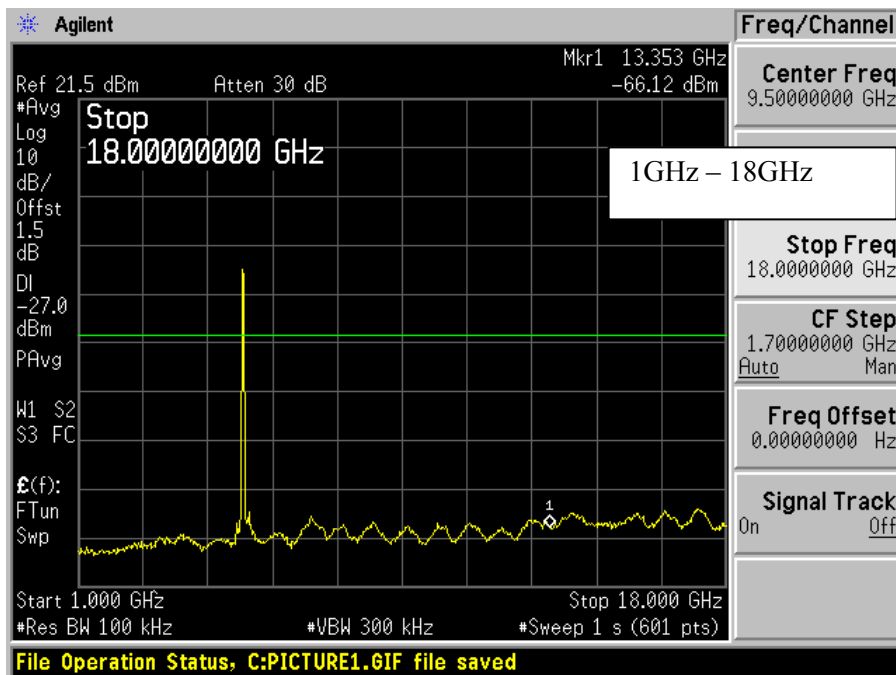


18GHz----40GHz

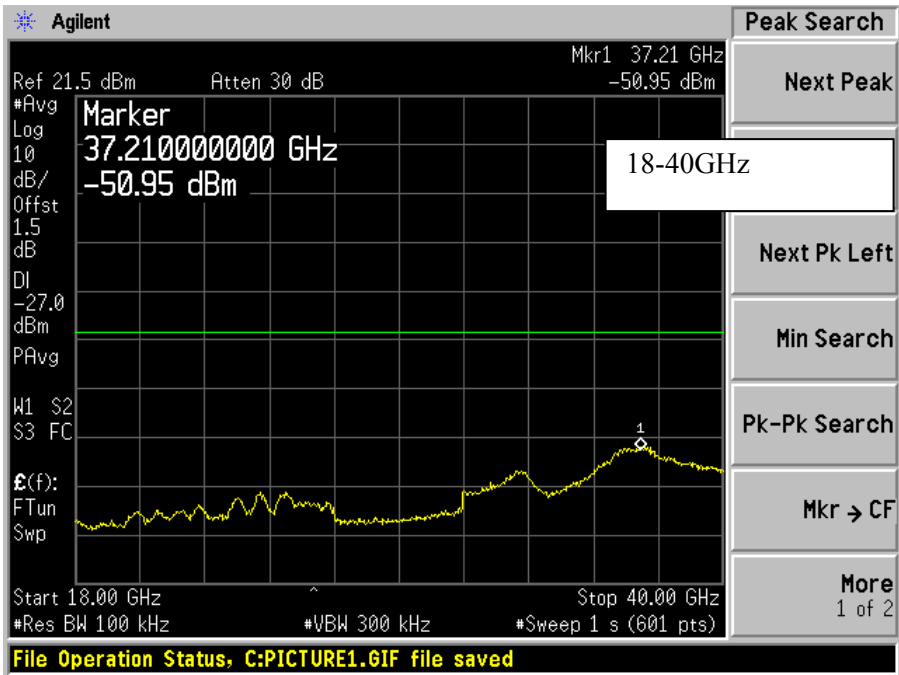


5470-5725 MHz


802.11a, Low Channel
30MHz----1GHz

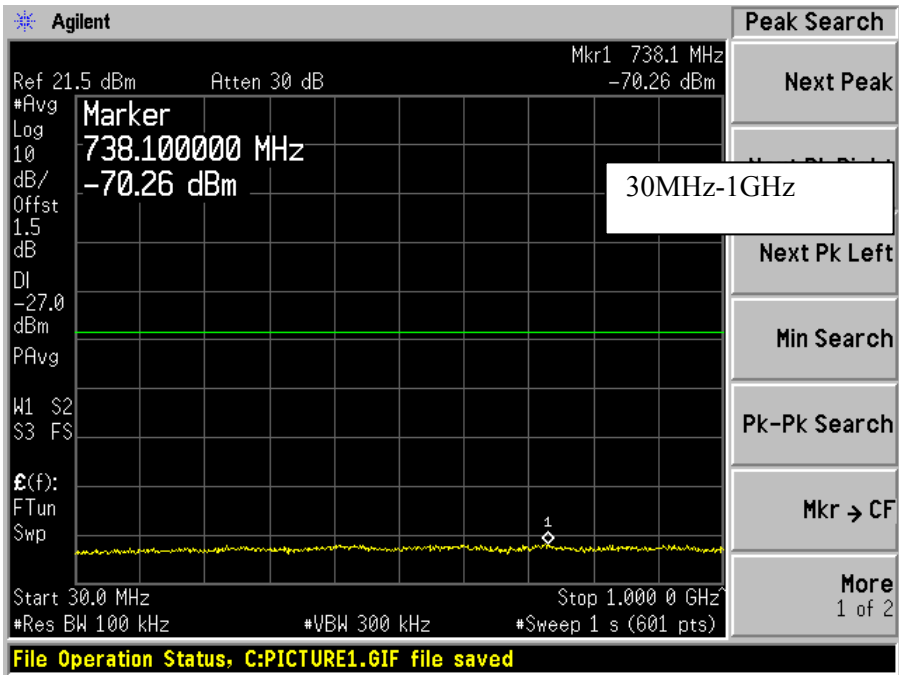

1GHz---18GHz

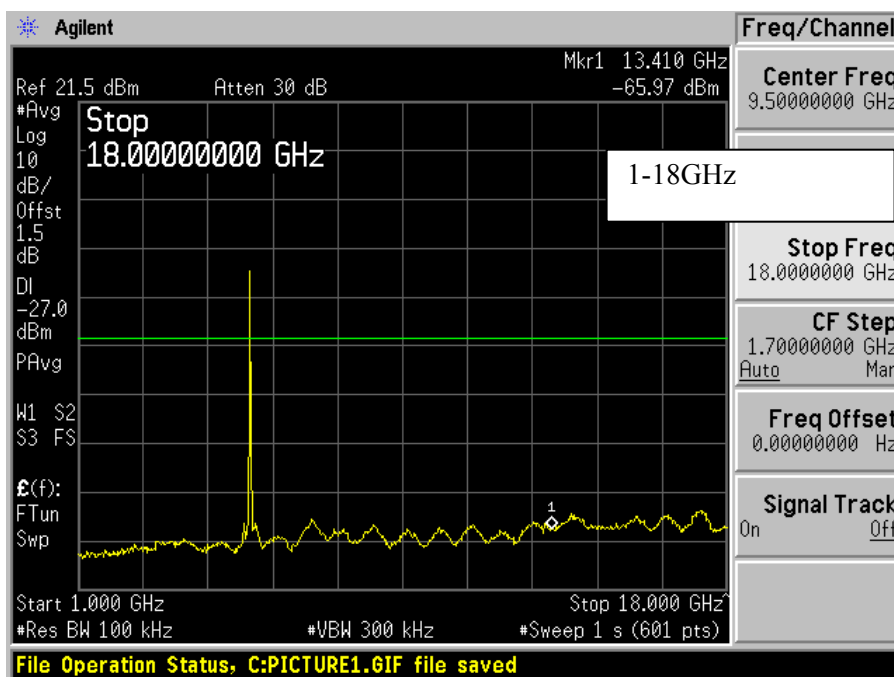


18GHz---40GHz

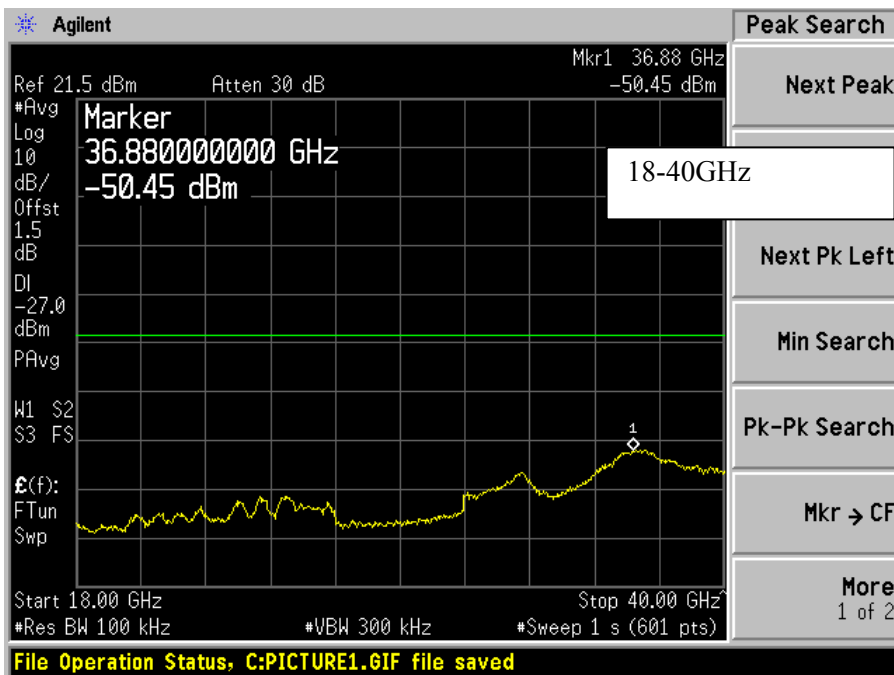


802.11a, Middle Channel


30MHz----1GHz

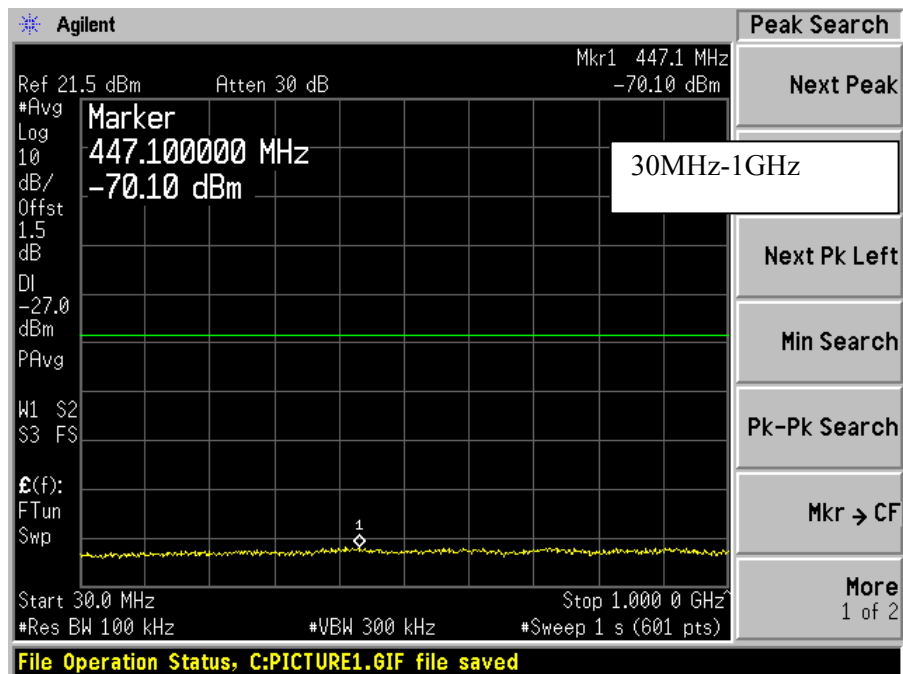

1GHz----18GHz

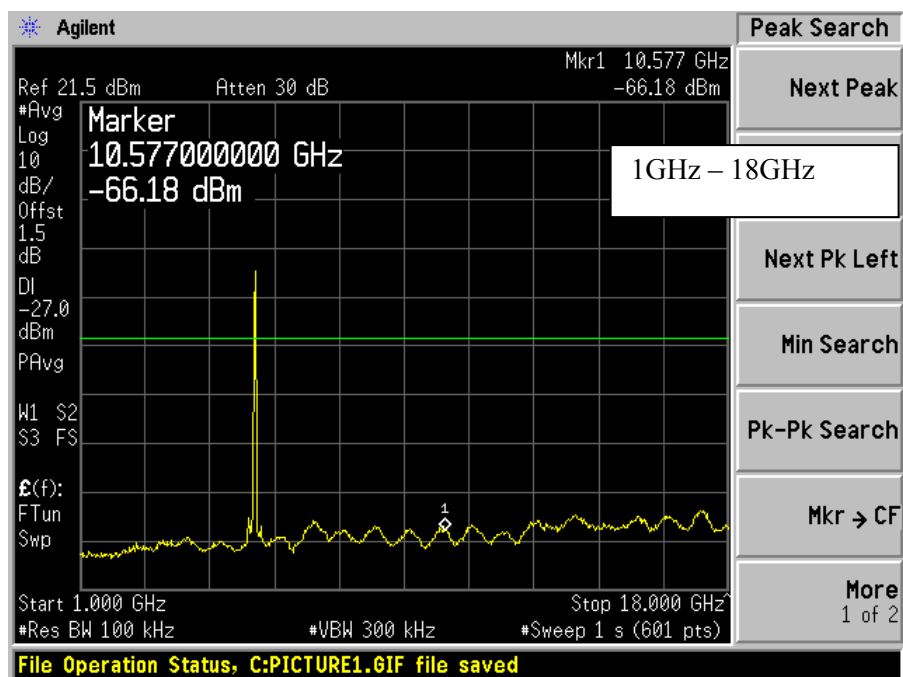


18GHz----40GHz

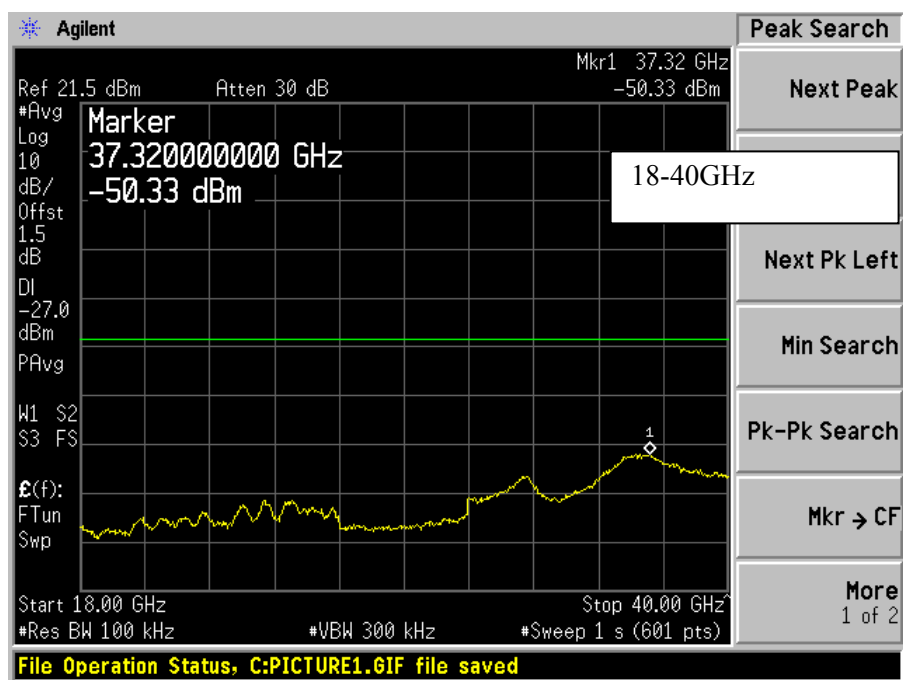


802.11a, High Channel


30MHz----1GHz

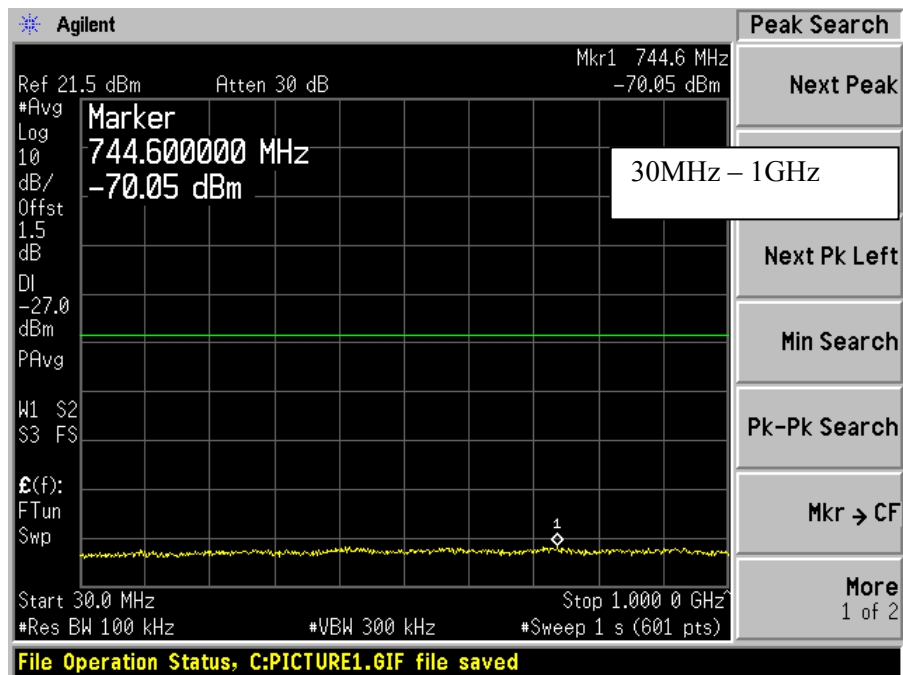

1GHz----18GHz

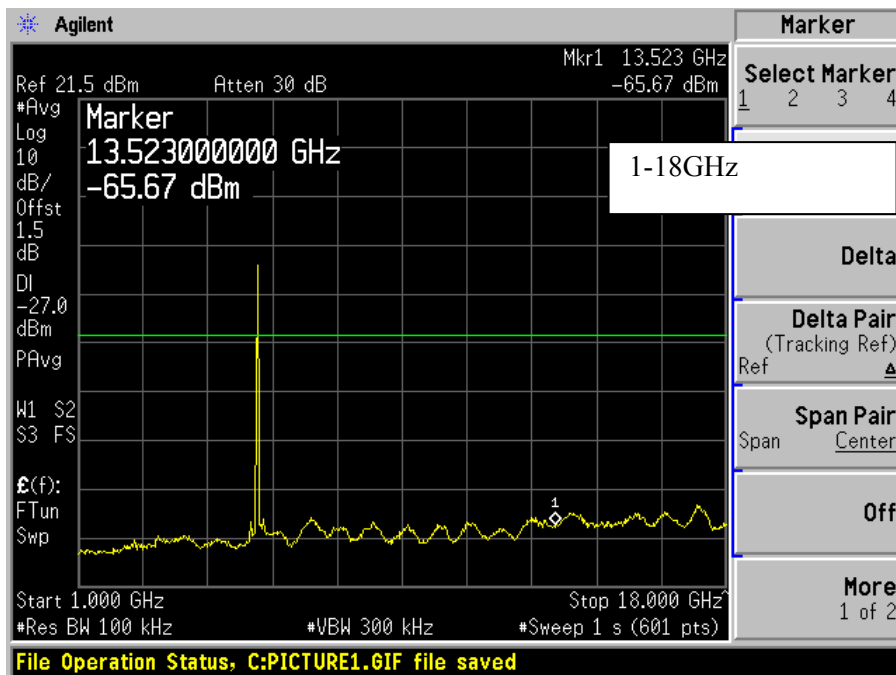


18GHz----40GHz

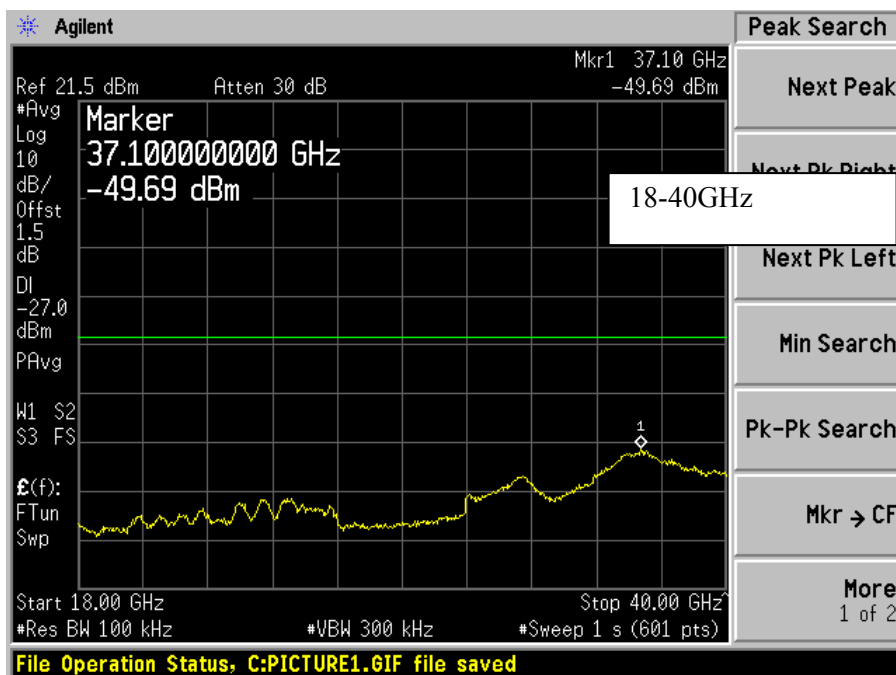


5250-5350 MHz

802.11n HT20, Low Channel


30MHz----1GHz

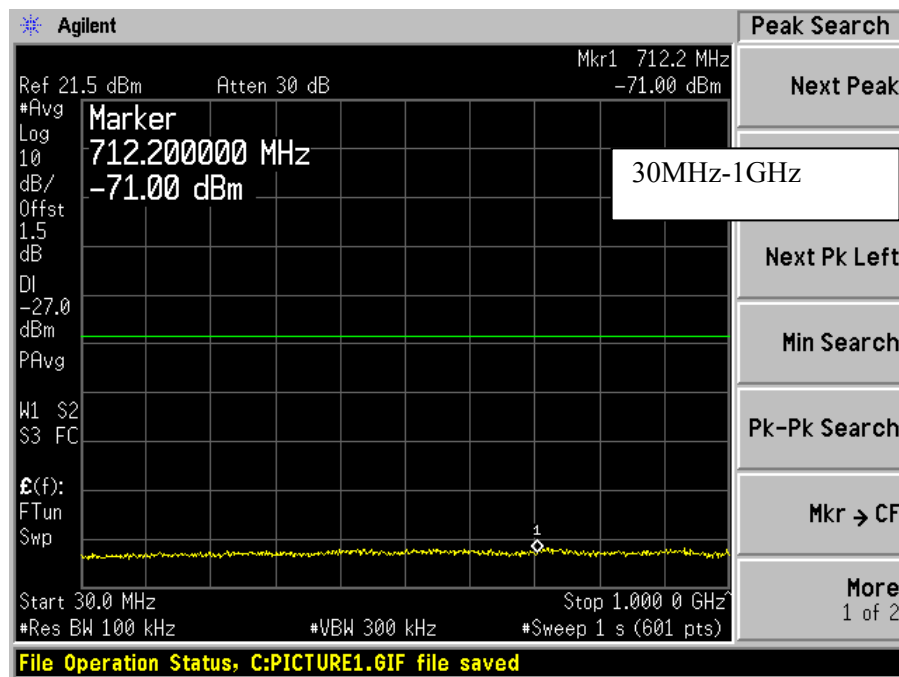

1GHz---18GHz

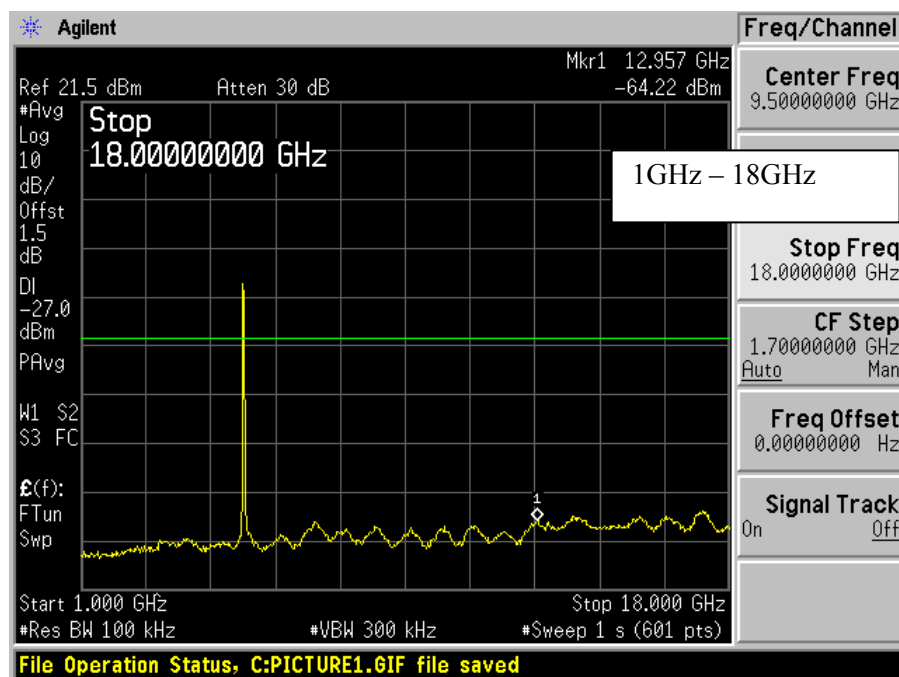


18GHz----40GHz

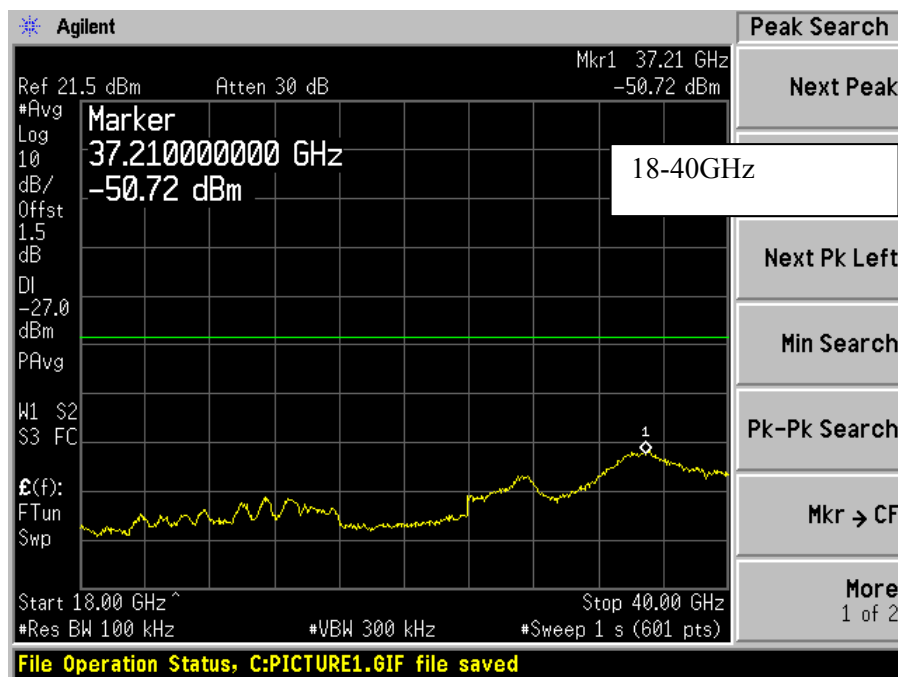


802.11n HT20, Middle Channel


30MHz----1GHz

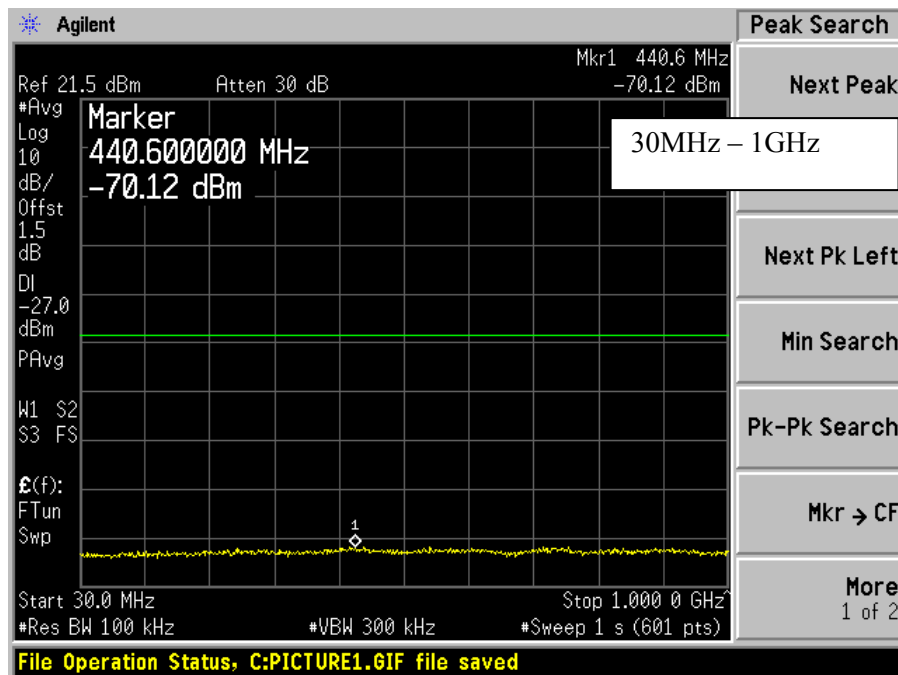

1GHz---18GHz

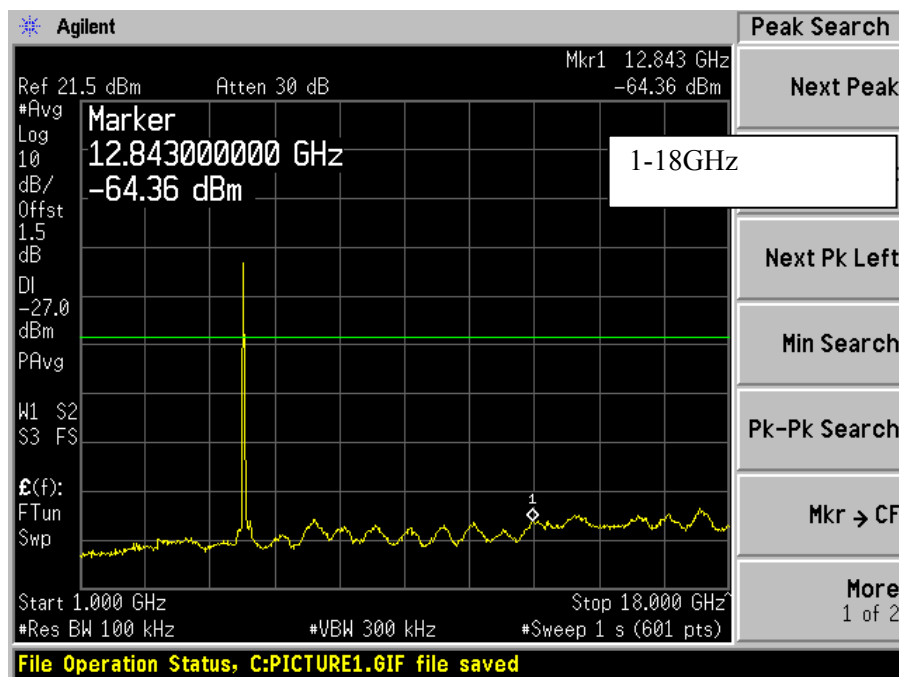


18GHz---40GHz

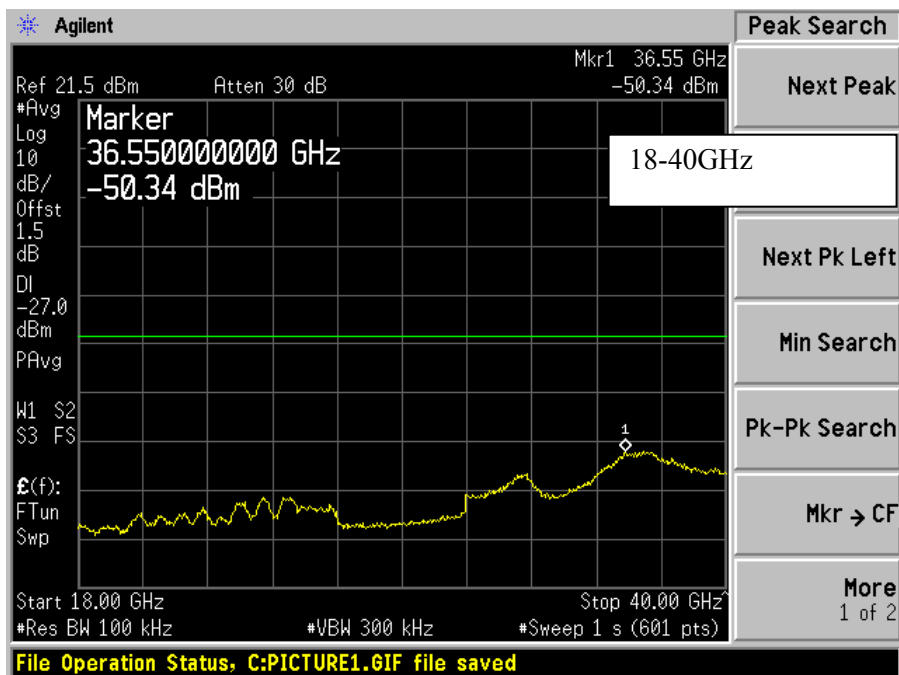


802.11n HT20, High Channel


30MHz----1GHz

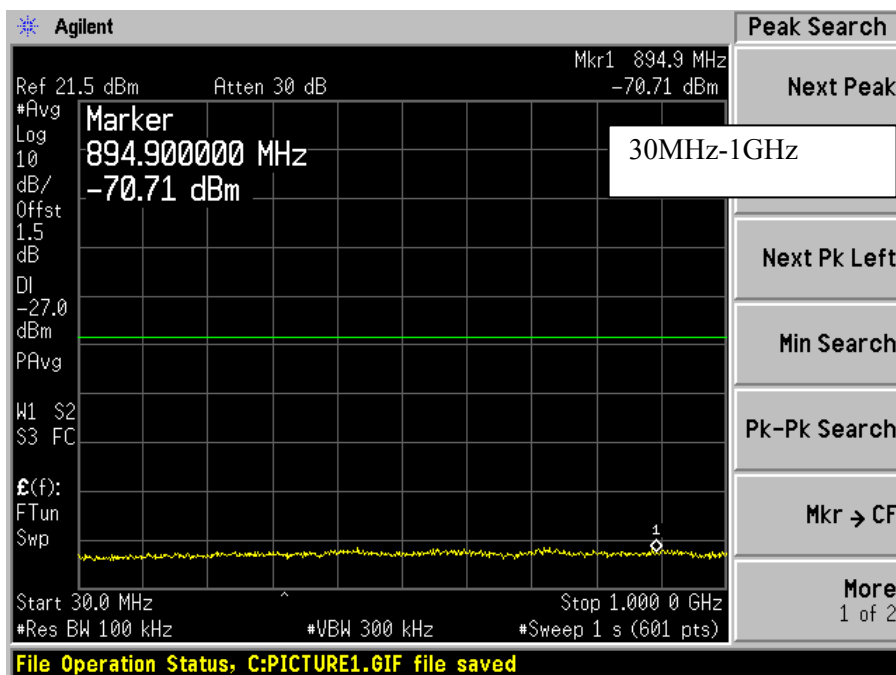

1GHz----18GHz

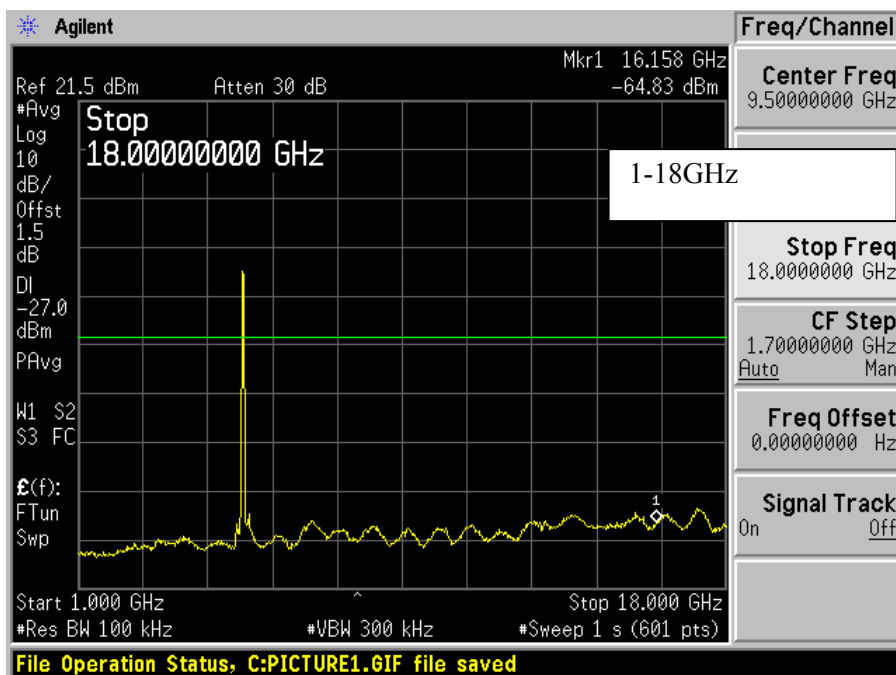


18GHz----40GHz

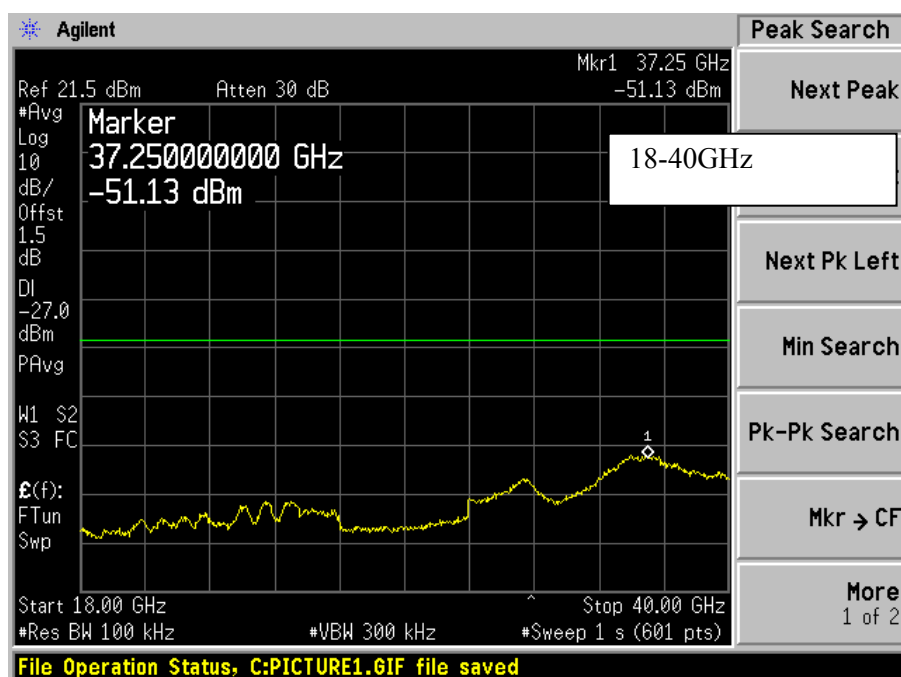


5470-5725 MHz

802.11 HT20, Low Channel


30MHz----1GHz

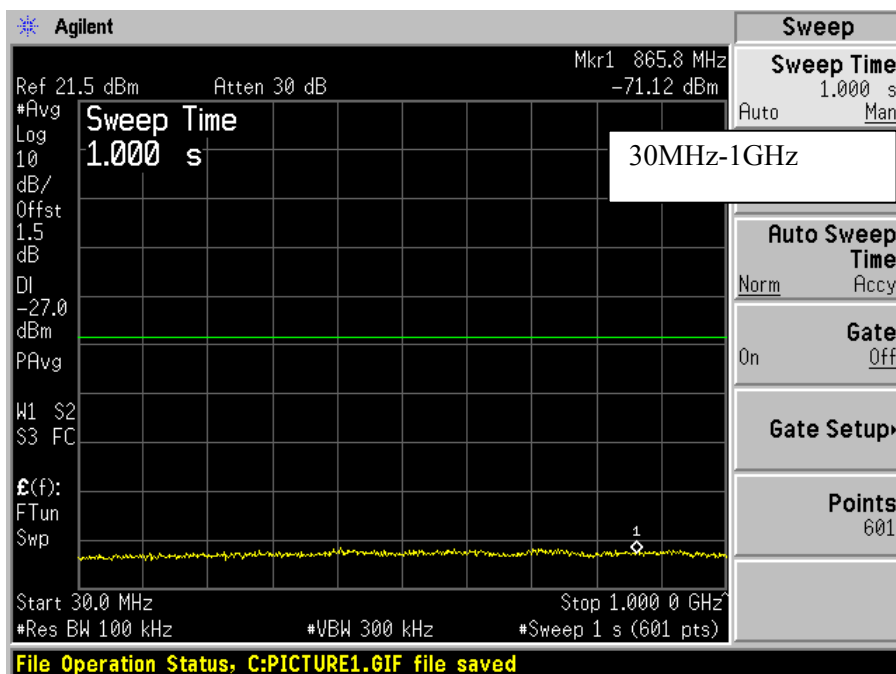

1GHz----18GHz

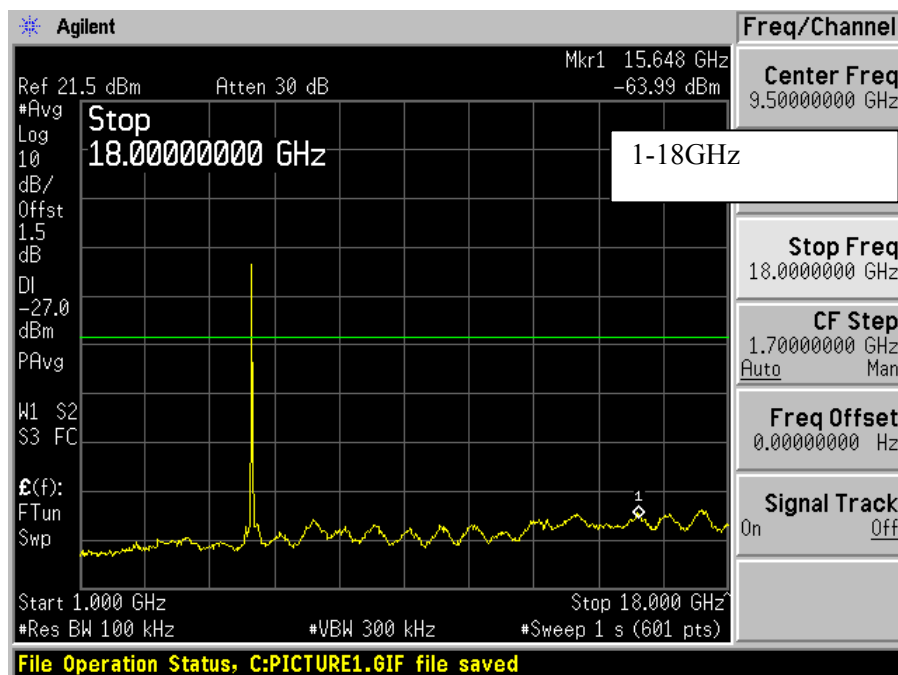


18GHz----40GHz

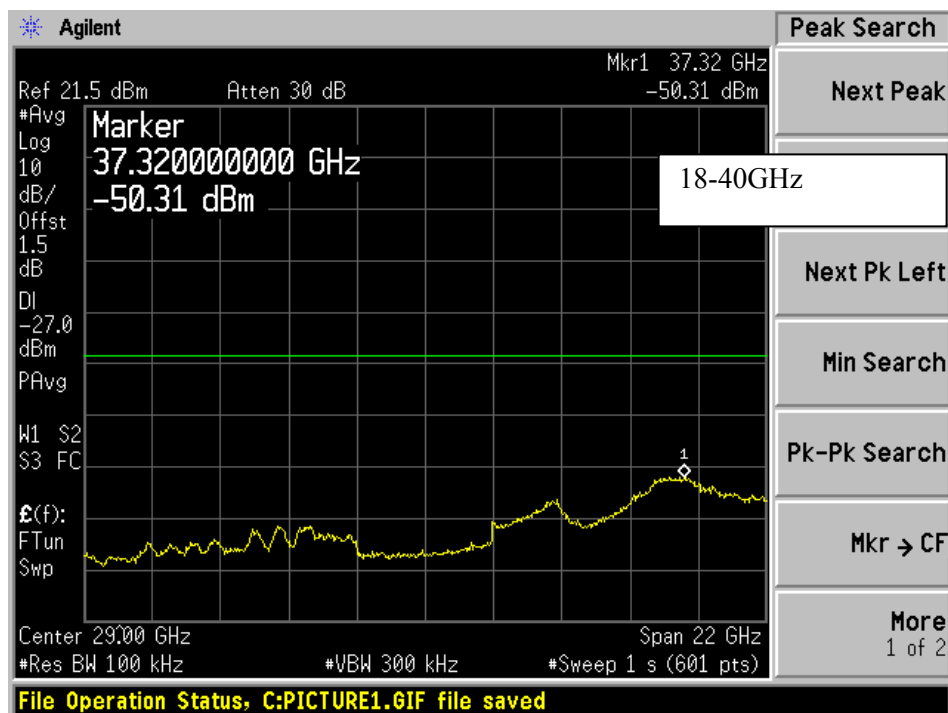


802.11n HT20, Middle Channel


30MHz----1GHz

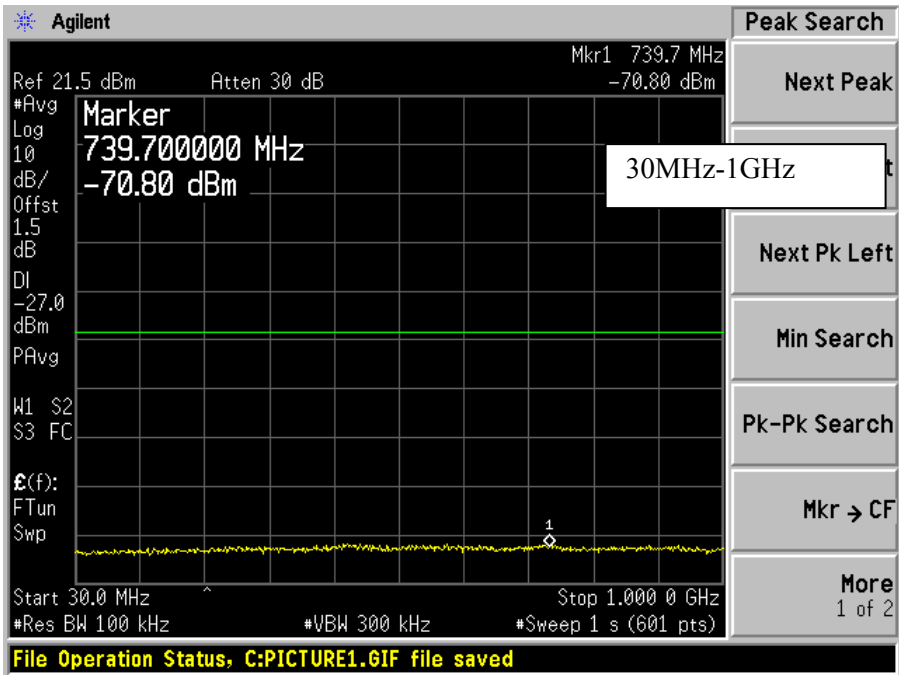

1GHz----18GHz

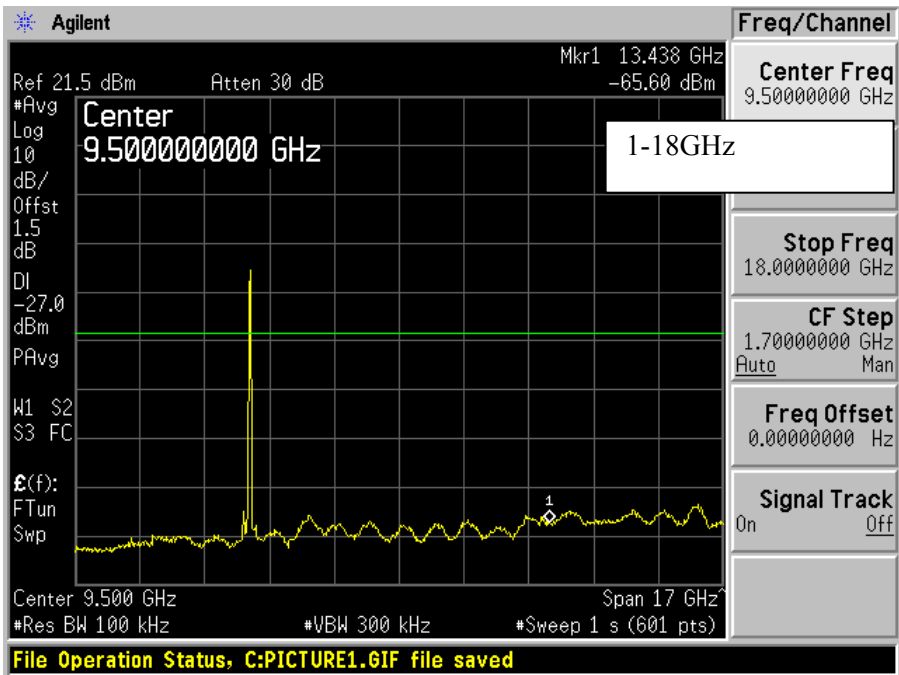


18GHz----40GHz

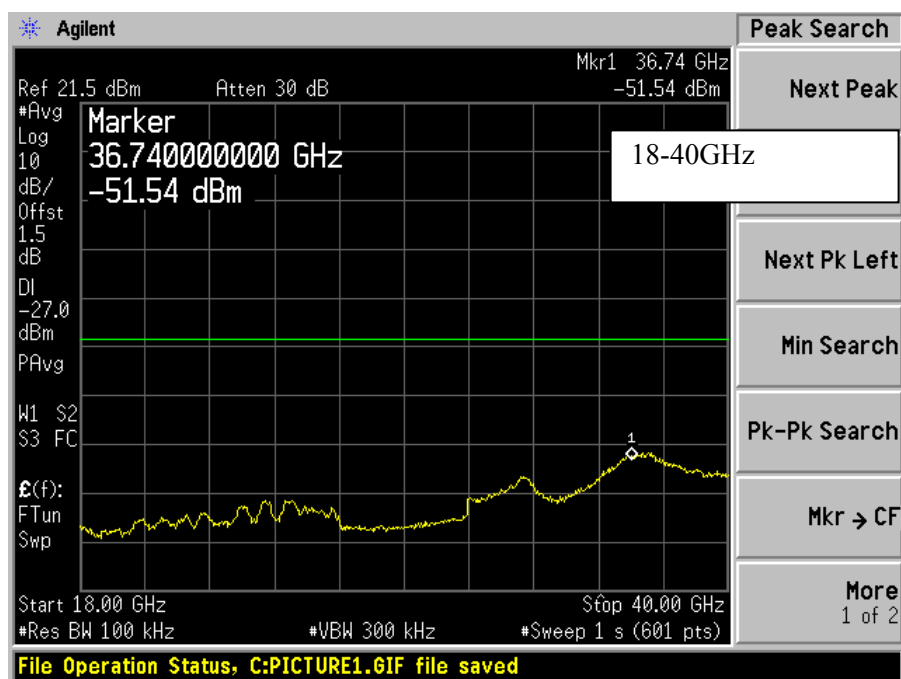


802.11n HT20, High Channel


30MHz----1GHz

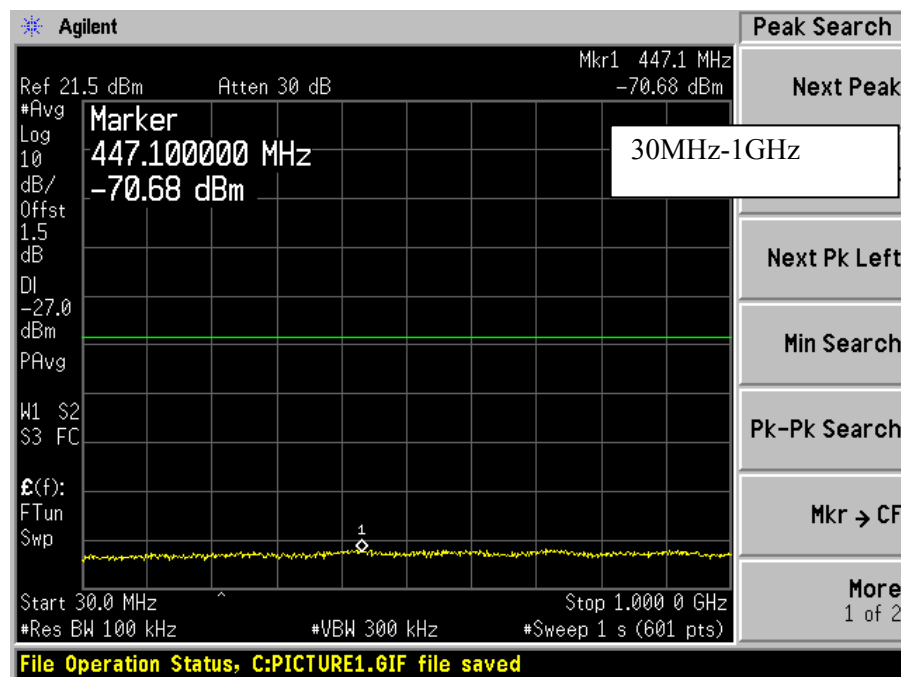

1GHz---18GHz

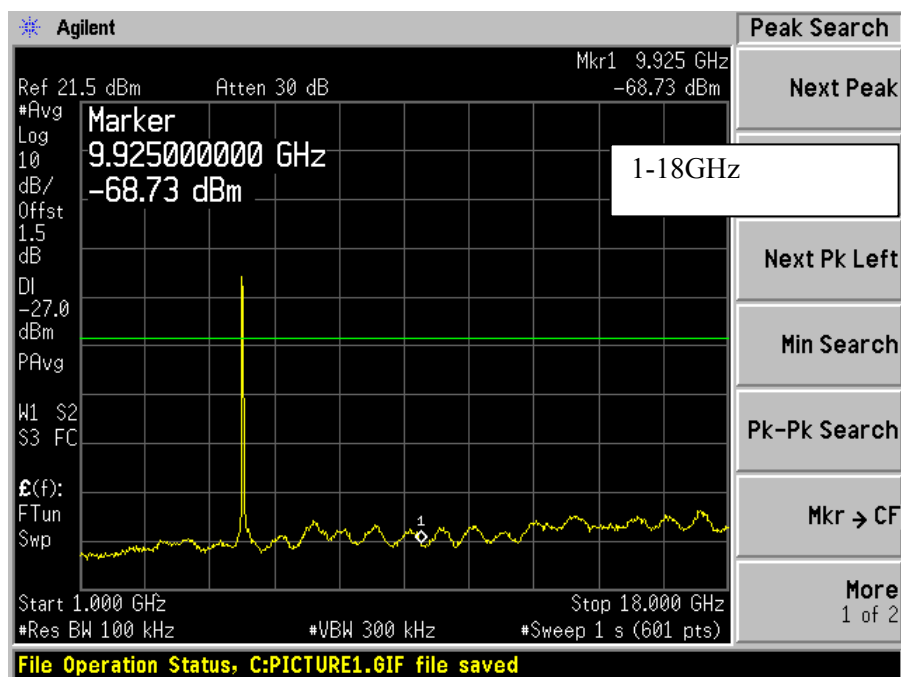


18GHz---40GHz

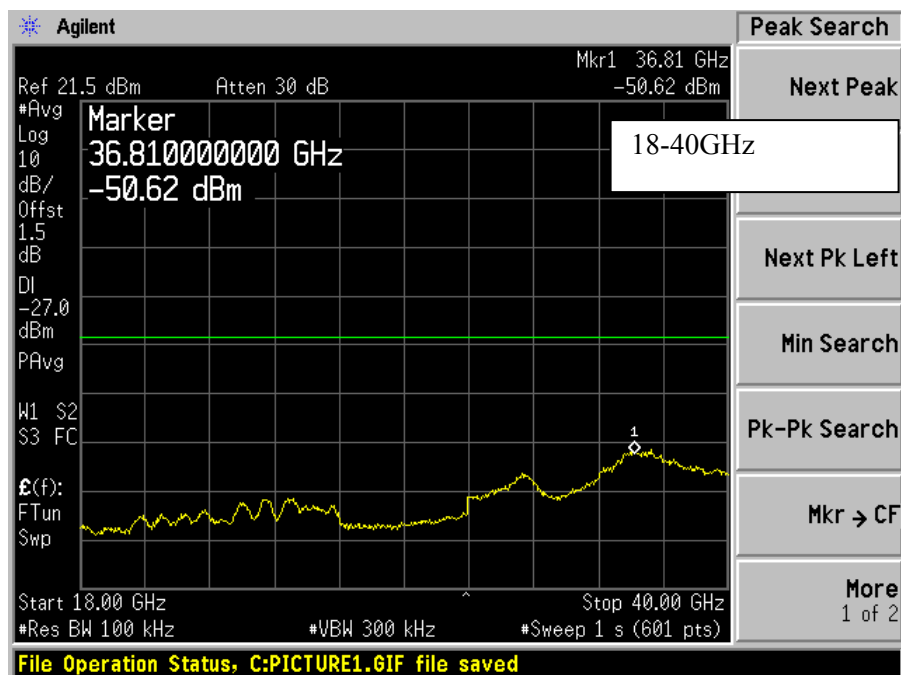


5250-5350 MHz

802.11n HT40, Low Channel


30MHz----1GHz

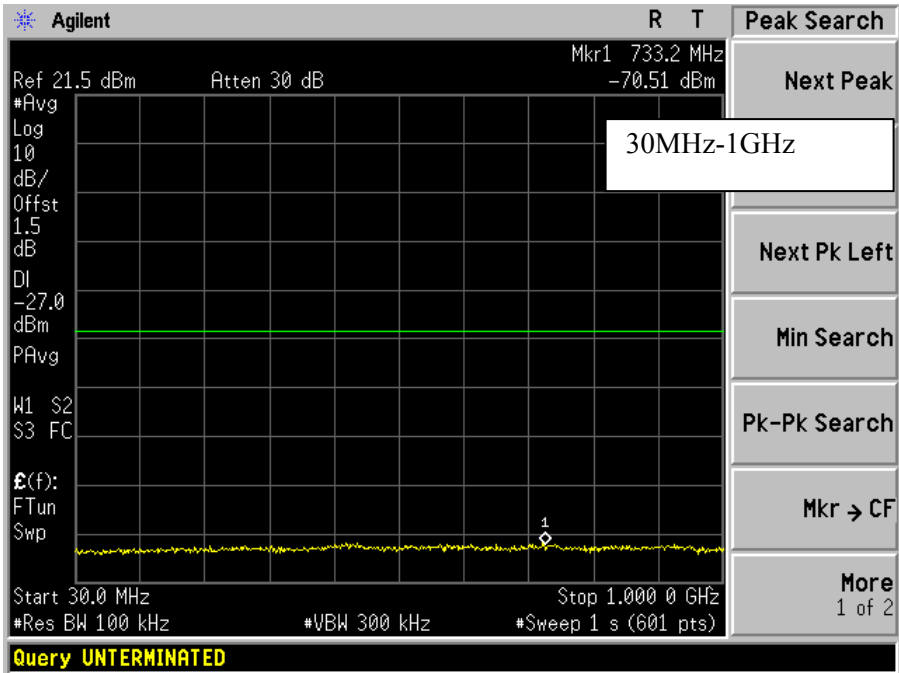

1GHz----18GHz

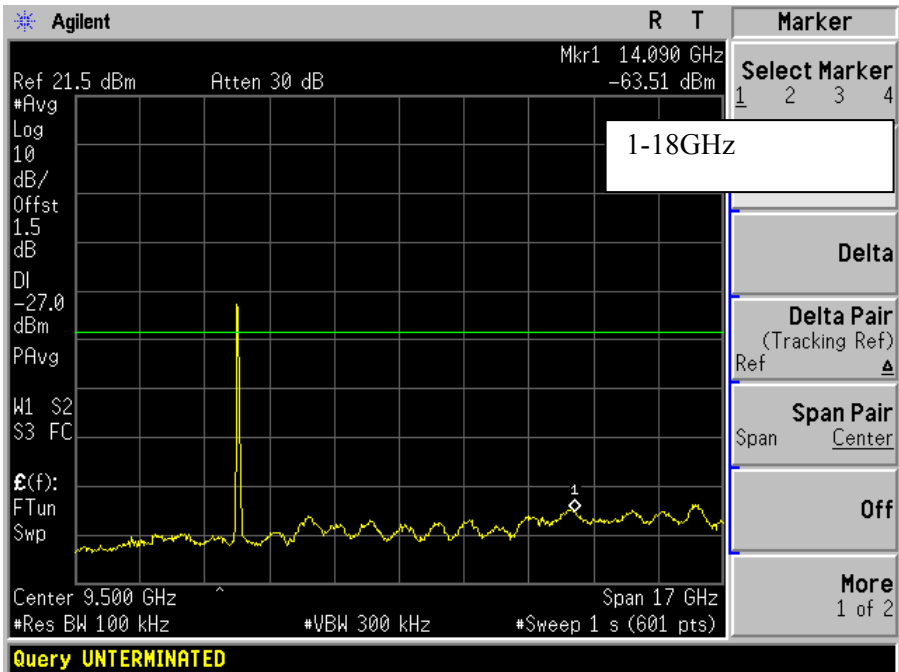


18GHz----40GHz

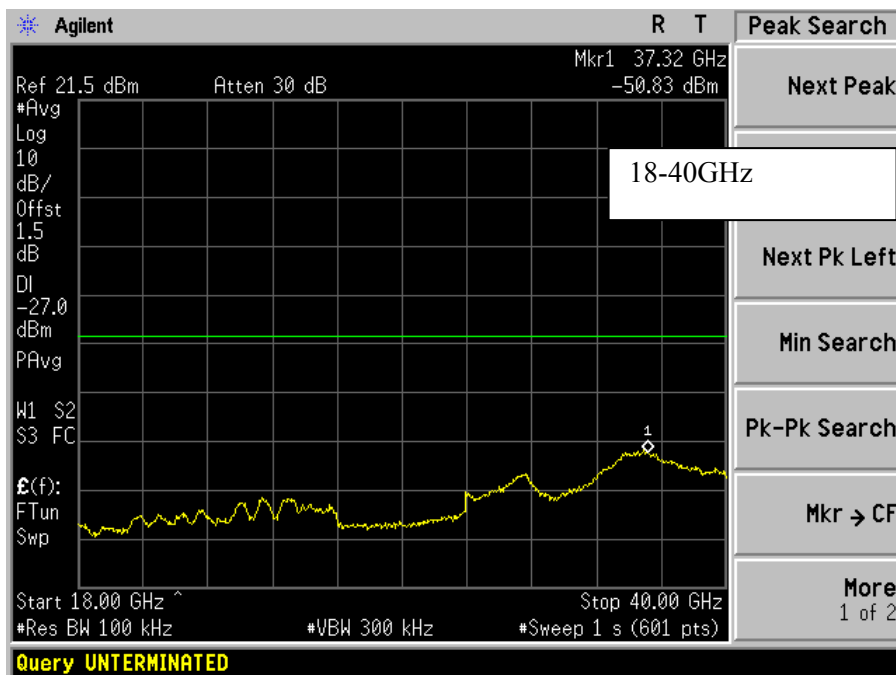


802.11n HT40, High Channel


30MHz----1GHz

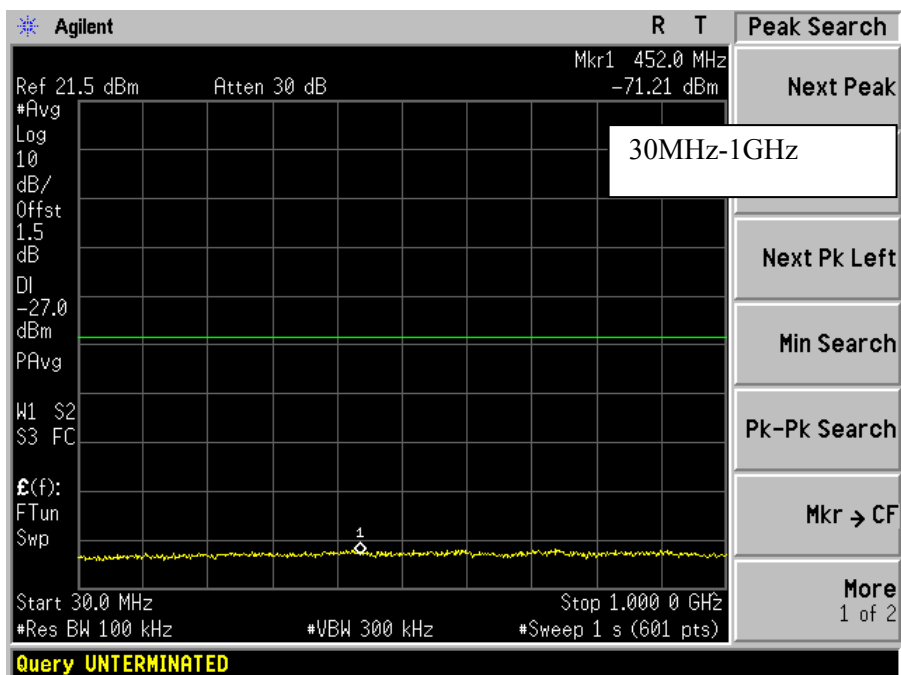

1GHz----18GHz

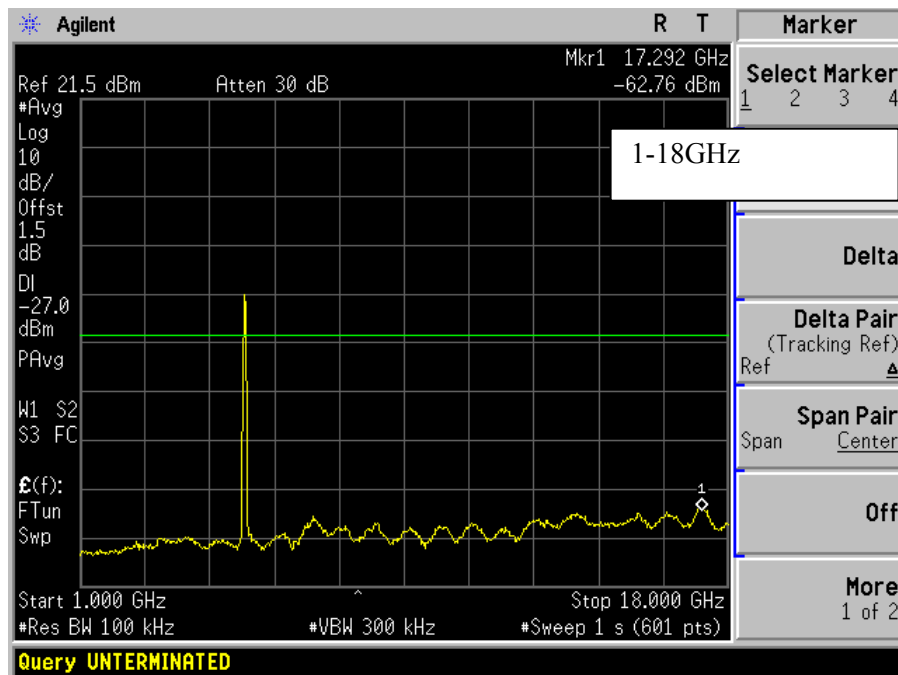


18GHz----40GHz

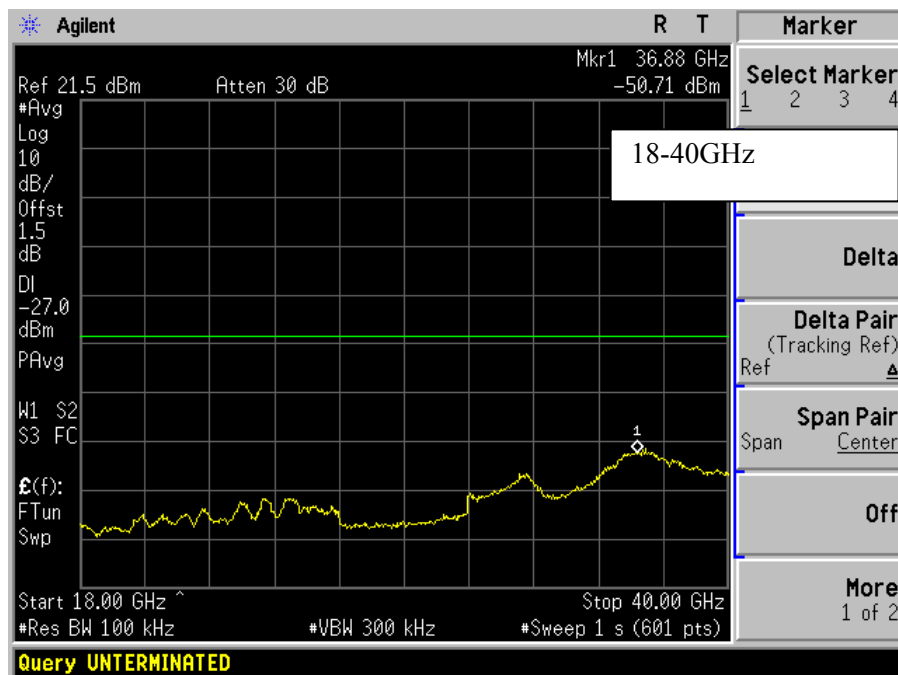


5470-5725 MHz

802.11n HT40,Low Channel


30MHz----1GHz

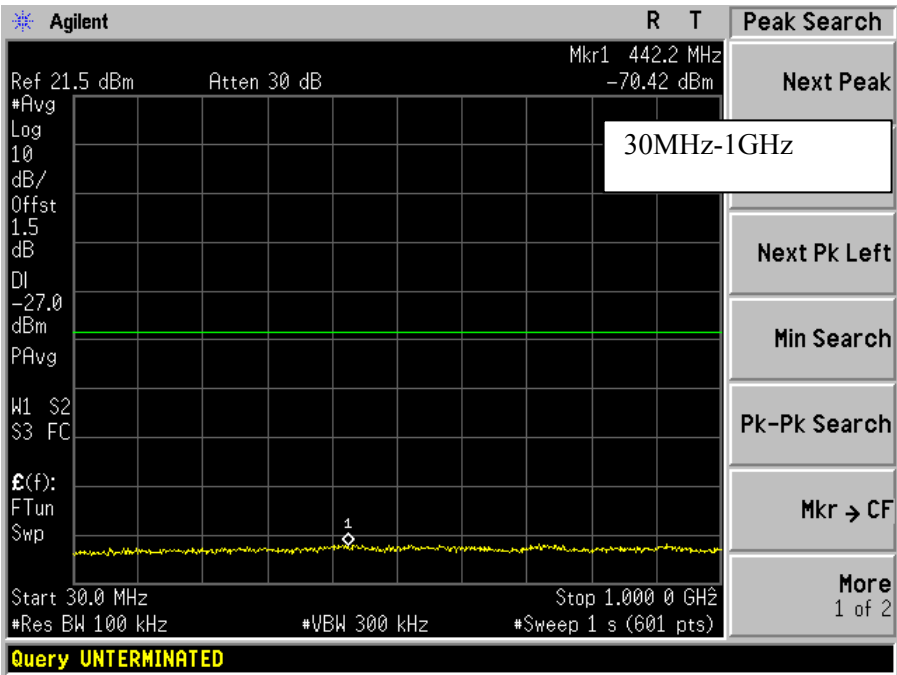

1GHz----18GHz

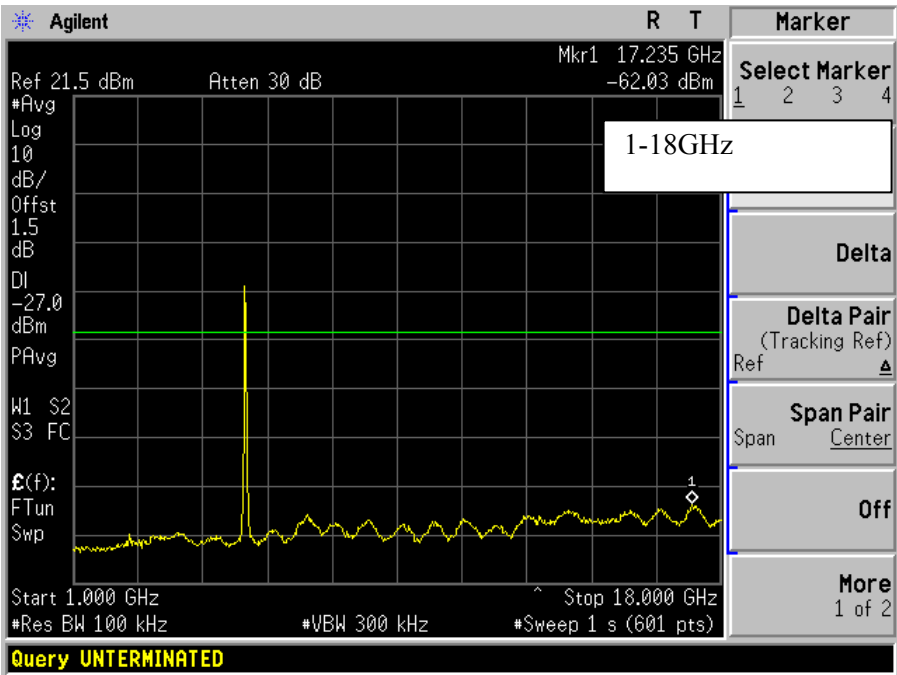


18GHz----40GHz

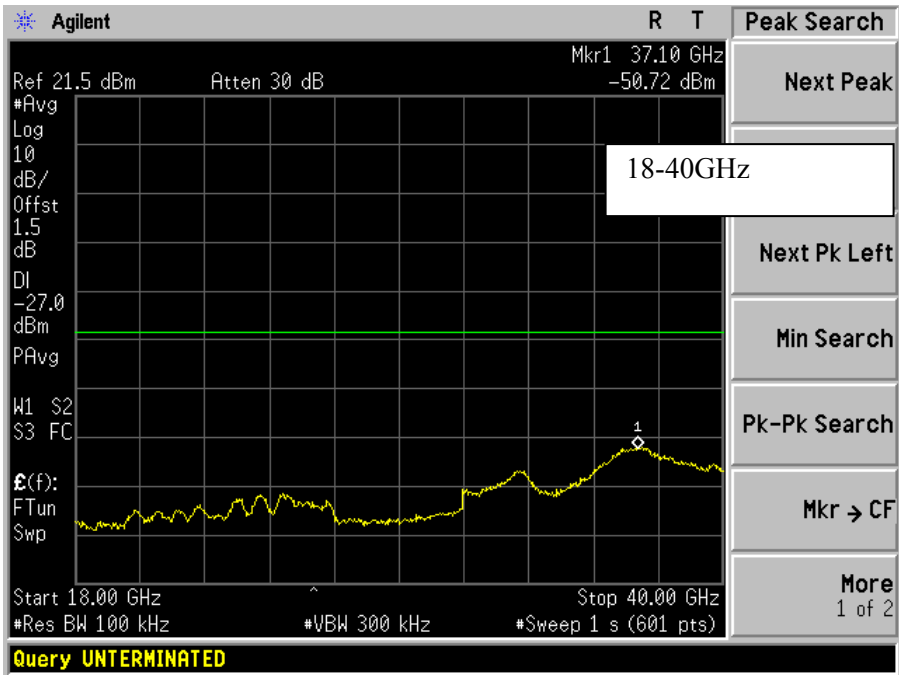


802.11n HT40, Middle Channel


30MHz----1GHz

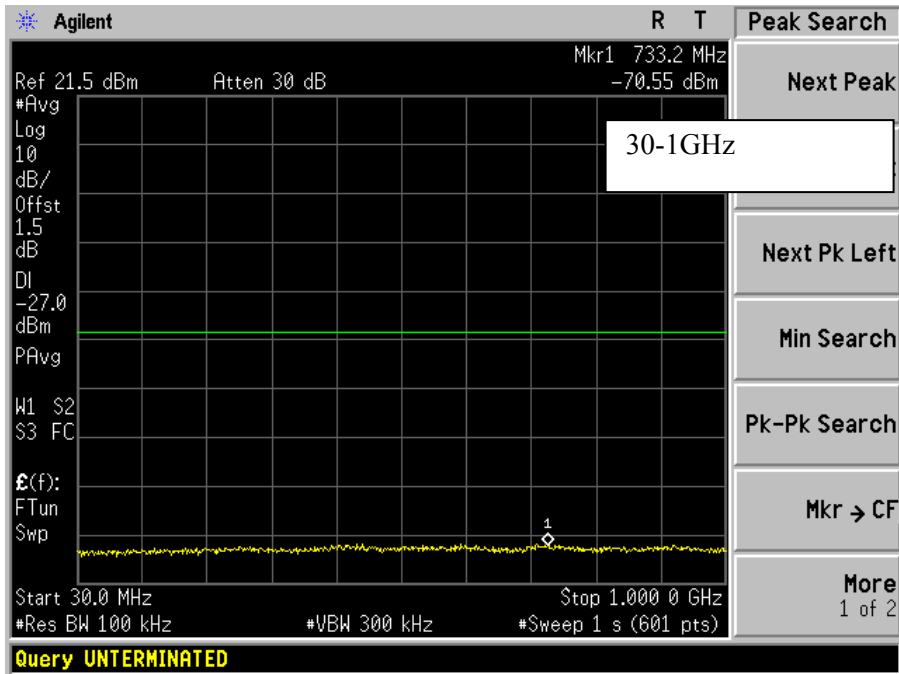

1GHz----18GHz

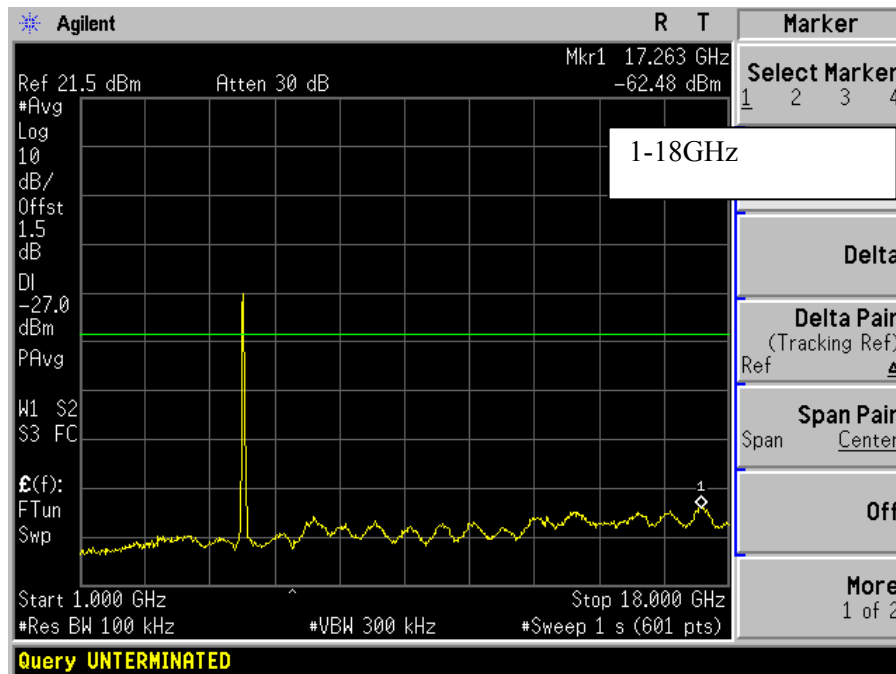


18GHz----40GHz

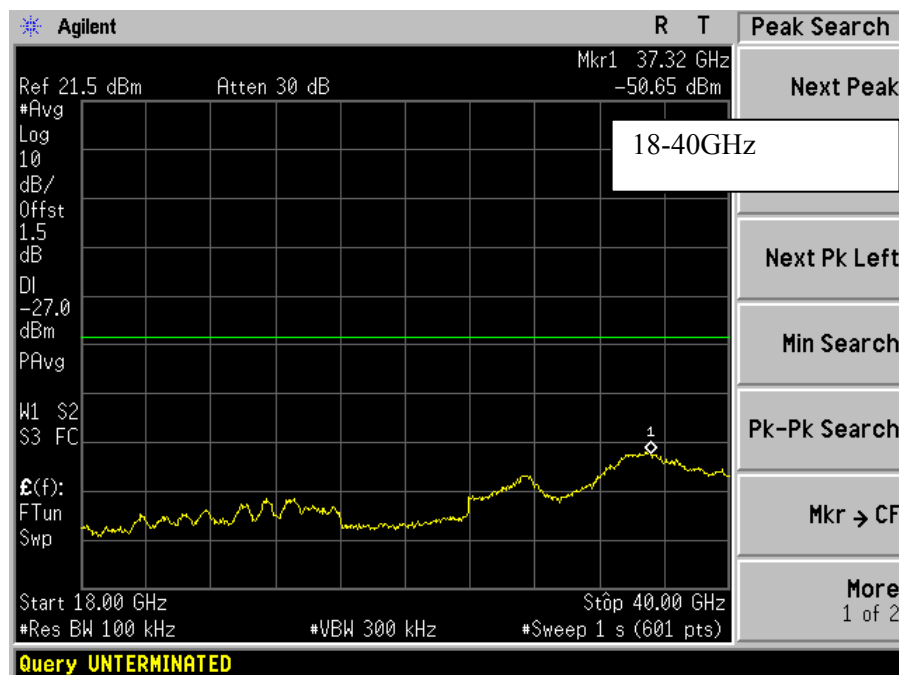


802.11n HT40, High Channel


30MHz----1GHz

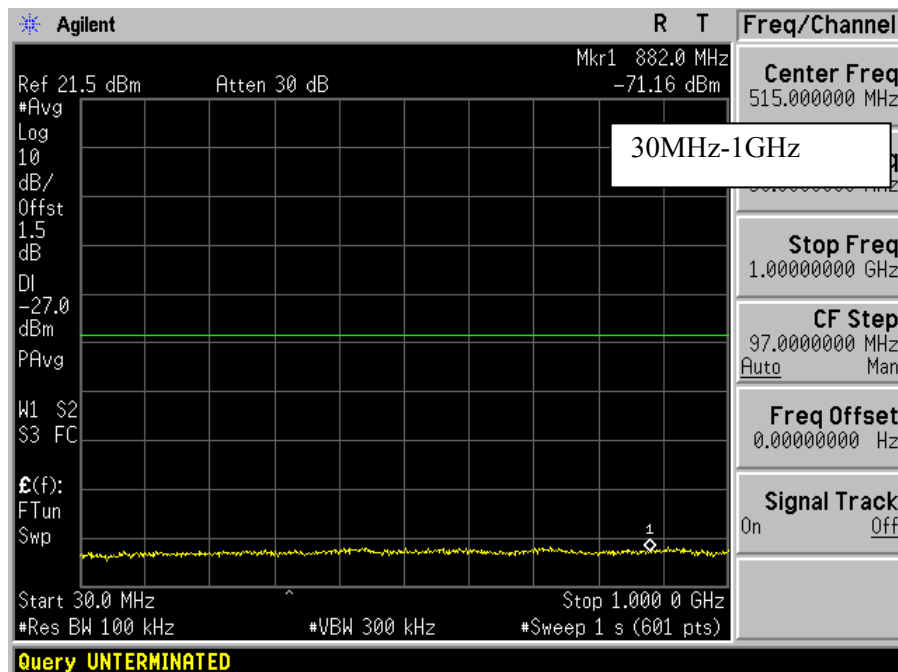

1GHz----18GHz

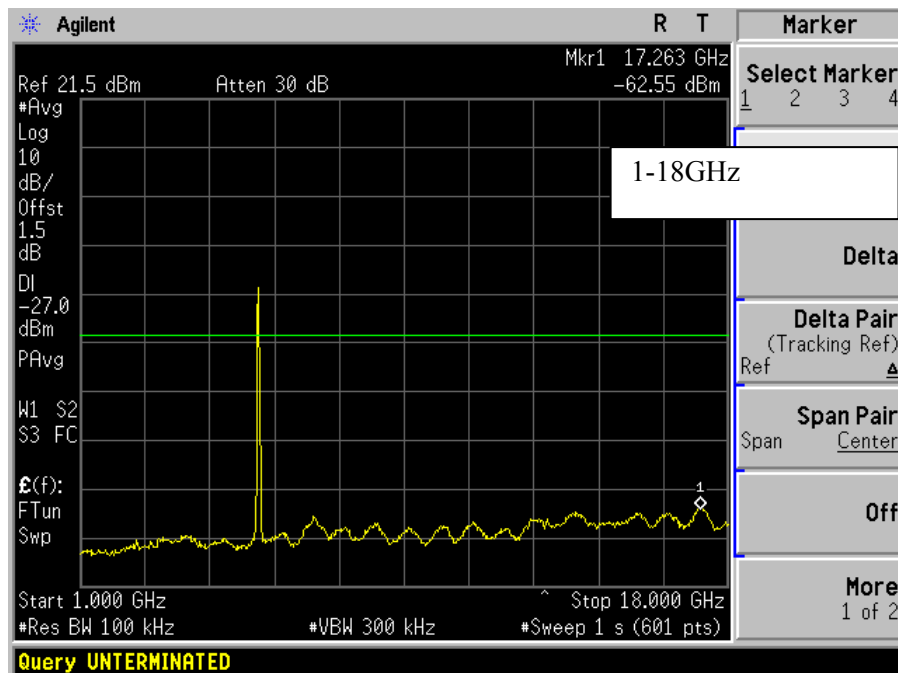

18GHz----40GHz

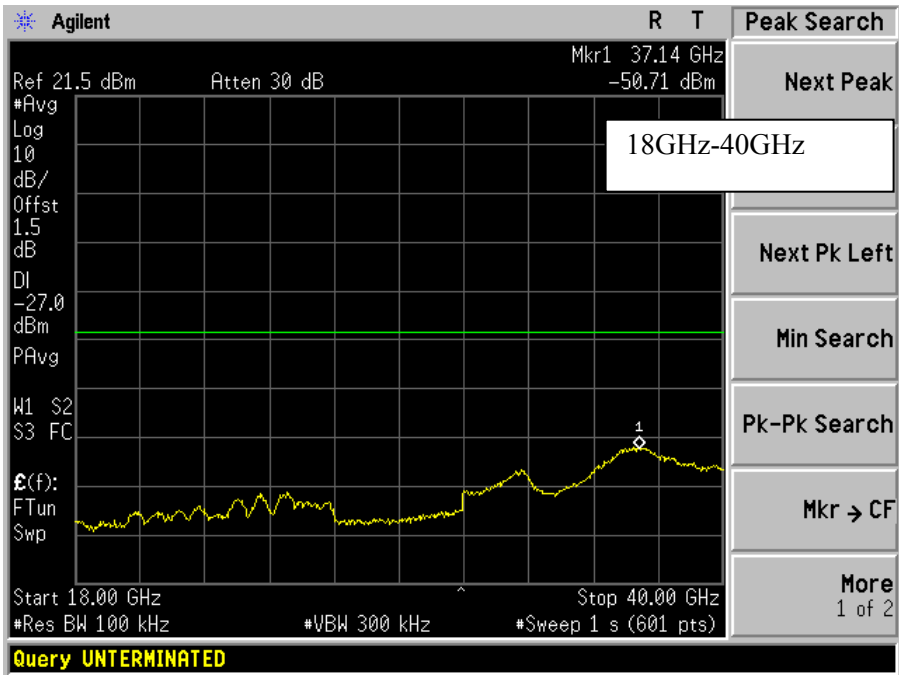


TX Chain 2


5250-5350 MHz

802.11a, Low Channel


30MHz---1GHz

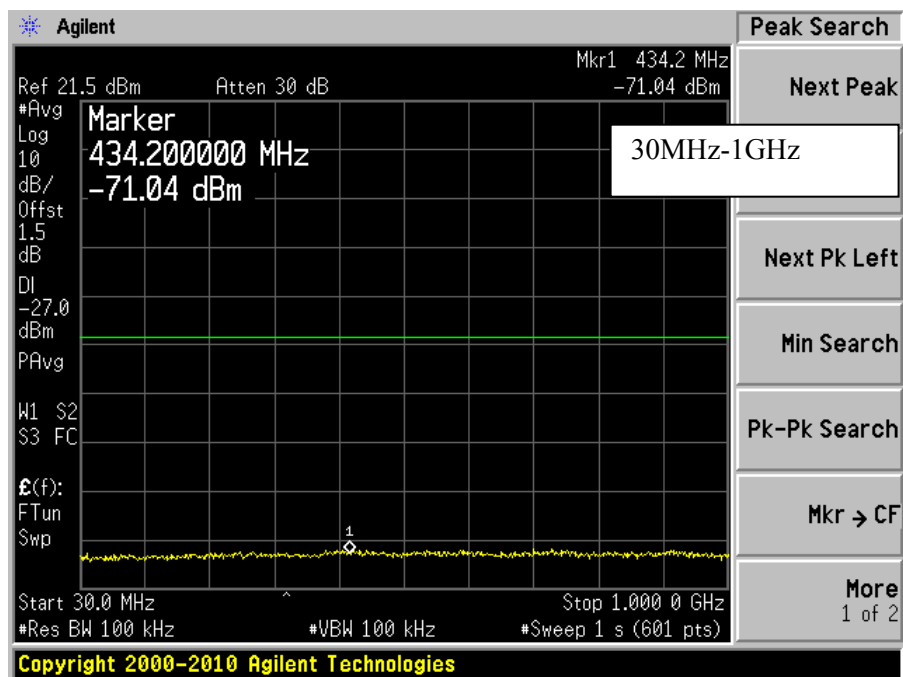

1GHz---18GHz

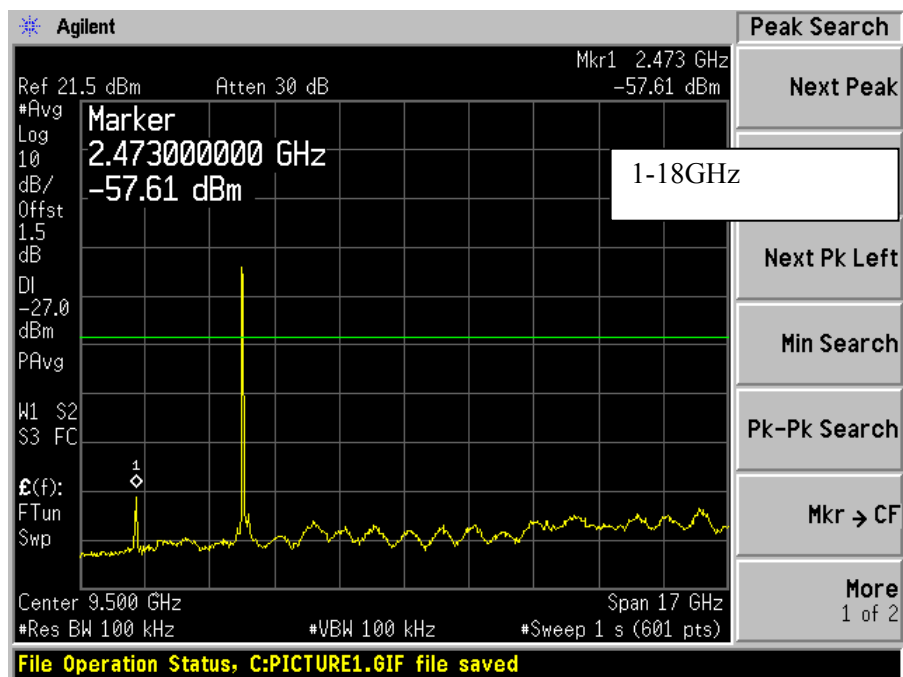


18GHz----40GHz

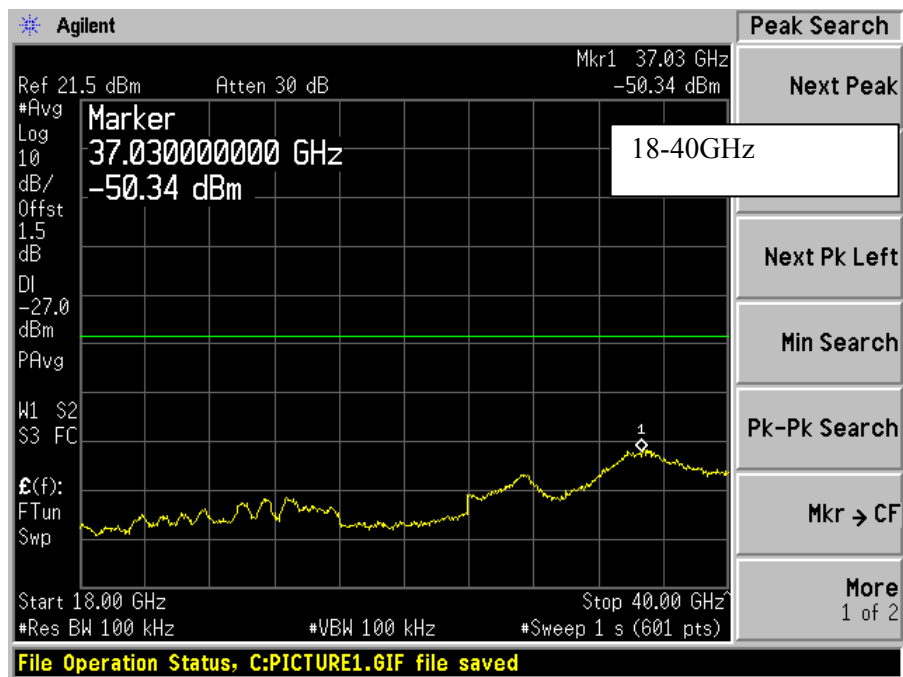


802.11a, Middle Channel


30MHz----1GHz

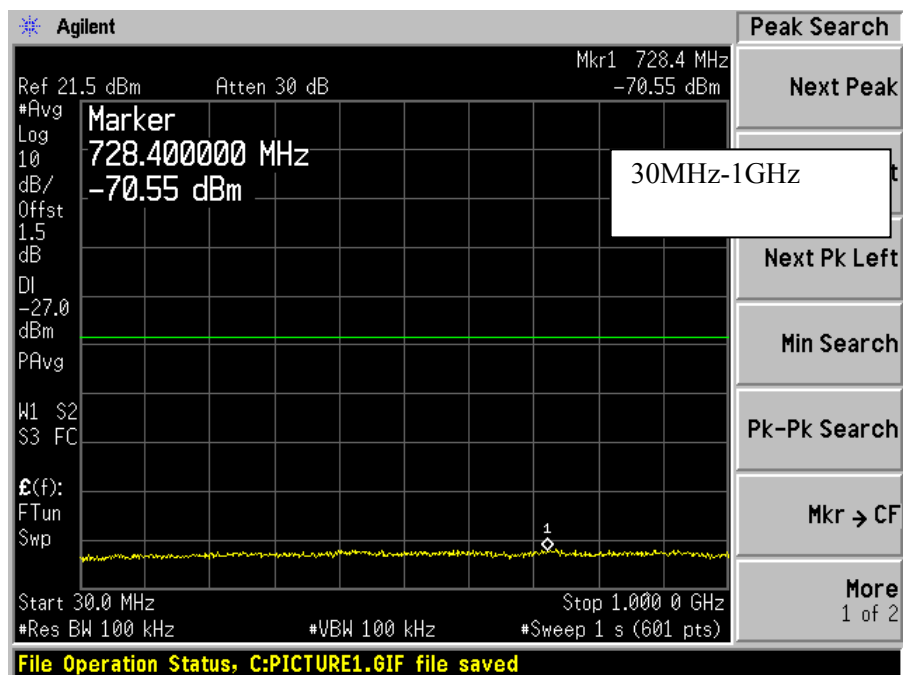

1GHz----18GHz

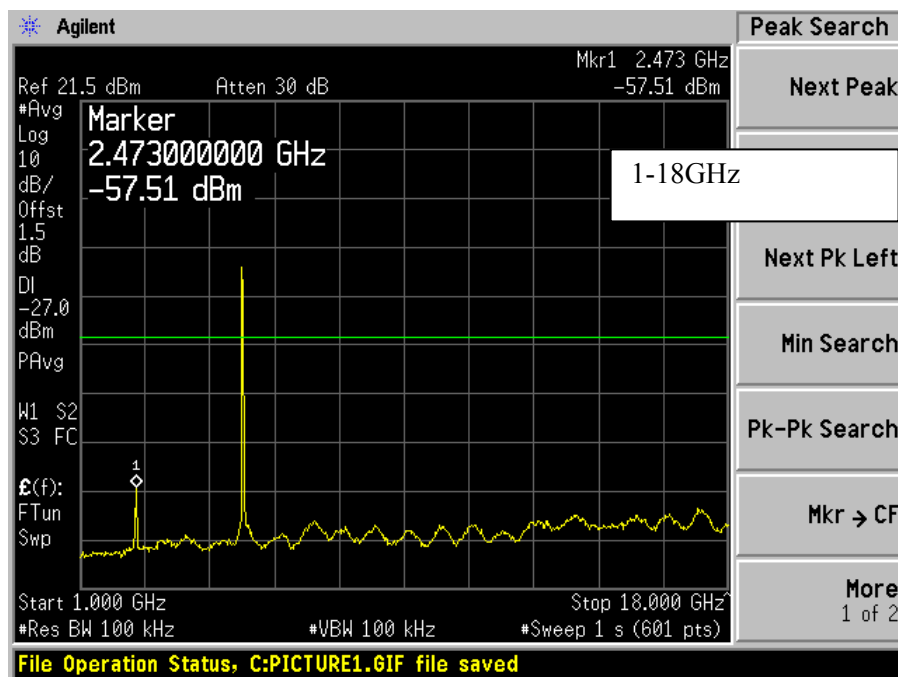


18GHz----40GHz

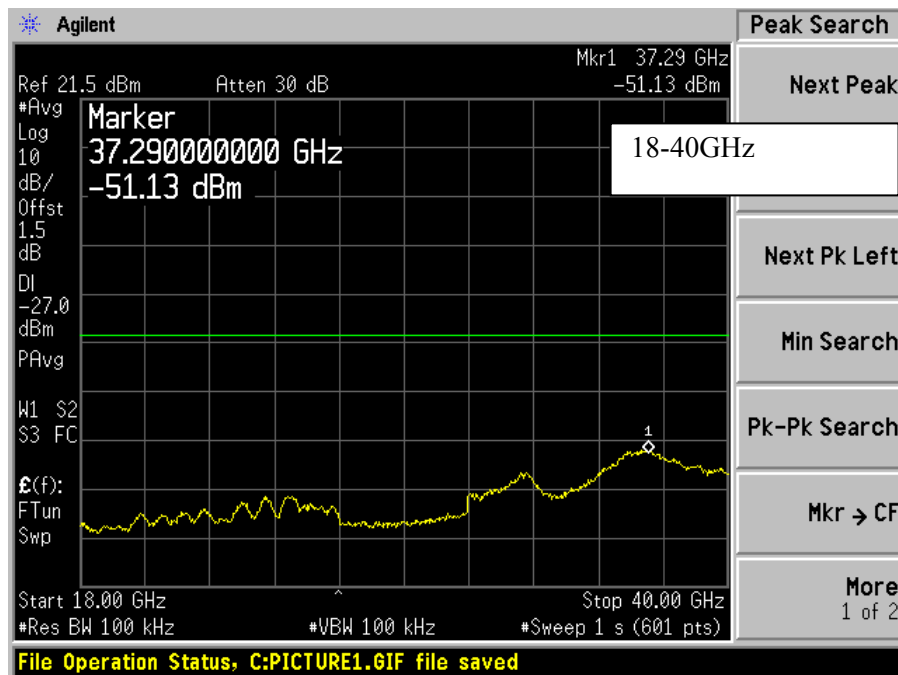


802.11a, High Channel


30MHz----1GHz

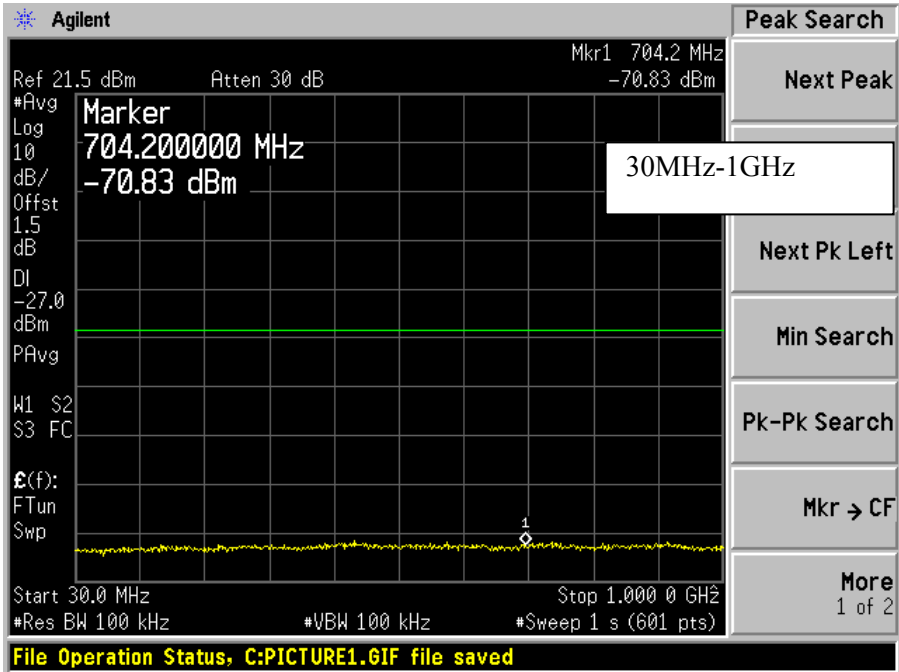

1GHz----18GHz

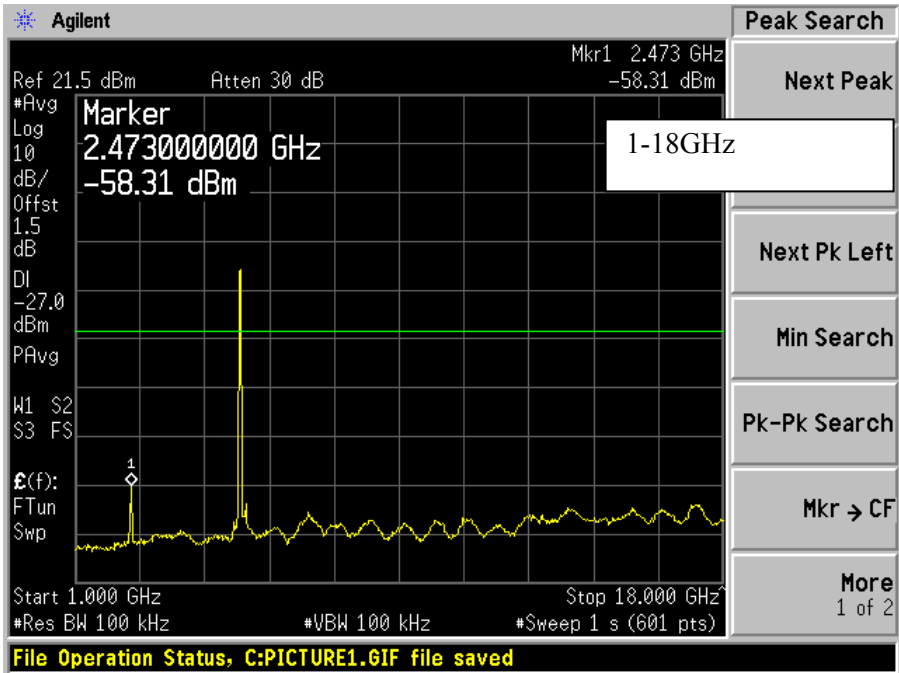


18GHz----40GHz

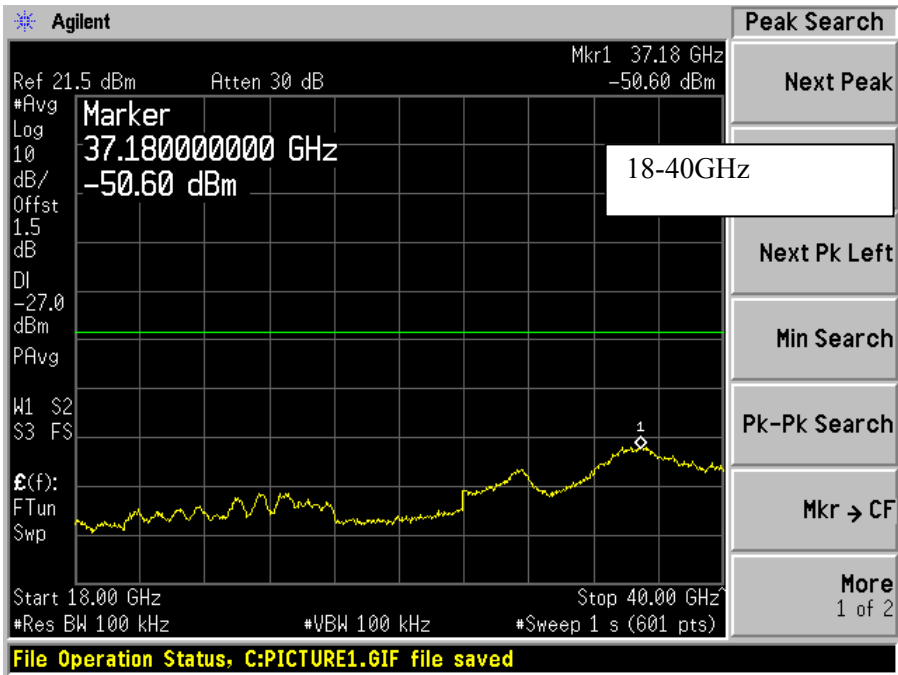


5470-5725 MHz

802.11a, Low Channel


30MHz----1GHz

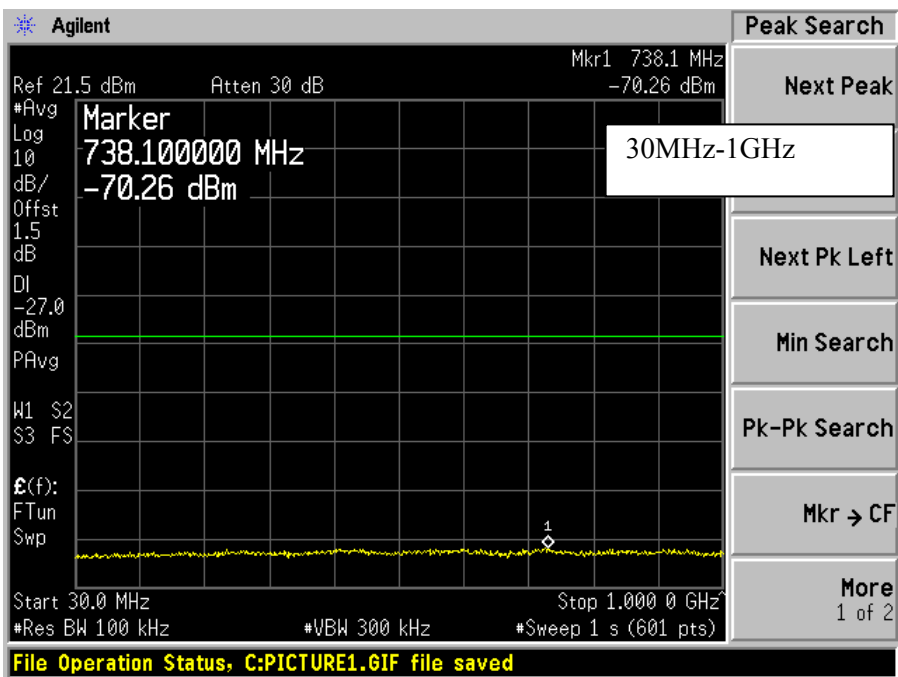

1GHz----18GHz

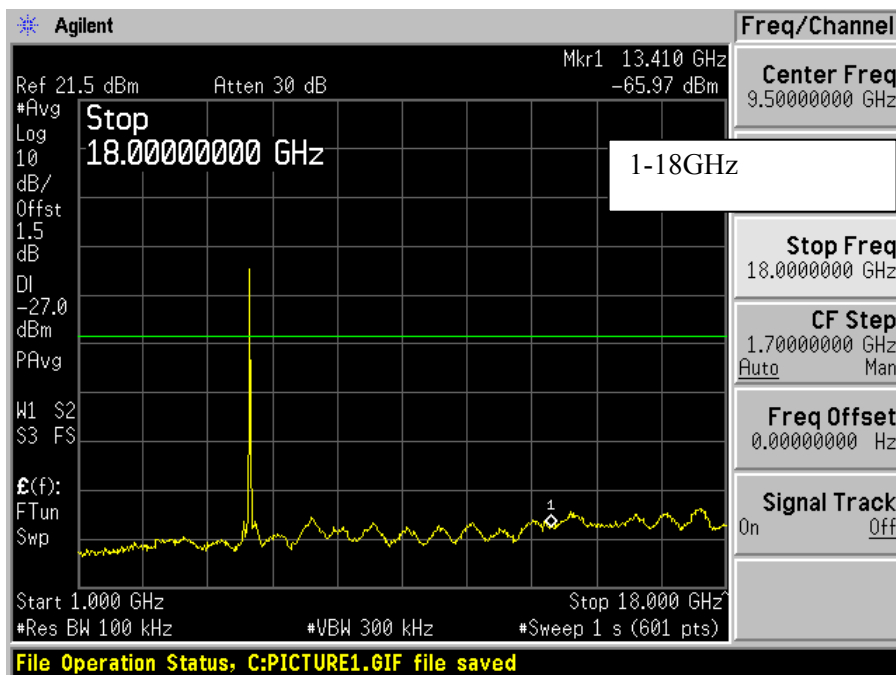


18GHz----40GHz

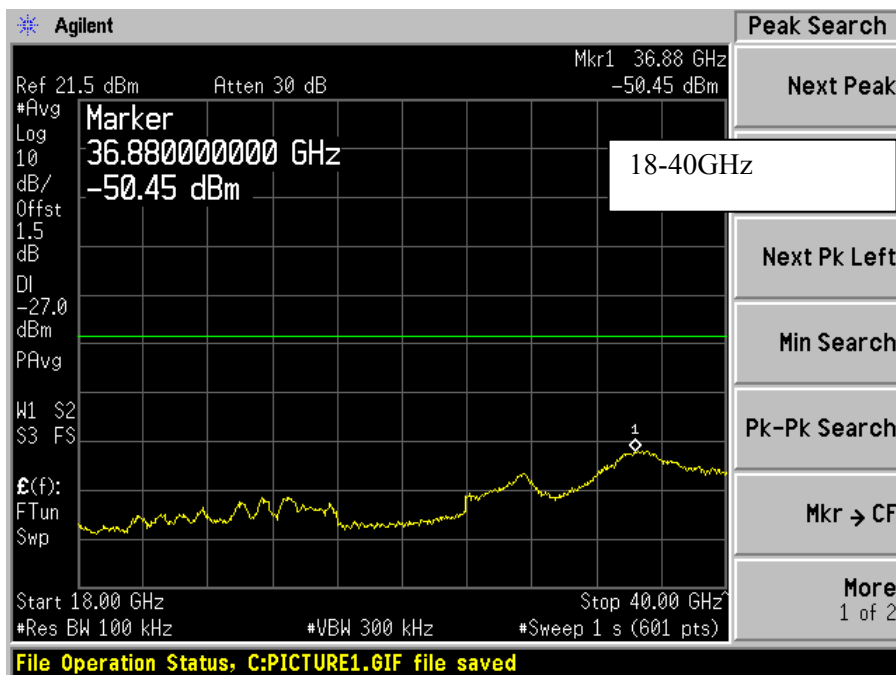


802.11a, Middle Channel


30MHz---1GHz

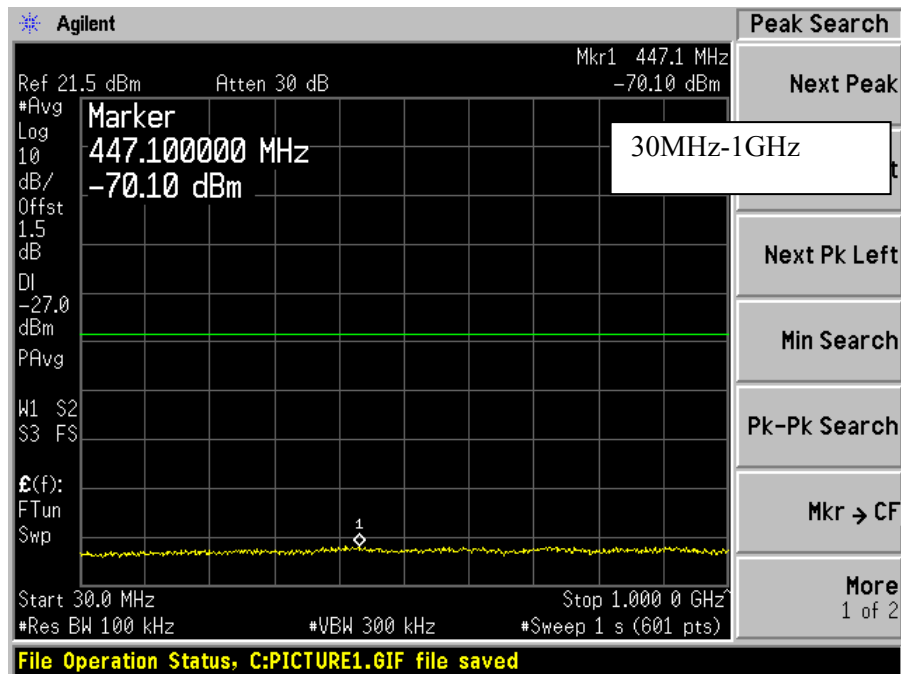

1GHz---18GHz

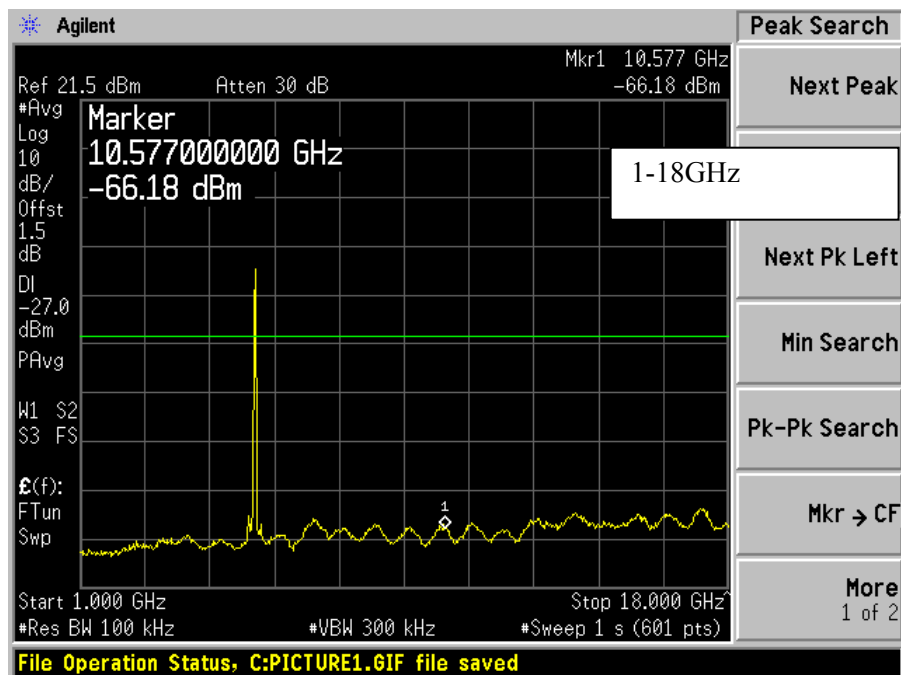


18GHz----40GHz

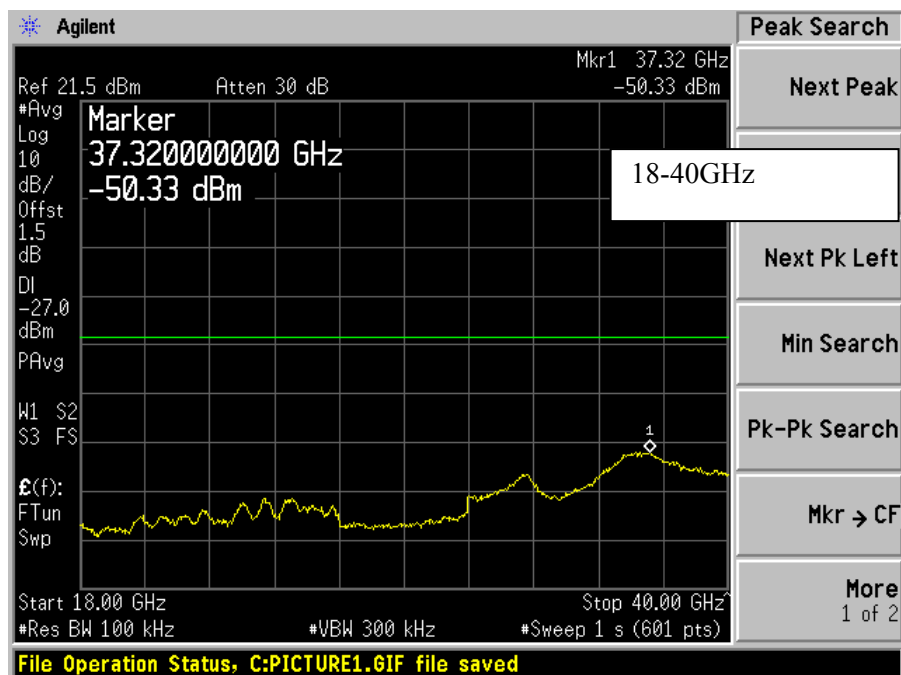


802.11a, High Channel


30MHz----1GHz

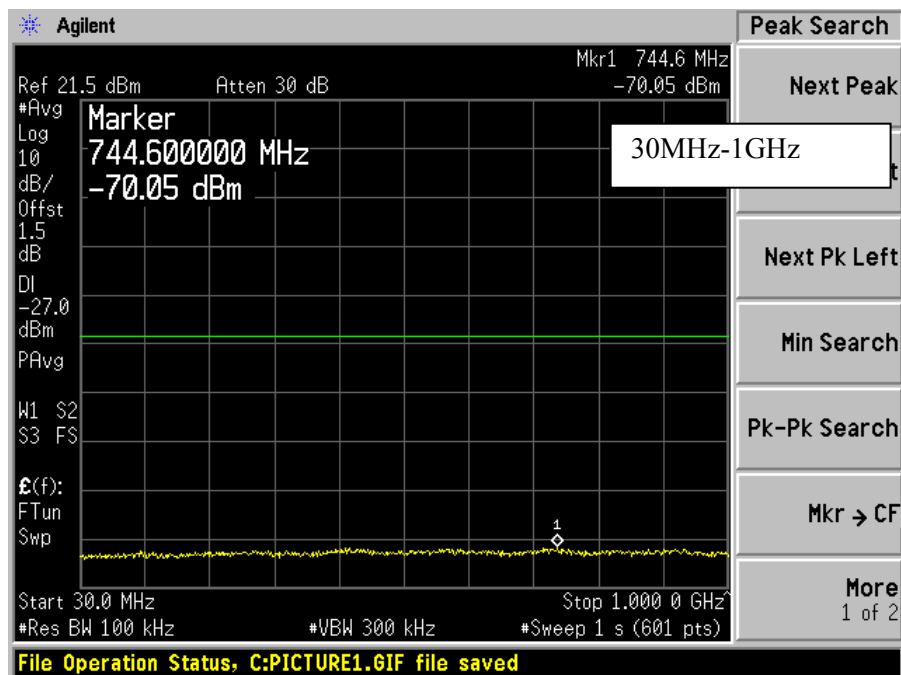

1GHz----18GHz

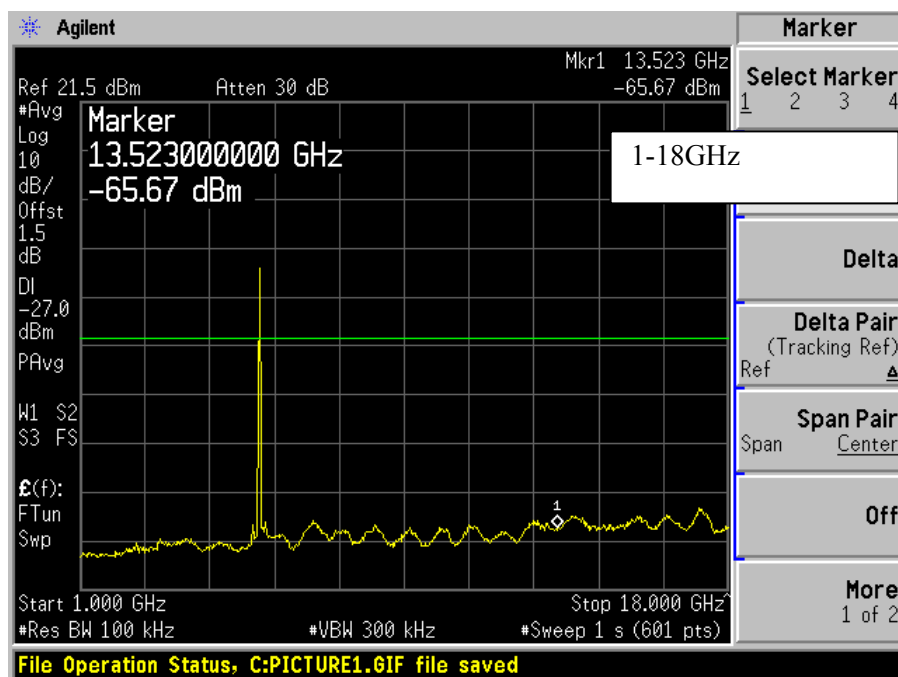


18GHz----40GHz

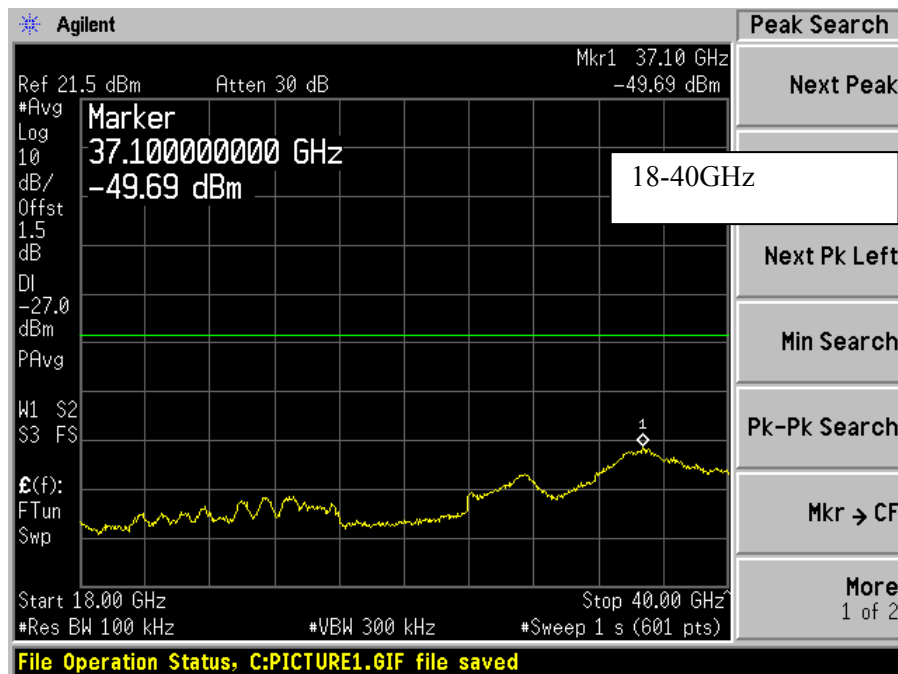


5250-5350 MHz

802.11n HT20, Low Channel


30MHz----1GHz

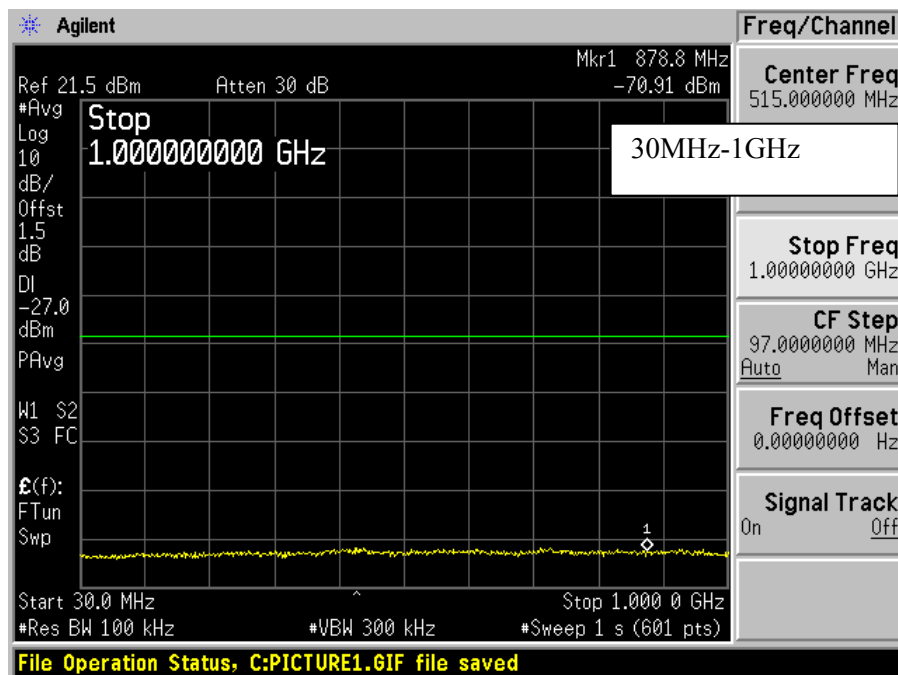

1GHz----18GHz

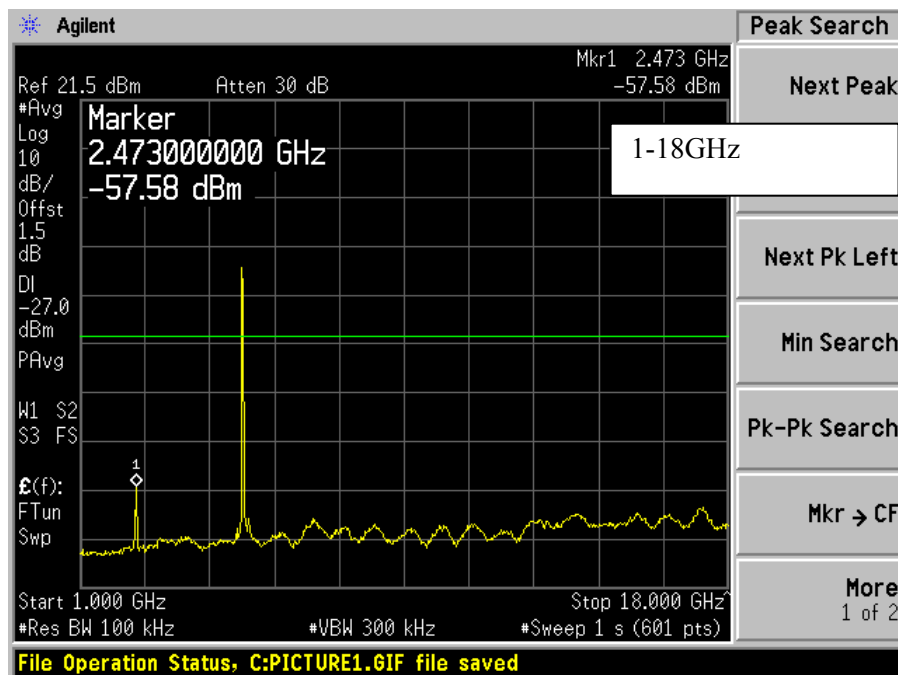


18GHz----40GHz

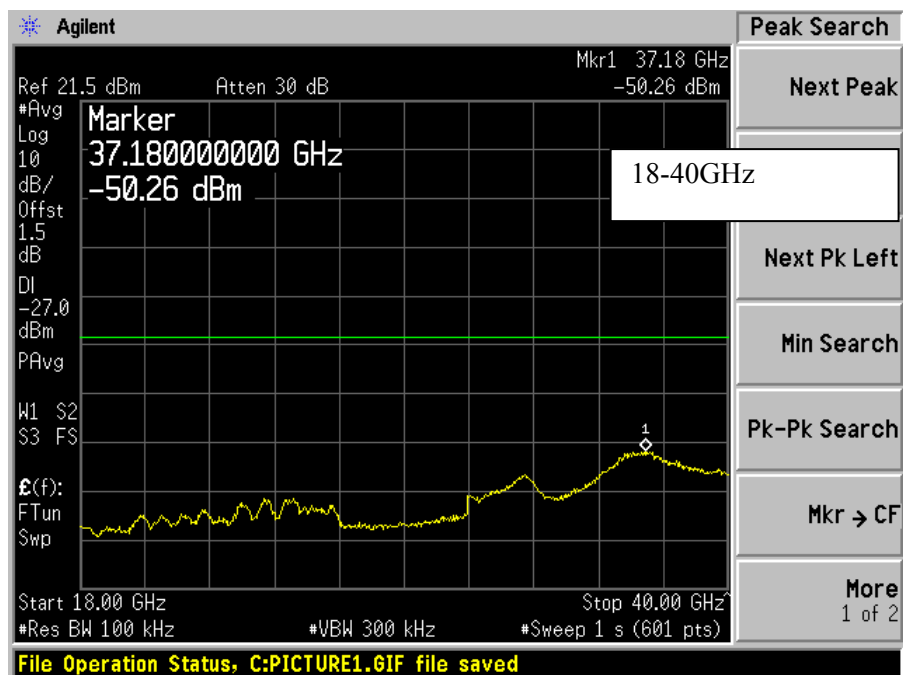


802.11n HT20, Middle Channel


30MHz----1GHz

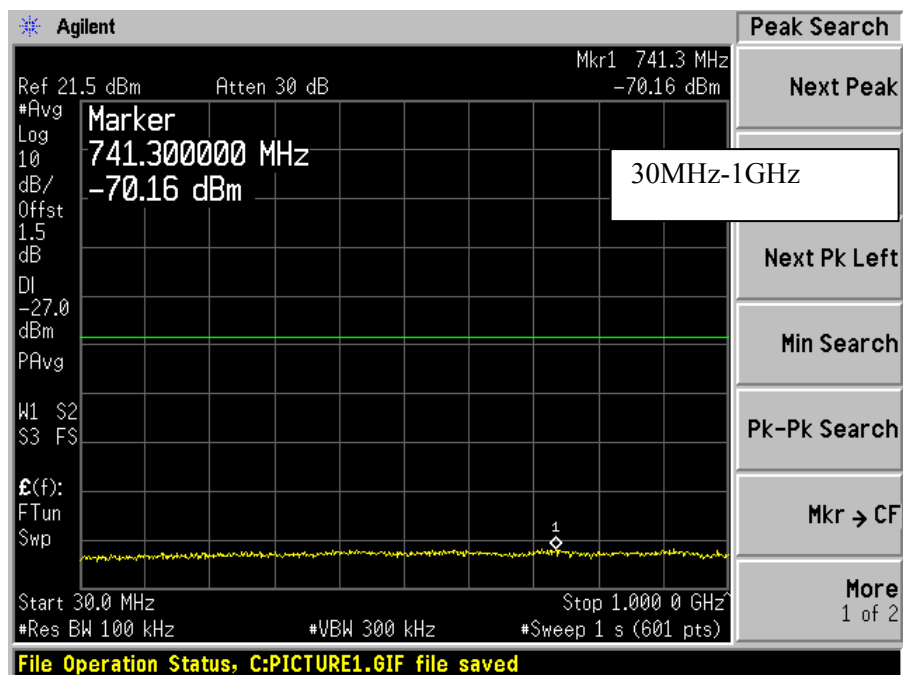

1GHz----18GHz

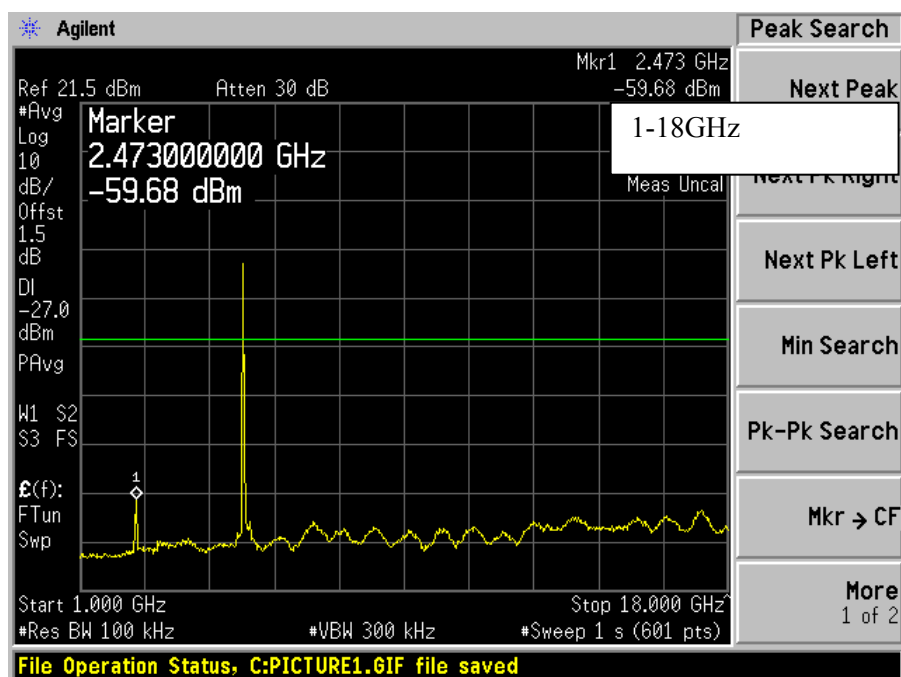


18GHz----40GHz

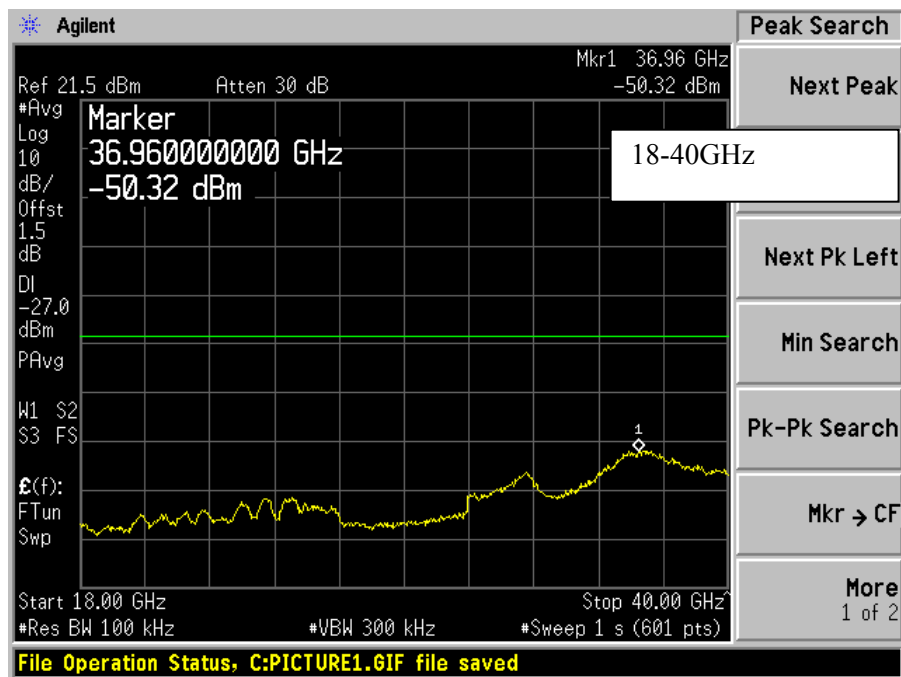


802.11n HT20, High Channel


30MHz----1GHz

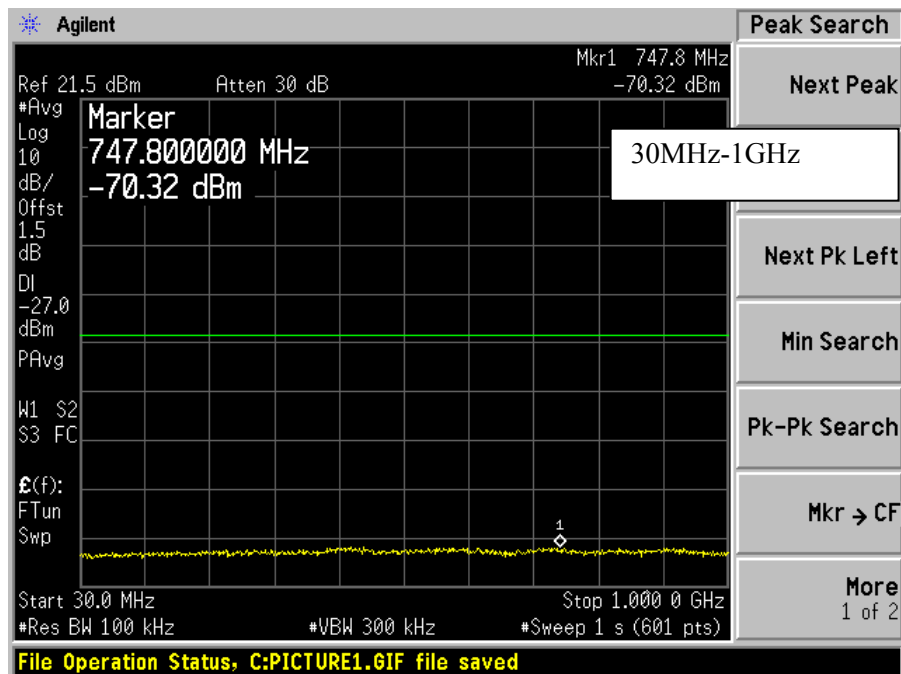

1GHz----18GHz

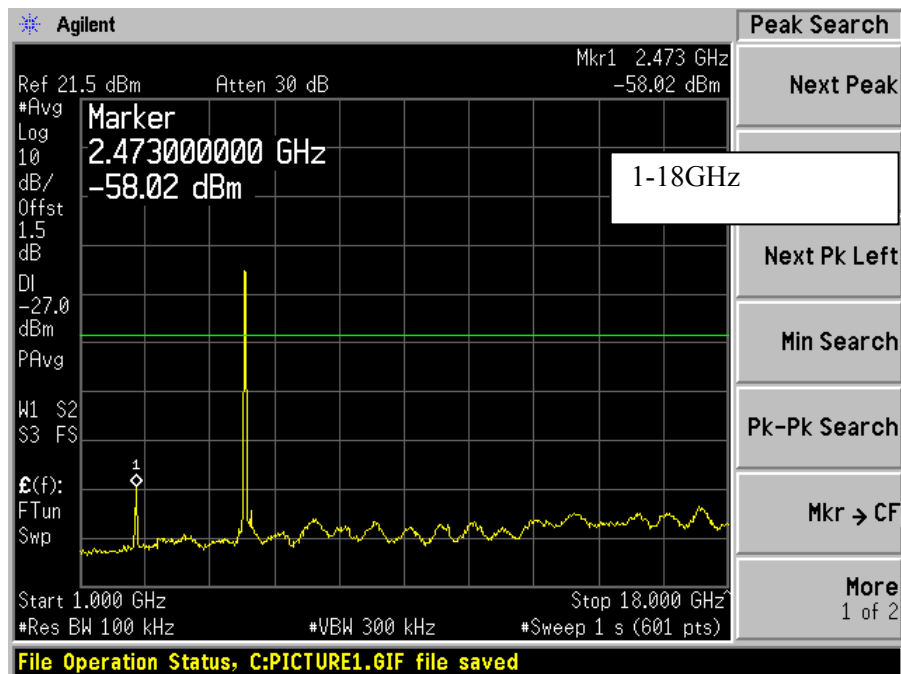


18GHz----40GHz

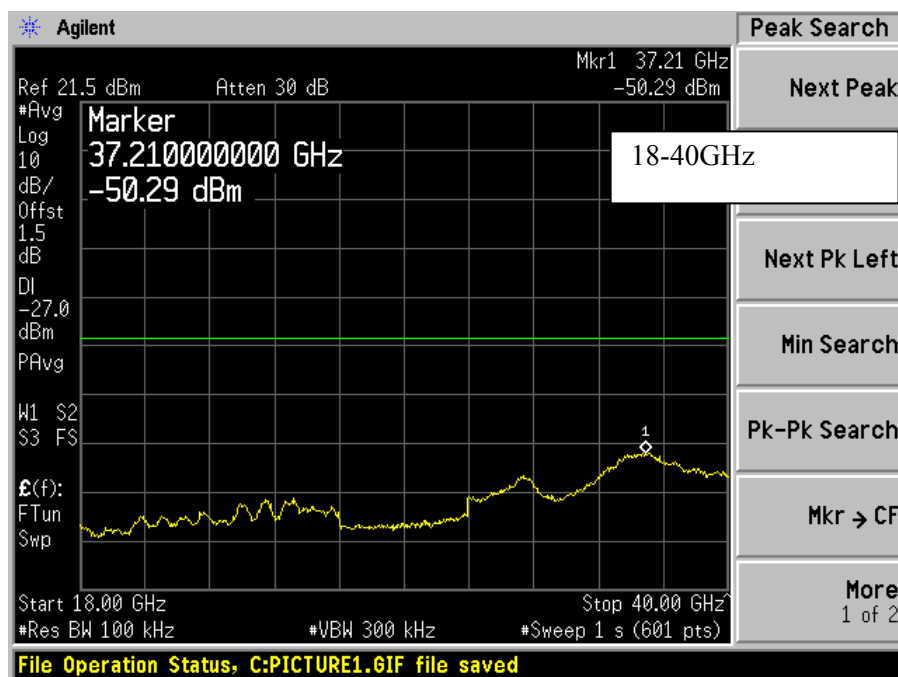


5470-5725 MHz

802.11n HT20, Low Channel


30MHz----1GHz

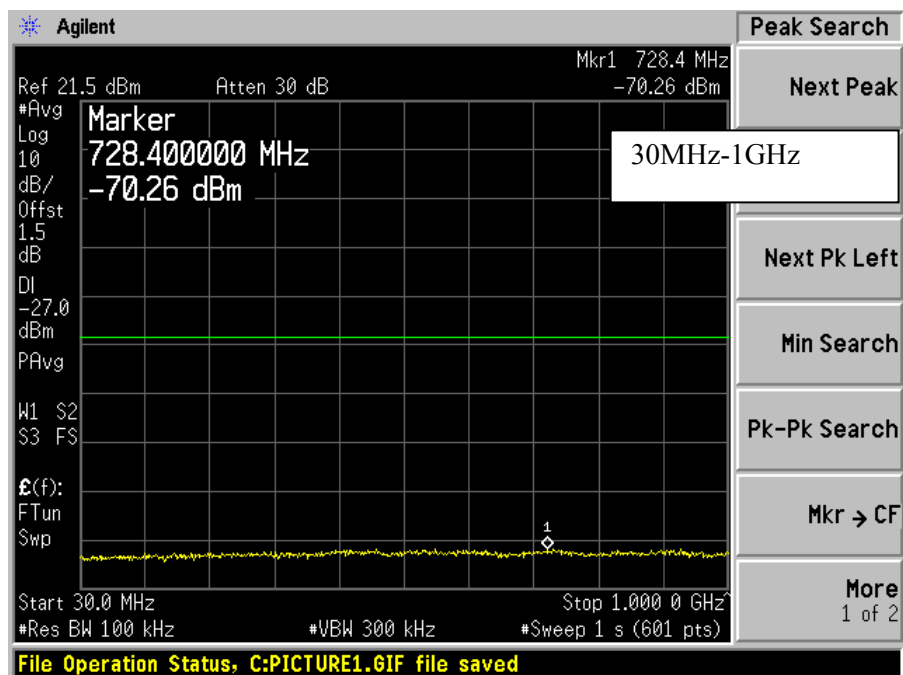

1GHz----18GHz

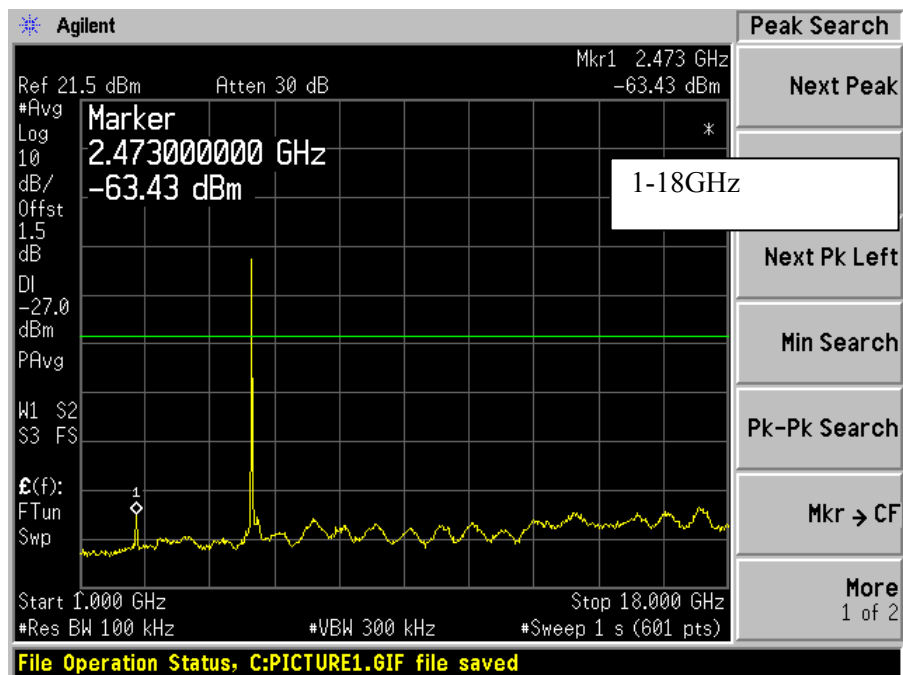


18GHz----40GHz

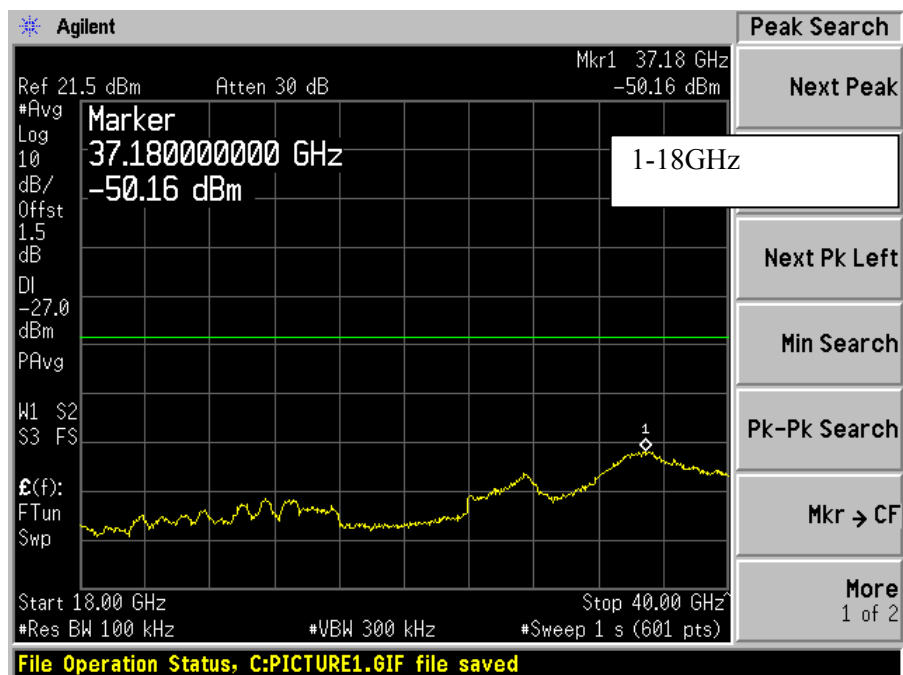


802.11n HT20, Middle Channel


30MHz----1GHz

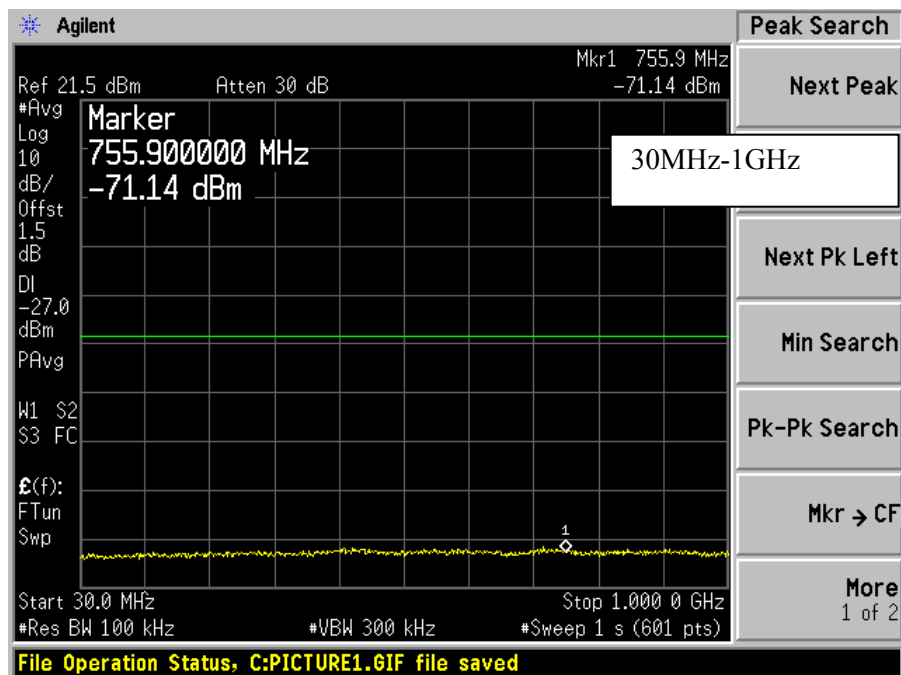

1GHz----18GHz

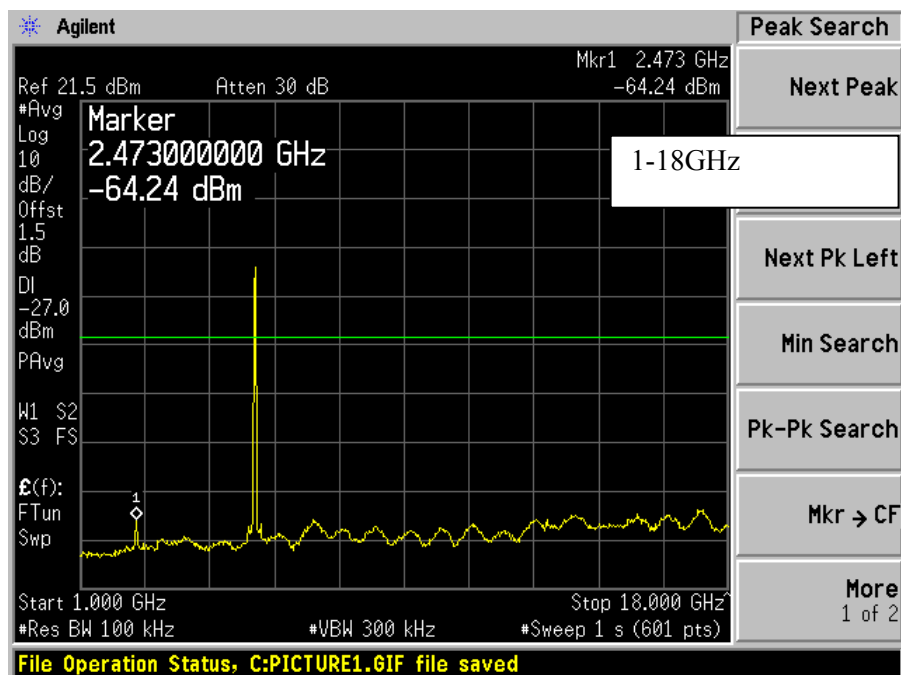


18GHz----40GHz

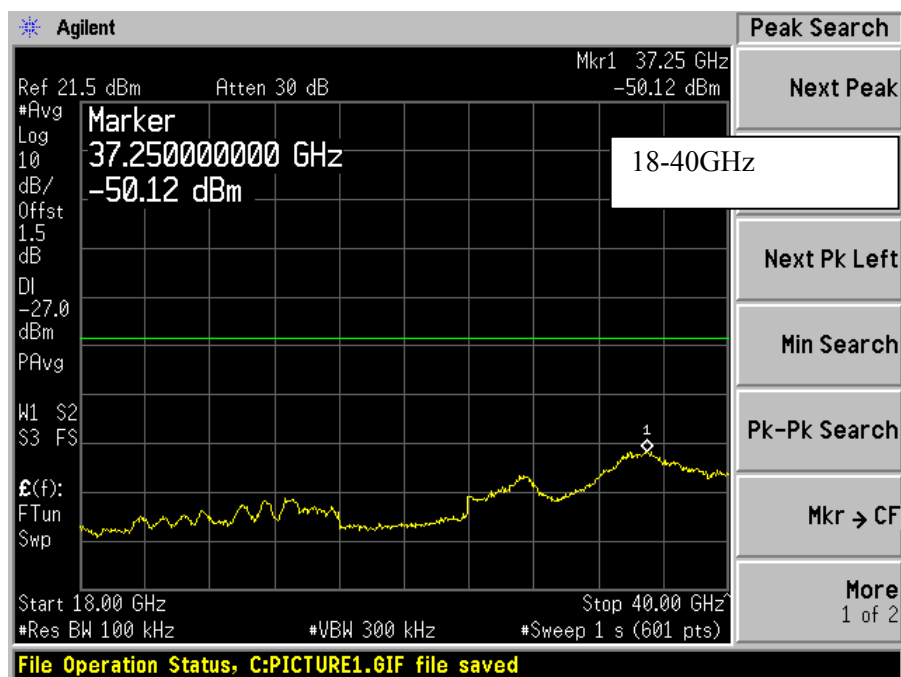


802.11n HT20, High Channel


30MHz----1GHz

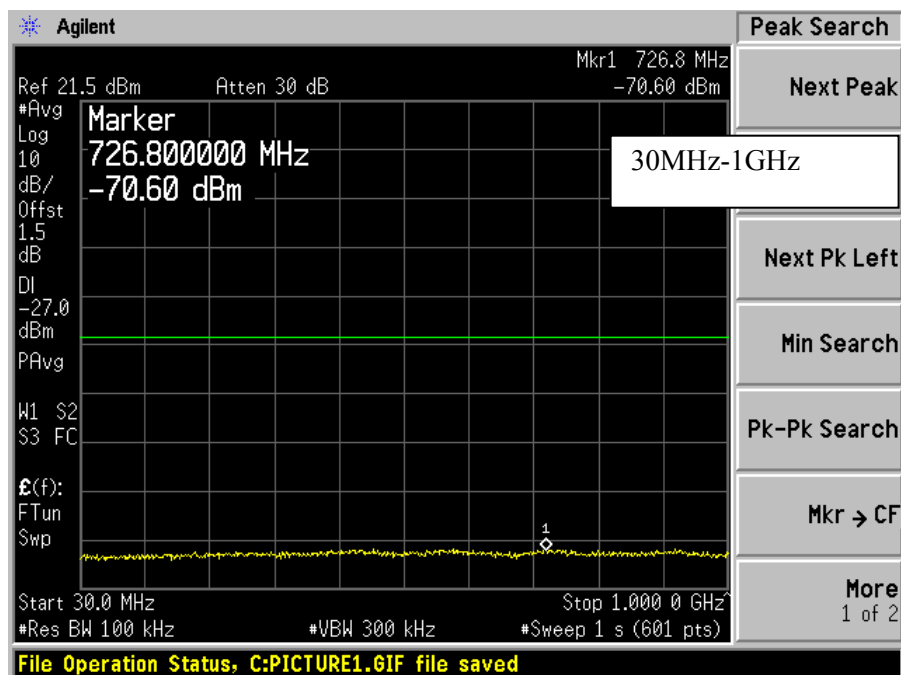

1GHz---18GHz

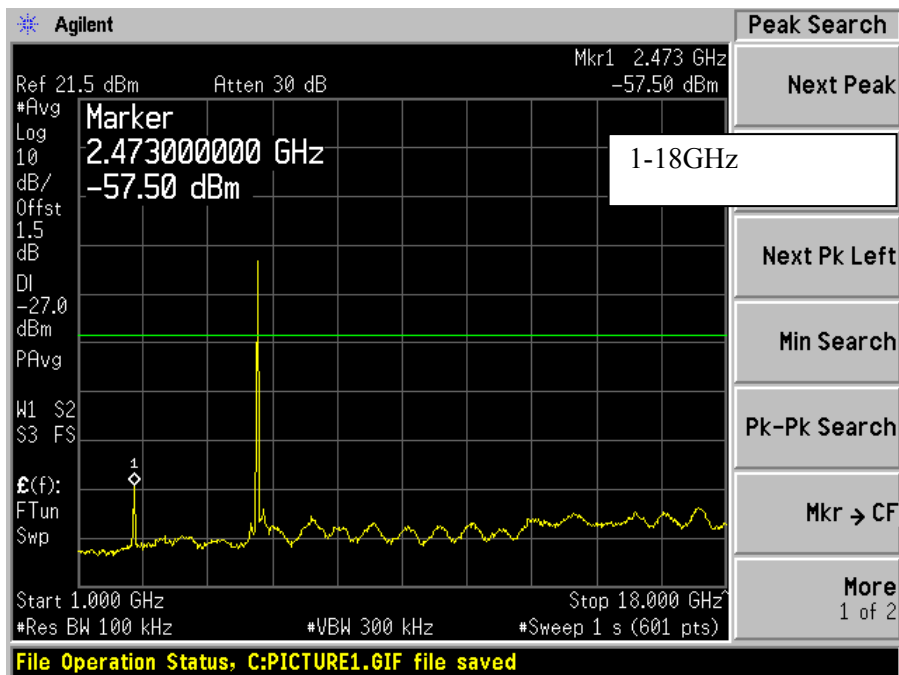


18GHz----40GHz

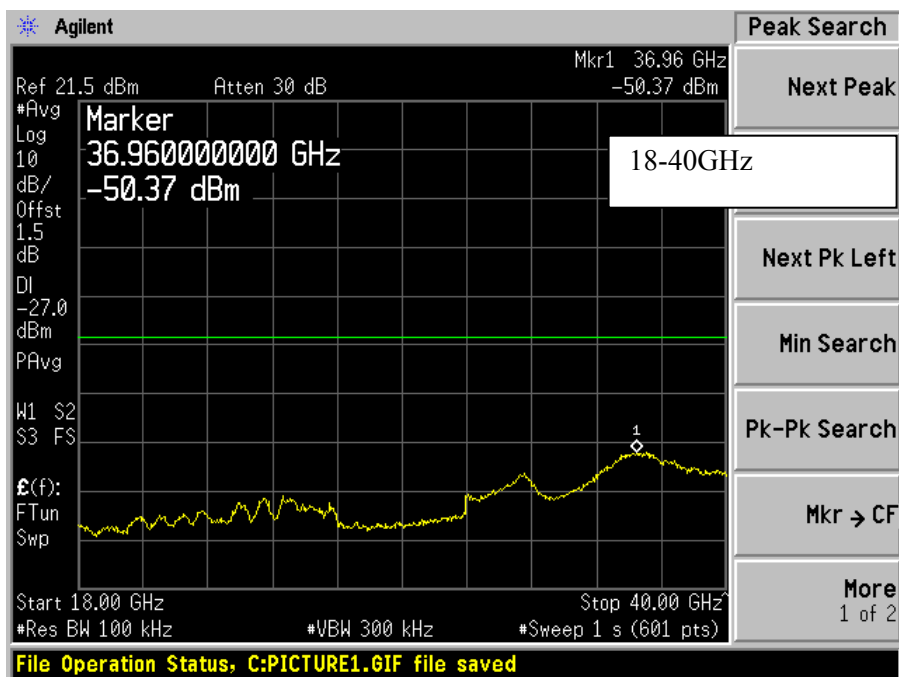


5250-5350 MHz

802.11n HT40, Low Channel


30MHz----1GHz

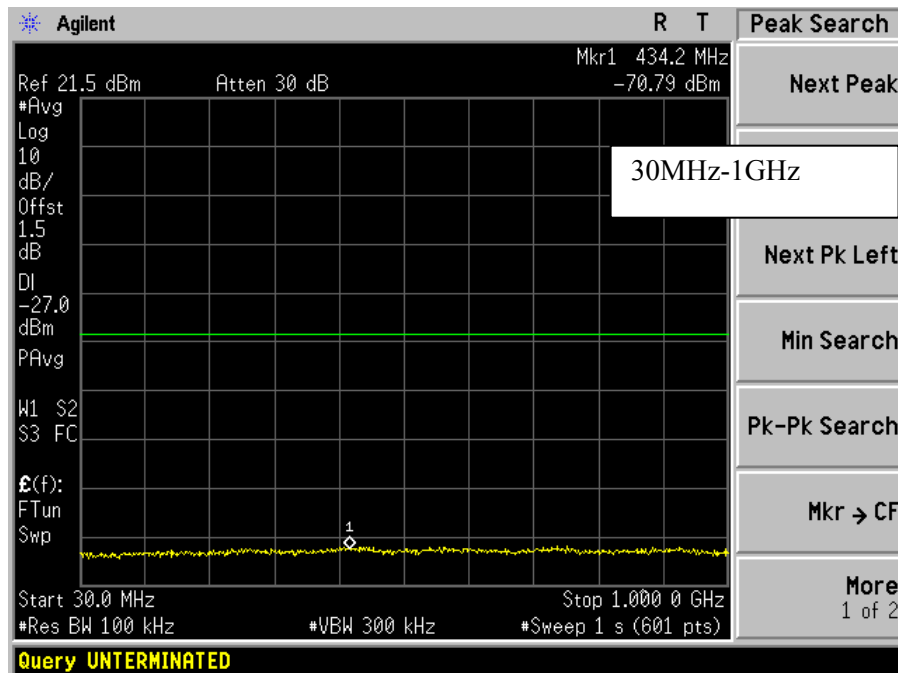

1GHz----18GHz

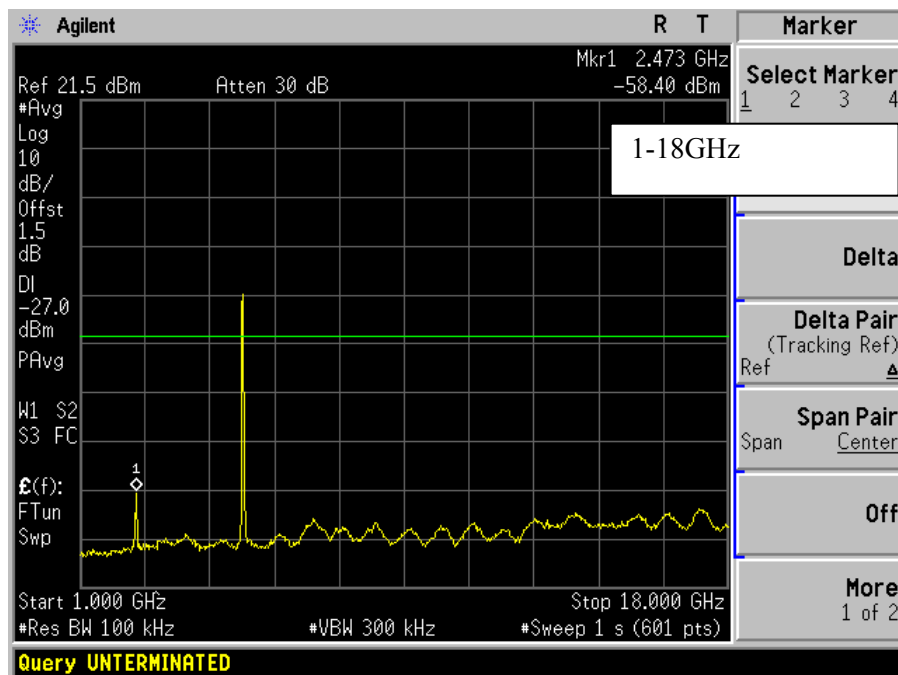


18GHz----40GHz

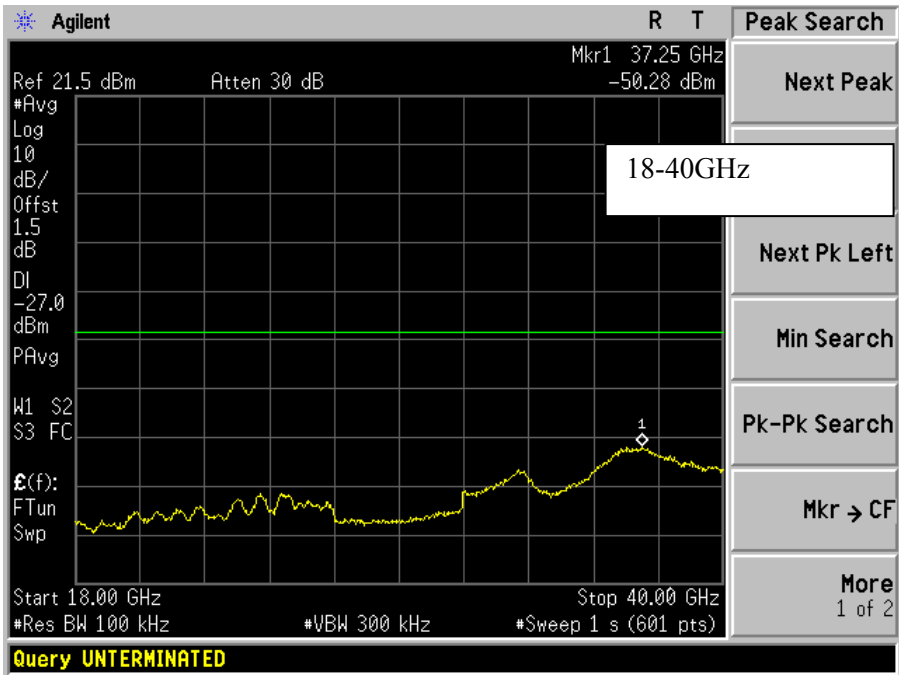


802.11n HT40, High Channel


30MHz----1GHz

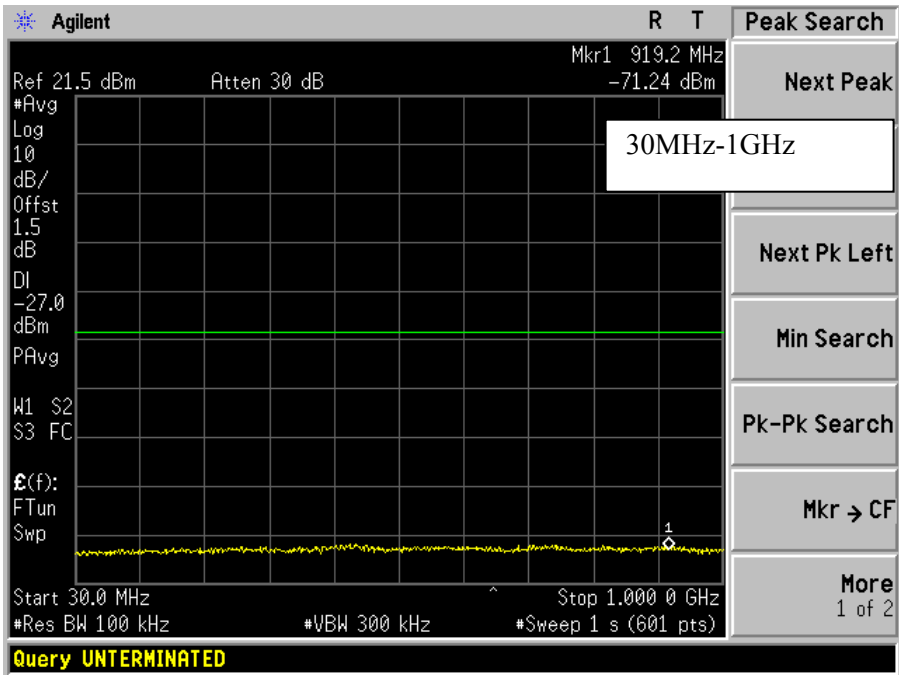

1GHz---18GHz

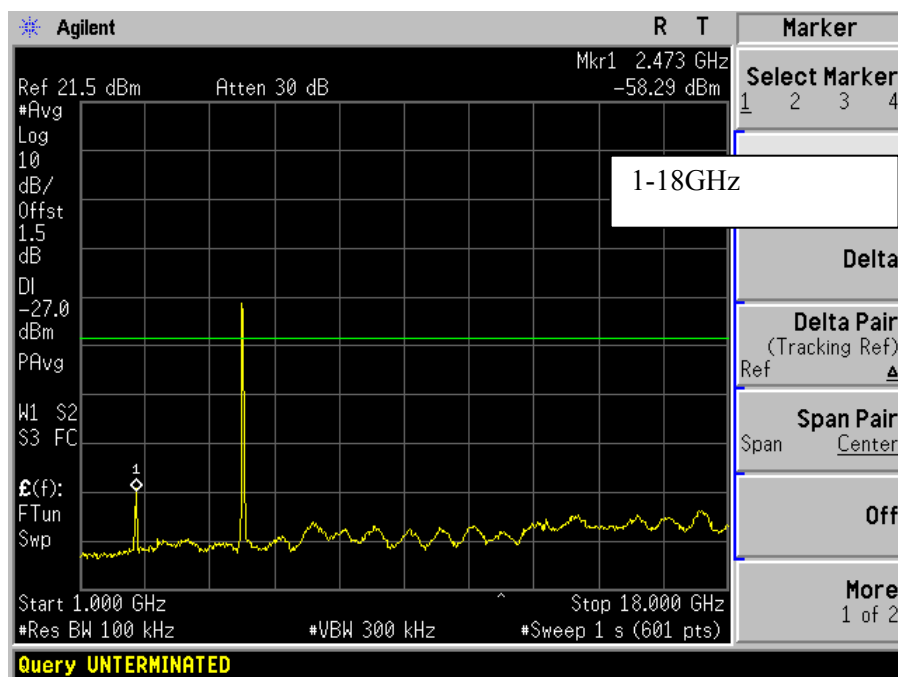


18GHz---40GHz

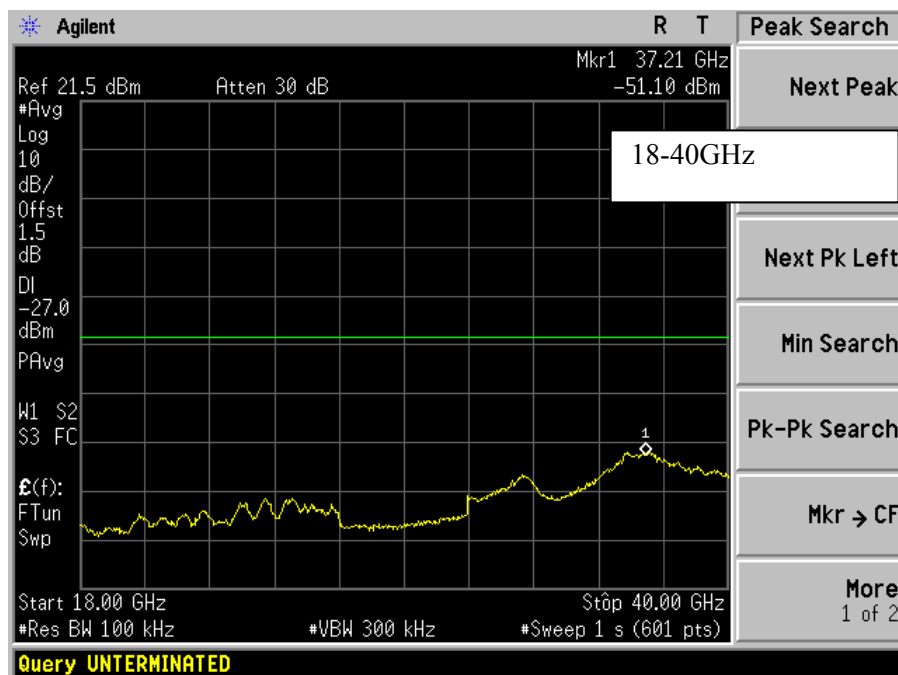


5470-5725 MHz

802.11n HT40, Low Channel


30MHz----1GHz

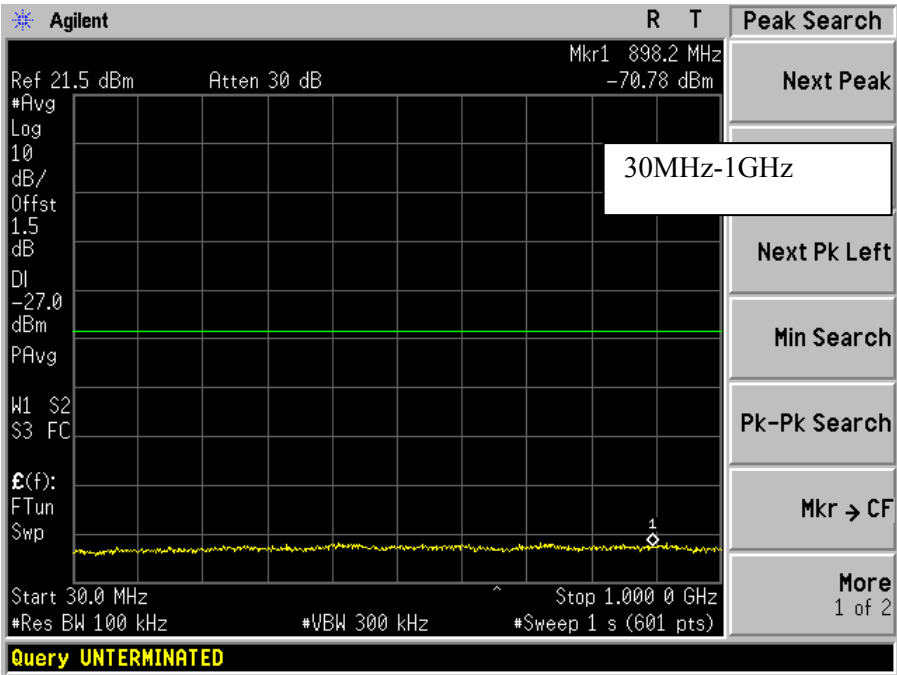

1GHz----18GHz

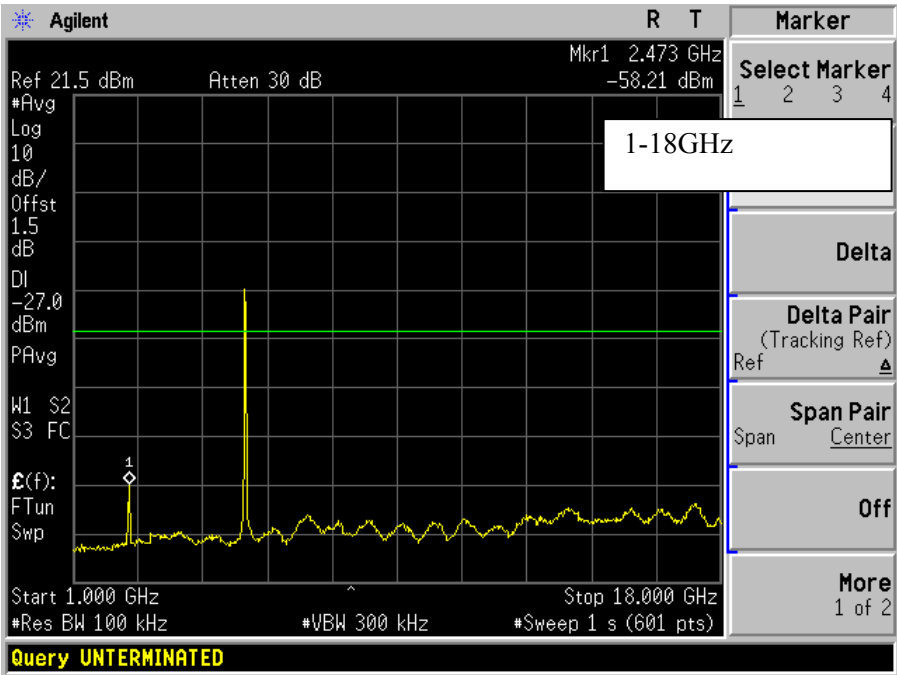


18GHz----40GHz

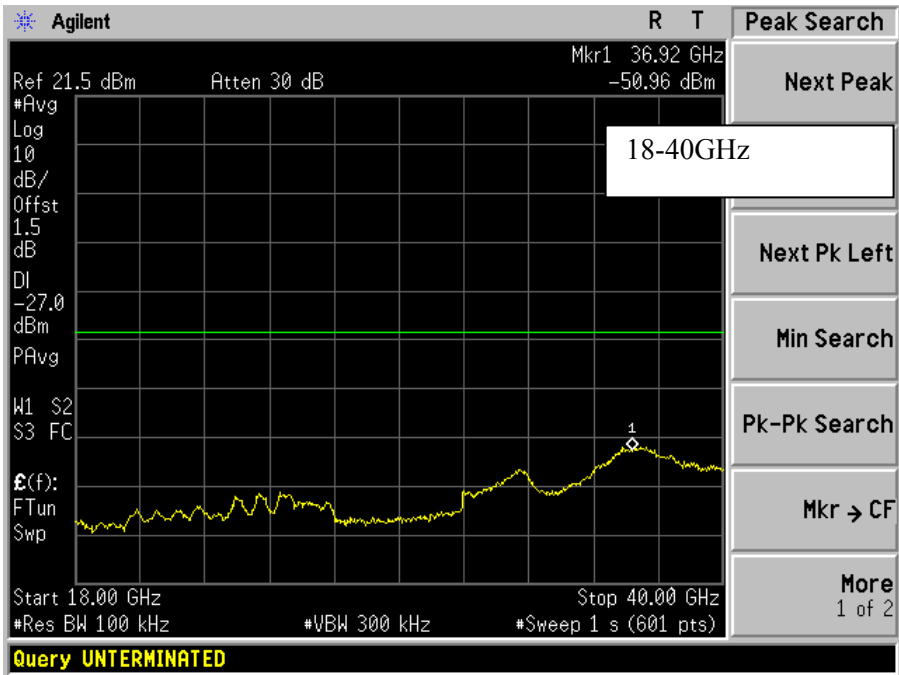


802.11n HT40, Middle Channel


30MHz----1GHz

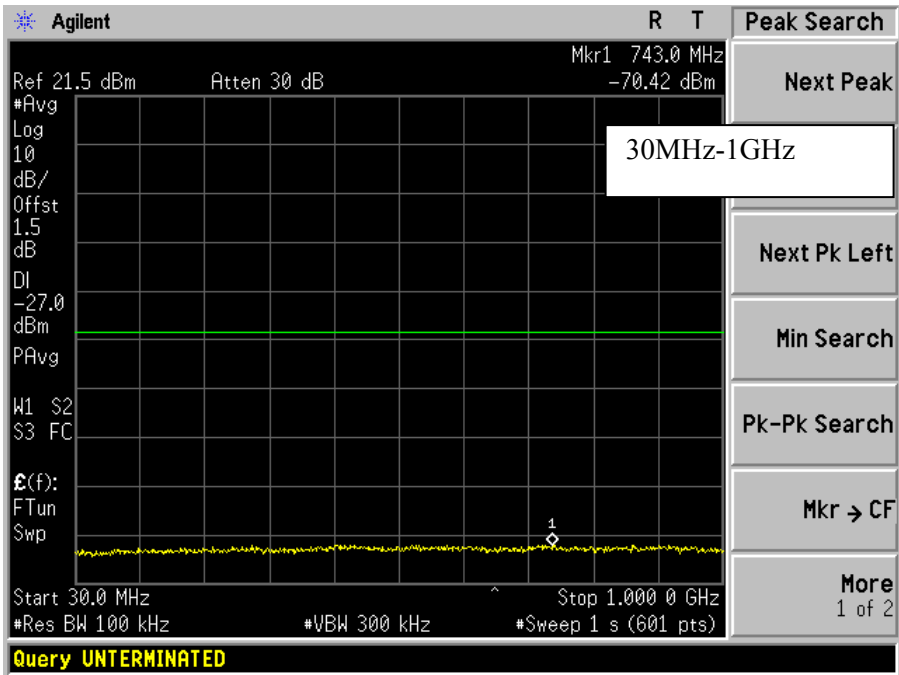

1GHz----18GHz

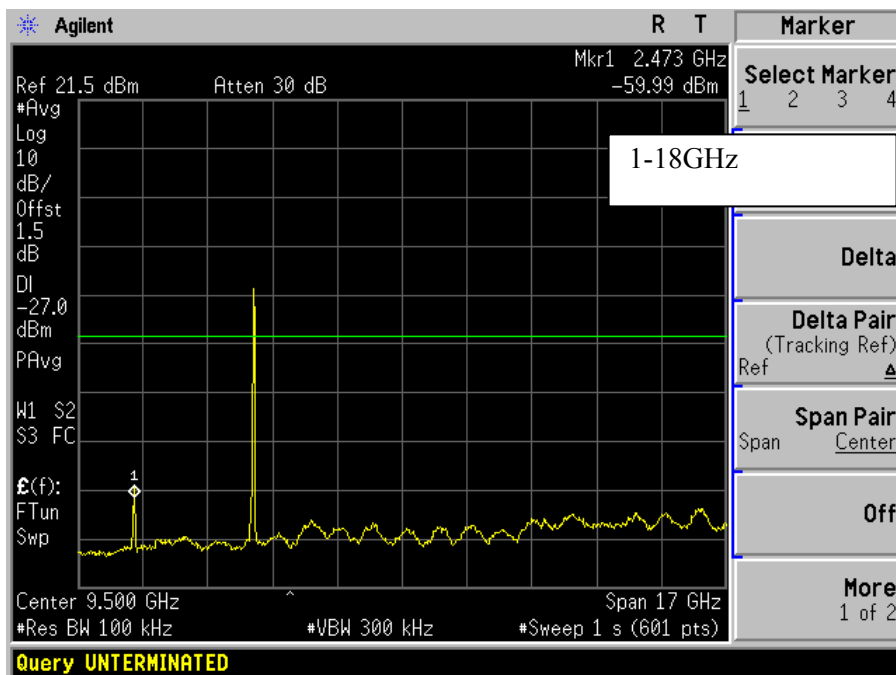


18GHz----40GHz

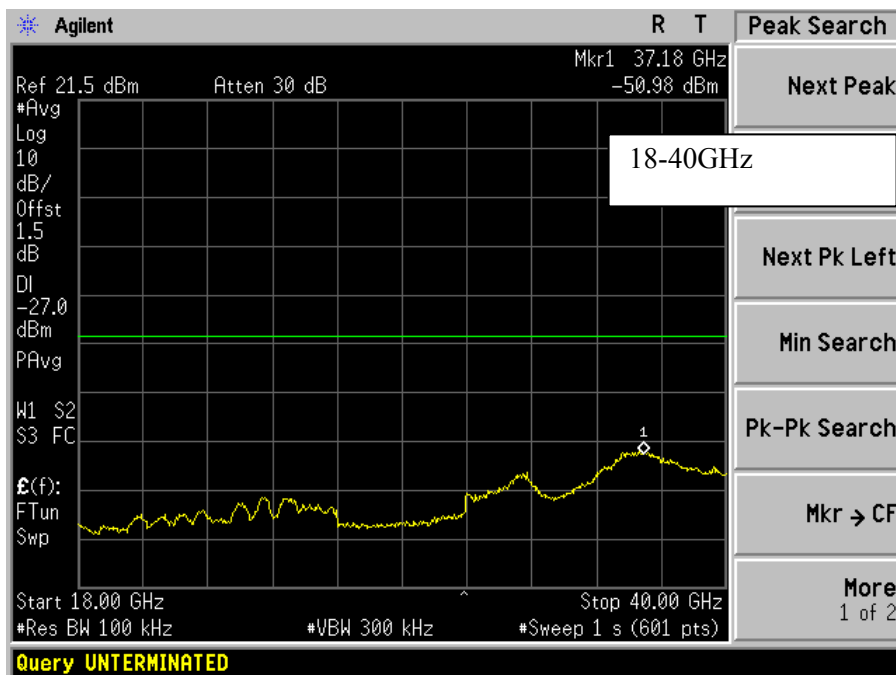


802.11n HT40, High Channel


30MHz----1GHz

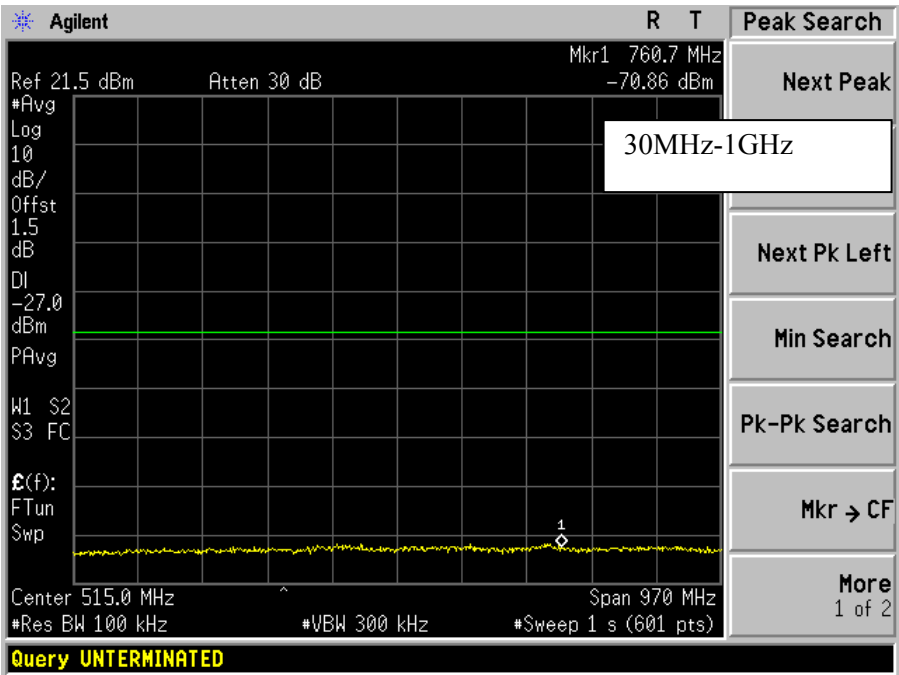

1GHz----18GHz

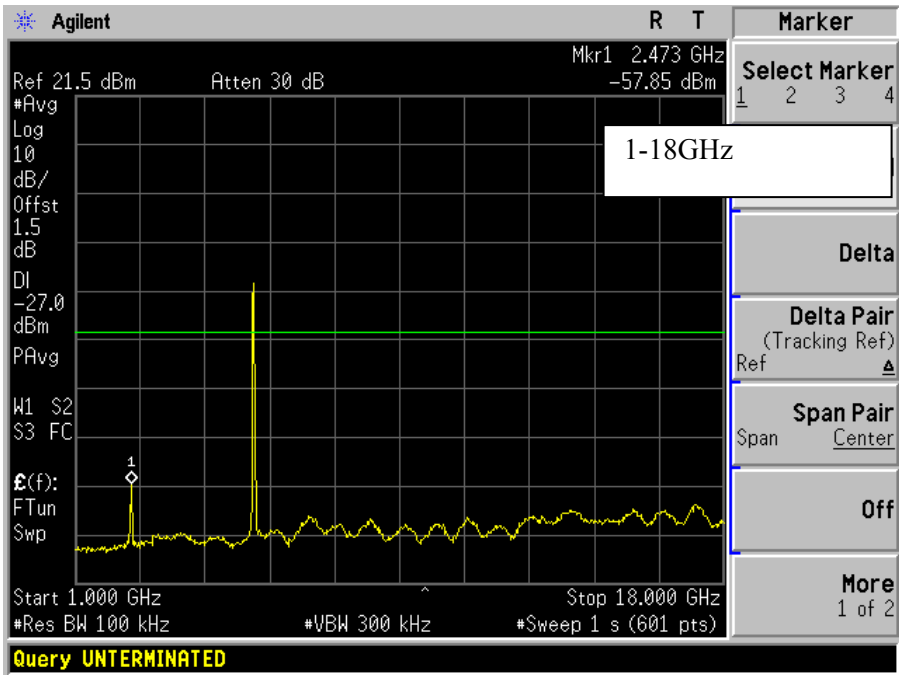

18GHz----40GHz

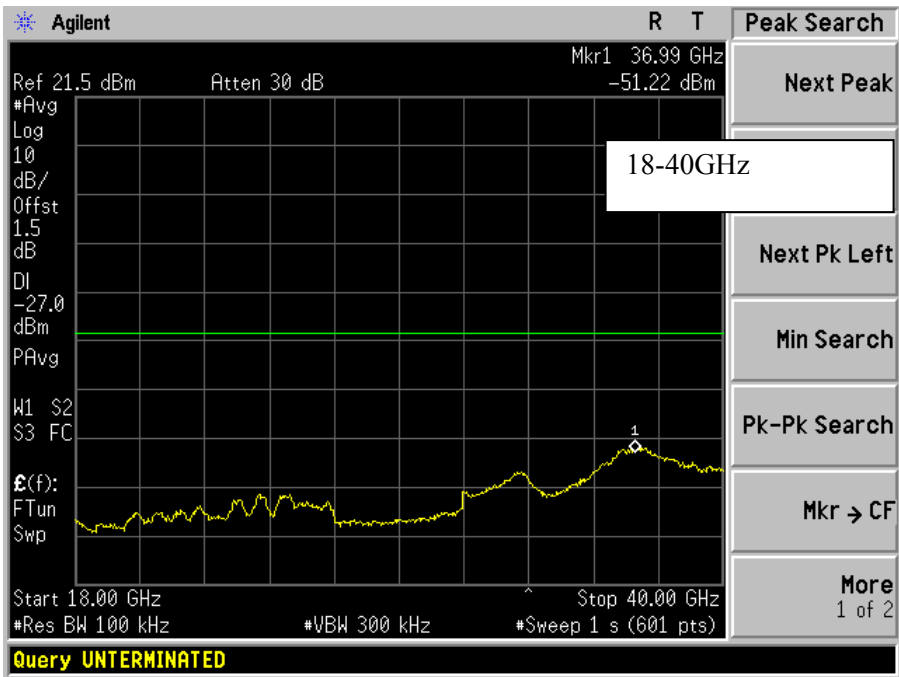

12 FCC §407(a)(6) - Peak Excursion Ratio

12.1 Applicable Standard

FCC §15.407(a)(6)

According to FCC §15.407(a) (6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

12.2 Test Procedure

Set the spectrum analyzer span to view the entire emission bandwidth.
The largest difference between the following two traces must be ≤ 13 dB for all frequencies across the emission bandwidth. Submit a plot.

1st Trace:

- Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and max hold settings.

2nd Trace:

- create the 2nd trace using the settings described in the section “FCC §15.407(a)(1)(2) – CONDUCTED TRANSMITTER OUTPUT POWER”.

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

requirements, traceable to the NIST.

12.4 Test Environmental Conditions

Temperature:	23-25 °C
Relative Humidity:	35-50 %
ATM Pressure:	101-103kPa

The testing was performed by Ning Ma on 2011-09-07~ 2011-09-11 at RF Site.

12.5 Test Results

Channel	Frequency (MHz)	TX Chain 1 PER (dBm)	TX Chain 2 PER (dBm)	Worst Antenna PER (dBm)	Limit (dBm)	Margin (dB)
802.11a, 5250-5350 MHz						
Low	5260	7.86	7.91	7.91	13	-5.09
Middle	5280	7.39	8.06	8.06	13	-4.94
High	5320	7.98	8.15	8.15	13	-4.85
802.11a, 5470-5725 MHz						
Low	5500	8.57	8.92	8.92	13	-4.08
Middle	5580	8.61	9.01	9.01	13	-3.99
High	5700	8.76	9.14	9.14	13	-3.86

Channel	Frequency (MHz)	TX Chain 1 PER (dBm)	TX Chain 2 PER (dBm)	Worst Antenna PER (dBm)	Limit (dBm)	Margin (dB)
802.11n HT20, 5250-5350 MHz						
Low	5260	7.88	8.26	8.39	13	-4.61
Middle	5280	7.94	8.02	8.02	13	-4.98
High	5320	7.89	8.31	8.31	13	-4.69
802.11n HT20, 5470-5725 MHz						
Low	5500	8.03	9.12	9.12	13	-3.88
Middle	5580	8.19	9.58	9.58	13	-3.42
High	5700	8.23	9.96	9.96	13	-3.04
802.11n HT40, 5250-5350 MHz						
Low	5270	8.93	9.69	9.69	13	-3.31
High	5310	8.81	9.53	9.53	13	-3.47
802.11n HT40, 5470-5725 MHz						
Low	5510	7.94	8.96	8.96	13	-4.04
Middle	5590	7.81	8.86	8.86	13	-4.14
High	5670	7.94	8.91	8.91	13	-4.09

13 FCC §15.407(f), §2.1091 & IC RSS-102 - RF Exposure

13.1 Applicable Standard

According to FCC §15.407(f) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of IC RSS-102 must be followed concerning the exposure of humans to RF fields.

According to IC RSS-102 Issue 2 section 4.1, RF limits used for general public will be applied to the EUT.

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Time Averaging (minutes)
0.003 - 1	280	2.19	-	6
1 - 10	280 / f	2.19 / f	-	6
10 - 30	28	2.19 / f	-	6
30 - 300	28	0.073	2*	6
300 - 1 500	1.585 f ^{0.5}	0.0042 f ^{0.5}	f / 150	6
1 500 - 15 000	61.4	0.163	10	6
15 000 - 150 000	61.4	0.163	10	616000 / f ^{1.2}
150 000- 300 000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000 / f ^{1.2}

Note: f is frequency in MHz

* = Power density limit is applicable at frequencies greater than 100 MHz

13.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

13.3 MPE Results

Radio Band	Max. Conducted Output Power (dBm)	Antenna Gain (dBi)	MPE Evaluation Distance (cm)	MPE (mw/cm ²)	MPE Limit (mw/cm ²)	Result
2.4 GHz	26.47	3.5	20	0.20	1.0	Compliance
W52	15.48	6.0	20	0.03	1.0	Compliance
W53	11.12	6.0	20	0.001	1.0	Compliance
W56	15.60	6.0	20	0.03	1.0	Compliance
W58	25.04	6.0	20	0.25	1.0	Compliance

The device is compliant with the requirement MPE limit for uncontrolled exposure at 20 cm distance.