



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

June 27, 2012

Meru Networks, Inc.
140 Knowles Drive
Los Gatos, CA 95032

Dear Rajendran Chary,

Enclosed is the EMC Wireless test report for compliance testing of the Meru Networks, Inc., Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15, Subpart B and ICES-003, Issue 4 February 2004 for Unintentional Radiators and Part 15.407 and Industry Canada RSS-210, Annex 9, Issue 8, December 2010 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Meru Networks, Inc.\EMCS34526B-FCC407 (UNII 1) Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

Electromagnetic Compatibility Criteria Test Report

for the

Meru Networks, Inc.

Model Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i

Tested under

the FCC Certification Rules
contained in

Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class B Digital Devices

&

FCC Part 15.407 & RSS-210, Annex 9
for Intentional Radiators

MET Report: EMCS34526B-FCC407 (UNII 1) Rev. 1

June 27, 2012

Prepared For:

**Meru Networks, Inc.
140 Knowles Drive
Los Gatos, CA 95032**

Prepared By:

MET Laboratories, Inc.

914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

for the

Meru Networks, Inc.
Model Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class B Digital Devices
&
FCC Part 15.407 & RSS-210, Annex 9
for Intentional Radiators



Jeff Pratt, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210 Annex 9 under normal use and maintenance.



Shawn McMillen,
Wireless Manager, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	June 6, 2012	Initial Issue.
1	June 27, 2012	Revised to reflect engineer corrections.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample.....	6
	E. Support Equipment	7
	F. Ports and Cabling Information.....	7
	G. Mode of Operation.....	7
	H. Method of Monitoring EUT Operation	8
	I. Modifications	8
	a) Modifications to EUT	8
	b) Modifications to Test Standard.....	8
	J. Disposition of EUT	8
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	9
	§ 15.107(a) Conducted Emissions Limits.....	10
	§ 15.109(a) Radiated Emissions Limits.....	15
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	19
	§ 15.203 Antenna Requirement	20
	§ 15.207 Conducted Emissions Limits	21
	§ 15.403(c) 26dB Bandwidth.....	24
	§ 15.407(a)(1) RF Power Output	39
	§ 15.407(a)(1) Peak Power Spectral Density	47
	§ 15.407(a)(6) Peak Excursion Ratio.....	55
	§ 15.407(b) Undesirable Emissions.....	63
	§ 15.407(f) RF Exposure	81
	§ 15.407(g) Frequency Stability	82
	RSS-GEN Receiver Spurious Emissions.....	87
V.	Test Equipment	91
VI.	Certification & User's Manual Information	93
	A. Certification Information	94
	B. Label and User's Manual Information	98

List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing	2
Table 2. EUT Summary.....	4
Table 3. References	5
Table 4. Support Equipment.....	7
Table 5. Ports and Cabling Information	7
Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	10
Table 7. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), 9001GR	11
Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), 9001GR.....	12
Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), GS18A12-P1J.....	13
Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), GS18A12-P1J	14
Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	15
Table 12. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits	16
Table 13. Radiated Emissions Limits, Test Results, 1 GHz – 6 GHz, FCC Limits.....	17
Table 14. Radiated Emissions Limits, Test Results, ICES-003 Limits	18
Table 15. Antenna List	20
Table 16. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	21
Table 17. Conducted Emissions, 15.207(a), Phase Line, Test Results	22
Table 18. Conducted Emissions, 15.207(a), Neutral Line, Test Results	23
Table 19. 26 dB Occupied Bandwidth, Test Results	25
Table 20. 99% Occupied Bandwidth, Test Results	26
Table 21. RF Power Output, Test Results	40
Table 22. Power Spectral Density, Test Results.....	48
Table 23. Spurious Emission Limits for Receivers	87
Table 24. Test Equipment List	92

List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
Figure 2. Occupied Bandwidth, Test Setup	24
Figure 3. Power Output Test Setup	39
Figure 4. Power Spectral Density Test Setup	47
Figure 5. Peak Excursion Ration Test Setup	55
Figure 6. Block Diagram, Conducted Receiver Spurious Emissions Test Setup	87

List of Plots

Plot 1. Conducted Emission, Phase Line Plot, 9001GR	11
Plot 2. Conducted Emission, Neutral Line Plot, 9001GR	12
Plot 3. Conducted Emission, Phase Line Plot, GS18A12-P1J	13
Plot 4. Conducted Emission, Neutral Line Plot, GS18A12-P1J	14
Plot 5. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits	16
Plot 6. Radiated Emissions, 1 GHz – 6 GHz, FCC Limits	17
Plot 7. Radiated Emissions, ICES-003 Limits	18
Plot 8. Conducted Emissions, 15.207(a), Phase Line	22
Plot 9. Conducted Emissions, 15.207(a), Neutral Line	23
Plot 10. 26 dB Occupied Bandwidth, Low Channel, 802.11a	27
Plot 11. 26 dB Occupied Bandwidth, Mid Channel, 802.11a	27
Plot 12. 26 dB Occupied Bandwidth, High Channel, 802.11a	27
Plot 13. 26 dB Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A4)	28
Plot 14. 26 dB Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A5)	28
Plot 15. 26 dB Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A6)	28
Plot 16. 26 dB Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A4)	29
Plot 17. 26 dB Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A5)	29
Plot 18. 26 dB Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A6)	29
Plot 19. 26 dB Occupied Bandwidth, High Channel, 802.11n 20 MHz (A4)	30
Plot 20. 26 dB Occupied Bandwidth, High Channel, 802.11n 20 MHz (A5)	30
Plot 21. 26 dB Occupied Bandwidth, High Channel, 802.11n 20 MHz (A6)	30
Plot 22. 26 dB Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A4)	31
Plot 23. 26 dB Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A5)	31
Plot 24. 26 dB Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A6)	31
Plot 25. 26 dB Occupied Bandwidth, High Channel, 802.11n 40 MHz (A4)	32
Plot 26. 26 dB Occupied Bandwidth, High Channel, 802.11n 40 MHz (A5)	32
Plot 27. 26 dB Occupied Bandwidth, High Channel, 802.11n 40 MHz (A6)	32
Plot 28. 99% Occupied Bandwidth, Low Channel, 802.11a	33
Plot 29. 99% Occupied Bandwidth, Mid Channel, 802.11a	33
Plot 30. 99% Occupied Bandwidth, High Channel, 802.11a	33
Plot 31. 99% Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A4)	34
Plot 32. 99% Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A5)	34
Plot 33. 99% Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A6)	34
Plot 34. 99% Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A4)	35
Plot 35. 99% Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A5)	35
Plot 36. 99% Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A6)	35
Plot 37. 99% Occupied Bandwidth, High Channel, 802.11n 20 MHz (A4)	36
Plot 38. 99% Occupied Bandwidth, High Channel, 802.11n 20 MHz (A5)	36
Plot 39. 99% Occupied Bandwidth, High Channel, 802.11n 20 MHz (A6)	36
Plot 40. 99% Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A4)	37
Plot 41. 99% Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A5)	37
Plot 42. 99% Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A6)	37
Plot 43. 99% Occupied Bandwidth, High Channel, 802.11n 40 MHz (A4)	38
Plot 44. 99% Occupied Bandwidth, High Channel, 802.11n 40 MHz (A5)	38
Plot 45. 99% Occupied Bandwidth, High Channel, 802.11n 40 MHz (A6)	38
Plot 46. RF Power Output, Low Channel, 802.11a	41
Plot 47. RF Power Output, Mid Channel, 802.11a	41
Plot 48. RF Power Output, High Channel, 802.11a	41
Plot 49. RF Power Output, Low Channel, 802.11n 20 MHz (A4)	42
Plot 50. RF Power Output, Low Channel, 802.11n 20 MHz (A5)	42
Plot 51. RF Power Output, Low Channel, 802.11n 20 MHz (A6)	42
Plot 52. RF Power Output, Mid Channel, 802.11n 20 MHz (A4)	43

Plot 53. RF Power Output, Mid Channel, 802.11n 20 MHz (A5)	43
Plot 54. RF Power Output, Mid Channel, 802.11n 20 MHz (A6)	43
Plot 55. RF Power Output, High Channel, 802.11n 20 MHz (A4)	44
Plot 56. RF Power Output, High Channel, 802.11n 20 MHz (A5)	44
Plot 57. RF Power Output, High Channel, 802.11n 20 MHz (A6)	44
Plot 58. RF Power Output, Low Channel, 802.11n 40 MHz (A4)	45
Plot 59. RF Power Output, Low Channel, 802.11n 40 MHz (A5)	45
Plot 60. RF Power Output, Low Channel, 802.11n 40 MHz (A6)	45
Plot 61. RF Power Output, High Channel, 802.11n 40 MHz (A4)	46
Plot 62. RF Power Output, High Channel, 802.11n 40 MHz (A5)	46
Plot 63. RF Power Output, High Channel, 802.11n 40 MHz (A6)	46
Plot 64. Power Spectral Density, Low Channel, 802.11a	49
Plot 65. Power Spectral Density, Mid Channel, 802.11a	49
Plot 66. Power Spectral Density, High Channel, 802.11a	49
Plot 67. Power Spectral Density, Low Channel, 802.11n 20 MHz (A4)	50
Plot 68. Power Spectral Density, Low Channel, 802.11n 20 MHz (A5)	50
Plot 69. Power Spectral Density, Low Channel, 802.11n 20 MHz (A6)	50
Plot 70. Power Spectral Density, Mid Channel, 802.11n 20 MHz (A4)	51
Plot 71. Power Spectral Density, Mid Channel, 802.11n 20 MHz (A5)	51
Plot 72. Power Spectral Density, Mid Channel, 802.11n 20 MHz (A6)	51
Plot 73. Power Spectral Density, High Channel, 802.11n 20 MHz (A4)	52
Plot 74. Power Spectral Density, High Channel, 802.11n 20 MHz (A5)	52
Plot 75. Power Spectral Density, High Channel, 802.11n 20 MHz (A6)	52
Plot 76. Power Spectral Density, Low Channel, 802.11n 40 MHz (A4)	53
Plot 77. Power Spectral Density, Low Channel, 802.11n 40 MHz (A5)	53
Plot 78. Power Spectral Density, Low Channel, 802.11n 40 MHz (A6)	53
Plot 79. Power Spectral Density, High Channel, 802.11n 40 MHz (A4)	54
Plot 80. Power Spectral Density, High Channel, 802.11n 40 MHz (A5)	54
Plot 81. Power Spectral Density, High Channel, 802.11n 40 MHz (A6)	54
Plot 82. Peak Excursion Ratio, Low Channel, 802.11a	56
Plot 83. Peak Excursion Ratio, Mid Channel, 802.11a	56
Plot 84. Peak Excursion Ratio, High Channel, 802.11a	56
Plot 85. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz (A4)	57
Plot 86. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz (A4)	57
Plot 87. Peak Excursion Ratio, High Channel, 802.11n 20 MHz (A4)	57
Plot 88. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz (A5)	58
Plot 89. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz (A5)	58
Plot 90. Peak Excursion Ratio, High Channel, 802.11n 20 MHz (A5)	58
Plot 91. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz (A6)	59
Plot 92. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz (A6)	59
Plot 93. Peak Excursion Ratio, High Channel, 802.11n 20 MHz (A6)	59
Plot 94. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz (A4)	60
Plot 95. Peak Excursion Ratio, High Channel, 802.11n 40 MHz (A4)	60
Plot 96. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz (A5)	61
Plot 97. Peak Excursion Ratio, High Channel, 802.11n 40 MHz (A5)	61
Plot 98. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz (A6)	62
Plot 99. Peak Excursion Ratio, High Channel, 802.11n 40 MHz (A6)	62
Plot 100. Radiated Spurious Emissions, 802.11a, Low Channel, 30 MHz – 1 GHz	64
Plot 101. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz	64
Plot 102. Radiated Spurious Emissions, 802.11a, Low Channel, 7 GHz – 18 GHz	64
Plot 103. Radiated Spurious Emissions, 802.11a, Low Channel, 18 GHz – 40 GHz	65
Plot 104. Radiated Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 1 GHz	65
Plot 105. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz	65
Plot 106. Radiated Spurious Emissions, 802.11a, Mid Channel, 7 GHz – 18 GHz	66
Plot 107. Radiated Spurious Emissions, 802.11a, Mid Channel, 18 GHz – 40 GHz	66
Plot 108. Radiated Spurious Emissions, 802.11a, High Channel, 30 MHz – 1 GHz	66

Plot 109. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz	67
Plot 110. Radiated Spurious Emissions, 802.11a, High Channel, 7 GHz – 18 GHz	67
Plot 111. Radiated Spurious Emissions, 802.11a, High Channel, 18 GHz – 40 GHz	67
Plot 112. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz	68
Plot 113. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz	68
Plot 114. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz	68
Plot 115. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 18 GHz – 40 GHz.....	69
Plot 116. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz	69
Plot 117. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz	69
Plot 118. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz	70
Plot 119. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 18 GHz – 40 GHz	70
Plot 120. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz	70
Plot 121. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz.....	71
Plot 122. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz.....	71
Plot 123. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 18 GHz – 40 GHz.....	71
Plot 124. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz.....	72
Plot 125. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz	72
Plot 126. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz	72
Plot 127. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 18 GHz – 40 GHz.....	73
Plot 128. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz.....	73
Plot 129. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz.....	73
Plot 130. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz.....	74
Plot 131. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 18 GHz – 40 GHz.....	74
Plot 132. Radiated Band Edge, 802.11a, Low Channel.....	75
Plot 133. Radiated Band Edge, 802.11a, High Channel.....	75
Plot 134. Radiated Band Edge, 802.11n 20 MHz, Low Channel	76
Plot 135. Radiated Band Edge, 802.11n 20 MHz, High Channel.....	76
Plot 136. Radiated Band Edge, 802.11n 40 MHz, Low Channel	77
Plot 137. Radiated Band Edge, 802.11n 40 MHz, High Channel.....	77
Plot 138. Radiated Band Edge, 802.11a, Low Channel, Average	78
Plot 139. Radiated Band Edge, 802.11a, Low Channel, Peak.....	78
Plot 140. Radiated Band Edge, 802.11n 20 MHz, Low Channel, Average.....	79
Plot 141. Radiated Band Edge, 802.11n 20 MHz, Low Channel, Peak.....	79
Plot 142. Radiated Band Edge, 802.11n 20 MHz, Low Channel, Average.....	80
Plot 143. Radiated Band Edge, 802.11n 40 MHz, Low Channel, Peak.....	80
Plot 144. Frequency Stability, 5150 – 5250 MHz, -30°C, 120 V.....	83
Plot 145. Frequency Stability, 5150 – 5250 MHz, -20°C, 120 V.....	83
Plot 146. Frequency Stability, 5150 – 5250 MHz, -10°C, 120 V.....	83
Plot 147. Frequency Stability, 5150 – 5250 MHz, 0°C, 120 V	84
Plot 148. Frequency Stability, 5150 – 5250 MHz, 10°C, 120 V	84
Plot 149. Frequency Stability, 5150 – 5250 MHz, 20°C, 108 V	84
Plot 150. Frequency Stability, 5150 – 5250 MHz, 20°C, 120 V	85
Plot 151. Frequency Stability, 5150 – 5250 MHz, 20°C, 132 V	85
Plot 152. Frequency Stability, 5150 – 5250 MHz, 30°C, 120 V	85
Plot 153. Frequency Stability, 5150 – 5250 MHz, 40°C, 120 V	86
Plot 154. Frequency Stability, 5150 – 5250 MHz, 50°C, 120 V	86
Plot 155. Frequency Stability, 5150 – 5250 MHz, 55°C, 120 V	86
Plot 156. Receiver Spurious Emission, 30 MHz – 1 GHz (Port 1).....	88
Plot 157. Receiver Spurious Emission, 1 GHz – 18 GHz (Port 1)	88
Plot 158. Receiver Spurious Emission, 30 MHz – 1 GHz (Port 2).....	89
Plot 159. Receiver Spurious Emission, 1 GHz – 18 GHz (Port 2)	89
Plot 160. Receiver Spurious Emission, 30 MHz – 1 GHz (Port 3).....	90
Plot 161. Receiver Spurious Emission, 1 GHz – 18 GHz (Port 3)	90

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Meru Networks, Inc. Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i. Meru Networks, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with Meru Networks, Inc., purchase order number 103991. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	Industry Canada Reference	Description	Results
§15.107	ICES-003 Issue 4 February 2004	Conducted Emissions	Compliant
§15.109	ICES-003 Issue 4 February 2004	Radiated Emissions	Compliant
§15.203	RSS-GEN 7.1.4	Antenna Requirements	Compliant
§15.207	RSS-GEN 7.2.2; RSS-210 2.2	AC Conducted Emissions 150KHz – 30MHz	Compliant
§15.403 (i)	A8.2	26dB Occupied Bandwidth	Compliant
§15.407 (a)(2)	A9.2(3)	Conducted Transmitter Output Power	Compliant
§15.407 (a)(2)	A9.2(3)	Power Spectral Density	Compliant
§15.407 (a)(6)	N/A	Peak Excursion	Compliant
§15.407 (b)(2), (3), (5), (6)	A9.3(4)	Undesirable Emissions (15.205/15.209 - General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Compliant
§15.407(f)	RSS-GEN/RSS-102	RF Exposure	Compliant
§15.407(g)	2.1	Frequency Stability	Compliant
N/A	RSS-Gen(4.8)	Receiver Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Meru Networks, Inc. to perform testing on the Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i, under Meru Networks, Inc.'s purchase order number 103991.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Meru Networks, Inc. Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i	
Model(s) Covered:	Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i	
EUT Specifications:	Primary Power: 120 VAC, 60 Hz	
	Highest Clock Frequency: 66.66 MHz	
	FCC ID: RE7-AP332I IC: 6749A-AP332I	
	Type of Modulations:	OFDM
	Equipment Code:	NII
	Peak RF Output Power:	14.42 dBm
	EUT Frequency Ranges:	5180 – 5240 MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Jeff Pratt	
Report Date(s):	June 27, 2012	

Table 2. EUT Summary

B. References

CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
RSS-210, Issue 8, Dec. 2010	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
RSS-GEN, Issue 3, Dec. 2010	General Requirements and Information for the Certification of Radio Apparatus
ICES-003, Issue 4 February 2004	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Meru Networks, Inc. Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i, Equipment Under Test (EUT), is a wireless access point (WAP) that allows wireless devices to connect to a wired network using Wi-Fi, standard. The WAP usually connects to a router (via a wired network), and can relay data between the wireless devices (such as computers or printers) and wired devices on the network.

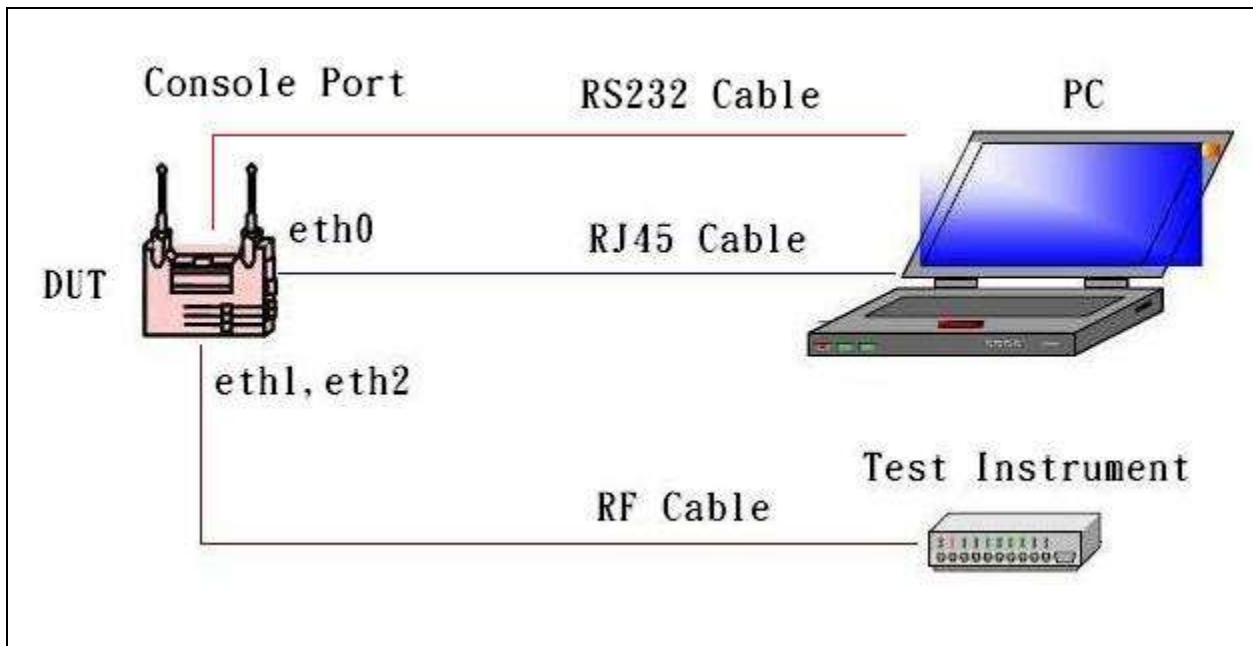


Figure 1. Block Diagram of Test Configuration

E. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

SN	Type	Model and Serial Number	Quantity
2	AP433i	SN: 112A332e0DEE9D, 112A332e0DEE9B, 112A332e0DEE9F	3
--	Antenna	ERU-ANT-PI622 Internal PIFA Dual-Band 3 x 3	--
10	PoE	PD-9001GR/AC	2
11	PoE	PS-9001G	2
12	Cable	Serial cable	2
13	Cable	Ethernet cable	4
--	--	AC-DC Adapter GS18A12-P1J	2

Table 4. Support Equipment

F. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
--	12V DC	DC power supply	1	1	N	--
--	Console Port	Serial cable	1	1	N	--
--	G1 PoE	Ethernet and PoE port	1	1	1	--

Table 5. Ports and Cabling Information

G. Mode of Operation

During the normal operation the configuration is controlled by the Meru controller which sets the country code, ESSID, Operating frequency band and Channel etc.

H. Method of Monitoring EUT Operation

During the normal operation with controller Green or Blue LED indication on the Access point indicate the normal operation of the Access point. A Red LED indicates a failure of hardware or software settings.

I. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

J. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Meru Networks, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

Frequency range (MHz)	Class A Conducted Limits (dB μ V)		*Class B Conducted Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50
Note 1 — The lower limit shall apply at the transition frequencies.				
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.				
* -- Limits per Subsection 15.207(a).				

Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a shielded test chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT and its support equipment were powered through separate 50 Ω /50 μ H LISNs. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were re-measured using a quasi-peak and/or average detector as appropriate.

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Jeff Pratt

Test Date(s): 05/23/12

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), 9001GR

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.212	36.8746193	0.01	36.8846193	63.13	-26.245381	25.1343549	0.01	25.14435492	53.13	-27.9856
0.427	41.2215065	0	41.22150647	57.31	-16.088494	36.7895609	0	36.78956095	47.31	-10.5204
1.368	30.0975692	0	30.09756919	56	-25.902431	24.8657229	0	24.86572292	46	-21.1343
1.963	27.7013955	0.01	27.71139553	56	-28.288604	21.9312488	0.01	21.94124877	46	-24.0588
3.928	29.6001389	0.04	29.64013886	56	-26.359861	20.3989336	0.04	20.43893363	46	-25.5611
12.93	47.2496495	0.12	47.3696495	60	-12.630351	43.0212651	0.12	43.14126507	50	-6.85873

Table 7. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), 9001GR

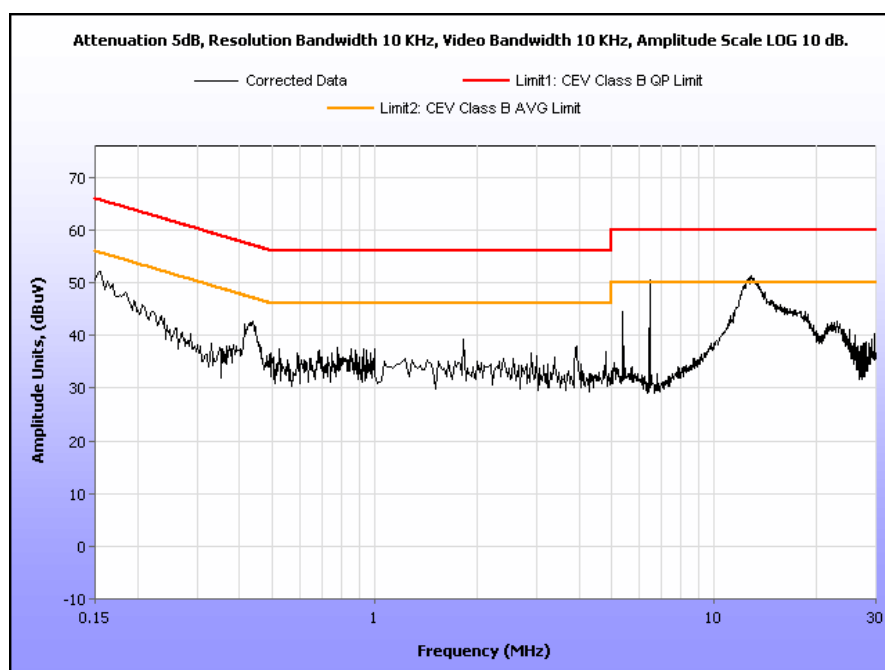


Plot 1. Conducted Emission, Phase Line Plot, 9001GR

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), 9001GR

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.154	43.1793052	0	43.17930521	65.78	-22.600695	31.5291306	0	31.52913065	55.78	-24.2509
0.43	39.8342655	0	39.83426551	57.25	-17.415734	35.1963775	0	35.19637755	47.25	-12.0536
1.053	27.4324385	0	27.43243854	56	-28.567561	14.6140309	0	14.61403089	46	-31.386
5.11	27.2872671	0.08	27.36726709	60	-32.632733	21.5836249	0.08	21.66362492	50	-28.3364
13	47.9726865	0.12	48.09268649	60	-11.907314	43.7504144	0.12	43.87041442	50	-6.12959
23.55	36.7744638	0.19	36.9644638	60	-23.035536	30.9481092	0.19	31.13810919	50	-18.8619

Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), 9001GR

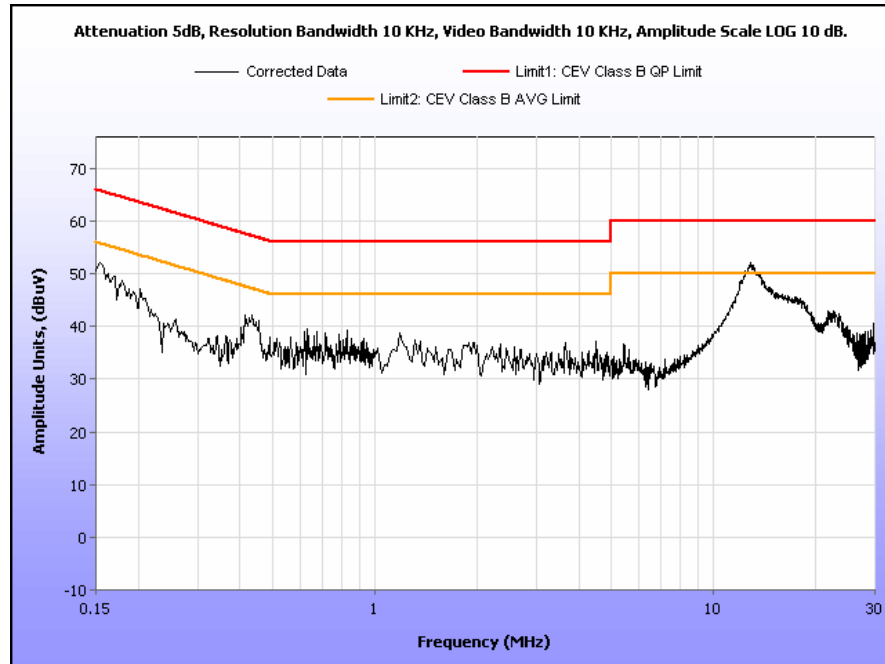


Plot 2. Conducted Emission, Neutral Line Plot, 9001GR

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), GS18A12-P1J

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.194	46.55	0	46.55	63.86	-17.31	40.32	0	40.32	53.86	-13.54
0.286	44.54	0.03	44.57	60.64	-16.07	32.36	0.03	32.39	50.64	-18.25
0.516	45.7	0	45.7	56	-10.3	31.14	0	31.14	46	-14.86
0.617	38.3	0	38.3	56	-17.7	26.17	0	26.17	46	-19.83
5.852	41.29	0.08	41.37	60	-18.63	35.74	0.08	35.82	50	-14.18
13.594	46.78	0.12	46.9	60	-13.1	40.7	0.12	40.82	50	-9.18

Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), GS18A12-P1J

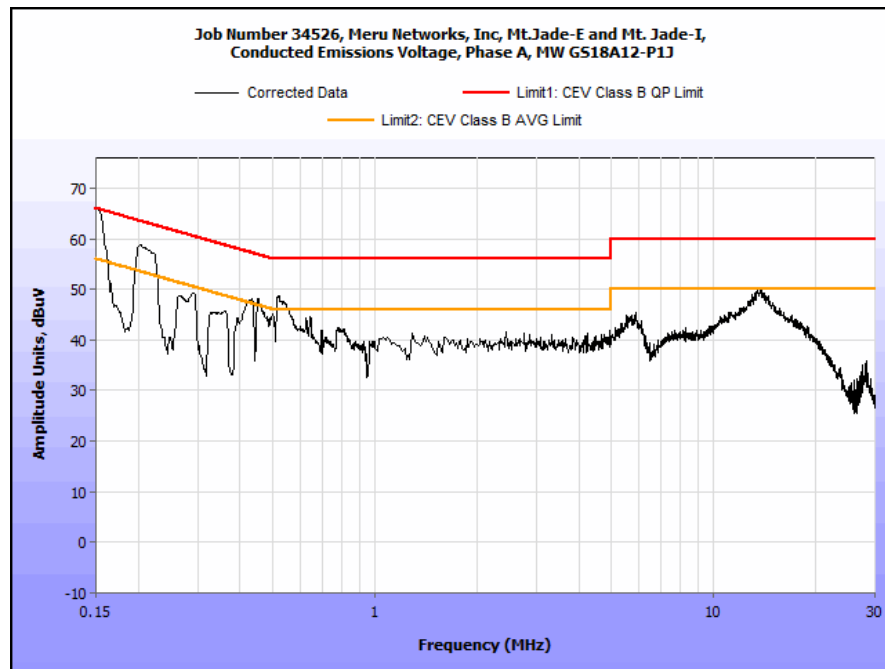


Plot 3. Conducted Emission, Phase Line Plot, GS18A12-P1J

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), GS18A12-P1J

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.194	57.91	0	57.91	63.86	-5.95	40.52	0	40.52	53.86	-13.34
0.432	46.72	0	46.72	57.21	-10.49	31.78	0	31.78	47.21	-15.43
0.451	48.94	0	48.94	56.86	-7.92	33.85	0	33.85	46.86	-13.01
0.531	46.32	0	46.32	56	-9.68	33.13	0	33.13	46	-12.87
5.475	40.4	0.1	40.5	60	-19.5	34.77	0.1	34.87	50	-15.13
13.546	42.82	0.12	42.94	60	-17.06	36.81	0.12	36.93	50	-13.07

Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), GS18A12-P1J

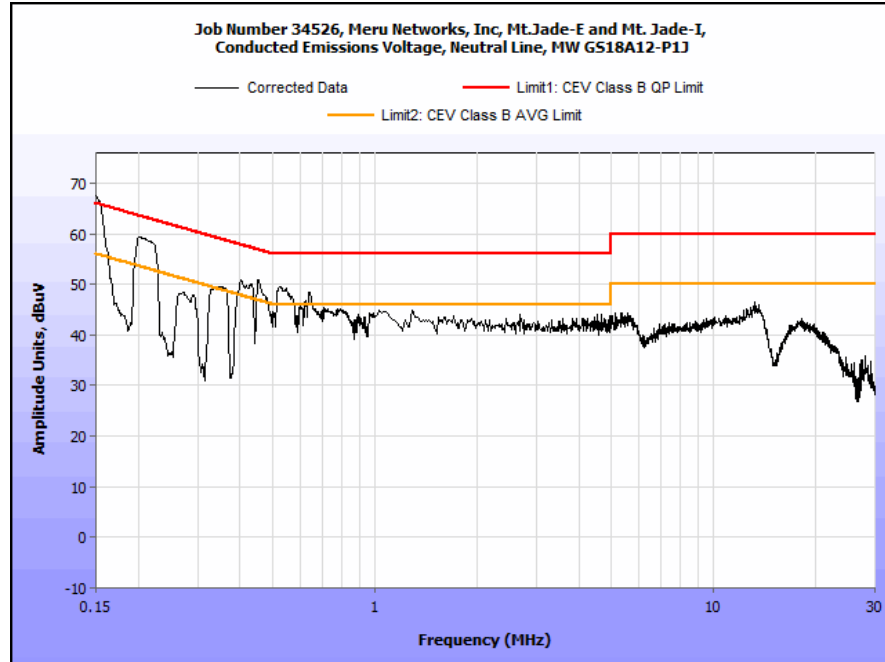

Plot 4. Conducted Emission, Neutral Line Plot, GS18A12-P1J

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 11.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 11.

Frequency (MHz)	Field Strength (dBμV/m)	
	§15.109 (b), Class A Limit (dBμV) @ 10m	§15.109 (a), Class B Limit (dBμV) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Jeff Pratt

Test Date(s): 05/15/12

Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
42.823609	32	H	2.23	6.02	12.24	0.43	0.00	18.69	40.00	-21.31
42.823609	362	V	1.02	19.90	12.24	0.43	0.00	32.57	40.00	-7.43
56.742485	346	H	1.01	8.46	7.50	0.52	0.00	16.48	40.00	-23.52
56.742485	3	V	1.01	24.80	7.50	0.52	0.00	32.82	40.00	-7.18
91.289579	319	H	2.24	14.81	8.16	0.74	0.00	23.71	43.50	-19.79
91.289579	115	V	1.20	22.32	8.16	0.74	0.00	31.22	43.50	-12.28
132.55411	309	H	1.50	14.67	13.66	0.92	0.00	29.25	43.50	-14.25
132.55411	43	V	1.01	21.85	13.66	0.92	0.00	36.43	43.50	-7.07
374.99352	1	H	1.01	20.35	15.60	1.54	0.00	37.49	46.00	-8.51
374.99352	324	V	1.00	17.12	15.60	1.54	0.00	34.26	46.00	-11.74
625.00754	226	H	1.01	16.39	19.80	2.09	0.00	38.28	46.00	-7.72
625.00754	83	V	1.01	20.21	19.80	2.09	0.00	42.10	46.00	-3.90

Table 12. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits

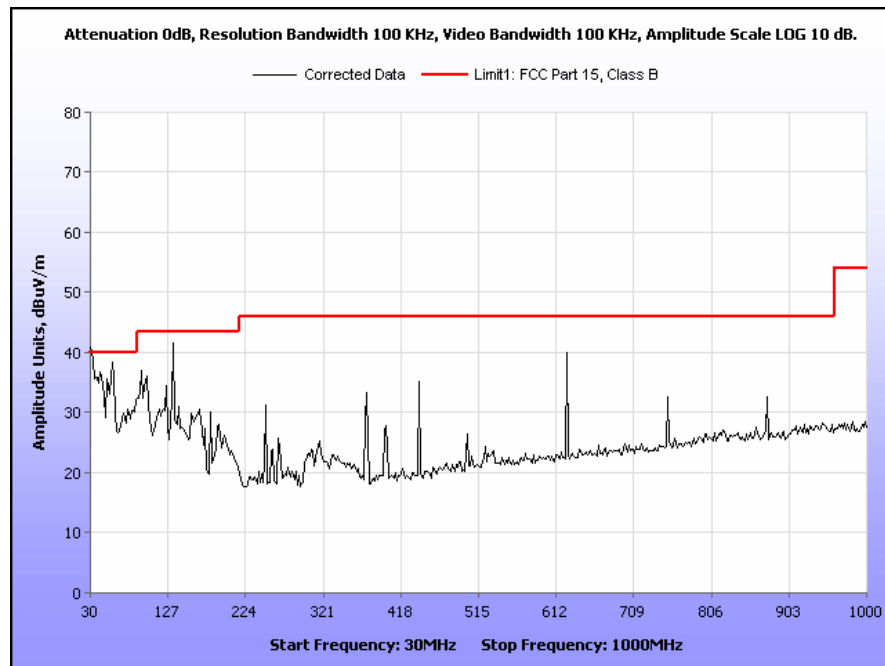


Plot 5. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits

Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
1500	H	10	100	69.11	25.723	54.06	0	0	40.773	54	-13.227
1500	V	280	100	71.82	25.723	54.06	0	0	43.483	54	-10.517
2412	V	315	100	67.31	28.491	55.379	0	0	40.422	54	-13.578

Table 13. Radiated Emissions Limits, Test Results, 1 GHz – 6 GHz, FCC Limits

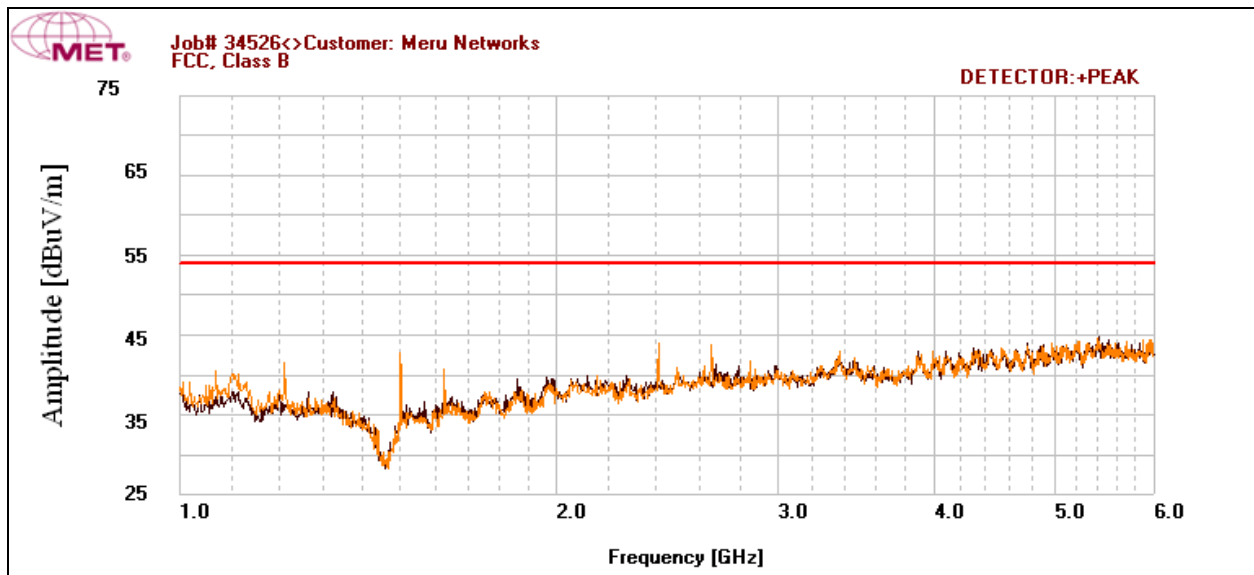


Plot 6. Radiated Emissions, 1 GHz – 6 GHz, FCC Limits

Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
42.823609	32	H	2.23	6.02	12.24	0.43	10.46	8.23	30.00	-21.77
42.823609	362	V	1.02	19.90	12.24	0.43	10.46	22.11	30.00	-7.89
56.742485	346	H	1.01	8.46	7.50	0.52	10.46	6.02	30.00	-23.98
56.742485	3	V	1.01	24.80	7.50	0.52	10.46	22.36	30.00	-7.64
91.289579	319	H	2.24	14.81	8.16	0.74	10.46	13.25	30.00	-16.75
91.289579	115	V	1.20	22.32	8.16	0.74	10.46	20.76	30.00	-9.24
132.55411	309	H	1.50	14.67	13.66	0.92	10.46	18.79	30.00	-11.21
132.55411	43	V	1.01	21.85	13.66	0.92	10.46	25.97	30.00	-4.03
374.99352	1	H	1.01	20.35	15.60	1.54	10.46	27.03	37.00	-9.97
374.99352	324	V	1.00	17.12	15.60	1.54	10.46	23.80	37.00	-13.20
625.00754	226	H	1.01	16.39	19.80	2.09	10.46	27.82	37.00	-9.18
625.00754	83	V	1.01	20.21	19.80	2.09	10.46	31.64	37.00	-5.36

Table 14. Radiated Emissions Limits, Test Results, ICES-003 Limits

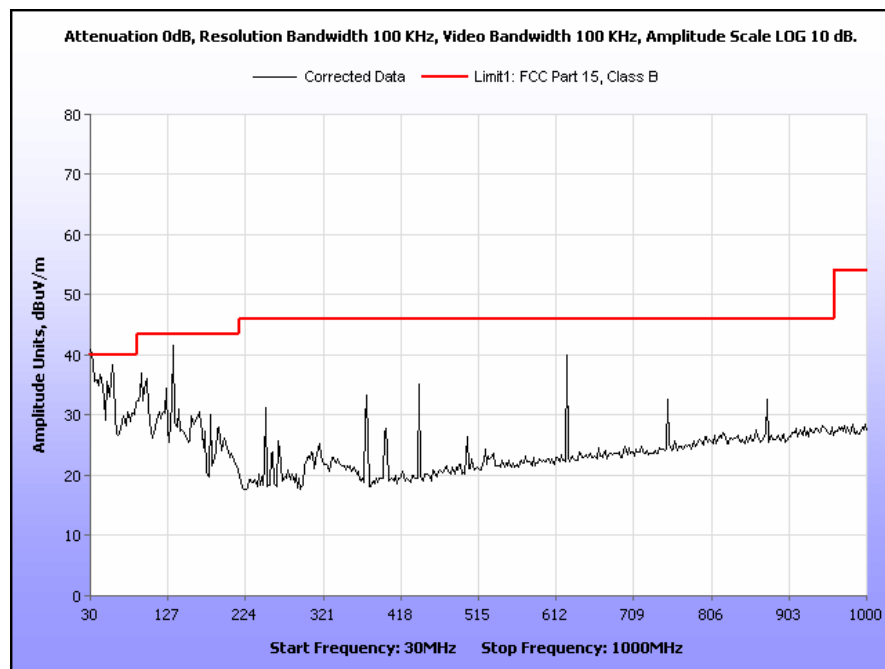

Plot 7. Radiated Emissions, ICES-003 Limits

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The device is professionally installed. This model also has an integral antenna, so it is also compliant because of this.

Test Engineer(s): Jeff Pratt

Test Date(s): 05/23/12

Gain (dBi)		Antenna Type	Antenna Description	Manufacturer	Model Number
2.4 GHz	5 GHz				
4	5	Planar Inverted-F Antenna (PIFA)	Internal PIFA Dual-Band 3 x 3	Meru	ERU-ANT-PI622

Table 15. Antenna List

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 16. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

Test Results: The EUT was compliant with this requirement. Measured emissions were below applicable limits.


Test Engineer(s): Anderson Soungpanya

Test Date(s): 05/07/12

15.207(a) Conducted Emissions Test Results

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Line	.190	60.18	64.042	-3.862	Pass	38.57	54.042	-15.472	Pass
Line	.257	49.38	61.54	-12.16	Pass	32.26	51.54	-19.28	Pass
Line	.389	43.69	58.107	-14.417	Pass	29.857	48.107	-18.25	Pass
Line	.485	41.37	56.26	-14.89	Pass	28.107	46.26	-18.153	Pass

Table 17. Conducted Emissions, 15.207(a), Phase Line, Test Results

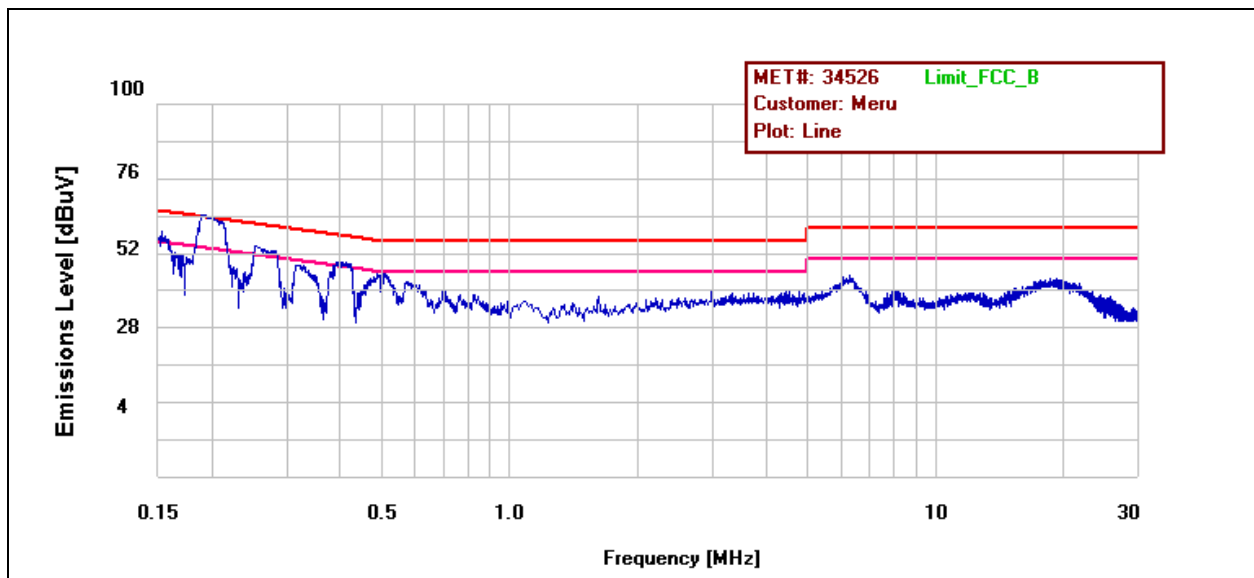


Plot 8. Conducted Emissions, 15.207(a), Phase Line

15.207(a) Conducted Emissions Test Results

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Neutral	.193	57.31	63.912	-6.602	Pass	38.43	53.912	-15.482	Pass
Neutral	.412	43.09	57.631	-14.541	Pass	30.54	47.631	-17.091	Pass
Neutral	.519	41.95	56	-14.05	Pass	28.42	46	-17.58	Pass

Table 18. Conducted Emissions, 15.207(a), Neutral Line, Test Results

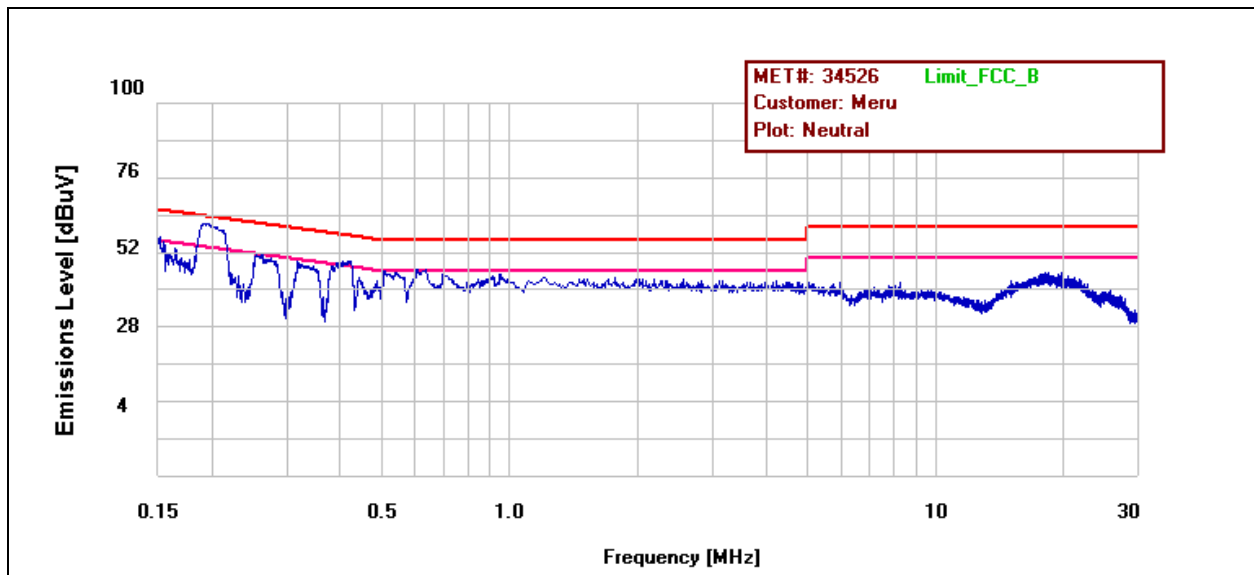

Plot 9. Conducted Emissions, 15.207(a), Neutral Line

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.403(c) 26dB Bandwidth

Test Requirements: § 15.403 (i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.

Test Results The 26 dB Bandwidth was compliant with the requirements of this section and was determined from the plots on the following pages.

Test Engineer(s): Jeff Pratt

Test Date(s): 05/22/12



Figure 2. Occupied Bandwidth, Test Setup


Mode	Channel	Frequency (MHz)	Port	26dB Bandwidth (MHz)
802.11a	Low	5180	A4	27.844
	Mid	5200	A4	26.809
	High	5240	A4	27.284
802.11n HT20	Low	5180	A4	26.818
			A5	26.544
			A6	27.322
	Mid	5200	A4	26.498
			A5	26.178
			A6	26.357
	High	5240	A4	26.742
			A5	25.872
			A6	25.752
802.11n HT40	Low	5190	A4	39.599
			A5	39.493
			A6	39.245
	High	5230	A4	39.093
			A5	39.563
			A6	39.491

Table 19. 26 dB Occupied Bandwidth, Test Results


Mode	Channel	Frequency (MHz)	Port	99% Bandwidth (MHz)
802.11a	Low	5180	A4	16.75
	Mid	5200	A4	16.62
	High	5240	A4	16.74
802.11n HT20	Low	5180	A4	17.72
			A5	17.67
			A6	17.7
	Mid	5200	A4	17.76
			A5	17.73
			A6	17.72
	High	5240	A4	17.76
			A5	17.87
			A6	17.59
802.11n HT40	Low	5190	A4	36.26
			A5	36.55
			A6	36.41
	High	5230	A4	36.85
			A5	35.99
			A6	37.15

Table 20. 99% Occupied Bandwidth, Test Results


26 dB Occupied Bandwidth, 802.11a

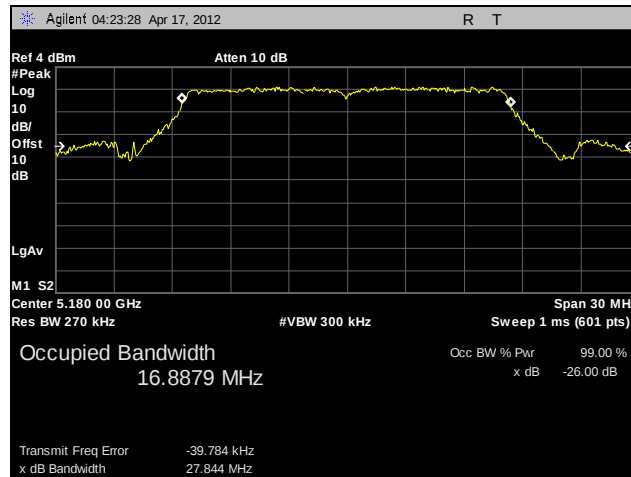

Plot 10. 26 dB Occupied Bandwidth, Low Channel, 802.11a

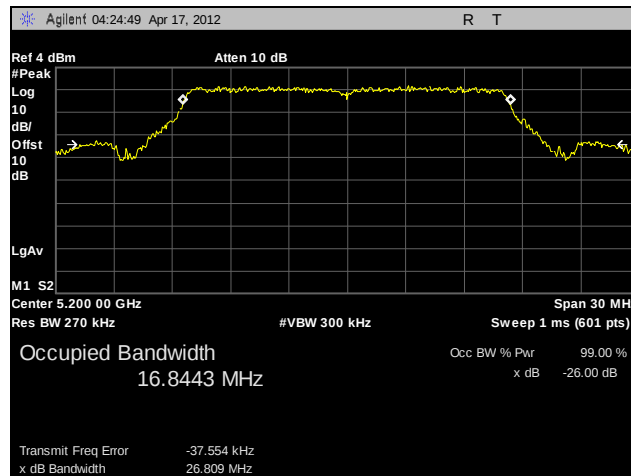


Plot 11. 26 dB Occupied Bandwidth, Mid Channel, 802.11a

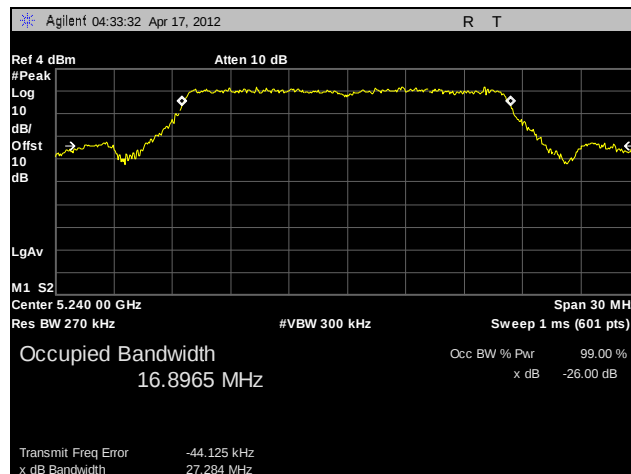


Plot 12. 26 dB Occupied Bandwidth, High Channel, 802.11a


26 dB Occupied Bandwidth, 802.11n 20 MHz, Low Channel

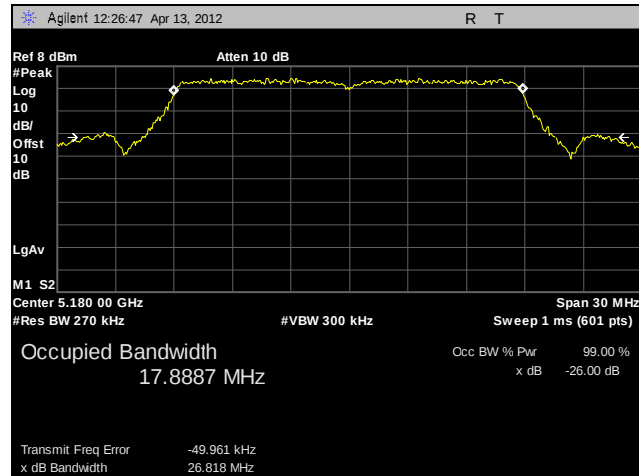

Plot 13. 26 dB Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A4)

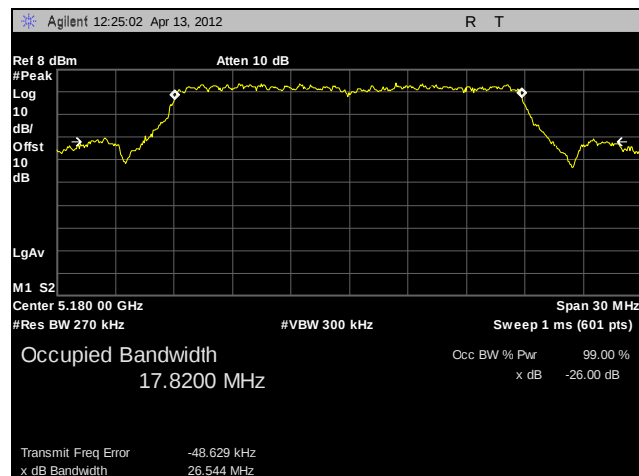


Plot 14. 26 dB Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A5)

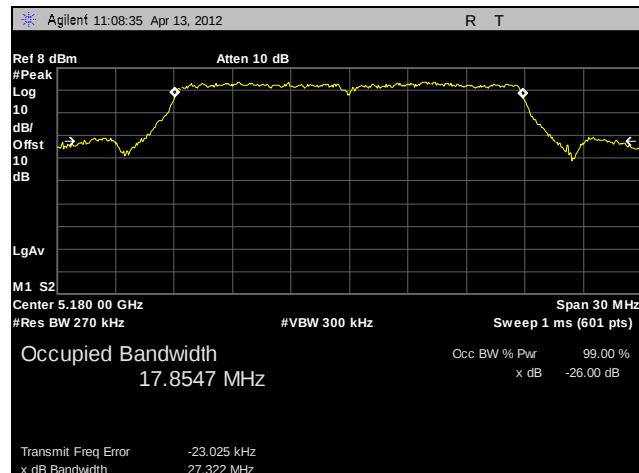


Plot 15. 26 dB Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A6)


26 dB Occupied Bandwidth, 802.11n 20 MHz, Mid Channel

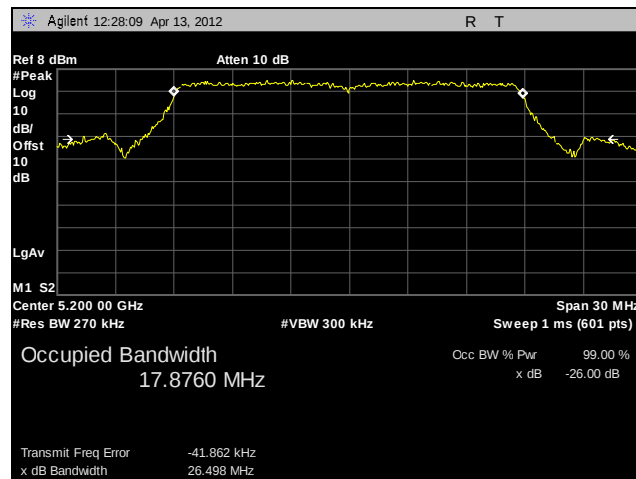

Plot 16. 26 dB Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A4)

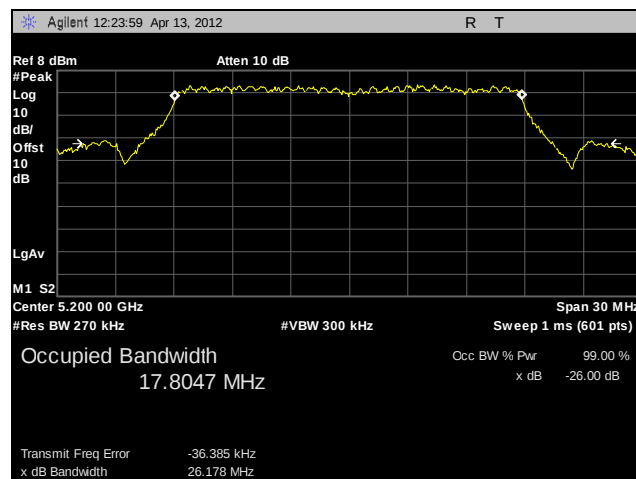


Plot 17. 26 dB Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A5)

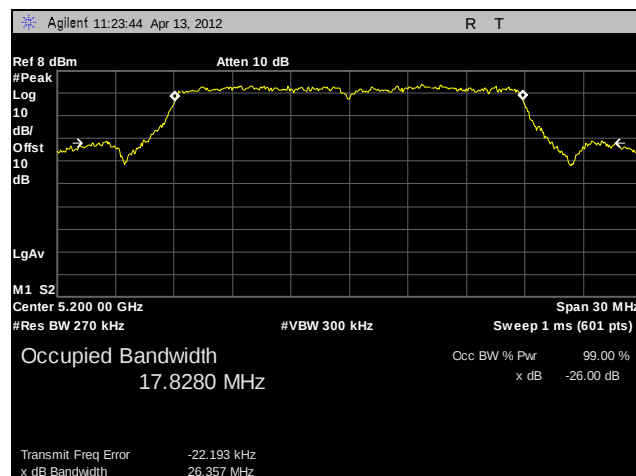


Plot 18. 26 dB Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A6)


26 dB Occupied Bandwidth, 802.11n 20 MHz, High Channel

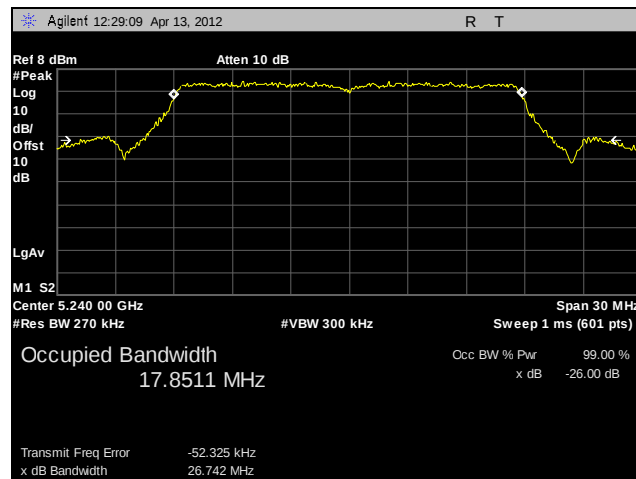

Plot 19. 26 dB Occupied Bandwidth, High Channel, 802.11n 20 MHz (A4)

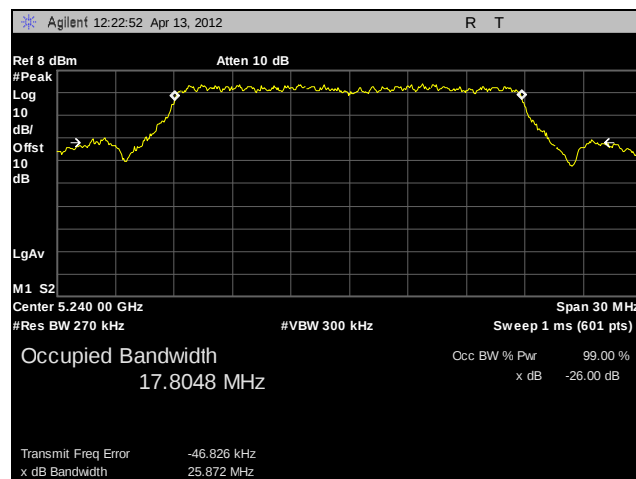


Plot 20. 26 dB Occupied Bandwidth, High Channel, 802.11n 20 MHz (A5)

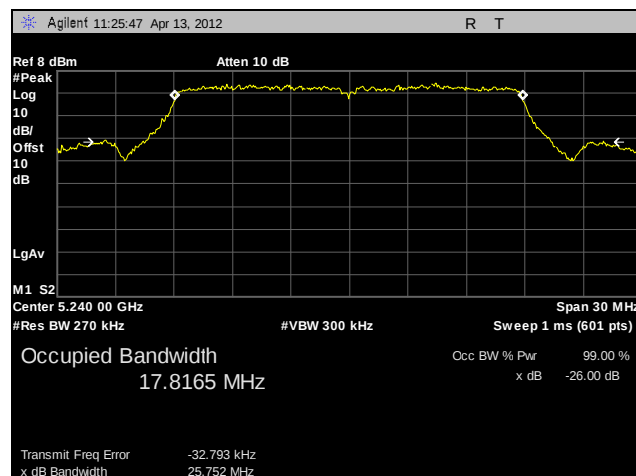


Plot 21. 26 dB Occupied Bandwidth, High Channel, 802.11n 20 MHz (A6)


26 dB Occupied Bandwidth, 802.11n 40 MHz, Low Channel

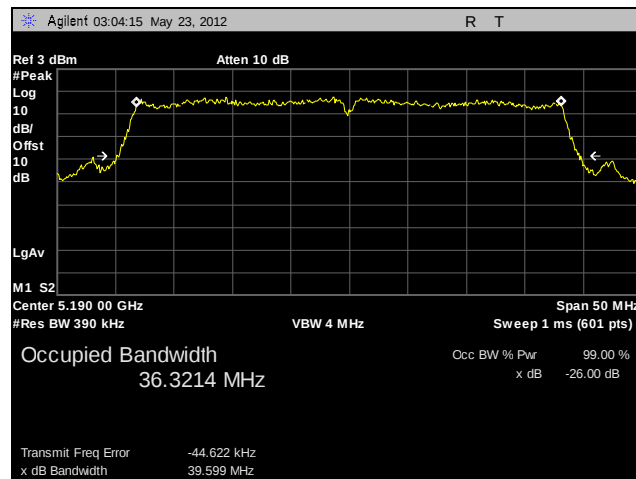

Plot 22. 26 dB Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A4)

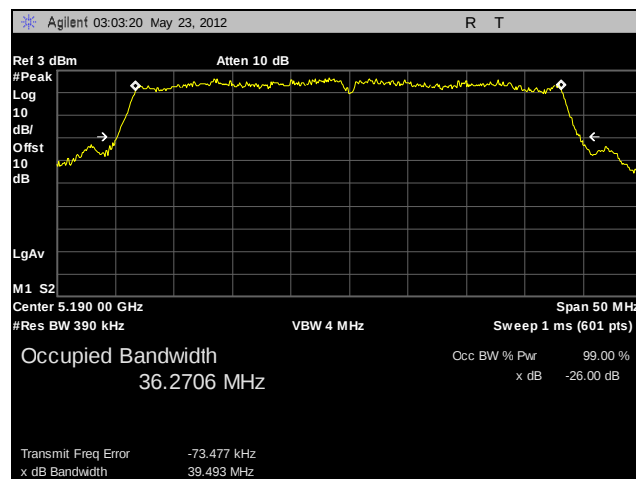


Plot 23. 26 dB Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A5)

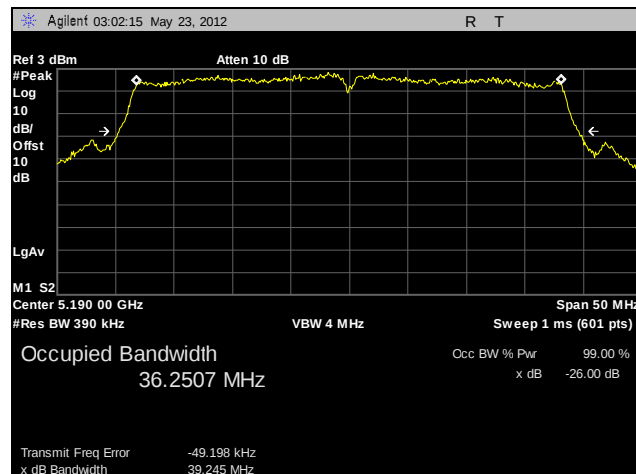


Plot 24. 26 dB Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A6)


26 dB Occupied Bandwidth, 802.11n 40 MHz, High Channel

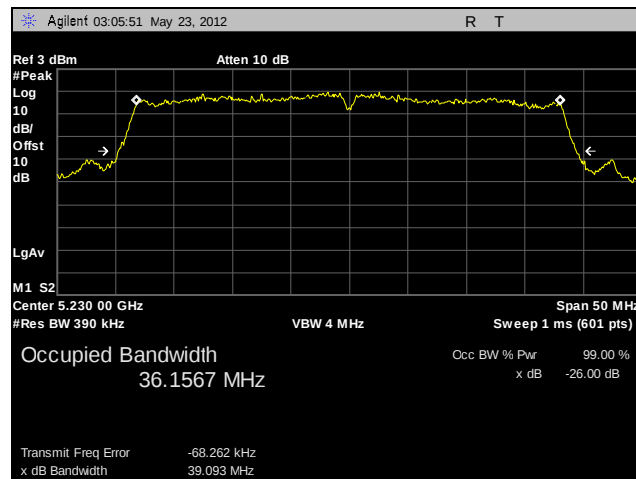

Plot 25. 26 dB Occupied Bandwidth, High Channel, 802.11n 40 MHz (A4)

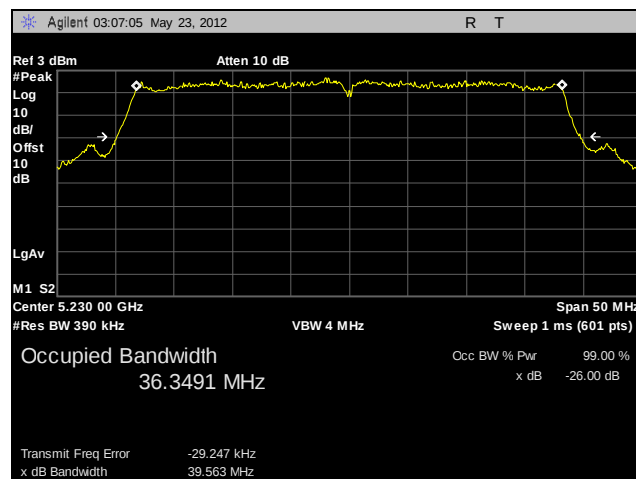


Plot 26. 26 dB Occupied Bandwidth, High Channel, 802.11n 40 MHz (A5)

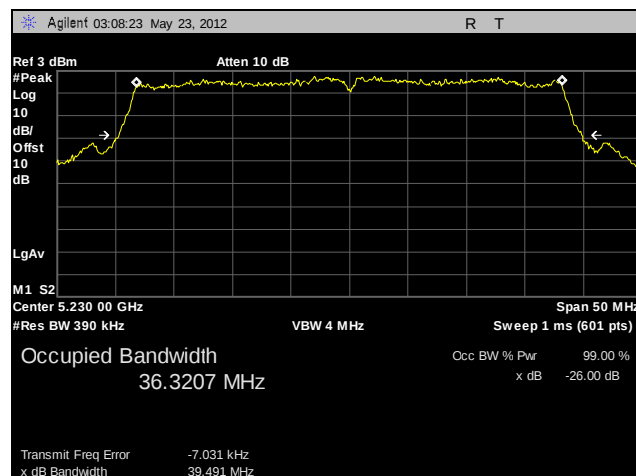


Plot 27. 26 dB Occupied Bandwidth, High Channel, 802.11n 40 MHz (A6)


99% Occupied Bandwidth, 802.11a

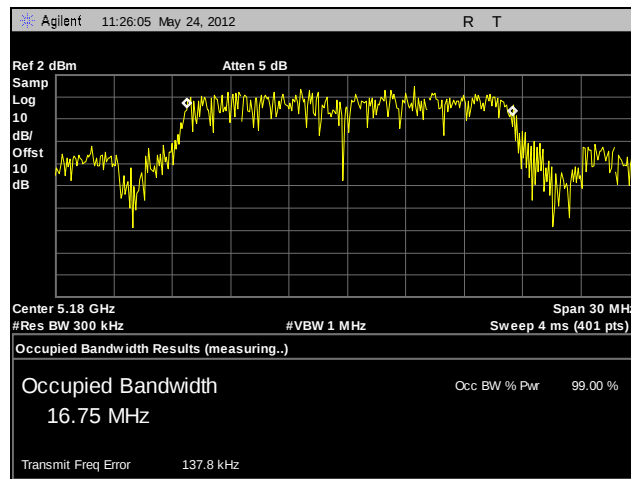

Plot 28. 99% Occupied Bandwidth, Low Channel, 802.11a

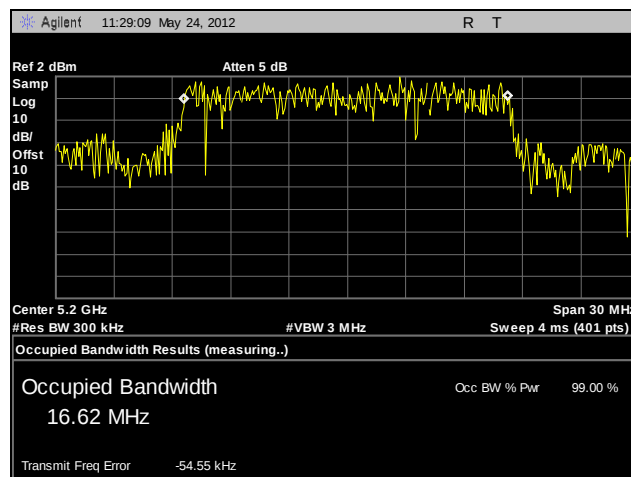


Plot 29. 99% Occupied Bandwidth, Mid Channel, 802.11a

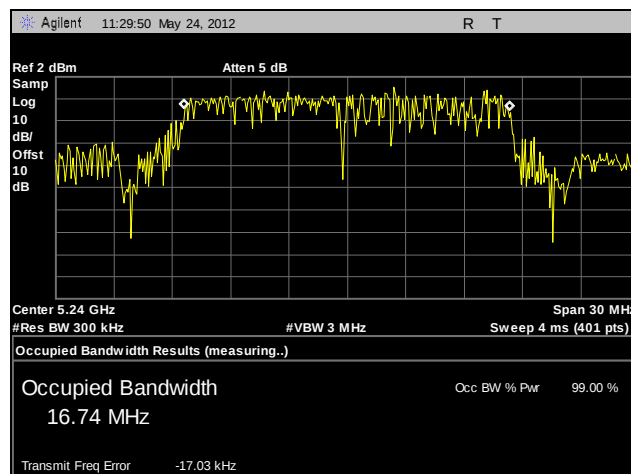


Plot 30. 99% Occupied Bandwidth, High Channel, 802.11a


99% Occupied Bandwidth, 802.11n 20 MHz, Low Channel

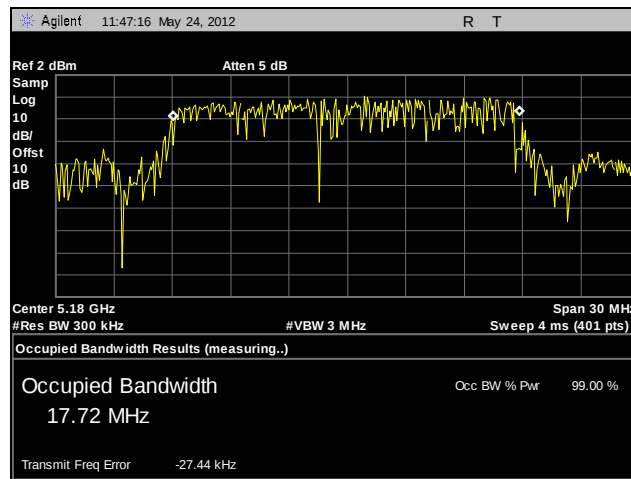

Plot 31. 99% Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A4)

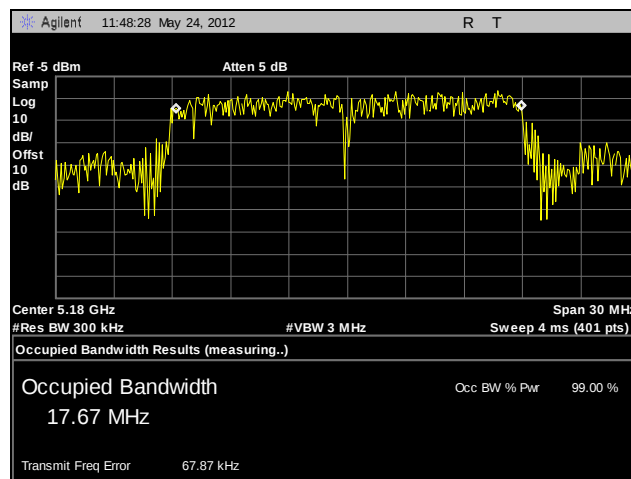


Plot 32. 99% Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A5)

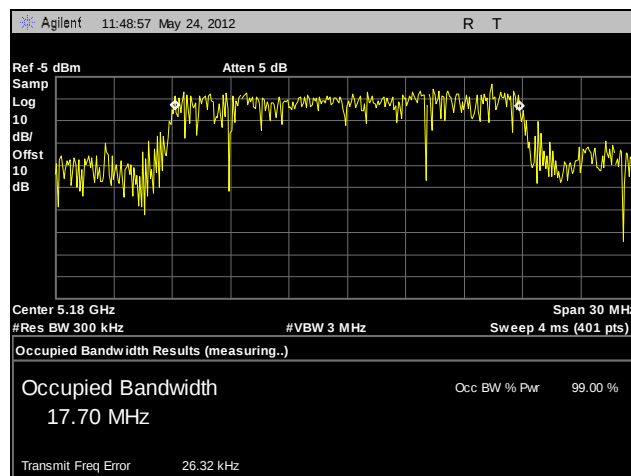


Plot 33. 99% Occupied Bandwidth, Low Channel, 802.11n 20 MHz (A6)


99% Occupied Bandwidth, 802.11n 20 MHz, Mid Channel

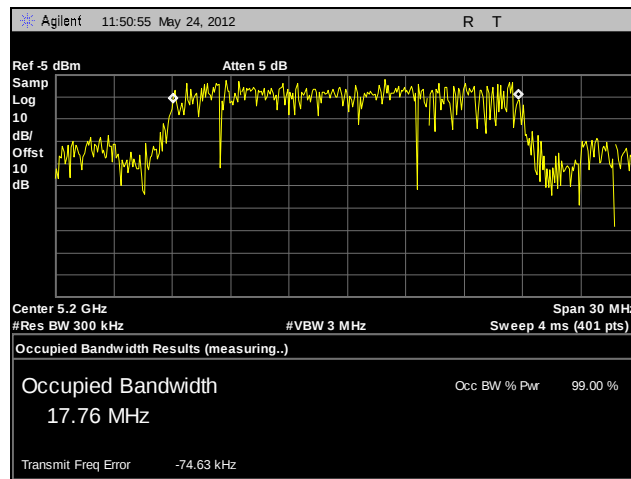

Plot 34. 99% Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A4)

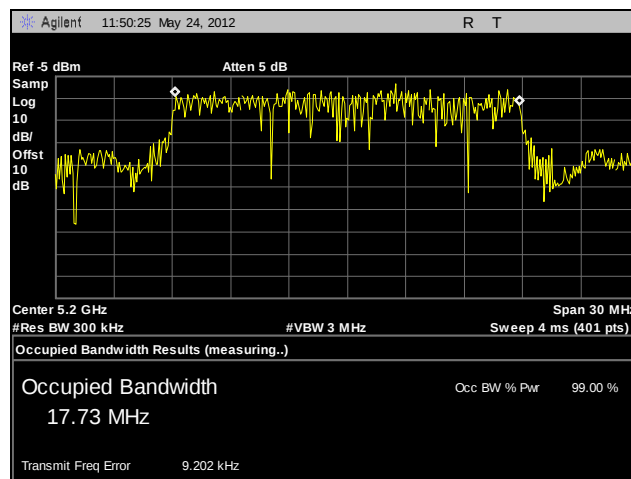


Plot 35. 99% Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A5)

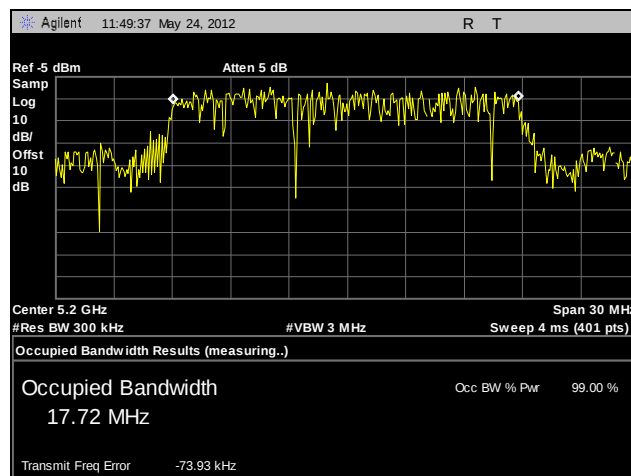


Plot 36. 99% Occupied Bandwidth, Mid Channel, 802.11n 20 MHz (A6)


99% Occupied Bandwidth, 802.11n 20 MHz, High Channel

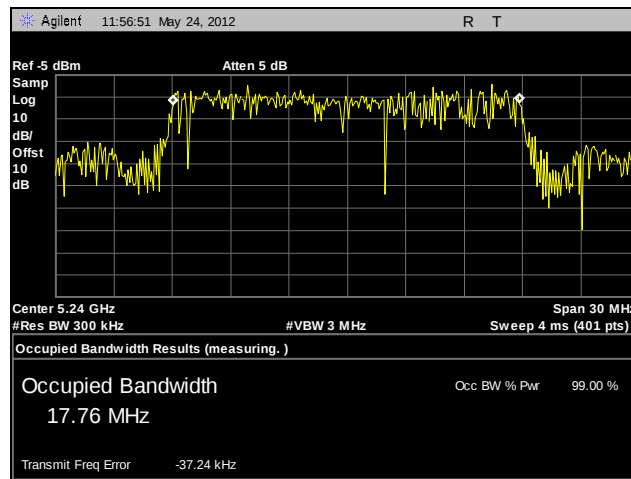

Plot 37. 99% Occupied Bandwidth, High Channel, 802.11n 20 MHz (A4)

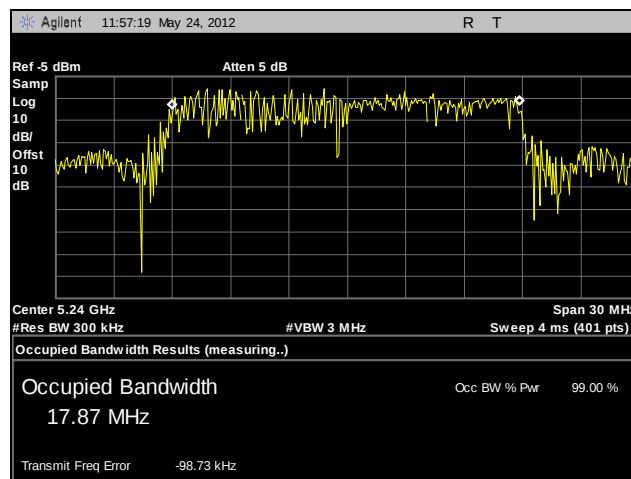


Plot 38. 99% Occupied Bandwidth, High Channel, 802.11n 20 MHz (A5)

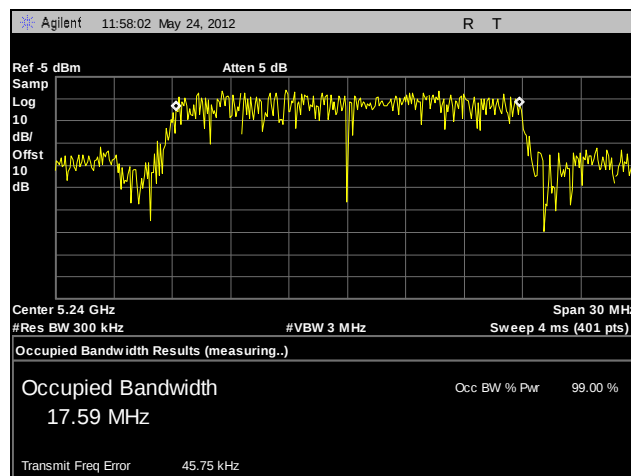


Plot 39. 99% Occupied Bandwidth, High Channel, 802.11n 20 MHz (A6)


99% Occupied Bandwidth, 802.11n 40 MHz, Low Channel

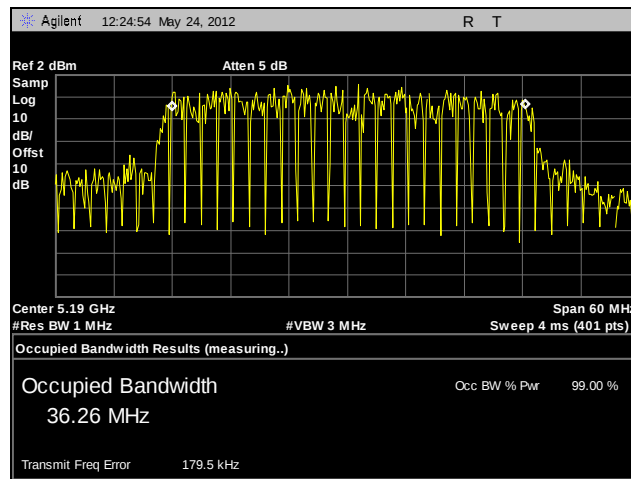

Plot 40. 99% Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A4)

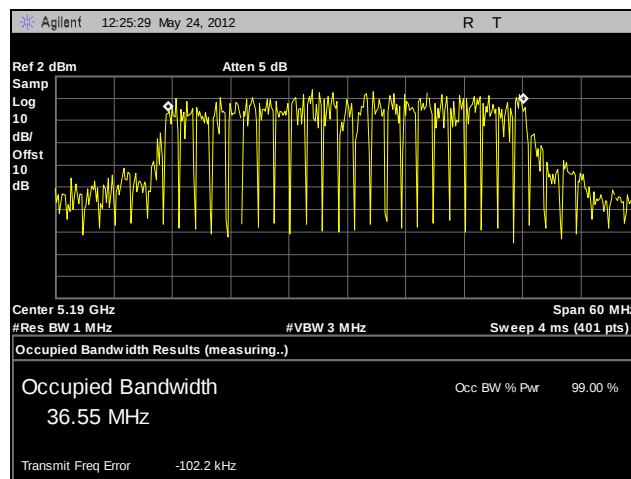


Plot 41. 99% Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A5)

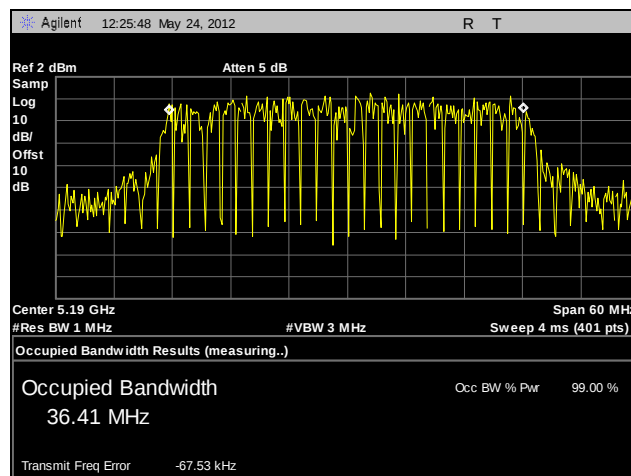


Plot 42. 99% Occupied Bandwidth, Low Channel, 802.11n 40 MHz (A6)


99% Occupied Bandwidth, 802.11n 40 MHz, High Channel

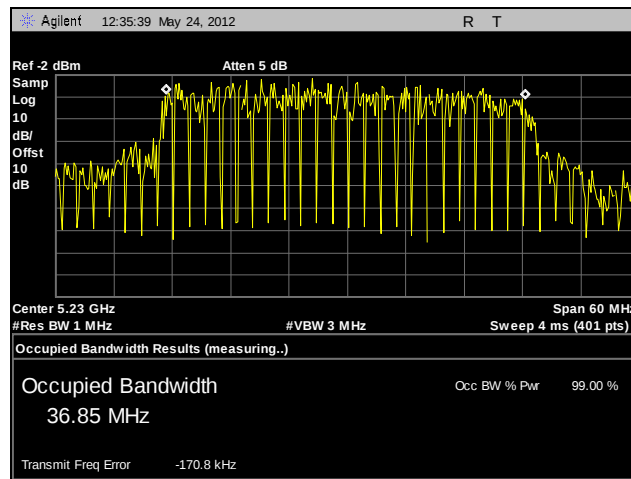

Plot 43. 99% Occupied Bandwidth, High Channel, 802.11n 40 MHz (A4)

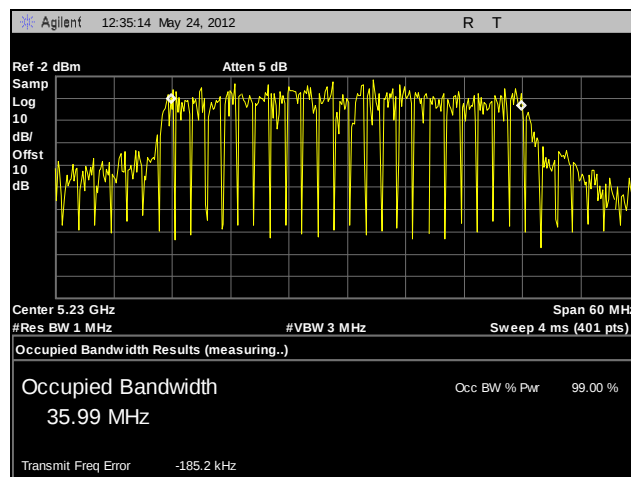

Plot 44. 99% Occupied Bandwidth, High Channel, 802.11n 40 MHz (A5)

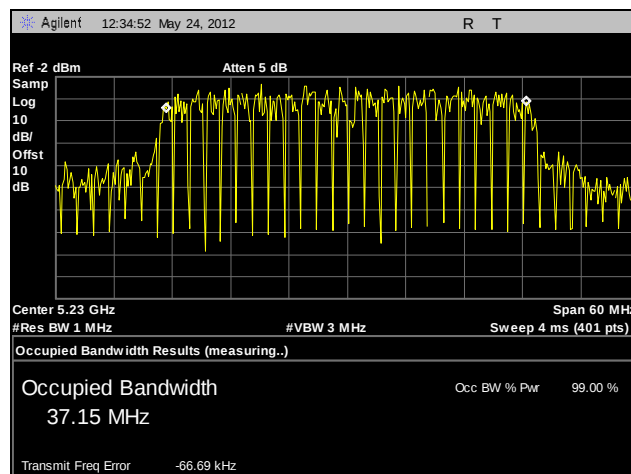

Plot 45. 99% Occupied Bandwidth, High Channel, 802.11n 40 MHz (A6)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15. 407(a)(1) RF Power Output

Test Requirements: §15.407(a)(1): For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz.

Test Procedure: The EUT was connected to a spectrum analyzer and set to transmit continuously on the low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in FCC publication number 789033.

Test Results: Equipment was compliant with the Peak Power Output limits of § 15.401(a)(1).

Test Engineer(s): Jeff Pratt

Test Date(s): 05/14/12

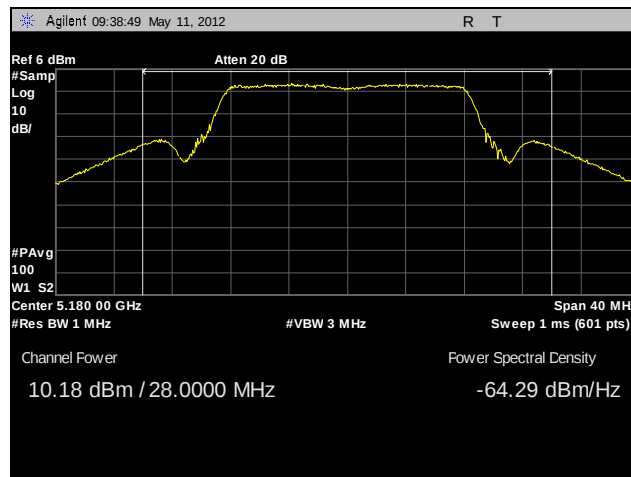


Figure 3. Power Output Test Setup


Integral PIFA Antenna								
Frequency (MHz)	Mode/Modulation Type	Port A4 Conducted Power (dBm)	Port A5 Conducted Power (dBm)	Power A6 Conducted Power (dBm)	Aggregate Conducted Power (dBm)	Antenna Array Gain (dBi)	Maximum Conducted Power (dBm)	Margin (dB)
5180	802.11a	10.18	--	--	10.18	5	16.9897	-6.8097
5200	802.11a	14.42	--	--	14.42	5	16.9897	-2.5697
5240	802.11a	14.13	--	--	14.13	5	16.9897	-2.8597
5180	802.11n HT20	6.72	6.32	6.89	11.421062	9.771213	13.2184875	-1.79743
5200	802.11n HT20	6.51	6.24	6.99	11.362367	9.771213	13.2184875	-1.85612
5240	802.11n HT20	6.94	6.2	6.54	11.341761	9.771213	13.2184875	-1.87673
5190	802.11n HT40	7.16	7.2	7.53	12.071071	9.771213	13.2184875	-1.14742
5230	802.11n HT40	7.62	7.13	7.59	12.223598	9.771213	13.2184875	-0.99489

Table 21. RF Power Output, Test Results


RF Power Output, 802.11a



Plot 46. RF Power Output, Low Channel, 802.11a

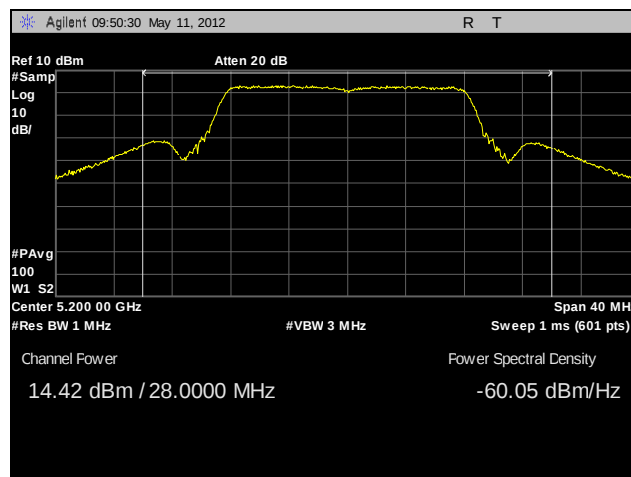


Plot 47. RF Power Output, Mid Channel, 802.11a

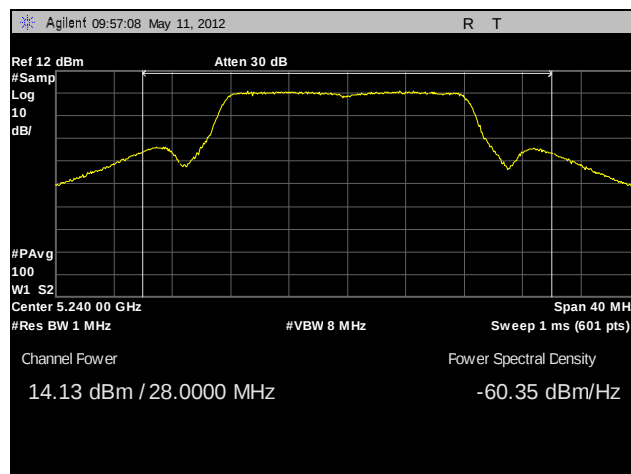


Plot 48. RF Power Output, High Channel, 802.11a


RF Power Output, 802.11n 20 MHz, Low Channel

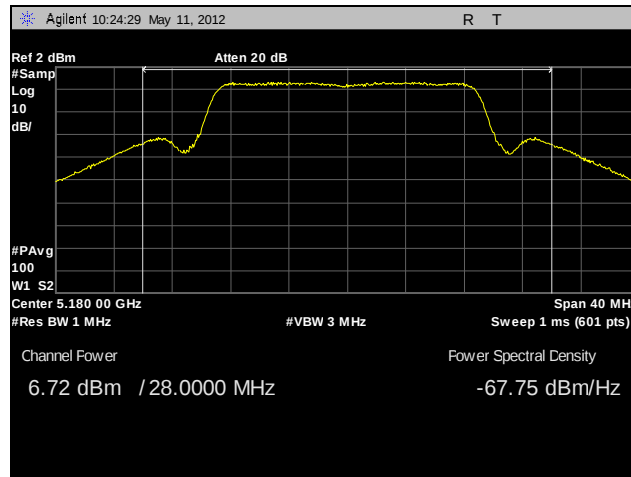

Plot 49. RF Power Output, Low Channel, 802.11n 20 MHz (A4)

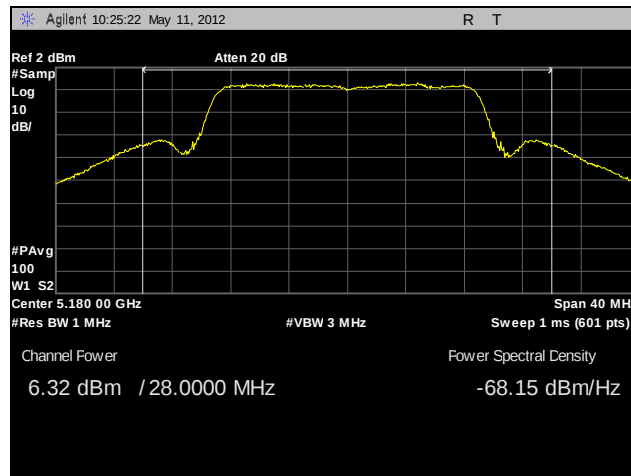


Plot 50. RF Power Output, Low Channel, 802.11n 20 MHz (A5)

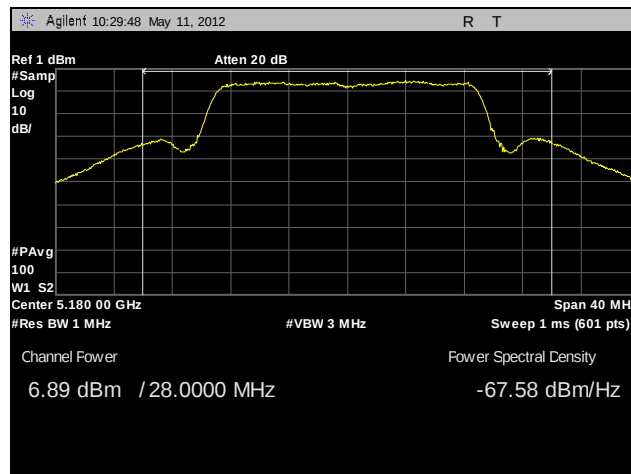


Plot 51. RF Power Output, Low Channel, 802.11n 20 MHz (A6)


RF Power Output, 802.11n 20 MHz, Mid Channel

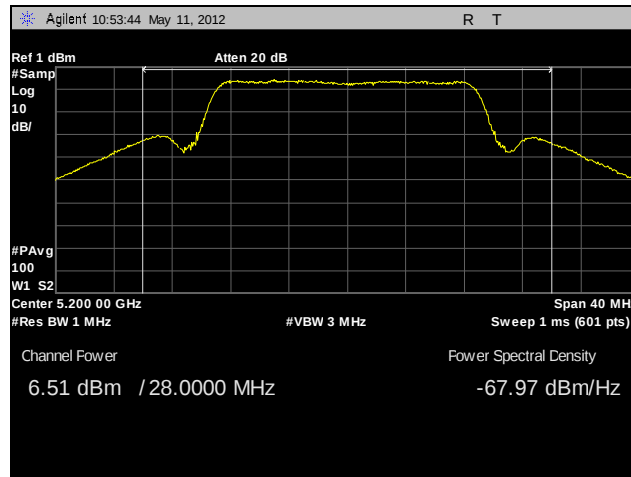

Plot 52. RF Power Output, Mid Channel, 802.11n 20 MHz (A4)

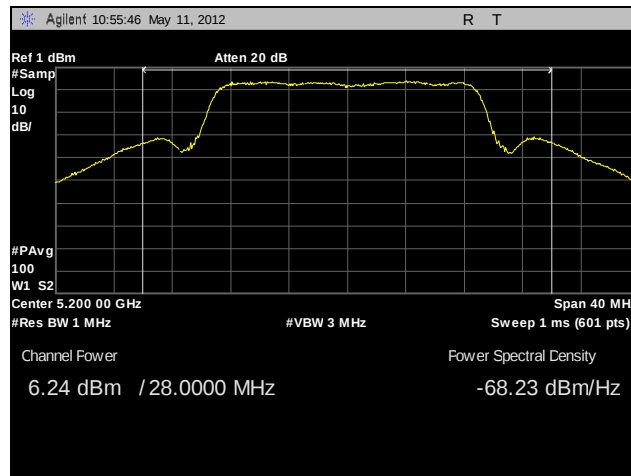


Plot 53. RF Power Output, Mid Channel, 802.11n 20 MHz (A5)

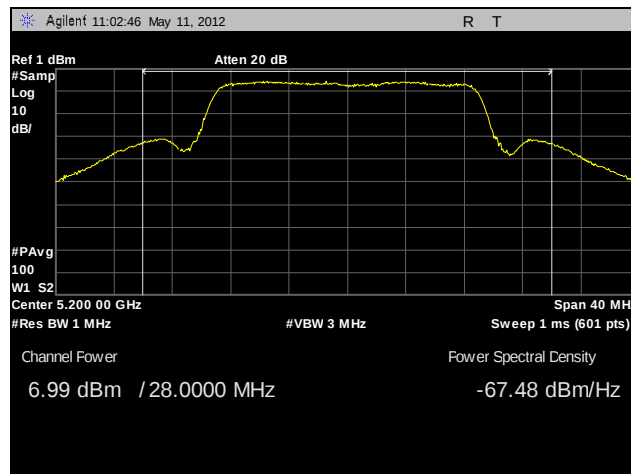


Plot 54. RF Power Output, Mid Channel, 802.11n 20 MHz (A6)


RF Power Output, 802.11n 20 MHz, High Channel

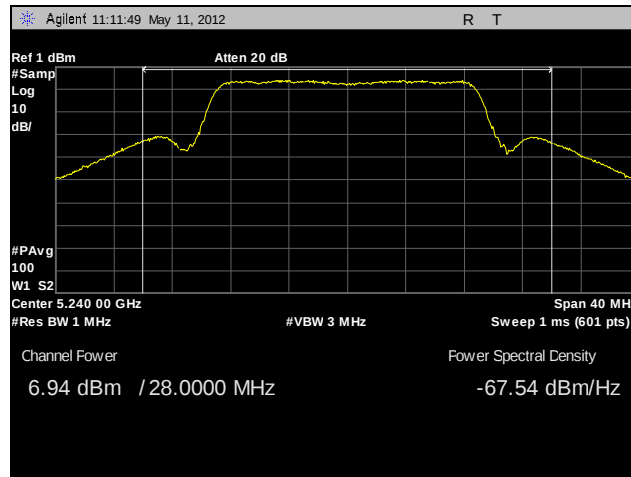

Plot 55. RF Power Output, High Channel, 802.11n 20 MHz (A4)

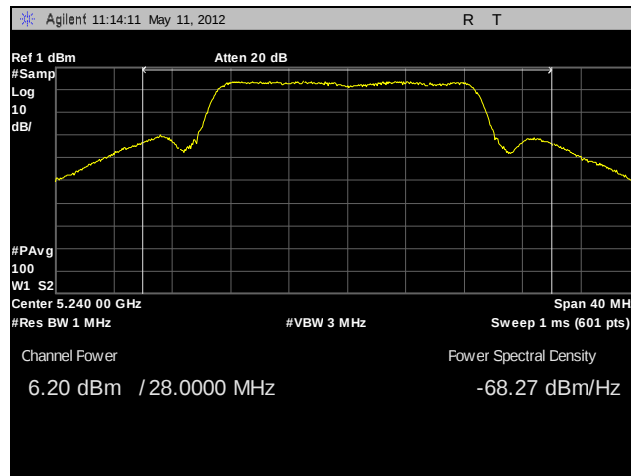


Plot 56. RF Power Output, High Channel, 802.11n 20 MHz (A5)

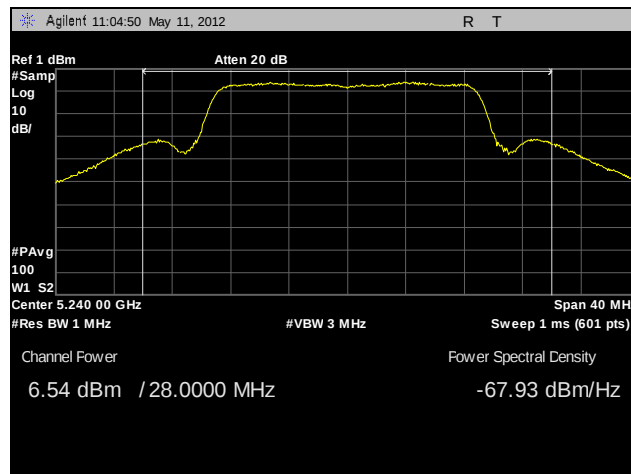


Plot 57. RF Power Output, High Channel, 802.11n 20 MHz (A6)


RF Power Output, 802.11n 40 MHz, Low Channel

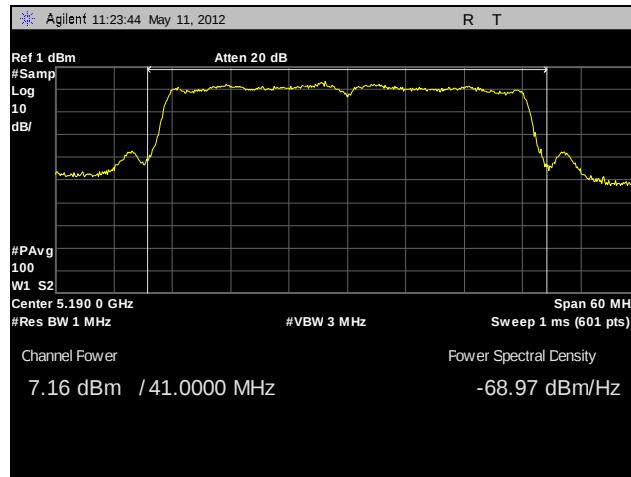

Plot 58. RF Power Output, Low Channel, 802.11n 40 MHz (A4)

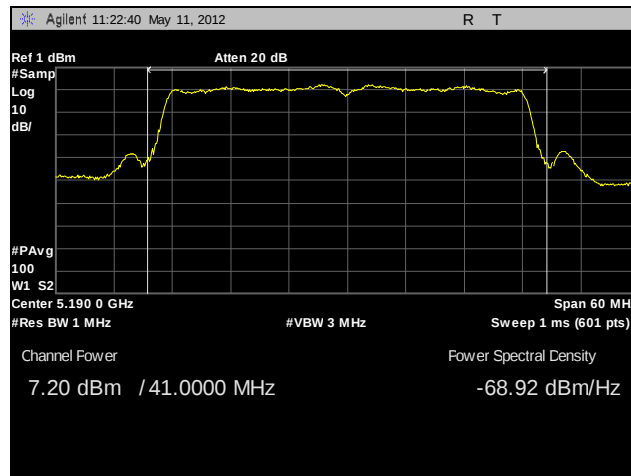


Plot 59. RF Power Output, Low Channel, 802.11n 40 MHz (A5)

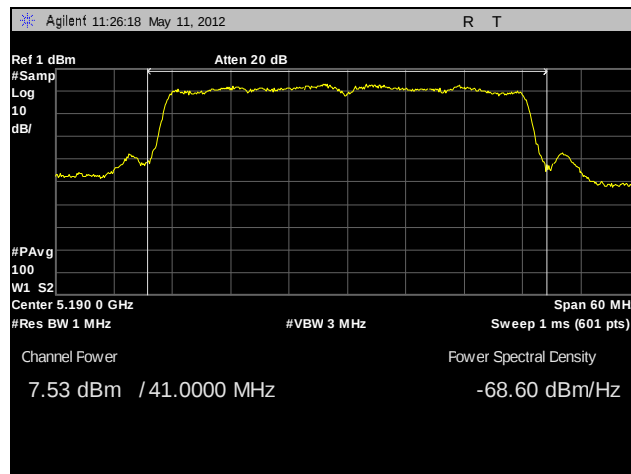


Plot 60. RF Power Output, Low Channel, 802.11n 40 MHz (A6)


RF Power Output, 802.11n 40 MHz, High Channel

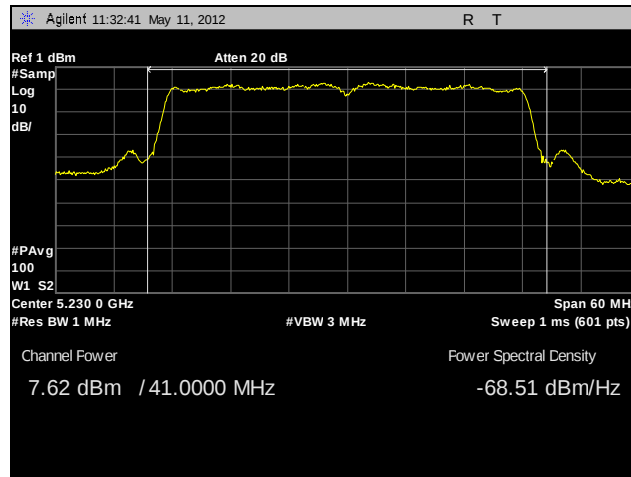

Plot 61. RF Power Output, High Channel, 802.11n 40 MHz (A4)

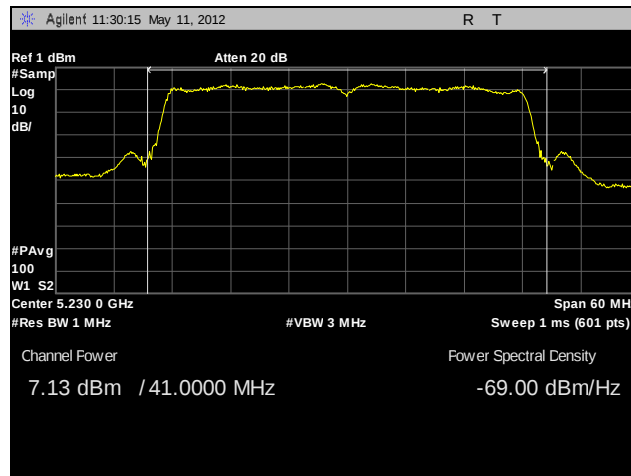

Plot 62. RF Power Output, High Channel, 802.11n 40 MHz (A5)

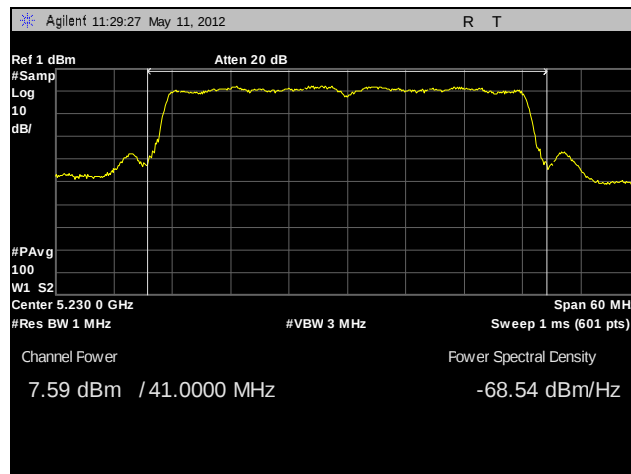

Plot 63. RF Power Output, High Channel, 802.11n 40 MHz (A6)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(a)(1) Peak Power Spectral Density

Test Requirements: § 15.407(a)(1): In addition, the peak power spectral density shall not exceed 4 dBm in any 1 megahertz band.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level on the EUT. The RBW was set to 1MHz and the VBW was set to 3MHz. The method of measurement used was method SA-1 from FCC Publication Number 789033.

Test Results: Equipment was compliant with the peak power spectral density limits of § 15.407 (a)(1). The peak power spectral density was determined from plots on the following page(s).

Test Engineer(s): Jeff Pratt

Test Date(s): 05/14/12

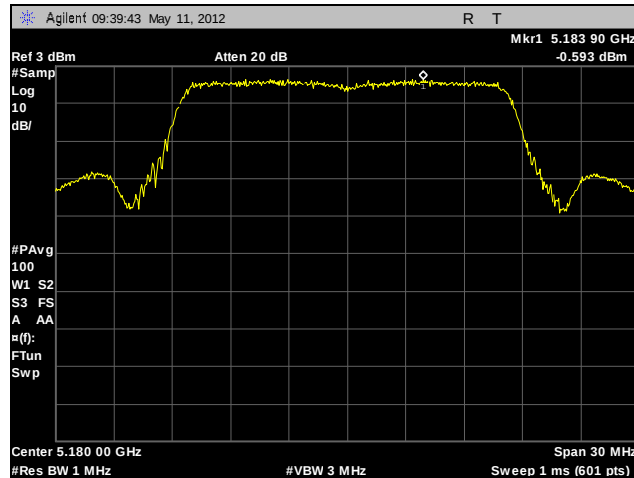


Figure 4. Power Spectral Density Test Setup


Internal PIFA Antenna								
Frequency (MHz)	Mode/Modulation Type	Port A4 Power Spectral Density (dBm)	Port A5 Power Spectral Density (dBm)	Port A6 Power Spectral Density (dBm)	Aggregate Power Spectral Density (dBm)	Antenna Array Gain (dBi)	Maximum Power Spectral Density (dBm)	Margin (dB)
5180	802.11a	-0.593	--	--	-0.593	5	4	-4.593
5200	802.11a	3.565	--	--	3.565	5	4	-0.435
5240	802.11a	3.121	--	--	3.121	5	4	-0.879
5180	802.11n HT20	-4.699	-4.744	-4.434	0.1477139	9.771213	0.2287875	-0.08107
5200	802.11n HT20	-4.723	-4.913	-4.774	-0.031381	9.771213	0.2287875	-0.26017
5240	802.11n HT20	-4.76	-4.939	-4.581	0.0136714	9.771213	0.2287875	-0.21512
5190	802.11n HT40	-5.871	-6.577	-6.063	-1.389015	9.771213	0.2287875	-1.6178
5230	802.11n HT40	-5.791	-5.985	-6.392	-1.277625	9.771213	0.2287875	-1.50641

Table 22. Power Spectral Density, Test Results


Power Spectral Density, 802.11a



Plot 64. Power Spectral Density, Low Channel, 802.11a

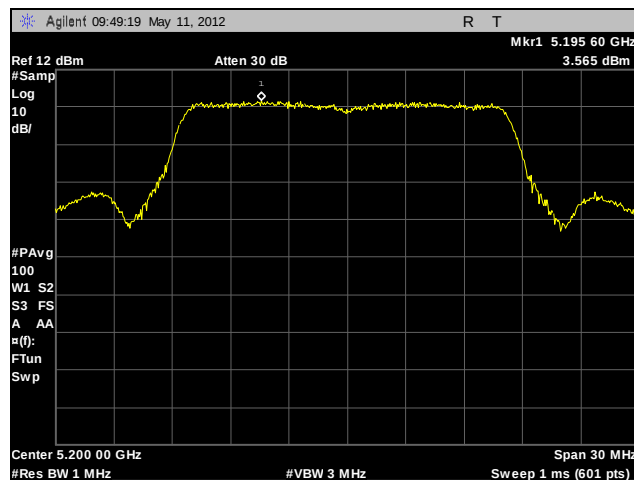


Plot 65. Power Spectral Density, Mid Channel, 802.11a

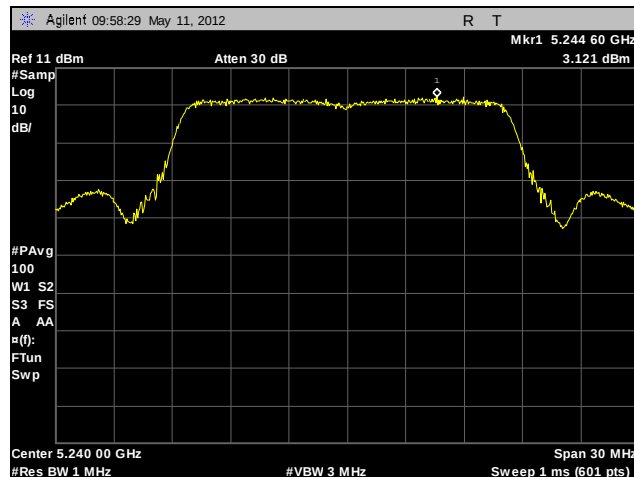


Plot 66. Power Spectral Density, High Channel, 802.11a


Power Spectral Density, 802.11n 20 MHz, Low Channel

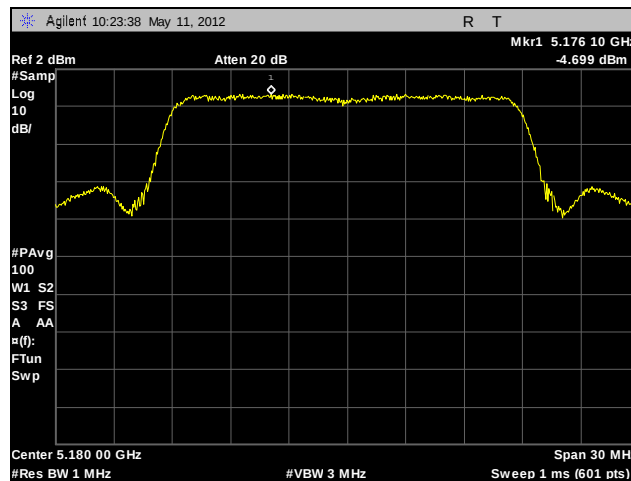

Plot 67. Power Spectral Density, Low Channel, 802.11n 20 MHz (A4)

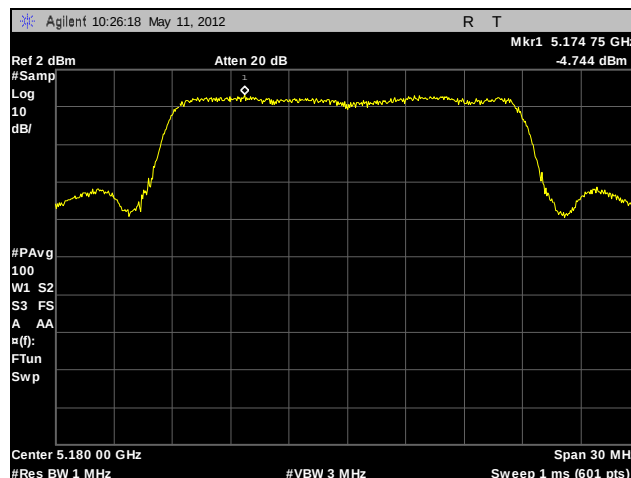


Plot 68. Power Spectral Density, Low Channel, 802.11n 20 MHz (A5)

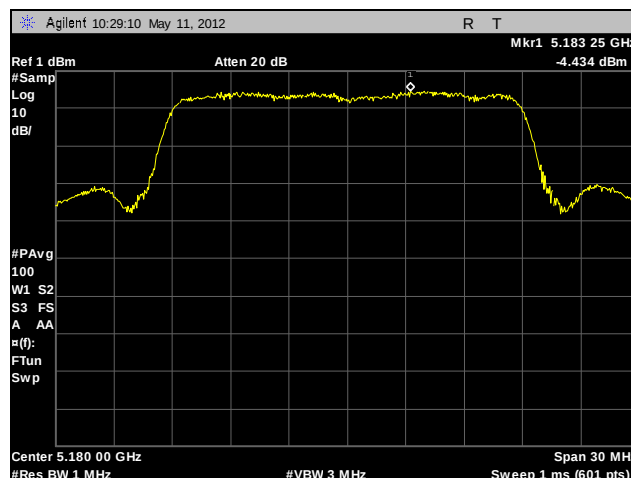


Plot 69. Power Spectral Density, Low Channel, 802.11n 20 MHz (A6)


Power Spectral Density, 802.11n 20 MHz, Mid Channel

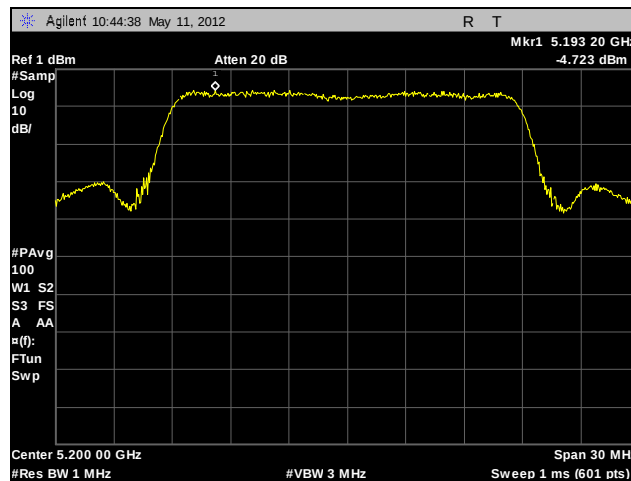

Plot 70. Power Spectral Density, Mid Channel, 802.11n 20 MHz (A4)

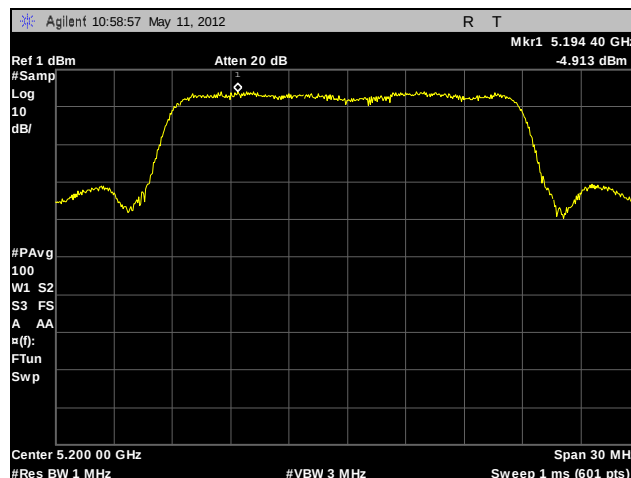


Plot 71. Power Spectral Density, Mid Channel, 802.11n 20 MHz (A5)

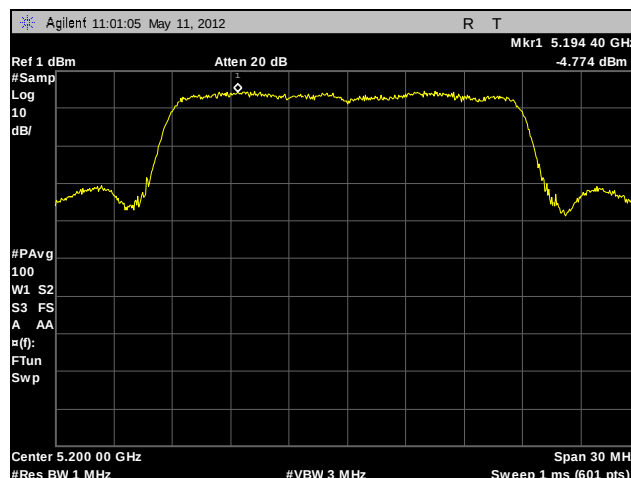


Plot 72. Power Spectral Density, Mid Channel, 802.11n 20 MHz (A6)


Power Spectral Density, 802.11n 20 MHz, High Channel

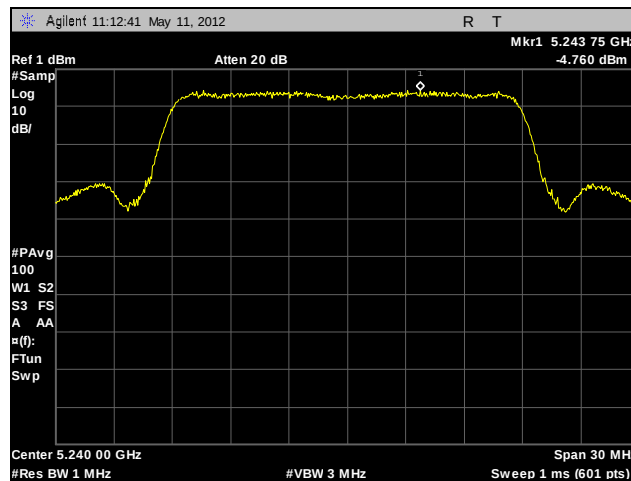

Plot 73. Power Spectral Density, High Channel, 802.11n 20 MHz (A4)

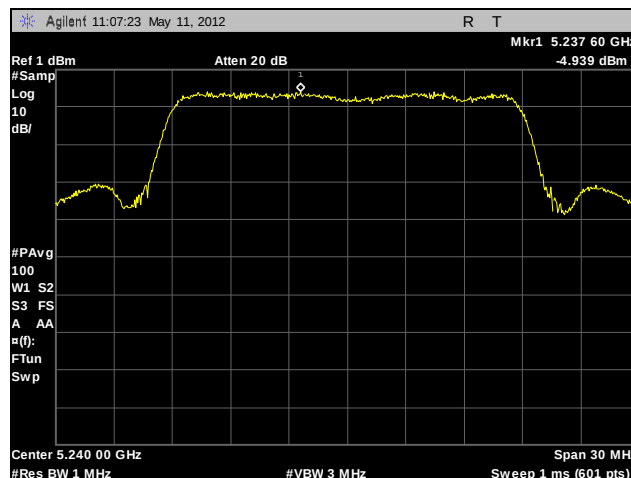


Plot 74. Power Spectral Density, High Channel, 802.11n 20 MHz (A5)

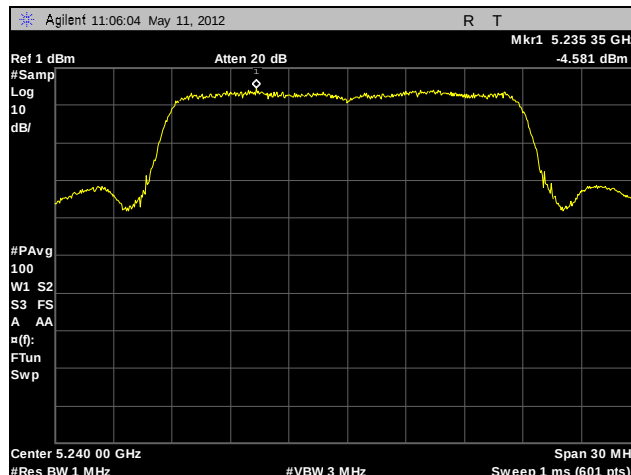


Plot 75. Power Spectral Density, High Channel, 802.11n 20 MHz (A6)


Power Spectral Density, 802.11n 40 MHz, Low Channel

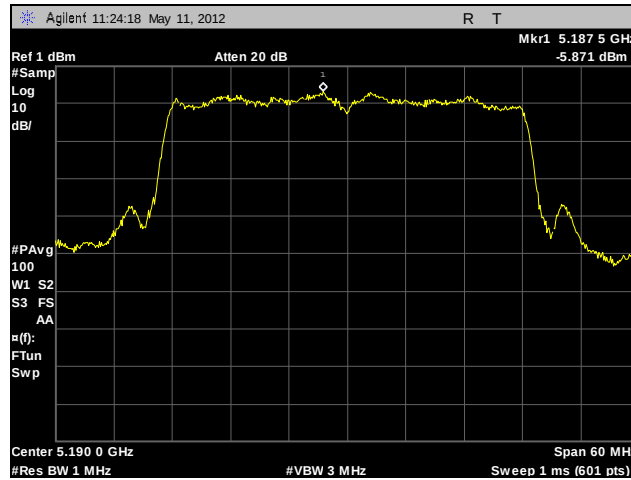

Plot 76. Power Spectral Density, Low Channel, 802.11n 40 MHz (A4)

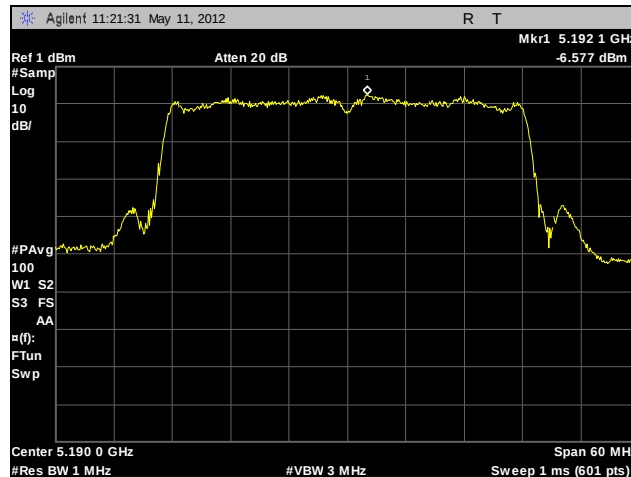


Plot 77. Power Spectral Density, Low Channel, 802.11n 40 MHz (A5)

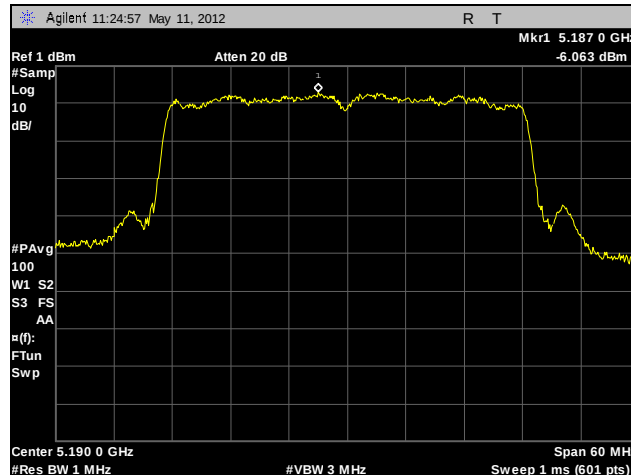


Plot 78. Power Spectral Density, Low Channel, 802.11n 40 MHz (A6)


Power Spectral Density, 802.11n 40 MHz, High Channel

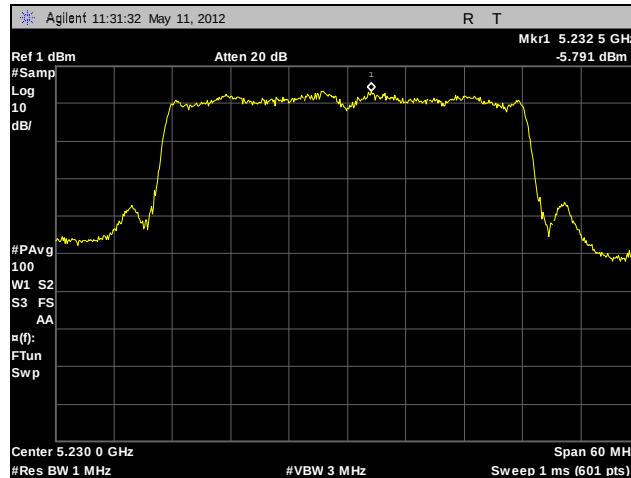

Plot 79. Power Spectral Density, High Channel, 802.11n 40 MHz (A4)

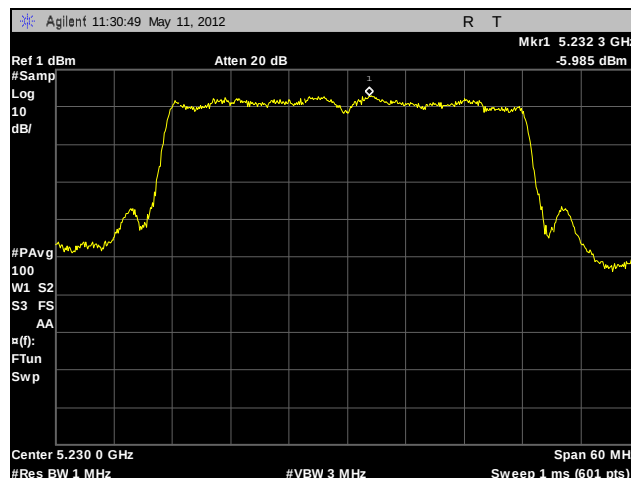

Plot 80. Power Spectral Density, High Channel, 802.11n 40 MHz (A5)

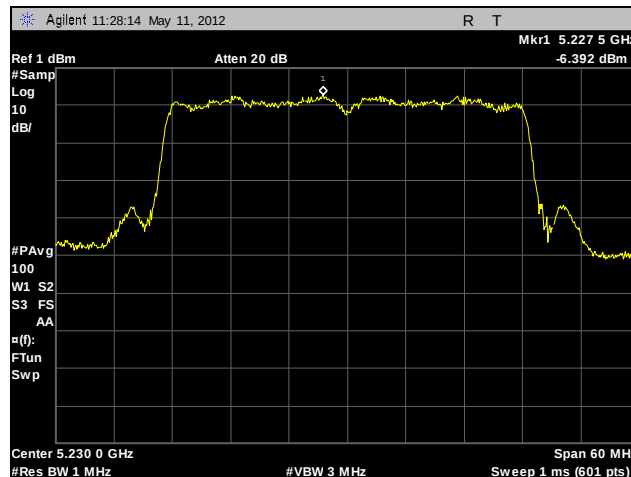

Plot 81. Power Spectral Density, High Channel, 802.11n 40 MHz (A6)

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.407(a)(6) Peak Excursion Ratio

Test Requirements:	§ 15.407(a)(6): The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.
Test Procedure:	The EUT was connected directly to the spectrum analyzer through cabling and attenuation. The 1 st trace on the spectrum analyzer was set to RBW=1MHz, VBW=3MHz. The peak detector mode was used and the trace max held. The 2 nd trace on the spectrum analyzer was set according to measurement method #1 from the FCC Public Notice DA 02-2138 for making conducted power measurements.
Test Results:	Equipment was compliant with the peak excursion ratio limits of § 15.407(a)(6) . The peak excursion ratio was determined from plots on the following page(s).
Test Engineer(s):	Jeff Pratt
Test Date(s):	05/08/12




Figure 5. Peak Excursion Ration Test Setup


Peak Excursion Ratio, 802.11a

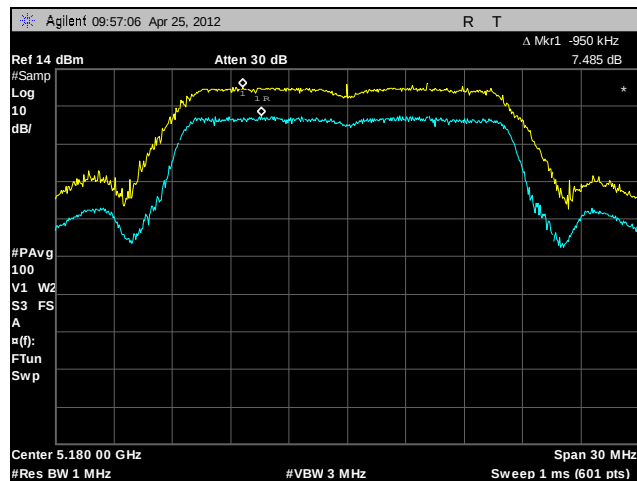

Plot 82. Peak Excursion Ratio, Low Channel, 802.11a

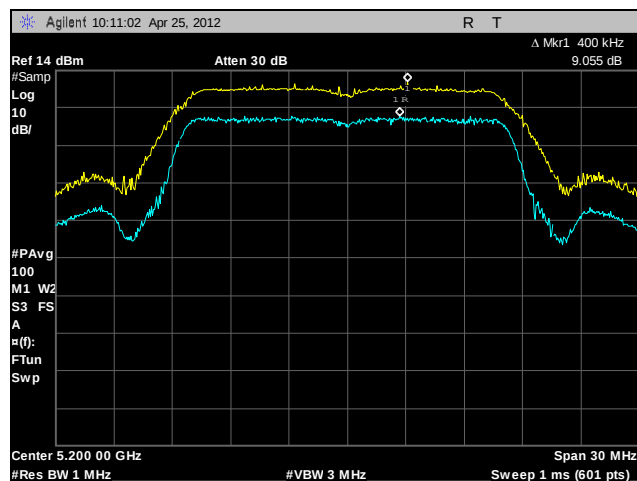


Plot 83. Peak Excursion Ratio, Mid Channel, 802.11a

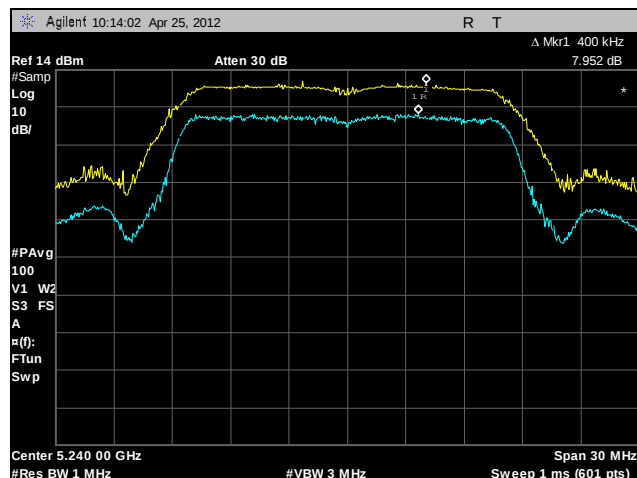


Plot 84. Peak Excursion Ratio, High Channel, 802.11a


Peak Excursion Ratio, 802.11n 20 MHz (A4)

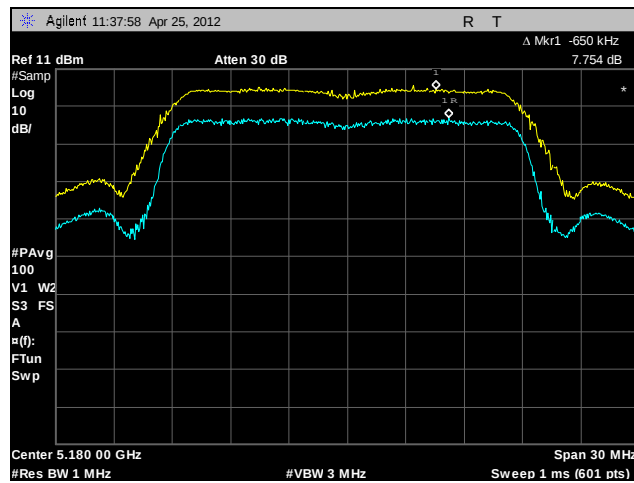

Plot 85. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz (A4)

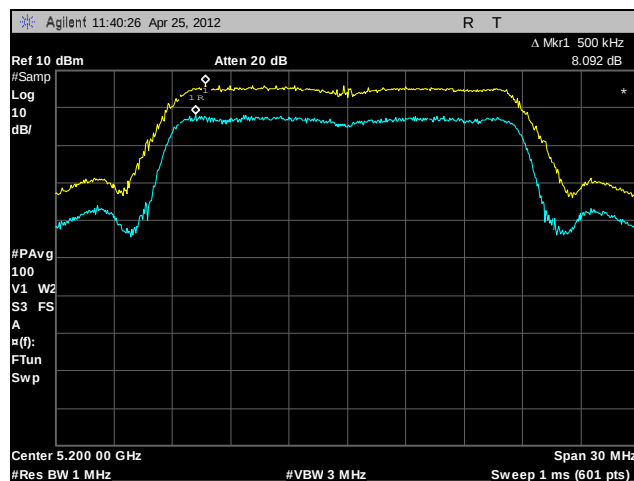


Plot 86. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz (A4)

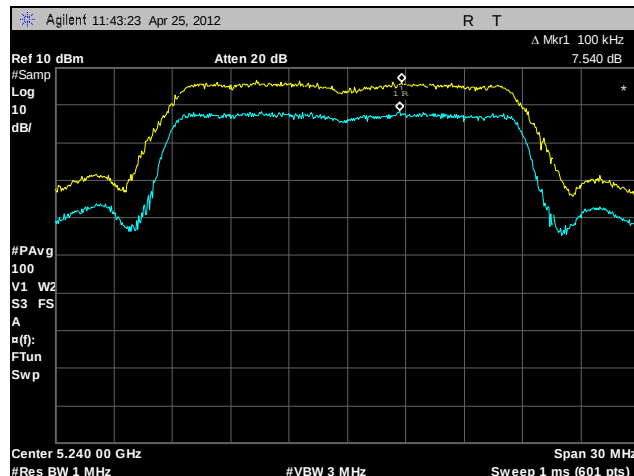


Plot 87. Peak Excursion Ratio, High Channel, 802.11n 20 MHz (A4)


Peak Excursion Ratio, 802.11n 20 MHz (A5)

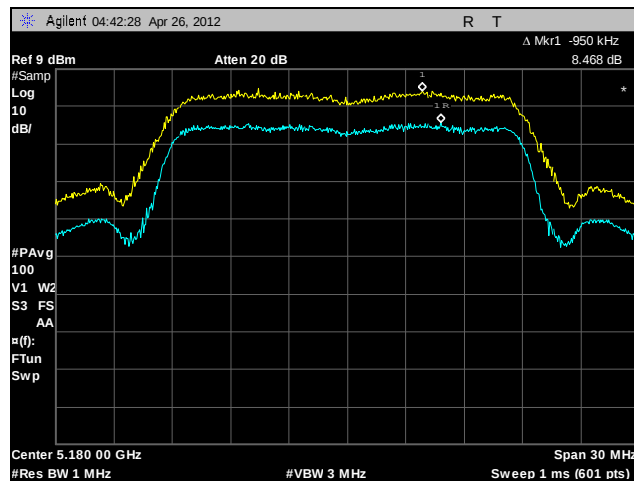

Plot 88. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz (A5)

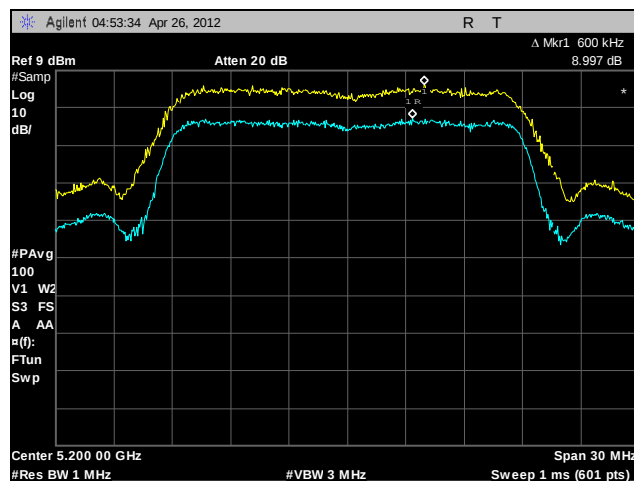


Plot 89. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz (A5)

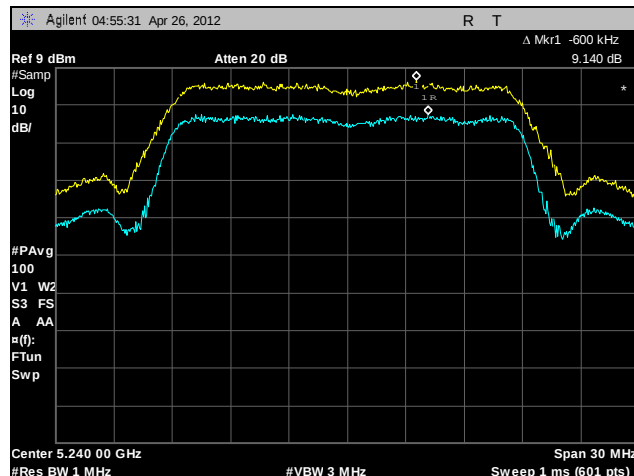


Plot 90. Peak Excursion Ratio, High Channel, 802.11n 20 MHz (A5)


Peak Excursion Ratio, 802.11n 20 MHz (A6)

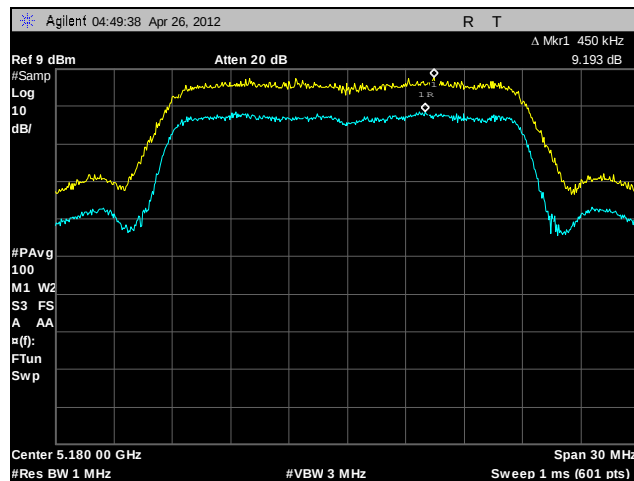

Plot 91. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz (A6)

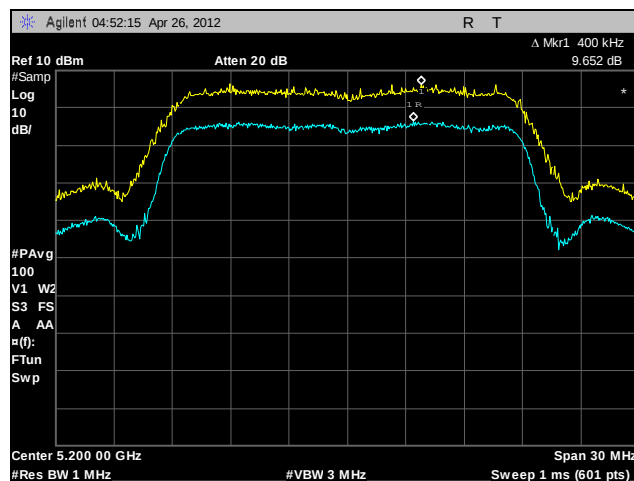


Plot 92. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz (A6)

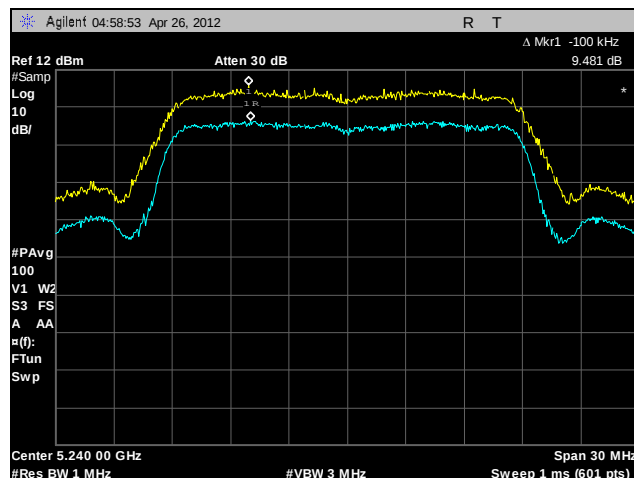


Plot 93. Peak Excursion Ratio, High Channel, 802.11n 20 MHz (A6)

Peak Excursion Ratio, 802.11n 40 MHz (A4)

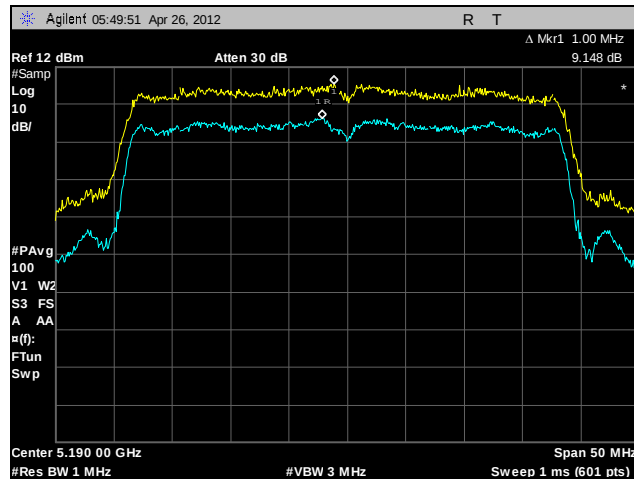


Plot 94. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz (A4)

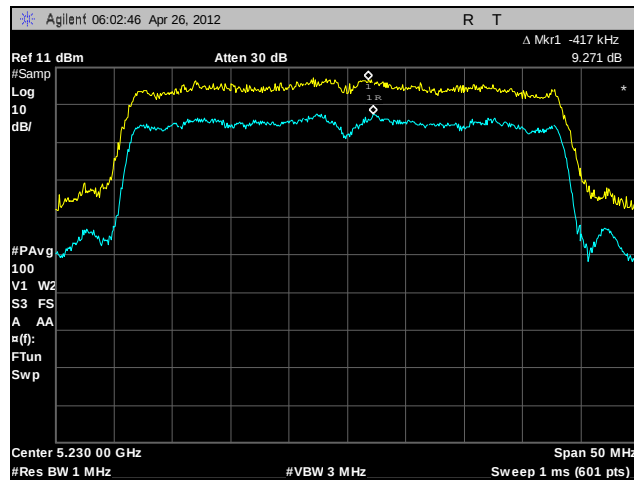


Plot 95. Peak Excursion Ratio, High Channel, 802.11n 40 MHz (A4)

Peak Excursion Ratio, 802.11n 40 MHz (A5)

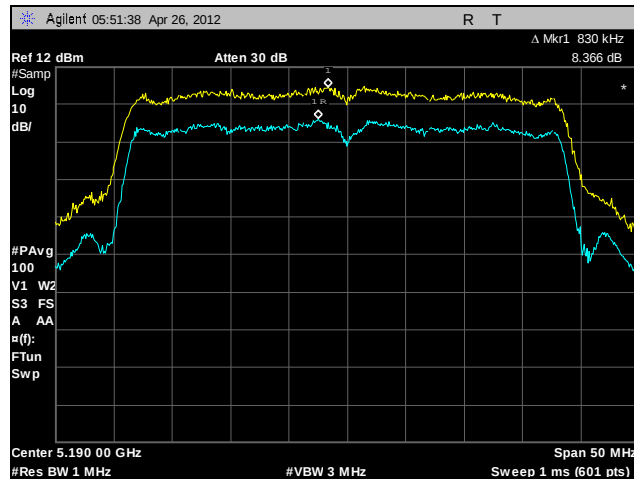


Plot 96. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz (A5)

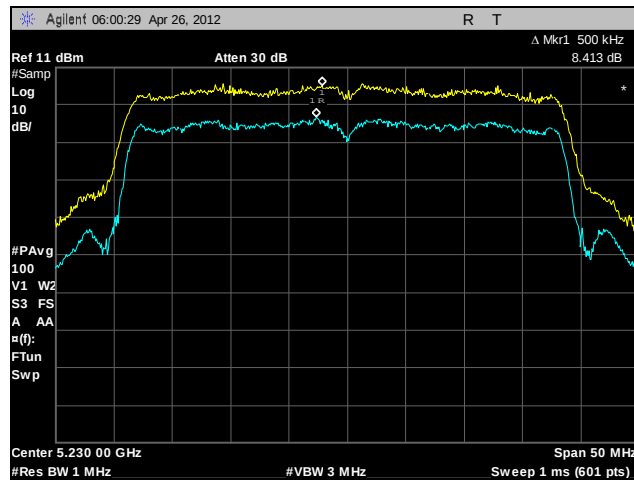


Plot 97. Peak Excursion Ratio, High Channel, 802.11n 40 MHz (A5)

Peak Excursion Ratio, 802.11n 40 MHz (A6)

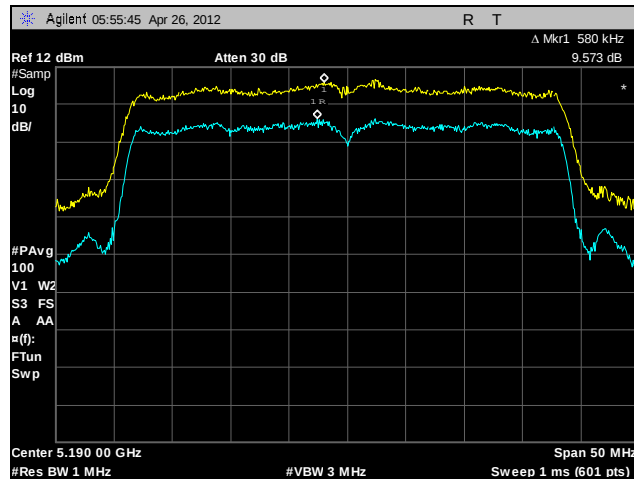

Plot 98. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz (A6)

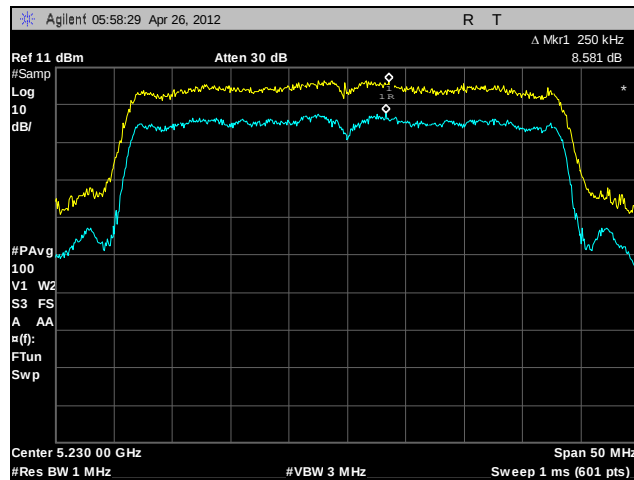

Plot 99. Peak Excursion Ratio, High Channel, 802.11n 40 MHz (A6)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(b)(1), (6), (7) Undesirable Emissions

Test Requirements: § 15.407(b)(1), (6), (7); §15.205: Emissions outside the frequency band.

§ 15.407(b)(1): For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure: The transmitter was placed on an 80cm wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Emissions were explored up to 40 GHz.

The equation, $EIRP = E + 20 \log D - 104.8$ was used to convert an EIRP limit to a field strength limit.

E = field strength (dBV/m)


D = Reference measurement distance

Test Results: The EUT was compliant with the Radiated Emission limits for Intentional Radiators. See following pages for detailed test results.


Test Engineer(s): Jeff Pratt

Test Date(s): 05/23/12


Radiated Spurious Emissions, 802.11a

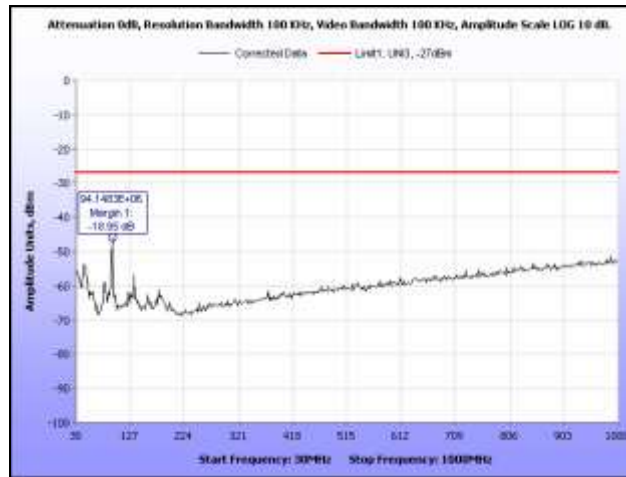


Plot 100. Radiated Spurious Emissions, 802.11a, Low Channel, 30 MHz – 1 GHz

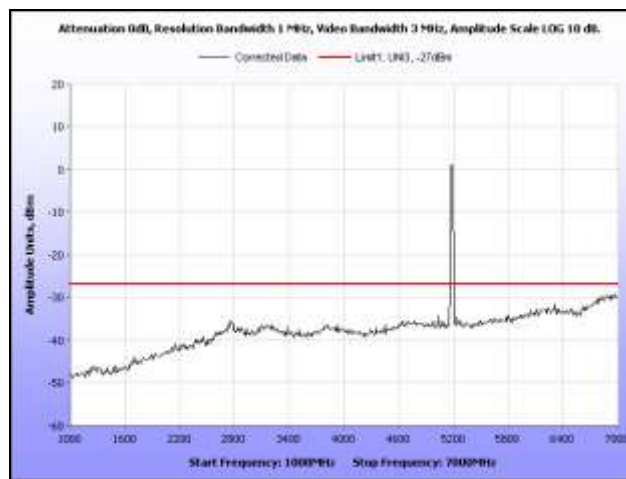


Plot 101. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz

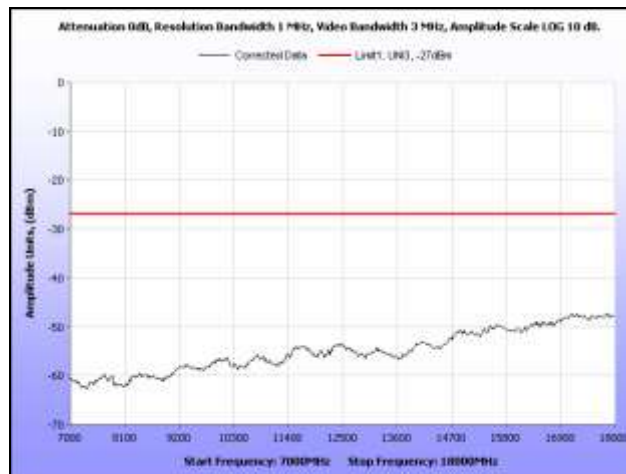


Plot 102. Radiated Spurious Emissions, 802.11a, Low Channel, 7 GHz – 18 GHz

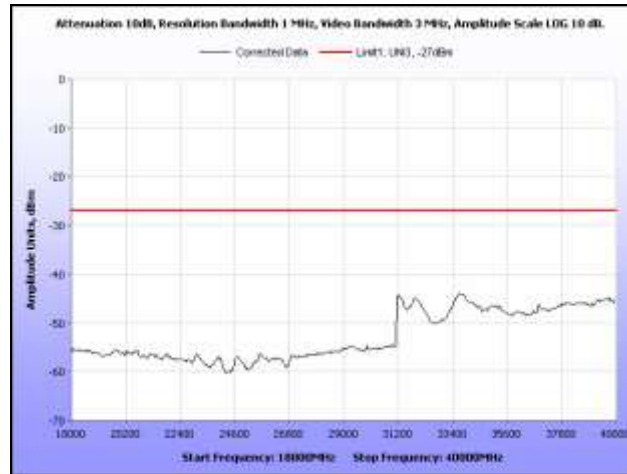


Plot 103. Radiated Spurious Emissions, 802.11a, Low Channel, 18 GHz – 40 GHz

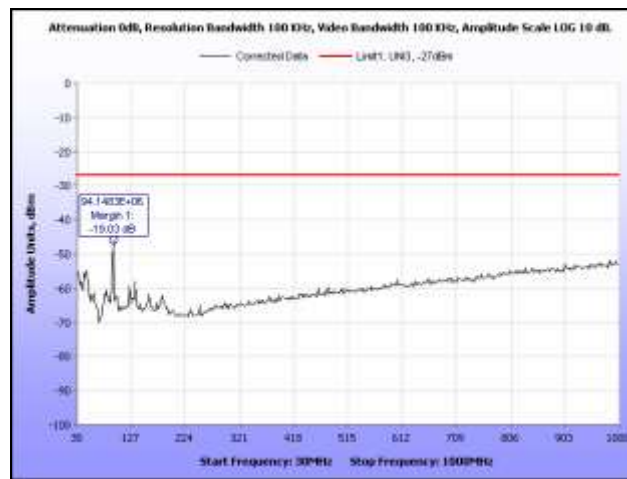


Plot 104. Radiated Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 1 GHz

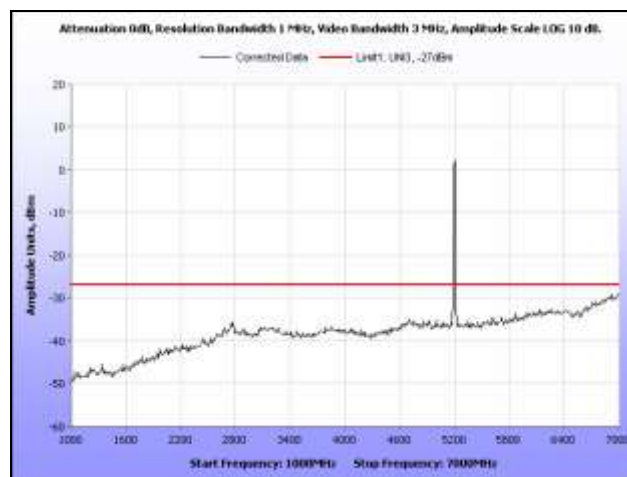


Plot 105. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz

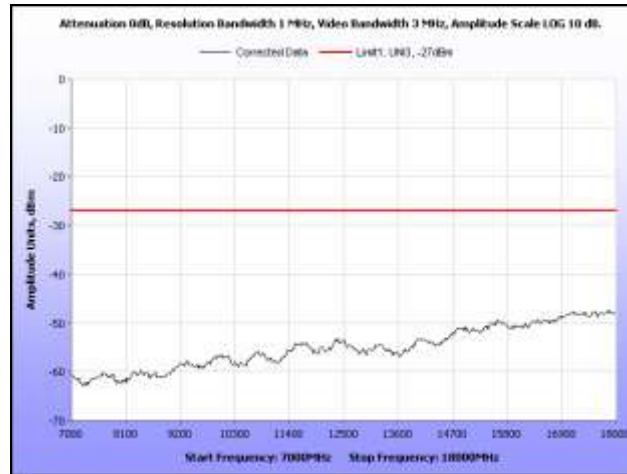


Plot 106. Radiated Spurious Emissions, 802.11a, Mid Channel, 7 GHz – 18 GHz

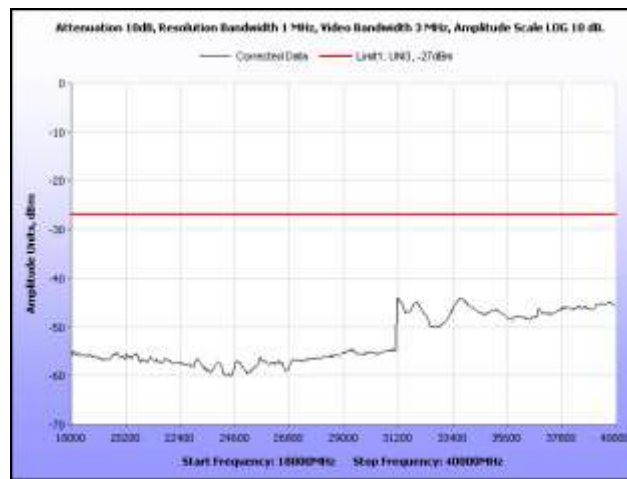


Plot 107. Radiated Spurious Emissions, 802.11a, Mid Channel, 18 GHz – 40 GHz

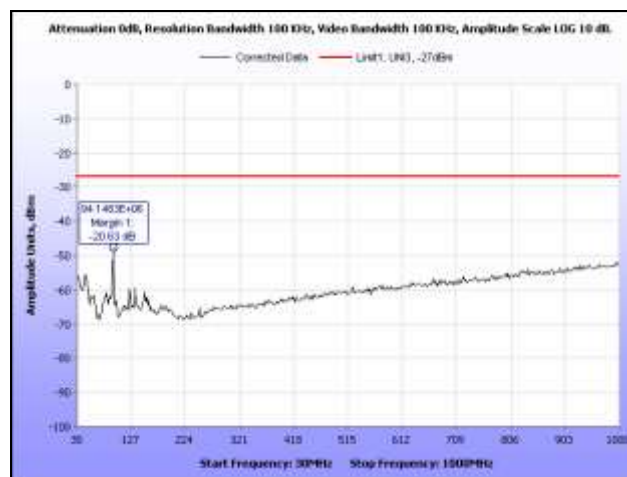


Plot 108. Radiated Spurious Emissions, 802.11a, High Channel, 30 MHz – 1 GHz

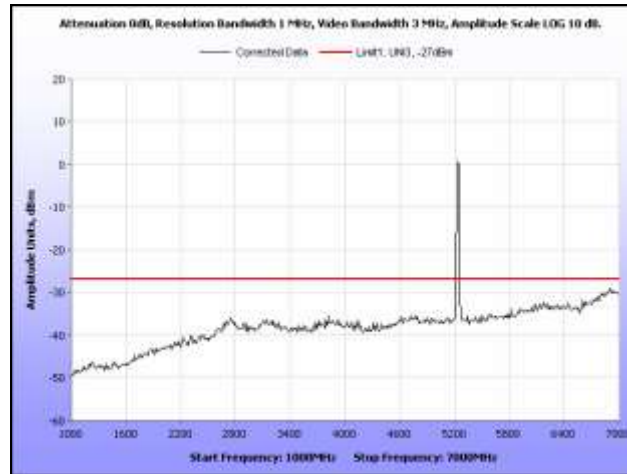

Plot 109. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz

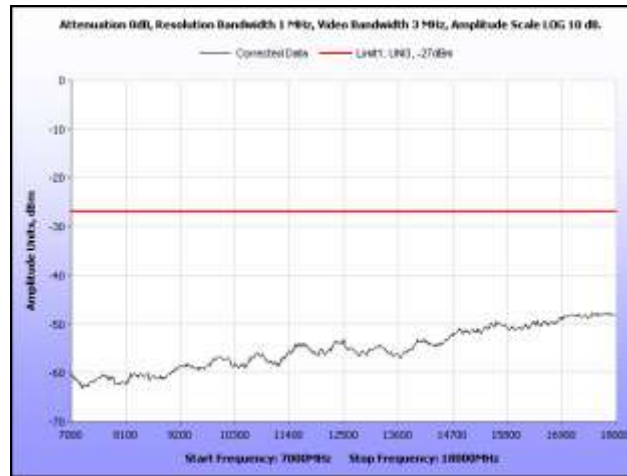


Plot 110. Radiated Spurious Emissions, 802.11a, High Channel, 7 GHz – 18 GHz

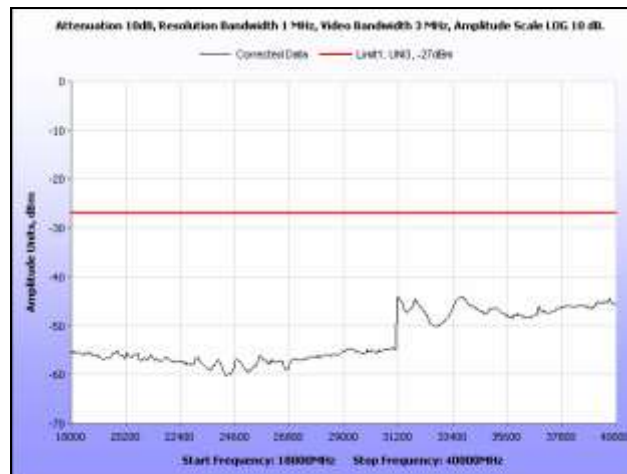


Plot 111. Radiated Spurious Emissions, 802.11a, High Channel, 18 GHz – 40 GHz


Radiated Spurious Emissions, 802.11n 20 MHz

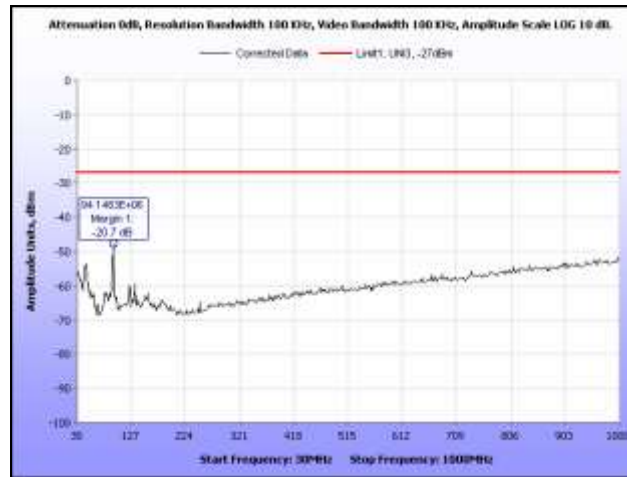


Plot 112. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz

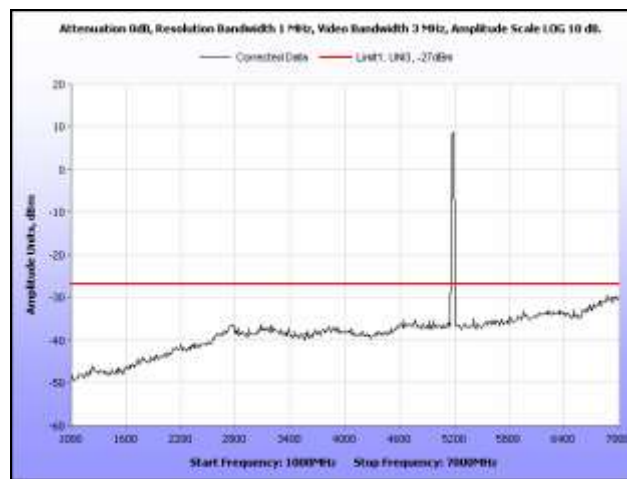


Plot 113. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz

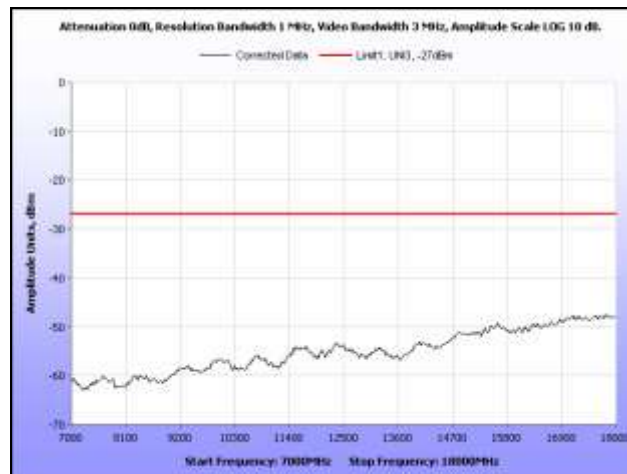


Plot 114. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz

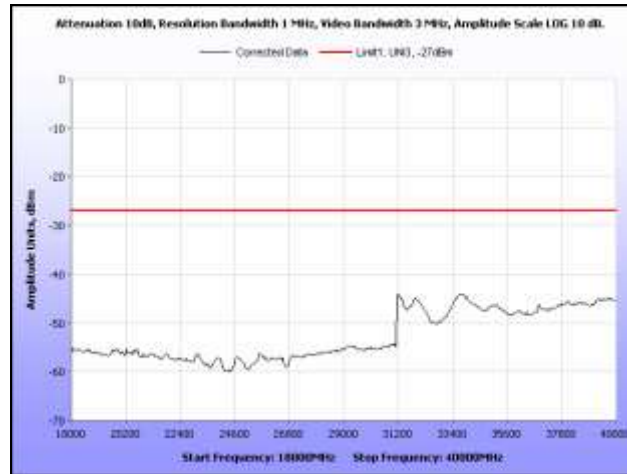


Plot 115. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 18 GHz – 40 GHz

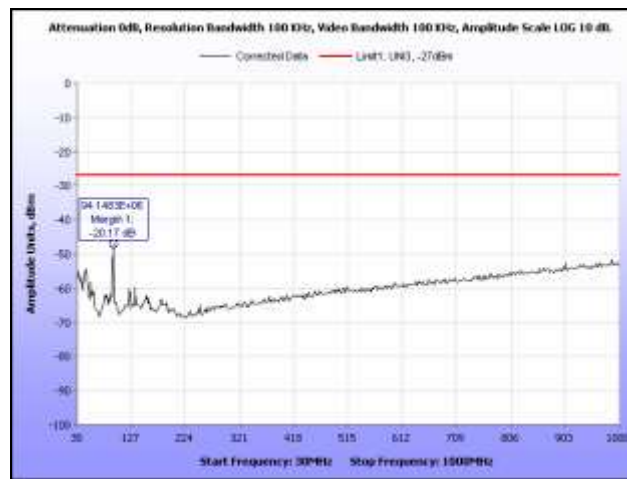


Plot 116. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz

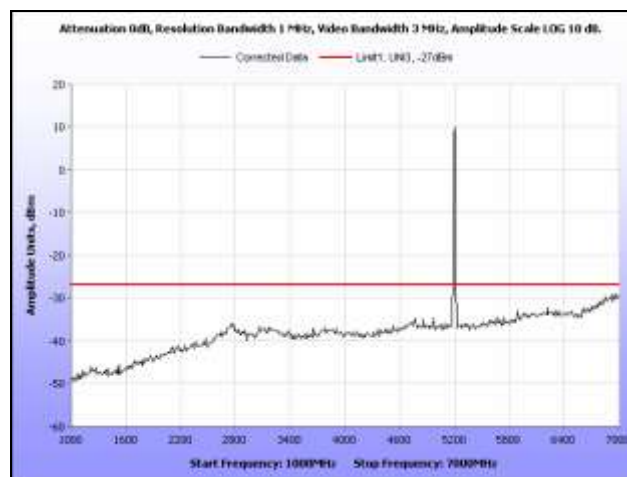


Plot 117. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz

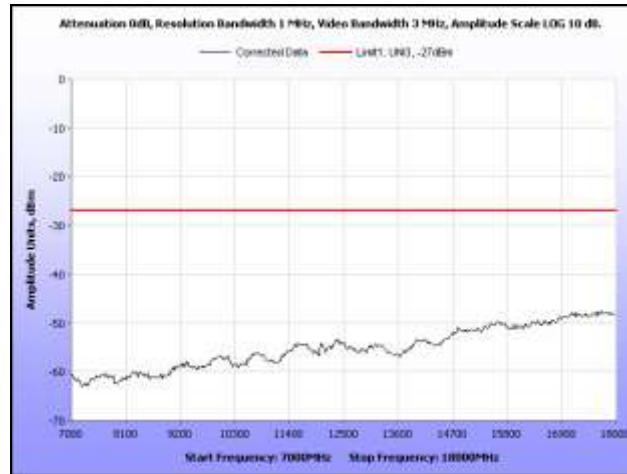


Plot 118. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz

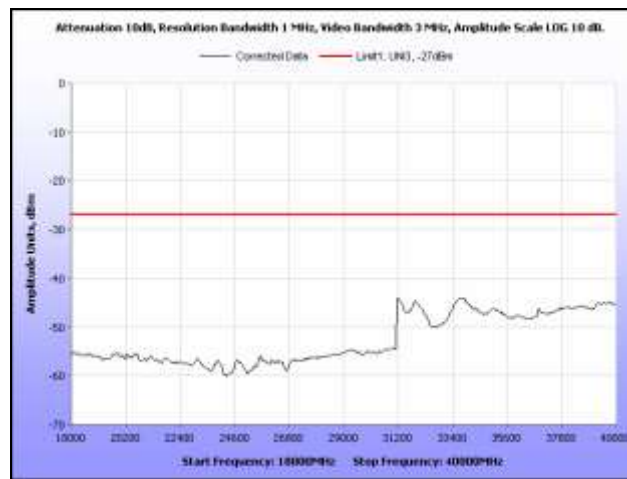


Plot 119. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 18 GHz – 40 GHz

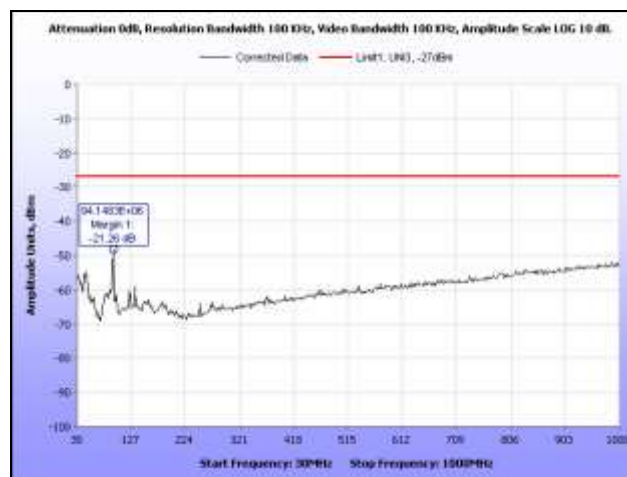


Plot 120. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz

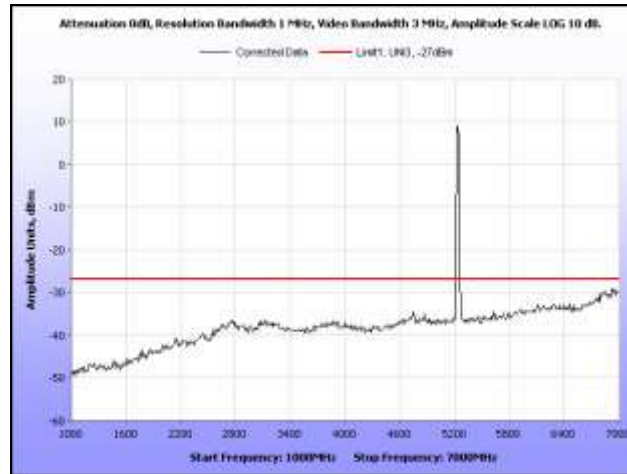

Plot 121. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz

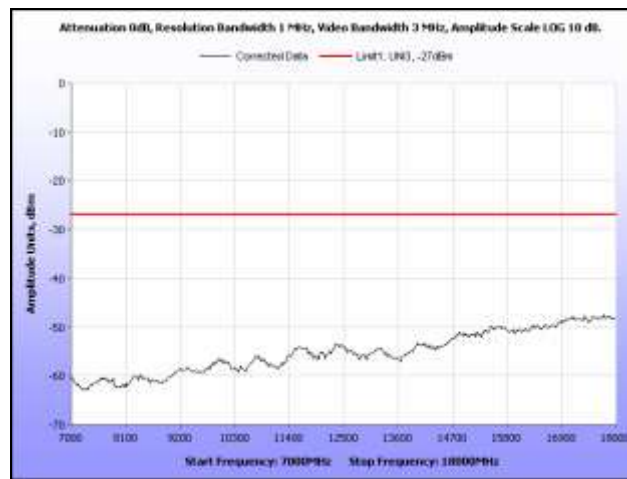

Plot 122. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz

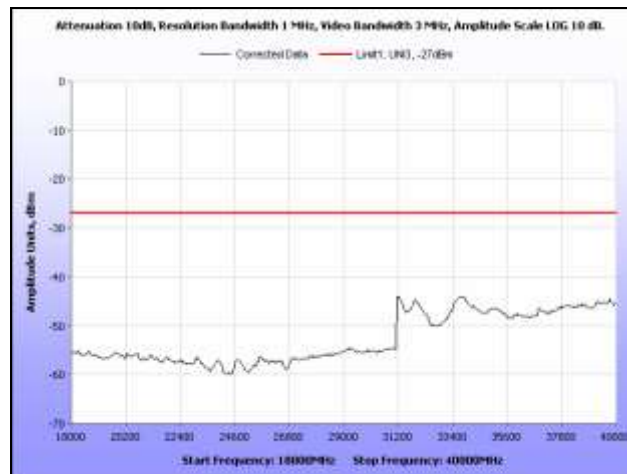


Plot 123. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 18 GHz – 40 GHz


Radiated Spurious Emissions, 802.11n 40 MHz




Plot 124. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz

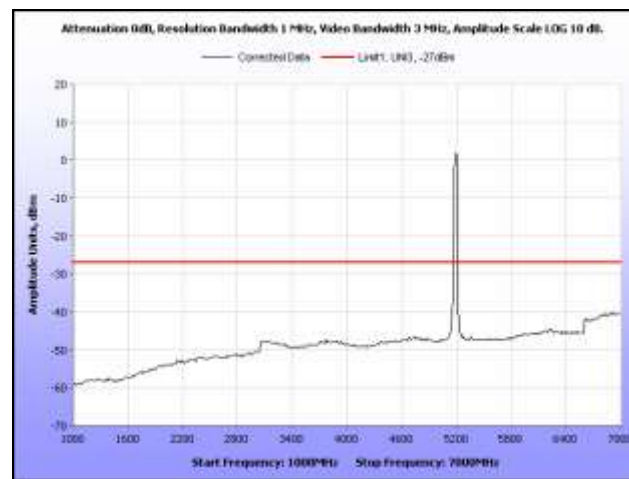


Plot 125. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz

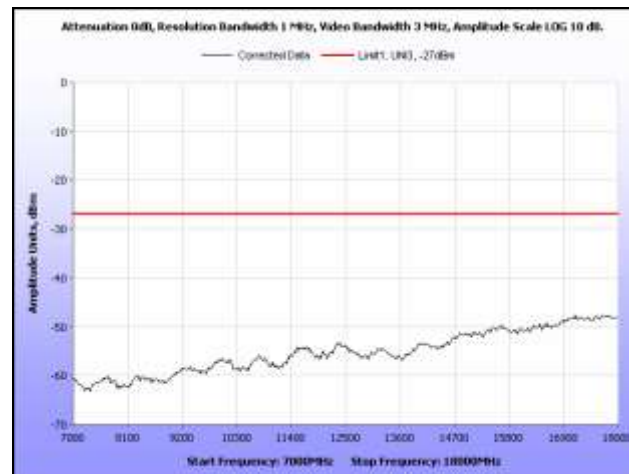


Plot 126. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz

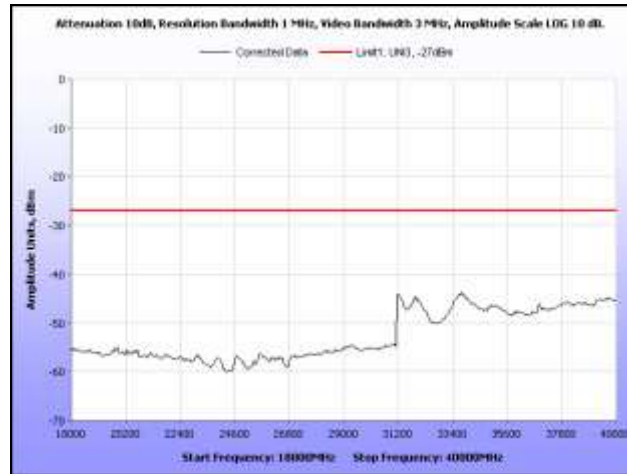


Plot 127. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 18 GHz – 40 GHz

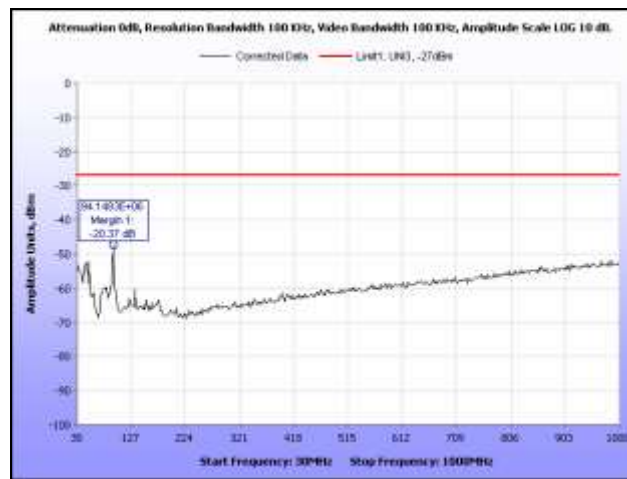


Plot 128. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz

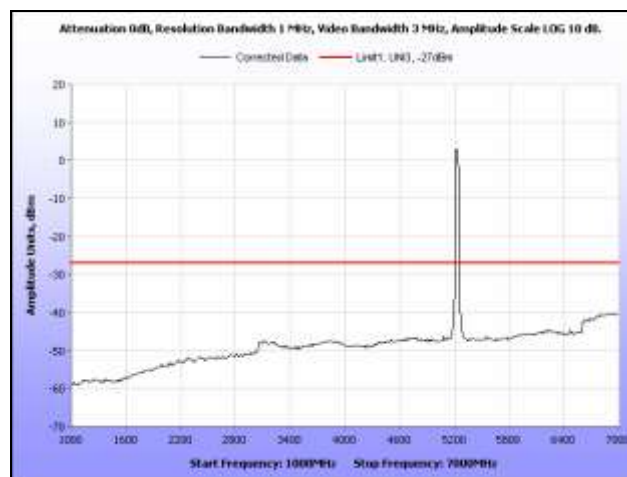

Plot 129. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz

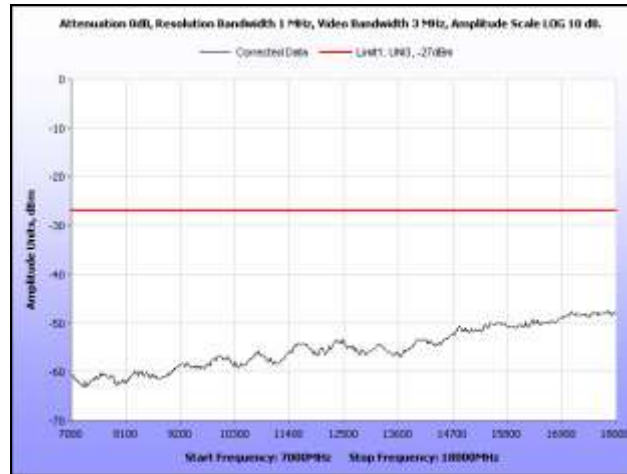


Plot 130. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz

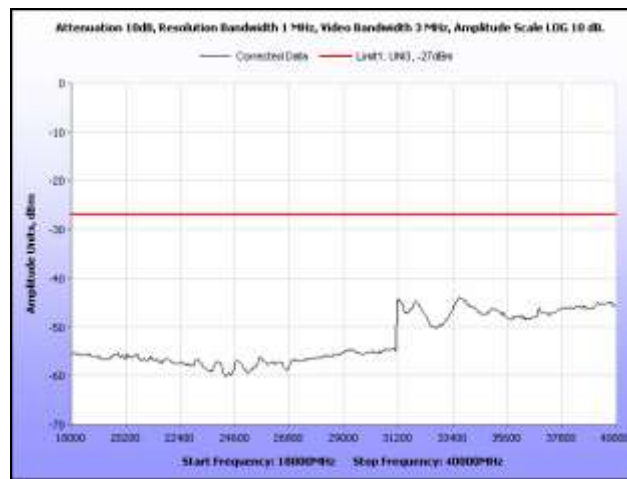


Plot 131. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 18 GHz – 40 GHz

Radiated Band Edge, 802.11a

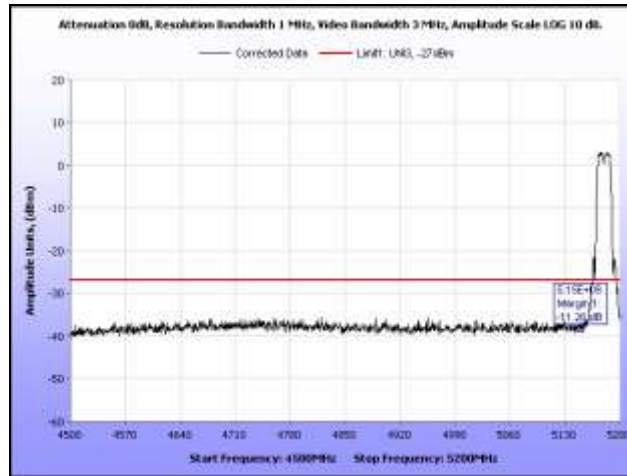


Plot 132. Radiated Band Edge, 802.11a, Low Channel

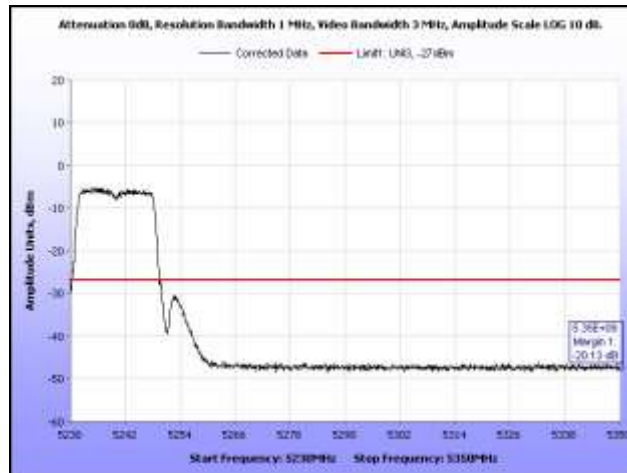


Plot 133. Radiated Band Edge, 802.11a, High Channel

Radiated Band Edge, 802.11n 20 MHz

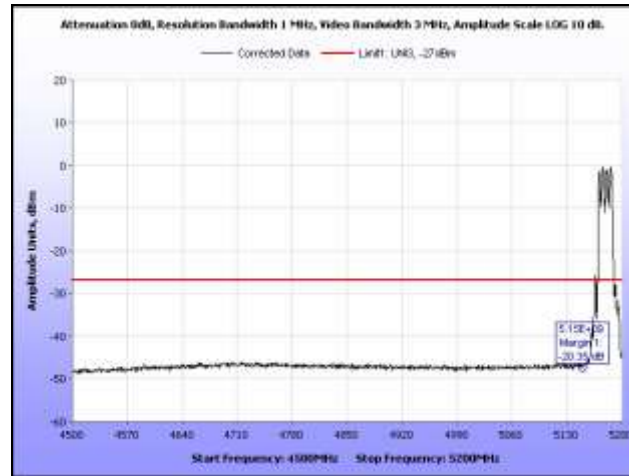


Plot 134. Radiated Band Edge, 802.11n 20 MHz, Low Channel

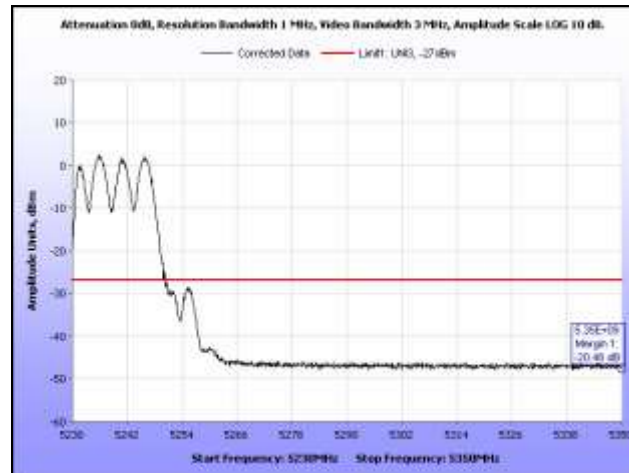


Plot 135. Radiated Band Edge, 802.11n 20 MHz, High Channel

Radiated Band Edge, 802.11n 40 MHz

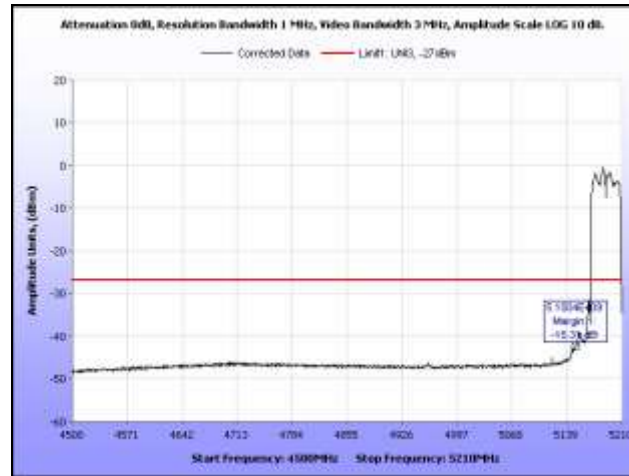


Plot 136. Radiated Band Edge, 802.11n 40 MHz, Low Channel

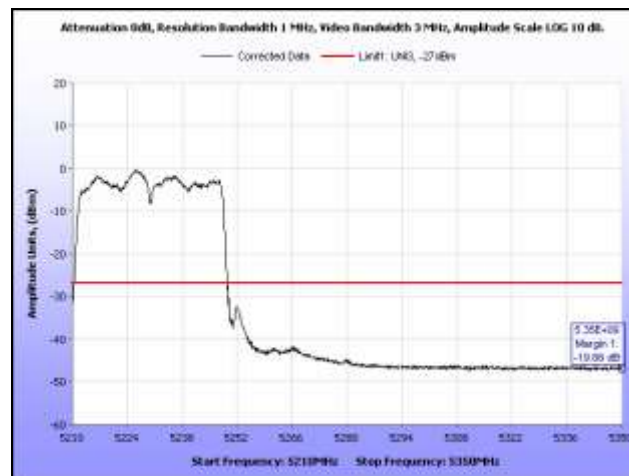


Plot 137. Radiated Band Edge, 802.11n 40 MHz, High Channel

Restricted Band, 802.11a

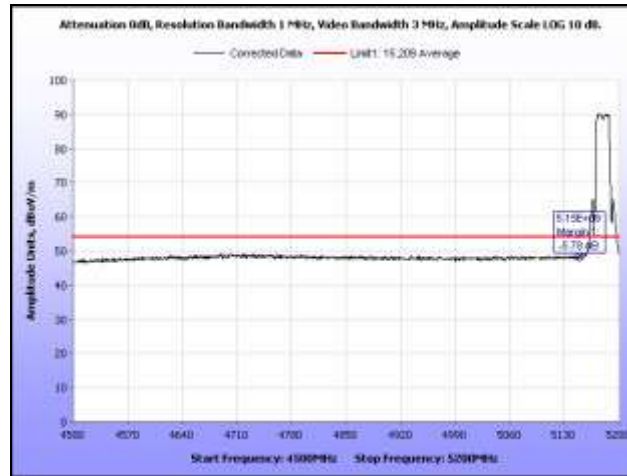


Plot 138. Radiated Band Edge, 802.11a, Low Channel, Average

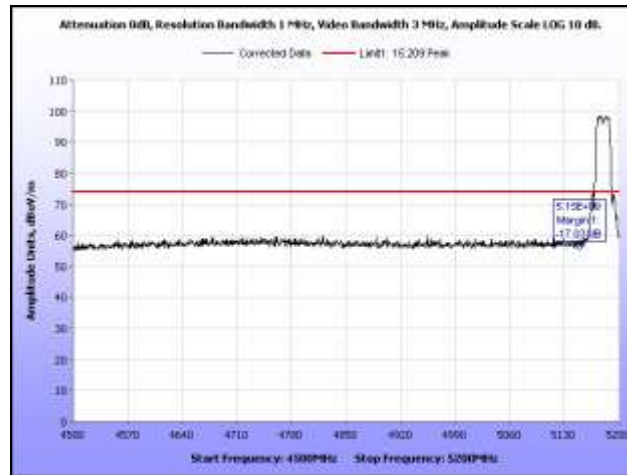


Plot 139. Radiated Band Edge, 802.11a, Low Channel, Peak

Restricted Band, 802.11n 20 MHz

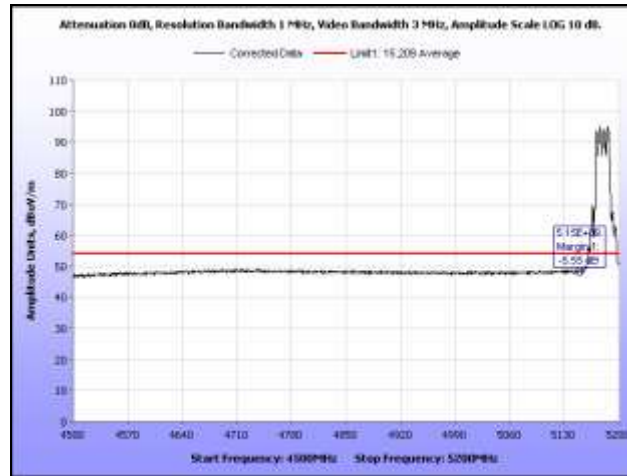


Plot 140. Radiated Band Edge, 802.11n 20 MHz, Low Channel, Average

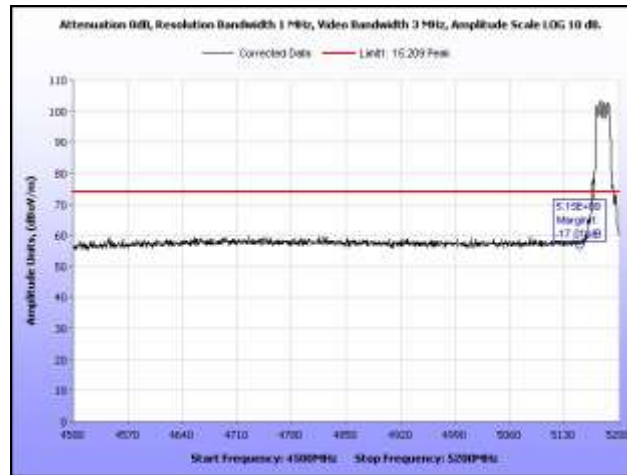


Plot 141. Radiated Band Edge, 802.11n 20 MHz, Low Channel, Peak

Restricted Band, 802.11n 20 MHz

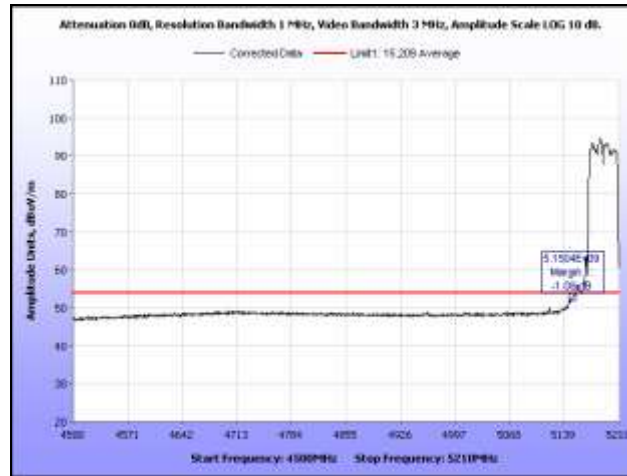

Plot 142. Radiated Band Edge, 802.11n 20 MHz, Low Channel, Average

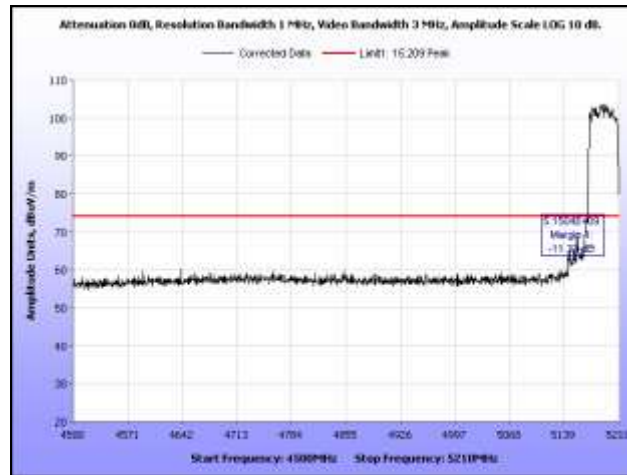

Plot 143. Radiated Band Edge, 802.11n 40 MHz, Low Channel, Peak

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f) RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5150-5250 MHz; highest conducted power = 14.42 dBm (Sample) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (27.67 mW)
G = Antenna Gain (3.16 numeric)
R = Minimum Distance between User and Antenna (20 cm)

$$S = (27.67 * 3.16) / (4 * 3.14 * 20^2) = 87.50 / 5024 = 0.017 \text{ mW/cm}^2$$


Since $S < 1 \text{ mW/cm}^2$, the minimum distance (R) is 20cm

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.407(g) Frequency Stability

Test Requirements:	§ 15.407(g): Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test Procedure:	The EUT was connected directly to a spectrum analyzer through a attenuator. The resolution band width of the spectrum analyzer was set to 10 KHz.
Test Results:	The EUT was compliant with the requirements of §15.407(g).
Test Engineer(s):	Jeff Pratt
Test Date(s):	05/23/12


Frequency Stability

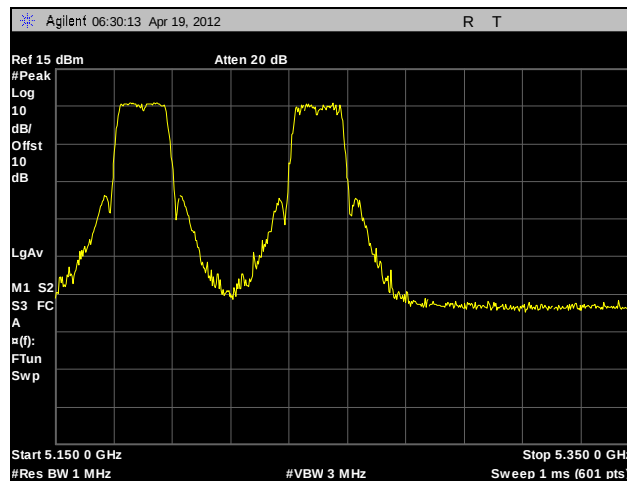


Plot 144. Frequency Stability, 5150 – 5250 MHz, -30°C, 120 V

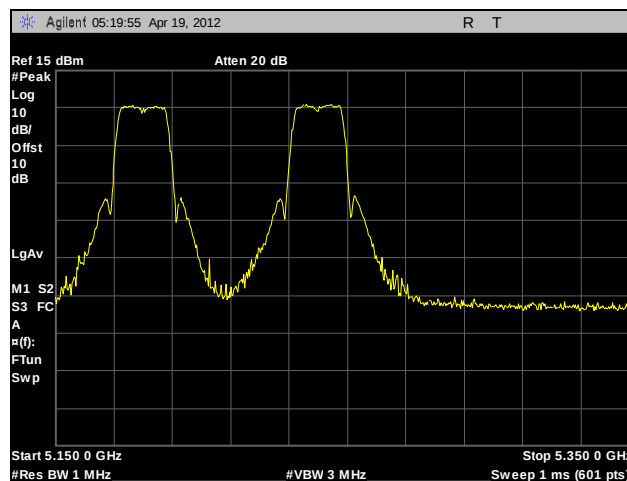


Plot 145. Frequency Stability, 5150 – 5250 MHz, -20°C, 120 V

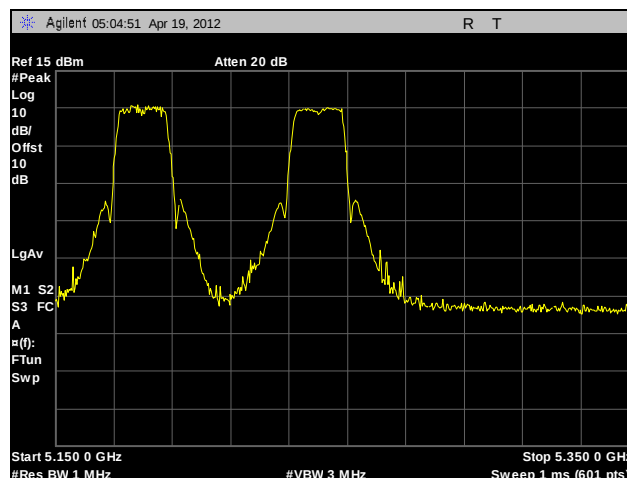


Plot 146. Frequency Stability, 5150 – 5250 MHz, -10°C, 120 V

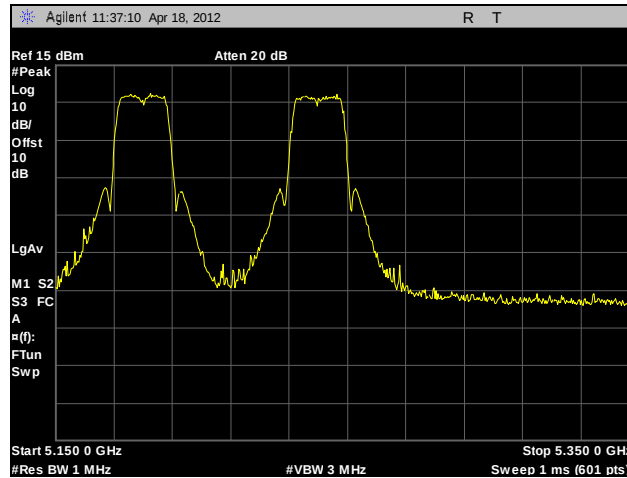


Plot 147. Frequency Stability, 5150 – 5250 MHz, 0°C, 120 V

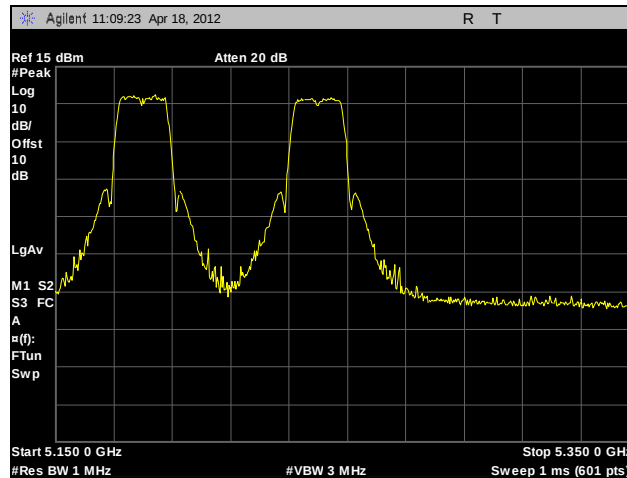


Plot 148. Frequency Stability, 5150 – 5250 MHz, 10°C, 120 V

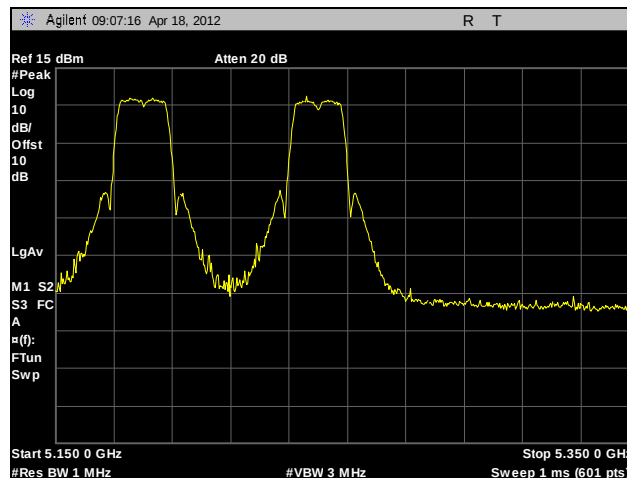


Plot 149. Frequency Stability, 5150 – 5250 MHz, 20°C, 108 V

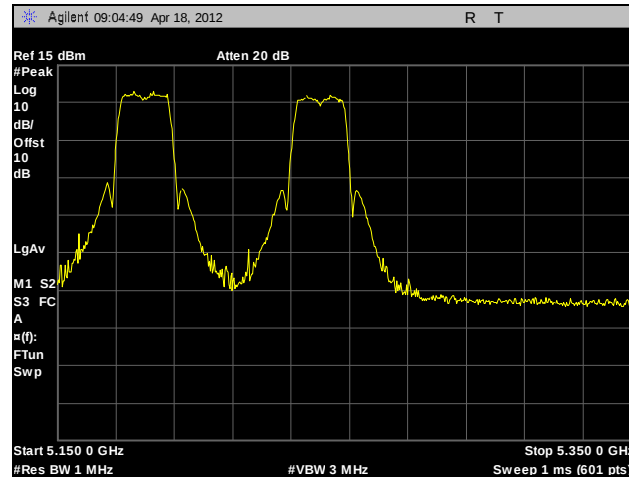


Plot 150. Frequency Stability, 5150 – 5250 MHz, 20°C, 120 V

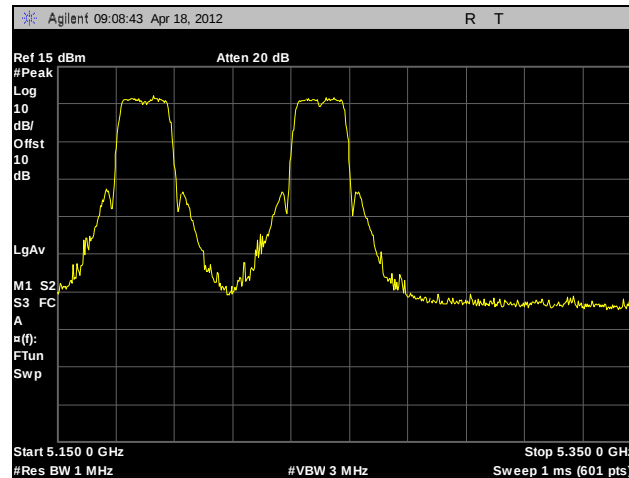


Plot 151. Frequency Stability, 5150 – 5250 MHz, 20°C, 132 V

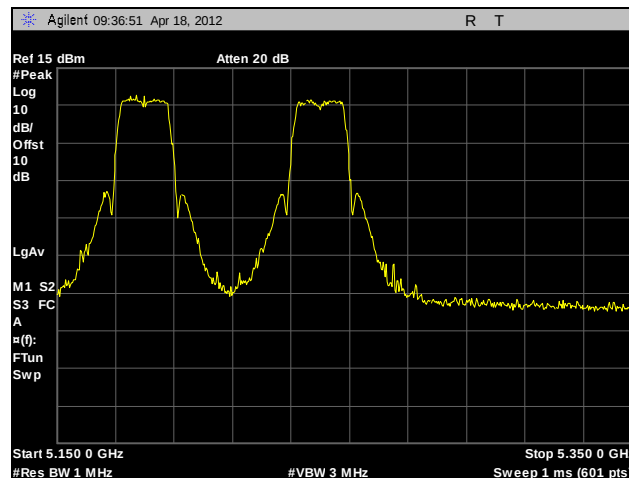


Plot 152. Frequency Stability, 5150 – 5250 MHz, 30°C, 120 V

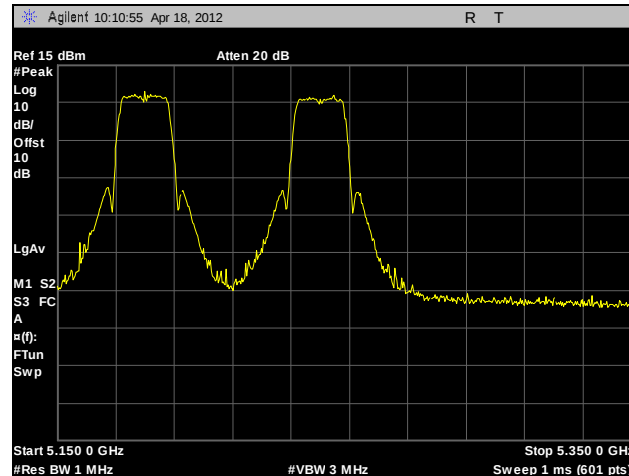

Plot 153. Frequency Stability, 5150 – 5250 MHz, 40°C, 120 V

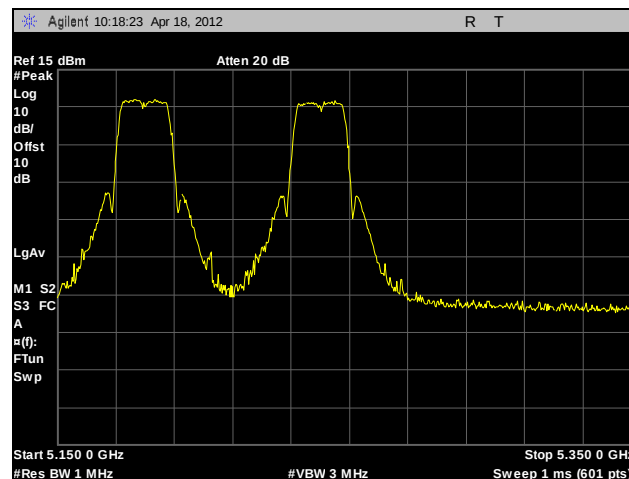

Plot 154. Frequency Stability, 5150 – 5250 MHz, 50°C, 120 V

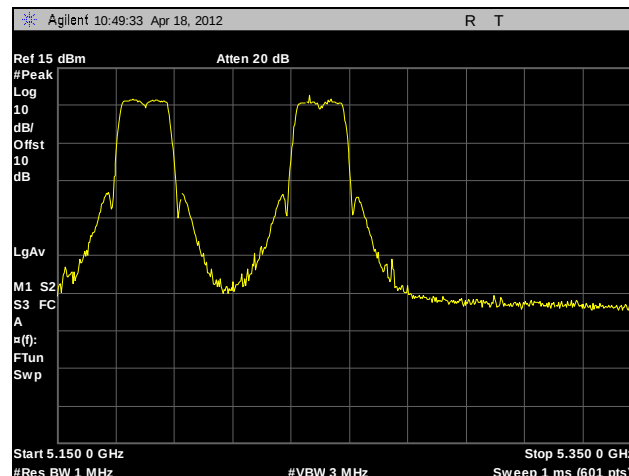

Plot 155. Frequency Stability, 5150 – 5250 MHz, 55°C, 120 V

Electromagnetic Compatibility Criteria for Intentional Radiators

RSS-GEN Receiver Spurious Emissions Requirements

Test Requirements: The following receiver spurious emission limits shall be complied with:

- (a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 23.

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 23. Spurious Emission Limits for Receivers

- (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

Test Procedures: The EUT was programmed for receive mode only. Conducted measurements were taken at the antenna port of the EUT. 100 kHz resolution bandwidth was used from 30 MHz - 1 GHz and 300 kHz resolution was used for measurements done above 1 GHz. All plots are corrected for cable loss.

Test Results: Equipment is compliant with the Receiver Spurious Emissions Requirements of RSS-GEN.

Test Engineer(s): Anderson Sounghanya and Lionel Gabrillo

Test Date(s): 05/09/12






Figure 6. Block Diagram, Conducted Receiver Spurious Emissions Test Setup

Conducted Receiver Spurious Emissions (Port 1)

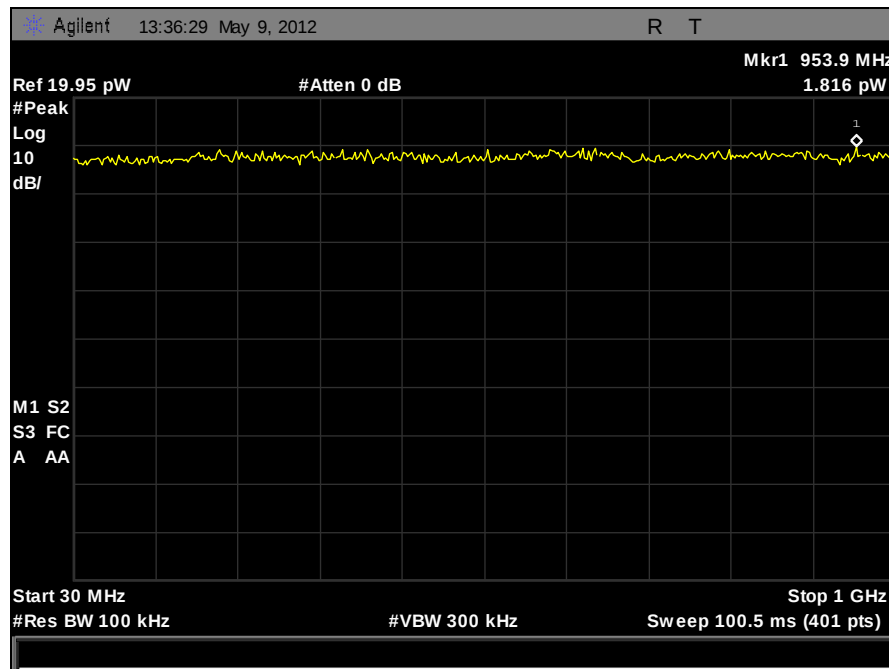


Plot 156. Receiver Spurious Emission, 30 MHz – 1 GHz (Port 1)

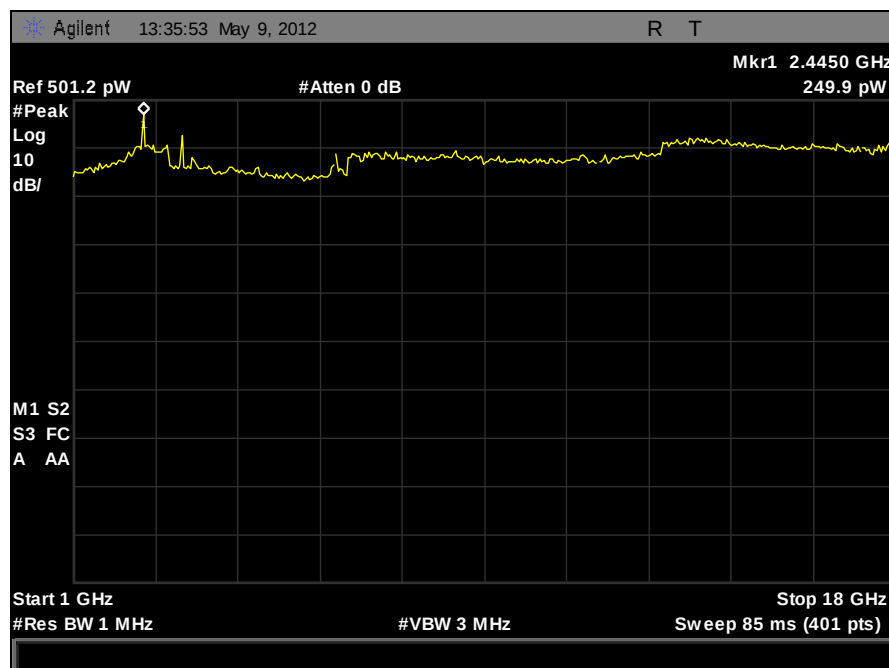


Plot 157. Receiver Spurious Emission, 1 GHz – 18 GHz (Port 1)

Conducted Receiver Spurious Emissions (Port 2)

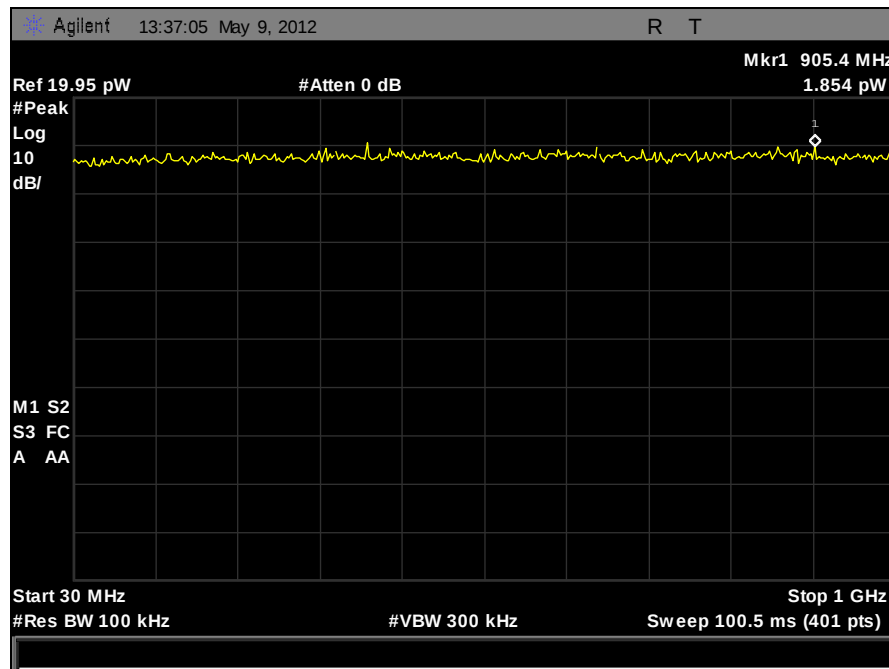


Plot 158. Receiver Spurious Emission, 30 MHz – 1 GHz (Port 2)

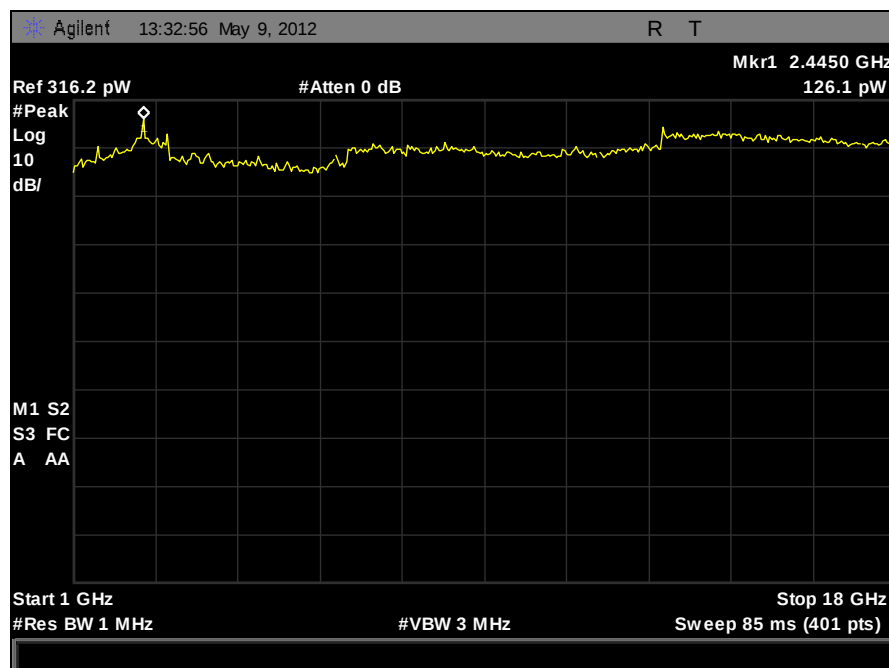


Plot 159. Receiver Spurious Emission, 1 GHz – 18 GHz (Port 2)

Conducted Receiver Spurious Emissions (Port 3)

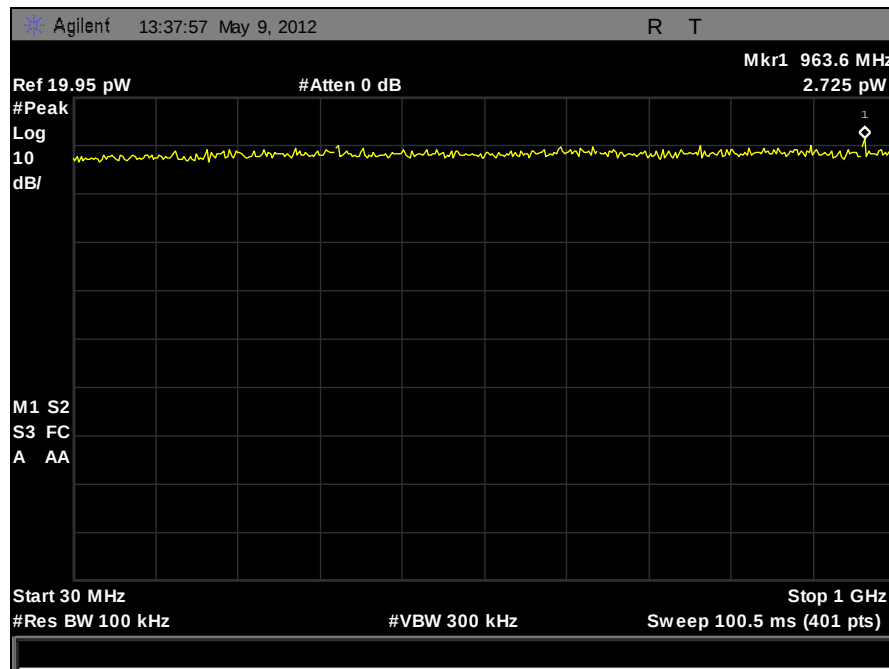

Plot 160. Receiver Spurious Emission, 30 MHz – 1 GHz (Port 3)

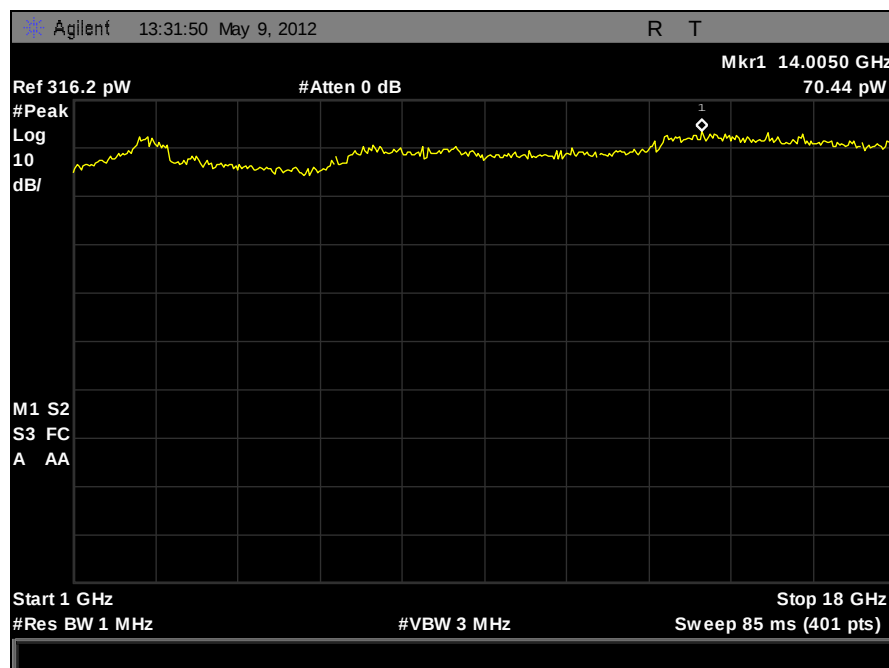

Plot 161. Receiver Spurious Emission, 1 GHz – 18 GHz (Port 3)

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Description	Manufacturer	Model	Cal Date	Cal Due Date
1T4771	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	6/25/2011	6/25/2012
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	6/14/2011	6/14/2012
1T4505	TEMPERATURE CHAMBER	TEST EQUITY	115	11/30/2011	11/30/2012
1T4751	ANTENNA – BILOG	SUNOL SCIENCES	JB6	12/7/2011	12/7/2012
1T4757	ANTENNA; HORN	ETS-LINDGREN	3117	2/18/2012	8/18/2013
1T4745	ANTENNA; HORN	ETS-LINDGREN	3116	10/4/2011	10/4/2012
1T4442	PRE-AMPLIFIER; MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4752	PRE-AMPLIFIER	MITEQ	JS44-18004000-35-8P	SEE NOTE	
1T4300A	SEMI-ANECHOIC CHAMBER #1	EMC TEST SYSTEMS	NONE	1/31/2010	1/31/2013
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY-PROOF	81	SEE NOTE	
1T4503	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	SEE NOTE	
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS	9322-50-R-10-BNC	11/30/2011	11/30/2012
1T4564	LISN (24 AMP)	SOLAR ELECTRONICS	9252-50-R-24-BNC	11/4/2011	11/4/2012
1T4568	RADIATING NOISE SOURCE	MET LABORATORIES	N/A	SEE NOTE	
1T4502	COMB GENERATOR	COM-POWER	CGC-255	11/3/2011	11/3/2012

Table 24. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



V. Certification & User's Manual Information



Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Meru Networks, Inc.

Dual Radio 802.11abgn 3x3 Access Point with internal antenna – AP322i

Electromagnetic Compatibility

End of Report

CFR Title 47, Part 15E; RSS-210 Annex 9 & ICES-003

End of Report