

Prüfbericht - Nr.: 16006964 001

Test Report No.:

Seite 1 von 15

Page 1 of 15

Auftraggeber: Classic Tech Development Ltd.

Client:

11-12/F., YUE XIU IND'L BLDG.
87 HUNG TO ROAD,
KWUN TONG, KOWLOON
HONG KONG

Gegenstand der Prüfung: Receiver of Wireless Headphone

Test item:

Bezeichnung:

HP2492

FCC ID:

REDHP2492-001R

Identification:

FCC ID

Wareneingangs-Nr.:

173020534

Eingangsdatum:

06.01.2006

Receipt No.:

Date of receipt:

Prüfört:

Testing location:

Shenzhen Bureau of Quality Technical
Supervision Shenzhen Academy of Metrology
and Quality Inspection
Bldg. of Shenzhen Academy of Metrology and
Quality Inspection, Longzhu Road, Nanshan,
Shenzhen,
P.R. China

Listed test laboratory
according to FCC rules
section 2.948 for
measuring devices
under Parts 15

Prüfgrundlage:

Test specification:

ANSI C63.4:2001

Conduct Emissions with limits described at FCC Part 15 subpart B section 15.107

Radiated Emissions with limits described at FCC Part 15 Subpart B section 15.109

38 dB rejection described at FCC Part 15 Subpart B section 15.121

Prüfergebnis:

Test Result:

Der vorstehend beschriebene Prüfgegenstand wurde geprüft und
entspricht oben genannter Prüfgrundlage.

The a. m. test item passed the test specification.

Prüflaboratorium:

Testing Laboratory

TÜV Rheinland (Guangdong) Ltd.

geprüft/ tested by:

kontrolliert/ reviewed by:

18.Jan.2006

Ricky Liu

Ricky Liu

25.Jan.2006

Dave Xie

Dave Xie

Datum
Date

Name
Name

Unterschrift
Signature

Datum
Date

Name
Name

Unterschrift
Signature

Sonstiges/ Other Aspects:

Abkürzungen:

ok / P = entspricht Prüfgrundlage
fail / F = entspricht nicht Prüfgrundlage
n.a. / N = nicht anwendbar

Abbreviations:

ok / P = passed
fail / F = failed
n.a. / N = not applicable

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Prüfbericht - Nr.: 16006964 001
Test Report No.:

Seite 2 von 15
Page 2 of 15

TEST SUMMARY

5.1 CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.107(A)

RESULT: *n.a.*

5.2 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A)

RESULT: *ok*

5.3 38 dB REJECTION SIGNAL FROM CELLULAR FREQUENCY BAND

RESULT: *ok*

Prüfbericht - Nr.: 16006964 001
Test Report No.:

Seite 3 von 15
Page 3 of 15

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACE ABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	MODIFICATION INFORMATION	6
3.1	RATINGS AND SYSTEM DETAILS	7
3.2	SUBMITTED DOCUMENTS	7
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	8
4.2	TEST OPERATION AND TEST SOFTWARE	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	8
4.5	TEST SET-UP.....	9
5	TEST RESULTS EMISSION	10
5.1	CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.107(A).....	10
5.2	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A).....	11
5.3	38 dB REJECTION SIGNAL FROM CELLULAR FREQUENCY BAND.....	12
6	PHOTOGRAPHS OF THE TEST SET-UP	13
7	LIST OF TABLES.....	15
8	LIST OF PHOTOGRAPHS.....	15

Prüfbericht - Nr.: 16006964 001
Test Report No.:

Seite 4 von 15
Page 4 of 15

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

Shenzhen SMQ

Shenzhen Bureau of Quality Technical Supervision
Shenzhen Academy of Metrology and Quality Inspection
Bldg, of Shenzhen Academy of Metrology and Quality Inspection
Longzhu Road, Nanshan, Shenzhen,
P.R. China

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Antenna	Chase	CBL6112B	2591	29.01.2006
Horn Antenna	Rohde & Schwarz	HF906	100014	29.01.2006
3m Semi-anechoic chamber	Albatross Projects	9X6X6	----	29.01.2006
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	29.01.2006
Communications Test Set	Rohde & Schwarz	CMU200	1100.0008.02	29.01.2006
Communications Test Set	HP	HP8920A	3438A05187	29.01.2006

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for conducted emissions measurements is ± 3 dB.
The estimated combined standard uncertainty for radiated emissions measurements is ± 3 dB.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

Shenzhen Bureau of Quality Technical Supervision, Shenzhen Academy of Metrology and Quality Inspection, Bldg. of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R.China is listed on the US Federal Communications Commission list of facilities approved to perform measurements

3 Modification Information

Brief description of the test sample:

The submitted sample HP2492 is Wireless Headphone Receiver with three operating frequencies. The EUT is changed from HP1294, the difference and common are as below:

- The PCB layout, UHF module and construction of them are identical;
- HP2492 is three channels, but HP1294 is two channels;
- HP2492 has one more crystal oscillator than HP1294 on the PCB.

According to above mention, the necessary test was performed on HP2492 operating at new channel frequency 912.5MHz.

Prüfbericht - Nr.: 16006964 001
Test Report No.:

Seite 7 von 15
Page 7 of 15

3.1 Ratings and System Details

Frequency range	:	912.03MHz, 912.53MHz, 913.03MHz
Number of channels	:	3 (auto tunable)
Type of antenna	:	Integral antenna
FCC ID:		REDHP1294-001R
Power supply	:	DC 2.4V (2 × AAA 1.2V rechargeable batteries)
Ports	:	Contact Charge Port, input
Protection Class	:	III

Refer to document for further information.

3.2 Submitted Documents

Block Diagram
Circuit Diagram
PCB Layout
FCC Label
User Manual
Photo Document

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

None

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Conducted Emission


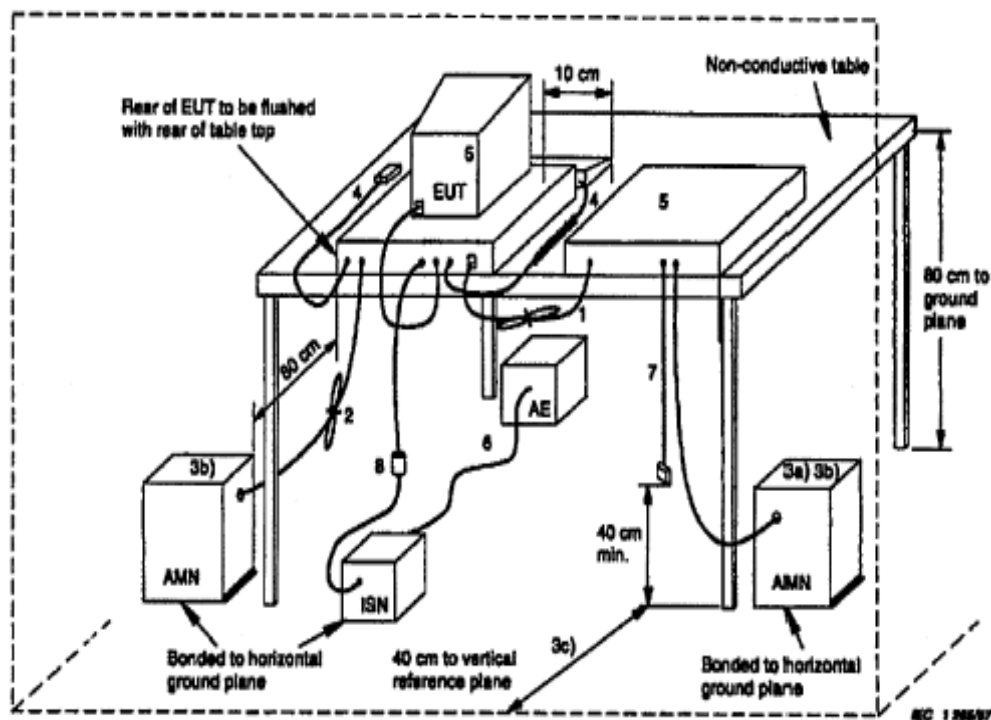


Diagram 2 of Measurement Equipment Configuration for Testing Radiated Emission

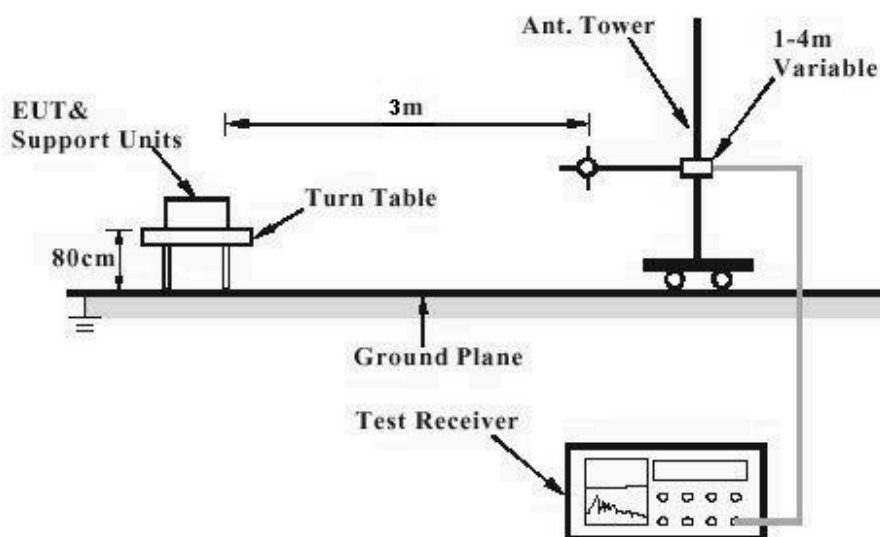

Prüfbericht - Nr.: 16006964 001
Test Report No.:

Seite 10 von 15
Page 10 of 15

5 Test Results EMISSION

5.1 Conducted Emission for FCC Part 15 Per Section 15.107(a)

RESULT:

n.a.

Date of testing	:	---
Test specification	:	FCC Part 15 Per Section 15.107(a)
Deviations from Standard Test procedures	:	None
Test procedure	:	n.a.
Kind of test site	:	Shielded room

There is no connection available for mains.

Prüfbericht - Nr.: 16006964 001

Test Report No.:

Seite 11 von 15

Page 11 of 15

5.2 Radiated Emission for FCC Part 15 Per Section 15.109(a)

RESULT:

ok

Date of testing : 08.01.2006
Test specification : FCC Part 15 Per Section 15.109(a)
Limit : FCC Part 15 Per Section 15.109(a)
Operation mode: Receiving
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Temperature : 19°C
Humidity : 50%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 2: Radiated Emission

Frequency [MHz]	QP [dB μ V/m]	AV [dB μ V/m]	Polarity	Limit [dB μ V/m]
902.349	35.9	---	H	46
902.349	35.5	---	V	46
2707.415	---	32.71	H	54
2707.415	---	38.94	V	54
3613.226	---	37.77	H	54
3613.226	---	36.53	V	54

Prüfbericht - Nr.: 16006964 001

Test Report No.:

Seite 12 von 15

Page 12 of 15

5.3 38 dB rejection signal from Cellular Frequency band

RESULT:

ok

Date of testing : 12.01.2006
 Test specification : FCC Part 15 Per Section 15.121(b)
 Limit : FCC Part 15 Per Section 15.121(b)
 Operation mode: Receiving
 Test procedure Procedure specified in ANSI C63.4 were followed
 Kind of test site : Shielded room
 Test signal : RF signal FM at 1kHz audio, 19kHz pilot with 75kHz deviation
 Reference level : -40dBm

Test procedure: set the wanted signal to establish a reference sensitivity (12dB SINAD) and then increased the signal level by 3dB, the level of wanted signal was -40dBm, then the unwanted mobile signal was injected into the submitted sample receiver and increased in level until the SINAD was reduced to 12dB, the level of unwanted mobile signal was greater than 17dBm, and then repeated above test steps for other cellular frequencies. Test result are listed as following table:

Table 3: 38 dB Rejection


Injection frequency(Cellular) in MHz	Level 12dB SINAD at injected frequency in dBm	Rejection in dB	Limit in dB
824.04	>17	>40	38
836.00	>17	>40	38
848.97	>17	>40	38
869.04	>17	>40	38
881.00	>17	>40	38
893.97	>17	>40	38

Prüfbericht - Nr.: 16006964 001
Test Report No.:

Seite 13 von 15
Page 13 of 15

6 Photographs of the Test Set-Up


Photograph 1: Set-up for Radiation Measurement Below 1GHz

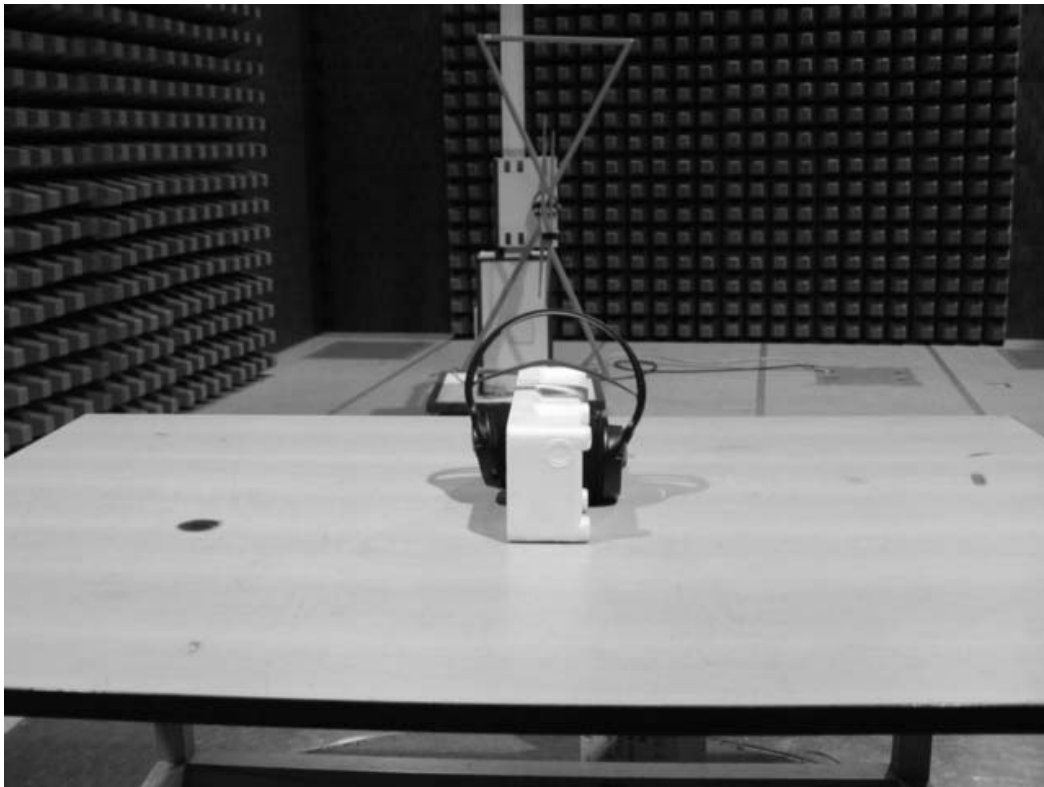

Prüfbericht - Nr.: 16006964 001
Test Report No.:

Seite 14 von 15
Page 14 of 15

Photograph 2: Set-up for Radiation Measurement Above 1GHz

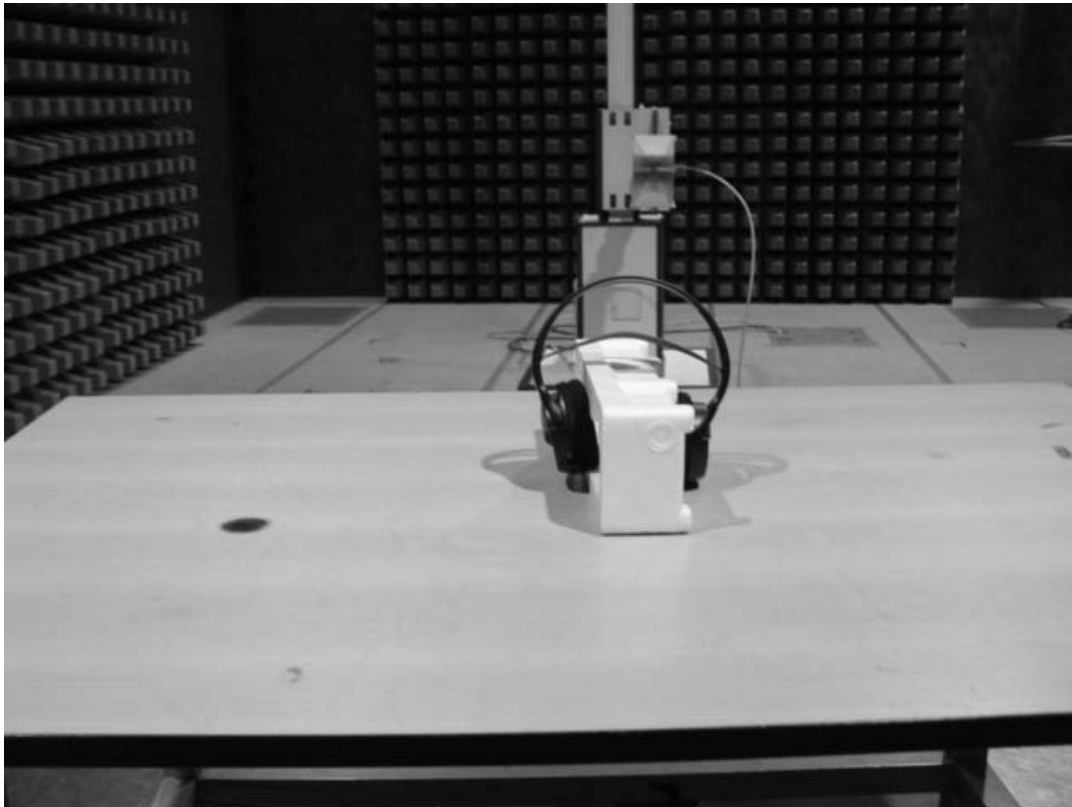

7 List of Tables

Table 1: List of Test and Measurement Equipment.....5
Table 2: Radiated Emission 11
Table 3: 38 dB Rejection 12

8 List of Photographs

Photograph 1: Set-up for Radiation Measurement Below 1GHz13
Photograph 2: Set-up for Radiation Measurement Above 1GHz 14

Prüfbericht - Nr.: 16006964 001


Test Report No.:

Seite 1 von 4

Page 1 of 4

Radiated Disturbance

EUT: M/N:2492 *HP2492*
Manufacturer:
Operating Condition: RX *channel 2 (912.5 MHz)*
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Horizontal
Comment: Battery

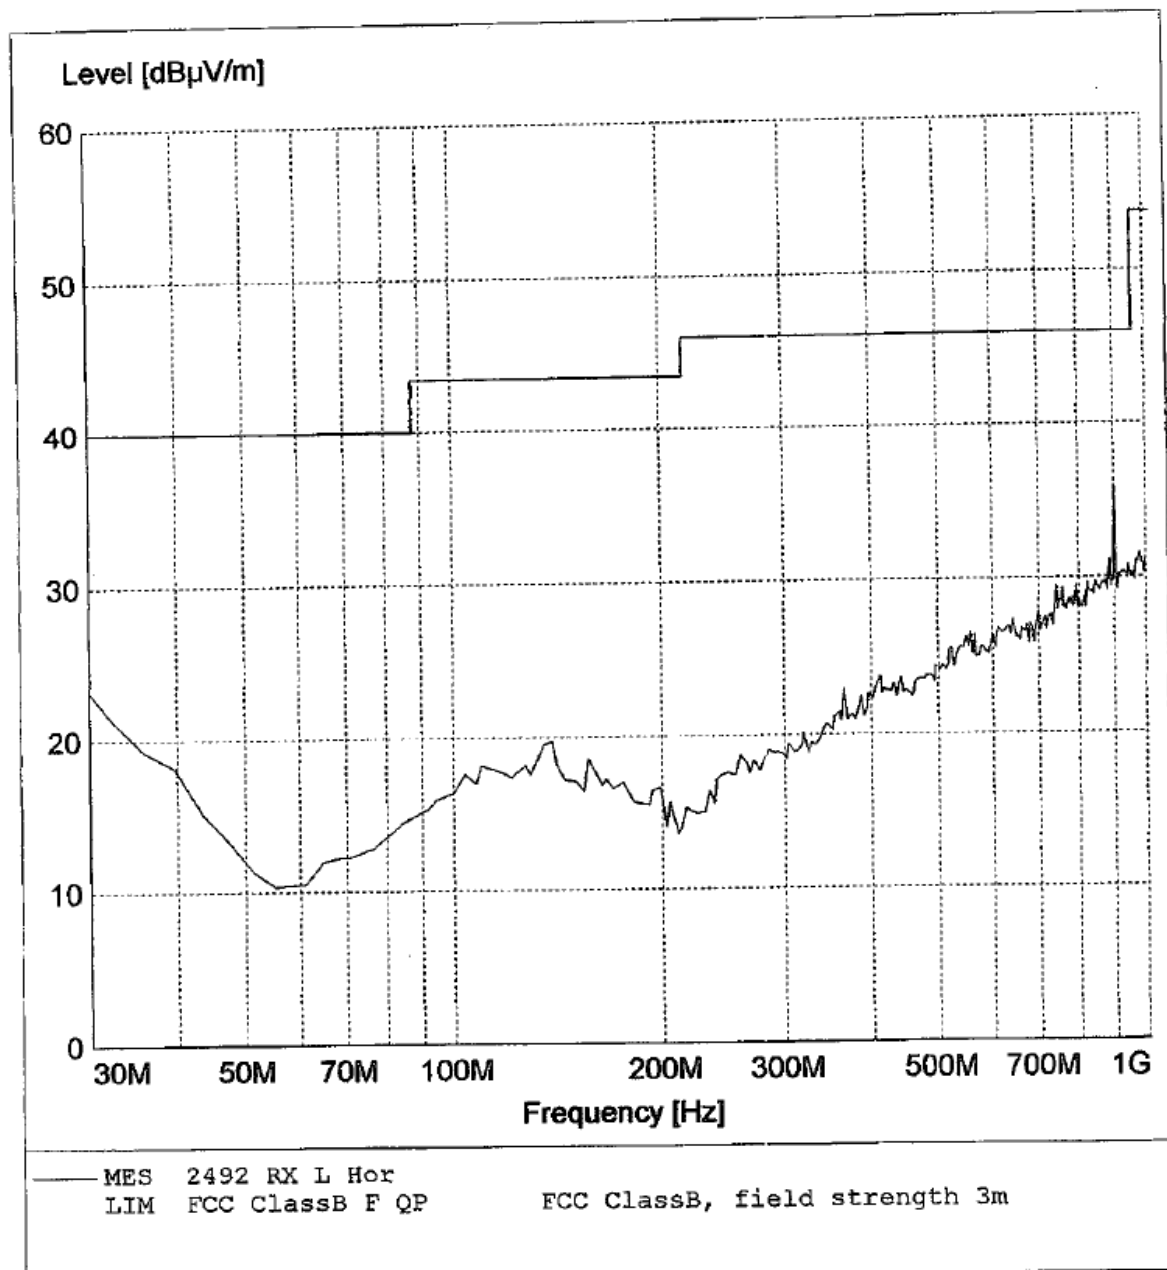

Prüfbericht - Nr.: 16006964 001

Test Report No.:

Seite 2 von 4


Page 2 of 4

Radiated Disturbance

EUT: M/N:2492
Manufacturer:
Operating Condition: RX
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Horizontal & Vertical
Comment: Battery

HP2492

channel 2 (912.5MHz)

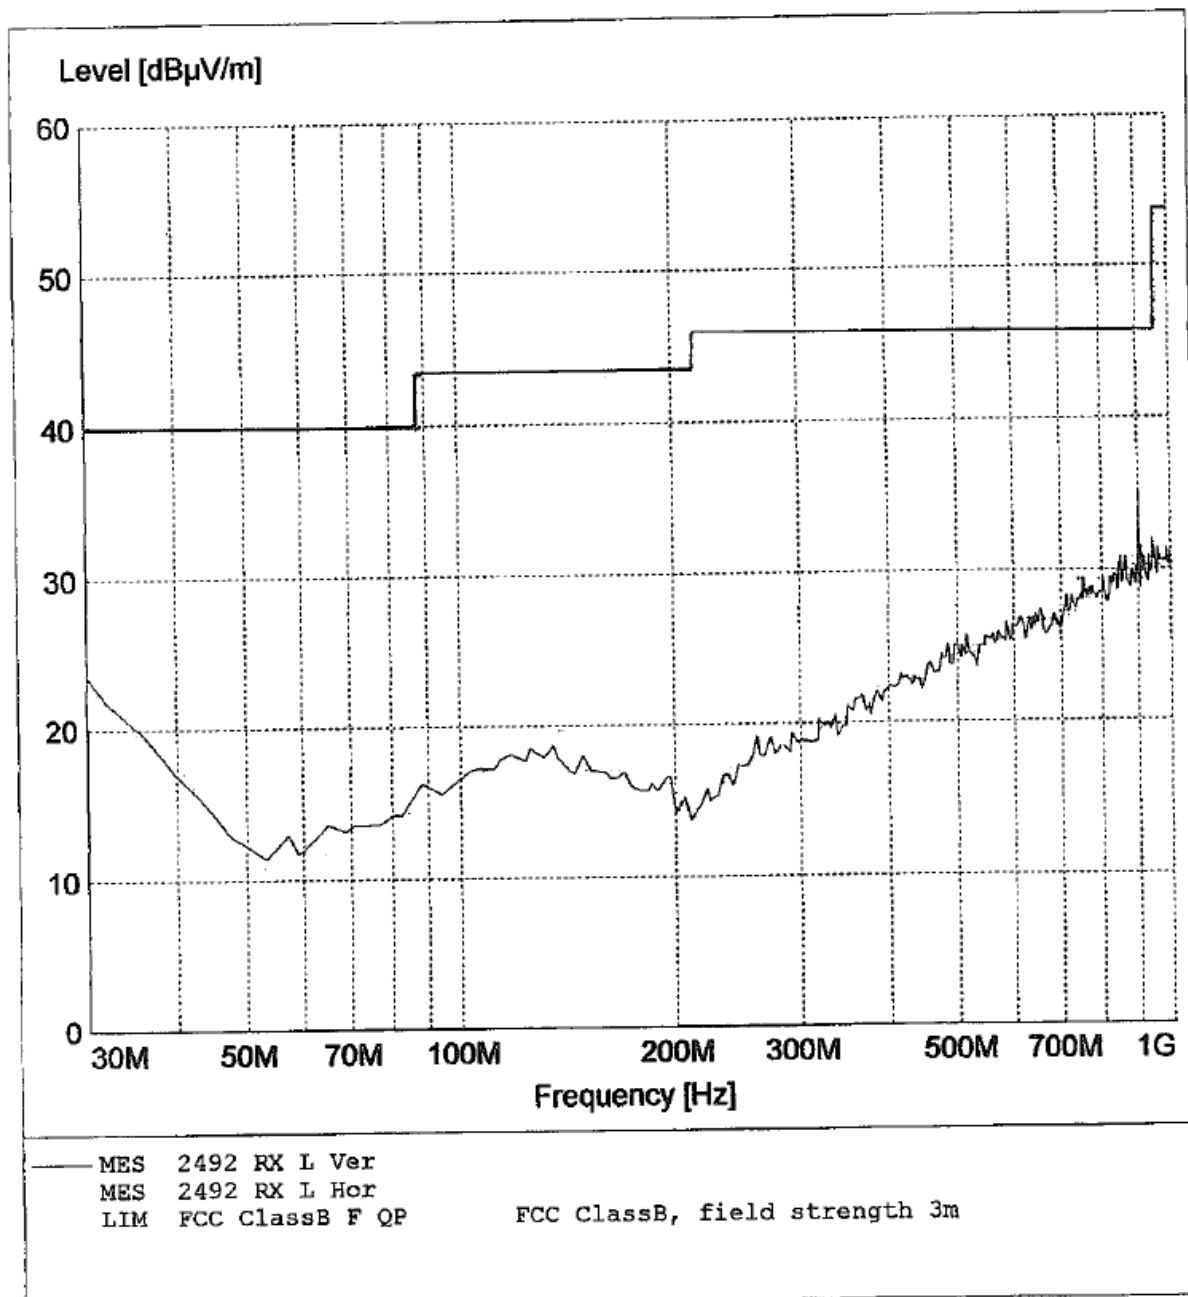

Prüfbericht - Nr.: 16006964 001

Test Report No.:

Seite 3 von 4

Page 3 of 4


Radiated Disturbance

EUT: M/N:2492
Manufacturer:
Operating Condition: RX
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Horizontal
Comment : Battery

HP2492

channel 2 (912.5 MHz)

Marker: 3.613226453 GHz 37.77 dB μ V/m

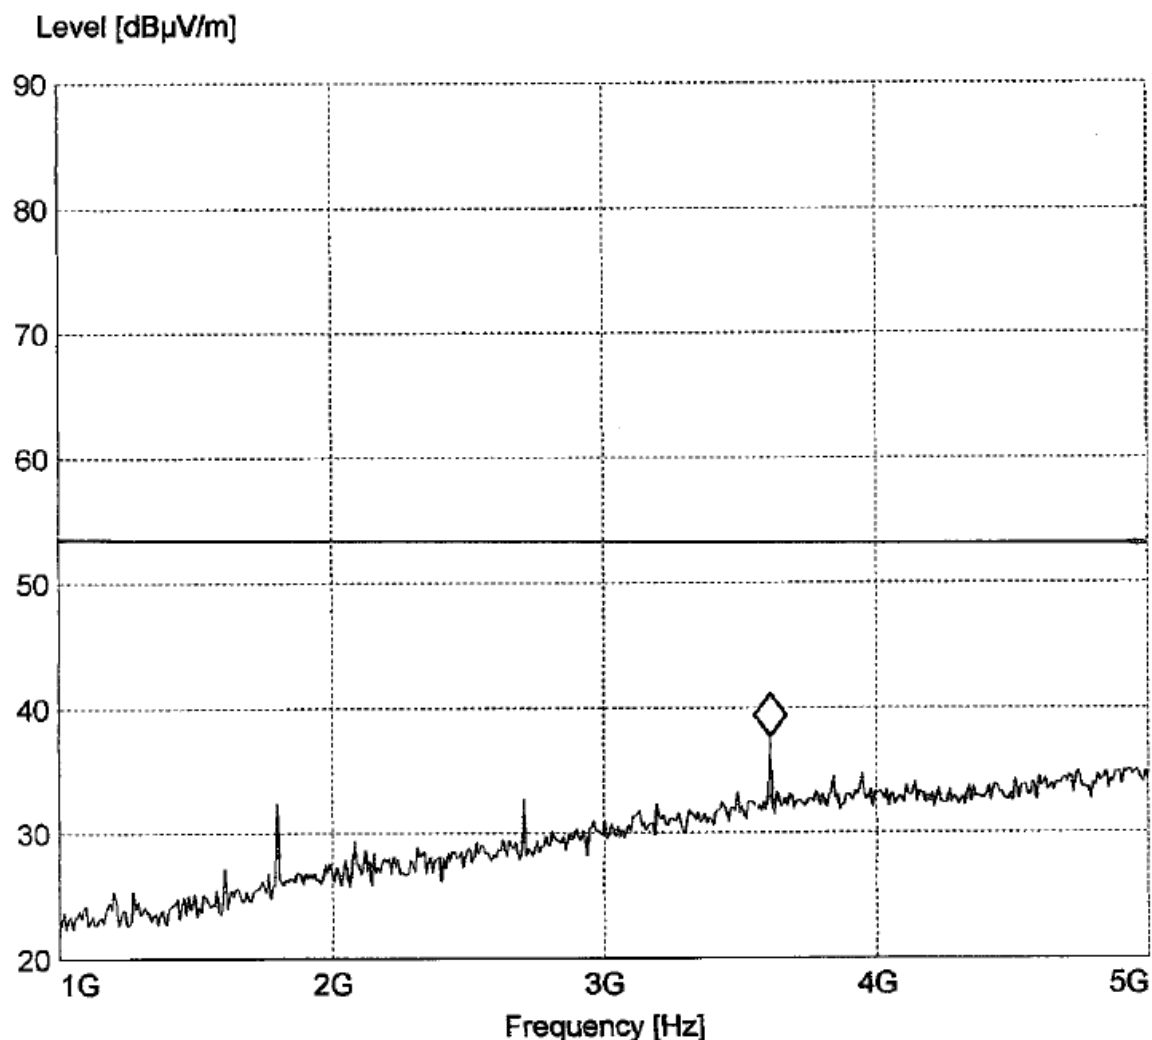

MES 2492 RX H Hor

LIM FCC ClassB F QP/AV

FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16006964 001

Test Report No.:

Seite 4 von 4

Page 4 of 4


Radiated Disturbance

EUT: M/N:2492
Manufacturer:
Operating Condition: RX
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Vertical
Comment: Battery

HP 2492

channel 2 (912.5 MHz)

Marker: 2.70741483 GHz 38.94 dB μ V/m

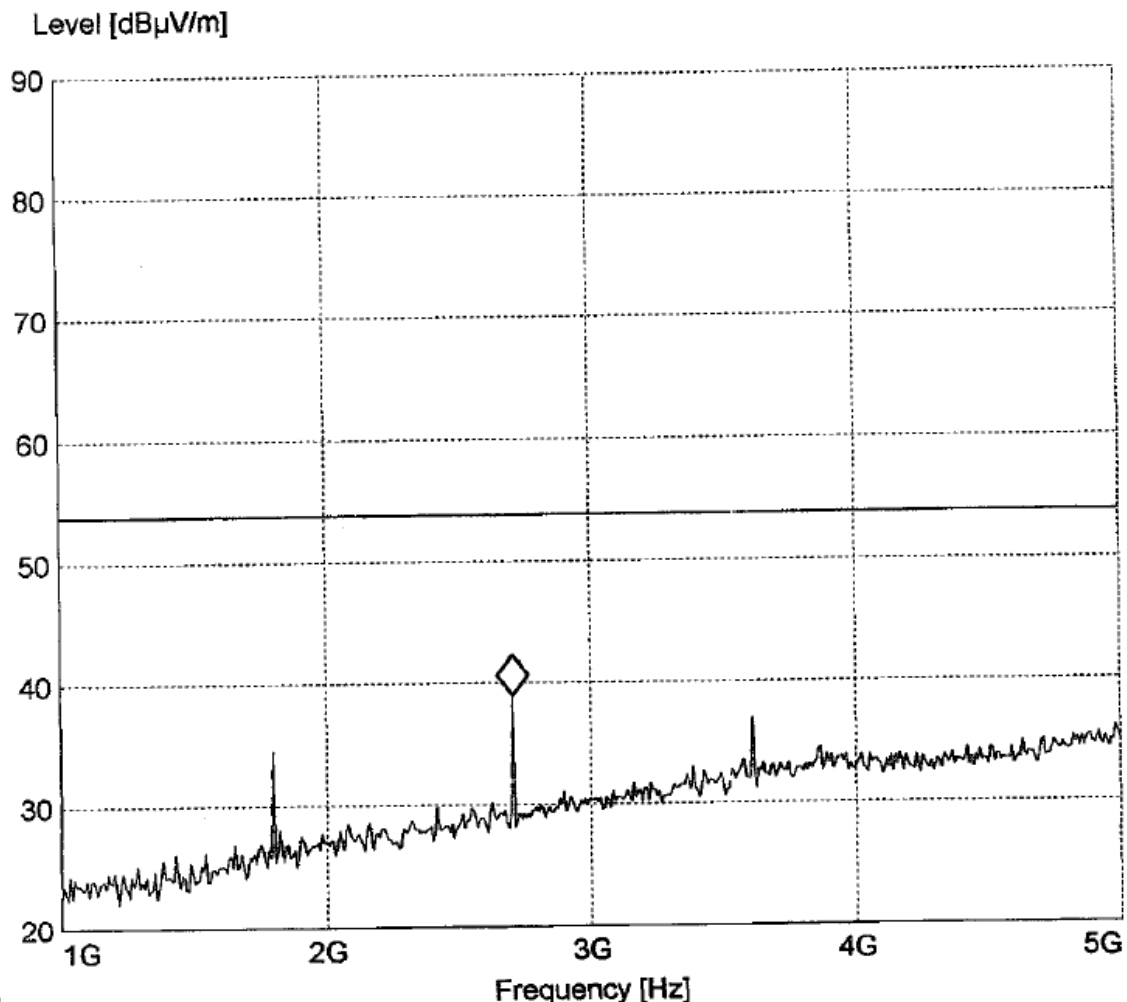

— MES 2492 RX H Ver
— LIM FCC ClassB F QP/AV FCC ClassB, field strength 3m