

Prüfbericht - Nr.: 16004247 001

Seite 1 von 16

Test Report No.:

Page 1 of 16

Auftraggeber: Classic Tech Development Ltd.

Client:

11-12/F., YUE XIU IND'L BLDG.
87 HUNG TO ROAD,
KWUN TONG, KOWLOON
HONG KONG

Gegenstand der Prüfung: Wireless Speaker Receiver

Test item:

Bezeichnung: SP1192A

Identification:

FCC ID:

FCC ID

REDSP1192A-001R

Wareneingangs-Nr.: 73014652

Receipt No.:

Eingangsdatum: 15.12.2004

Date of receipt:

Prüfort:

Testing location:

Shenzhen Bureau of Quality Technical
Supervision Shenzhen Academy of Metrology
and Quality Inspection
Bldg, of Shenzhen Academy of Metrology and
Quality Inspection, Longzhu Road, Nanshan,
Shenzhen,
P.R. China

Listed test laboratory
according to FCC rules
section 2.948 for
measuring devices under
Parts 15

Prüfgrundlage:

Test specification:

ANSI C63.4:2001

**Conduct Emissions with limits described at FCC Part 15 subpart B section
15.107**

**Radiated Emissions with limits described at FCC Part 15 Subpart B section
15.109**

38 dB rejection described at FCC Part 15 Subpart B section 15.121

Prüfergebnis:

Test Result:

**Der vorstehend beschriebene Prüfgegenstand wurde geprüft und
entspricht oben genannter Prüfgrundlage.**

The a. m. test item passed the test specification.

Prüflaboratorium/ Testing Laboratory: TÜV Rheinland (Guangdong) Ltd

zusammengestellt/ compiled by:

kontrolliert/ reviewed by:

03.01.2005

Dave Xie

Datum

Name

Date

Name

Unterschrift

Signature

17.01.2005

Yuxin Huang

Datum

Name

Date

Name

Unterschrift

Signature

Sonstiges/ Other Aspects:

Abkürzungen: ok / P = entspricht Prüfgrundlage
fail / F = entspricht nicht Prüfgrundlage
n.a. / N = nicht anwendbar

Abbreviations: ok / P = passed
fail / F = failed
n.a. / N = not applicable

**Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht
auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.**
*This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be
duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.*

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 2 von 16

Page 2 of 16

TEST SUMMARY

5.1 CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.107(A)

RESULT: ok

5.2 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A)

RESULT: ok

5.3 38 dB REJECTION SIGNAL FROM CELLULAR FREQUENCY BAND

RESULT: ok

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 3 von 16

Page 3 of 16

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACE ABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	6
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	SUBMITTED DOCUMENTS	7
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	8
4.2	TEST OPERATION AND TEST SOFTWARE.....	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	8
4.5	TEST SET-UP.....	9
5	TEST RESULTS EMISSION	10
5.1	CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.107(A).....	10
5.2	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A).....	12
5.3	38 dB REJECTION SIGNAL FROM CELLULAR FREQUENCY BAND.....	13
6	PHOTOGRAPHS OF THE TEST SET-UP	14
7	LIST OF TABLES.....	16
8	LIST OF PHOTOGRAPHS.....	16

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 4 von 16

Page 4 of 16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

Shenzhen SMQ

Shenzhen Bureau of Quality Technical Supervision
Shenzhen Academy of Metrology and Quality Inspection
Bldg, of Shenzhen Academy of Metrology and Quality Inspection
Longzhu Road, Nanshan, Shenzhen,
P.R. China

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 5 von 16

Page 5 of 16

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Antenna	Chase	CBL6112B	2591	29.01.2005
Horn Antenna	Rohde & Schwarz	HF906	100014	29.01.2005
3m Semi-anechoic chamber	Albatross Projects	9X6X6	----	29.01.2005
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	29.01.2005
Communications Test Set	Rohde & Schwarz	CMU200	1100.0008.02	29.01.2005
Communications Test Set	HP	HP8920A	3438A05187	29.01.2005

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 6 von 16

Page 6 of 16

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for conducted emissions measurements is ± 3 dB.
The estimated combined standard uncertainty for radiated emissions measurements is ± 3 dB.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

Shenzhen Bureau of Quality Technical Supervision, Shenzhen Academy of Metrology and Quality Inspection, Bldg. of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R.China is listed on the US Federal Communications Commission list of facilities approved to perform measurements

3 General Product Information

Brief description of the test sample:

The submitted sample is Wireless Speaker Receiver with two operating frequencies. An auto scan function can be found in the sample: in case there is not signal detected, the local oscillator is continuously switching for these two receiving frequencies.

The submitted sample has also the function of volume, which the user can select.

Prüfbericht - Nr.: 16004247 001
Test Report No.:

Seite 7 von 16
Page 7 of 16

3.1 Product Function and Intended Use

For details, refer to user manual.

3.2 Ratings and System Details

Frequency range	:	912.0MHz, 913.0MHz
Number of channels	:	2 (auto tunable)
Type of antenna	:	Integral antenna
FCC ID:		REDSP1192A-001R
Power supply	:	DC 15V (Powered by AC/DC adaptor) (12V NiCd battery 1)
Ports	:	None
Protection Class	:	III

Refer to document for further information

3.3 Independent Operation Modes

The basic operation modes are:

Receiving with volume, SRS and freq. adjustable

For further information refer to User Manual

3.4 Submitted Documents

Block Diagram
Circuit Diagram
PCB Layout
FCC Label
User Manual
Photo Document

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 8 von 16

Page 8 of 16

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following AC/DC Adaptor:

Model	: JOD-48U-35
Input	: AC 120V 60Hz 225mA
Output	: DC 15V 1A
Protection class	: II

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Conducted Emission


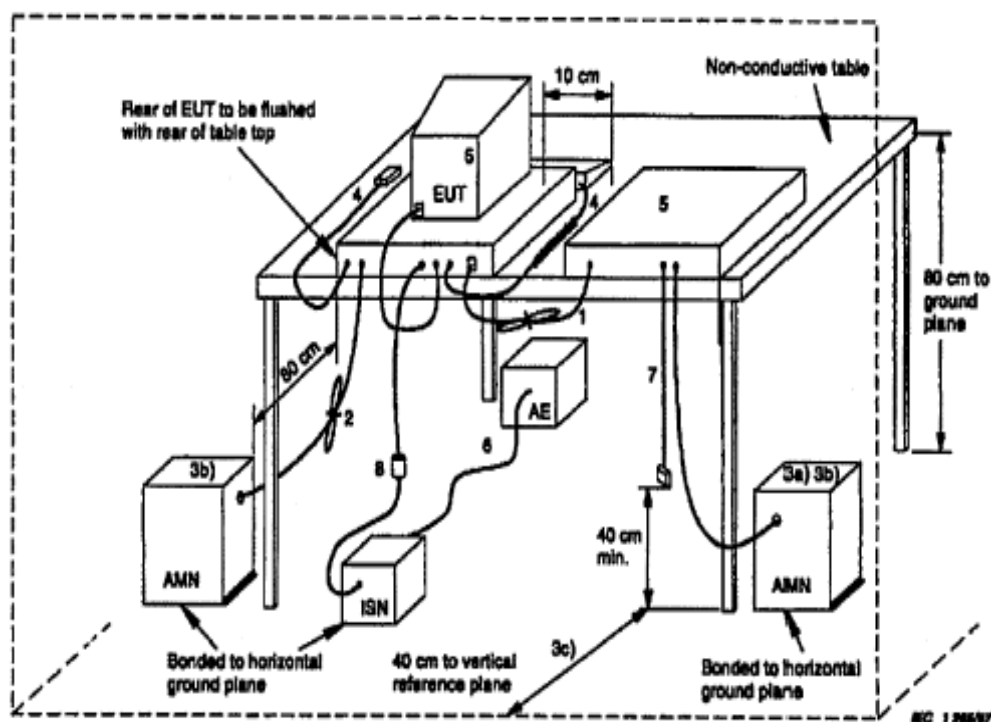


Diagram 2 of Measurement Equipment Configuration for Testing Radiated Emission

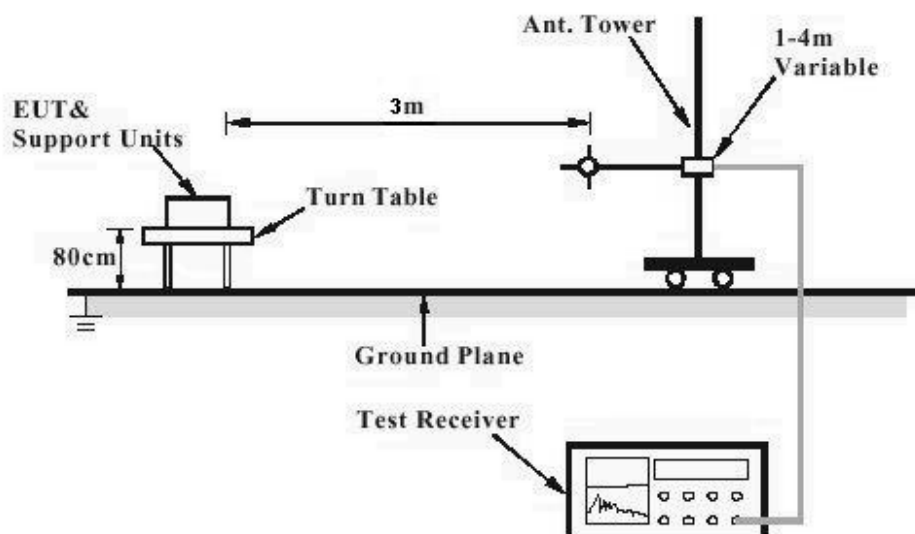

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 10 von 16

Page 10 of 16

5 Test Results EMISSION

5.1 Conducted Emission for FCC Part 15 Per Section 15.107(a)

RESULT:

ok

Date of testing	:	10.12.2004
Test specification	:	FCC Part 15 Per Section 15.107(a)
Limits	:	FCC Part 15 Per Section 15.107(a)
Deviations from Standard Test procedures	:	None
Test procedure	:	Procedure specified in ANSI C63.4 were followed
Kind of test site	:	Shielded room
Operation mode	:	Receiving
Temperature	:	22°C
Humidity	:	40%

If the result of the measurement with the Quasi Peak detector is below the Average limit, the measurement with Average Detector has been omitted.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 11 von 16

Page 11 of 16

Table 2: Disturbance Voltage on AC Mains

Frequency [MHz]	Line	QP [dB μ V]	AV [dB μ V]	Quasi Peak Limit [dB μ V]	Average Limit [dB μ V]
0.154	L	65.7	26.3	65.7	55.7
0.226	L	53.9	23.8	62.6	52.6
0.342	L	50.3	20.6	59.1	49.1
0.572	L	43.0	15.3	56	46
1.150	L	32.2	8.0	56	46
0.150	N	56.9	26.4	66	56
0.214	N	54.3	24.0	63.0	53.0
0.362	N	49.6	20.0	58.7	48.7
0.490	N	45.4	16.2	56.2	46.2
0.728	N	32.7	7.7	56	46

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 12 von 16

Page 12 of 16

5.2 Radiated Emission for FCC Part 15 Per Section 15.109(a)

RESULT:

ok

Date of testing : 14.12.2004
Test specification : FCC Part 15 Per Section 15.109(a)
Limit : FCC Part 15 Per Section 15.109(a)
Operation mode: Receiving
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Temperature : 22°C
Humidity : 46%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 3: Radiated Emission

Frequency [MHz]	QP [dB μ V/m]	AV [dB μ V/m]	Polarity	Limit [dB μ V/m]
901.289	38.02	---	H	46
901.311	40.1	---	V	46
2703.888	---	44.0	H	53.9
2703.888	---	39.16	V	53.9
3605.156	---	39.9	H	53.9
3605.156	---	36.79	V	53.9

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 13 von 16

Page 13 of 16

5.3 38 dB rejection signal from Cellular Frequency band

RESULT:

ok

Date of testing : 14.12.2004
Test specification : FCC Part 15 Per Section 15.121(b)
Limit : FCC Part 15 Per Section 15.121(b)
Operation mode: Receiving
Test procedure Procedure specified in ANSI C63.4 were followed
Kind of test site : Shielded room
Test signal : RF signal FM at 1kHz audio, 19kHz pilot with 75kHz deviation
Reference level : -40dBm

Table 4 : 38 dB Rejection

Injection frequency(Cellular) in MHz	Level 12dB SINAD at injected frequency in dBm	Rejection in dB	Limit in dB
824.04	>17	>40	38
836.00	>17	>40	38
848.97	>17	>40	38
869.04	>17	>40	38
881.00	>17	>40	38
893.97	>17	>40	38

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 14 von 16

Page 14 of 16

6 Photographs of the Test Set-Up

Photograph 1: Set up for Conducted Emission on AC Mains




Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 15 von 16

Page 15 of 16

Photograph 2: Set-up for Radiation Measurement Below 1GHz

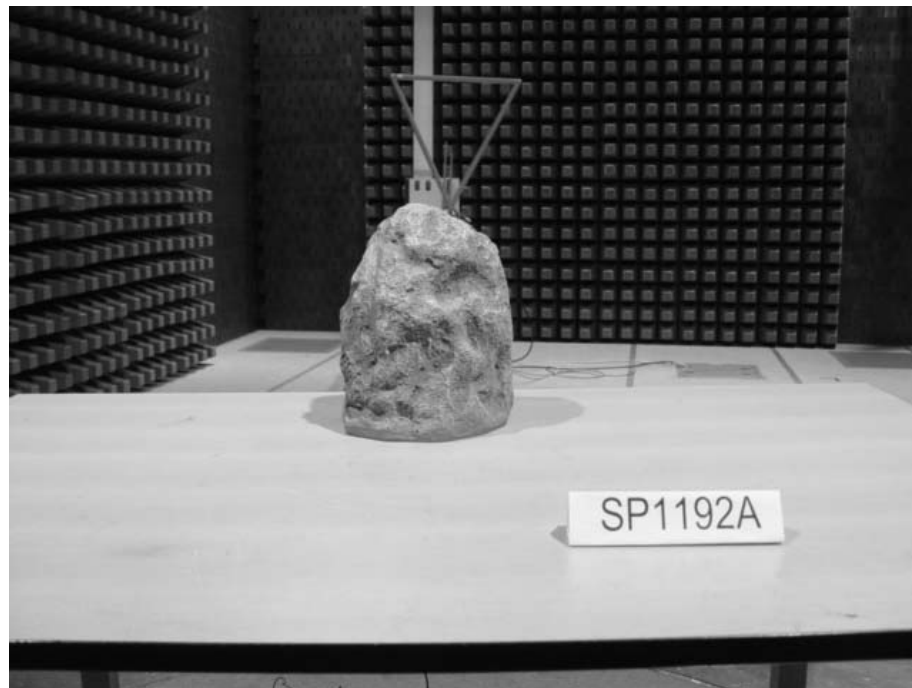

Photograph 3: Set-up for Radiation Measurement Above 1GHz



7 List of Tables

Table 1: List of Test and Measurement Equipment.....5
Table 2: Disturbance Voltage on AC Mains.....11
Table 3: Radiated Emission.....12
Table 4 : 38 dB Rejection.....13

8 List of Photographs

Photograph 1: Set up for Conducted Emission on AC Mains14
Photograph 2: Set-up for Radiation Measurement Below 1GHz15
Photograph 3: Set-up for Radiation Measurement Above 1GHz15

Prüfbericht - Nr.: 16004247 001


Test Report No.:

Seite 1 von 6

Page 1 of 6

Conducted Disturbance

EUT: M/N:SP1192A
Op Cond: RX
Test Spec: N
Comment: AC 120V/60Hz
Date: 10. Dec 04 11:30

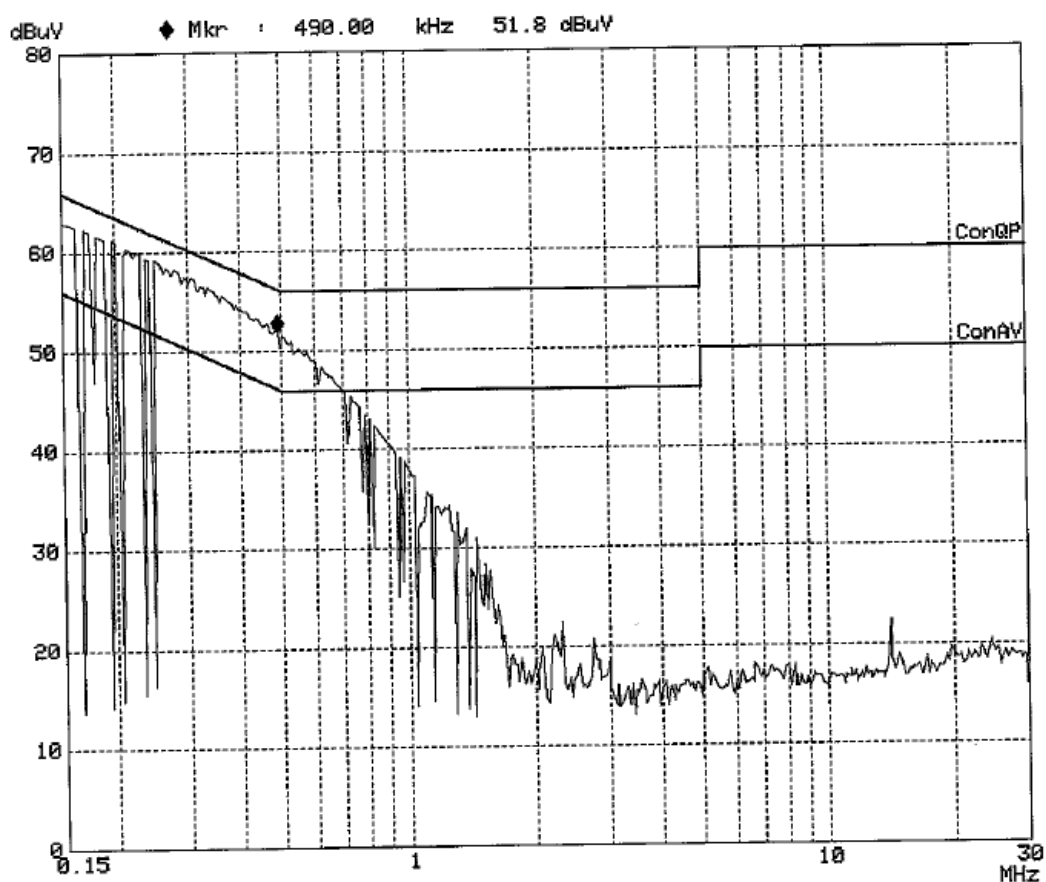

Prüfbericht - Nr.: 16004247 001


Test Report No.:

Seite 2 von 6

Page 2 of 6

Conducted Disturbance

EUT: M/N:SP1192A
Op Cond: RX
Test Spec: L
Comment: AC 120V/60Hz
Date: 10. Dec 04 11:14

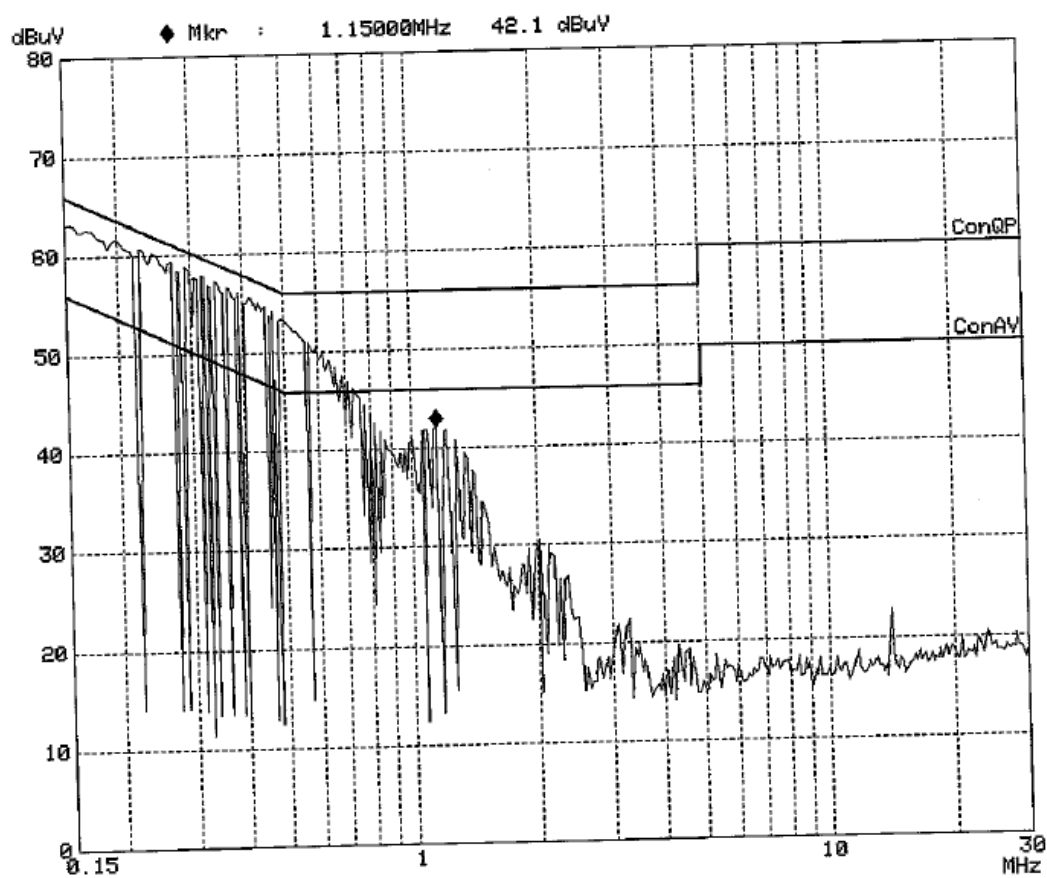

Prüfbericht - Nr.: 16004247 001

Test Report No.:


Seite 3 von 6

Page 3 of 6

Radiated Disturbance

Fcc part15

EUT: M/N:SP1192A
Manufacturer:
Operating Condition: RX (CH1)
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Vertical
Comment: AC 120V/60Hz

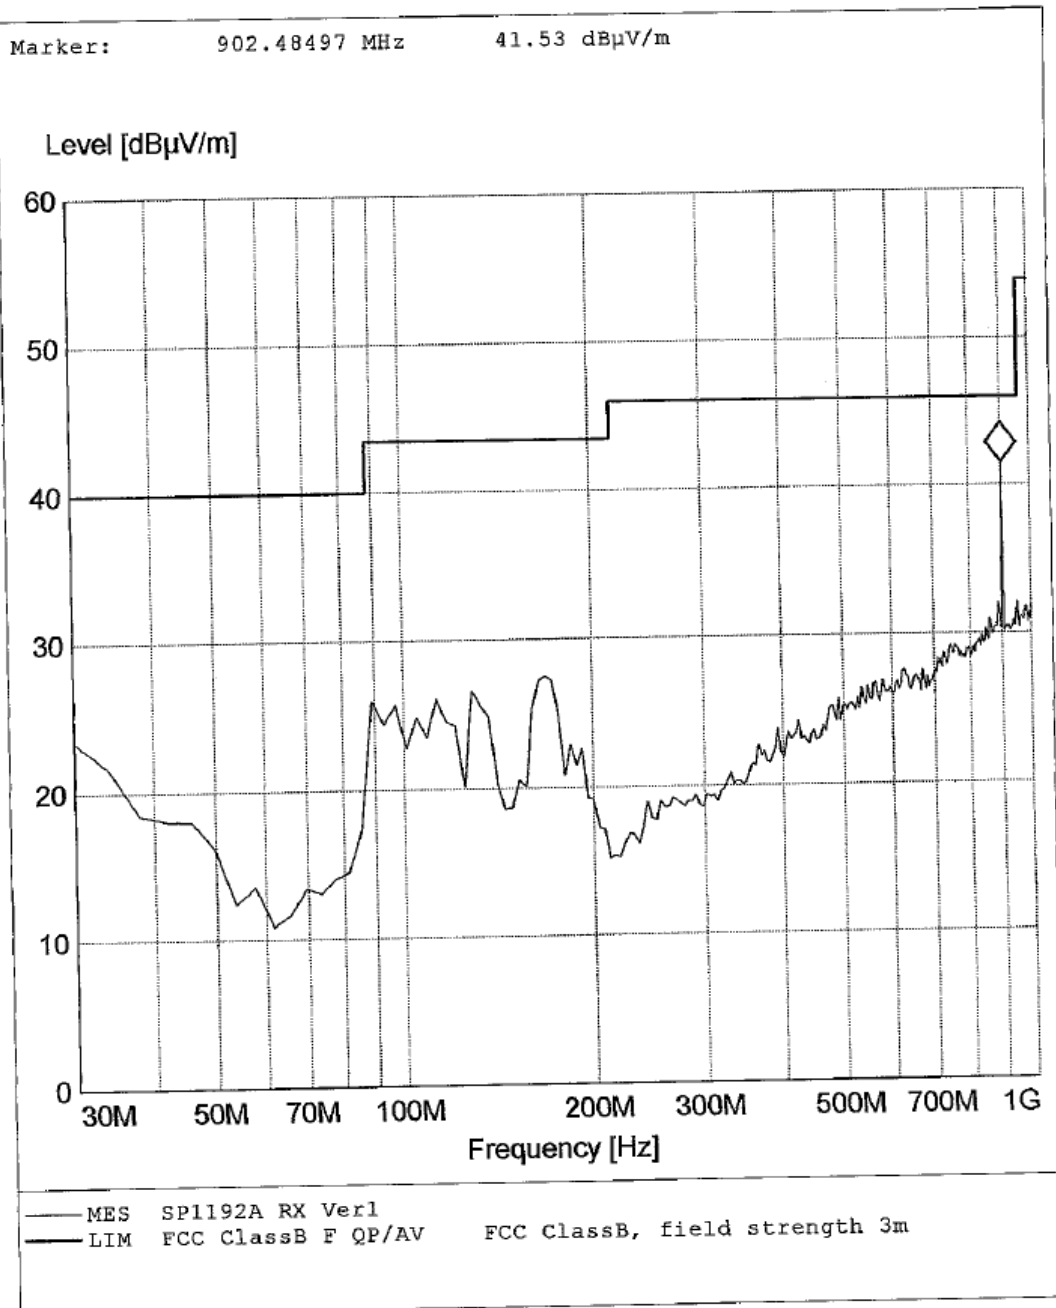

Prüfbericht - Nr.: 16004247 001

Test Report No.:


Seite 4 von 6

Page 4 of 6

Radiated Disturbance

Fcc part15

EUT: M/N:SP1192A
Manufacturer:
Operating Condition: RX (CH1)
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Horizontal
Comment: AC 120V/60Hz

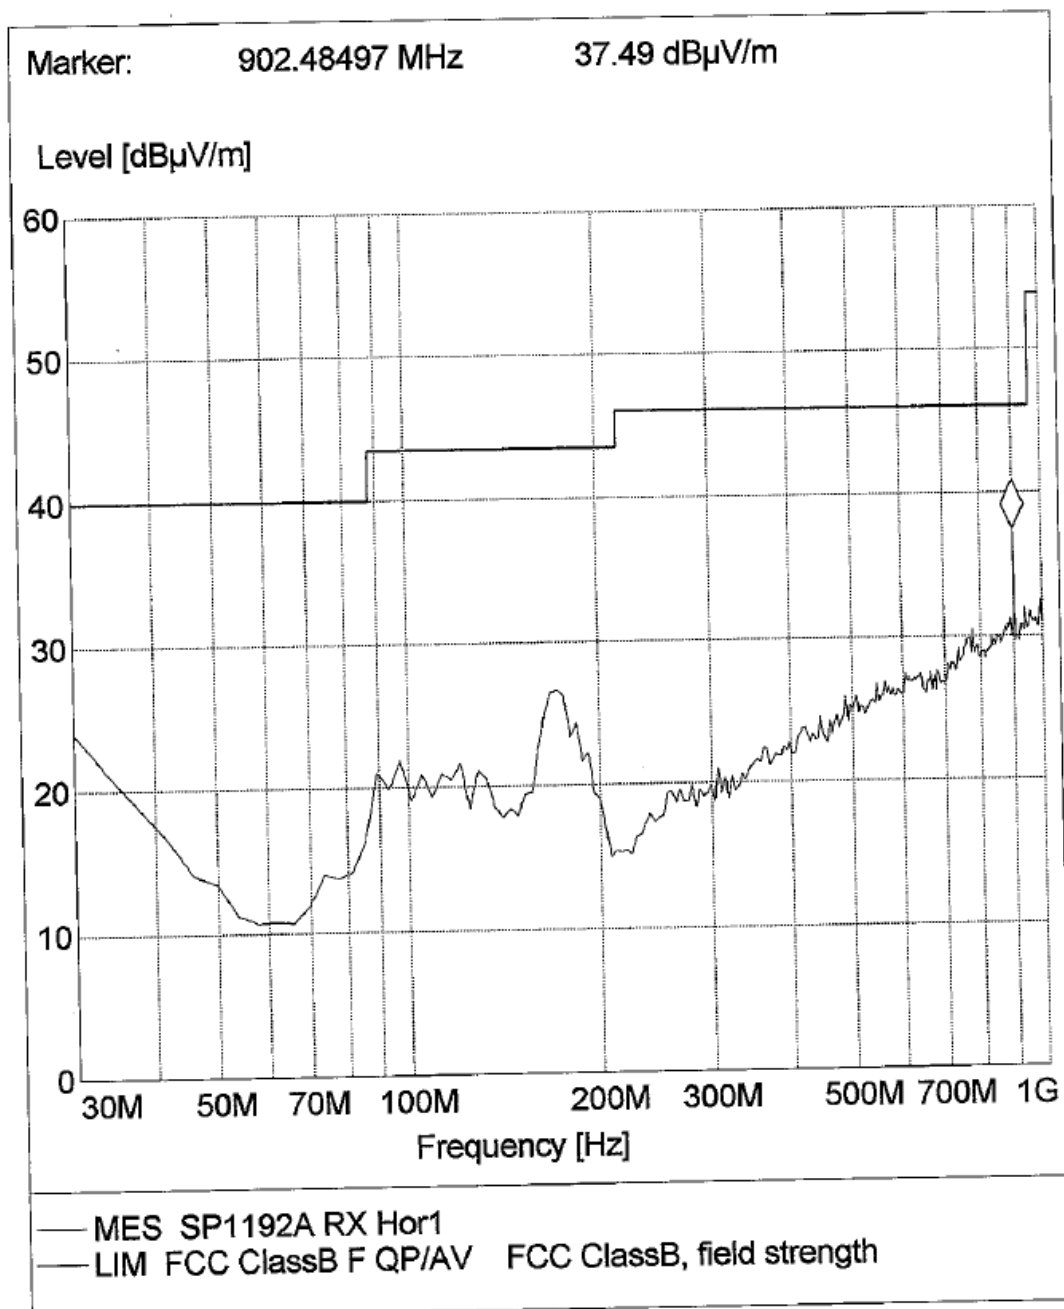

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 5 von 6


Page 5 of 6

Radiated Disturbance

Fcc part15

EUT: M/N:SP1192A
Manufacturer:
Operating Condition: RX (CH1)
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Horizontal
Comment: AC 120V/60Hz

Marker: 2.695390782 GHz 43.55 dBµV/m
Delta Mk: 901.803607 MHz -3.11 dB

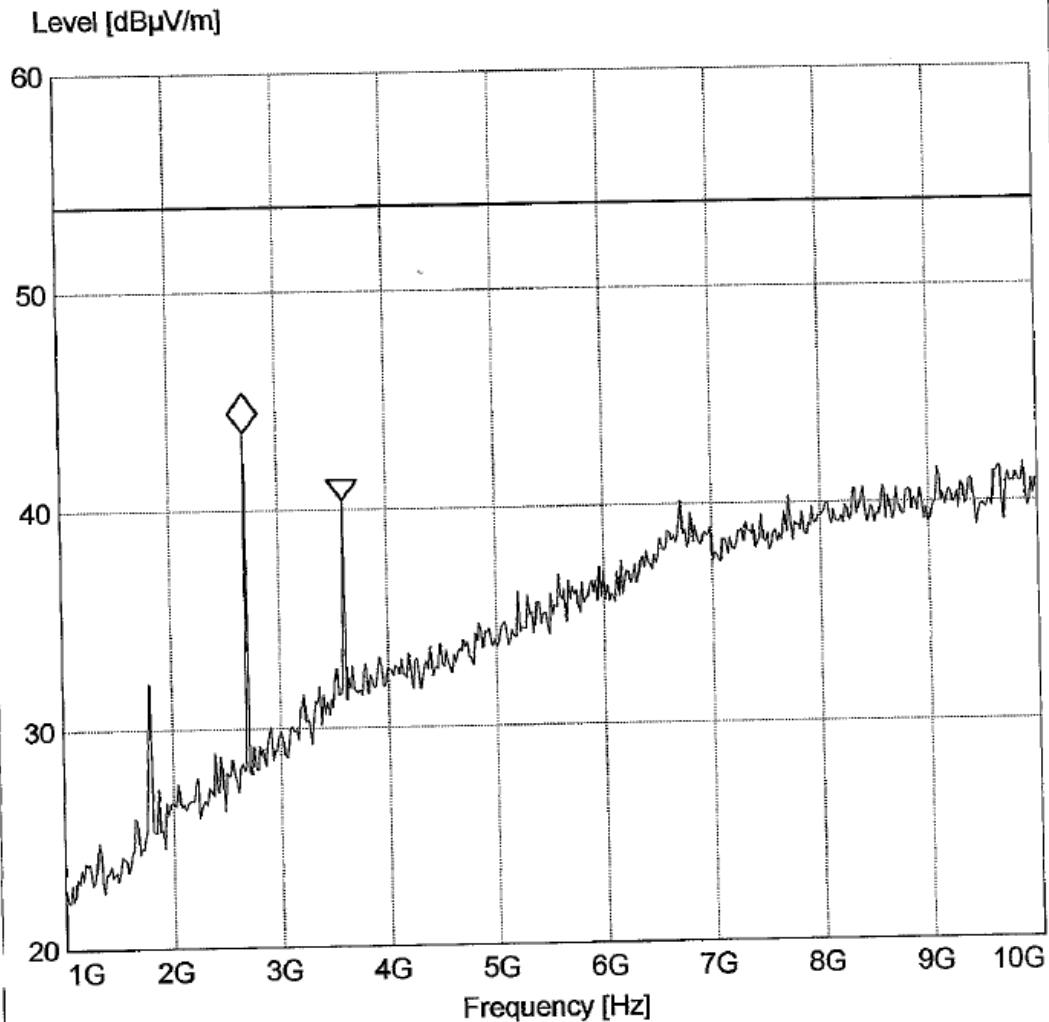

— MES SP1192A RX(CH1) HHor
— LIM FCC ClassB F QP/AV FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16004247 001

Test Report No.:

Seite 6 von 6

Page 6 of 6

Radiated Disturbance

Fcc part15

EUT: M/N:SP1192A
Manufacturer:
Operating Condition: RX (CH1)
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Vertical
Comment: AC 120V/60Hz

