



**SGS-CSTC Standards  
Technical Services Ltd.**

1/F., Building No. 1 Building, Agriculture Machinery Materials Co. Wushan  
Road, Shipai, Tianhe District, Guangzhou, China  
Telephone: +86 (0) 20 3848 1001      Fax: +86 (0) 20 3848 1006  
kent\_hsu@sgs.com



**FEDERAL COMMUNICATIONS COMMISSION**  
Registration number: 282399

Report No.: 04.04.0849EF  
Page: 1 of 10  
FCC ID: REKFF49A

## **FCC TEST REPORT**

**Application No. :** 04.04.0849E (SGS HK No. 2007305/EL)

**Applicant:** SWITOY LIMITED

**FCC ID:** REKFF49A

**Fundamental Carrier Frequency :** 49.860 MHz

**Equipment Under Test (EUT):**

**Name:** RADIO CONTROL VEHICLES

**Model:** 71079, 71080, 71081, 71082, 71083, 71084, 71085, 71086, 71087,  
71088, 71089, 71090, 21079, 21080, 21081, 21082, 21083, 21084,  
21085, 21086, 21087, 21088, 21089, 21089, 21090, 73101, 73102, 73103,  
83101, 83102, 83103, 0237 \*

\* Please refer to section 3.5 of this report which indicates which model was actually tested and which were electrically identical.

**Standards:** FCC PART 15, SUBPART C : 2002

**Date of Receipt:** 20 April 2004

**Date of Test:** 26 April 2004

**Date of Issue:** 30 April 2004

<b>Test Result :</b>	<b>PASS *</b>
----------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kent Hsu  
Laboratory Manager  
SGS-CSTC Co., Ltd.

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the SGS PRODUCT CERTIFICATION MARK.. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

All test results in this report can be traceable to National or International Standards.

**2 Contents**

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 CONTENTS.....</b>	<b>2</b>
<b>3 GENERAL INFORMATION.....</b>	<b>3</b>
3.1 CLIENT INFORMATION .....	3
3.2 DETAILS OF E.U.T. .....	3
3.3 DESCRIPTION OF SUPPORT UNITS.....	3
3.4 TEST LOCATION.....	3
3.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	3
3.6 TEST FACILITY.....	4
<b>4 TEST RESULTS.....</b>	<b>5</b>
4.1 TEST INSTRUMENTS .....	5
4.2 E.U.T. OPERATION .....	5
4.3 TEST PROCEDURE & MEASUREMENT DATA.....	5
4.3.1 <i>Radiated Emissions</i> .....	5
4.3.2 <i>Occupied Bandwidth</i> .....	7
4.3.3 <i>Photographs - Radiated Emission Test Setup in Chamber</i> .....	8
<b>5 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....</b>	<b>9-10</b>

### **3 General Information**

#### **3.1 Client Information**

Applicant Name: SWITOEY LIMITED  
Applicant Address: Rm1009, 10/F Austin Tower, 22-26A Austin Avenue, T.S.T  
Kowloon, Hong Kong

#### **3.2 Details of E.U.T.**

Product Name: RADIO CONTROL VEHICLES – 49 MHz  
Model: 71079, 71080, 71081, 71082, 71083, 71084, 71085, 71086,  
71087, 71088, 71089, 71090, 21079, 21080, 21081, 21082,  
21083, 21084, 21085, 21086, 21087, 21088, 21089, 21090,  
73101, 73102, 73103, 83101, 83102, 83103, 0237 ♣  
\* Please refer to section 3.5 of this report which indicates which model was  
actually tested and which were electrically identical.  
Power Supply: 9V DC (1 x '6F22' Size Battery) for Tx  
Power Cord: N/A-

#### **3.3 Description of Support Units**

The EUT was tested as an independent unit: a 49MHz radio transmitter.

#### **3.4 Test Location**

All tests were performed at:-

SGS-CSTC Standards Technical Services Ltd., Guangzhou Safety & EMC Laboratory,  
1/F, Building No. 1, Agriculture Machinery Materials Company Warehouse Ltd.,  
Wushan Road Shipai, Tianhe District, Guangzhou, China. P.C. 510630.

Tel: +86 20 3848 1001

Fax: +86 20 3848 1006

#### **3.5 Other Information Requested by the Customer**

Only one model was tested since the electrical circuit design, layout, components used  
and internal wiring for all models listed in page 1 were identical, with only the outer  
decoration being different. Please refer to the facsimile from Bonnie of UNI-FORTUNE  
TOYS INDUSTRIAL LTD., dated 27 April 2004 for further details.



### **3.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0. Effective through February 2, 2003.

- **ACA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **VCCI**

The 3m Semi-anechoic chamber and Shielded Room (11.5m x 4m x 4m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1599 and C-1706 respectively.

Date of Registration: February 28, 2003. Valid until May 30, 2005

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FINKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAL – LAB Code: L0141**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAL/AC01: 2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.

- **FCC – Registration No.: 282399**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002. With the above and NVLAP, SGS-CSTC is an authorized test laboratory for the DoC process.

## 4 Test Results

### 4.1 Test Instruments

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Due Date
3m Semi- Anechoic Chamber	Frankonia	N/A	N/A	15-02-2005
EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	04-11-2004
EMI Test Software	Rohde & Schwarz	ES-K1	N/A	N/A
Coaxial cable	SGS	N/A	N/A	04-12-2004
Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	17-01-2005
Horn Antenna	Rohde & Schwarz	HF906	100095	01-04-2005
Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	22-12-2004
0.1-1300 MHz Pre-Amplifier	HP	8447D OPT 010	2944A06252	30-05-2004

### 4.2 E.U.T. Operation

Input voltage: 9V DC (1 x '6F22' Size Battery)

Operating Environment:

Temperature: 21.0 °C

Humidity: 57 % RH

Atmospheric Pressure: 1010 mbar

EUT Operation: Test the EUT in transmitting mode.

### 4.3 Test Procedure & Measurement Data

#### 4.3.1 Radiated Emissions

**Test Requirement:** FCC Part15 C

**Test Method:** ANSI C63.4

**Test Date:** 26 April 2004

**Measurement Distance:** 3m (Semi-Anechoic Chamber)

**Requirements:** Carrier frequency will not exceed 80dB<sub>u</sub>V/m AT 3m.

Out of band emissions shall not exceed:

40.0 dB<sub>u</sub>V/m between 30MHz & 88MHz

43.5 dB<sub>u</sub>V/m between 88MHz & 216MHz

46.0 dB<sub>u</sub>V/m between 216MHz & 960MHz

54.0 dB<sub>u</sub>V/m above 960MHz

**Detector:** Peak Scan (120kHz resolution bandwidth)

Test Procedure: The procedure used was ANSI Standard C63.4-2001. The receive was scanned from 30MHz to 1000MHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. The worst case emissions were reported.

The following measurements were performed on the EUT on 26 April 2004:

Test the EUT in transmitting mode.

Intentional emission

<b>Test Frequency (MHz)</b>	<b>Peak (dBuV/m)</b>		<b>Limits (dBuV/m)</b>	<b>Margin (dB)</b>	
	Vertical	Horizontal		Vertical	Horizontal
49.860	<b>75.6</b>	<b>77.6</b>	100.0	<b>24.4</b>	<b>22.4</b>

<b>Test Frequency (MHz)</b>	<b>Average (dBuV/m)</b>		<b>Limits (dBuV/m)</b>	<b>Margin (dB)</b>	
	Vertical	Horizontal		Vertical	Horizontal
49.860	<b>67.2</b>	<b>69.9</b>	80.0	<b>12.8</b>	<b>10.1</b>

Other emissions

<b>Test Frequency (MHz)</b>	<b>Quasi-Peak (dBuV/m)</b>		<b>Limits (dBuV/m)</b>	<b>Margin (dB)</b>	
	Vertical	Horizontal		Vertical	Horizontal
2 <sup>nd</sup> 99.720	<b>32.1</b>	<b>32.1</b>	43.5	<b>11.4</b>	<b>11.4</b>
3 <sup>rd</sup> 149.545	<b>31.3</b>	<b>33.2</b>	43.5	<b>12.2</b>	<b>10.3</b>
4 <sup>th</sup> 199.440	<b>18.6</b>	<b>18.6</b>	43.5	<b>24.9</b>	<b>24.9</b>
5 <sup>th</sup> 249.312	<b>34.3</b>	<b>23.2</b>	46.0	<b>11.7</b>	<b>22.8</b>
6 <sup>th</sup> 299.167	<b>33.2</b>	<b>21.3</b>	46.0	<b>12.8</b>	<b>24.7</b>
7 <sup>th</sup> 349.020	<b>29.3</b>	<b>25.3</b>	46.0	<b>16.7</b>	<b>20.7</b>
8 <sup>th</sup> 398.880	<b>24.2</b>	<b>24.2</b>	46.0	<b>21.8</b>	<b>21.8</b>
9 <sup>th</sup> 448.740	<b>23.3</b>	<b>23.3</b>	46.0	<b>22.7</b>	<b>22.7</b>
10 <sup>th</sup> 498.600	<b>21.3</b>	<b>23.1</b>	46.0	<b>24.7</b>	<b>22.9</b>

**Test Results: The unit does meet the FCC Part 15 C requirements.**


#### 4.3.2 Occupied Bandwidth

Test Requirement: FCC Part 15 C  
Test Method: Based on FCC Part15 C Section 15.235:  
Operation within the band 49.86 – 49.92 MHz  
Test Date: 26 April 2004

Requirements: The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

Method of measurement: The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical Scale is set to –10dB per division. The horizontal scale is set to 5KHz per division.

The graph as below, represents the emissions take for this device.

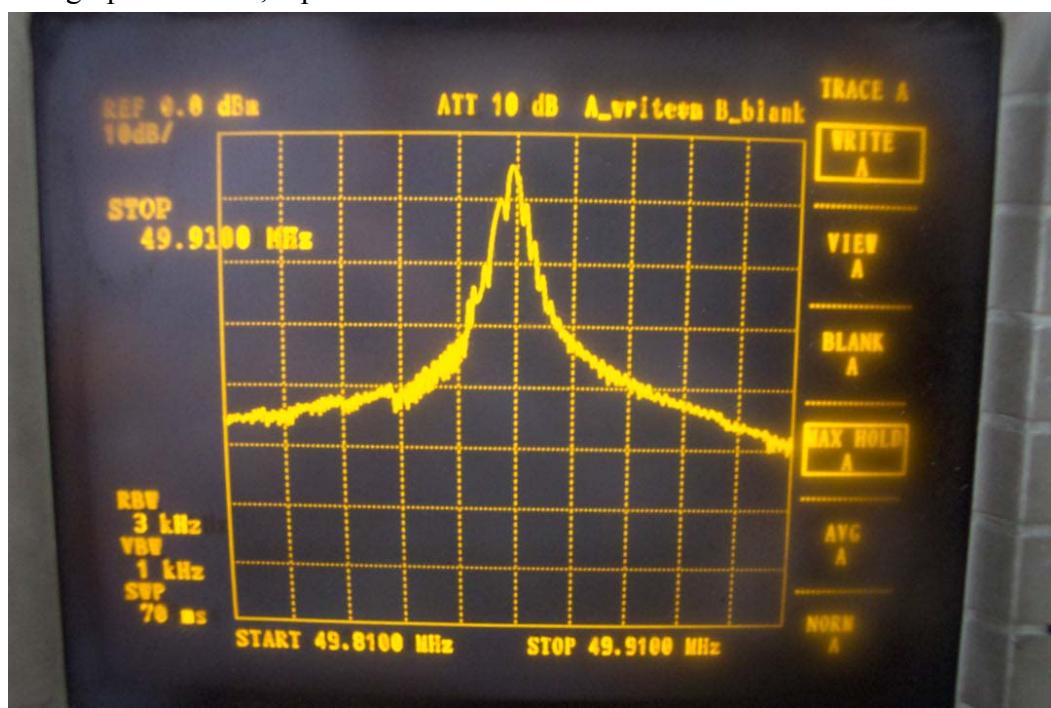

The results: The unit does meet the FCC Part 15 C requirements.