

# FCC ID PER PART 15.227

## EMI MEASUREMENT AND TEST REPORT

For

### Panyu Elite Century Electronics Co., Ltd.

The second Industrial Park of Xia Village, Gongming Baoan District,  
Shenzhen City, Guogdong Province, China

**FCC ID: RETKM80520M**

2003-09-08

|   |  |
|---|--|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report   | <b>Equipment Type:</b><br>Wireless Mouse - ITE |
| <b>Test Engineer:</b> <u>Jerry Wang</u>   |  |
| <b>Report No.:</b> <u>R0308087(T)</u>   |  |
| <b>Test Date:</b> <u>2003-08-31</u>   |  |
| <b>Reviewed By:</b> <u>Ling Zhang</u>   |  |
| <b>Prepared By:</b> Bay Area Compliance Laboratory Corporation (BACL)<br>230 Commercial Street<br>Sunnyvale, CA 94085<br>Tel: (408) 732-9162<br>Fax: (408) 732-9164 |  |

**Note:** This test report is specially limited to the above client company and the product model only.  
It may not be duplicated without prior written consent of Bay Area Compliance Laboratory  
Corporation. This report **must not** be used by the client to claim product endorsement by  
NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

|  |          |
|--|----------|
| <b>1 - GENERAL INFORMATION.....</b>                          | <b>3</b> |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 3        |
| 1.2 OBJECTIVE .....  | 3        |
| 1.3 RELATED SUBMITTAL(S)/GRANT(S).....                       | 3        |
| 1.4 TEST METHODOLOGY .....                                   | 3        |
| 1.5 TEST FACILITY .....                                      | 3        |
| 1.6 TEST EQUIPMENT LIST .....                                | 4        |
| <b>2 - SYSTEM TEST CONFIGURATION.....</b>                    | <b>5</b> |
| 2.1 JUSTIFICATION .....                                      | 5        |
| 2.2 SPECIAL ACCESSORIES .....                                | 5        |
| 2.3 SCHEMATICS AND BLOCK DIAGRAM.....                        | 5        |
| 2.4 EQUIPMENT MODIFICATIONS .....                            | 5        |
| 2.5 TEST SETUP CONFIGURATION .....                           | 5        |
| 2.6 TEST SETUP BLOCK DIAGRAM .....                           | 5        |
| <b>3 - SUMMARY OF TEST RESULTS.....</b>                      | <b>6</b> |
| <b>4 - RADIATED EMISSION TEST.....</b>                       | <b>7</b> |
| 4.1 MEASUREMENT UNCERTAINTY .....                            | 7        |
| 4.2 EUT SETUP.....   | 7        |
| 4.3 SPECTRUM ANALYZER SETUP .....                            | 7        |
| 4.4 TEST PROCEDURE .....                                     | 7        |
| 4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....           | 8        |
| 4.6 SUMMARY OF TEST RESULTS .....                            | 8        |
| 4.7 RADIATED EMISSIONS TEST RESULT DATA .....                | 8        |
| 4.8 OUT OF BAND EMISSION .....                               | 9        |

## 1 - GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

The *Panyu Elite Century Electronics Co., Ltd.*'s product, model name: KM80520 or the "EUT" as referred to in this report is a Wireless Mouse. The EUT is a Transmitter, which measures approximately 5.00" Lx2.50" Wx1.25" H.

*\* The test data gathered are from typical production samples provided by the manufacturer.*

### 1.2 Objective

This Type approval report is prepared on behalf of *Panyu Elite Century Electronics Co., Ltd.* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules, Part 15, sec 15.209 and sec 15.227.

### 1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

### 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at BACL. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### 1.5 Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22: 1997:

## 1.6 Test Equipment List

| Manufacturer | Description             | Model  | Serial Number                                | Cal. Due Date |
|--------------|-------------------------|--------|--|---------------|
| HP           | Spectrum Analyzer       | 8568B  | Panel<br>2408A00105<br>Display<br>2403A06544 | 2004-05-01    |
| HP           | Spectrum Analyzer       | 8593A  | 29190A00242                                  | 2004-05-01    |
| HP           | Amplifier               | 8447E  | 1937A01054                                   | 2004-05-01    |
| HP           | Quasi-Peak Adapter      | 85650A | 2521A00718                                   | 2004-05-01    |
| Com-Power    | Biconical Antenna       | AB-100 | 14012  | 2004-05-01    |
| Com-Power    | LISN                    | LI-200 | 12005  | 2004-03-28    |
| Com-Power    | LISN                    | LI-200 | 12008  | 2004-03-28    |
| Com-Power    | Log Periodic<br>Antenna | AL-100 | 16091  | 2004-05-01    |
| Com-Power    | Log Periodic<br>Antenna | AB-900 | 15049  | 2004-05-01    |
| HP           | Voltmeter               | 6236B  | 2003A05705                                   | Not Required  |

\* **Statement of Traceability:** BACL Corp. certifies that all calibration has been performed using suitable standards traceable to the NIST.

## 2 - SYSTEM TEST CONFIGURATION

### 2.1 Justification

The EUT was configured for testing in a typical fashion (as normally used by a typical user).

### 2.2 Special Accessories

As shown in section 2.6, all interface cables used for compliance testing are shielded as normally supplied by INMAC, Monster Cable, Y.C. Cables and Qubbain Data Max. The peripherals featured shielded metal connectors.

### 2.3 Schematics and Block Diagram

Please refer to Appendix D.

### 2.4 Equipment Modifications


No modifications were necessary for the EUT to comply.

### 2.5 Test Setup Configuration



Mouse Transmitter

### 2.6 Test Setup Block Diagram

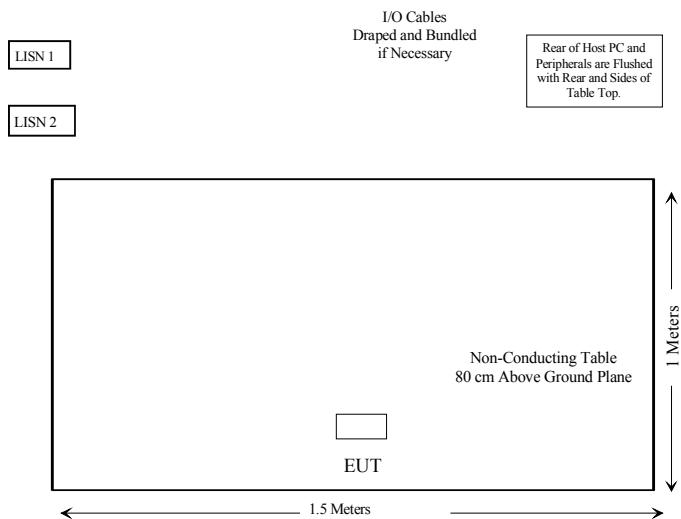

### 3 - SUMMARY OF TEST RESULTS

| FCC RULES            | DESCRIPTION OF TEST     | RESULT    |
|----------------------|-------------------------|-----------|
| § 15.203             | Antenna requirement     | Compliant |
| § 15.205             | Restricted Band         | Compliant |
| § 15.209<br>§ 15.227 | Radiated emission limit | Compliant |

## 4 - RADIATED EMISSION TEST

### 4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

### 4.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the ANSI C63.4-2001. The specification used was the FCC Subpart C limits.

### 4.3 Spectrum Analyzer Setup

According to FCC Rules, §15.33 (a) (1), the system was tested to 1000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

| <b><i>Frequency Range</i></b> | <b><i>RBW</i></b> | <b><i>Video B/W</i></b> |
|-------------------------------|-------------------|-------------------------|
| Below 30MHz                   | 10kHz             | 10kHz                   |
| 30 – 1000MHz                  | 100kHz            | 100kHz                  |
| Above 1000MHz                 | 1MHz              | 1MHz                    |

### 4.4 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within  $-4$  dB $\mu$ V of specification limitation), and are distinguished with a "QP" in the data table.

The EUT was operating at normal to represent worst case during final qualification test. Therefore, this configuration was used for final test data recorded in the table(s) listed under section 4.7 of this report.

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

#### 4.6 Summary of Test Results

According to the final data in section 4.7, the EUT complied with the FCC 15.227 and FCC 15.209 standards, and had the worst margin of:

-5.6 dB $\mu$ V at 54.08 MHz in the Horizontal polarization, 27-1000MHz

#### 4.7 Radiated Emissions Test Result Data

| INDICATED     |                    | TABLE | ANTENNA      |              | CORRECTION FACTOR |                      |          | CORRECTED AMPLITUDE | FCC SUBPART C            |                    | COMMENT   |
|---------------|--------------------|-------|--------------|--------------|-------------------|----------------------|----------|---------------------|--------------------------|--------------------|-----------|
| Frequency MHz | Ampl. dB $\mu$ V/m |       | Angle Degree | Height Meter | Polar H/V         | Antenna dB $\mu$ V/m | Cable dB | Amp. dB             | Corr. Ampl. dB $\mu$ V/m | Limit dB $\mu$ V/m |           |
| 27.04         | 59.8               | 90    | 1.0          | V            | 15.3              | 0.8                  | 25.0     | 50.9                | 80.00                    | -29.1              | Fund/Ave  |
| 27.04         | 60.1               | 90    | 1.2          | H            | 15.3              | 0.8                  | 25.0     | 51.2                | 80.00                    | -28.8              | Fund/Ave  |
| 27.04         | 78.2               | 90    | 1            | V            | 15.3              | 0.8                  | 25.0     | 69.3                | 100                      | -30.7              | Fund/Peak |
| 27.04         | 79.5               | 90    | 1.2          | H            | 15.3              | 0.8                  | 25.0     | 70.6                | 100                      | -29.4              | Fund/Peak |
| 54.08         | 49.2               | 200   | 1.5          | H            | 10.5              | 2.0                  | 27.3     | 34.4                | 40.00                    | -5.6               | Peak      |
| 54.08         | 48.9               | 180   | 1.2          | V            | 10.5              | 2.0                  | 27.3     | 34.1                | 40.00                    | -5.9               | Peak      |
| 81.12         | 39.6               | 0     | 1.2          | V            | 9.6               | 2.7                  | 27.5     | 24.4                | 40.00                    | -15.6              | Peak      |
| 81.12         | 38.6               | 30    | 1.5          | H            | 9.6               | 2.7                  | 27.5     | 23.4                | 40.00                    | -16.6              | Peak      |
| 135.20        | 36.7               | 30    | 1.2          | V            | 12.9              | 3.6                  | 27.5     | 25.7                | 43.50                    | -17.8              | Peak      |
| 135.21        | 35.1               | 0     | 1.5          | H            | 12.9              | 3.6                  | 27.5     | 24.1                | 43.50                    | -19.4              | Peak      |

The mouse transmitter was placed in continuous transmit mode for all tests.

#### 4.8 Out of Band Emission

The result has been complied with the 15.227(b), see the following plot:

