



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 1 of 107

TEST REPORT

Application No.:	KSCR2407001217AT
FCC ID:	RF41761B
IC:	5798A-1761B
Applicant:	KEYENCE CORPORATION
Address of Applicant:	1-3-14, Higashinakajima, Higashiyodogawa-ku, Osaka, 533-8555 Japan
Manufacturer:	KEYENCE CORPORATION
Address of Manufacturer:	1-3-14, Higashinakajima, Higashiyodogawa-ku, Osaka, 533-8555 Japan
Factory:	KEYENCE CORPORATION
Address of Factory:	1-3-14, Higashinakajima, Higashiyodogawa-ku, Osaka, 533-8555 Japan
Equipment Under Test (EUT):	
EUT Name:	Handheld Terminal
Model No.:	BT-A600
Trade Mark:	KEYENCE
Standard(s) :	47 CFR Part 15, Subpart C 15.247 RSS-247 Issue 3, August 2023 RSS-Gen Issue 5 Amendment 2 (February 2021)
Date of Receipt:	2024-07-02
Date of Test:	2024-08-27 to 2024-09-12
Date of Issue:	2024-09-12

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 2 of 107

Revision Record			
Version	Description	Date	Remark
00	Original	2024-09-12	/

Authorized for issue by:				
Tested By		<i>Maker Qi</i>		
		<u>Maker_Qi/Project Engineer</u>		
Approved By		<i>Terry Hou</i>		
		<u>Terry Hou /Reviewer</u>		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Clause 8.8	ANSI C63.10 (2013) Section 6.2	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247a(2)	RSS-247 Clause 5.2(a)	ANSI C63.10 (2013) Section 11.8.1	Pass
Conducted Average Output Power	47 CFR Part 15, Subpart C 15.247(b)(3)	RSS-247 Clause 5.4(d)	ANSI C63.10 (2013) Section 11.9.2	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247(e)	RSS-247 Clause 5.2(b)	ANSI C63.10 (2013) Section 11.10.2	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.13.3.2	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.11	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 Power level setting using in test	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty	6
4.5 Test Location	7
4.6 Test Facility	7
4.7 Deviation from Standards	7
4.8 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	9
6.1 Antenna Requirement	9
7 Radio Spectrum Matter Test Results	10
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	10
7.2 Radiated Emissions which fall in the restricted bands	14
7.3 Radiated Spurious Emissions Below 1GHz	24
7.4 Radiated Spurious Emissions Above 1GHz	28
7.5 Conducted Peak Output Power	42
7.6 Minimum 6dB Bandwidth	44
7.7 Power Spectrum Density	45
7.8 Conducted Band Edges Measurement	46
7.9 Conducted Spurious Emissions	47
7.10 99% Bandwidth	48
8 Test Setup Photo	49
9 EUT Constructional Details (EUT Photos)	49
10 Appendix	50

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.6V by Rechargeable Battery Battery information: Model: DX-BC6 Rate Capacity: 6270mAh Rate Energy: 22.57Wh Normal Voltage: DC 3.6V
Bluetooth Version:	V5.0 Dual mode
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	FPC Antenna
Antenna Gain:	Ant1: 1.69dBi(Provided by the manufacturer) Ant5: 1.98dBi(Provided by the manufacturer)

4.2 Power level setting using in test

Ant1 & Ant5

Channel	BLE 1M	BLE 2M
	Ant 1	Ant 1
0	default	default
19	default	default
39	default	default

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--

The EUT has been tested as an independent unit.

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz) 5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz) 4.5dB (30MHz-1GHz) 5.1dB (1GHz-18GHz) 5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 7 of 107

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 8 of 107

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301101	01/15/2024	01/14/2025
2	LISN	R&S	ENV216	KS301197	01/15/2024	01/14/2025
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2024	01/14/2025
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	01/15/2024	01/14/2025
5	CE test Cable	Thermax	/	CZ301102	01/15/2024	01/14/2025
6	Test Software	ESE	E3_V 6.111221a	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2024	01/14/2025
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/12/2024	08/11/2025
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2024	01/14/2025
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/15/2024	01/14/2025
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/26/2024	08/25/2025
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
15	Software	BST	TST-PASS	/	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/19/2024	03/18/2025
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E006	03/19/2024	03/18/2025
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	03/23/2024	08/22/2026
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	04/07/2023	04/06/2025
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2024	01/14/2025
11	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/12/2024	08/11/2025
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/12/2024	08/11/2025
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/21/2024	03/20/2025
14	Software	Faratronic	EZ_EMCA-3A1	/	NCR	NCR
15	Software	ESE	E3_V 6.111221a	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is Ant1: 1.69dBi; Ant5: 1.98dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.1.3 Test Setup Diagram

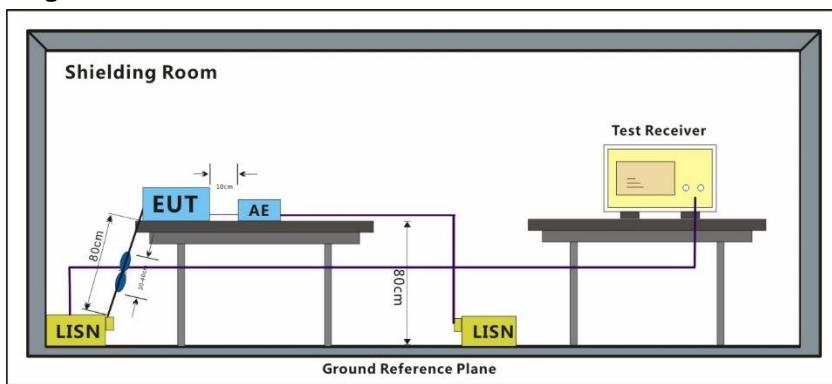

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 μ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702


Page: 12 of 107

Test Mode: 04; Line: Live line

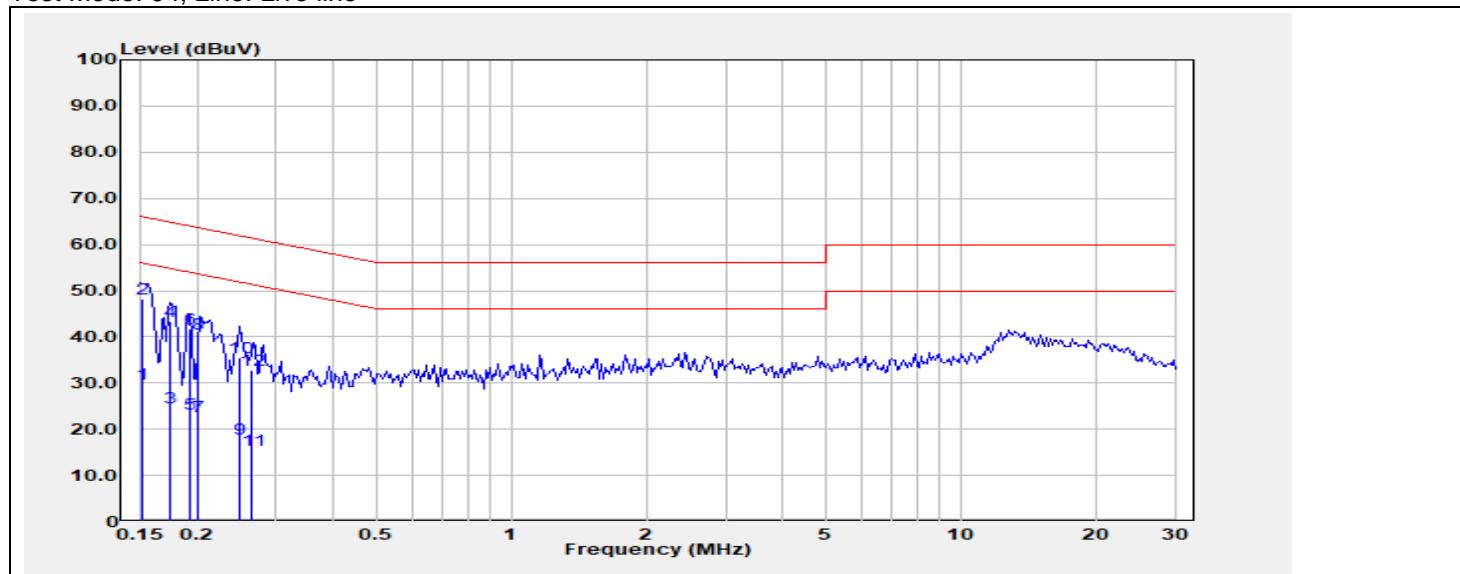

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1508	9.46	20.25	29.71	55.96	-26.25	Average
2	0.1508	28.02	20.25	48.27	65.96	-17.69	QP
3	0.1735	4.62	20.15	24.77	54.79	-30.02	Average
4	0.1735	23.10	20.15	43.25	64.79	-21.54	QP
5	0.1919	3.16	20.08	23.24	53.95	-30.71	Average
6	0.1919	21.52	20.08	41.60	63.95	-22.35	QP
7	0.2007	2.66	20.05	22.71	53.58	-30.87	Average
8	0.2007	20.50	20.05	40.55	63.58	-23.03	QP
9	0.2477	-2.30	20.07	17.77	51.83	-34.06	Average
10	0.2477	15.47	20.07	35.54	61.83	-26.29	QP
11	0.2651	-4.65	20.07	15.42	51.27	-35.85	Average
12	0.2651	12.75	20.07	32.82	61.27	-28.45	QP

Test Mode: 04; Line: Neutral Line

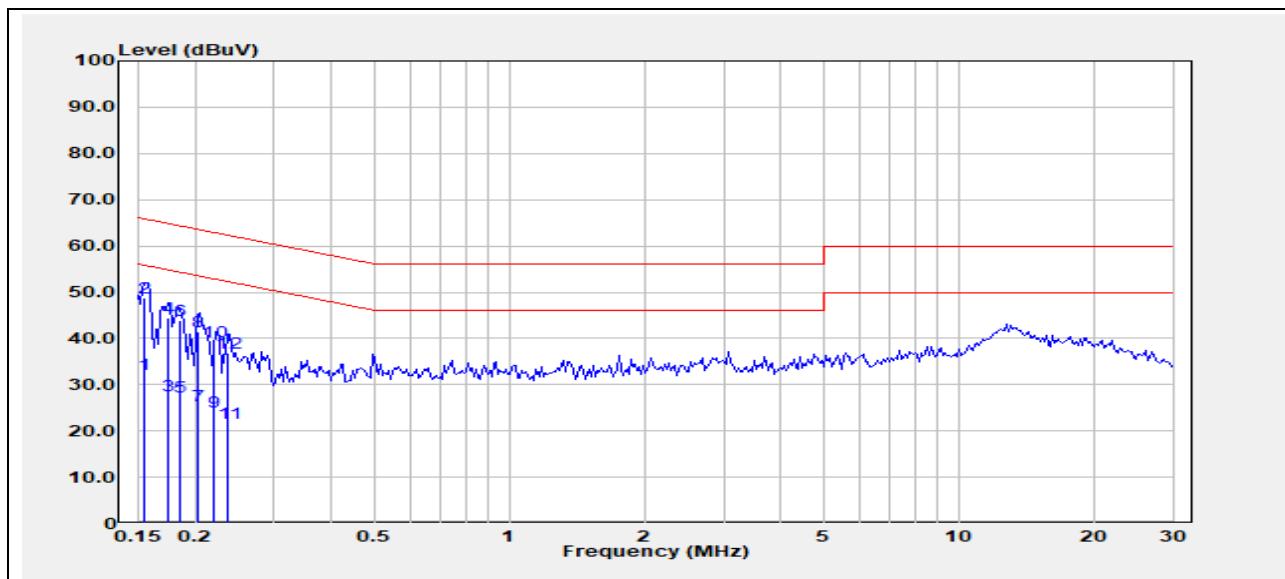

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	12.14	20.18	32.32	55.79	-23.47	Average
2	0.1539	28.60	20.18	48.78	65.79	-17.01	QP
3	0.1748	7.41	20.15	27.56	54.73	-27.17	Average
4	0.1748	24.26	20.15	44.41	64.73	-20.32	QP
5	0.1848	7.35	20.13	27.48	54.27	-26.79	Average
6	0.1848	23.64	20.13	43.77	64.27	-20.50	QP
7	0.2021	5.40	20.11	25.51	53.53	-28.02	Average
8	0.2021	21.32	20.11	41.43	63.53	-22.10	QP
9	0.2200	3.90	20.11	24.01	52.82	-28.81	Average
10	0.2200	19.10	20.11	39.21	62.82	-23.61	QP
11	0.2368	1.48	20.10	21.58	52.21	-30.63	Average
12	0.2368	16.82	20.10	36.92	62.21	-25.29	QP

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 14 of 107

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 21.3 °C

Humidity: 47.6 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

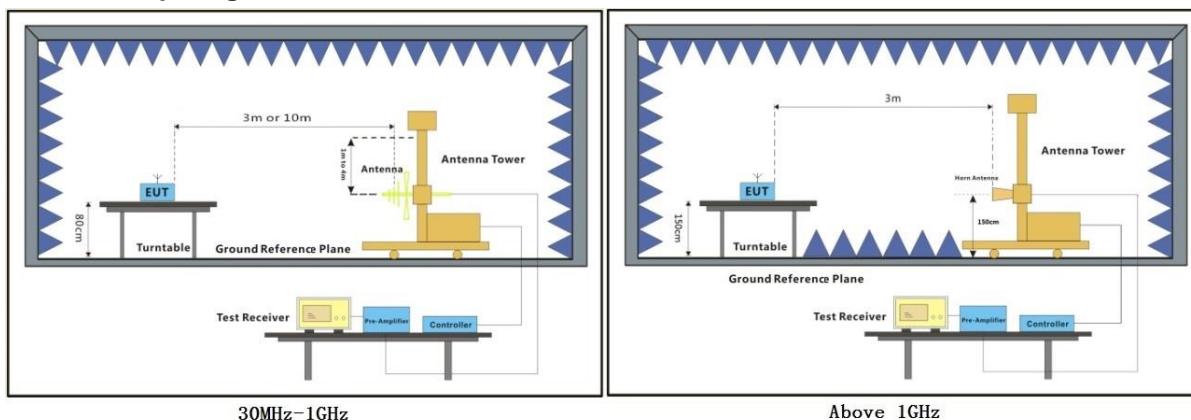7.2.3 Test Setup Diagram**7.2.4 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 16 of 107

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:Low

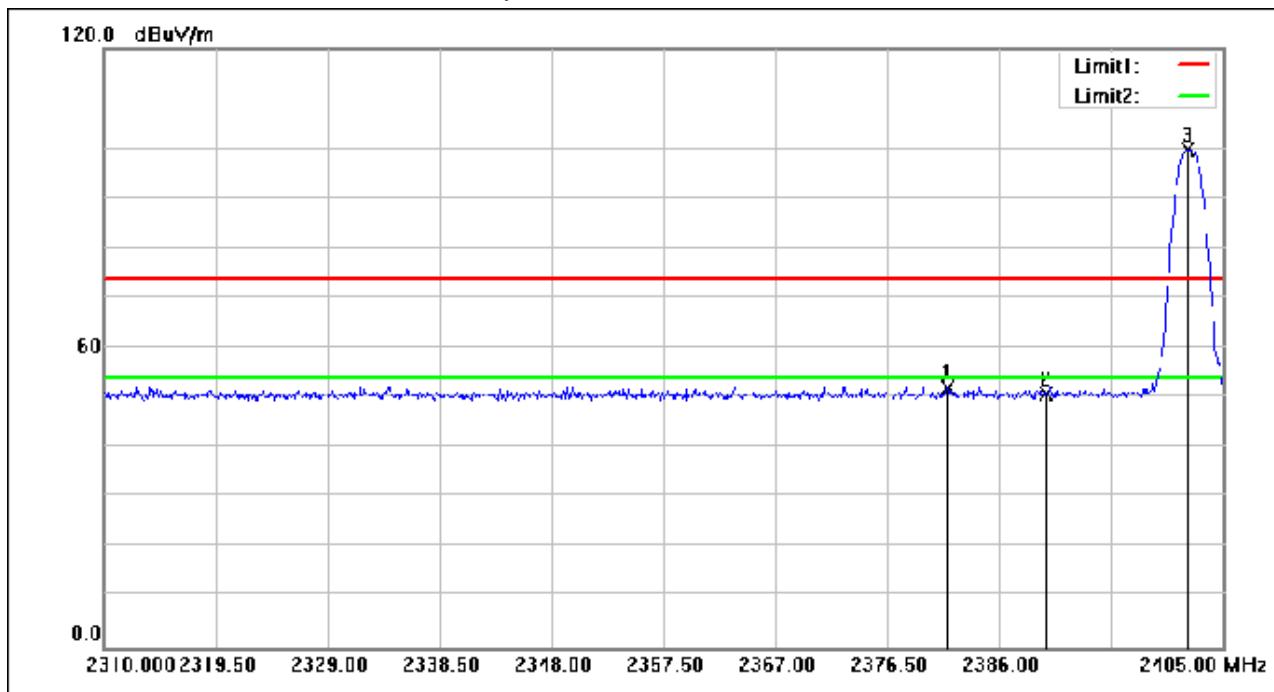

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.630	76.79	-24.74	52.05	74.00	-21.95	peak
2	2390.000	75.48	-24.71	50.77	74.00	-23.23	peak
3	2402.055	124.40	-24.65	99.75	74.00	25.75	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 17 of 107

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:Low

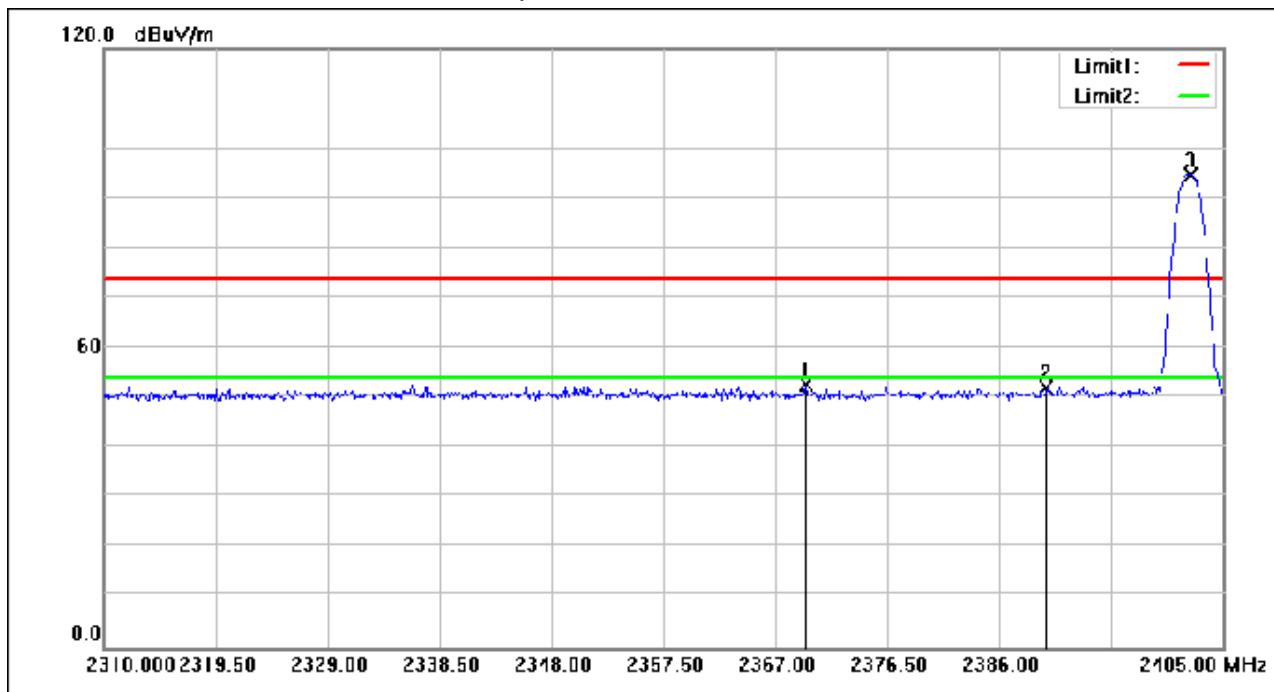

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2369.565	77.53	-24.80	52.73	74.00	-21.27	peak
2	2390.000	76.68	-24.71	51.97	74.00	-22.03	peak
3	2402.245	119.31	-24.65	94.66	74.00	20.66	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 18 of 107

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:High

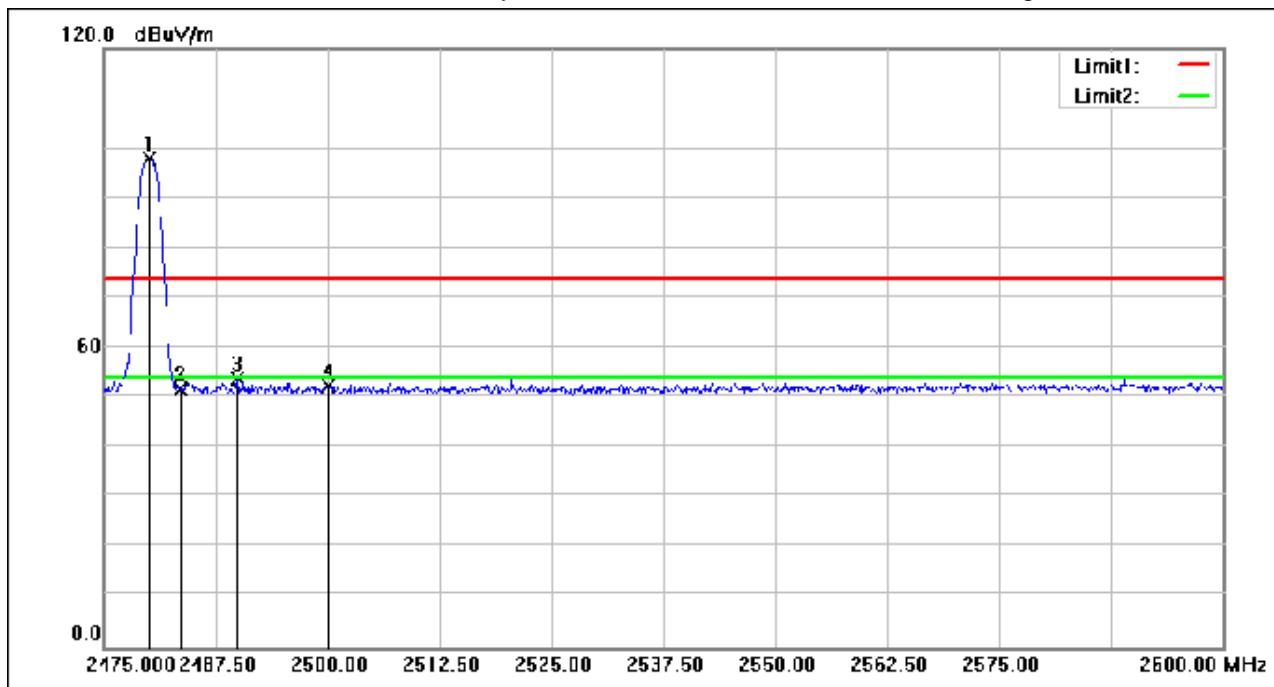

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	122.31	-24.28	98.03	74.00	24.03	peak
2	2483.500	76.04	-24.27	51.77	74.00	-22.23	peak
3	2489.875	77.99	-24.24	53.75	74.00	-20.25	peak
4	2500.000	76.62	-24.19	52.43	74.00	-21.57	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 19 of 107

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:High

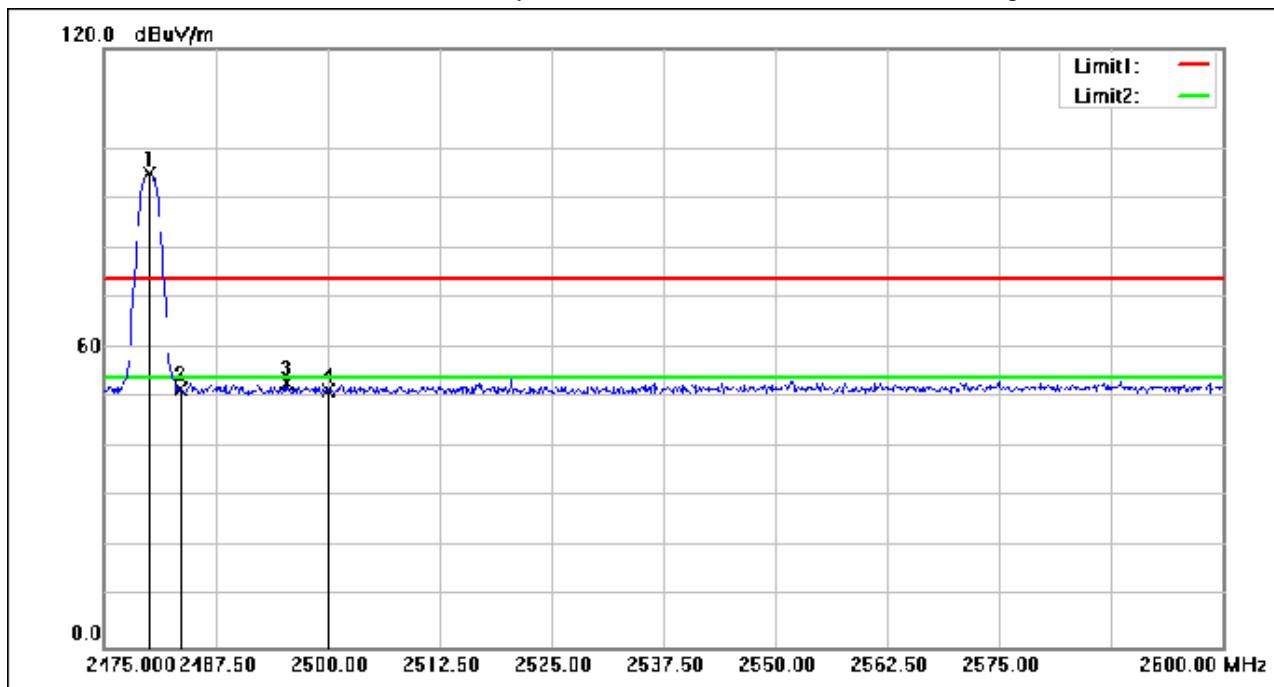

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	119.21	-24.28	94.93	74.00	20.93	peak
2	2483.500	76.08	-24.27	51.81	74.00	-22.19	peak
3	2495.375	77.20	-24.21	52.99	74.00	-21.01	peak
4	2500.000	75.66	-24.19	51.47	74.00	-22.53	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 20 of 107

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

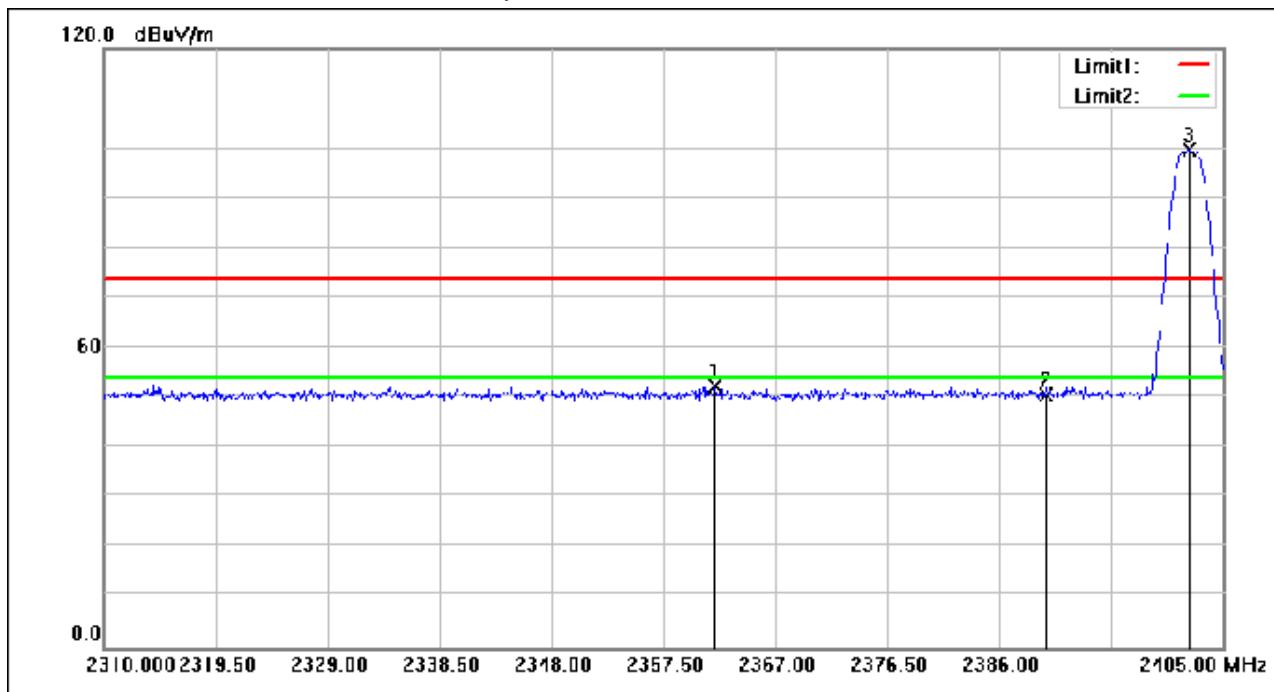

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2361.870	77.29	-24.84	52.45	74.00	-21.55	peak
2	2390.000	75.40	-24.71	50.69	74.00	-23.31	peak
3	2402.150	124.29	-24.65	99.64	74.00	25.64	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 21 of 107

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

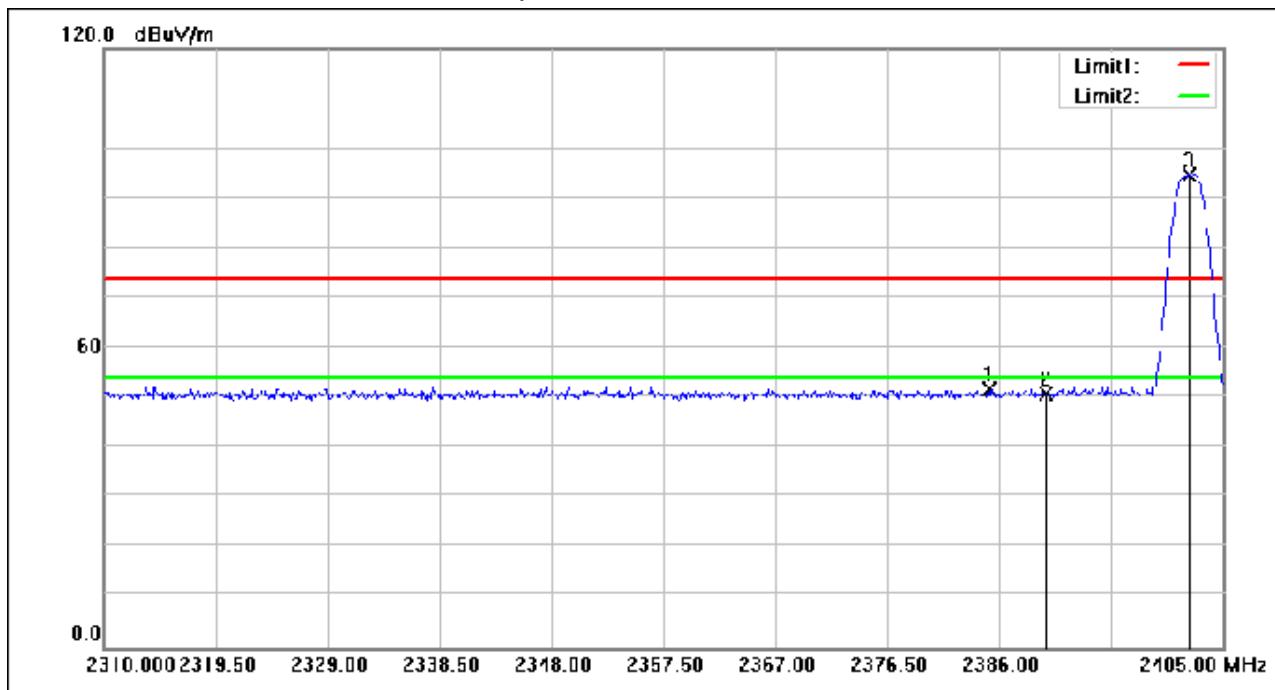

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.145	76.61	-24.73	51.88	74.00	-22.12	peak
2	2390.000	75.59	-24.71	50.88	74.00	-23.12	peak
3	2402.150	119.32	-24.65	94.67	74.00	20.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 22 of 107

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

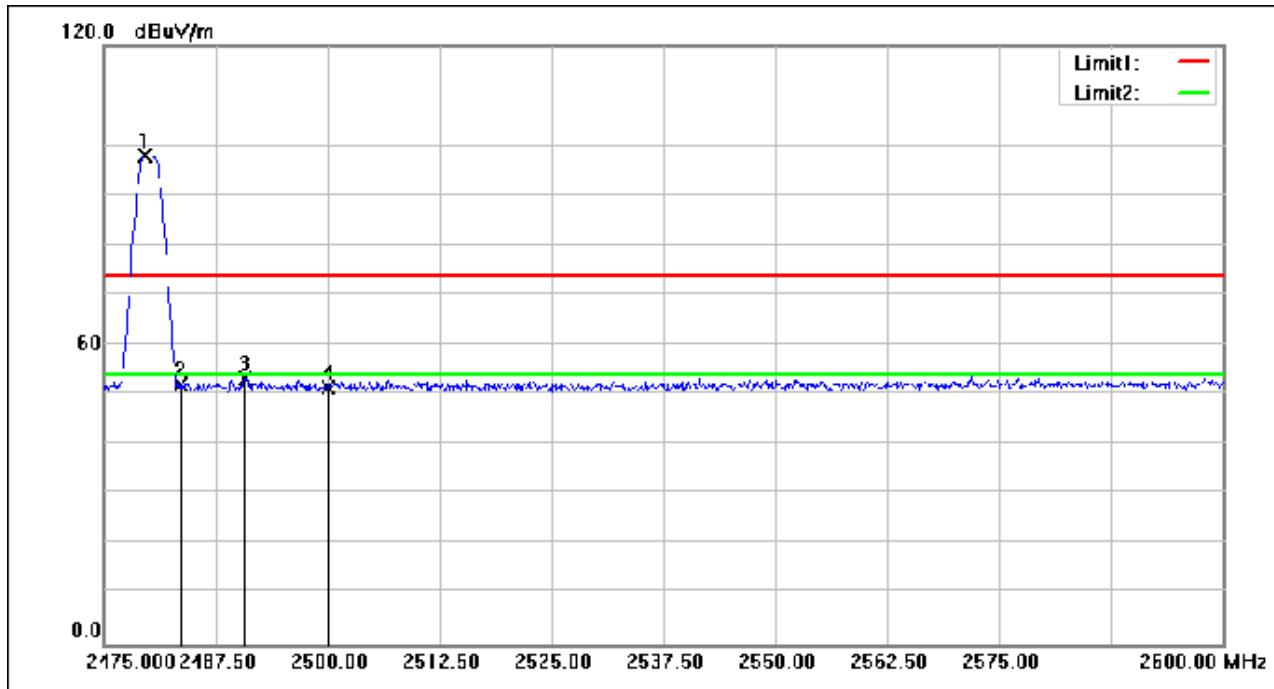

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.500	122.32	-24.28	98.04	74.00	24.04	peak
2	2483.500	76.36	-24.27	52.09	74.00	-21.91	peak
3	2490.750	77.44	-24.24	53.20	74.00	-20.80	peak
4	2500.000	75.60	-24.19	51.41	74.00	-22.59	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 23 of 107

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

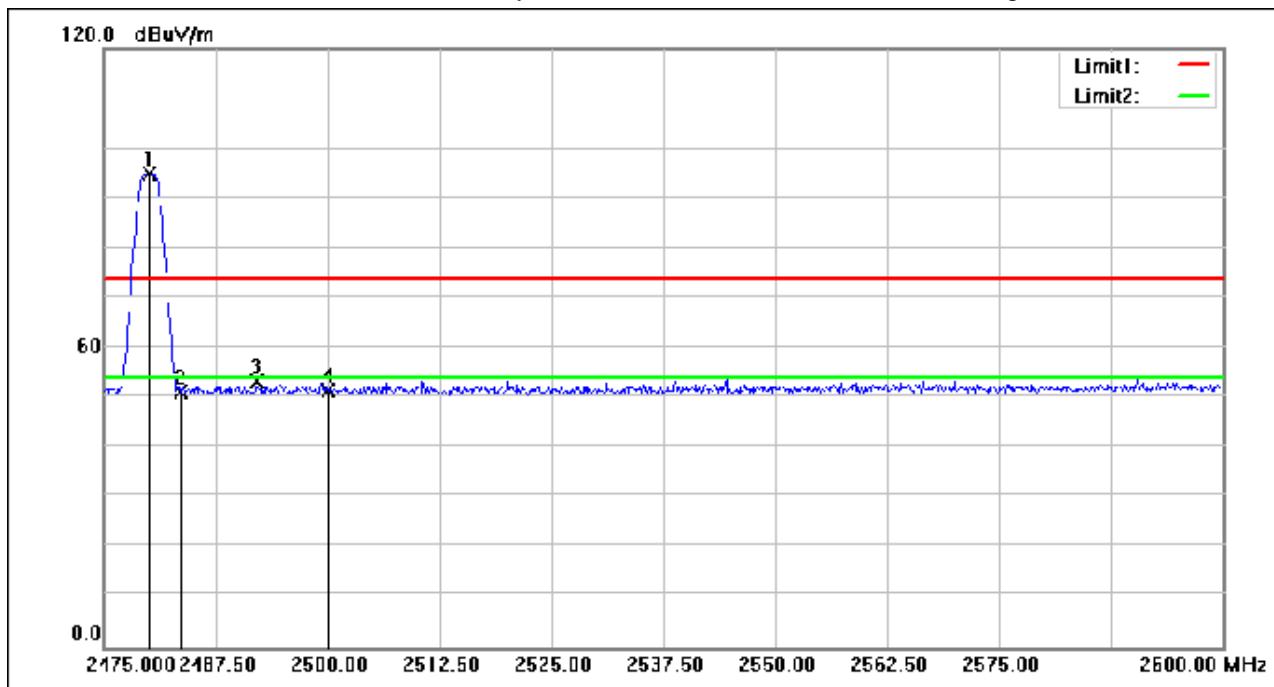

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	119.28	-24.28	95.00	74.00	21.00	peak
2	2483.500	75.30	-24.27	51.03	74.00	-22.97	peak
3	2492.000	77.46	-24.23	53.23	74.00	-20.77	peak
4	2500.000	75.51	-24.19	51.32	74.00	-22.68	peak

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 21.6 °C Humidity: 47.1 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.3.3 Test Setup Diagram

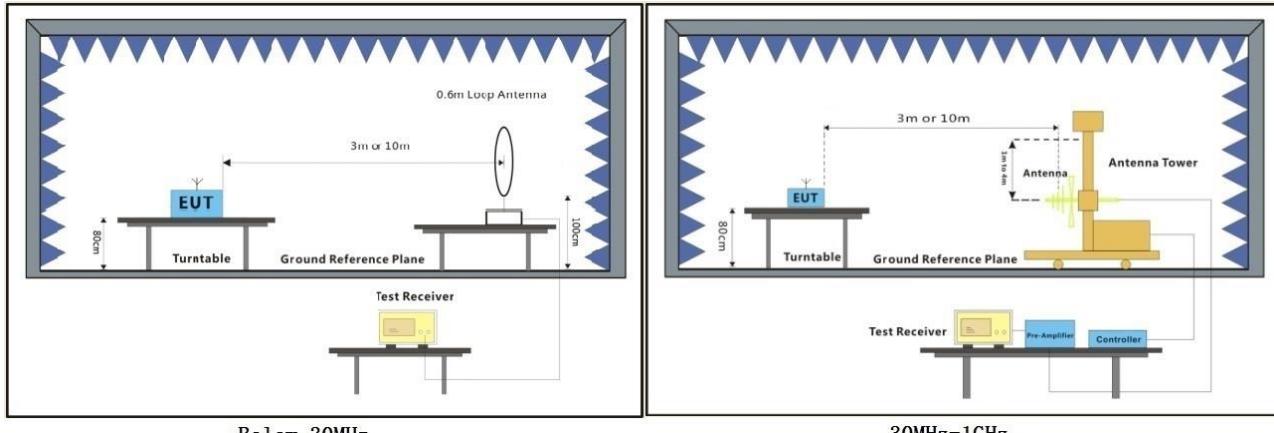

7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702


Page: 26 of 107

Test Mode: 04; Polarity: Horizontal

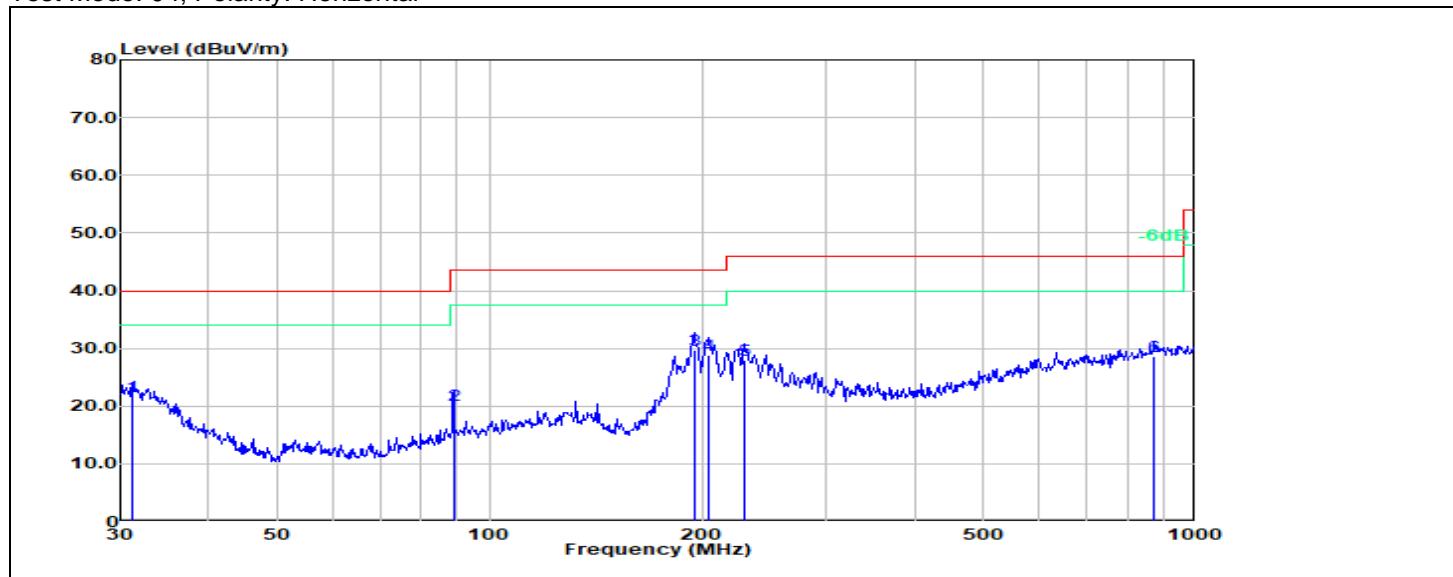

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	31.1798	3.29	18.45	21.74	40.00	-18.26	100	2	QP
2	88.9639	8.58	11.59	20.17	43.50	-23.33	100	280	QP
3	195.1365	17.90	11.72	29.62	43.50	-13.88	100	30	QP
4	204.2377	17.14	11.60	28.74	43.50	-14.76	200	23	QP
5	229.2931	14.99	12.97	27.96	46.00	-18.04	100	16	QP
6	875.2469	3.37	25.26	28.63	46.00	-17.37	100	199	QP

Test Mode: 04; Polarity: Vertical

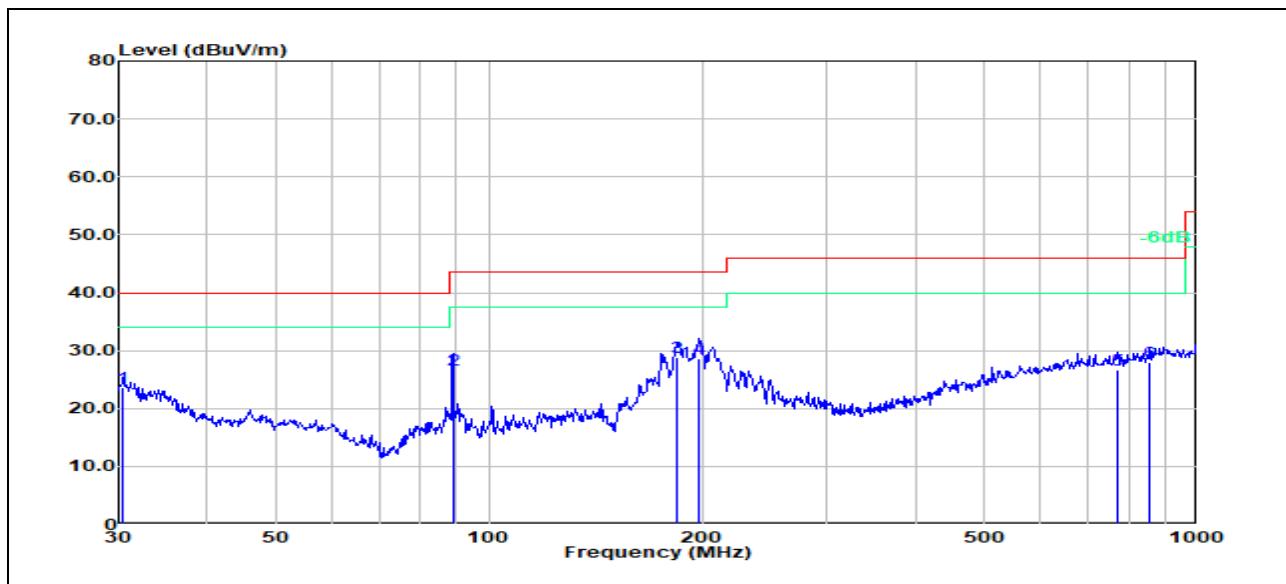

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	30.4238	4.53	19.08	23.61	40.00	-16.39	100	0	QP
2	88.9639	14.99	11.59	26.58	43.50	-16.92	100	220	QP
3	184.4898	16.58	12.16	28.74	43.50	-14.76	100	194	QP
4	197.8928	16.98	11.62	28.60	43.50	-14.90	100	0	QP
5	771.4485	2.26	24.48	26.74	46.00	-19.26	100	274	QP
6	857.0247	2.91	25.05	27.96	46.00	-18.04	100	146	QP

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 21.9 °C Humidity: 48.6 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.4.3 Test Setup Diagram

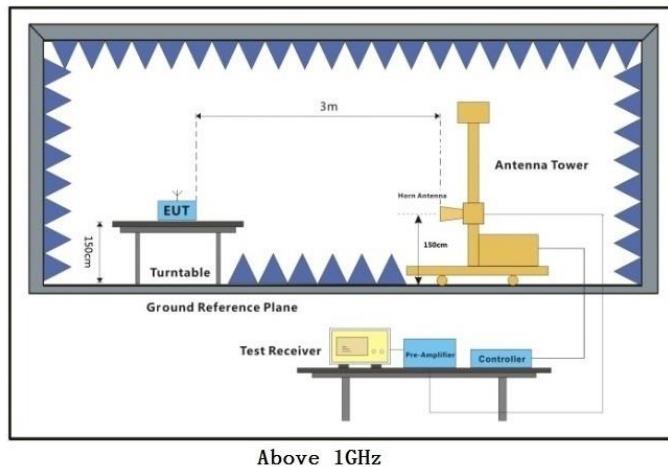

7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 30 of 107

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:Low

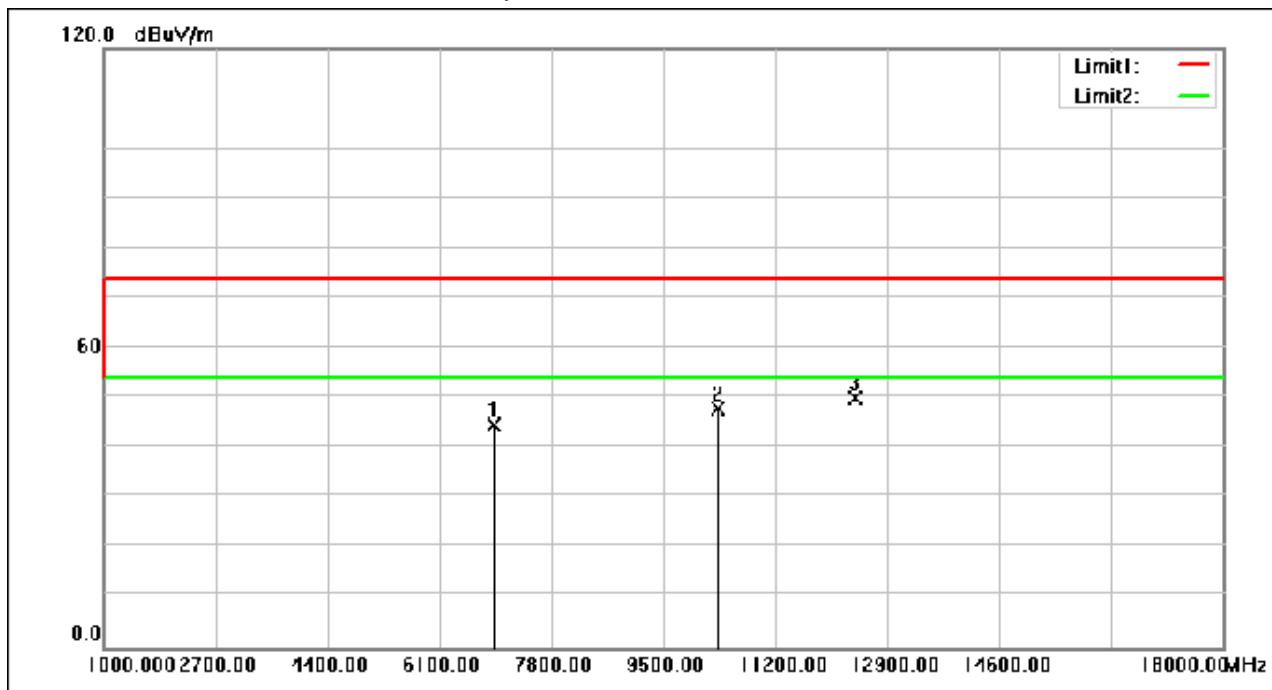

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6928.240	56.11	-11.69	44.42	74.00	-29.58	peak
2	10316.680	54.89	-7.15	47.74	74.00	-26.26	peak
3	12420.600	55.91	-6.08	49.83	74.00	-24.17	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 31 of 107

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:Low

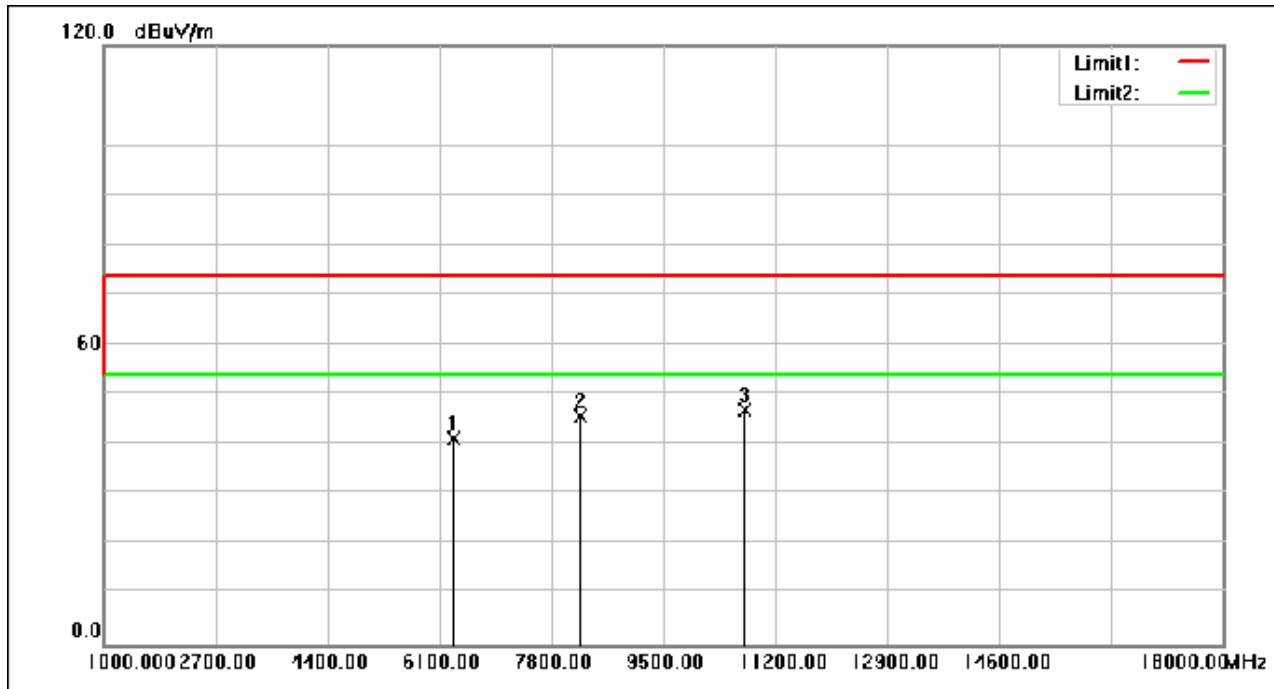

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6327.800	55.29	-14.12	41.17	74.00	-32.83	peak
2	8248.120	55.80	-10.17	45.63	74.00	-28.37	peak
3	10734.880	53.95	-6.91	47.04	74.00	-26.96	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 32 of 107

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:middle

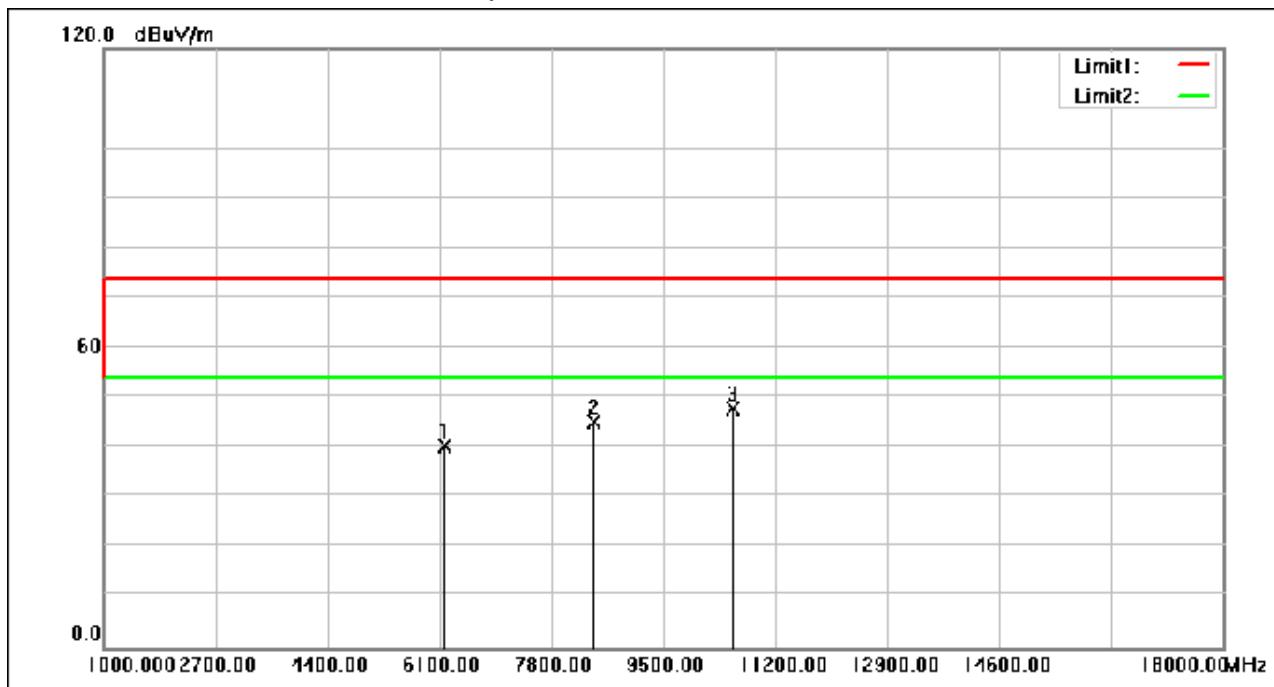

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6175.480	55.17	-14.92	40.25	74.00	-33.75	peak
2	8455.520	54.87	-9.82	45.05	74.00	-28.95	peak
3	10557.400	54.95	-7.01	47.94	74.00	-26.06	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 33 of 107

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:middle

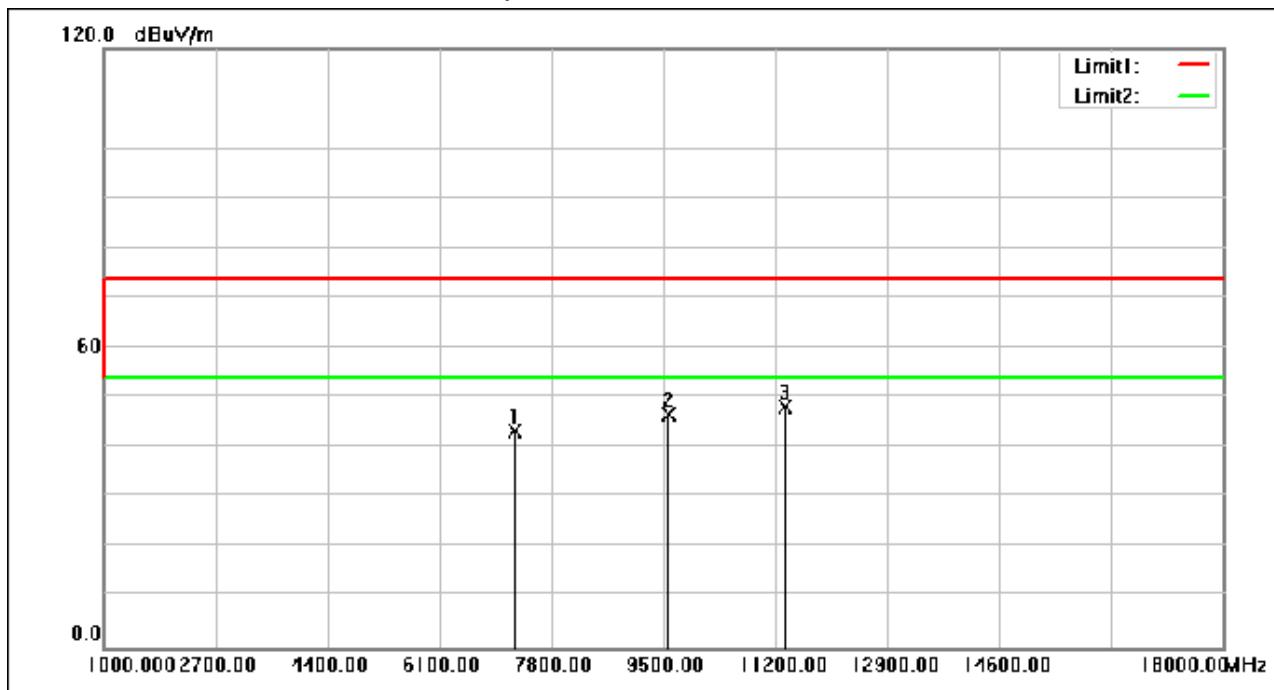

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7245.120	54.66	-11.46	43.20	74.00	-30.80	peak
2	9571.400	54.44	-7.82	46.62	74.00	-27.38	peak
3	11354.360	54.76	-6.48	48.28	74.00	-25.72	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 34 of 107

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:High

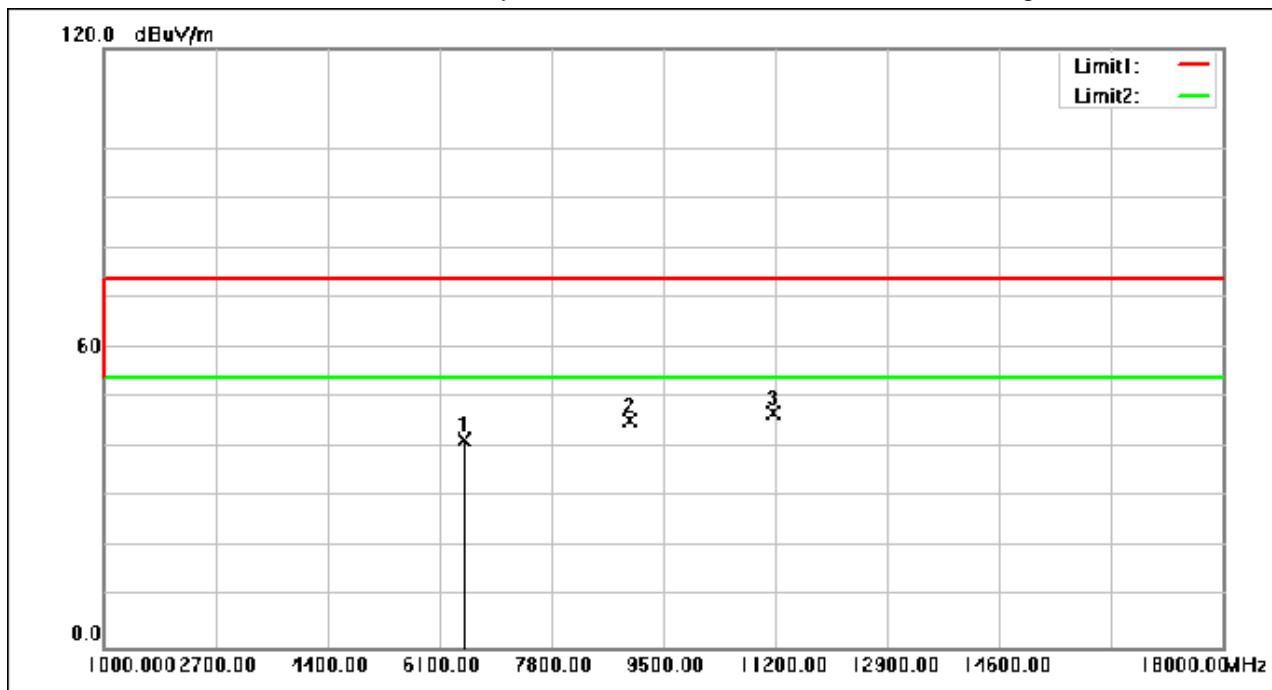

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6475.360	55.00	-13.36	41.64	74.00	-32.36	peak
2	8996.800	54.41	-8.90	45.51	74.00	-28.49	peak
3	11171.440	53.59	-6.63	46.96	74.00	-27.04	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 35 of 107

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:High

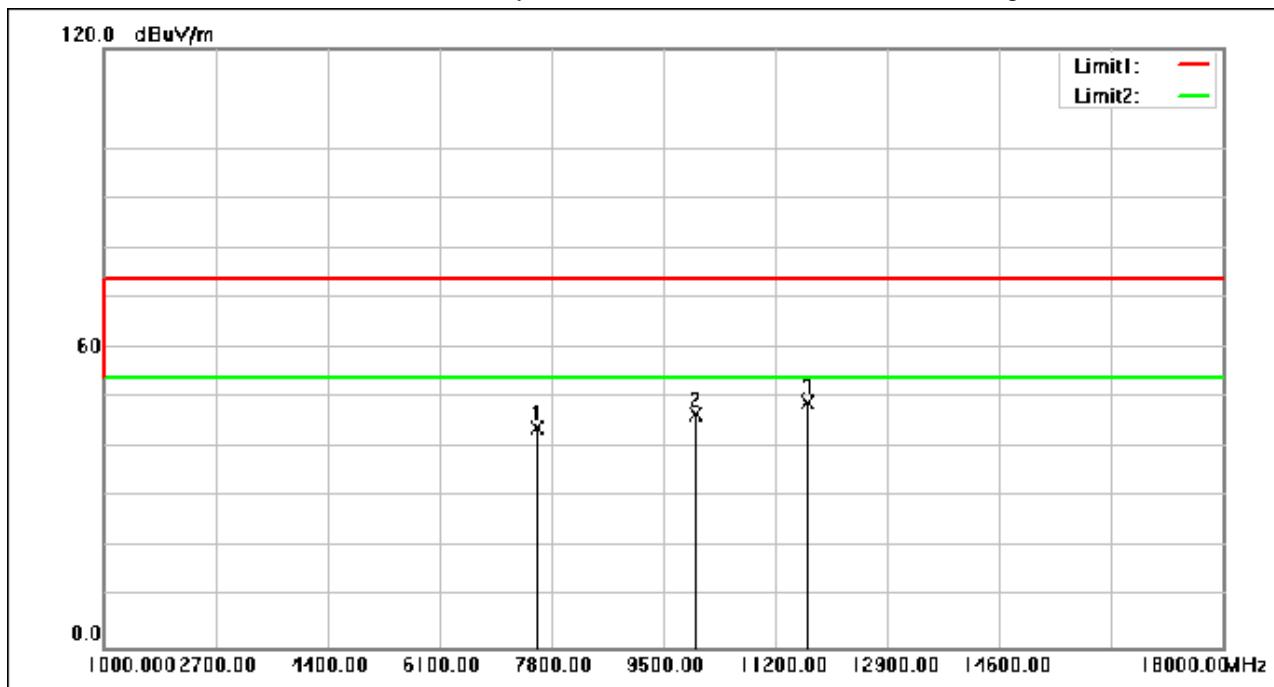

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7586.480	55.03	-11.15	43.88	74.00	-30.12	peak
2	9986.880	54.04	-7.33	46.71	74.00	-27.29	peak
3	11704.560	55.26	-6.20	49.06	74.00	-24.94	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 36 of 107

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

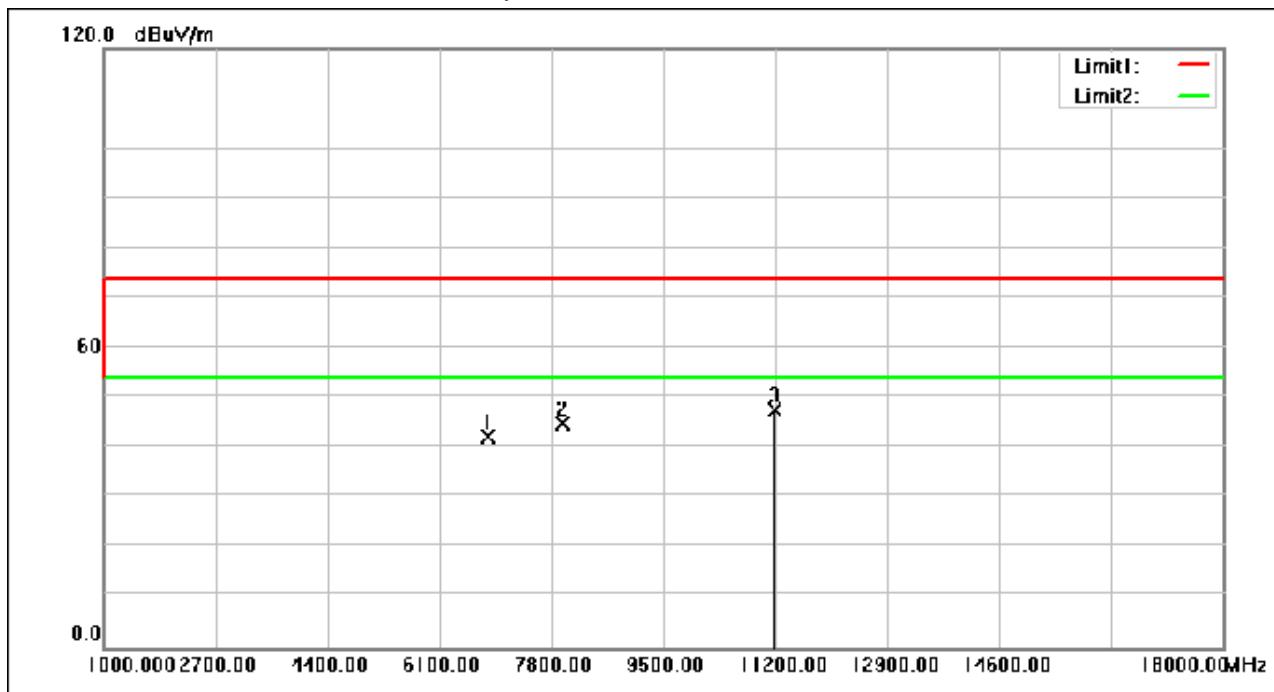

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6836.440	53.93	-11.85	42.08	74.00	-31.92	peak
2	7984.960	55.58	-10.62	44.96	74.00	-29.04	peak
3	11183.680	54.18	-6.62	47.56	74.00	-26.44	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 37 of 107

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

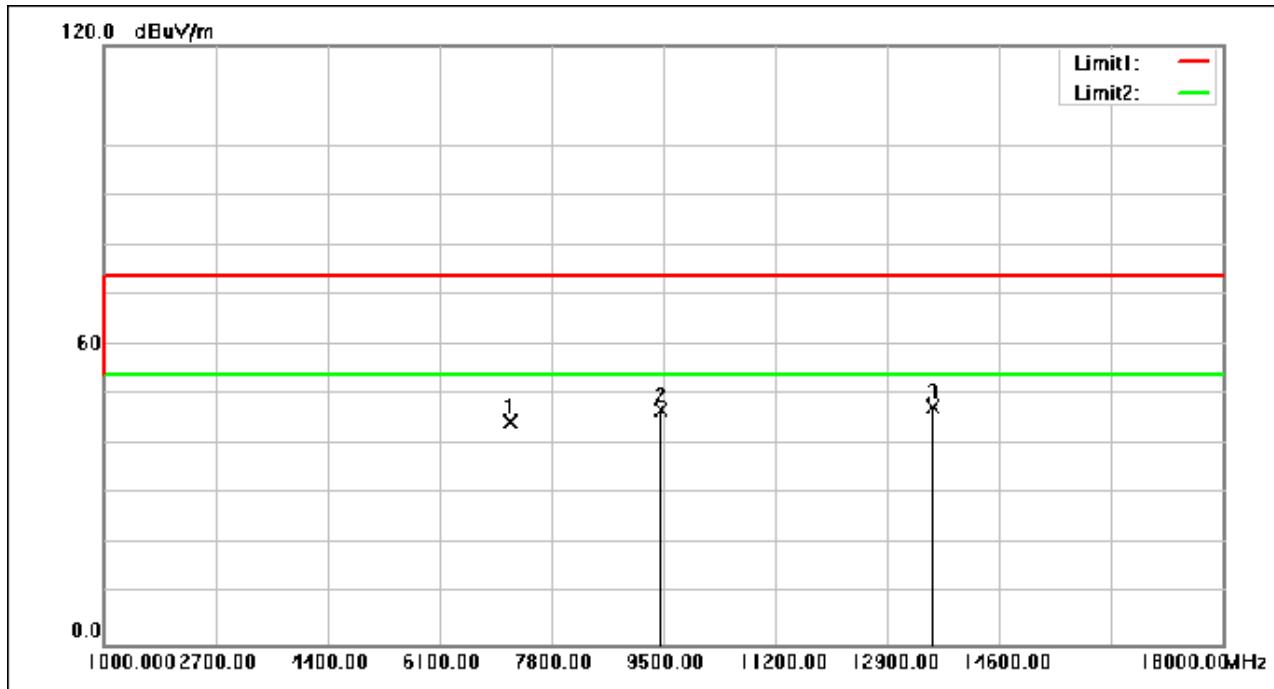

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7176.440	56.10	-11.49	44.61	74.00	-29.39	peak
2	9466.680	54.86	-8.02	46.84	74.00	-27.16	peak
3	13596.320	53.77	-6.36	47.41	74.00	-26.59	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 38 of 107

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:middle

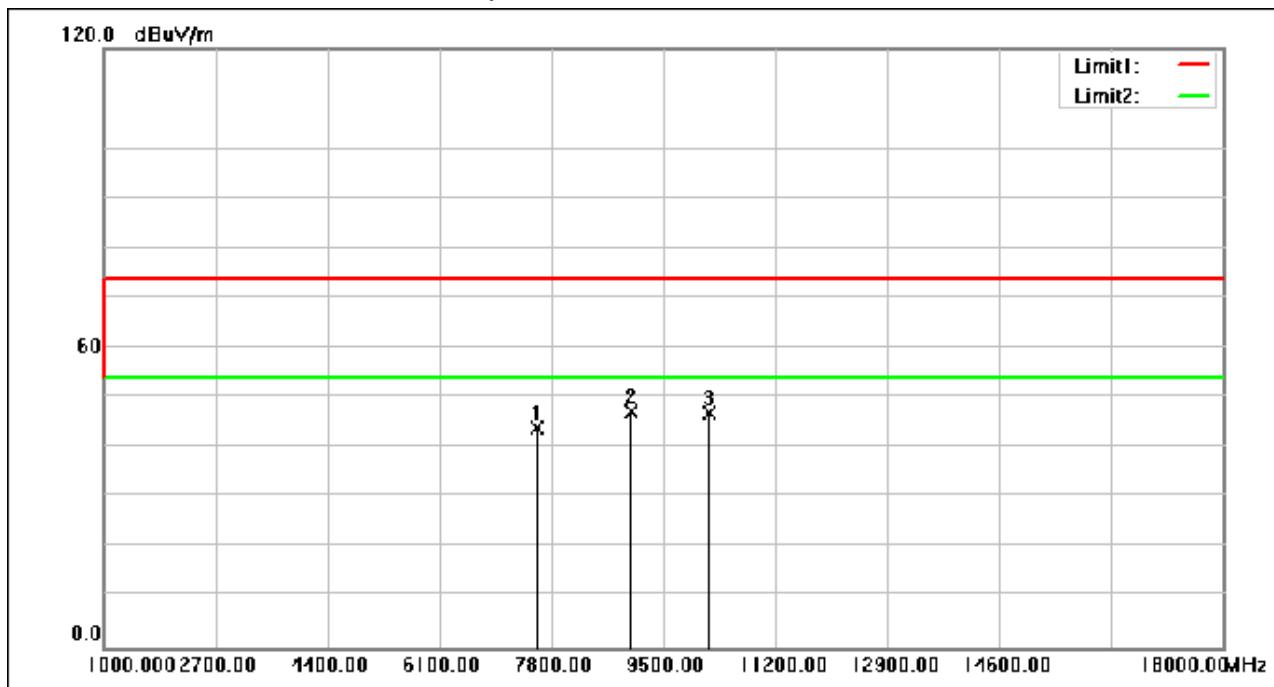

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7592.600	55.12	-11.14	43.98	74.00	-30.02	peak
2	9012.440	56.22	-8.87	47.35	74.00	-26.65	peak
3	10199.720	54.30	-7.21	47.09	74.00	-26.91	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 39 of 107

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:middle

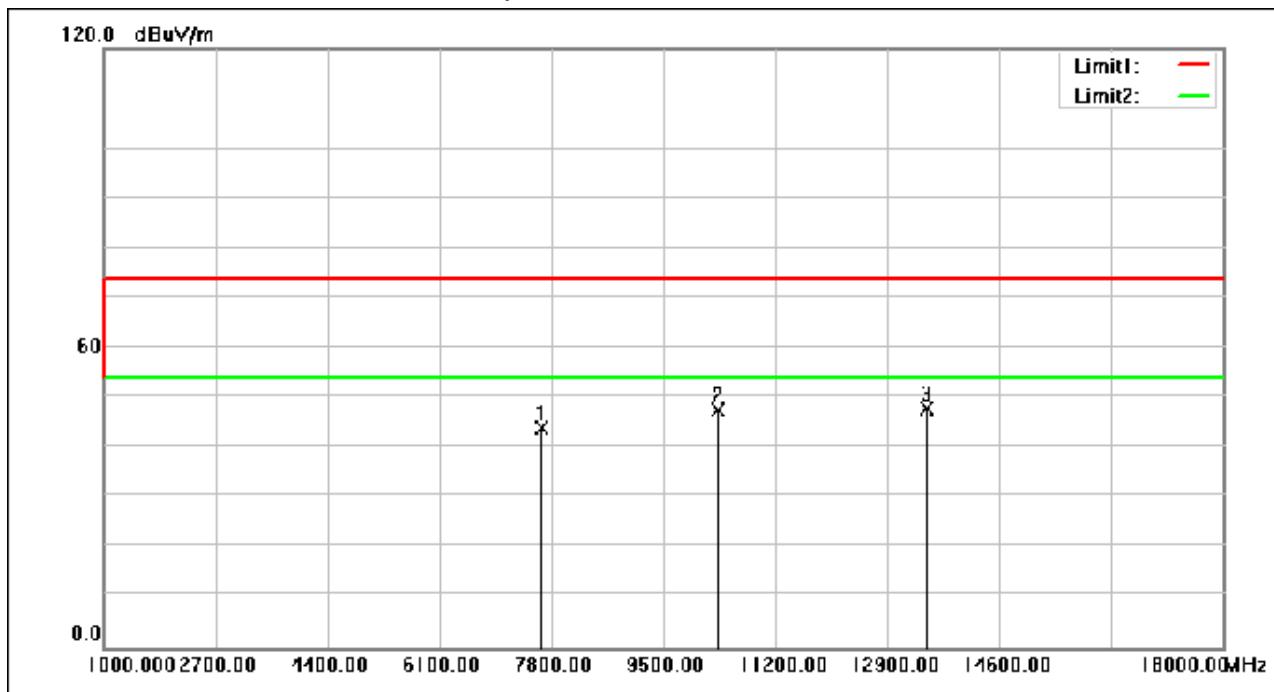

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7651.760	55.06	-11.06	44.00	74.00	-30.00	peak
2	10321.440	54.67	-7.14	47.53	74.00	-26.47	peak
3	13497.720	54.15	-6.34	47.81	74.00	-26.19	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 40 of 107

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

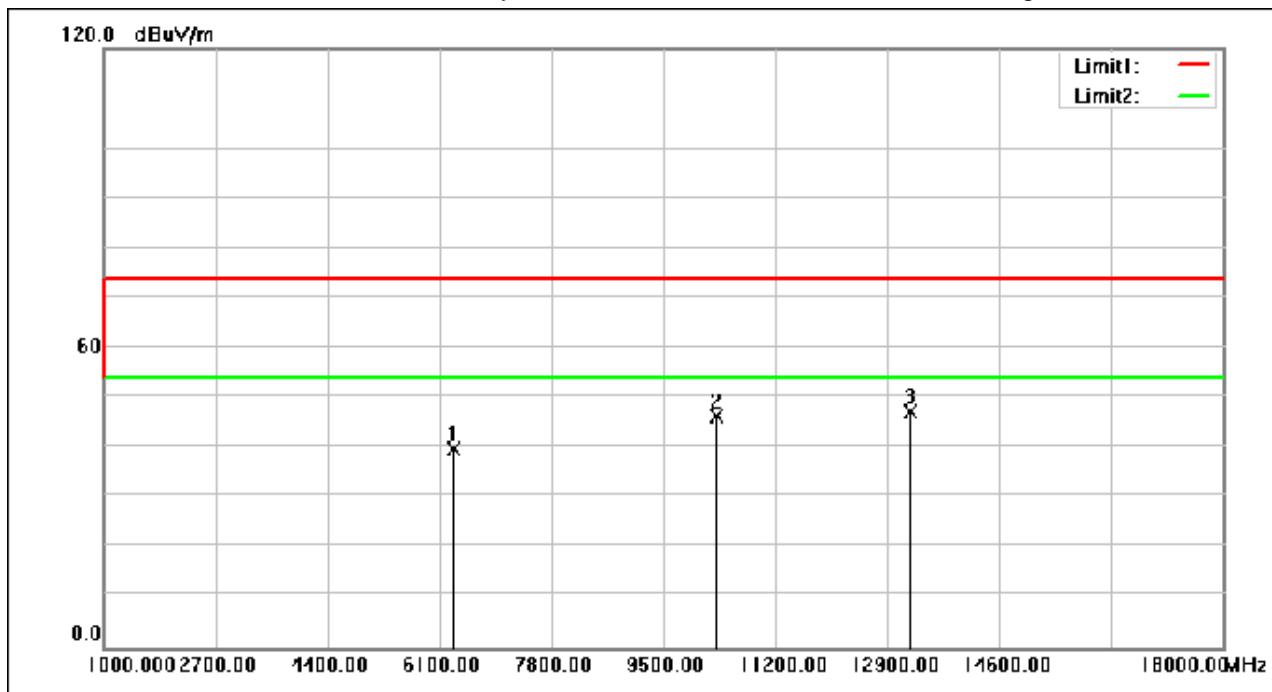

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6310.120	54.03	-14.22	39.81	74.00	-34.19	peak
2	10307.160	53.35	-7.15	46.20	74.00	-27.80	peak
3	13273.320	53.57	-6.30	47.27	74.00	-26.73	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 41 of 107

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

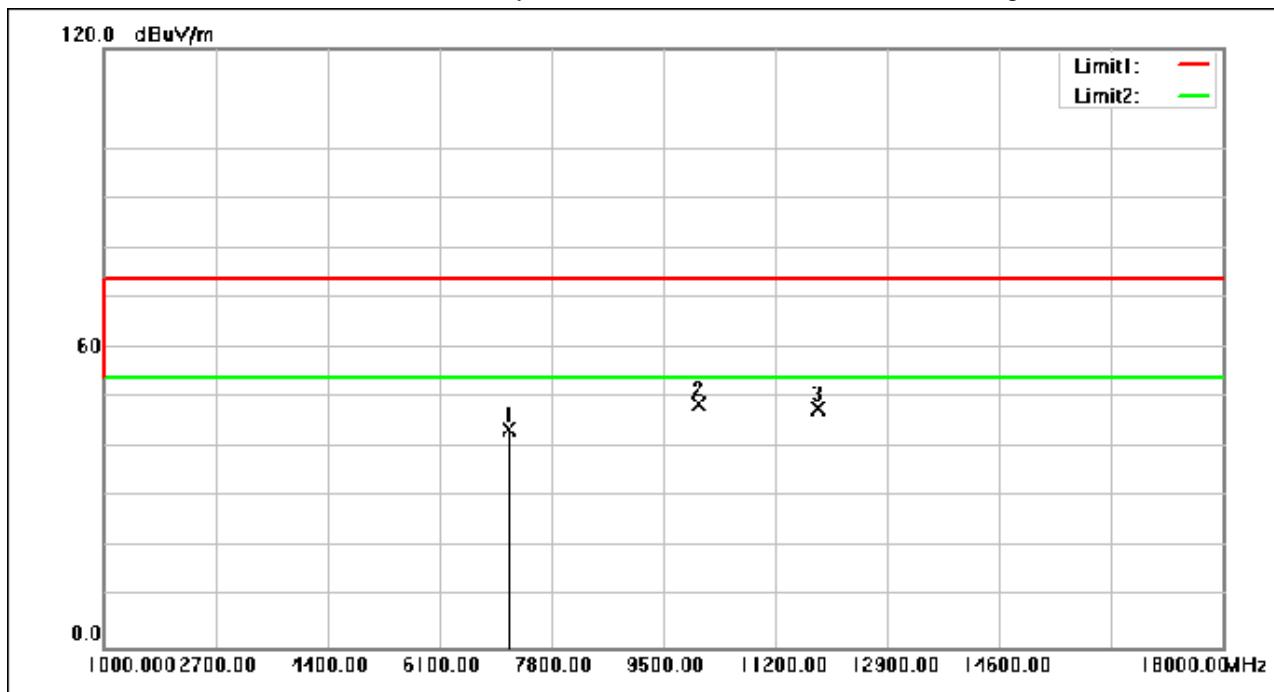

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7158.080	55.08	-11.49	43.59	74.00	-30.41	peak
2	10034.480	55.98	-7.31	48.67	74.00	-25.33	peak
3	11850.760	54.00	-6.08	47.92	74.00	-26.08	peak

7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 25.3 °C Humidity: 52.6 % RH Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.5.3 Test Setup Diagram

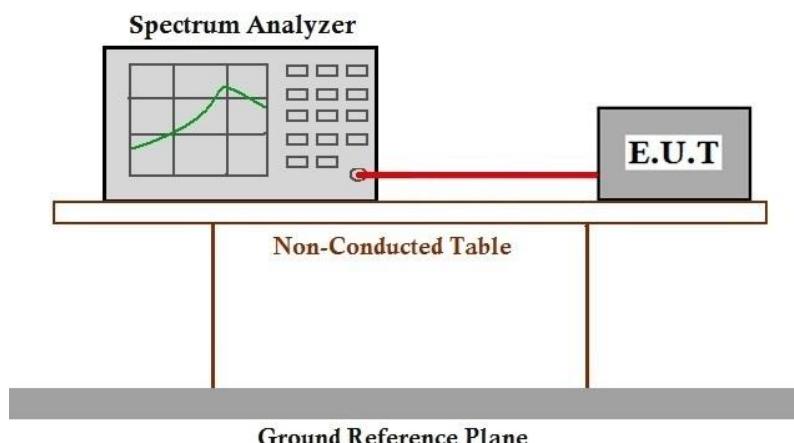



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121702

Page: 43 of 107

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:

≥500 kHz

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 25.3 °C Humidity: 52.6 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

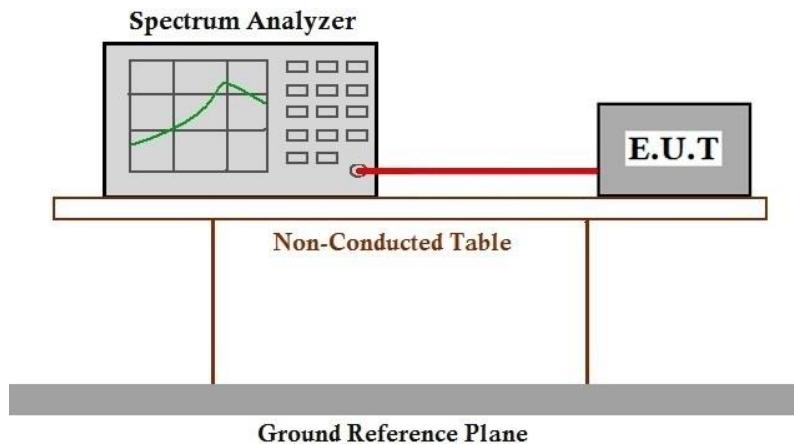

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 25.3 °C Humidity: 52.6 % RH Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

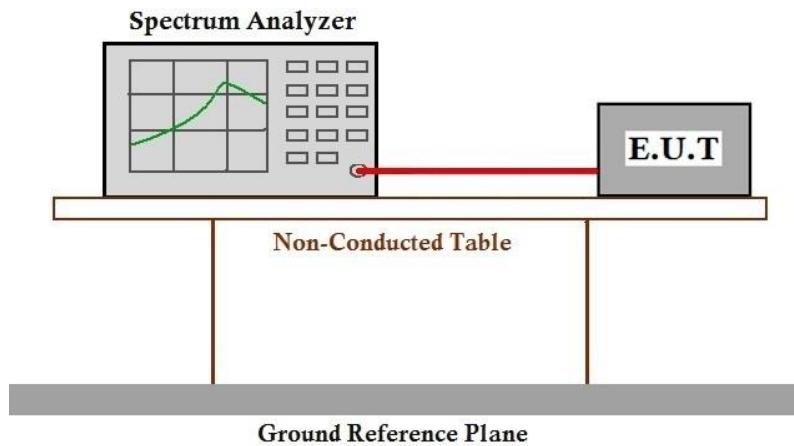

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 25.3 °C Humidity: 52.6 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.8.3 Test Setup Diagram

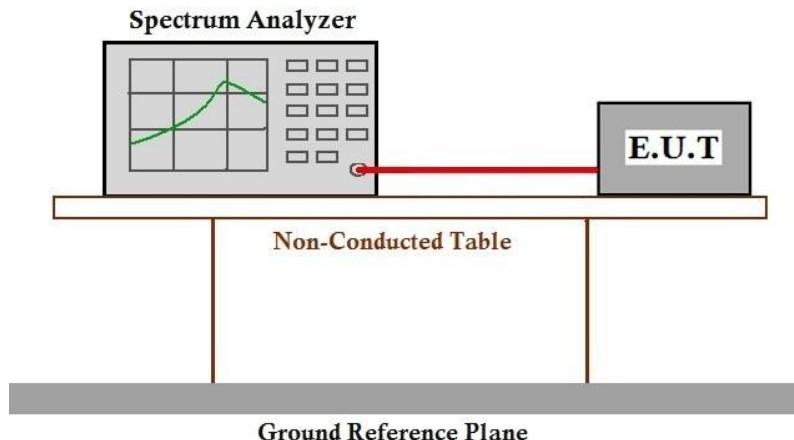

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 25.3 °C Humidity: 52.6 % RH Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.9.3 Test Setup Diagram

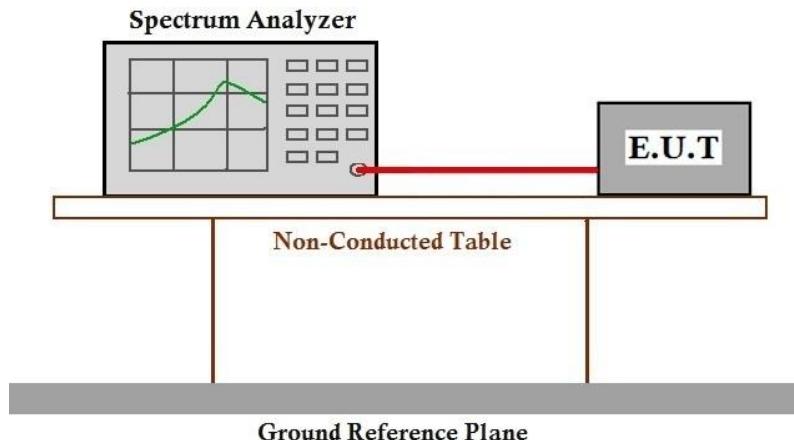

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.10 99% Bandwidth


Test Requirement RSS-Gen Section 6.7
Test Method: ANSI C63.10 (2013) Section 6.9.3

7.10.1 E.U.T. Operation

Operating Environment:
Temperature: 25.4 °C Humidity: 44.1 % RH Atmospheric Pressure: 1010 mbar

7.10.1 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

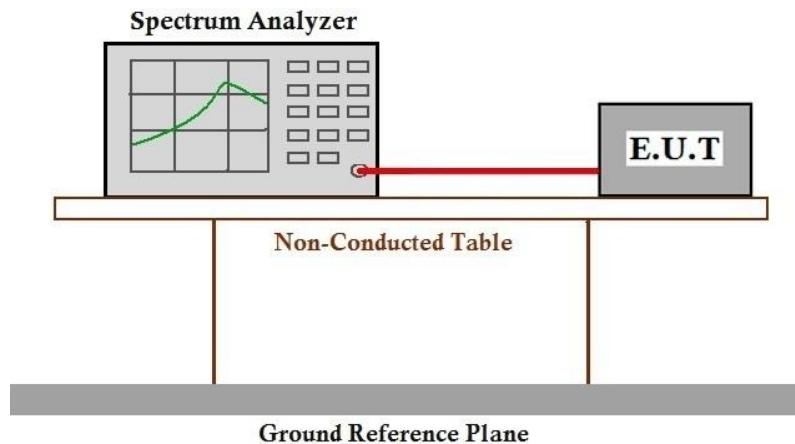7.10.2 Test Setup Diagram**7.10.3 Measurement Procedure and Data**

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2407001217AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2407001217AT

10 Appendix

Ant1

1. Duty Cycle



1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.394	0.625	63.04	2.00	0.03
		2440	0.393	0.625	62.88	2.01	0.03
		2480	0.392	0.625	62.72	2.03	0.03
2M	SISO	2402	0.209	0.625	33.44	4.76	0.03
		2440	0.209	0.625	33.44	4.76	0.06
		2480	0.210	0.625	33.60	4.74	0.03

1.2 Test Graph


1.2.1 Ant1

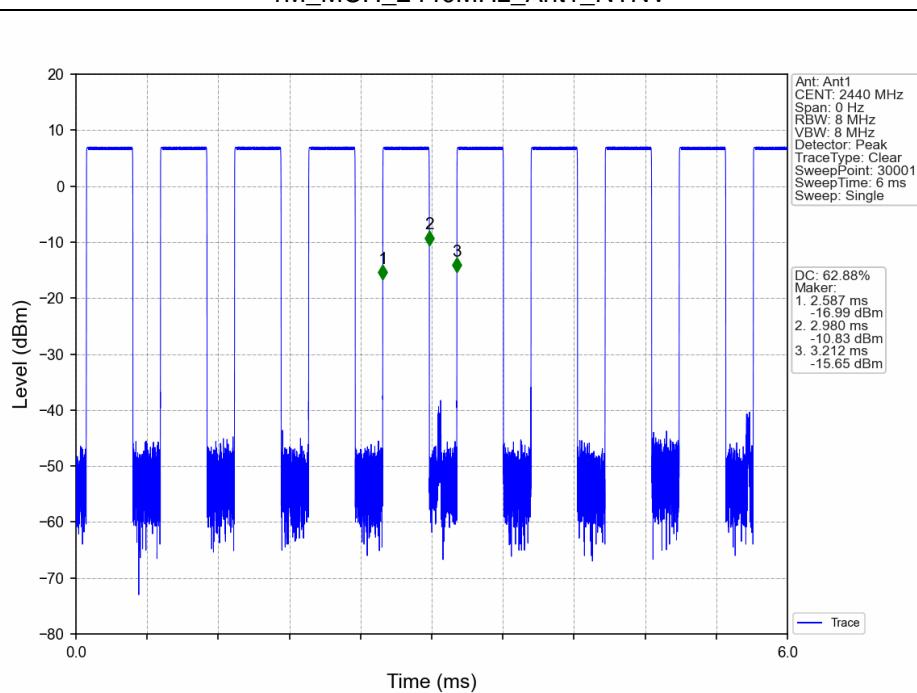
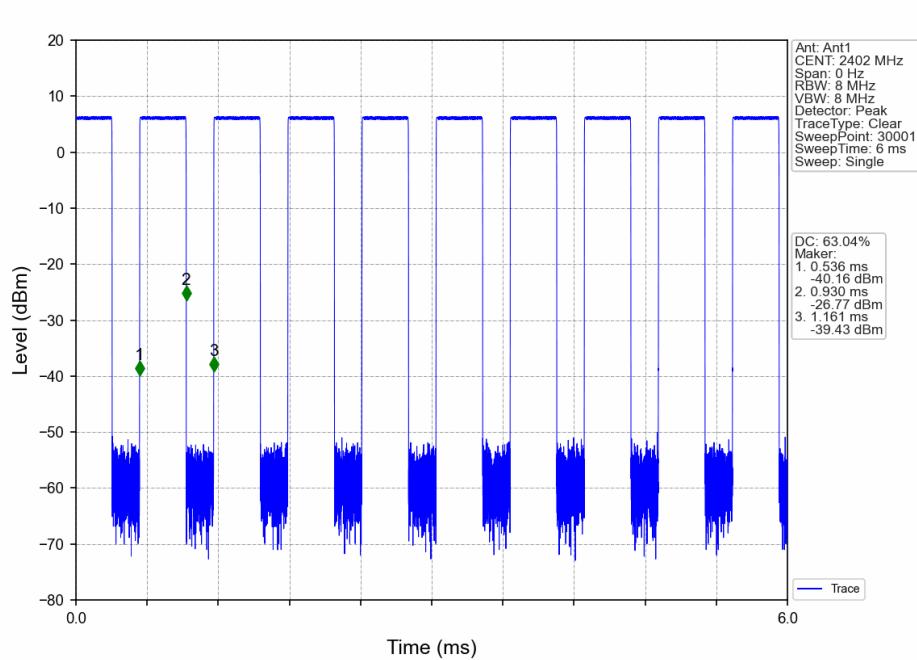


1M_HCH_2480MHz_Ant1_NTNV

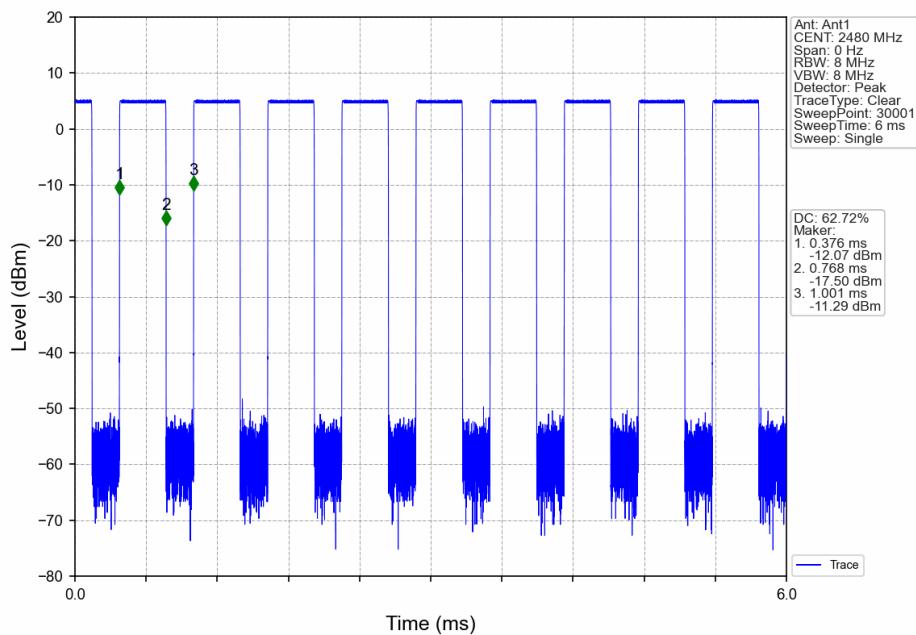

2M_LCH_2402MHz_Ant1_NTNV

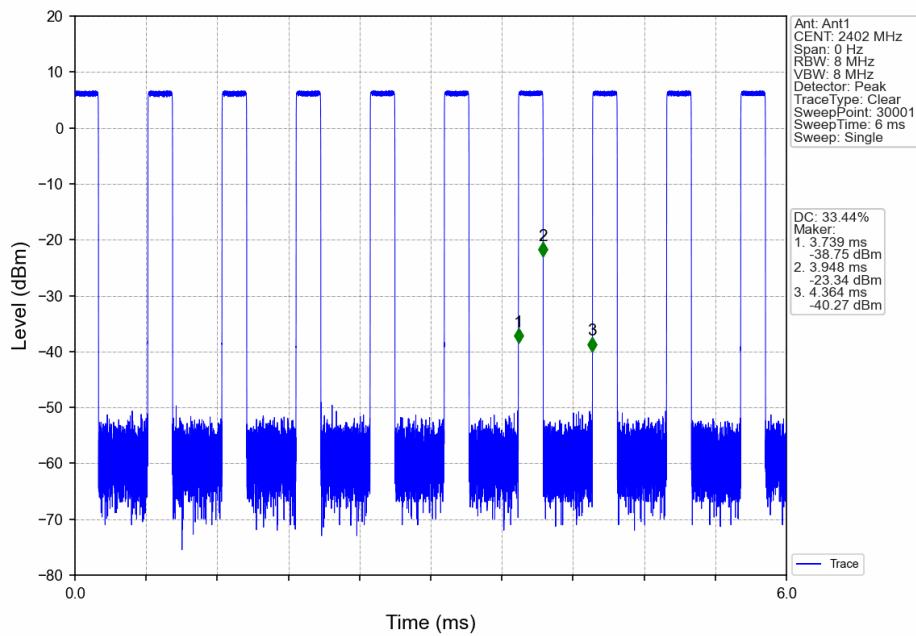

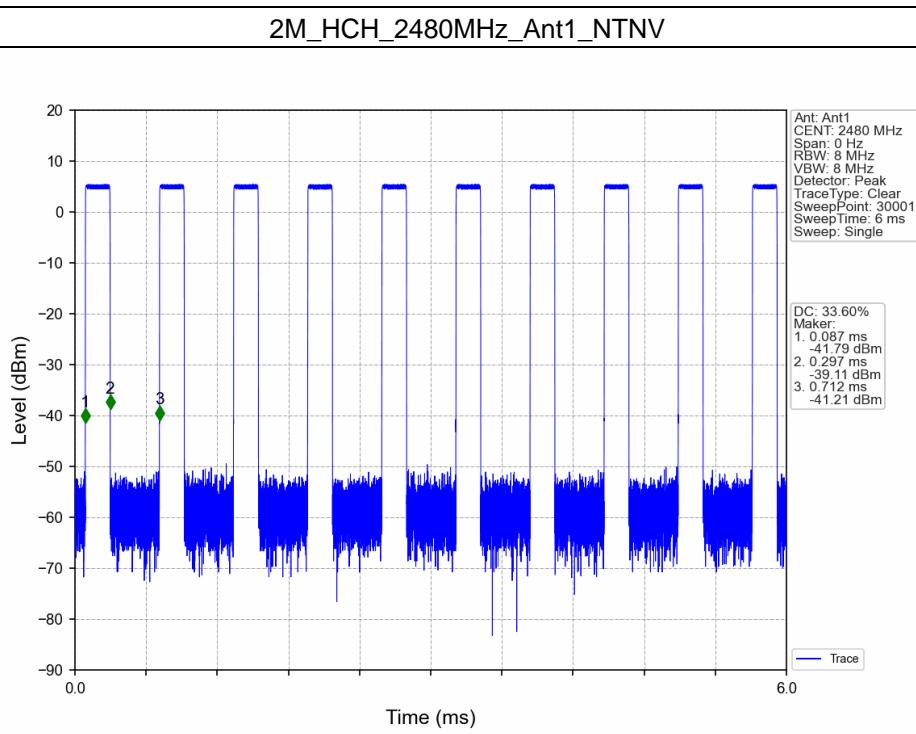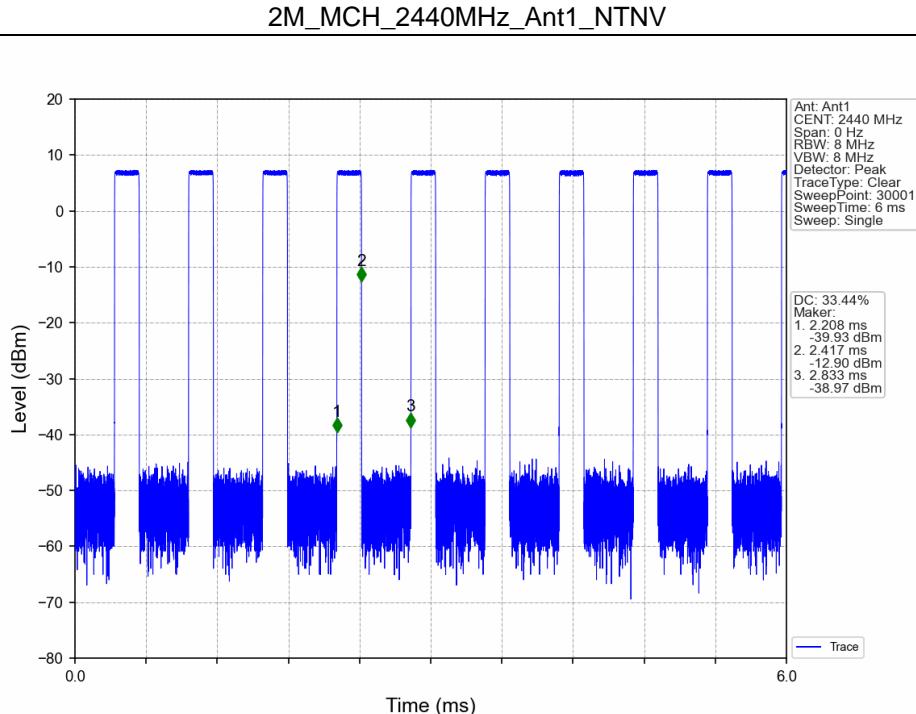

2. Bandwidth

2.1 Test Result

2.1.1 OBW



Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.028	/	Pass
		2440	1	1.028	/	Pass
		2480	1	1.027	/	Pass
2M	SISO	2402	1	2.030	/	Pass
		2440	1	2.033	/	Pass
		2480	1	2.032	/	Pass



2.1.2 6dB BW



Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.668	>=0.5	Pass
		2440	1	0.667	>=0.5	Pass
		2480	1	0.666	>=0.5	Pass
2M	SISO	2402	1	1.142	>=0.5	Pass
		2440	1	1.148	>=0.5	Pass
		2480	1	1.145	>=0.5	Pass

2.2 Test Graph



2.2.1 OBW

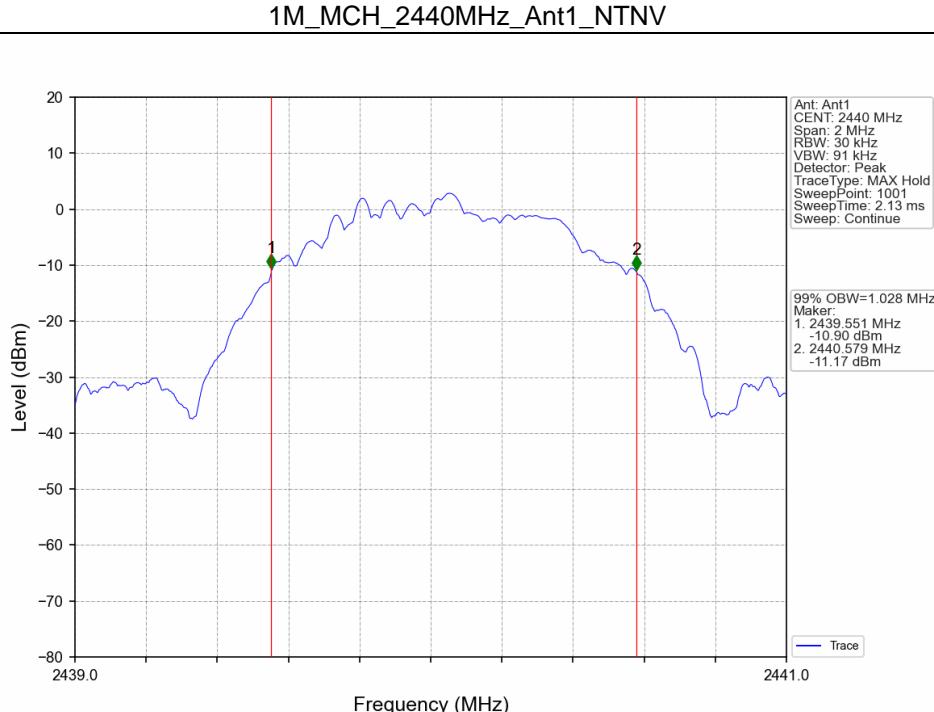
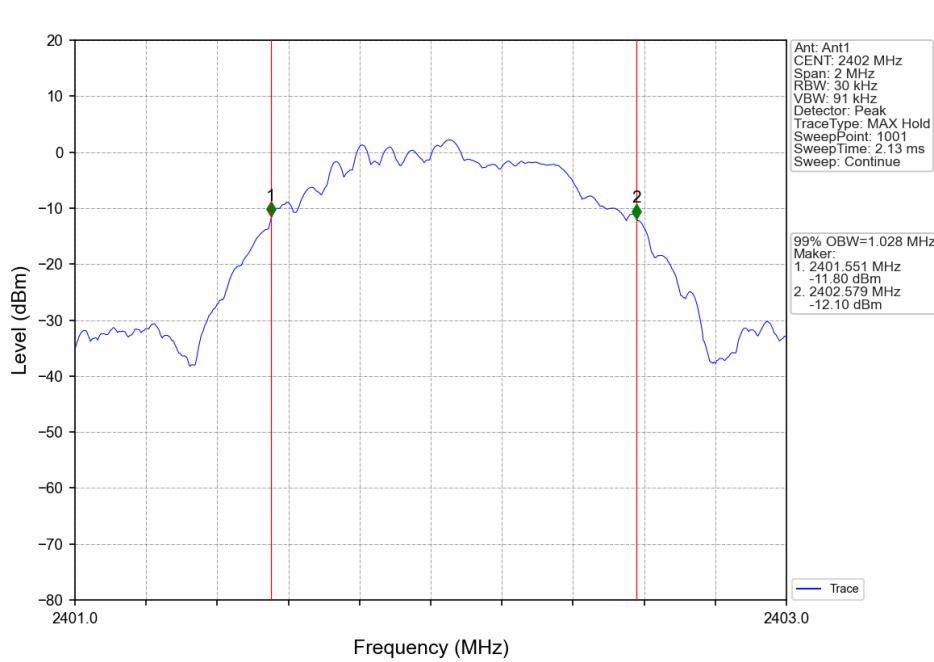


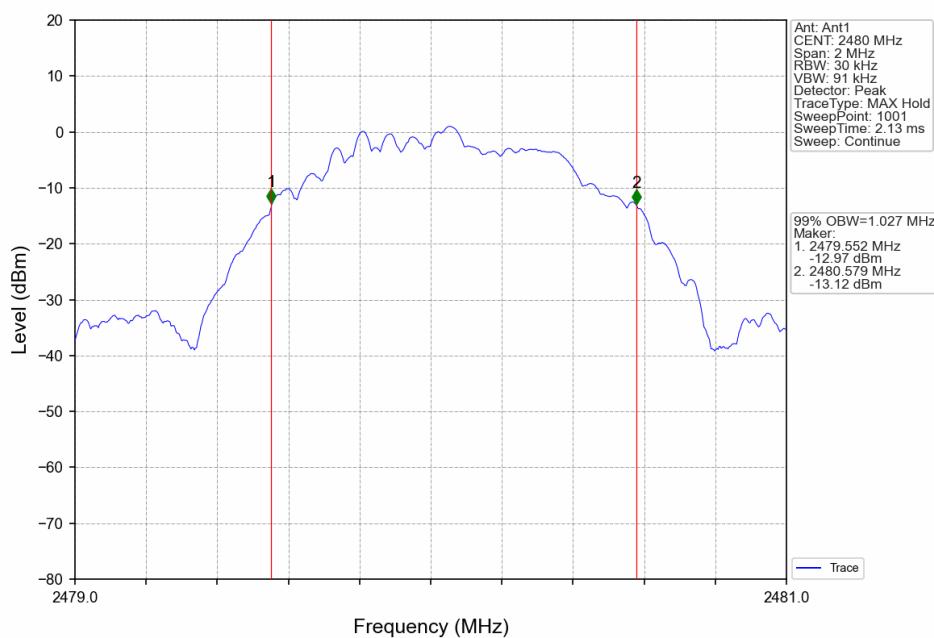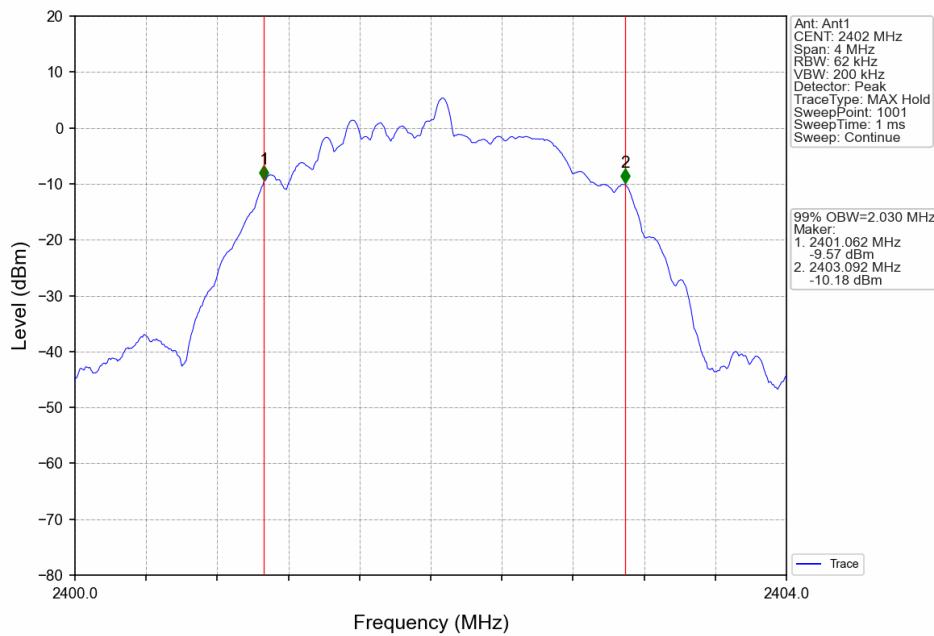
1M_HCH_2480MHz_Ant1_NTNV**2M_LCH_2402MHz_Ant1_NTNV**

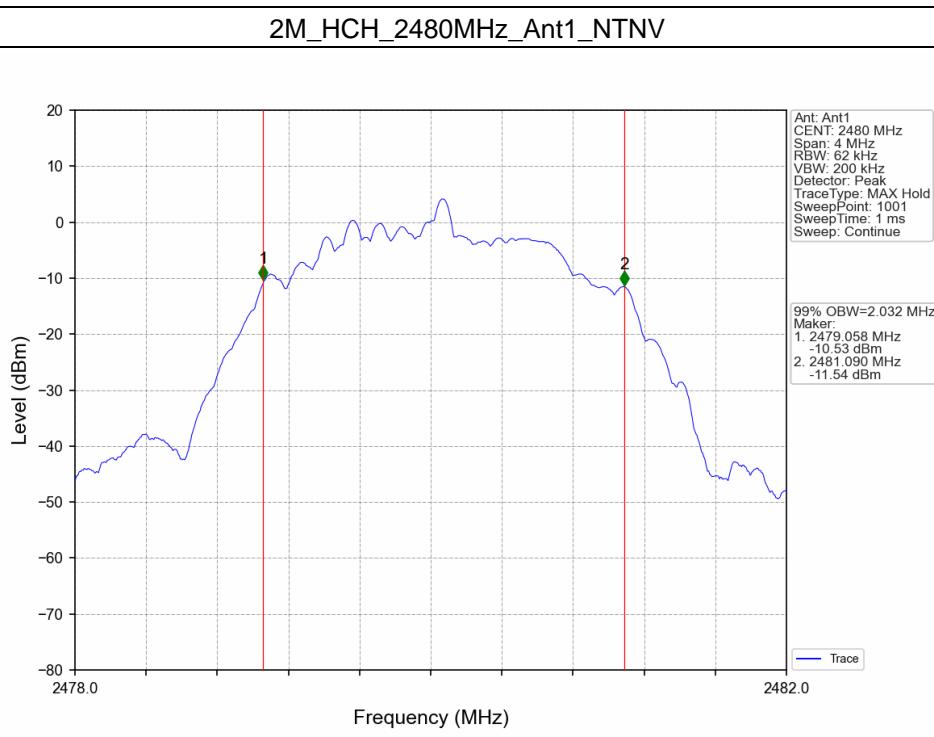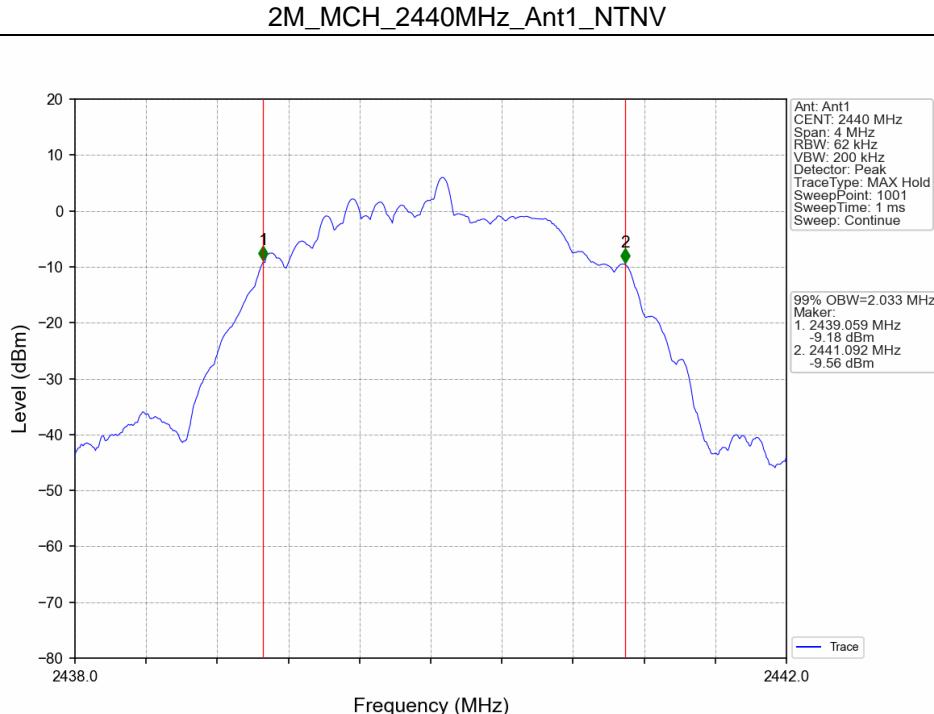

2.2.2 6dB BW

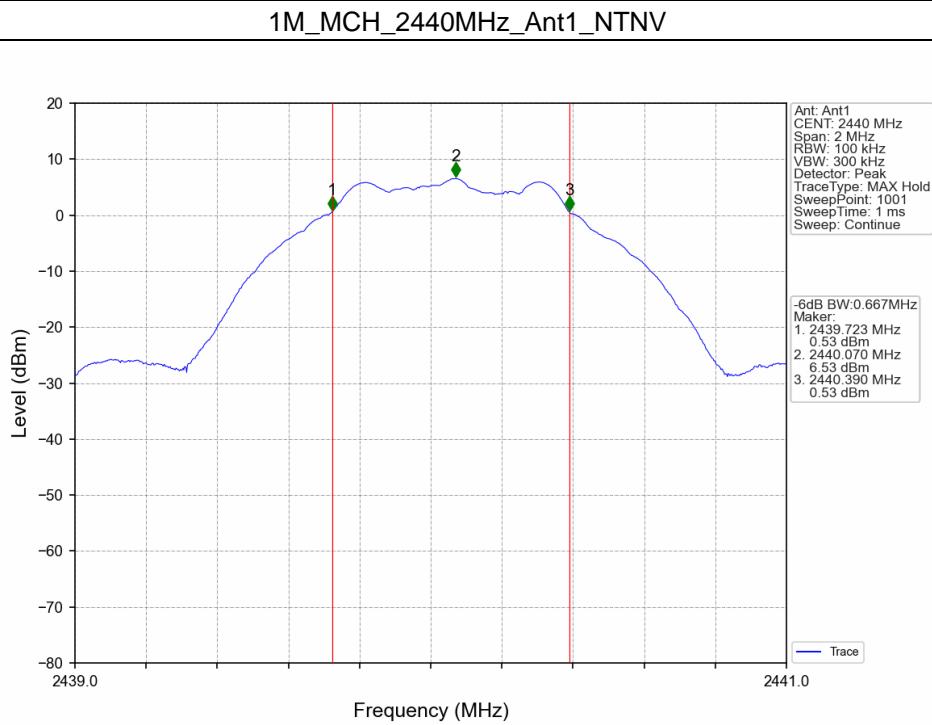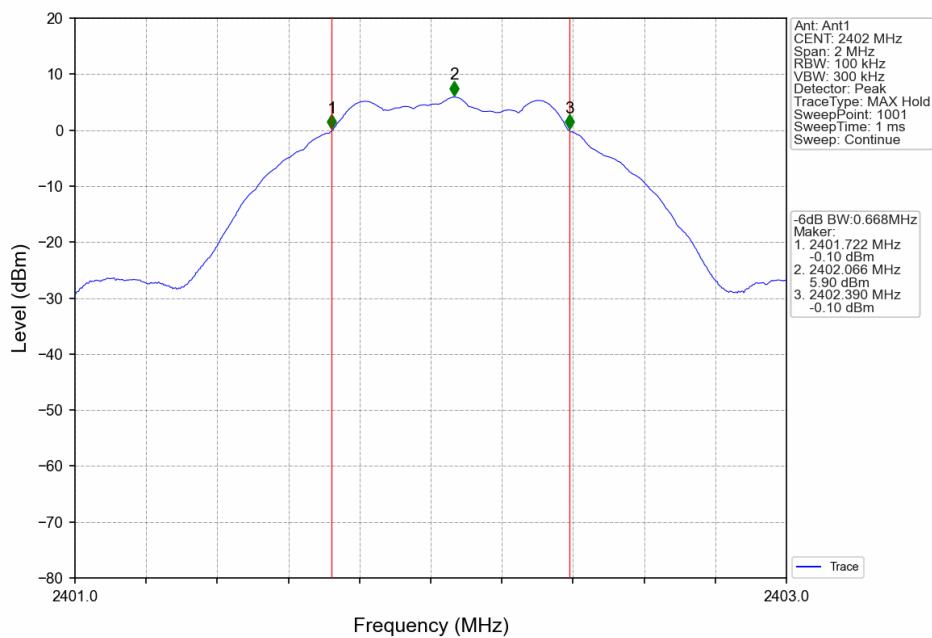

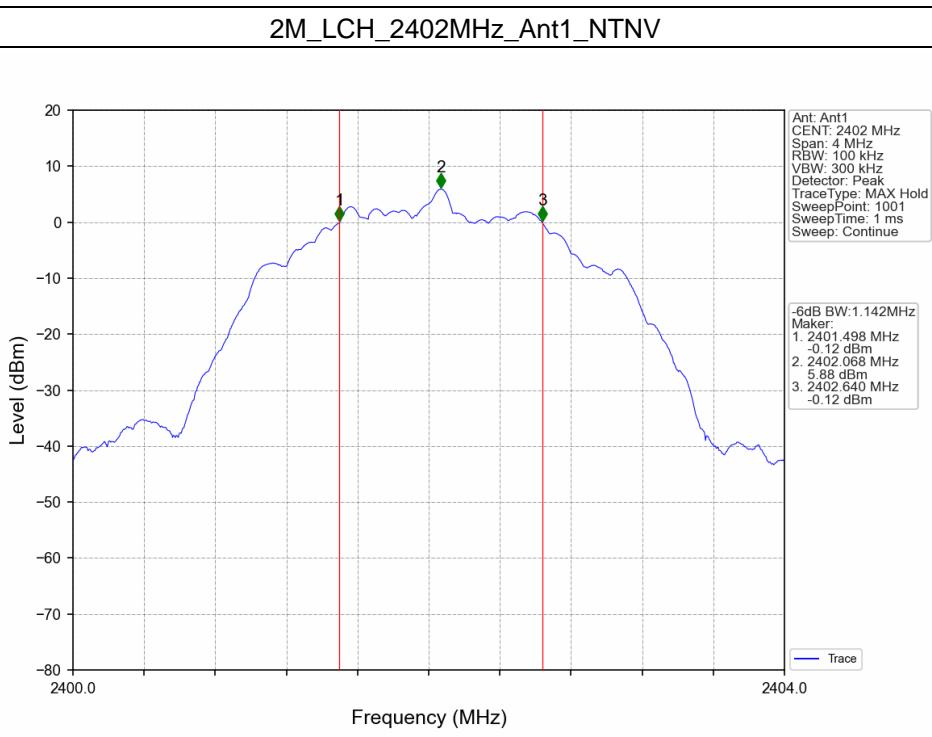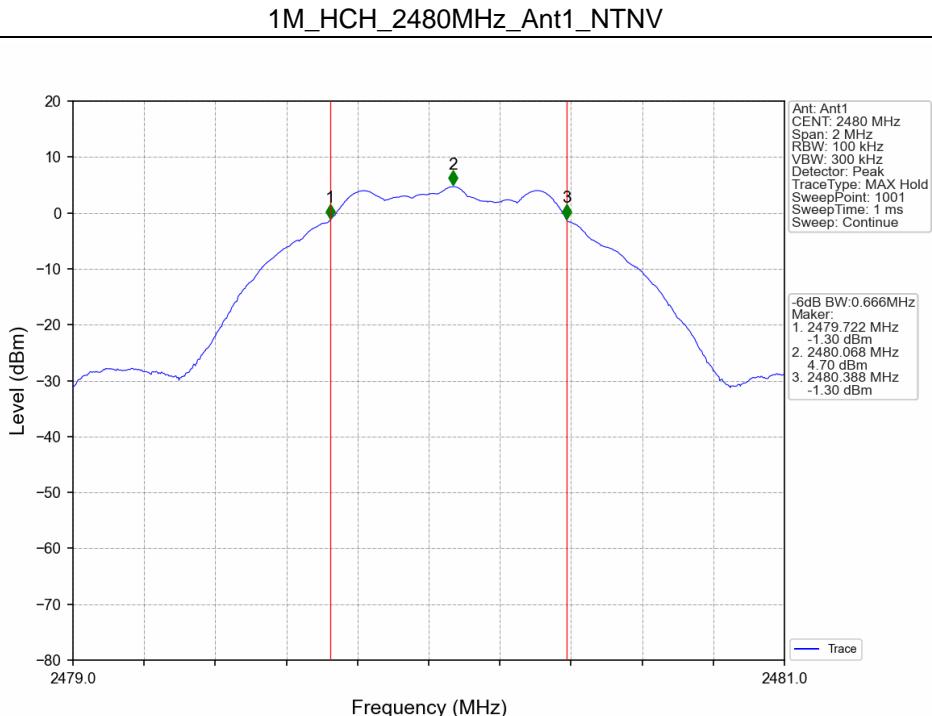

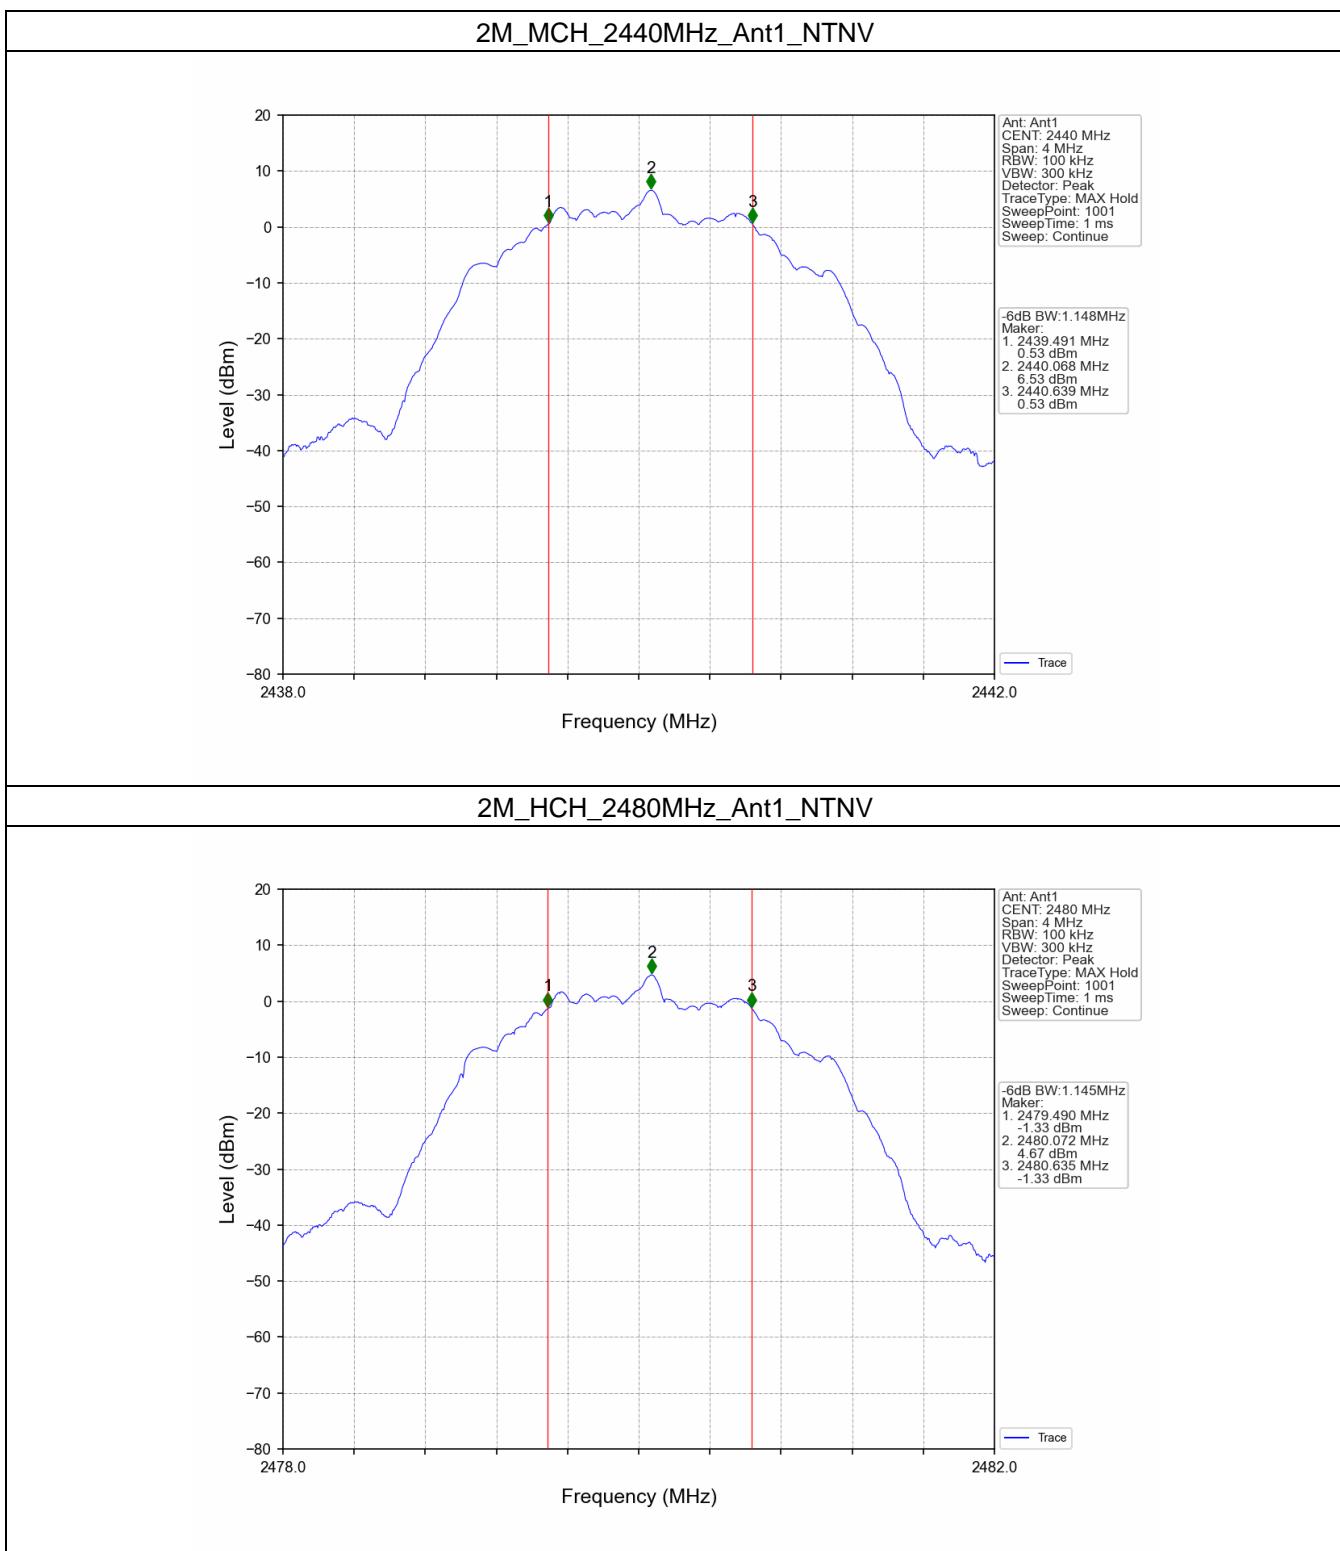

3. Maximum Conducted Output Power

3.1 Test Result



3.1.1 Power



Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	6.31	<=30	Pass
		2440	6.96	<=30	Pass
		2480	5.11	<=30	Pass
2M	SISO	2402	6.39	<=30	Pass
		2440	7.03	<=30	Pass
		2480	5.18	<=30	Pass



Note1: Antenna Gain: Ant1: 1.69dBi;

3.2 Test Graph

3.2.1 Power

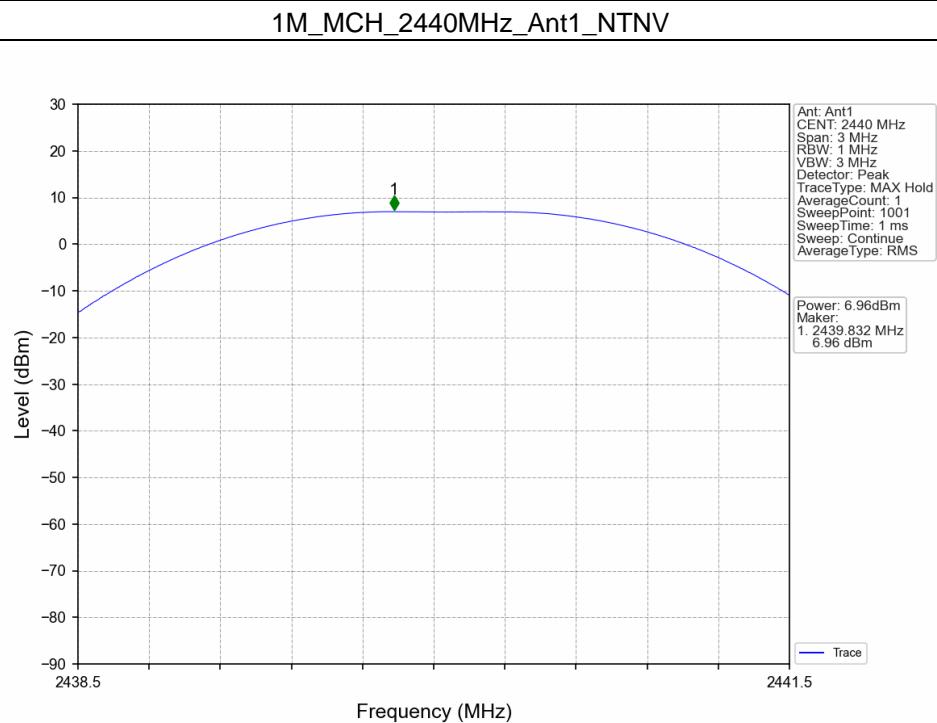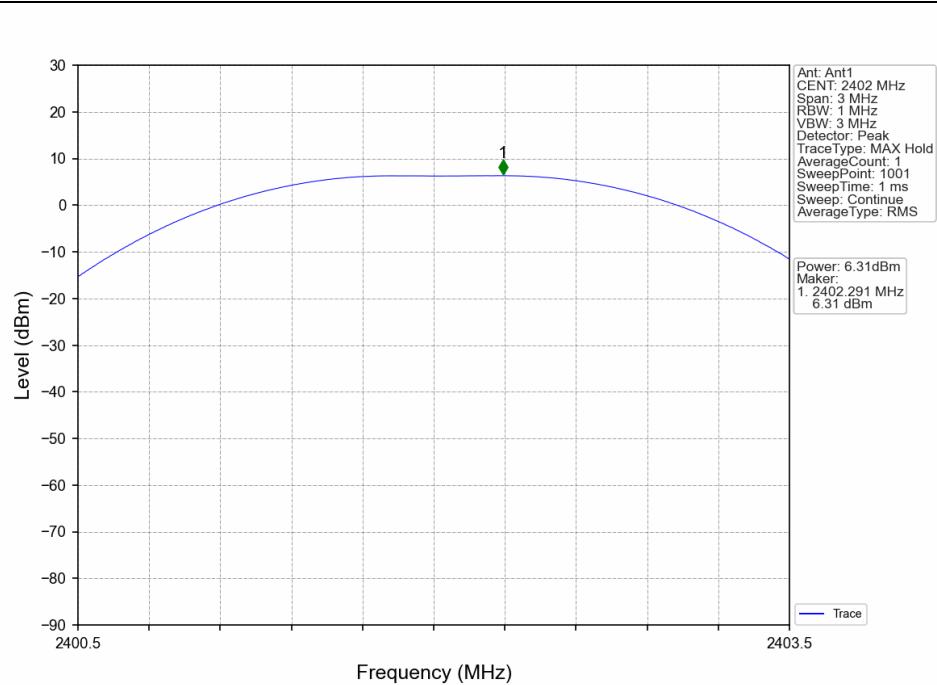

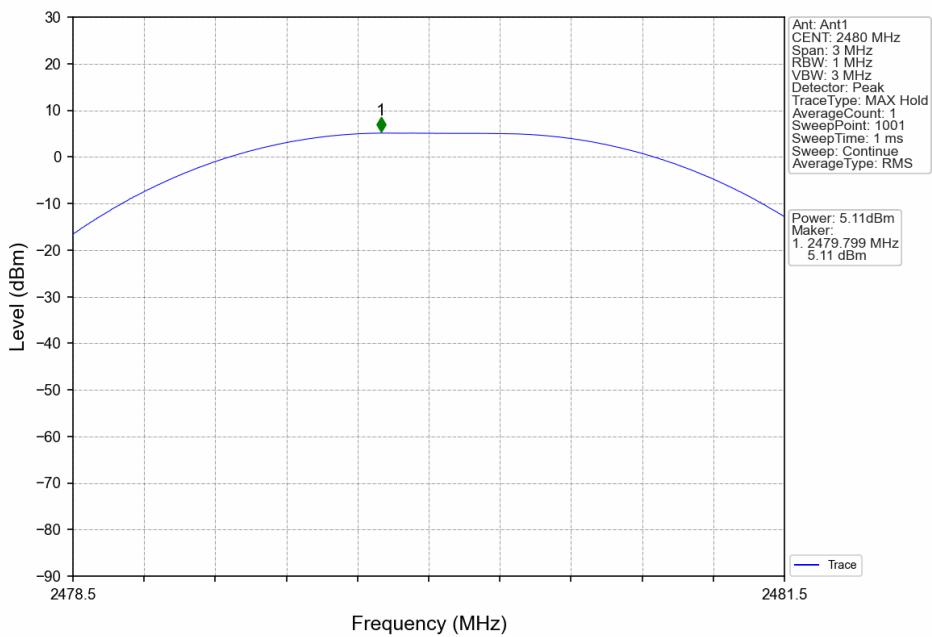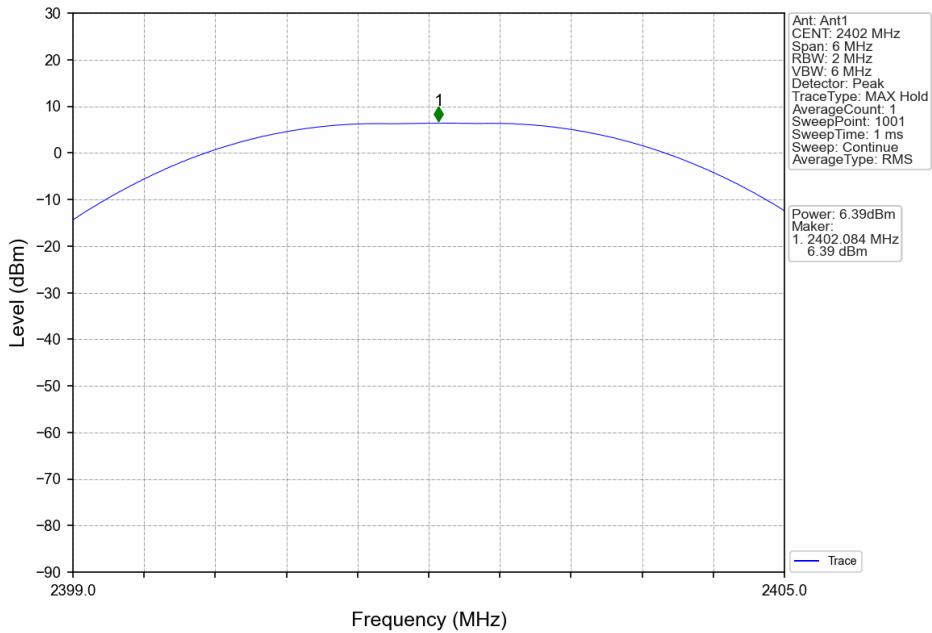1M_HCH_2480MHz_Ant1_NTNV**2M_LCH_2402MHz_Ant1_NTNV**

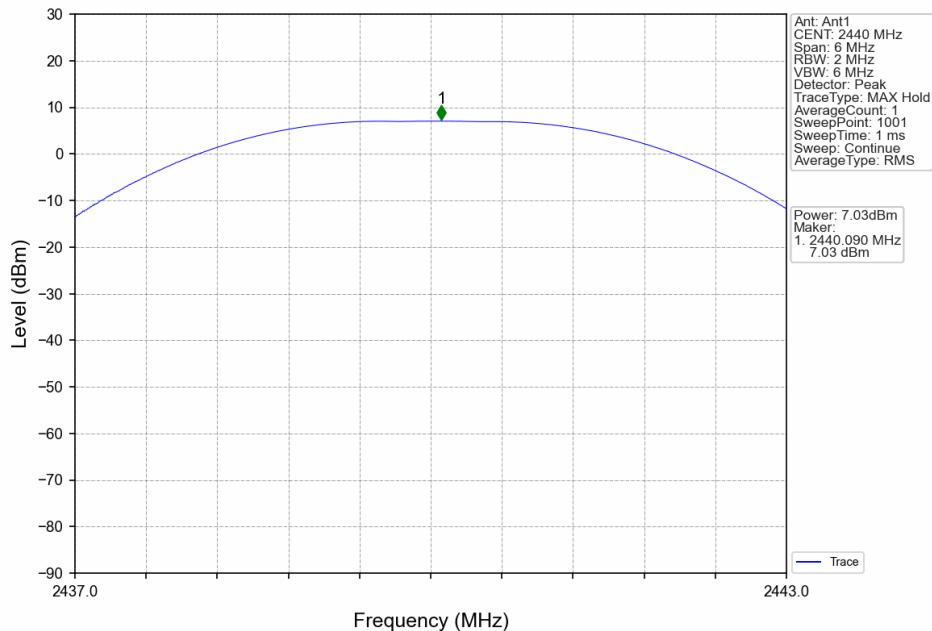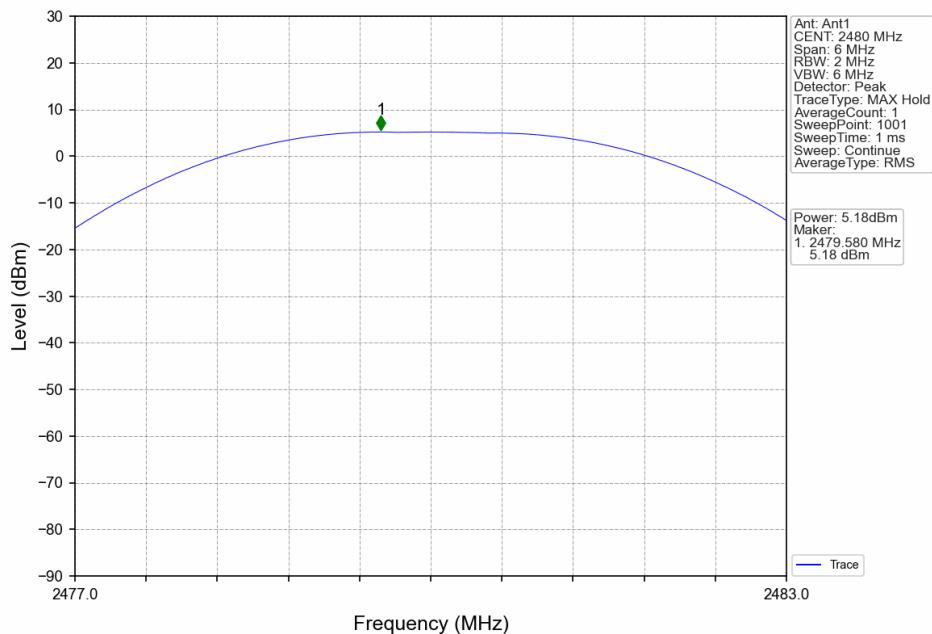2M_MCH_2440MHz_Ant1_NTNV**2M_HCH_2480MHz_Ant1_NTNV**

4. Maximum Power Spectral Density

4.1 Test Result



4.1.1 PSD



Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-8.52	<=8	Pass
		2440	-7.88	<=8	Pass
		2480	-9.72	<=8	Pass
2M	SISO	2402	-11.21	<=8	Pass
		2440	-10.63	<=8	Pass
		2480	-12.38	<=8	Pass



Note1: Antenna Gain: Ant1: 1.69dBi;

4.2 Test Graph

4.2.1 PSD

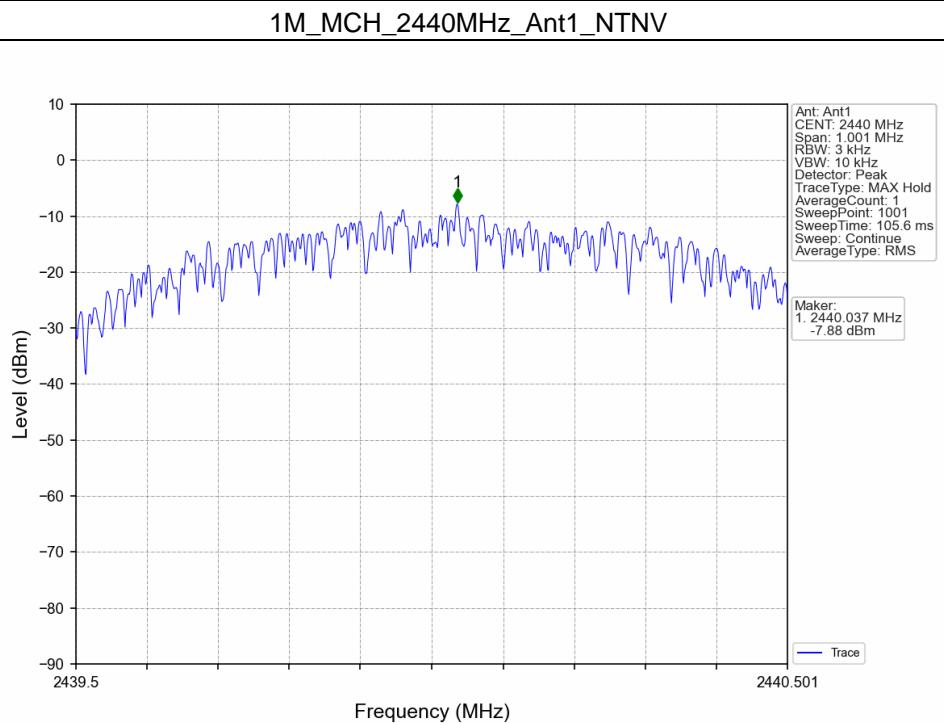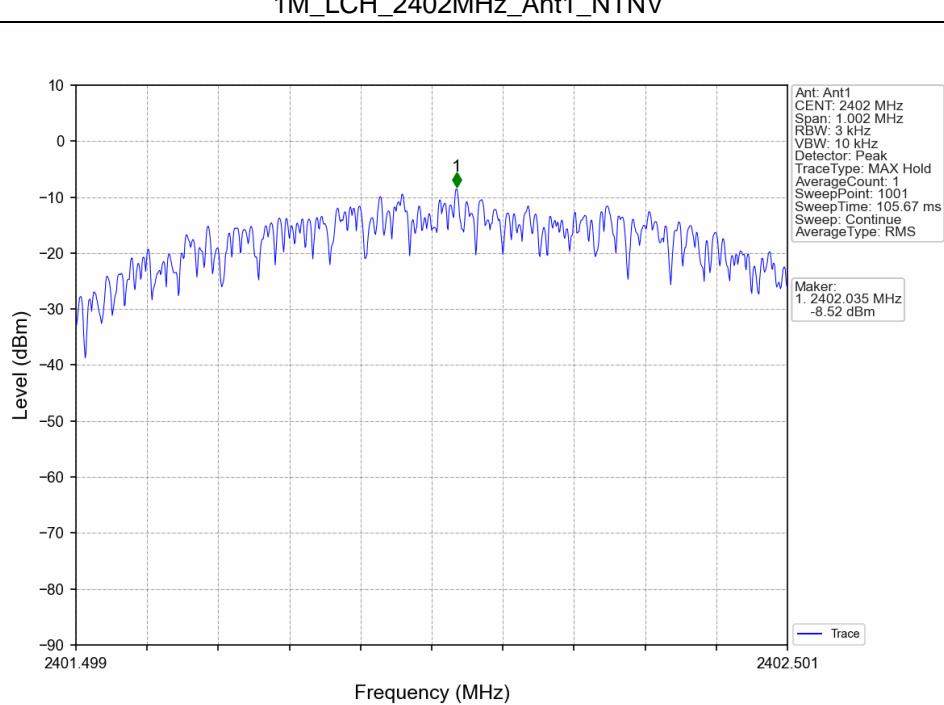

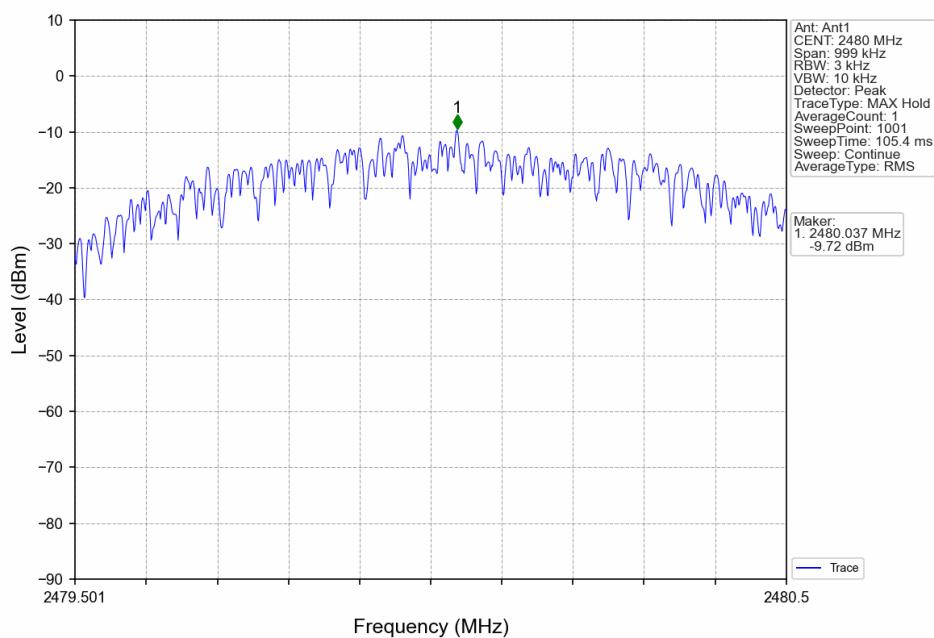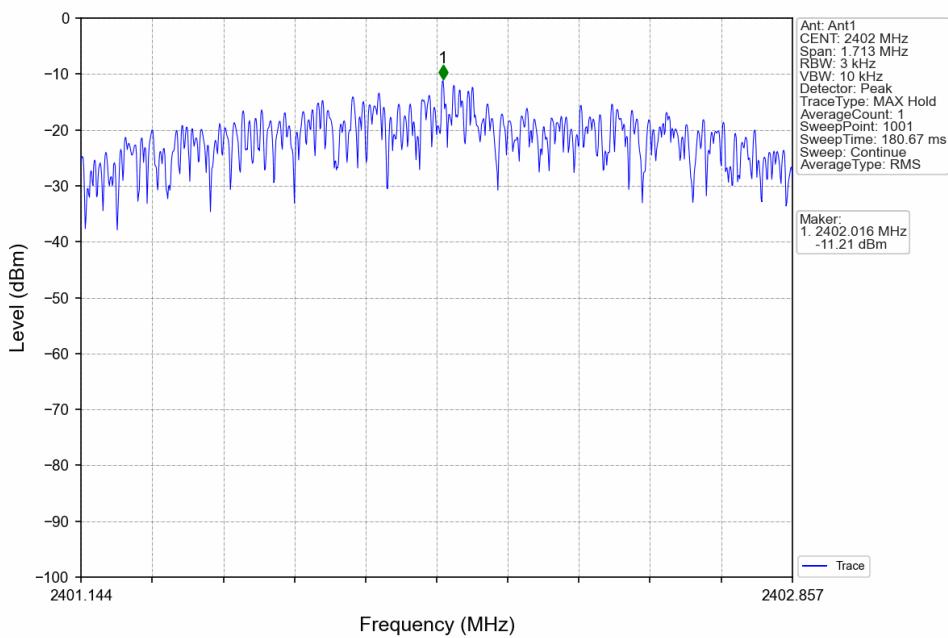1M_HCH_2480MHz_Ant1_NTNV**2M_LCH_2402MHz_Ant1_NTNV**

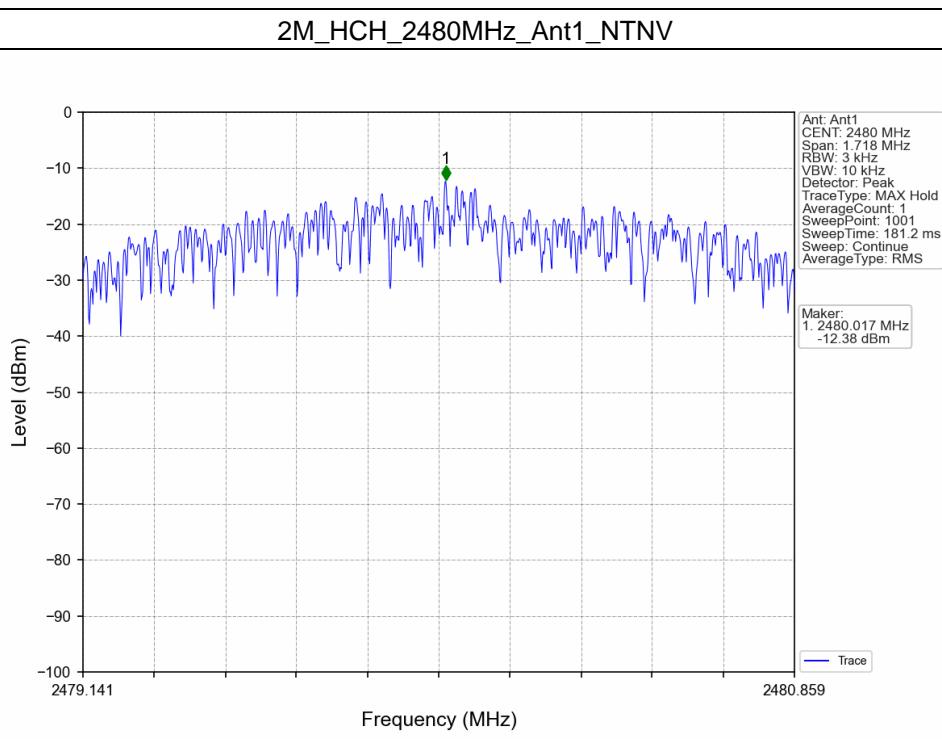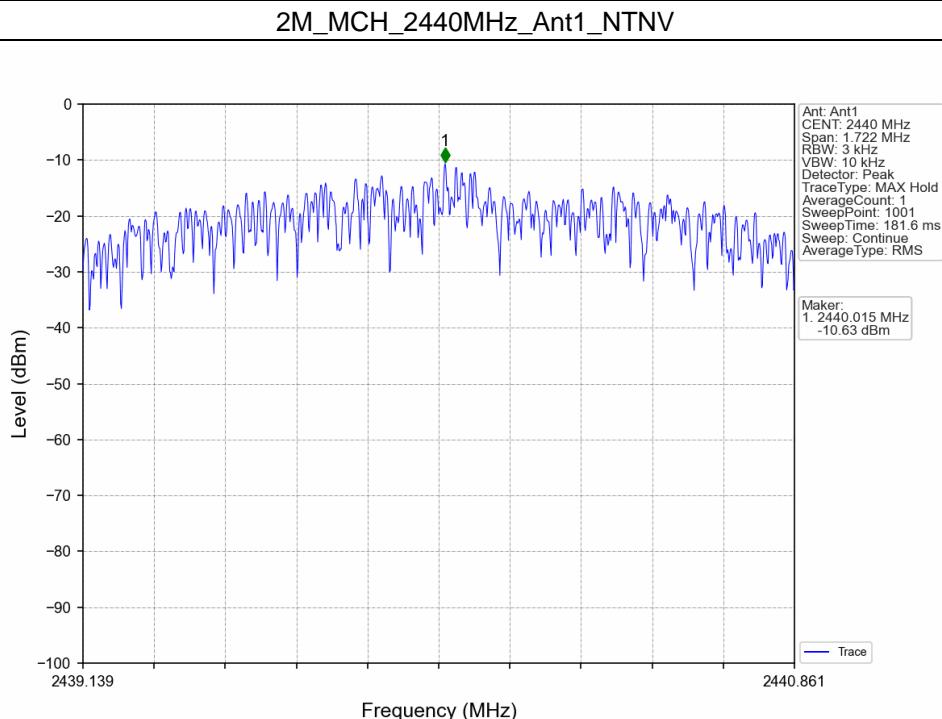

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	5.88
		2440	1	6.54
		2480	1	4.68
2M	SISO	2402	1	5.86
		2440	1	6.51
		2480	1	4.67

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.



5.1.2 CSE



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	6.54	-13.46	Pass
		2440	1	6.54	-13.46	Pass
		2480	1	6.54	-13.46	Pass
2M	SISO	2402	1	6.51	-13.49	Pass
		2440	1	6.51	-13.49	Pass
		2480	1	6.51	-13.49	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.2 Test Graph



5.2.1 Ref

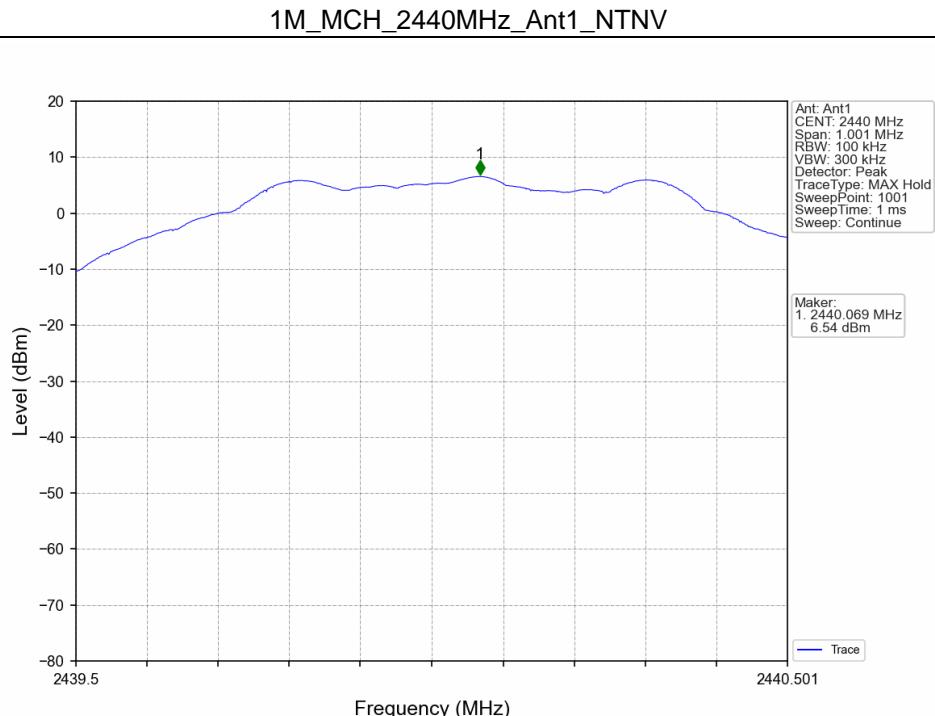
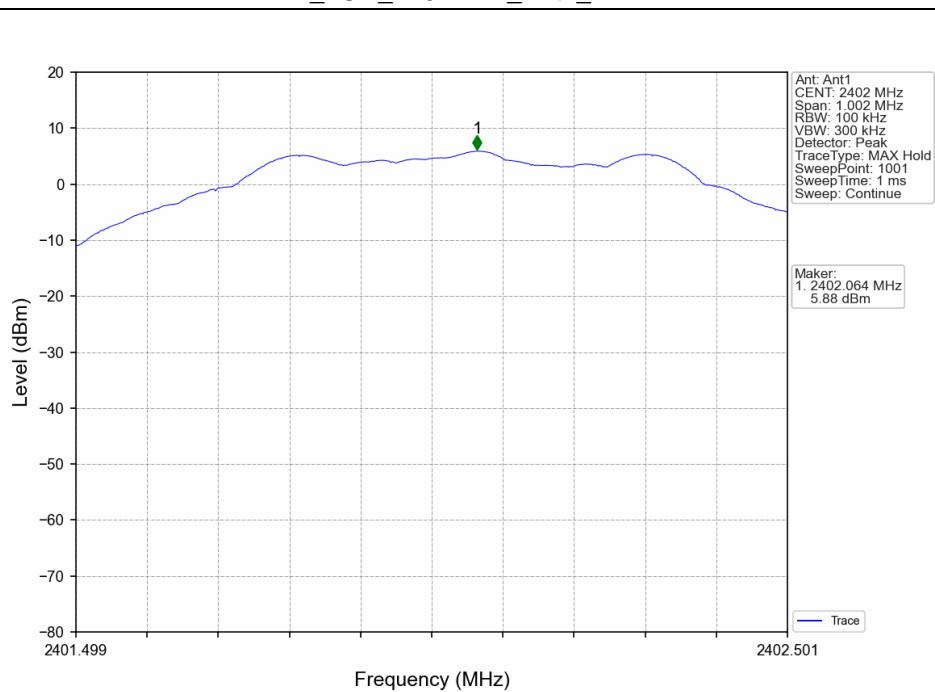


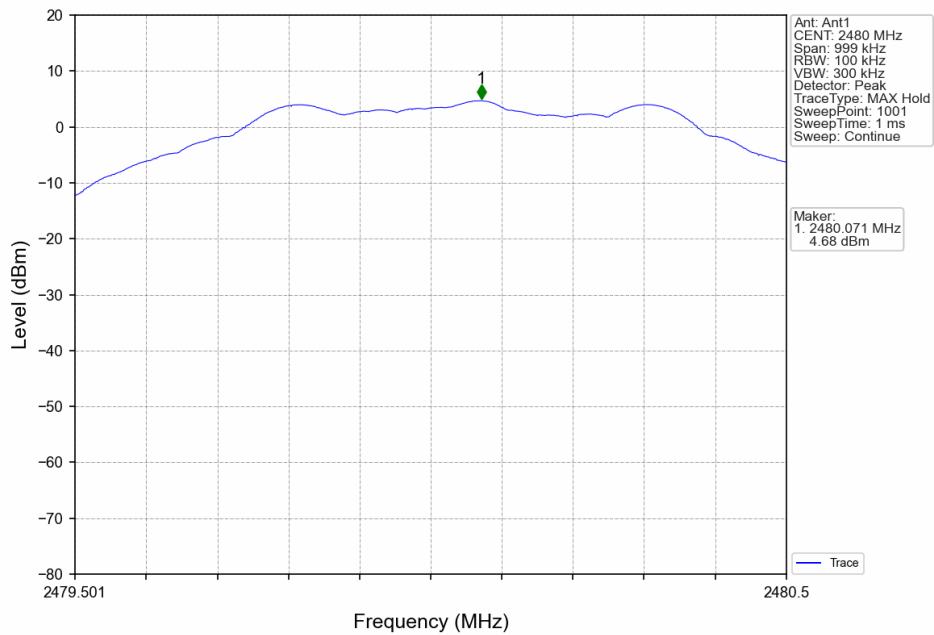
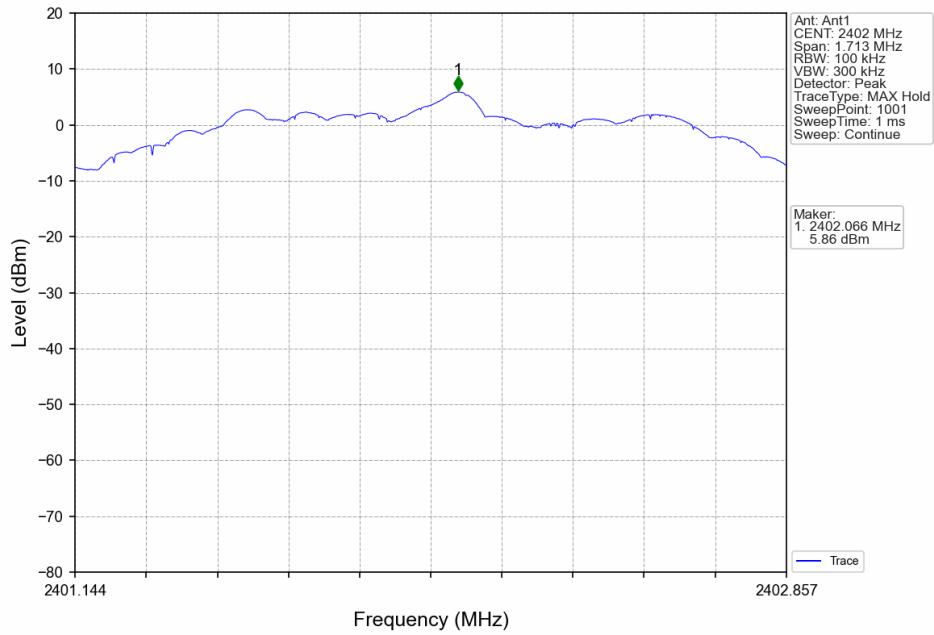
1M_HCH_2480MHz_Ant1_NTNV**2M_LCH_2402MHz_Ant1_NTNV**

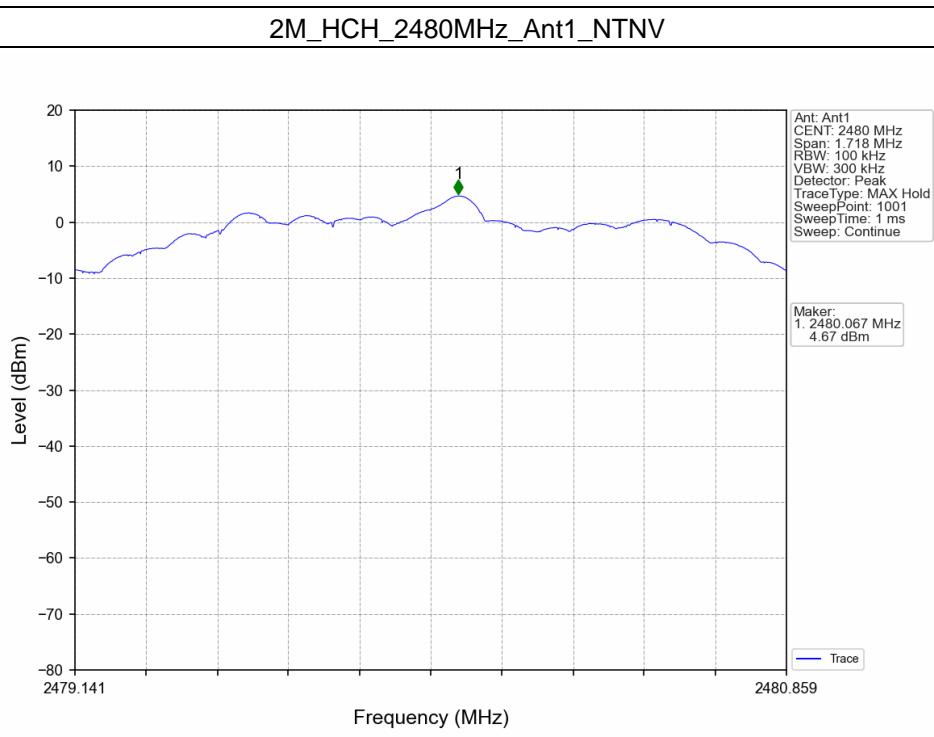
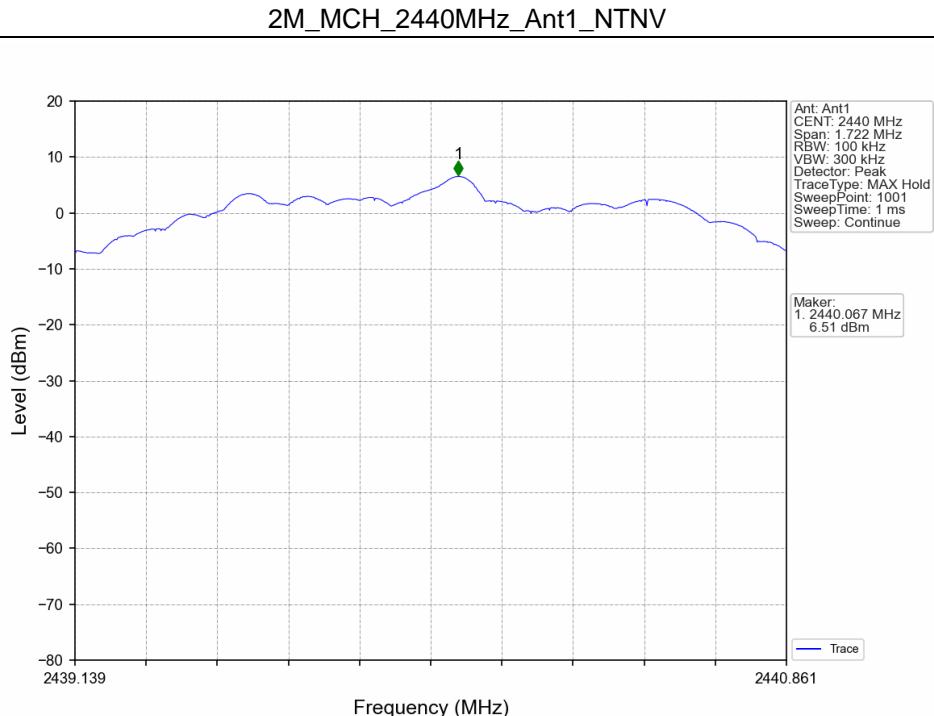




5.2.2 CSE

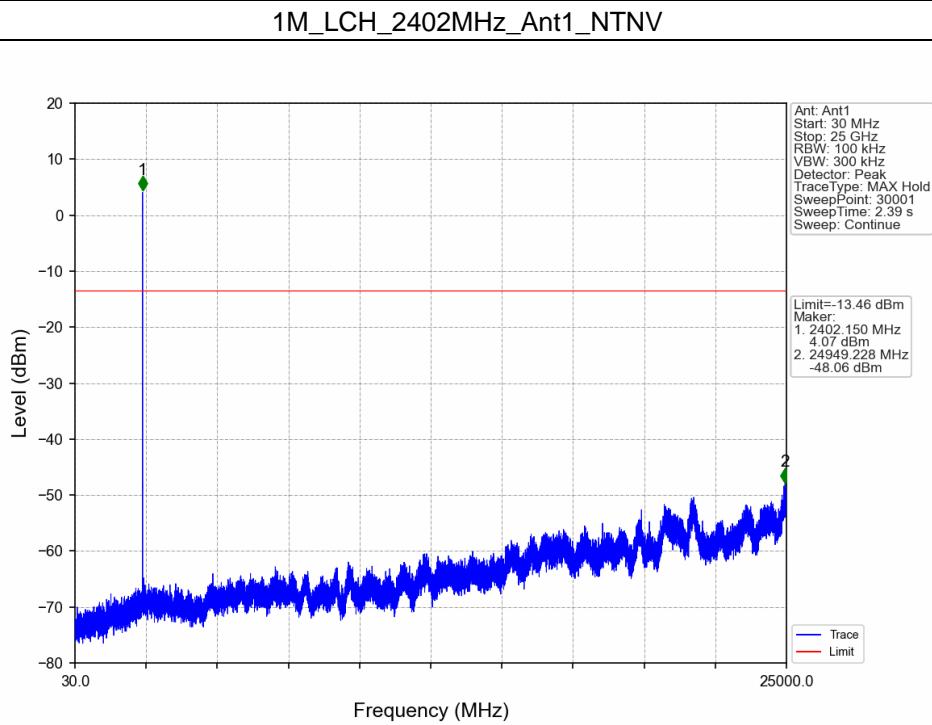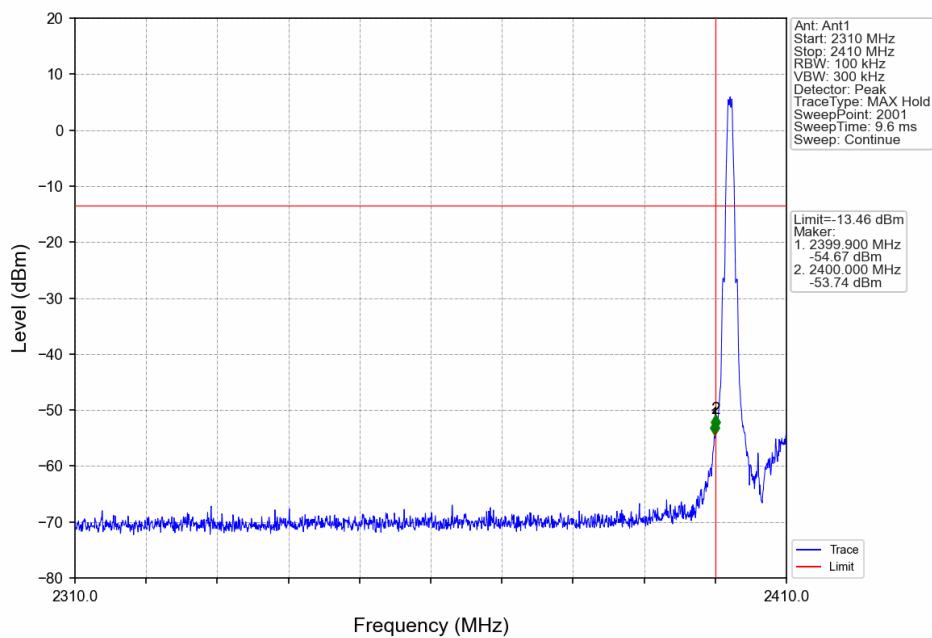

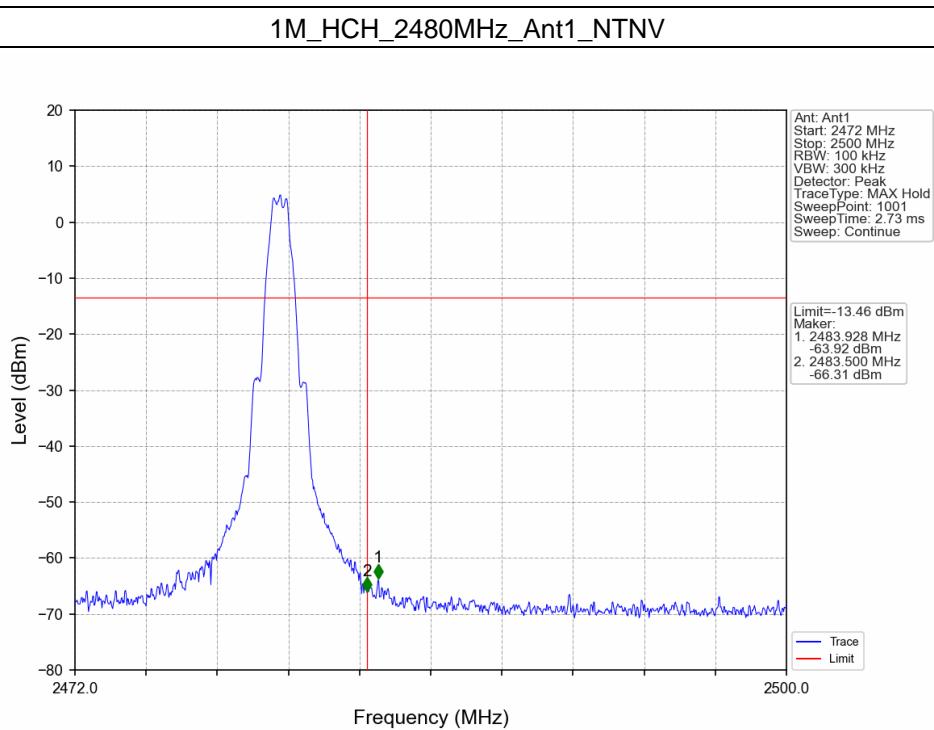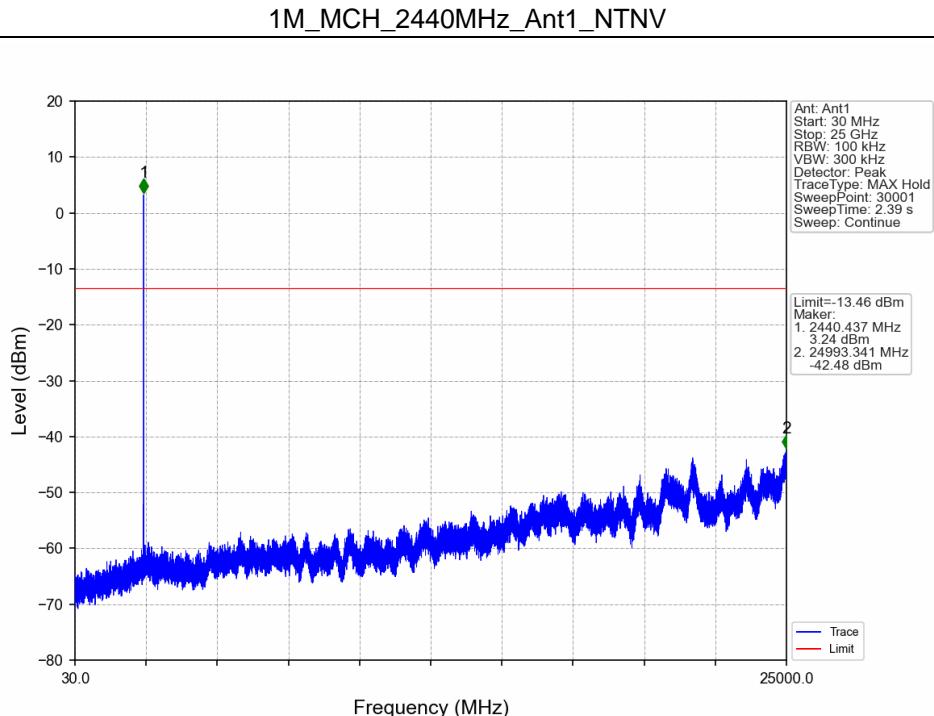

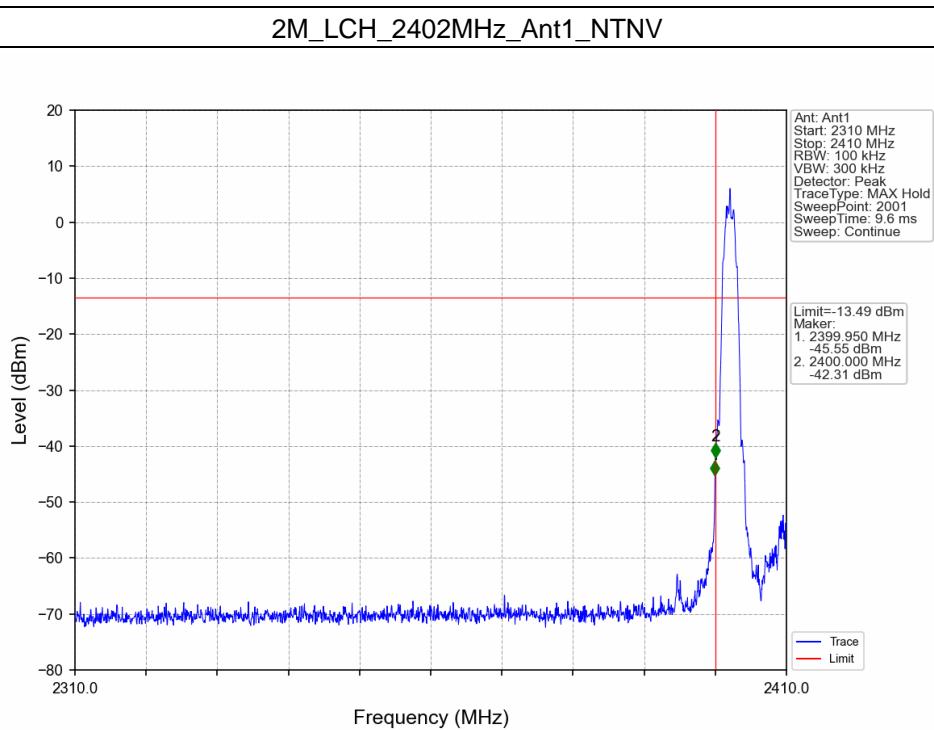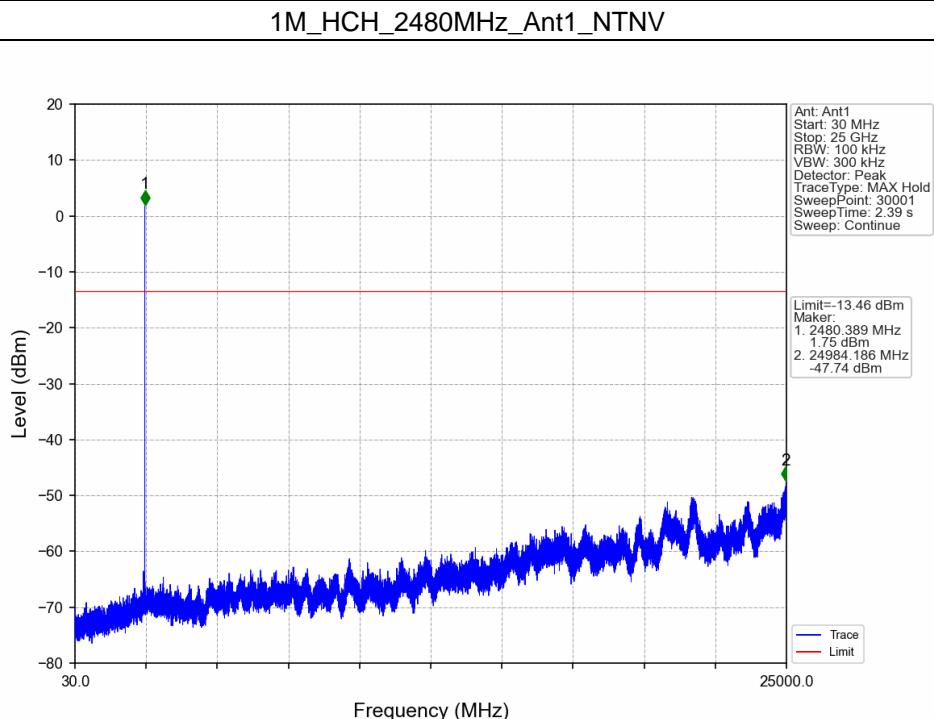

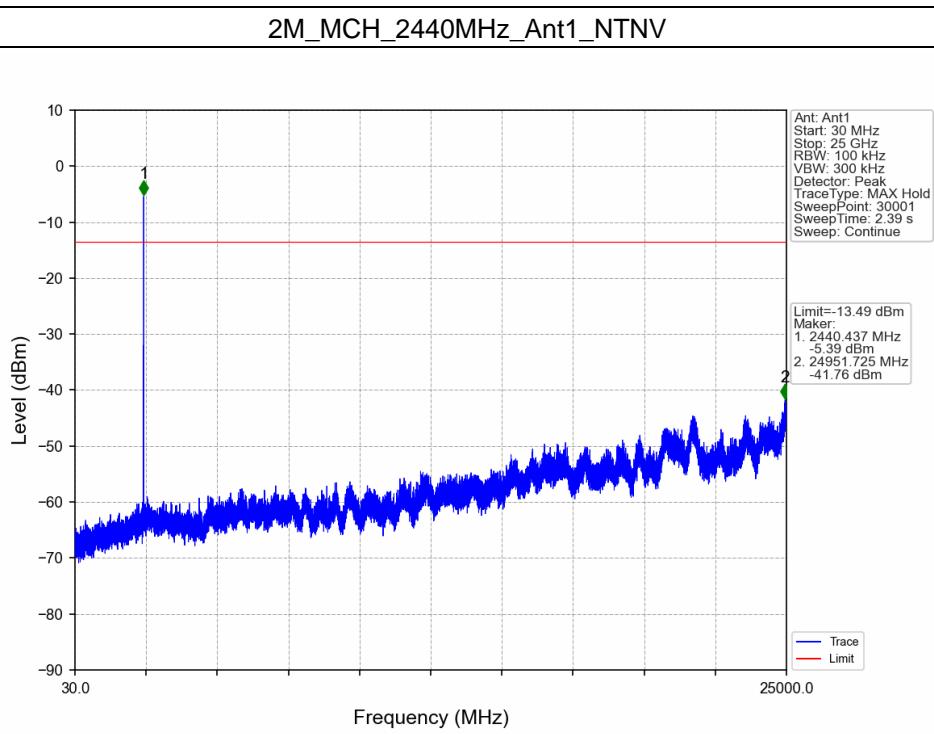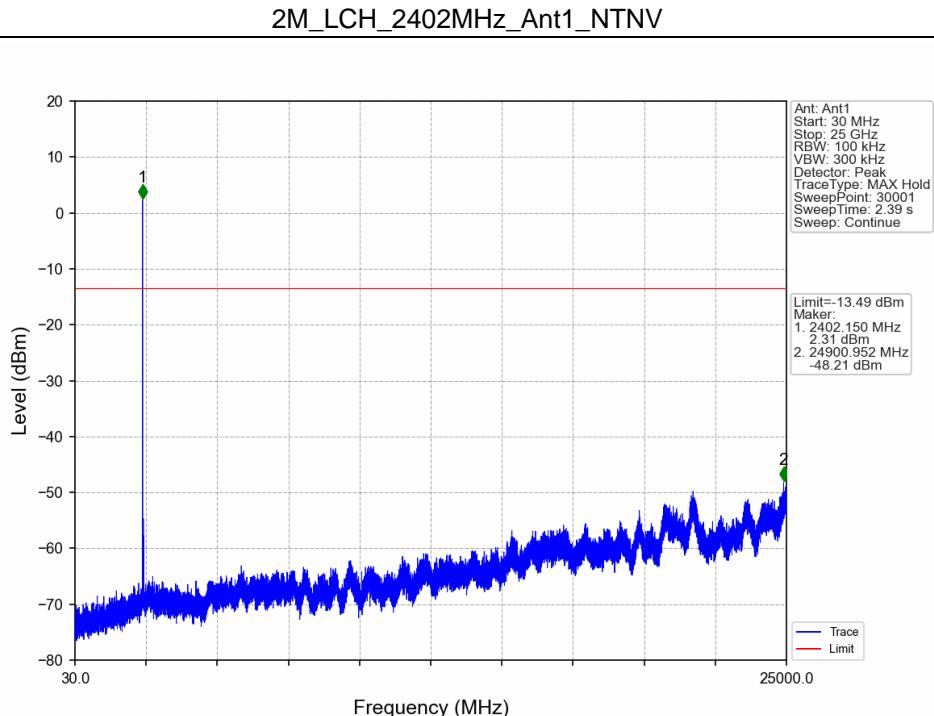

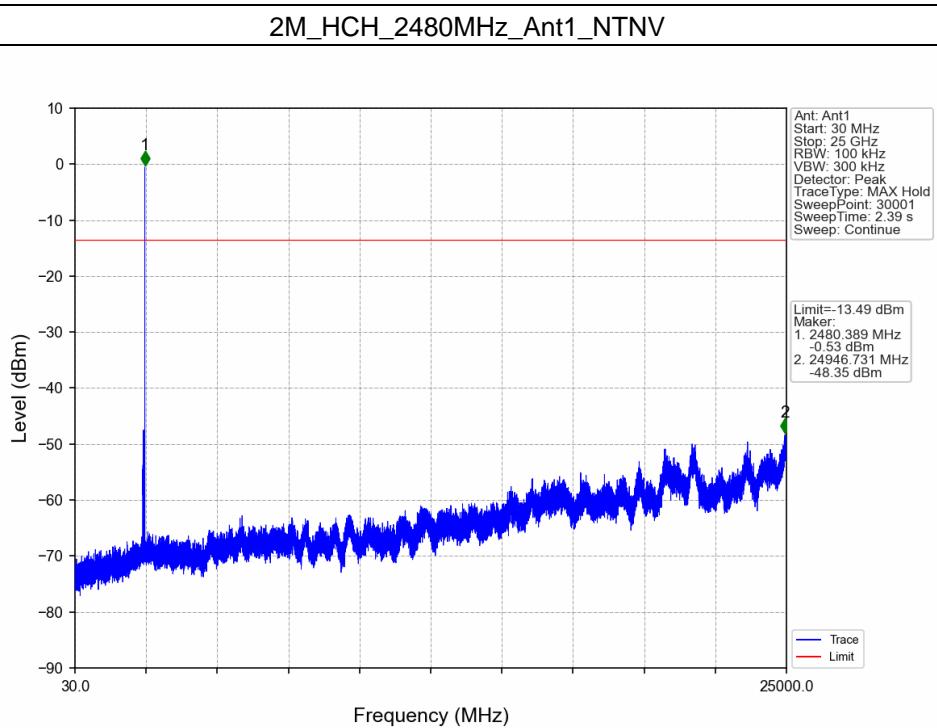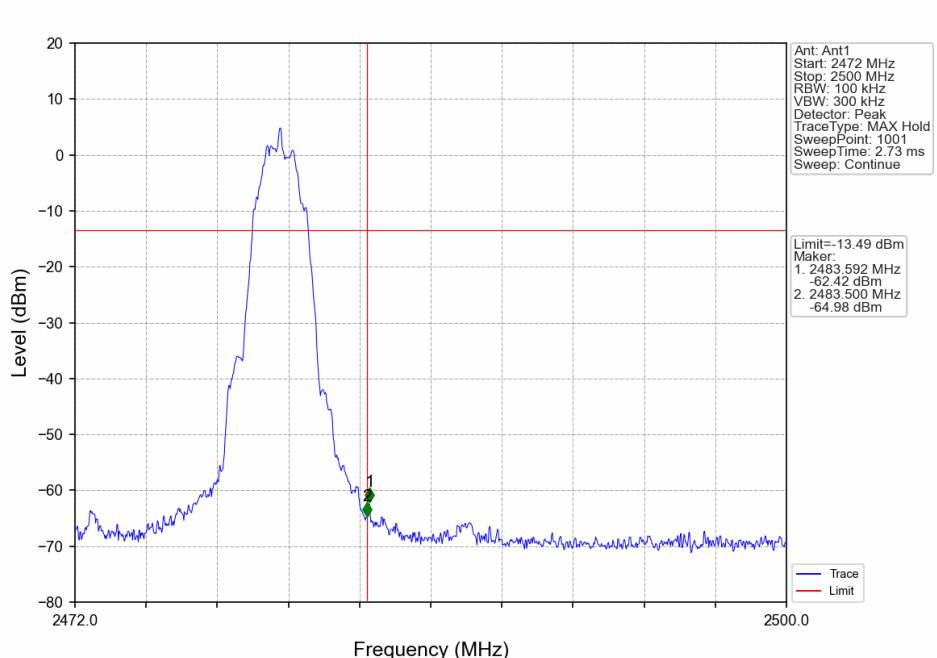

6. Frequency Error

6.1 Test Result

6.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
1M	SISO	2402	20	102	2402.055	2401.589 to 2402.411	Pass
				120	2402.056	2401.589 to 2402.411	Pass
				138	2402.056	2401.589 to 2402.411	Pass
			-20	120	2402.057	2401.589 to 2402.411	Pass
			50	120	2402.057	2401.589 to 2402.411	Pass
		2440	20	102	2440.057	2439.589 to 2440.411	Pass
				120	2440.056	2439.589 to 2440.411	Pass
				138	2440.055	2439.589 to 2440.411	Pass
			-20	120	2440.056	2439.589 to 2440.411	Pass
			50	120	2440.056	2439.589 to 2440.411	Pass
		2480	20	102	2480.055	2479.589 to 2480.411	Pass
				120	2480.057	2479.589 to 2480.411	Pass
				138	2480.057	2479.589 to 2480.411	Pass
			-20	120	2480.056	2479.589 to 2480.411	Pass
			50	120	2480.056	2479.589 to 2480.411	Pass
2M	SISO	2402	20	102	2402.054	2401.188 to 2402.812	Pass
				120	2402.054	2401.188 to 2402.812	Pass
				138	2402.054	2401.188 to 2402.812	Pass
			-20	120	2402.054	2401.188 to 2402.812	Pass
			50	120	2402.052	2401.188 to 2402.812	Pass
		2440	20	102	2440.048	2439.187 to 2440.813	Pass
				120	2440.046	2439.187 to 2440.813	Pass
				138	2440.050	2439.187 to 2440.813	Pass
			-20	120	2440.048	2439.187 to 2440.813	Pass
			50	120	2440.048	2439.187 to 2440.813	Pass
		2480	20	102	2480.046	2479.187 to 2480.813	Pass
				120	2480.042	2479.187 to 2480.813	Pass
				138	2480.042	2479.187 to 2480.813	Pass
			-20	120	2480.042	2479.187 to 2480.813	Pass
			50	120	2480.042	2479.187 to 2480.813	Pass



Ant5**1. Duty Cycle****1.1 Test Result****1.1.1 Ant5**



Ant5							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.394	0.625	63.04	2.00	0.03
		2440	0.413	0.625	66.08	1.80	0.92
		2480	0.412	0.625	65.92	1.81	0.00
2M	SISO	2402	0.210	0.625	33.60	4.74	0.03
		2440	0.210	0.625	33.60	4.74	0.03
		2480	0.210	0.625	33.60	4.74	0.03

1.2 Test Graph

1.2.1 Ant5

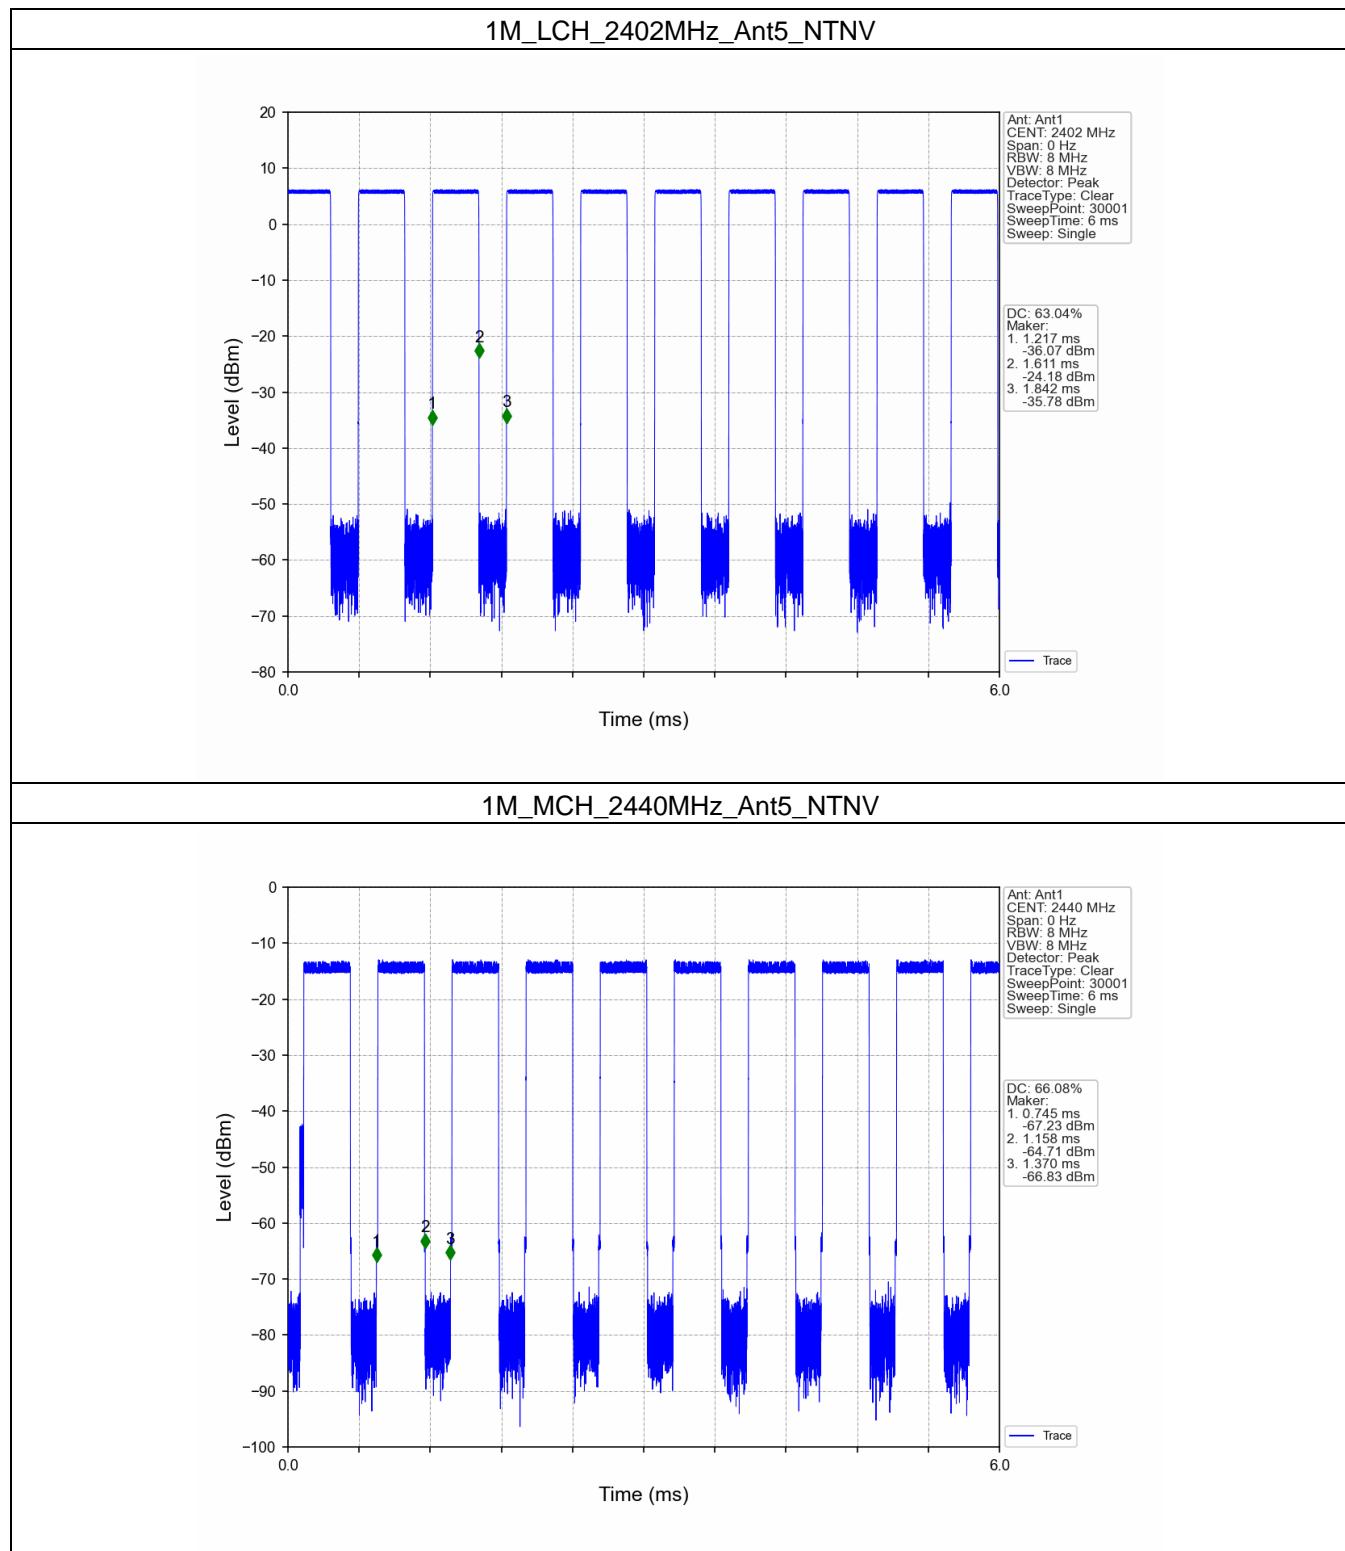

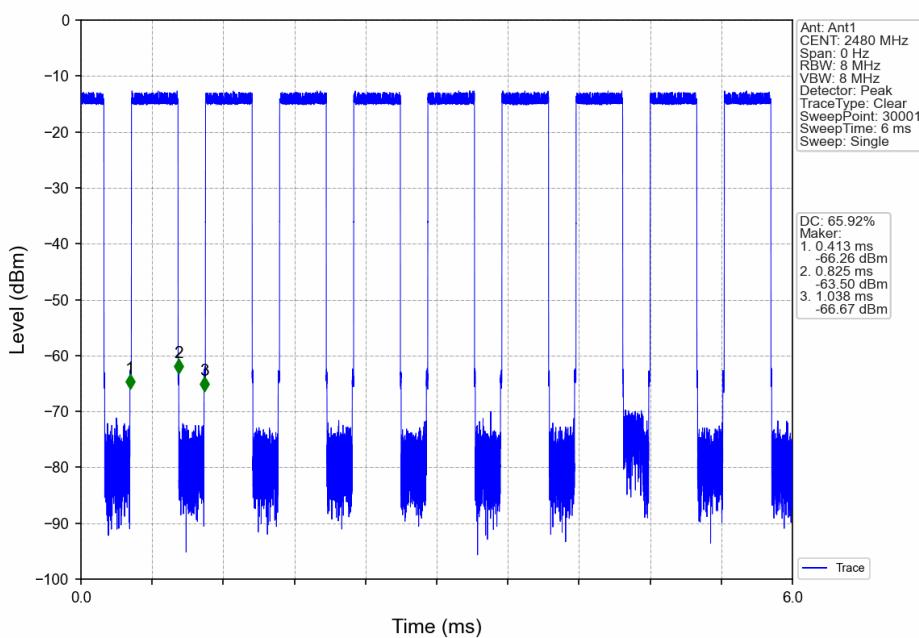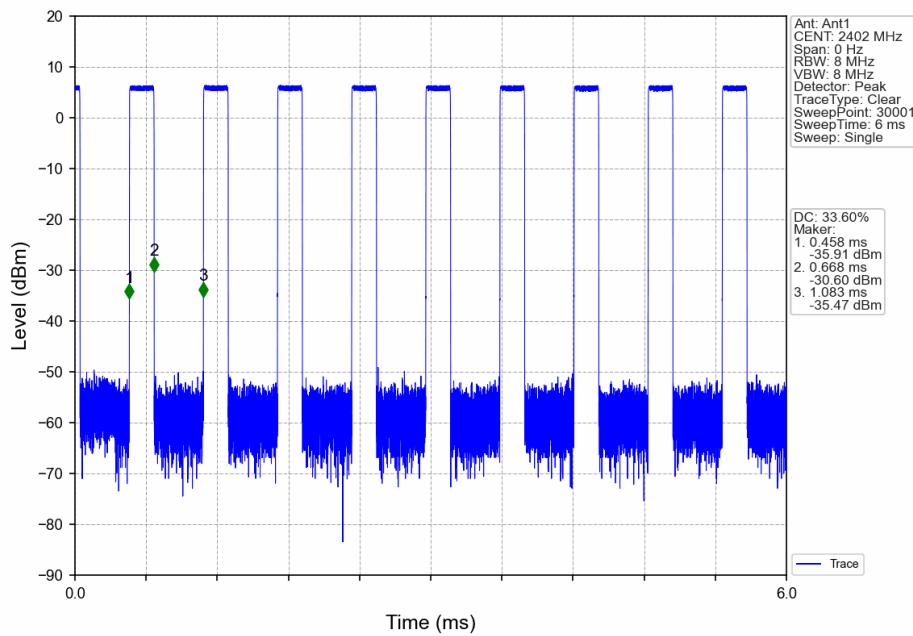1M_HCH_2480MHz_Ant5_NTNV**2M_LCH_2402MHz_Ant5_NTNV**

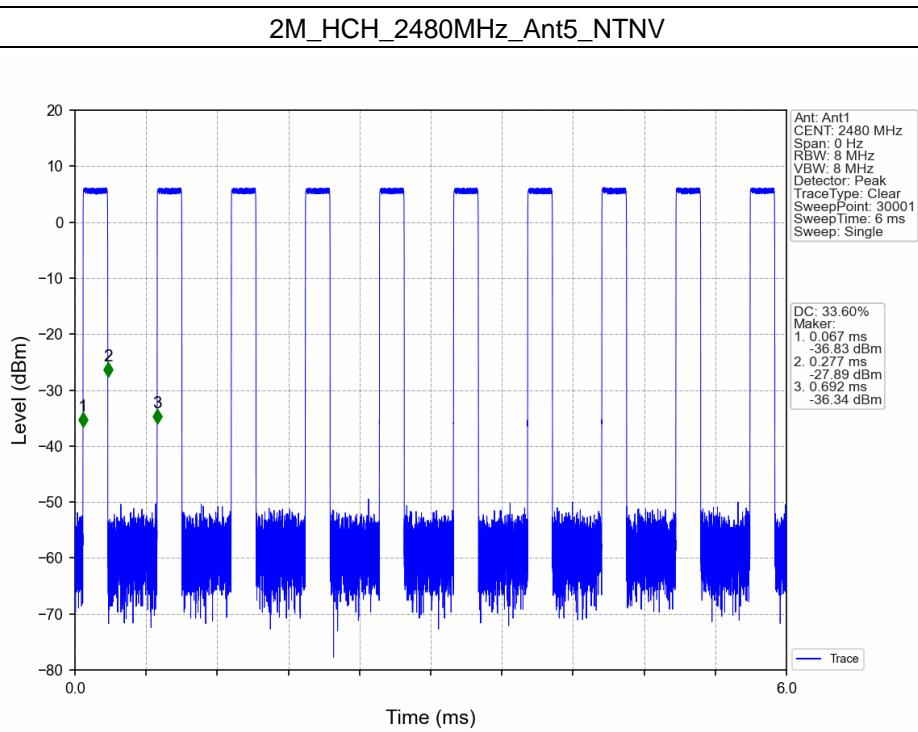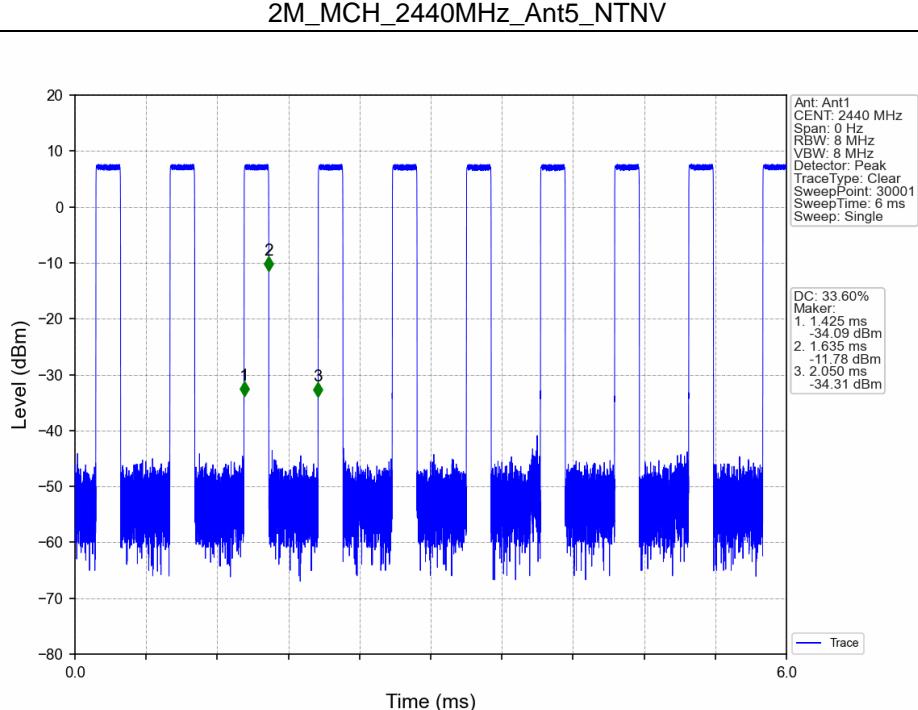

2. Bandwidth

2.1 Test Result

2.1.1 OBW



Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	5	1.028	/	Pass
		2440	5	1.028	/	Pass
		2480	5	1.027	/	Pass
2M	SISO	2402	5	2.029	/	Pass
		2440	5	2.030	/	Pass
		2480	5	2.031	/	Pass



2.1.2 6dB BW



Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	5	0.670	>=0.5	Pass
		2440	5	0.666	>=0.5	Pass
		2480	5	0.665	>=0.5	Pass
2M	SISO	2402	5	1.133	>=0.5	Pass
		2440	5	1.142	>=0.5	Pass
		2480	5	1.133	>=0.5	Pass

2.2 Test Graph



2.2.1 OBW

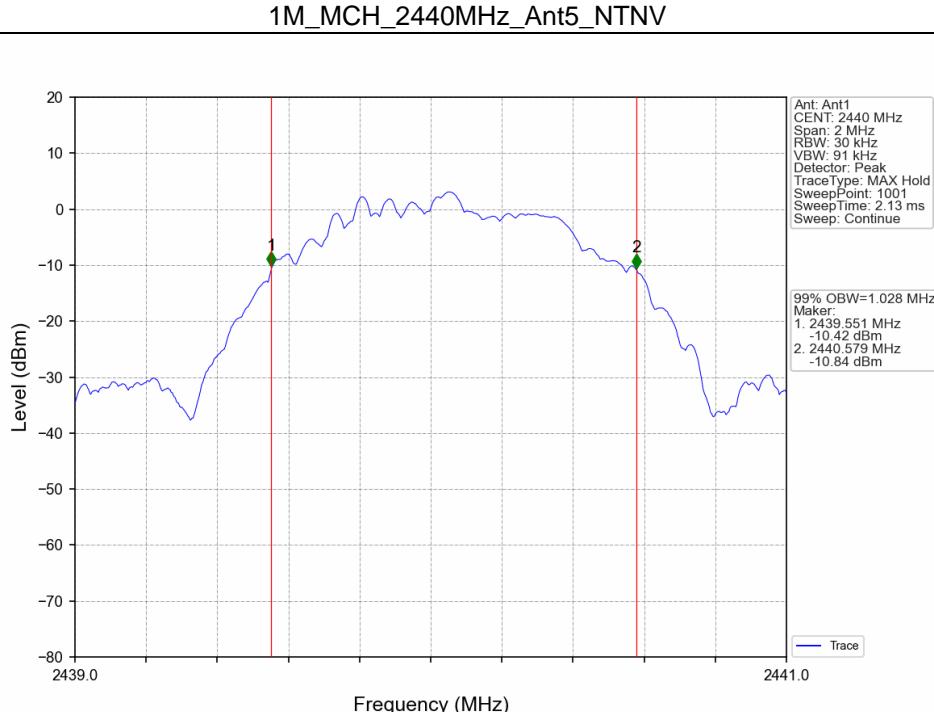
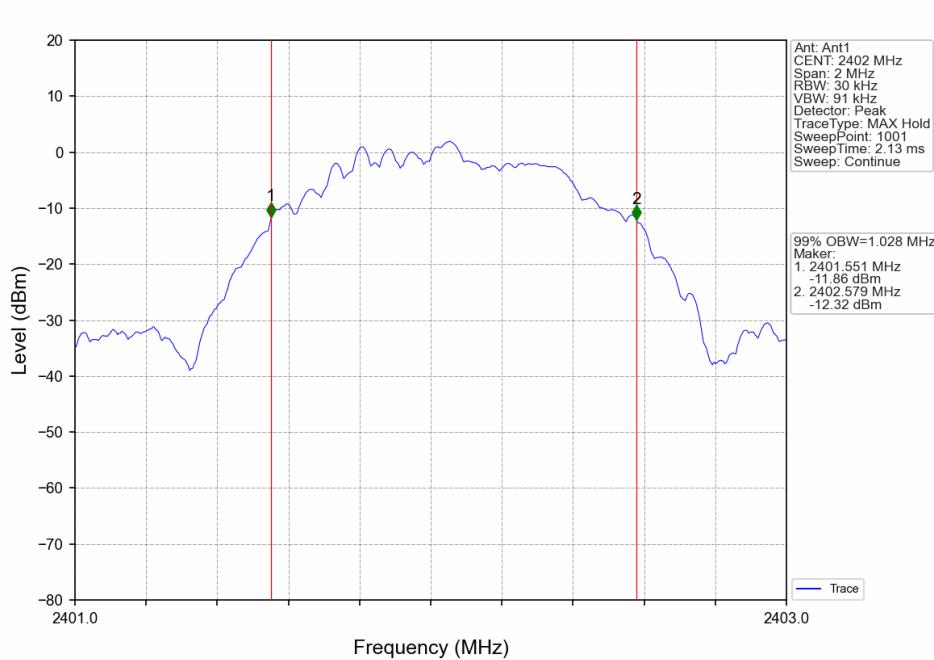


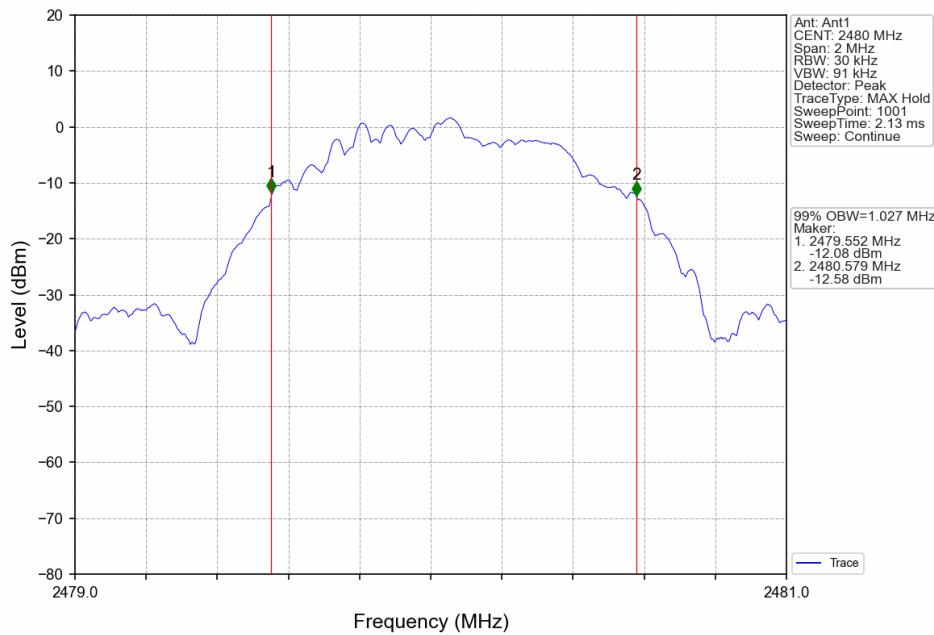
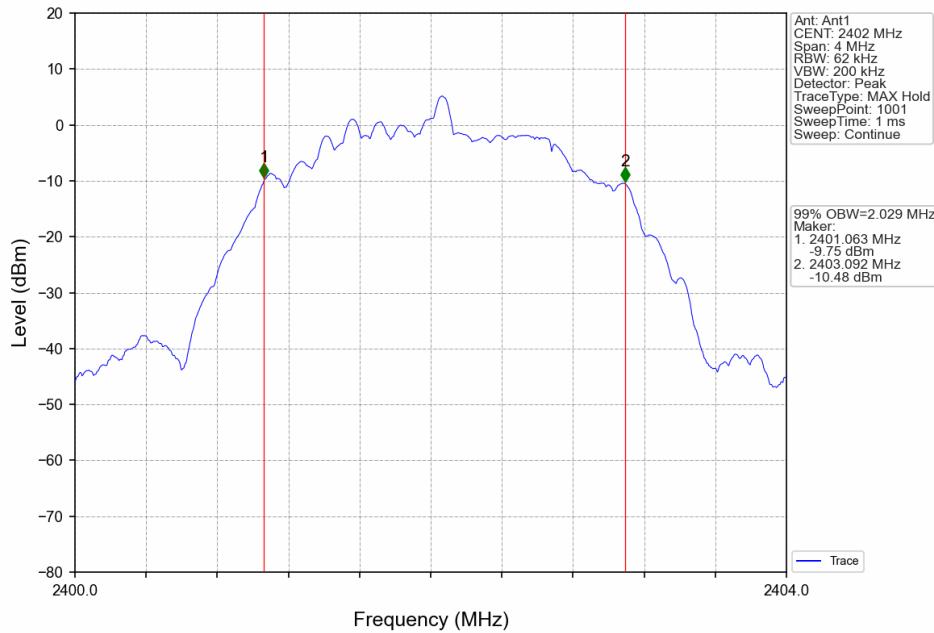
1M_HCH_2480MHz_Ant5_NTNV**2M_LCH_2402MHz_Ant5_NTNV**

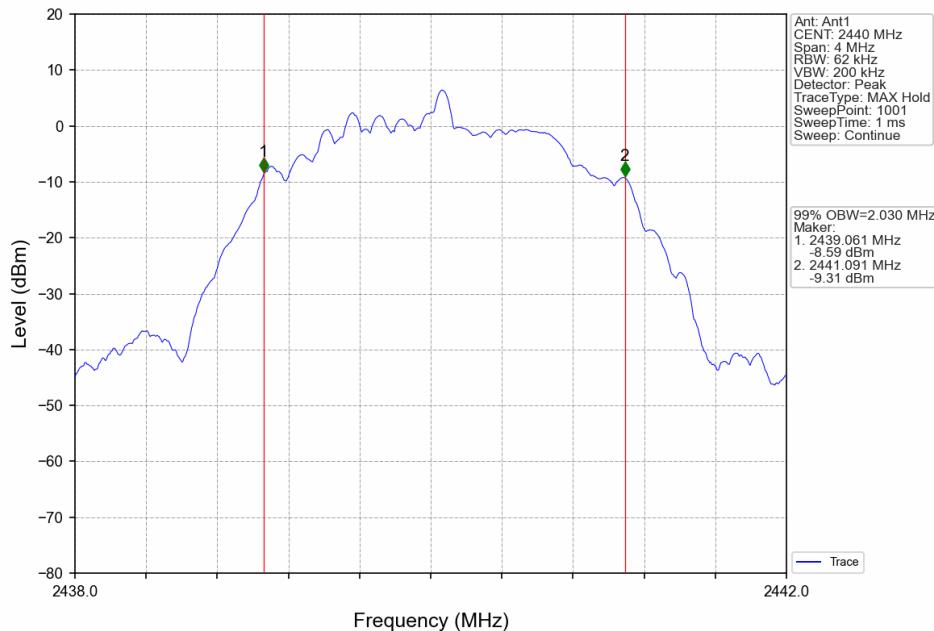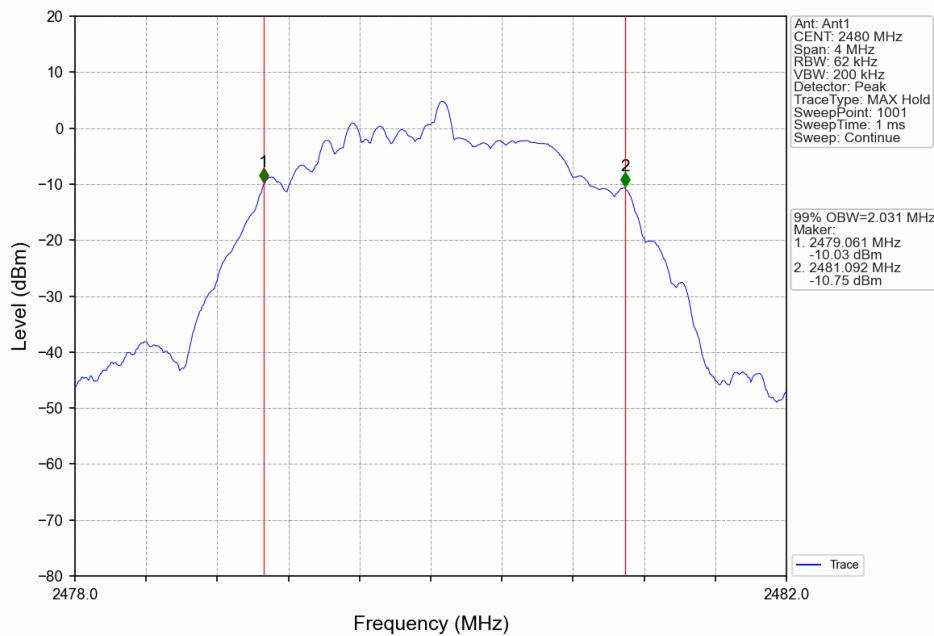2M_MCH_2440MHz_Ant5_NTNV**2M_HCH_2480MHz_Ant5_NTNV**

2.2.2 6dB BW

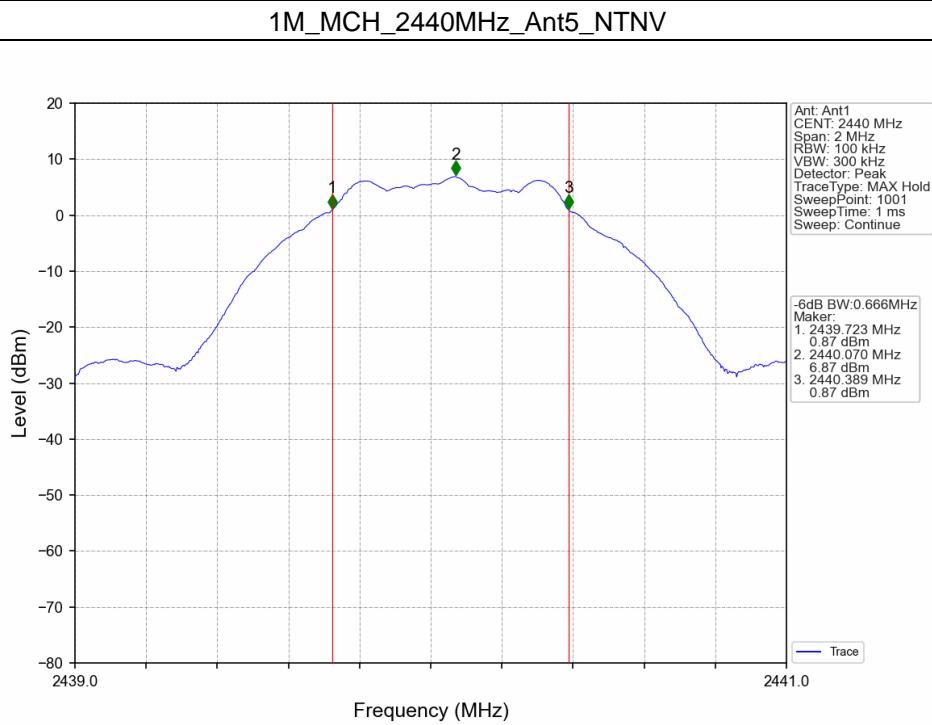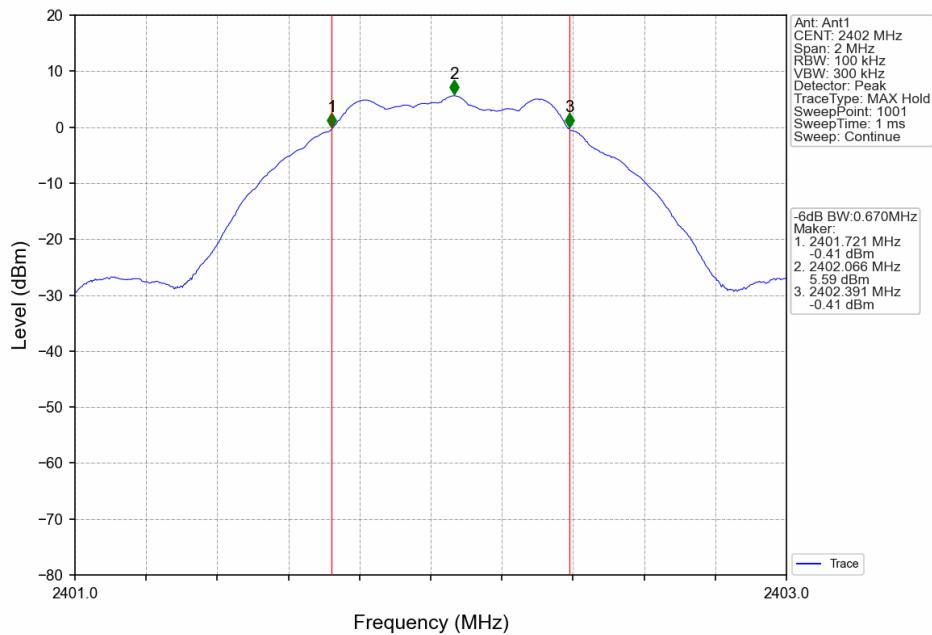

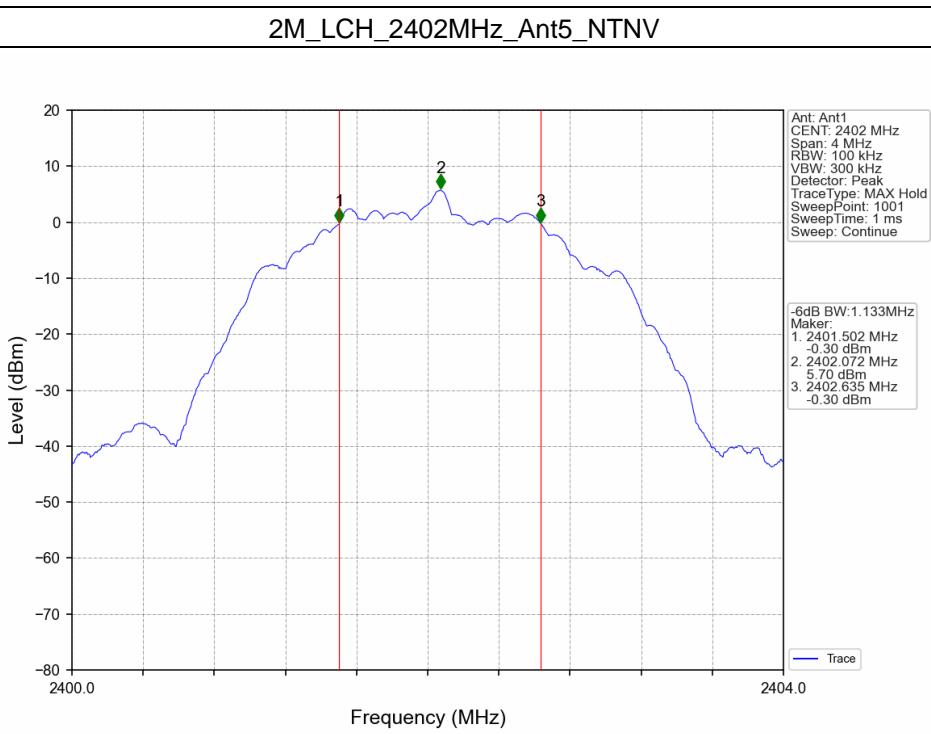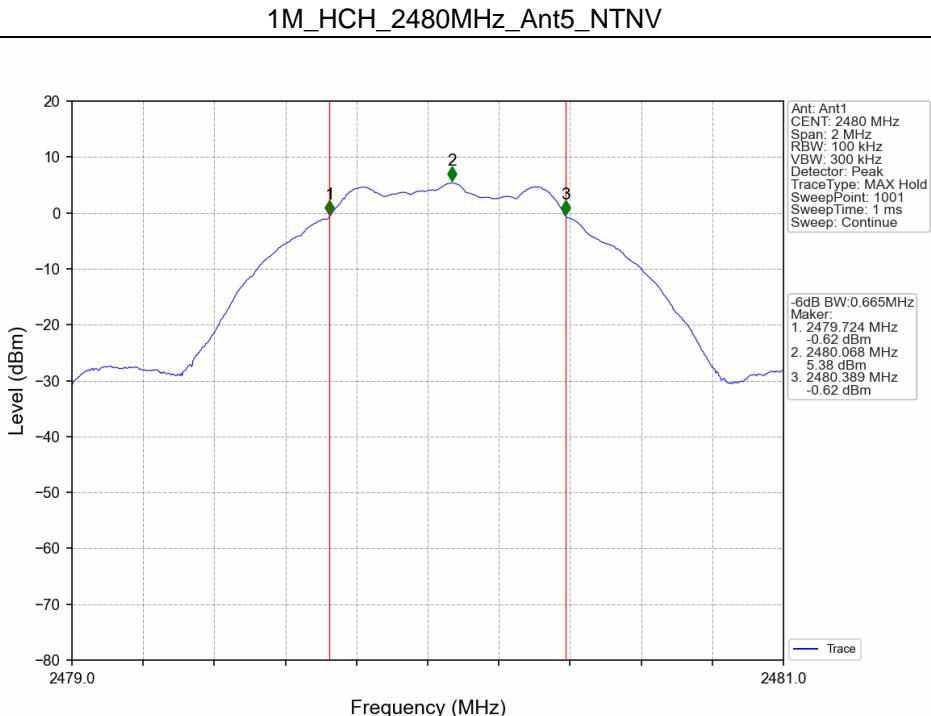

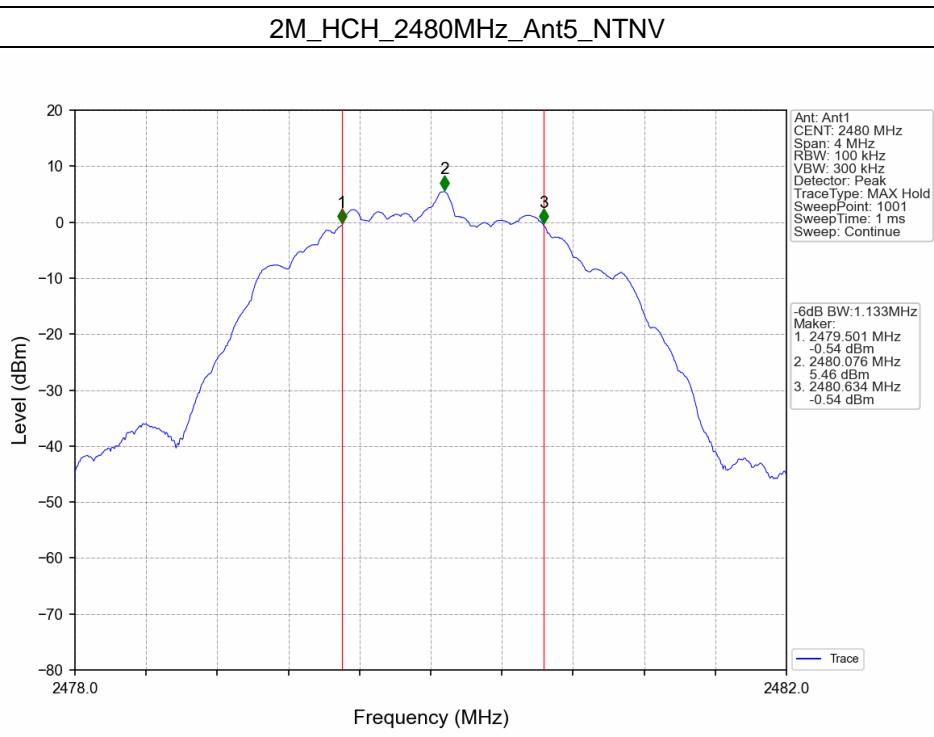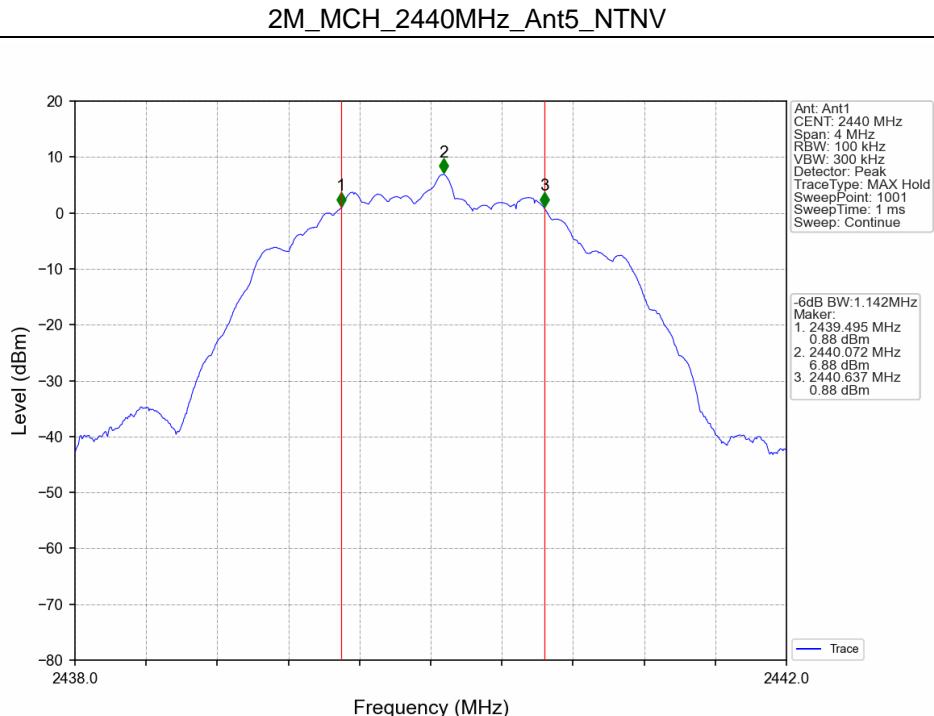

3. Maximum Conducted Output Power

3.1 Test Result



3.1.1 Power



Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT5	Limit	
1M	SISO	2402	6.08	<=30	Pass
		2440	7.29	<=30	Pass
		2480	5.76	<=30	Pass
2M	SISO	2402	6.15	<=30	Pass
		2440	7.36	<=30	Pass
		2480	5.93	<=30	Pass



Note1: Antenna Gain: Ant5: 1.98dBi;

3.2 Test Graph

3.2.1 Power

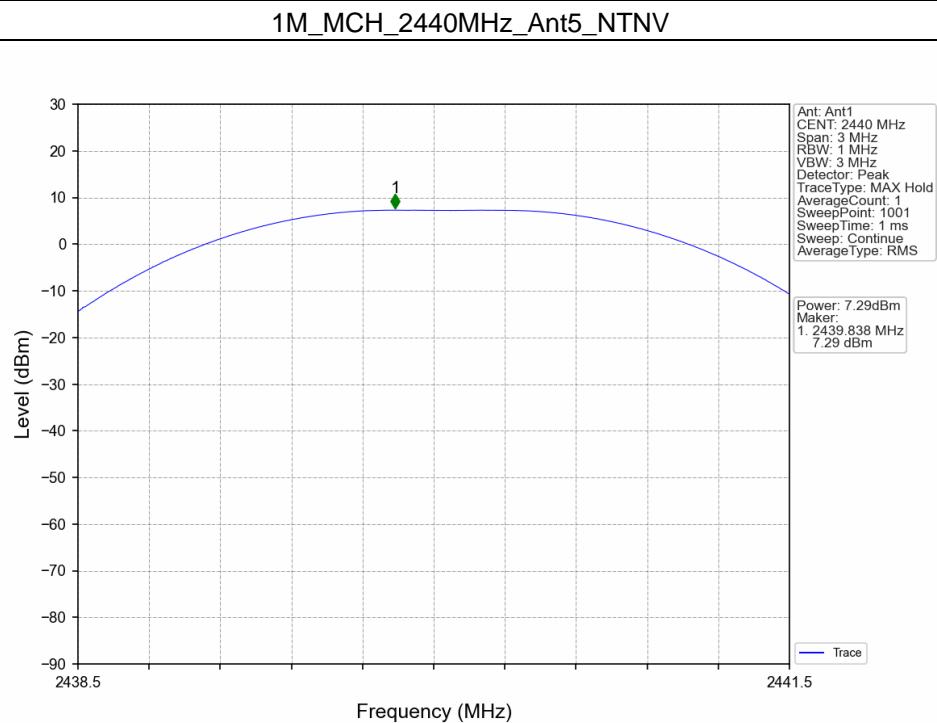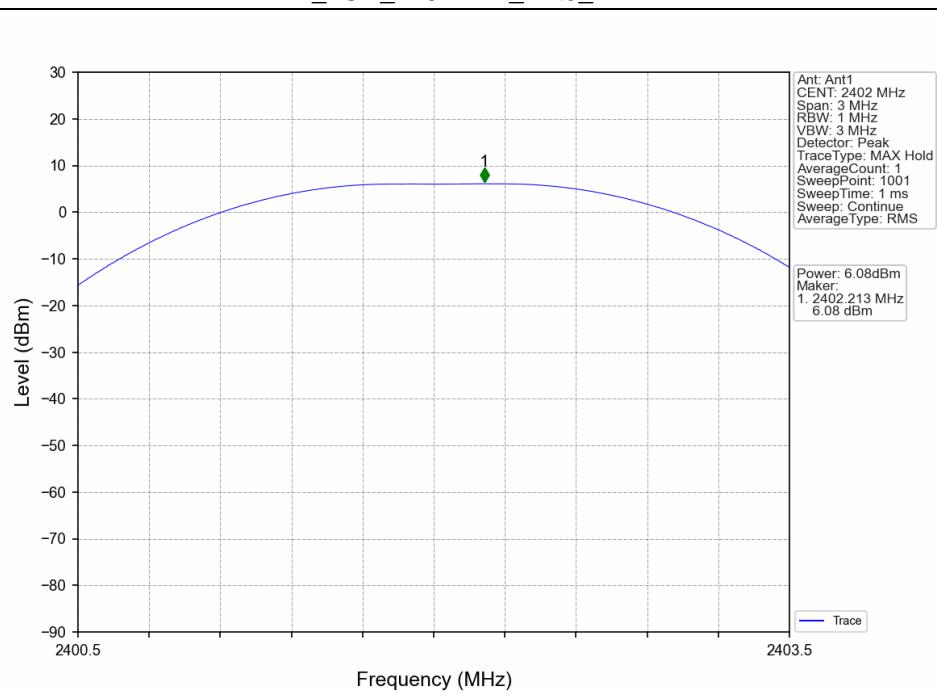

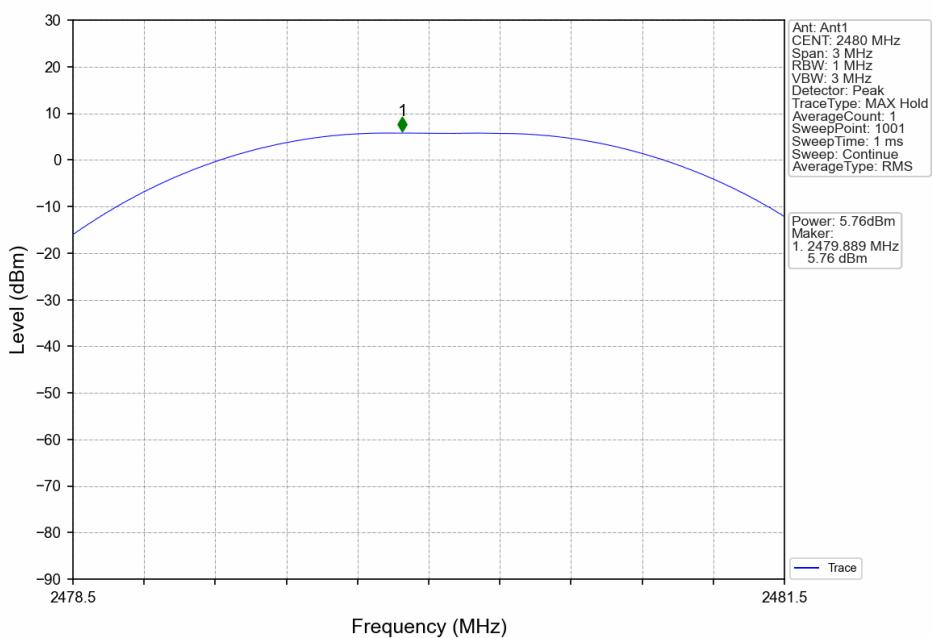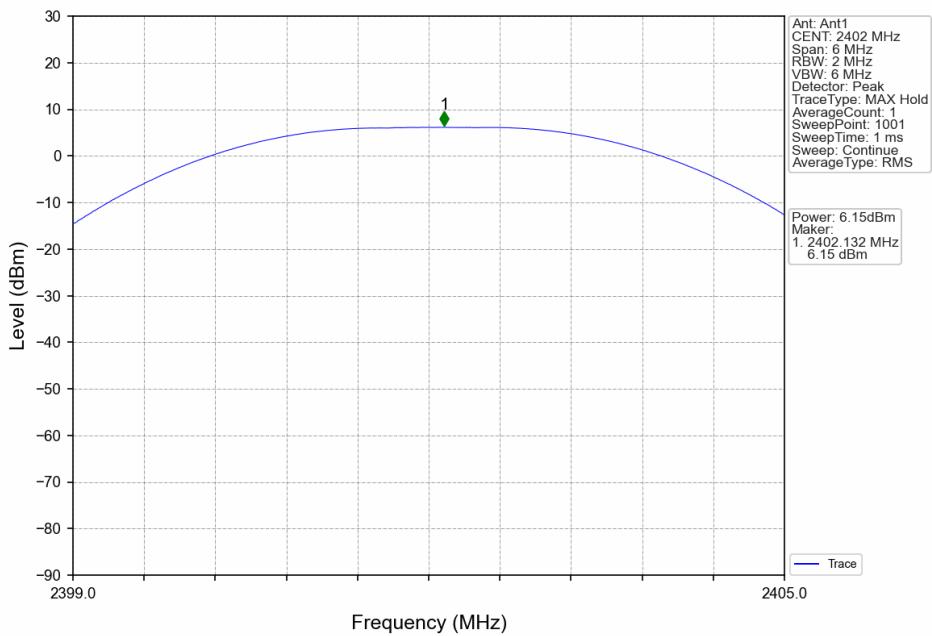1M_HCH_2480MHz_Ant5_NTNV**2M_LCH_2402MHz_Ant5_NTNV**

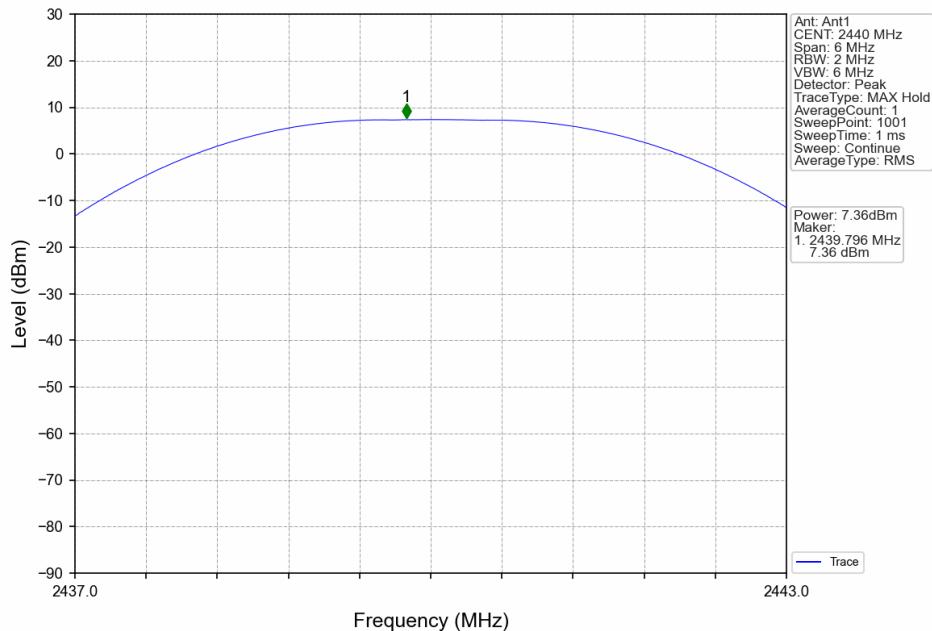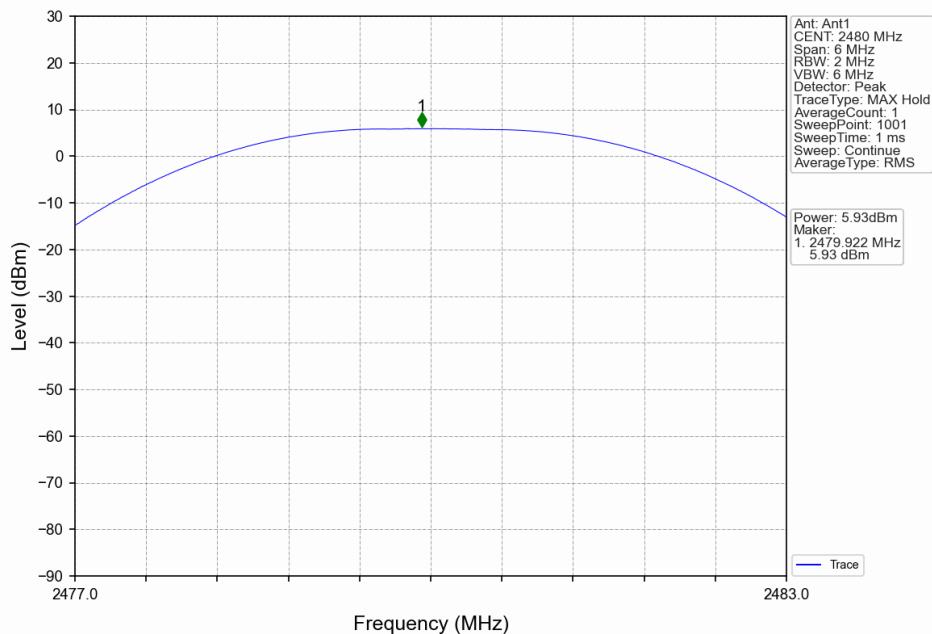2M_MCH_2440MHz_Ant5_NTNV**2M_HCH_2480MHz_Ant5_NTNV**

4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD



Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT5	Limit	
1M	SISO	2402	-8.78	<=8	Pass
		2440	-7.62	<=8	Pass
		2480	-9.09	<=8	Pass
2M	SISO	2402	-11.48	<=8	Pass
		2440	-10.23	<=8	Pass
		2480	-11.72	<=8	Pass



Note1: Antenna Gain: Ant5: 1.98dBi;

4.2 Test Graph

4.2.1 PSD

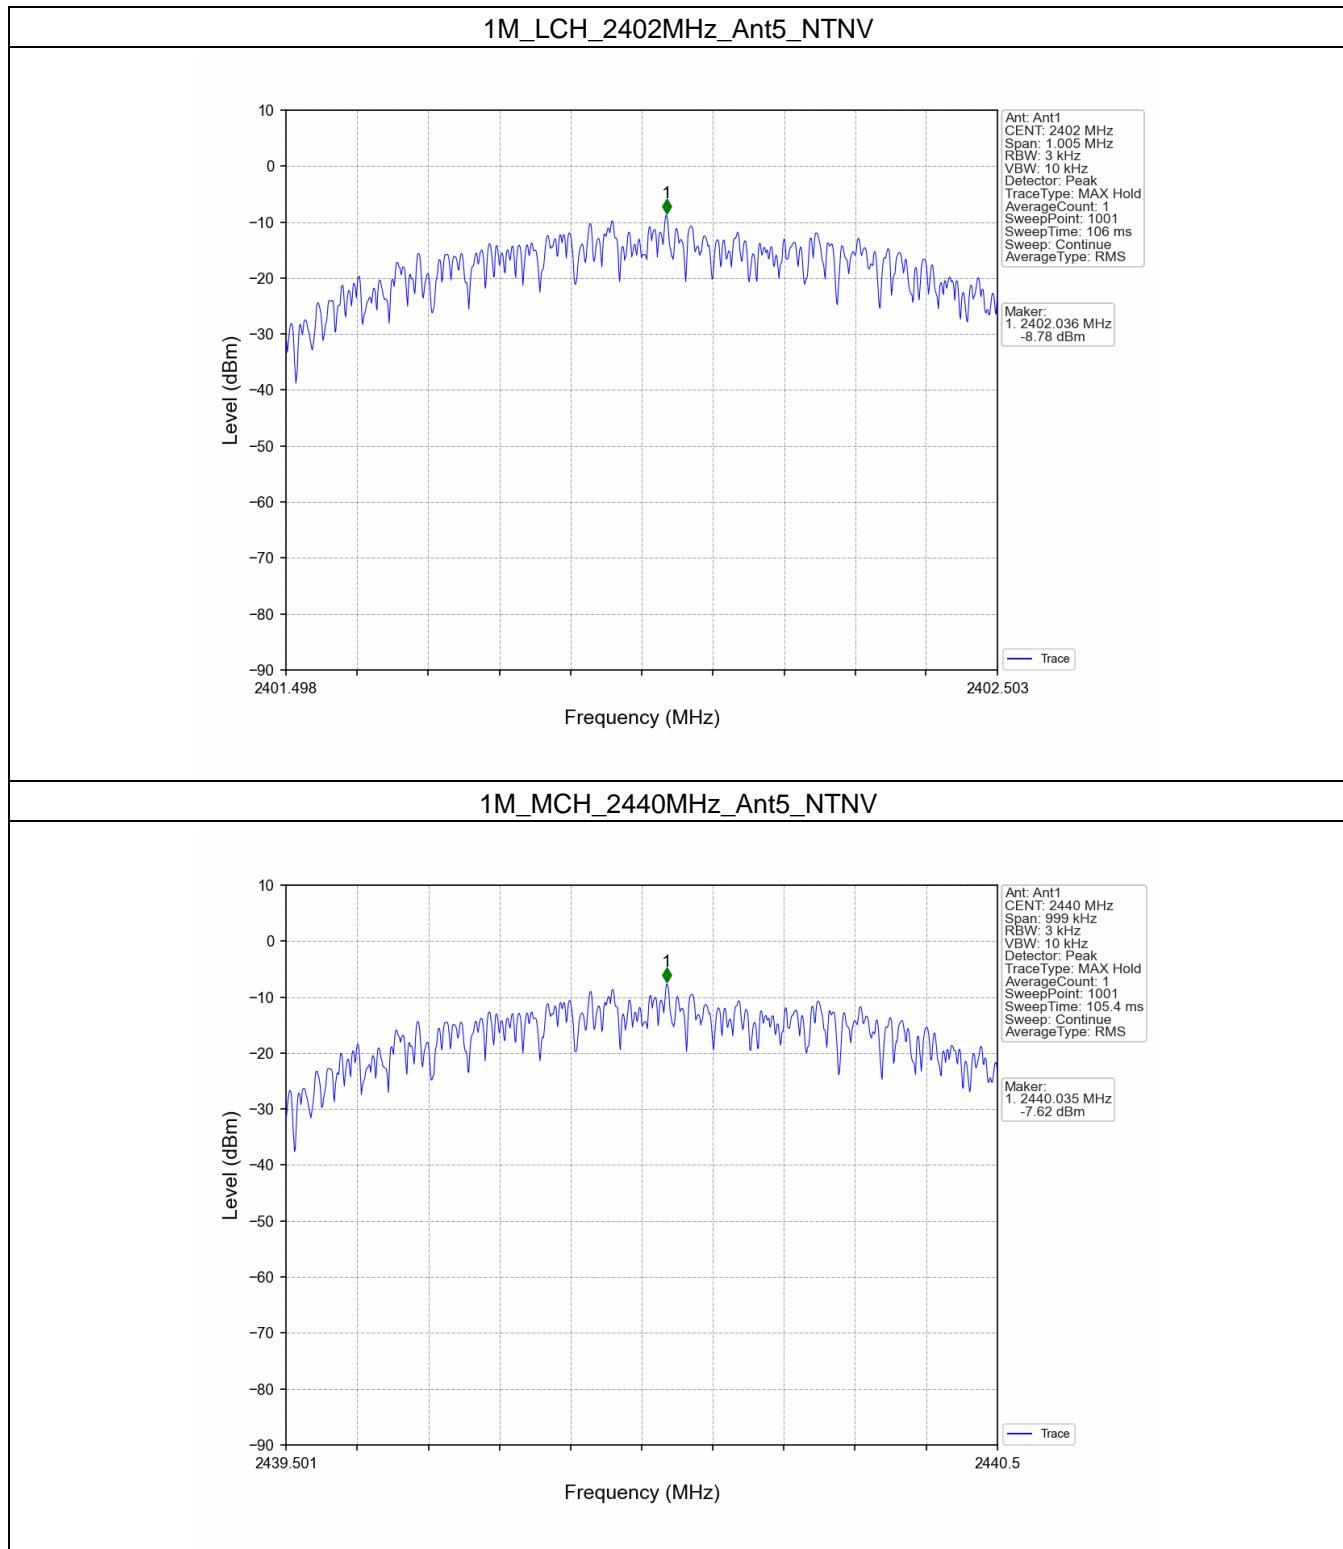

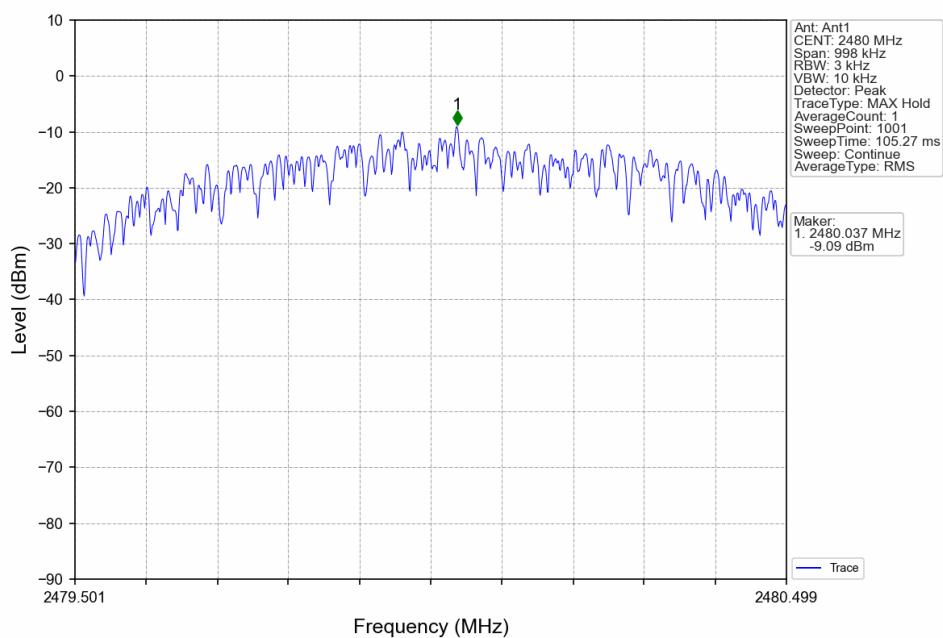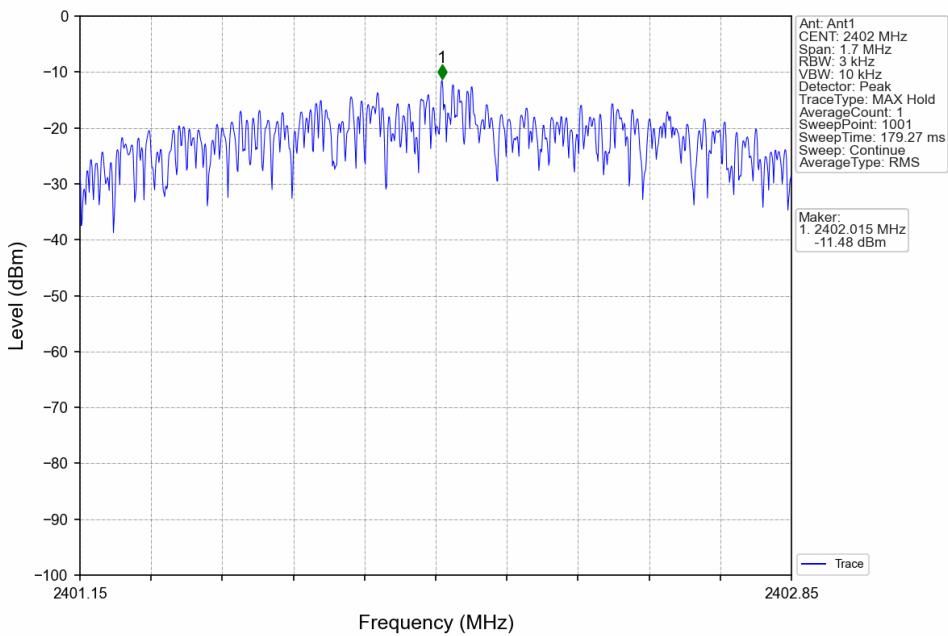1M_HCH_2480MHz_Ant5_NTNV**2M_LCH_2402MHz_Ant5_NTNV**

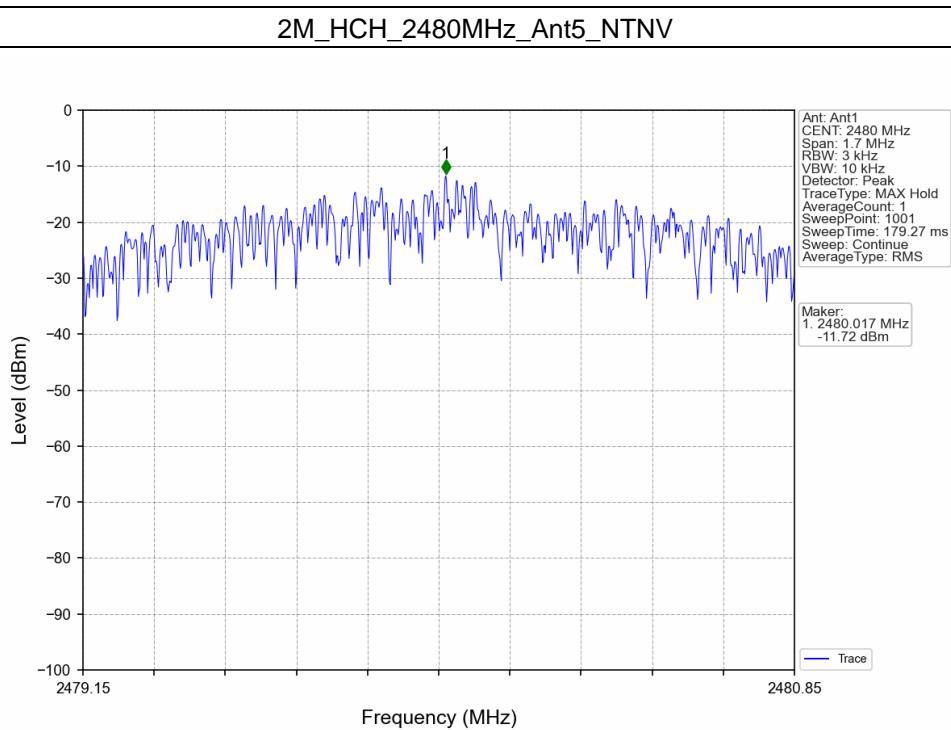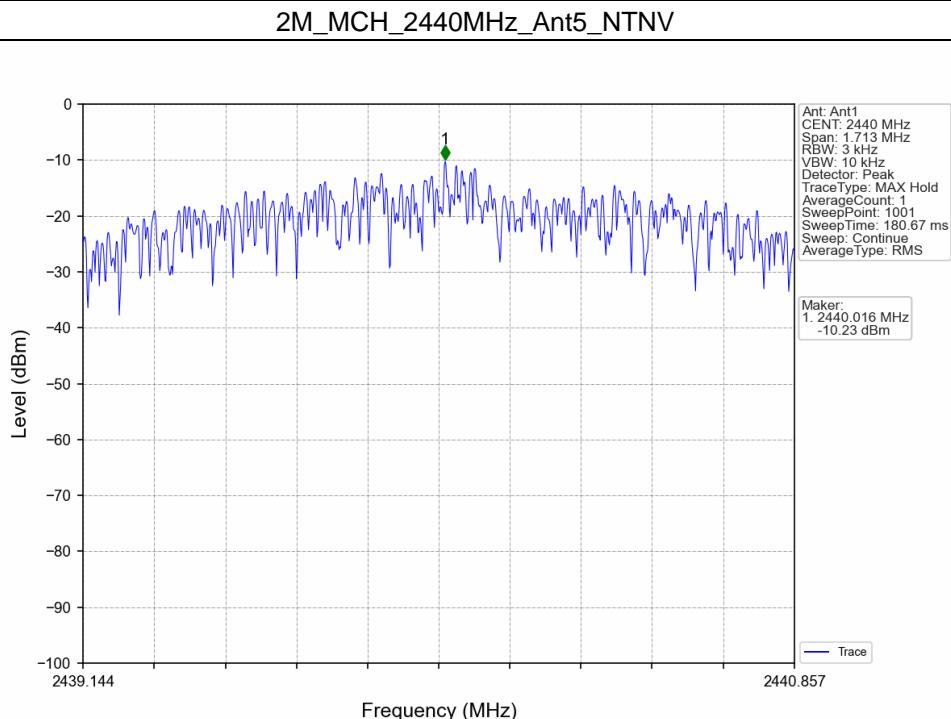

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	5	5.64
		2440	5	6.87
		2480	5	5.35
2M	SISO	2402	5	5.73
		2440	5	6.94
		2480	5	5.49

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.



5.1.2 CSE



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	5	6.87	-13.13	Pass
		2440	5	6.87	-13.13	Pass
		2480	5	6.87	-13.13	Pass
2M	SISO	2402	5	6.94	-13.06	Pass
		2440	5	6.94	-13.06	Pass
		2480	5	6.94	-13.06	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.2 Test Graph



5.2.1 Ref

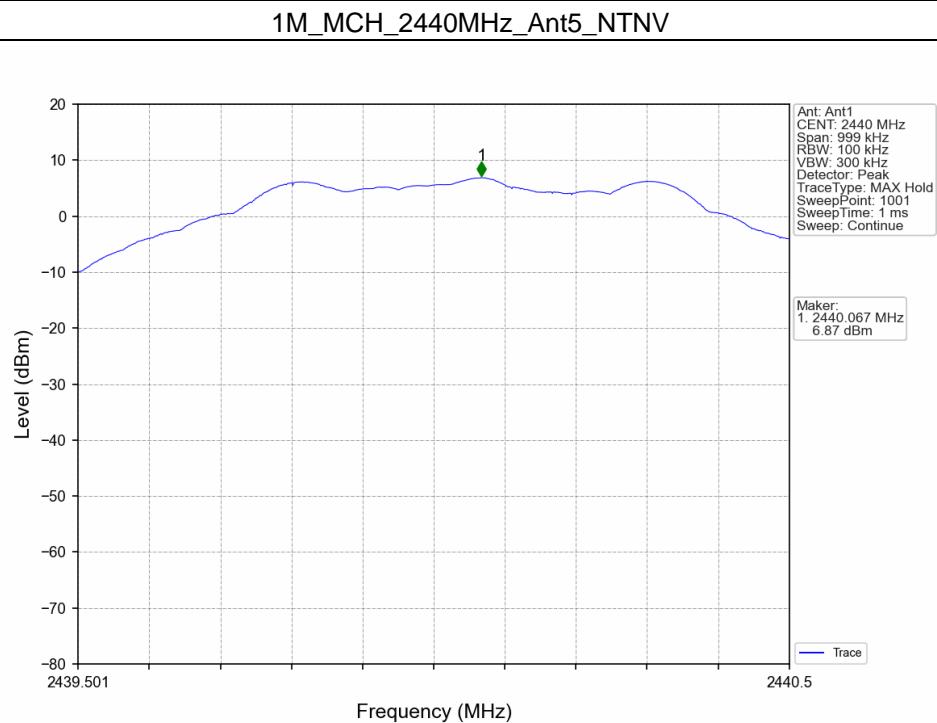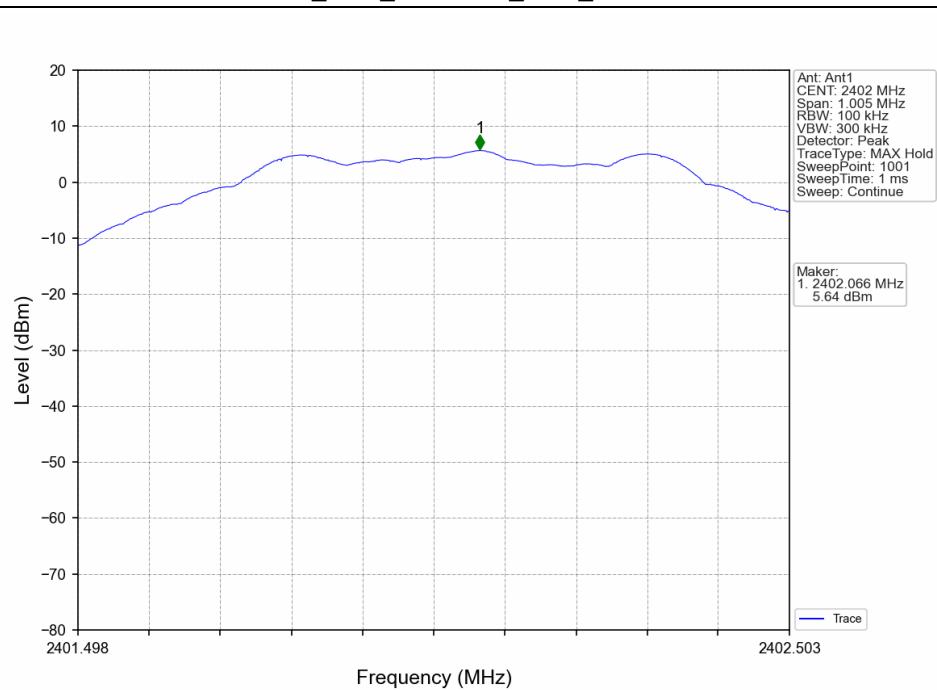


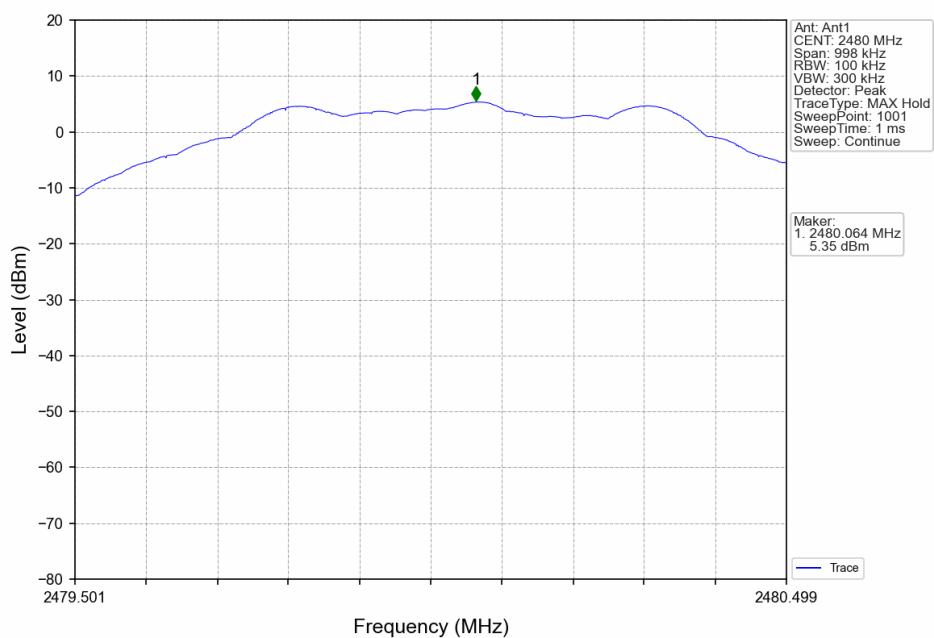
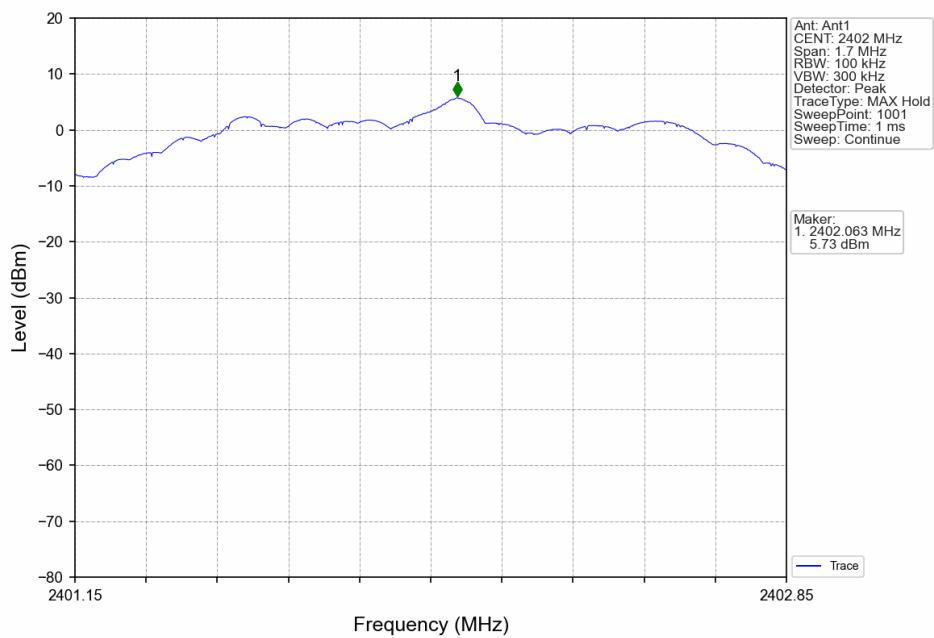
1M_HCH_2480MHz_Ant5_NTNV**2M_LCH_2402MHz_Ant5_NTNV**

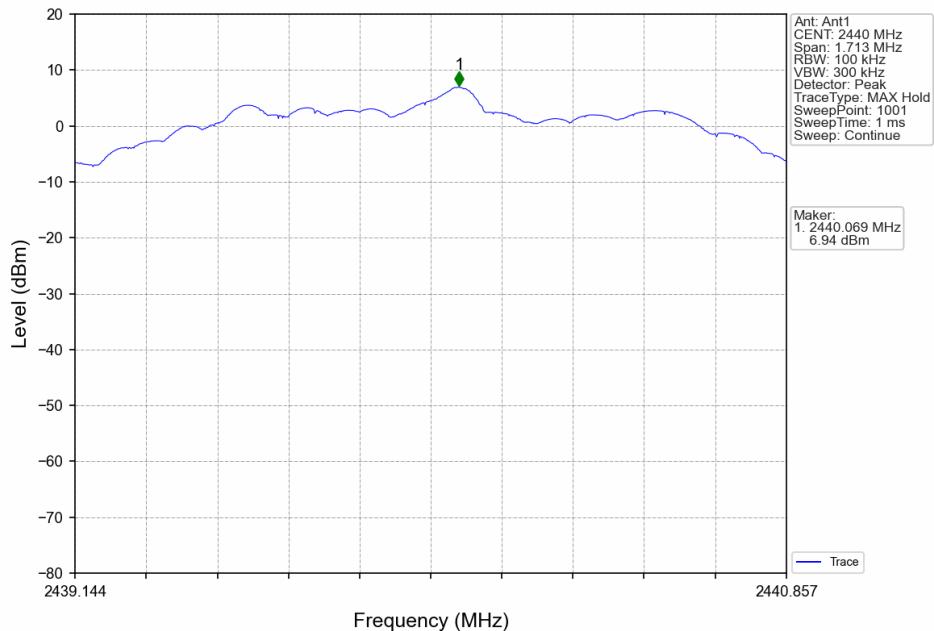
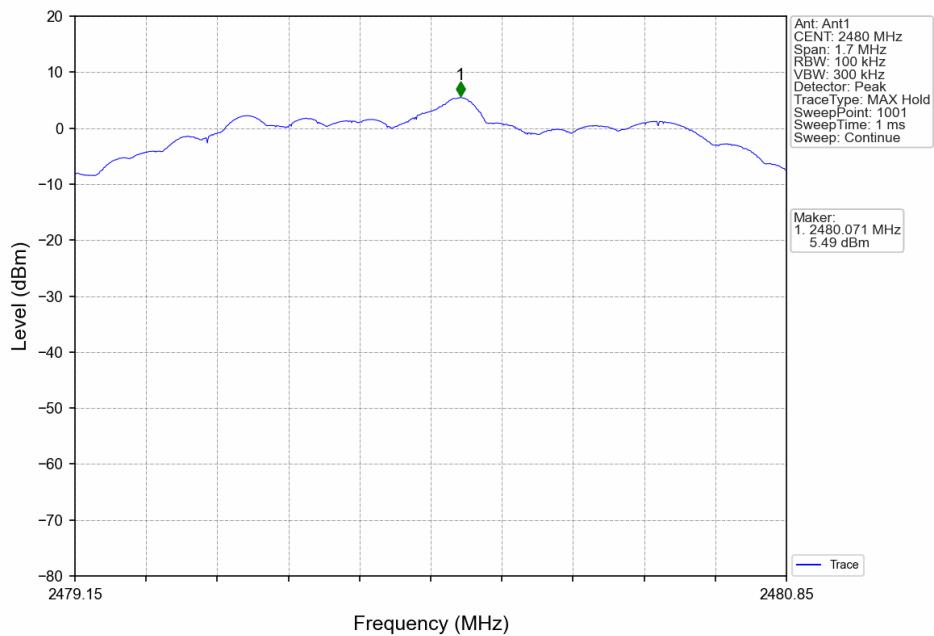
2M_MCH_2440MHz_Ant5_NTNV**2M_HCH_2480MHz_Ant5_NTNV**



5.2.2 CSE

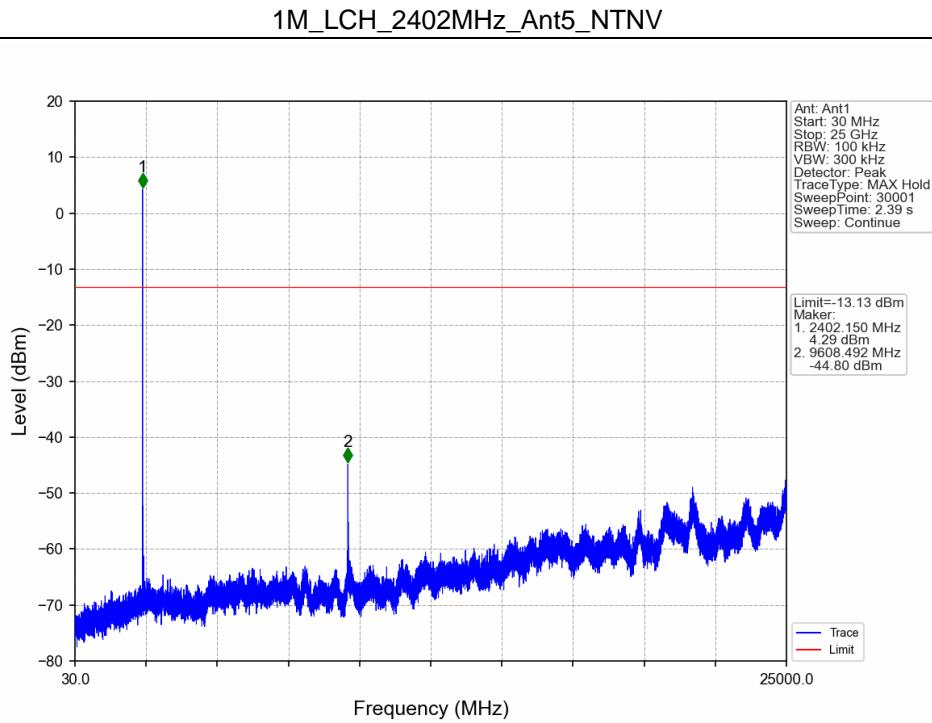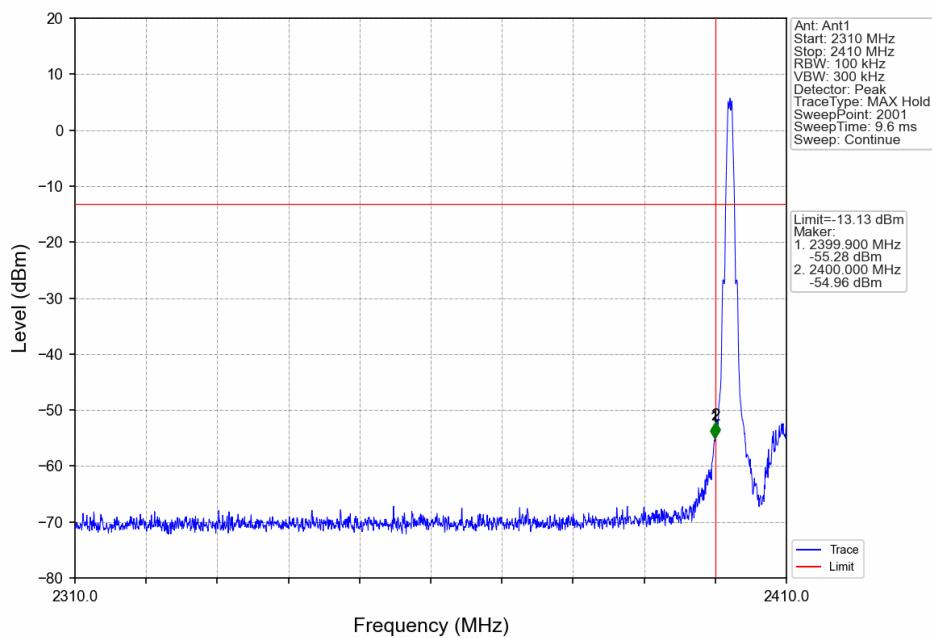

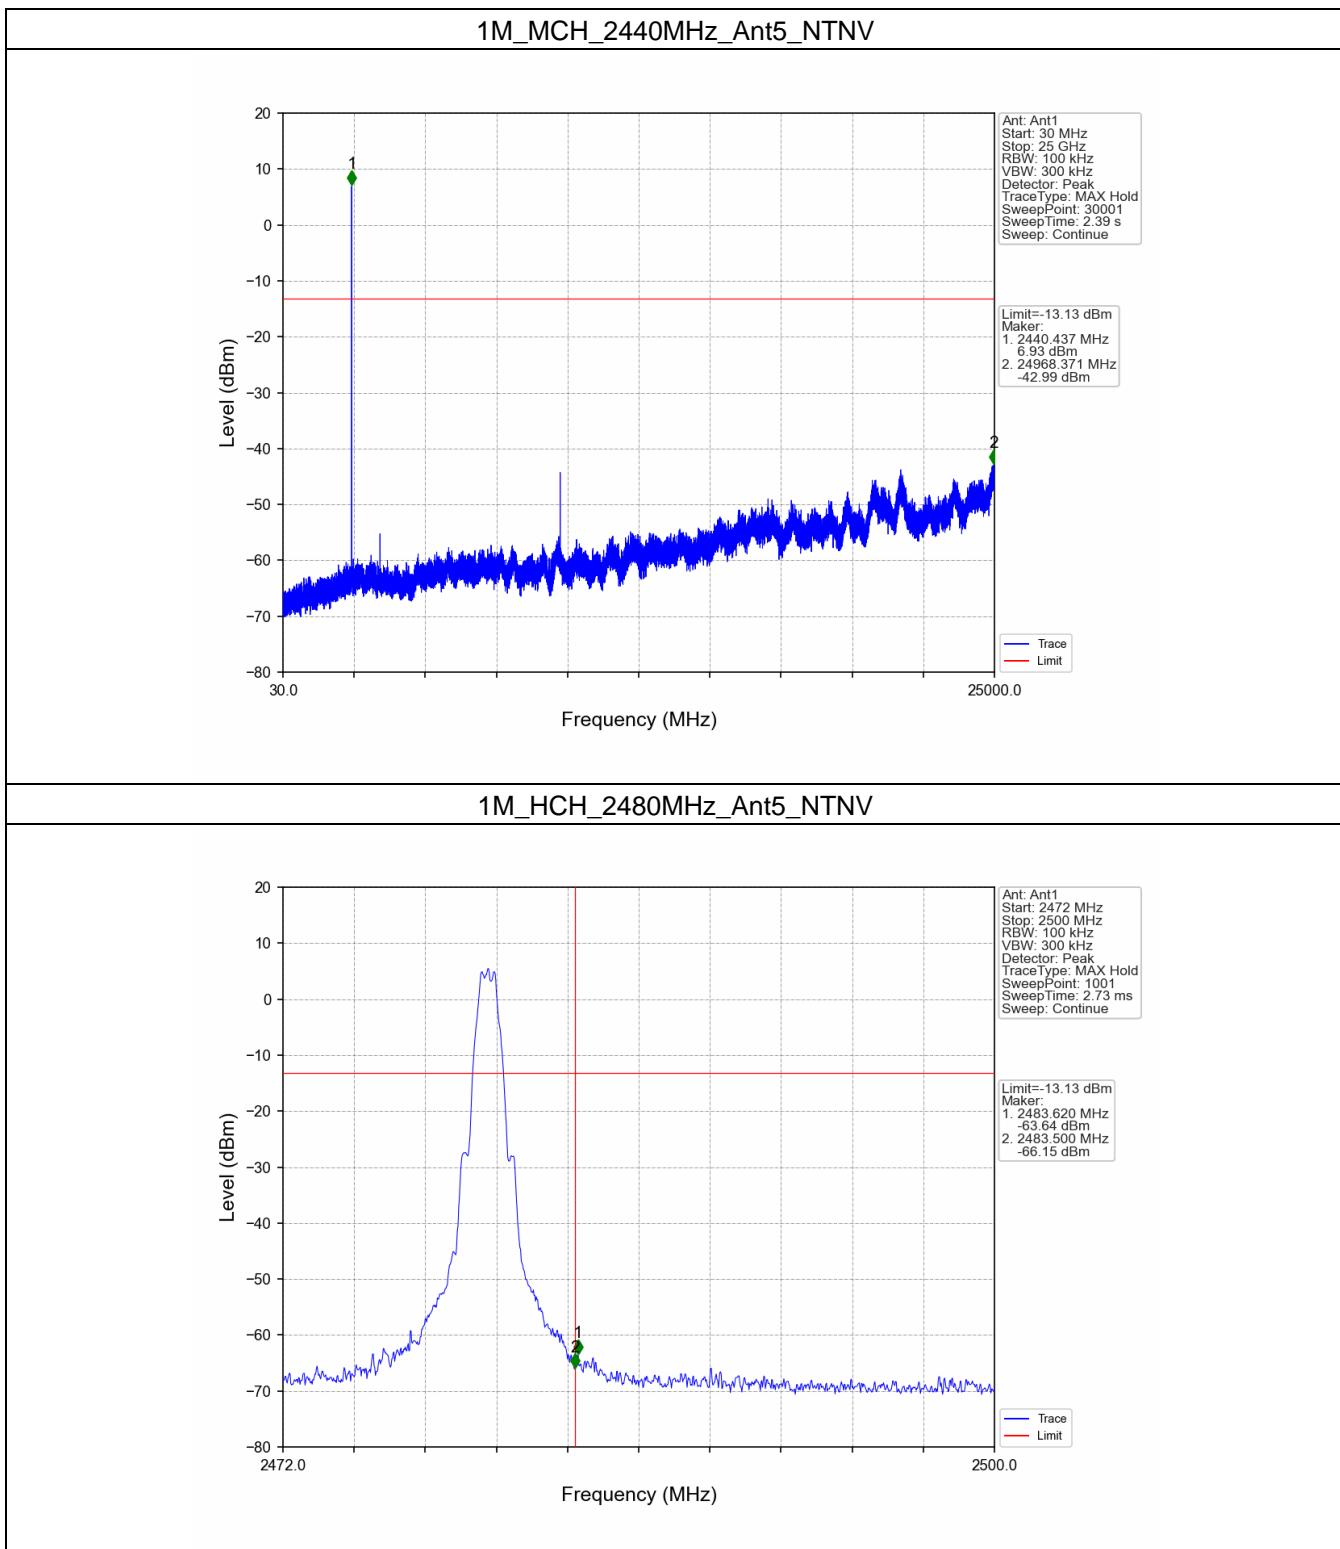

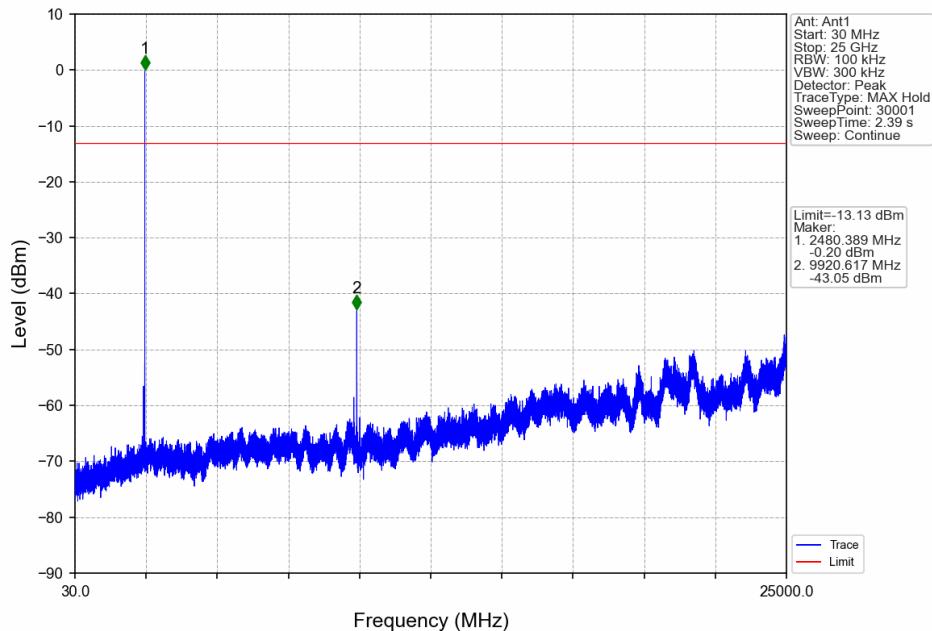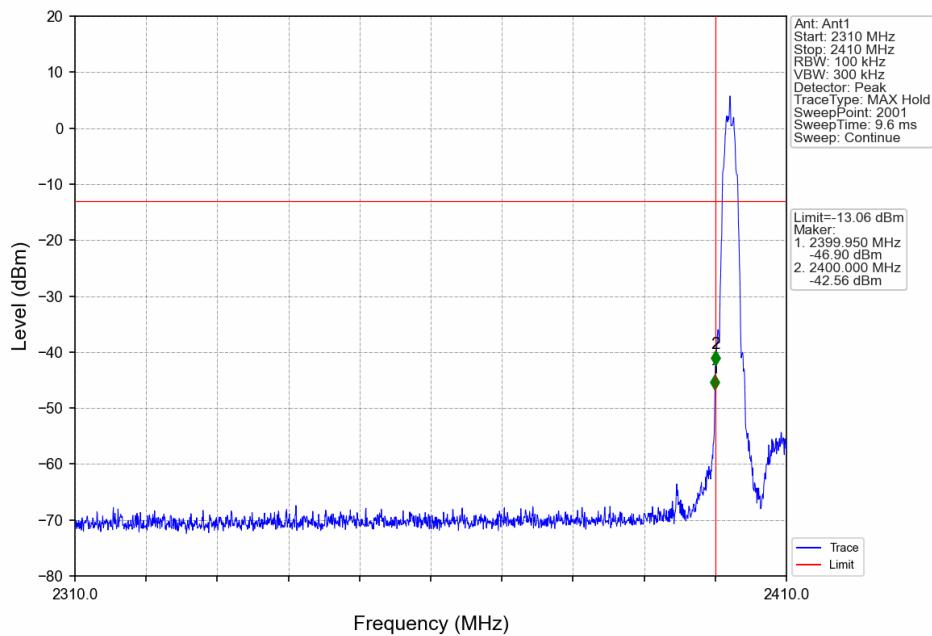1M_HCH_2480MHz_Ant5_NTNV**2M_LCH_2402MHz_Ant5_NTNV**

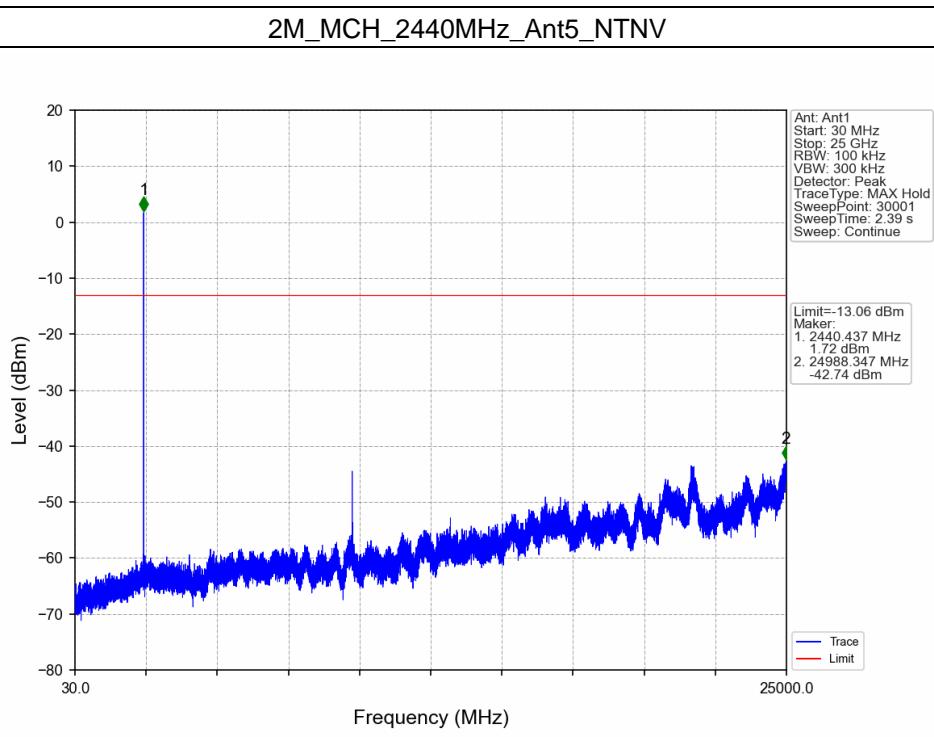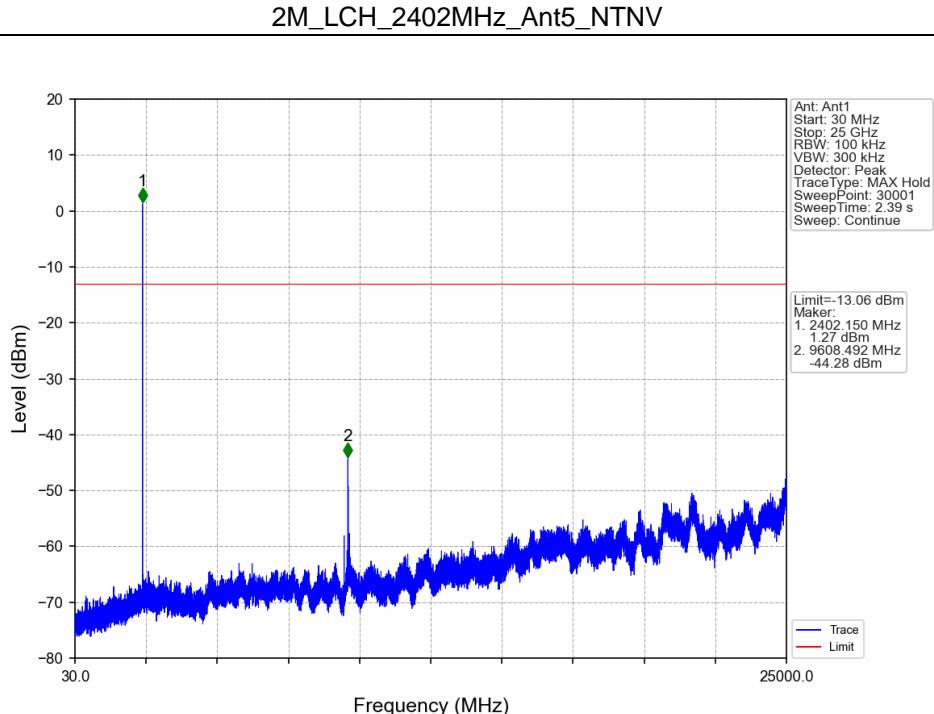

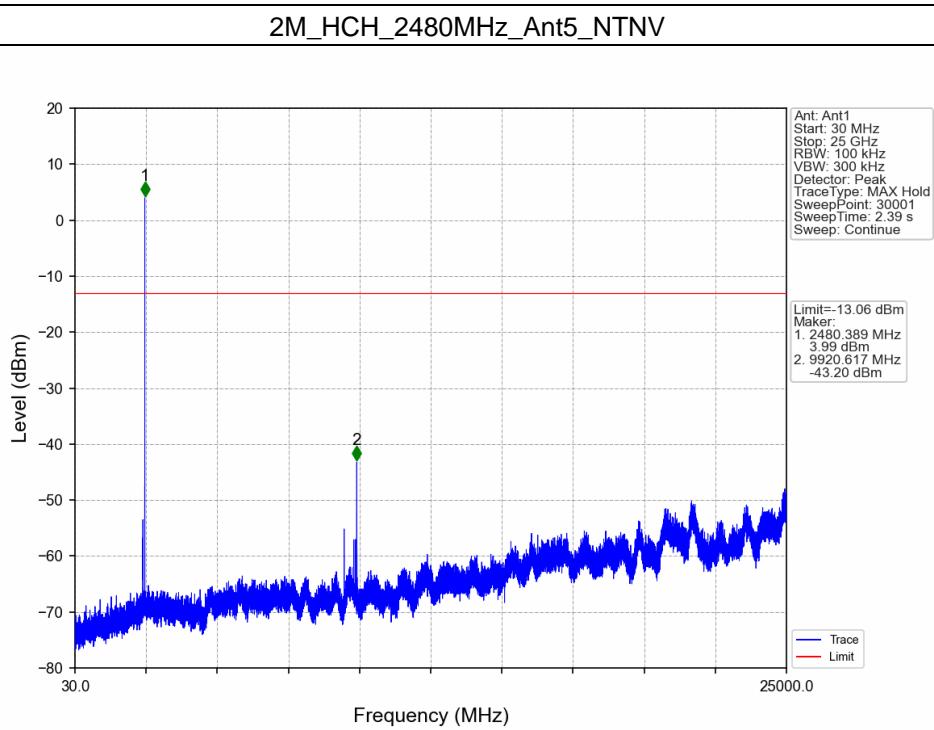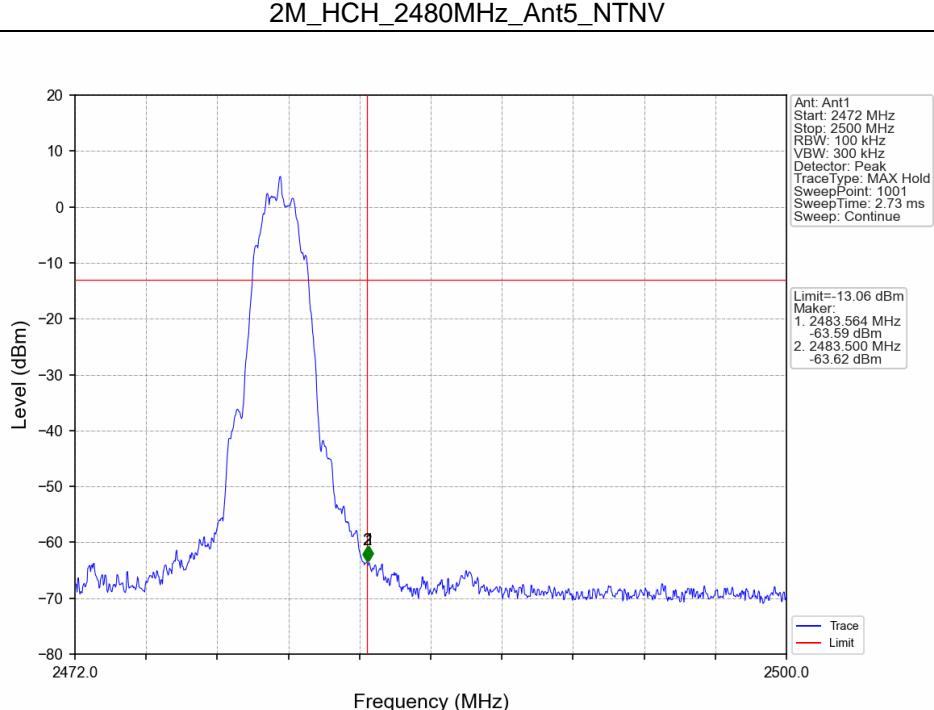

6. Frequency Error

6.1 Test Result

6.1.1 Ant5

Ant5							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
1M	SISO	2402	20	102	2402.057	2401.589 to 2402.411	Pass
				120	2402.055	2401.589 to 2402.411	Pass
				138	2402.057	2401.589 to 2402.411	Pass
			-20	120	2402.056	2401.589 to 2402.411	Pass
			50	120	2402.057	2401.589 to 2402.411	Pass
		2440	20	102	2440.057	2439.589 to 2440.411	Pass
				120	2440.057	2439.589 to 2440.411	Pass
				138	2440.056	2439.589 to 2440.411	Pass
			-20	120	2440.056	2439.589 to 2440.411	Pass
			50	120	2440.057	2439.589 to 2440.411	Pass
2M	SISO	2402	20	102	2402.054	2401.188 to 2402.812	Pass
				120	2402.054	2401.188 to 2402.812	Pass
				138	2402.054	2401.188 to 2402.812	Pass
			-20	120	2402.056	2401.188 to 2402.812	Pass
			50	120	2402.054	2401.188 to 2402.812	Pass
		2440	20	102	2440.046	2439.188 to 2440.812	Pass
				120	2440.046	2439.188 to 2440.812	Pass
				138	2440.048	2439.188 to 2440.812	Pass
			-20	120	2440.046	2439.188 to 2440.812	Pass
			50	120	2440.048	2439.188 to 2440.812	Pass
		2480	20	102	2480.044	2479.188 to 2480.812	Pass
				120	2480.046	2479.188 to 2480.812	Pass
				138	2480.046	2479.188 to 2480.812	Pass
			-20	120	2480.044	2479.188 to 2480.812	Pass
			50	120	2480.046	2479.188 to 2480.812	Pass