



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 1 of 167

# TEST REPORT

**Application No.:** KSCR2407001217AT  
**FCC ID:** RF41761B  
**IC:** 5798A-1761B  
**Applicant:** KEYENCE CORPORATION  
**Address of Applicant:** 1-3-14, Higashinakajima, Higashiyodogawa-ku, Osaka, 533-8555 Japan  
**Manufacturer:** KEYENCE CORPORATION  
**Address of Manufacturer:** 1-3-14, Higashinakajima, Higashiyodogawa-ku, Osaka, 533-8555 Japan  
**Factory:** KEYENCE CORPORATION  
**Address of Factory:** 1-3-14, Higashinakajima, Higashiyodogawa-ku, Osaka, 533-8555 Japan  
**Equipment Under Test (EUT):**  
**EUT Name:** Handheld Terminal  
**Model No.:** BT-A600  
**Trade Mark:** KEYENCE  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
RSS-247 Issue 3, August 2023  
RSS-Gen Issue 5 Amendment 2 (February 2021)  
**Date of Receipt:** 2024-07-02  
**Date of Test:** 2024-08-27 to 2024-09-12  
**Date of Issue:** 2024-09-12

**Test Result:**

**Pass\***

\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 2 of 167

| Revision Record |             |            |        |
|-----------------|-------------|------------|--------|
| Version         | Description | Date       | Remark |
| 00              | Original    | 2024-09-12 | /      |
|                 |             |            |        |
|                 |             |            |        |

|                          |  |                           |  |
|--------------------------|--|---------------------------|--|
| Authorized for issue by: |  |                           |  |
| Tested By                |  | Maker Qi                  |  |
|                          |  | Maker_Qi/Project Engineer |  |
| Approved By              |  | Terry Hou                 |  |
|                          |  | Terry Hou /Reviewer       |  |

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 3 of 167

## 2 Test Summary

| Radio Spectrum Technical Requirement                                                     |                                                |                        |        |                      |
|------------------------------------------------------------------------------------------|------------------------------------------------|------------------------|--------|----------------------|
| Item                                                                                     | FCC Requirement                                | IC Requirement         | Method | Result               |
| Antenna Requirement                                                                      | 47 CFR Part 15, Subpart C 15.203 & 15.247(c)   | RSS-Gen Clause 6.8     | N/A    | Customer Declaration |
| Other requirements<br>Frequency Hopping<br>Spread Spectrum<br>System Hopping<br>Sequence | 47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h) | RSS-247 Section 5.1(a) | N/A    | Pass                 |

N/A: Not applicable

| Radio Spectrum Matter Part                            |                                           |                                           |                                        |        |
|-------------------------------------------------------|-------------------------------------------|-------------------------------------------|----------------------------------------|--------|
| Item                                                  | FCC Requirement                           | IC Requirement                            | Method                                 | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | 47 CFR Part 15, Subpart C 15.207          | RSS-Gen Section 8.8                       | ANSI C63.10 (2013) Section 6.2         | Pass   |
| Conducted Average Output Power                        | 47 CFR Part 15, Subpart C 15.247(b)(1)    | RSS-247 Section 5.4(b)                    | ANSI C63.10 (2013) Section 7.8.5       | Pass   |
| 20dB Bandwidth                                        | 47 CFR Part 15, Subpart C 15.247(a)(1)    | RSS-247 Section 5.1(a)                    | ANSI C63.10 (2013) Section 7.8.7       | Pass   |
| Carrier Frequencies Separation                        | 47 CFR Part 15, Subpart C 15.247a(1)      | RSS-247 Section 5.1(b)                    | ANSI C63.10 (2013) Section 7.8.2       | Pass   |
| Hopping Channel Number                                | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | RSS-247 Section 5.1(d)                    | ANSI C63.10 (2013) Section 7.8.3       | Pass   |
| Dwell Time                                            | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | RSS-247 Section 5.1(d)                    | ANSI C63.10 (2013) Section 7.8.4       | Pass   |
| Conducted Band Edges Measurement                      | 47 CFR Part 15, Subpart C 15.247(d)       | RSS-247 Section 5.5                       | ANSI C63.10 (2013) Section 7.8.6       | Pass   |
| Conducted Spurious Emissions                          | 47 CFR Part 15, Subpart C 15.247(d)       | RSS-247 Section 5.5                       | ANSI C63.10 (2013) Section 7.8.8       | Pass   |
| Radiated Emissions which fall in the restricted bands | 47 CFR Part 15, Subpart C 15.205 & 15.209 | RSS-247 Section 3.3 & RSS-Gen Section 8.9 | ANSI C63.10 (2013) Section 6.10.5      | Pass   |
| Radiated Spurious Emissions                           | 47 CFR Part 15, Subpart C 15.205 & 15.209 | RSS-247 Section 3.3 & RSS-Gen Section 8.9 | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | Pass   |
| 99% Bandwidth                                         | -                                         | RSS-Gen Section 6.7                       | ANSI C63.10 Section 6.9.3              | Pass   |

### 3 Contents

|                                                                                        | Page      |
|----------------------------------------------------------------------------------------|-----------|
| <b>1 COVER PAGE.....</b>                                                               | <b>1</b>  |
| <b>2 Test Summary.....</b>                                                             | <b>3</b>  |
| <b>3 Contents .....</b>                                                                | <b>4</b>  |
| <b>4 General Information .....</b>                                                     | <b>5</b>  |
| 4.1 Details of E.U.T.....                                                              | 5         |
| 4.2 Power level setting using in test .....                                            | 5         |
| 4.3 Description of Support Units .....                                                 | 5         |
| 4.4 Measurement Uncertainty.....                                                       | 6         |
| 4.5 Test Location .....                                                                | 7         |
| 4.6 Test Facility.....                                                                 | 7         |
| 4.7 Deviation from Standards .....                                                     | 7         |
| 4.8 Abnormalities from Standard Conditions .....                                       | 7         |
| <b>5 Equipment List.....</b>                                                           | <b>8</b>  |
| <b>6 Radio Spectrum Technical Requirement .....</b>                                    | <b>9</b>  |
| 6.1 Antenna Requirement.....                                                           | 9         |
| 6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence ..... | 10        |
| <b>7 Radio Spectrum Matter Test Results.....</b>                                       | <b>11</b> |
| 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....                           | 11        |
| 7.2 Radiated Emissions which fall in the restricted bands.....                         | 15        |
| 7.3 Radiated Spurious Emissions Below 1GHz.....                                        | 29        |
| 7.4 Radiated Spurious Emissions Above 1GHz .....                                       | 33        |
| 7.5 Conducted Peak Output Power .....                                                  | 53        |
| 7.6 20dB Bandwidth.....                                                                | 55        |
| 7.7 Carrier Frequencies Separation.....                                                | 56        |
| 7.8 Hopping Channel Number .....                                                       | 57        |
| 7.9 Dwell Time .....                                                                   | 58        |
| 7.10 Conducted Band Edges Measurement.....                                             | 59        |
| 7.11 Conducted Spurious Emissions.....                                                 | 61        |
| 7.12 99% Bandwidth .....                                                               | 62        |
| <b>8 Test Setup Photo .....</b>                                                        | <b>63</b> |
| <b>9 EUT Constructional Details (EUT Photos) .....</b>                                 | <b>63</b> |
| <b>10 Appendix .....</b>                                                               | <b>64</b> |

## 4 General Information

### 4.1 Details of E.U.T.

|                             |                                                                                                                                                       |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply:               | DC 3.6V by Rechargeable Battery<br>Battery information:<br>Model: DX-BC6<br>Rate Capacity: 6270mAh<br>Rate Energy: 22.57Wh<br>Normal Voltage: DC 3.6V |
| Bluetooth Version:          | V5.0 Dual mode                                                                                                                                        |
| Operation Frequency:        | 2402MHz to 2480MHz                                                                                                                                    |
| Modulation Type:            | GFSK, Pi/4DQPSK, 8DPSK                                                                                                                                |
| Channel Spacing:            | 1MHz                                                                                                                                                  |
| Number of Channels:         | 79                                                                                                                                                    |
| Antenna Type:               | FPC Antenna                                                                                                                                           |
| Antenna Gain:               | Ant1: 1.69dBi(Provided by the manufacturer)<br>Ant5: 1.98dBi(Provided by the manufacturer)                                                            |
| Spectrum Spread Technology: | Frequency Hopping Spread Spectrum(FHSS)                                                                                                               |

### 4.2 Power level setting using in test

#### Ant1 & Ant5

| Channel | DH    | 2DH   | 3DH   |
|---------|-------|-------|-------|
|         | Ant 1 | Ant 1 | Ant 1 |
| 00      | 9     | 9     | 9     |
| 39      | 9     | 9     | 9     |
| 78      | 9     | 9     | 9     |

### 4.3 Description of Support Units

| Description                                     | Manufacturer | Model No. | Serial No. |
|-------------------------------------------------|--------------|-----------|------------|
| --                                              | --           | --        | --         |
| The EUT has been tested as an independent unit. |              |           |            |

## 4.4 Measurement Uncertainty

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | $8.4 \times 10^{-8}$    |
| 2   | Timeout                         | 2s                      |
| 3   | Duty Cycle                      | 0.37%                   |
| 4   | Occupied Bandwidth              | 3%                      |
| 5   | RF Conducted Power              | 0.6dB                   |
| 6   | RF Power Density                | 2.9dB                   |
| 7   | Conducted Spurious Emissions    | 0.75dB                  |
| 8   | RF Radiated Power               | 5.2dB (Below 1GHz)      |
|     |                                 | 5.9dB (Above 1GHz)      |
| 9   | Radiated Spurious Emission Test | 4.2dB (Below 30MHz)     |
|     |                                 | 4.5dB (30MHz-1GHz)      |
|     |                                 | 5.1dB (1GHz-18GHz)      |
|     |                                 | 5.4dB (Above 18GHz)     |
| 10  | Temperature Test                | 1°C                     |
| 11  | Humidity Test                   | 3%                      |
| 12  | Supply Voltages                 | 1.5%                    |
| 13  | Time                            | 3%                      |

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

#### 4.7 Deviation from Standards

None

#### 4.8 Abnormalities from Standard Conditions

None

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 8 of 167

### 5 Equipment List

| Item                                         | Equipment                            | Manufacturer       | Model          | Inventory No      | Cal Date   | Cal. Due Date |
|----------------------------------------------|--------------------------------------|--------------------|----------------|-------------------|------------|---------------|
| <b>Conducted Emission at Mains Terminals</b> |                                      |                    |                |                   |            |               |
| 1                                            | EMI Test Receive                     | R&S                | ESCI           | KS301101          | 01/15/2024 | 01/14/2025    |
| 2                                            | LISN                                 | R&S                | ENV216         | KS301197          | 01/15/2024 | 01/14/2025    |
| 3                                            | LISN                                 | Schwarzbeck        | NNLK 8129      | KS301091          | 01/15/2024 | 01/14/2025    |
| 4                                            | Pulse Limiter                        | R&S                | ESH3-Z2        | KUS1902E001       | 01/15/2024 | 01/14/2025    |
| 5                                            | CE test Cable                        | Thermax            | /              | CZ301102          | 01/15/2024 | 01/14/2025    |
| 6                                            | Test Software                        | ESE                | E3_V 6.111221a | /                 | N.C.R      | N.C.R         |
| <b>RF Conducted Test</b>                     |                                      |                    |                |                   |            |               |
| 1                                            | Spectrum Analyzer                    | Keysight           | N9020A         | KUS1911E004-2     | 08/01/2024 | 07/31/2025    |
| 2                                            | Spectrum Analyzer                    | Keysight           | N9020A         | KUS2001M001-2     | 08/01/2024 | 07/31/2025    |
| 3                                            | Spectrum Analyzer                    | Keysight           | N9030B         | KSEM021-1         | 01/15/2024 | 01/14/2025    |
| 4                                            | Signal Generator                     | R&S                | SMBV100B       | KSEM032           | 03/19/2024 | 03/18/2025    |
| 5                                            | Signal Generator                     | R&S                | SMW200A        | KSEM020-1         | 08/02/2024 | 08/01/2025    |
| 6                                            | Signal Generator                     | Agilent            | N5182A         | KUS2001M001-1     | 08/01/2024 | 07/31/2025    |
| 7                                            | Signal Generator                     | Agilent            | E8257C         | KS301066          | 08/06/2024 | 08/05/2025    |
| 8                                            | Radio Communication Test Station     | Anritsu            | MT8000A        | KSEM001-1         | 08/01/2024 | 07/31/2025    |
| 9                                            | Radio Communication Analyzer         | Anritsu            | MT8821C        | KSEM002-1         | 03/19/2024 | 03/18/2025    |
| 10                                           | Universal Radio Communication Tester | R&S                | CMW500         | KUS1911E004-1     | 08/12/2024 | 08/11/2025    |
| 11                                           | Switcher                             | TST                | FY562          | KUS2001M001-4     | 01/15/2024 | 01/14/2025    |
| 12                                           | Conducted Test Cable                 | Thermax            | RF01-RF04      | CZ301111-CZ301120 | 01/15/2024 | 01/14/2025    |
| 13                                           | Temp. / Humidity Chamber             | TERCHY             | MHK-120AK      | KS301190          | 08/26/2024 | 08/25/2025    |
| 14                                           | Temperature & Humidity Recorder      | Renke Control      | RS-WS-N01-6J   | KSEM024-5         | 03/19/2024 | 03/18/2025    |
| 15                                           | Software                             | BST                | TST-PASS       | /                 | NCR        | NCR           |
| <b>RF Radiated Test</b>                      |                                      |                    |                |                   |            |               |
| 1                                            | Spectrum Analyzer                    | R&S                | FSV40          | KUS1806E003       | 08/06/2024 | 08/05/2025    |
| 2                                            | Universal Radio Communication Tester | R&S                | CMW500         | KSEM009-1         | 03/19/2024 | 03/18/2025    |
| 4                                            | Loop Antenna                         | COM-POWER          | AL-130R        | KUS1806E001       | 03/18/2023 | 03/17/2025    |
| 5                                            | Bilog Antenna                        | TESEQ              | CBL 6112D      | KUS1806E005       | 06/29/2023 | 06/28/2025    |
| 6                                            | Bilog Antenna                        | TESEQ              | CBL 6112D      | KUS1806E006       | 03/19/2024 | 03/18/2025    |
| 7                                            | Horn-antenna(1-18GHz)                | Schwarzbeck        | BBHA9120D      | KS301079          | 03/23/2024 | 08/22/2026    |
| 8                                            | Horn-antenna(1-18GHz)                | ETS-LINDGREN       | 3117           | KS301186          | 04/07/2023 | 04/06/2025    |
| 9                                            | Horn Antenna(18-40GHz)               | Schwarzbeck        | BBHA9170       | CZ301058          | 01/07/2024 | 01/06/2026    |
| 10                                           | Amplifier(30MHz~18GHz)               | PANSHAN TECHNOLOGY | LNA:1~18G      | KSEM010-1         | 01/15/2024 | 01/14/2025    |
| 11                                           | Amplifier(18~40GHz)                  | PANSHAN TECHNOLOGY | LNA180400G40   | KSEM038           | 08/12/2024 | 08/11/2025    |
| 12                                           | RE Test Cable                        | REBES MICROWAVE    | /              | CZ301097          | 08/12/2024 | 08/11/2025    |
| 13                                           | Temperature & Humidity Recorder      | Renke Control      | RS-WS-N01-6J   | KSEM024-4         | 03/21/2024 | 03/20/2025    |
| 14                                           | Software                             | Faratronic         | EZ_EMC-v 3A1   | /                 | NCR        | NCR           |
| 15                                           | Software                             | ESE                | E3_V 6.111221a | /                 | NCR        | NCR           |

## **6 Radio Spectrum Technical Requirement**

### **6.1 Antenna Requirement**

#### **6.1.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### **6.1.2 Conclusion**

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is Ant1: 1.69dBi; Ant5: 1.98dBi.

Antenna location: Refer to internal photo.

## **6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence**

### **6.2.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

### **6.2.2 Conclusion**

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz) | Conducted limit(dBμV) |           |
|----------------------------|-----------------------|-----------|
|                            | Quasi-peak            | Average   |
| 0.15-0.5                   | 66 to 56*             | 56 to 46* |
| 0.5-5                      | 56                    | 46        |
| 5-30                       | 60                    | 50        |

\*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                                        |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 06        | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

#### 7.1.3 Test Setup Diagram

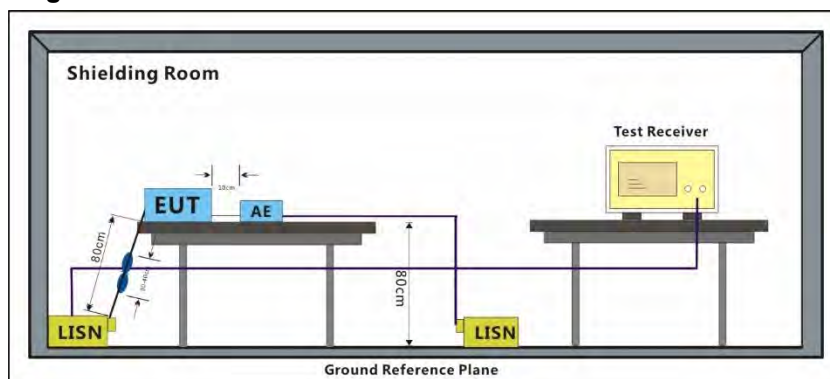

**7.1.4 Measurement Procedure and Data**

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 13 of 167

Test Mode: 06; Line: Live line

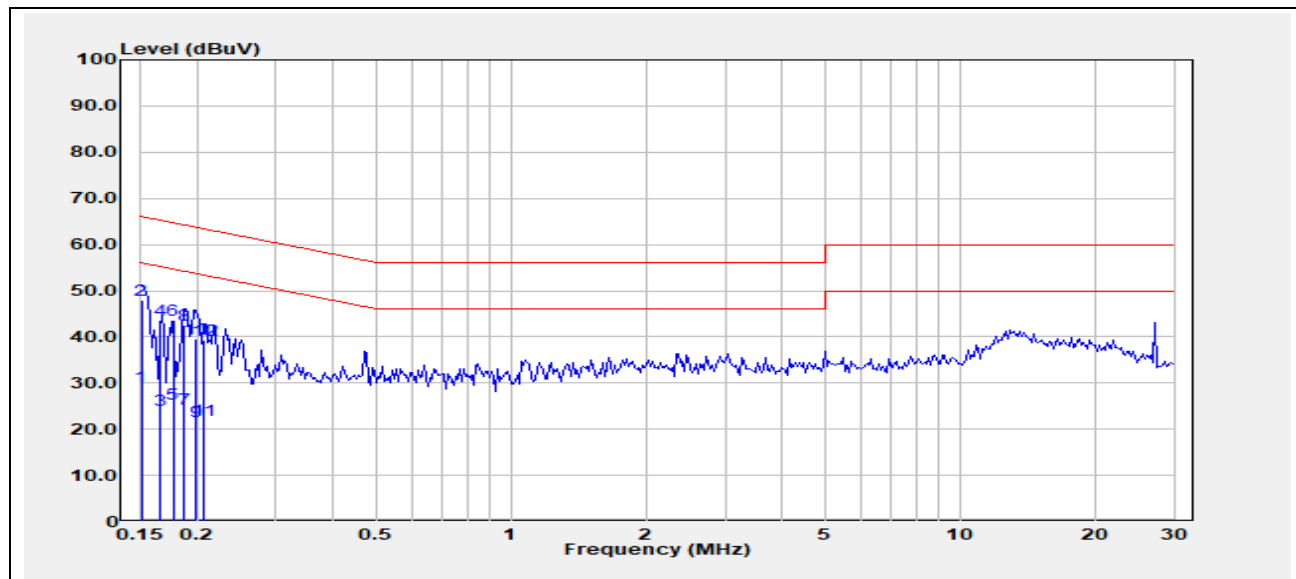

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark  |
|-----|--------------------|-------------------|-----------------------|------------------|-----------------|----------------|---------|
| 1   | 0.1502             | 9.03              | 20.25                 | 29.28            | 55.99           | -26.71         | Average |
| 2   | 0.1502             | 27.79             | 20.25                 | 48.04            | 65.99           | -17.95         | QP      |
| 3   | 0.1661             | 3.82              | 20.18                 | 24.00            | 55.15           | -31.15         | Average |
| 4   | 0.1661             | 23.37             | 20.18                 | 43.55            | 65.15           | -21.60         | QP      |
| 5   | 0.1768             | 5.34              | 20.14                 | 25.48            | 54.64           | -29.16         | Average |
| 6   | 0.1768             | 23.38             | 20.14                 | 43.52            | 64.64           | -21.12         | QP      |
| 7   | 0.1860             | 4.42              | 20.10                 | 24.52            | 54.21           | -29.69         | Average |
| 8   | 0.1860             | 22.34             | 20.10                 | 42.44            | 64.21           | -21.77         | QP      |
| 9   | 0.1983             | 1.58              | 20.06                 | 21.64            | 53.68           | -32.04         | Average |
| 10  | 0.1983             | 19.56             | 20.06                 | 39.62            | 63.68           | -24.06         | QP      |
| 11  | 0.2067             | 1.83              | 20.06                 | 21.89            | 53.34           | -31.45         | Average |
| 12  | 0.2067             | 19.35             | 20.06                 | 39.41            | 63.34           | -23.93         | QP      |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 14 of 167

Test Mode: 06; Line: Neutral Line

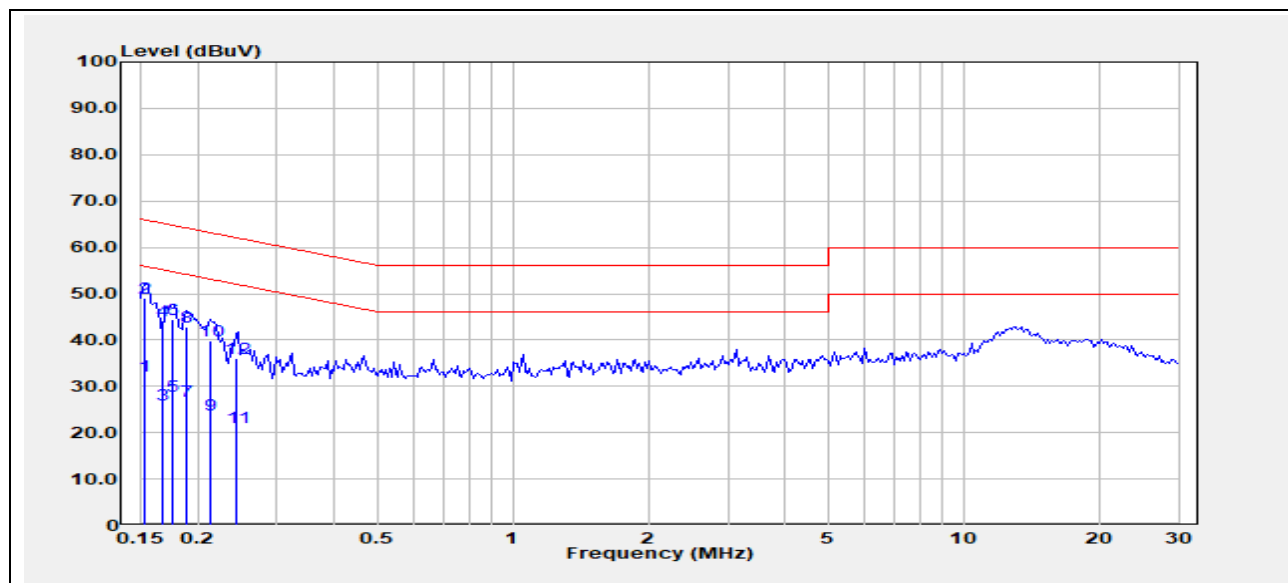

| No. | Frequency<br>(MHz) | Reading<br>(dBUV) | Correct<br>Factor(dB) | Result<br>(dBUV) | Limit<br>(dBUV) | Margin<br>(dB) | Remark  |
|-----|--------------------|-------------------|-----------------------|------------------|-----------------|----------------|---------|
| 1   | 0.1523             | 12.02             | 20.18                 | 32.20            | 55.88           | -23.68         | Average |
| 2   | 0.1523             | 28.83             | 20.18                 | 49.01            | 65.88           | -16.87         | QP      |
| 3   | 0.1675             | 5.88              | 20.16                 | 26.04            | 55.08           | -29.04         | Average |
| 4   | 0.1675             | 24.08             | 20.16                 | 44.24            | 65.08           | -20.84         | QP      |
| 5   | 0.1757             | 7.69              | 20.15                 | 27.84            | 54.69           | -26.85         | Average |
| 6   | 0.1757             | 24.29             | 20.15                 | 44.44            | 64.69           | -20.25         | QP      |
| 7   | 0.1884             | 6.74              | 20.13                 | 26.87            | 54.11           | -27.24         | Average |
| 8   | 0.1884             | 22.79             | 20.13                 | 42.92            | 64.11           | -21.19         | QP      |
| 9   | 0.2128             | 3.72              | 20.11                 | 23.83            | 53.10           | -29.27         | Average |
| 10  | 0.2128             | 19.81             | 20.11                 | 39.92            | 63.10           | -23.18         | QP      |
| 11  | 0.2444             | 1.01              | 20.10                 | 21.11            | 51.94           | -30.83         | Average |
| 12  | 0.2444             | 16.06             | 20.10                 | 36.16            | 61.94           | -25.78         | QP      |

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 15 of 167

### 7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

#### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 21.6 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.2.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                                        |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 06        | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

### 7.2.3 Test Setup Diagram

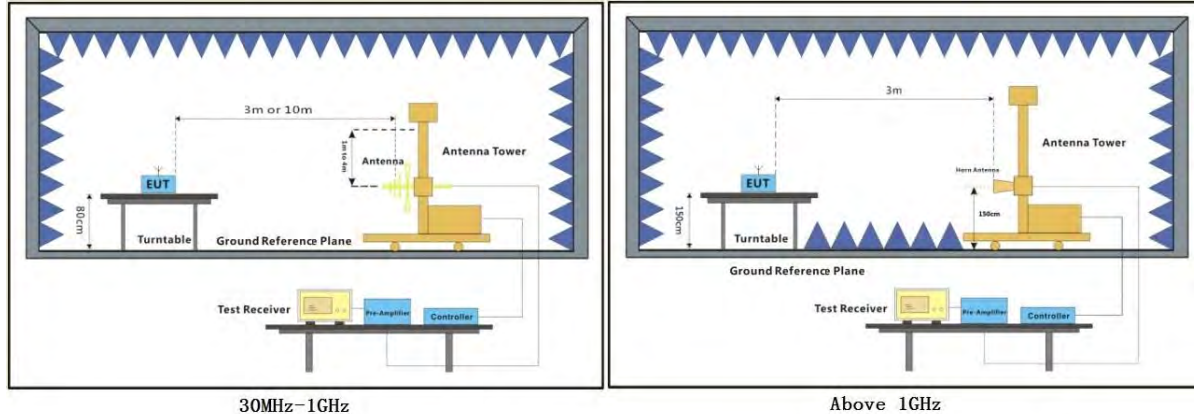

### 7.2.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 17 of 167

Test Mode: 06; Polarity: Horizontal; Modulation: GFSK; Channel: Low

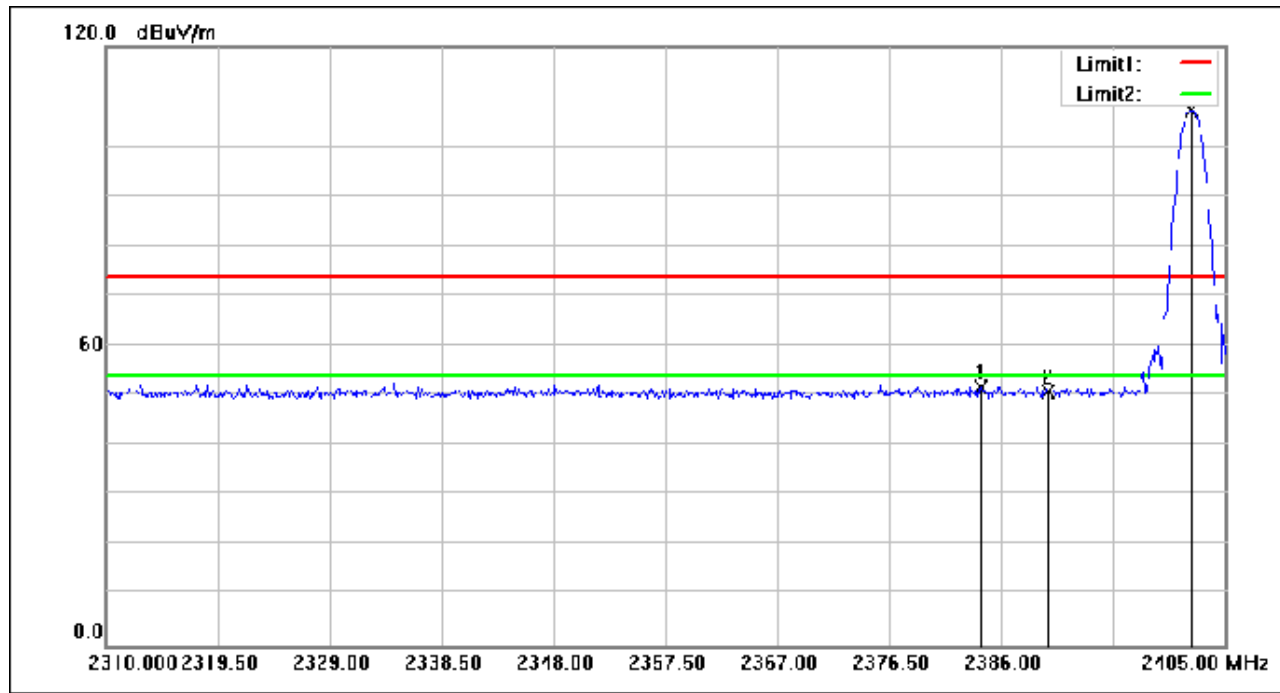

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2384.290        | 76.55            | -24.73                | 51.82           | 74.00          | -22.18      | peak   |
| 2   | 2390.000        | 75.48            | -24.71                | 50.77           | 74.00          | -23.23      | peak   |
| 3   | 2402.150        | 131.79           | -24.65                | 107.14          | 74.00          | 33.14       | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 18 of 167

Test Mode: 06; Polarity: Vertical; Modulation: GFSK; Channel: Low

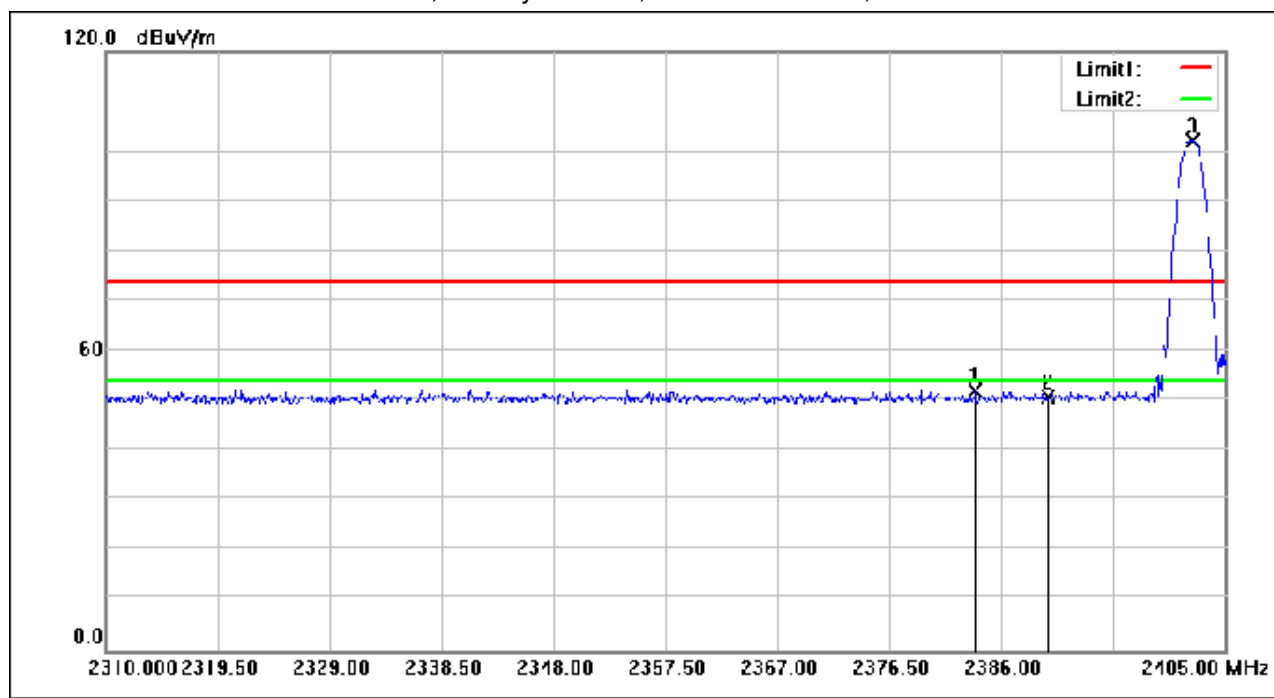

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2383.815        | 76.67            | -24.73                | 51.94           | 74.00          | -22.06      | peak   |
| 2   | 2390.000        | 75.68            | -24.71                | 50.97           | 74.00          | -23.03      | peak   |
| 3   | 2402.245        | 126.92           | -24.65                | 102.27          | 74.00          | 28.27       | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 19 of 167

Test Mode: 06; Polarity: Horizontal; Modulation: GFSK; Channel: High

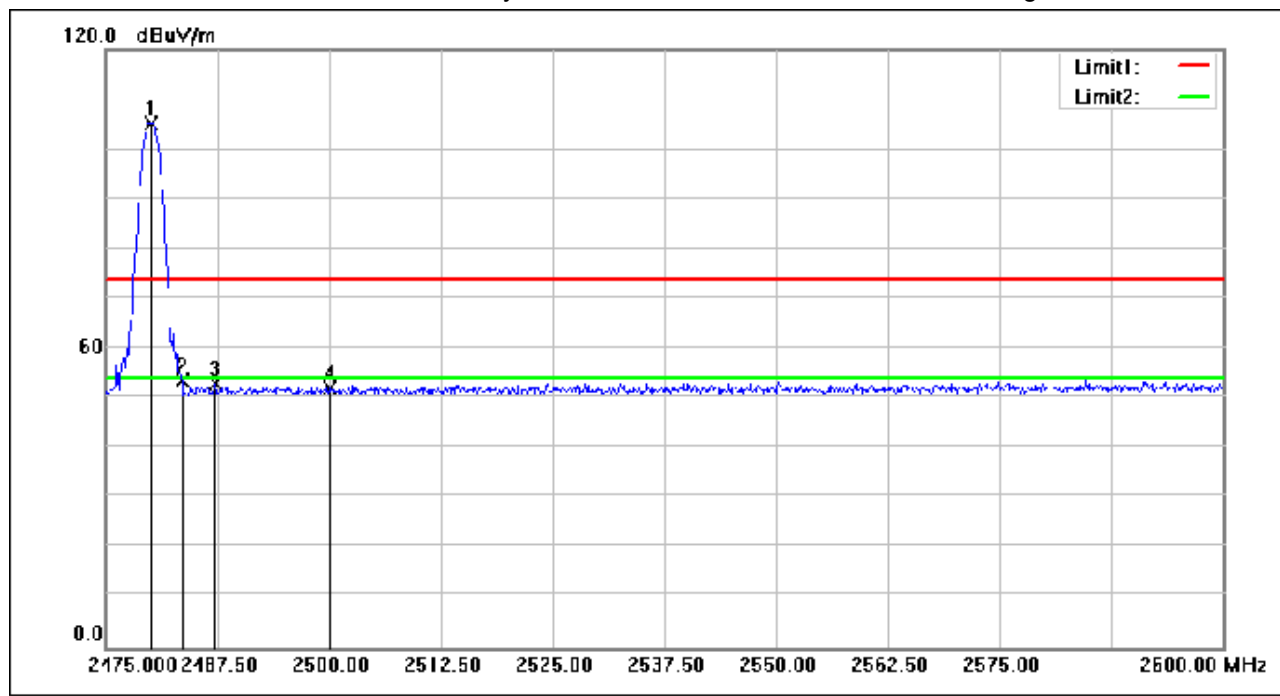

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2480.000        | 129.57           | -24.28                | 105.29          | 74.00          | 31.29       | peak   |
| 2   | 2483.500        | 77.79            | -24.27                | 53.52           | 74.00          | -20.48      | peak   |
| 3   | 2487.250        | 77.16            | -24.25                | 52.91           | 74.00          | -21.09      | peak   |
| 4   | 2500.000        | 76.34            | -24.19                | 52.15           | 74.00          | -21.85      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 20 of 167

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

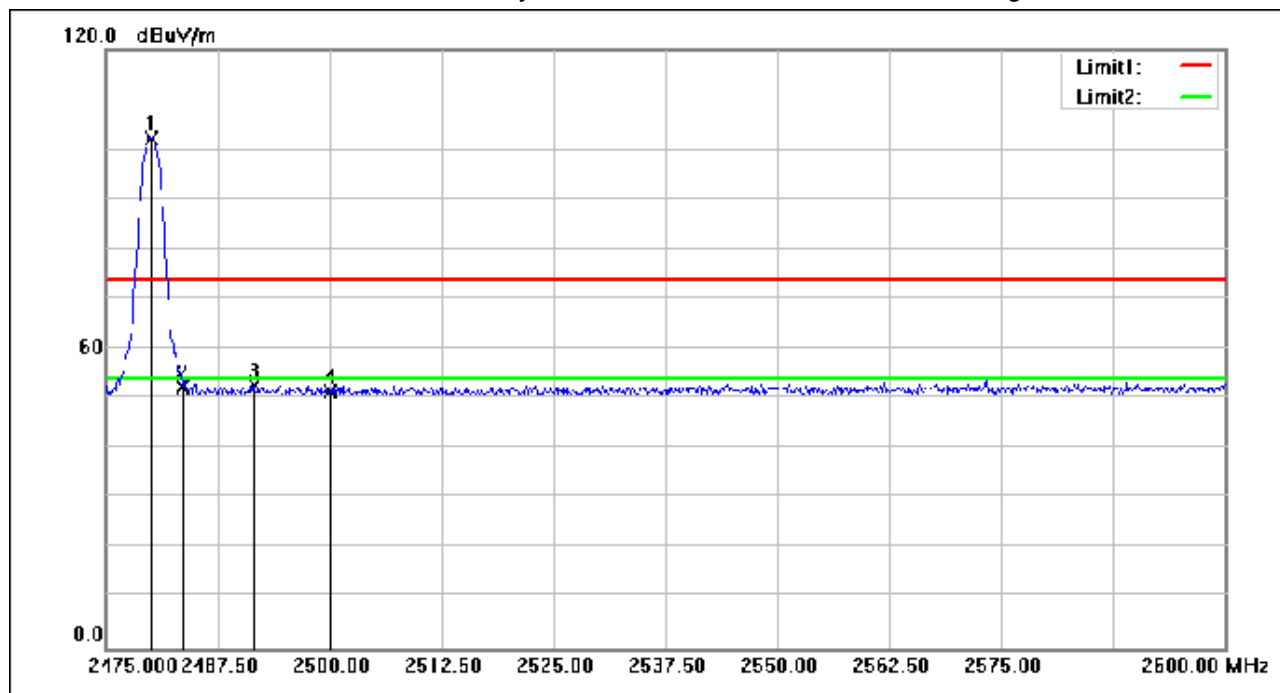

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2480.125        | 126.47           | -24.28                | 102.19          | 74.00          | 28.19       | peak   |
| 2   | 2483.500        | 76.54            | -24.27                | 52.27           | 74.00          | -21.73      | peak   |
| 3   | 2491.500        | 76.81            | -24.23                | 52.58           | 74.00          | -21.42      | peak   |
| 4   | 2500.000        | 75.66            | -24.19                | 51.47           | 74.00          | -22.53      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 21 of 167

Test Mode: 06; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

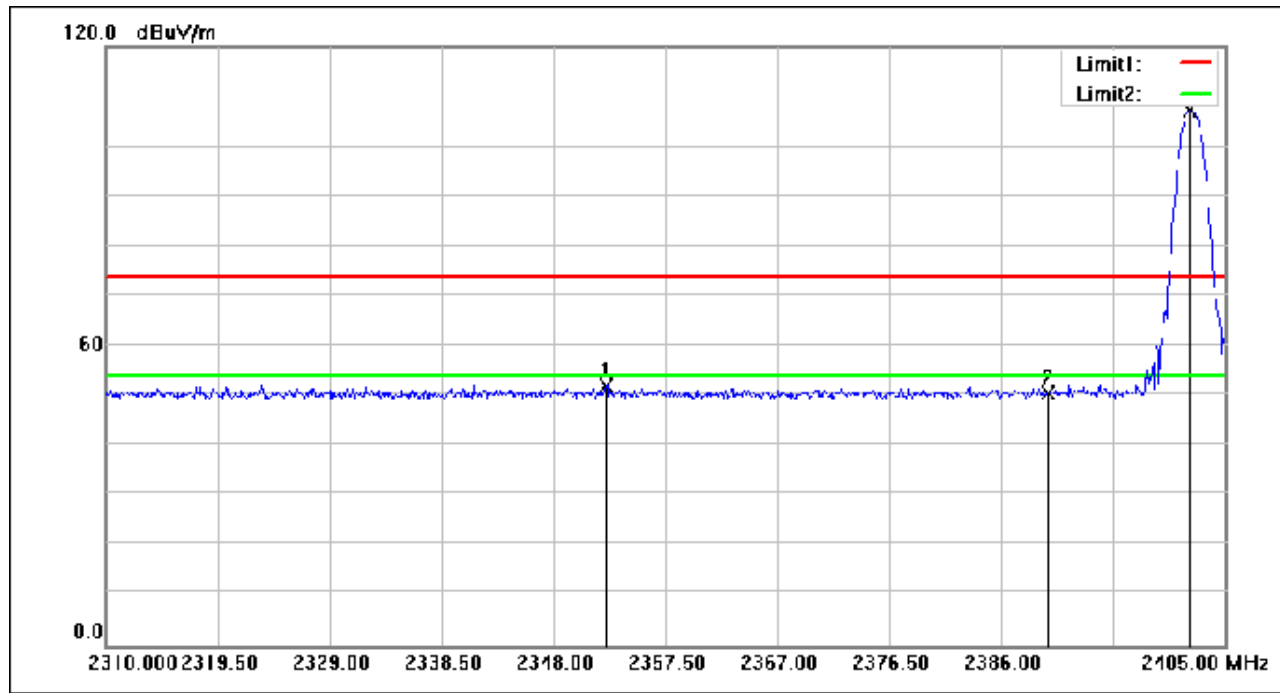

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2352.465        | 76.98            | -24.88                | 52.10           | 74.00          | -21.90      | peak   |
| 2   | 2390.000        | 75.19            | -24.71                | 50.48           | 74.00          | -23.52      | peak   |
| 3   | 2401.960        | 131.79           | -24.65                | 107.14          | 74.00          | 33.14       | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 22 of 167

Test Mode: 06; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

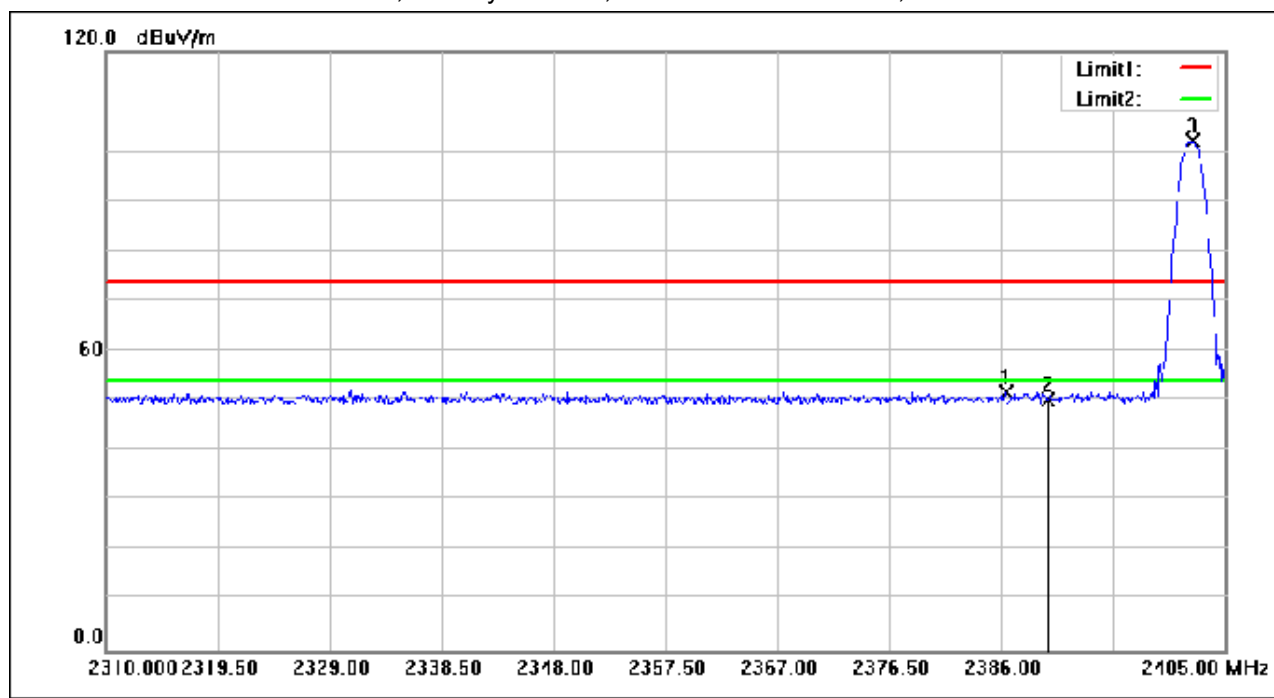

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2386.380        | 76.50            | -24.72                | 51.78           | 74.00          | -22.22      | peak   |
| 2   | 2390.000        | 75.11            | -24.71                | 50.40           | 74.00          | -23.60      | peak   |
| 3   | 2402.245        | 126.66           | -24.65                | 102.01          | 74.00          | 28.01       | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 23 of 167

Test Mode: 06; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

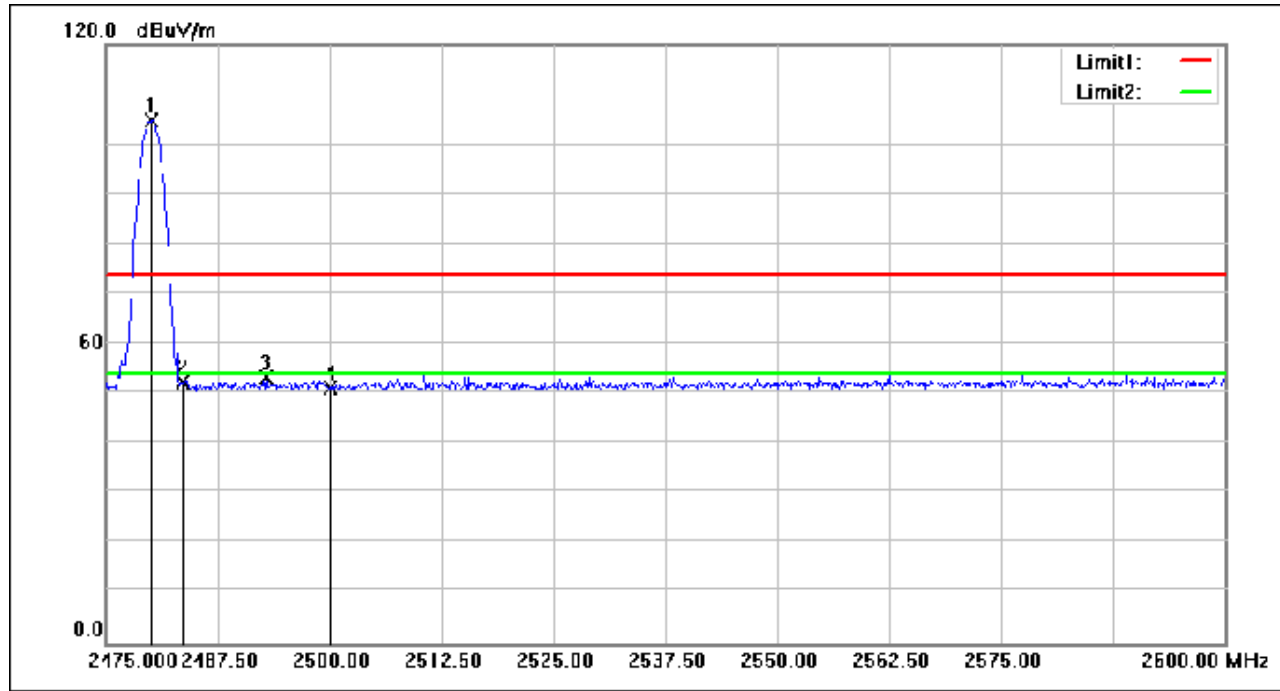

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|------------------------|-----------------|----------------|-------------|--------|
| 1   | 2480.000        | 129.04           | -24.28                 | 104.76          | 74.00          | 30.76       | peak   |
| 2   | 2483.500        | 76.49            | -24.27                 | 52.22           | 74.00          | -21.78      | peak   |
| 3   | 2492.875        | 77.44            | -24.22                 | 53.22           | 74.00          | -20.78      | peak   |
| 4   | 2500.000        | 75.36            | -24.19                 | 51.17           | 74.00          | -22.83      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 24 of 167

Test Mode: 06; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

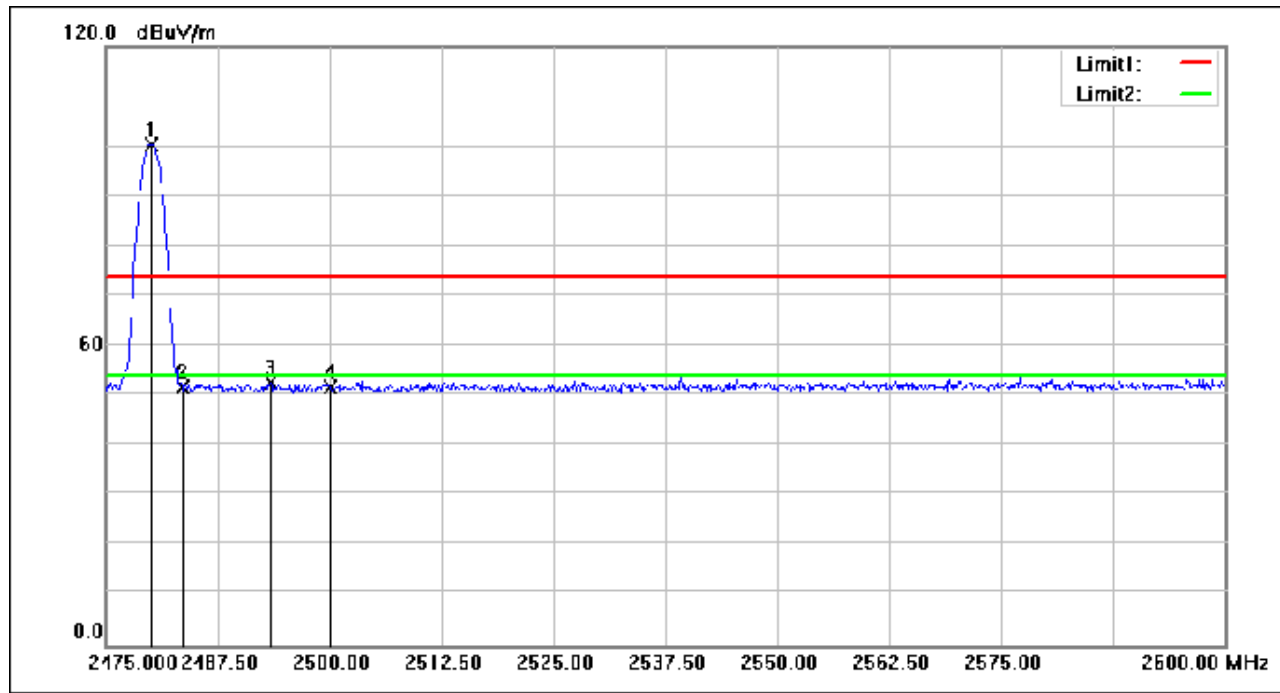

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|------------------------|-----------------|----------------|-------------|--------|
| 1   | 2480.125        | 124.76           | -24.28                 | 100.48          | 74.00          | 26.48       | peak   |
| 2   | 2483.500        | 76.09            | -24.27                 | 51.82           | 74.00          | -22.18      | peak   |
| 3   | 2493.375        | 76.98            | -24.22                 | 52.76           | 74.00          | -21.24      | peak   |
| 4   | 2500.000        | 76.08            | -24.19                 | 51.89           | 74.00          | -22.11      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 25 of 167

Test Mode: 06; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

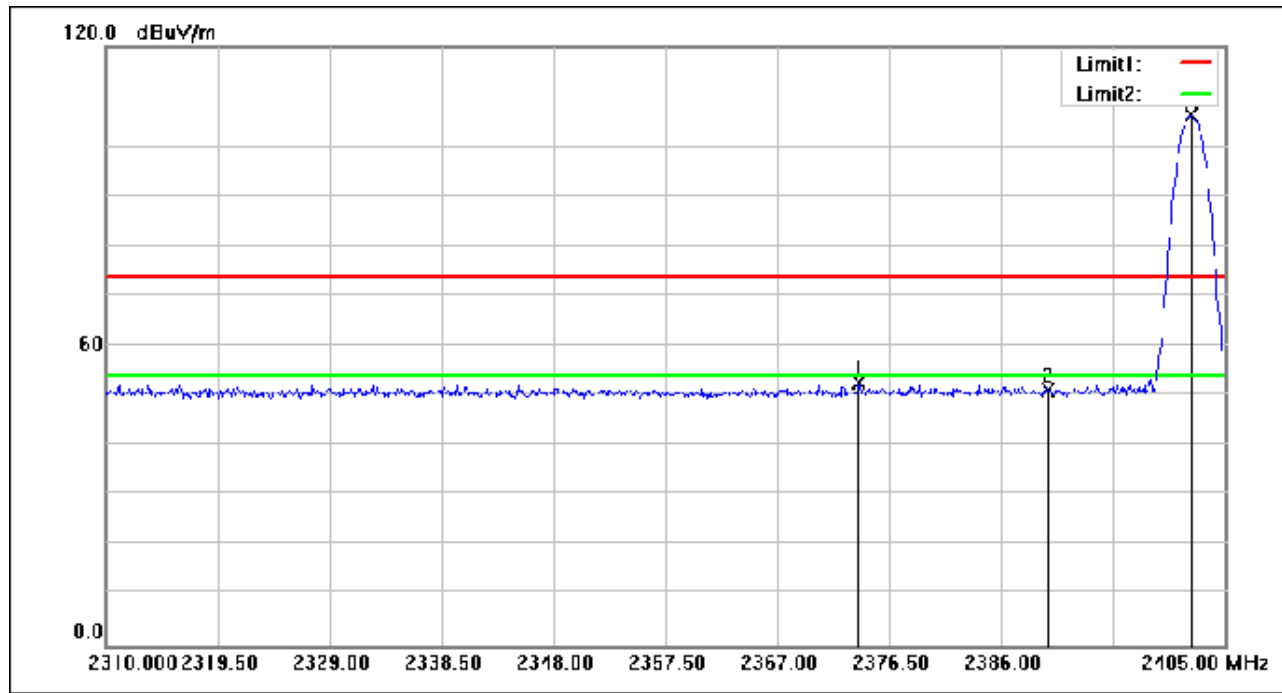

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2373.840        | 77.42            | -24.78                | 52.64           | 74.00          | -21.36      | peak   |
| 2   | 2390.000        | 75.91            | -24.71                | 51.20           | 74.00          | -22.80      | peak   |
| 3   | 2402.150        | 130.92           | -24.65                | 106.27          | 74.00          | 32.27       | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 26 of 167

Test Mode: 06; Polarity: Vertical; Modulation: 8DPSK; Channel: Low

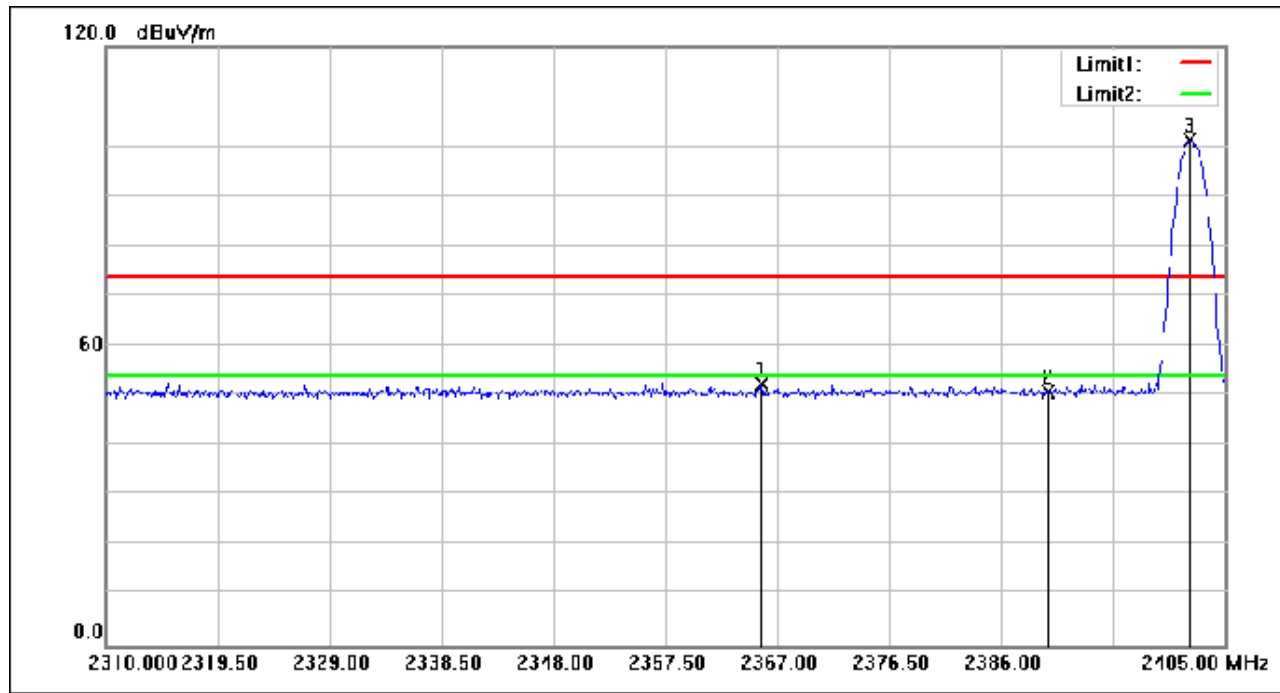

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2365.670        | 77.04            | -24.82                | 52.22           | 74.00          | -21.78      | peak   |
| 2   | 2390.000        | 75.68            | -24.71                | 50.97           | 74.00          | -23.03      | peak   |
| 3   | 2402.055        | 125.76           | -24.65                | 101.11          | 74.00          | 27.11       | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 27 of 167

Test Mode: 06; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

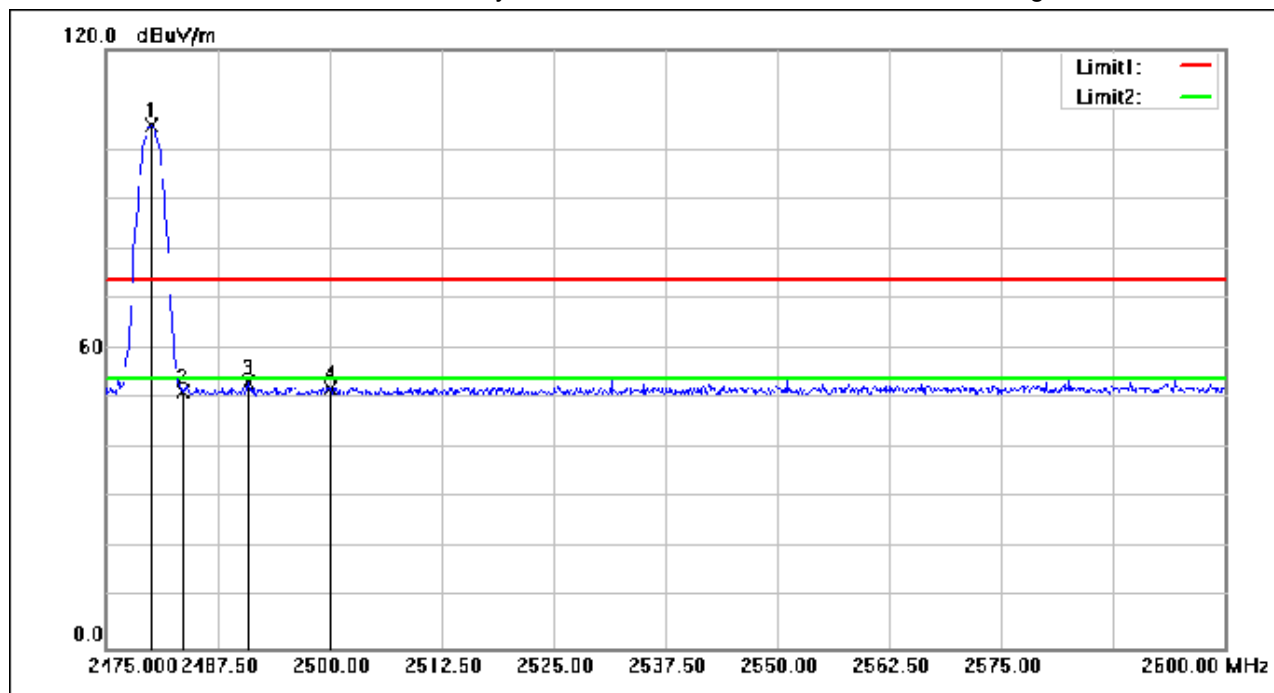

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|------------------------|-----------------|----------------|-------------|--------|
| 1   | 2480.000        | 129.17           | -24.28                 | 104.89          | 74.00          | 30.89       | peak   |
| 2   | 2483.500        | 75.73            | -24.27                 | 51.46           | 74.00          | -22.54      | peak   |
| 3   | 2490.875        | 77.48            | -24.24                 | 53.24           | 74.00          | -20.76      | peak   |
| 4   | 2500.000        | 76.20            | -24.19                 | 52.01           | 74.00          | -21.99      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 28 of 167

Test Mode: 06; Polarity: Vertical; Modulation: 8DPSK; Channel: High

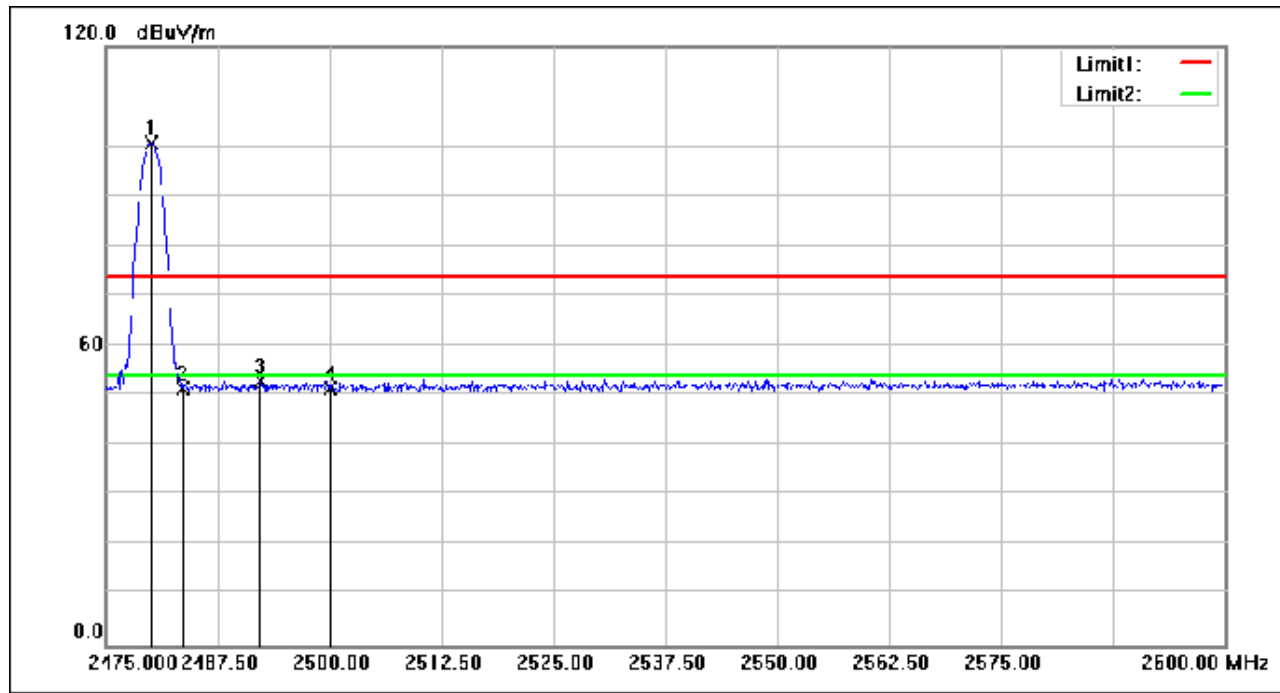

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2480.000        | 125.01           | -24.28                | 100.73          | 74.00          | 26.73       | peak   |
| 2   | 2483.500        | 75.87            | -24.27                | 51.60           | 74.00          | -22.40      | peak   |
| 3   | 2492.250        | 77.06            | -24.23                | 52.83           | 74.00          | -21.17      | peak   |
| 4   | 2500.000        | 75.58            | -24.19                | 51.39           | 74.00          | -22.61      | peak   |

### 7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| 960-1000       | 500                              | 3                            |

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C


Humidity: 46.9 % RH

Atmospheric Pressure: 1010 mbar

#### 7.3.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                                        |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 06        | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

#### 7.3.3 Test Setup Diagram

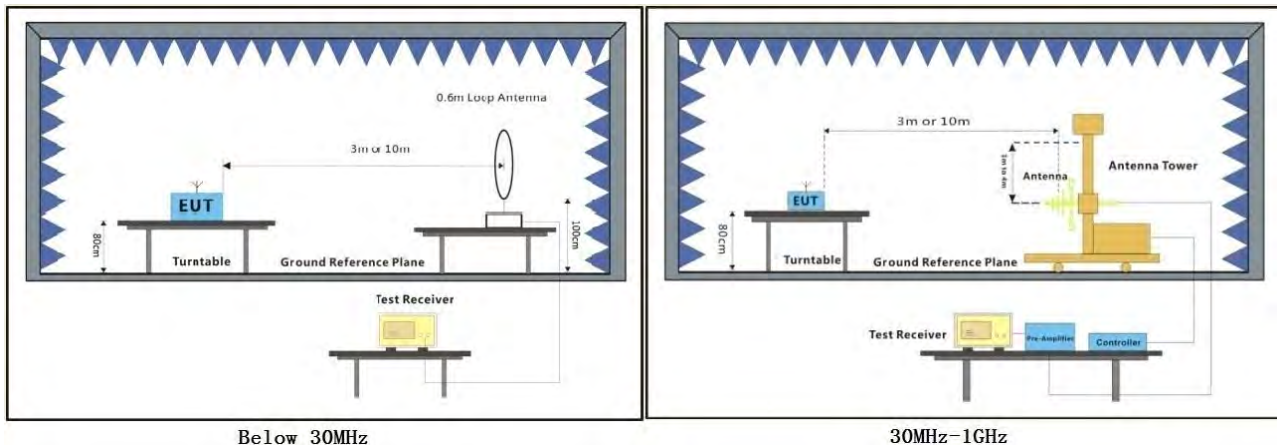

## 7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1.  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 31 of 167

Test Mode: 06; Polarity: Horizontal

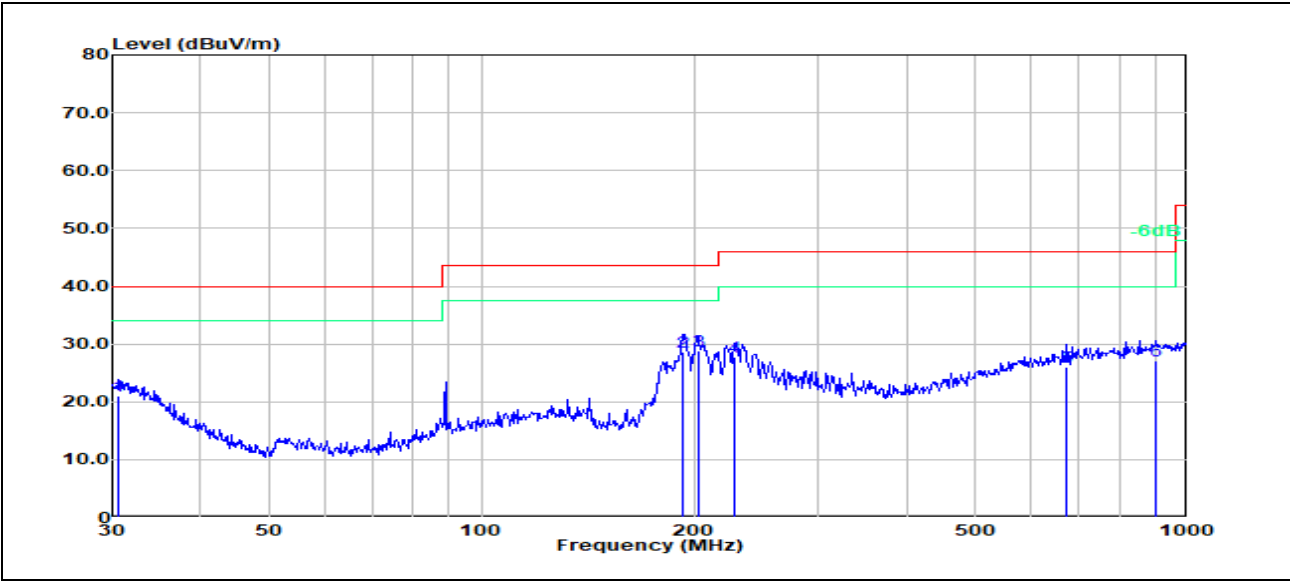

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 30.6379            | 2.05              | 18.91                   | 20.96              | 40.00             | -19.04         | 100            | 0                | QP     |
| 2   | 193.0945           | 16.97             | 11.66                   | 28.63              | 43.50             | -14.87         | 200            | 32               | QP     |
| 3   | 202.8104           | 17.23             | 11.51                   | 28.74              | 43.50             | -14.76         | 100            | 53               | QP     |
| 4   | 228.4904           | 14.76             | 12.93                   | 27.69              | 46.00             | -18.31         | 100            | 32               | QP     |
| 5   | 675.2080           | 2.41              | 23.64                   | 26.05              | 46.00             | -19.95         | 100            | 294              | QP     |
| 6   | 903.3094           | 1.42              | 25.69                   | 27.11              | 46.00             | -18.89         | 100            | 146              | QP     |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 32 of 167

Test Mode: 06; Polarity: Vertical

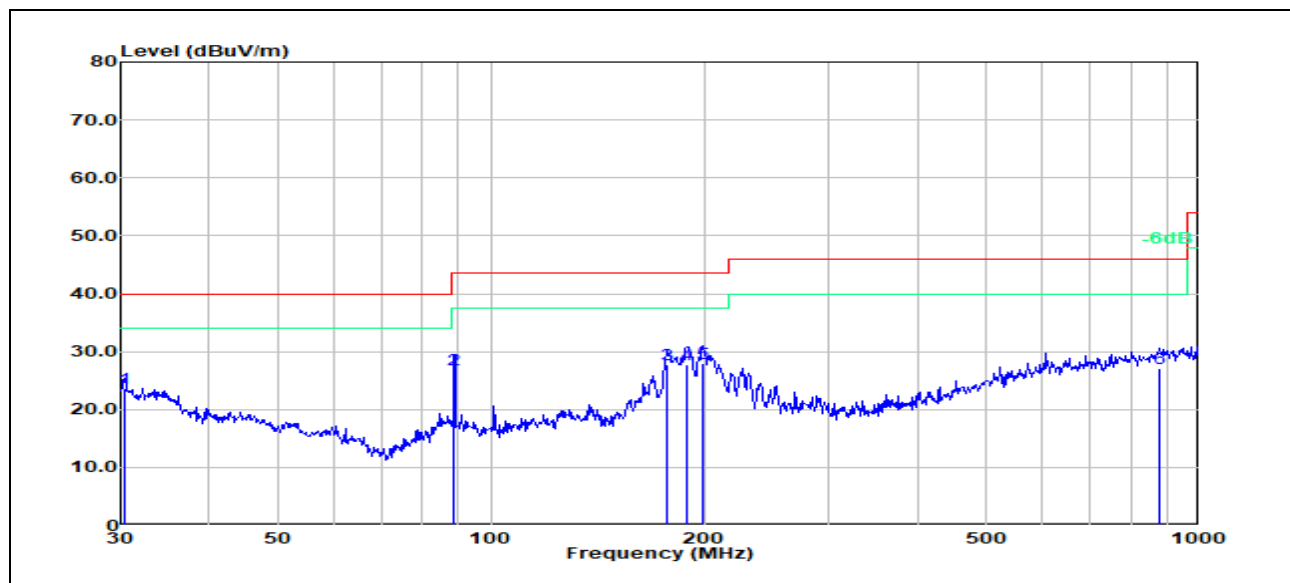

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 30.3173            | 4.46              | 19.17                   | 23.63              | 40.00             | -16.37         | 100            | 120              | QP     |
| 2   | 88.6525            | 15.35             | 11.50                   | 26.85              | 43.50             | -16.65         | 100            | 299              | QP     |
| 3   | 176.8878           | 15.31             | 12.50                   | 27.81              | 43.50             | -15.69         | 100            | 177              | QP     |
| 4   | 189.0743           | 15.90             | 11.94                   | 27.84              | 43.50             | -15.66         | 100            | 170              | QP     |
| 5   | 198.5880           | 16.08             | 11.78                   | 27.86              | 43.50             | -15.64         | 100            | 360              | QP     |
| 6   | 878.3215           | 1.71              | 25.48                   | 27.19              | 46.00             | -18.81         | 100            | 228              | QP     |

## 7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| Above 1000     | 500                              | 3                            |

### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 21.8 °C


Humidity: 49.3 % RH

Atmospheric Pressure: 1010 mbar

### 7.4.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                                        |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 06        | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

### 7.4.3 Test Setup Diagram

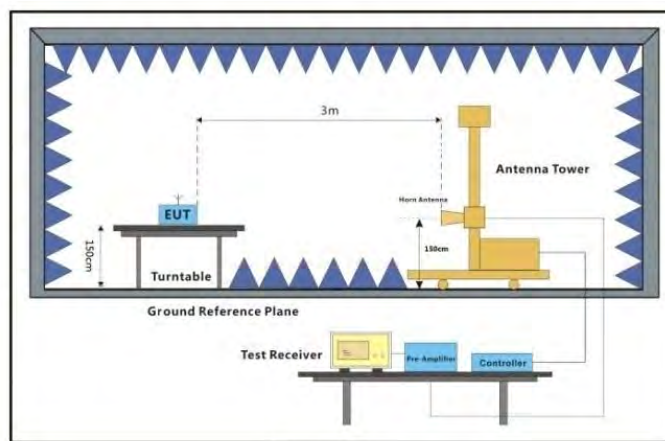

Above 1GHz

## 7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1.  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 35 of 167

Test Mode: 06; Polarity: Horizontal; Modulation: GFSK; Channel: Low

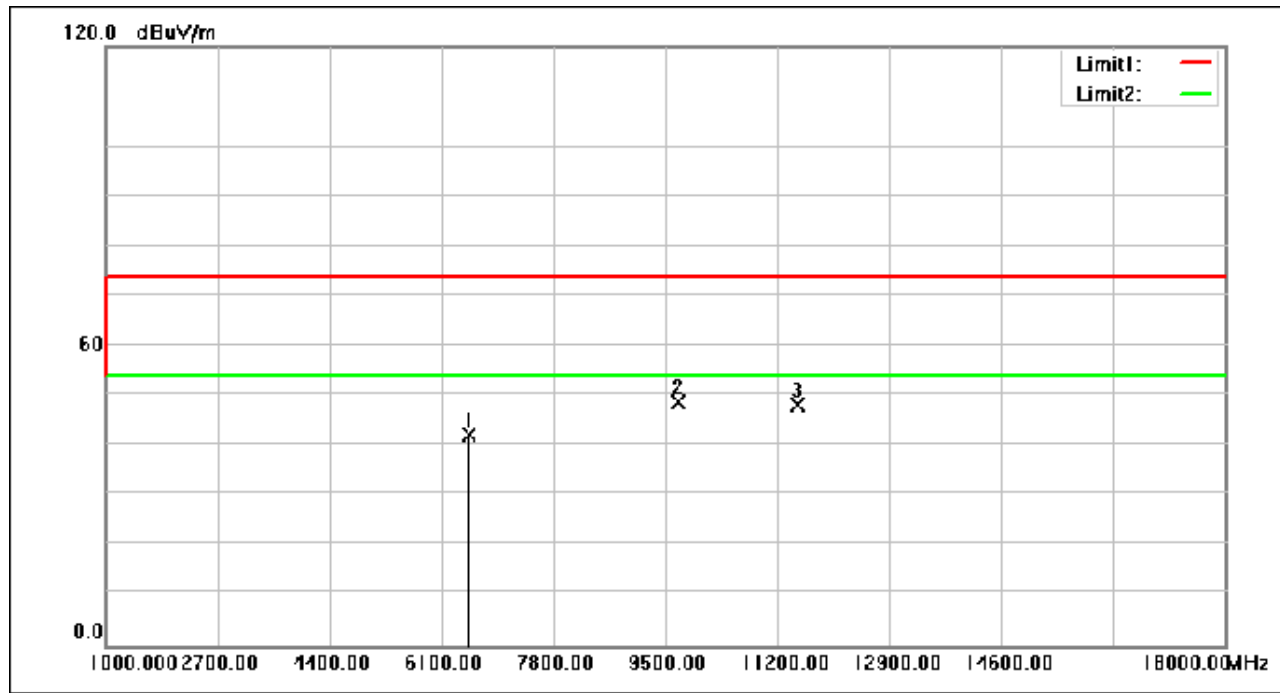

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6541.320        | 55.14            | -13.00                | 42.14           | 74.00          | -31.86      | peak   |
| 2   | 9695.840        | 56.24            | -7.58                 | 48.66           | 74.00          | -25.34      | peak   |
| 3   | 11518.920       | 54.57            | -6.34                 | 48.23           | 74.00          | -25.77      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 36 of 167

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

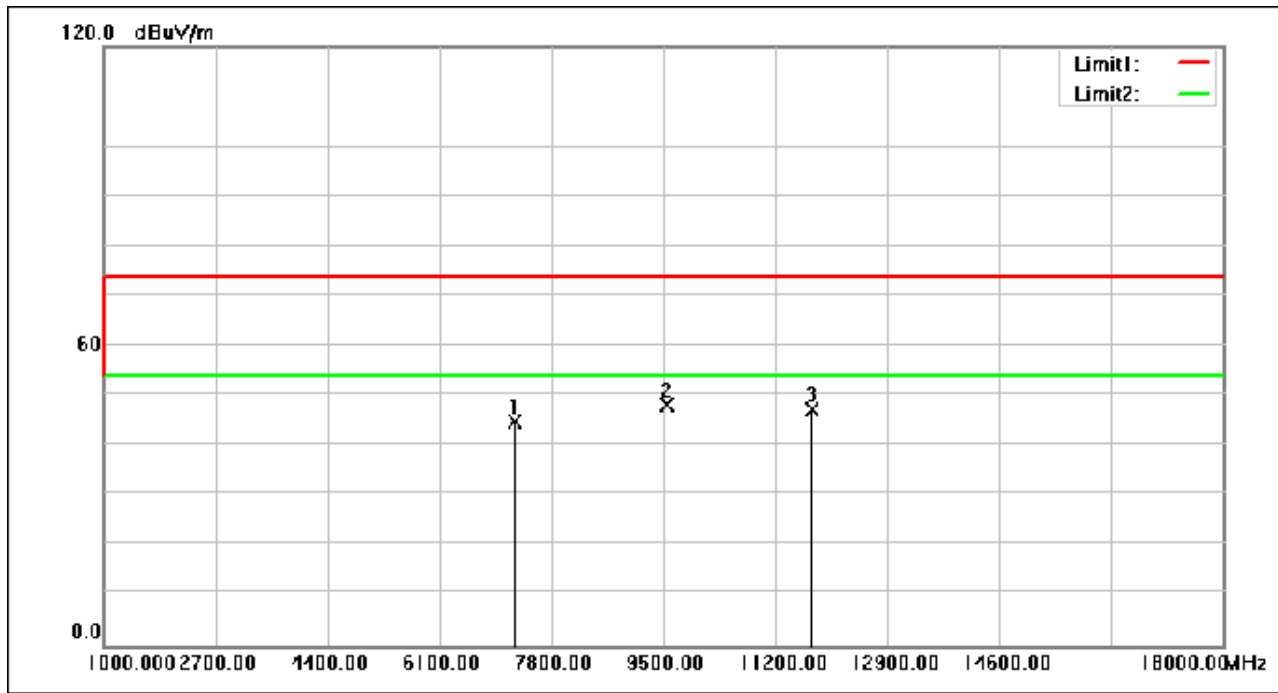

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 7246.480        | 56.43            | -11.46                | 44.97           | 74.00          | -29.03      | peak   |
| 2   | 9558.480        | 56.08            | -7.85                 | 48.23           | 74.00          | -25.77      | peak   |
| 3   | 11763.040       | 53.53            | -6.15                 | 47.38           | 74.00          | -26.62      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 37 of 167

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:middle

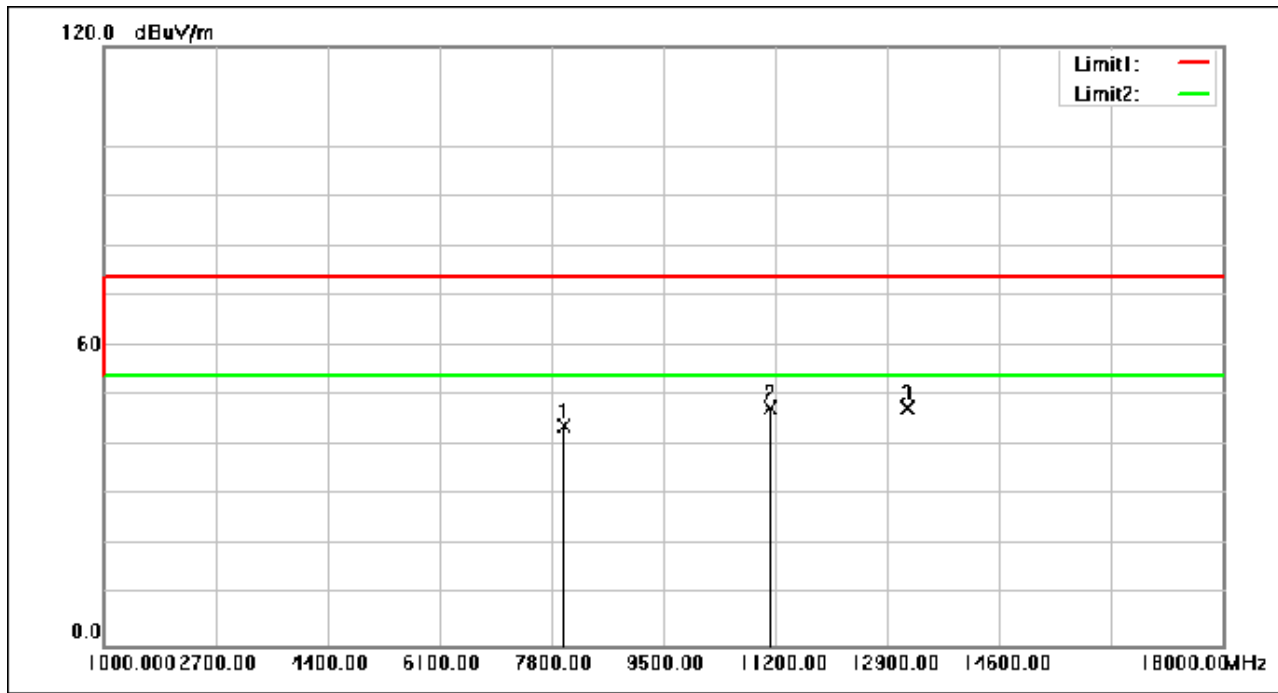

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 7992.440        | 54.69            | -10.61                | 44.08           | 74.00          | -29.92      | peak   |
| 2   | 11130.640       | 54.24            | -6.66                 | 47.58           | 74.00          | -26.42      | peak   |
| 3   | 13209.400       | 53.89            | -6.29                 | 47.60           | 74.00          | -26.40      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 38 of 167

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:middle

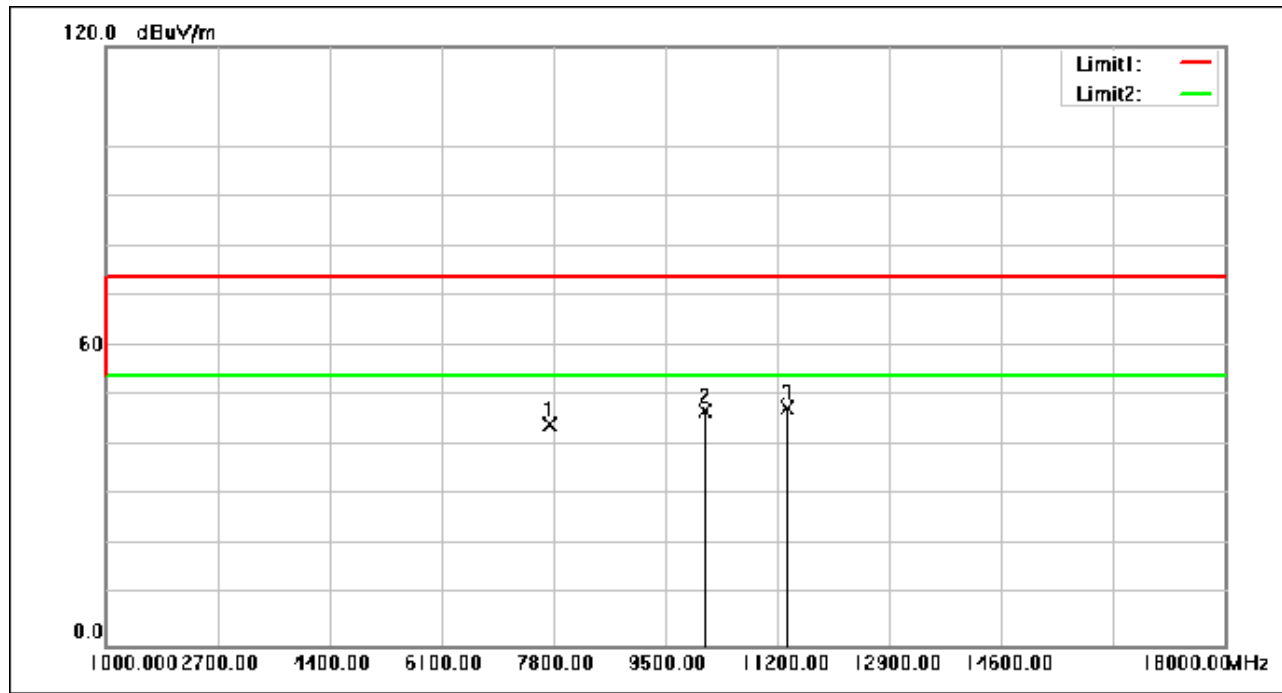

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 7765.320        | 55.08            | -10.91                | 44.17           | 74.00          | -29.83      | peak   |
| 2   | 10102.480       | 54.10            | -7.27                 | 46.83           | 74.00          | -27.17      | peak   |
| 3   | 11354.360       | 53.95            | -6.48                 | 47.47           | 74.00          | -26.53      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 39 of 167

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

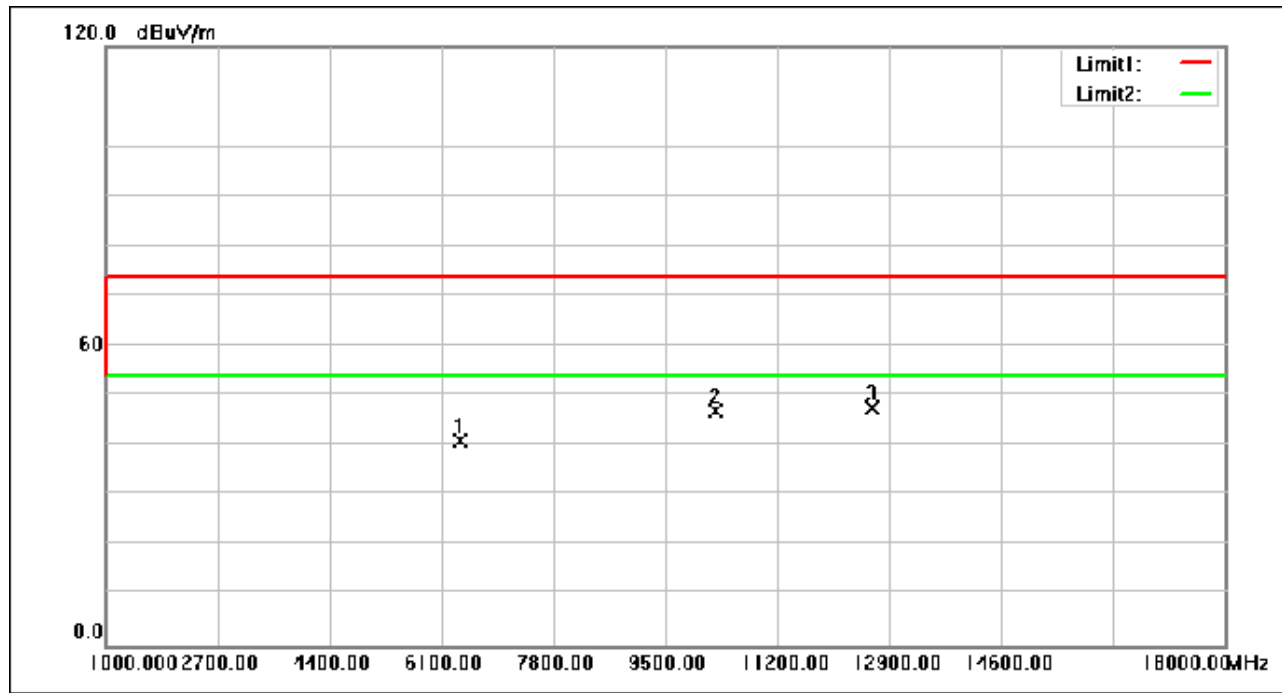

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6380.840        | 54.92            | -13.85                | 41.07           | 74.00          | -32.93      | peak   |
| 2   | 10254.800       | 54.03            | -7.18                 | 46.85           | 74.00          | -27.15      | peak   |
| 3   | 12651.800       | 53.62            | -6.19                 | 47.43           | 74.00          | -26.57      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 40 of 167

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

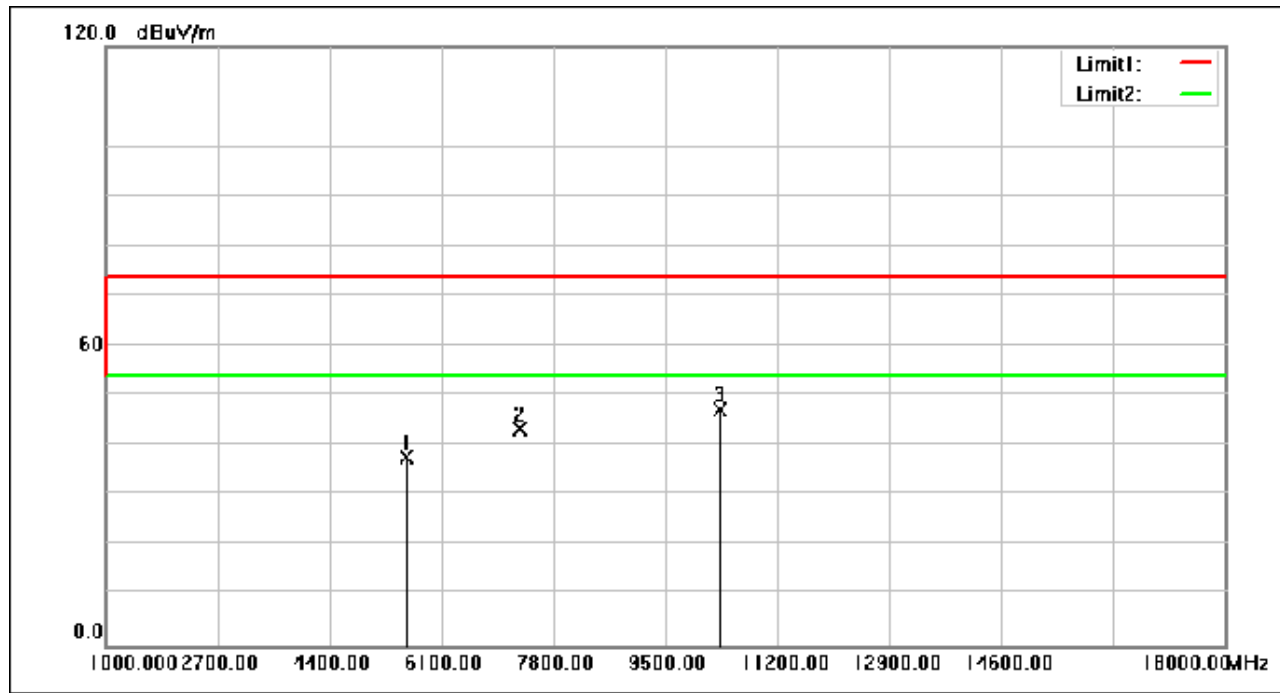

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5577.080        | 55.20            | -17.53                | 37.67           | 74.00          | -36.33      | peak   |
| 2   | 7294.080        | 54.83            | -11.44                | 43.39           | 74.00          | -30.61      | peak   |
| 3   | 10337.760       | 54.41            | -7.13                 | 47.28           | 74.00          | -26.72      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 41 of 167

Test Mode: 06; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

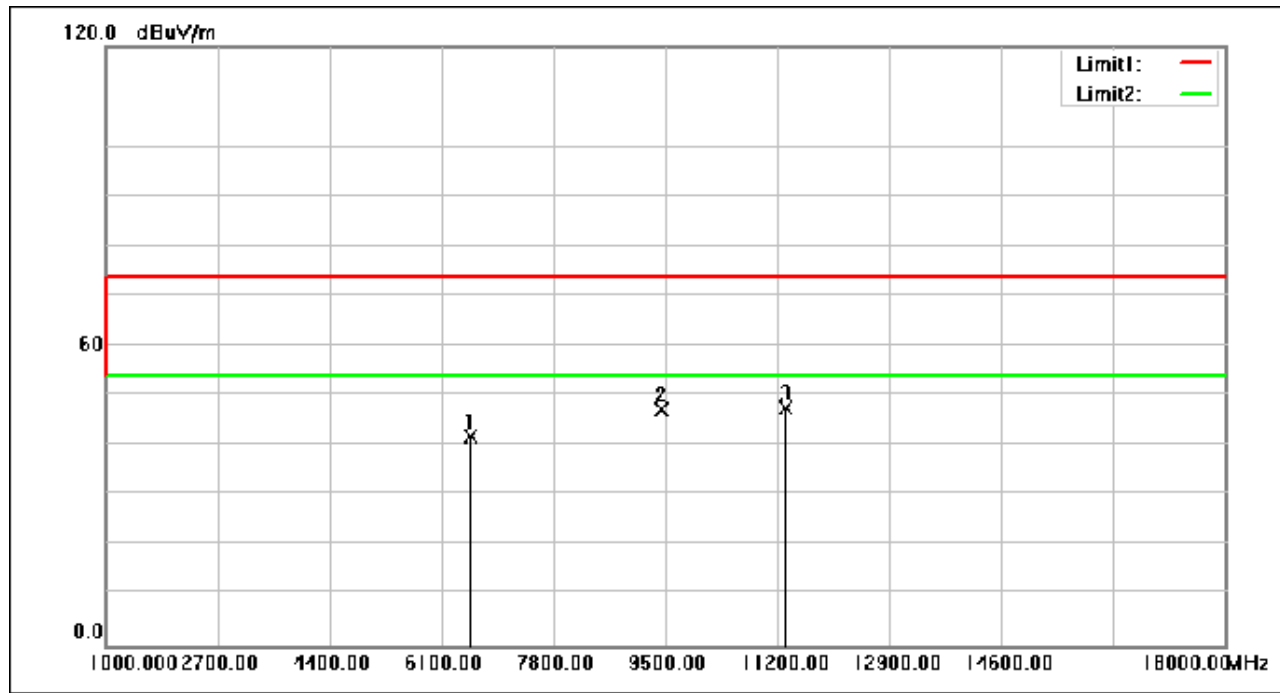

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6550.840        | 54.96            | -12.96                | 42.00           | 74.00          | -32.00      | peak   |
| 2   | 9459.880        | 55.36            | -8.03                 | 47.33           | 74.00          | -26.67      | peak   |
| 3   | 11333.960       | 53.95            | -6.50                 | 47.45           | 74.00          | -26.55      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 42 of 167

Test Mode: 06; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

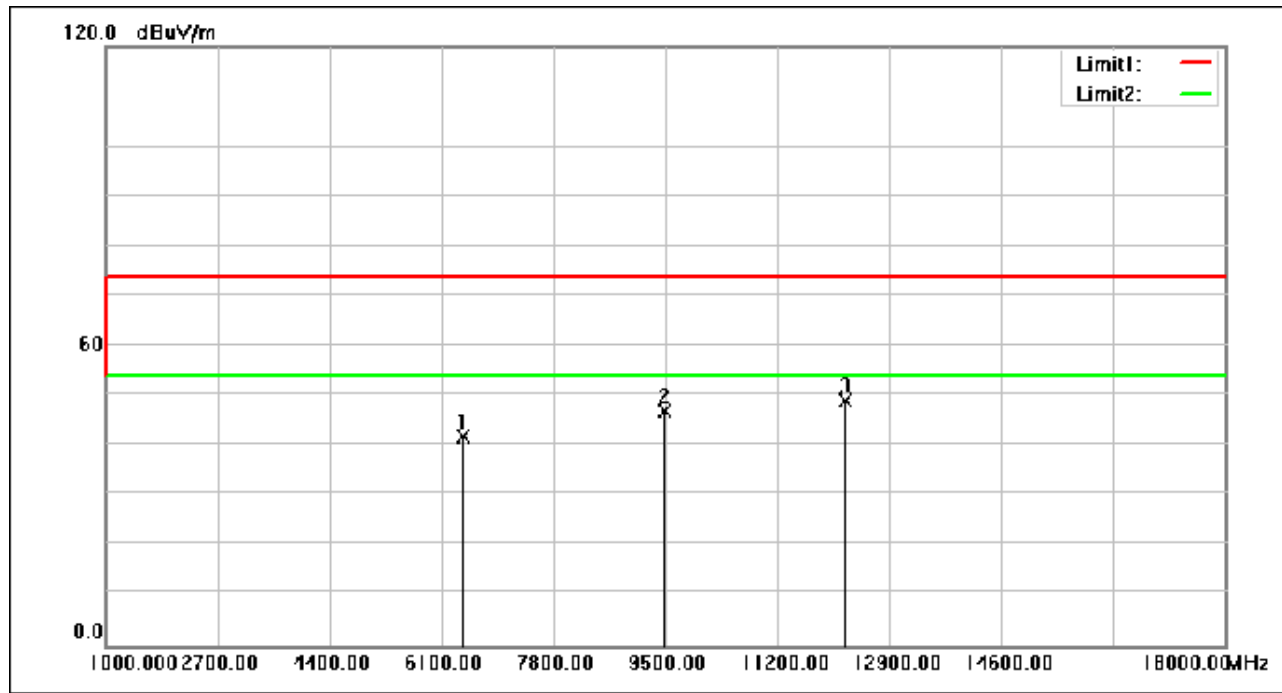

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6423.680        | 55.51            | -13.62                | 41.89           | 74.00          | -32.11      | peak   |
| 2   | 9486.400        | 54.83            | -7.98                 | 46.85           | 74.00          | -27.15      | peak   |
| 3   | 12222.040       | 54.93            | -5.98                 | 48.95           | 74.00          | -25.05      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 43 of 167

Test Mode: 06; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: middle

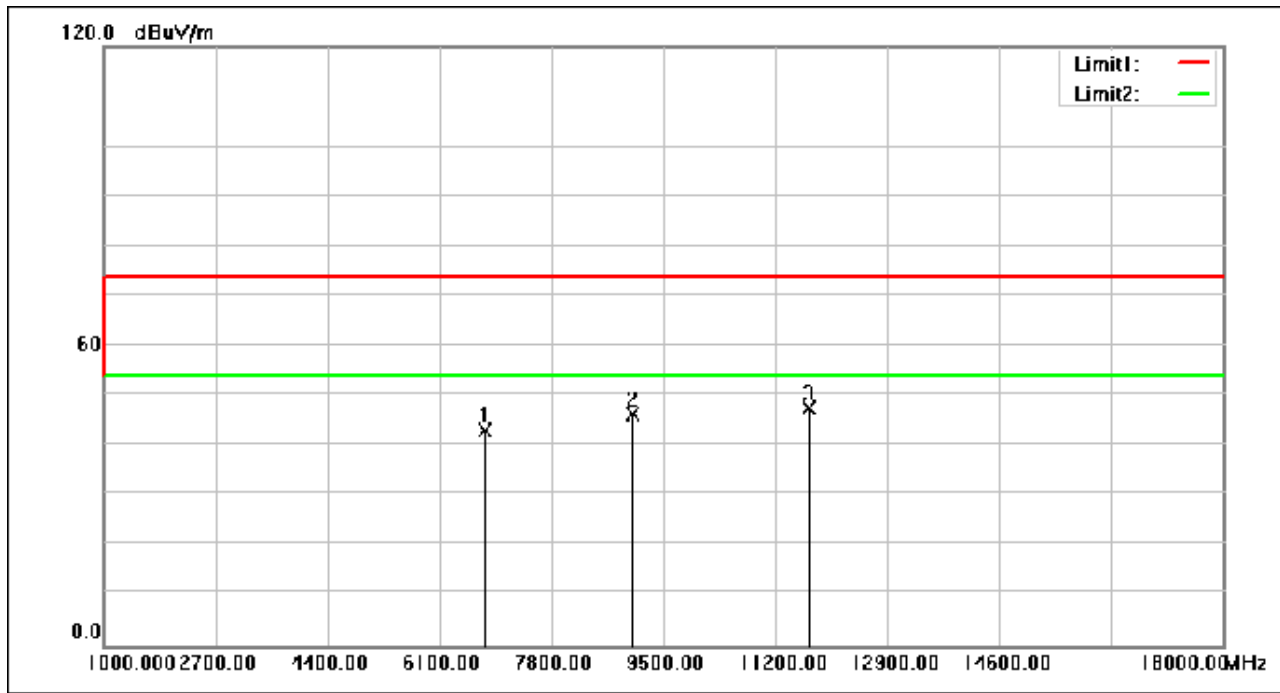

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6782.040        | 55.05            | -11.94                | 43.11           | 74.00          | -30.89      | peak   |
| 2   | 9029.440        | 55.04            | -8.84                 | 46.20           | 74.00          | -27.80      | peak   |
| 3   | 11718.160       | 53.81            | -6.18                 | 47.63           | 74.00          | -26.37      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 44 of 167

Test Mode: 06; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: middle

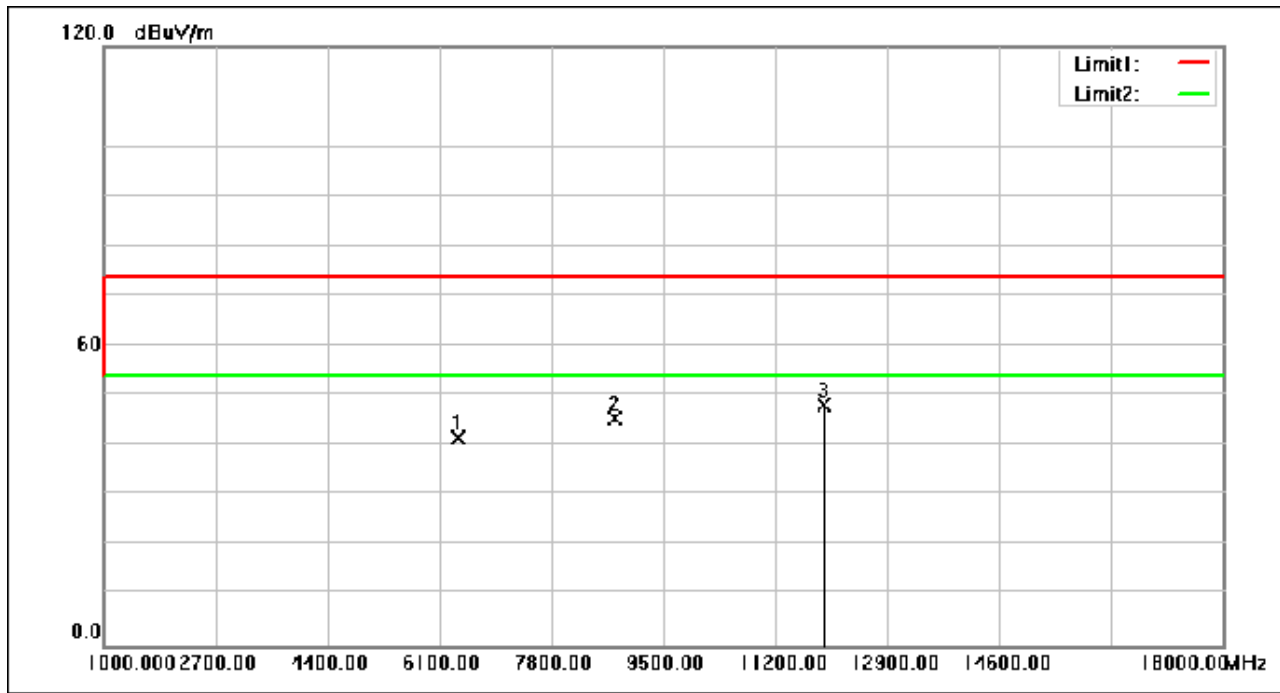

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6400.560        | 55.31            | -13.74                | 41.57           | 74.00          | -32.43      | peak   |
| 2   | 8773.760        | 54.75            | -9.30                 | 45.45           | 74.00          | -28.55      | peak   |
| 3   | 11941.200       | 54.15            | -5.99                 | 48.16           | 74.00          | -25.84      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 45 of 167

Test Mode: 06; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

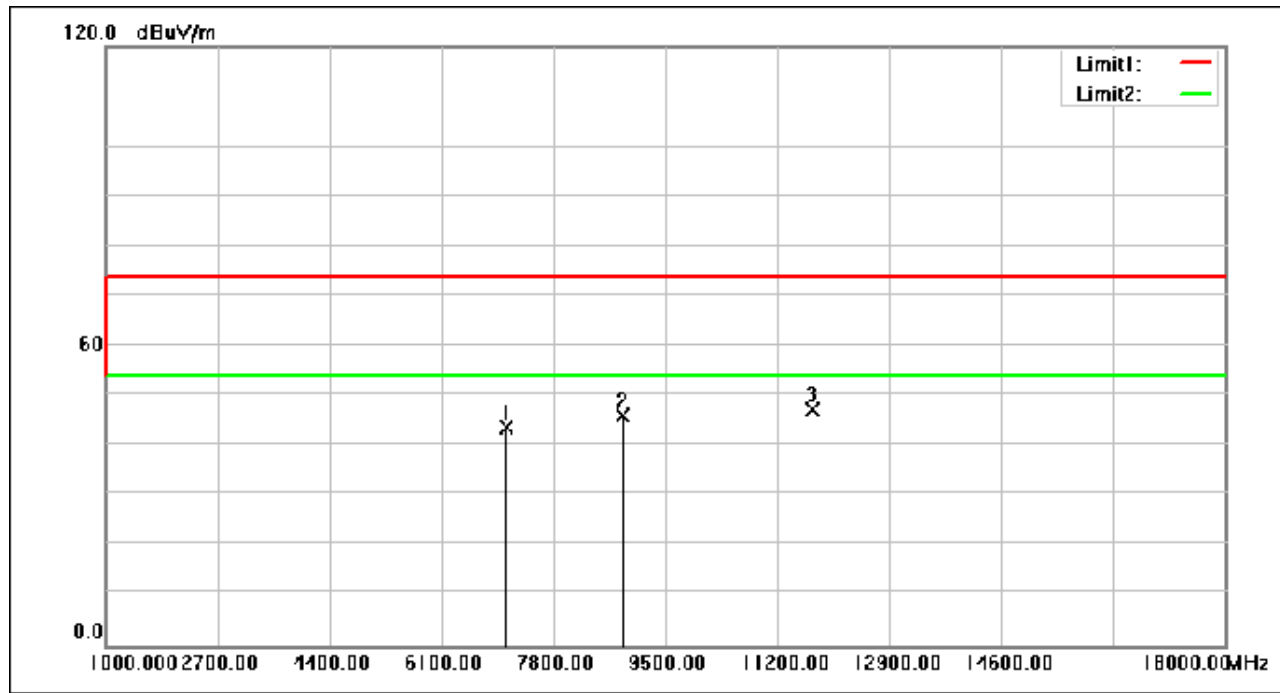

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 7097.560        | 55.03            | -11.52                | 43.51           | 74.00          | -30.49      | peak   |
| 2   | 8862.160        | 55.14            | -9.15                 | 45.99           | 74.00          | -28.01      | peak   |
| 3   | 11729.040       | 53.44            | -6.17                 | 47.27           | 74.00          | -26.73      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 46 of 167

Test Mode: 06; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

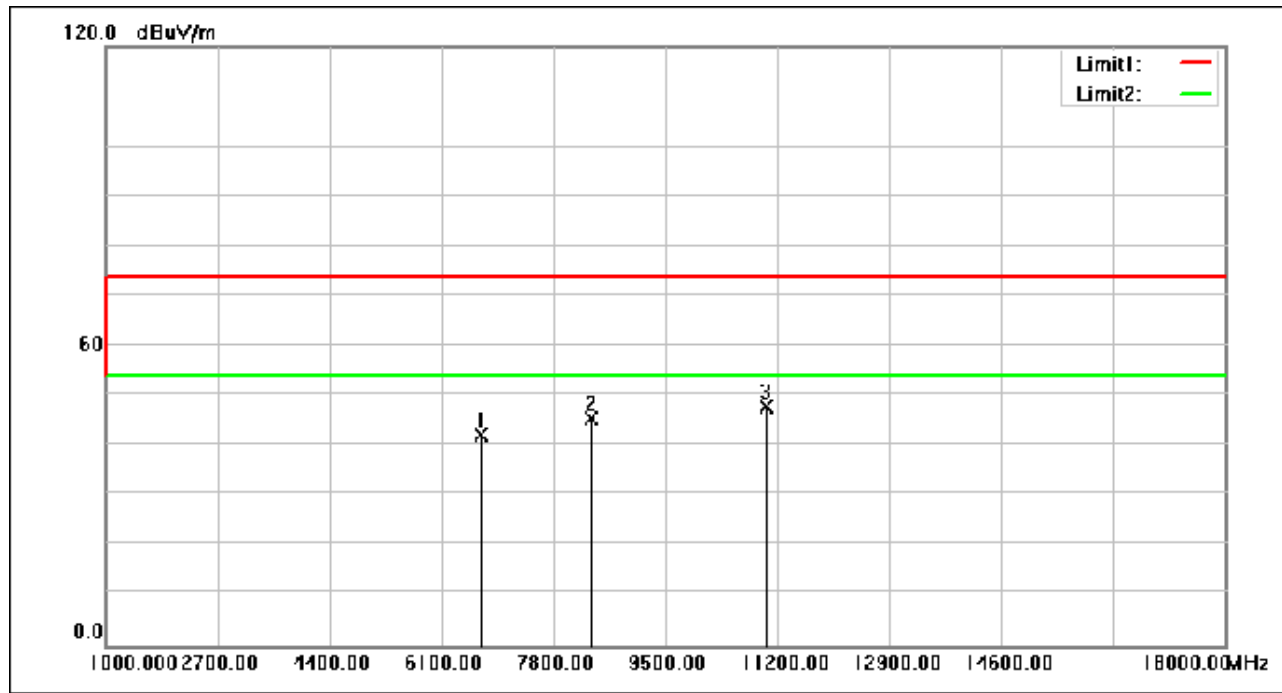

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6703.160        | 54.39            | -12.17                | 42.22           | 74.00          | -31.78      | peak   |
| 2   | 8394.320        | 55.51            | -9.93                 | 45.58           | 74.00          | -28.42      | peak   |
| 3   | 11034.080       | 54.62            | -6.74                 | 47.88           | 74.00          | -26.12      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 47 of 167

Test Mode: 06; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

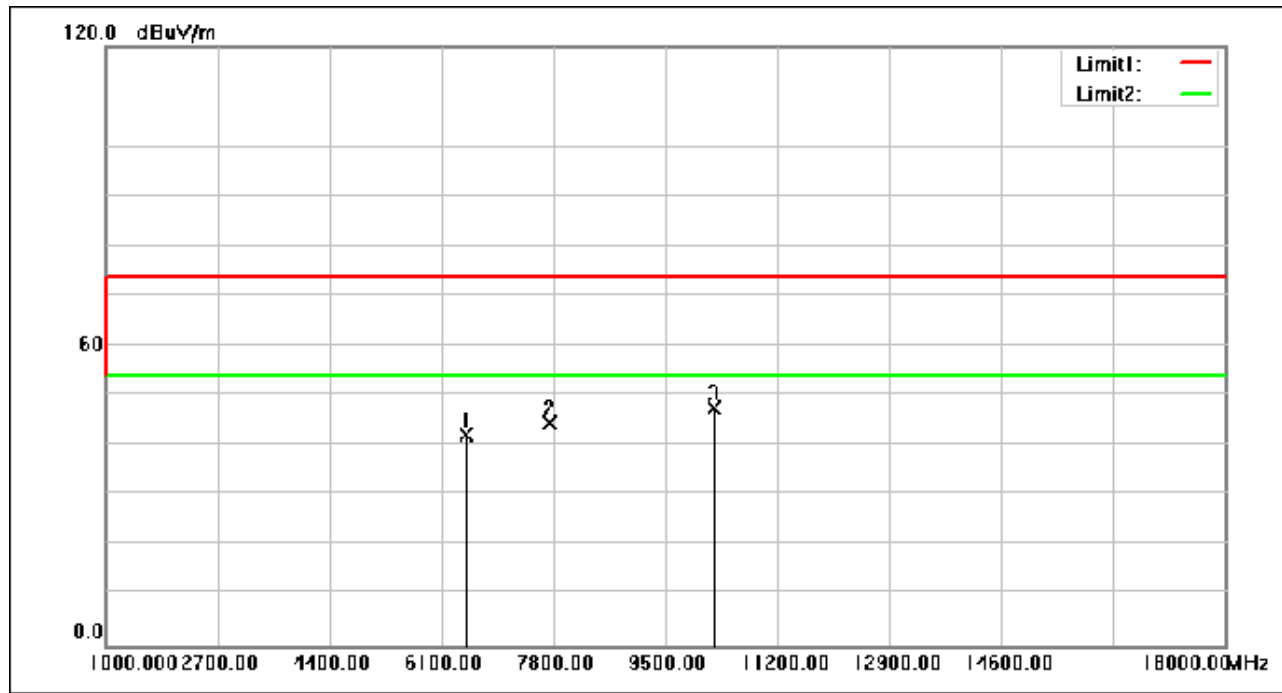

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6476.720        | 55.59            | -13.35                | 42.24           | 74.00          | -31.76      | peak   |
| 2   | 7760.560        | 55.45            | -10.91                | 44.54           | 74.00          | -29.46      | peak   |
| 3   | 10235.760       | 54.71            | -7.19                 | 47.52           | 74.00          | -26.48      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 48 of 167

Test Mode: 06; Polarity: Vertical; Modulation: 8DPSK; Channel: Low

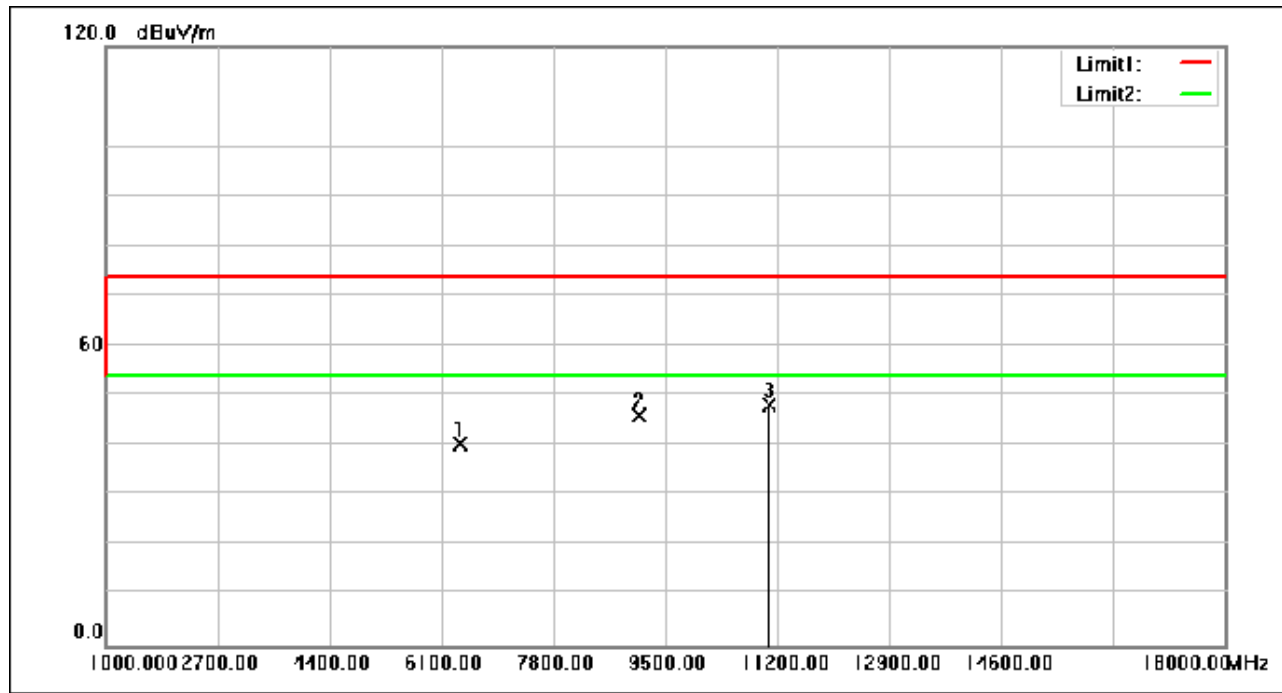

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6397.160        | 54.23            | -13.76                | 40.47           | 74.00          | -33.53      | peak   |
| 2   | 9115.120        | 54.66            | -8.68                 | 45.98           | 74.00          | -28.02      | peak   |
| 3   | 11078.280       | 54.76            | -6.70                 | 48.06           | 74.00          | -25.94      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 49 of 167

Test Mode: 06; Polarity: Horizontal; Modulation: 8DPSK; Channel: middle

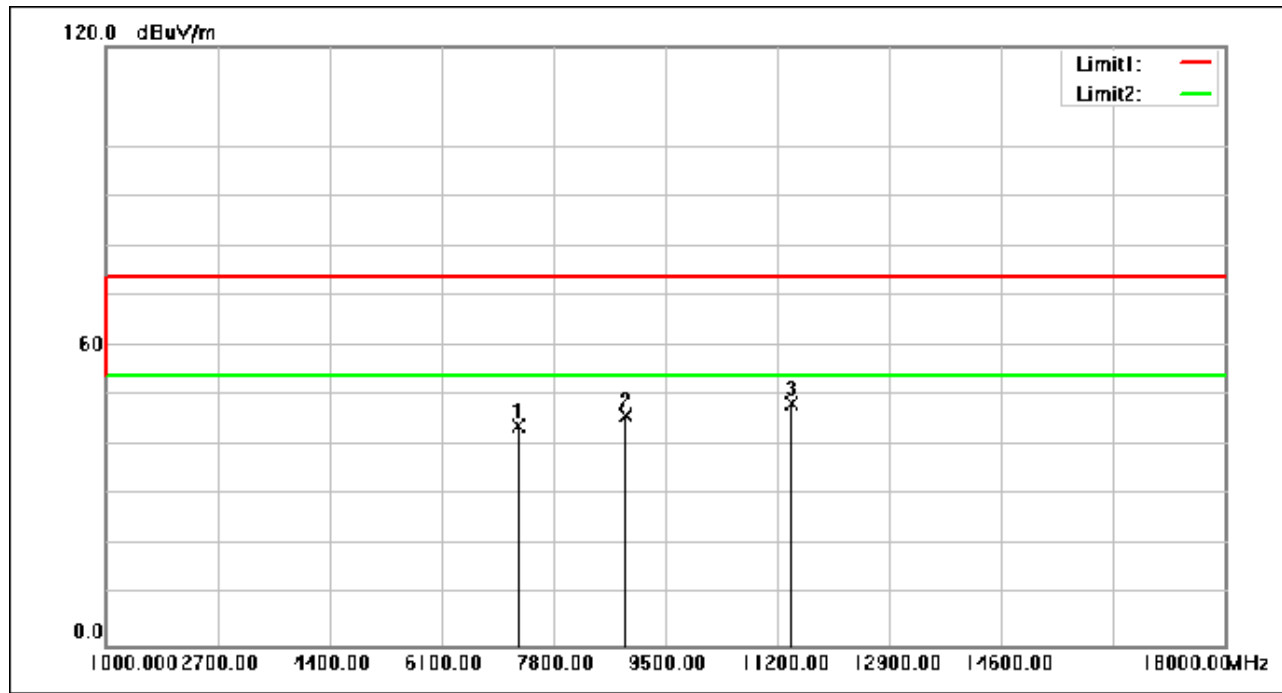

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 7288.640        | 55.35            | -11.44                | 43.91           | 74.00          | -30.09      | peak   |
| 2   | 8911.800        | 55.13            | -9.08                 | 46.05           | 74.00          | -27.95      | peak   |
| 3   | 11413.520       | 54.76            | -6.43                 | 48.33           | 74.00          | -25.67      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 50 of 167

Test Mode: 06; Polarity: Vertical; Modulation: 8DPSK; Channel: middle

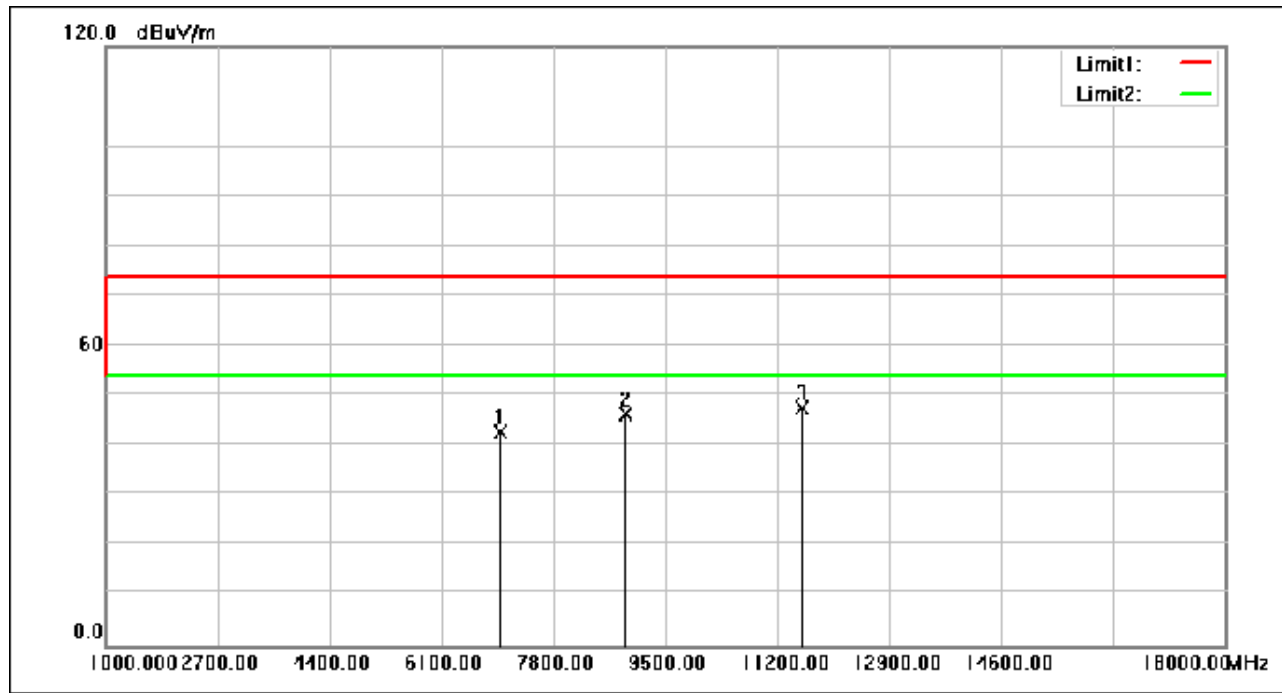

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 7007.800        | 54.40            | -11.56                | 42.84           | 74.00          | -31.16      | peak   |
| 2   | 8912.480        | 55.30            | -9.08                 | 46.22           | 74.00          | -27.78      | peak   |
| 3   | 11574.680       | 53.78            | -6.30                 | 47.48           | 74.00          | -26.52      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 51 of 167

Test Mode: 06; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

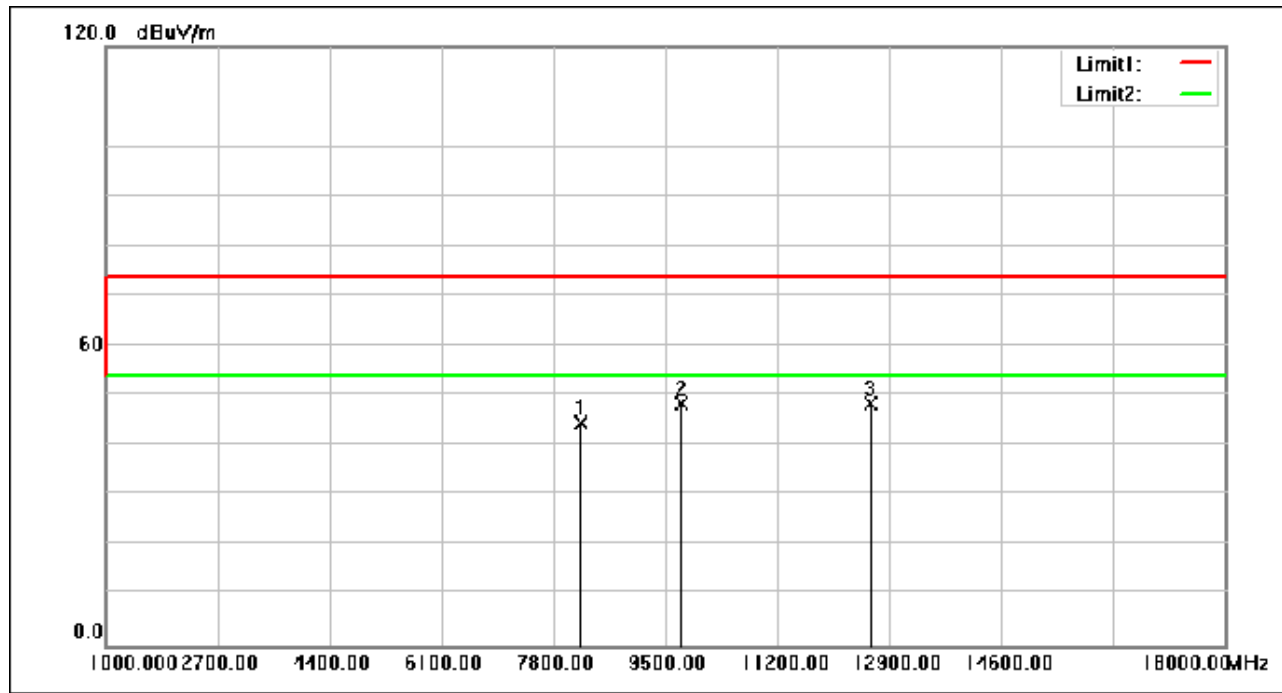

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 8210.040        | 54.84            | -10.24                | 44.60           | 74.00          | -29.40      | peak   |
| 2   | 9740.040        | 55.91            | -7.50                 | 48.41           | 74.00          | -25.59      | peak   |
| 3   | 12615.080       | 54.57            | -6.17                 | 48.40           | 74.00          | -25.60      | peak   |


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 52 of 167

Test Mode: 06; Polarity: Vertical; Modulation: 8DPSK; Channel: High

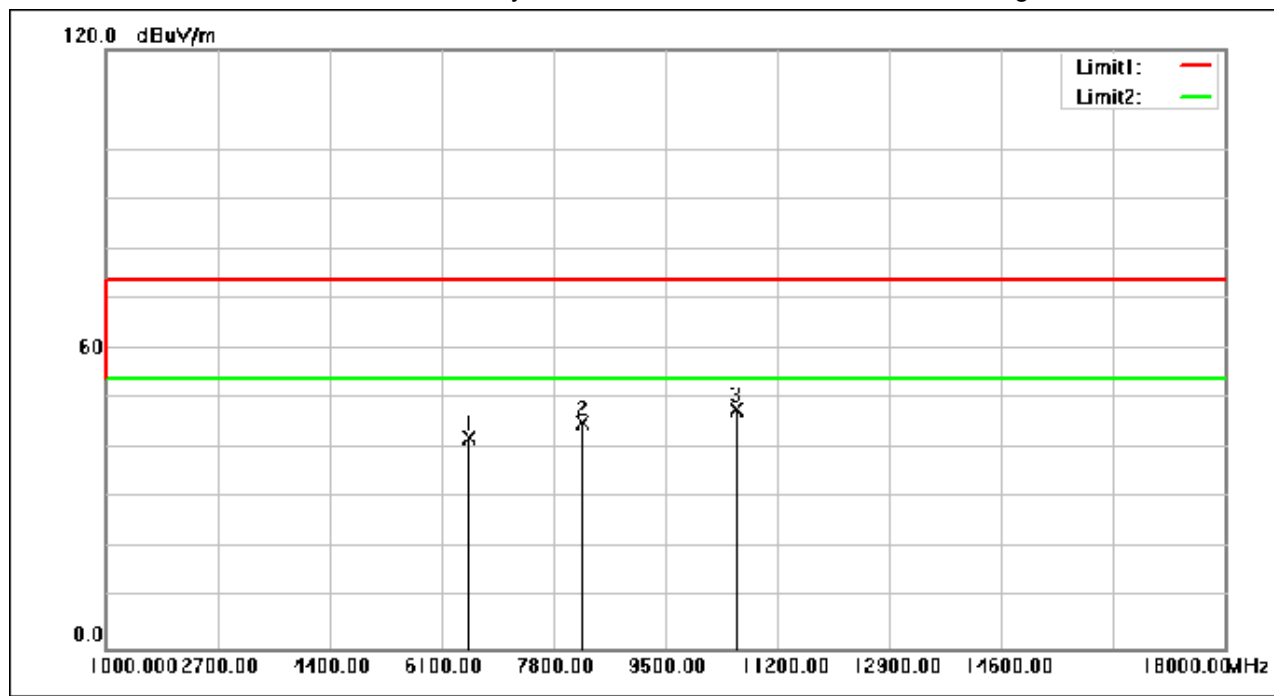

| No. | Frequency (MHz) | Reading (dBuV/m) | Correction factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 6522.960        | 55.28            | -13.10                | 42.18           | 74.00          | -31.82      | peak   |
| 2   | 8250.160        | 55.19            | -10.16                | 45.03           | 74.00          | -28.97      | peak   |
| 3   | 10577.800       | 54.85            | -7.00                 | 47.85           | 74.00          | -26.15      | peak   |

### 7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

| Frequency range(MHz) | Output power of the intentional radiator(watt)         |
|----------------------|--------------------------------------------------------|
| 902-928              | 1 for $\geq 50$ hopping channels                       |
|                      | 0.25 for $25 \leq$ hopping channels $< 50$             |
|                      | 1 for digital modulation                               |
| 2400-2483.5          | 1 for $\geq 75$ non-overlapping hopping channels       |
|                      | 0.125 for all other frequency hopping systems          |
|                      | 1 for digital modulation                               |
| 5725-5850            | 1 for frequency hopping systems and digital modulation |

#### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

#### 7.5.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                                        |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 06        | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

#### 7.5.3 Test Setup Diagram

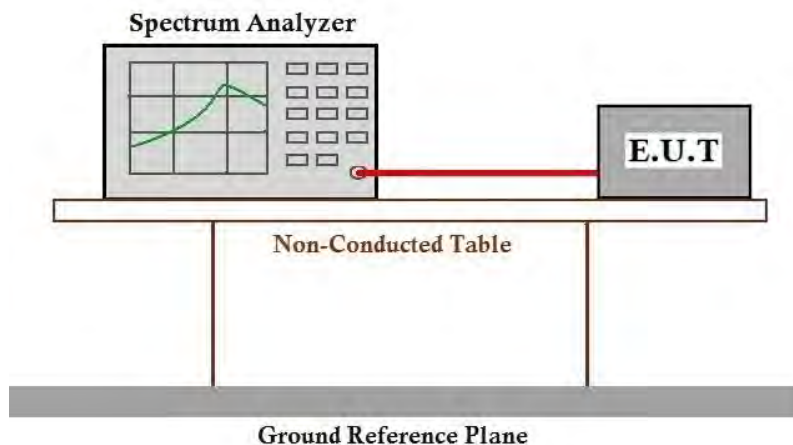



## **Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 54 of 167

### **7.5.4 Measurement Procedure and Data**

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

### 7.6 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7

#### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

#### 7.6.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                        |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 06           | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

#### 7.6.3 Test Setup Diagram

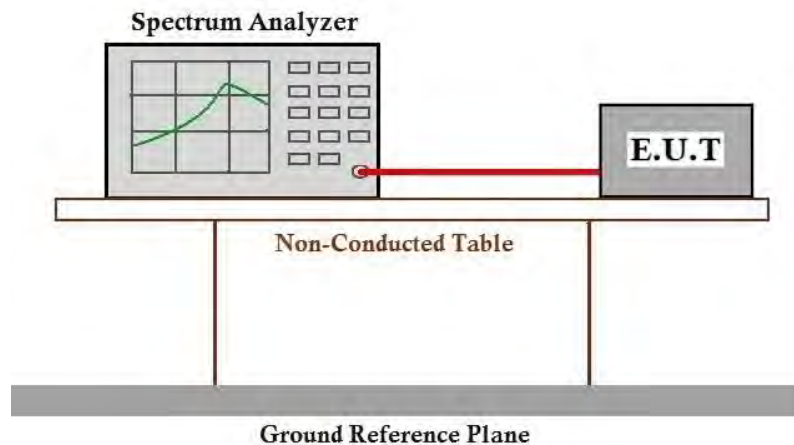

#### 7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.7 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.7.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                            |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 07        | TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

### 7.7.3 Test Setup Diagram

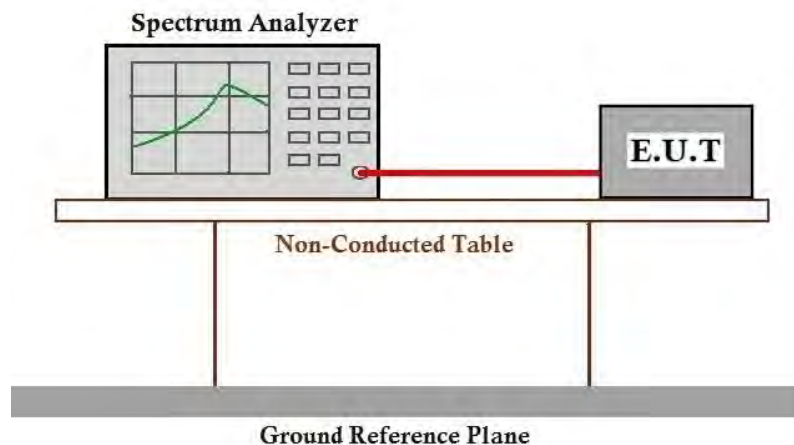

### 7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.8 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

| Frequency range(MHz) | Number of hopping channels (minimum) |
|----------------------|--------------------------------------|
| 902-928              | 50 for 20dB bandwidth <250kHz        |
|                      | 25 for 20dB bandwidth ≥250kHz        |
| 2400-2483.5          | 15                                   |
| 5725-5850            | 75                                   |

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.8.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                            |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 07        | TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

### 7.8.3 Test Setup Diagram

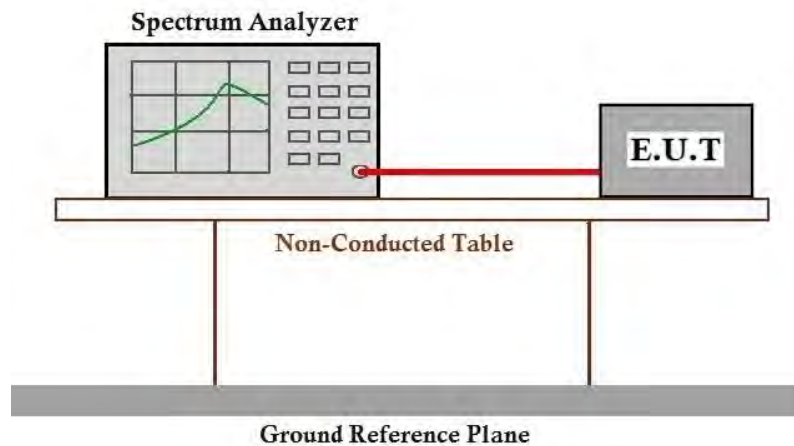

### 7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 58 of 167

### 7.9 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

| Frequency(MHz) | Limit                                                                     |
|----------------|---------------------------------------------------------------------------|
| 902-928        | 0.4S within a 20S period(20dB bandwidth<250kHz)                           |
|                | 0.4S within a 10S period(20dB bandwidth≥250kHz)                           |
| 2400-2483.5    | 0.4S within a period of 0.4S multiplied by the number of hopping channels |
| 5725-5850      | 0.4S within a 30S period                                                  |

#### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

#### 7.9.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                            |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 07        | TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

#### 7.9.3 Test Setup Diagram

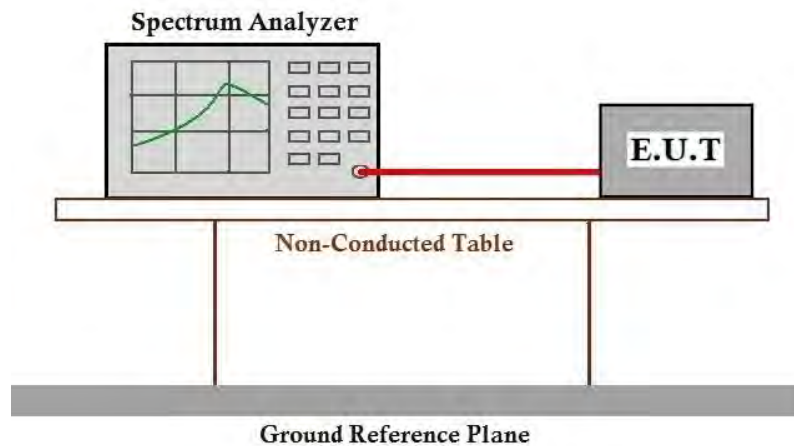

#### 7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.10 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.6

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

#### 7.10.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                                        |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 06        | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |
| Final test            | 07        | TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.             |

#### 7.10.3 Test Setup Diagram

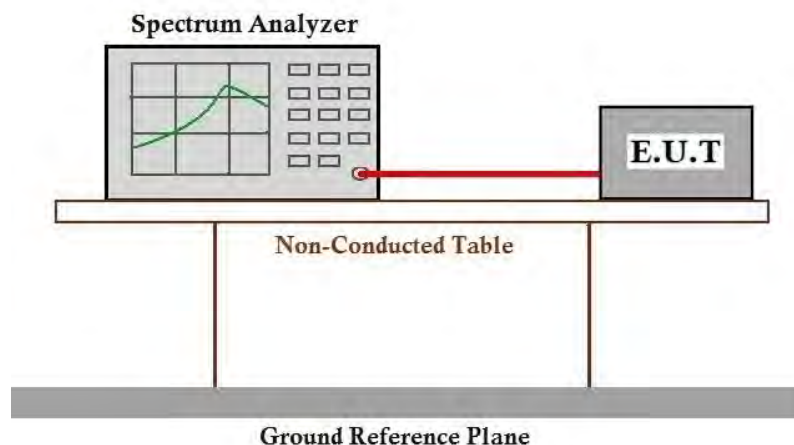



## **Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 60 of 167

### **7.10.4 Measurement Procedure and Data**

Please Refer to Appendix for Details

### 7.11 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

#### 7.11.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                                        |
|-----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test            | 06        | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

#### 7.11.3 Test Setup Diagram

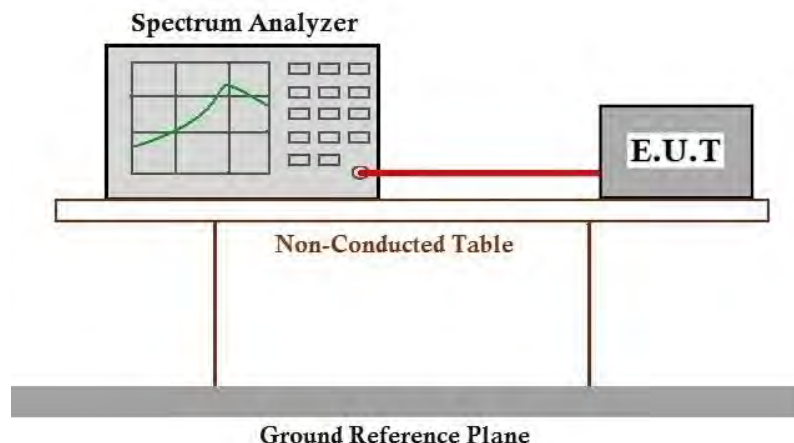

#### 7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.12 99% Bandwidth

Test Requirement RSS-Gen Section 6.7  
Test Method: ANSI C63.10 (2013) Section 6.9.3


#### 7.12.1 E.U.T. Operation

Operating Environment:  
Temperature: 25.3 °C Humidity: 52.6 % RH Atmospheric Pressure: 1010 mbar

#### 7.12.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                        |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 06           | TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report. |

#### 7.12.3 Test Setup Diagram

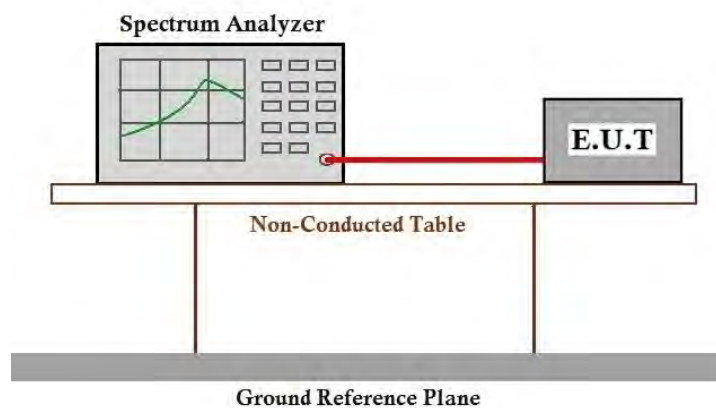

#### 7.12.4 Measurement Procedure and Data

Please Refer to Appendix for Details



## **Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 63 of 167

### **8 Test Setup Photo**

Refer to Appendix - Test Setup Photo for KSCR2407001217AT

### **9 EUT Constructional Details (EUT Photos)**

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2407001217AT

## 10 Appendix

### Ant1

#### 1. Bandwidth

##### 1.1 Test Result

##### 1.1.1 OBW


| Mode      | TX Type | Frequency (MHz) | Packet Type | ANT | 99% Occupied Bandwidth (MHz) |       | Verdict |
|-----------|---------|-----------------|-------------|-----|------------------------------|-------|---------|
|           |         |                 |             |     | Result                       | Limit |         |
| GFSK      | SISO    | 2402            | DH5         | 1   | 0.833                        | /     | Pass    |
|           |         | 2441            | DH5         | 1   | 0.832                        | /     | Pass    |
|           |         | 2480            | DH5         | 1   | 0.835                        | /     | Pass    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 1   | 1.174                        | /     | Pass    |
|           |         | 2441            | 2DH5        | 1   | 1.176                        | /     | Pass    |
|           |         | 2480            | 2DH5        | 1   | 1.174                        | /     | Pass    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 1   | 1.184                        | /     | Pass    |
|           |         | 2441            | 3DH5        | 1   | 1.182                        | /     | Pass    |
|           |         | 2480            | 3DH5        | 1   | 1.182                        | /     | Pass    |

##### 1.1.2 20dB BW


| Mode      | TX Type | Frequency (MHz) | Packet Type | ANT | 20dB Bandwidth (MHz) |       | Verdict |
|-----------|---------|-----------------|-------------|-----|----------------------|-------|---------|
|           |         |                 |             |     | Result               | Limit |         |
| GFSK      | SISO    | 2402            | DH5         | 1   | 0.937                | /     | Pass    |
|           |         | 2441            | DH5         | 1   | 0.937                | /     | Pass    |
|           |         | 2480            | DH5         | 1   | 0.935                | /     | Pass    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 1   | 1.330                | /     | Pass    |
|           |         | 2441            | 2DH5        | 1   | 1.338                | /     | Pass    |
|           |         | 2480            | 2DH5        | 1   | 1.330                | /     | Pass    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 1   | 1.318                | /     | Pass    |
|           |         | 2441            | 3DH5        | 1   | 1.319                | /     | Pass    |
|           |         | 2480            | 3DH5        | 1   | 1.319                | /     | Pass    |

### 1.2 Test Graph


#### 1.2.1 OBW

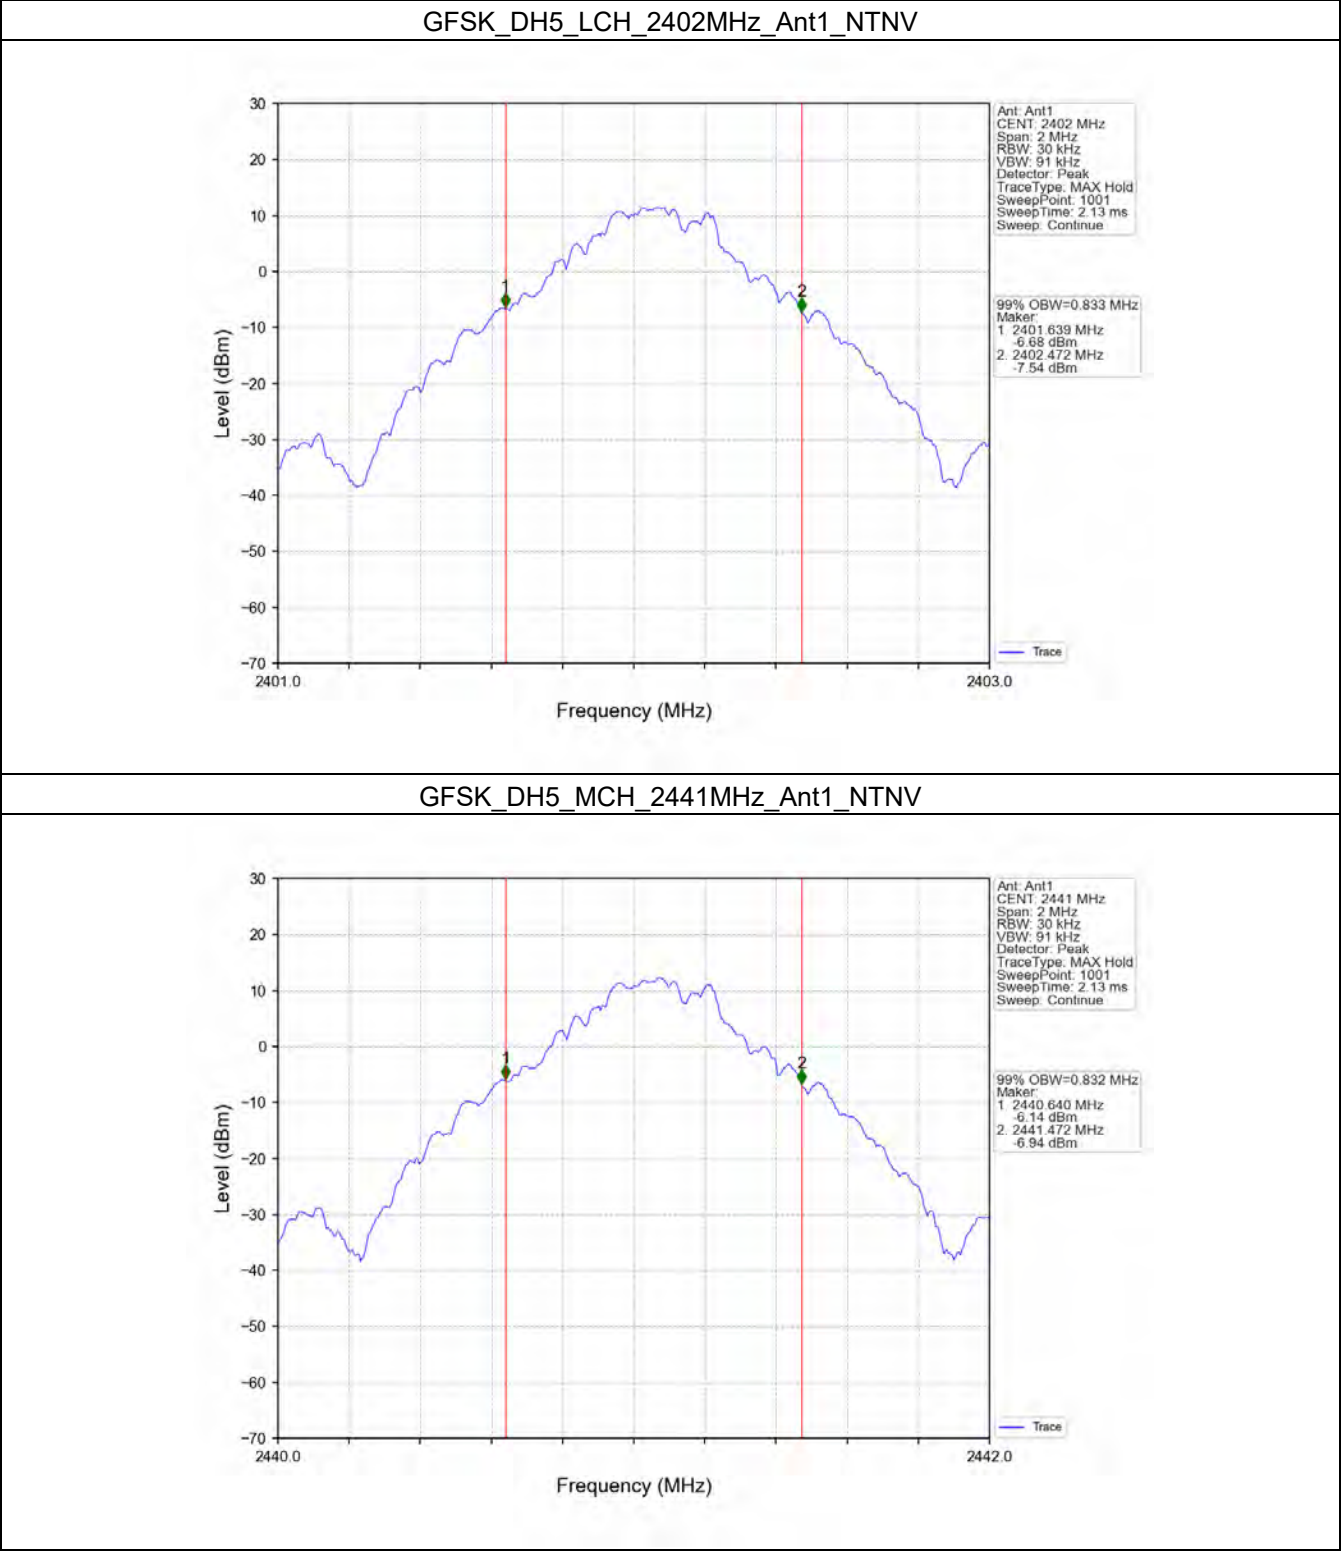

GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

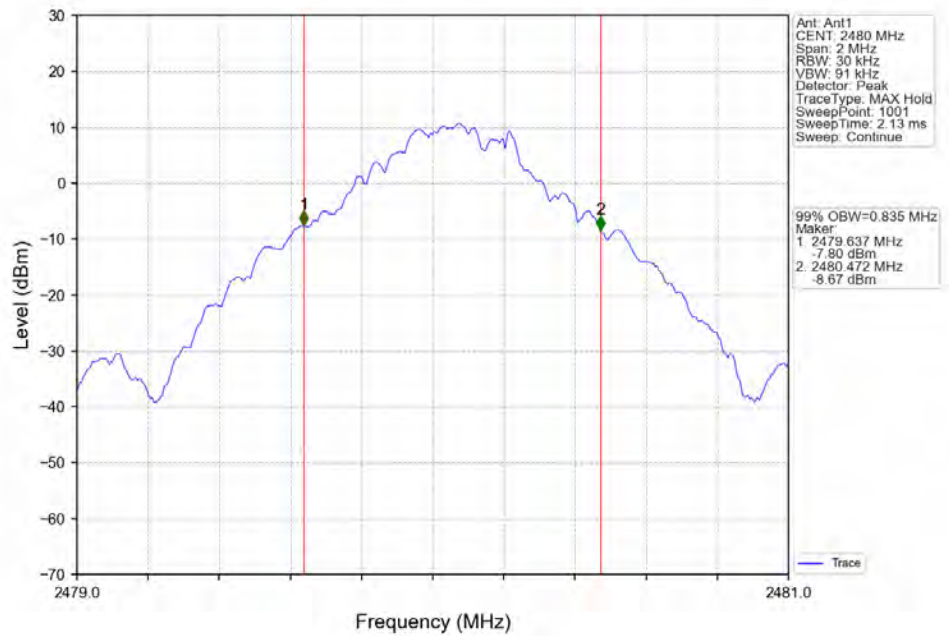

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

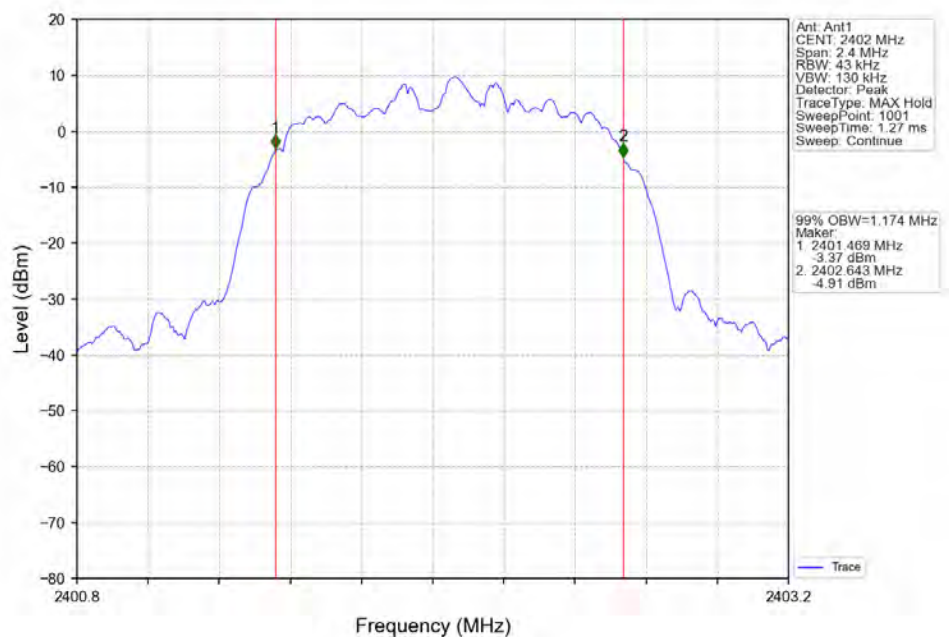


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 67 of 167

Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

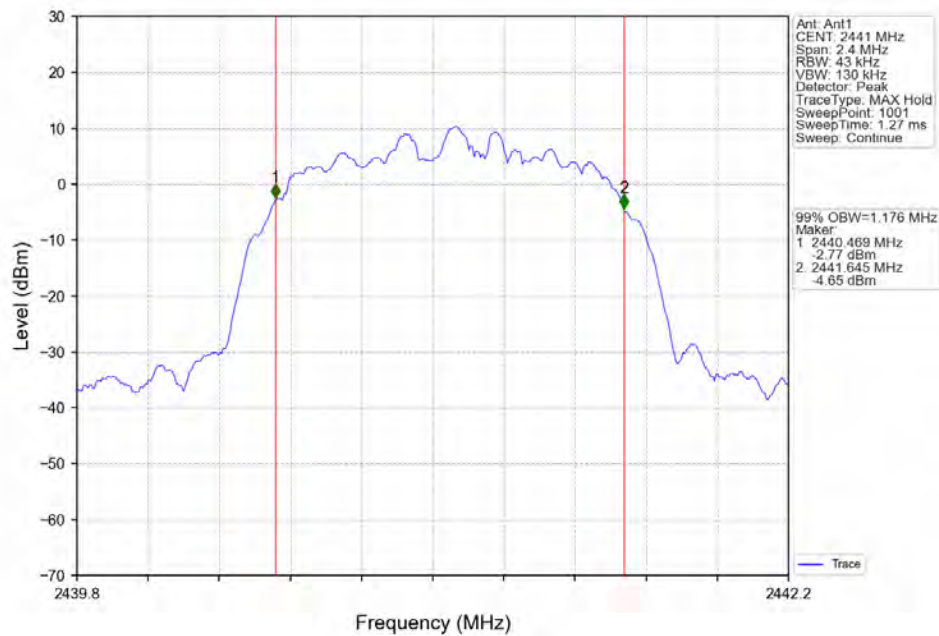

Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

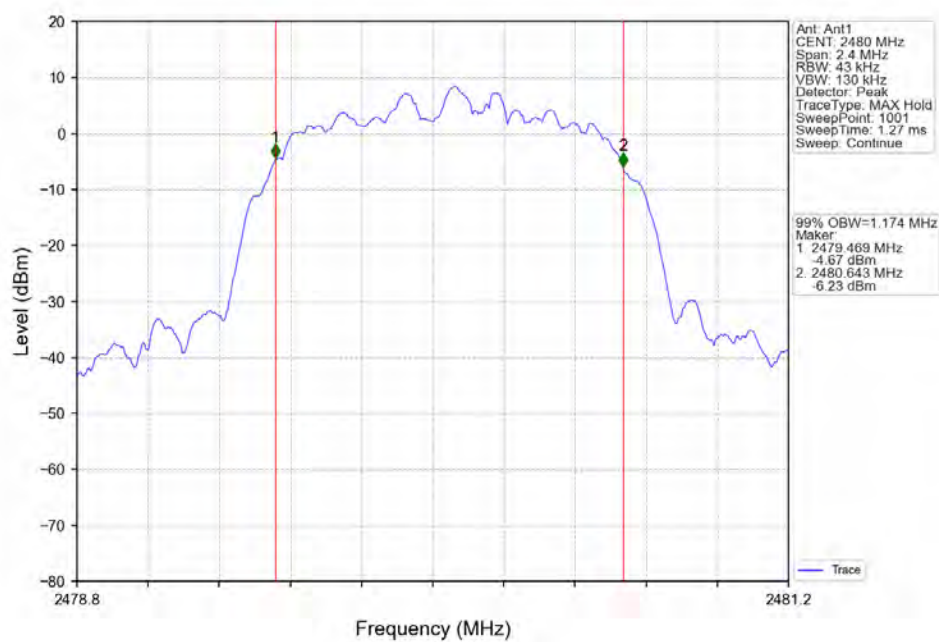


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 68 of 167

8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

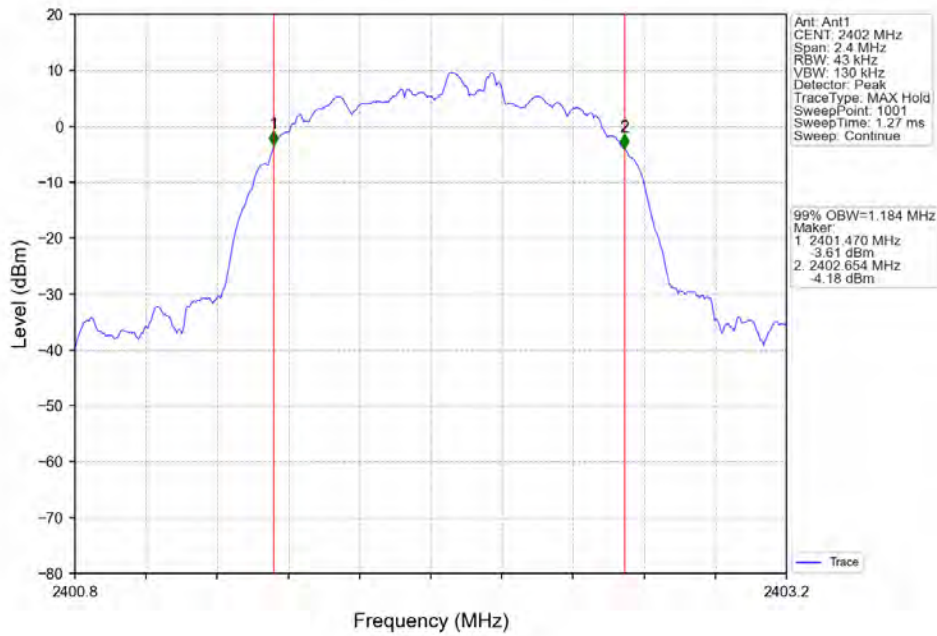

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

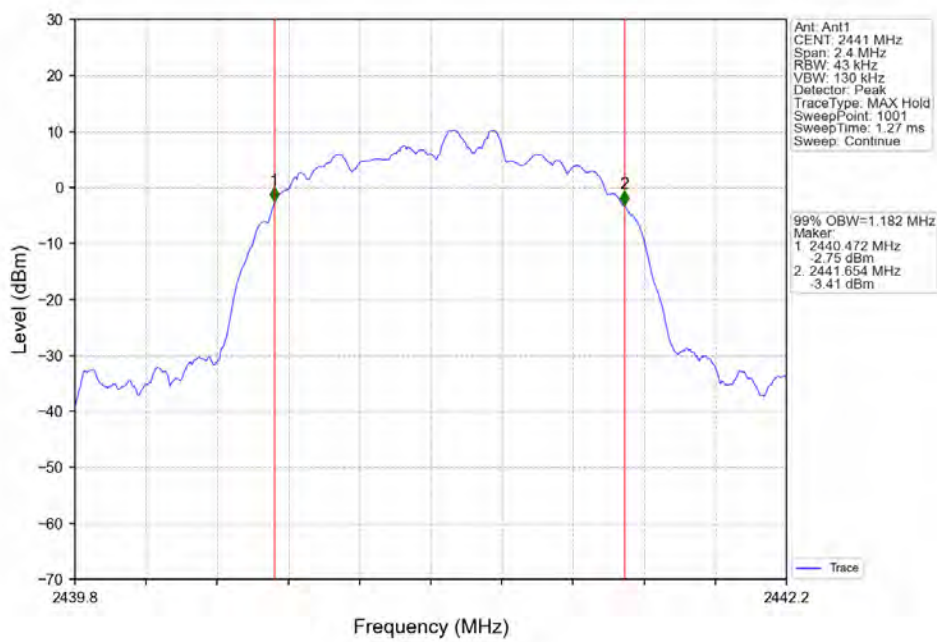


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 69 of 167


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

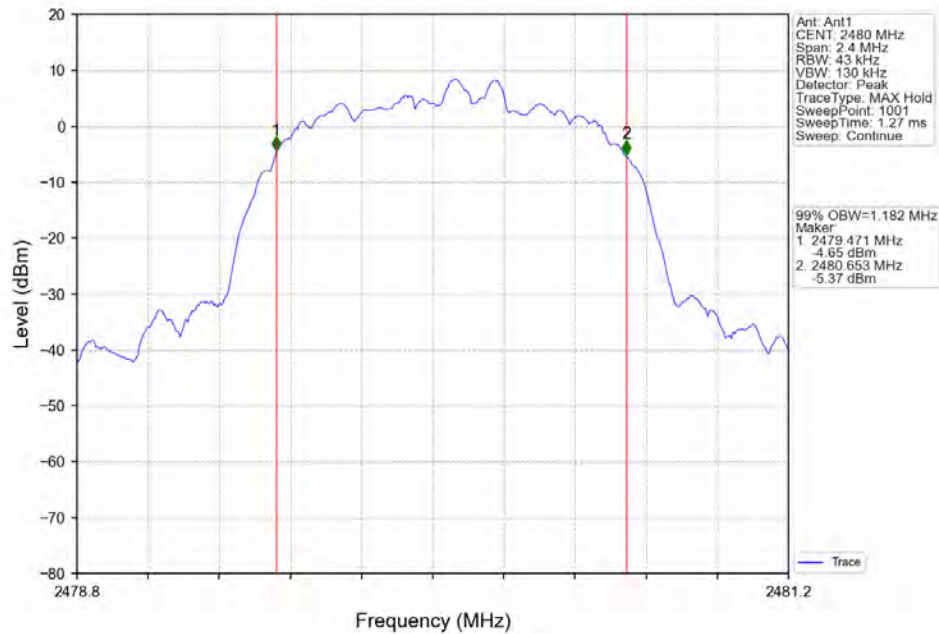


### 1.2.2 20dB BW

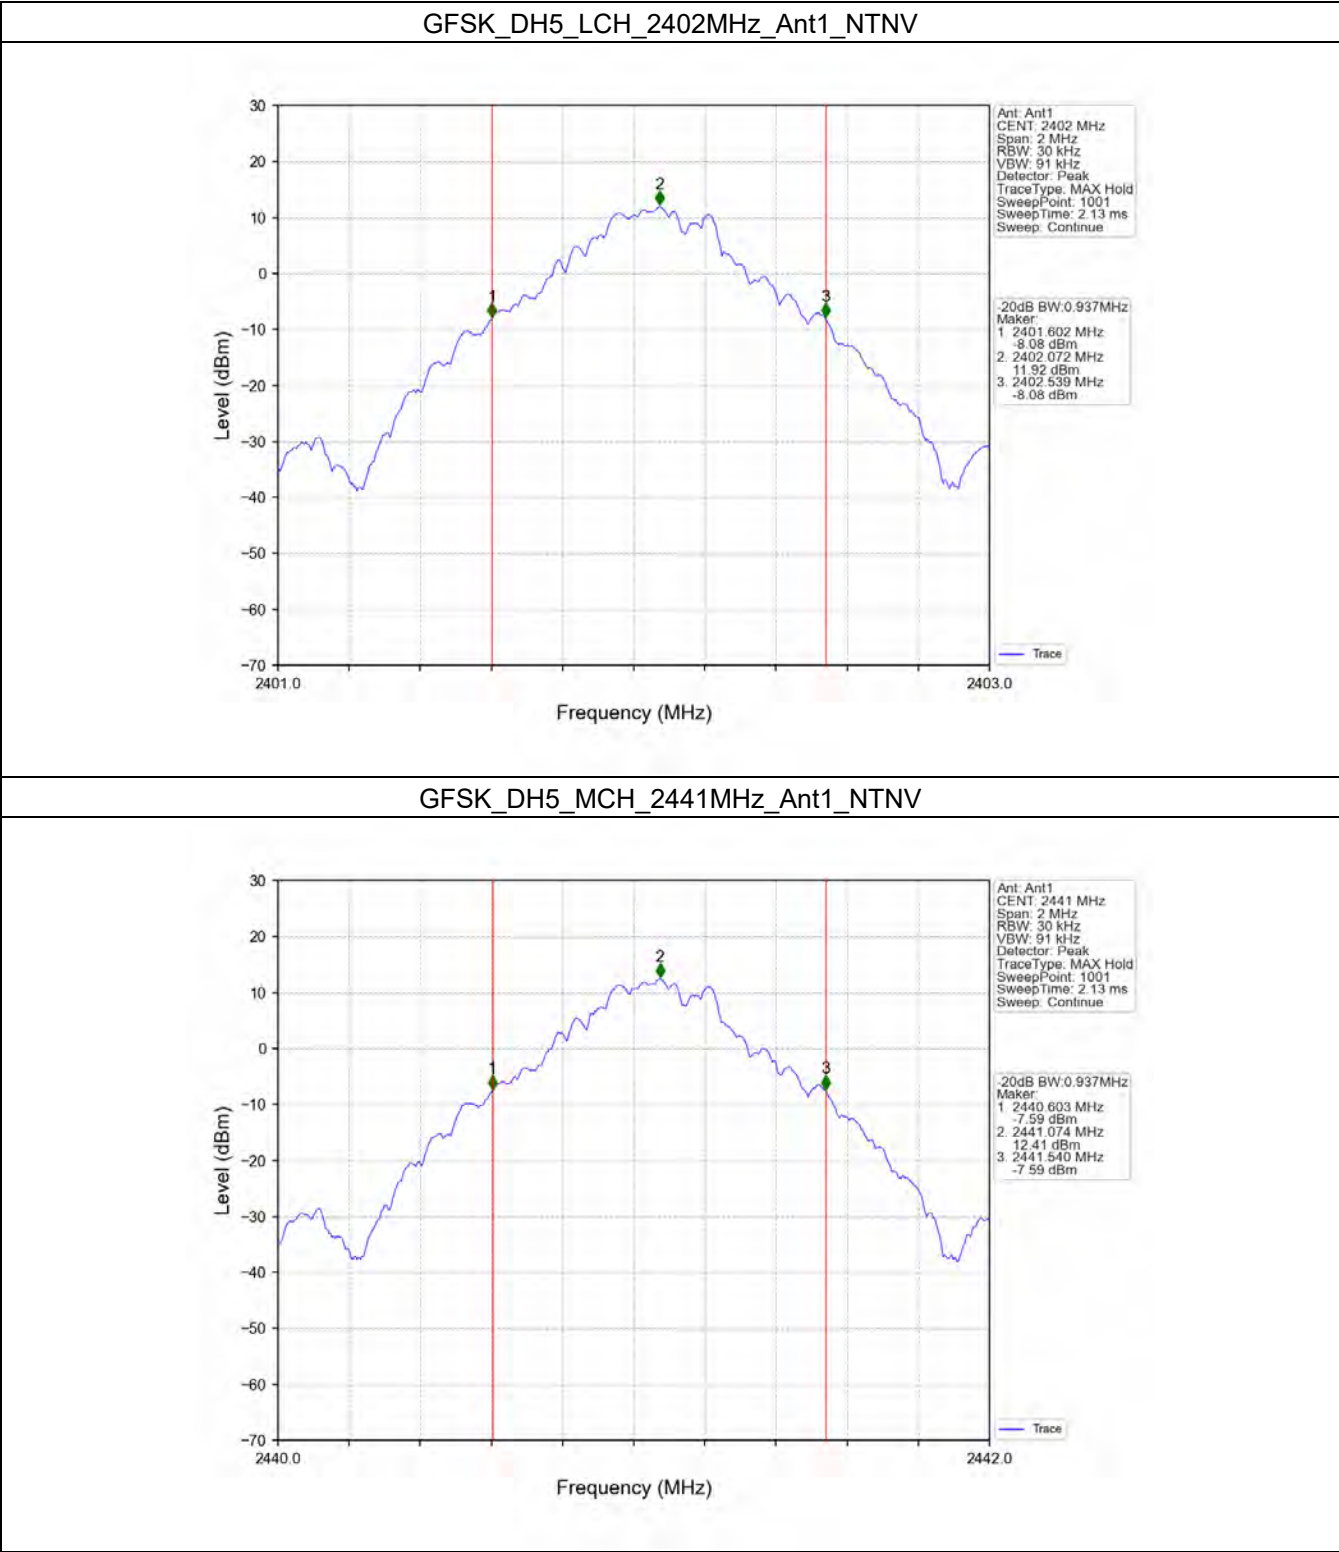

GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

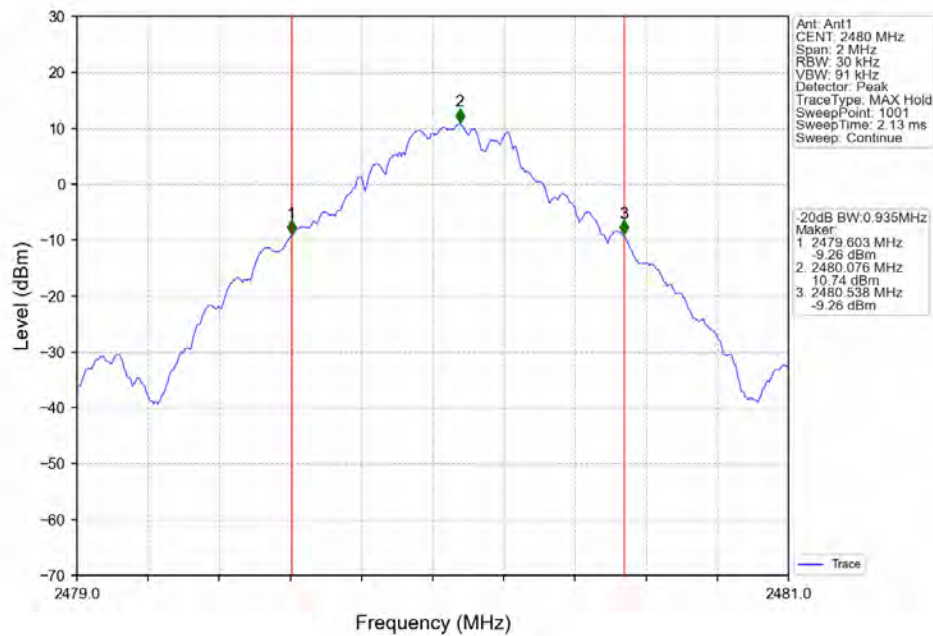

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

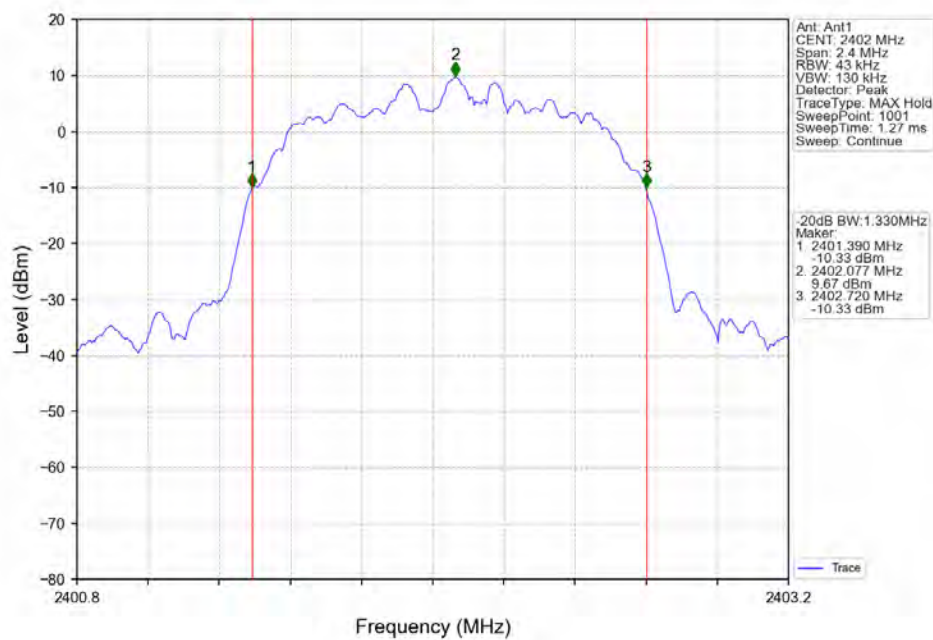


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 72 of 167


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

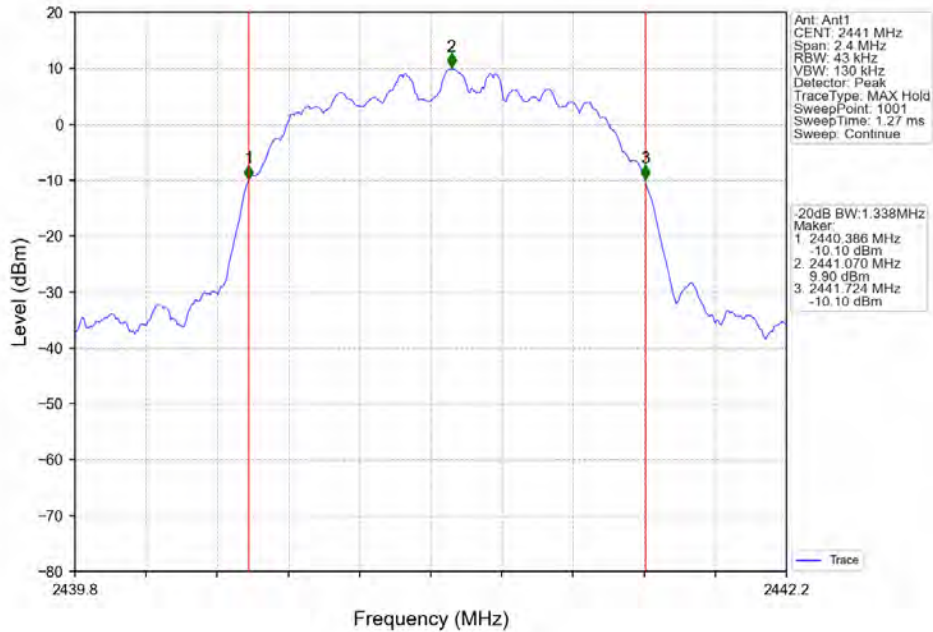


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

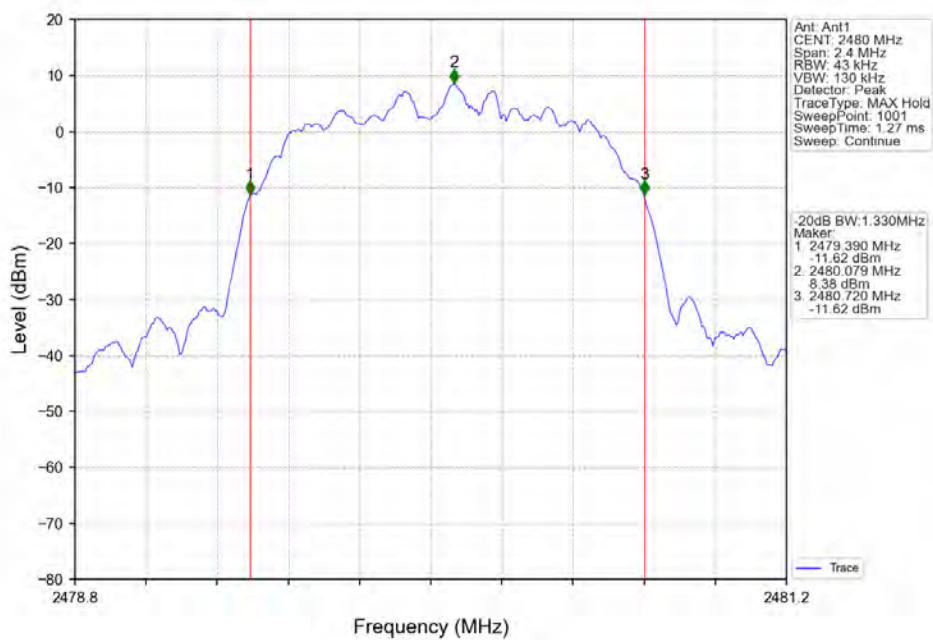


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

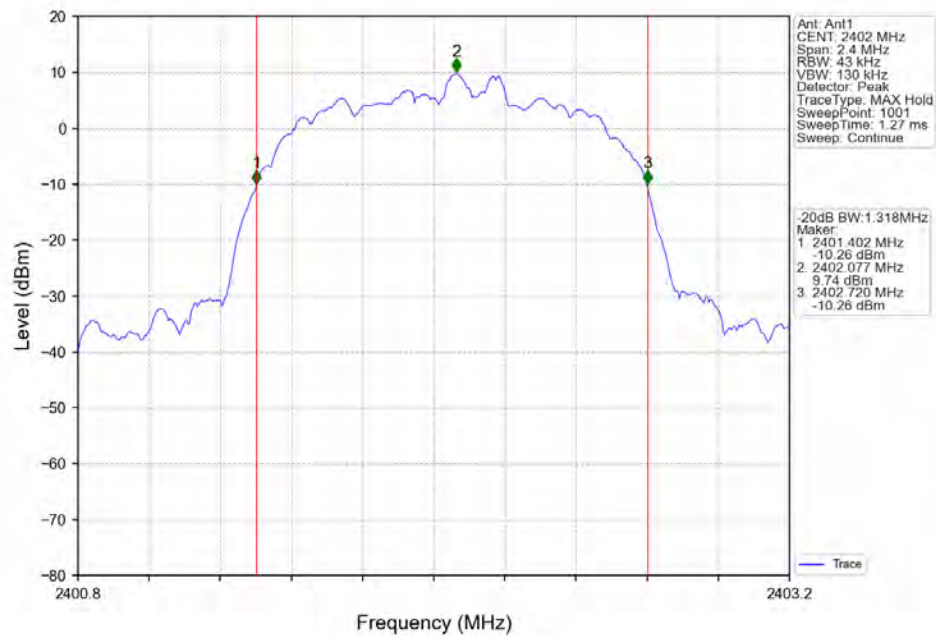

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

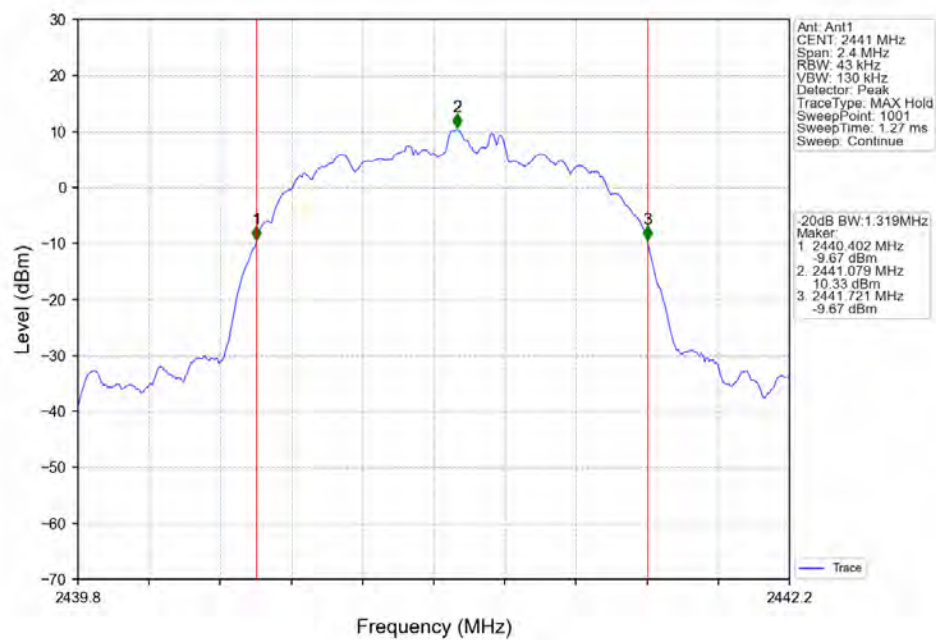


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

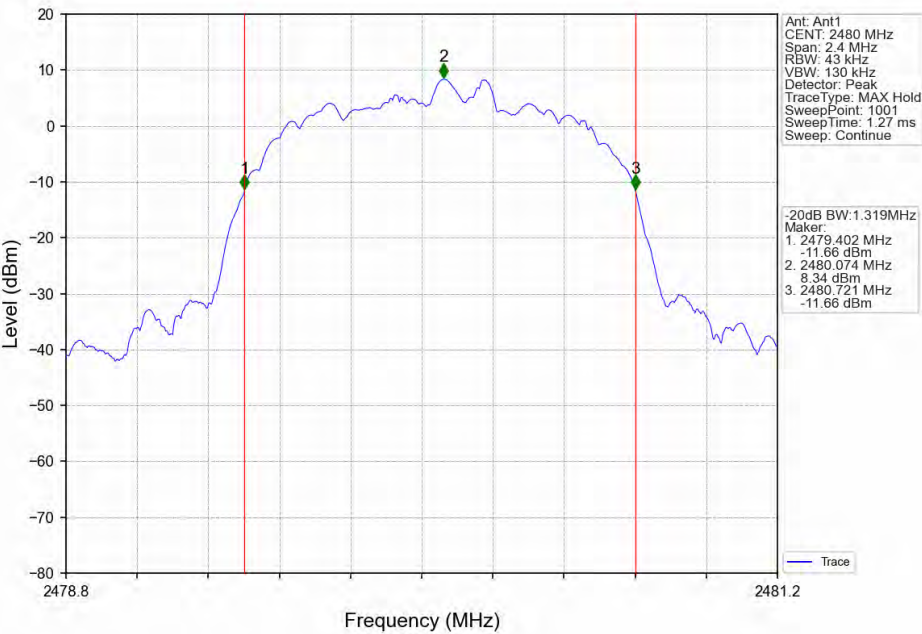

Note1: Antenna Gain: Ant1: 1.69dBi;

### 2.2 Test Graph

#### 2.2.1 Power

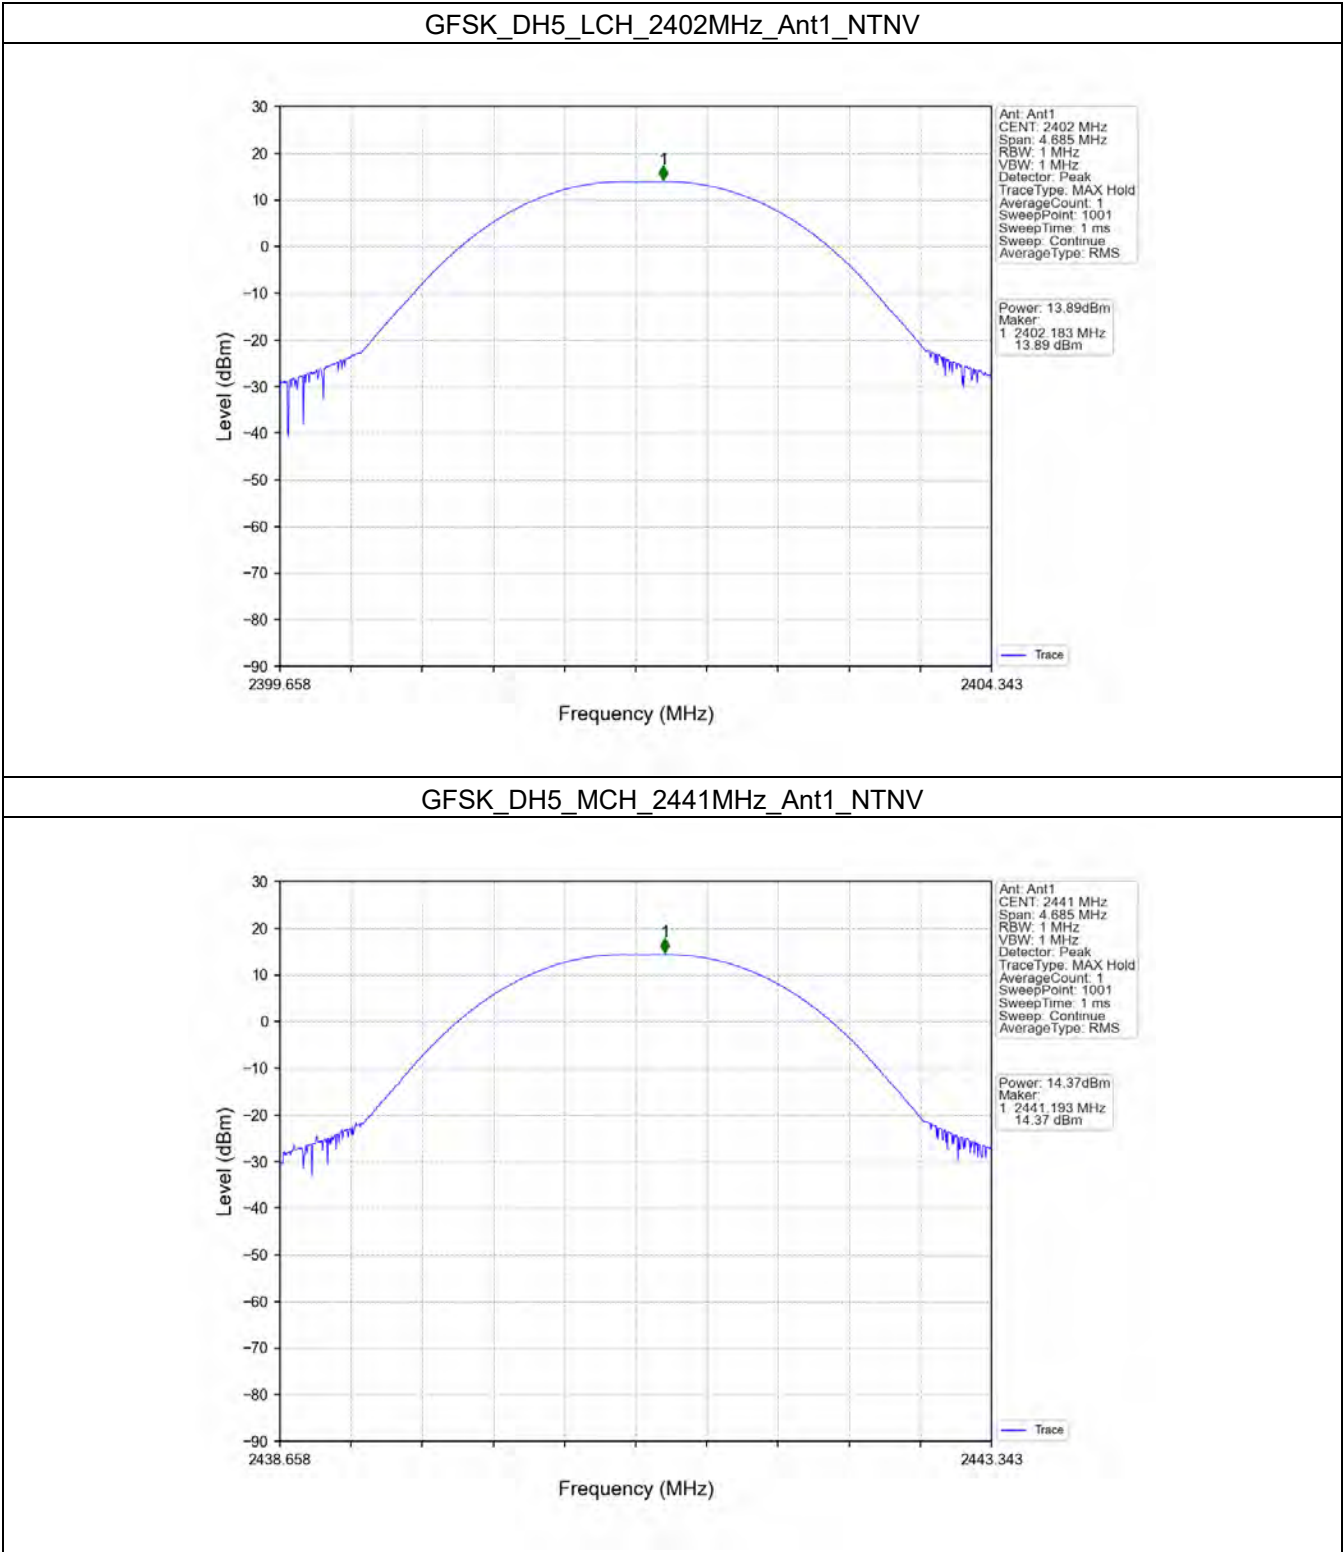


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 77 of 167

GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

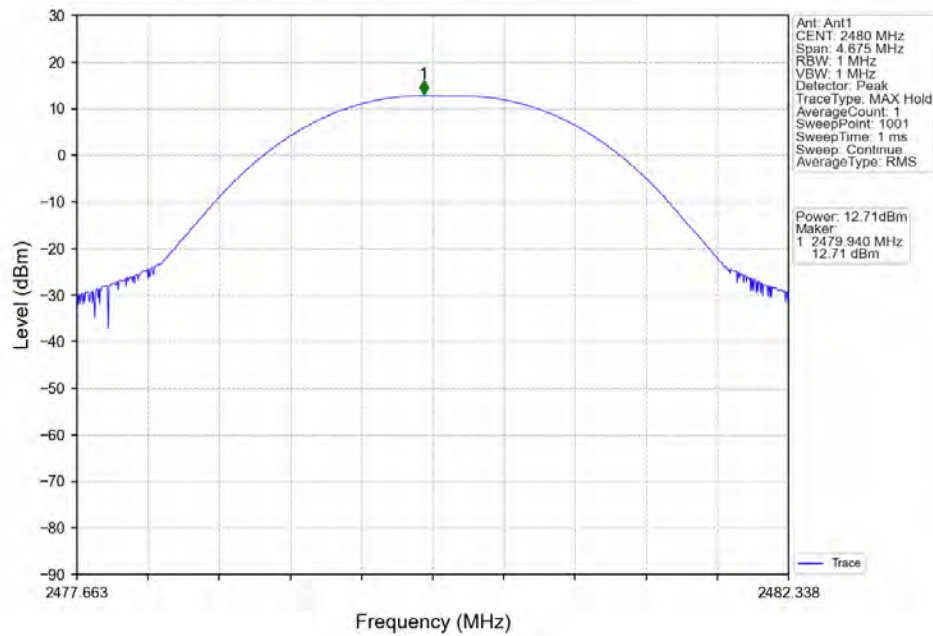

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

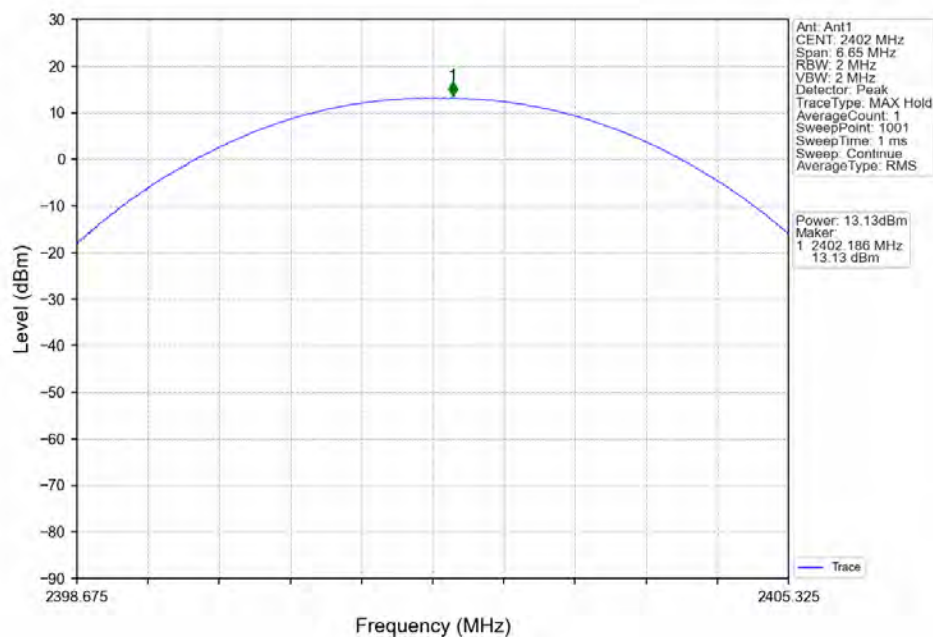


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 78 of 167


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

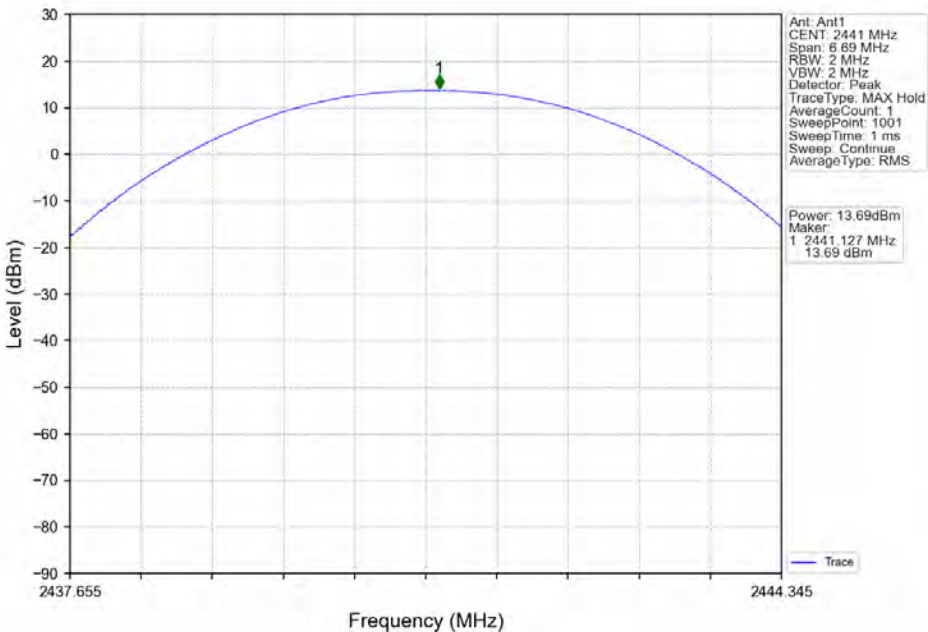


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

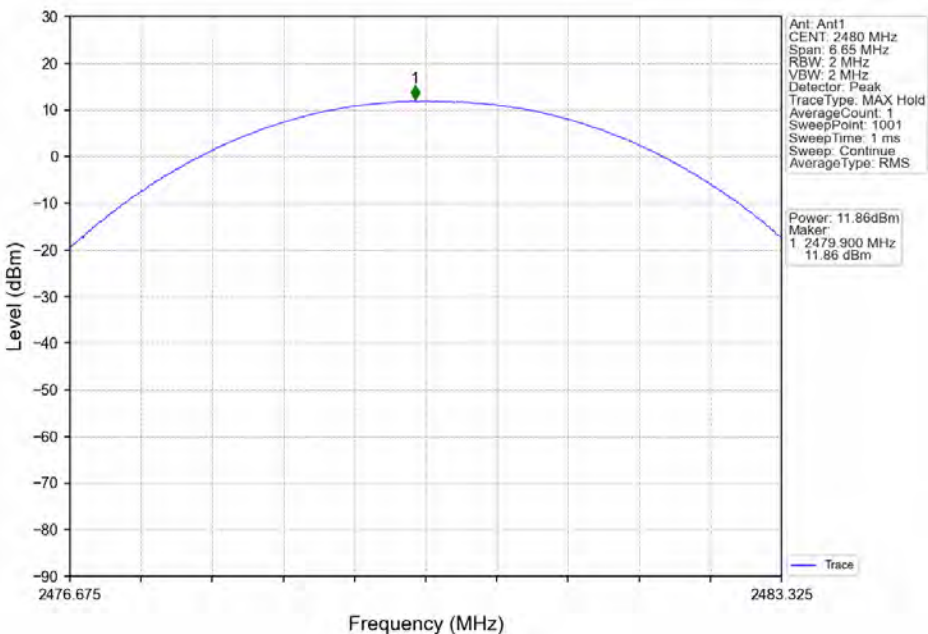


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

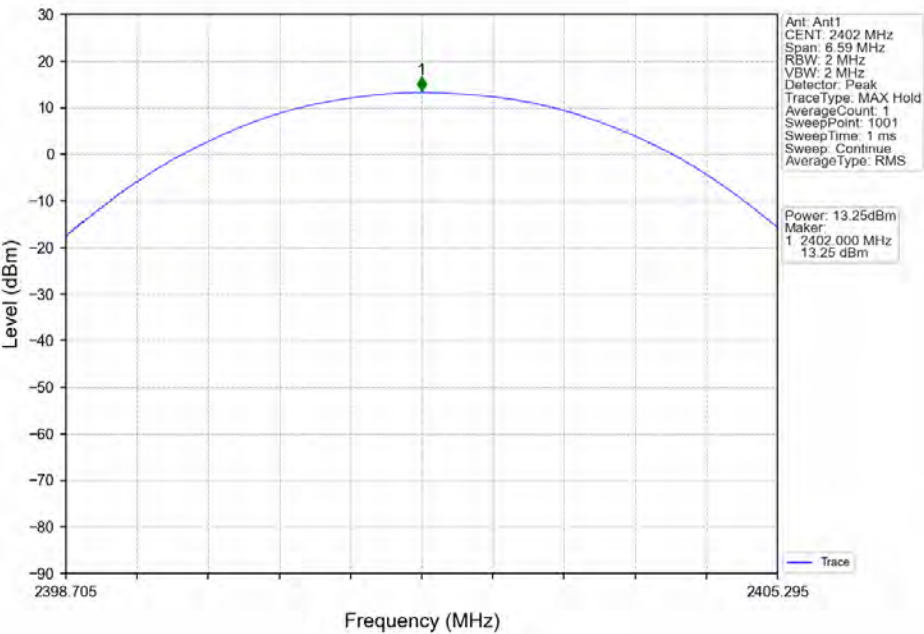

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

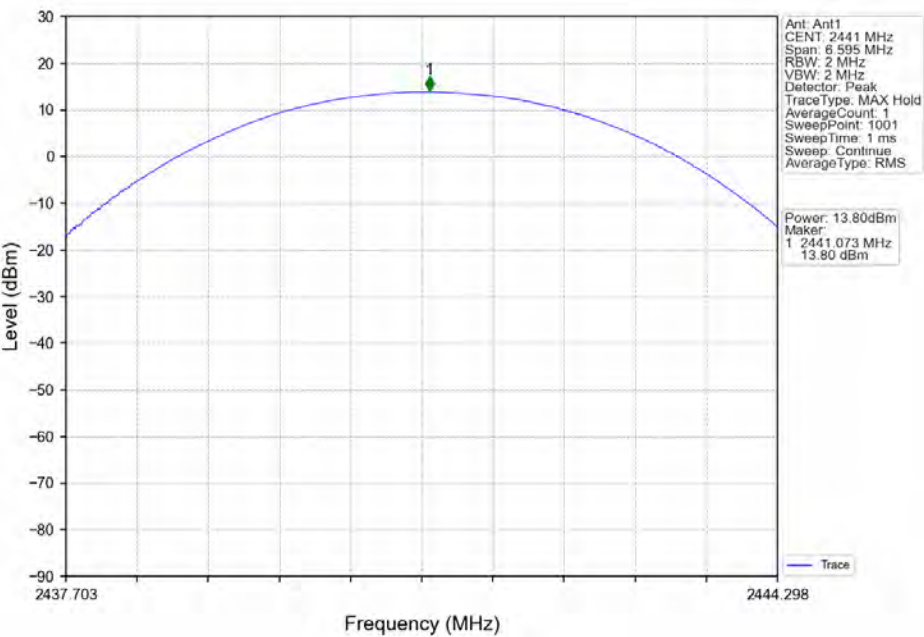

### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

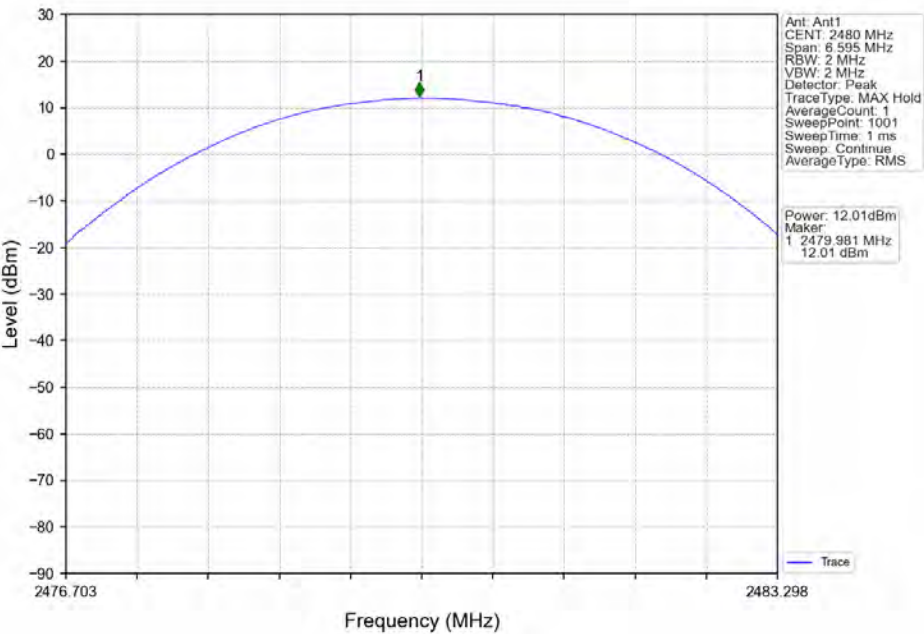



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 81 of 167

3. Carrier Frequency Separation


3.1 Test Result

3.1.1 Ant1

| Ant1      |         |                 |             |                          |                      |              |         |
|-----------|---------|-----------------|-------------|--------------------------|----------------------|--------------|---------|
| Mode      | TX Type | Frequency (MHz) | Packet Type | Channel Separation (MHz) | 20dB Bandwidth (MHz) | Limit (MHz)  | Verdict |
| GFSK      | SISO    | HOPP            | DH5         | 1.000                    | 0.937                | $\geq 0.937$ | Pass    |
| Pi/4DQPSK | SISO    | HOPP            | 2DH5        | 1.001                    | 1.338                | $\geq 0.892$ | Pass    |
| 8DPSK     | SISO    | HOPP            | 3DH5        | 0.982                    | 1.319                | $\geq 0.879$ | Pass    |

### 3.2 Test Graph

#### 3.2.1 Ant1

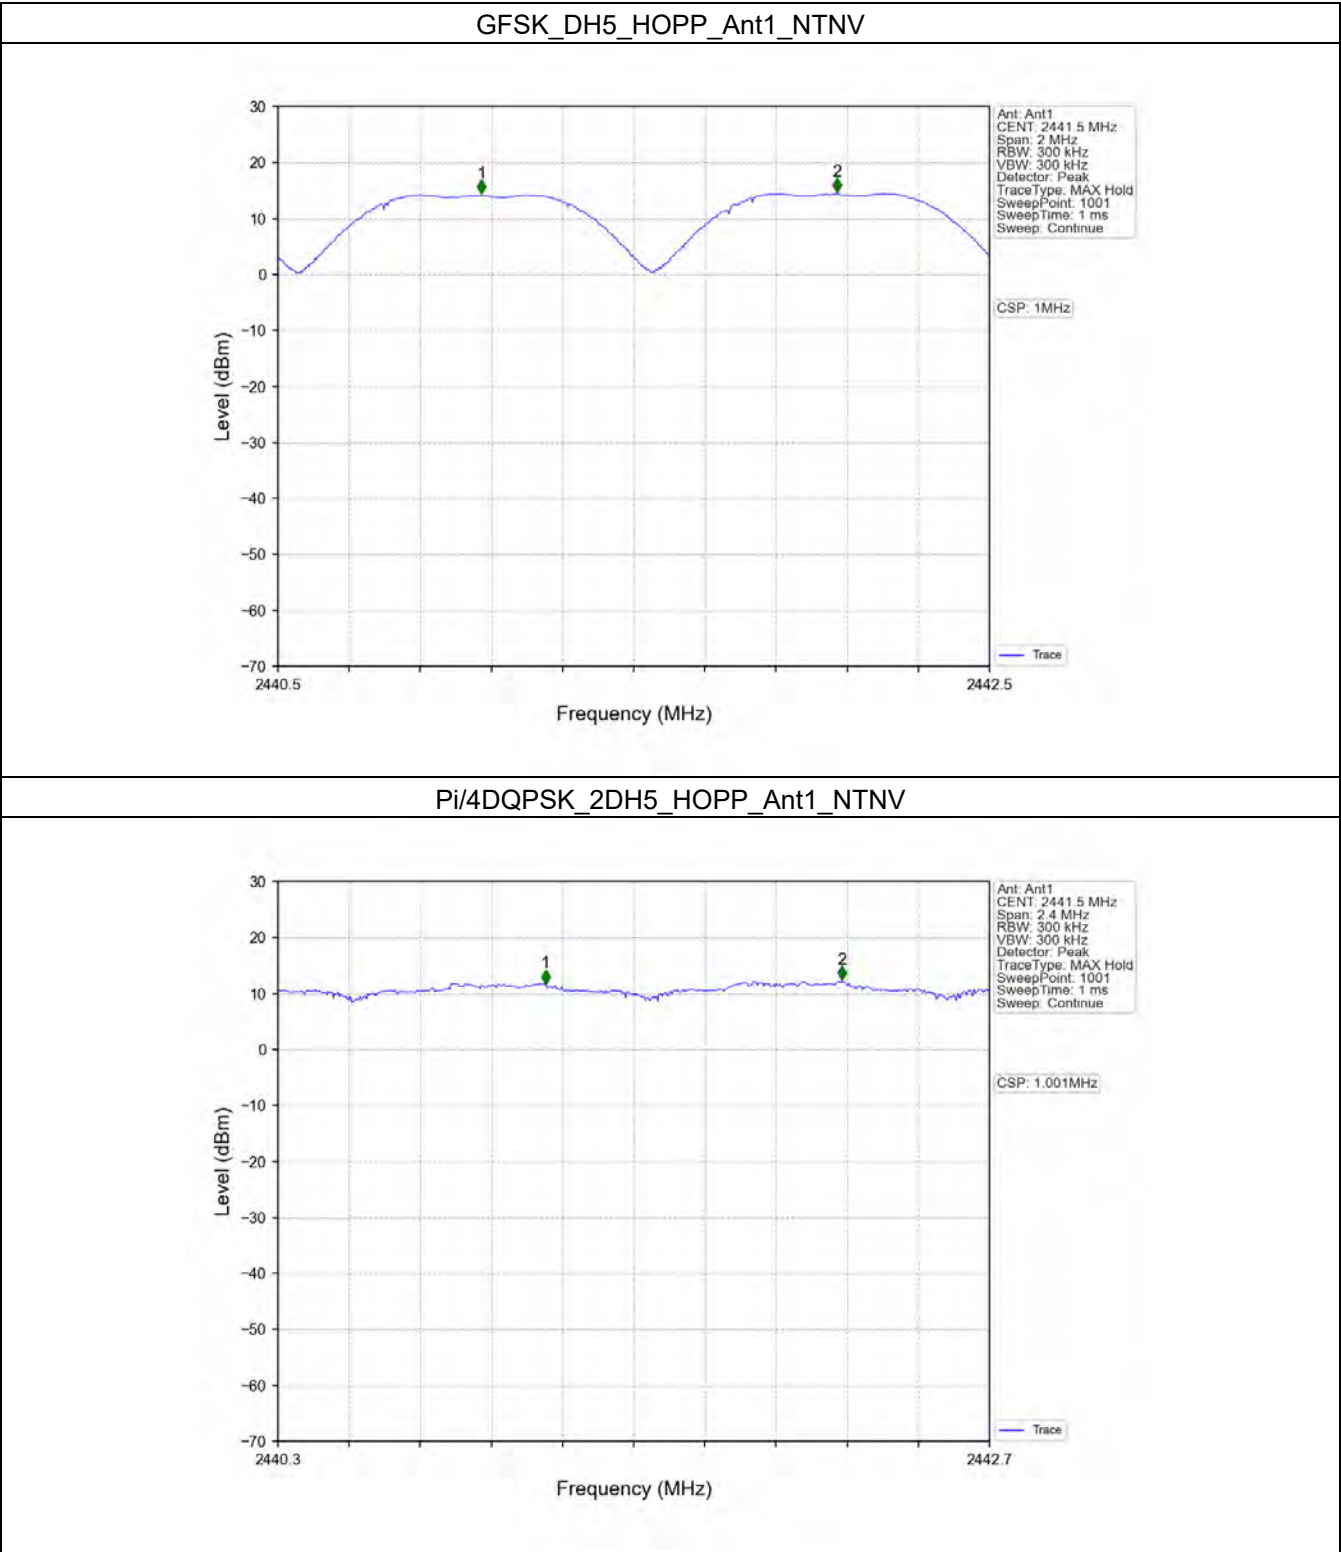


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 83 of 167

8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

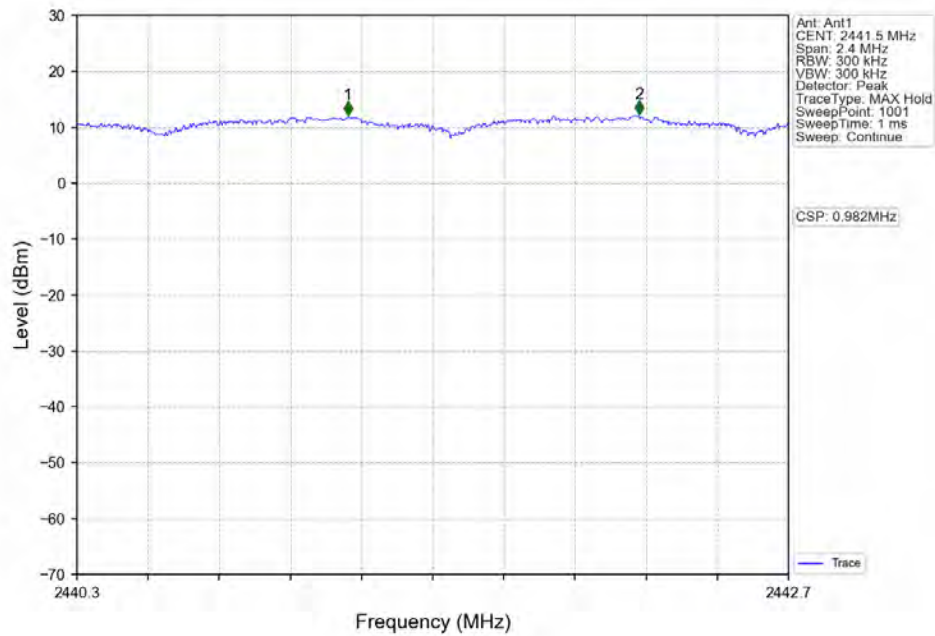



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 84 of 167

4. Number of Hopping Frequencies


4.1 Test Result

4.1.1 HoppNum

| Mode      | TX Type | Frequency (MHz) | Packet Type | Num of Hopping Frequencies |       | Verdict |
|-----------|---------|-----------------|-------------|----------------------------|-------|---------|
|           |         |                 |             | ANT1                       | Limit |         |
| GFSK      | SISO    | HOPP            | DH5         | 79                         | >=15  | Pass    |
| Pi/4DQPSK | SISO    | HOPP            | 2DH5        | 79                         | >=15  | Pass    |
| 8DPSK     | SISO    | HOPP            | 3DH5        | 79                         | >=15  | Pass    |

### 4.2 Test Graph

#### 4.2.1 HoppNum

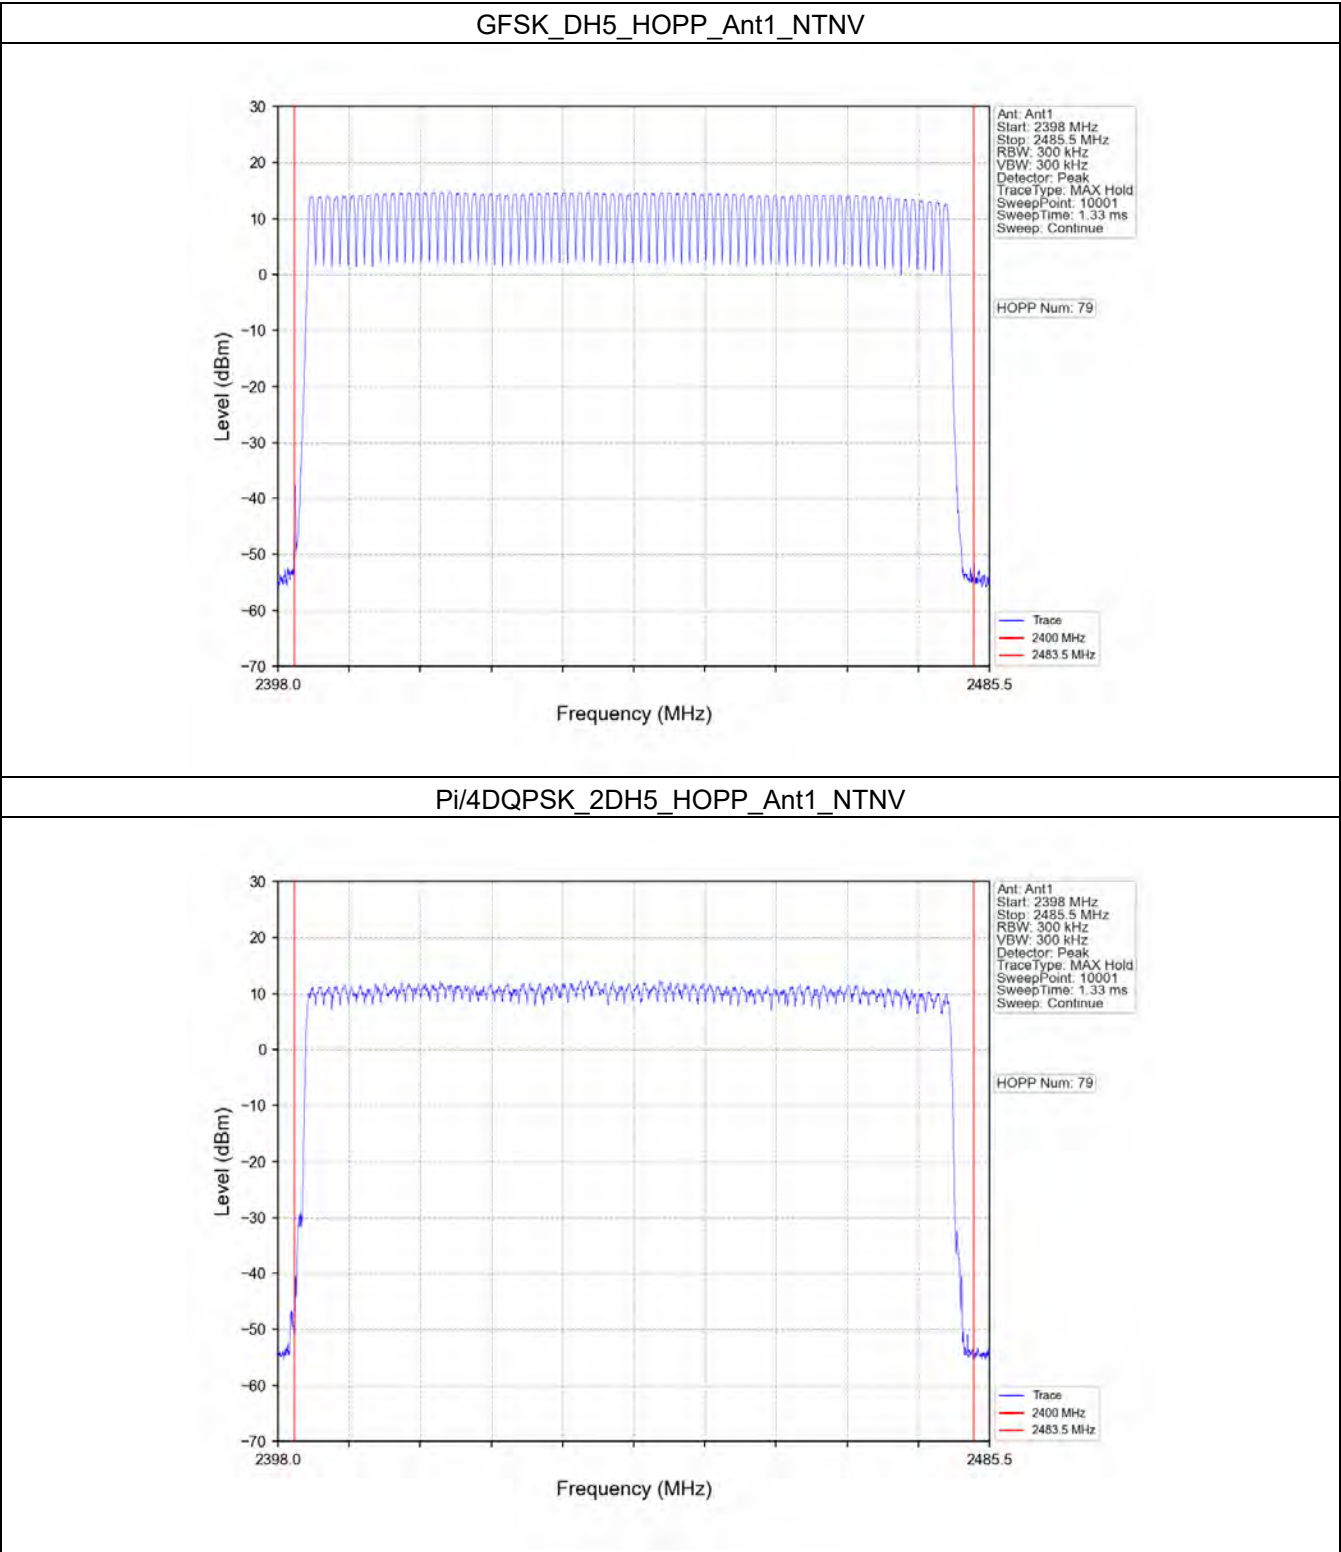


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 86 of 167

8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

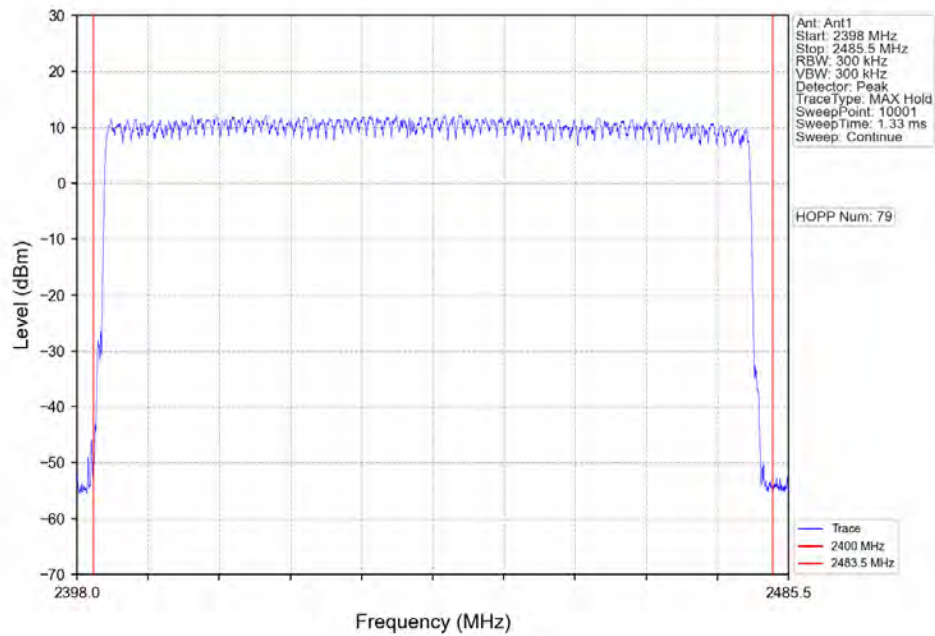

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 87 of 167

### 5. Time of Occupancy (Dwell Time)


#### 5.1 Test Result

##### 5.1.1 Ant1


| Ant1      |         |                 |             |                               |                        |                                    |                 |            |         |
|-----------|---------|-----------------|-------------|-------------------------------|------------------------|------------------------------------|-----------------|------------|---------|
| Mode      | TX Type | Frequency (MHz) | Packet Type | Duration of Single Pulse (ms) | Observation Period (s) | Num of Pulse in Observation Period | Dwell Time (ms) | Limit (ms) | Verdict |
| GFSK      | SISO    | HOPP            | DH1         | 0.386                         | 31.600                 | 320                                | 123.520         | <=400      | Pass    |
|           |         |                 | DH3         | 1.642                         | 31.600                 | 159                                | 261.078         | <=400      | Pass    |
|           |         |                 | DH5         | 2.890                         | 31.600                 | 109                                | 315.010         | <=400      | Pass    |
| Pi/4DQPSK | SISO    | HOPP            | 2DH1        | 0.392                         | 31.600                 | 319                                | 125.048         | <=400      | Pass    |
|           |         |                 | 2DH3        | 1.644                         | 31.600                 | 166                                | 272.904         | <=400      | Pass    |
|           |         |                 | 2DH5        | 2.894                         | 31.600                 | 102                                | 295.188         | <=400      | Pass    |
| 8DPSK     | SISO    | HOPP            | 3DH1        | 0.392                         | 31.600                 | 320                                | 125.440         | <=400      | Pass    |
|           |         |                 | 3DH3        | 1.644                         | 31.600                 | 160                                | 263.040         | <=400      | Pass    |
|           |         |                 | 3DH5        | 2.894                         | 31.600                 | 115                                | 332.810         | <=400      | Pass    |

### 5.2 Test Graph


#### 5.2.1 Ant1

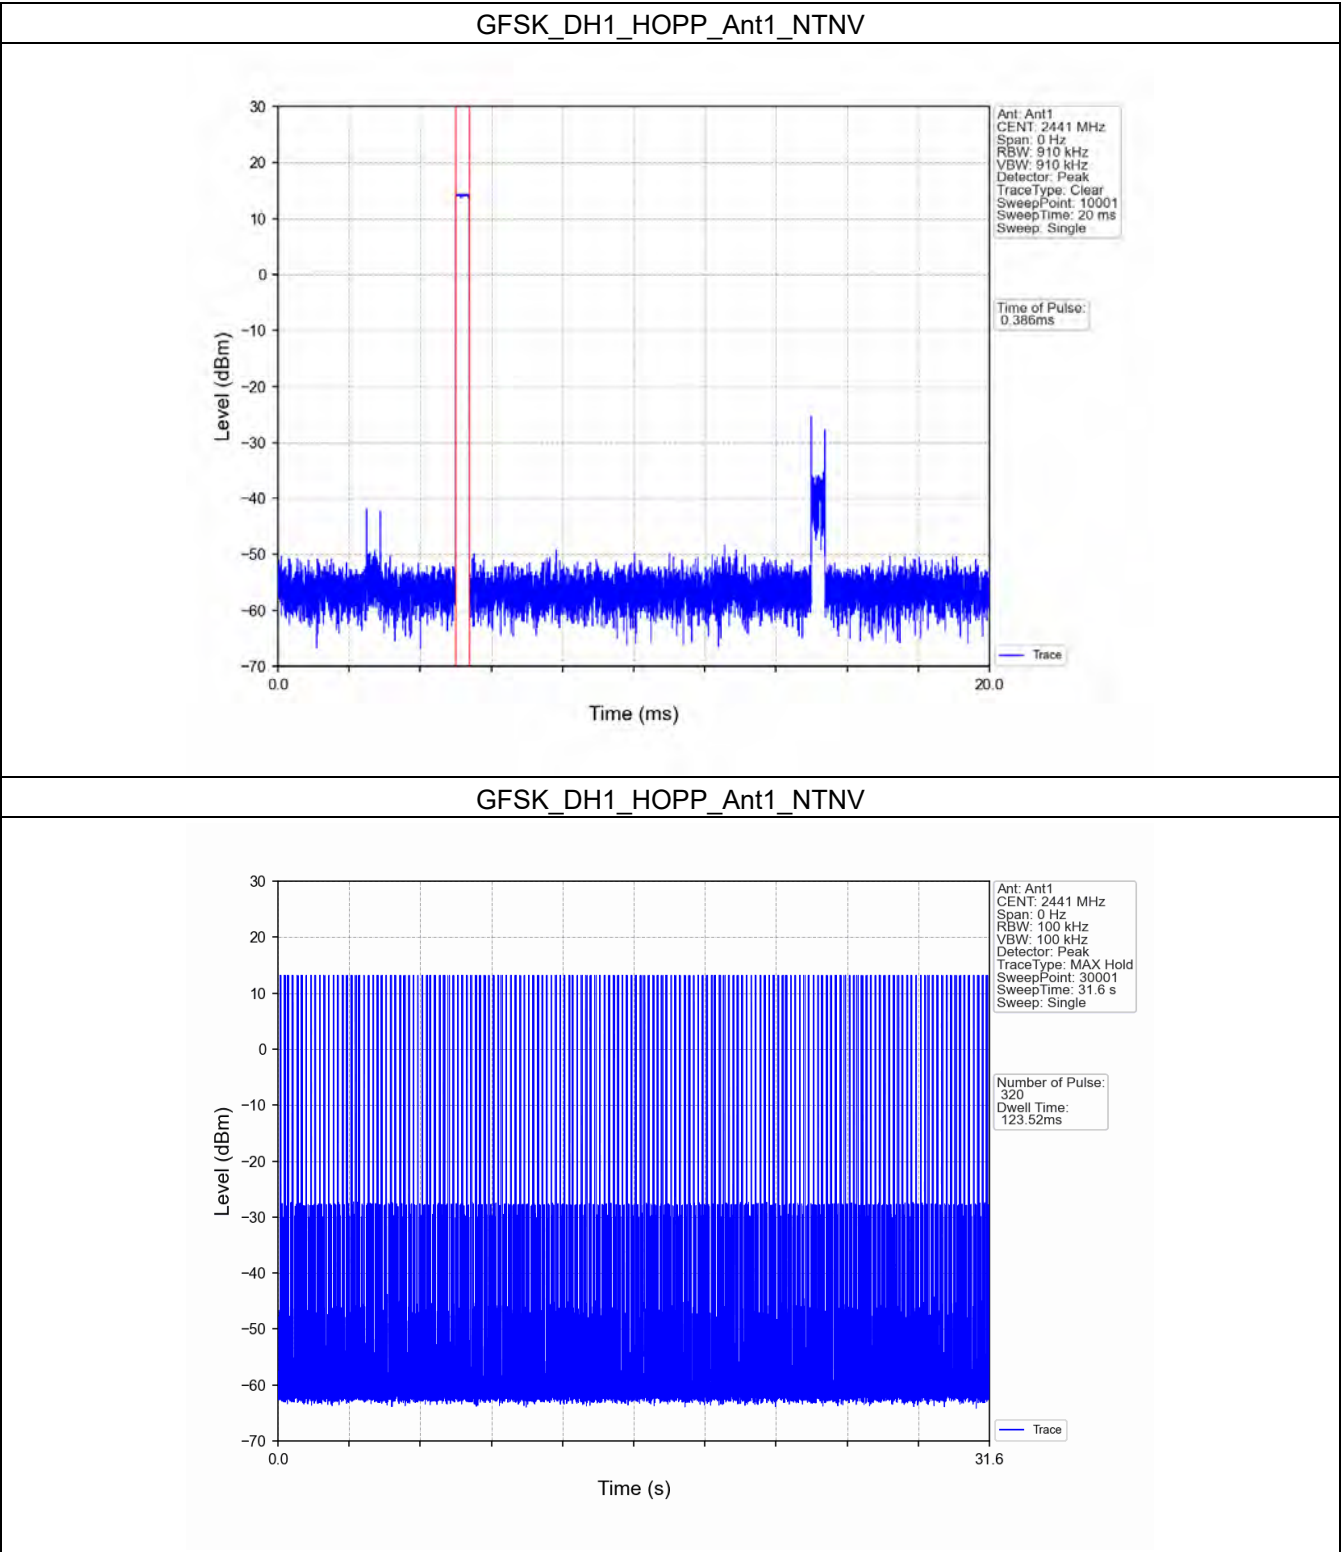


GFSK\_DH3\_HOPP\_Ant1\_NTNV

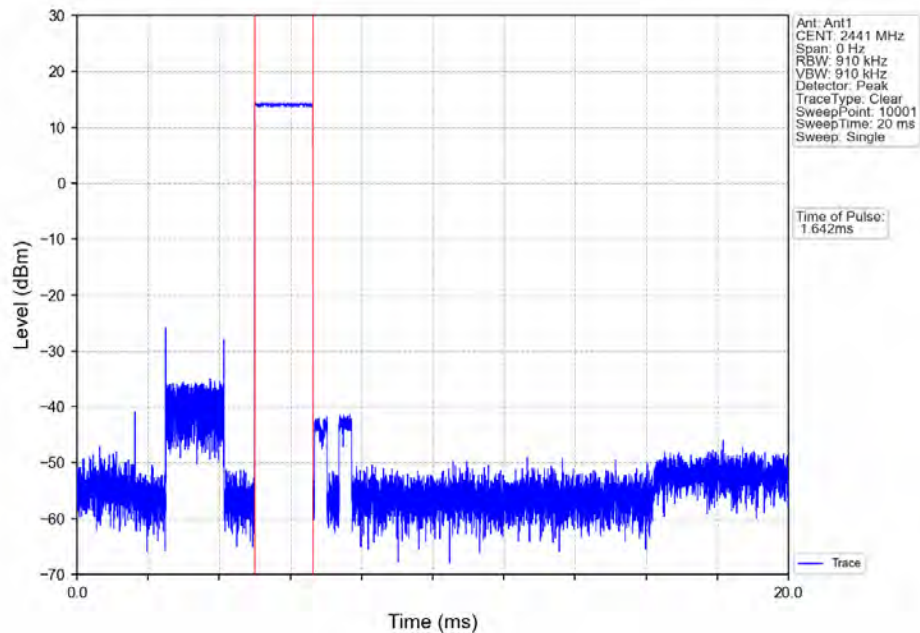


GFSK\_DH3\_HOPP\_Ant1\_NTNV

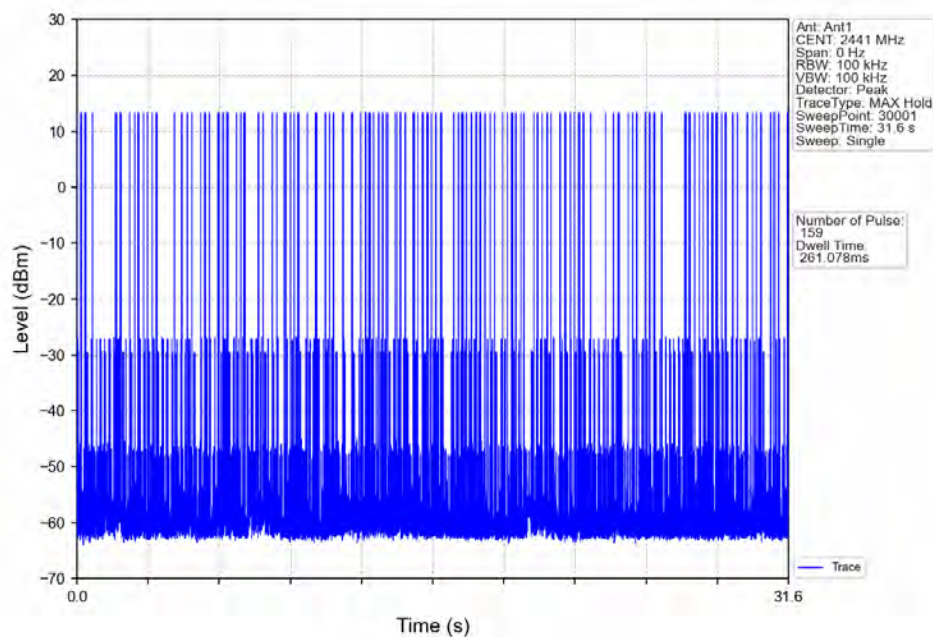


GFSK\_DH5\_HOPP\_Ant1\_NTNV

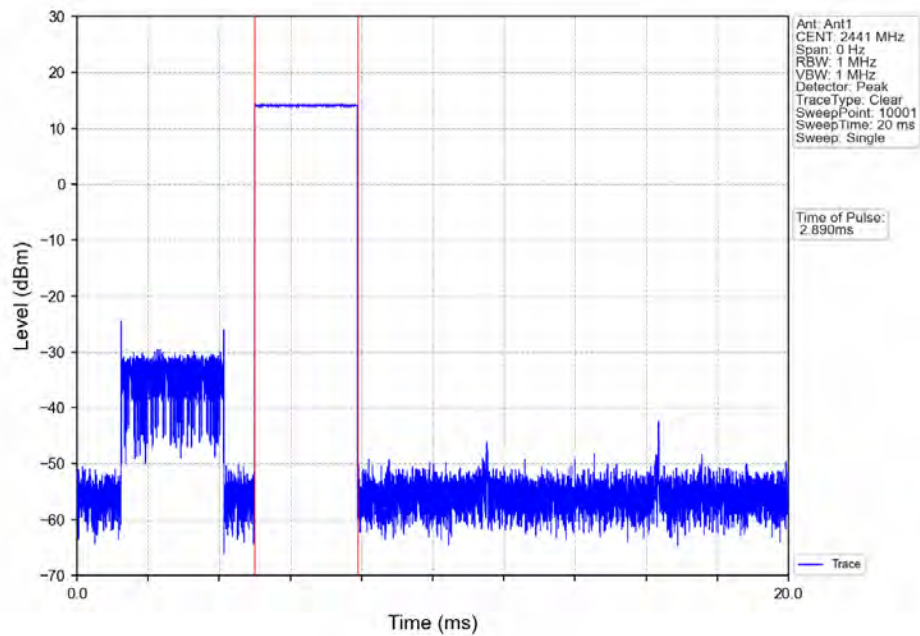


GFSK\_DH5\_HOPP\_Ant1\_NTNV

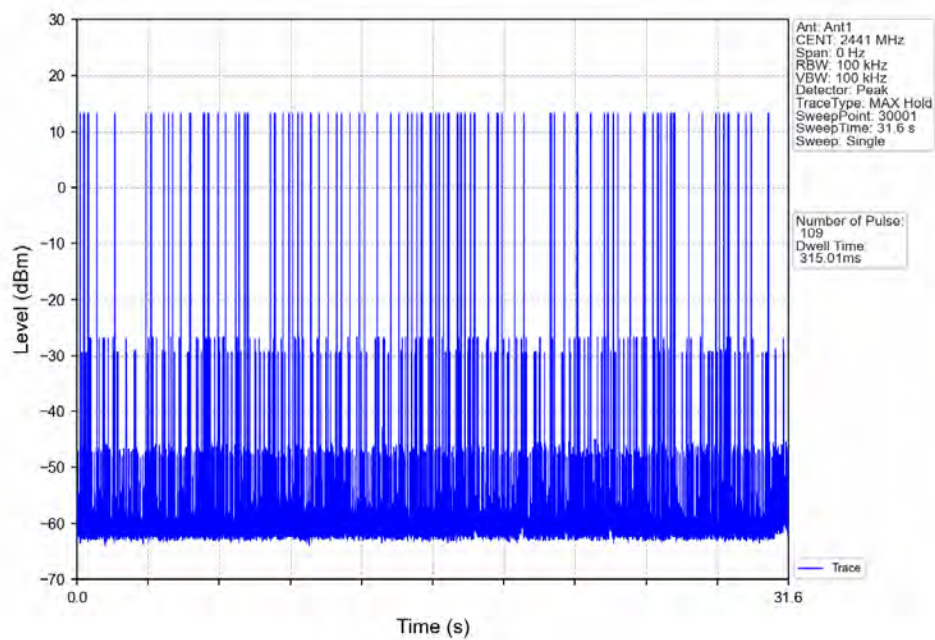


Pi/4DQPSK\_2DH1\_HOPP\_Ant1\_NTNV

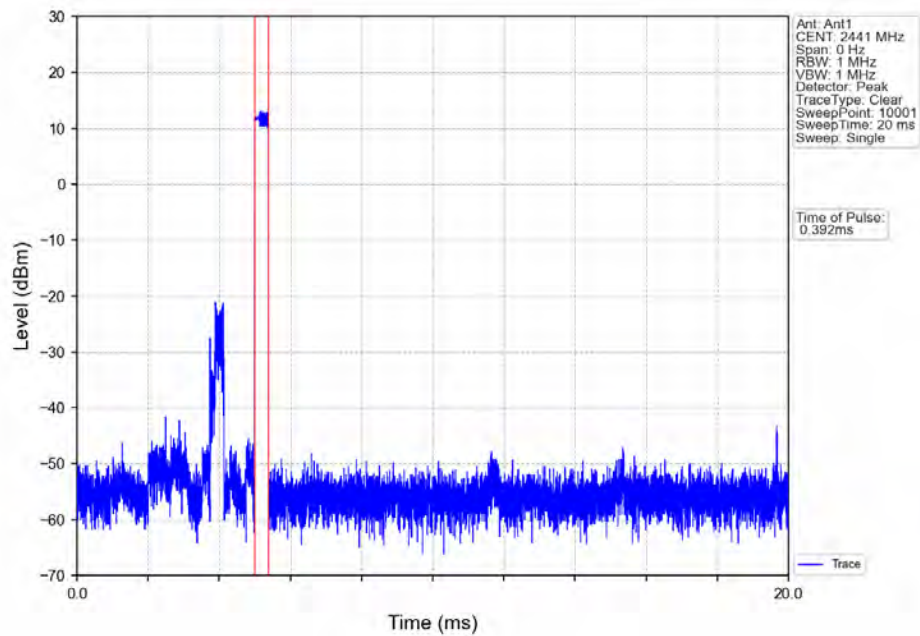


Pi/4DQPSK\_2DH1\_HOPP\_Ant1\_NTNV

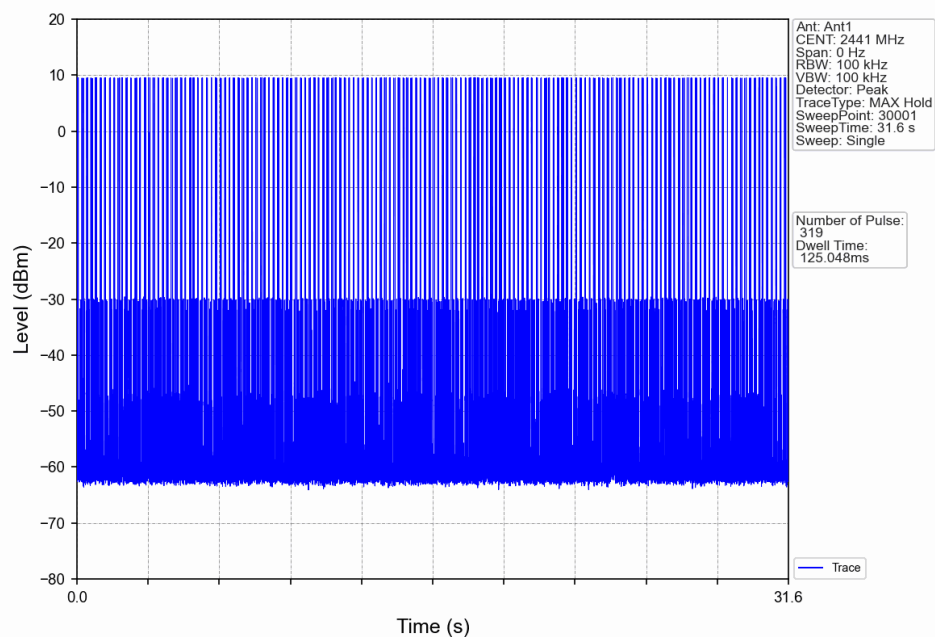


Pi/4DQPSK\_2DH3\_HOPP\_Ant1\_NTNV

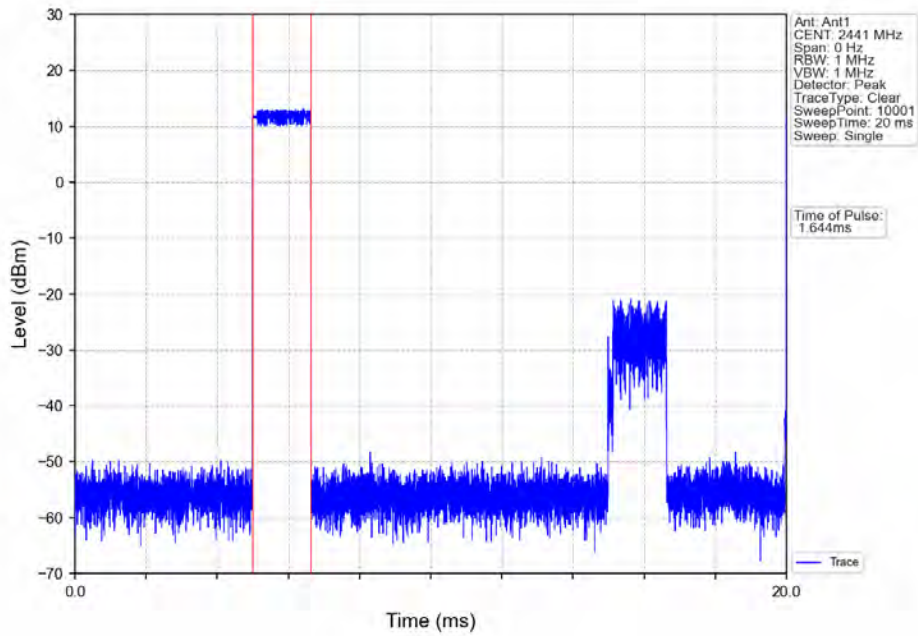


Pi/4DQPSK\_2DH3\_HOPP\_Ant1\_NTNV

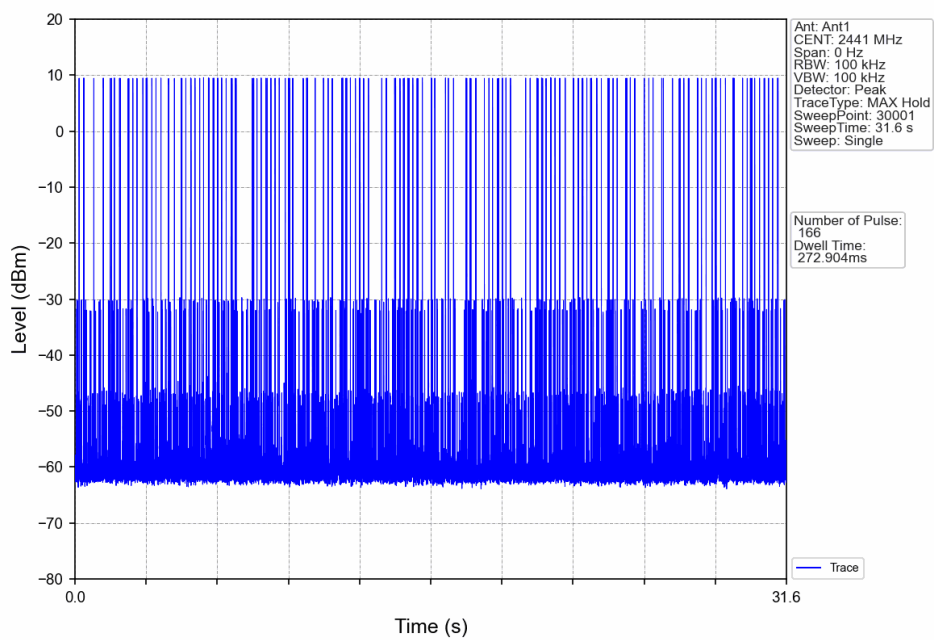


Pi/4DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

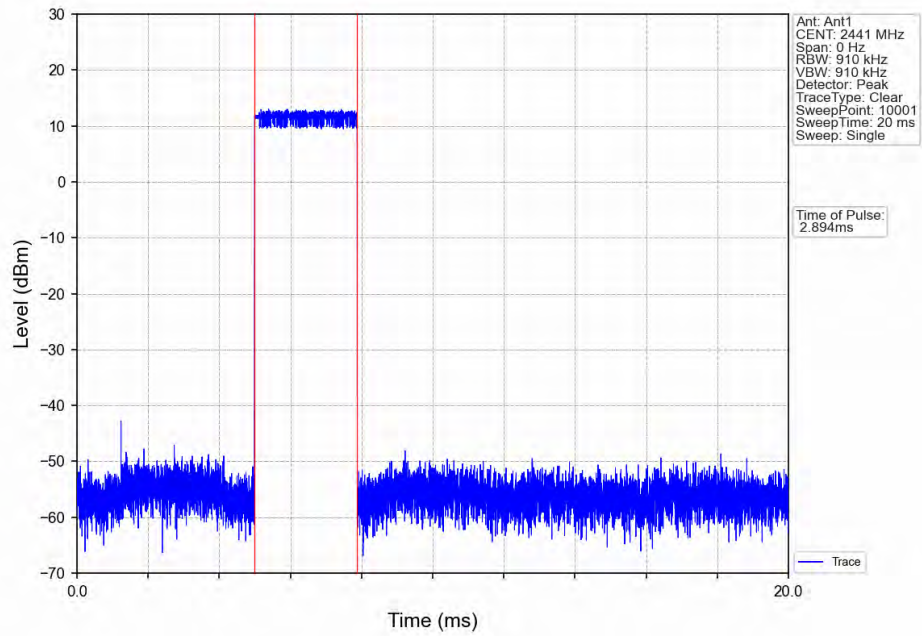


Pi/4DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

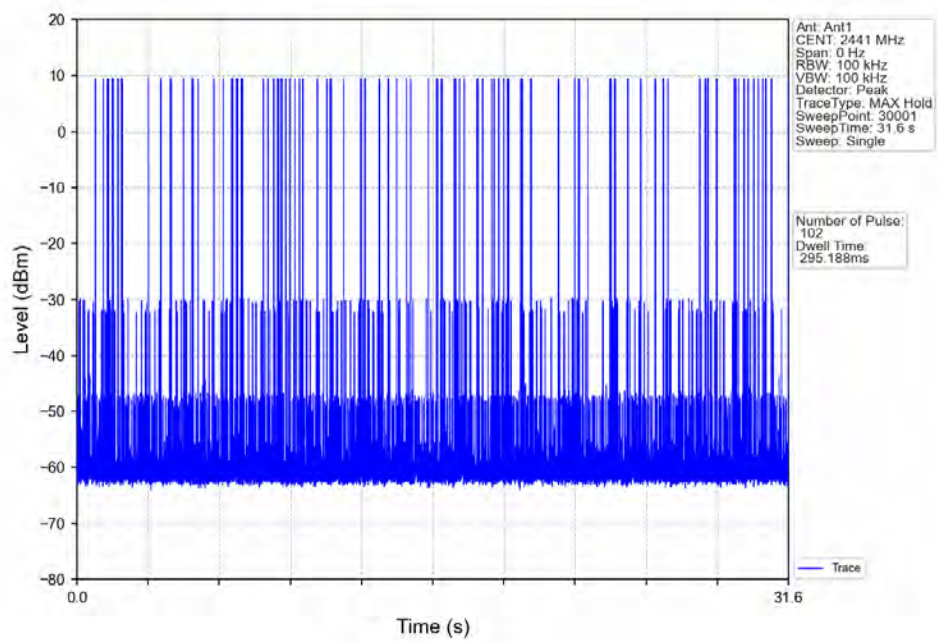

8DPSK\_3DH1\_HOPP\_Ant1\_NTNV

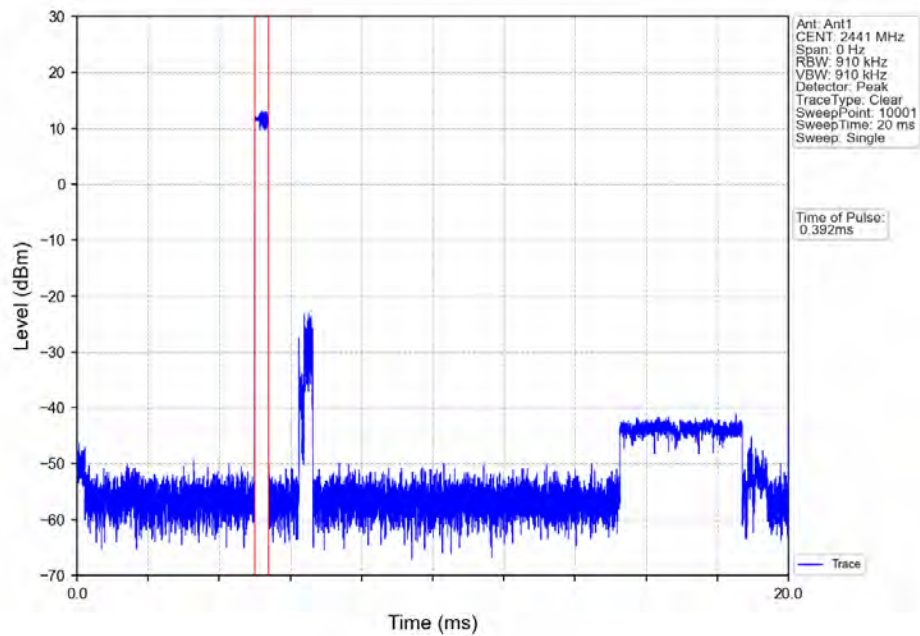

8DPSK\_3DH1\_HOPP\_Ant1\_NTNV

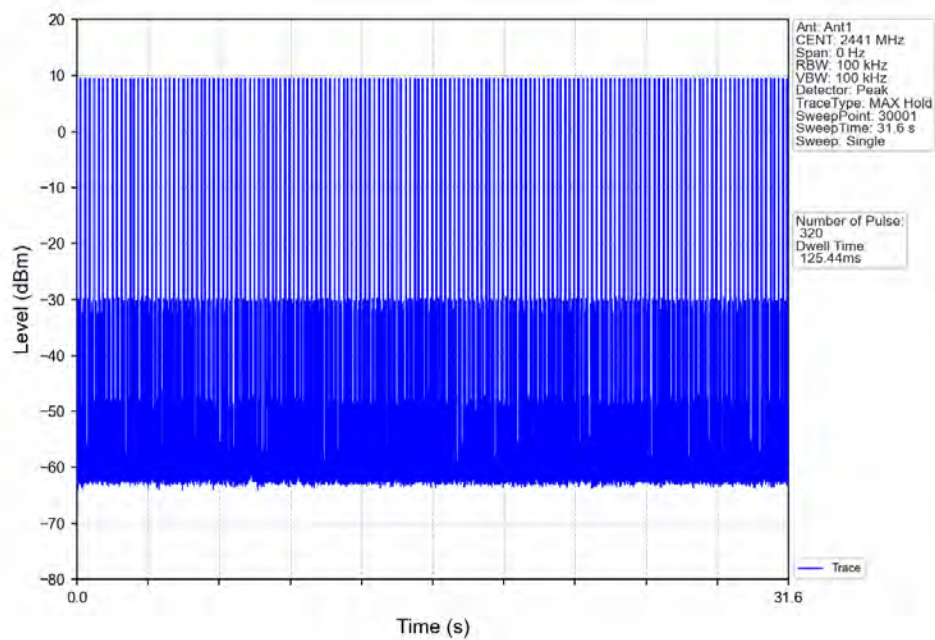


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 95 of 167


8DPSK\_3DH3\_HOPP\_Ant1\_NTNV

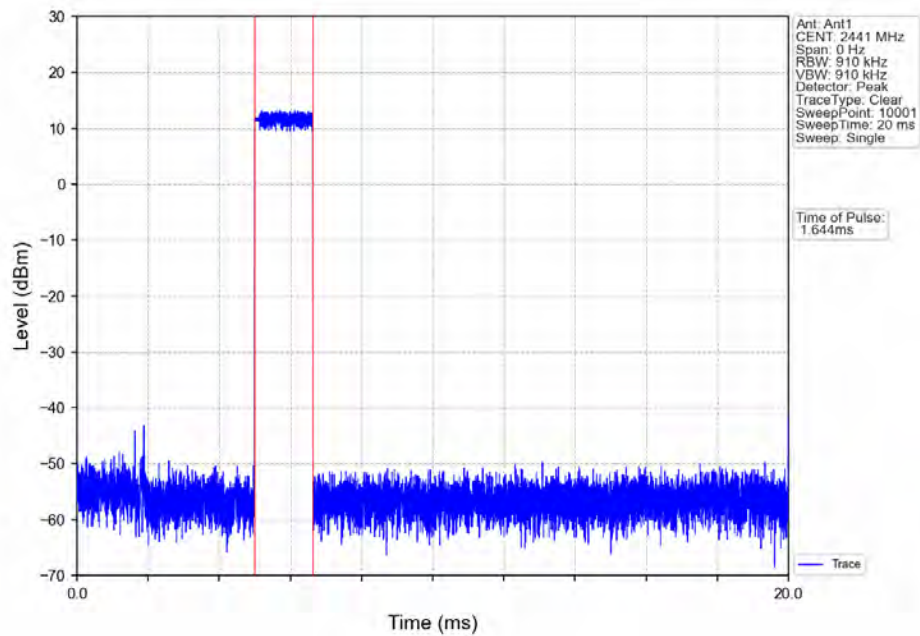


8DPSK\_3DH3\_HOPP\_Ant1\_NTNV

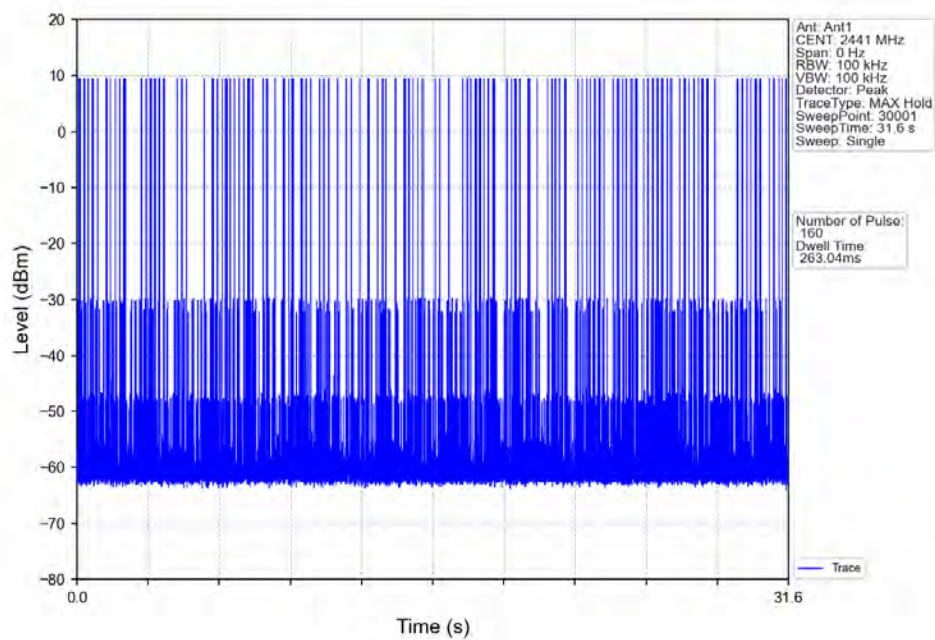

### 8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

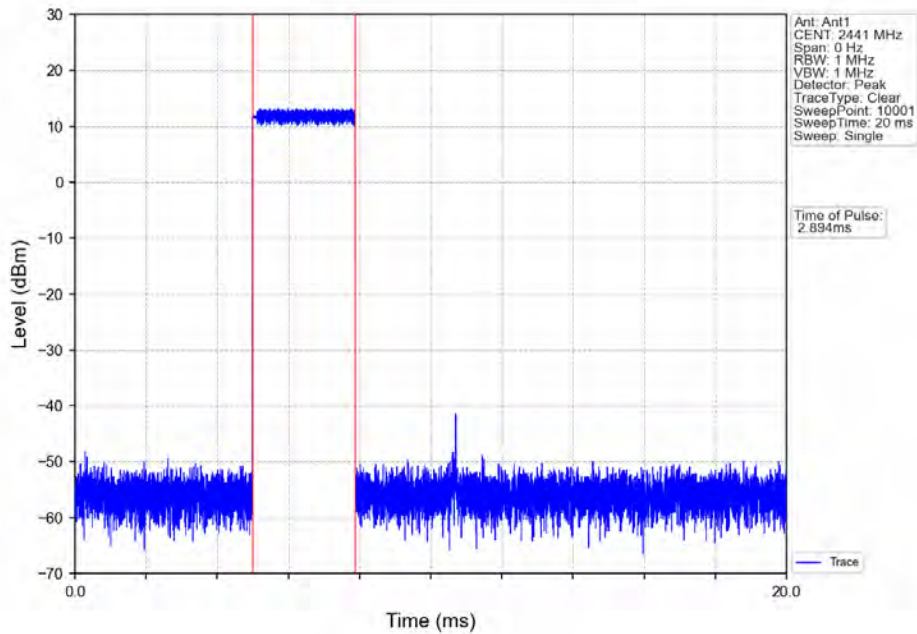

### 8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

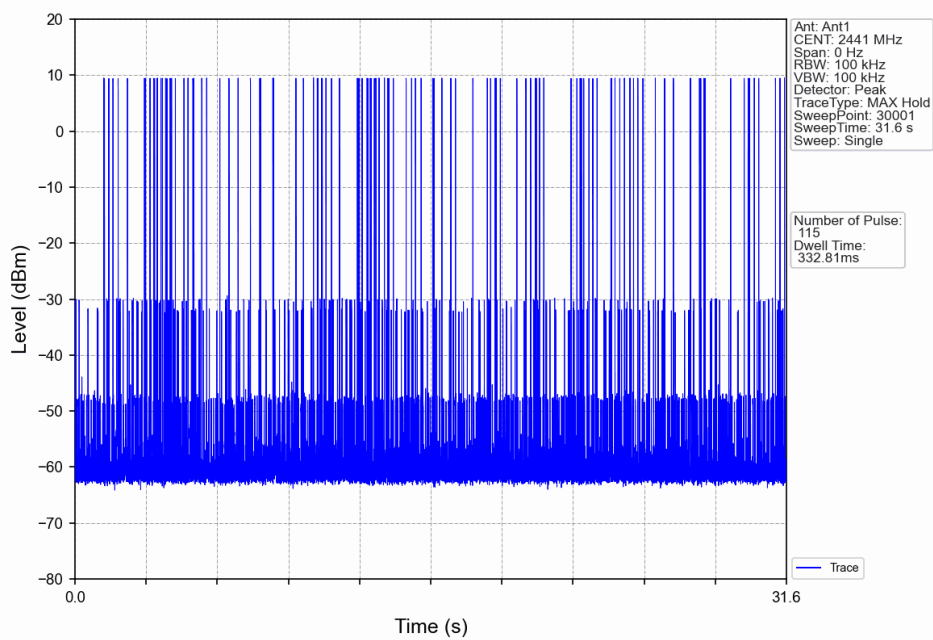

## 6. Unwanted Emissions In Non-restricted Frequency Bands

### 6.1 Test Result

#### 6.1.1 Ref

| Mode      | TX Type | Frequency (MHz) | Packet Type | ANT | Level of Reference (dBm) |
|-----------|---------|-----------------|-------------|-----|--------------------------|
| GFSK      | SISO    | 2402            | DH5         | 1   | 13.68                    |
|           |         | 2441            | DH5         | 1   | 14.17                    |
|           |         | 2480            | DH5         | 1   | 12.40                    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 1   | 11.02                    |
|           |         | 2441            | 2DH5        | 1   | 11.67                    |
|           |         | 2480            | 2DH5        | 1   | 9.72                     |
| 8DPSK     | SISO    | 2402            | 3DH5        | 1   | 11.10                    |
|           |         | 2441            | 3DH5        | 1   | 11.73                    |
|           |         | 2480            | 3DH5        | 1   | 9.73                     |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


#### 6.1.2 CSE

| Mode      | TX Type | Frequency (MHz) | Packet Type | ANT | Level of Reference (dBm) | Limit (dBm) | Verdict |
|-----------|---------|-----------------|-------------|-----|--------------------------|-------------|---------|
| GFSK      | SISO    | 2402            | DH5         | 1   | 14.17                    | -5.83       | Pass    |
|           |         | 2441            | DH5         | 1   | 14.17                    | -5.83       | Pass    |
|           |         | 2480            | DH5         | 1   | 14.17                    | -5.83       | Pass    |
|           |         | HOPP            | DH5         | 1   | 14.17                    | -5.83       | Pass    |
|           |         |                 |             |     | 14.17                    | -5.83       | Pass    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 1   | 11.67                    | -8.33       | Pass    |
|           |         | 2441            | 2DH5        | 1   | 11.67                    | -8.33       | Pass    |
|           |         | 2480            | 2DH5        | 1   | 11.67                    | -8.33       | Pass    |
|           |         | HOPP            | 2DH5        | 1   | 11.67                    | -8.33       | Pass    |
|           |         |                 |             |     | 11.67                    | -8.33       | Pass    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 1   | 11.73                    | -8.27       | Pass    |
|           |         | 2441            | 3DH5        | 1   | 11.73                    | -8.27       | Pass    |
|           |         | 2480            | 3DH5        | 1   | 11.73                    | -8.27       | Pass    |
|           |         | HOPP            | 3DH5        | 1   | 11.73                    | -8.27       | Pass    |
|           |         |                 |             |     | 11.73                    | -8.27       | Pass    |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

### 6.2 Test Graph

#### 6.2.1 Ref

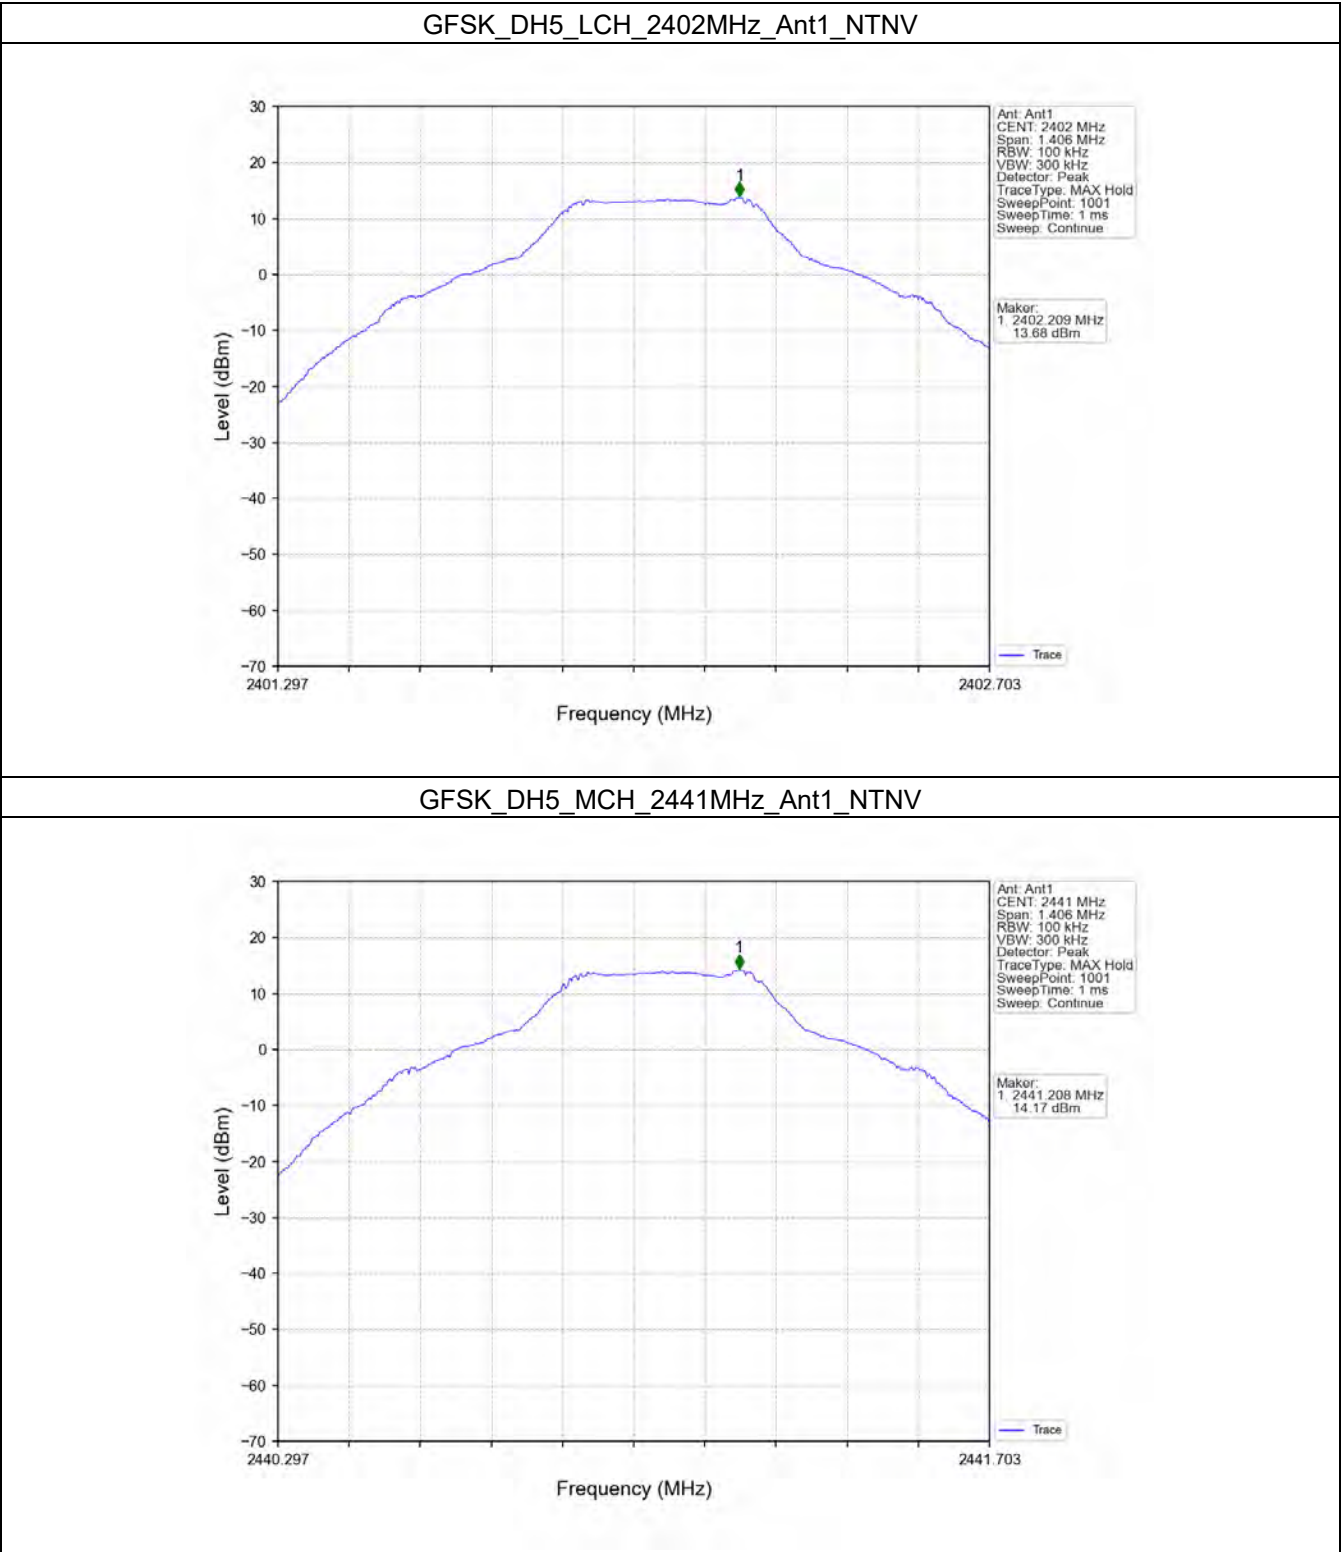


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 99 of 167

GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

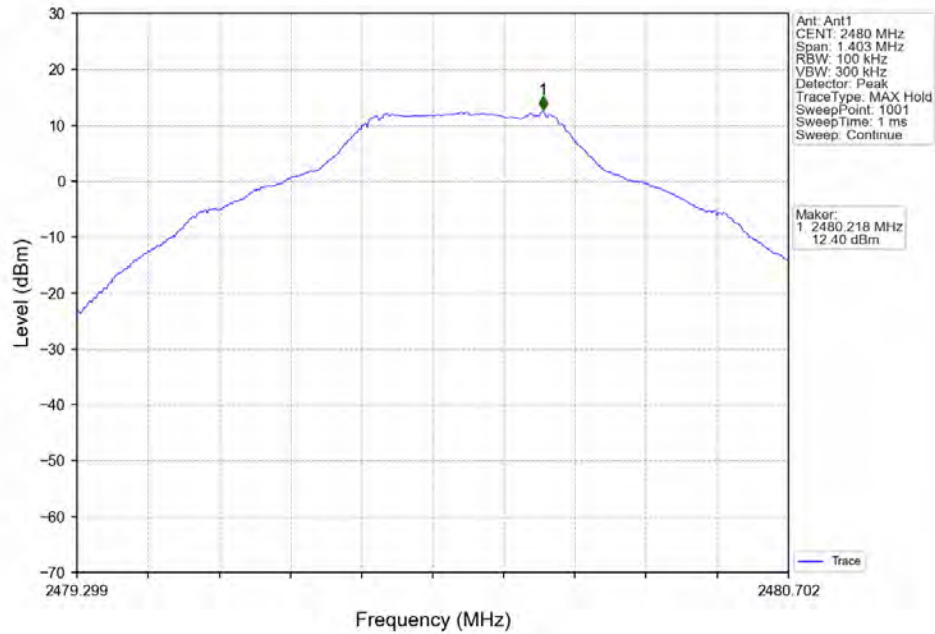

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

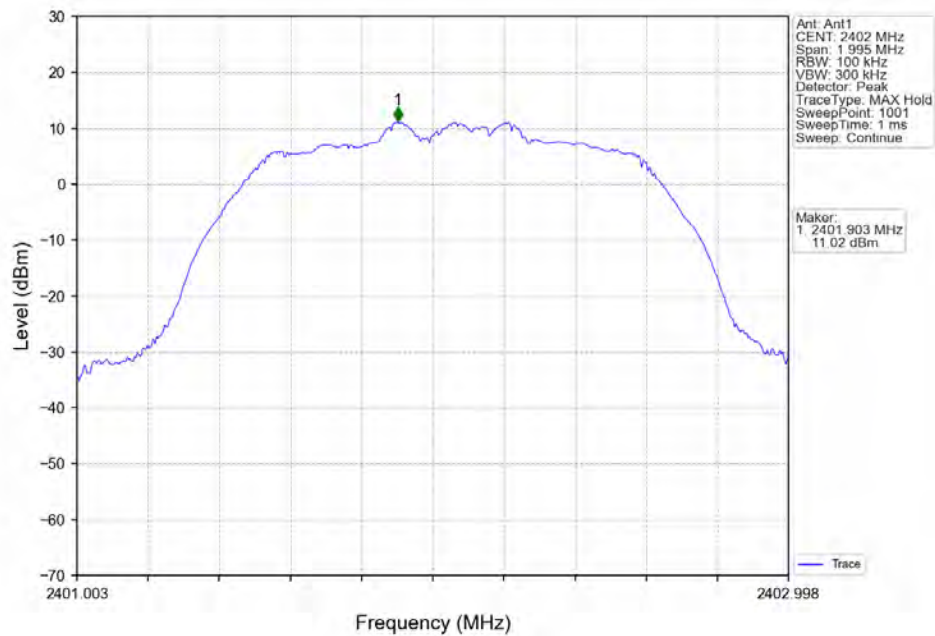


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 100 of 167


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

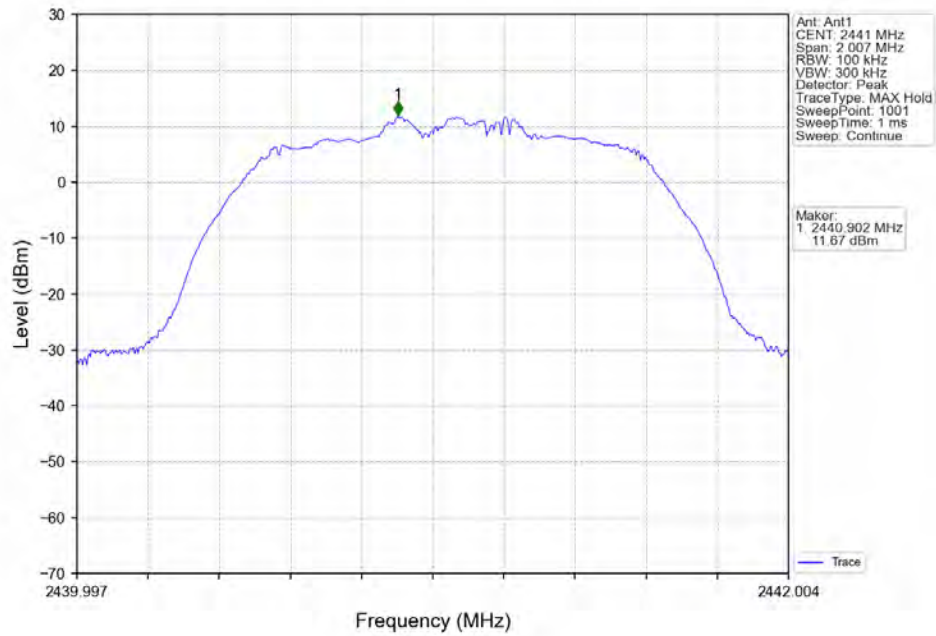


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

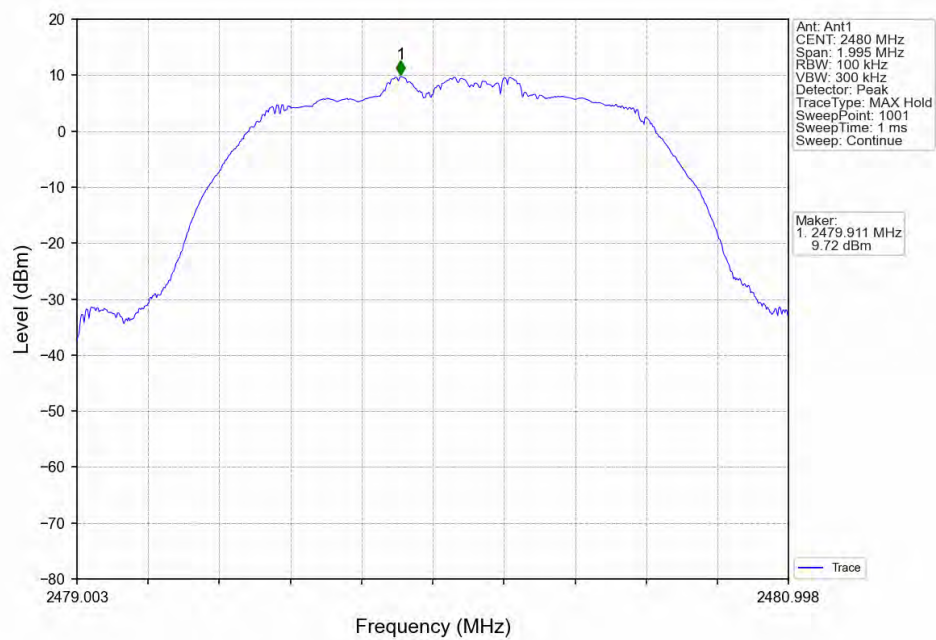

8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

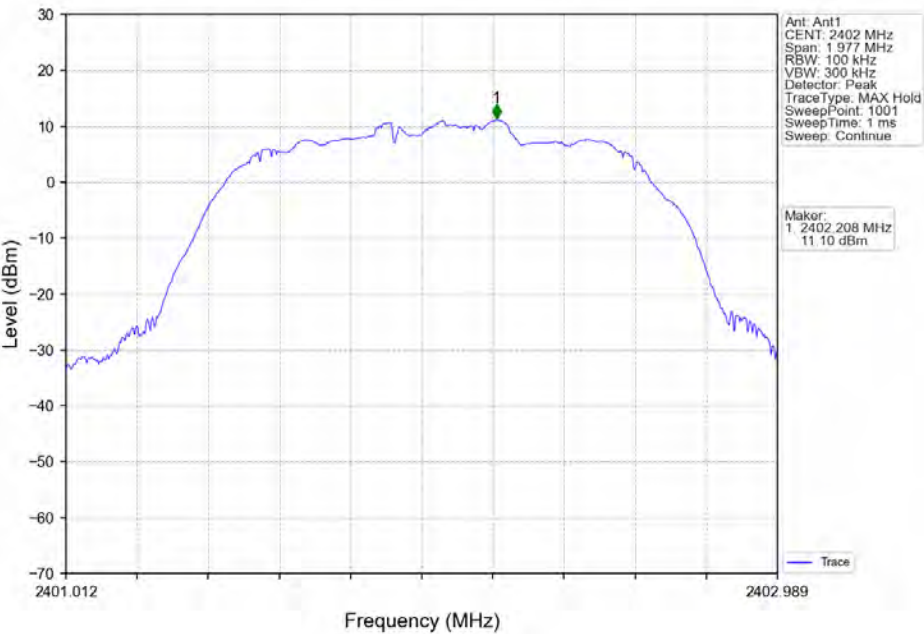

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

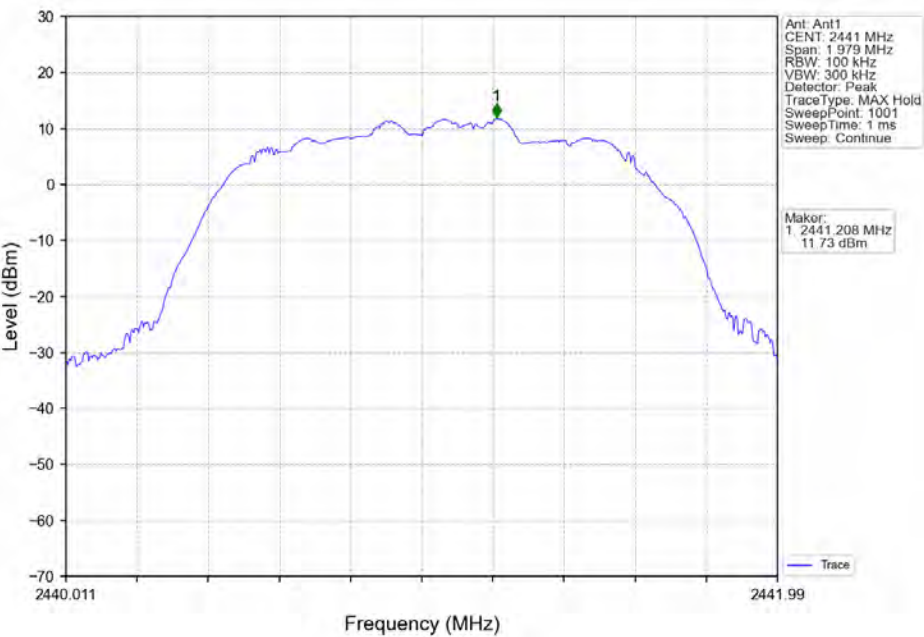


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 102 of 167

8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

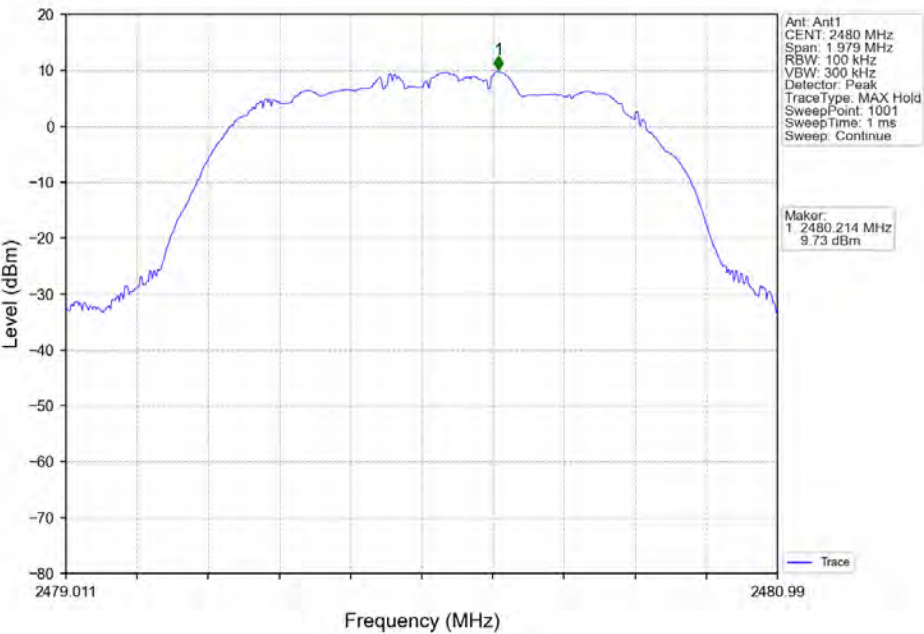

### 6.2.2 CSE

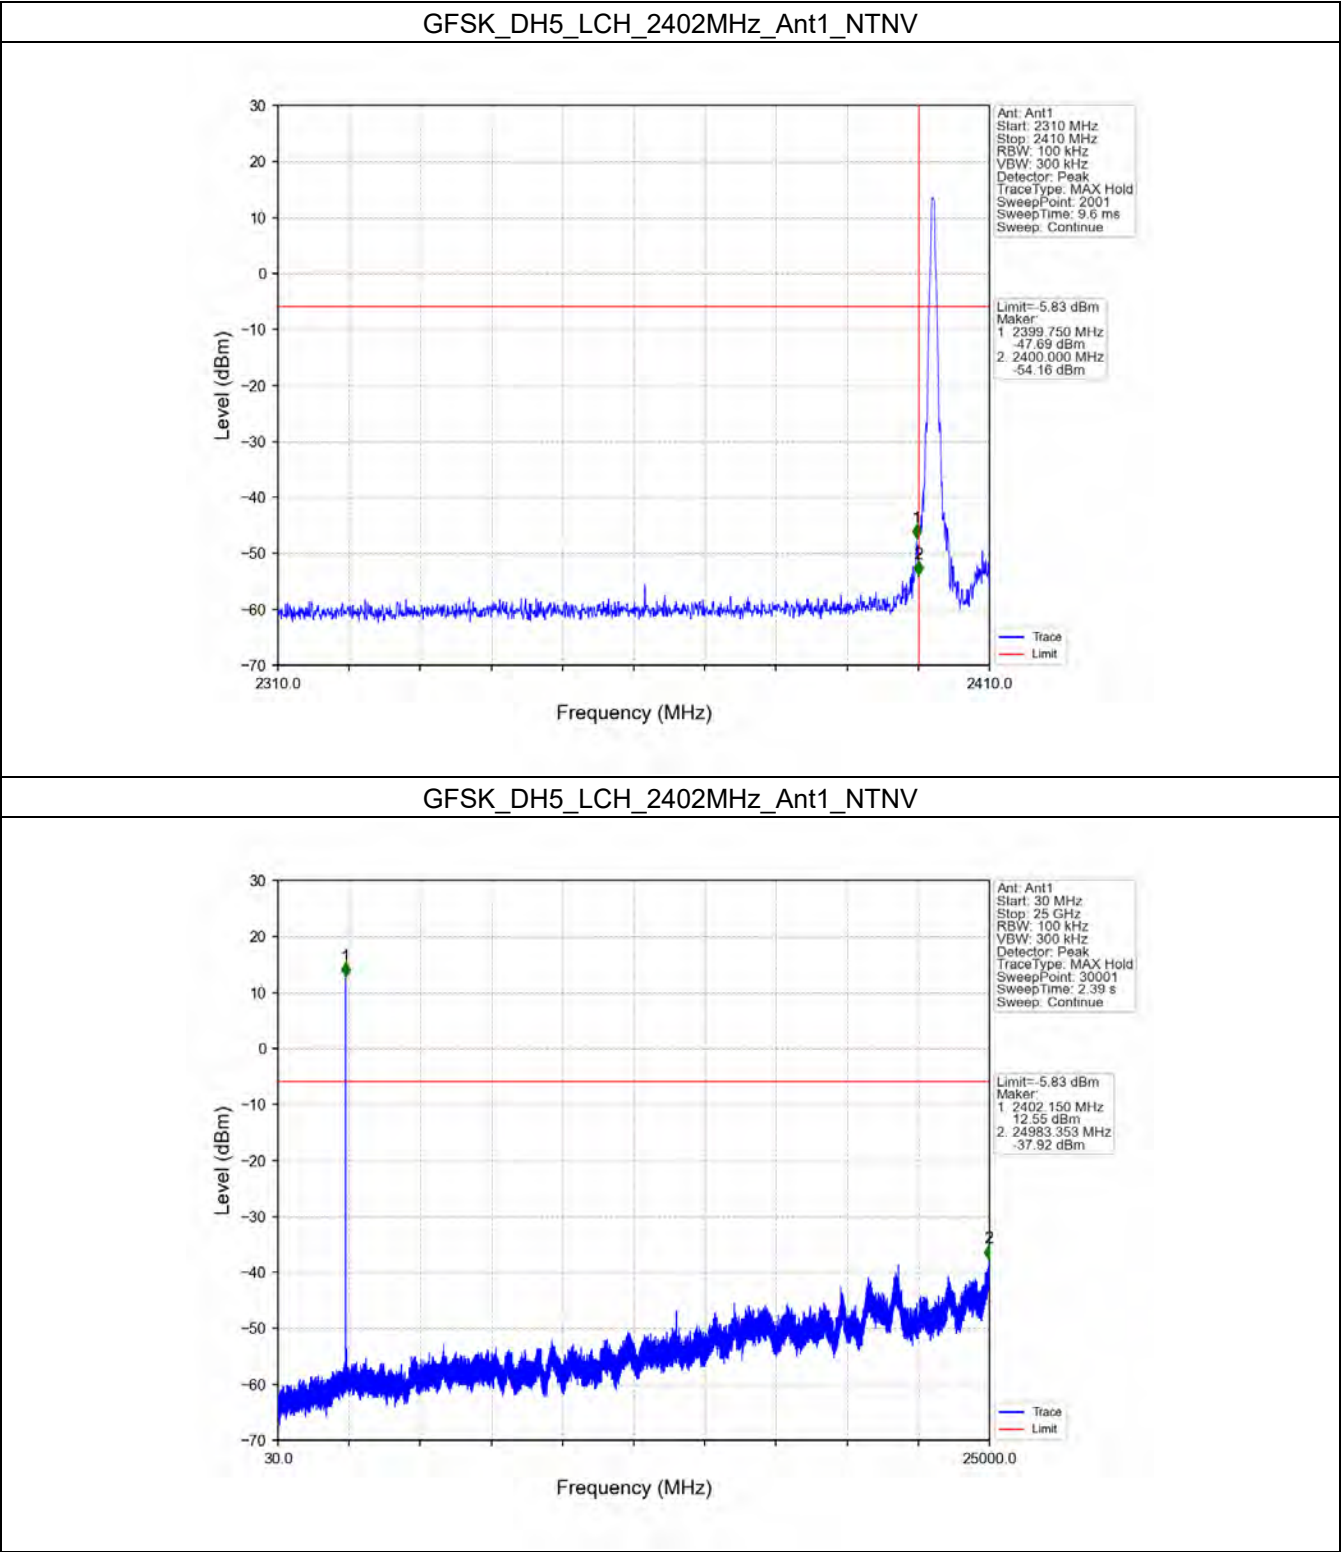


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 104 of 167


GFSK\_DH5\_MCH\_2441MHz\_Ant1\_NTNV

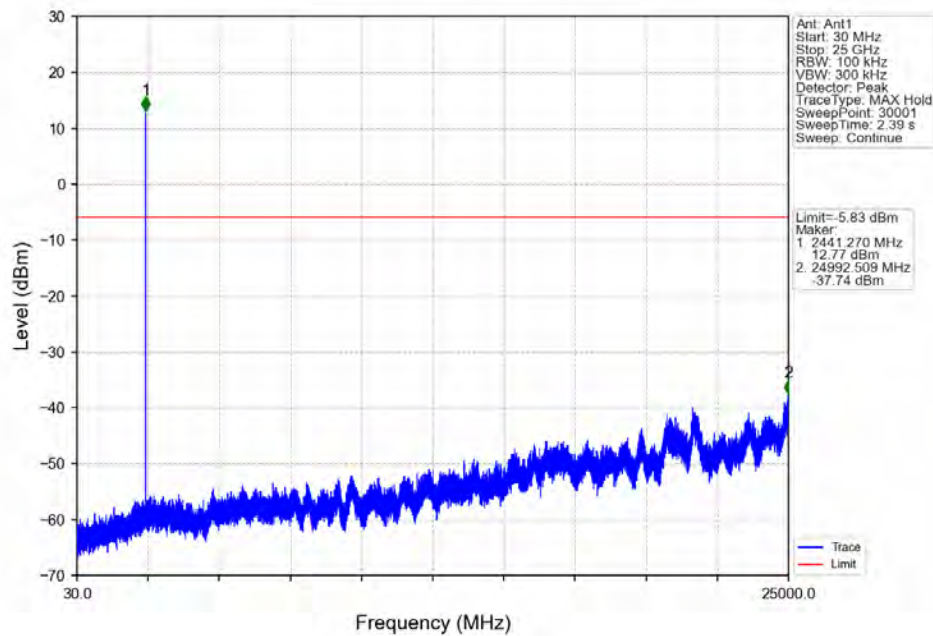


GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

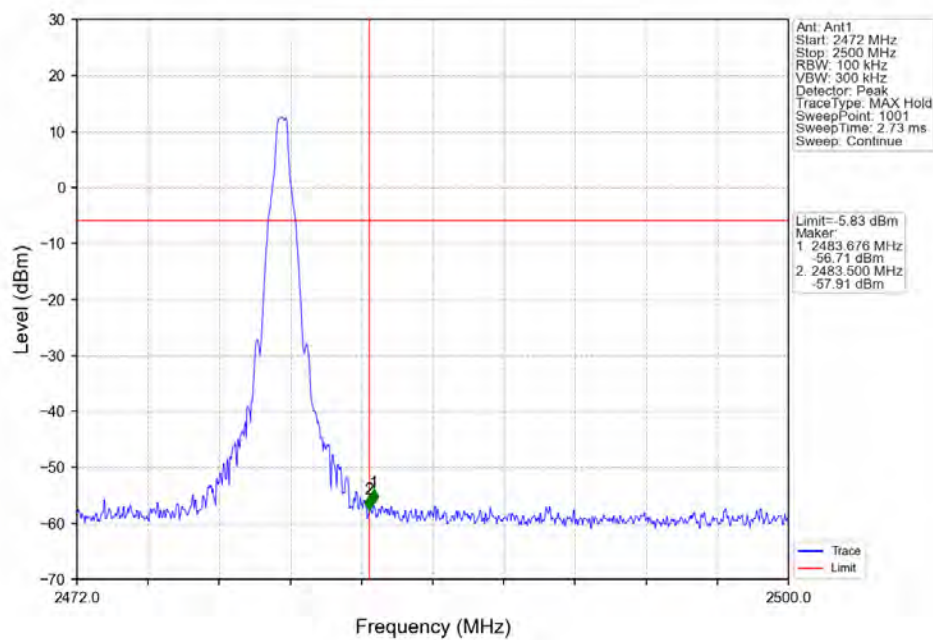


### GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

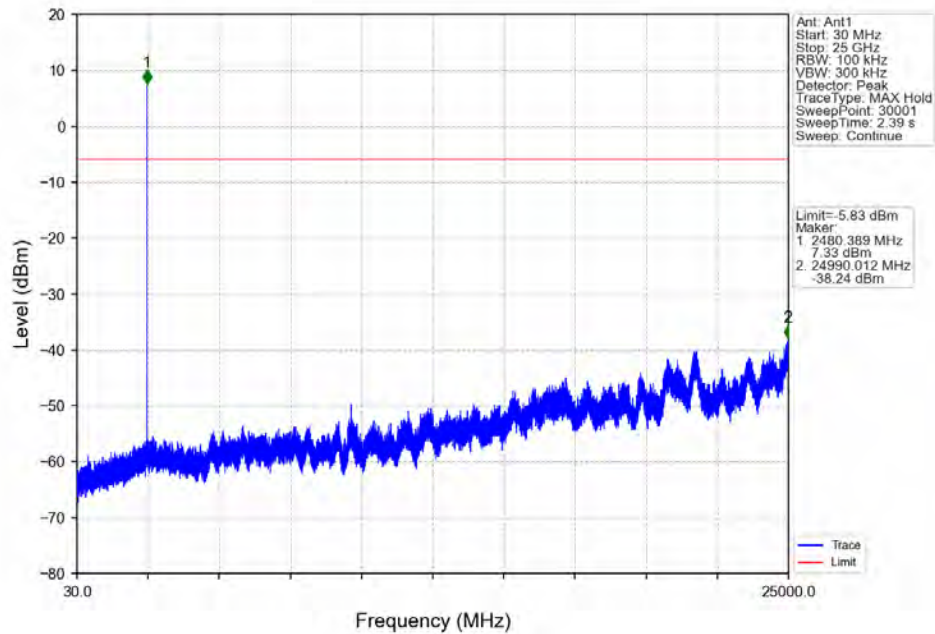


### GFSK\_DH5\_HOPP\_2400MHz\_Ant1\_NTNV

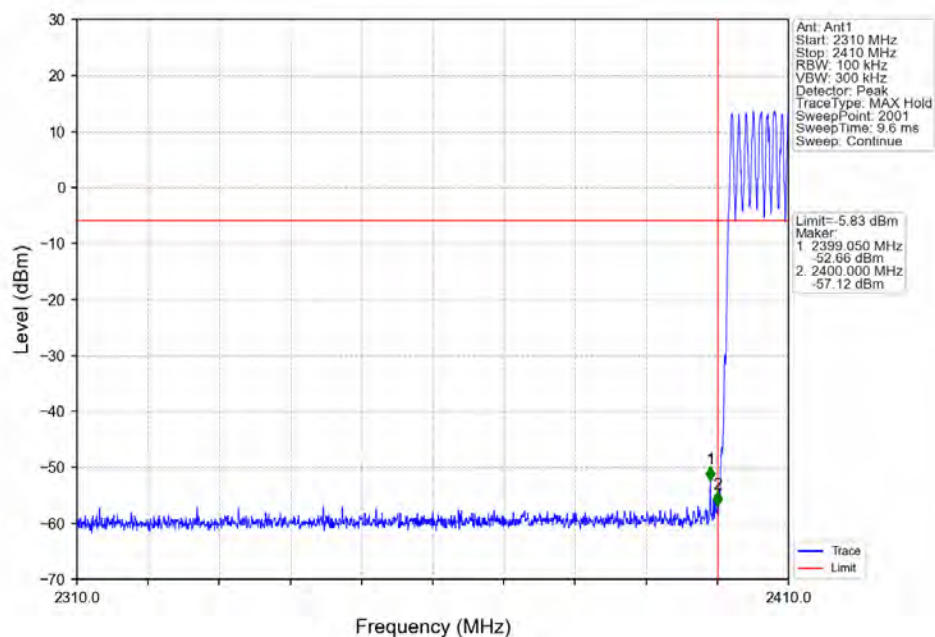


### GFSK\_DH5\_HOPP\_Ant1\_NTNV

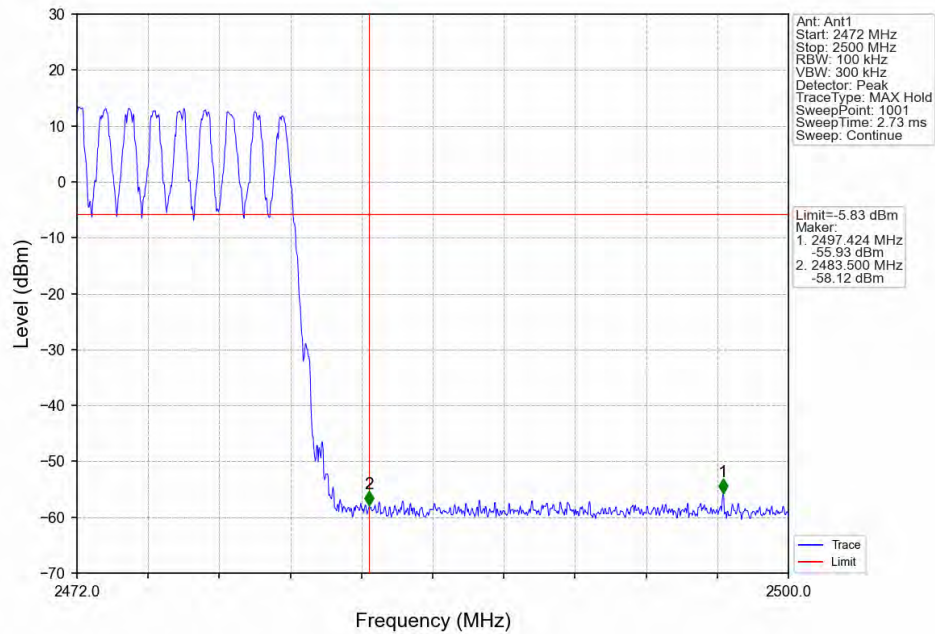


### Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

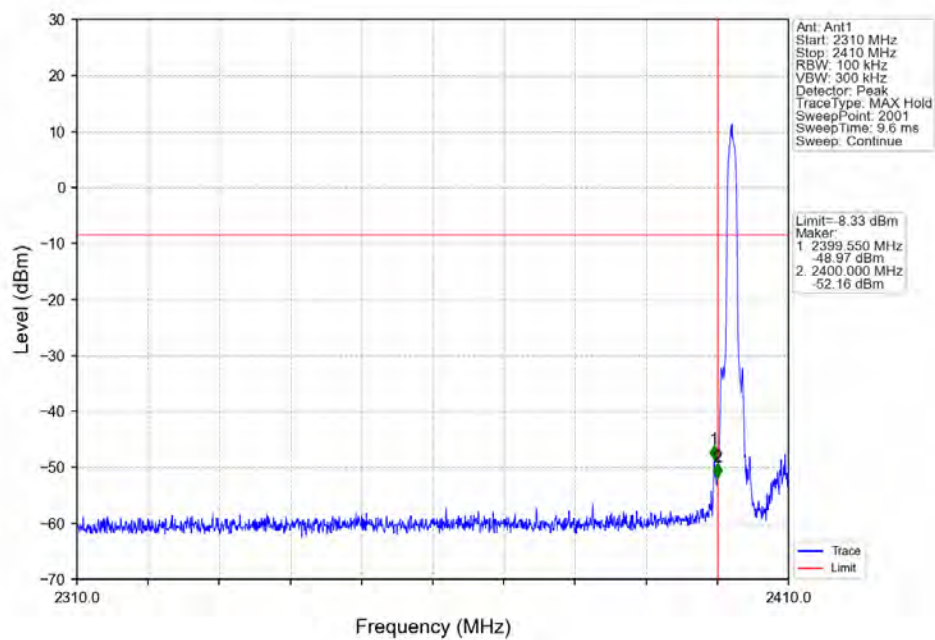

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

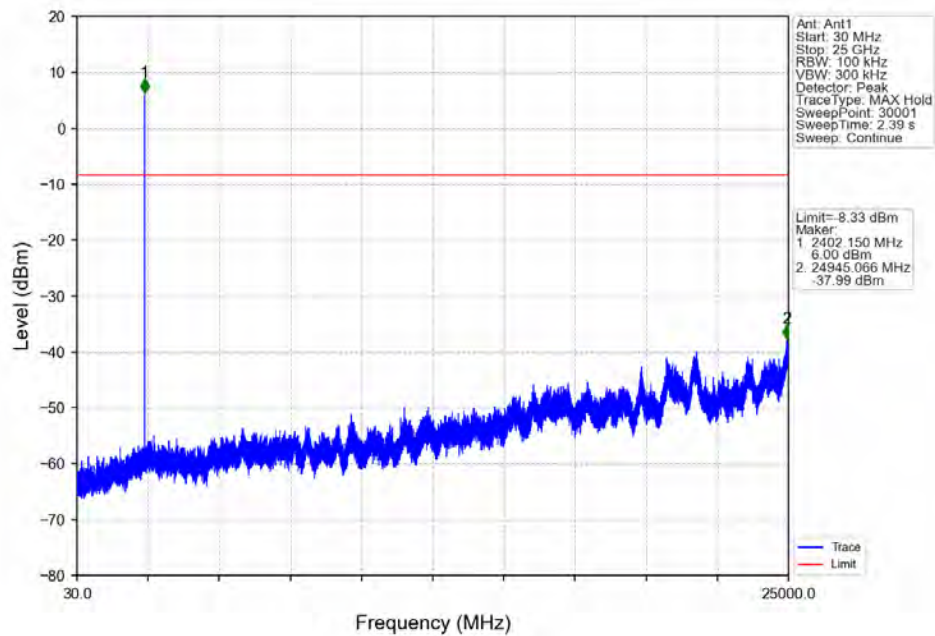

Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

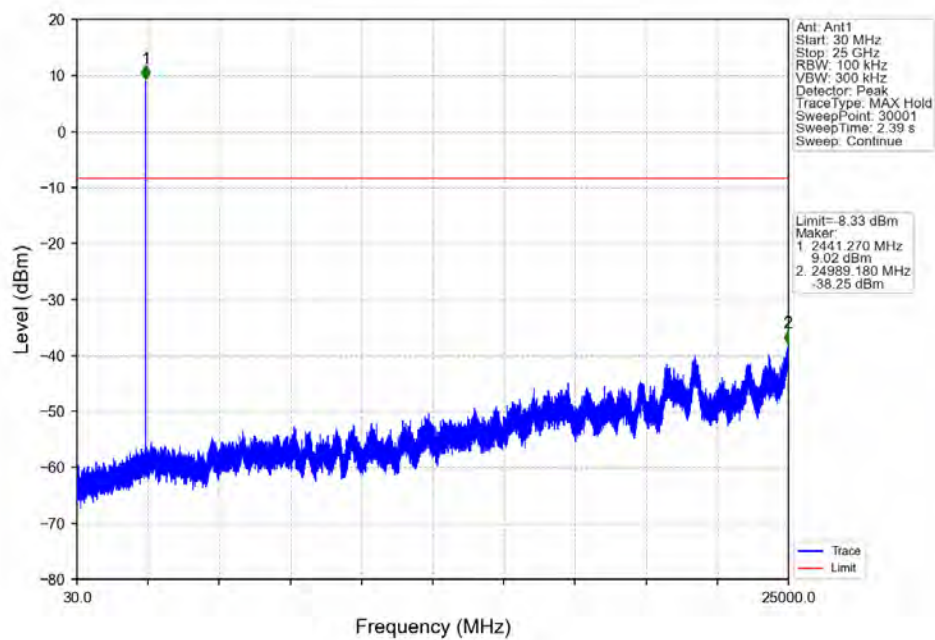


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 108 of 167


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

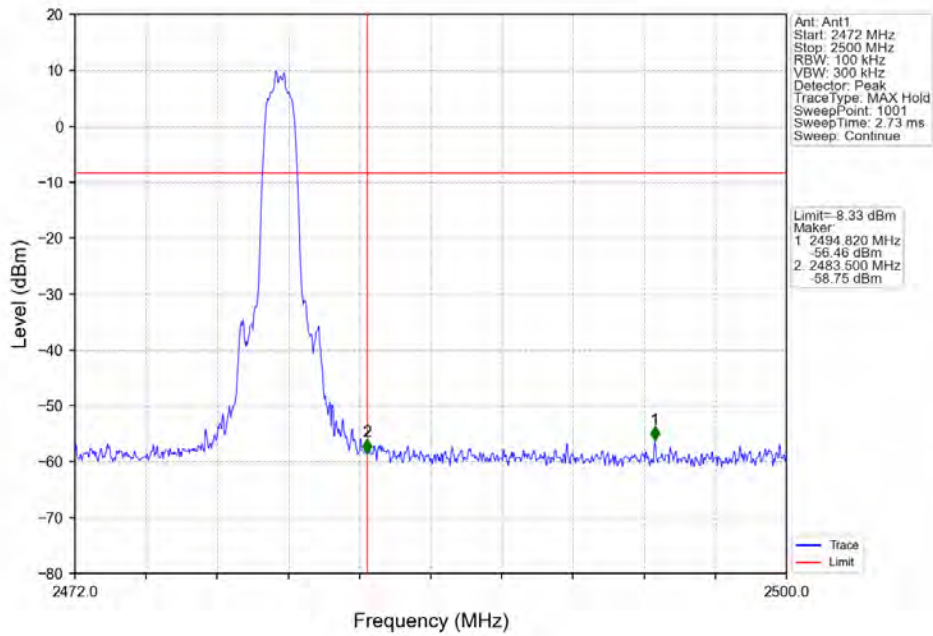


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

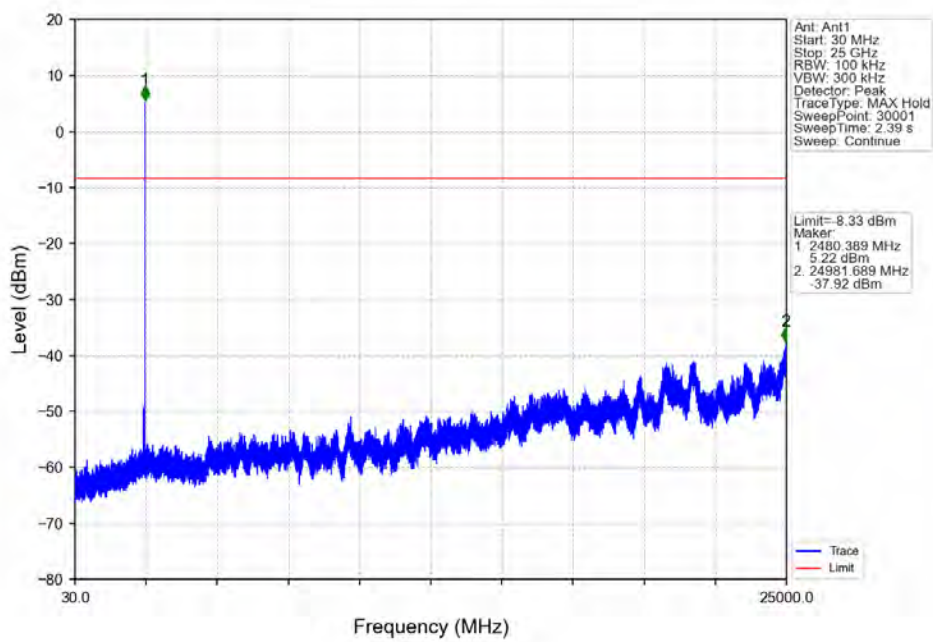


Pi/4DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

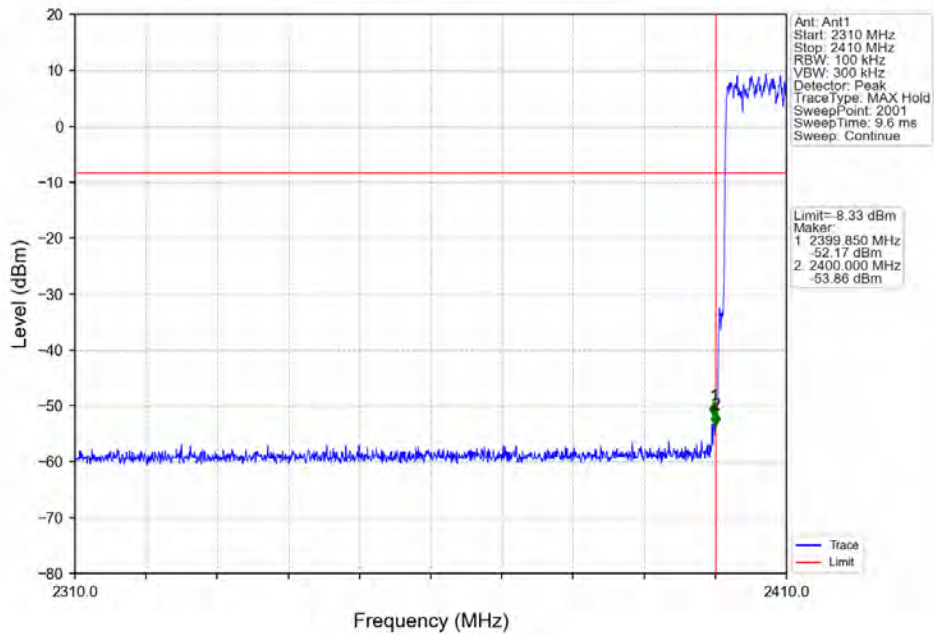


Pi/4DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

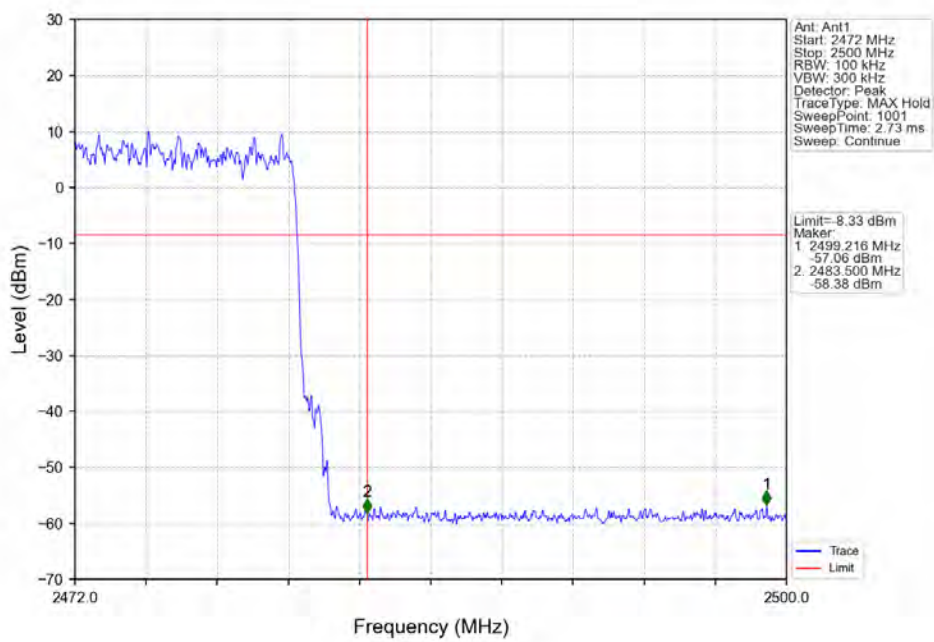


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

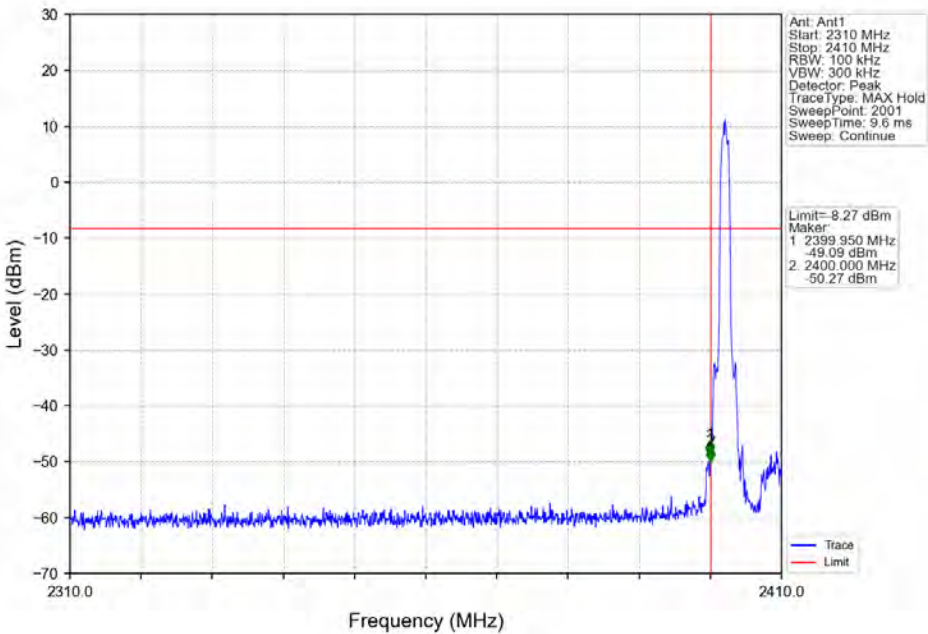


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

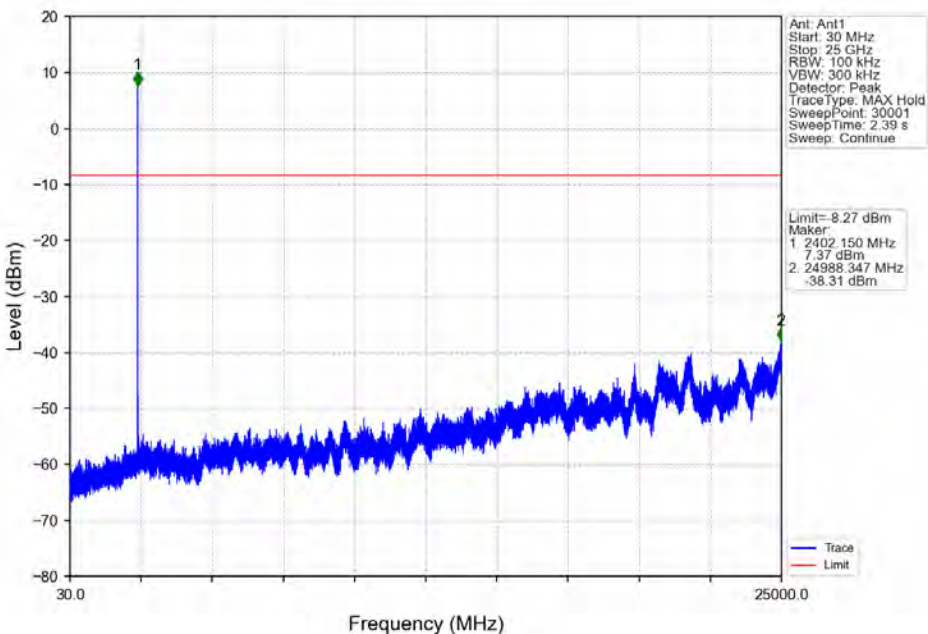


### 8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

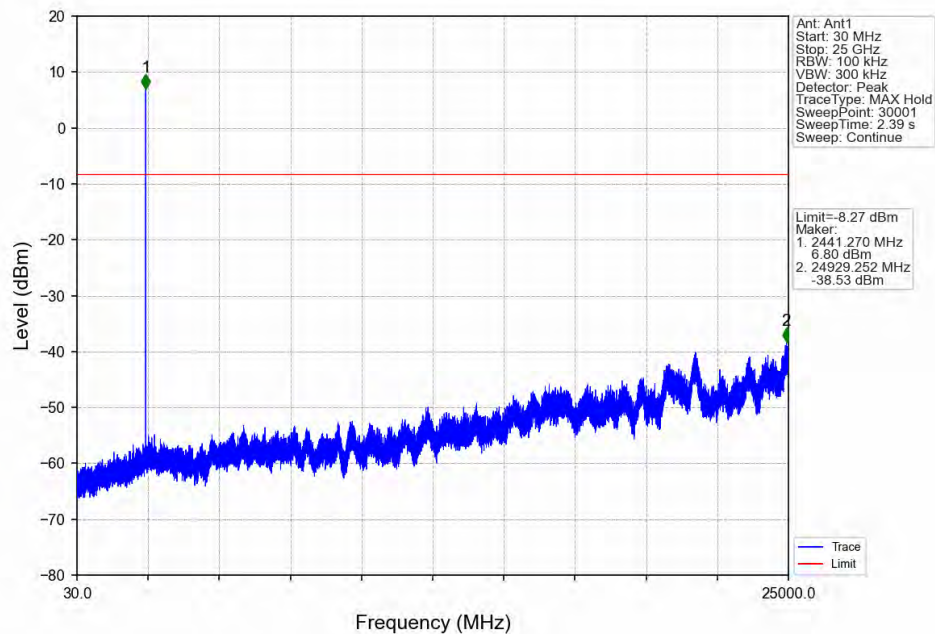


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

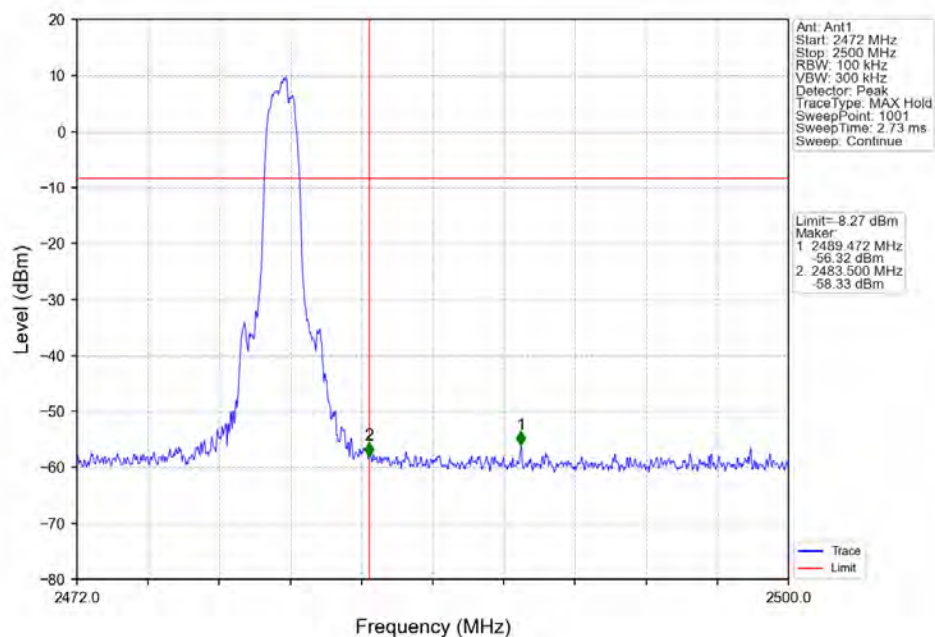

### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

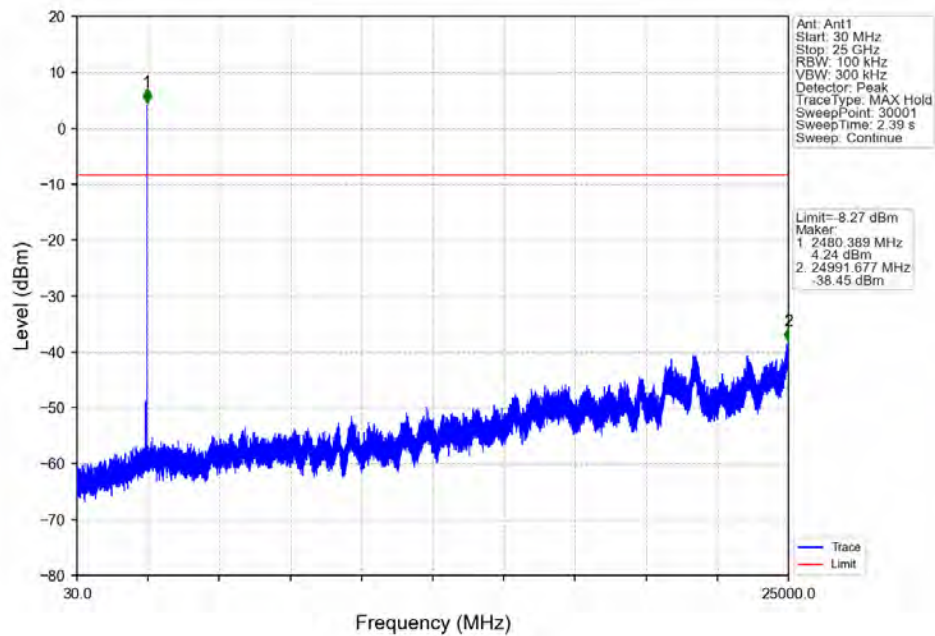

### 8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

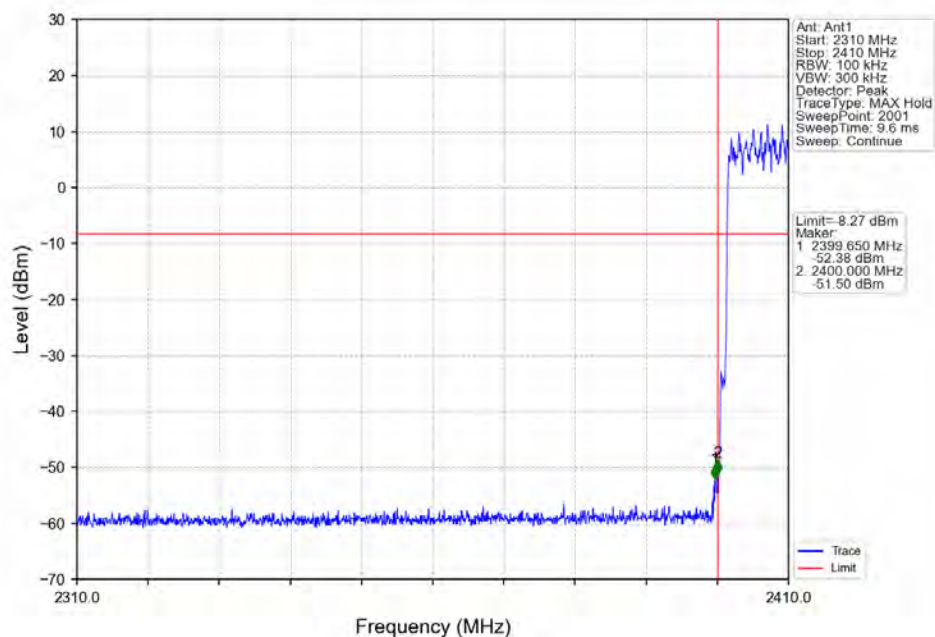


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 113 of 167

### 8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

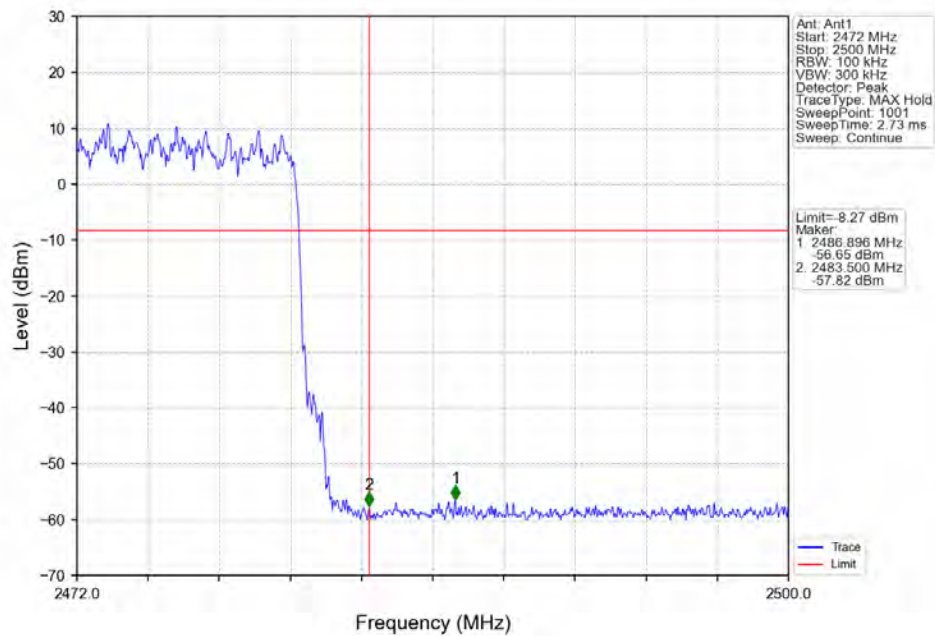

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 114 of 167

### 7. Frequency Error

#### 7.1 Test Result

##### 7.1.1 Ant1

| Ant1      |         |                 |             |                  |               |                          |                      |         |
|-----------|---------|-----------------|-------------|------------------|---------------|--------------------------|----------------------|---------|
| Mode      | TX Type | Frequency (MHz) | Packet Type | Temperature (°C) | Voltage (VAC) | Measured Frequency (MHz) | Limit (MHz)          | Verdict |
| GFSK      | SISO    | 2402            | DH5         | 20               | 102           | 2402.054                 | 2401.667 to 2402.333 | Pass    |
|           |         |                 |             |                  | 120           | 2402.056                 | 2401.667 to 2402.333 | Pass    |
|           |         |                 |             |                  | 138           | 2402.055                 | 2401.667 to 2402.333 | Pass    |
|           |         |                 |             | -20              | 120           | 2402.056                 | 2401.667 to 2402.333 | Pass    |
|           |         |                 |             | 50               | 120           | 2402.055                 | 2401.667 to 2402.333 | Pass    |
|           |         | 2441            | DH5         | 20               | 102           | 2441.055                 | 2440.667 to 2441.333 | Pass    |
|           |         |                 |             |                  | 120           | 2441.056                 | 2440.667 to 2441.333 | Pass    |
|           |         |                 |             |                  | 138           | 2441.055                 | 2440.667 to 2441.333 | Pass    |
|           |         |                 |             | -20              | 120           | 2441.056                 | 2440.667 to 2441.333 | Pass    |
|           |         |                 |             | 50               | 120           | 2441.058                 | 2440.667 to 2441.333 | Pass    |
|           |         | 2480            | DH5         | 20               | 102           | 2480.056                 | 2479.666 to 2480.334 | Pass    |
|           |         |                 |             |                  | 120           | 2480.057                 | 2479.666 to 2480.334 | Pass    |
|           |         |                 |             |                  | 138           | 2480.056                 | 2479.666 to 2480.334 | Pass    |
|           |         |                 |             | -20              | 120           | 2480.056                 | 2479.666 to 2480.334 | Pass    |
|           |         |                 |             | 50               | 120           | 2480.058                 | 2479.666 to 2480.334 | Pass    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 20               | 102           | 2402.055                 | 2401.53 to 2402.47   | Pass    |
|           |         |                 |             |                  | 120           | 2402.054                 | 2401.53 to 2402.47   | Pass    |
|           |         |                 |             |                  | 138           | 2402.055                 | 2401.53 to 2402.47   | Pass    |
|           |         |                 |             | -20              | 120           | 2402.056                 | 2401.53 to 2402.47   | Pass    |
|           |         |                 |             | 50               | 120           | 2402.054                 | 2401.53 to 2402.47   | Pass    |
|           |         | 2441            | 2DH5        | 20               | 102           | 2441.058                 | 2440.53 to 2441.47   | Pass    |
|           |         |                 |             |                  | 120           | 2441.058                 | 2440.53 to 2441.47   | Pass    |
|           |         |                 |             |                  | 138           | 2441.054                 | 2440.53 to 2441.47   | Pass    |
|           |         |                 |             | -20              | 120           | 2441.056                 | 2440.53 to 2441.47   | Pass    |
|           |         |                 |             | 50               | 120           | 2441.056                 | 2440.53 to 2441.47   | Pass    |
|           |         | 2480            | 2DH5        | 20               | 102           | 2480.056                 | 2479.53 to 2480.47   | Pass    |
|           |         |                 |             |                  | 120           | 2480.054                 | 2479.53 to 2480.47   | Pass    |
|           |         |                 |             |                  | 138           | 2480.056                 | 2479.53 to 2480.47   | Pass    |
|           |         |                 |             | -20              | 120           | 2480.058                 | 2479.53 to 2480.47   | Pass    |
|           |         |                 |             | 50               | 120           | 2480.054                 | 2479.53 to 2480.47   | Pass    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 20               | 102           | 2402.053                 | 2401.526 to 2402.474 | Pass    |
|           |         |                 |             |                  | 120           | 2402.050                 | 2401.526 to 2402.474 | Pass    |
|           |         |                 |             |                  | 138           | 2402.050                 | 2401.526 to 2402.474 | Pass    |
|           |         |                 |             | -20              | 120           | 2402.049                 | 2401.526 to 2402.474 | Pass    |



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 115 of 167

|  |  |      |      |    |     |          |                      |      |
|--|--|------|------|----|-----|----------|----------------------|------|
|  |  |      |      | 50 | 120 | 2402.056 | 2401.526 to 2402.474 | Pass |
|  |  | 2441 | 3DH5 | 20 | 102 | 2441.054 | 2440.527 to 2441.473 | Pass |
|  |  |      |      |    | 120 | 2441.055 | 2440.527 to 2441.473 | Pass |
|  |  |      |      |    | 138 | 2441.053 | 2440.527 to 2441.473 | Pass |
|  |  |      |      |    | -20 | 2441.049 | 2440.527 to 2441.473 | Pass |
|  |  |      |      | 50 | 120 | 2441.053 | 2440.527 to 2441.473 | Pass |
|  |  | 2480 | 3DH5 | 20 | 102 | 2480.054 | 2479.527 to 2480.473 | Pass |
|  |  |      |      |    | 120 | 2480.048 | 2479.527 to 2480.473 | Pass |
|  |  |      |      |    | 138 | 2480.053 | 2479.527 to 2480.473 | Pass |
|  |  |      |      |    | -20 | 2480.053 | 2479.527 to 2480.473 | Pass |
|  |  |      |      | 50 | 120 | 2480.052 | 2479.527 to 2480.473 | Pass |

# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 116 of 167

## Ant5

### 1. Bandwidth

#### 1.1 Test Result

##### 1.1.1 OBW

| Mode      | TX Type | Frequency (MHz) | Packet Type | ANT | 99% Occupied Bandwidth (MHz) |       | Verdict |
|-----------|---------|-----------------|-------------|-----|------------------------------|-------|---------|
|           |         |                 |             |     | Result                       | Limit |         |
| GFSK      | SISO    | 2402            | DH5         | 5   | 0.833                        | /     | Pass    |
|           |         | 2441            | DH5         | 5   | 0.832                        | /     | Pass    |
|           |         | 2480            | DH5         | 5   | 0.832                        | /     | Pass    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 5   | 1.173                        | /     | Pass    |
|           |         | 2441            | 2DH5        | 5   | 1.174                        | /     | Pass    |
|           |         | 2480            | 2DH5        | 5   | 1.173                        | /     | Pass    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 5   | 1.183                        | /     | Pass    |
|           |         | 2441            | 3DH5        | 5   | 1.180                        | /     | Pass    |
|           |         | 2480            | 3DH5        | 5   | 1.181                        | /     | Pass    |


##### 1.1.2 20dB BW

| Mode      | TX Type | Frequency (MHz) | Packet Type | ANT | 20dB Bandwidth (MHz) |       | Verdict |
|-----------|---------|-----------------|-------------|-----|----------------------|-------|---------|
|           |         |                 |             |     | Result               | Limit |         |
| GFSK      | SISO    | 2402            | DH5         | 5   | 0.936                | /     | Pass    |
|           |         | 2441            | DH5         | 5   | 0.937                | /     | Pass    |
|           |         | 2480            | DH5         | 5   | 0.939                | /     | Pass    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 5   | 1.327                | /     | Pass    |
|           |         | 2441            | 2DH5        | 5   | 1.332                | /     | Pass    |
|           |         | 2480            | 2DH5        | 5   | 1.330                | /     | Pass    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 5   | 1.319                | /     | Pass    |
|           |         | 2441            | 3DH5        | 5   | 1.320                | /     | Pass    |
|           |         | 2480            | 3DH5        | 5   | 1.320                | /     | Pass    |


## 1.2 Test Graph

## 1.2.1 OBW


GFSK\_DH5\_LCH\_2402MHz\_Ant5\_NTNV

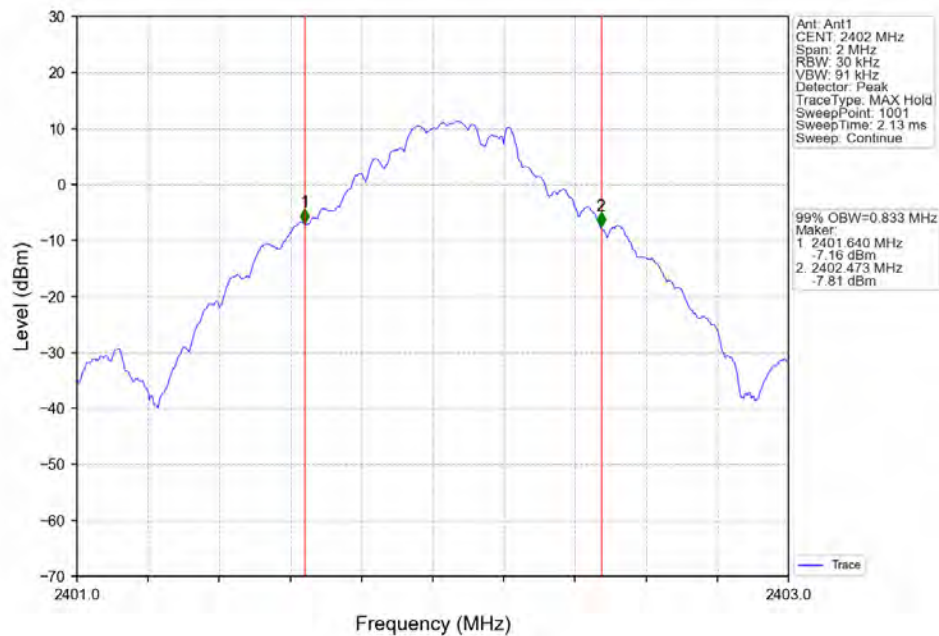


GFSK\_DH5\_MCH\_2441MHz\_Ant5\_NTNV

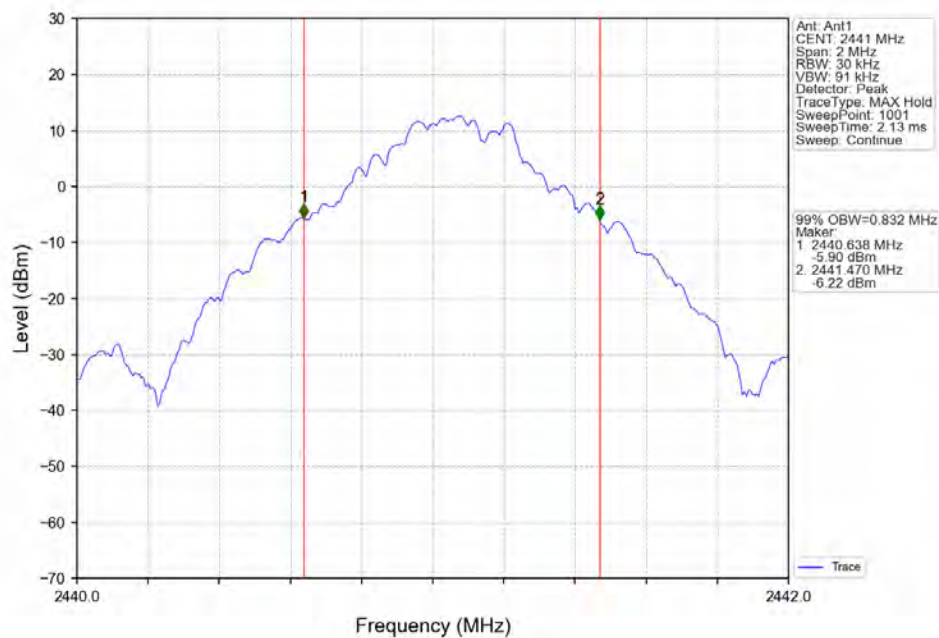


GFSK\_DH5\_HCH\_2480MHz\_Ant5\_NTNV

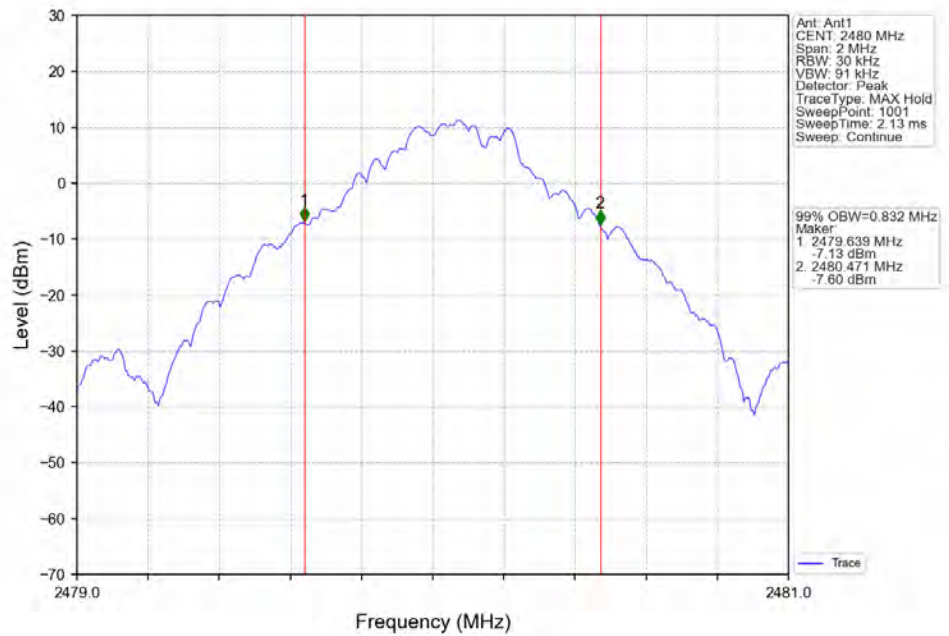


Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant5\_NTNV

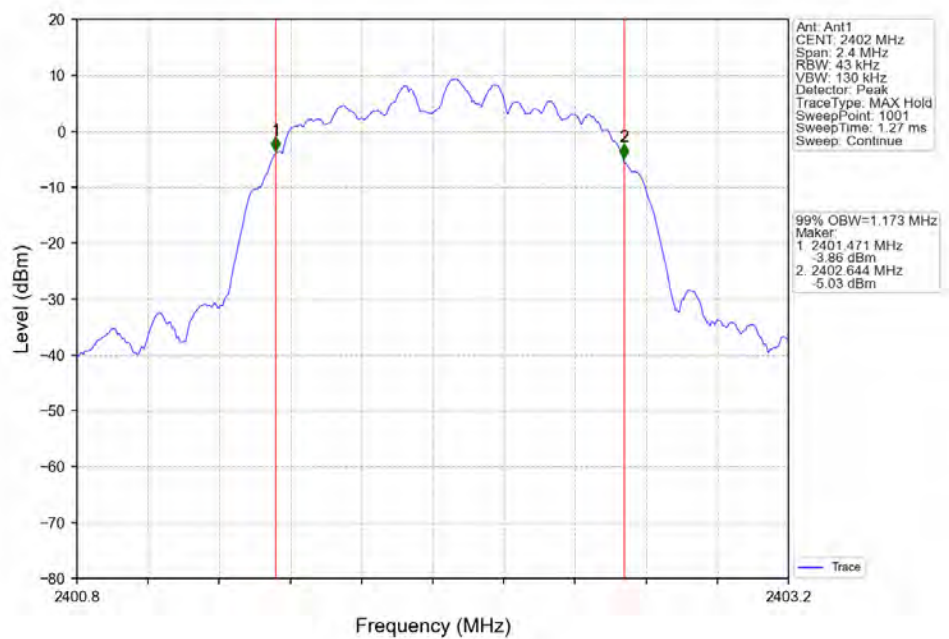


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant5\_NTNV

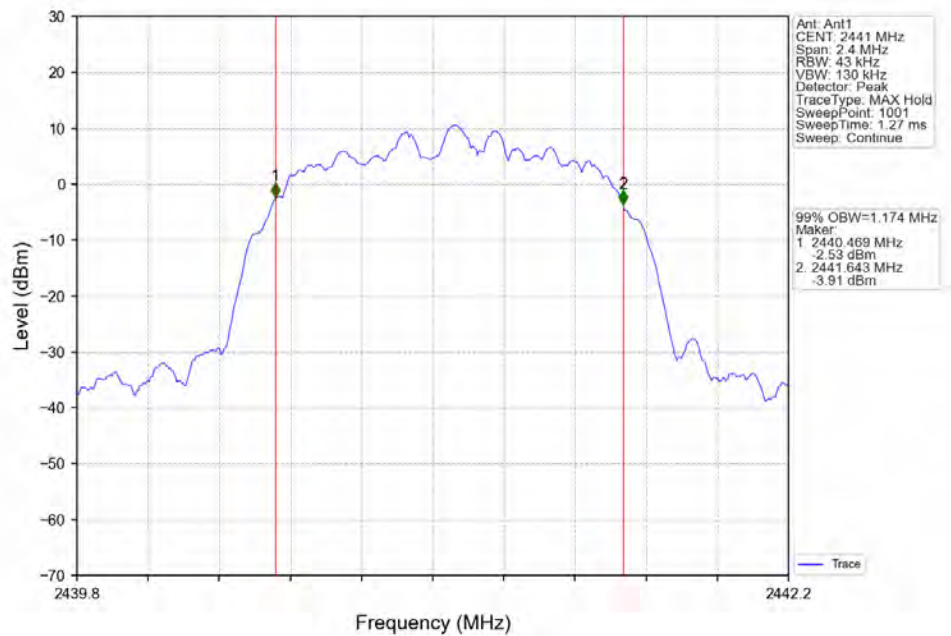


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant5\_NTNV

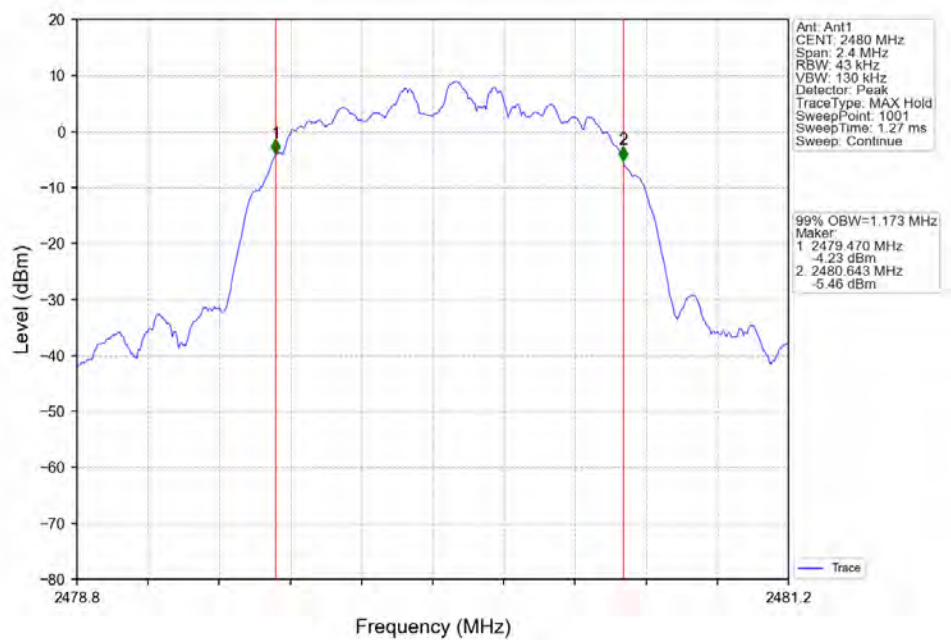

8DPSK\_3DH5\_LCH\_2402MHz\_Ant5\_NTNV

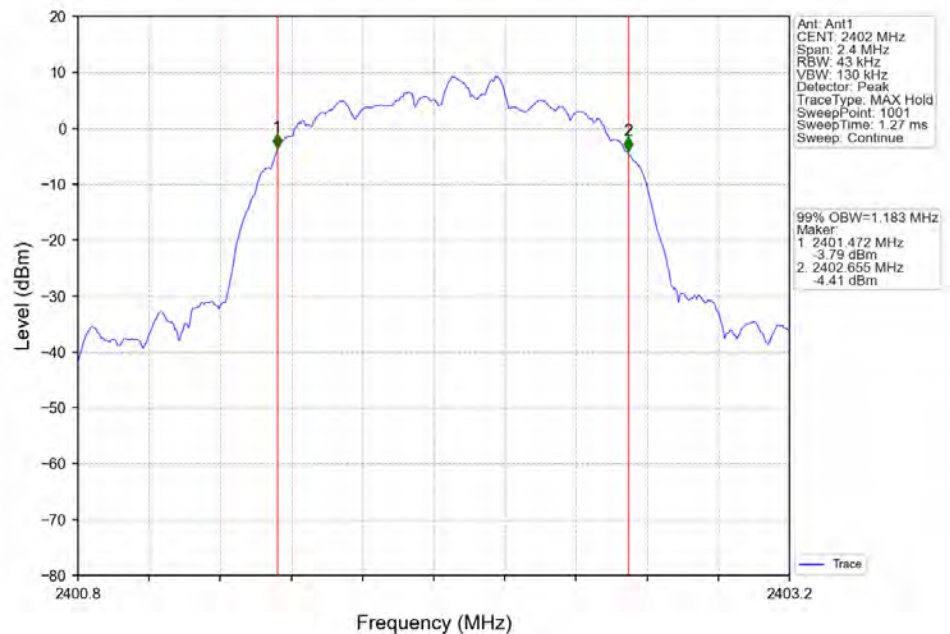

8DPSK\_3DH5\_MCH\_2441MHz\_Ant5\_NTNV

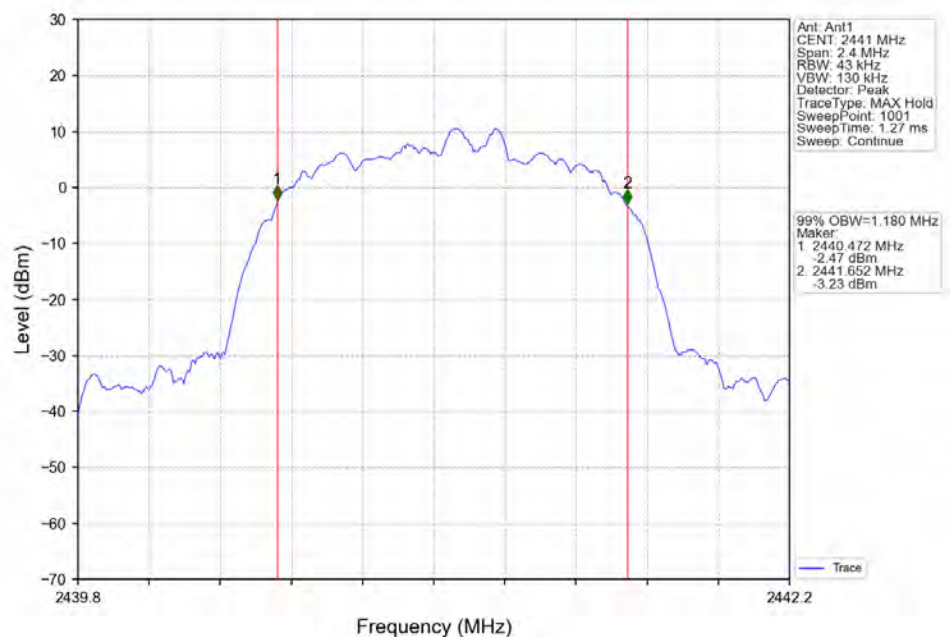


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 121 of 167


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant5\_NTNV

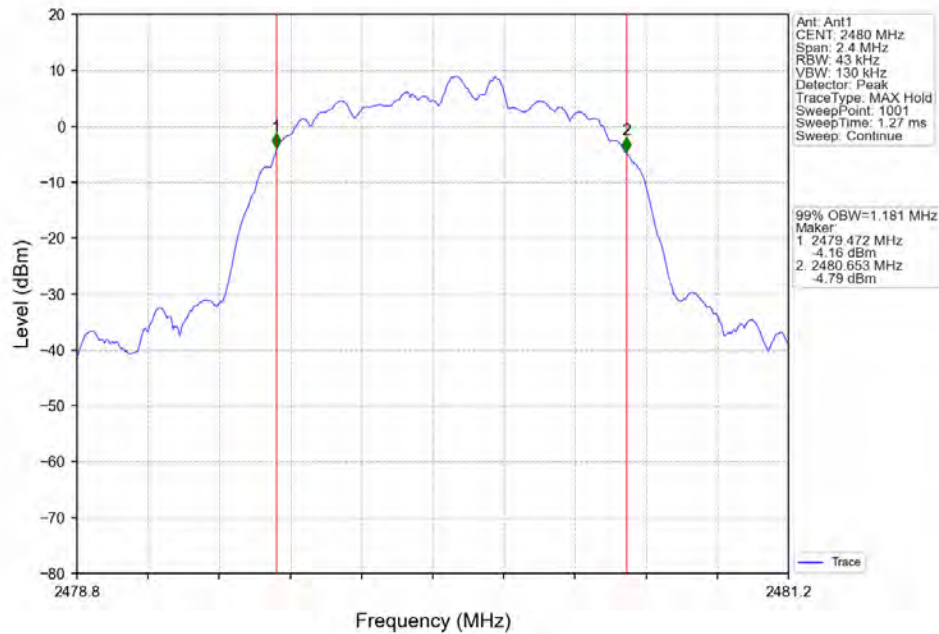


### 1.2.2 20dB BW

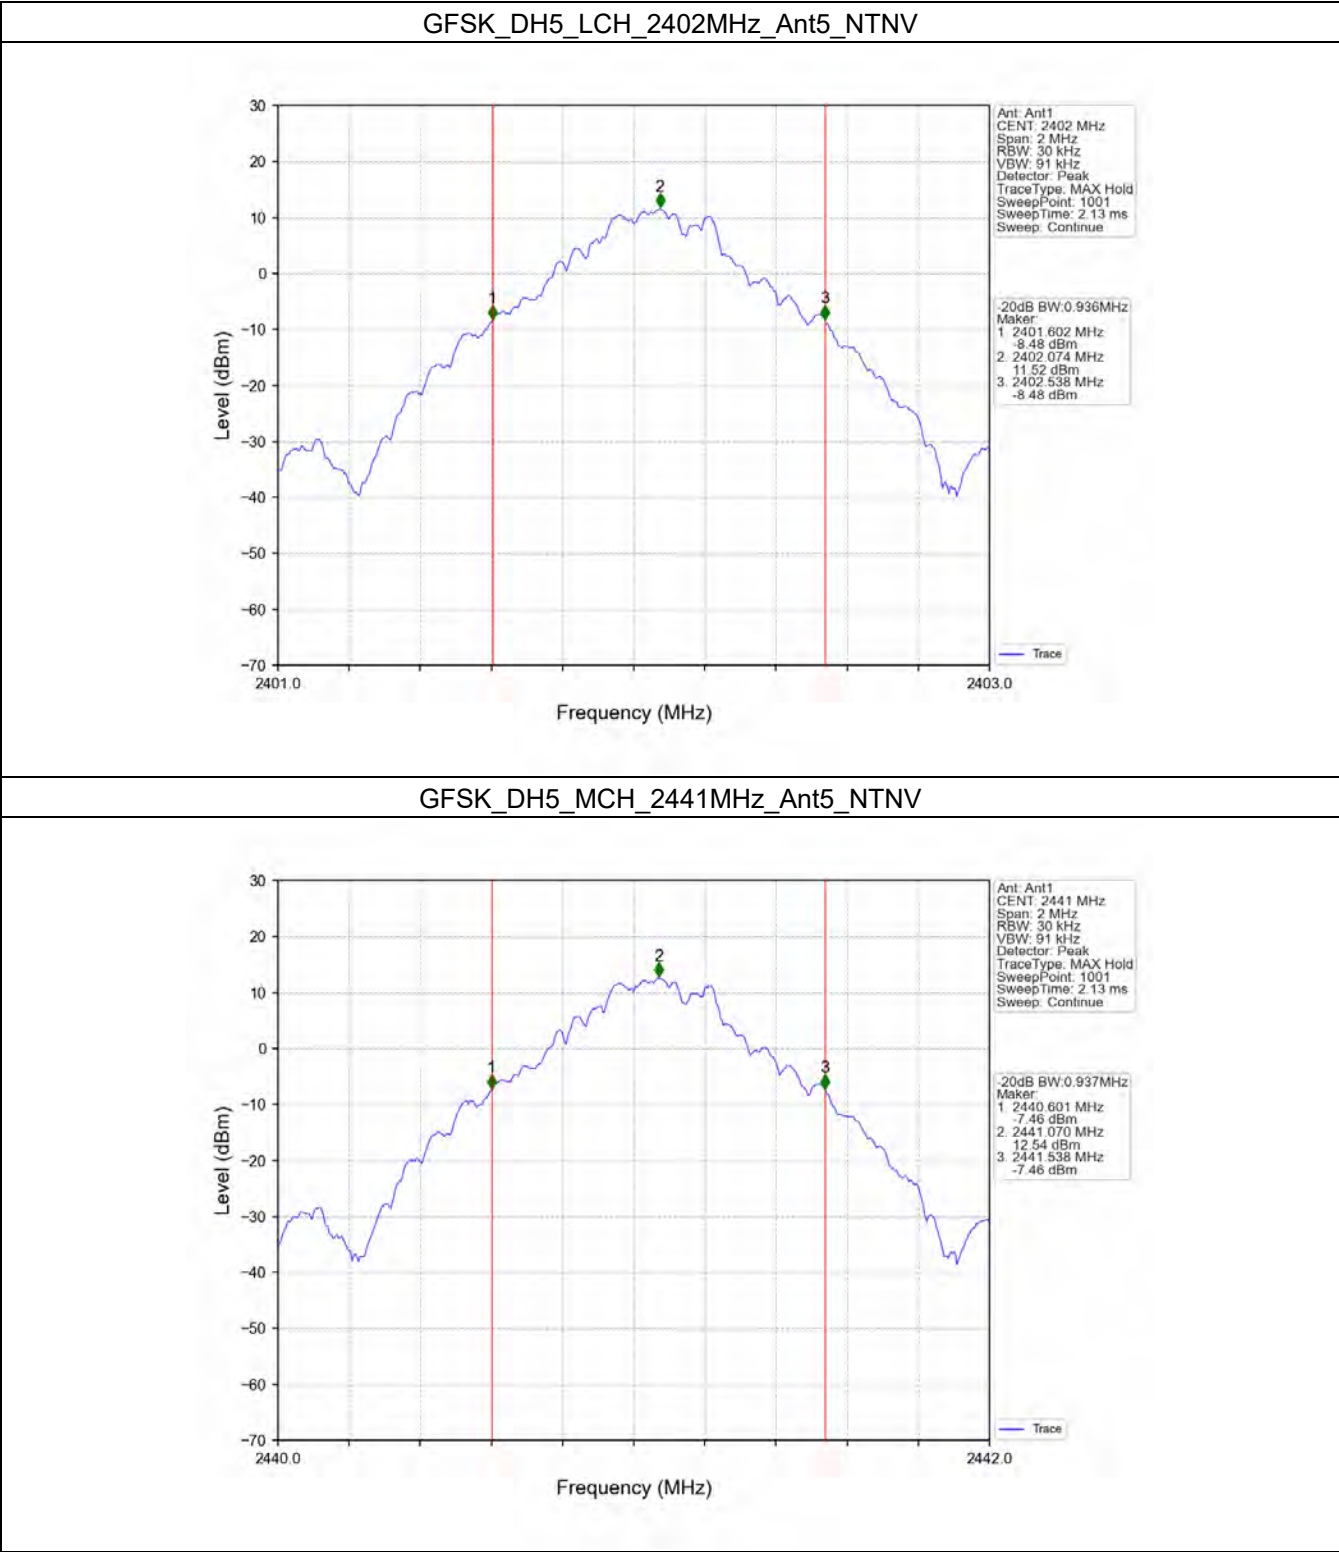

GFSK\_DH5\_HCH\_2480MHz\_Ant5\_NTNV

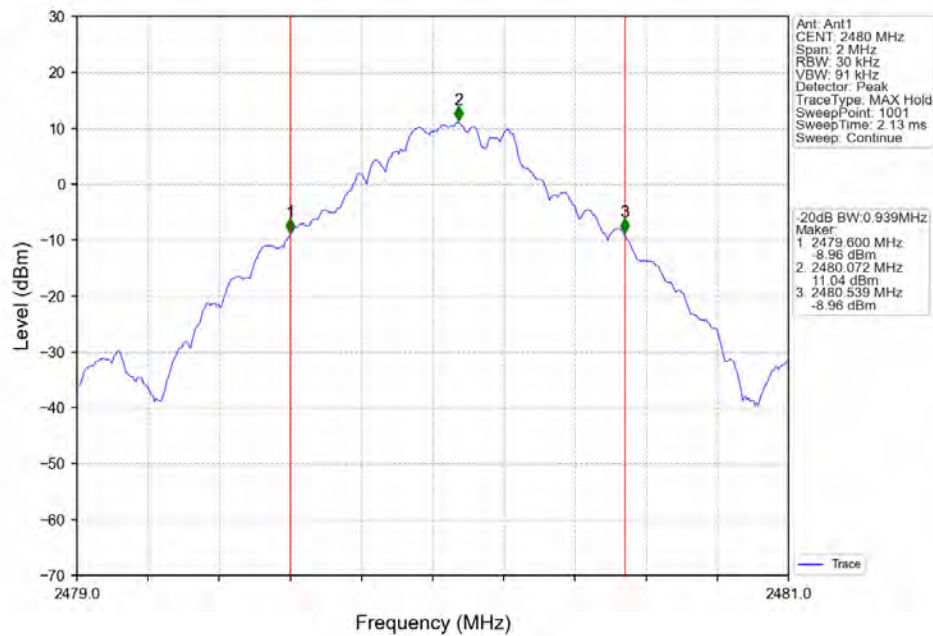

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant5\_NTNV

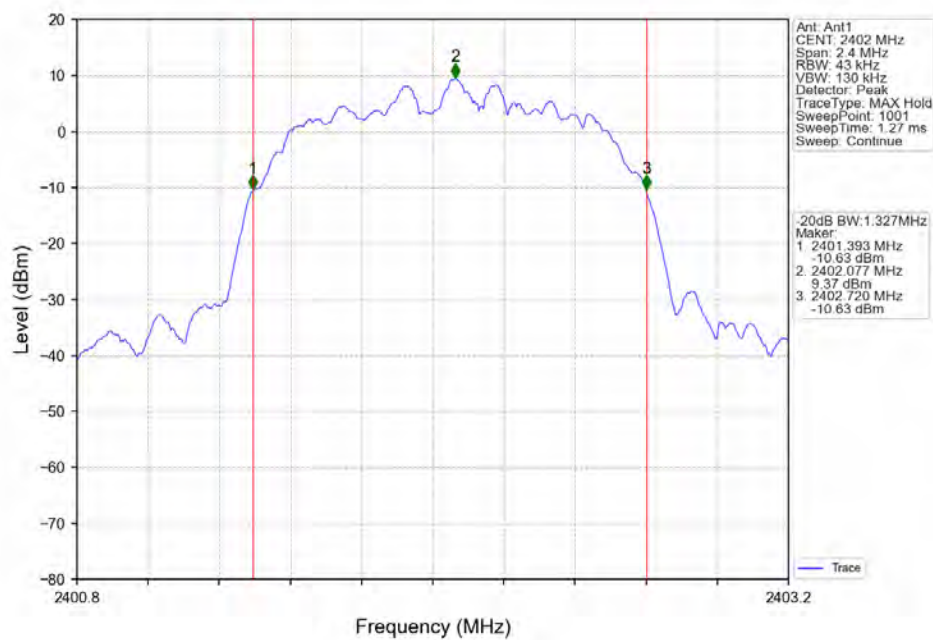


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 124 of 167


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant5\_NTNV

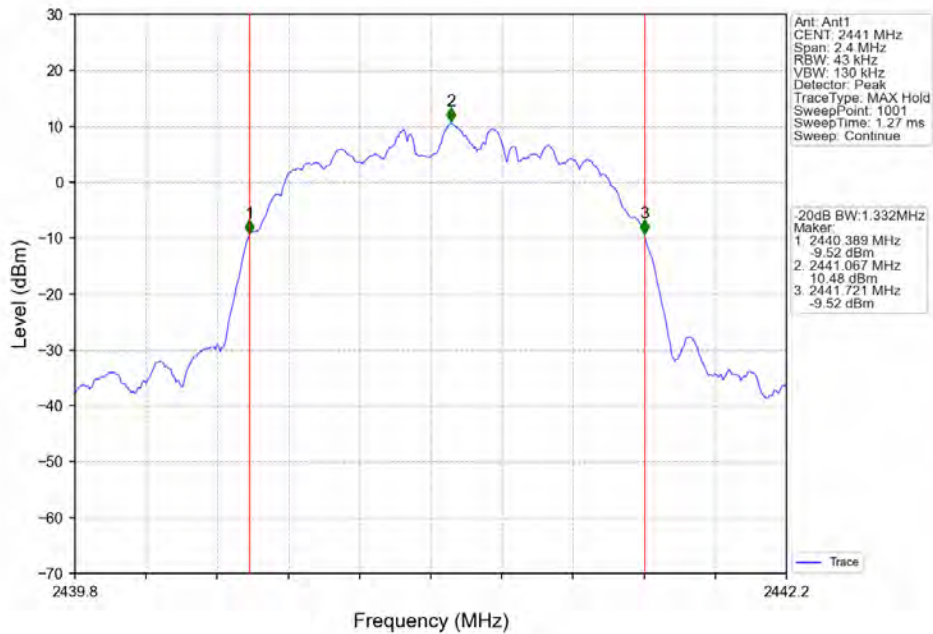


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant5\_NTNV

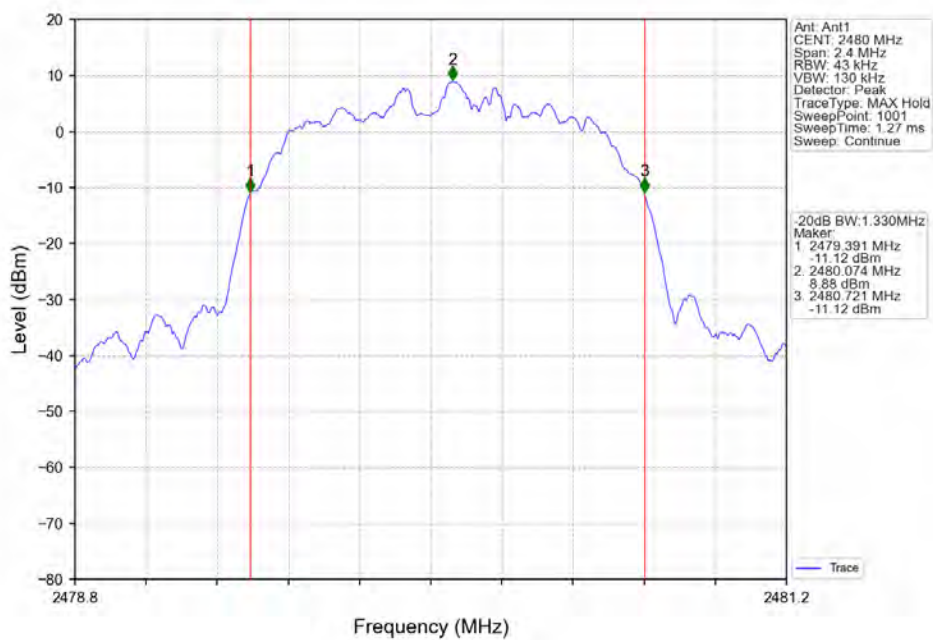

8DPSK\_3DH5\_LCH\_2402MHz\_Ant5\_NTNV

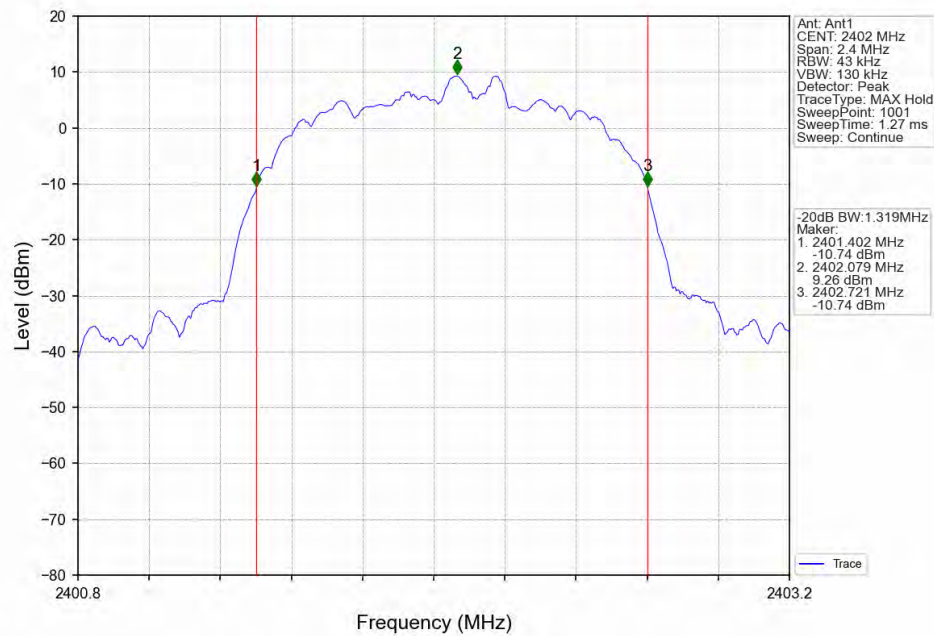

8DPSK\_3DH5\_MCH\_2441MHz\_Ant5\_NTNV

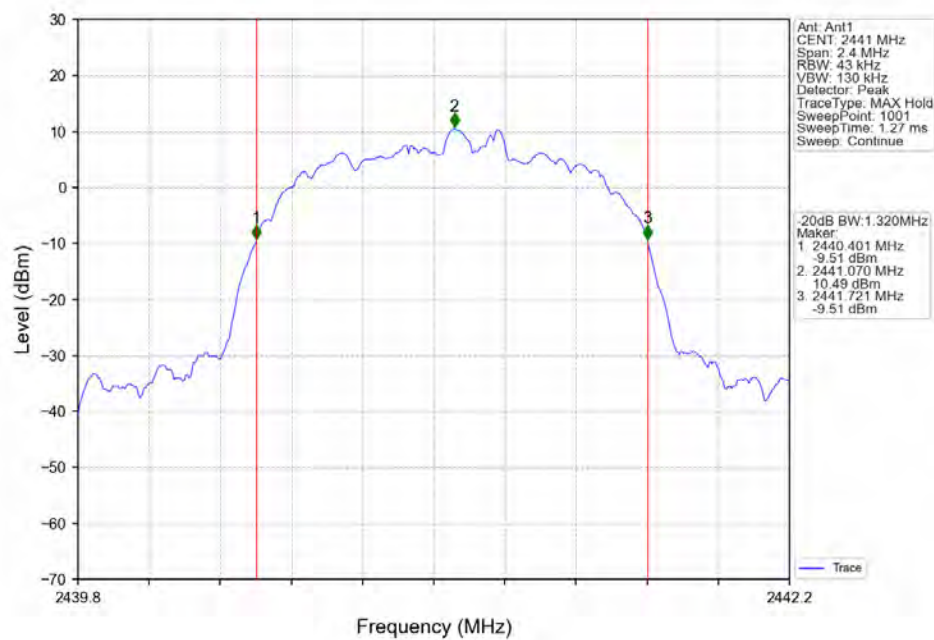


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 126 of 167


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant5\_NTNV

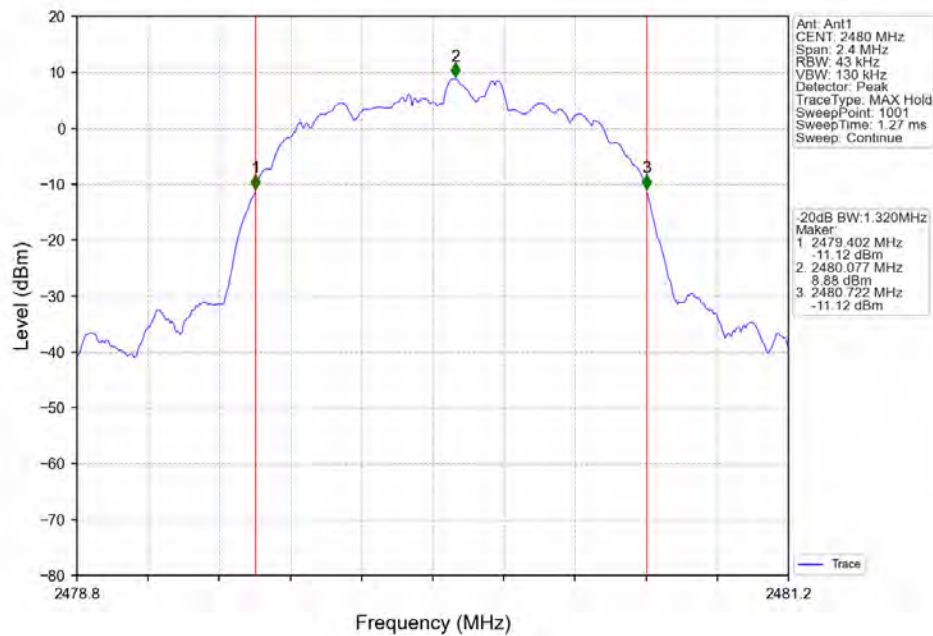


Note1: Antenna Gain: Ant5: 1.98dBi;

### 2.2 Test Graph


#### 2.2.1 Power

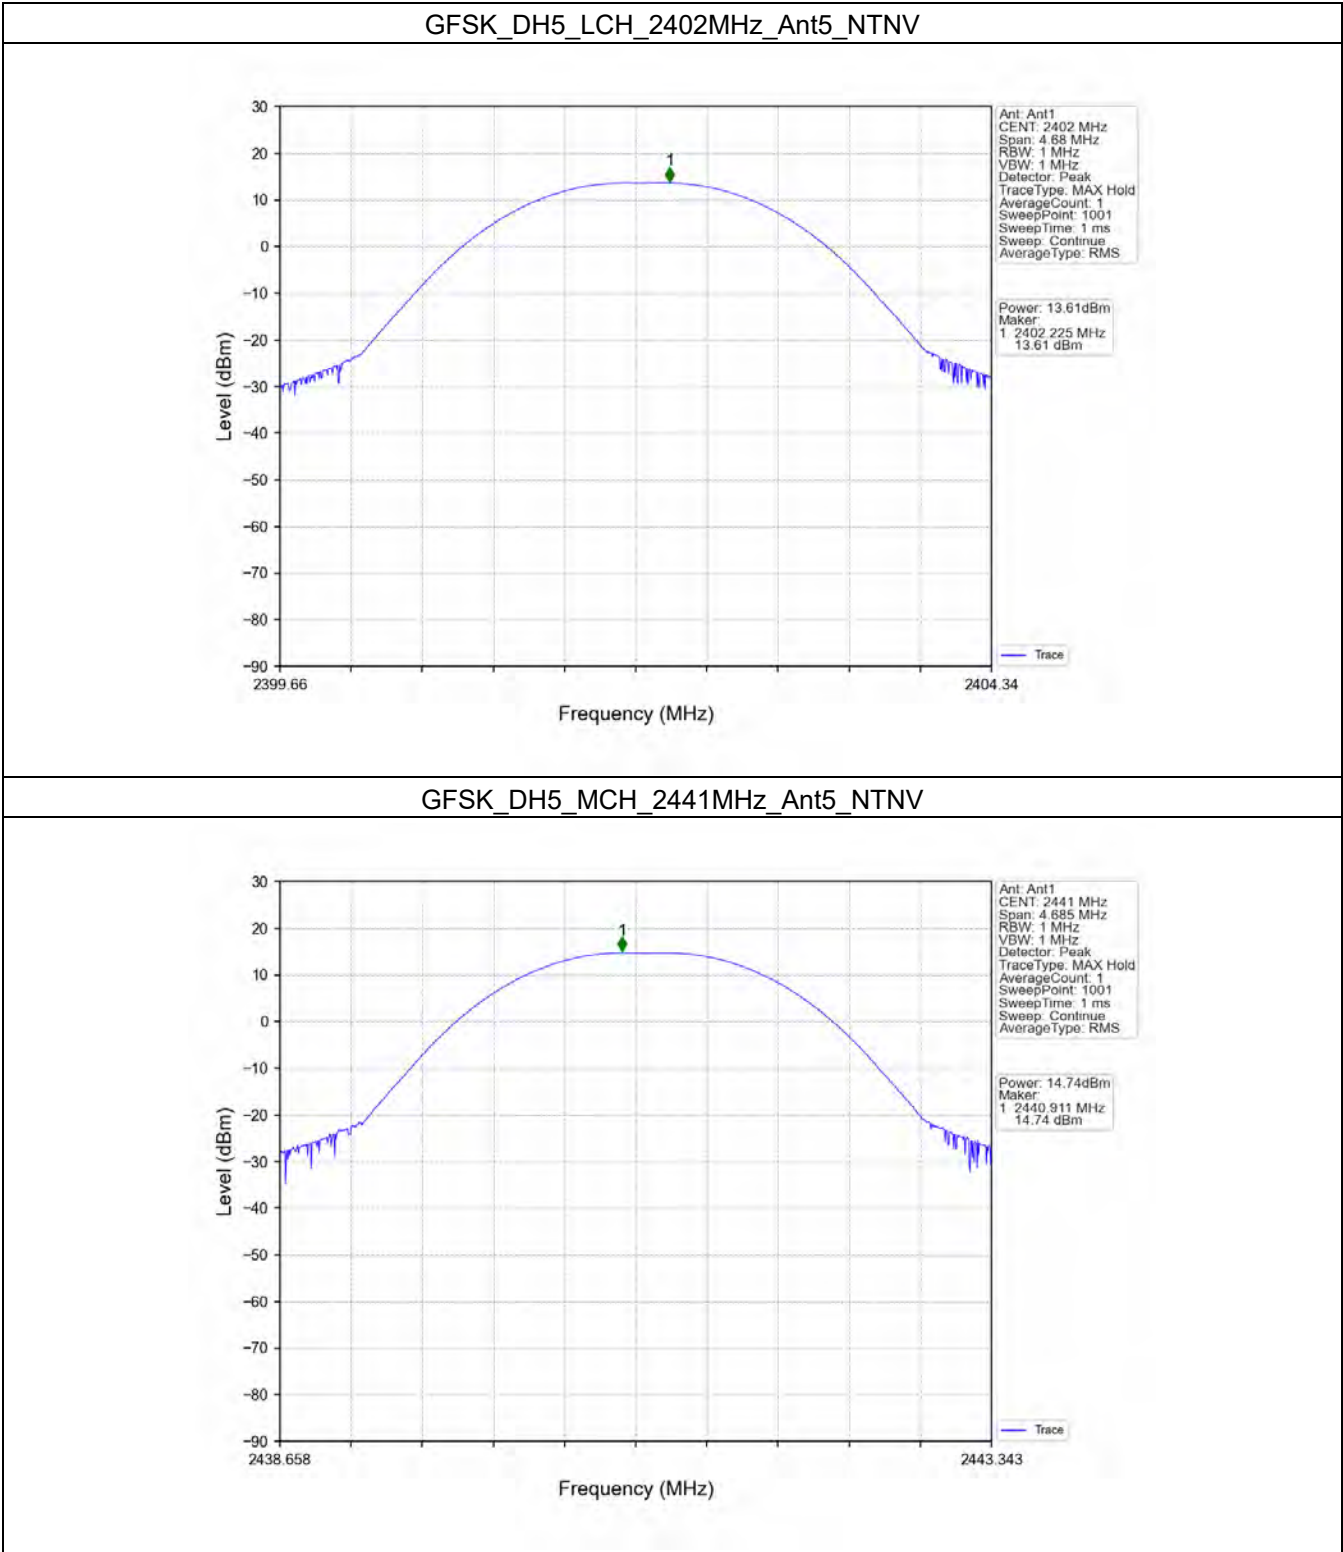

GFSK\_DH5\_HCH\_2480MHz\_Ant5\_NTNV

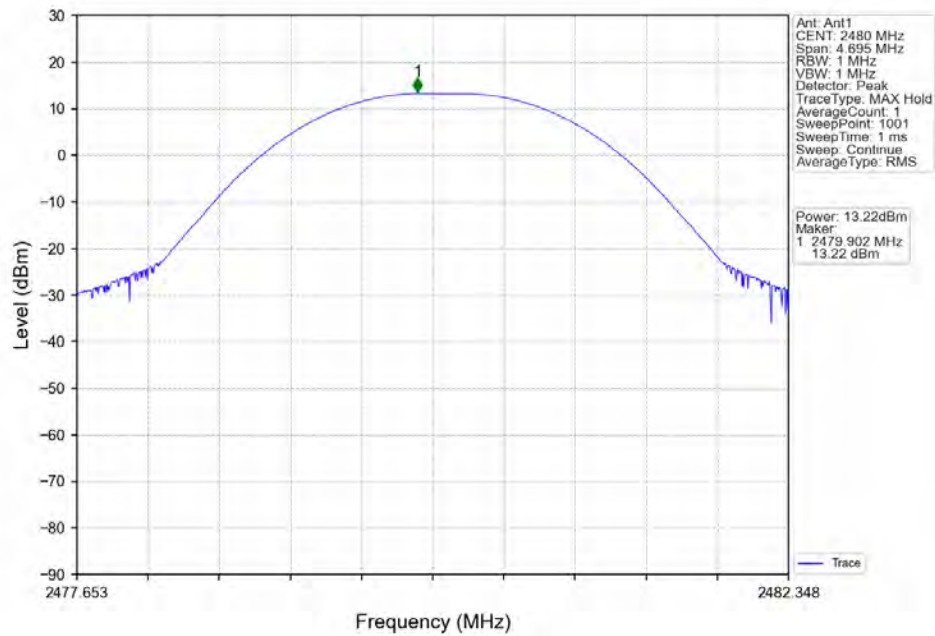

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant5\_NTNV

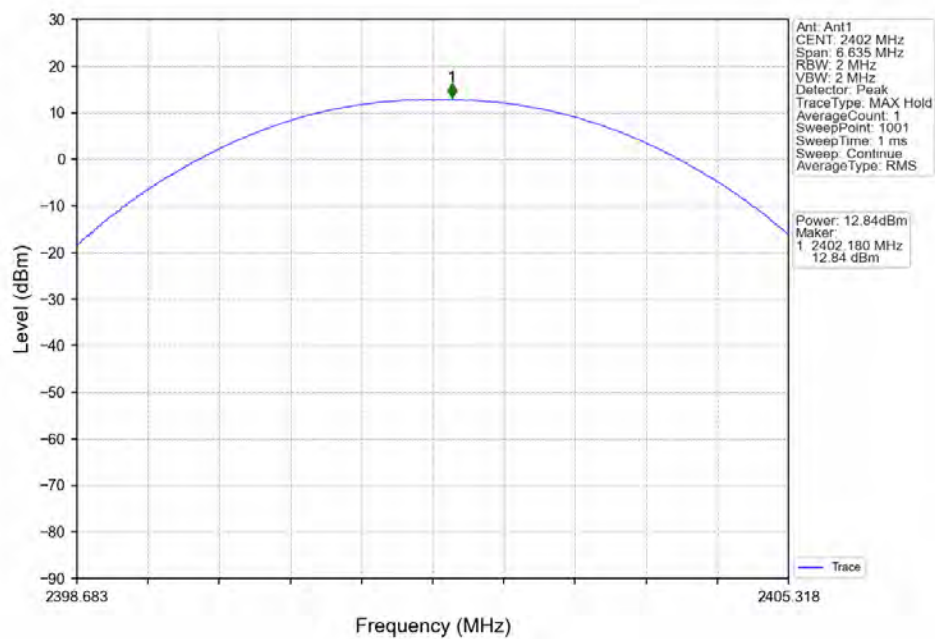


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 130 of 167

Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant5\_NTNV

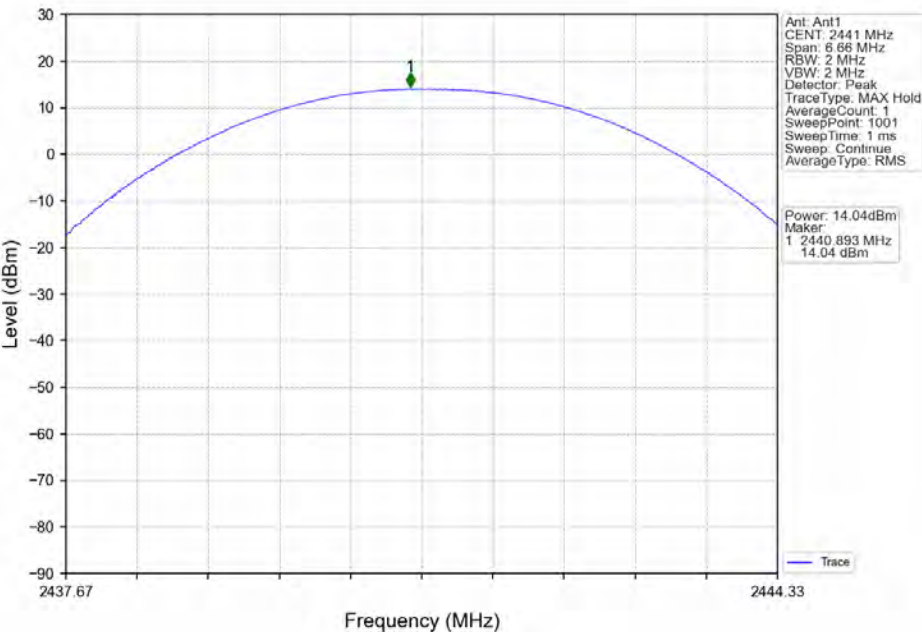

Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant5\_NTNV

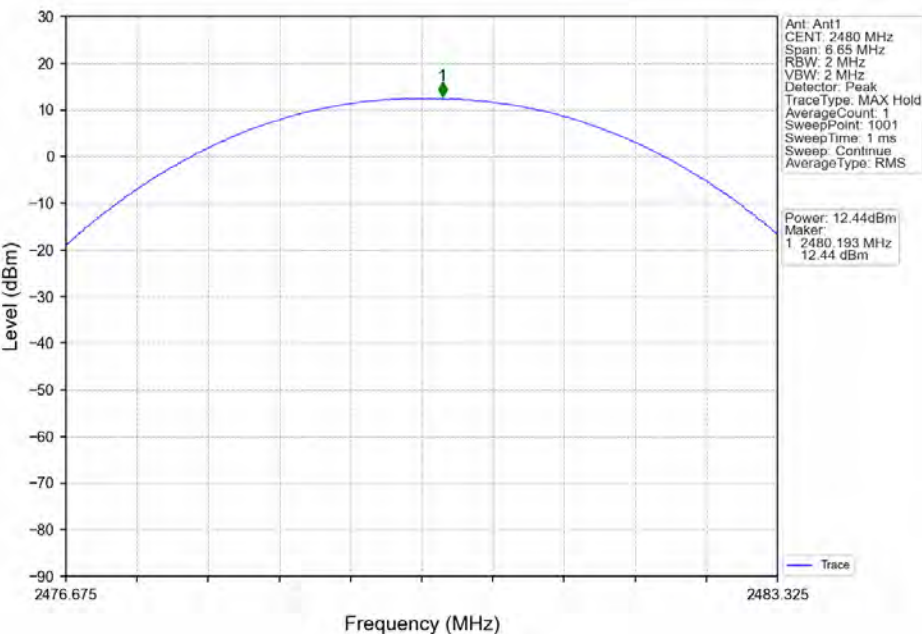


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 131 of 167


8DPSK\_3DH5\_LCH\_2402MHz\_Ant5\_NTNV

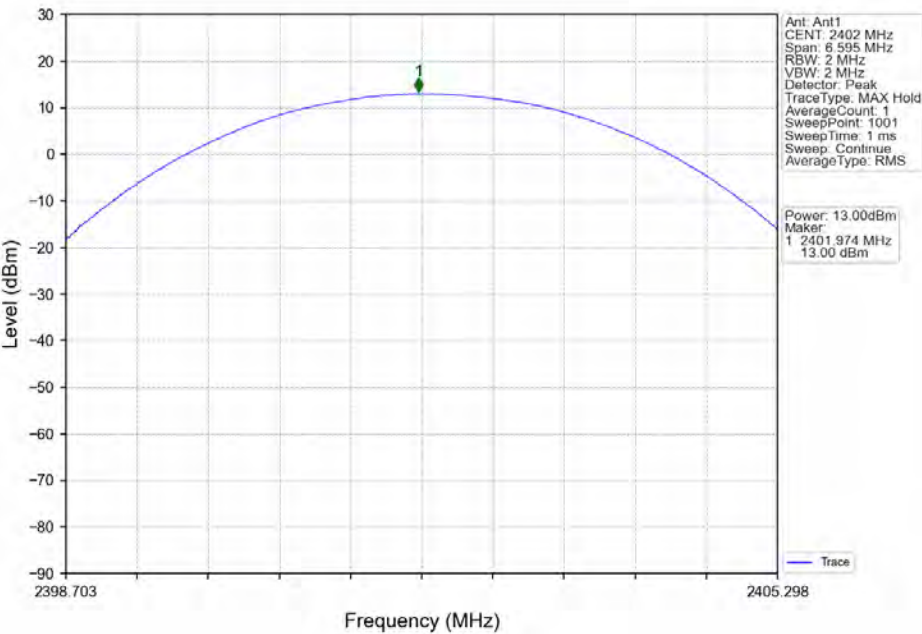

8DPSK\_3DH5\_MCH\_2441MHz\_Ant5\_NTNV

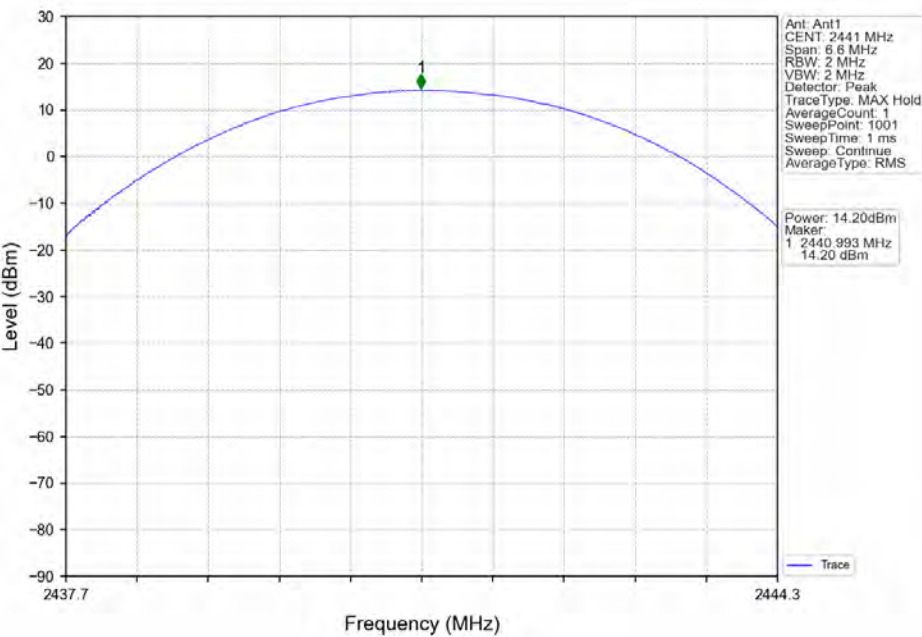

### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant5\_NTNV

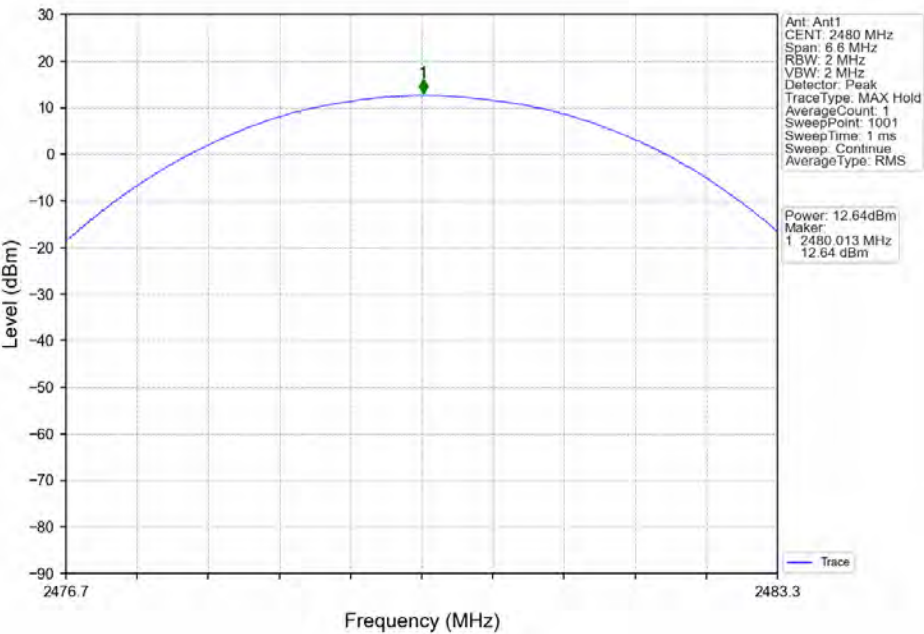



**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 133 of 167

**3. Carrier Frequency Separation**


**3.1 Test Result**

**3.1.1 Ant5**

| Ant5      |         |                 |             |                          |                      |             |         |
|-----------|---------|-----------------|-------------|--------------------------|----------------------|-------------|---------|
| Mode      | TX Type | Frequency (MHz) | Packet Type | Channel Separation (MHz) | 20dB Bandwidth (MHz) | Limit (MHz) | Verdict |
| GFSK      | SISO    | HOPP            | DH5         | 1.012                    | 0.939                | >=0.939     | Pass    |
| Pi/4DQPSK | SISO    | HOPP            | 2DH5        | 1.001                    | 1.332                | >=0.888     | Pass    |
| 8DPSK     | SISO    | HOPP            | 3DH5        | 1.001                    | 1.320                | >=0.88      | Pass    |

### 3.2 Test Graph

#### 3.2.1 Ant5

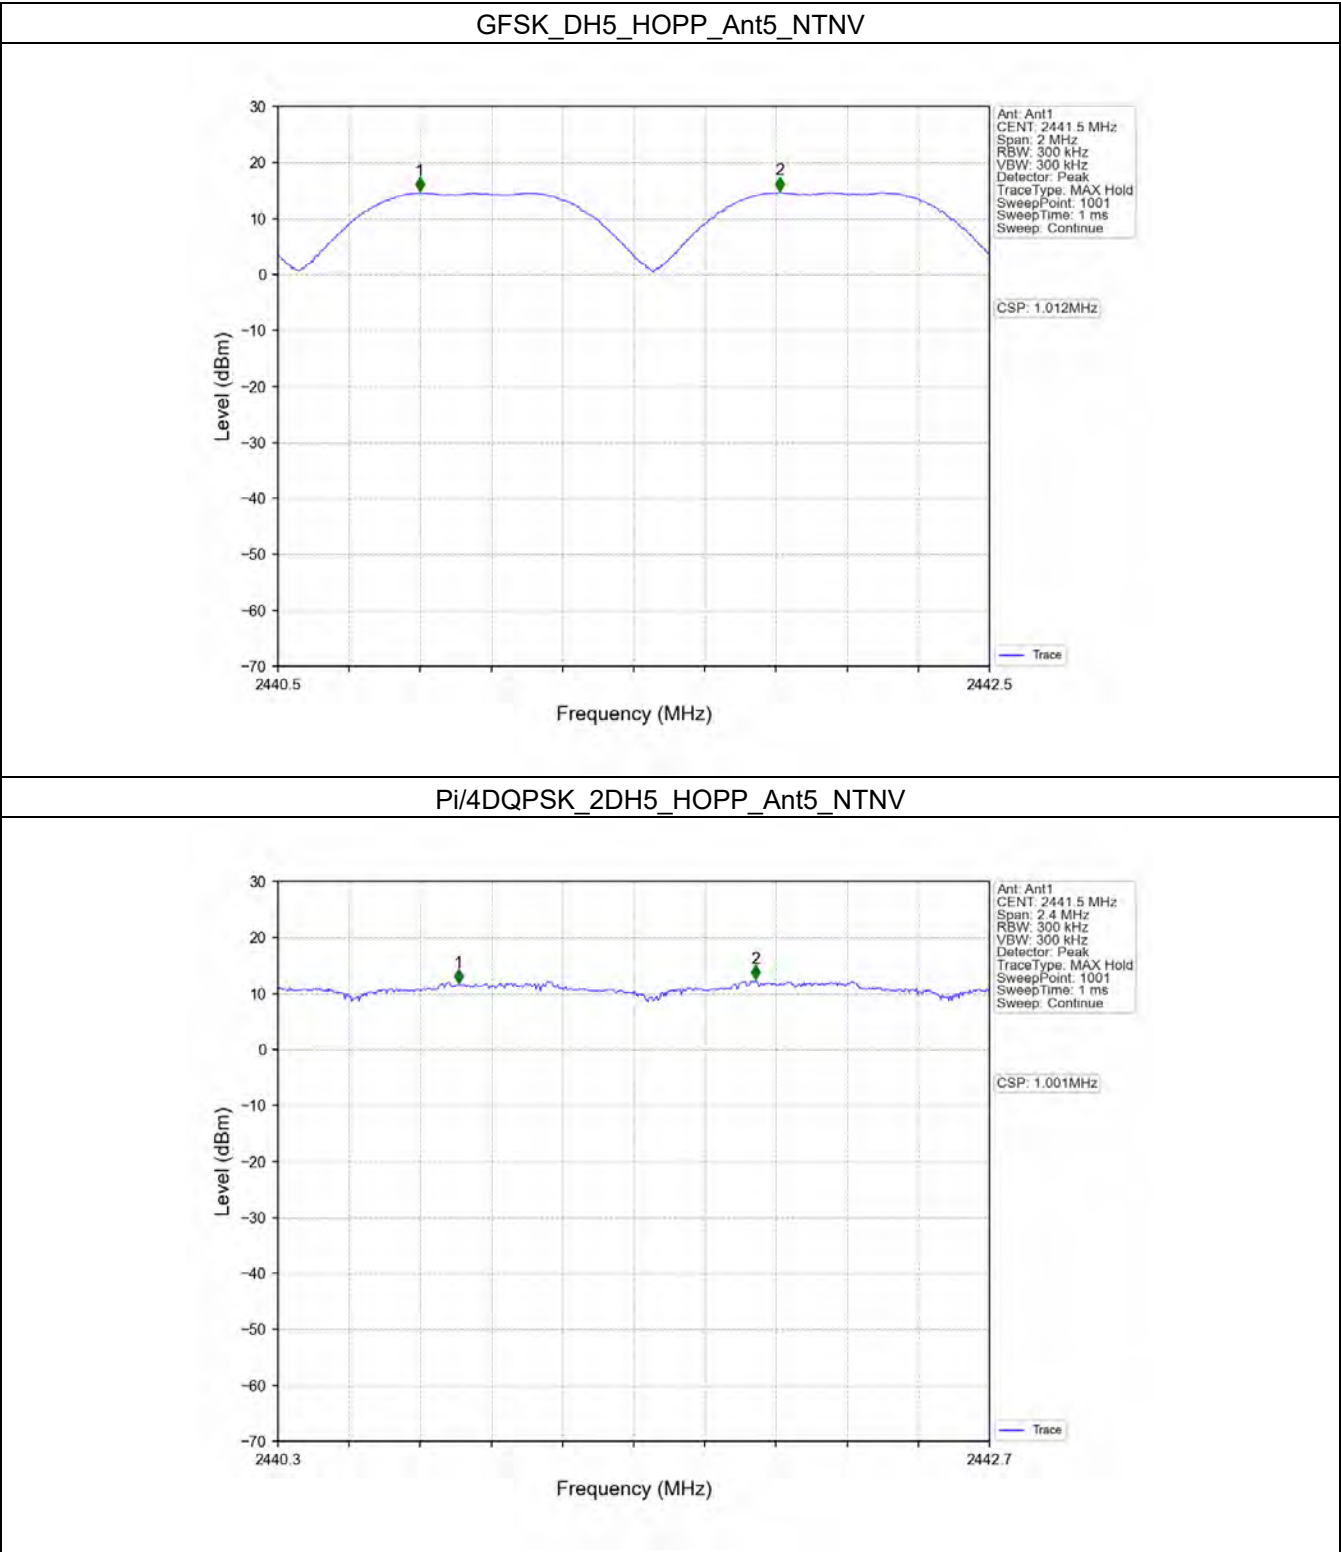


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 135 of 167

8DPSK\_3DH5\_HOPP\_Ant5\_NTNV

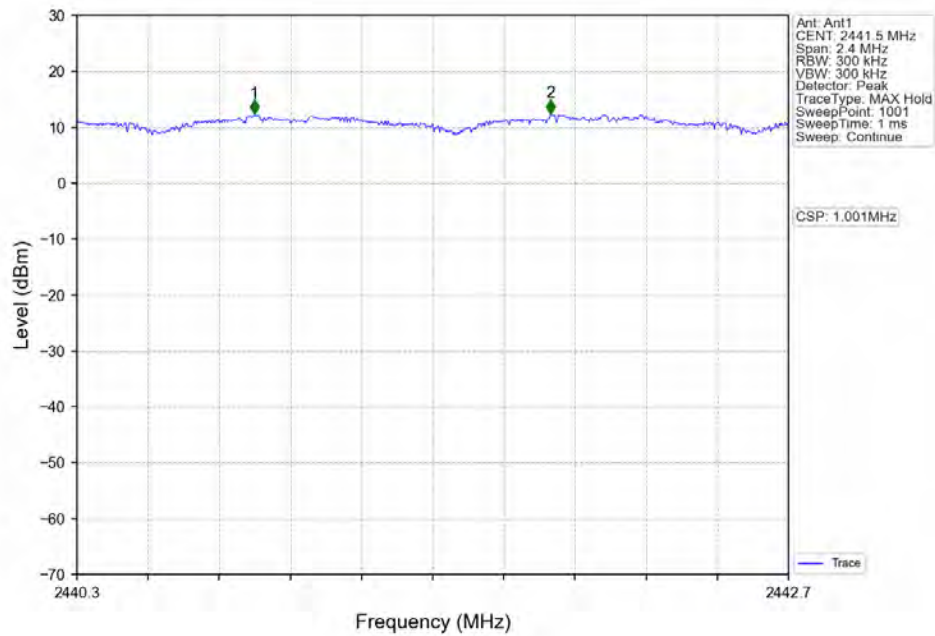



**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 136 of 167

**4. Number of Hopping Frequencies**


**4.1 Test Result**

**4.1.1 HoppNum**

| Mode      | TX Type | Frequency (MHz) | Packet Type | Num of Hopping Frequencies |       | Verdict |
|-----------|---------|-----------------|-------------|----------------------------|-------|---------|
|           |         |                 |             | ANT5                       | Limit |         |
| GFSK      | SISO    | HOPP            | DH5         | 79                         | >=15  | Pass    |
| Pi/4DQPSK | SISO    | HOPP            | 2DH5        | 79                         | >=15  | Pass    |
| 8DPSK     | SISO    | HOPP            | 3DH5        | 79                         | >=15  | Pass    |

### 4.2 Test Graph

#### 4.2.1 HoppNum

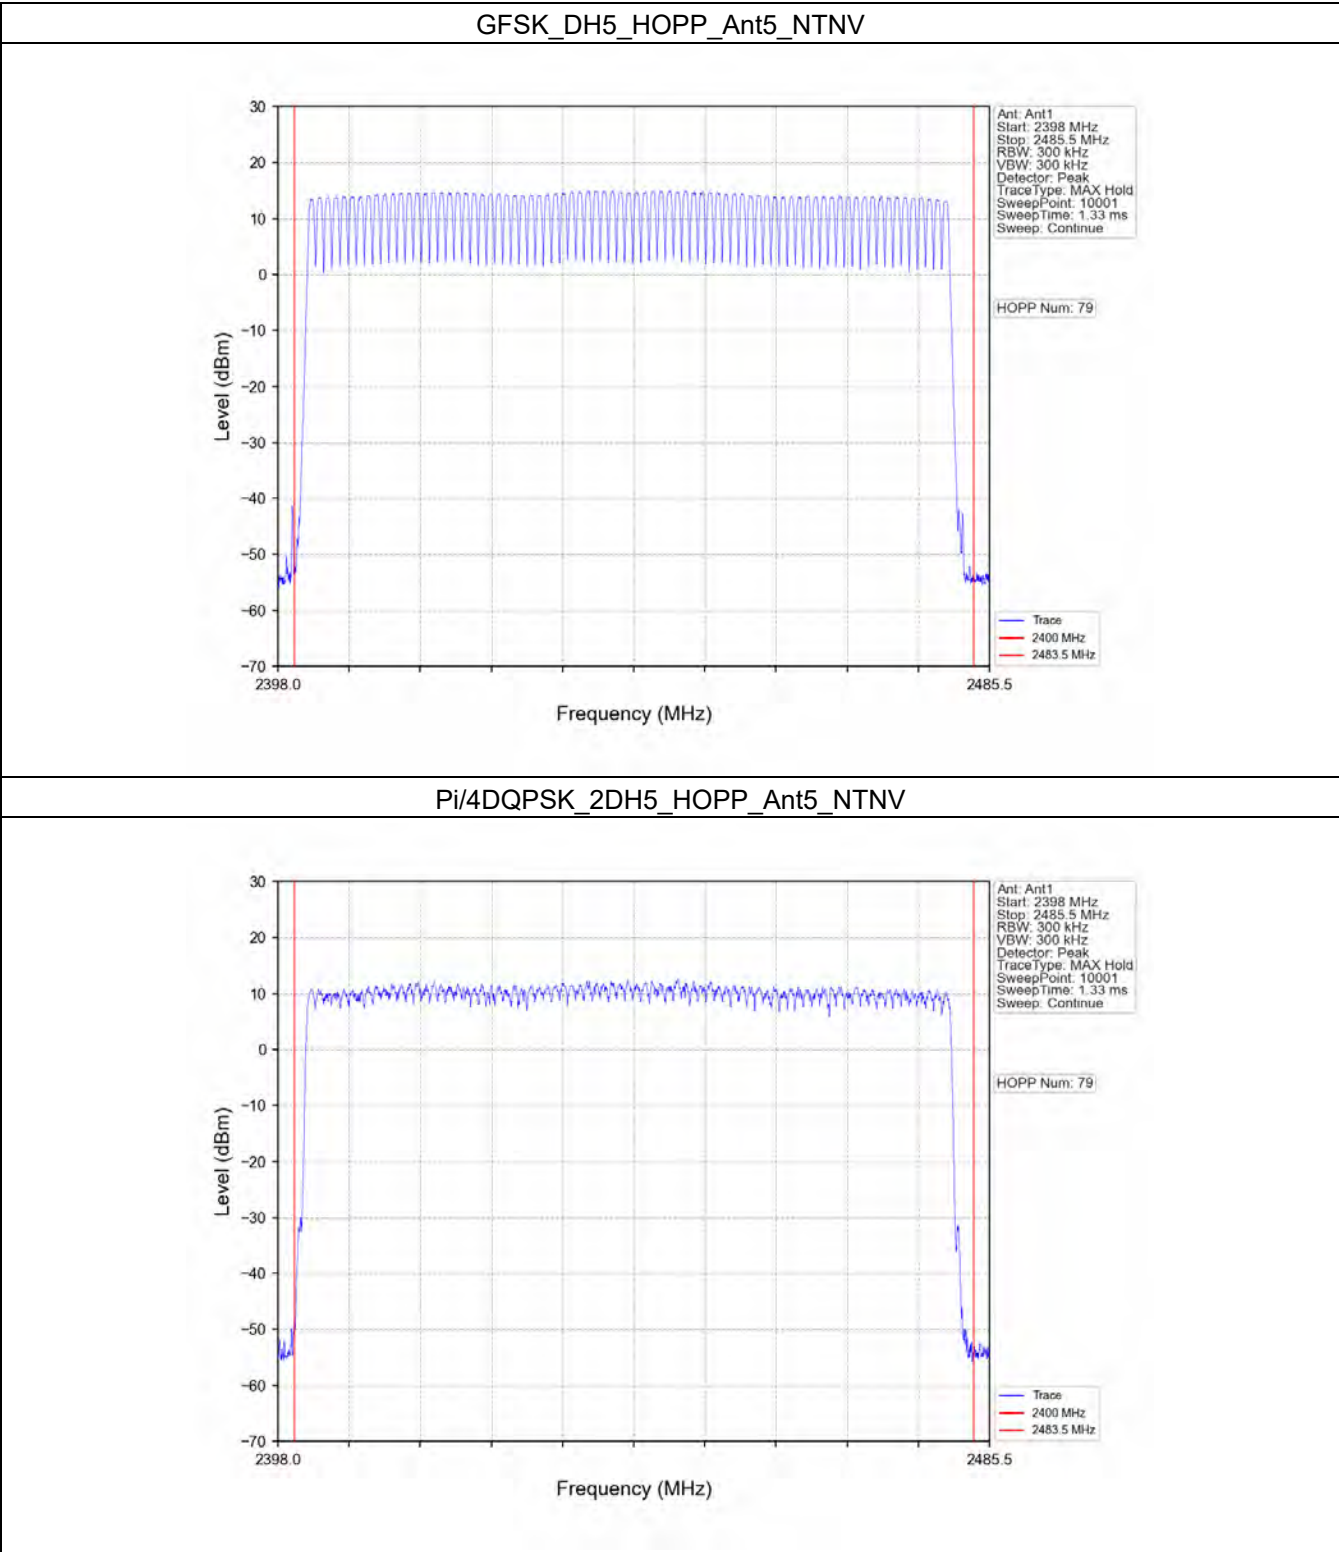


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 138 of 167

8DPSK\_3DH5\_HOPP\_Ant5\_NTNV

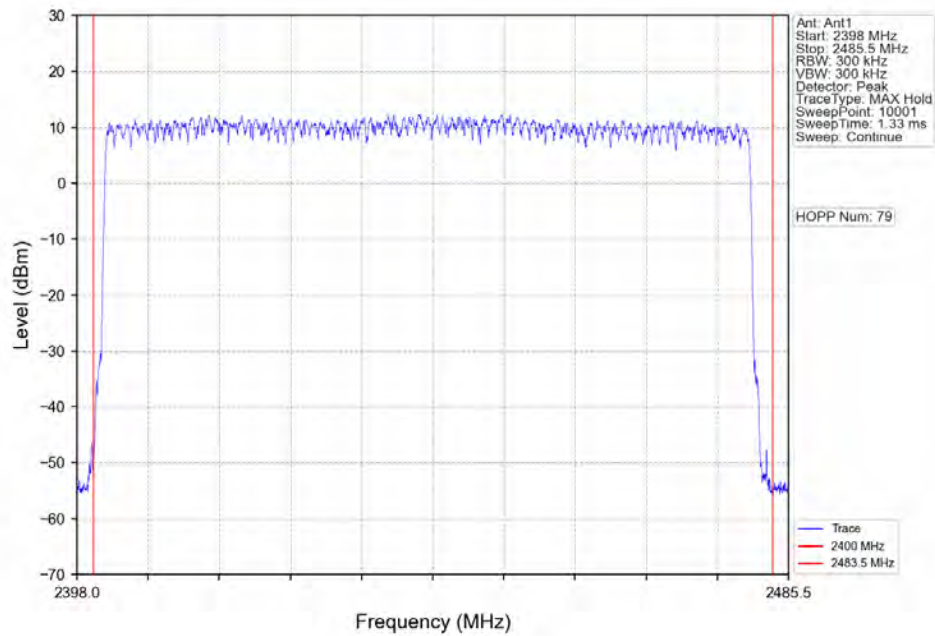

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 139 of 167

### 5. Time of Occupancy (Dwell Time)


#### 5.1 Test Result

##### 5.1.1 Ant5


| Ant5      |         |                 |             |                               |                        |                                    |                 |            |         |
|-----------|---------|-----------------|-------------|-------------------------------|------------------------|------------------------------------|-----------------|------------|---------|
| Mode      | TX Type | Frequency (MHz) | Packet Type | Duration of Single Pulse (ms) | Observation Period (s) | Num of Pulse in Observation Period | Dwell Time (ms) | Limit (ms) | Verdict |
| GFSK      | SISO    | HOPP            | DH1         | 0.386                         | 31.600                 | 320                                | 123.520         | <=400      | Pass    |
|           |         |                 | DH3         | 1.642                         | 31.600                 | 155                                | 254.510         | <=400      | Pass    |
|           |         |                 | DH5         | 2.892                         | 31.600                 | 106                                | 306.552         | <=400      | Pass    |
| Pi/4DQPSK | SISO    | HOPP            | 2DH1        | 0.392                         | 31.600                 | 319                                | 125.048         | <=400      | Pass    |
|           |         |                 | 2DH3        | 1.644                         | 31.600                 | 164                                | 269.616         | <=400      | Pass    |
|           |         |                 | 2DH5        | 2.892                         | 31.600                 | 102                                | 294.984         | <=400      | Pass    |
| 8DPSK     | SISO    | HOPP            | 3DH1        | 0.388                         | 31.600                 | 320                                | 124.160         | <=400      | Pass    |
|           |         |                 | 3DH3        | 1.644                         | 31.600                 | 162                                | 266.328         | <=400      | Pass    |
|           |         |                 | 3DH5        | 2.896                         | 31.600                 | 103                                | 298.288         | <=400      | Pass    |

### 5.2 Test Graph


#### 5.2.1 Ant5

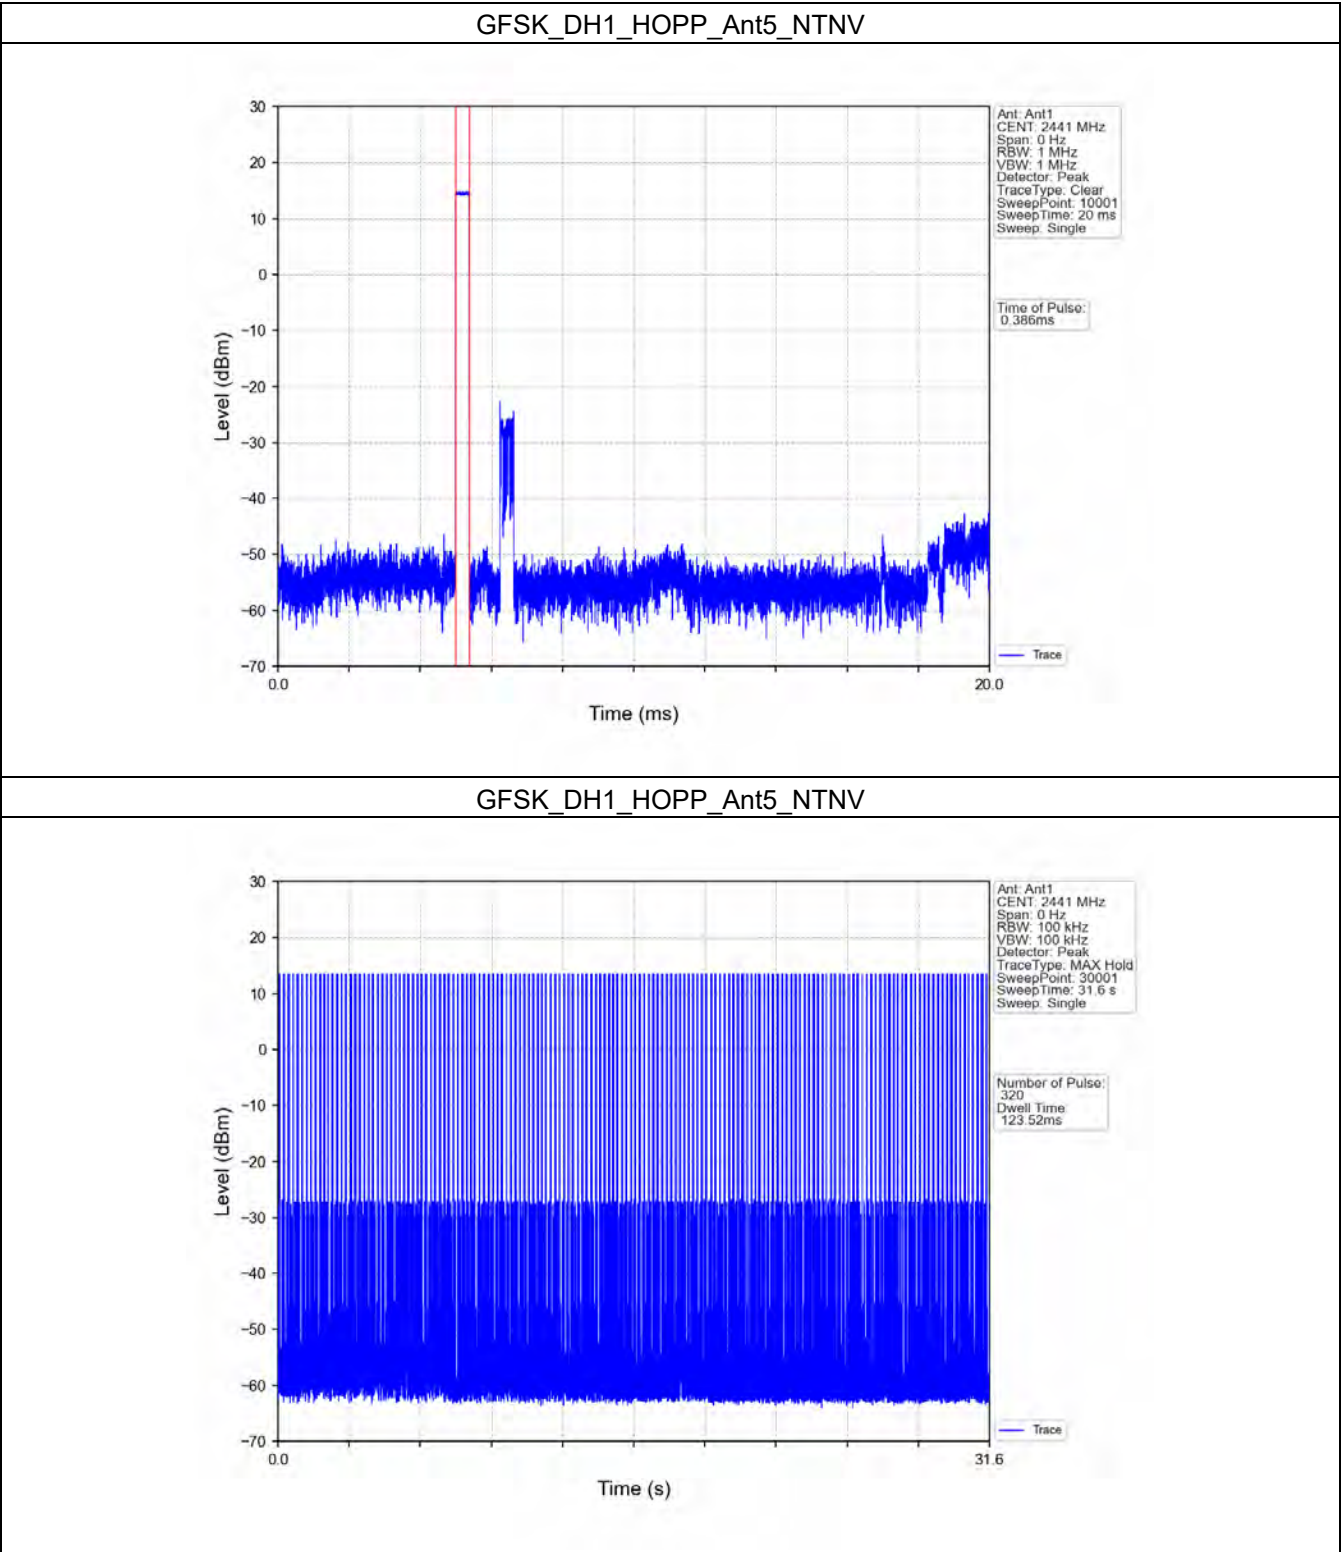


GFSK\_DH3\_HOPP\_Ant5\_NTNV

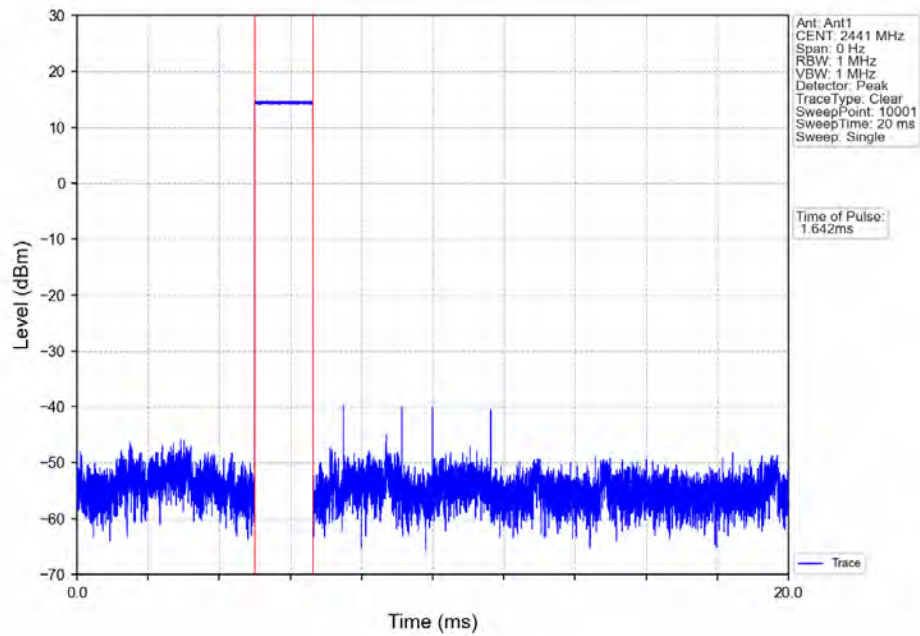


GFSK\_DH3\_HOPP\_Ant5\_NTNV

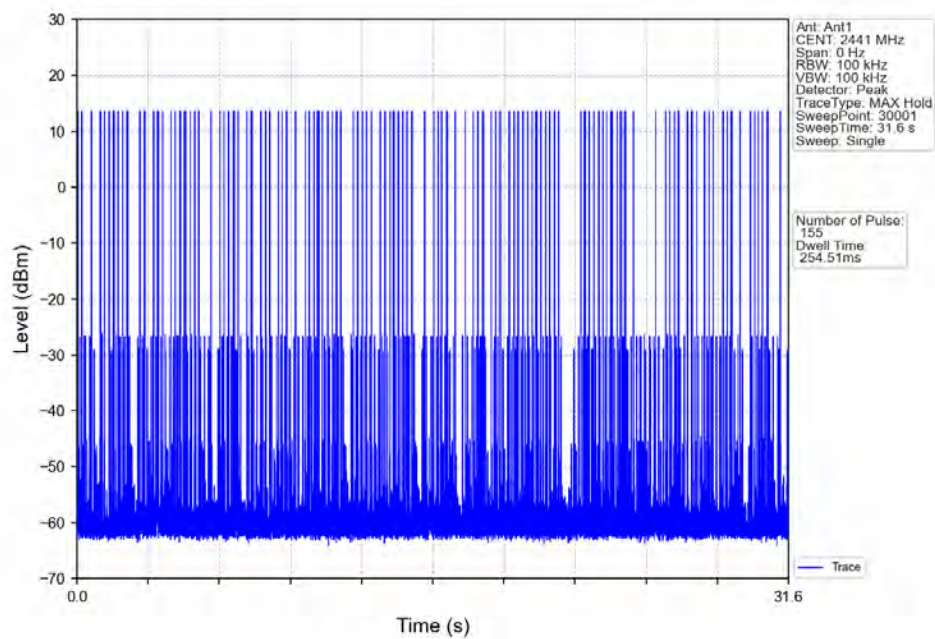


GFSK\_DH5\_HOPP\_Ant5\_NTNV

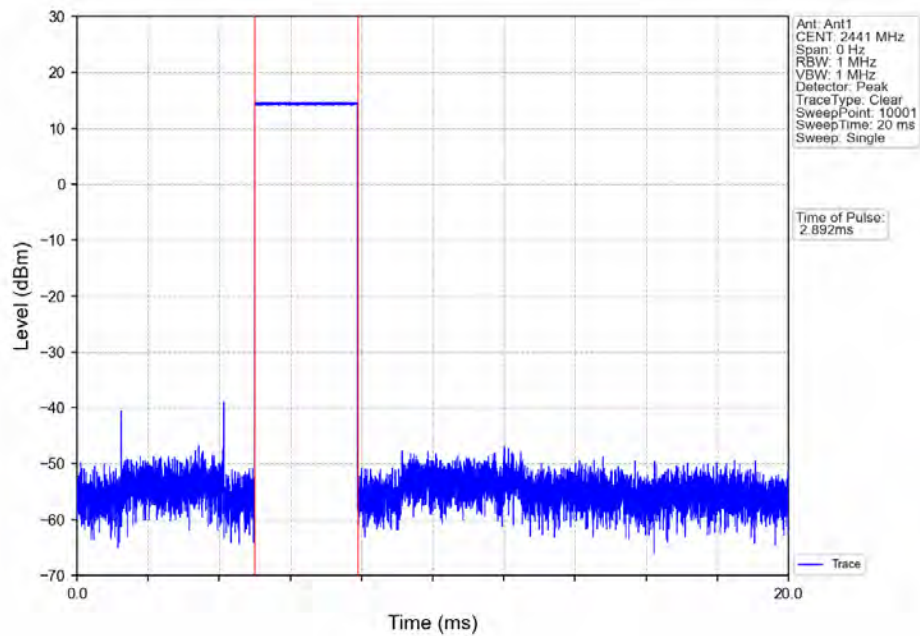


GFSK\_DH5\_HOPP\_Ant5\_NTNV

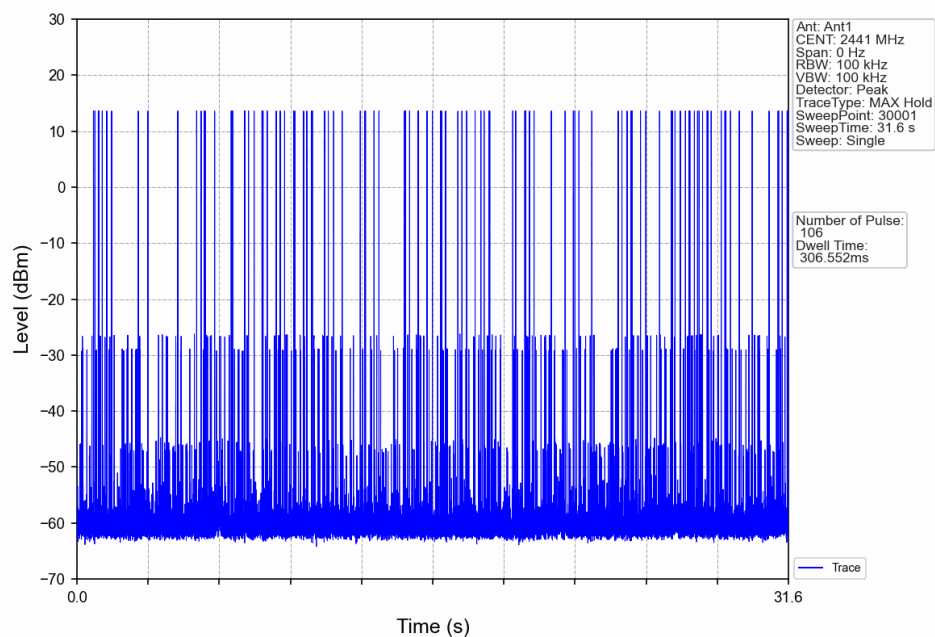

Pi/4DQPSK\_2DH1\_HOPP\_Ant5\_NTNV

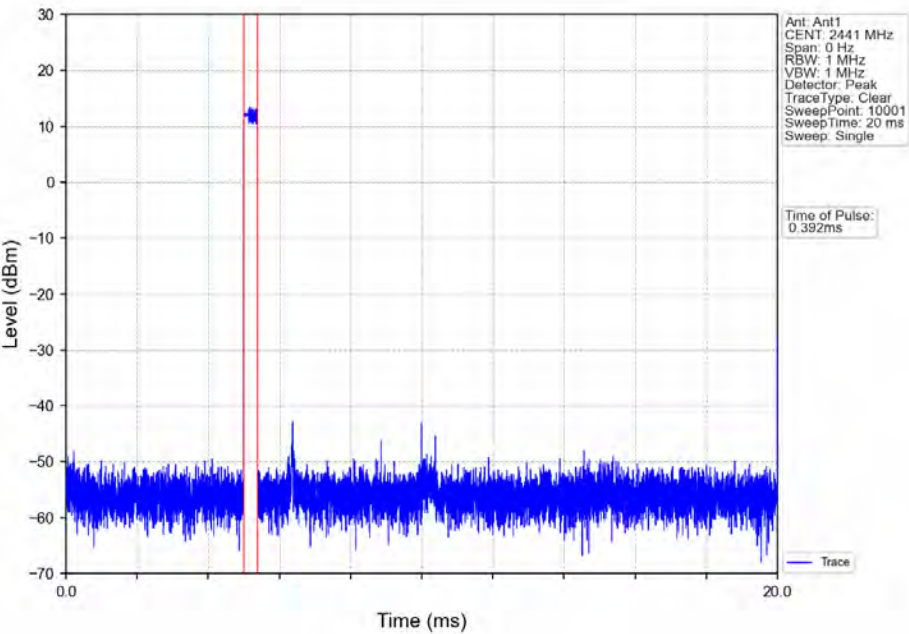

Pi/4DQPSK\_2DH1\_HOPP\_Ant5\_NTNV

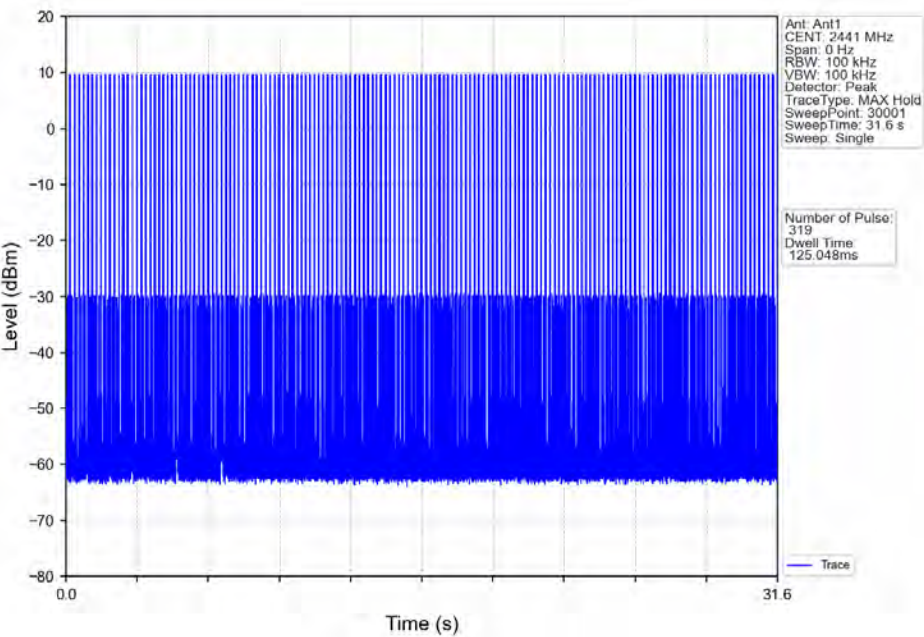


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 144 of 167

Pi/4DQPSK\_2DH3\_HOPP\_Ant5\_NTNV

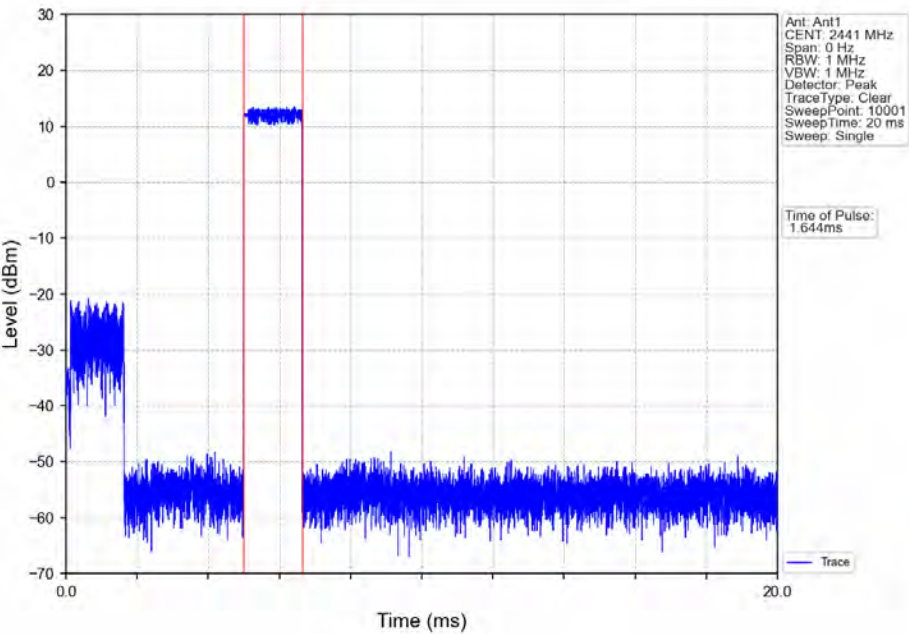

Pi/4DQPSK\_2DH3\_HOPP\_Ant5\_NTNV

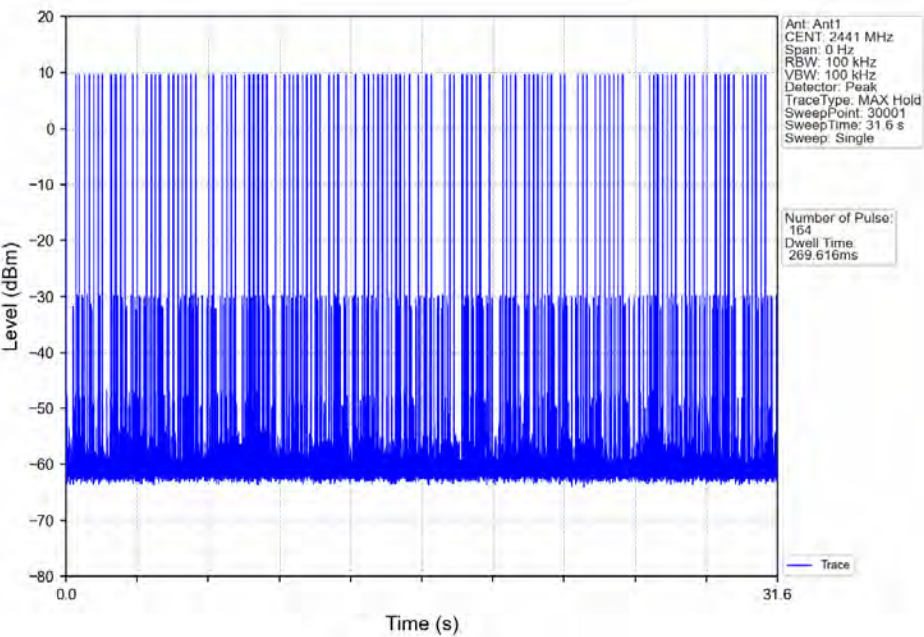


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 145 of 167


Pi/4DQPSK\_2DH5\_HOPP\_Ant5\_NTNV

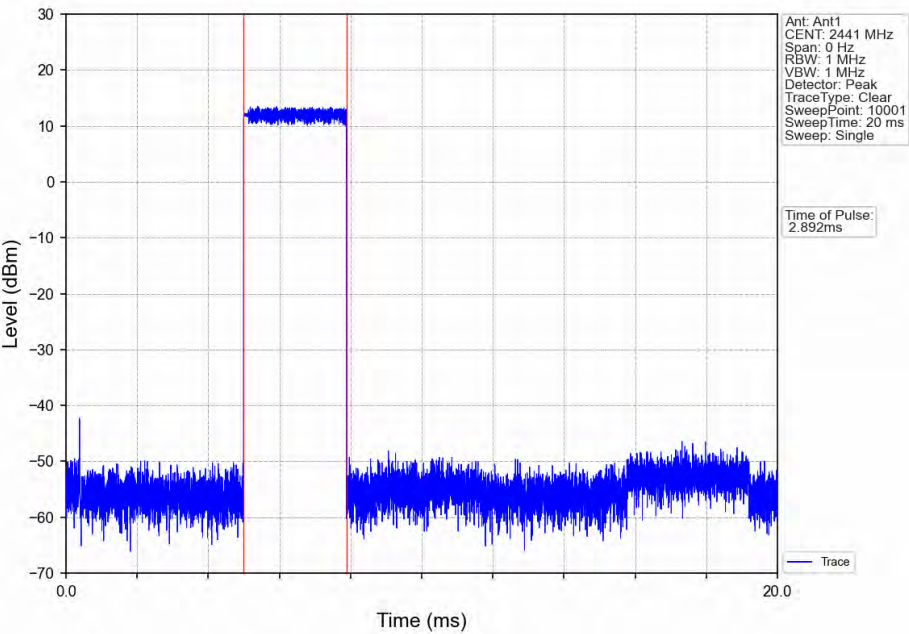


Pi/4DQPSK\_2DH5\_HOPP\_Ant5\_NTNV

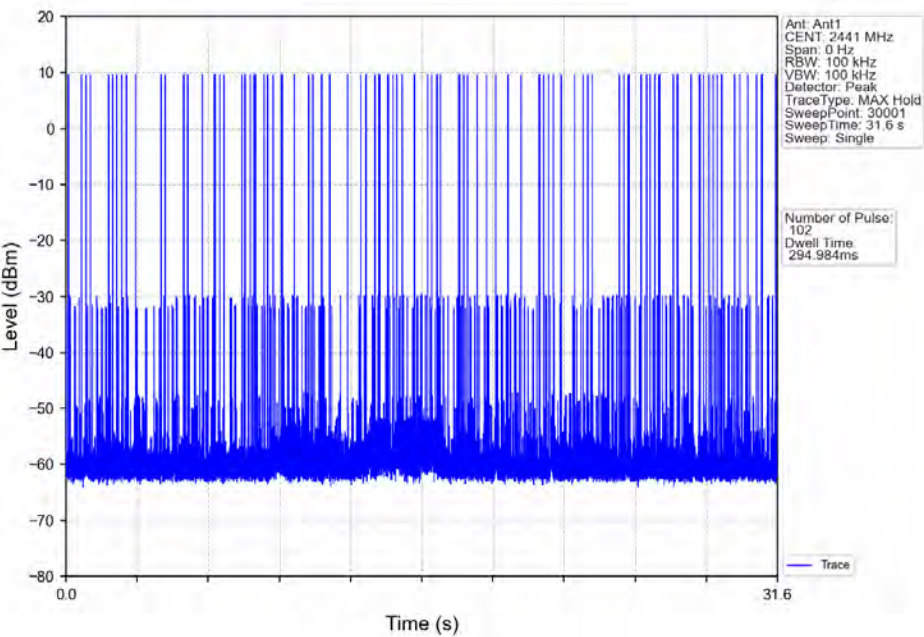

### 8DPSK\_3DH1\_HOPP\_Ant5\_NTNV

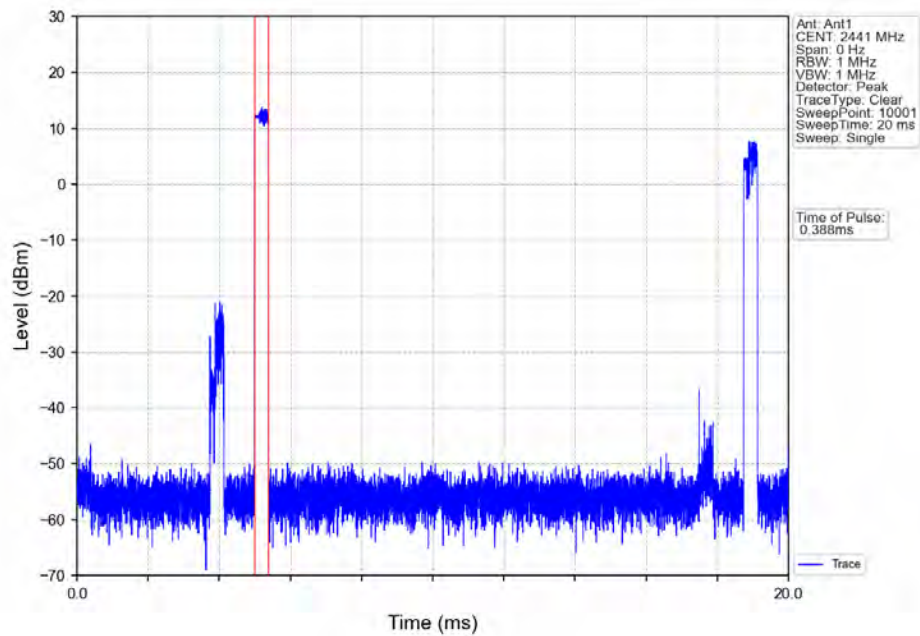

### 8DPSK\_3DH1\_HOPP\_Ant5\_NTNV

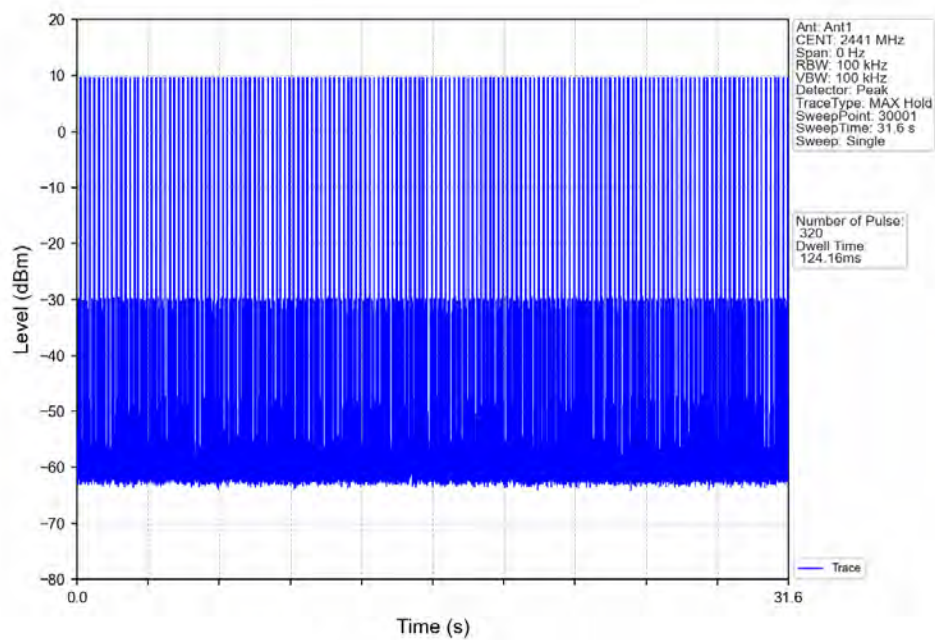


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 147 of 167


8DPSK\_3DH3\_HOPP\_Ant5\_NTNV

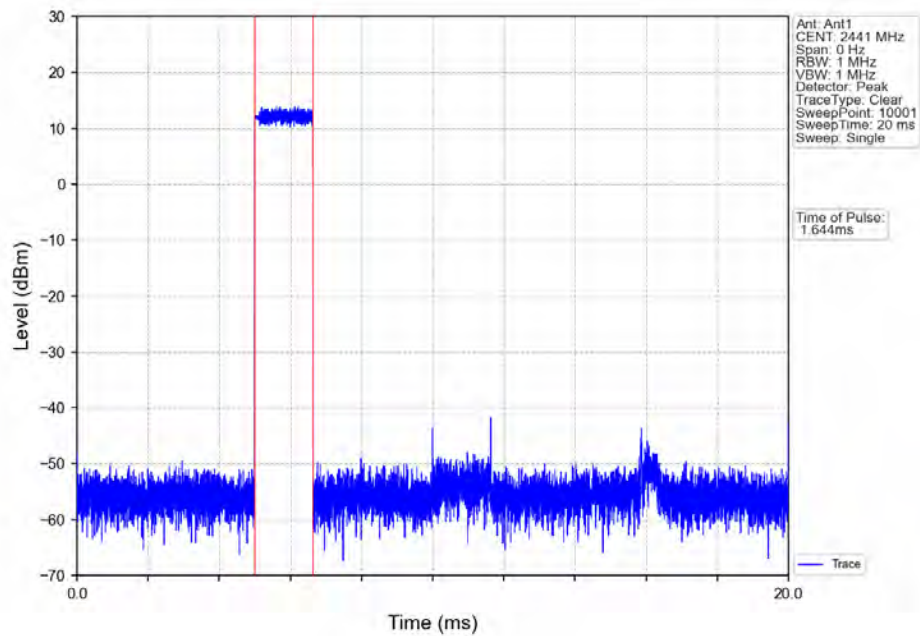


8DPSK\_3DH3\_HOPP\_Ant5\_NTNV

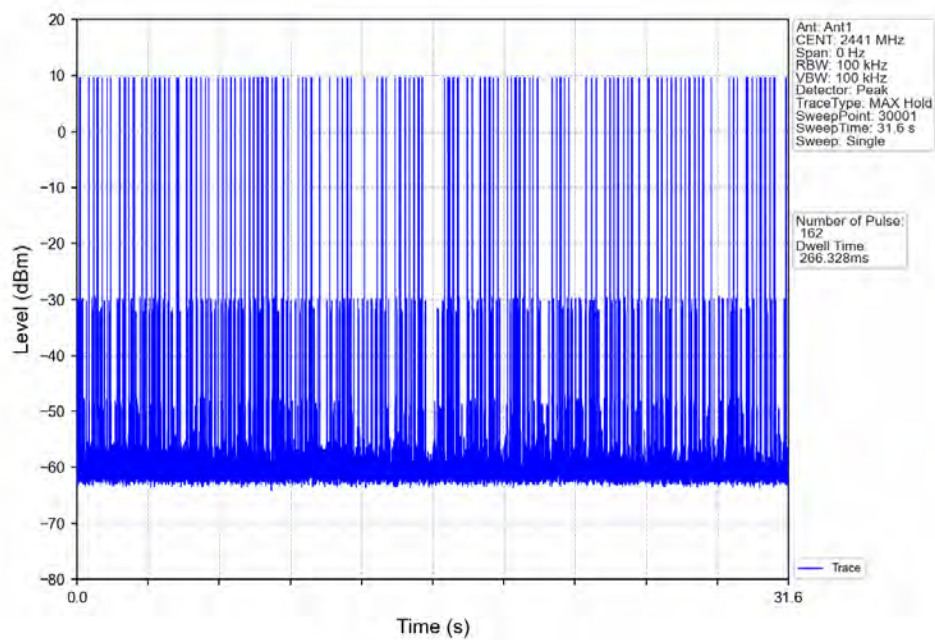

8DPSK\_3DH5\_HOPP\_Ant5\_NTNV

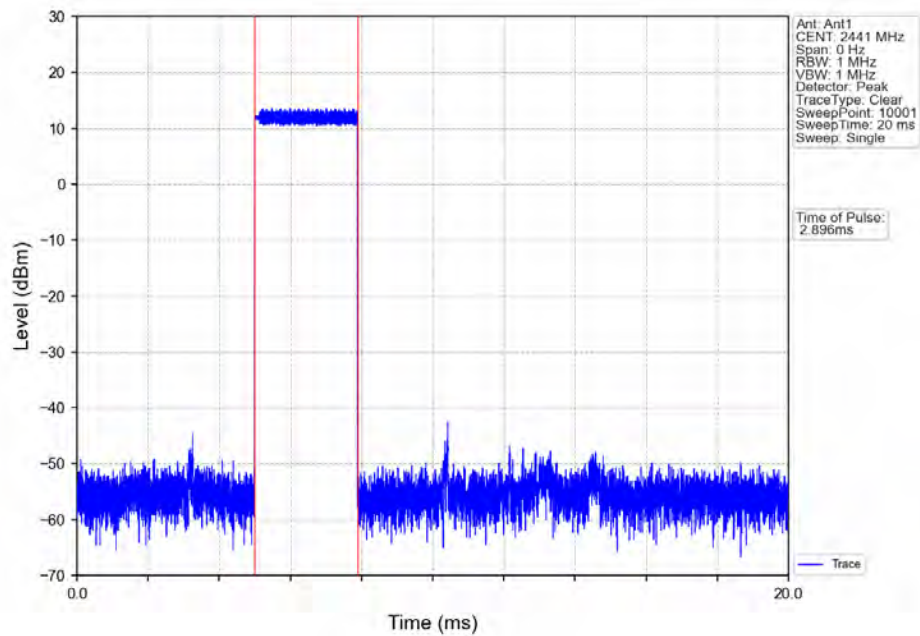

8DPSK\_3DH5\_HOPP\_Ant5\_NTNV

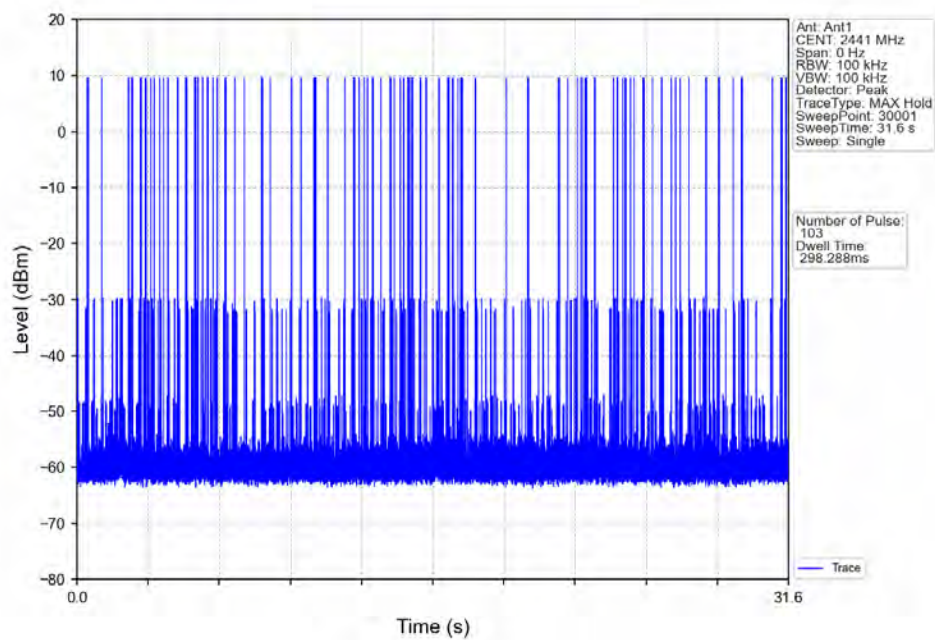

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 149 of 167

### 6. Unwanted Emissions In Non-restricted Frequency Bands

#### 6.1 Test Result

##### 6.1.1 Ref

| Mode      | TX Type | Frequency (MHz) | Packet Type | ANT | Level of Reference (dBm) |
|-----------|---------|-----------------|-------------|-----|--------------------------|
| GFSK      | SISO    | 2402            | DH5         | 5   | 13.35                    |
|           |         | 2441            | DH5         | 5   | 14.38                    |
|           |         | 2480            | DH5         | 5   | 12.94                    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 5   | 10.66                    |
|           |         | 2441            | 2DH5        | 5   | 11.95                    |
|           |         | 2480            | 2DH5        | 5   | 10.31                    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 5   | 10.53                    |
|           |         | 2441            | 3DH5        | 5   | 11.96                    |
|           |         | 2480            | 3DH5        | 5   | 10.25                    |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


##### 6.1.2 CSE

| Mode      | TX Type | Frequency (MHz) | Packet Type | ANT | Level of Reference (dBm) | Limit (dBm) | Verdict |
|-----------|---------|-----------------|-------------|-----|--------------------------|-------------|---------|
| GFSK      | SISO    | 2402            | DH5         | 5   | 14.38                    | -5.62       | Pass    |
|           |         | 2441            | DH5         | 5   | 14.38                    | -5.62       | Pass    |
|           |         | 2480            | DH5         | 5   | 14.38                    | -5.62       | Pass    |
|           |         | HOPP            | DH5         | 5   | 14.38                    | -5.62       | Pass    |
|           |         |                 |             |     | 14.38                    | -5.62       | Pass    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 5   | 11.95                    | -8.05       | Pass    |
|           |         | 2441            | 2DH5        | 5   | 11.95                    | -8.05       | Pass    |
|           |         | 2480            | 2DH5        | 5   | 11.95                    | -8.05       | Pass    |
|           |         | HOPP            | 2DH5        | 5   | 11.95                    | -8.05       | Pass    |
|           |         |                 |             |     | 11.95                    | -8.05       | Pass    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 5   | 11.96                    | -8.04       | Pass    |
|           |         | 2441            | 3DH5        | 5   | 11.96                    | -8.04       | Pass    |
|           |         | 2480            | 3DH5        | 5   | 11.96                    | -8.04       | Pass    |
|           |         | HOPP            | 3DH5        | 5   | 11.96                    | -8.04       | Pass    |
|           |         |                 |             |     | 11.96                    | -8.04       | Pass    |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

### 6.2 Test Graph

#### 6.2.1 Ref

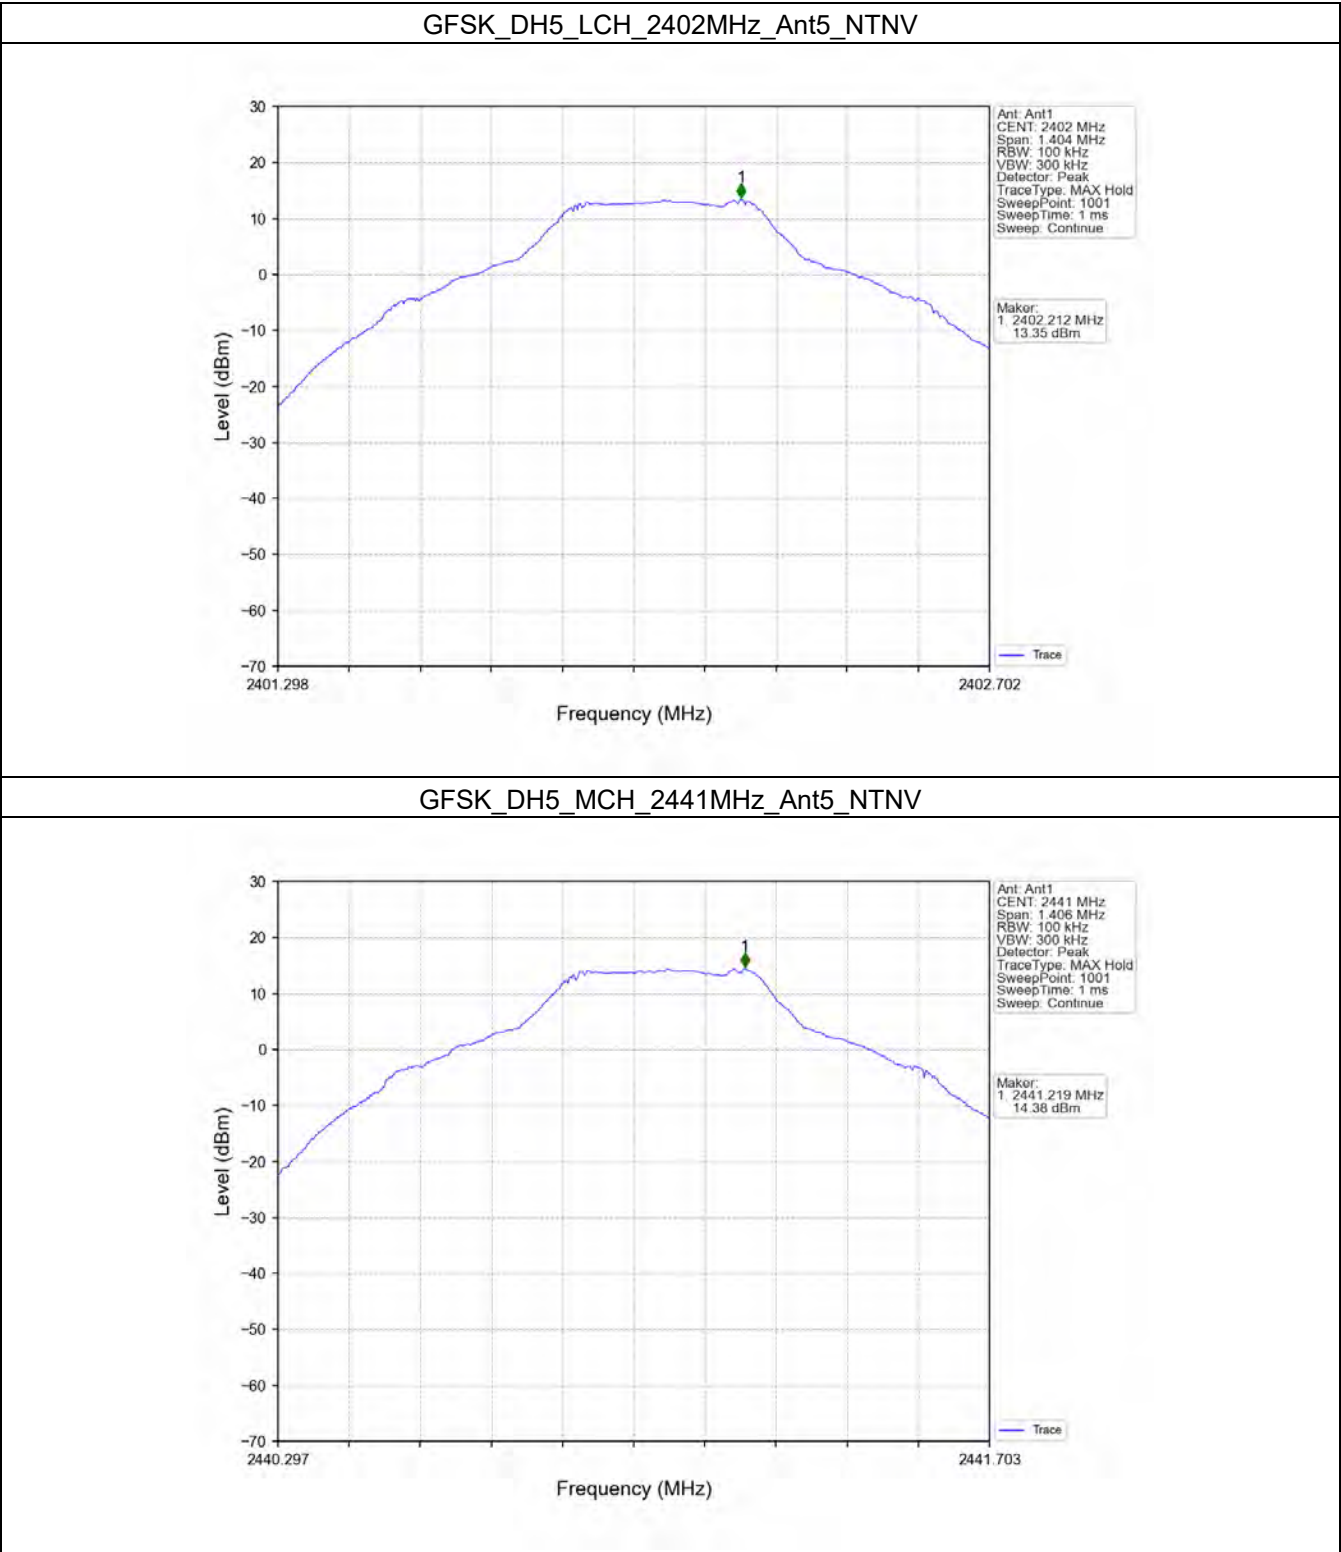


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 151 of 167

GFSK\_DH5\_HCH\_2480MHz\_Ant5\_NTNV

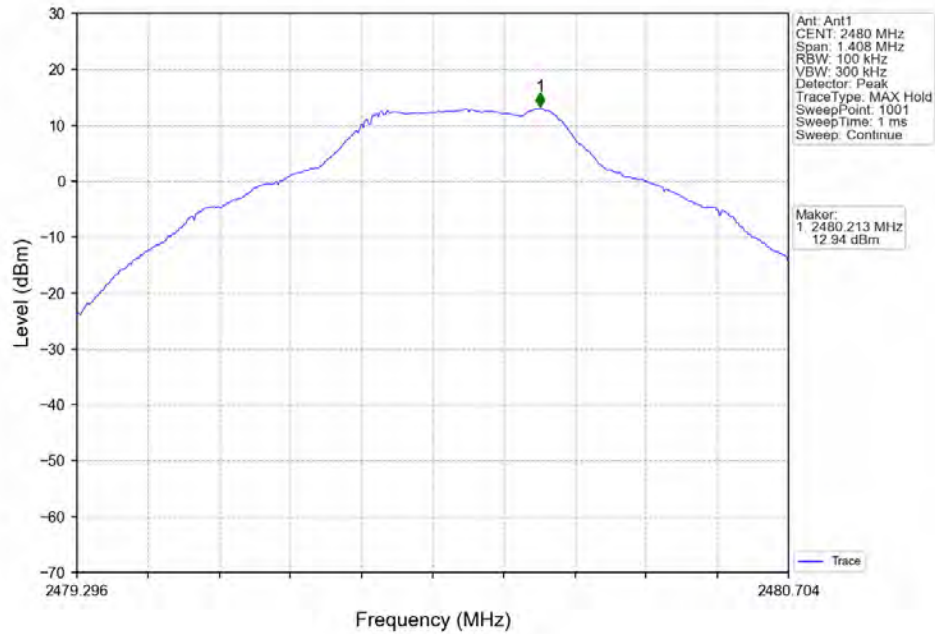

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant5\_NTNV

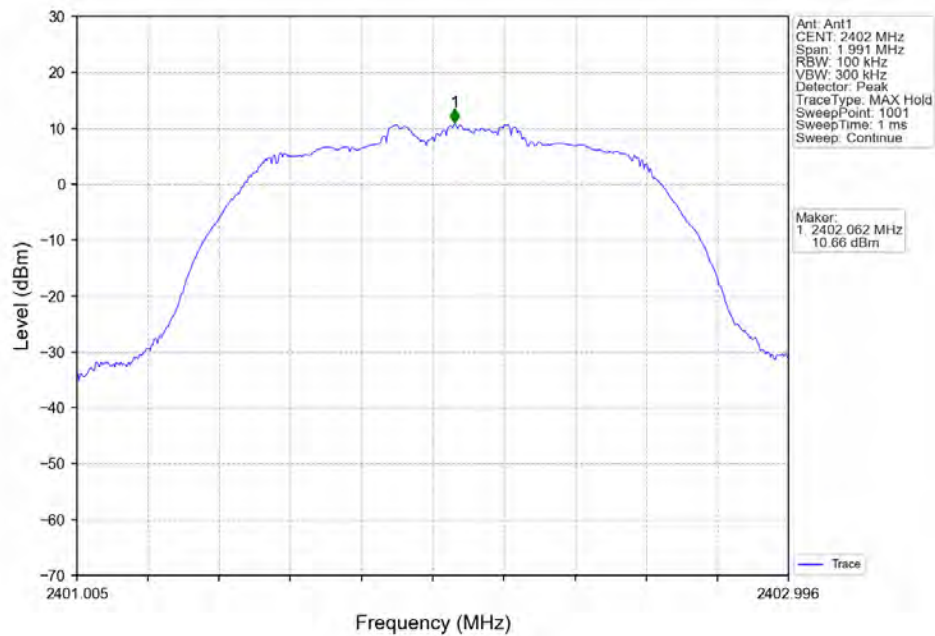


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 152 of 167


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant5\_NTNV

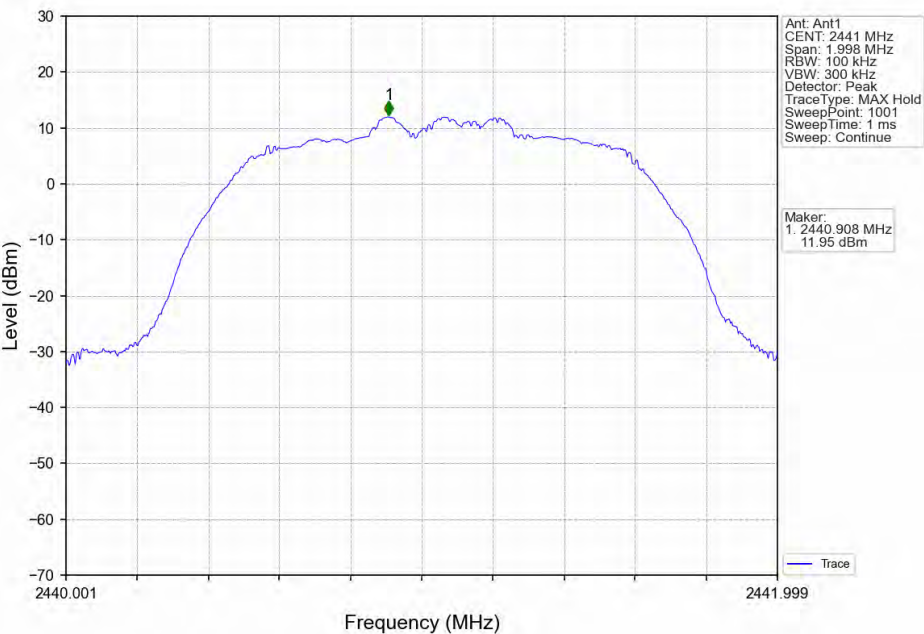


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant5\_NTNV

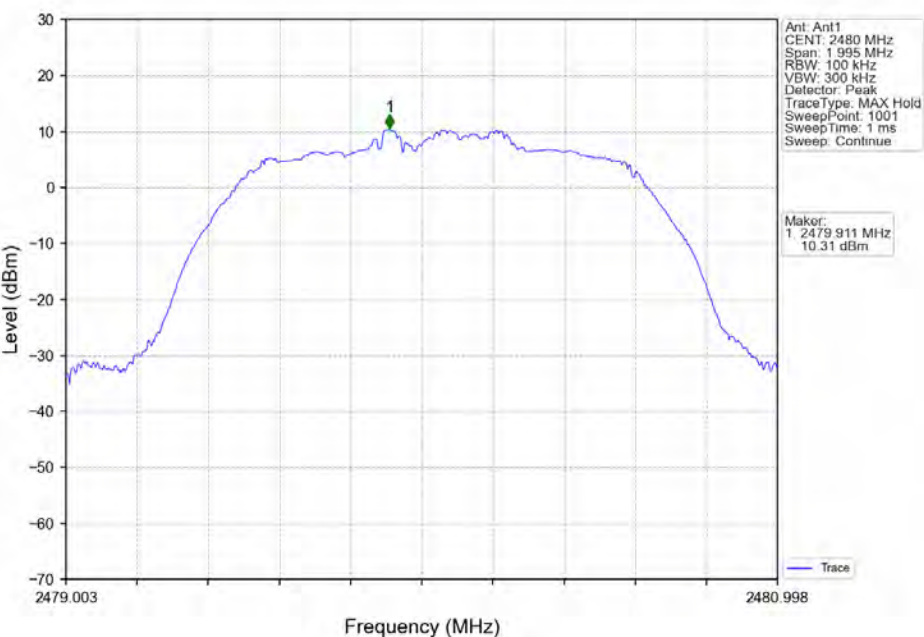

8DPSK\_3DH5\_LCH\_2402MHz\_Ant5\_NTNV

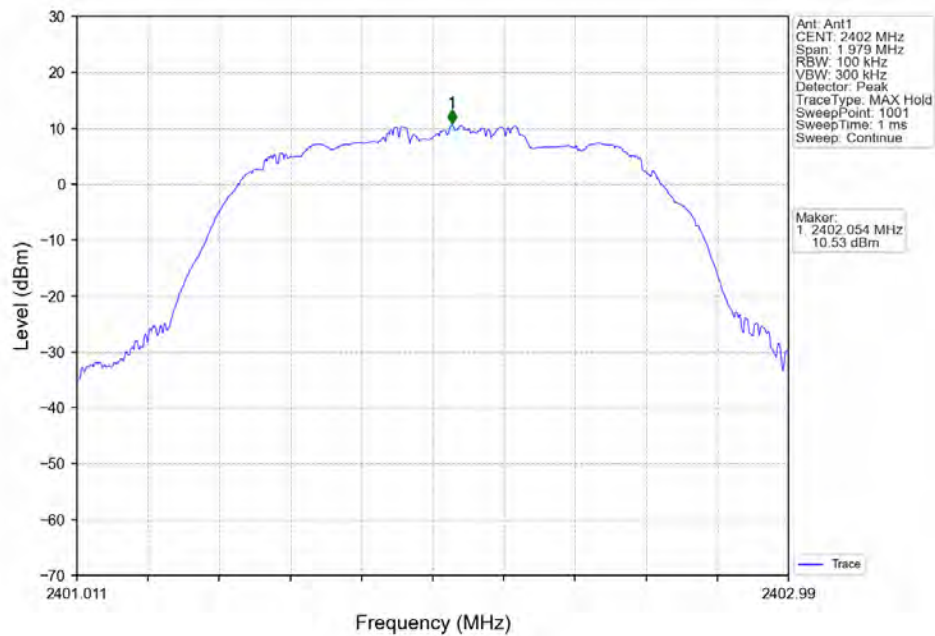

8DPSK\_3DH5\_MCH\_2441MHz\_Ant5\_NTNV

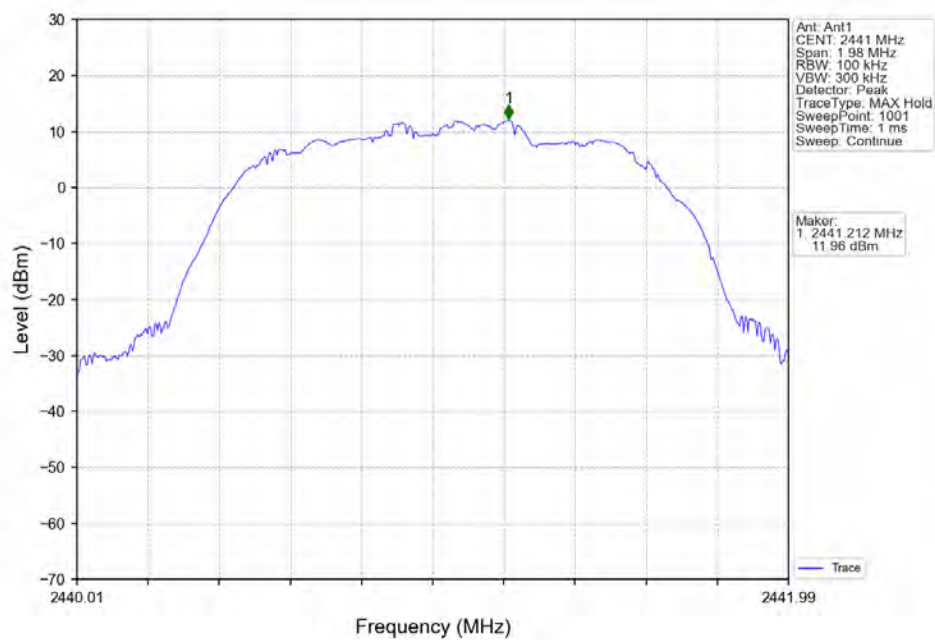


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 154 of 167

8DPSK\_3DH5\_HCH\_2480MHz\_Ant5\_NTNV

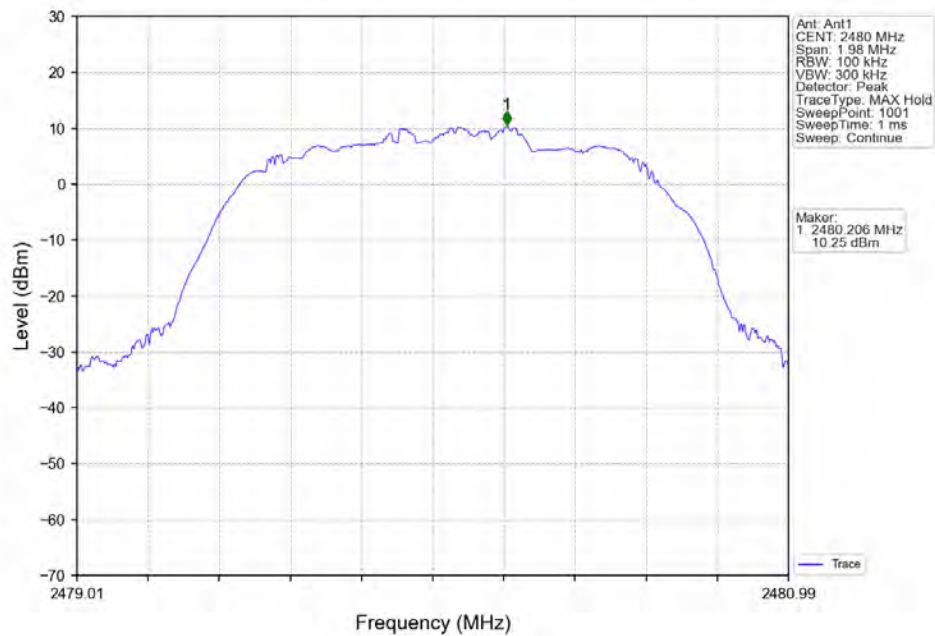

### 6.2.2 CSE

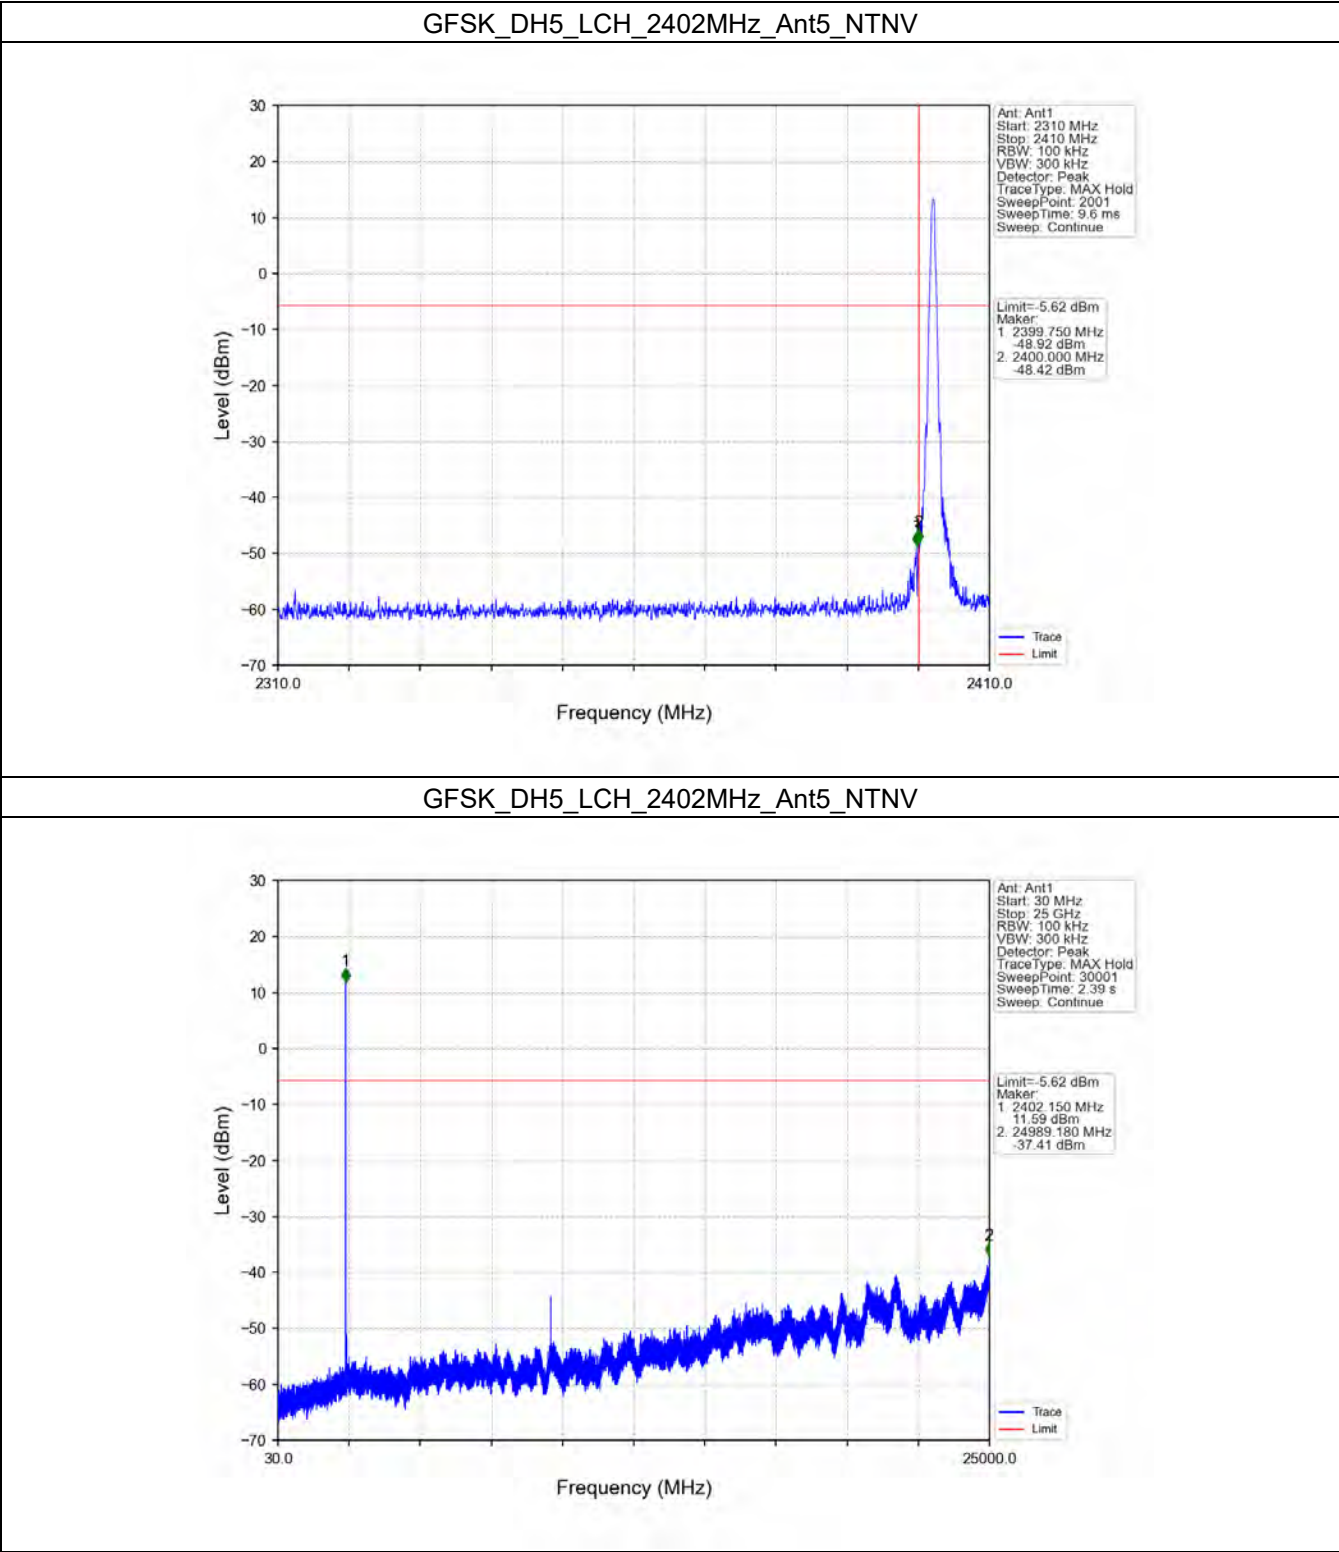


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 156 of 167

GFSK\_DH5\_MCH\_2441MHz\_Ant5\_NTNV

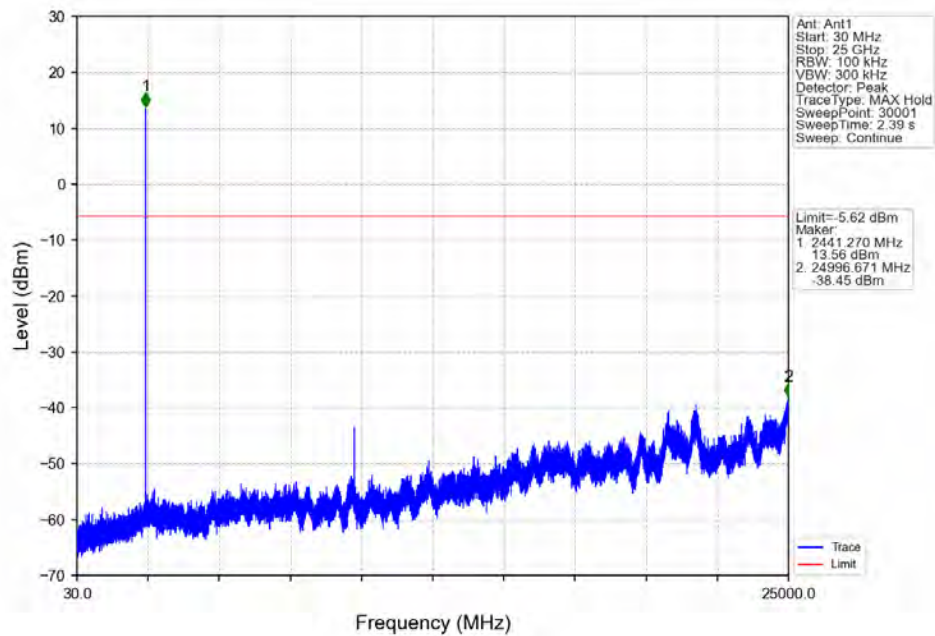

GFSK\_DH5\_HCH\_2480MHz\_Ant5\_NTNV

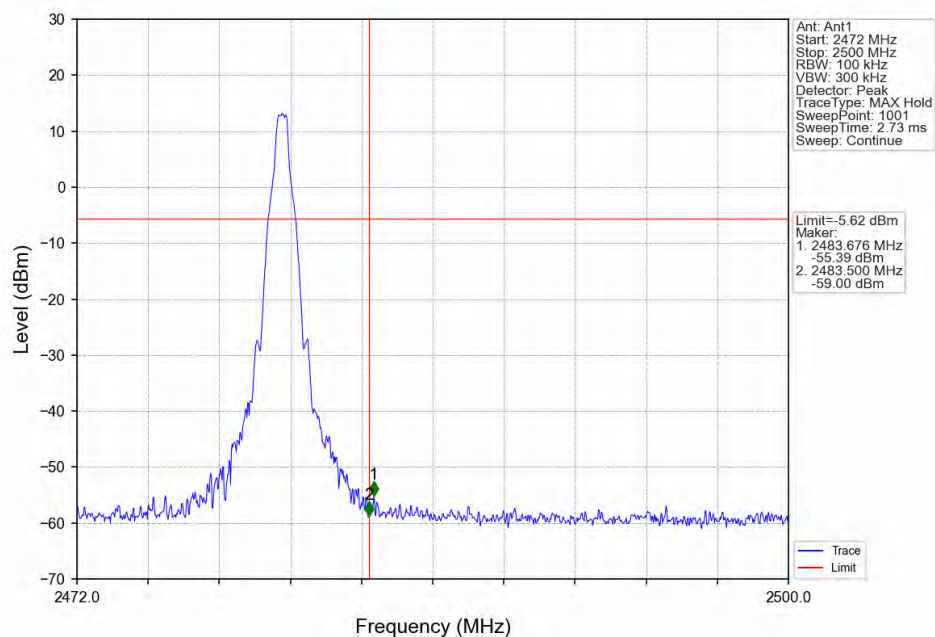


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 157 of 167


GFSK\_DH5\_HCH\_2480MHz\_Ant5\_NTNV

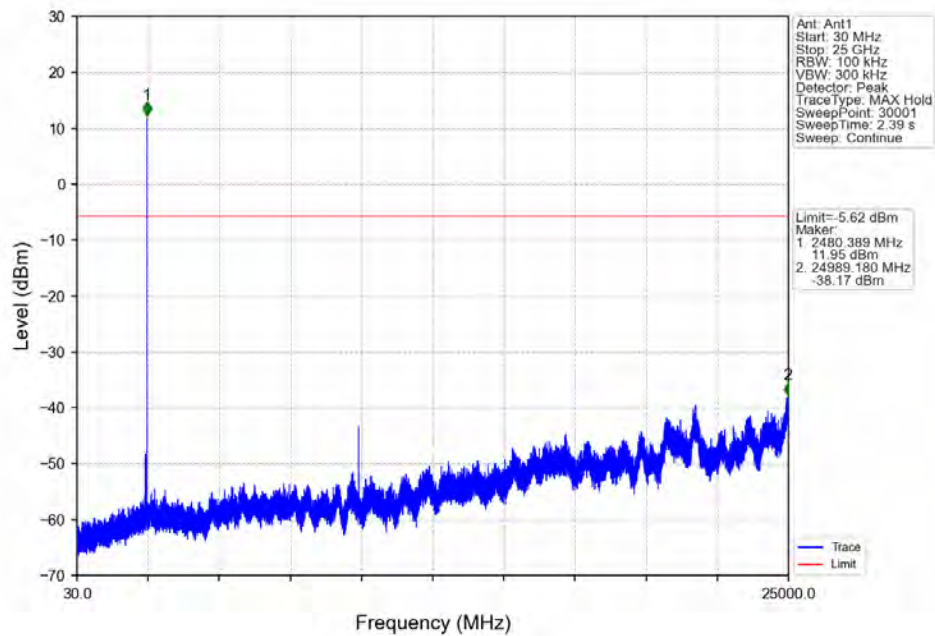


GFSK\_DH5\_HOPP\_Ant5\_NTNV

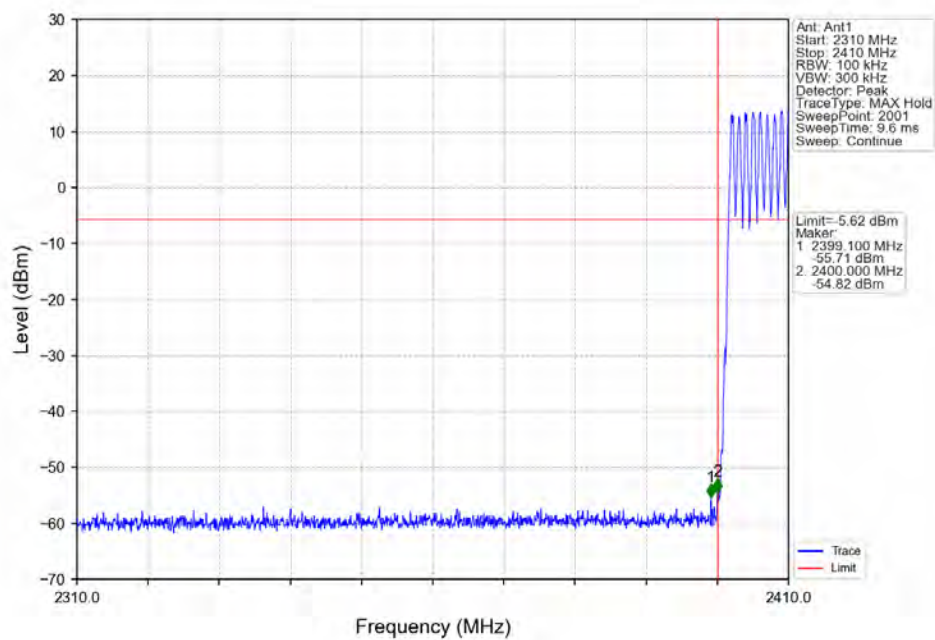

### GFSK\_DH5\_HOPP\_Ant5\_NTNV

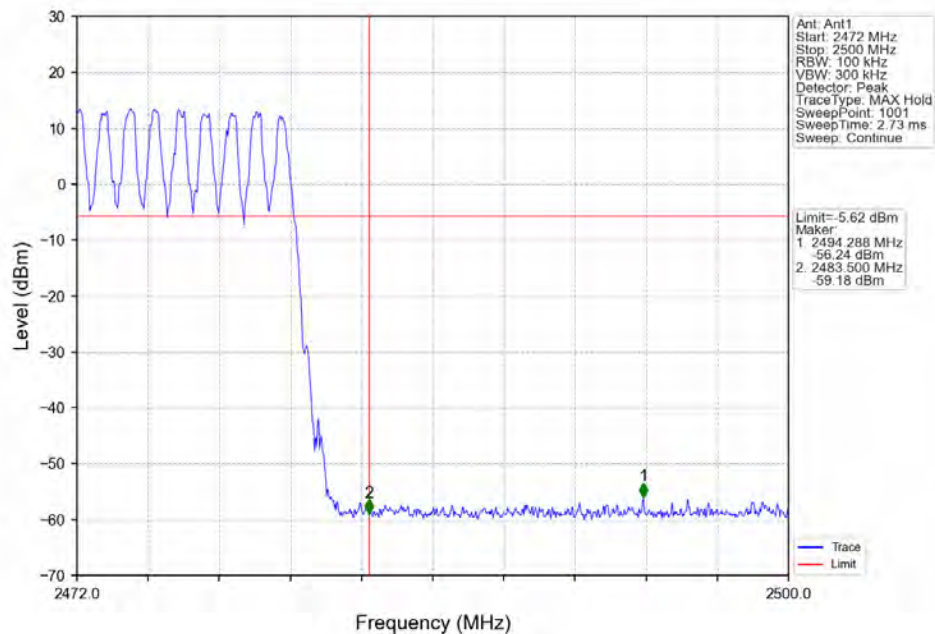

### Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant5\_NTNV

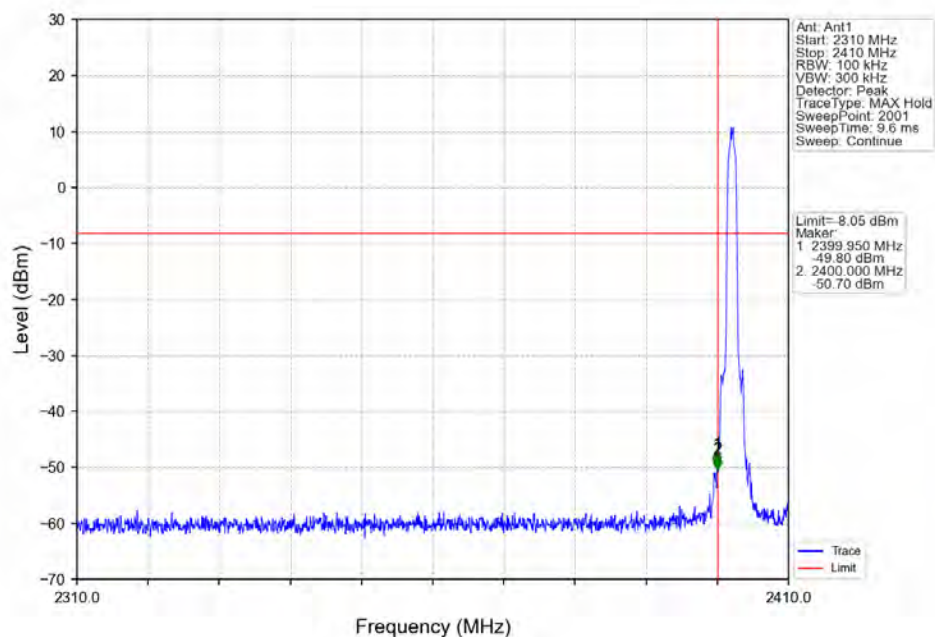


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700121703

Page: 159 of 167


Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant5\_NTNV

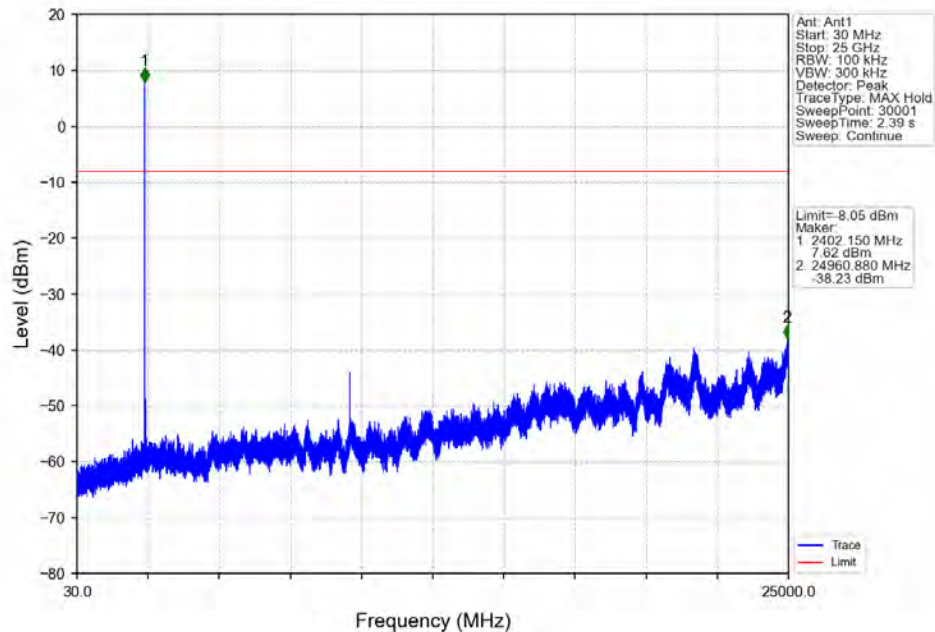


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant5\_NTNV

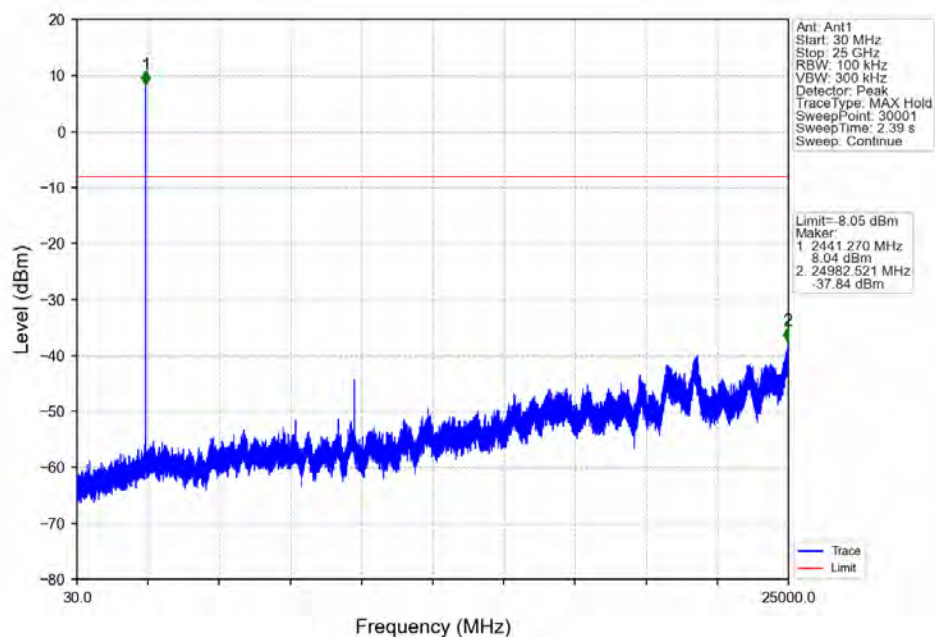


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant5\_NTNV

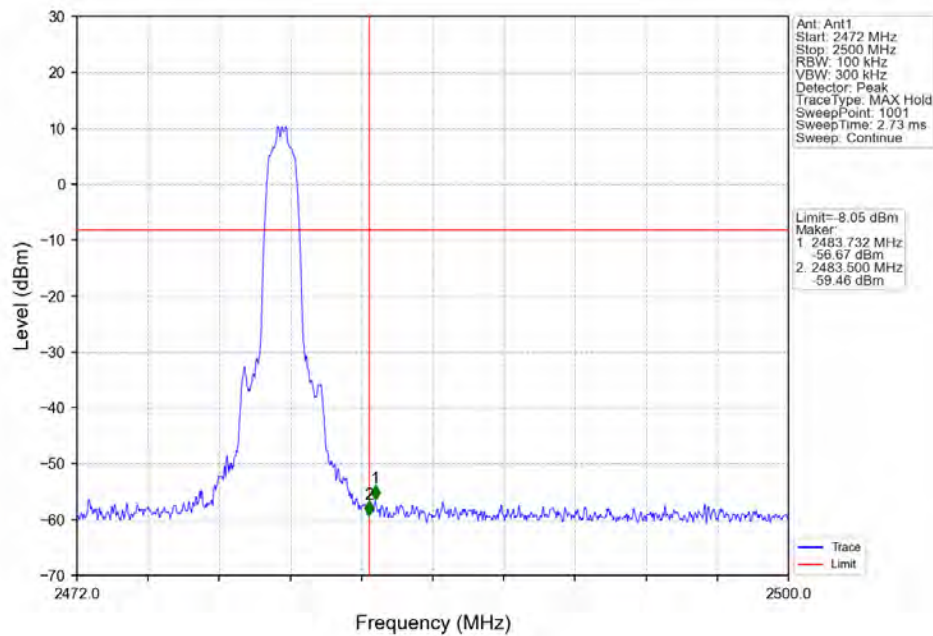


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant5\_NTNV

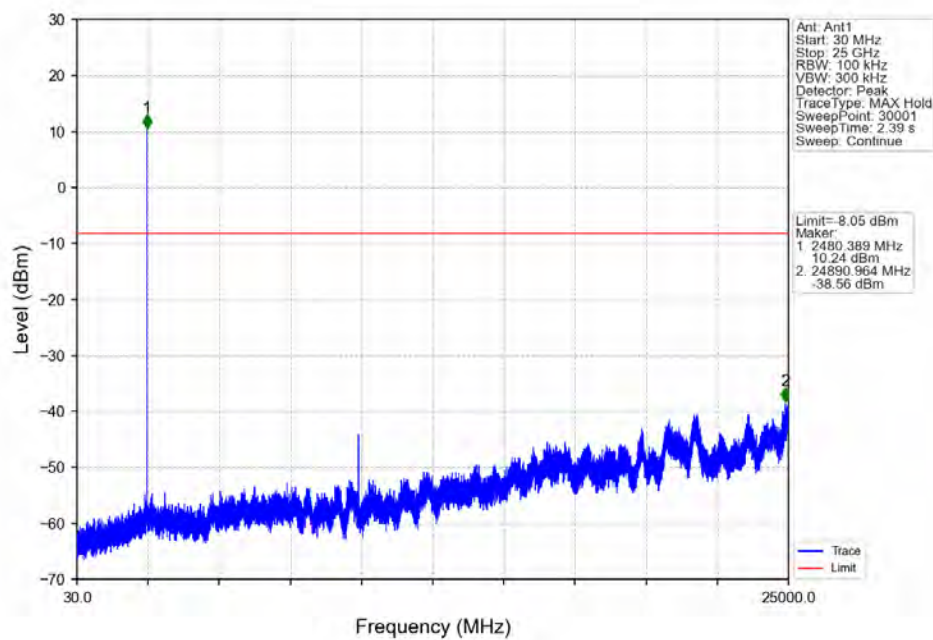


Pi/4DQPSK\_2DH5\_HOPP\_Ant5\_NTNV

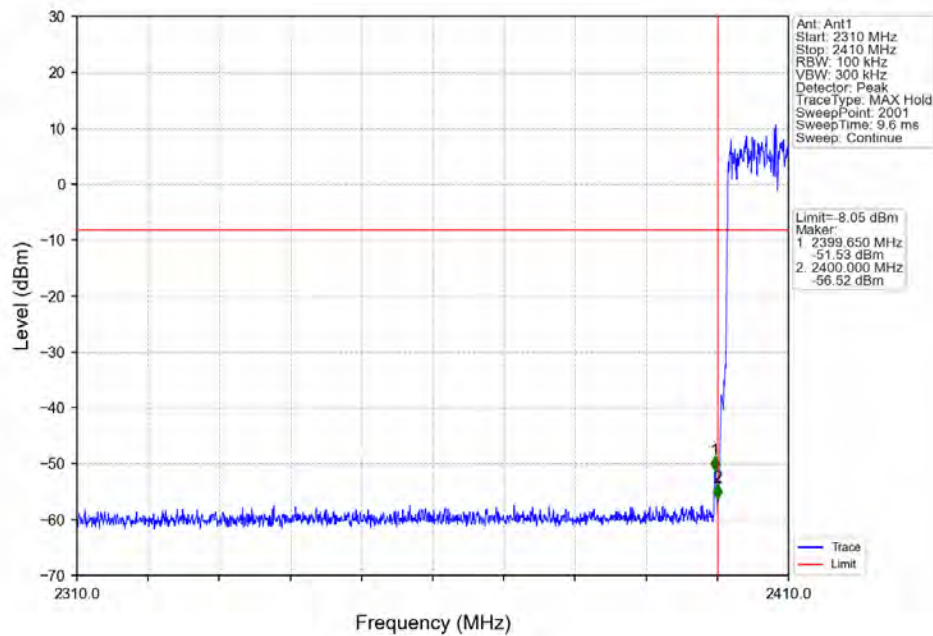


Pi/4DQPSK\_2DH5\_HOPP\_Ant5\_NTNV

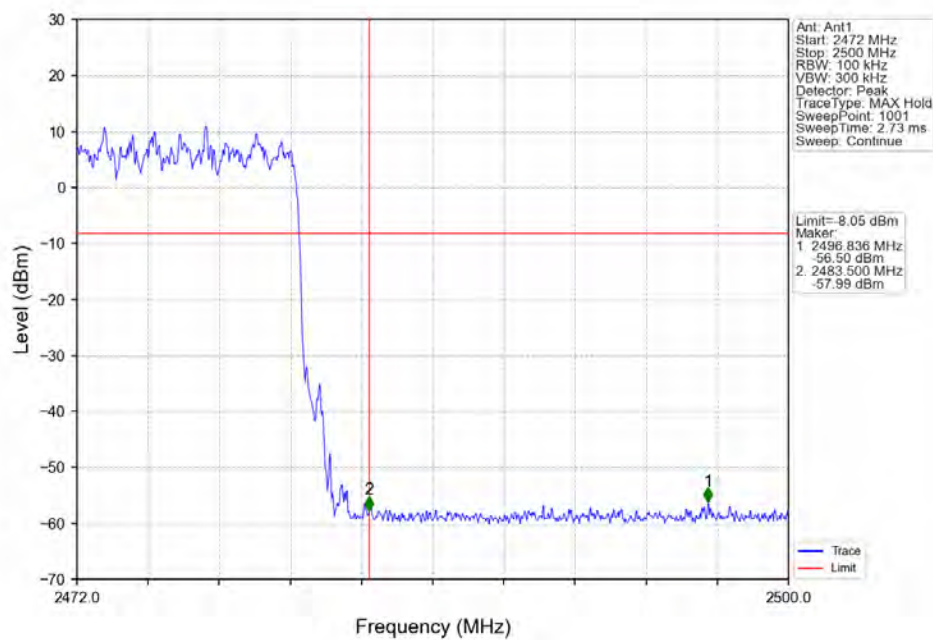


8DPSK\_3DH5\_LCH\_2402MHz\_Ant5\_NTNV

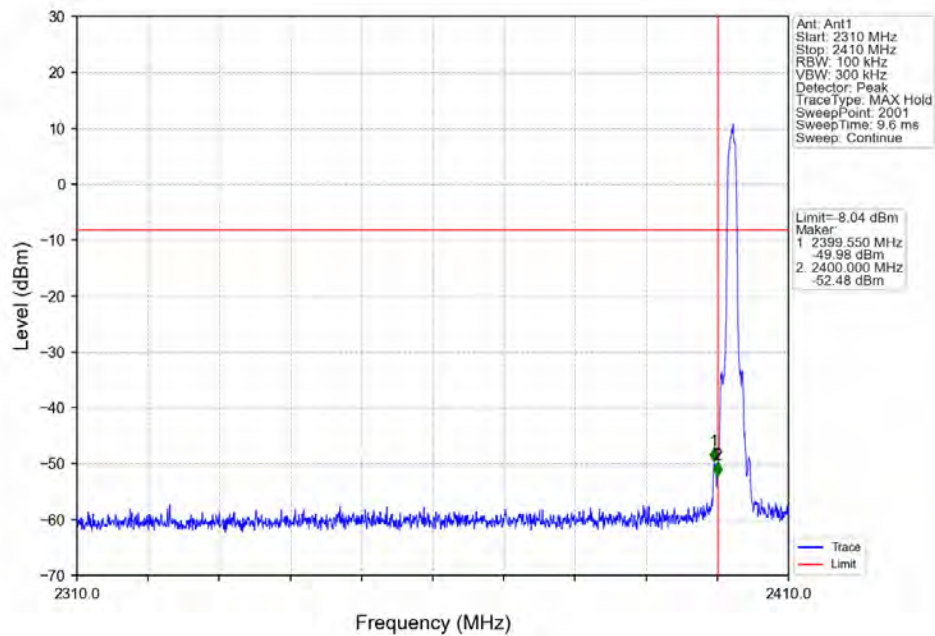


8DPSK\_3DH5\_LCH\_2402MHz\_Ant5\_NTNV

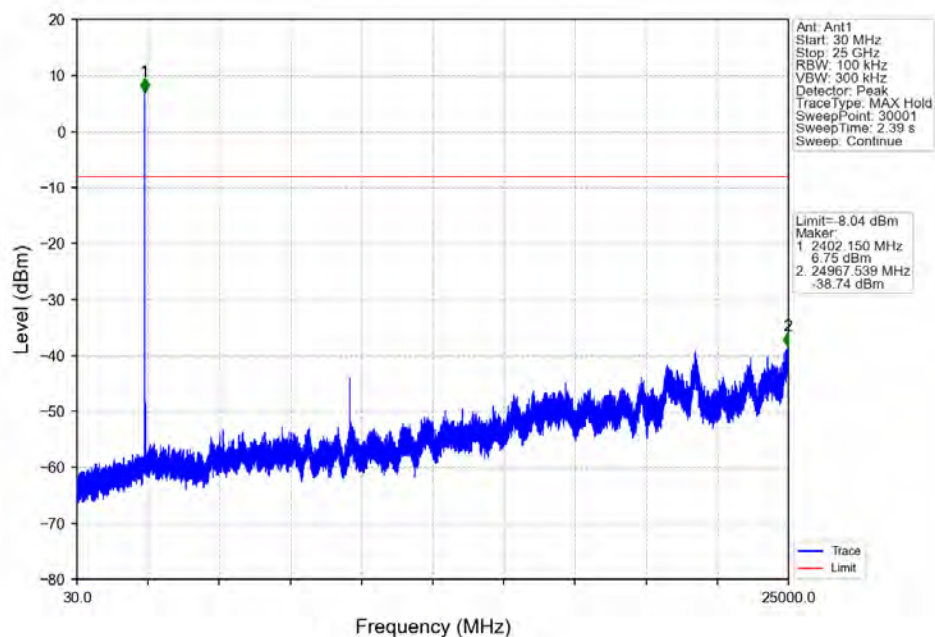


### 8DPSK\_3DH5\_MCH\_2441MHz\_Ant5\_NTNV

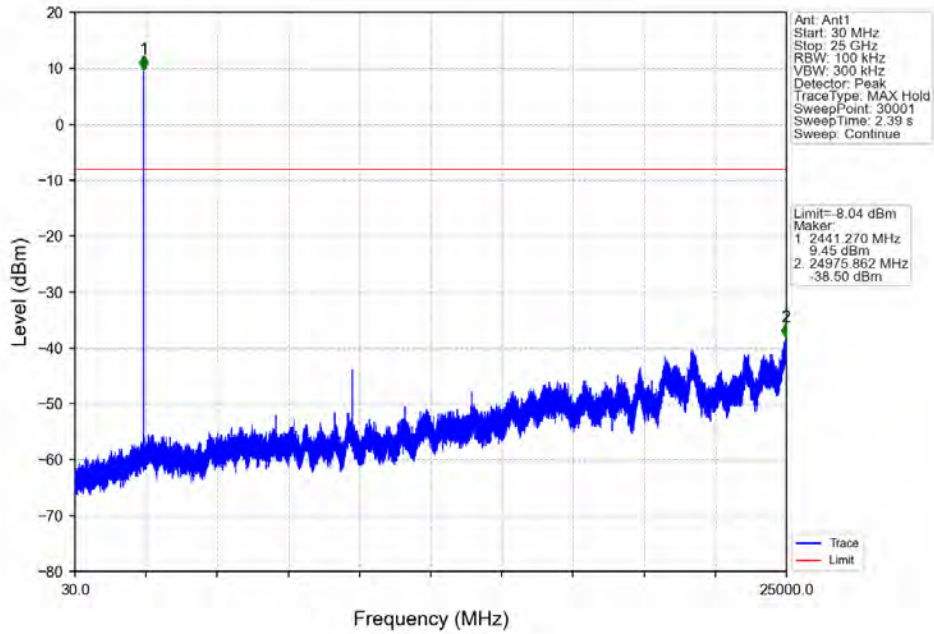


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant5\_NTNV

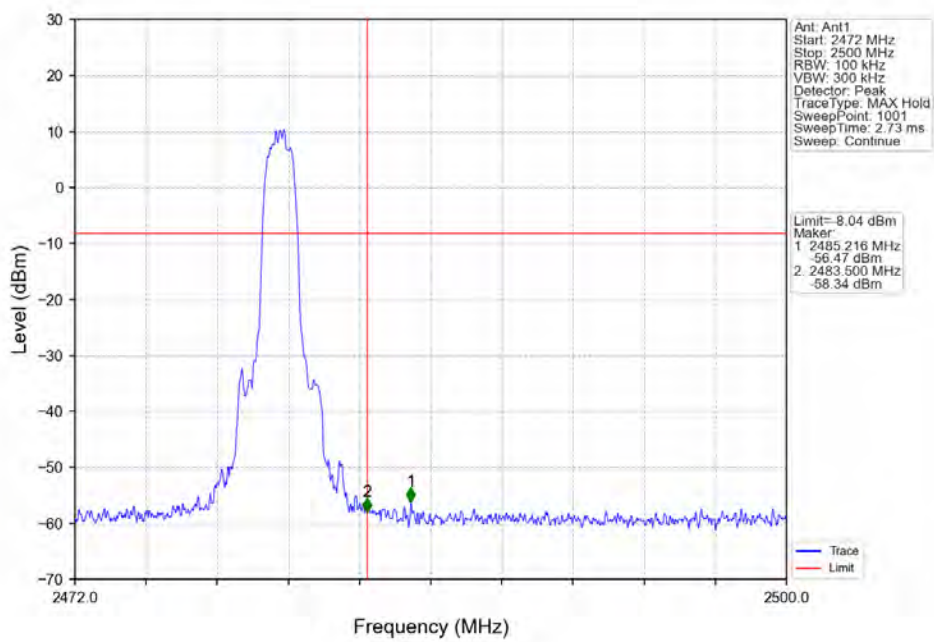

### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant5\_NTNV

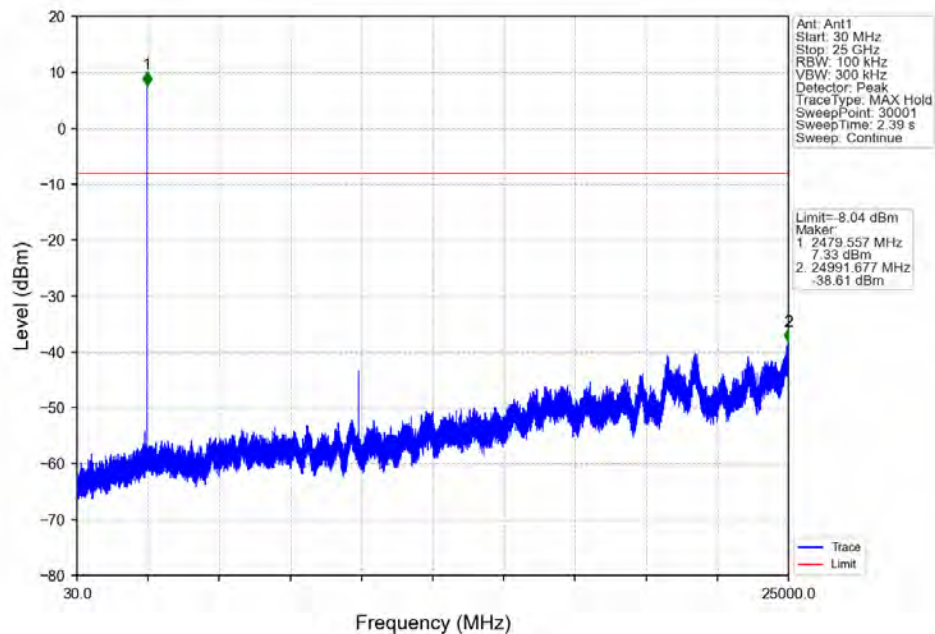

### 8DPSK\_3DH5\_HOPP\_Ant5\_NTNV

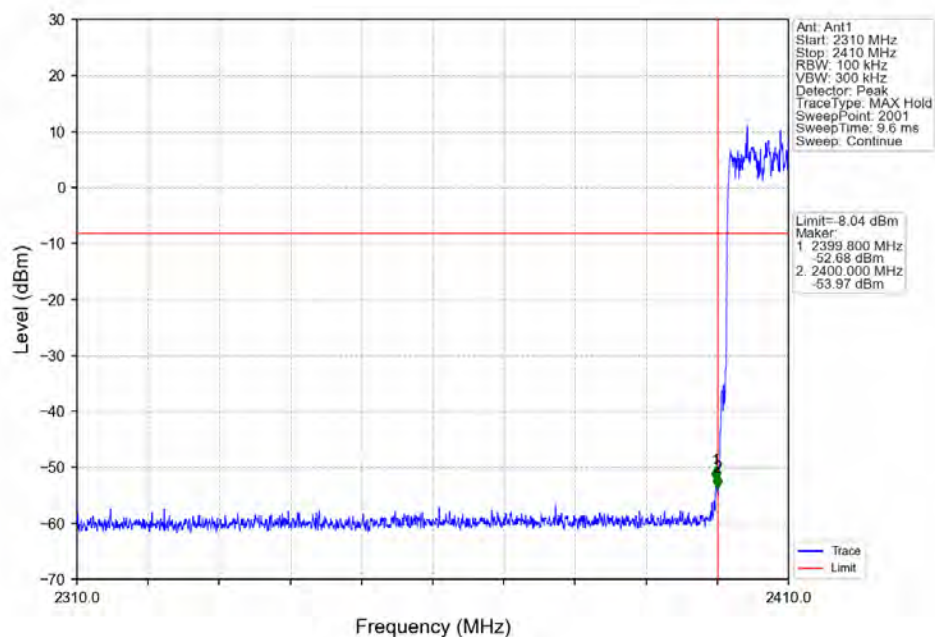


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 165 of 167

### 8DPSK\_3DH5\_HOPP\_Ant5\_NTNV

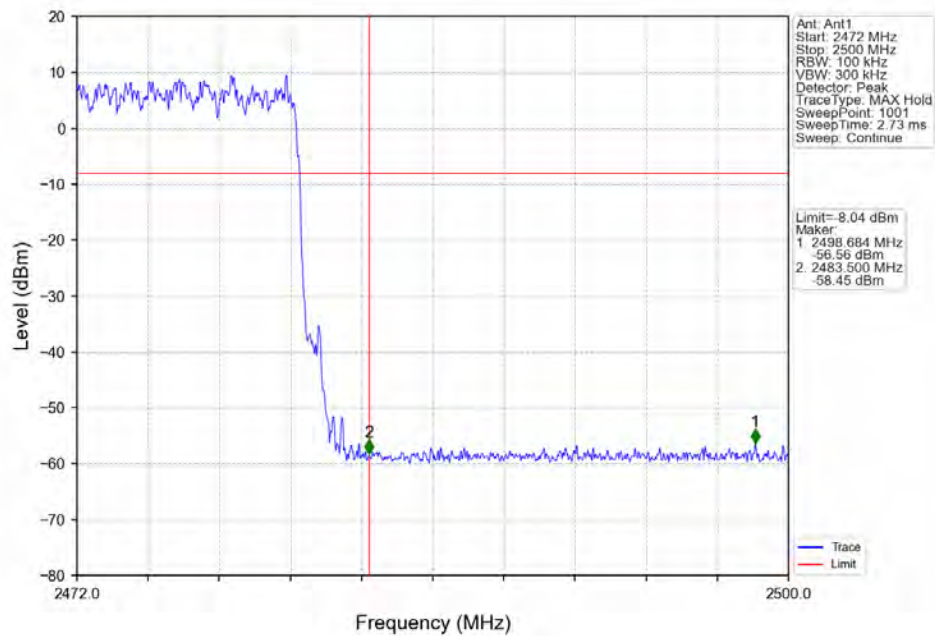

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 166 of 167

### 7. Frequency Error

#### 7.1 Test Result

##### 7.1.1 Ant5

| Ant5      |         |                 |             |                  |               |                          |                      |         |
|-----------|---------|-----------------|-------------|------------------|---------------|--------------------------|----------------------|---------|
| Mode      | TX Type | Frequency (MHz) | Packet Type | Temperature (°C) | Voltage (VAC) | Measured Frequency (MHz) | Limit (MHz)          | Verdict |
| GFSK      | SISO    | 2402            | DH5         | 20               | 102           | 2402.056                 | 2401.667 to 2402.333 | Pass    |
|           |         |                 |             |                  | 120           | 2402.056                 | 2401.667 to 2402.333 | Pass    |
|           |         |                 |             |                  | 138           | 2402.056                 | 2401.667 to 2402.333 | Pass    |
|           |         |                 |             | -20              | 120           | 2402.055                 | 2401.667 to 2402.333 | Pass    |
|           |         |                 |             | 50               | 120           | 2402.056                 | 2401.667 to 2402.333 | Pass    |
|           |         | 2441            | DH5         | 20               | 102           | 2441.056                 | 2440.667 to 2441.333 | Pass    |
|           |         |                 |             |                  | 120           | 2441.056                 | 2440.667 to 2441.333 | Pass    |
|           |         |                 |             |                  | 138           | 2441.055                 | 2440.667 to 2441.333 | Pass    |
|           |         |                 |             | -20              | 120           | 2441.055                 | 2440.667 to 2441.333 | Pass    |
|           |         |                 |             | 50               | 120           | 2441.055                 | 2440.667 to 2441.333 | Pass    |
|           |         | 2480            | DH5         | 20               | 102           | 2480.057                 | 2479.667 to 2480.333 | Pass    |
|           |         |                 |             |                  | 120           | 2480.058                 | 2479.667 to 2480.333 | Pass    |
|           |         |                 |             |                  | 138           | 2480.054                 | 2479.667 to 2480.333 | Pass    |
|           |         |                 |             | -20              | 120           | 2480.058                 | 2479.667 to 2480.333 | Pass    |
|           |         |                 |             | 50               | 120           | 2480.056                 | 2479.667 to 2480.333 | Pass    |
| Pi/4DQPSK | SISO    | 2402            | 2DH5        | 20               | 102           | 2402.055                 | 2401.531 to 2402.469 | Pass    |
|           |         |                 |             |                  | 120           | 2402.058                 | 2401.531 to 2402.469 | Pass    |
|           |         |                 |             |                  | 138           | 2402.056                 | 2401.531 to 2402.469 | Pass    |
|           |         |                 |             | -20              | 120           | 2402.058                 | 2401.531 to 2402.469 | Pass    |
|           |         |                 |             | 50               | 120           | 2402.059                 | 2401.531 to 2402.469 | Pass    |
|           |         | 2441            | 2DH5        | 20               | 102           | 2441.053                 | 2440.53 to 2441.47   | Pass    |
|           |         |                 |             |                  | 120           | 2441.055                 | 2440.53 to 2441.47   | Pass    |
|           |         |                 |             |                  | 138           | 2441.052                 | 2440.53 to 2441.47   | Pass    |
|           |         |                 |             | -20              | 120           | 2441.056                 | 2440.53 to 2441.47   | Pass    |
|           |         |                 |             | 50               | 120           | 2441.054                 | 2440.53 to 2441.47   | Pass    |
|           |         | 2480            | 2DH5        | 20               | 102           | 2480.054                 | 2479.531 to 2480.469 | Pass    |
|           |         |                 |             |                  | 120           | 2480.054                 | 2479.531 to 2480.469 | Pass    |
|           |         |                 |             |                  | 138           | 2480.059                 | 2479.531 to 2480.469 | Pass    |
|           |         |                 |             | -20              | 120           | 2480.056                 | 2479.531 to 2480.469 | Pass    |
|           |         |                 |             | 50               | 120           | 2480.055                 | 2479.531 to 2480.469 | Pass    |
| 8DPSK     | SISO    | 2402            | 3DH5        | 20               | 102           | 2402.055                 | 2401.527 to 2402.473 | Pass    |
|           |         |                 |             |                  | 120           | 2402.054                 | 2401.527 to 2402.473 | Pass    |
|           |         |                 |             |                  | 138           | 2402.053                 | 2401.527 to 2402.473 | Pass    |
|           |         |                 |             | -20              | 120           | 2402.054                 | 2401.527 to 2402.473 | Pass    |



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700121703

Page: 167 of 167

|  |  |      |      |    |     |          |                      |      |
|--|--|------|------|----|-----|----------|----------------------|------|
|  |  |      |      | 50 | 120 | 2402.055 | 2401.527 to 2402.473 | Pass |
|  |  | 2441 | 3DH5 | 20 | 102 | 2441.050 | 2440.528 to 2441.472 | Pass |
|  |  |      |      |    | 120 | 2441.055 | 2440.528 to 2441.472 | Pass |
|  |  |      |      |    | 138 | 2441.054 | 2440.528 to 2441.472 | Pass |
|  |  |      |      |    | -20 | 2441.050 | 2440.528 to 2441.472 | Pass |
|  |  |      |      | 50 | 120 | 2441.056 | 2440.528 to 2441.472 | Pass |
|  |  | 2480 | 3DH5 | 20 | 102 | 2480.056 | 2479.528 to 2480.472 | Pass |
|  |  |      |      |    | 120 | 2480.052 | 2479.528 to 2480.472 | Pass |
|  |  |      |      |    | 138 | 2480.054 | 2479.528 to 2480.472 | Pass |
|  |  |      |      |    | -20 | 2480.056 | 2479.528 to 2480.472 | Pass |
|  |  |      |      | 50 | 120 | 2480.054 | 2479.528 to 2480.472 | Pass |

- End of the Report -