

FCC TEST REPORT

FCC ID : RF8-HS8086I
Applicant : Hansun Technologies Inc.
Address : 209 Zhuyuan Road, Suzhou New District, Jiangsu, China
Manufacturer : The same as above
Address : The same as above

Equipment Under Test (EUT) :

Product Name : TurboTV Bar&AnjoyTV Bar
Model No. : HS8086I

Rules : FCC CFR47 Part15 B Section 15.109:2010

Date of Test : Jan. 09, 2013

Date of Issue : Feb. 25, 2013

Test Result : PASS*

Remark:

* The sample detailed above has been tested to the requirements of FCC rules mentioned above.

The test results have been reviewed against the directives above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West of Baima Road., Songgang Street, Bao'an District,
Shenzhen, China


Tel: +86-755-83551033 Fax: +86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.107	PASS
Radiated Emissions	15.109	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION	4
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.....	4
4.3 TEST FACILITY	4
4.4 TEST LOCATION.....	4
5 EQUIPMENT USED DURING TEST.....	5
5.1 EQUIPMENTS LIST.....	5
5.2 MEASUREMENT UNCERTAINTY.....	5
5.3 TEST EQUIPMENT CALIBRATION	5
6 CONDUCTED EMISSIONS	6
6.1 E.U.T. TEST CONDITION.....	6
6.2 EUT SETUP	6
6.3 CONDUCTED EMISSION TEST RESULT.....	6
7 RADIATED EMISSIONS	9
7.1 EUT OPERATION:.....	9
7.2 TEST SETUP	9
7.3 SPECTRUM ANALYZER SETUP.....	11
7.4 TEST PROCEDURE.....	11
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	11
7.6 SUMMARY OF TEST RESULTS	12
8 PHOTOGRAPHS –TEST SETUP.....	16
8.1 CONDUCTED EMISSIONS	16
8.2 RADIATED EMISSIONS	17
9 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	19
9.1 EUT – EXTERNAL VIEW	19
9.2 EUT- INTERNAL VIEW	19

4 General Information

4.1 General Description of E.U.T.

Product Name	: TurboTV Bar&AnjoyTV Bar
Model No.	: HS8086I
Model Description	: N/A
Oscillator	: Crystal 32.768kHz, 24MHz, 26MHz and 40MHz
Remark	:This device working with two kinds of remote: IR remote(Exempted device) RF remote(Contains two granted FCC ID QZVCZ-SRC-AF100 and QZVCZ-DG-AF100)

4.2 Details of E.U.T.

Technical Data	: DC12V, 1A powered from adapter
Remark	:This device can use with 3 kinds of adapter optionally.Only the worst data when using with adapter 2 were shown in this report.
Adapter1	:Ktec Model:KSAS0101200100HU INPUT:100-240V~50/60Hz 0.4A
Adapter2	:Mass Power Model:SEF1200100A1BA INPUT:100-240V~50/60Hz 0.3A
Adapter3	:APD Model:WA-12L12FU INPUT:100-240V~50/60Hz 0.5A Max.

4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: IC7760A**

Waltek Services (Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.4 Test Location

All the tests were performed at:
Waltek Services (Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	Aug. 13,2012	Aug. 13,2013
2.	LISN	R&S	ENV216	101215	Aug. 13,2012	Aug. 13,2013
3.	Cable	Top	TYPE16(3.5M)	-	Aug.14,2012	Aug. 14,2013
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Aug. 13,2012	Aug. 13,2013
2.	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Aug. 13,2012	Aug. 13,2013
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Aug. 13,2012	Aug. 13,2013
4.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Aug. 13,2012	Aug. 13,2013
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Aug. 13,2012	Aug. 13,2013
6.	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Feb .23,2012	Feb .23,2013
7.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Aug. 13,2012	Aug. 13,2013
8.	10m Coaxial Cable with N- plug	SCHWARZBECK	AK 9515 H	-	Aug. 13,2012	Aug. 13,2013
9.	10m 50 Ohm Coaxial Cable with N-plug	Top	TYPE16(13M)	-	Aug. 13,2012	Aug. 13,2013
Associated Equipment						
1	Computer	Acer	Aspire AG1720	1300148096	-	-
2	Mouse	shuangfeiyan	OP-220		-	-
3	Keyboard	shuangfeiyan	KB-8620D		-	-
4	LCD	MAG	EV527	W11W061001477	-	-

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 4.74 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emissions

Test Requirement:	FCC CFR 47 Part 15 Section 15.107
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Test Condition

Operating Environment:


Temperature:	25.5 °C
Humidity:	51 % RH
Atmospheric Pressure:	1010 mbar

Operation Mode and Spectrum Setup:

The EUT was tested in Ethernet linking mode and connected with PC. The worst data were shown as follow.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, the specification used in this report was the FCC Part15.207 limits.

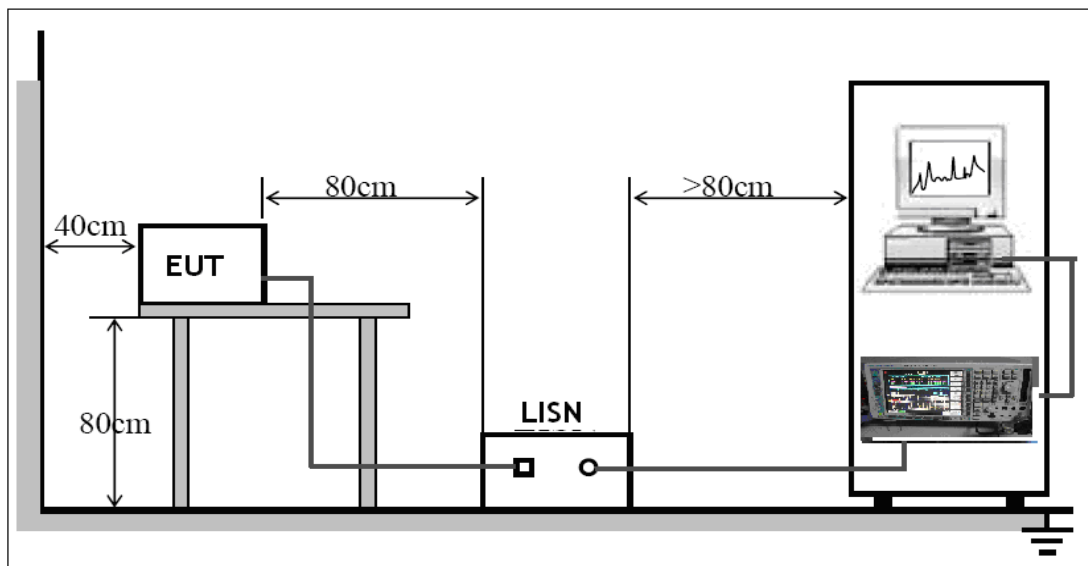


The EUT was placed on the test table in shielding room

6.3 Conducted Emission Test Result


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

Test Mode: Ethernet linking and connected with PC
Live line:

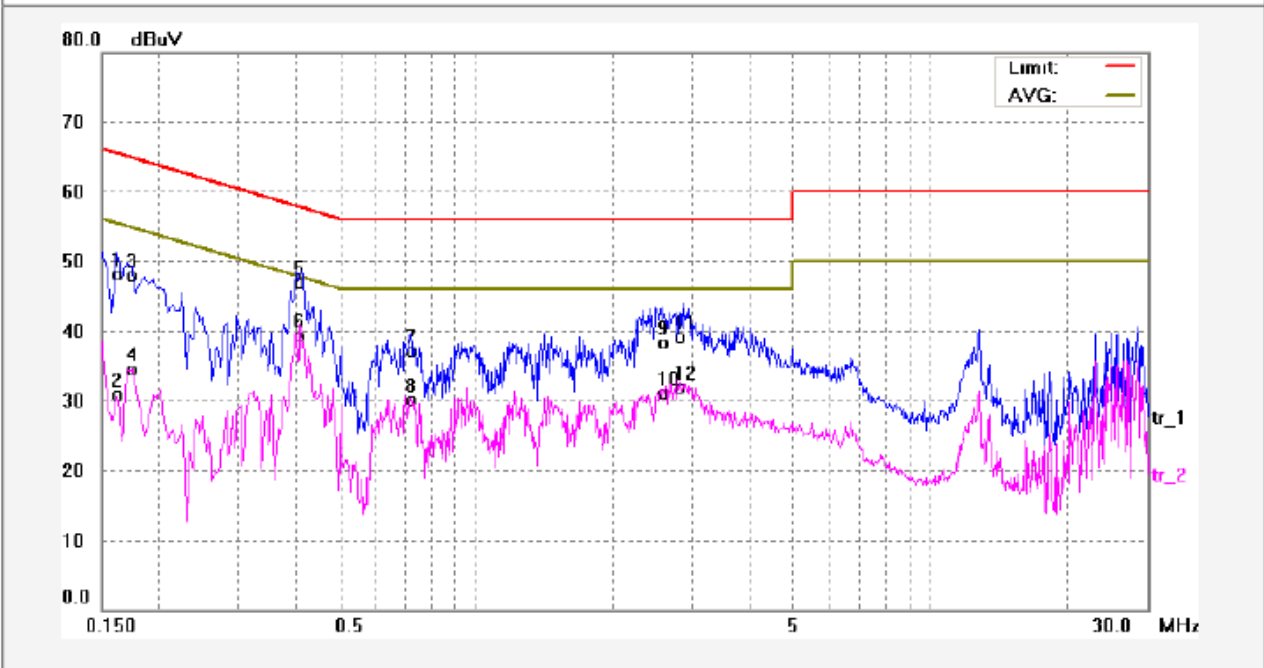

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	37.51	9.81	47.32	65.36	-18.04	QP	
2	0.1620	20.39	9.81	30.20	55.36	-25.16	AVG	
3	0.1722	37.25	9.82	47.07	64.85	-17.78	QP	
4	0.1722	23.81	9.82	33.63	54.85	-21.22	AVG	
5	0.4140	36.22	9.90	46.12	57.57	-11.45	QP	
6	0.4140	28.62	9.90	38.52	47.57	-9.05	AVG	
7	0.7180	26.30	9.95	36.25	56.00	-19.75	QP	
8	0.7180	19.42	9.95	29.37	46.00	-16.63	AVG	
9	2.5740	27.45	10.02	37.47	56.00	-18.53	QP	
10	2.5740	20.24	10.02	30.26	46.00	-15.74	AVG	
11	2.8500	28.24	10.03	38.27	56.00	-17.73	QP	
12	2.8500	21.02	10.03	31.05	46.00	-14.95	AVG	

Neutral line:

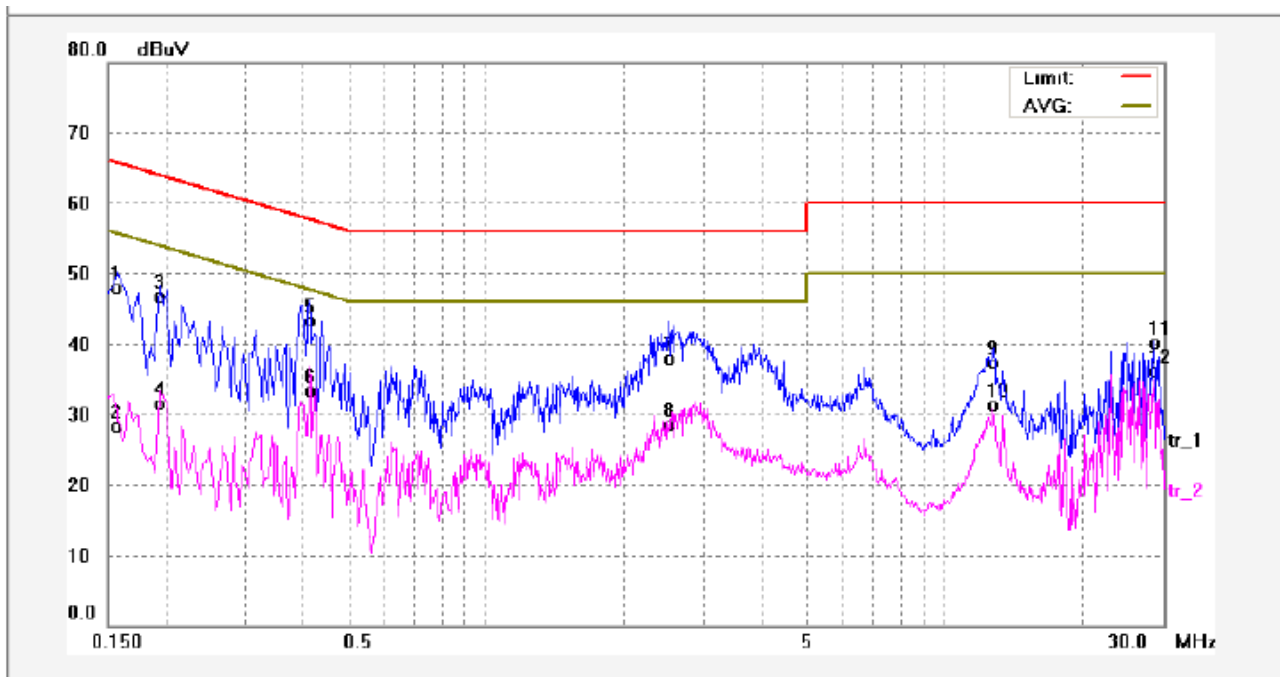

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	37.30	9.81	47.11	65.56	-18.45	QP	
2	0.1580	17.62	9.81	27.43	55.56	-28.13	AVG	
3	0.1940	36.10	9.84	45.94	63.86	-17.92	QP	
4	0.1940	20.81	9.84	30.65	53.86	-23.21	AVG	
5	0.4140	32.68	9.90	42.58	57.57	-14.99	QP	
6	0.4140	22.54	9.90	32.44	47.57	-15.13	AVG	
7	2.5100	27.00	10.02	37.02	56.00	-18.98	QP	
8	2.5100	17.70	10.02	27.72	46.00	-18.28	AVG	
9	12.8100	25.84	10.72	36.56	60.00	-23.44	QP	
10	12.8100	19.79	10.72	30.51	50.00	-19.49	AVG	
11	28.6860	27.12	12.12	39.24	60.00	-20.76	QP	
12	28.6860	23.26	12.12	35.38	50.00	-14.62	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.109

Test Method: ANSI C63.4:2003

Test Result: PASS

Except as otherwise indicated in paragraphs (b)(2) or (b)(3), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to 5th harmonic of the highest frequency .

Measurement Distance: 3m

15.109 Limit:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 -0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

7.1 EUT Operation:

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


Operation Mode:

The EUT was tested in Ethernet linking mode and connected with PC. The worst data were shown as follow.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

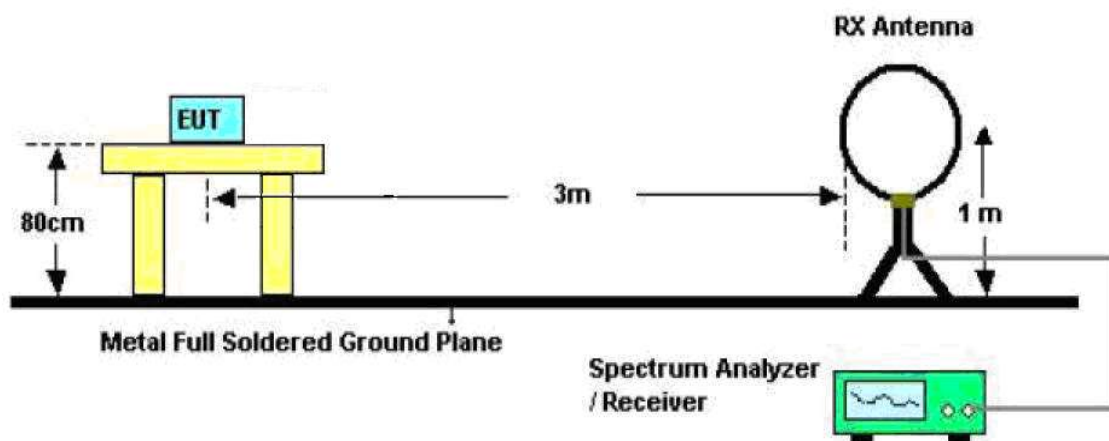

The test setup for emission measurement from 30 MHz to 1 GHz.

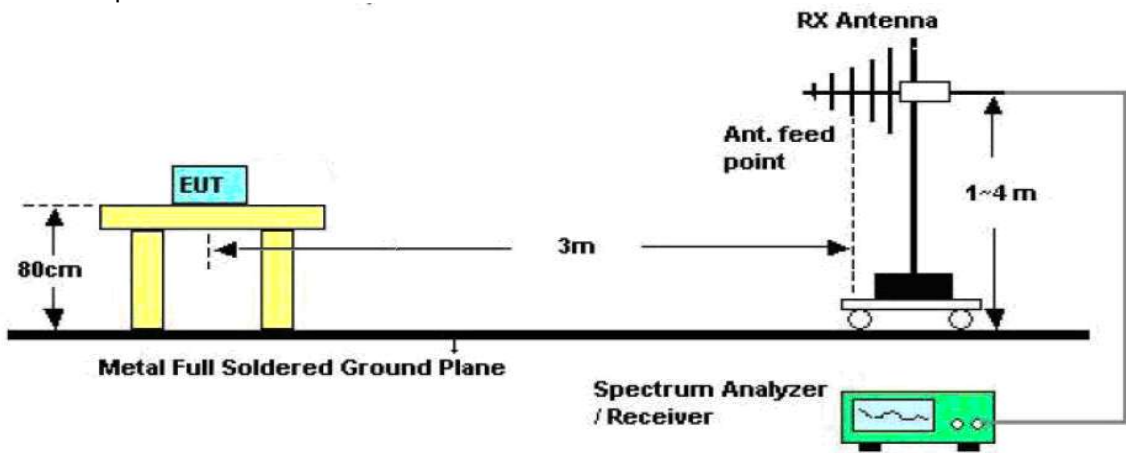

The test setup for emission measurement above 1 GHz.

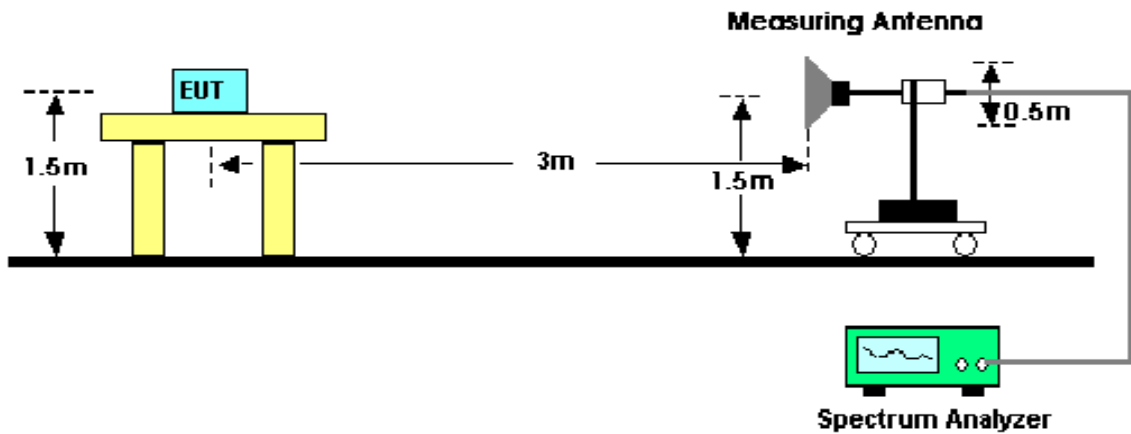

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested from 32.768KHz to 13 GHz.

Below 30MHz

Sweep Speed	Auto
IF Bandwidth.....	10KHz
Video Bandwidth.....	10KHz
Resolution Bandwidth.....	10KHz

30 MHz to 1 GHz.

Sweep Speed	Auto
IF Bandwidth.....	120 KHz
Video Bandwidth.....	100KHz
Quasi-Peak Adapter Bandwidth	120 KHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth.....	100KHz

Above 1GHz

Sweep Speed	Auto
IF Bandwidth.....	120 KHz
Video Bandwidth.....	3MHz
Quasi-Peak Adapter Bandwidth	120 KHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth.....	1MHz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under X-axis. The worst data were shown as follow.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:
 Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain the “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test mode: Ethernet linking and connected with PC


Test Frequency : Below 30MHz

Remark: All emissions were more than 20 dB below the limit and therefore not reported.


Test mode: Ethernet linking and connected with PC

Test Frequency : 30MHz ~ 1000MHz

Antenna polarization: Vertical

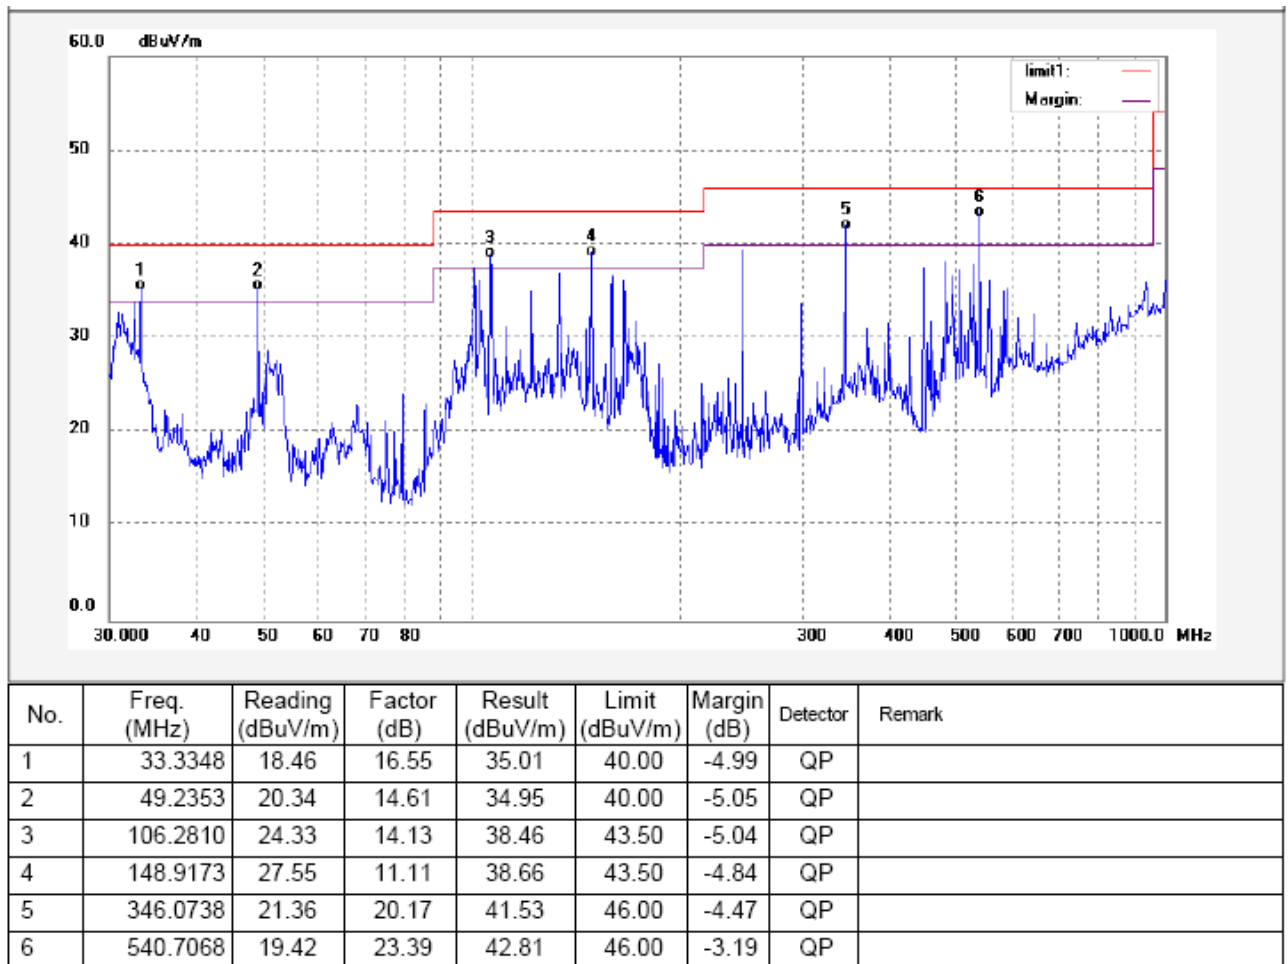

Antenna polarization: Horizontal

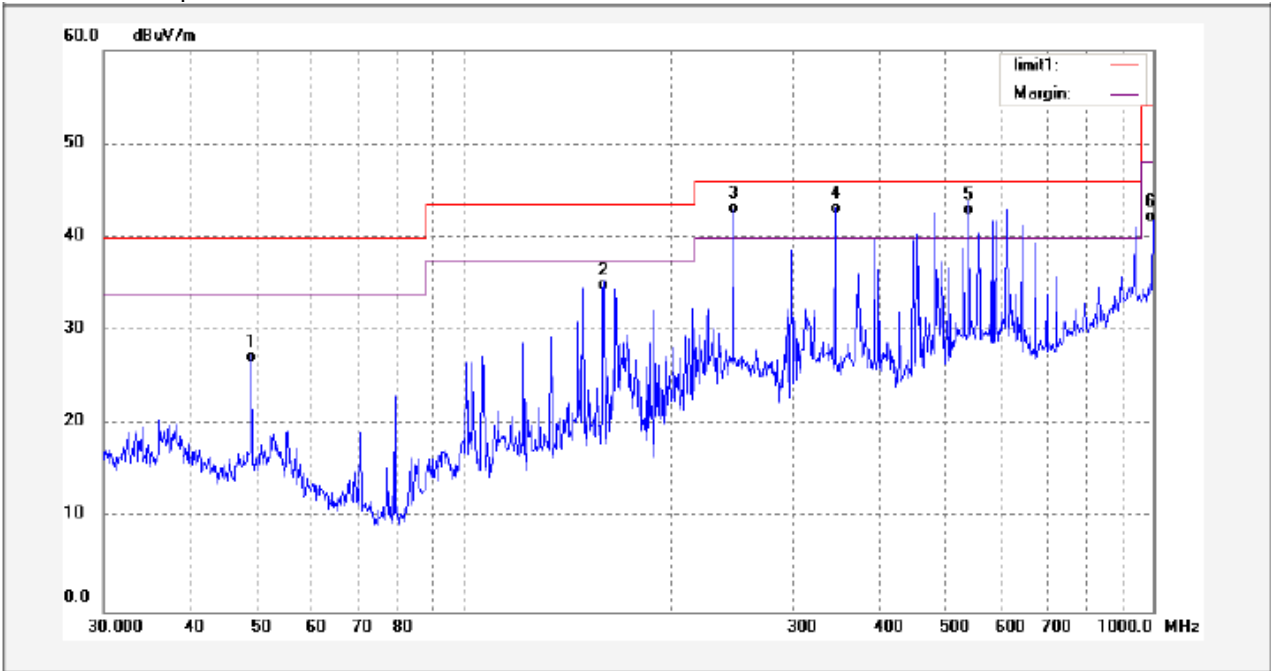


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	49.2353	11.95	14.61	26.56	40.00	-13.44	QP	
2	159.7583	23.00	11.27	34.27	43.50	-9.23	QP	
3	246.1237	27.36	15.17	42.53	46.00	-3.47	QP	
4	346.0738	22.43	20.17	42.60	46.00	-3.40	QP	
5	540.7068	18.96	23.39	42.35	46.00	-3.65	QP	
6	1000.0000	9.08	32.55	41.63	54.00	-12.37	QP	


Test mode: Ethernet linking and connected with PC

Test Frequency : from 1GHz to 5GHz

Antenna polarization: Vertical

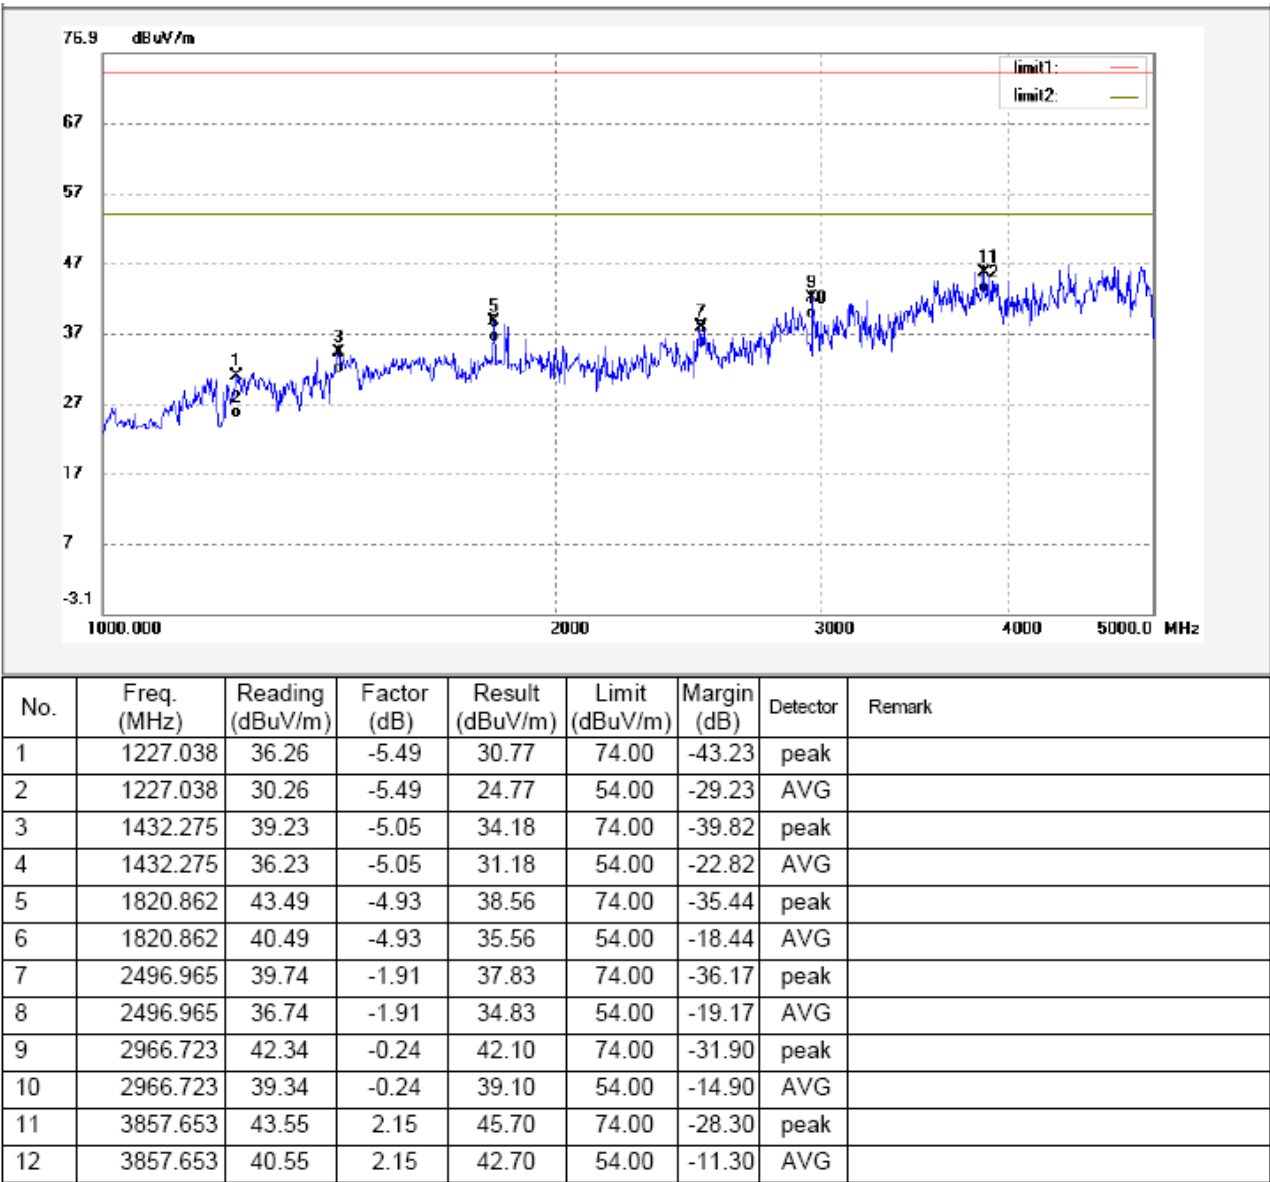

Antenna polarization: Horizontal

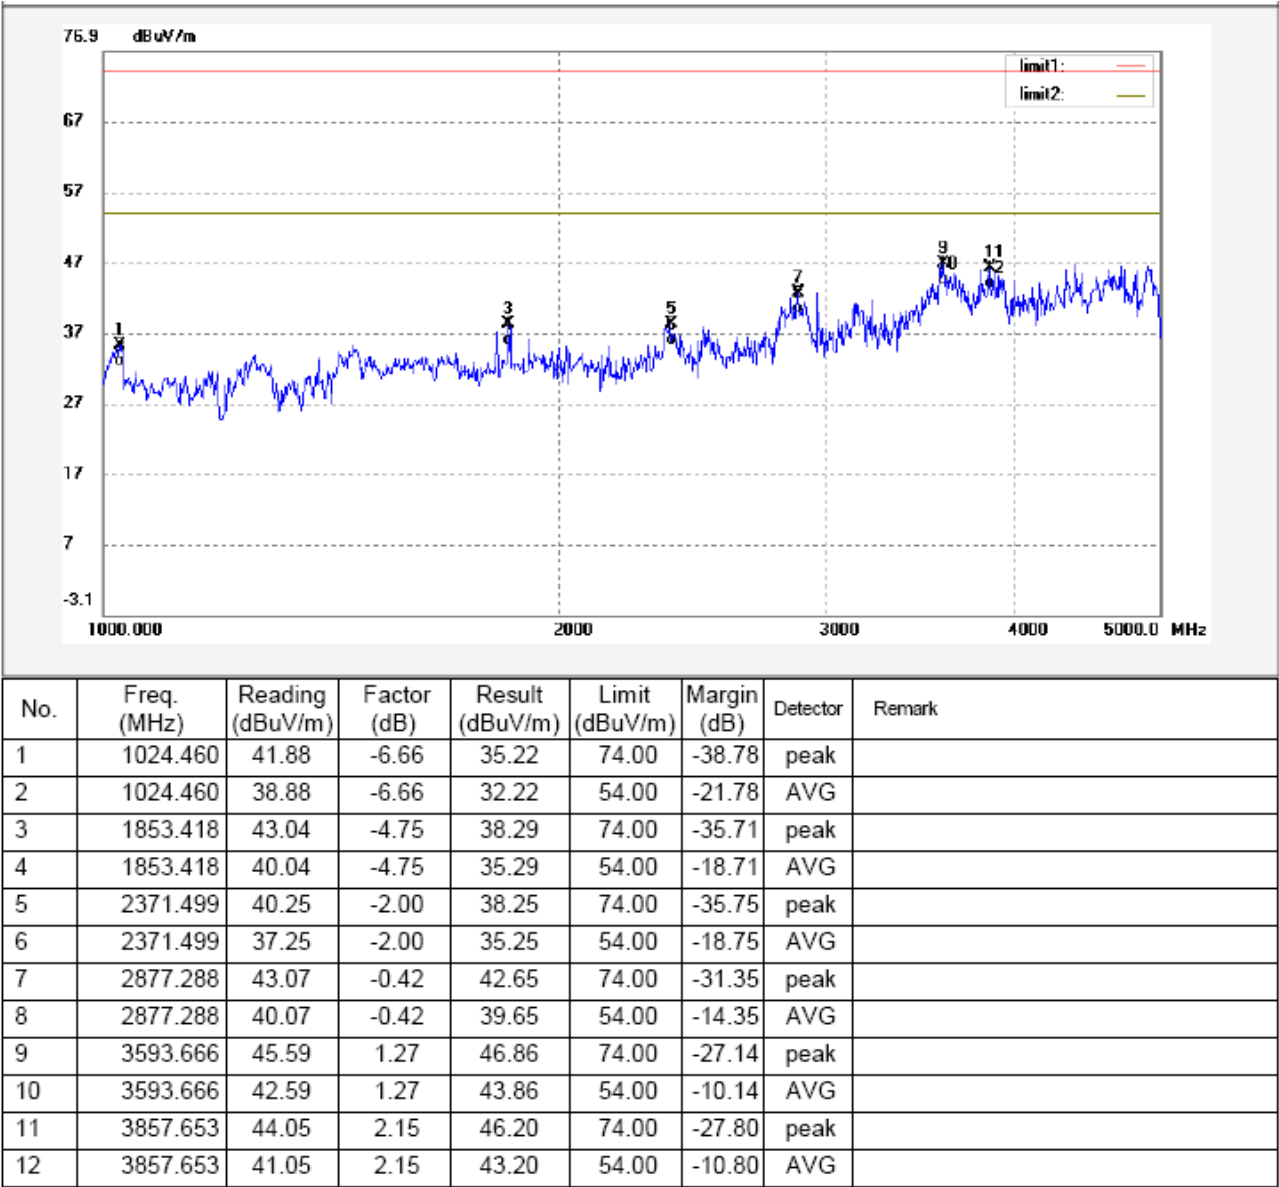

Test mode: Ethernet linking and connected with PC

Test Frequency : above 5GHz

Remark: All emissions were more than 20 dB below the limit and therefore not reported.

8 Photographs –Test Setup

8.1 Conducted Emissions



8.2 Radiated Emissions

Below 30MHz



From 30-1000MHz



Above 1000MHz



9 Photographs - Constructional Details

9.1 EUT – External View

Refer to test report No.: WT12128537-U-S-F

9.2 EUT- Internal View

Refer to test report No.: WT12128537-U-S-F

==End of test report==