

SAR TEST REPORT**FCC 47 CFR Part 2.1093
Industry Canada RSS-102****RF-Exposure evaluation of portable equipment****Report Reference No.** : G0M-1812-7889-TFC093SR-V01**Testing Laboratory** : Eurofins Product Service GmbHAddress : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation

DAkkS - Registration number : D-PL-12092-01-03 (ISED)
ISED Testing Laboratory site: 3470A-2
DAkkS - Registration number : D-PL-12092-01-04 (FCC)
FCC Filed Test Laboratory, Reg.-No.: 96970**Applicant's name** : Leica Geosystems AGAddress : Heinrich Wild Strasse
9435 Heerbrugg
SWITZERLAND**Test specification:**Standard..... : FCC 47 CFR Part 2 §2.1093
447498 D01 General RF Exposure Guidance v05r02
IEEE Std. 1528 - 2013
IC RSS-102 Issue 5

Non-standard test method.....: None

Test scope..... : complete Radio compliance test

Equipment under test (EUT):

Product description : Field Controller Win EC7

Model No. : CS20

Additional Model(s) : None

Brand Name(s) : Leica Geosystems

Hardware version : V1.00

Firmware / Software version : V4.97

FCC-ID: : RFD-CSNGV

IC: : 3177A-CSNGV

Test result : **Passed**

Test Report No.: G0M-1812-7889-TFC093SR-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 1 of 71

Possible test case verdicts:

- neither assessed nor tested.....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object.....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2019-03-14

Date (s) of performance of tests: 2019-03-14 - 2019-03-20

Compiled by: Burkhard Pudell

Tested by (+ signature): Burkhard Pudell
(Responsible for Test)



Approved by (+ signature).....: Christian Weber
(Head of Lab)



Date of issue: 2019-05-21

Total number of pages: 71

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

The BT/WLAN module has a time-shared antenna, only one technology could transmit at the same time.

Version History

Version	Issue Date	Remarks	Revised by
01	2019-05-21	Initial Release	

REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION	6
1.1 Equipment photos	7
1.2 Equipment setup photos	9
1.3 Reference Documents	11
1.4 Supporting Equipment Used During Testing	12
1.5 Supported standalone operating modes	12
1.6 Conducted Power Values	12
1.7 Standalone Operational Mode Test Exclusion for FCC	14
1.8 Standalone Operational Mode Exemption limits for IC	16
1.9 SAR value estimation for multi-transmitter evaluation	16
1.10 Supported concurrent (multi-transmitter) operating modes	16
1.11 Supported use cases	17
1.12 Radio Test Modes	17
1.13 Test Positions	17
1.14 Test Equipment Used During Testing	18
2 RESULT SUMMARY	19
3 DEFINITIONS	20
3.1 Controlled Exposure	20
3.2 Uncontrolled Exposure	20
3.3 Localized SAR	20
4 LOCALIZED SAR MEASUREMENT EQUIPMENT	21
4.1 Complete SAR DASY5 Measurement System	21
4.2 Robot Arm	23
4.3 Data Acquisition Electronics	23
4.4 Isotropic E-Field Probe \leq 3 GHz	24
4.5 Isotropic E-Field Probe \leq 6 GHz	25
4.6 Test phantom and positioner	26
4.7 System Validation Dipoles	27
5 SINGLE-BAND SAR MEASUREMENT	28
5.1 General measurement description	28
5.2 SAR measurement description	28
5.3 Reference lines and points for Handsets	29
5.4 Test positions relative to the Head	30

5.5	Test positions relative to the human body	31
5.6	Measurement Uncertainty	32
6	TEST CONDITIONS AND RESULTS	35
6.1	Recipes for Tissue Simulating Liquids	35
6.2	Test Conditions and Results – Tissue Validation	36
6.3	Test Conditions and Results – System Validation	38
6.4	Test Conditions and Results – Standalone SAR Measurement	39
6.5	Test Conditions and Results – Multi-transmitter SAR Result	39
ANNEX A	Calibration Documents	40
ANNEX B	System Validation Reports	67
ANNEX C	SAR Measurement Reports	69

1 Equipment (Test item) Description

Description	Field Controller Win EC7	
Model	CS20	
Additional Model(s)	None	
Brand Name(s)	Leica Geosystems	
Serial number	2400557	
Hardware version	V1.00	
Software / Firmware version	V4.97	
PMN	CS20	
HVIN	CS20	
FVIN	-/-	
HMN	-/-	
Contains FCC-ID	RFD-BTWCO	
Contains IC	3177A-BTWCO	
Equipment type	End product	
Prototype or production unit	Production Unit	
Device category	Handset	
Environment	General public	
Radio technologies	WLAN IEEE 802.11b,g,n / Bluetooth Classic	
Operating frequency ranges	WLAN 2.4G: 2412 - 2462 MHz Bluetooth : 2402 - 2480 MHz	
Modulations	WLAN 2.4G: CCK / DSSS / OFDM Bluetooth : GFSK, PI/4-DQPSK, 8-DPSK	
Antenna	Type	integrated
	Model	W3008C
	Manufacturer	Pulse Electronics
	Gain	1 dBi (manufacturer declaration)
Power supply	V_{NOM}	11.1 VDC (Lithium Battery)
AC/DC-Adaptor	Model	GEV276
	Vendor	Leica Geosystems
	Input	100 – 240; 50 / 60 Hz
	Output	15 VDC
Accessories	None	
Manufacturer	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	

1.1 Equipment photos



EUT Connector Side**Power Supply**

Test Report No.: G0M-1812-7889-TFC093SR-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

1.2 Equipment setup photos

CS20-Front-1



CS20-Front-2



CS20-Back-1**CS20-Back-2**

1.3 Reference Documents

Document
KDB Publication 447498 : Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
KDB Publication 648474 : SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas
KDB Publication 648474 : Review and Approval Policies for SAR Evaluation of Handsets with Multiple Transmitters and Antennas
KDB Publication 865664 : SAR measurement procedures for devices operating between 100 MHz to 6 GHz
KDB Publication 941225: SAR Measurement Procedures for 3G Devices
KDB Publication 941225: 3GPP R6 HSPA and R7 HSPA+ SAR Guidance
KDB Publication 941225: Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE
KDB Publication 941225: SAR Test Consideration for LTE Handsets and Data Modems
KDB Publication 447498 : SAR Measurement Procedures for USB Dongle Transmitters
KDB Publication 248227 : SAR Measurement Procedures for 802.11 a/b/g Transmitters
KDB Publication 450824 : SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments				
	None							
*Note: Use the following abbreviations:								
AE : Auxiliary/Associated Equipment, or								
SIM : Simulator (Not Subjected to Test)								
CABL : Connecting cables								

1.5 Supported standalone operating modes

Mode	Modulation	Frequency range	Duty cycle
Bluetooth	GFSK	2402 – 2480 MHz	0.77
Bluetooth	PI/4-DQPSK	2402 – 2480 MHz	0.77
Bluetooth	8-DPSK	2402 – 2480 MHz	0.77
802.11b	DSSS	2412 – 2462 MHz	1.0
802.11g/n 20MHz	OFDM	2412 – 2462 MHz	1.0

1.6 Conducted Power Values

Bluetooth BR+EDR – Average Output Power			
Frequency [MHz]	Source-base time-average power [dBm] (+ Tuneup= 0.5dB)		
	BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)
	DH5	2-DH5	3-DH5
2402	<u>8.1</u>	5,7	5,7
2441	8,0	5,4	5,5
2480	8,0	5,3	5,3
Date, Operator:	15.03.2019 , B. Pudell		

IEEE 802.11b – Average Output Power						
Antenna port			intern			
Band	Channel	Frequency [MHz]	Source-base time-average power [dBm] (+ Tuneup= 0.5dB)			
			Data rate [Mbps]			
			1	2	5.5	11
2.4 GHz	1	2412	17,0	14,2	14,1	16,4
	6	2437	16,8	13,9	13,8	16,2
	7	2442				
	11	2462	16,8	13,9	13,9	16,2
	13	2472				
Date, Operator:			18.03.2019 , B. Pudell			

IEEE 802.11g – Average Output Power								
Antenna port			intern					
Band	Channel	Frequency [MHz]	Source-base time-average power [dBm] (+ Tuneup= 0.5dB)					
			Data rate [Mbps]					
			6	9	12	18	24	36
2.4 GHz	1	2412	14,4	14,2	14,1	14,1	14,2	14,0
	6	2437	14,1	13,9	13,8	13,8	13,8	13,8
	7	2442						
	11	2462	14,1	13,8	13,9	13,8	13,9	13,9
	13	2472						
Date, Operator:			18.03.2019 , B. Pudell					

IEEE 802.11n HT20 1SS – Average Output Power								
Antenna port				intern				
Band	BW [MHz]	Ch.	Frequency [MHz]	Source-base time-average power [dBm] (+ Tuneup= 0.5dB)				
				Data rate [Mbps]				
				MCS0	MCS1	MCS2	MCS3	MCS4
2.4 GHz	20	1	2412	14,0	14,0	14,0	13,9	13,9
		6	2437	13,7	13,7	13,7	13,6	13,6
		7	2442					
		11	2462	13,8	13,8	13,7	13,6	13,6
		13	2472					
Date, Operator:				18.03.2019 , B. Pudell				

1.7 Standalone Operational Mode Test Exclusion for FCC

According to KDB 447498 D01 v05r02 for standalone SAR evaluation the test exclusion power condition is given by

$$\frac{\text{max Power, } mW}{\text{test distance, } mm} \cdot \sqrt{f_{GHz}} \leq 3.0$$


for test separation distance $\leq 50\text{mm}$. For test separation distances $> 50\text{mm}$, the SAR test exclusion threshold is:

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot \frac{f[\text{MHz}]}{150} ,$$

$100 \text{ MHz} < f < 1500 \text{ MHz}$

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot 10 ,$$

$1500 \text{ MHz} < f < 6 \text{ GHz}$

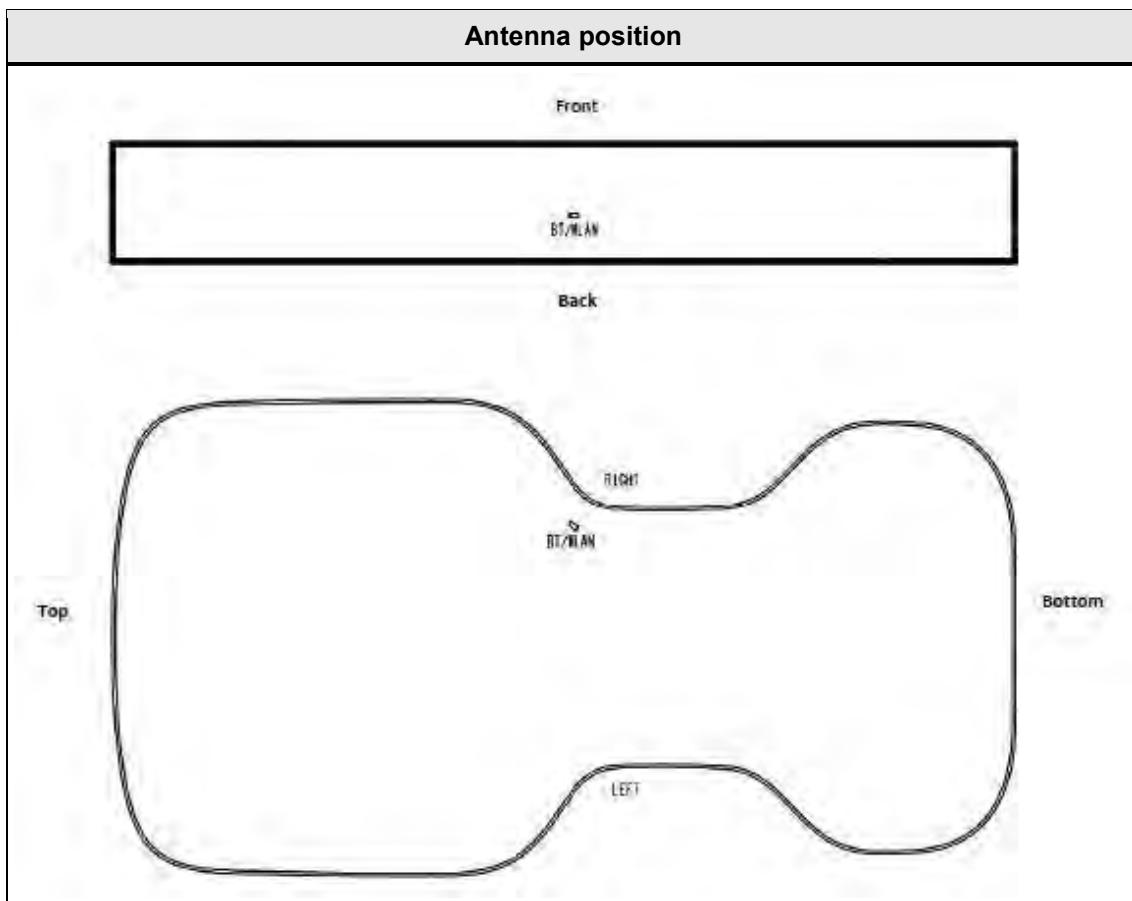

SAR Test Exclusion															
Mode	Pmax [mW]	An. t.	Reg.	EUT Edge											
				Top		Left		Right		Bottom		Back		Front	
				Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]
WLAN b	50.1	int	FCC	137	967	107	667	37	71	136	957	13	25	31.6	60
WLAN g	27.5	int	FCC	137	967	107	667	37	71	136	957	13	25	31.6	60
WLAN n	25.1	int	FCC	137	967	107	667	37	71	136	957	13	25	31.6	60
BT-BR	6.5	int	FCC	137	967	107	667	37	71	136	957	13	25	31.6	60
WLAN b	63.1	int	ISED	137	<303	107	<303	37	143	136	<303	13	11	31.6	95
WLAN g	34.7	int	ISED	137	<303	107	<303	37	143	136	<303	13	11	31.6	95
WLAN n	31.6	int	ISED	137	<303	107	<303	37	143	136	<303	13	11	31.6	95
BT-BR	8.1	int	ISED	137	<303	107	<303	37	143	136	<303	13	11	31.6	95

Comments: All bold Threshold values are above the limit and have to be measured

Date, Operator:	19.03.2019 , B. Pudell
------------------------	------------------------

1.8 Standalone Operational Mode Exemption limits for IC

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW
Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

1.9 SAR value estimation for multi-transmitter evaluation

According to KDB 447498 D01 v05r02 for standalone SAR evaluation the estimated SAR is given by

$$\frac{\text{max Power (including tune up tolerance), mW}}{\text{min. test separation distance, mm}} \cdot \sqrt{\frac{f_{GHz}}{x}} \leq 0.4 \frac{W}{kg}$$

x=7.5 for 1-g SAR, and x=18.75 for 10-g SAR, for test separation ≤ 50mm.

For test separation distance > 50mm, the estimated SAR value is 0.4 W/kg

1.10 Supported concurrent (multi-transmitter) operating modes

No multi-transmitter evaluation

1.11 Supported use cases

Use case	Distance to human body	corresponding test configuration
EUT placed at human body	0 mm (worst case)	body-supported device

1.12 Radio Test Modes

Mode	Settings
IEEE 802.11b	Mode = 802.11b Modulation = DSSS Duty cycle = 100% Data rate = 1 Mbps Power level = maximum Antenna = integrated
Remarks: result of SAR test exclusion	

1.13 Test Positions

Position	Description
FRONT-0MM	EUT top side directly touching the phantom.
BACK-0MM	EUT rear side directly touching the phantom.
Remarks: result of SAR test exclusion	

1.14 Test Equipment Used During Testing

SAR Measurement					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Stäubli Robot	Stäubli	RX90B L	EF00271	functional test	functional test
Stäubli Robot Controller	Stäubli	CS7MB	EF00272	functional test	functional test
DASY 5 Measurement Server	Schmid & Partner		EF00273	functional test	functional test
Control Pendant	Stäubli		EF00274	functional test	functional test
Dell Computer	Schmid & Partner	Intel	EF00275	functional test	functional test
Data Acquisition Electronics	Schmid & Partner	DAE3V1	EF00276	2018-09	2019-09
Dosimetric E-Field Probe	Schmid & Partner	EX3DV4	EF00826	2018-09	2019-09
System Validation Kit	Schmid & Partner	D2450V2	EF00284	2018-09	2021-09
Flat phantom	Schmid & Partner	V 4.4	EF00328	no calibration required	no calibration required
Oval flat phantom	Schmid & Partner	ELI 4	EF00289	functional test	functional test
Mounting Device	Schmid & Partner	V 3.1	EF00287	functional test	functional test
Millivoltmeter	Rohde & Schwarz	URV 5	EF00126	2016-08	2019-08
Power sensor	Rohde & Schwarz	NRV-Z2	EF00125	2017-07	2019-07
RF signal generator	Rohde & Schwarz	SMP 02	EF00165	2017-07	2019-07
Insertion unit	Rohde & Schwarz	URV5-Z4	EF00322	2017-08	2019-08
Directional Coupler	HP	HP 87300B	EF00288	functional test	functional test
Network Analyzer 300 kHz to 3 GHz	Agilent	8752C	EF00140	2018-07	2019-07
Dielectric Probe Kit	Agilent	85070C	EF00291	functional test	functional test
Dielectric Probe Kit	SPEAG	DAK-3.5	EF00945	2018-09	2019-09
DAK Measurement Software	SPEAG	DAKS	EF00965	-	-
Thermometer	LKM electronic GmbH	DTM3000	EF00967	2019-01	2020-01

2 Result Summary

447498 D01 General RF Exposure Guidance, RSS-102					
Product Specific Standard Section	Requirement – Test	Reference Method	Maximum SAR [W/kg]	Result	Remarks
447498 D01 General RF Exposure Guidance RSS-102 Section 3	Single-band conformity	KDB Publication 447498 KDB Publication 248227 KDB Publication 865664	0.058	PASS	
447498 D01 General RF Exposure Guidance RSS-102 Section 3	Multi-band conformity	KDB Publication 447498 KDB Publication 648474 KDB Publication 865664	N/A	N/R	No concurrent transmission modes
Remarks: The BT/WLAN module has a time-shared antenna, only one technology could transmit at the same time.					

3 Definitions

The specific absorption rate (SAR) is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ_t), expressed in watts per kilogram (W/kg)

$$\text{SAR} = \frac{dW}{dt} \frac{dm}{dV} = \frac{dW}{dt} \frac{dW}{\rho_t dV} = \sigma / \rho_t |E_t|^2$$

where

$$dW/dt = \int_V E J dV = \int_V \sigma E^2 dV$$

3.1 Controlled Exposure

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category and the general population/uncontrolled exposure limits apply to these devices.

3.2 Uncontrolled Exposure

In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on the risk of potential exposure and instructions on methods to minimize such exposure risks.

3.3 Localized SAR


Compliance with the localized SAR limits is demonstrated using the head and trunk limit because this SAR limit is only half the limbs limit value. The values are obtained by SAR measurements according to EN 62209-2.

4 Localized SAR Measurement Equipment


The measurements were performed with Dasy5 automated near-field scanning system comprised of high precision robot, robot controller, computer, e-field probe, probe alignment unit, phantoms, non-conductive phone positioned and software extension.

4.1 Complete SAR DASY5 Measurement System

Measurements are performed using the DASY5 automated assessment system made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland.

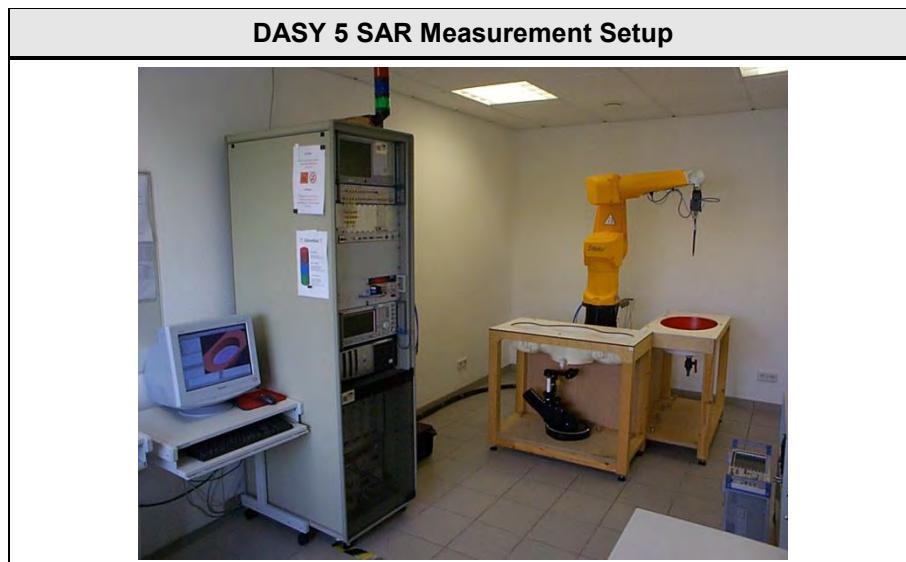

The following Diagram show the elements involved in the measurement setup.

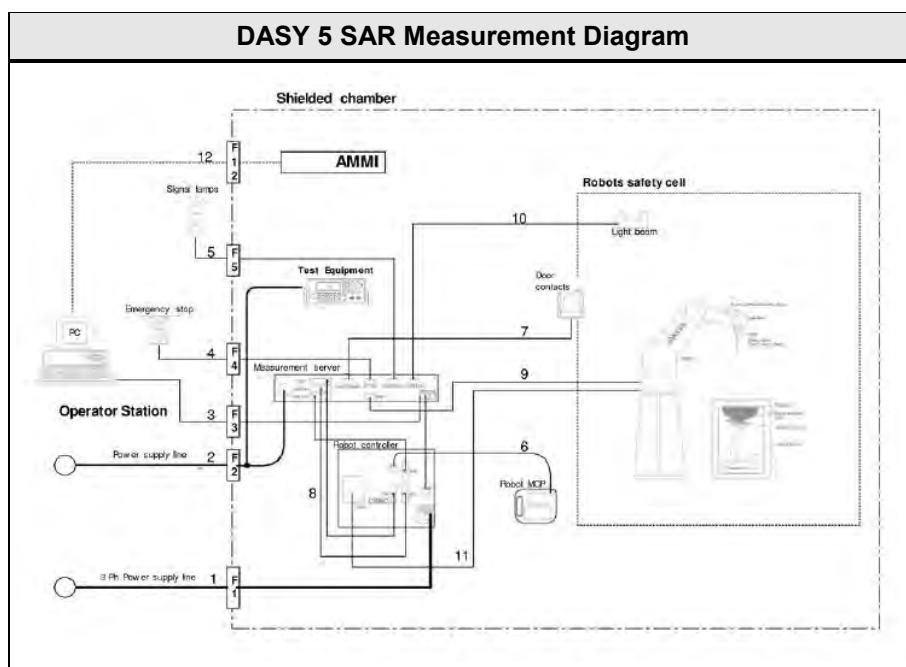

The DASY5 system for performing compliance tests consists of the following items:


DASY5 SAR Measurement System	
Device	Description:
RX90BL	A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software.
Probe Alignment Unit	A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
Teach Pendant	The Manual Control Pendant (MCP), also called the manual teach pendant, is the user interface to the robot. In DASY, it is used for certain installation and teach procedures
Signal Lamps	External warning lamp which indicates when the robot arm is powered-on and if the robot is under software control or in manual mode (controlled with the teach pendant).
DAE	The data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
E-Field Probes	Isotropic E-Field probe optimized and calibrated for E-field measurements in free space.
EOC	The electro-optical converter (EOC) performs the conversion between optical and electrical signals
Measurement Server	The functions of the measurement server is to perform the time critical task such as signal filtering, surveillance of the robot operation, fast movement interrupts.
Control Computer	A computer operating Windows 2000 or Windows NT with DASY 4 Software.
Control Software	DASY4 and SEMCAD post processing Software
SAM Twin Phantom	The SAM twin phantom enabling testing left-hand and right-hand usage.
Flat Phantom	Flat Phantom (only for body-mounted transceivers operating below 800 MHz).
Tissue simulating liquid	Tissue simulating liquid mixed according to the given recipes.
Device Holder	The device holder for handheld mobile phones.
System Validation Dipoles	System validation dipoles allowing to validate the proper functioning of the system.

4.2 Robot Arm

The DASY5 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France).

The RX robot series have many features that are important for our application:


- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

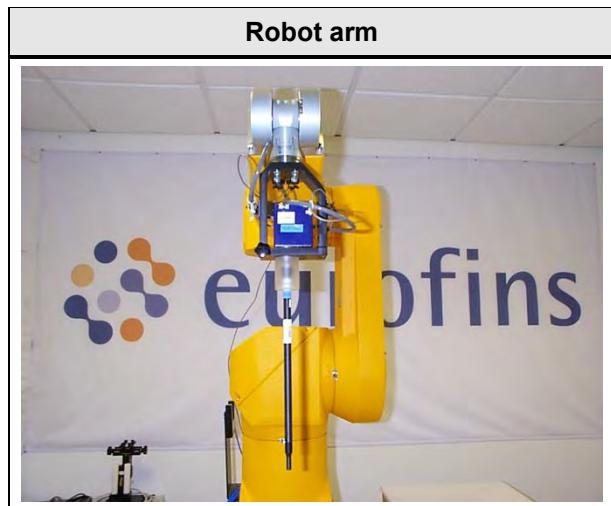

4.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

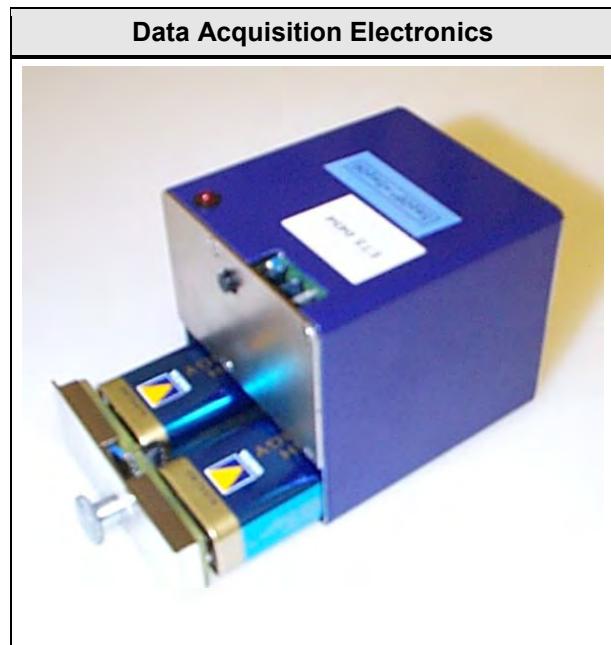

4.4 Isotropic E-Field Probe ≤ 3 GHz

Probe Specifications

Construction:

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

Calibration:

In air from 10 MHz to 2.5 GHz,
In brain and muscle simulating tissue at
Frequencies of 835MHz, 900MHz, 1800MHz,
1900 MHz and 2450 MHz

Frequency:

10MHz to > 3 GHz,
Linearity ± 0.2 dB (30MHz to 3GHz)

Directivity:

± 0.2 dB in HSL (rotation around probe axis)
 ± 0.4 dB in HSL (rotation normal to probe axis)

Dynamic Range:

5 μ W/g to > 100 mW/g

Linearity:

± 0.2 dB

Dimensions:

Overall Length: 330mm (Tip: 16mm),
Tip Diameter: 6.8mm (Body: 12mm),
Distance from probe tip to dipole centers: 2.7mm

Application:

General dosimetry up to 3 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms



4.5 Isotropic E-Field Probe ≤ 6 GHz

Probe Specifications

Construction:

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

Calibration:

In air from 10 MHz to 6 GHz,
In brain and muscle simulating tissue at
Frequencies of 5200, 5500, 5800

Frequency:

10MHz to 6GHz,
Linearity ± 0.2 dB (30MHz to 6GHz)

Directivity:

± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range:

10 μ W/g to > 100mW/g

Linearity:

± 0.2 dB

Dimensions:

Overall Length: 337mm (Tip: 20mm),
Tip Diameter: 2.5mm (Body: 12mm),
Distance from probe tip to dipole centers: 1mm

Application:

General dosimetry up to 6 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms


Isotropic E-Field Probe EX3DV4



4.6 Test phantom and positioner


The positioner and test phantoms are manufactured by SPEAG. The test phantoms are used for all tests i.e. for both validation testing and device testing. The positioner and test phantom conforms to the requirements of EN 62209 and IEEE 1528.

The SPEAG device holder was used to position the test device in all tests whilst a tripod was used to position the validation dipoles in the test arch.

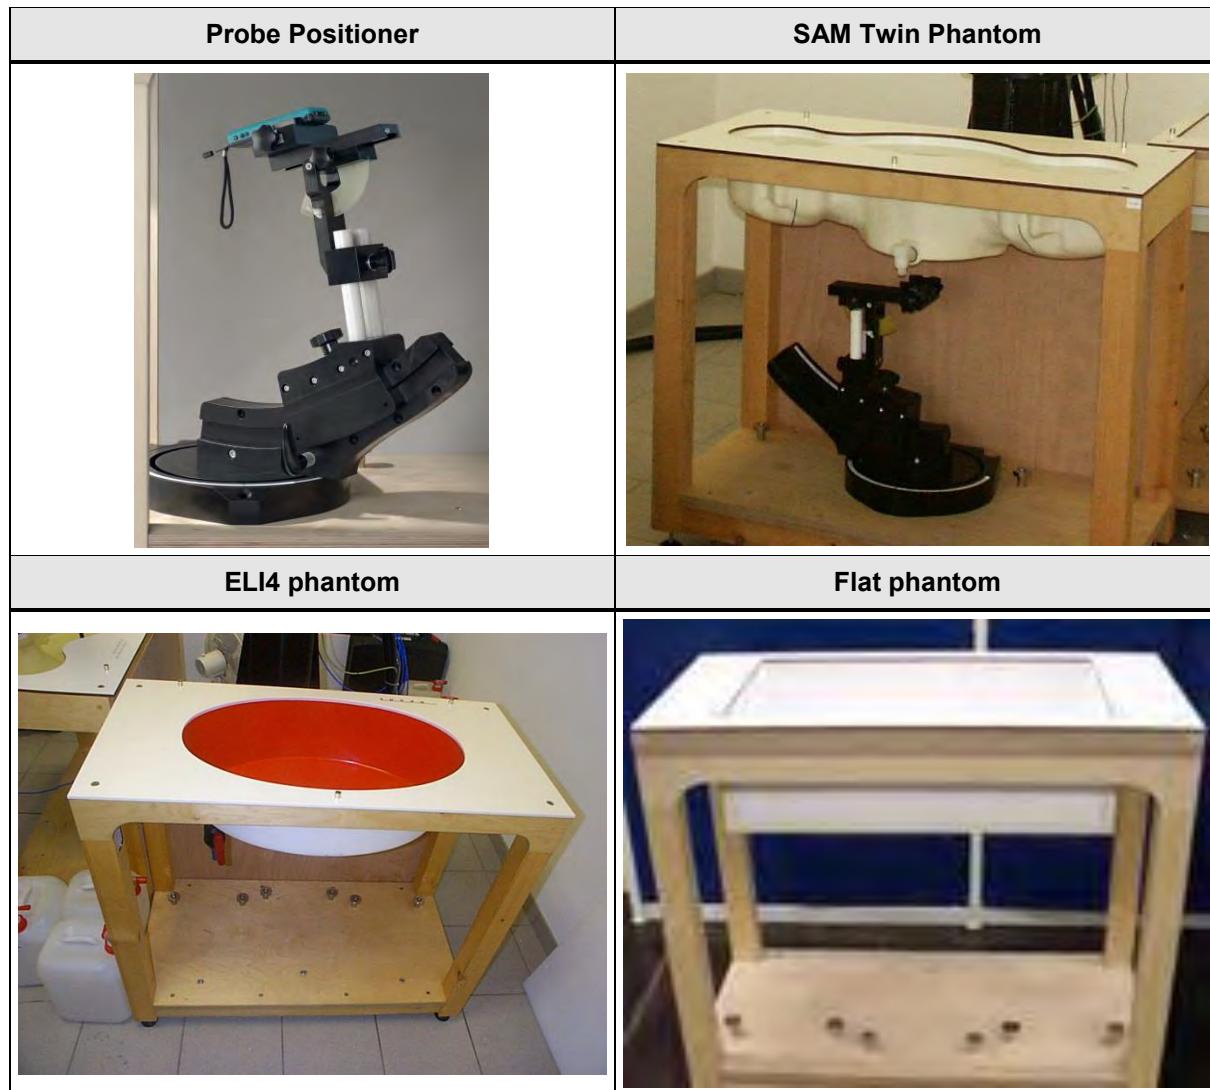

4.7 System Validation Dipoles

A set of calibration dipoles (D900V2, D1900V2, D2450V2, D5GHzV2) is included as a part of the SAR measurement setup. These are used for the validation of the test setup after its installation and prior to the EUT measurements. The calibration dipole is placed in the position normally occupied by the EUT. All calibration dipoles have the same height which allows an exact fitting below the center point of the test phantom. The dipole center is 10mm below the surface of the test phantom.

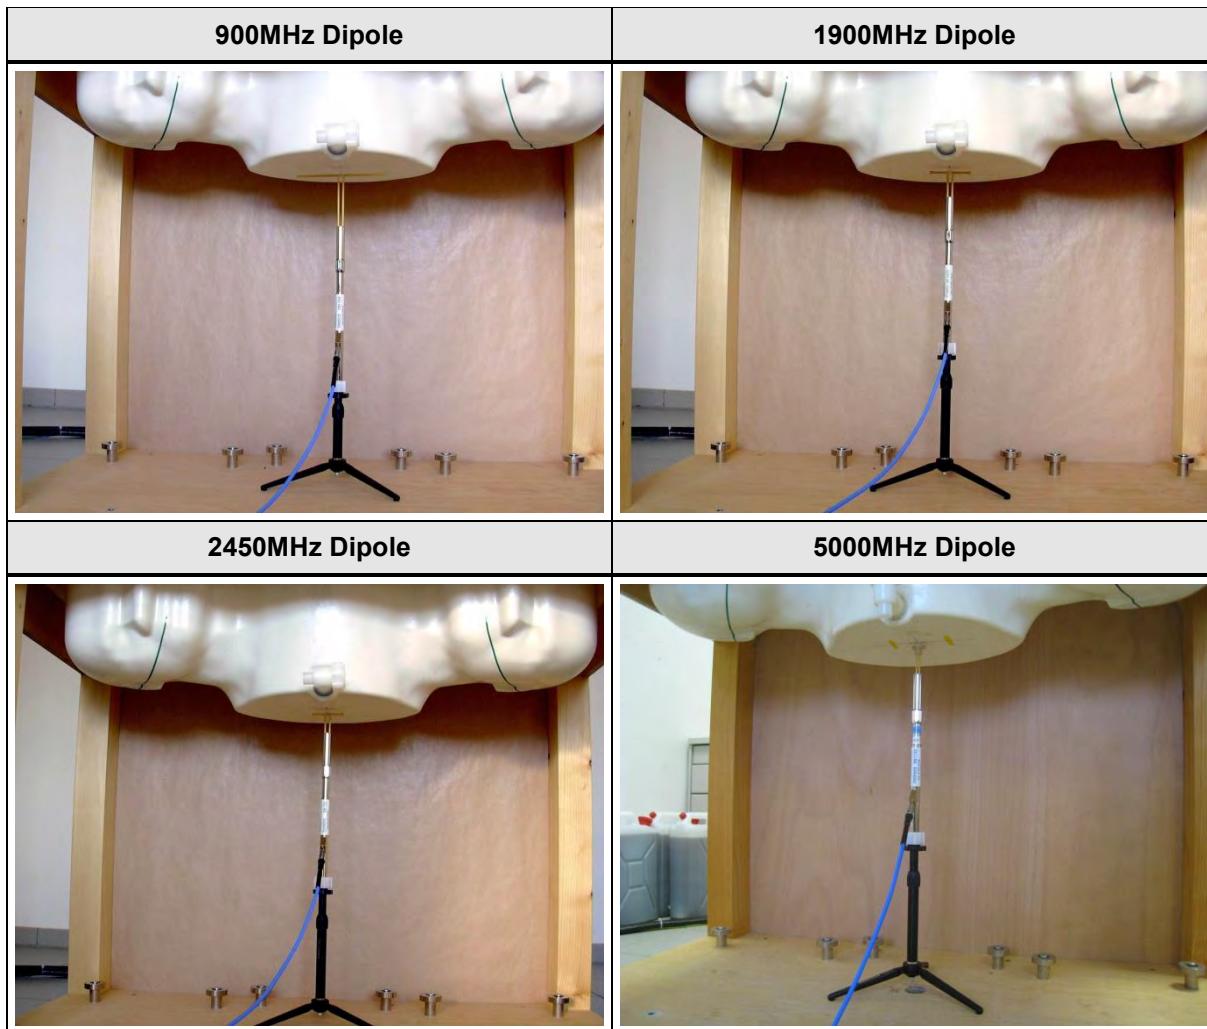

5 Single-band SAR Measurement

After successful completion of the tissue and system verification the SAR values of the EUT are measured according to the following description.

5.1 General measurement description

The measurement is performed for each frequency band of the device. If the width of the transmit frequency band exceeds 1% of its center frequency, than the channels at the lowest and highest frequencies should also be tested. Furthermore, if the width of the transmit band exceeds 10% of its center frequency the following formula is used to determine the number of channels:

$$N_C = 2 \cdot \text{roundup}[10 \cdot (f_{\text{high}} - f_{\text{low}})/f_c] + 1$$

First the device is tested on the center channel of each frequency band used by the device. An operation mode and configuration with maximum transmit power is established. If battery operated equipment is used, the batteries are fully charged.

SAR measurements are performed using the steps outlined in the next section for all relevant operational modes, EUT configurations and measurement positions.

For the condition (position, configuration, operational mode) that provides the highest spatial-average SAR value on the center channel, the other channels are also tested.

Additionally all other conditions where the spatial-average SAR value is within 3dB of the SAR limit are also tested on all determined test frequencies.

5.2 SAR measurement description

First the local SAR value at a test point within 10mm or less in normal direction from the inner surface of the phantom is measured. This SAR value is used to determine the measurement drift during SAR measurement.

Next an area scan is performed over an area larger than the projection of the EUT with antenna on the surface of the phantom with a spatial grid step of 10mm.

From the scanned SAR distribution the position of maximum SAR value is identified as well as any local SAR maxima within 2dB of the maximum value that are not within the zoom scan volume. (The additional peaks are only measured when the primary peak is within 2dB of the SAR limit.)



The zoom-scan volume constructed on the peak SAR position is scanned with a grid step of 5mm. The measured data are extracted and the local SAR value for each measurement point is calculated. The measured values are interpolated over a fine-mesh within the scan volume and the average SAR value over 10g mass is calculated.

At the end of the measurement the reference point measured at the beginning of the measurement is measured again and from the difference the drift is calculated.

5.3 Reference lines and points for Handsets


For all measurement positions of the EUT, the EUT has to be placed in a specific orientation with respect to the phantom. The orientation of the EUT relative to the phantom is defined by reference lines and points.

According to IEEE 1528, the reference lines and points shall be positioned at the EUT as shown in the following figure.

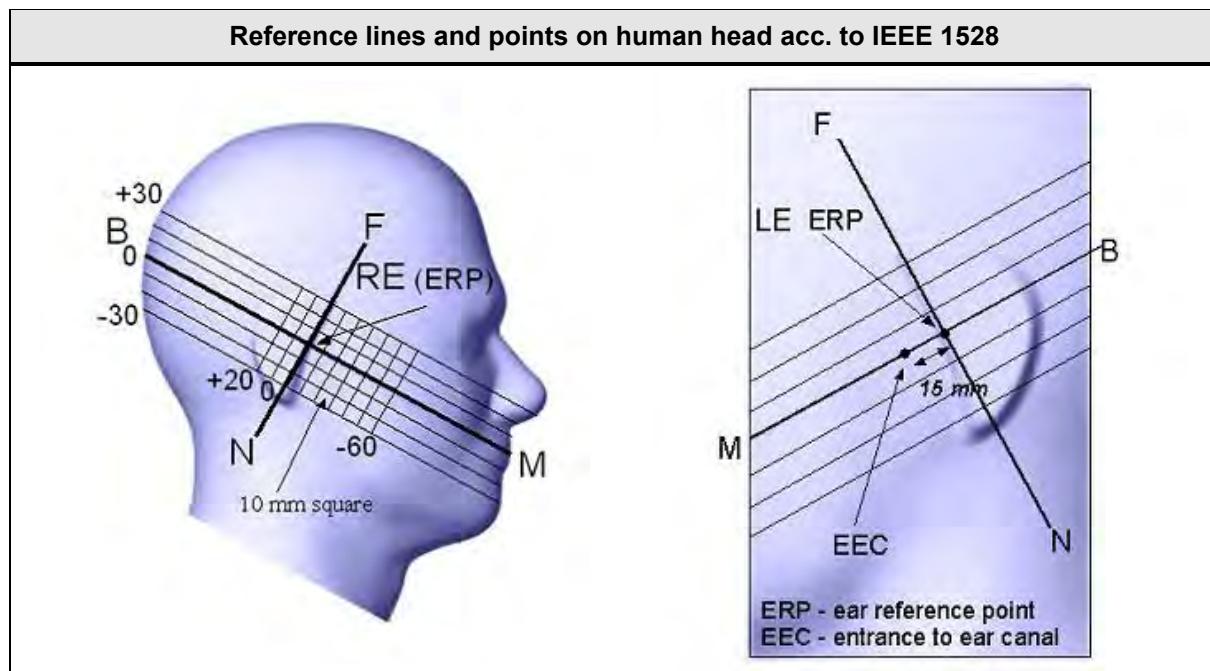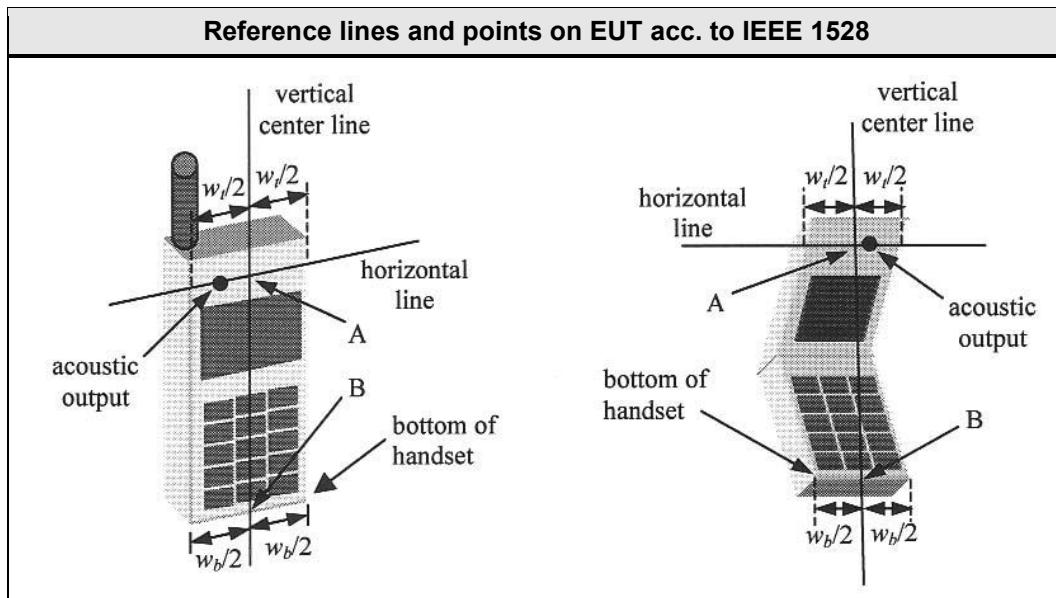

5.4 Test positions relative to the Head


Cheek position

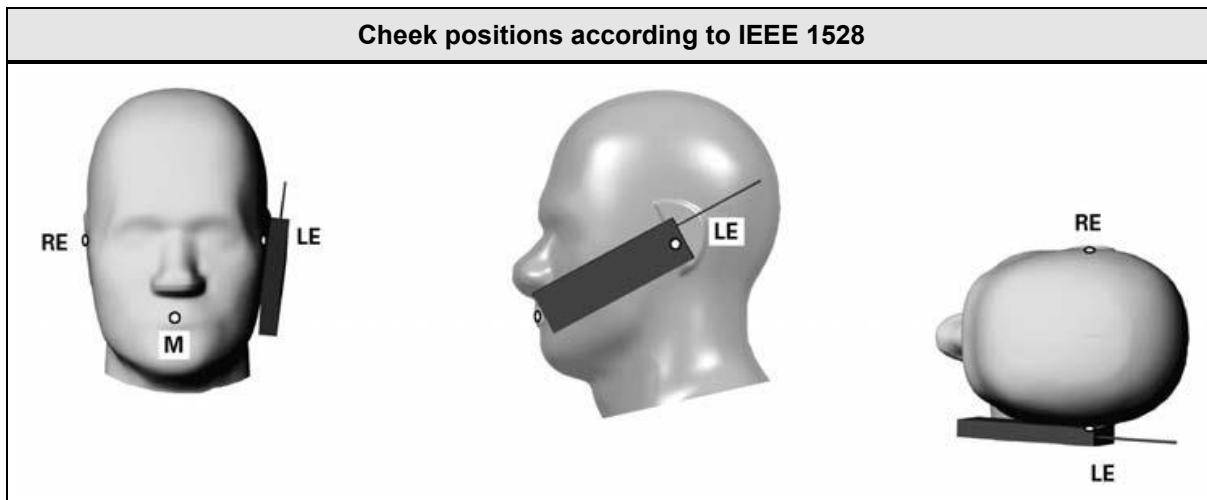

The handset is positioned close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom. Next the handset is translated towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.

While the handset is maintained in this plane, it is rotated around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane. Then it is rotated around the vertical centerline until the handset (horizontal line) is parallel to the N-F line. While the vertical centerline is maintained in the Reference Plane, point A is kept on the line passing through RE and LE, and the handset is maintained in contact with the pinna, the handset is rotated about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek.


Tilt position

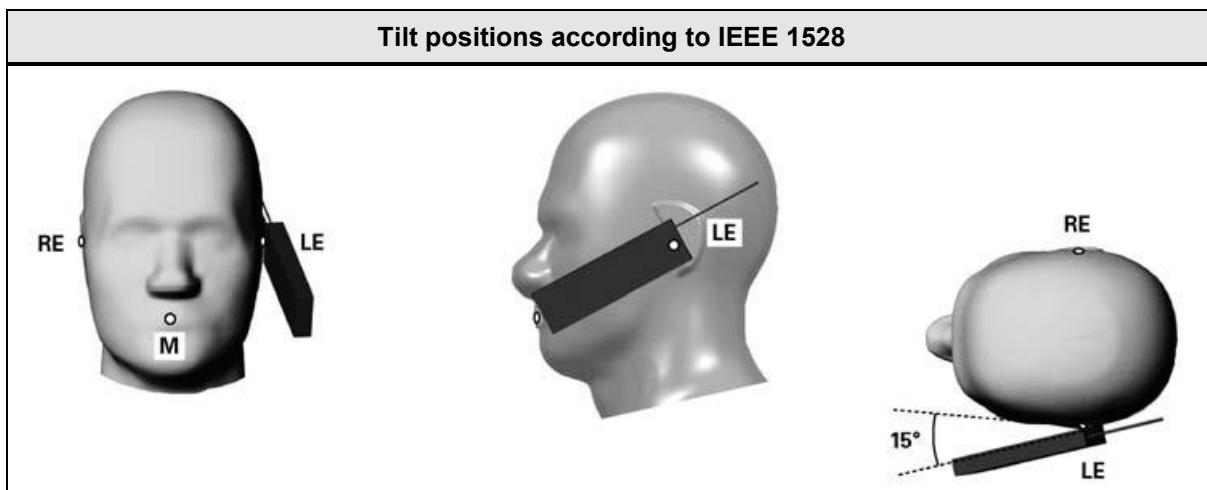

First the EUT is placed in the cheek position. Next the handset is moved away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°. Then the handset is rotated around the horizontal line by 15°.

The handset is moved towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head

5.5 Test positions relative to the human body

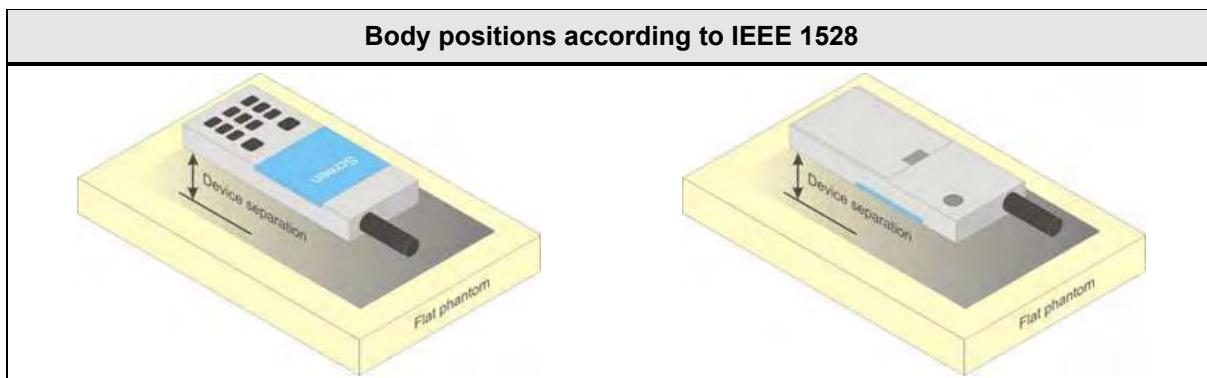

In body worn configuration the device is positioned parallel to the phantom surface with either top or bottom side of the EUT facing against the phantom.

The separation distance of the EUT is selected according to the use case of the EUT (e.g. with belt clip or holster).

5.6 Measurement Uncertainty

Measurement Uncertainty according to IEEE 1528							
Error Description	Uncertainty Value	Probability Distribution	Div.	c_i (1g)	c_i (10g)	Std. Unc. 1g	Std. Unc. 10g
Measurement System							
Probe Calibration	$\pm 6.55\%$	N	1	1	1	$\pm 6.55\%$	$\pm 6.55\%$
Axial Isotropy	$\pm 4.7\%$	R	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$
Hemispherical Isotropy	$\pm 9.6\%$	R	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$
Linearity	$\pm 4.7\%$	R	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$
Modulation Response	$\pm 2.4\%$	R	$\sqrt{3}$	1	1	$\pm 1.4\%$	$\pm 1.4\%$
System Detection Limits	$\pm 1.0\%$	R	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$
Boundary effects	$\pm 2.0\%$	R	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$
Readout Electronics	$\pm 0.3\%$	N	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$
Response Time	$\pm 0.8\%$	R	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$
Integration Time	$\pm 2.6\%$	R	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$
RF Ambient Noise	$\pm 3.0\%$	R	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$
RF Ambient Reflections	$\pm 3.0\%$	R	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$
Probe Positioner	$\pm 0.8\%$	R	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$
Probe Positioning	$\pm 6.7\%$	R	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$
Post processing	$\pm 4.0\%$	R	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$
Test Sample Related							
Device Holder	$\pm 3.6\%$	N	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$
Test Sample Positioning	$\pm 2.9\%$	N	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$
Power Scaling	$\pm 0\%$	R	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$
Power Drift	$\pm 5.0\%$	R	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$
Phantom and Setup Related							
Phantom Uncertainty	$\pm 7.9\%$	R	$\sqrt{3}$	1	1	$\pm 4.6\%$	$\pm 4.6\%$
SAR correction	$\pm 1.9\%$	R	$\sqrt{3}$	1	0.84	$\pm 1.1\%$	$\pm 0.9\%$
Liquid conductivity (measured)	$\pm 2.5\%$	N	1	0.78	0.71	$\pm 2.0\%$	$\pm 1.8\%$
Liquid permittivity (measured)	$\pm 2.5\%$	N	1	0.26	0.26	$\pm 0.1\%$	$\pm 0.1\%$
Temperature uncertainty - Conductivity	$\pm 5.2\%$	R	$\sqrt{3}$	0.78	0.71	$\pm 2.3\%$	$\pm 2.1\%$
Temperature uncertainty - Permittivity	$\pm 0.8\%$	R	$\sqrt{3}$	0.23	0.26	$\pm 0.1\%$	$\pm 0.1\%$
Combined Standard Uncertainty						$\pm 12.8\%$	$\pm 12.7\%$
Expanded Standard Uncertainty						$\pm 25.6\%$	$\pm 25.4\%$

Test Report No.: G0M-1812-7889-TFC093SR-V01

Measurement Uncertainty according to EN 62209-1							
Error Description	Uncertainty Value	Probability Distribution	Div.	c_i (1g)	c_i (10g)	Std. Unc. 1g	Std. Unc. 10g
Measurement System							
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Boundary effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Max. SAR Evaluation	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Test Sample Related							
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%
Phantom and Setup Related							
Phantom Uncertainty	±6.1%	R	$\sqrt{3}$	1	1	±3.5%	±3.5%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.6%	±0.7%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
Combined Standard Uncertainty						±11.4%	±11.3%
Expanded Standard Uncertainty						±22.9%	±22.7%

Measurement Uncertainty according to EN 62209-2							
Error Description	Uncertainty Value	Probability Distribution	Div.	c_i (1g)	c_i (10g)	Std. Unc. 1g	Std. Unc. 10g
Measurement System							
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Boundary effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%
Post processing	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%
Test Sample Related							
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
Phantom and Setup Related							
Phantom Uncertainty	±7.9%	R	$\sqrt{3}$	1	1	±4.6%	±4.6%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.1%	±0.1%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
Combined Standard Uncertainty						±12.8%	±12.7%
Expanded Standard Uncertainty						±25.6%	±25.4%

6 Test Conditions and Results

6.1 Recipes for Tissue Simulating Liquids

Body Tissue Simulating Liquids					
Ingredient	M 450-B weight (%)	M 900-B weight (%)	M 1800-B weight (%)	M 1950-A weight (%)	M 2450-B weight (%)
Water	46.21	50.75	70.17	69.79	68.64
Sugar	51.17	48.21			
Cellulose	0.18				
Salt	2.34		0.39	0.2	
Preventol	0.08	0.1			
DGBE			29.44	30	31.37
Head Tissue Simulating Liquids					
Ingredient	HSL 450-A weight (%)	HSL 900-B weight (%)	HSL 1800-F weight (%)	HSL 1950-B weight (%)	HSL 2450-B weight (%)
Water	38.91	40.29	55.24	55.41	55
Sugar	56.93	57.9			
Cellulose	0.25	0.24			
Salt	3.79	1.38	0.31	0.08	
Preventol	0.12	0.18			
DGBE			44.45	44.51	45

Water: deionized water, resistivity $\geq 16 \text{ M}\Omega$

Sugar: refined white sugar

Salt: pure NaCl

Cellulose: Hydroxyethyl-cellulose

Preservative: Preventol D-7


DGBE: Diethylenglycol-monobutyl ether

The parameters for the different frequencies are defined in the corresponding compliance standards (e.g., IEEE 1528-2003, IEC 62209-1)

The HBBL3-6GHz and MBBL 3-6 GHz liquids are direct from Speag.

6.2 Test Conditions and Results – Tissue Validation

Tissue Validation acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102					Verdict: PASS
Test according to measurement reference	Reference Method				
	865664 D01 SAR Measurement 100 MHz to 6 GHz				
Target Values					
Frequency [MHz]	Head		Body		Permitted tolerance [%]
	Relative dielectric constant ϵ_r	Conductivity σ [S/m]	Relative dielectric constant ϵ_r	Conductivity σ [S/m]	
150	52.3	0.76	61.9	0.80	$\leq \pm 5$
300	45.3	0.87	58.2	0.92	$\leq \pm 5$
450	43.5	0.87	56.7	0.94	$\leq \pm 5$
835	41.5	0.90	55.2	0.97	$\leq \pm 5$
900	41.5	0.97	55.0	1.05	$\leq \pm 5$
915	41.5	0.98	55.0	1.06	$\leq \pm 5$
1450	40.5	1.20	54.0	1.30	$\leq \pm 5$
1610	40.3	1.29	53.8	1.40	$\leq \pm 5$
1800 – 2000	40.0	1.40	53.3	1.52	$\leq \pm 5$
2450	39.2	1.80	52.7	1.95	$\leq \pm 5$
3000	38.5	2.40	52.0	2.73	$\leq \pm 5$
5200	36.0	4.66	49.0	5.30	$\leq \pm 5$
5500	35.6	4.96	48.6	5.65	$\leq \pm 5$
5800	35.3	5.27	48.2	6.00	$\leq \pm 5$

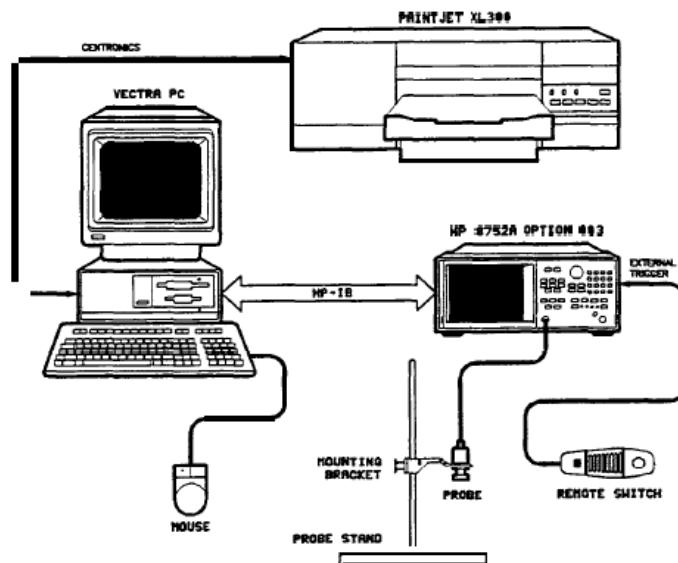Test setup

Test procedure

1. The dielectric probe kit is calibrated using the standards air, short circuit and deionized water
2. The tissue simulating liquid is measured using the dielectric probe
3. Target values are compared to the measurement values and deviations are determined


TISSUE VALIDATION

Room Temperature [°C]					23.9				
Tissue	Freq. [MHz]	Measured ϵ_r	Target ϵ_r *	$\Delta \epsilon_r$ [%] **	Measured σ [S/m]	Target σ [S/m] *	$\Delta \sigma$ [%] **	Operator	Date
MSL-2450	2450	50.853	52.70	-3.50	2.014	1.95	3.28	B. Pudell	19.03.2019
MSL-2450	2402	50.951	52.76	-3.43	1.941	1.90	2.16	B. Pudell	19.03.2019
MSL-2450	2412	50.954	52.75	-3.41	1.956	1.91	2.41	B. Pudell	19.03.2019
MSL-2450	2437	50.898	52.72	-3.46	1.994	1.94	2.78	B. Pudell	19.03.2019
MSL-2450	2441	50.884	52.71	-3.46	2.000	1.94	3.09	B. Pudell	19.03.2019
MSL-2450	2462	50.812	52.68	-3.55	2.031	1.97	3.10	B. Pudell	19.03.2019
MSL-2450	2480	50.755	52.66	-3.62	2.058	1.99	3.42	B. Pudell	19.03.2019

* The target tissue dielectric properties of the corresponding basic SAR measurement standard apply

** The deviation has to be 5% or lower

6.3 Test Conditions and Results – System Validation

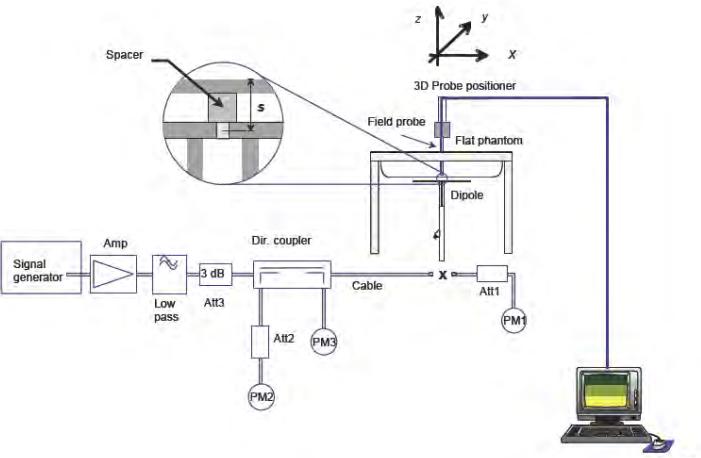System Validation acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102							Verdict: PASS		
Test according to measurement reference			Reference Method						
			865664 D01 SAR Measurement 100 MHz to 6 GHz / IEEE 1528						
Test frequency range			Tested frequencies						
			2450 MHz						
Test mode	unmodulated CW								
Target Values									
Frequency [MHz]	Target SAR value [W/kg (1g)]				Permitted tolerance [%]				
2450	13.2 @ 250mW				$\leq \pm 10$				
The target reference values are taken from the calibration sheets (see annex)									
Test setup									
 <small>IEC 247/05</small>									
Test procedure									
<ol style="list-style-type: none"> 1. The dipole antenna input power is set to 250mW 2. The reference dipole is positioned under the phantom 3. With the dipole antenna powered the SAR value is measured 4. The measured SAR values are compared to the target SAR values 									
SYSTEM VALIDATION – 1g									
Room Temperature [°C]	23.9								
TSL	Validation Dipole	Measurement Phantom	Validation Frequency [MHz]	Input Power [mW]	Measured SAR (1g) [W/kg]	Target SAR (1g) [W/kg] *	Δ SAR (1g) [%] **	Operator	Date
MSL-2450	D2450V2	ELI 4	2450	250 mW	52.8	50.9	3.73	B. Pudell	19.03.2019

Test Report No.: G0M-1812-7889-TFC093SR-V01

6.4 Test Conditions and Results – Standalone SAR Measurement

Standalone SAR acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102		Verdict: PASS
Test according to measurement reference		Reference Method
865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102 Issue 5		
Room temperature		22.5 – 24.5 °C
Liquid depth		15.5 cm
Environment		general public
Limits		
Region		Occupational SAR values [W/kg]
Whole body average SAR		0.4
Localized SAR (Head and trunk) SAR averaging mass = 1g		8
Localized SAR (Limbs) SAR averaging mass = 10g		20
General public SAR values [W/kg]		
		0.08
		1.6
		4

SINGLE TRANSMITTER SAR EVALUATION – 1g											
Room Temperature [°C]						23.9					
Mode	Position	TSL	Phant.	Ch.	Freq. [MHz]	Power Drift [dB]	Measured SAR (1g) [W/kg]	Power Scaling Factor*	Reported SAR (1g) [W/kg] **	Operator	Date
b	Back	MSL-2450	ELI 4	1	2412	-0.17	0.004	1.03	0.004	B. Pudell	19.03.2019
b	Front	MSL-2450	ELI 4	1	2412	-0.19	0.056	1.03	0.058	B. Pudell	19.03.2019
g	Front	MSL-2450	ELI 4	1	2412	-0.16	0.021	1.04	0.022	B. Pudell	19.03.2019
n	Front	MSL-2450	ELI 4	1	2412	-0.13	0.013	1.04	0.014	B. Pudell	19.03.2019

* Scaling factor = Max. conducted power (including tune up tolerance) / measured conducted power

** Reported SAR = Measured SAR * Scaling Factor

According to KDB 865664 D02 v01r01 only the SAR plots for the highest SAR results for each EUT configuration and operating condition are given in the "SAR Results" part of the report.

6.5 Test Conditions and Results – Multi-transmitter SAR Result

None

ANNEX A Calibration Documents



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Eurofins**

Certificate No: **DAE3-522_Sep18**

CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 522**

Calibration procedure(s) **QA CAL-06.v29**
 Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **September 17, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	03-Sep-18 (No:23488)	Sep-19
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	04-Jan-18 (in house check)	In house check: Jan-19
Calibrator Box V2.1	SE UMS 006 AA 1002	04-Jan-18 (in house check)	In house check: Jan-19

Calibrated by: **Dominique Steffen** **Laboratory Technician**

Approved by: **Sven Kühn** **Deputy Manager**

Issued: September 17, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = $6.1\mu\text{V}$, full range = $-100...+300\text{ mV}$

Low Range: 1LSB = 61nV , full range = $-1.....+3\text{mV}$

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$404.479 \pm 0.02\% \text{ (k=2)}$	$404.153 \pm 0.02\% \text{ (k=2)}$	$404.993 \pm 0.02\% \text{ (k=2)}$
Low Range	$3.95965 \pm 1.50\% \text{ (k=2)}$	$3.93902 \pm 1.50\% \text{ (k=2)}$	$3.99701 \pm 1.50\% \text{ (k=2)}$

Connector Angle

Connector Angle to be used in DASY system	$327.0^\circ \pm 1^\circ$
---	---------------------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range		Reading (µV)	Difference (µV)	Error (%)
Channel X	+ Input	200000.93	2.49	0.00
Channel X	+ Input	20003.02	1.18	0.01
Channel X	- Input	-20000.43	1.21	-0.01
Channel Y	+ Input	200000.57	2.19	0.00
Channel Y	+ Input	20001.94	0.18	0.00
Channel Y	- Input	-20002.78	-1.04	0.01
Channel Z	+ Input	199997.72	-1.25	-0.00
Channel Z	+ Input	20000.11	-1.62	-0.01
Channel Z	- Input	-20003.62	-1.73	0.01

Low Range		Reading (µV)	Difference (µV)	Error (%)
Channel X	+ Input	2000.45	-0.77	-0.04
Channel X	+ Input	201.58	0.14	0.07
Channel X	- Input	-197.77	0.63	-0.32
Channel Y	+ Input	2000.43	-0.72	-0.04
Channel Y	+ Input	200.83	-0.57	-0.28
Channel Y	- Input	-197.79	0.68	-0.34
Channel Z	+ Input	2001.66	0.63	0.03
Channel Z	+ Input	200.31	-1.07	-0.53
Channel Z	- Input	-200.03	-1.38	0.70

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-3.80	-5.29
	-200	6.14	4.50
Channel Y	200	-2.04	-2.59
	-200	1.39	1.67
Channel Z	200	15.93	16.20
	-200	-17.00	-17.81

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	-0.12	-4.75
Channel Y	200	7.03	-	1.00
Channel Z	200	8.67	5.84	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15771	17023
Channel Y	15724	15708
Channel Z	16045	14942

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input $10M\Omega$

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	0.18	-2.21	2.02	0.68
Channel Y	-1.24	-2.88	0.22	0.58
Channel Z	-0.67	-2.91	1.12	0.63

6. Input Offset Current

Nominal Input circuitry offset current on all channels: $<25fA$

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

DAE REPAIR REPORT – SPEAG Production Center

PRODUCT	DAE3 - Data Acquisition Electronics				
SERIAL Nr.:	SN 522		IN DATE:	3-Sep-2018	
CUSTOMER:	Eurofins				
DAE REPAIR					
MATERIAL	WORK DESCRIPTION				
Emergency stop:	fixed <input type="radio"/>	exchanged <input type="radio"/>	6 new magnets <input type="radio"/>	hours	
DAE Connector:	fixed <input type="radio"/>	exchanged <input checked="" type="radio"/> <input type="radio"/>	0.50 hours	
DAE Battery Cover:	fixed <input type="radio"/>	exchanged <input type="radio"/> <input type="radio"/>	hours	
AD Converter Print:	fixed <input type="radio"/>	exchanged <input type="radio"/> <input type="radio"/>	hours	
Battery Connector:	fixed <input type="radio"/>	exchanged <input type="radio"/> <input type="radio"/>	hours	
Battery Con. PCB:	fixed <input type="radio"/>	exchanged <input type="radio"/> <input type="radio"/>	hours	
Modification B-C	fixed <input type="radio"/>	exchanged <input type="radio"/> <input type="radio"/>	hours	
Logic PCB:	fixed <input type="radio"/>	exchanged <input type="radio"/> <input type="radio"/>	hours	
Input PCB:	fixed <input type="radio"/>	exchanged <input type="radio"/> <input type="radio"/>	hours	
Analysis:					
Final Assembly:					
Total hours	2.00 hours				
COMMENTS:	This DAE was returned to SPEAG for calibration. The initial inspection found one broken pin in the DAE probe connector. Since there was only a single pin broken and the other pins remained straight, we consider this breakage a fatigue breakage. The connector has therefore been replaced for free. The DAE will be newly calibrated after this repair.				
CONDUCTED BY:			APPROVED BY:		
DATE:	13-Sep-2018		DATE:	13-Sep-2018	
REPAIR COST:					
MATERIAL COST:	free	<input type="radio"/>	USD	<input type="radio"/>	Euro
REPAIR:	free	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
TOTAL COST:	free	QUOTATION #:			
APPROVED BY:					
DATE:	13-Sep-2018				

IMPORTANT NOTICE

USAGE OF THE DAE 3

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

Battery Exchange: The battery cover of the DAE3 unit is connected to a fragile 3-pin battery connector. Customer is responsible to apply outmost caution not to bend or damage the connector when changing batteries.

Shipping of the DAE: Before shipping the DAE to SPEAG for calibration the customer shall remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts transportation. The package shall be marked to indicate that a fragile instrument is inside.

E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent Estop failure, Customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 M Ω is given in the corresponding configuration file.

Important Note:

Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

Important Note:

Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

Important Note:

To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Eurofins**

Certificate No: **EX3-3893_Sep18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3893**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
 QA CAL-25.v6
 Calibration procedure for dosimetric E-field probes**

Calibration date: **September 20, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Michael Weber	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 20, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM x,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORM x,y,z
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). $NORM_{x,y,z}$ are only intermediate values, i.e., the uncertainties of $NORM_{x,y,z}$ does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- $NORM(f)_{x,y,z} = NORM_{x,y,z} * \text{frequency_response}$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCP_{x,y,z}$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}$; $VR_{x,y,z}$: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORM_{x,y,z} * ConvF$ whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the $NORM_x$ (no uncertainty required).

Probe EX3DV4

SN:3893

Manufactured: October 9, 2012
Calibrated: September 20, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.55	0.41	0.32	$\pm 10.1 \%$
DCP (mV) ^B	103.1	101.4	100.3	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	175.4	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		190.9	
		Z	0.0	0.0	1.0		196.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
300	45.3	0.87	12.19	12.19	12.19	0.08	1.20	± 13.3 %
450	43.5	0.87	11.33	11.33	11.33	0.14	1.20	± 13.3 %
750	41.9	0.89	10.63	10.63	10.63	0.49	0.80	± 12.0 %
900	41.5	0.97	9.99	9.99	9.99	0.46	0.85	± 12.0 %
1750	40.1	1.37	9.08	9.08	9.08	0.35	0.88	± 12.0 %
1810	40.0	1.40	8.79	8.79	8.79	0.28	0.90	± 12.0 %
1950	40.0	1.40	8.35	8.35	8.35	0.35	0.84	± 12.0 %
2150	39.7	1.53	8.33	8.33	8.33	0.29	0.87	± 12.0 %
2450	39.2	1.80	7.49	7.49	7.49	0.38	0.84	± 12.0 %
2600	39.0	1.96	7.38	7.38	7.38	0.43	0.81	± 12.0 %
5200	36.0	4.66	5.19	5.19	5.19	0.40	1.80	± 13.1 %
5500	35.6	4.96	5.05	5.05	5.05	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.89	4.89	4.89	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
300	58.2	0.92	11.71	11.71	11.71	0.05	1.20	± 13.3 %
450	56.7	0.94	11.55	11.55	11.55	0.08	1.20	± 13.3 %
750	55.5	0.96	10.54	10.54	10.54	0.39	0.93	± 12.0 %
900	55.0	1.05	10.17	10.17	10.17	0.41	0.90	± 12.0 %
1750	53.4	1.49	8.66	8.66	8.66	0.32	0.96	± 12.0 %
1810	53.3	1.52	8.47	8.47	8.47	0.33	0.98	± 12.0 %
1950	53.3	1.52	8.38	8.38	8.38	0.39	0.85	± 12.0 %
2150	53.1	1.66	8.20	8.20	8.20	0.40	0.85	± 12.0 %
2450	52.7	1.95	7.88	7.88	7.88	0.32	0.85	± 12.0 %
2600	52.5	2.16	7.55	7.55	7.55	0.31	0.97	± 12.0 %
5200	49.0	5.30	4.59	4.59	4.59	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.15	4.15	4.15	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.23	4.23	4.23	0.50	1.90	± 13.1 %


^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


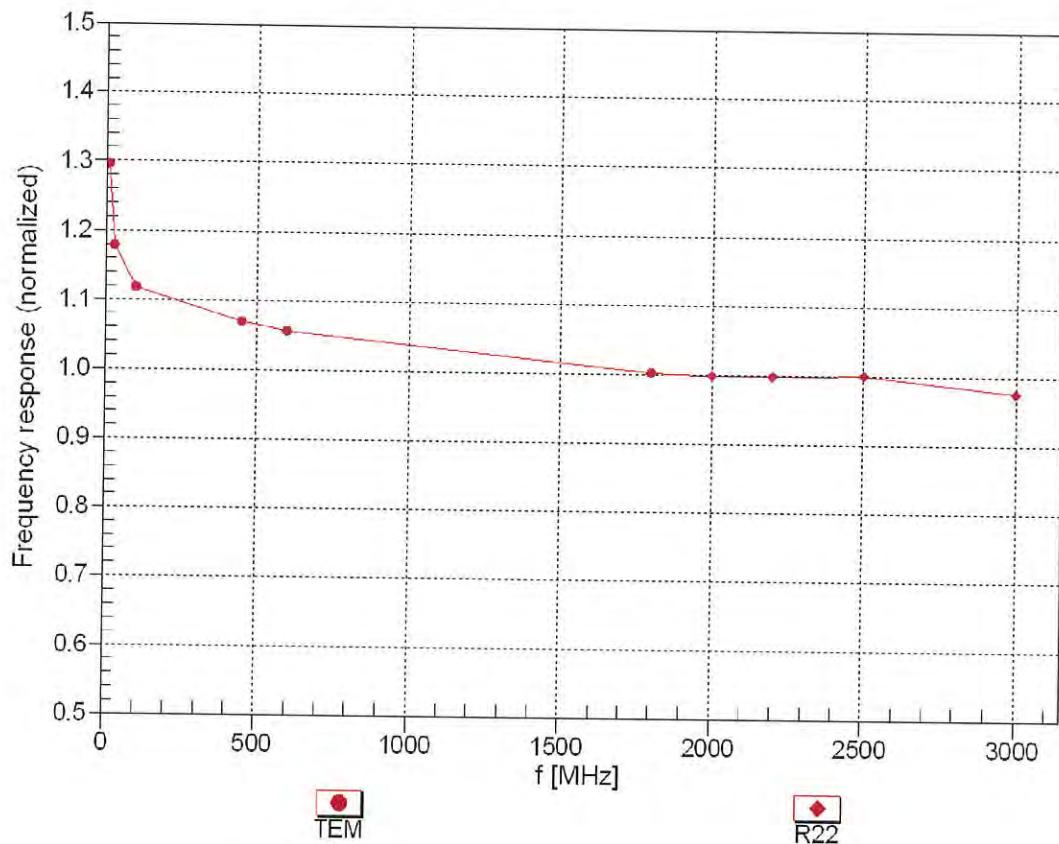


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz, TEM

f=1800 MHz, R22

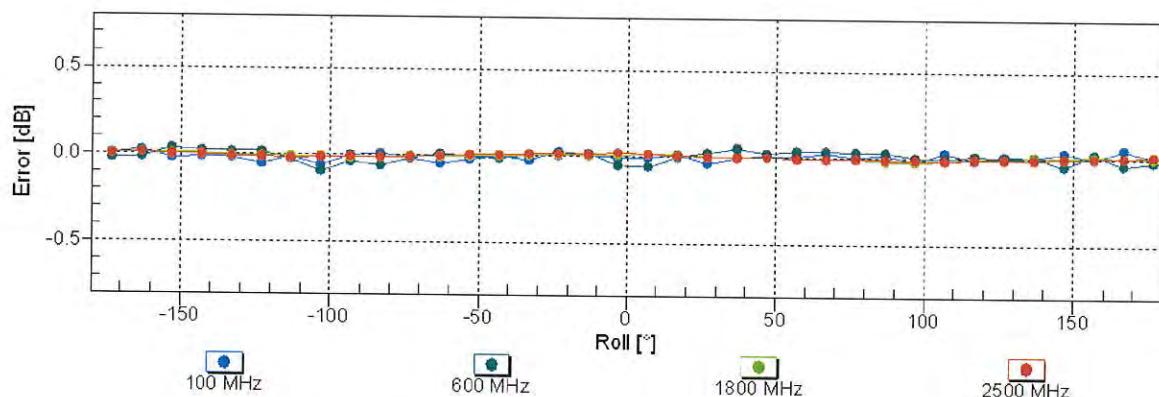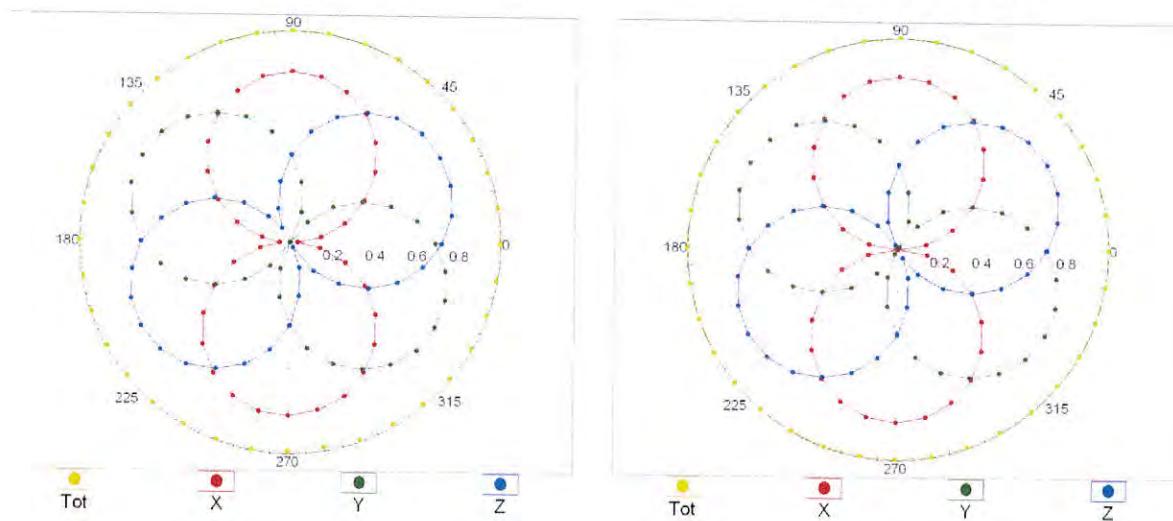


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

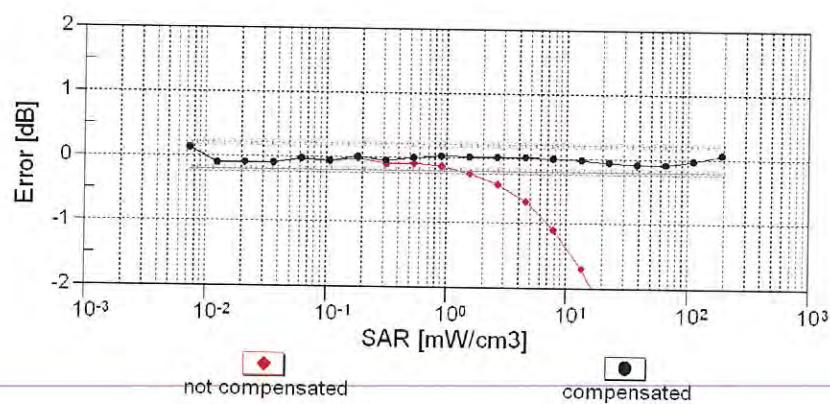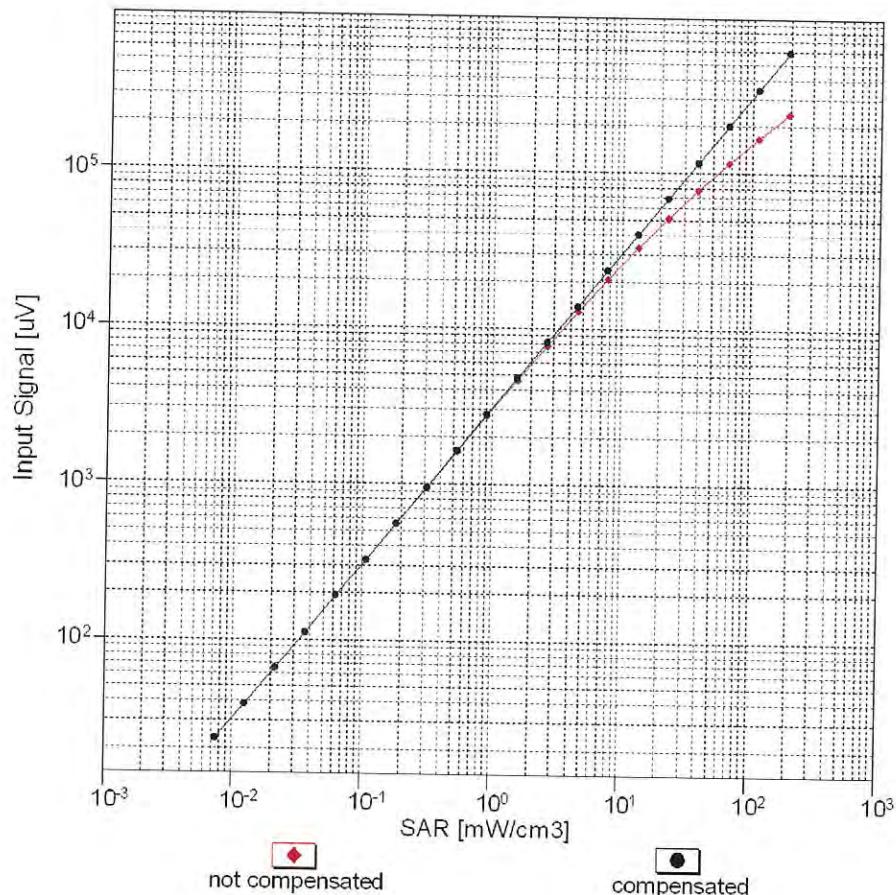


Uncertainty of Linearity Assessment: $\pm 0.6\% (k=2)$

Conversion Factor Assessment

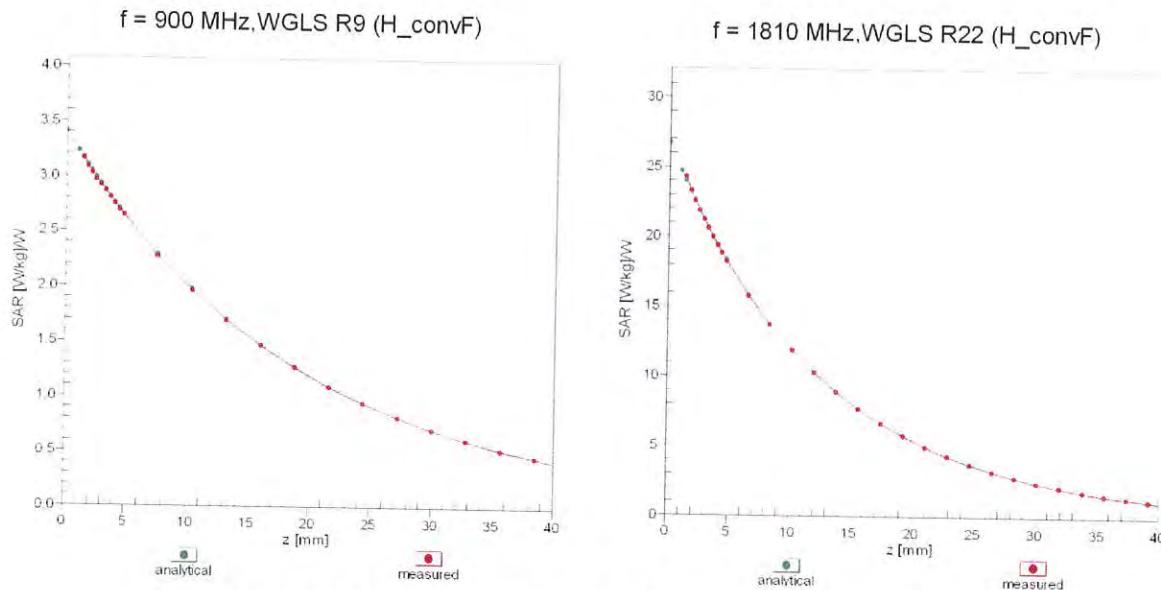

Deviation from Isotropy in Liquid Error (ϕ, θ), $f = 900$ MHz

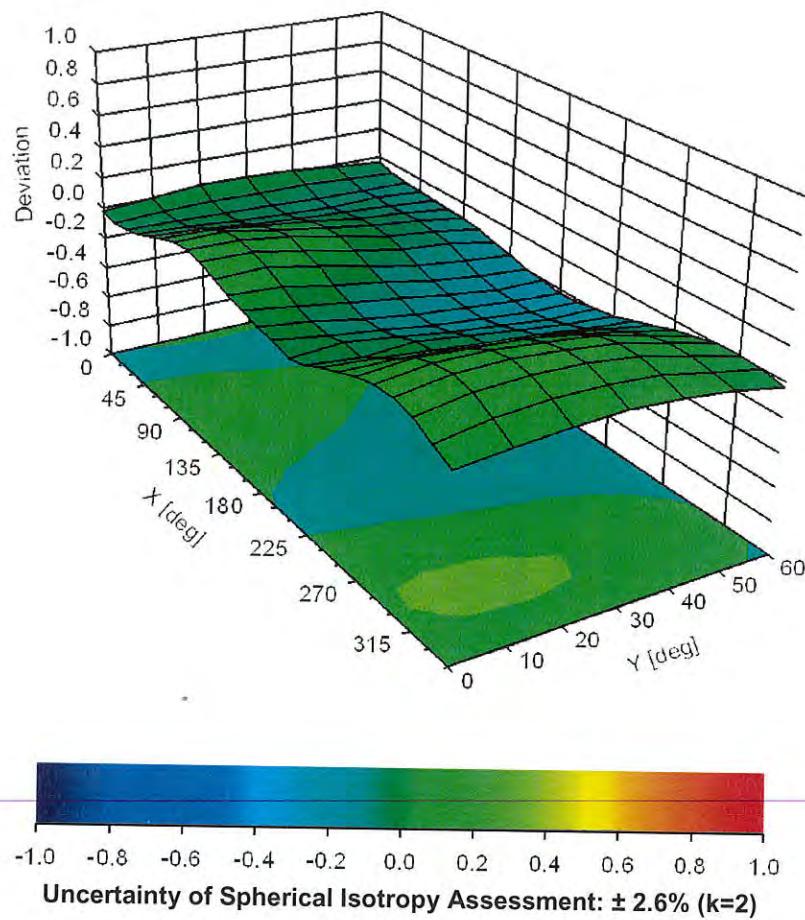

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-23.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Eurofins**

Certificate No: **D2450V2-722_Sep18**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:722**

Calibration procedure(s) **QA CAL-05.v10**
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **September 04, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name	Function	Signature
	Michael Weber	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Issued: September 4, 2018



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSI	tissue simulating liquid
ConvF	sensitivity in TSI / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSI:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSI parameters:* The measured TSI parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.7 ± 6 %	1.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.3 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.19 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.8 ± 6 %	2.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.9 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.0 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.5 \Omega + 8.9 j\Omega$
Return Loss	- 20.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.7 \Omega + 10.9 j\Omega$
Return Loss	- 18.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 16, 2002

DASY5 Validation Report for Head TSL

Date: 04.09.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:722

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.8 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 26.8 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.19 W/kg

Maximum value of SAR (measured) = 21.0 W/kg

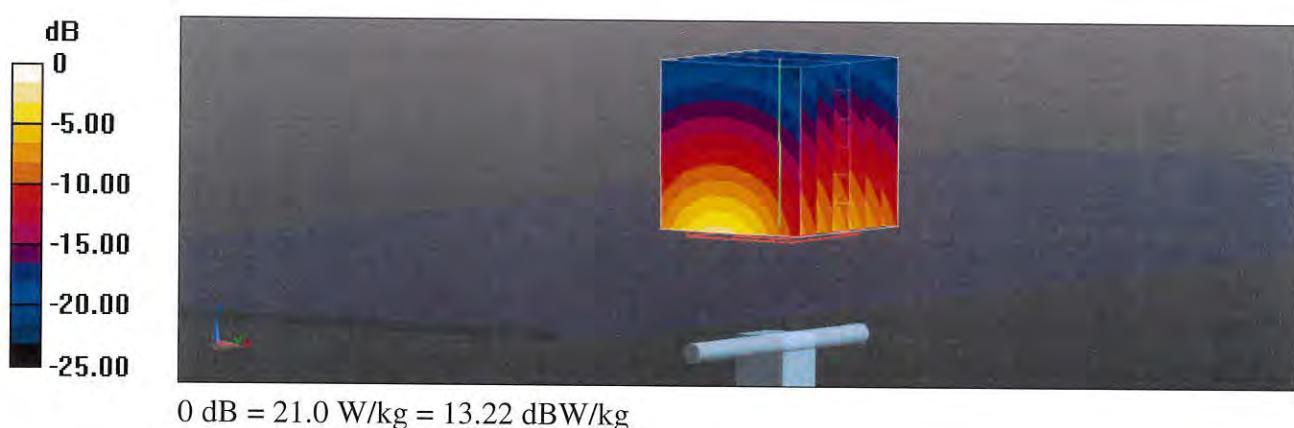

Impedance Measurement Plot for Head TSL

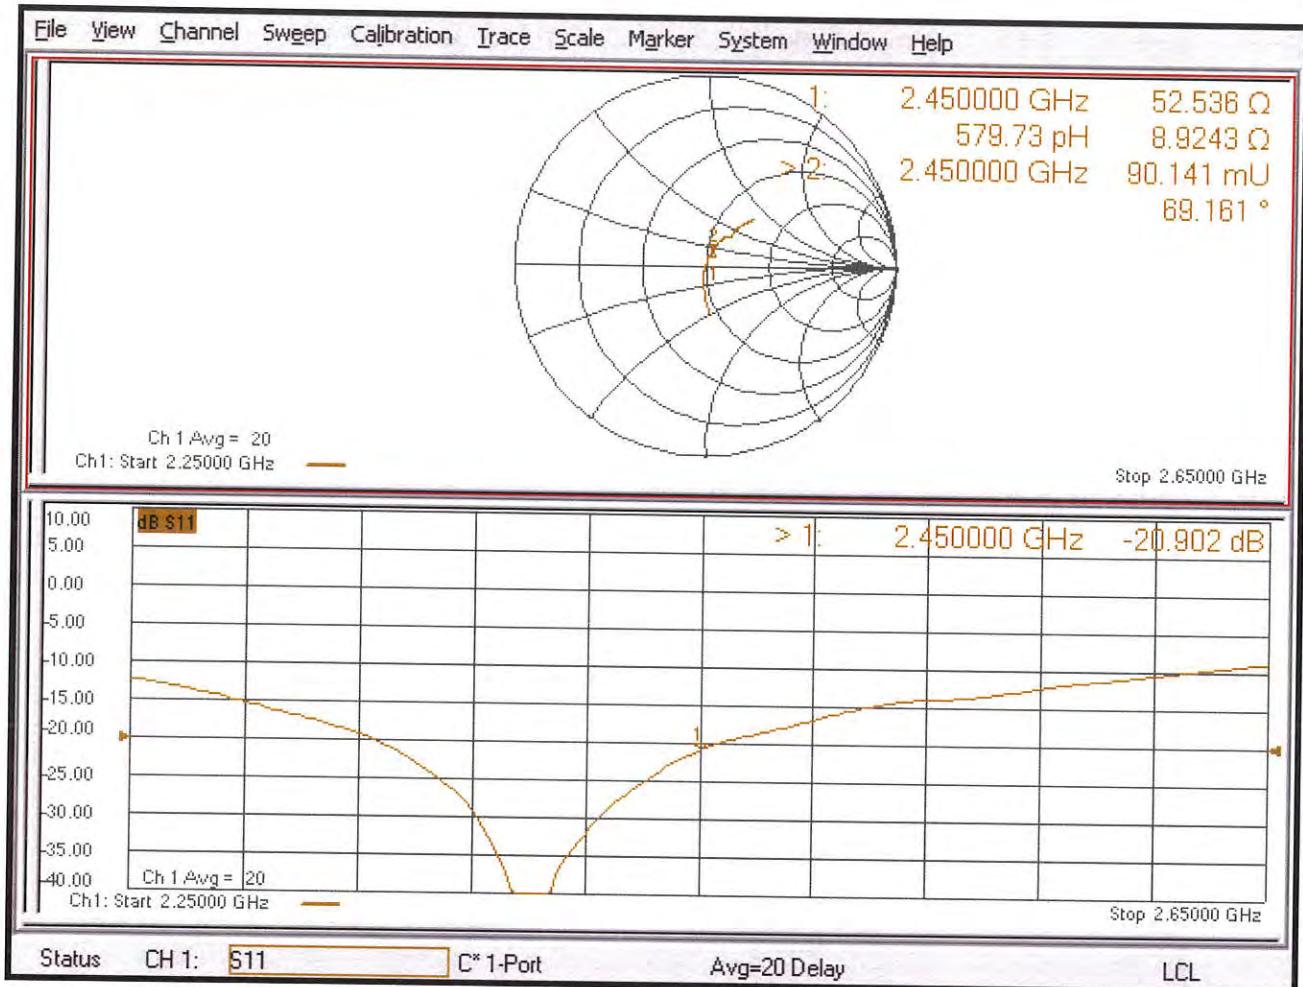

DASY5 Validation Report for Body TSL

Date: 04.09.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:722

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.01, 8.01, 8.01) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.4 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.08 W/kg

Maximum value of SAR (measured) = 20.9 W/kg

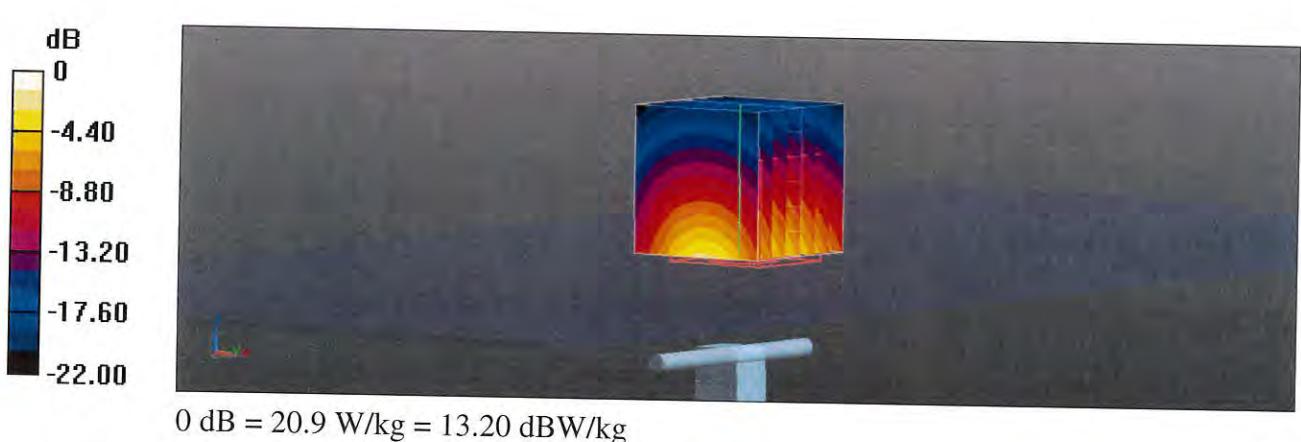

Impedance Measurement Plot for Body TSL

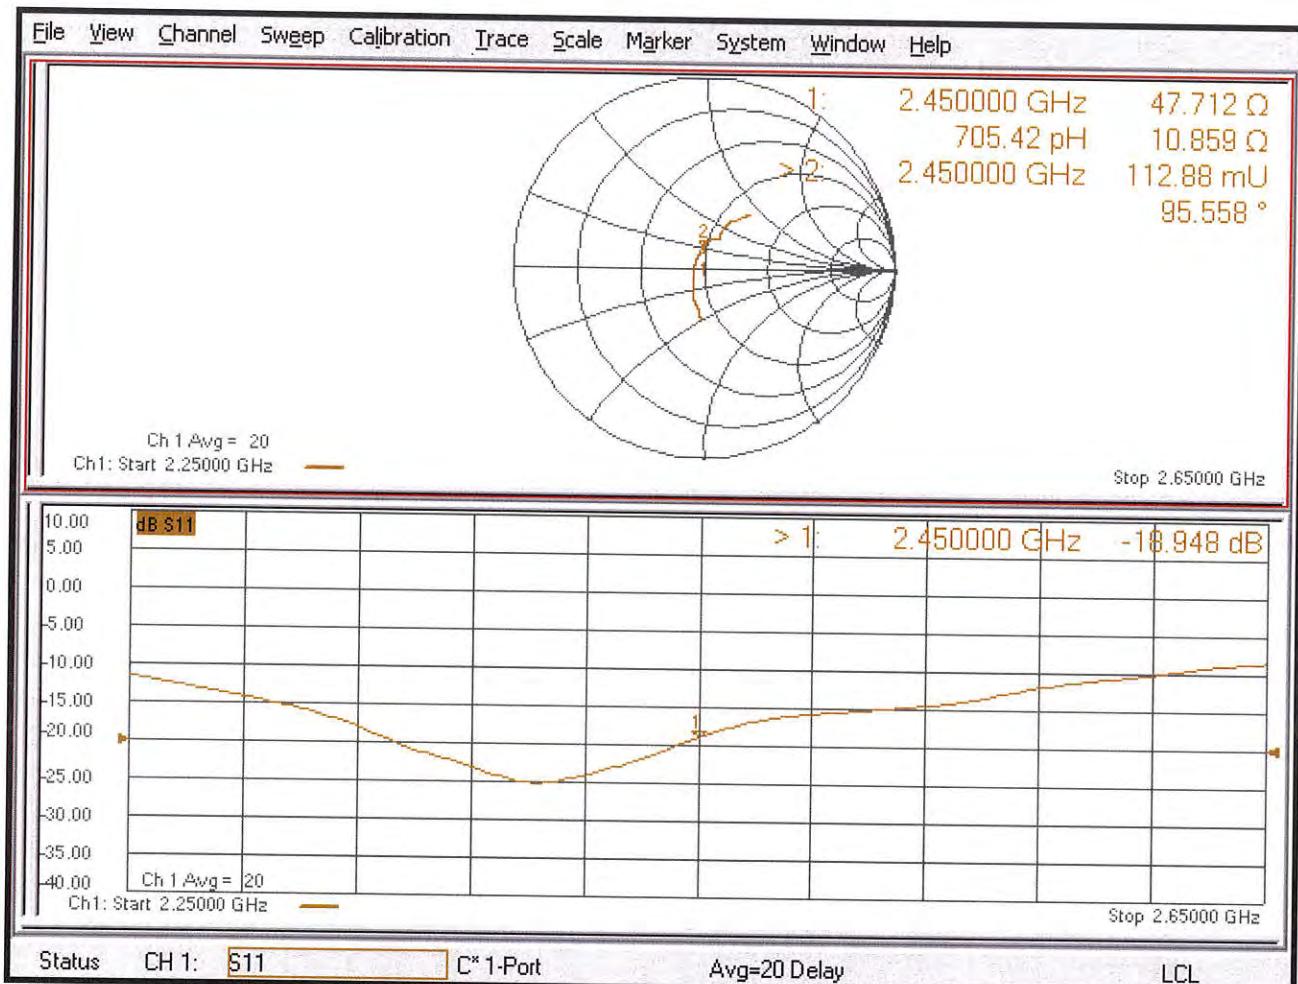

ANNEX B System Validation Reports

Test Laboratory: Eurofins Product Service GmbH**Dipol Valid.2450 (m)_250mW ELI4_19.03.2019****DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 722**

Communication System: UID 0 - n/a, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 2.014$ S/m; $\epsilon_r = 50.853$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.88, 7.88, 7.88); Calibrated: 2018-09-20;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2018-09-17
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.8 W/kg

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.914 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

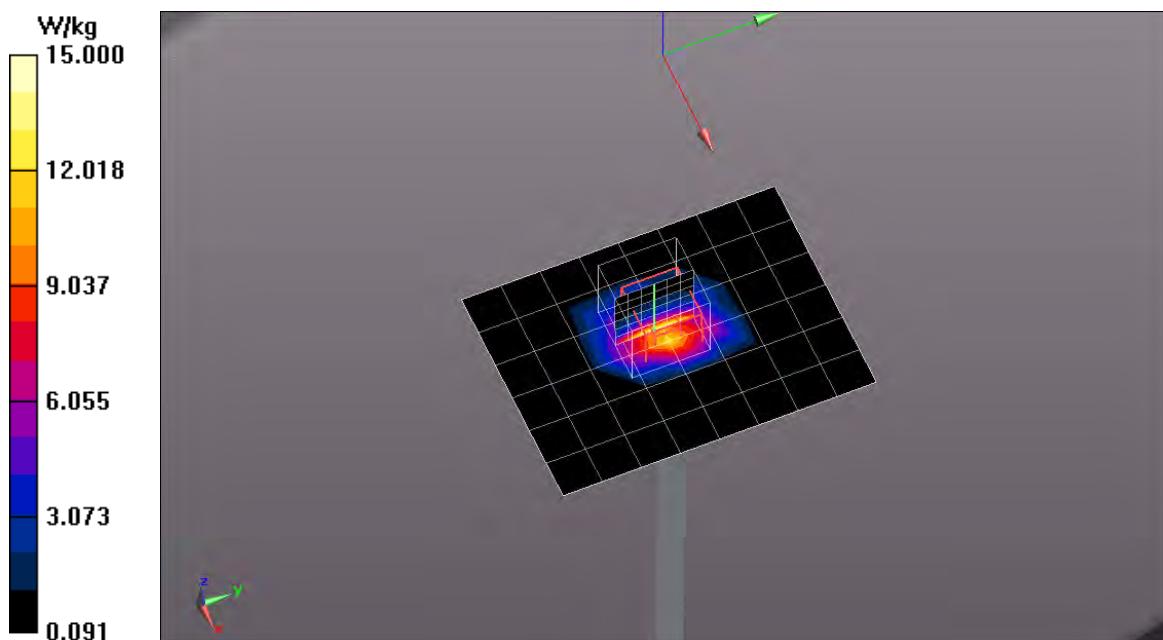

ANNEX C SAR Measurement Reports

Test Laboratory: Eurofins Product Service GmbH**WLAN_2.4G_CH 1_DSSS_1Mbps_Flat_Front_0mm****DUT: CS20 (876476); Type: Field Controller; Serial: 2400557**

Communication System: UID 0 - n/a, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1Mbps); Frequency: 2412 MHz; Duty Cycle: 1:1.53815

Medium: Muscle 2450 MHz Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 50.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.88, 7.88, 7.88); Calibrated: 2018-09-20;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2018-09-17
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/CS20/Area Scan (17x28x1): Measurement grid: dx=12.5mm, dy=12.5mm

Maximum value of SAR (measured) = 0.0602 W/kg


Configuration/CS20/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.441 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0633 W/kg

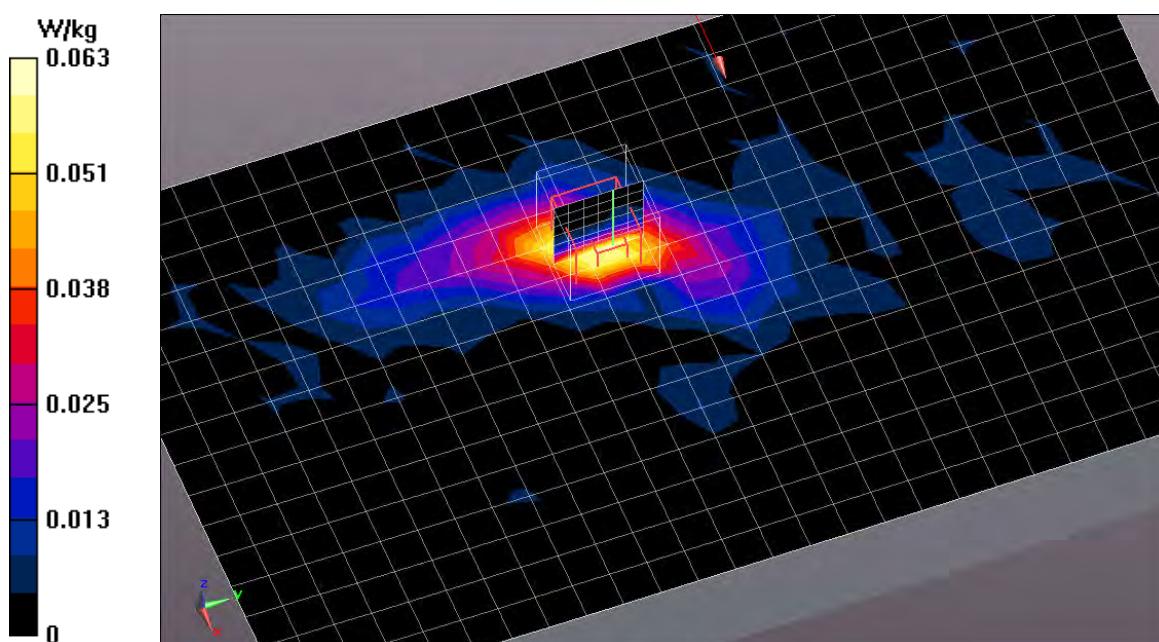

Test Laboratory: Eurofins Product Service GmbH**WLAN_2.4G_CH 1_DSSS_1Mbps_Flat_Back_0mm****DUT: CS20 (876476); Type: Field Controller; Serial: 2400557**

Communication System: UID 0 - n/a, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1Mbps); Frequency: 2412 MHz; Duty Cycle: 1:1.53815

Medium: Muscle 2450 MHz Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 50.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.88, 7.88, 7.88); Calibrated: 2018-09-20;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2018-09-17
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/CS20/Area Scan (17x28x1): Measurement grid: dx=12.5mm, dy=12.5mm

Maximum value of SAR (measured) = 0.00713 W/kg

Configuration/CS20/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.290 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.00405 W/kg; SAR(10 g) = 0.000831 W/kg

Maximum value of SAR (measured) = 0.00577 W/kg

