


RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No	G0M-1812-7889-TFC247WF-V02
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 ISED Testing Laboratory site: 3470A-2
Applicant	Leica Geosystems AG
Address	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, 2018-04
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Field Controller Win EC7
Model(s)	CS20
Additional Model(s)	None
Brand Name(s)	Leica Geosystems
Hardware Version(s)	V1.00
Software Version(s)	V4.97
FCC-ID	RFD-CSNGV
IC	3177A-CSNGV
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2019-01-07	
Report:		
Compiled by	Wilfried Treffke	
Tested by (+ signature) (Responsible for Test)	Wilfried Treffke	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2019-05-17	
Total number of pages	106	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		
The EUT can operate with different power requirements. (120V AC/DC adaptor and 11.1V DC Li- battery) Test mode selection is based on comparative tests. The 120V AC power port was selected for compliance tests.		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2019-03-15	Initial Release	
02	2019-05-17	Page 1 and 6: Brand Name corrected Page 9: Picture of Bluetooth Module corrected.	W. Treffke

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
BPSK	Binary Phase Shift Keying
DSSS	Direct Sequence Spread Spectrum
EUT	Equipment Under Test
FCC	Federal Communications Commission
HT	High Throughput
IEEE 802.11	MAC and PHY Layer for WiFi
ISED	Innovation, Science and Economic Development Canada
OFDM	Orthogonal Frequency Division Multiplexing
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage


REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External	7
1.2	Photos – Equipment Internal	9
1.3	Photos – Test Setup.....	12
1.5	Support Equipment.....	13
1.6	Test mode duty cycle	14
1.7	Test Modes	16
1.8	Test Frequencies.....	17
1.9	Sample emission level calculation.....	18
2	Result Summary.....	19
3	Test Conditions and Results.....	20
3.1	Test Conditions and Results - Occupied bandwidth.....	20
3.2	Test Conditions and Results - AC powerline conducted emissions.....	23
3.3	Test Conditions and Results - Transmitter radiated emissions	26
3.4	Test Conditions and Results - Receiver radiated emissions	30
ANNEX A	Transmitter spurious emissions	33
ANNEX B	Receiver spurious emissions	97

1 Equipment (Test Item) Under Test

Description	Field Controller Win EC7	
Model	CS20	
Additional Model(s)	None	
Brand Name(s)	Leica Geosystems	
Serial Number(s)	2400557	
Hardware Version(s)	V1.00	
Software Version(s)	V4.97	
PMN	CS20	
HVIN	CS20	
FVIN	-/-	
HMN	-/-	
FCC-ID	RFD-CSNGV	
IC	3177A-CSNGV	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	IEEE 802.11 b/g/n (HT20)	
Modulation	BPSK, QPSK, 16-QAM, 32-QAM	
Number of antenna ports	1	
Radio Module	Type	Integrated Transceiver Modules for WLAN 802.11 b/g/n, Bluetooth, Bluetooth Low Energy (BLE)
	Model	TIWI-BLE
	Manufacturer	Laird Technologies (LSR)
	HW Version	unspecified
	SW Version	unspecified
	FCC-ID	RFD-BTWCO
	IC	3177A-BTWCO
Antenna	Type	Integrated
	Model	W3008C
	Manufacturer	Pulse Electronics
	Gain	1 dBi (manufacturer dsclaration)
Supply Voltage	V _{NOM}	100 – 240 AC; 50 / 60 Hz
Operating Temperature	T _{NOM}	15 VDC
AC/DC-Adaptor	Model	Integrated
	Vendor	W3008C
	Input	Pulse Electronics
	Output	1 dBi (manufacturer declaration)
Manufacturer	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	

1.1 Photos – Equipment External

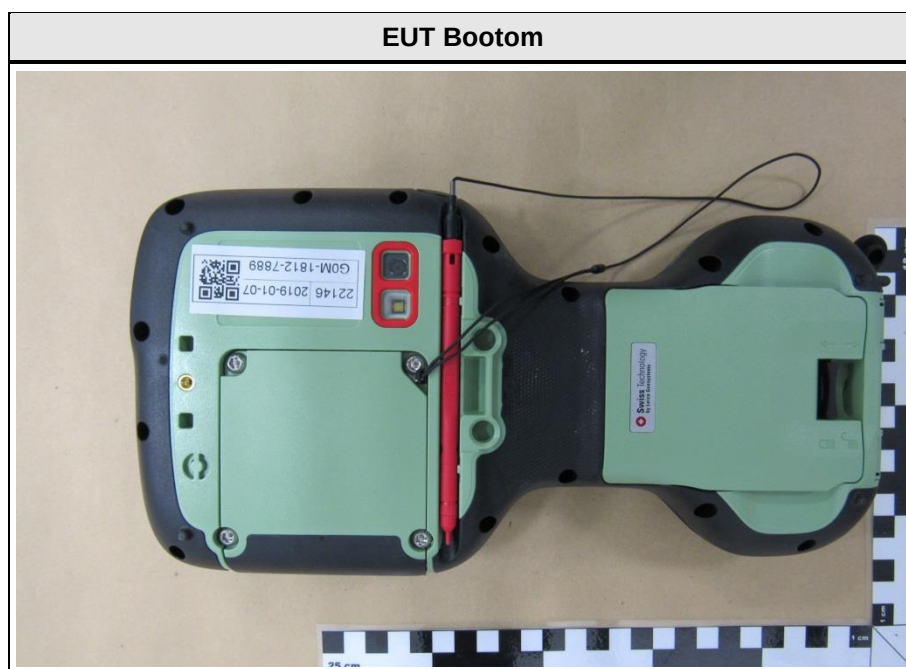


EUT Connector Side




Power Supply




1.2 Photos – Equipment Internal

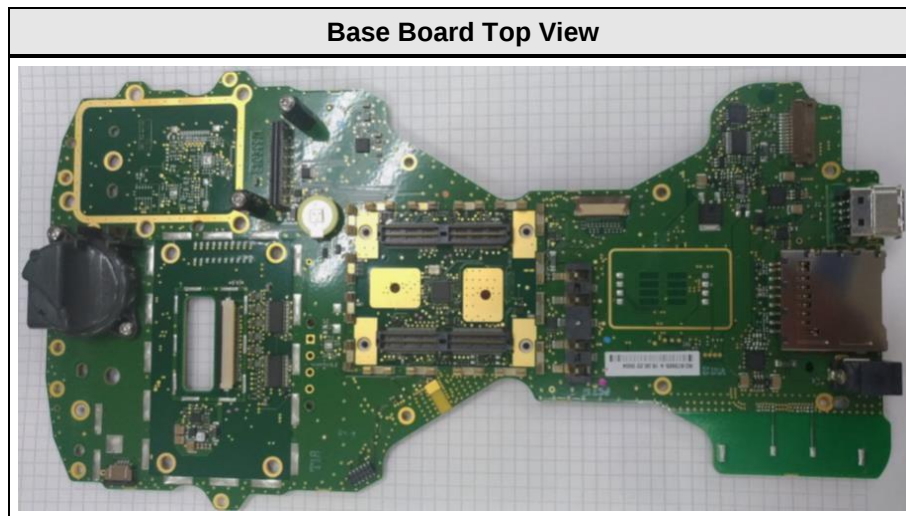


Core Module Top View

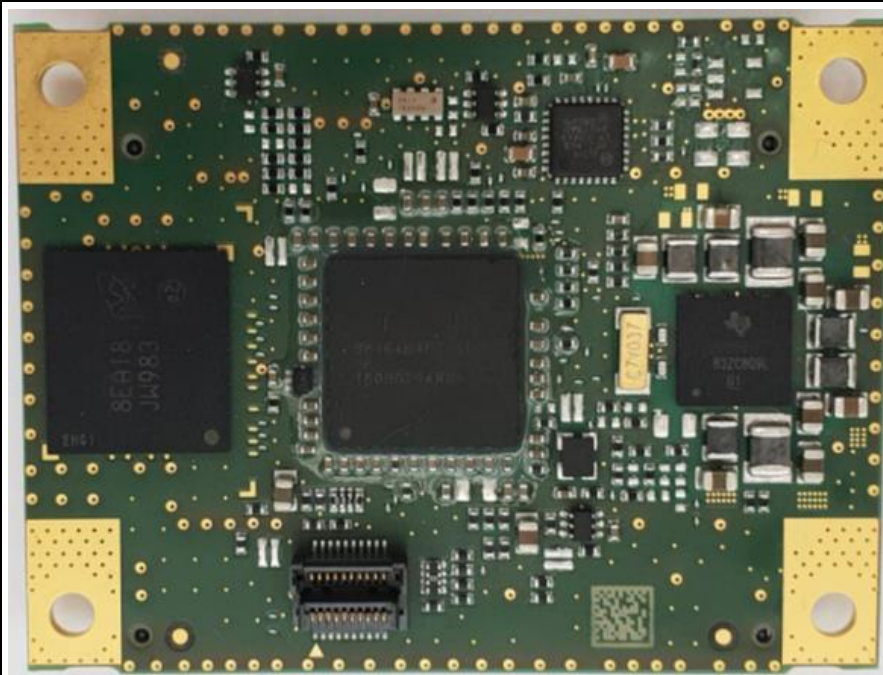


Core Module Bottom View

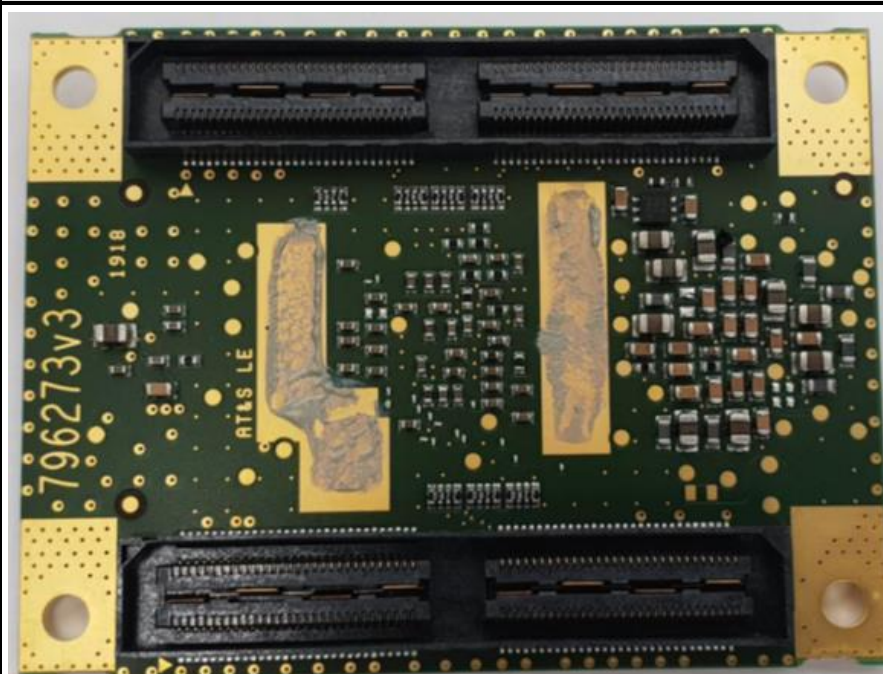



Camera Board Top View

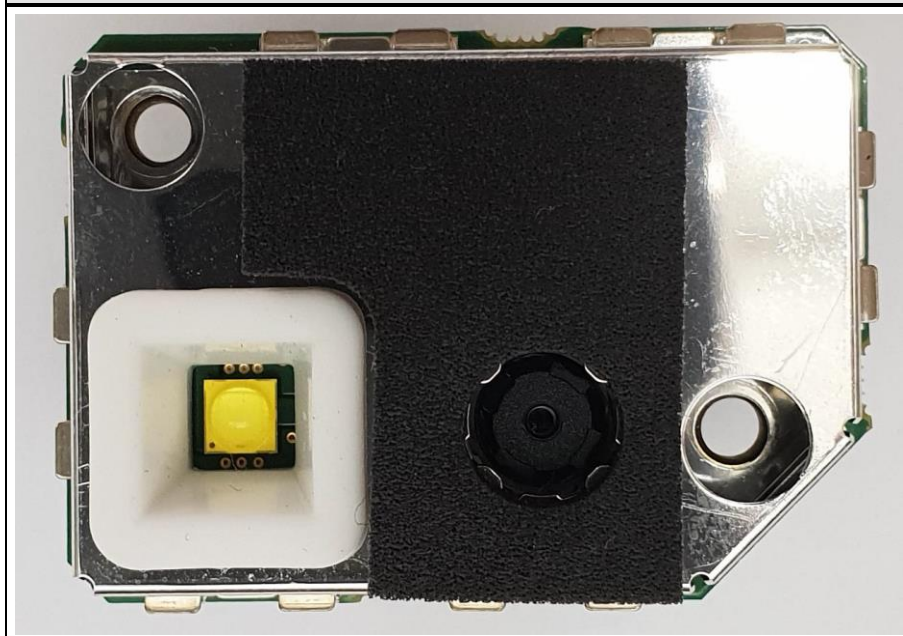

Camera Board Bottom View

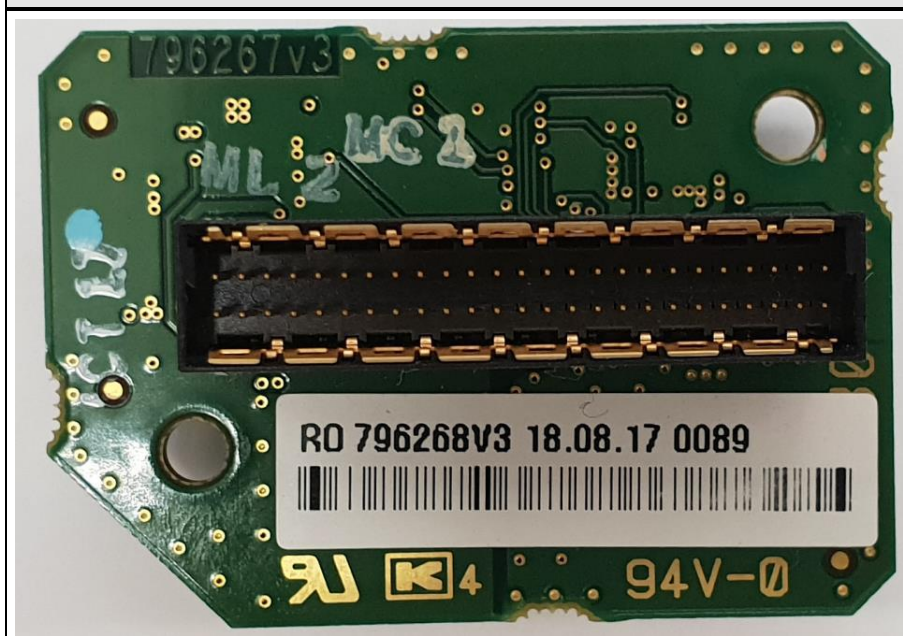

1.3 Photos – Test Setup

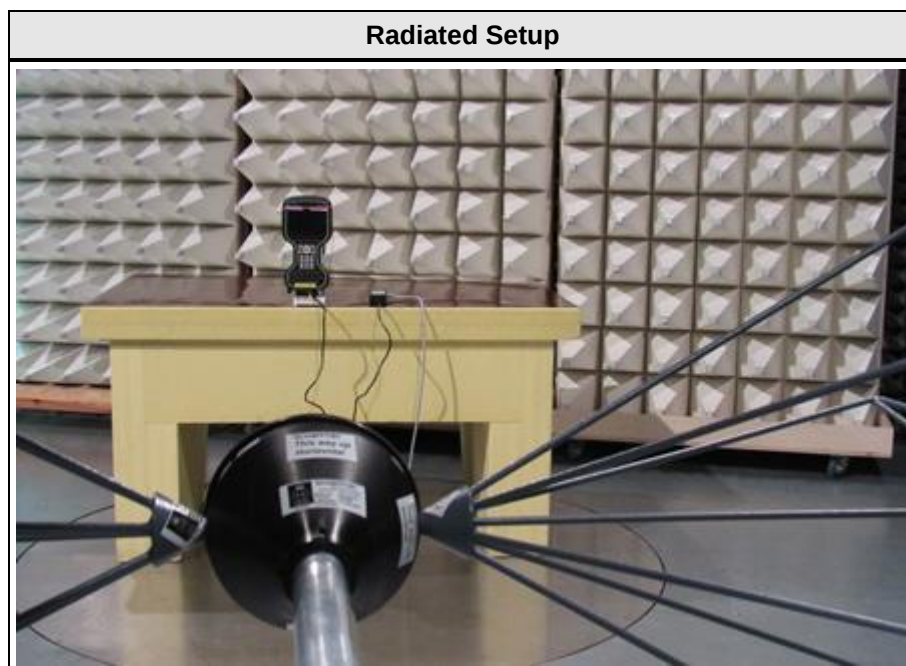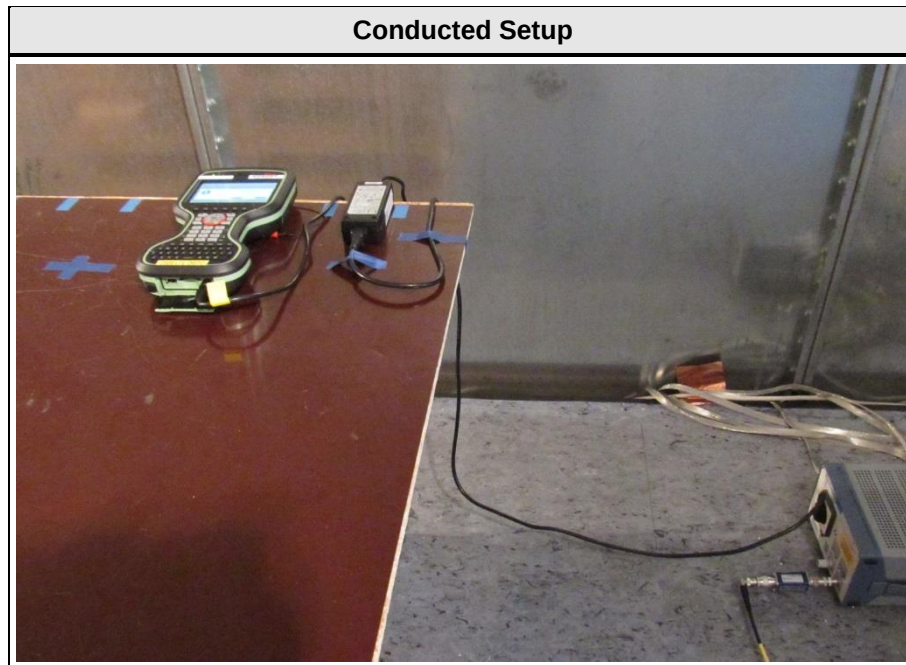

1.5 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Laptop	Dell	Latitude E6420	S/N HPJ4R1
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.6 Test mode duty cycle


1.6.1 Information

Test Information	
Measurement Method	ANSI C63.10 11.6

1.6.2 Requirements

Requirements	
Duty cycle	Duty cycle correction
$\geq 98 \%$	No correction required
$< 98 \%$	Correction required ($10 \times \log_{10}(1/DC)$)

1.6.3 Setup

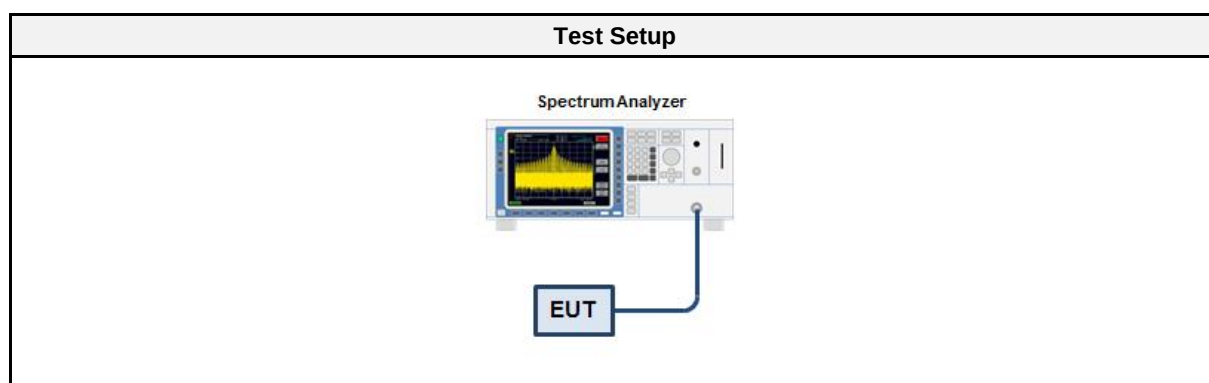

1.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

1.6.5 Procedure

Test Procedure
1. EUT set to test mode 2. Span is set to zero span 3. Detector set to peak 4. Sweep time is set long enough to capture at least 5 bursts 5. Envelope peak value of emission spectrum is selected 6. The maximum burst duration T_{ON} is measured using two markers set to the start and the end of the longest burst 7. The minimum idle duration T_{OFF} is measured using two markers set to the start and the end of the shortest idle period 8. The duty cycle is calculated by $DC = T_{ON} / (T_{ON} + T_{OFF})$ 9. The duty cycle correction is calculated by $DC = 10 \times \log_{10}(T_{ON} / (T_{ON} + T_{OFF}))$

1.6.6 Results

Duty Cycle Results		
Mode	Duty Cycle [%]	Correction Factor [dB]
DSSS	100	0
OFDM	100	0
HT20	100	0

1.7 Test Modes

Mode	Description
DSSS (IEEE 802.11b)	Mode = Transmit Modulation = BPSK Spreading = DSSS Bandwidth = 20 MHz Duty cycle = 100% Power setting = xx Data rate = 1 Mbps
OFDM (IEEE 802.11g)	Mode = Transmit Modulation = BPSK Spreading = OFDM Bandwidth = 20 MHz Duty cycle = 100% Power setting = xx Data rate = 6 Mbps
HT20 (IEEE 802.11n)	Mode = Transmit Modulation = BPSK Spreading = OFDM Bandwidth = 20 MHz Duty cycle = 100% Power setting (1 Simultaneous Tx) = xx Data rate (1 Simultaneous Tx) = 6.5 Mbps MCS (1 Simultaneous Tx) = 0
Receive	Mode = Receive
Comment: The above settings were found as worst case during pre-tests.	

1.8 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	1	2412
F2	Tx / Rx	6	2437
F3	Tx / Rx	11	2462

1.9 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBμV + 26 dB/m	= 47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 (section 6.6)	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247, Issue 2 (section 5.2)	6 dB Bandwidth	ANSI C63.10-2013	N/T	
FCC § 15.247(b)(1) ISED RSS-247, Issue 2 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	N/T	
FCC § 15.247(e) ISED RSS-247, Issue 2 (section 5.2)	Power spectral density	ANSI C63.10-2013	N/T	
FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Band edge compliance	ANSI C63.10-2013	N/T	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	N/T	
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247, Issue 2 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen, Issue 5 (section 6.6)
Measurement Method	ANSI C63.10 6.9.3
Operator	Wilfried Treffke
Date	2019-02-07

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

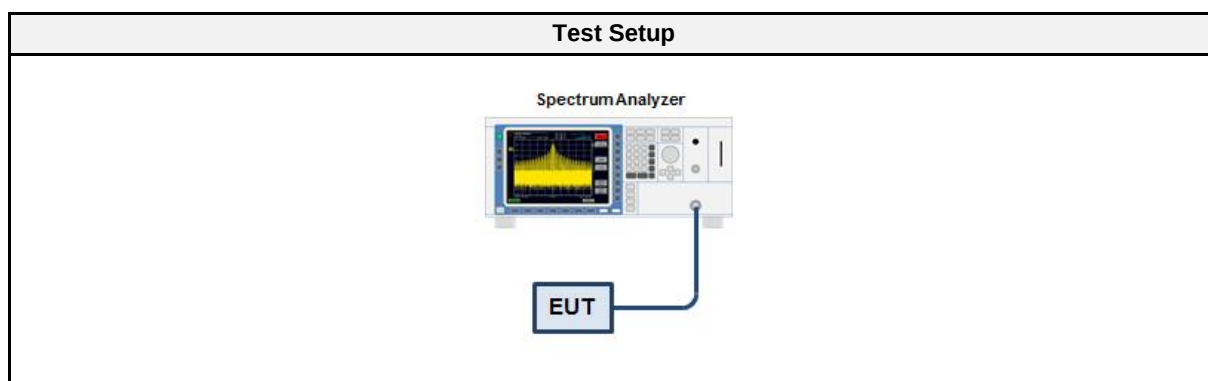

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

3.1.5 Procedure


Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to the range of 1 % to 5 % of the occupied bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
HT20	2437	16.320
Comment	worst case	

Occupied Bandwidth

Project Number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 Model Description: Field Controller Win EC7
 Model: CS20
 Test Sample ID: 22146
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-02-07
 Occupied Bandwidth [MHz]: 16.320

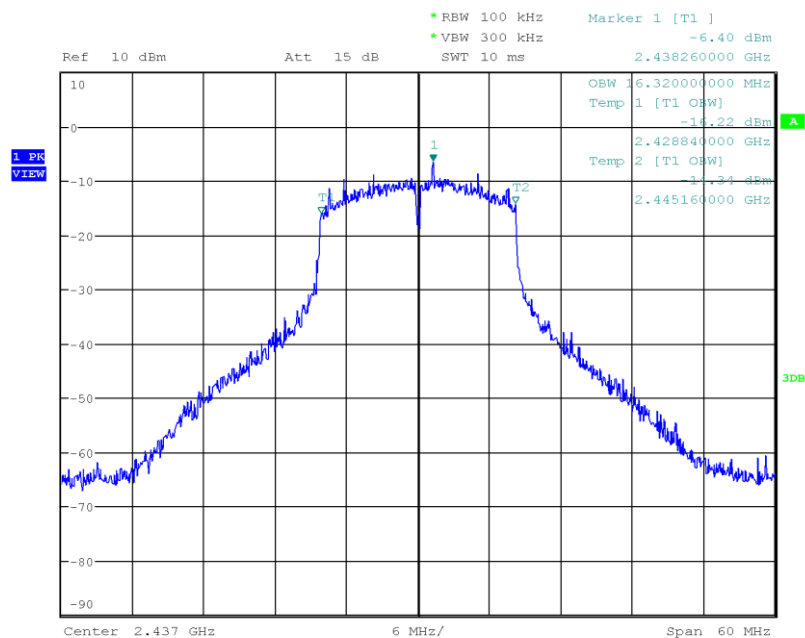

Date: 7.FEB.2019 11:28:52

3.2 Test Conditions and Results - AC powerline conducted emissions

3.2.1 Information


Test Information	
Reference	FCC § 15.207; ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.2
Operator	Wilfried Treffke
Date	2019-02-08

3.2.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBμV]	Average [dBμV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.2.3 Setup

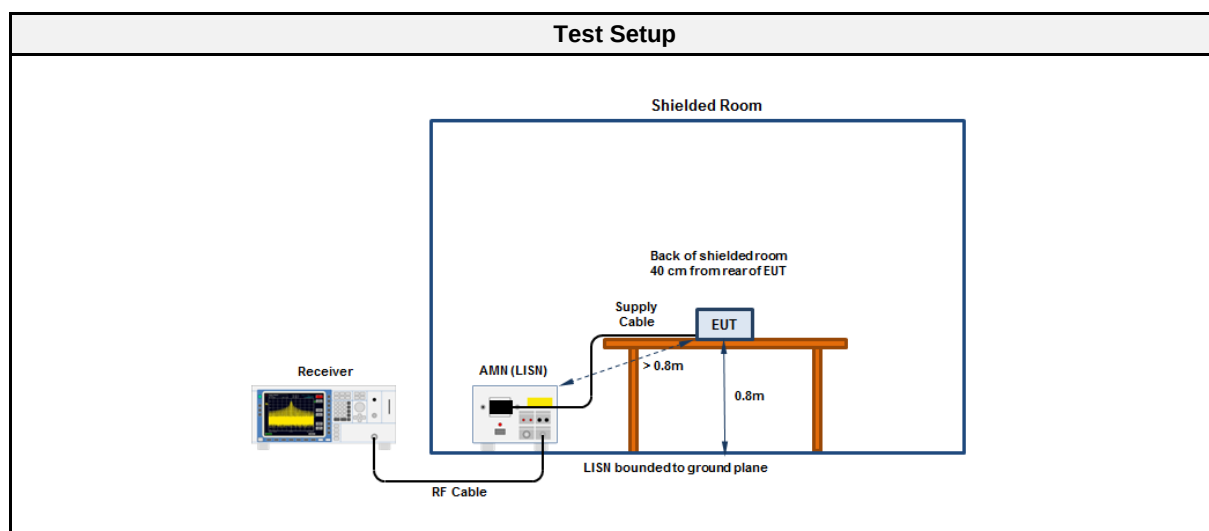

3.2.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10


Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Test Receiver	R&S	ESR7	EF00943	2018-07	2019-07
LISN	R&S	ESH3-Z5	EF00036	2017-01	2019-07

EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 24°C, Unom: 120 VAC / 60Hz
 LISN: ESH3-Z5 (N)
 Mode: Tx, IEEE 802.11b
 Test Date: 2019-02-08
 Note:

Index 1

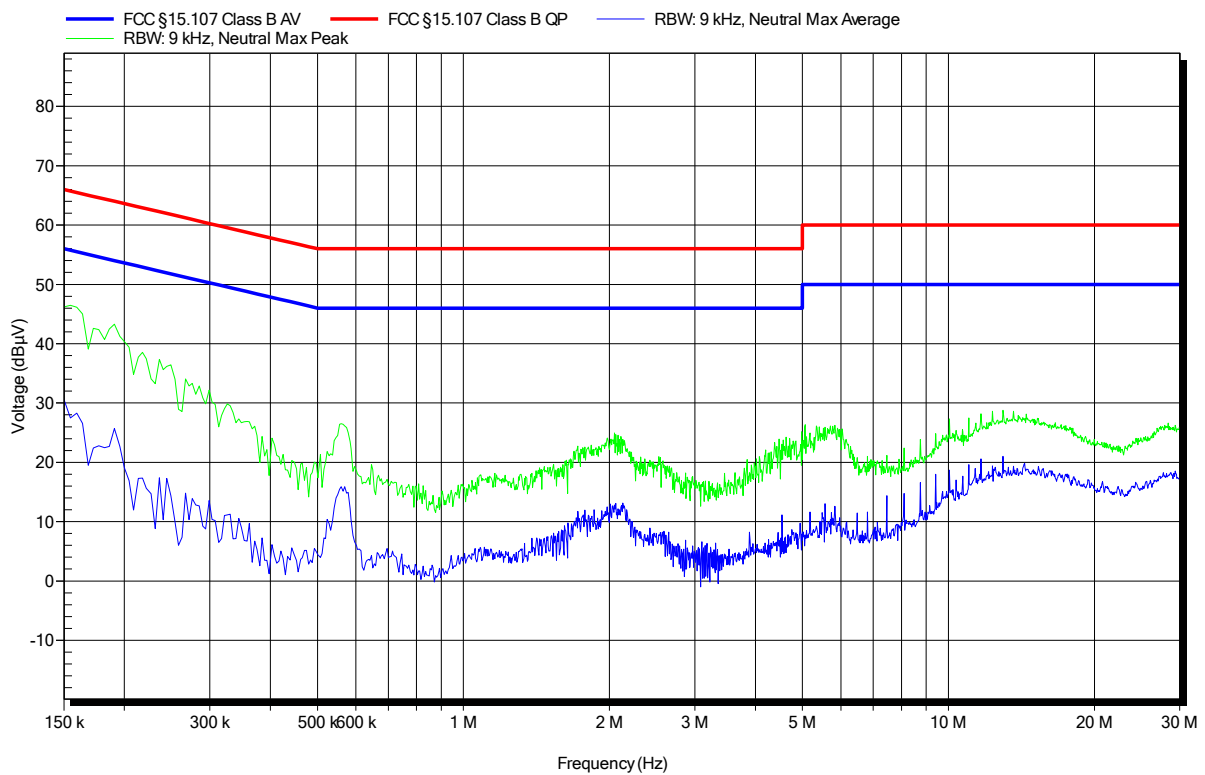


EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: Tnom: 24°C, Unom: 120 VAC / 60Hz
LISN: ESH3-Z5 (L)
Mode: Tx, IEEE 802.11b
Test Date: 2019-02-08
Note:

Index 2

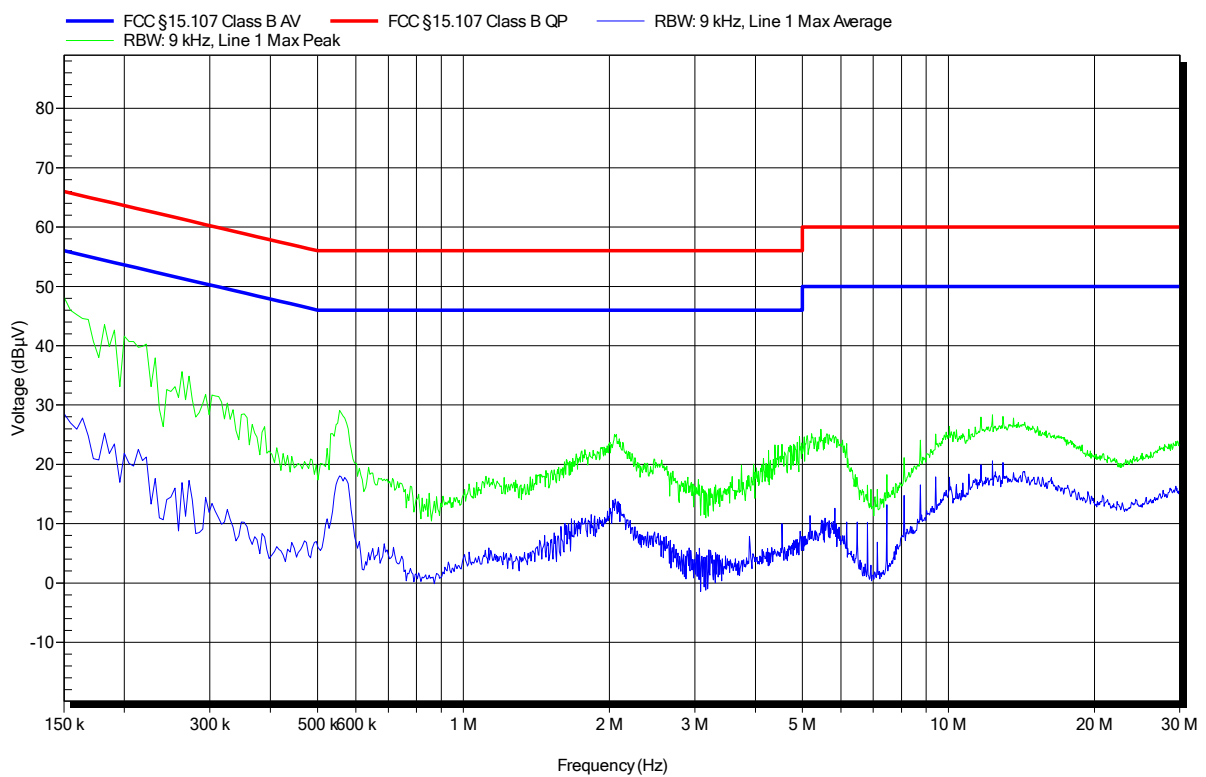

3.3 Test Conditions and Results - Transmitter radiated emissions


3.3.1 Information


Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISSED RSS-Gen, Issue 5 (section 6.13)
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2019-02-06

3.3.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
0.009 - 0.09	Average	$2400/F[\text{kHz}]$	300
0.09 - 0.110	Quasi-Peak	$2400/F[\text{kHz}]$	300
0.110 - 0.490	Average	$2400/F[\text{kHz}]$	300
0.490 - 1.705	Quasi-Peak	$24000/F[\text{kHz}]$	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.3.3 Setup

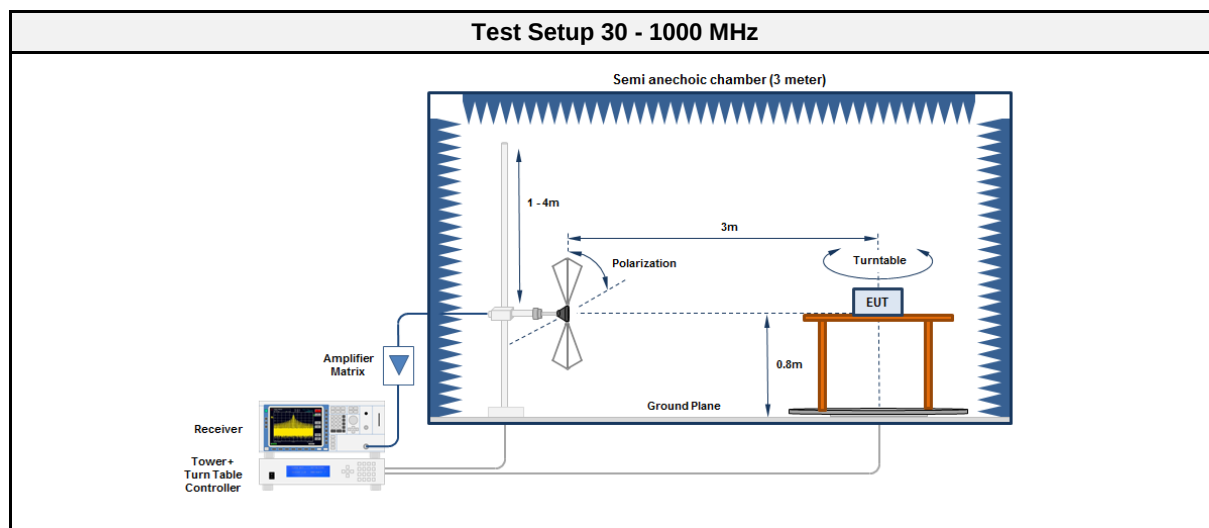

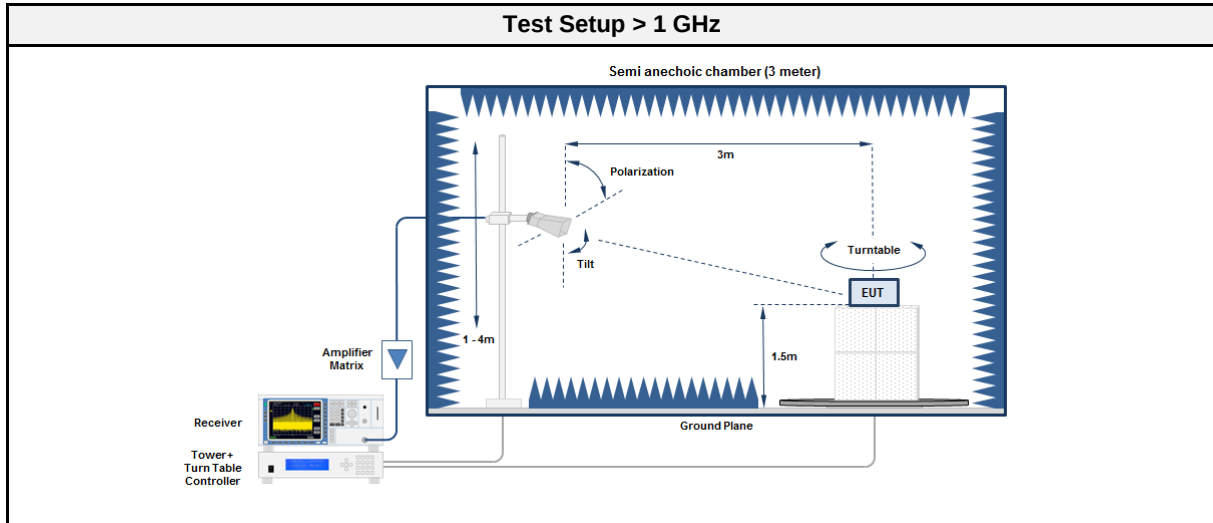

3.3.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2015.2.4

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	R&S	VULB 9162	EF00978	2016-11	2019-11
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF00302	2018-04	2019-04
Antenna	Amplifier Research	AT4560	EF01152	2018-10	2019-10

3.3.5 Procedure

Test Procedure < 30 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The EUT is rotated through 360° 4. The emissions are measured with peak detector and max hold 5. All significant emissions are measured again using the corresponding final detector

Test Procedure 30 - 1000 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.3.6 Results

Test Results - DSSS						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2412	108.608	35.52	pk	ver	43.52	-08.00
2412	4941	39.38	pk	ver	74.00	-34.62
2462	4922	36.81	pk	hor	74.00	-37.19

Test Results - OFDM						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2412	2389.6	50.11	pk	hor	74.00	-23.89
2412	2389.6	38.39	RMS	hor	54.00	-15.61
2412	2485.9	37.94	pk	ver	74.00	-36.06
2437	2382.1	34.57	pk	hor	74.00	-39.43
2437	2483.5	34.38	pk	hor	74.00	-39.62
2462	2484.5	53.56	pk	hor	74.00	-20.44
2462	2484.5	39.38	RMS	hor	54.00	-14.62
Comment	Only plots containing spurious emission are shown in this annex. All missing plots only contain noise.					

Test Results - HT20						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2412	2389	50.88	pk	hor	74.00	-23.12
2412	2389	38.41	RMS	hor	54.00	-15.59
2412	2487.4	43.88	pk	hor	74.00	-30.12
2412	2487.4	23.48	RMS	hor	54.00	-30.52
2437	2388.8	33.85	pk	hor	74.00	-40.15
2437	2483.5	34.75	pk	hor	74.00	-39.25
2462	2483.9	54.09	pk	hor	74.00	-19.91
2462	2483.9	39.40	RMS	hor	54.00	-14.60
Comment	Only plots containing spurious emission are shown in this annex. All missing plots only contain noise.					

3.4 Test Conditions and Results - Receiver radiated emissions


3.4.1 Information


Test Information	
Reference	ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.5, 6.6
Operator	Wilfried Treffke
Date	2019-02-07

3.4.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.4.3 Setup

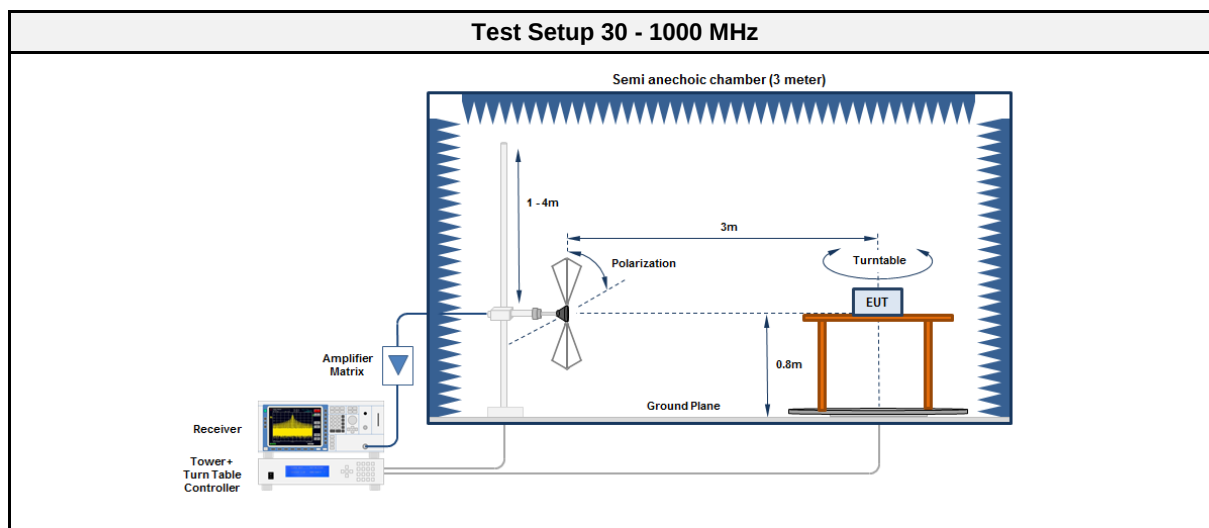

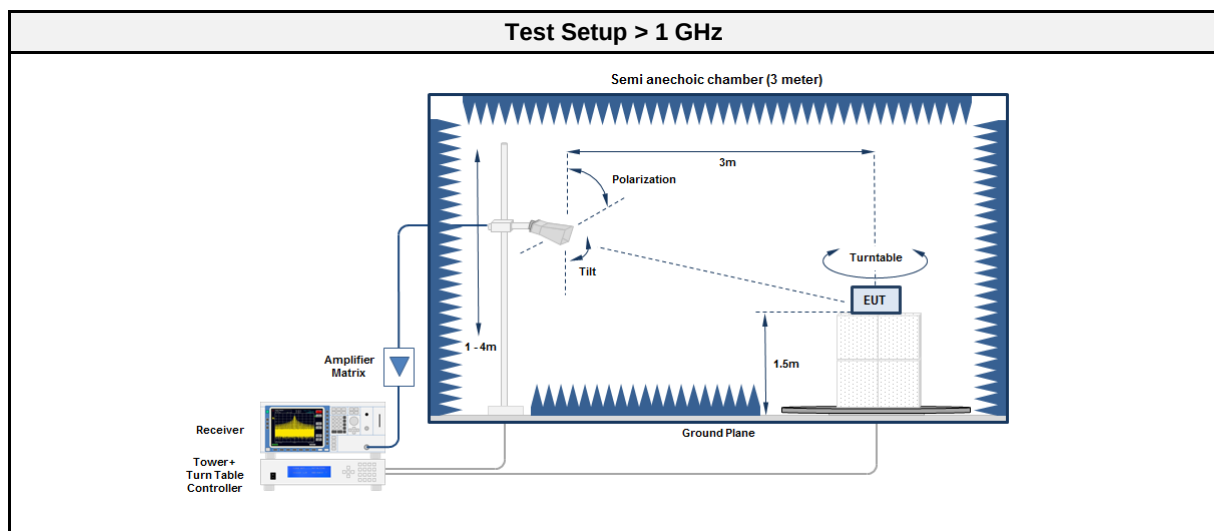

3.4.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2015.2.4

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	R&S	VULB 9162	EF00978	2016-11	2019-11
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF00302	2018-04	2019-04
Antenna	Amplifier Research	AT4560	EF01152	2018-10	2019-10

3.4.5 Procedure

Test Procedure 30 - 1000 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz	
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

3.4.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2437	32.992	34.89	pk	ver	40.00	-05.11
2437	237.12	21.98	pk	hor	46.00	-24.02
2437	898.88	27.97	pk	ver	46.00	-18.03
2437	4954	39.96	pk	ver	53.98	-14.02


ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
Test Date: 2019-02-07
Note:

Index 114

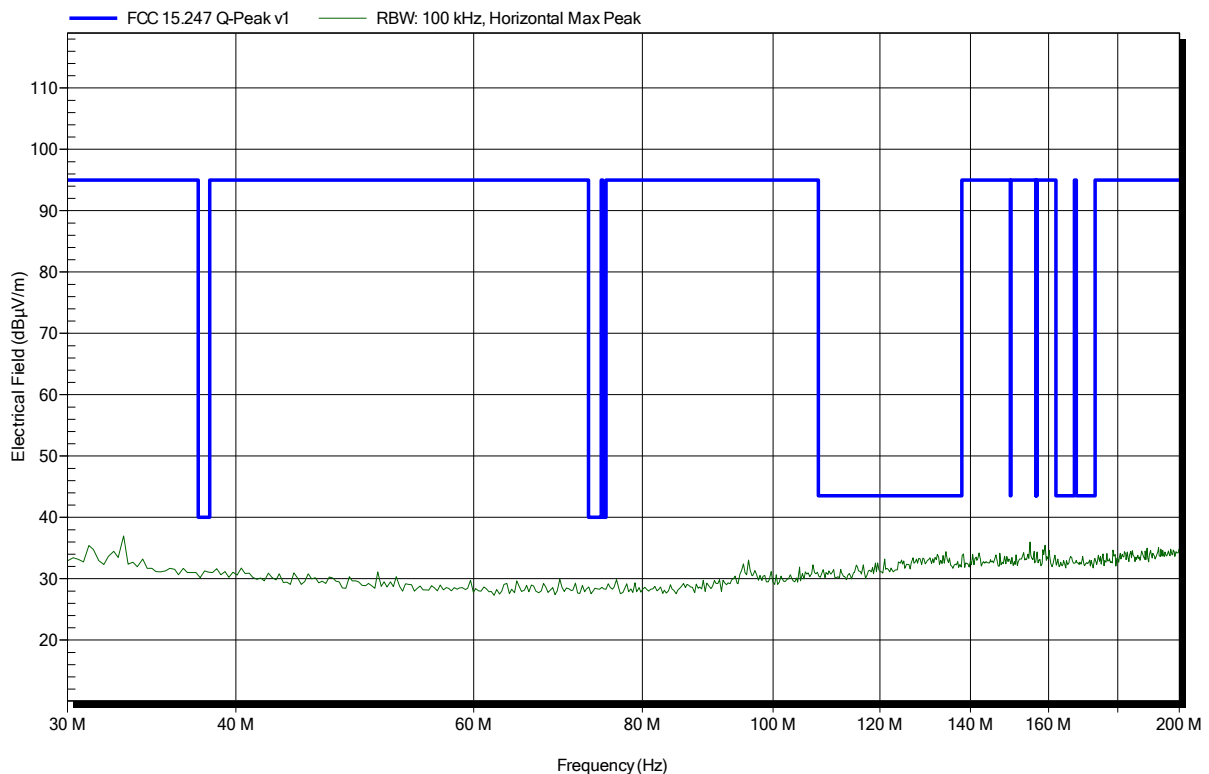


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
Test Date: 2019-02-07
Note:

Index 115

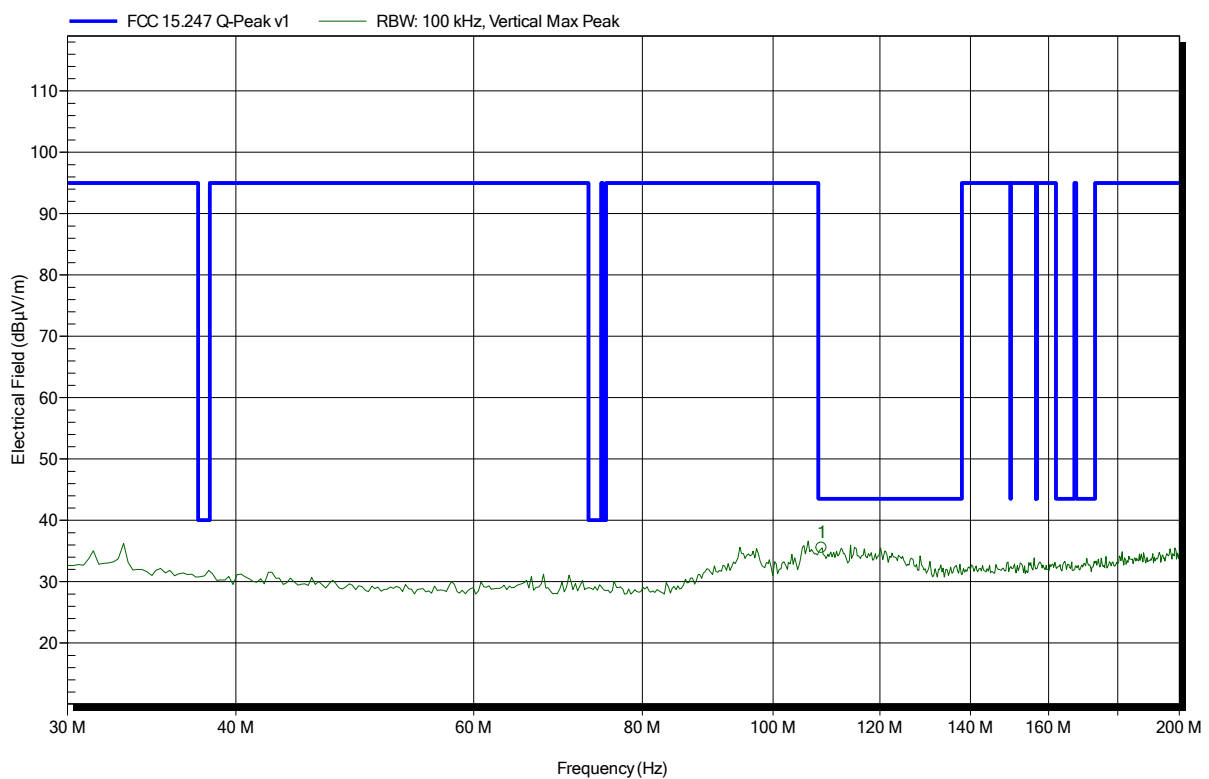


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
108.608 MHz	35.52 dBμV/m	43.52 dBμV/m	-8 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
 Test Date: 2019-02-07
 Note:

Index 112

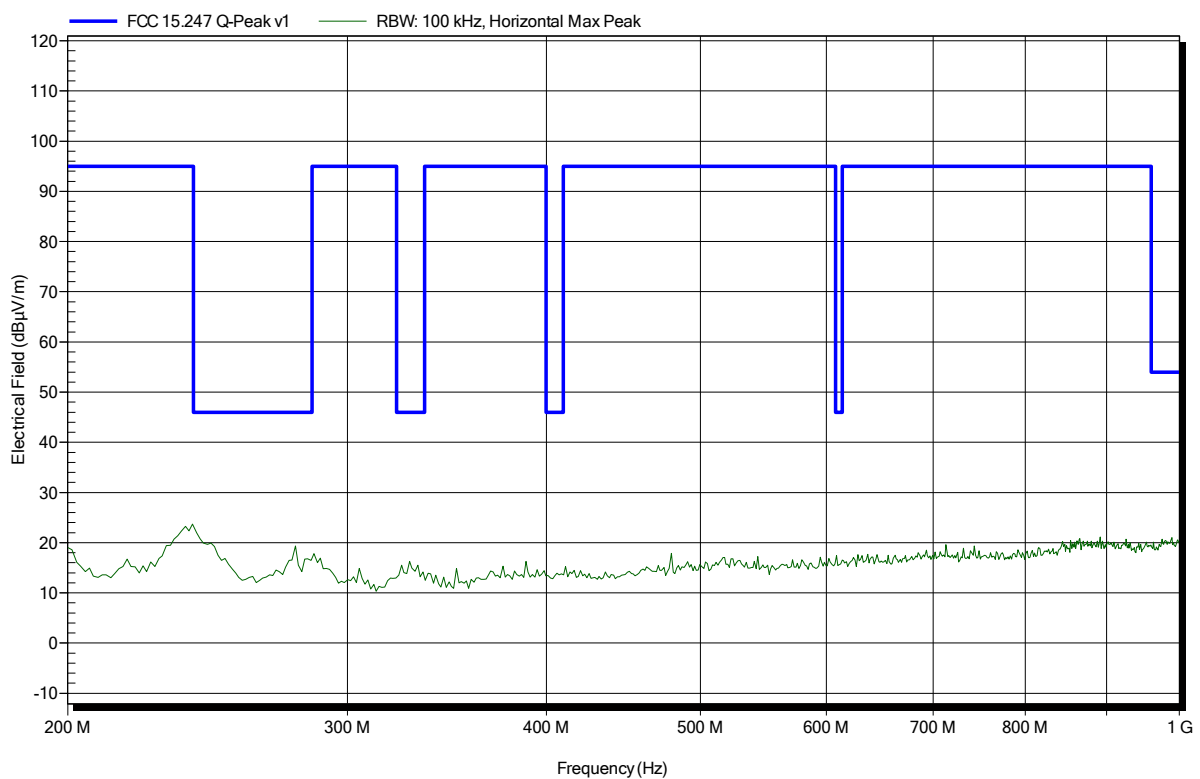


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
Test Date: 2019-02-07
Note:

Index 113

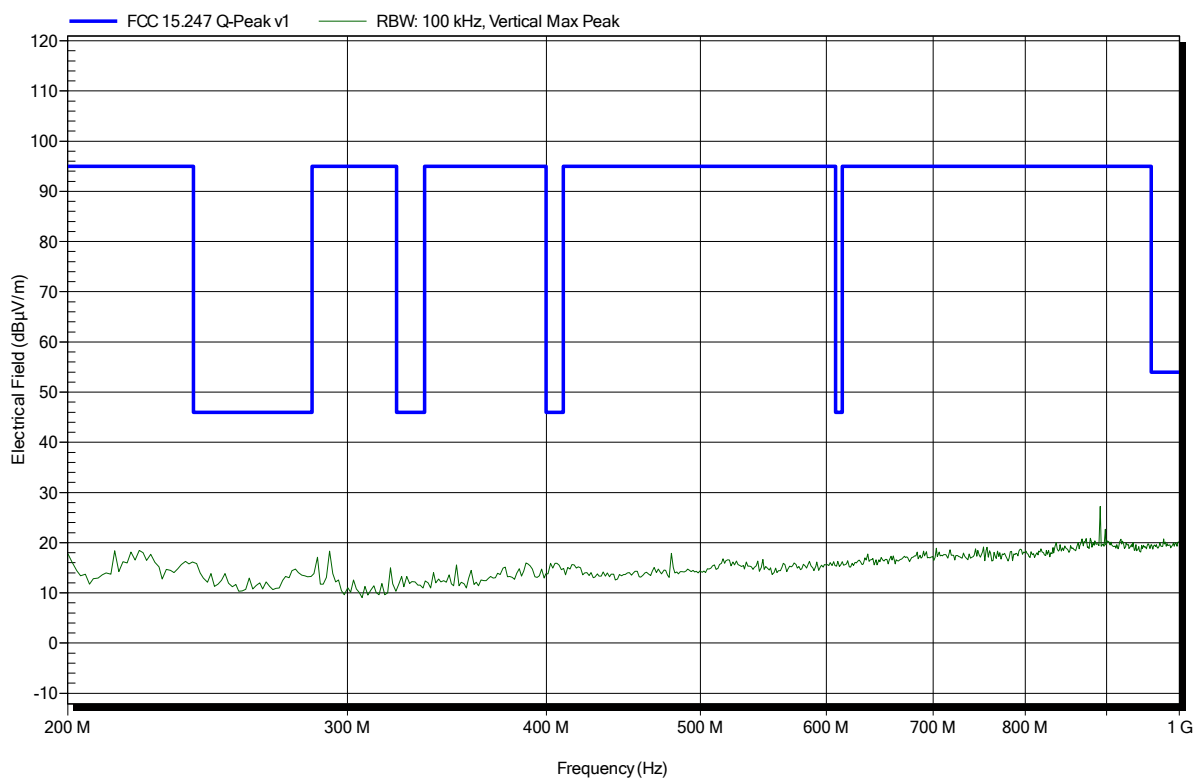

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG

EUT Name: Field Controller Win EC7

Model: CS20

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz

Test Date: 2019-02-06

Note:

Index 52

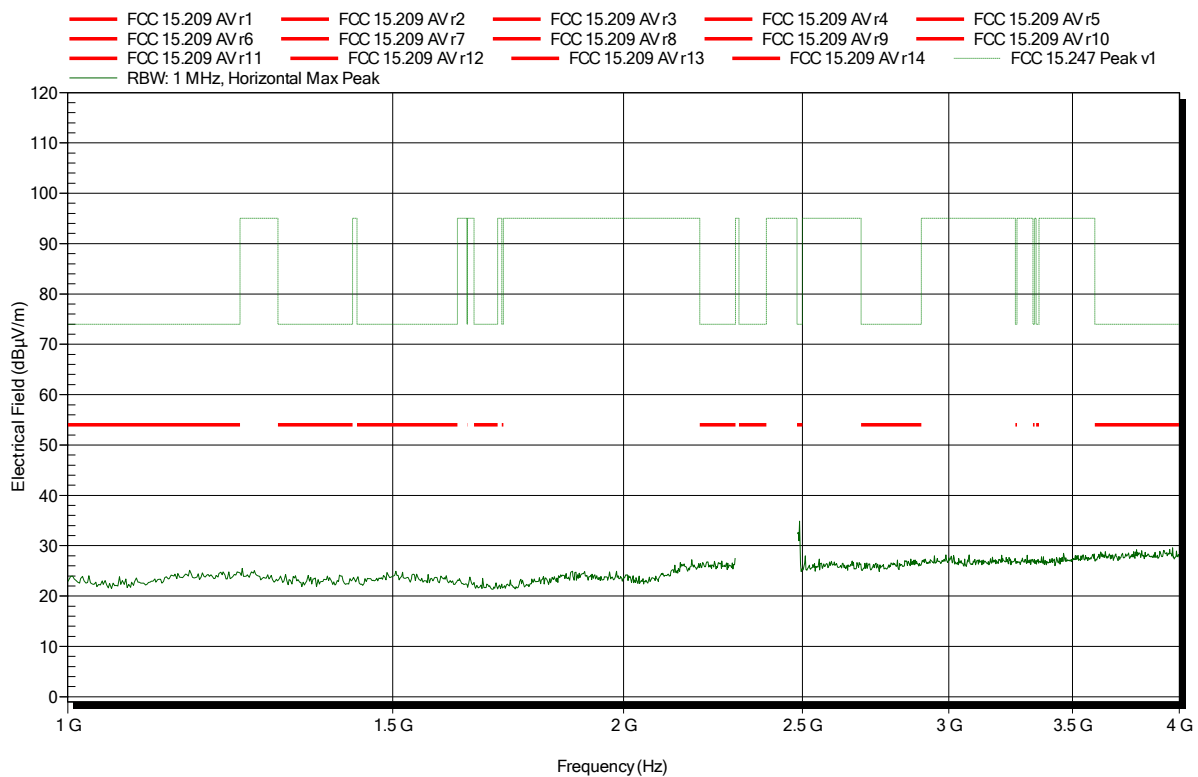

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG

EUT Name: Field Controller Win EC7

Model: CS20

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz

Test Date: 2019-02-06

Note:

Index 56

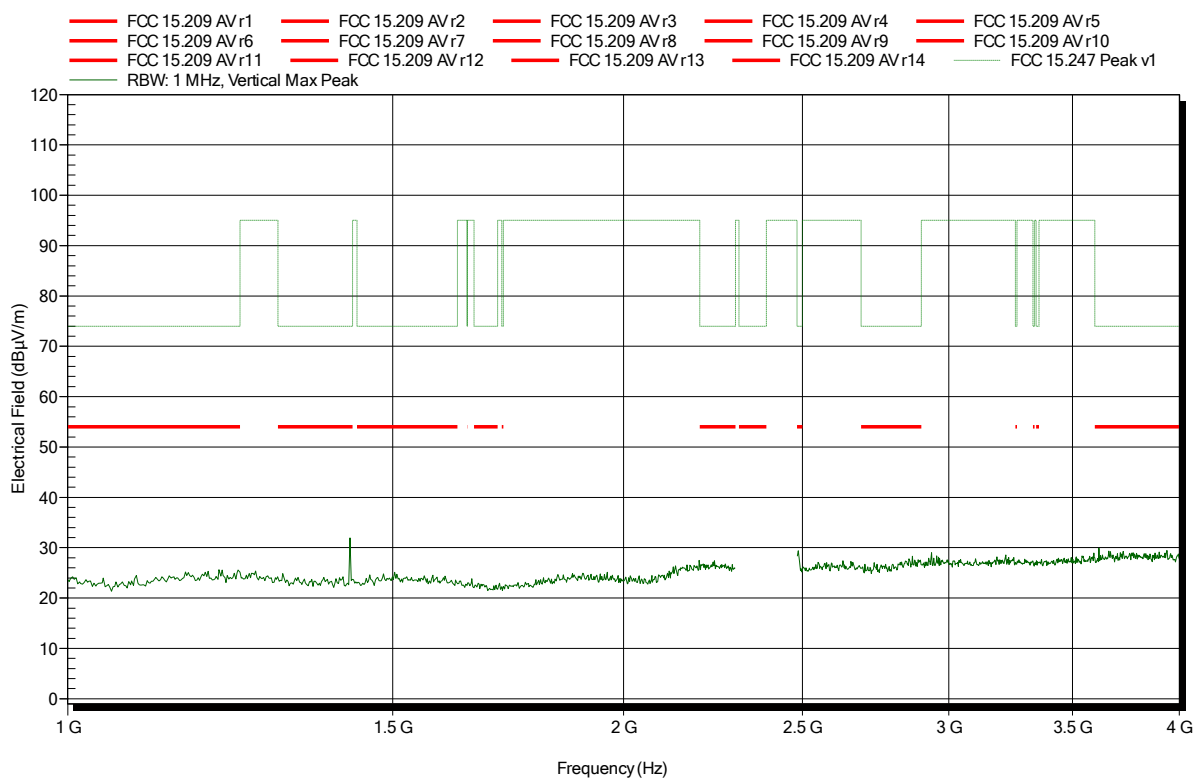


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
Test Date: 2019-02-06
Note: lower bandedge

Index 61

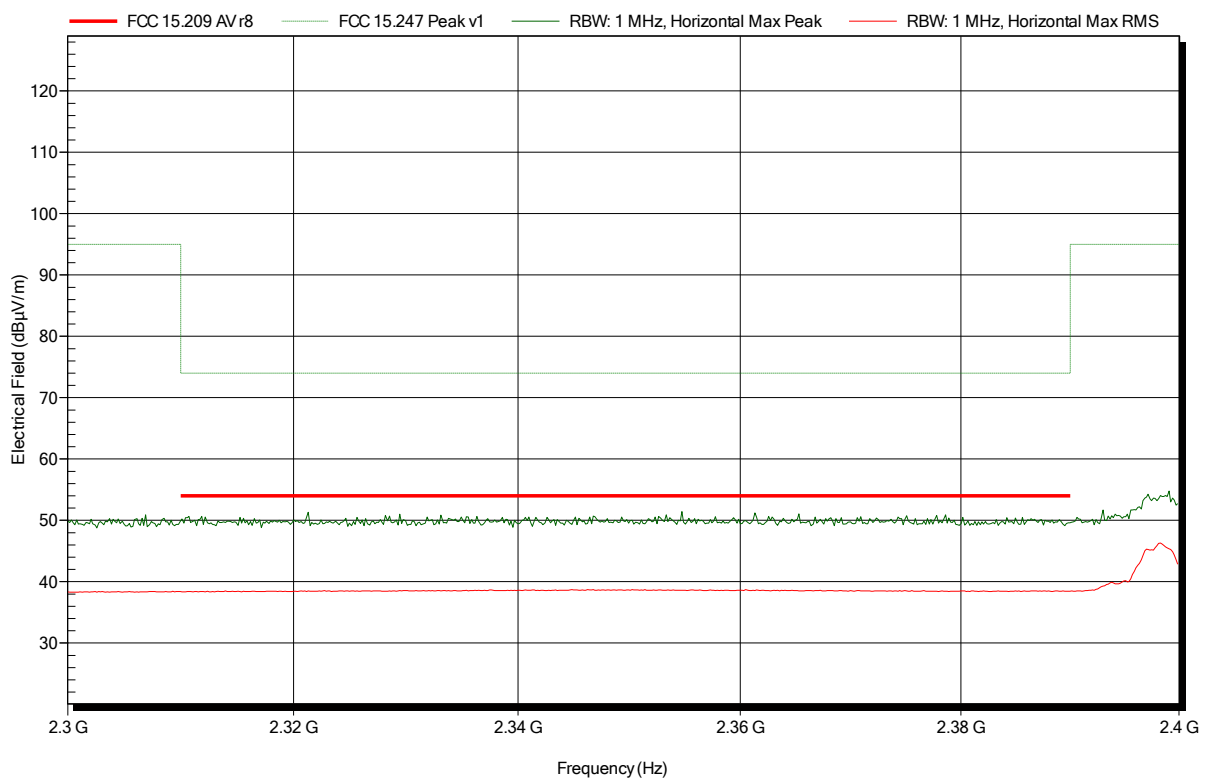


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
Test Date: 2019-02-06
Note: lower bandedge


Index 60

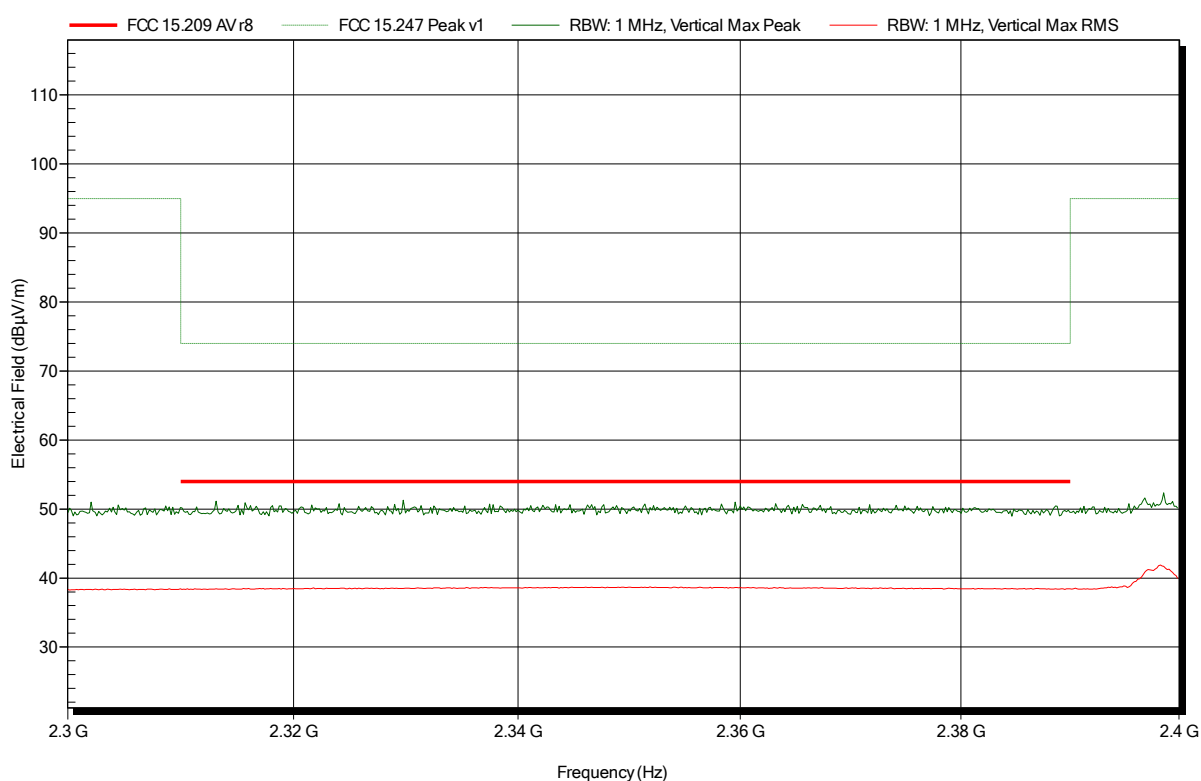

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
 Test Date: 2019-02-06
 Note:


Index 53

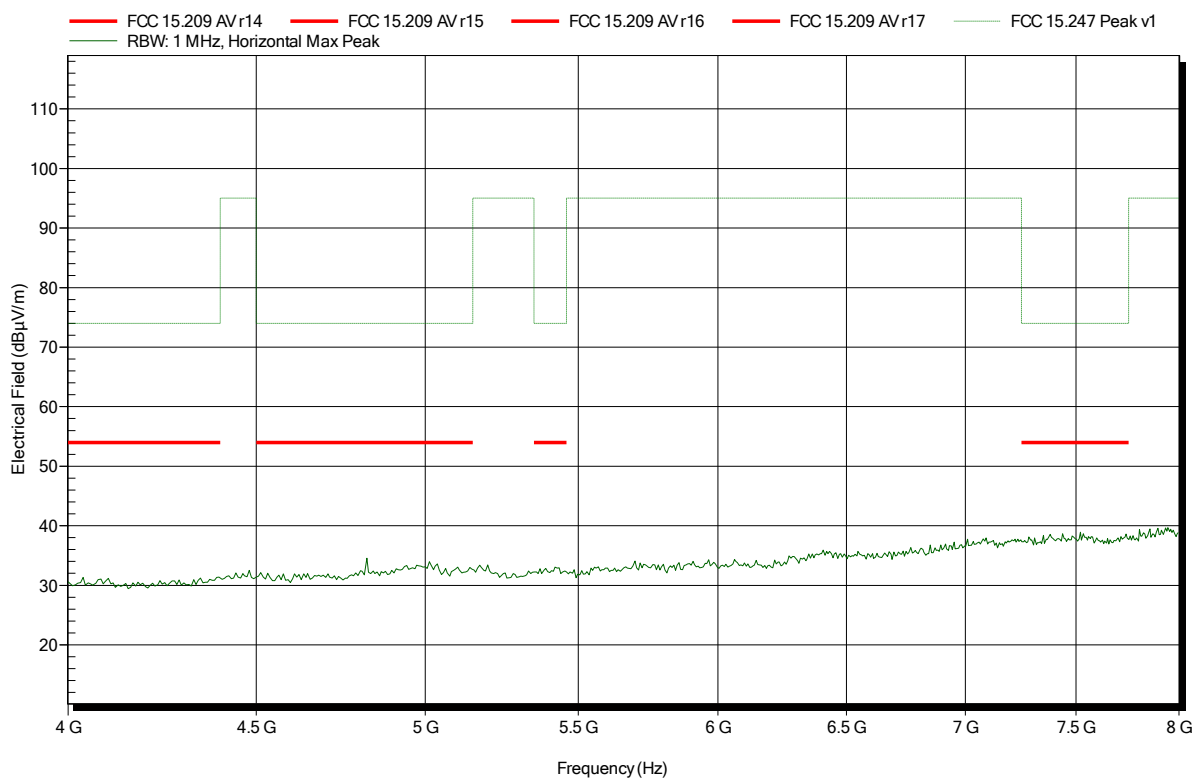

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
 Test Date: 2019-02-06
 Note:

Index 58

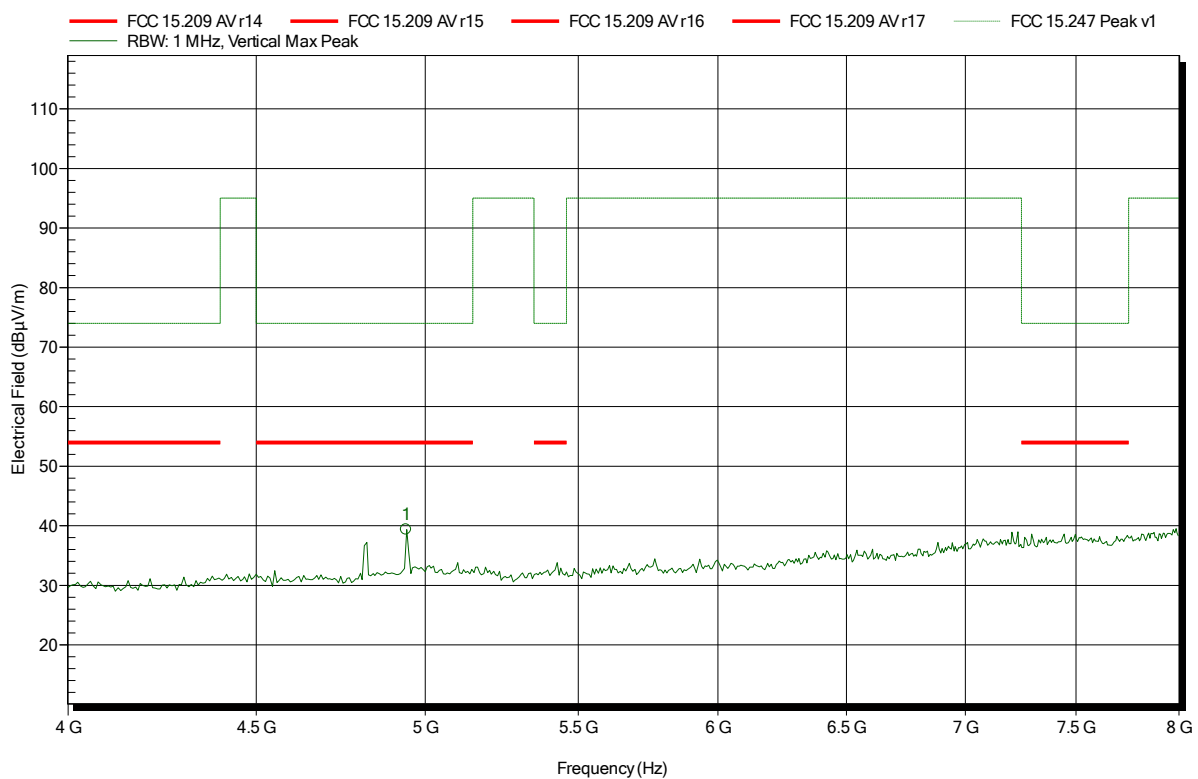


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.941 GHz	39.38 dBµV/m	74 dBµV/m	-34.62 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
 Test Date: 2019-02-06
 Note:


Index 54

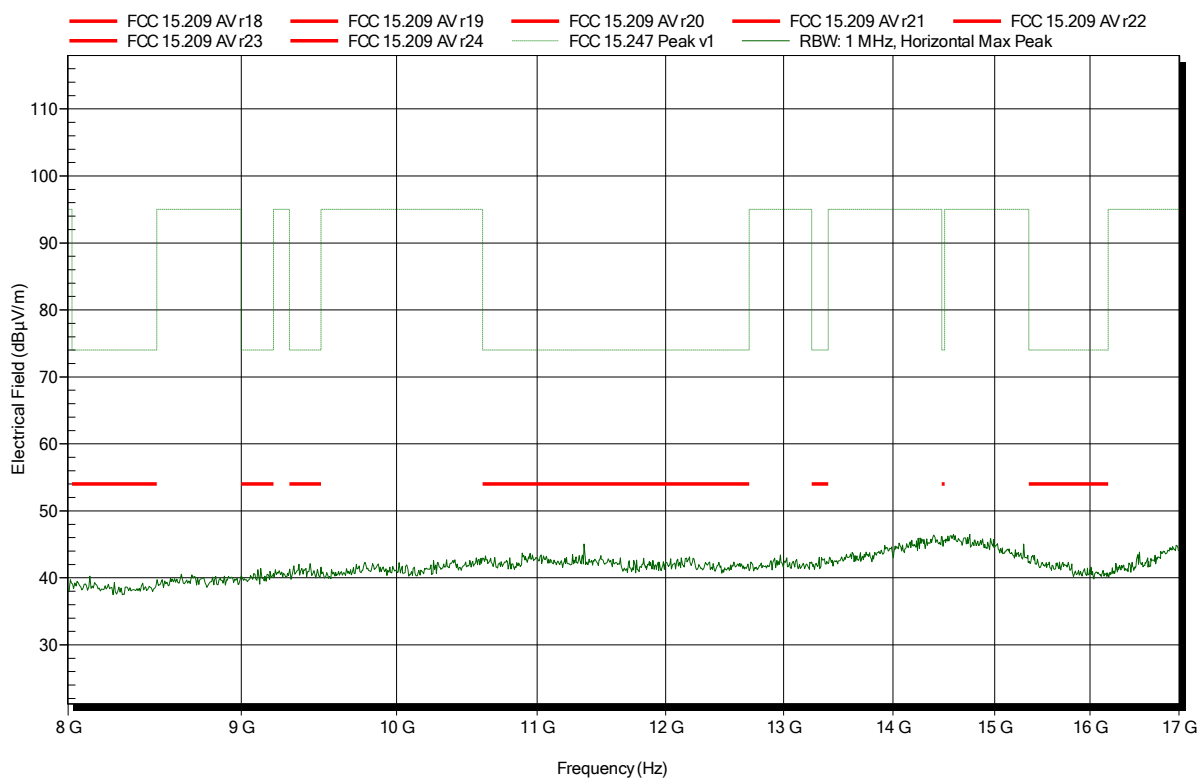

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
 Test Date: 2019-02-06
 Note:


Index 57

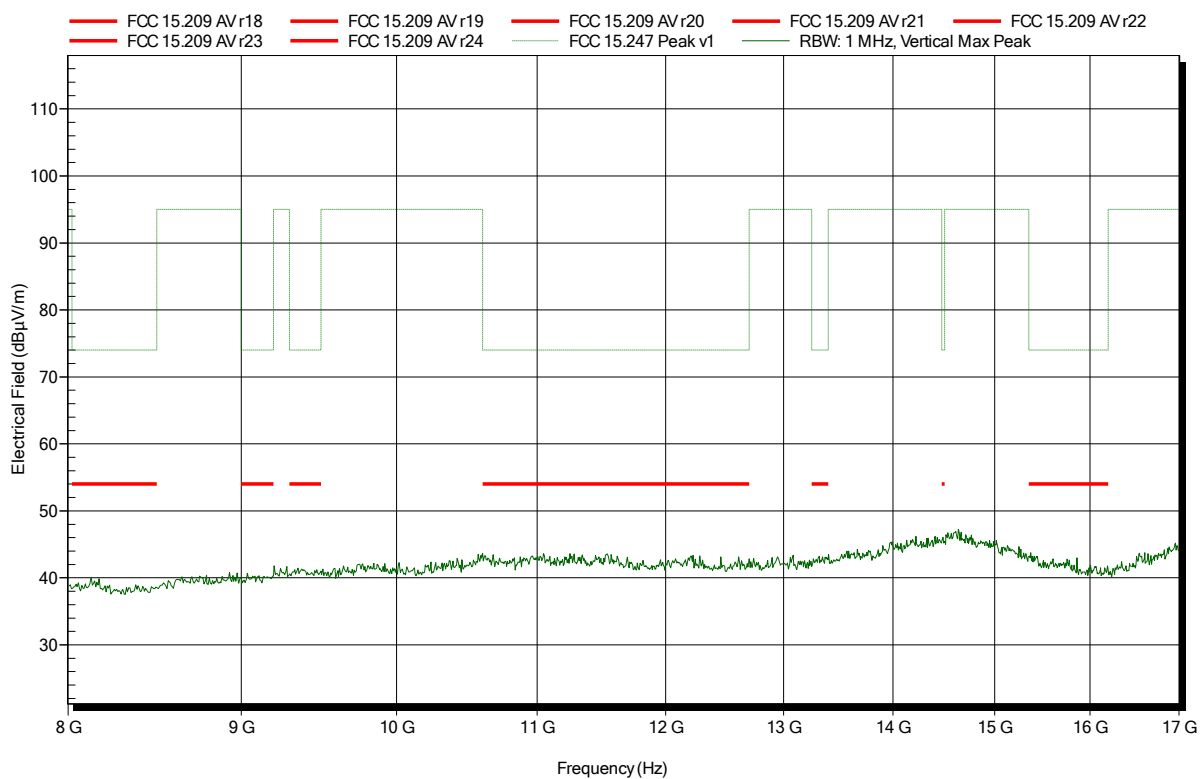

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
 Test Date: 2019-02-06
 Note:

Index 55

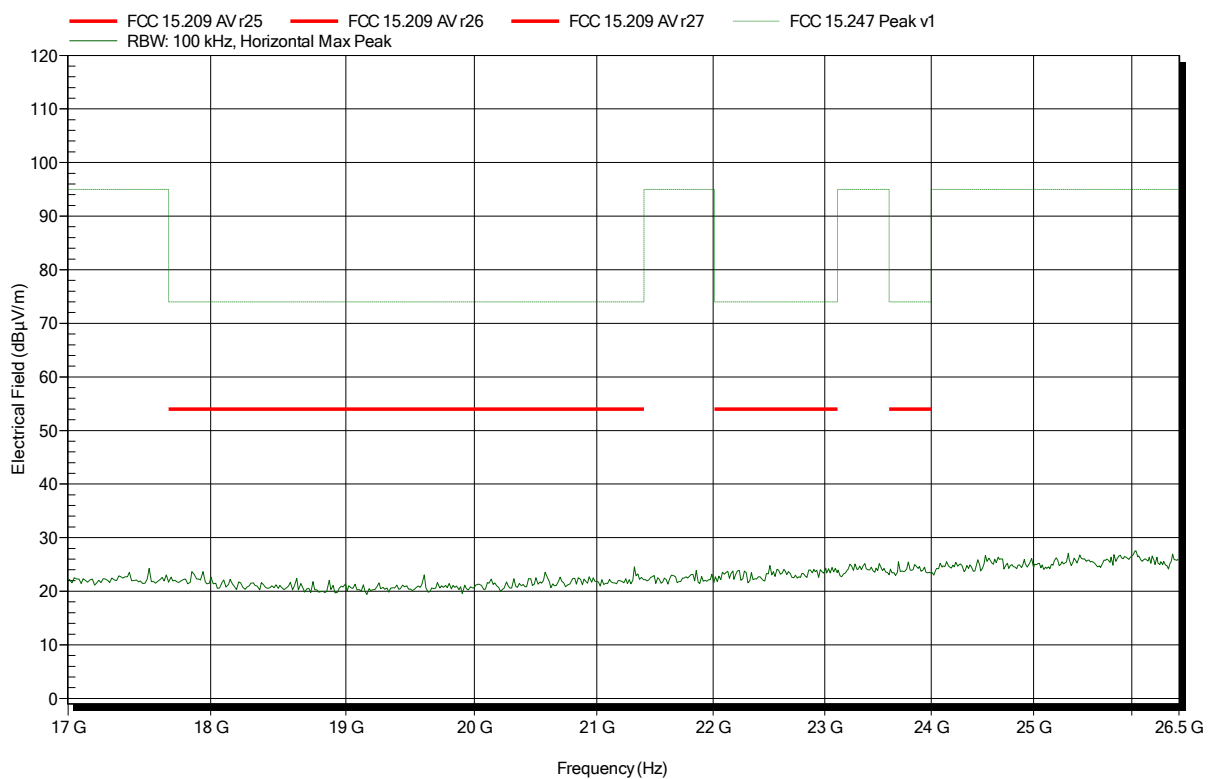


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Amplifier Research AT4560, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 b; 1Mbps; 2412 MHz
Test Date: 2019-02-06
Note:

Index 59

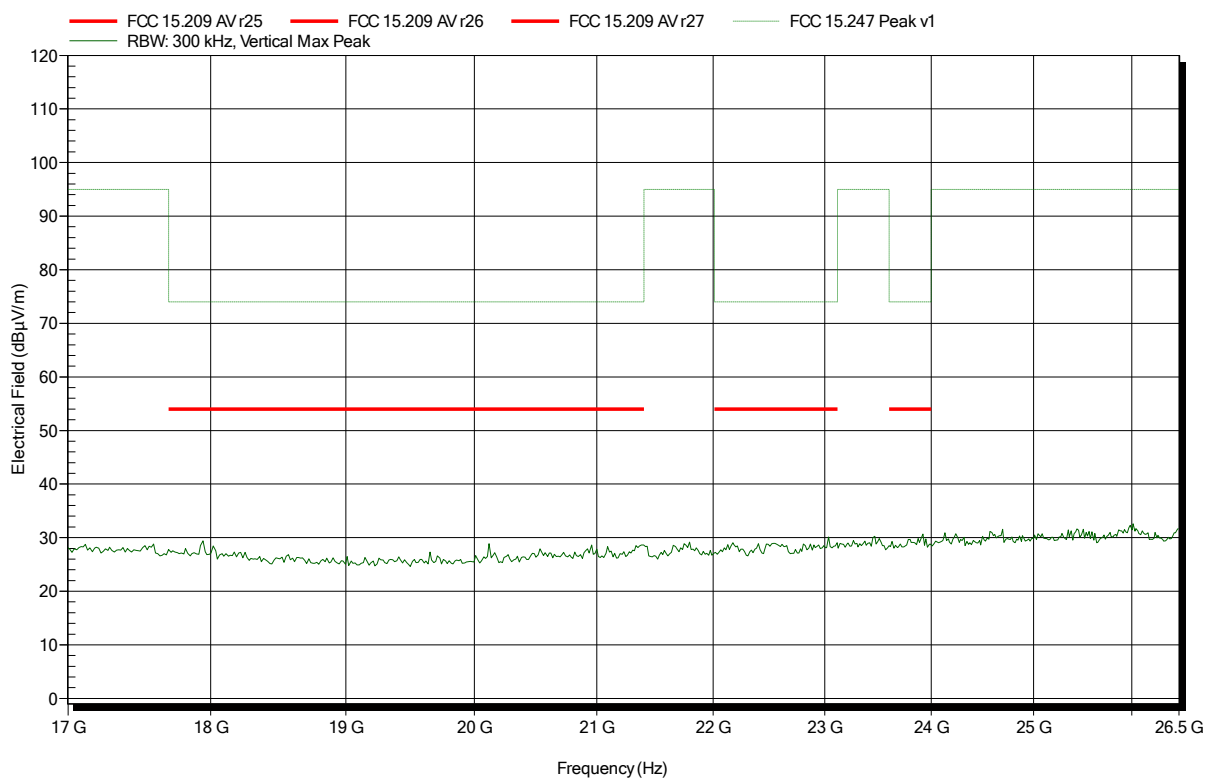

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG

EUT Name: Field Controller Win EC7

Model: CS20

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11 b; 1Mbps; 2437 MHz

Test Date: 2019-02-06

Note:

Index 62

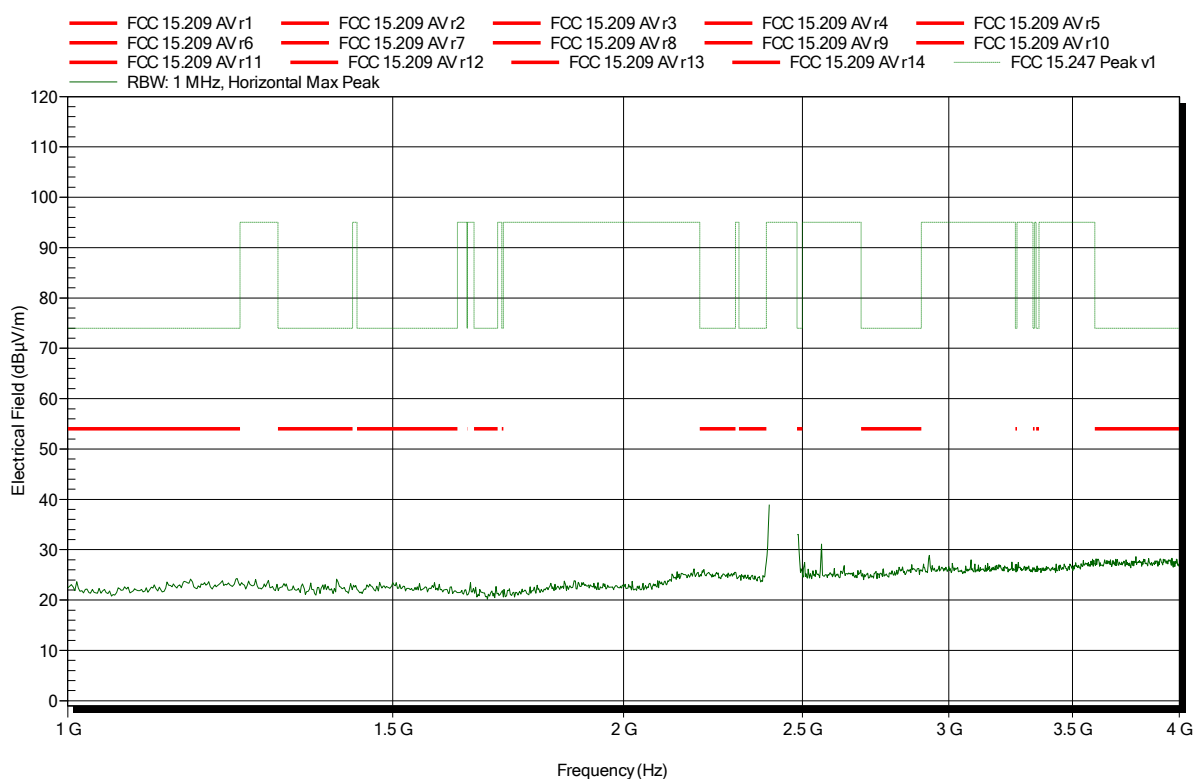

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG

EUT Name: Field Controller Win EC7

Model: CS20

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11 b; 1Mbps; 2437 MHz

Test Date: 2019-02-06

Note:

Index 66

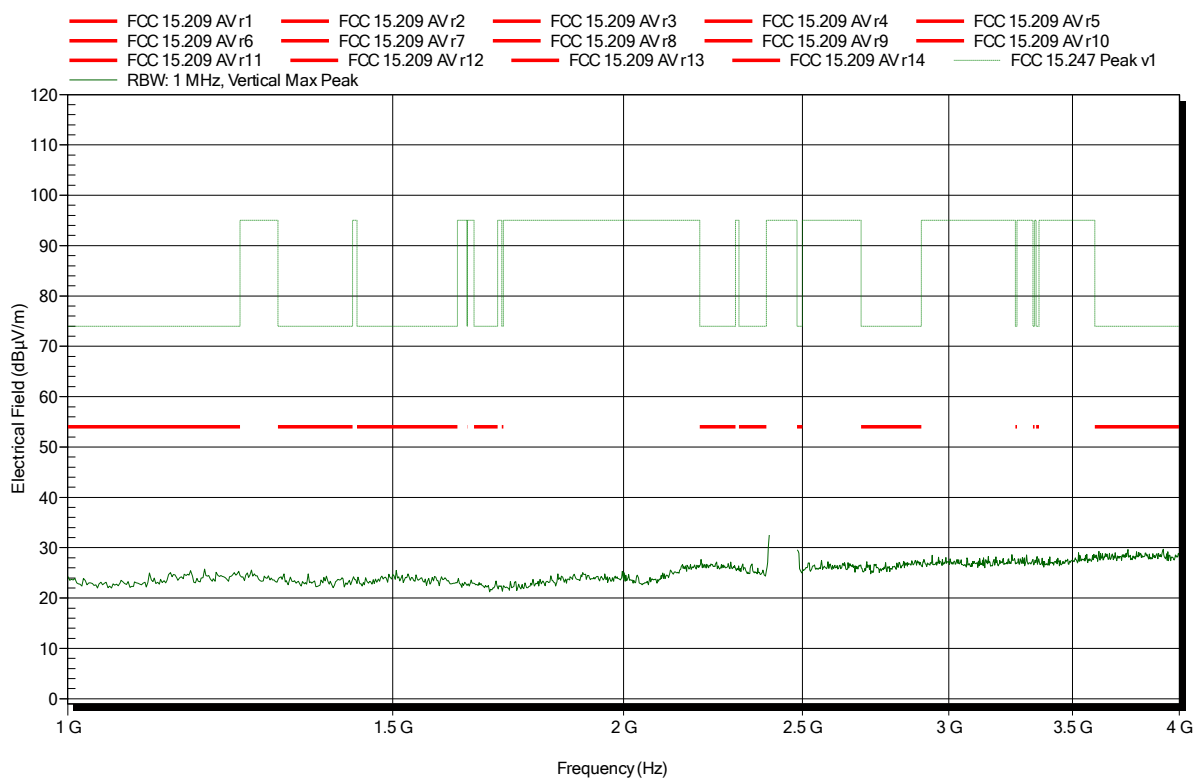


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2437 MHz
 Test Date: 2019-02-06
 Note:

Index 63

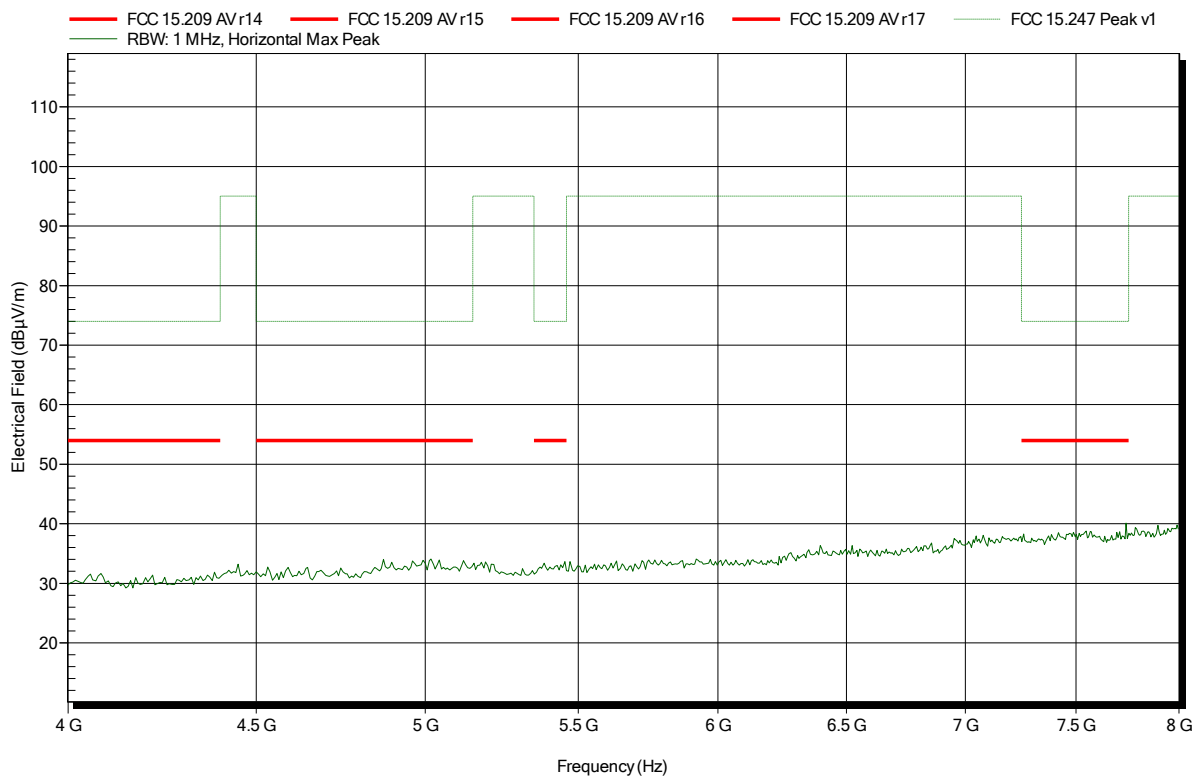


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2437 MHz
 Test Date: 2019-02-06
 Note:


Index 67

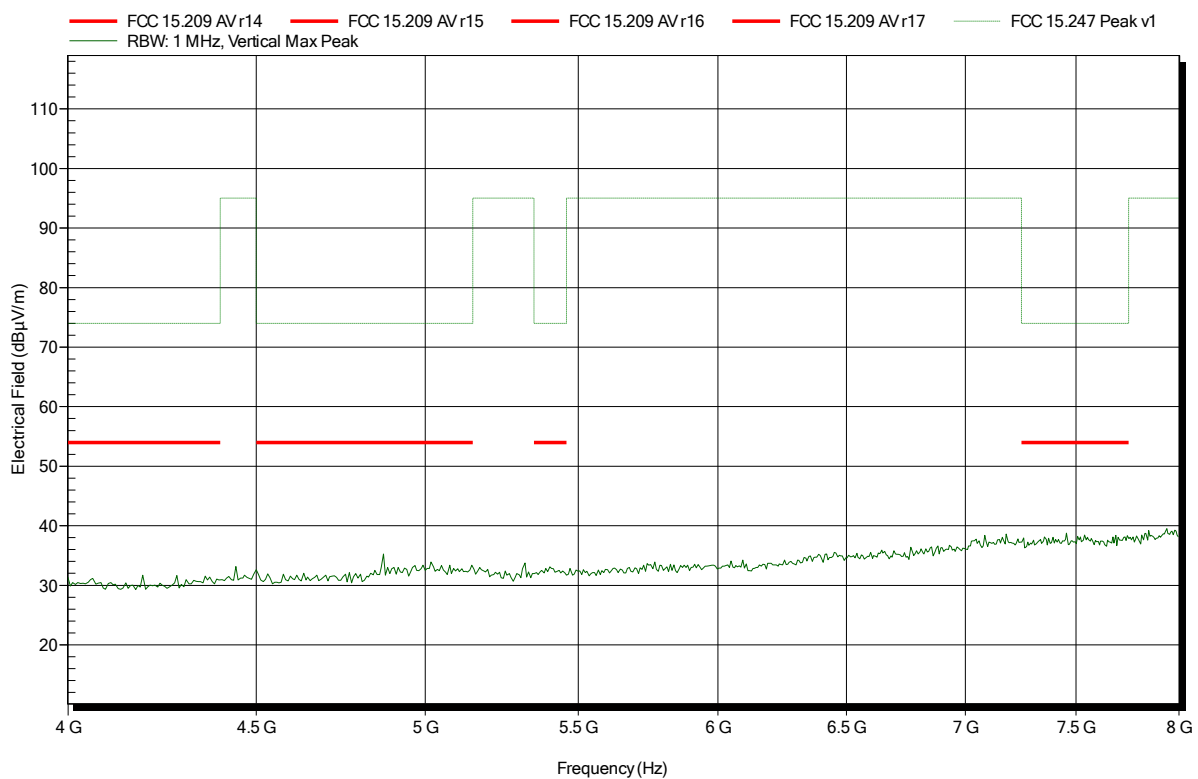

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2437 MHz
 Test Date: 2019-02-06
 Note:

Index 64

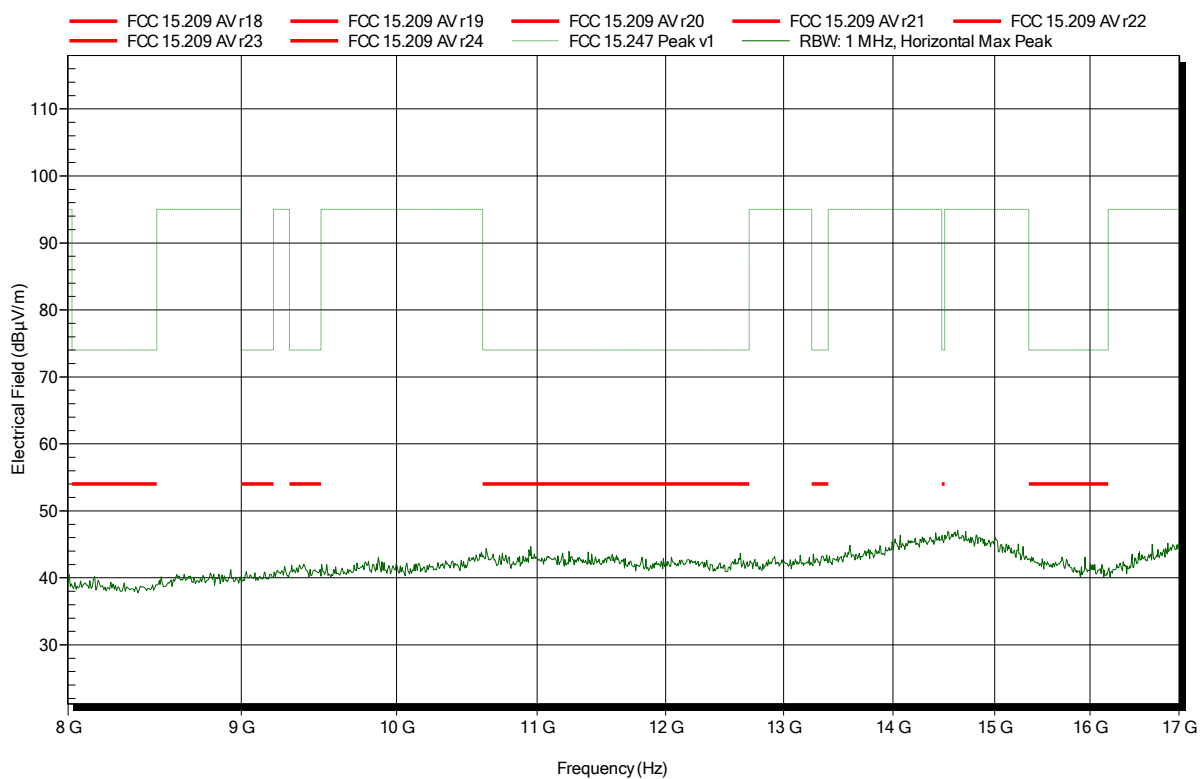


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 b; 1Mbps; 2437 MHz
Test Date: 2019-02-06
Note:


Index 68

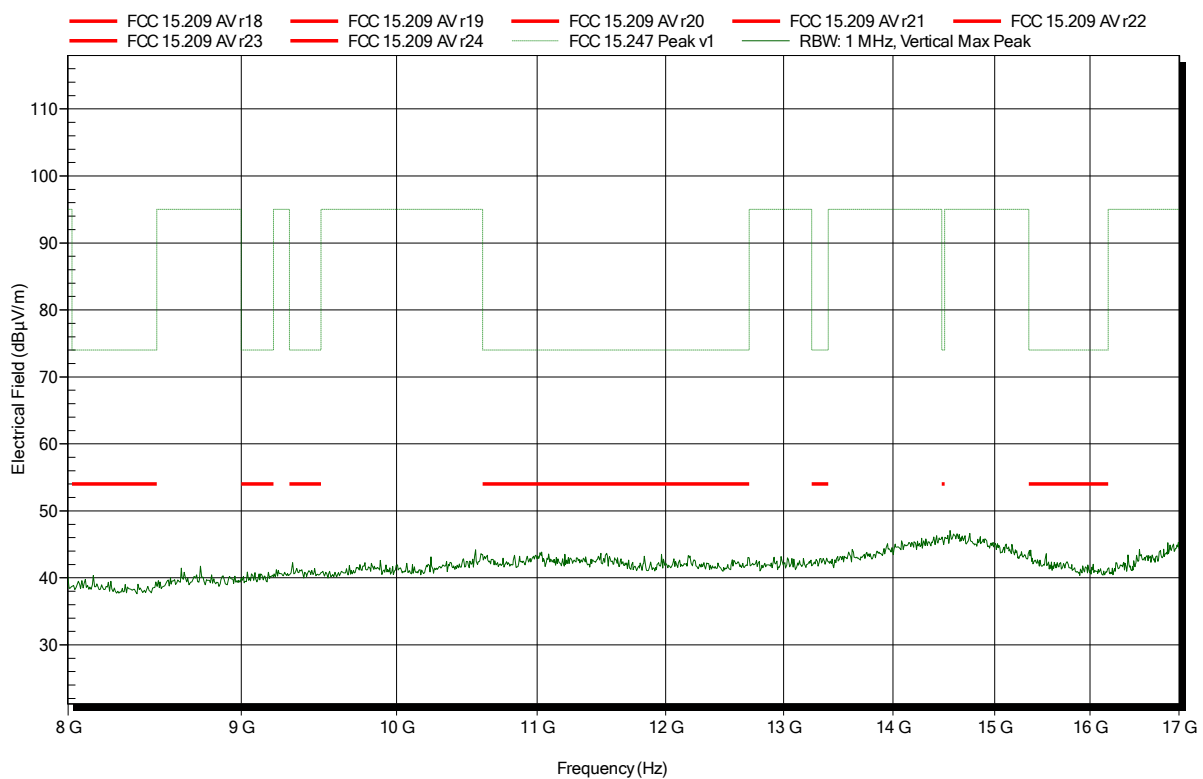

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2437 MHz
 Test Date: 2019-02-06
 Note:

Index 65

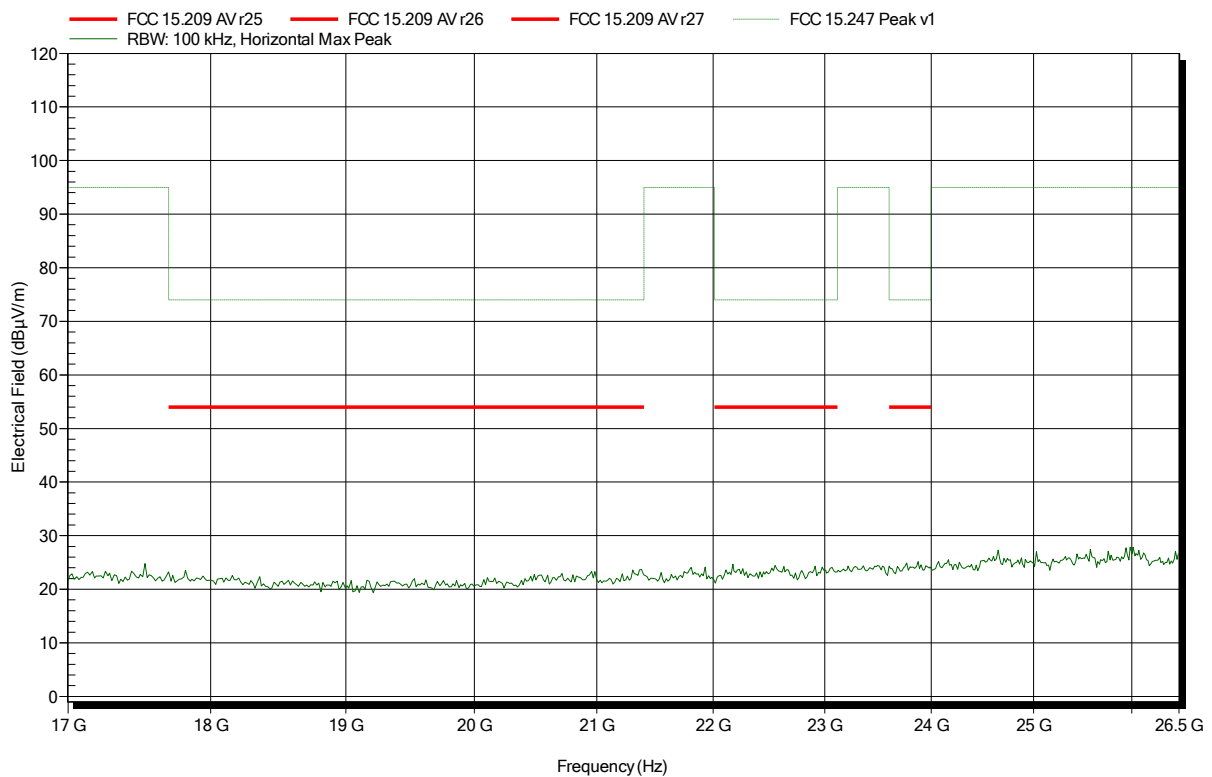


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2437 MHz
 Test Date: 2019-02-06
 Note:


Index 69

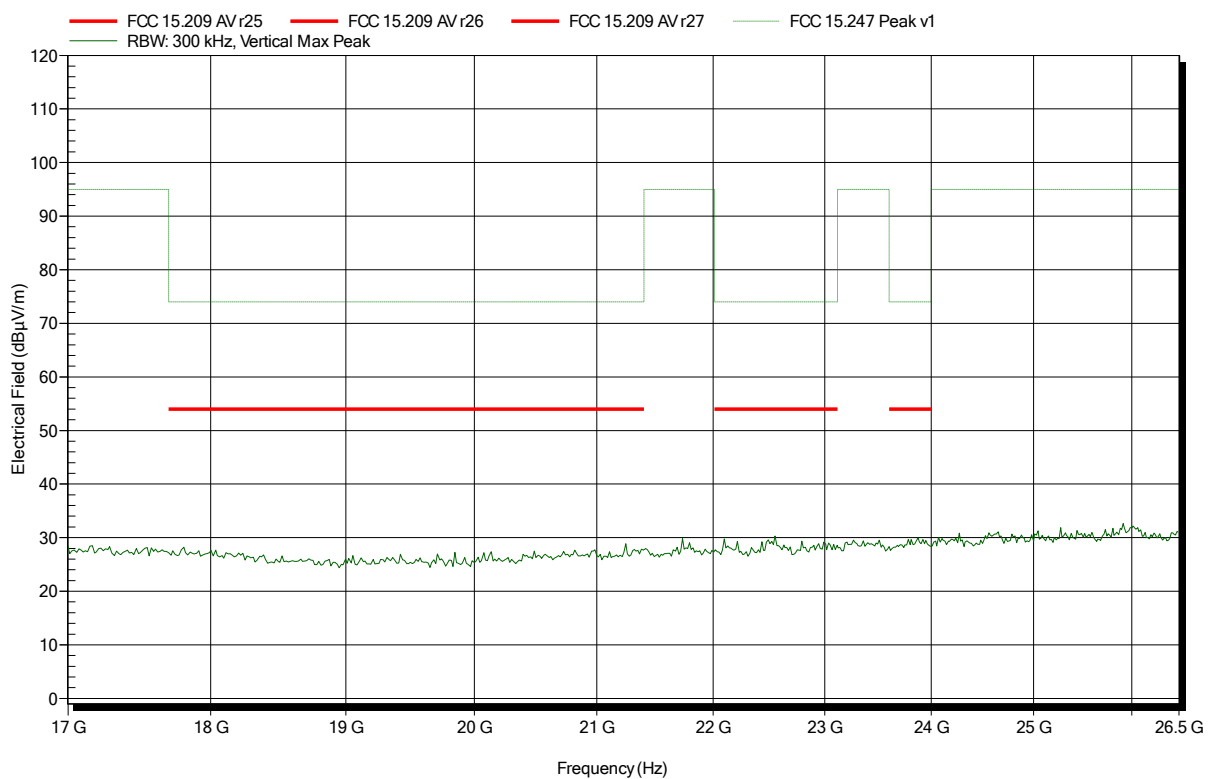

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note:


Index 70

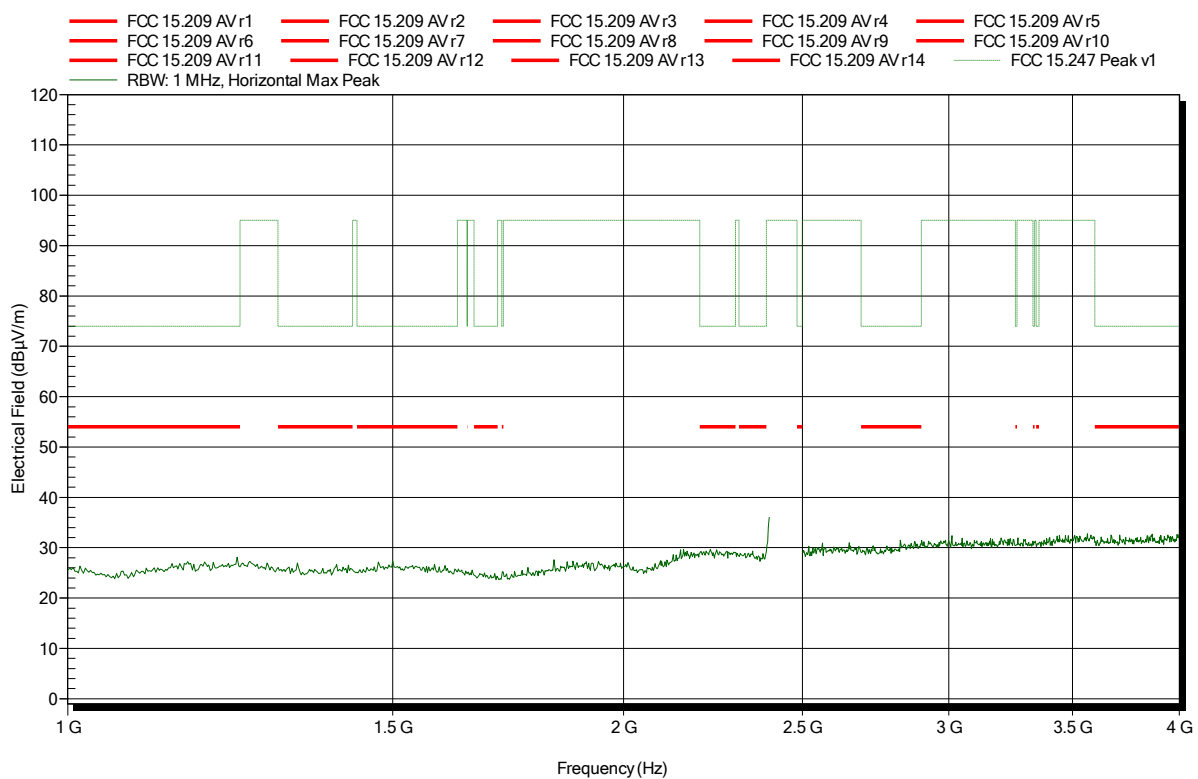

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note:

Index 75

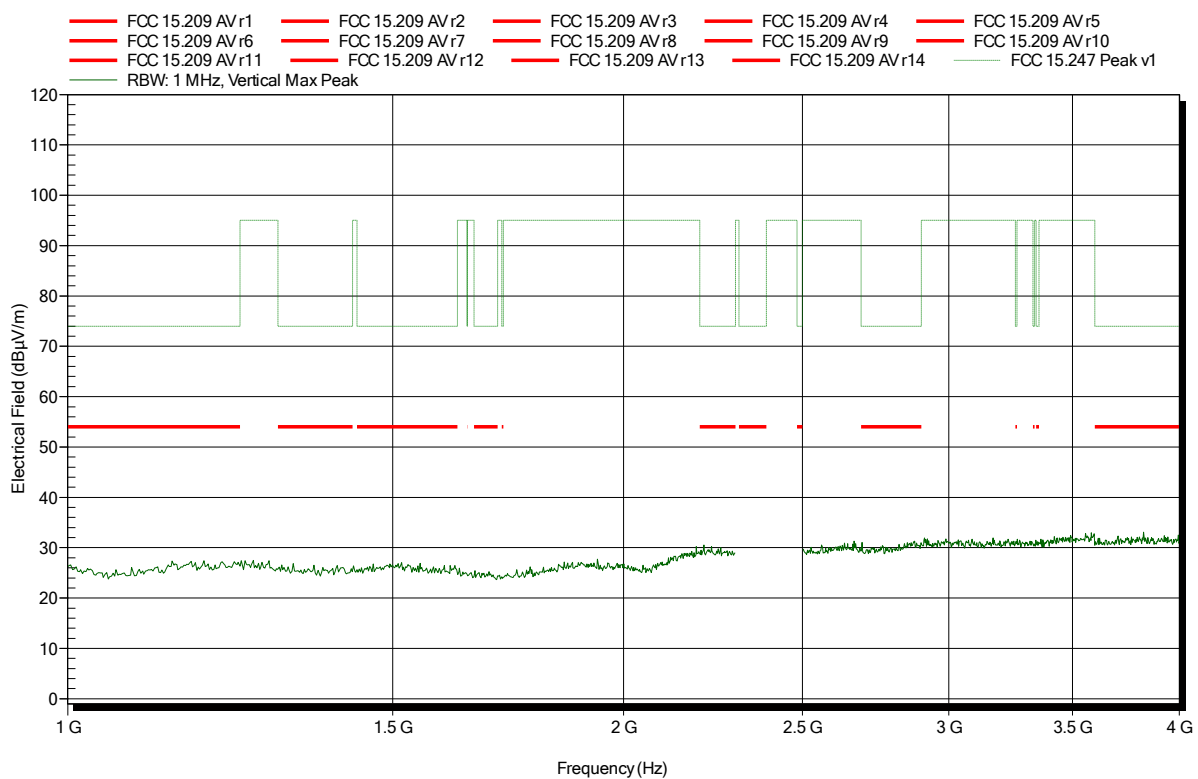


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note: upper bandedge

Index 71

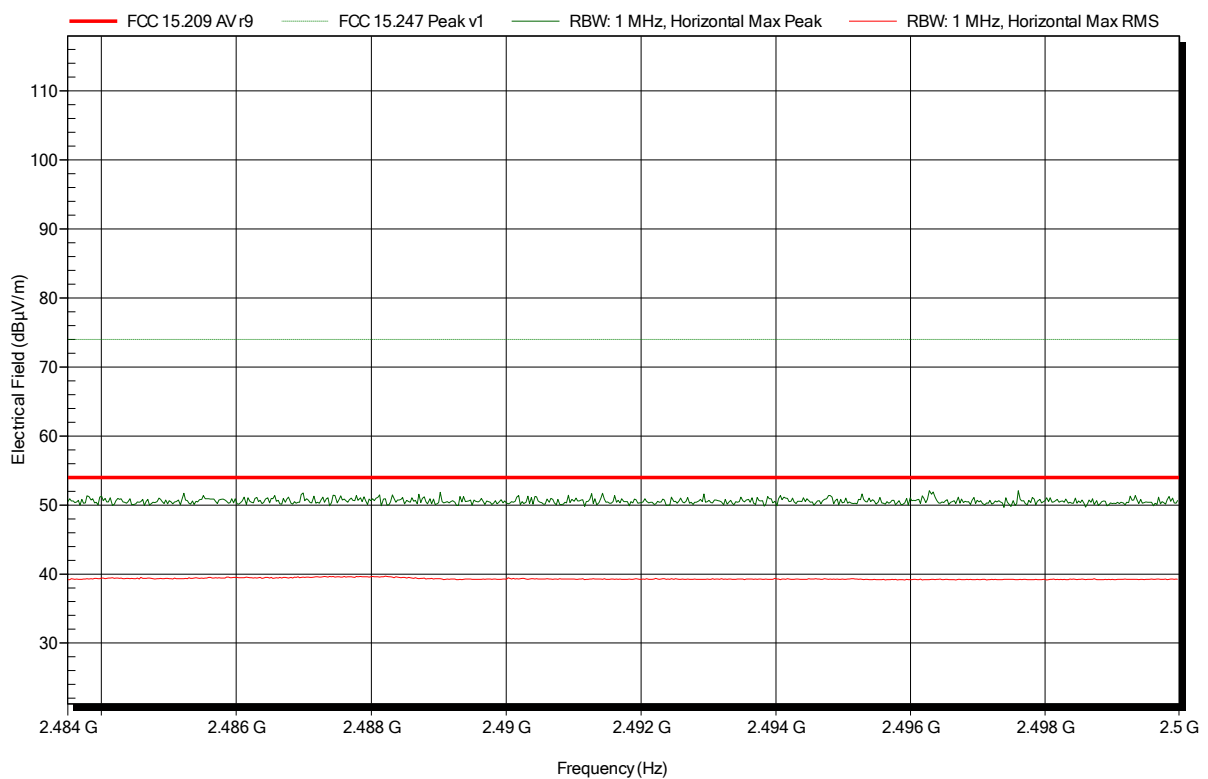


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note: upper bandedge

Index 77

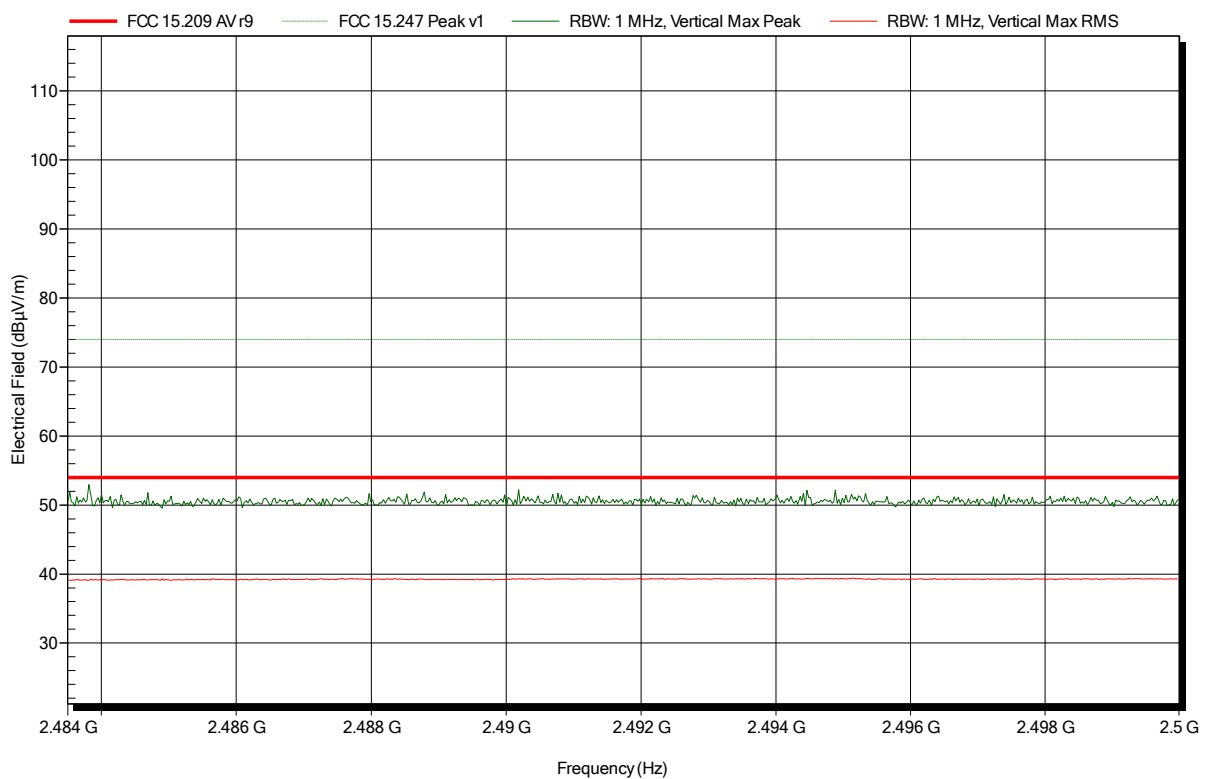


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note:

Index 72

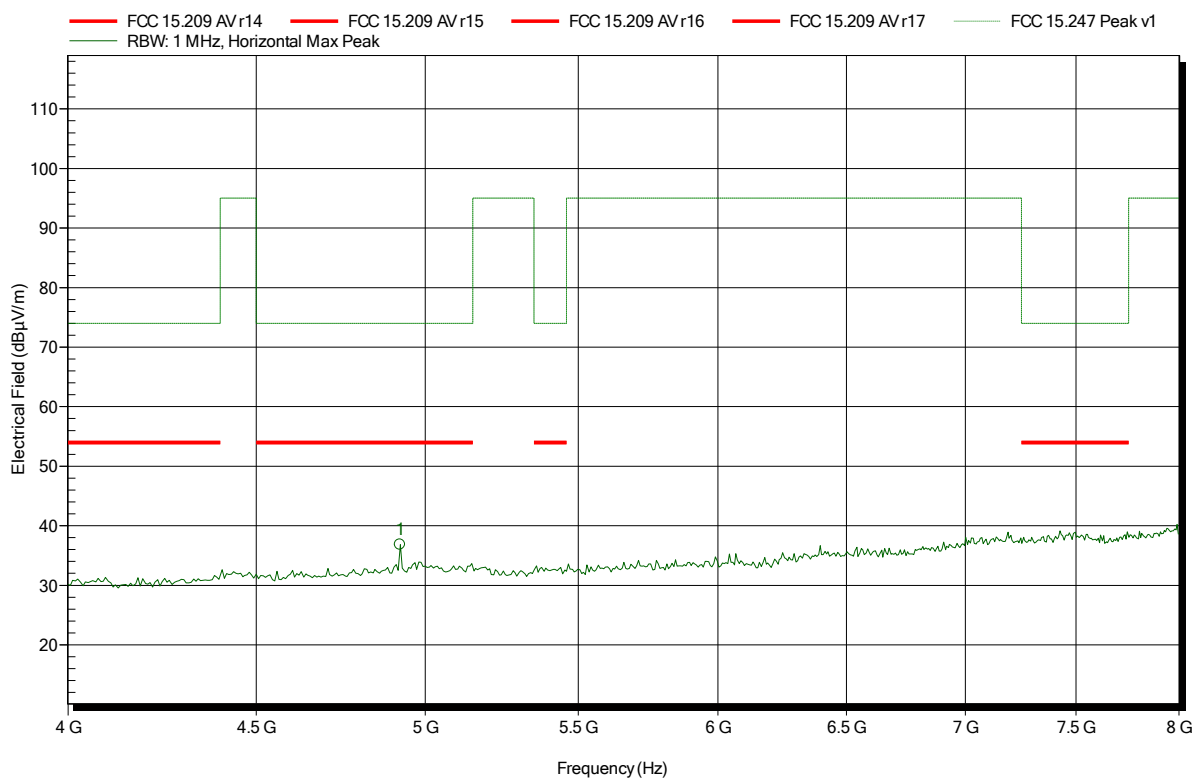


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.922 GHz	36.81 dBµV/m	74 dBµV/m	-37.19 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note:

Index 76

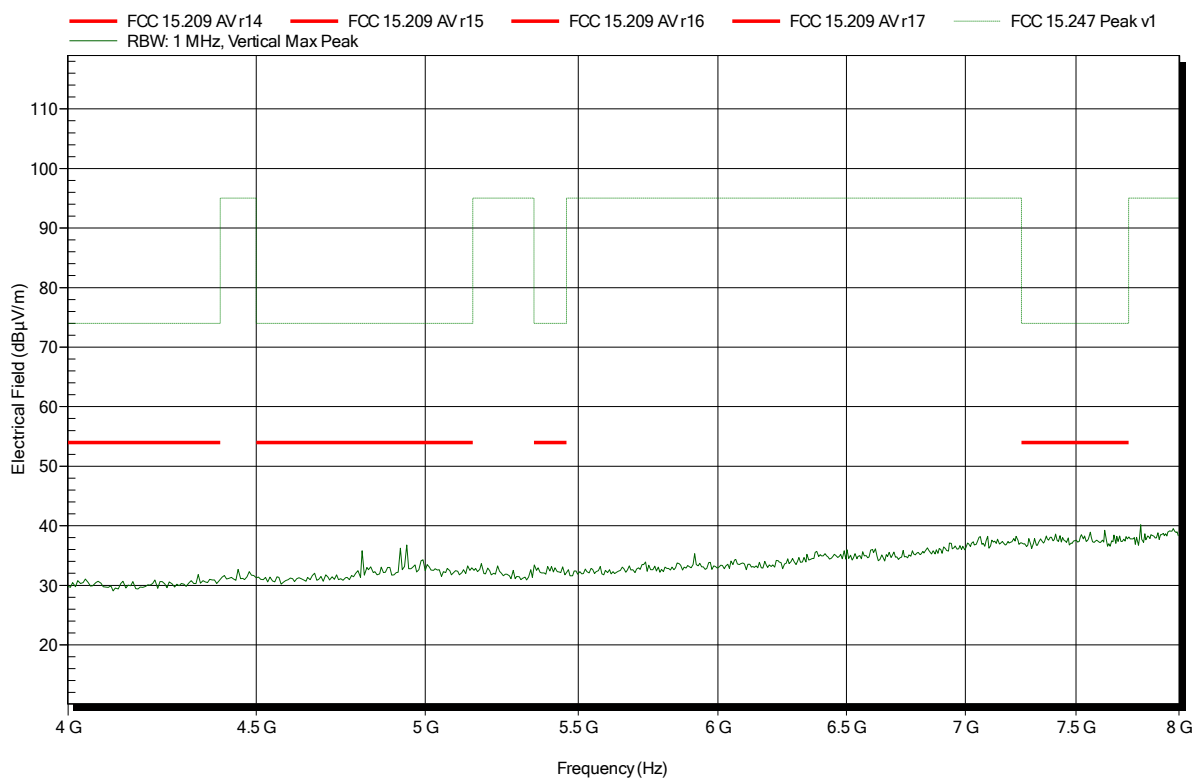


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
Test Date: 2019-02-07
Note:

Index 73

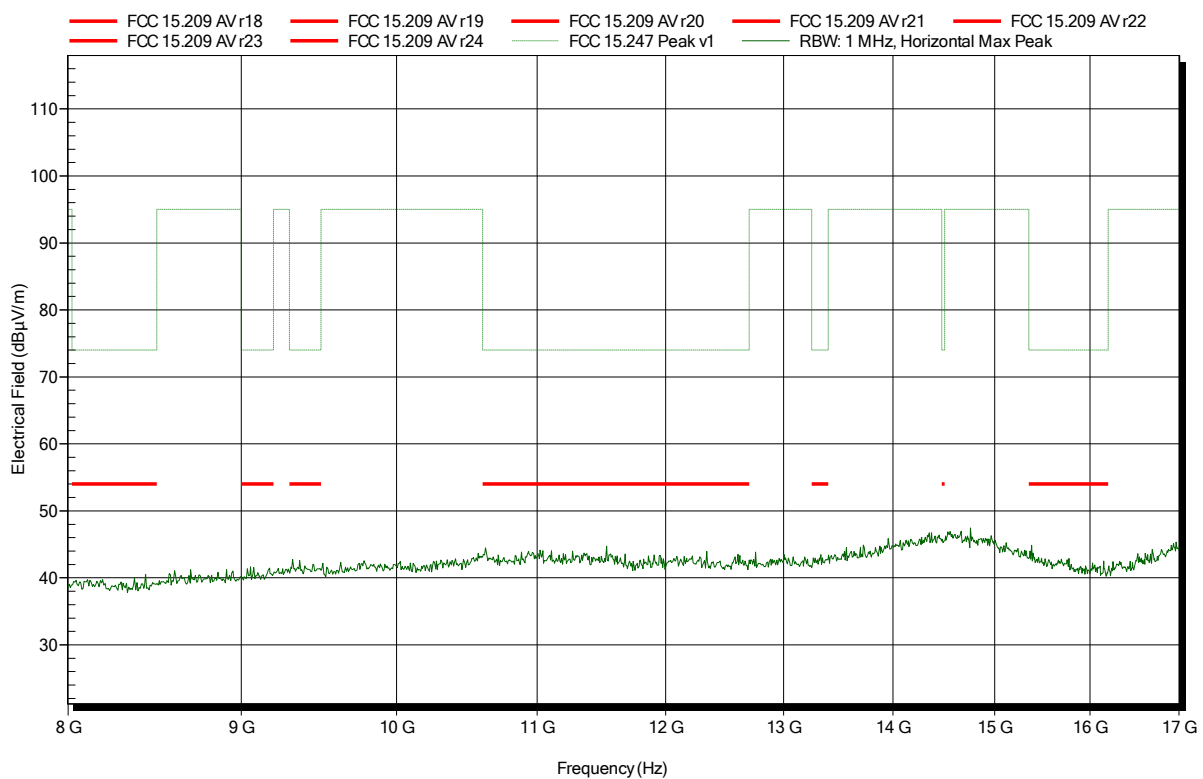


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
Test Date: 2019-02-07
Note:


Index 78

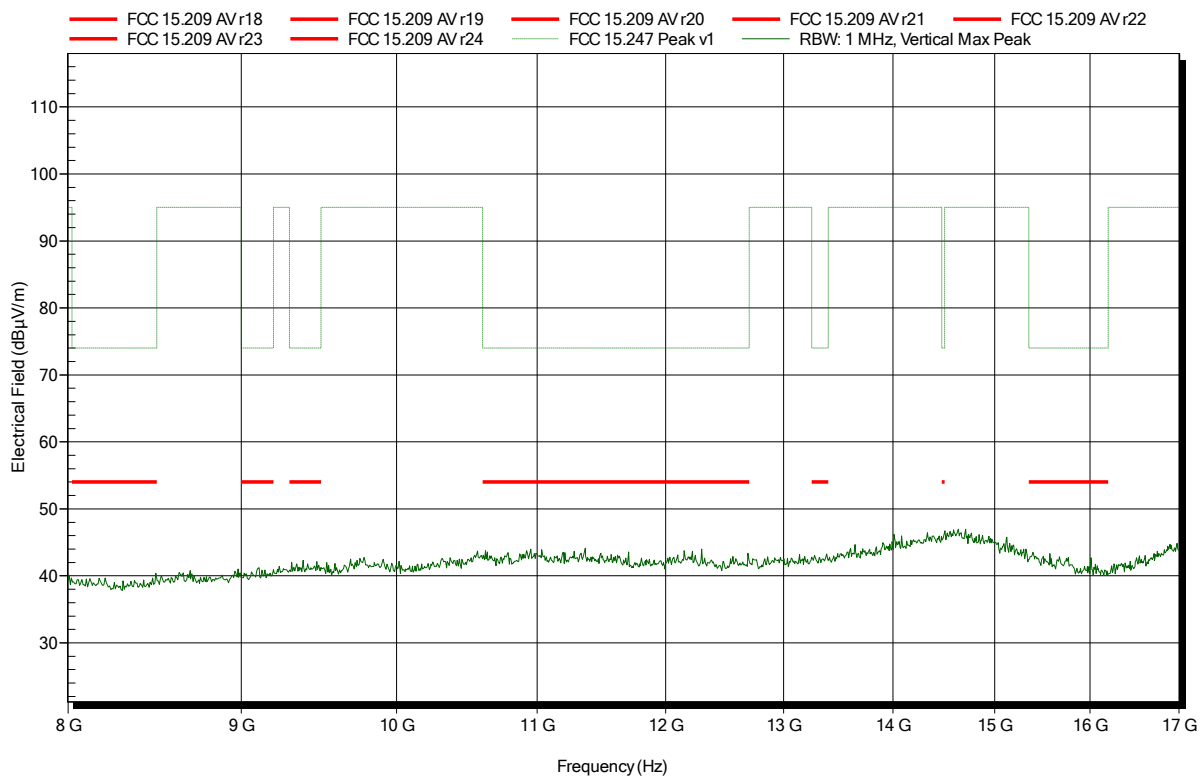

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note:

Index 74

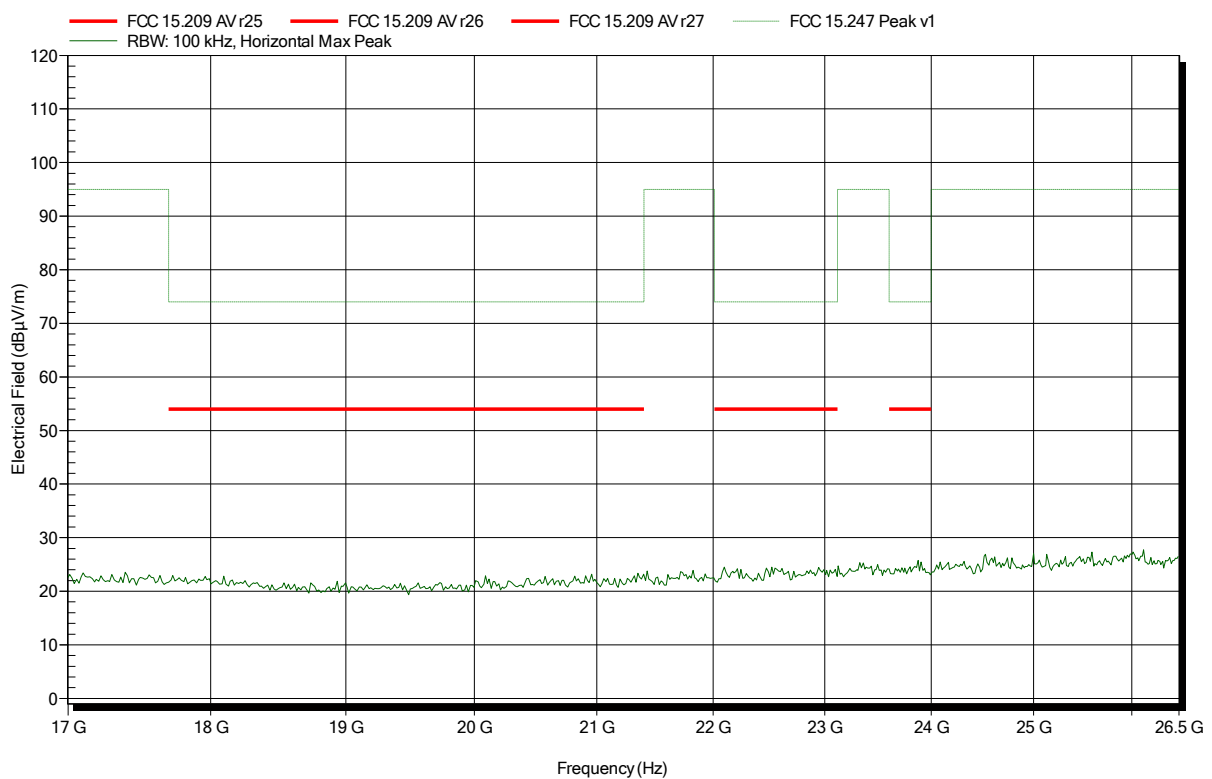


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Amplifier Research AT4560, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 b; 1Mbps; 2462 MHz
Test Date: 2019-02-07
Note:

Index 79

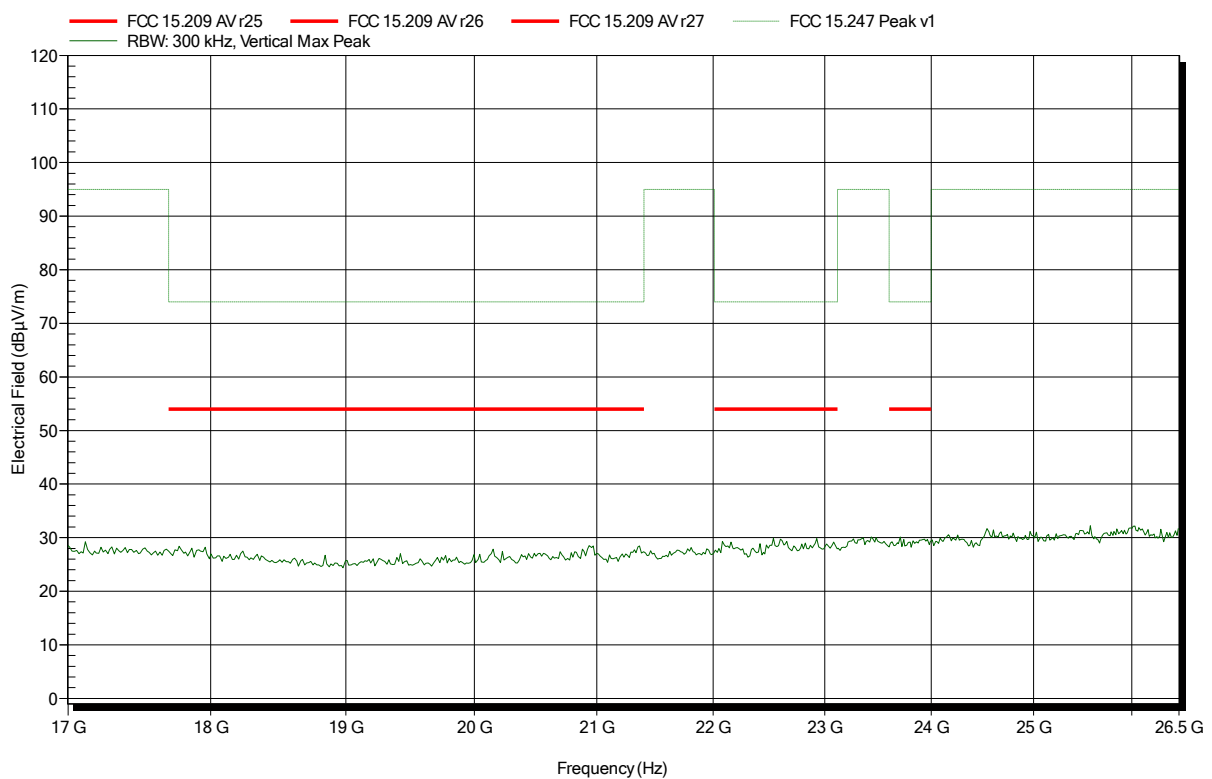


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 g; 6Mbps; 2412 MHz
Test Date: 2019-02-07
Note:

Index 80

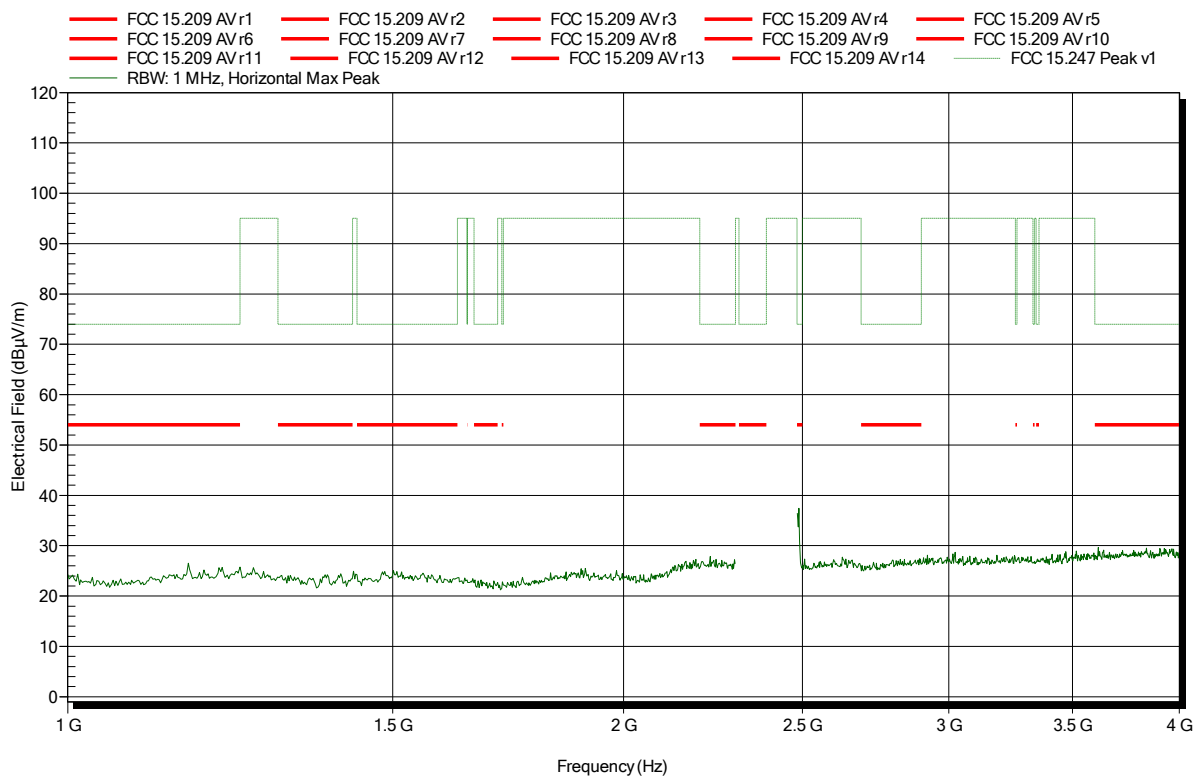


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2412 MHz
 Test Date: 2019-02-07
 Note:

Index 83

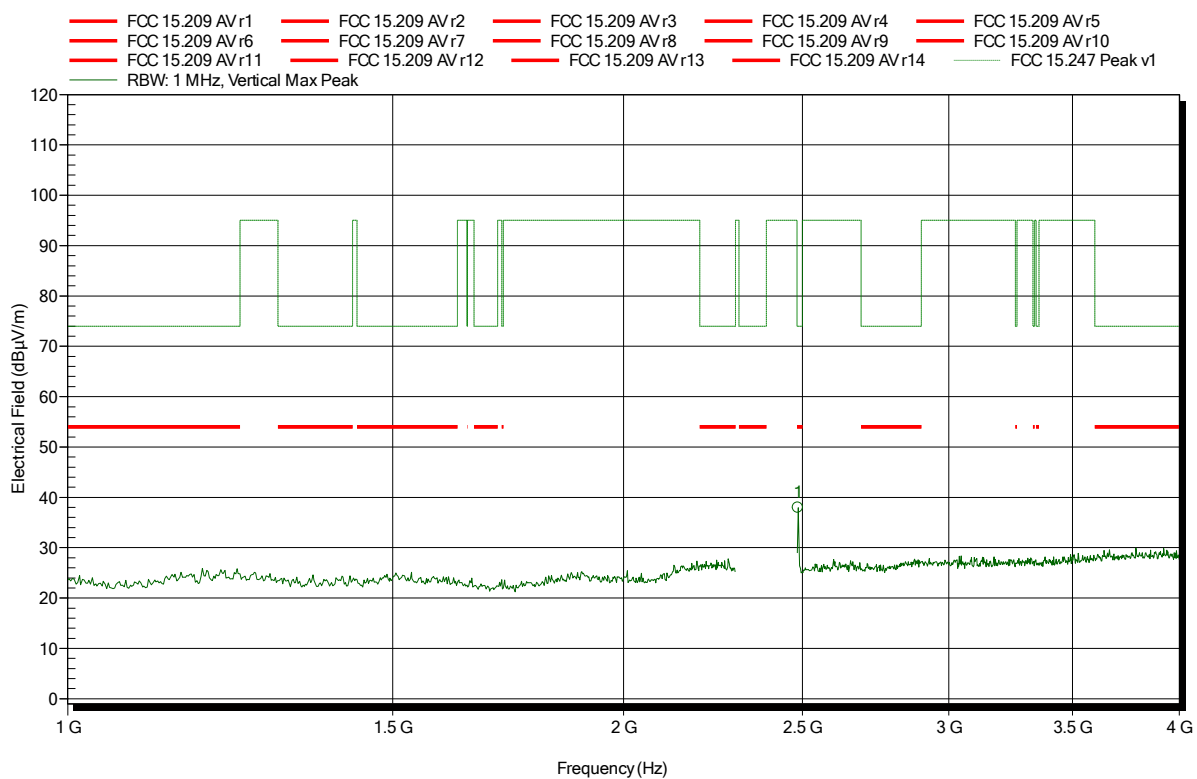


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4859 GHz	37.94 dBµV/m	74 dBµV/m	-36.06 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2412 MHz
 Test Date: 2019-02-07
 Note: lower bandedge

Index 81

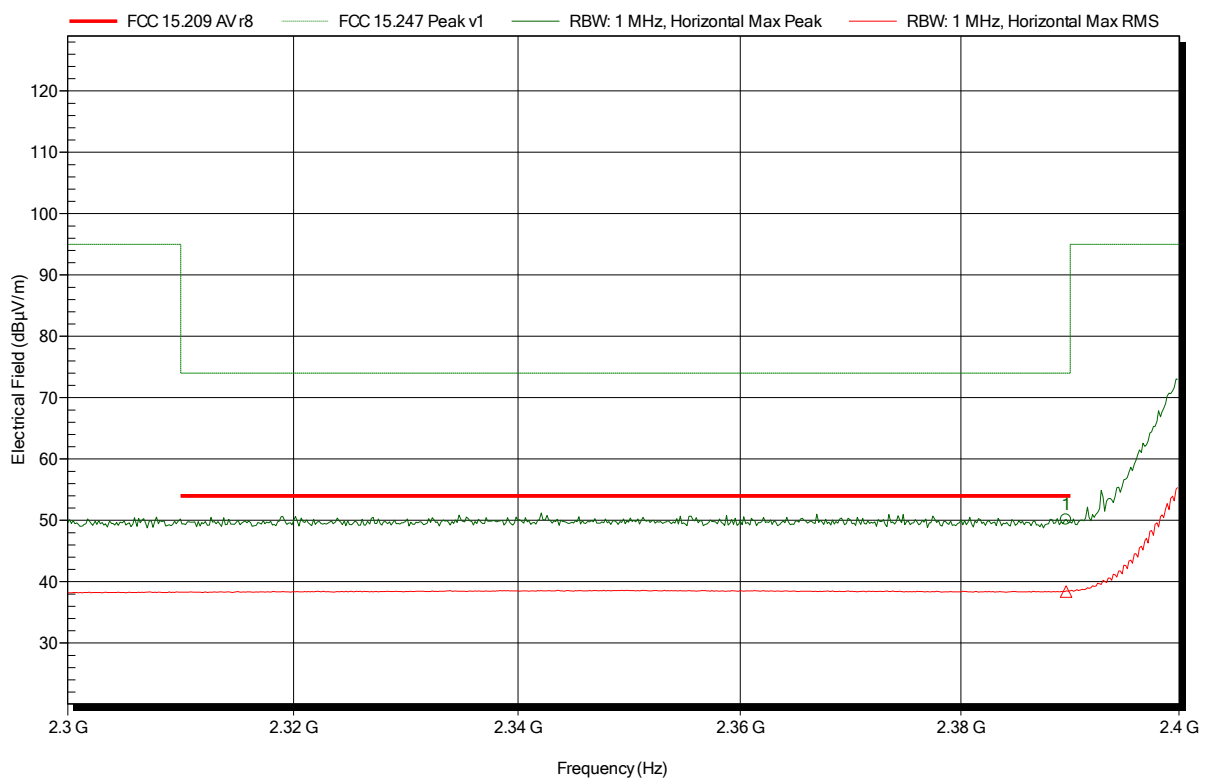


Frequency 2.3896 GHz	Peak 50.11 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -23.89 dB	Peak Status Pass
Frequency 2.3896 GHz	RMS 38.39 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -15.61 dB	RMS Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 g; 6Mbps; 2412 MHz
Test Date: 2019-02-07
Note: lower bandedge

Index 84

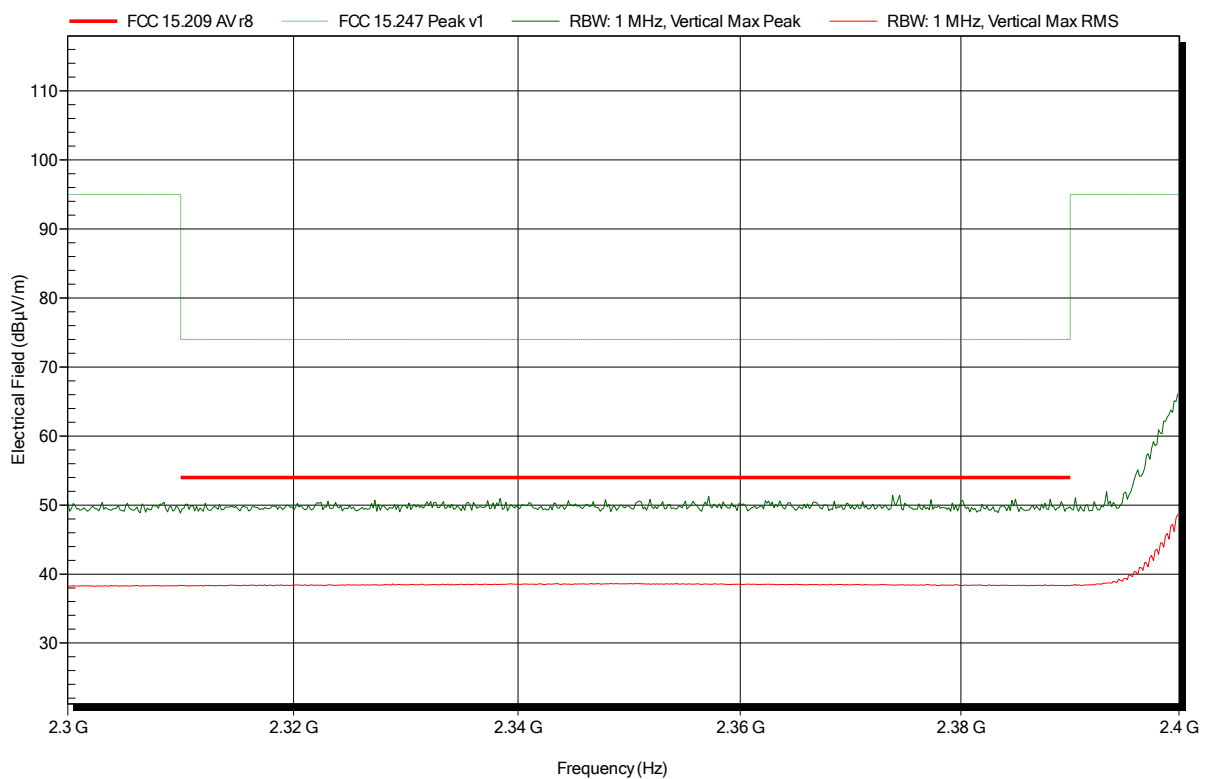


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2412 MHz
 Test Date: 2019-02-07
 Note:

Index 82

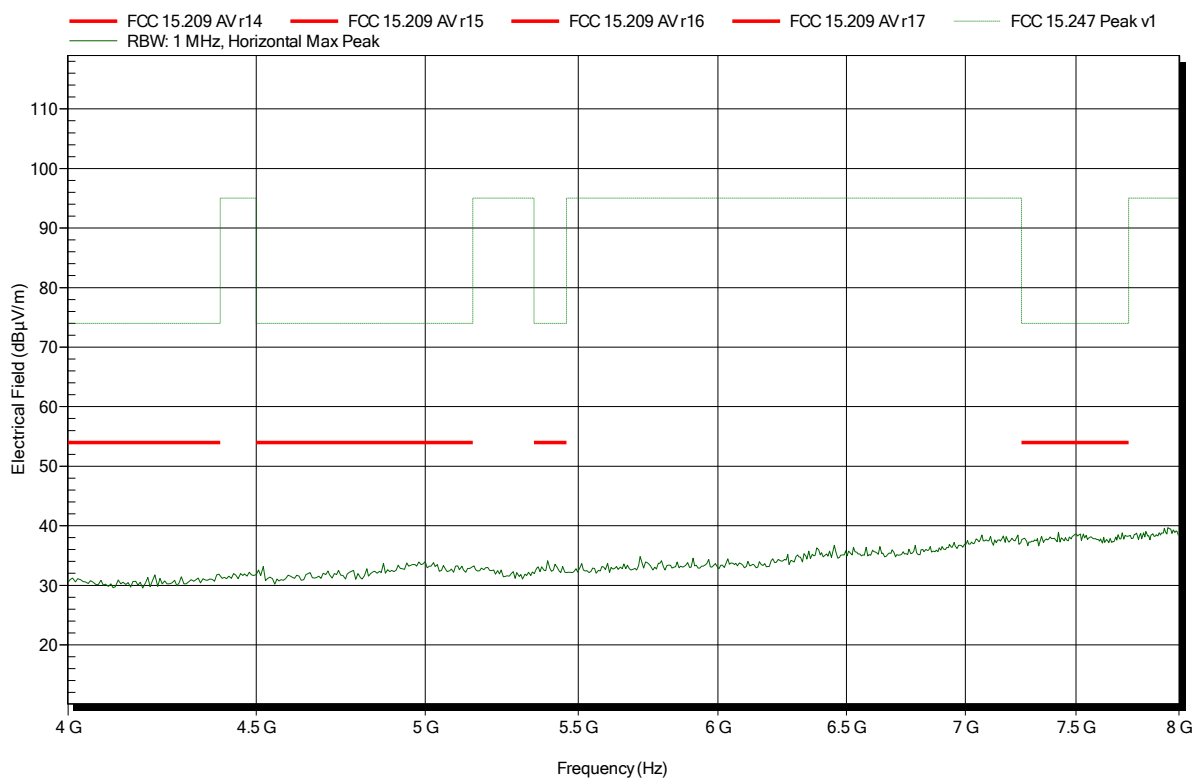


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 g; 6Mbps; 2412 MHz
Test Date: 2019-02-07
Note:

Index 85

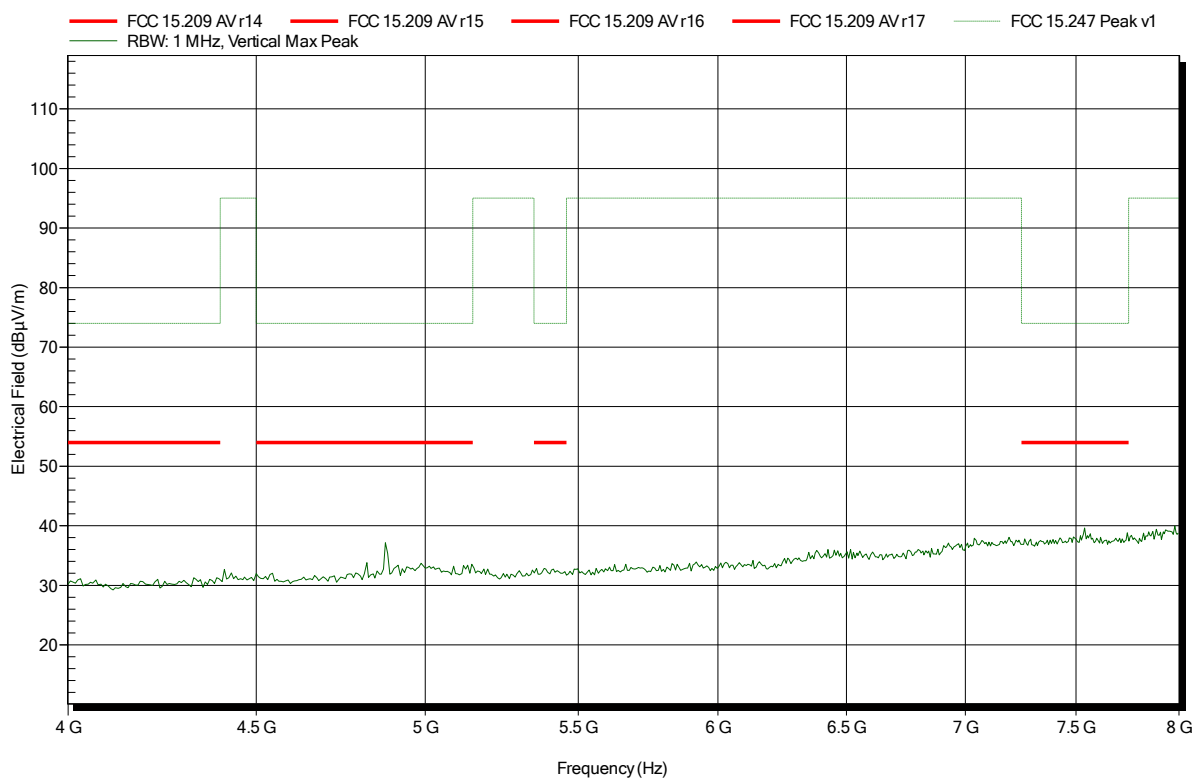

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG

EUT Name: Field Controller Win EC7

Model: CS20

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11 g; 6Mbps; 2437 MHz

Test Date: 2019-02-07

Note:

Index 86

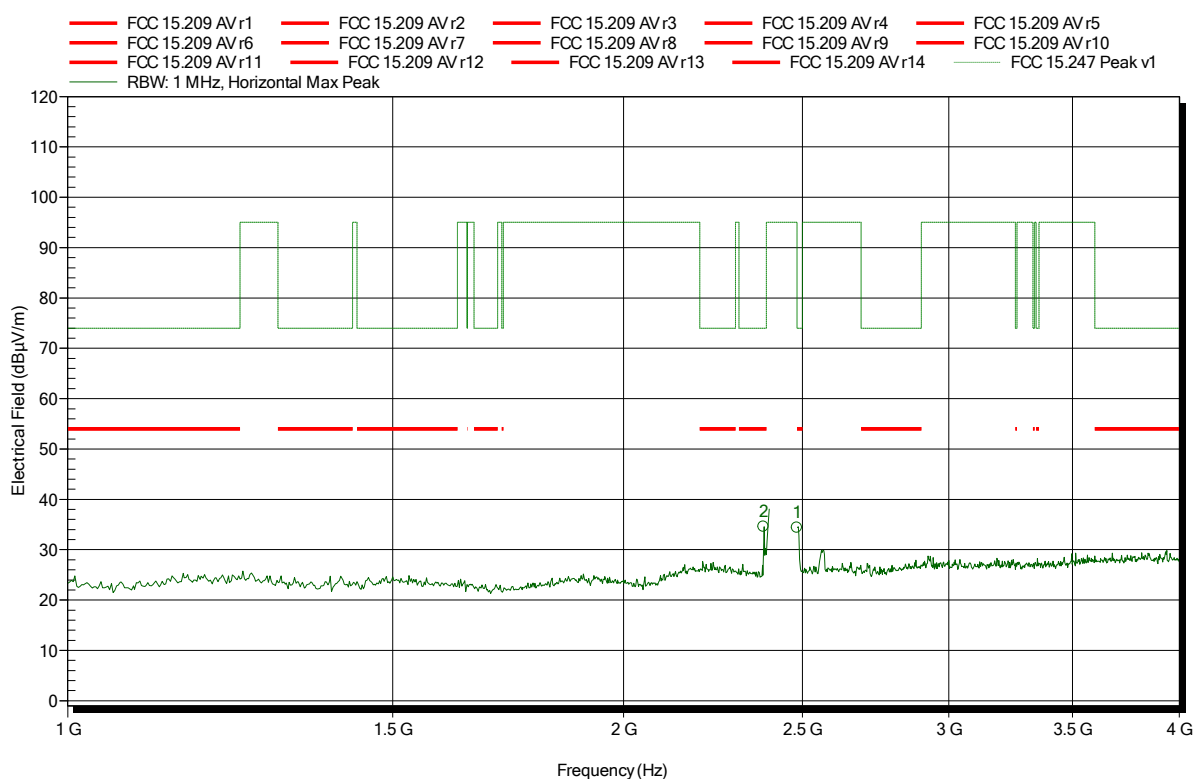


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.3821 GHz	34.57 dBμV/m	74 dBμV/m	-39.43 dB	Pass
2.4835 GHz	34.38 dBμV/m	74 dBμV/m	-39.62 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2437 MHz
 Test Date: 2019-02-07
 Note:


Index 88

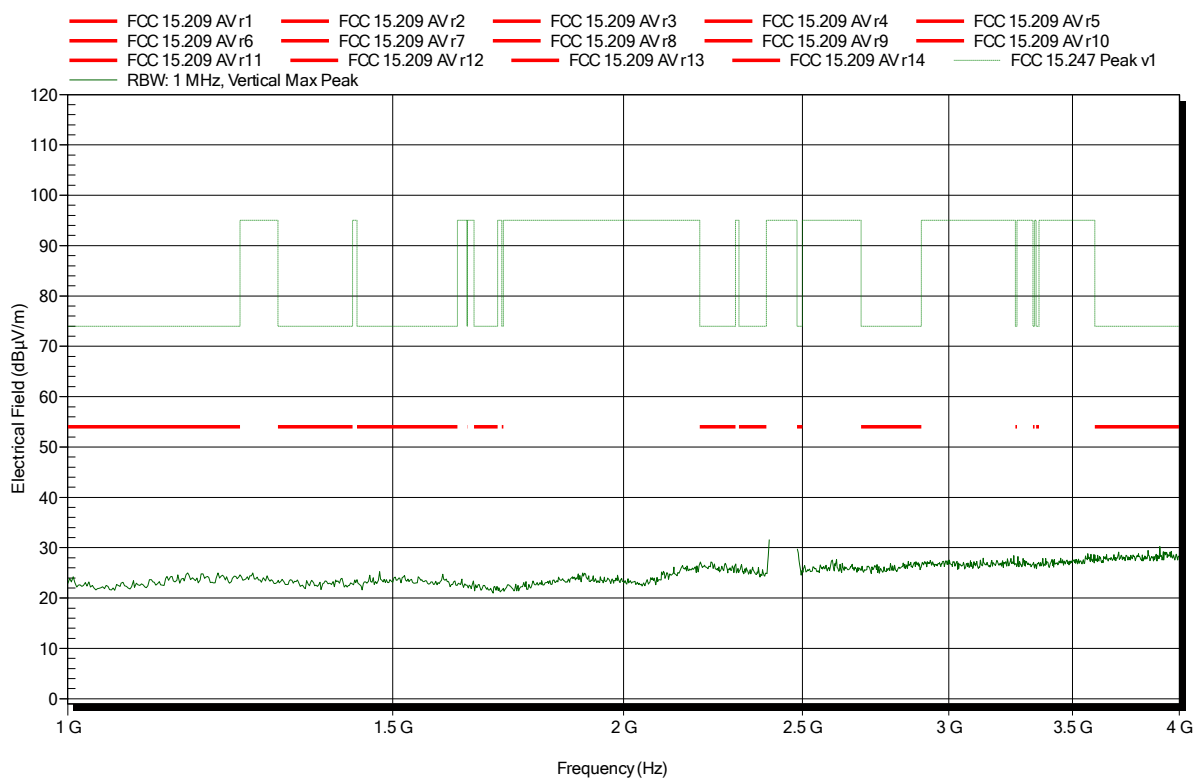

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 87

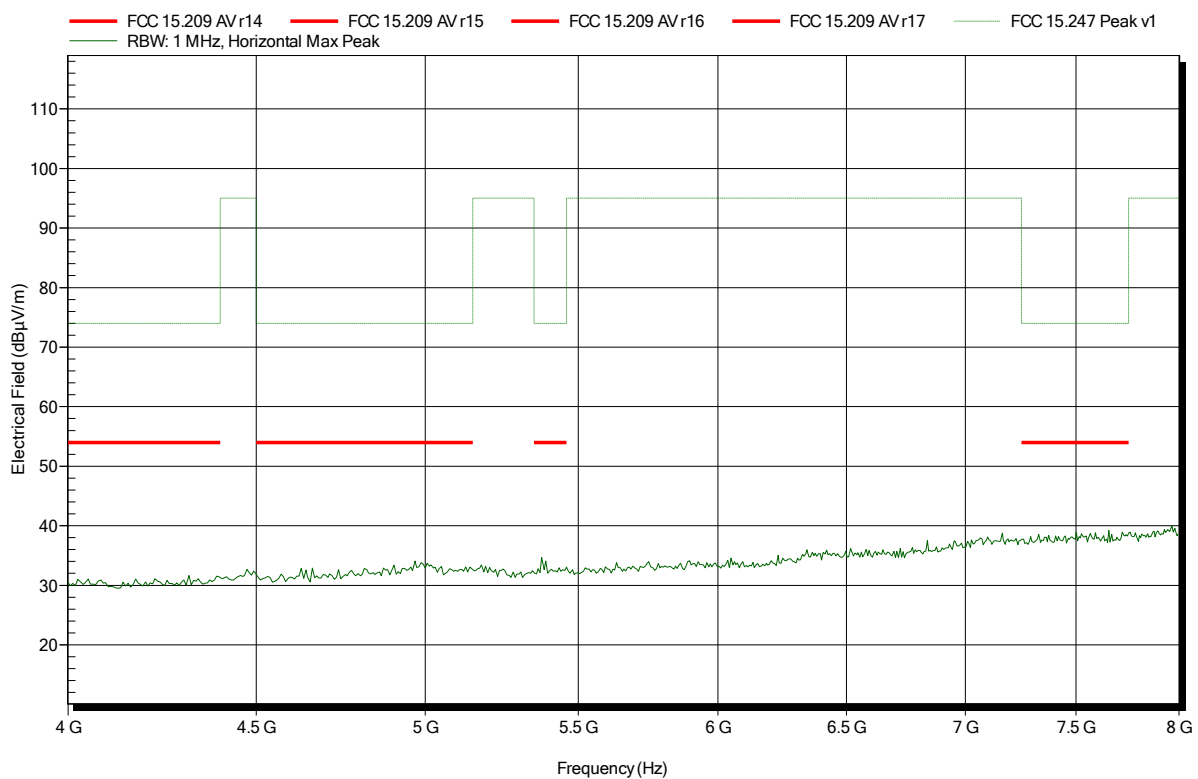


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 89

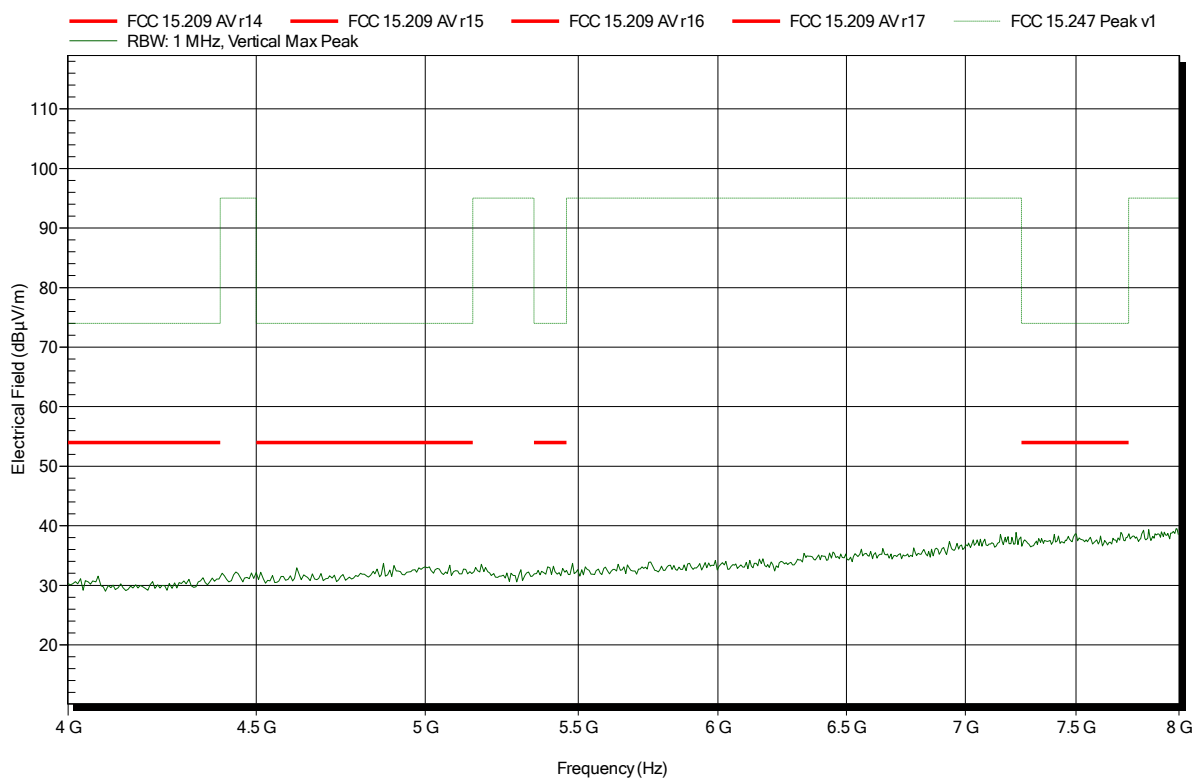


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note:


Index 90

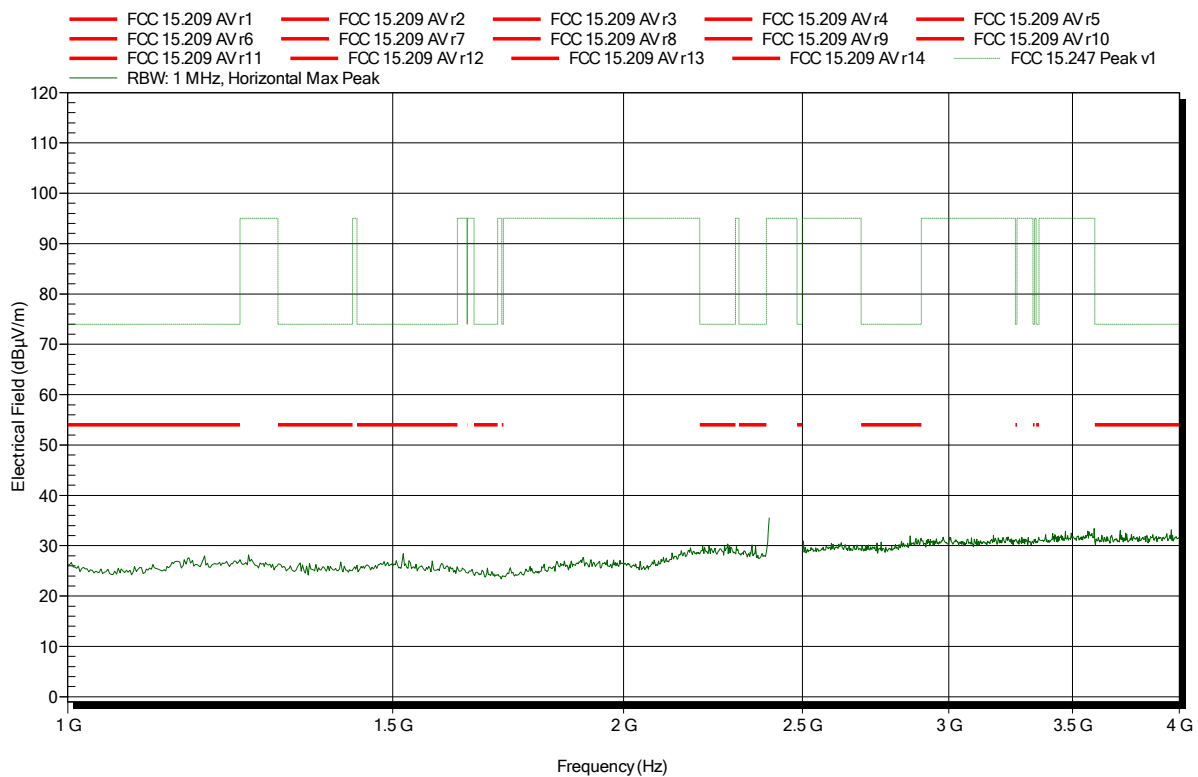

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note:


Index 93

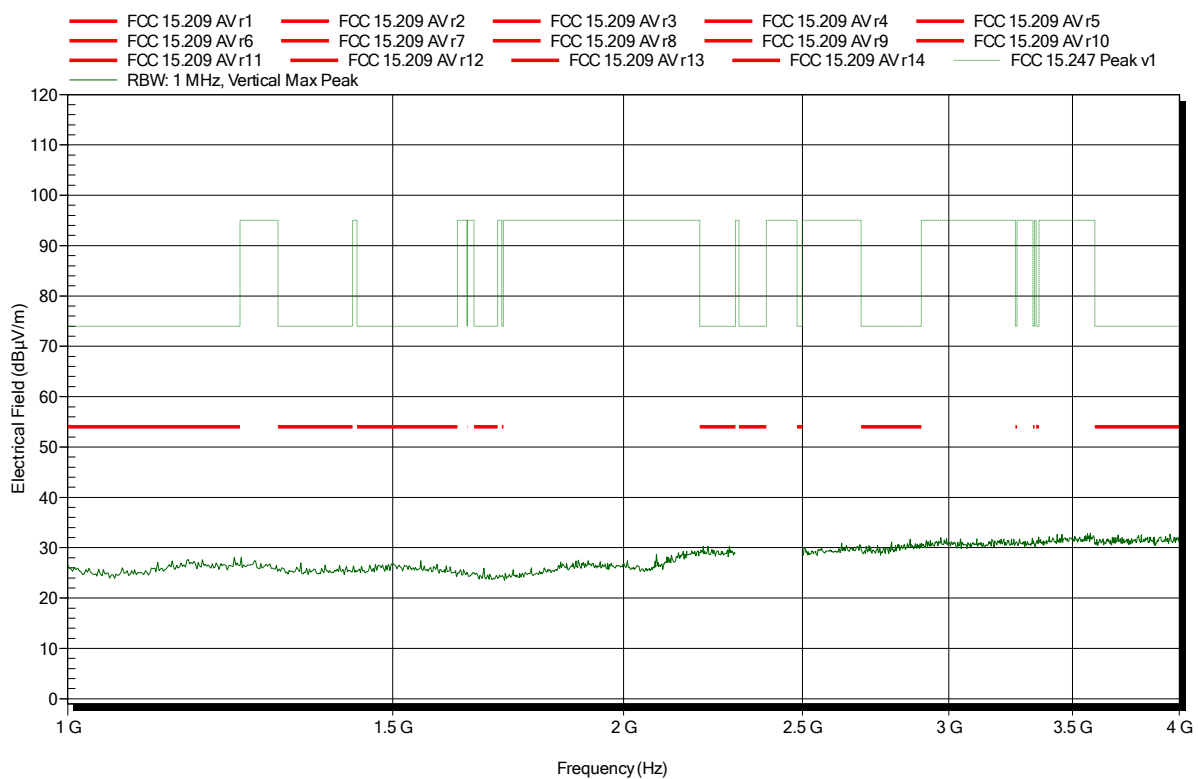

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note: upper bandedge

Index 91

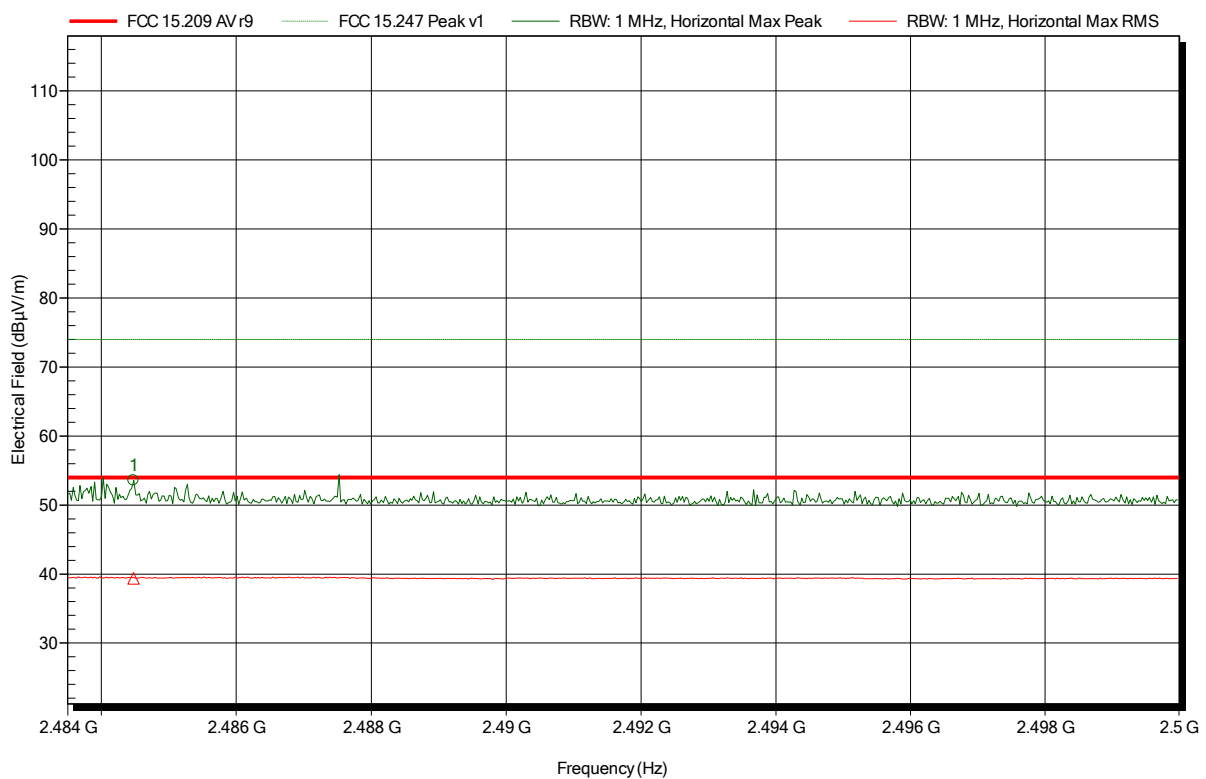


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4845 GHz	53.56 dBµV/m	74 dBµV/m	-20.44 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4845 GHz	39.38 dBµV/m	54 dBµV/m	-14.62 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 g; 6Mbps; 2462 MHz
Test Date: 2019-02-07
Note: upper bandedge

Index 94

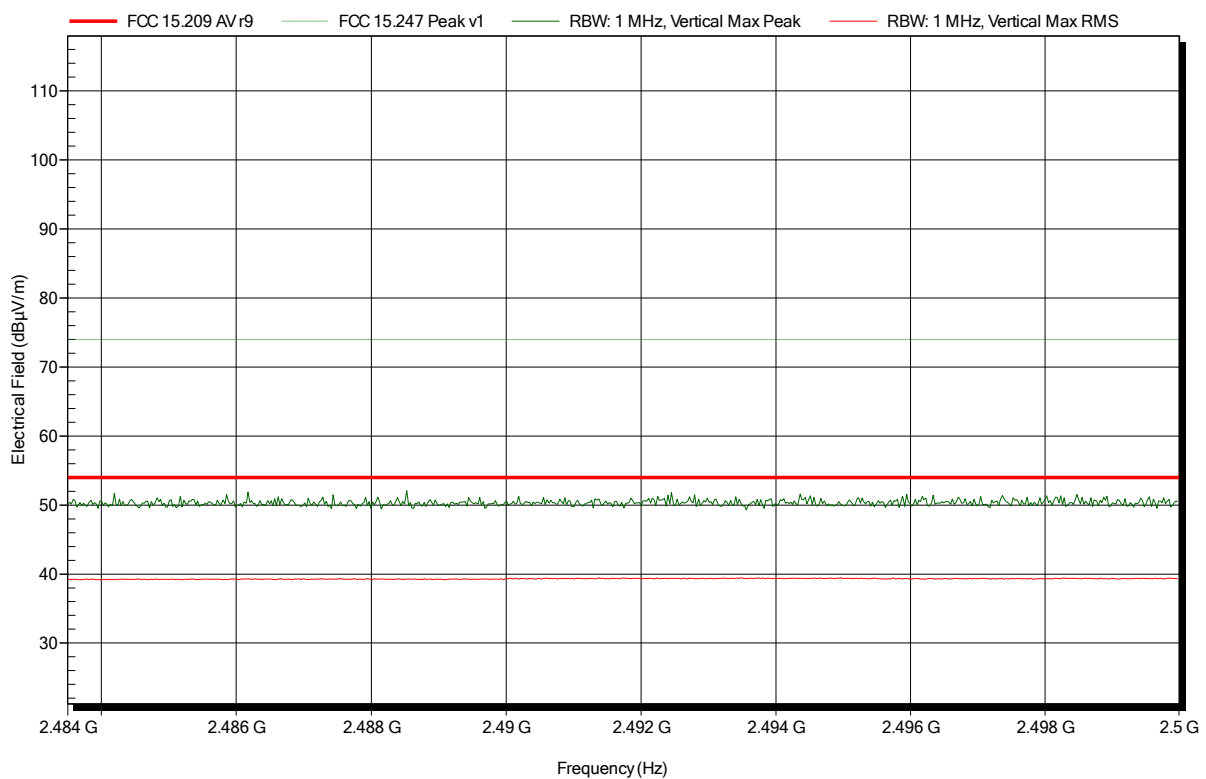


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
EUT Name: Field Controller Win EC7
Model: CS20
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11 g; 6Mbps; 2462 MHz
Test Date: 2019-02-07
Note:

Index 92

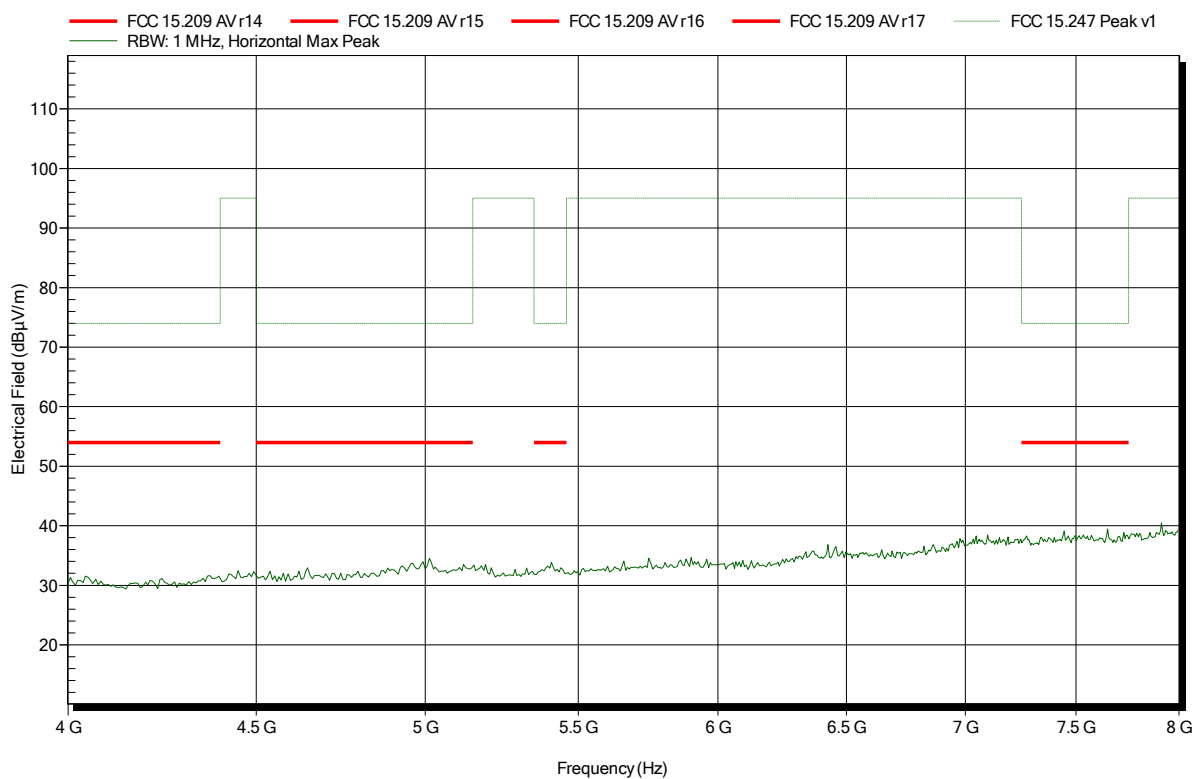


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 g; 6Mbps; 2462 MHz
 Test Date: 2019-02-07
 Note:


Index 95

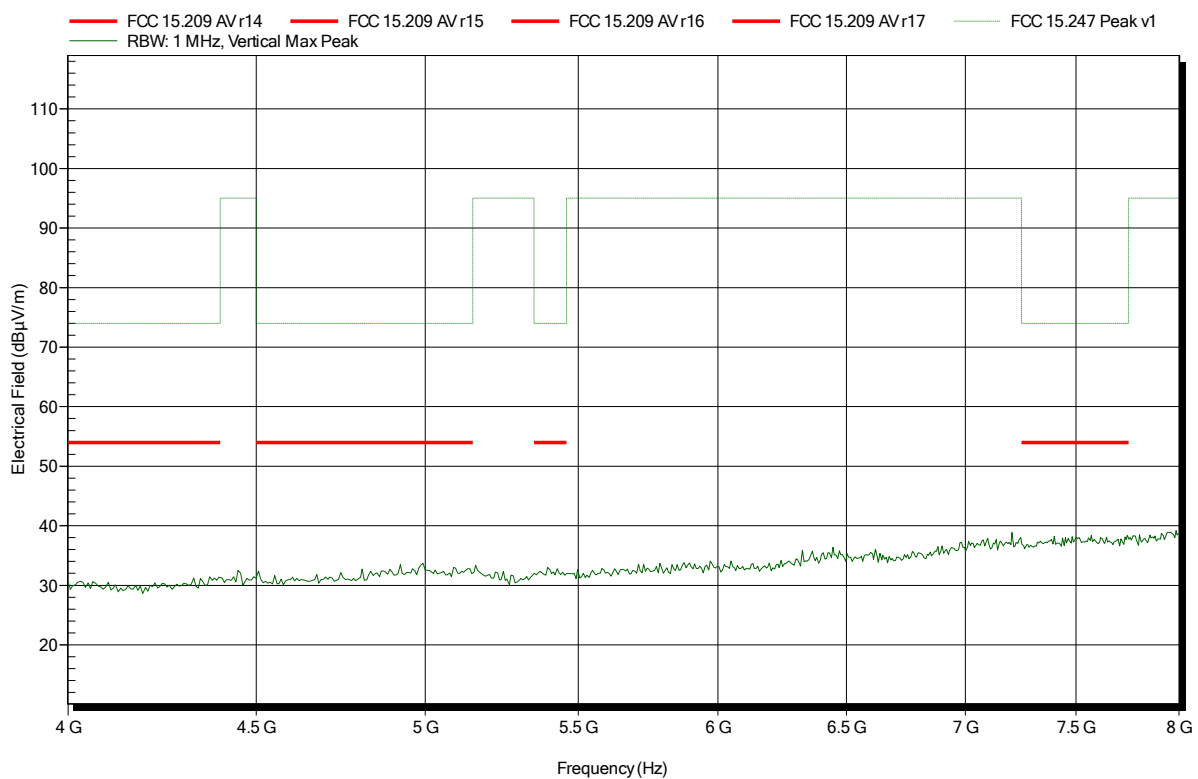

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2412 MHz
 Test Date: 2019-02-07
 Note:

Index 96

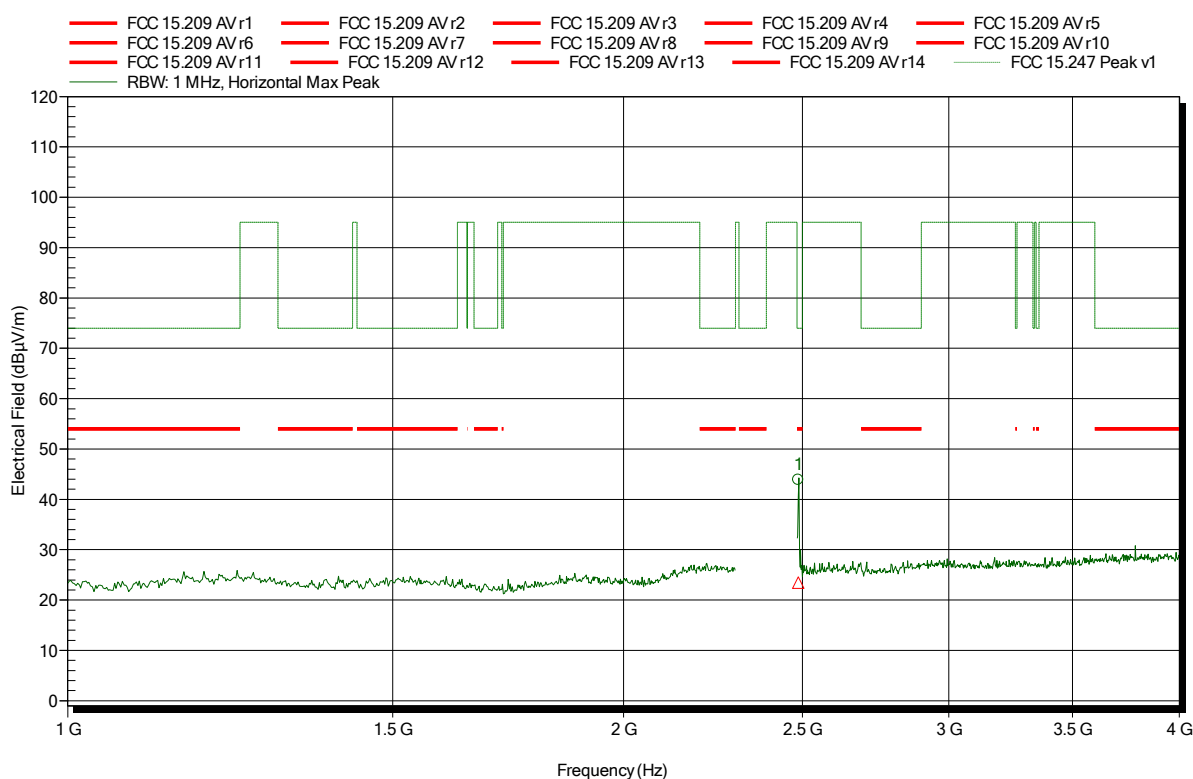


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4874 GHz	43.88 dBµV/m	74 dBµV/m	-30.12 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4874 GHz	23.48 dBµV/m	54 dBµV/m	-30.52 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2412 MHz
 Test Date: 2019-02-07
 Note:

Index 99

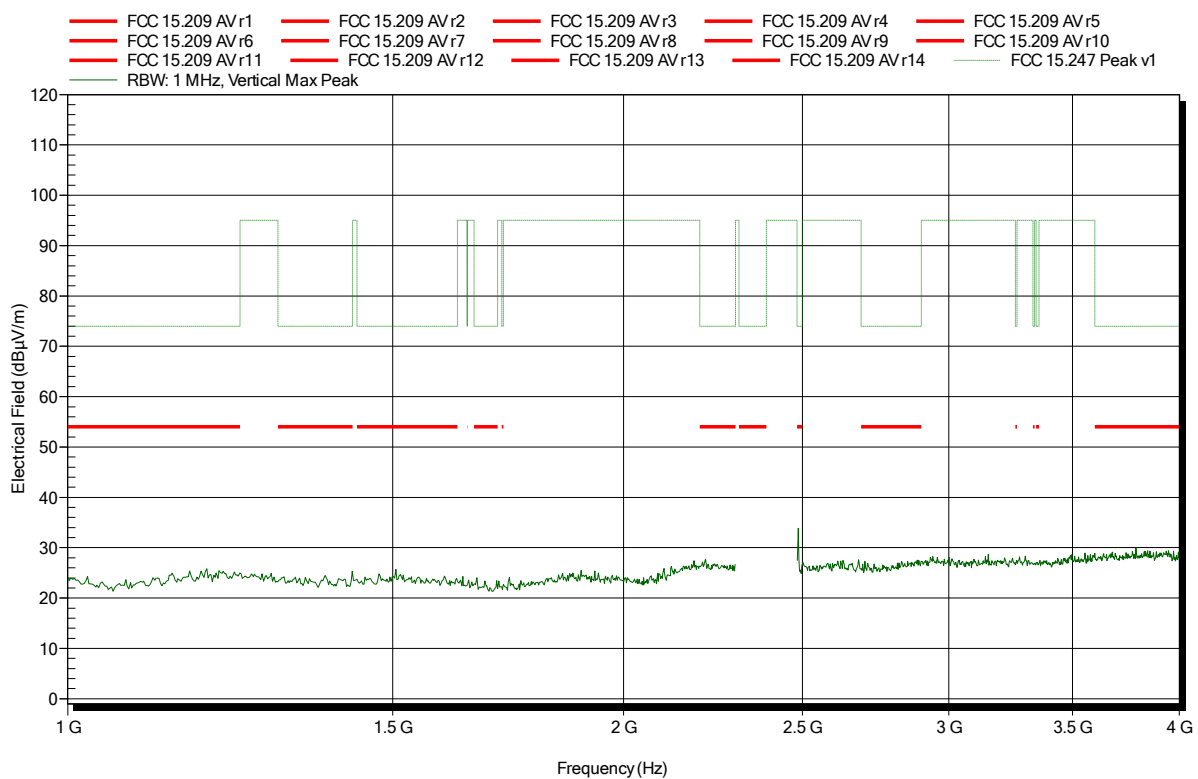


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2412 MHz
 Test Date: 2019-02-07
 Note: lower bandedge

Index 97

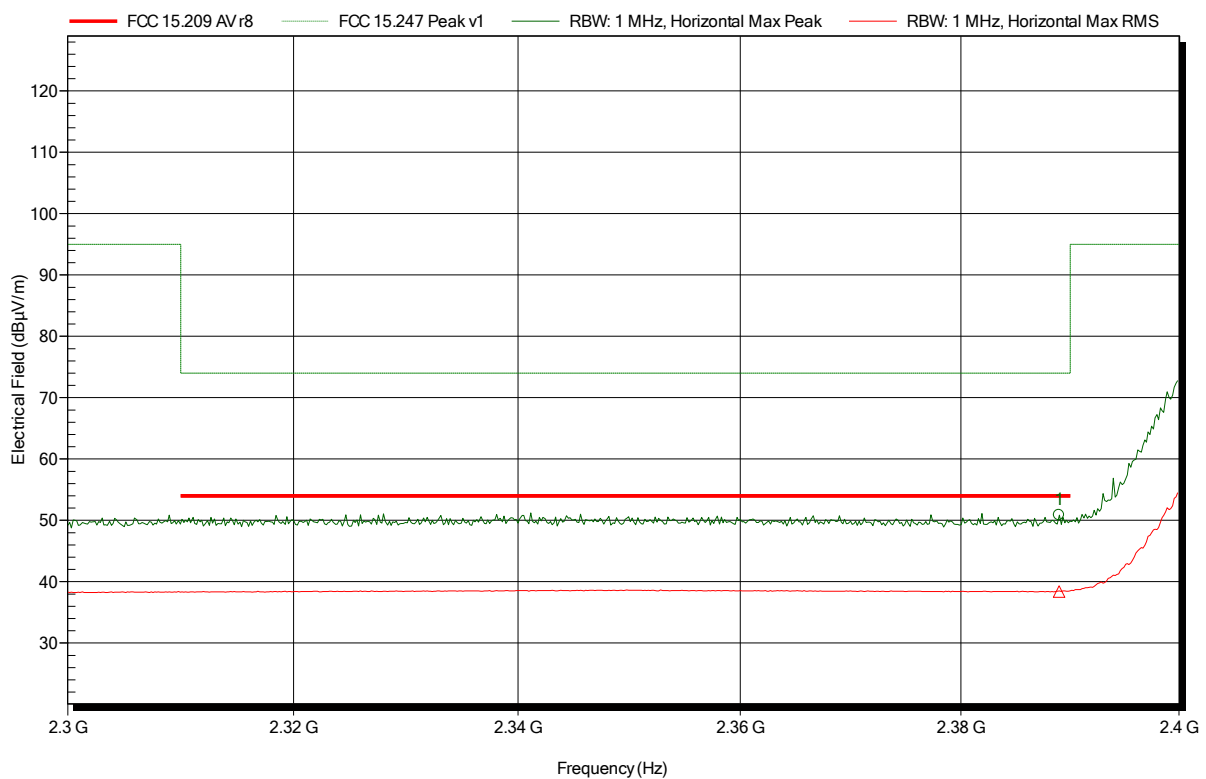


Frequency 2.389 GHz	Peak 50.88 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -23.12 dB	Peak Status Pass
Frequency 2.389 GHz	RMS 38.41 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -15.59 dB	RMS Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2412 MHz
 Test Date: 2019-02-07
 Note: lower bandedge


Index 100

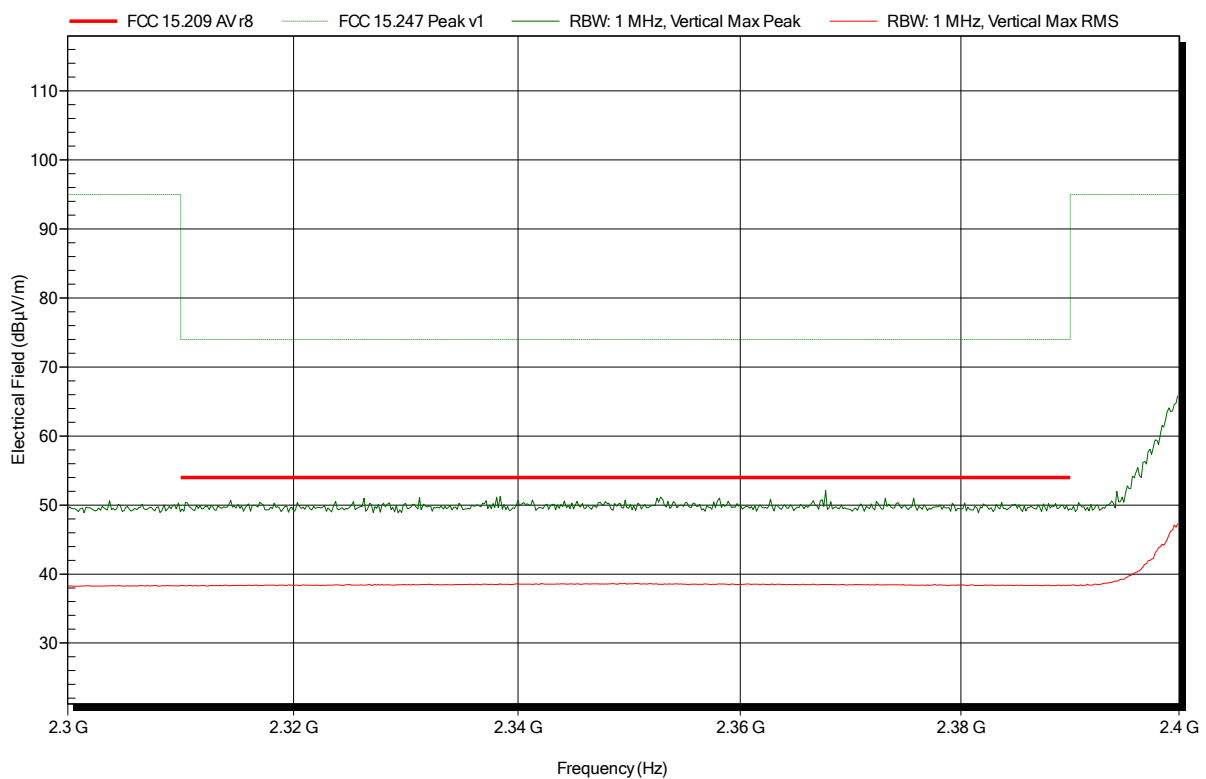

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2412 MHz
 Test Date: 2019-02-07
 Note:

Index 98

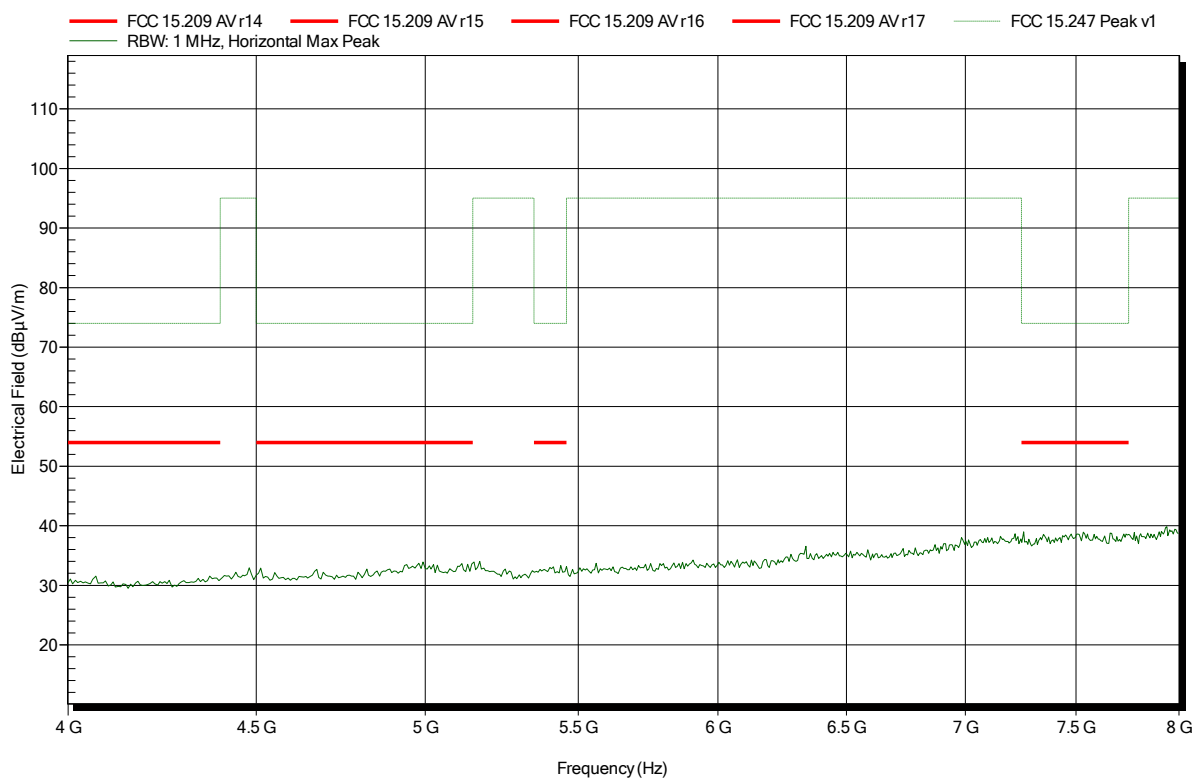


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2412 MHz
 Test Date: 2019-02-07
 Note:

Index 101

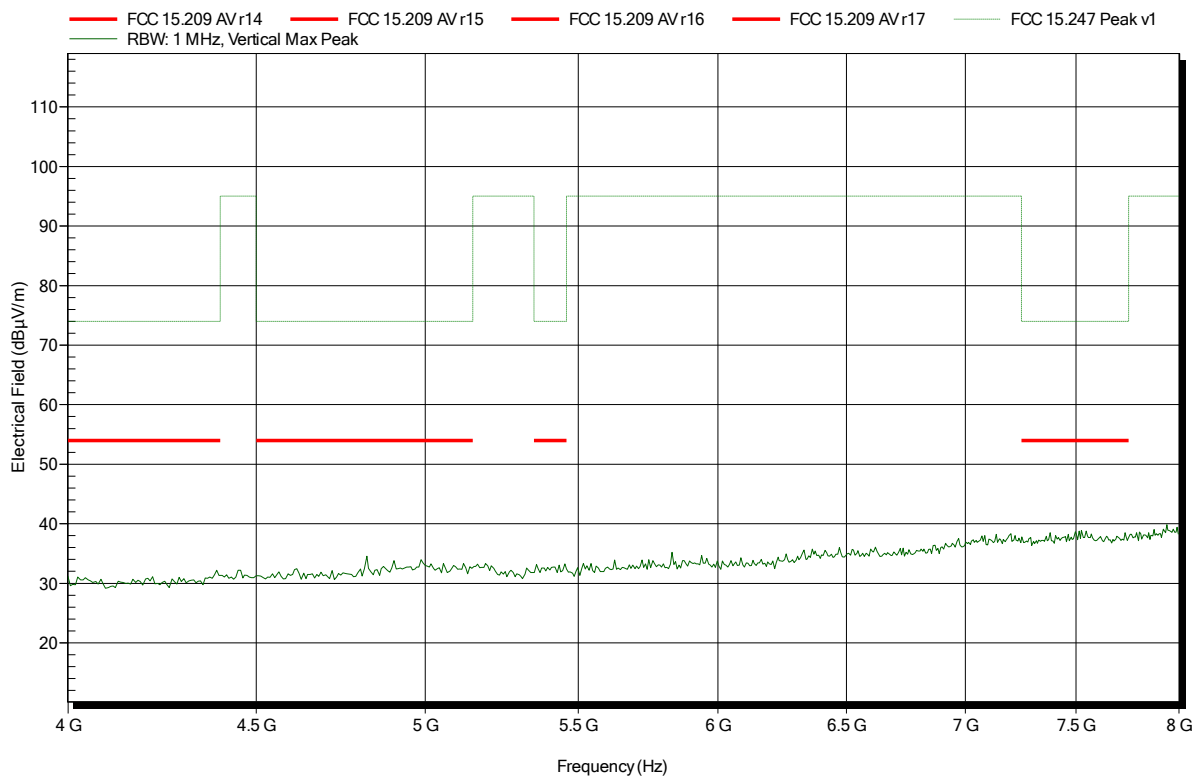

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG

EUT Name: Field Controller Win EC7

Model: CS20

Test Site: Eurofins Product Service GmbH

Operator: Wilfried Treffke

Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11 n; MCS0; 2437 MHz

Test Date: 2019-02-07

Note:


Index 102

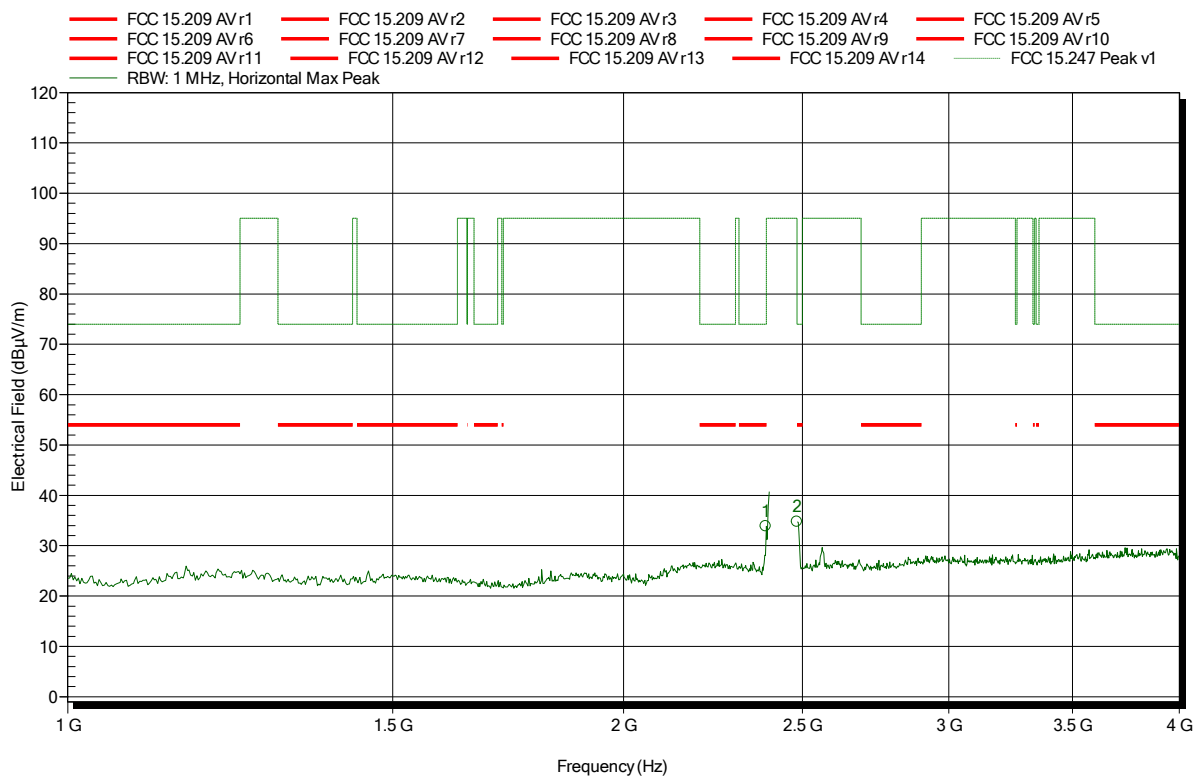

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2437 MHz
 Test Date: 2019-02-07
 Note:


Index 104

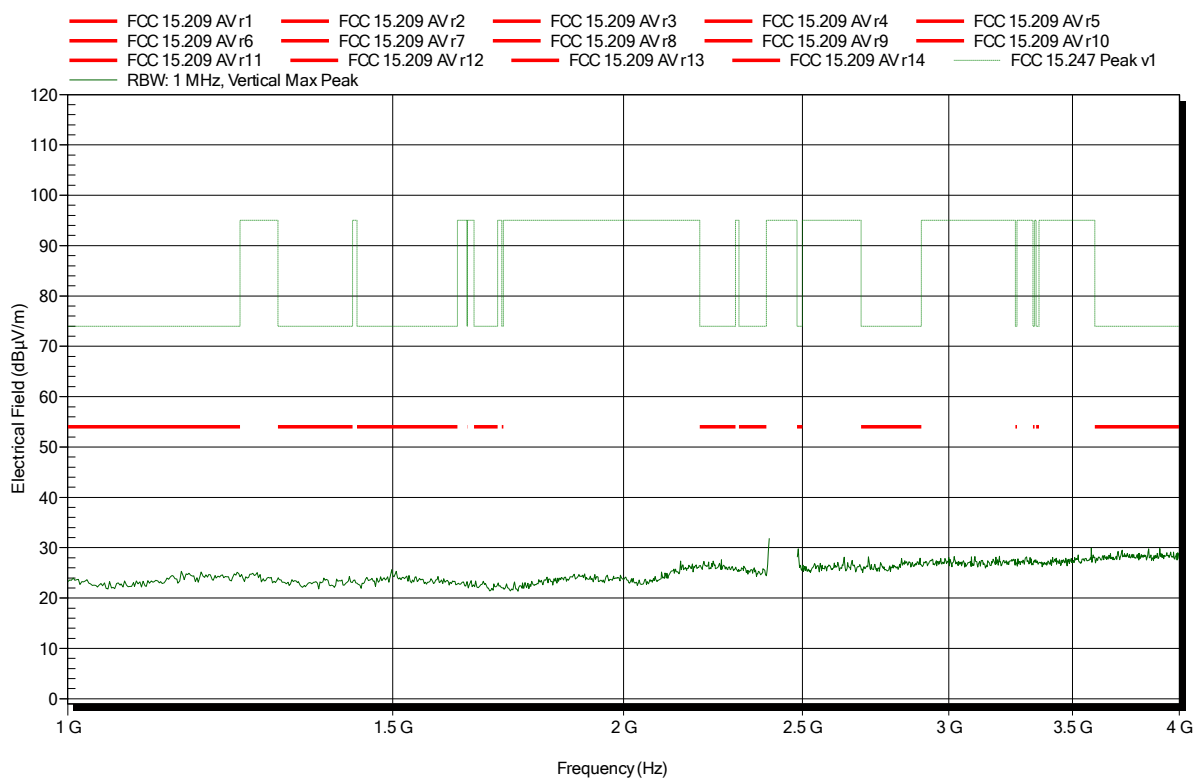

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 103

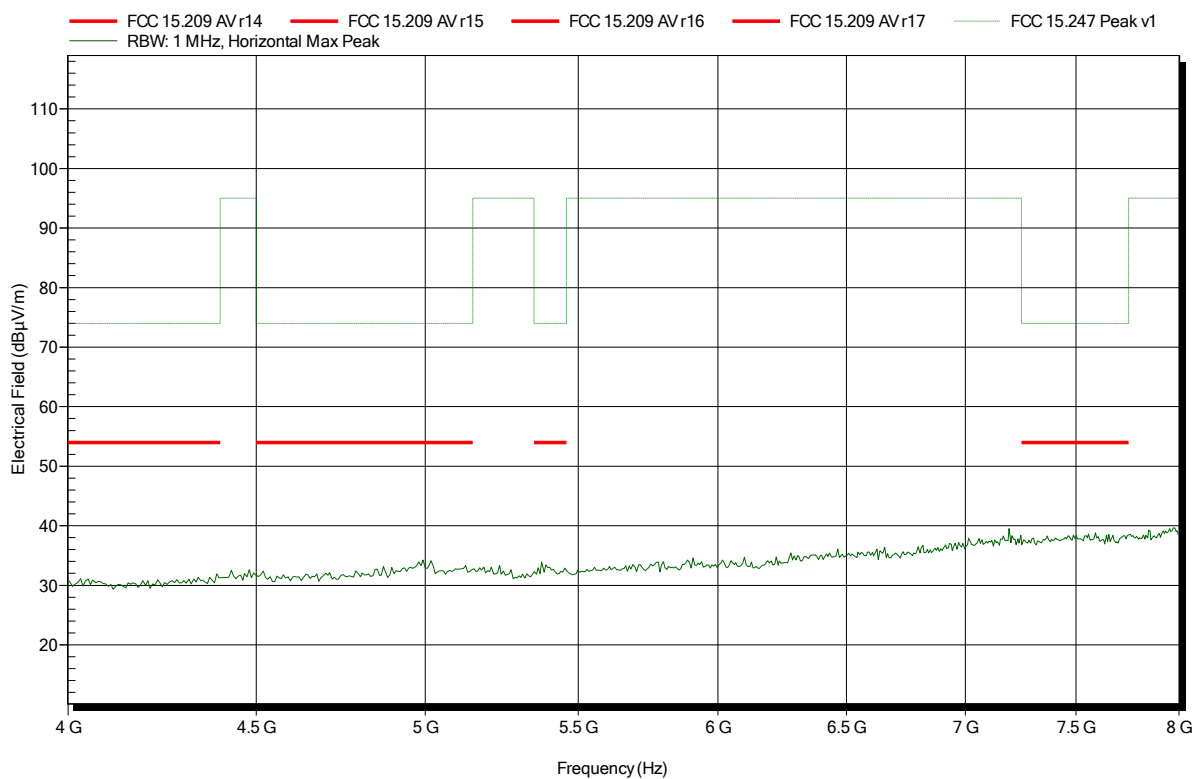


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2437 MHz
 Test Date: 2019-02-07
 Note:


Index 105

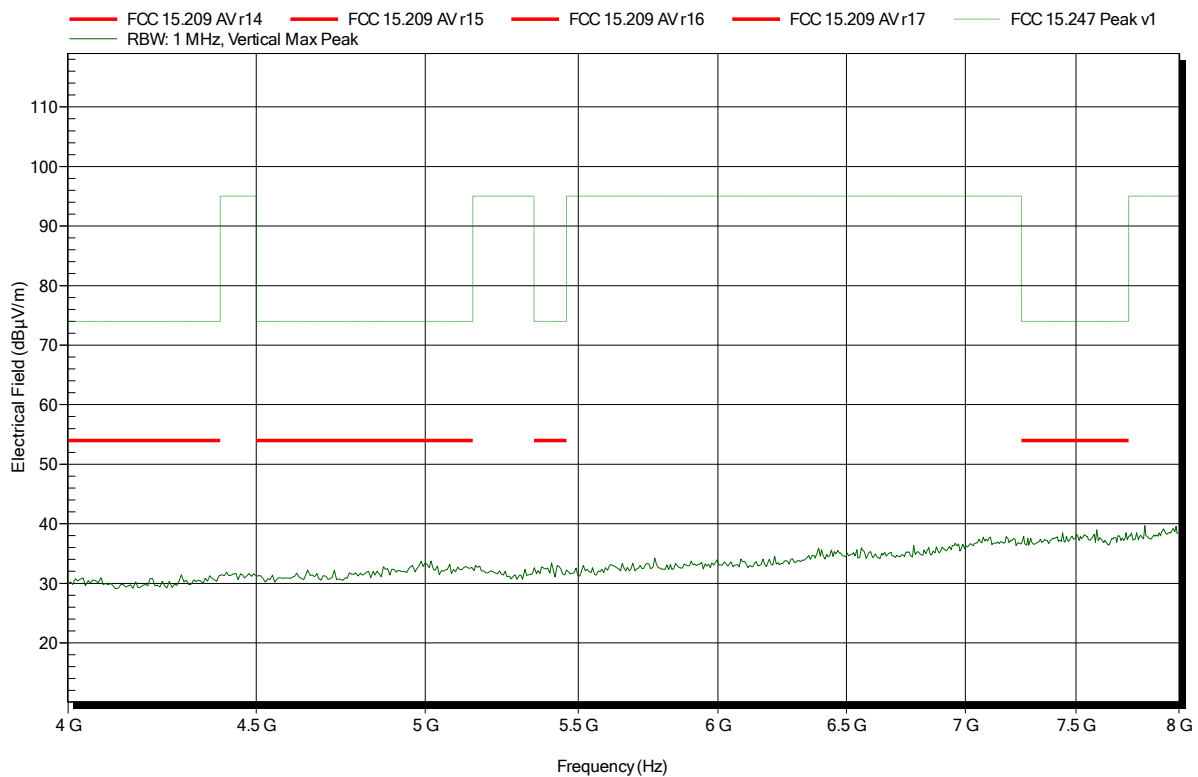

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2462 MHz
 Test Date: 2019-02-07
 Note:


Index 106

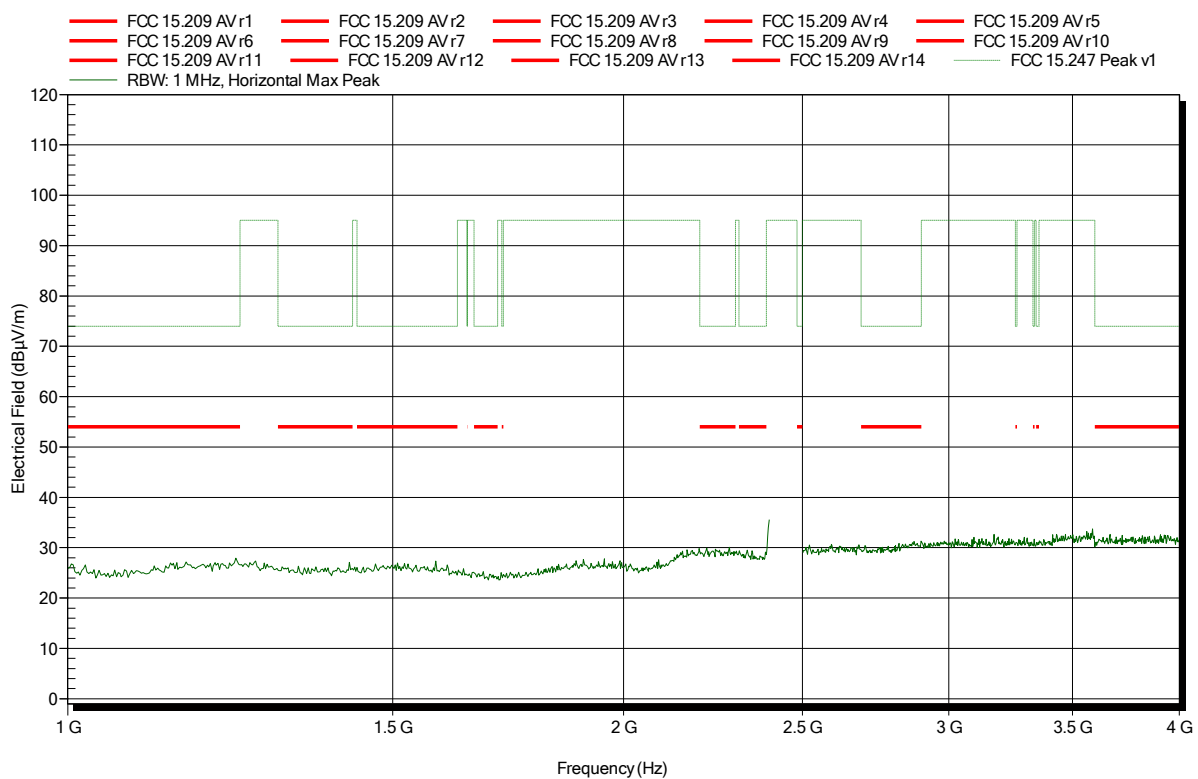

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2462 MHz
 Test Date: 2019-02-07
 Note:

Index 109

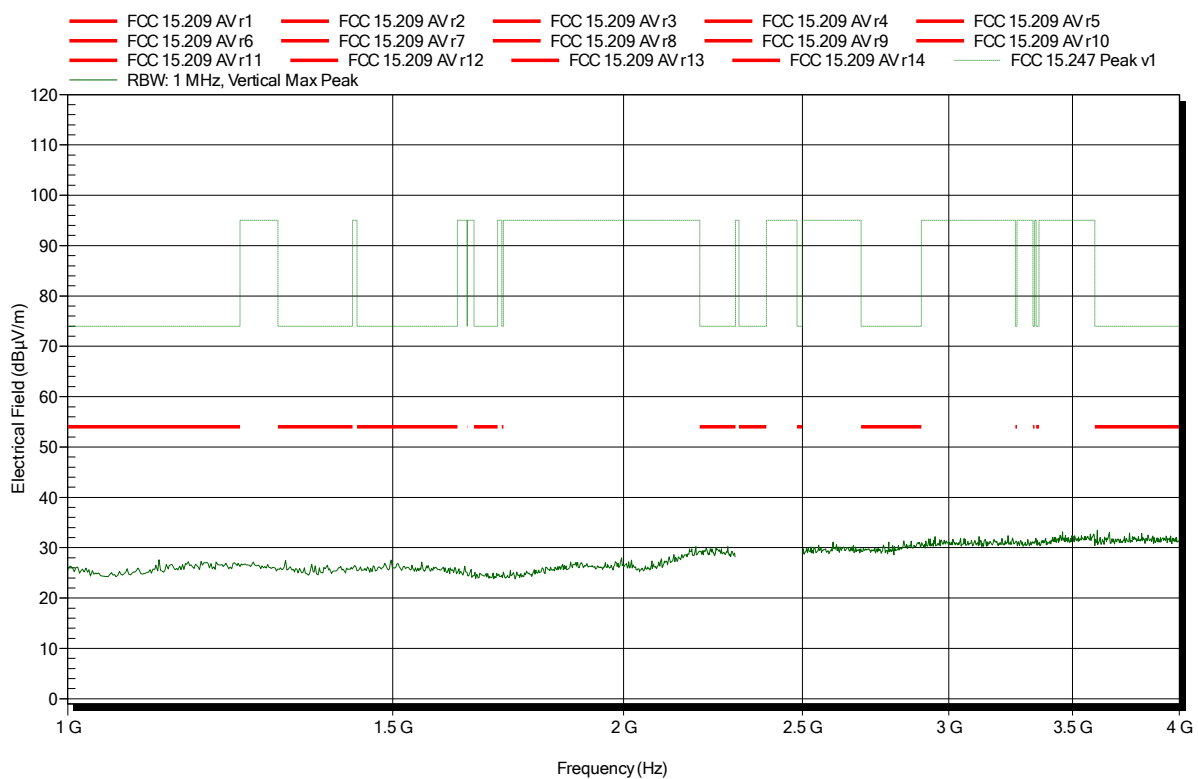


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2462 MHz
 Test Date: 2019-02-07
 Note: upper bandedge

Index 107

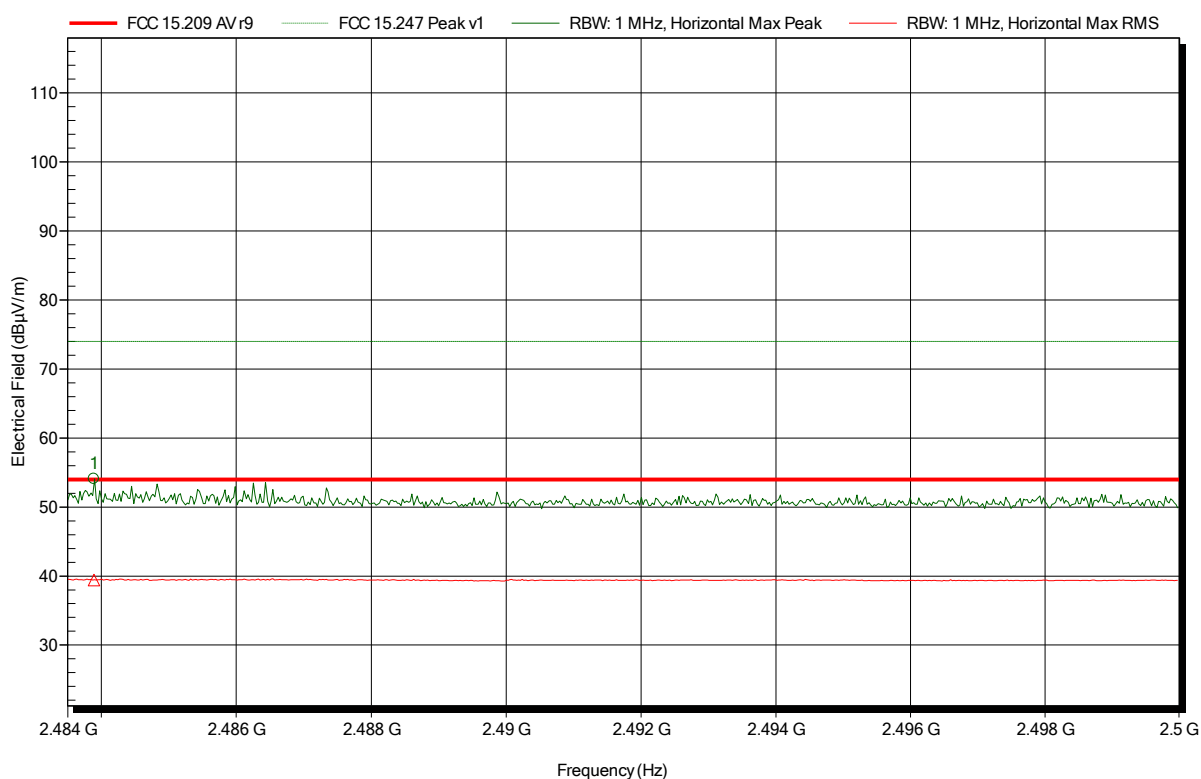


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4839 GHz	54.09 dBµV/m	74 dBµV/m	-19.91 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4839 GHz	39.4 dBµV/m	54 dBµV/m	-14.6 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2462 MHz
 Test Date: 2019-02-07
 Note: upper bandedge

Index 110

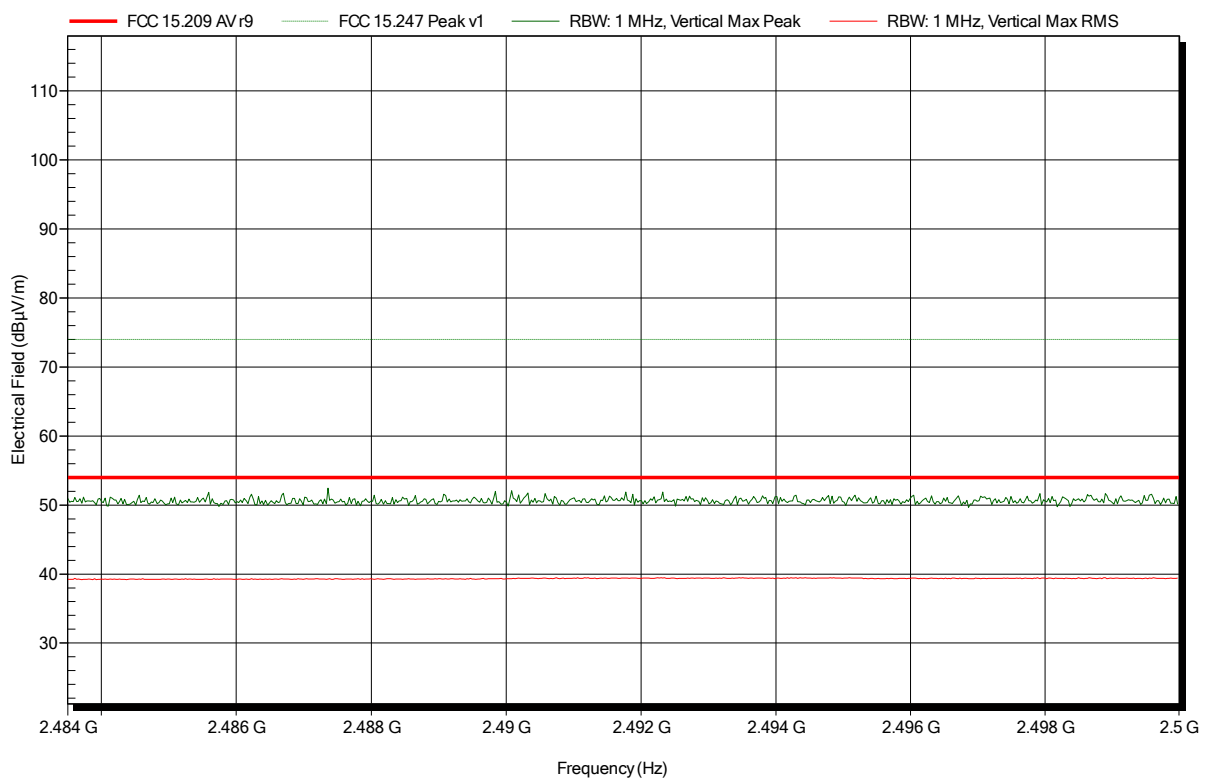


Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2462 MHz
 Test Date: 2019-02-07
 Note:


Index 108

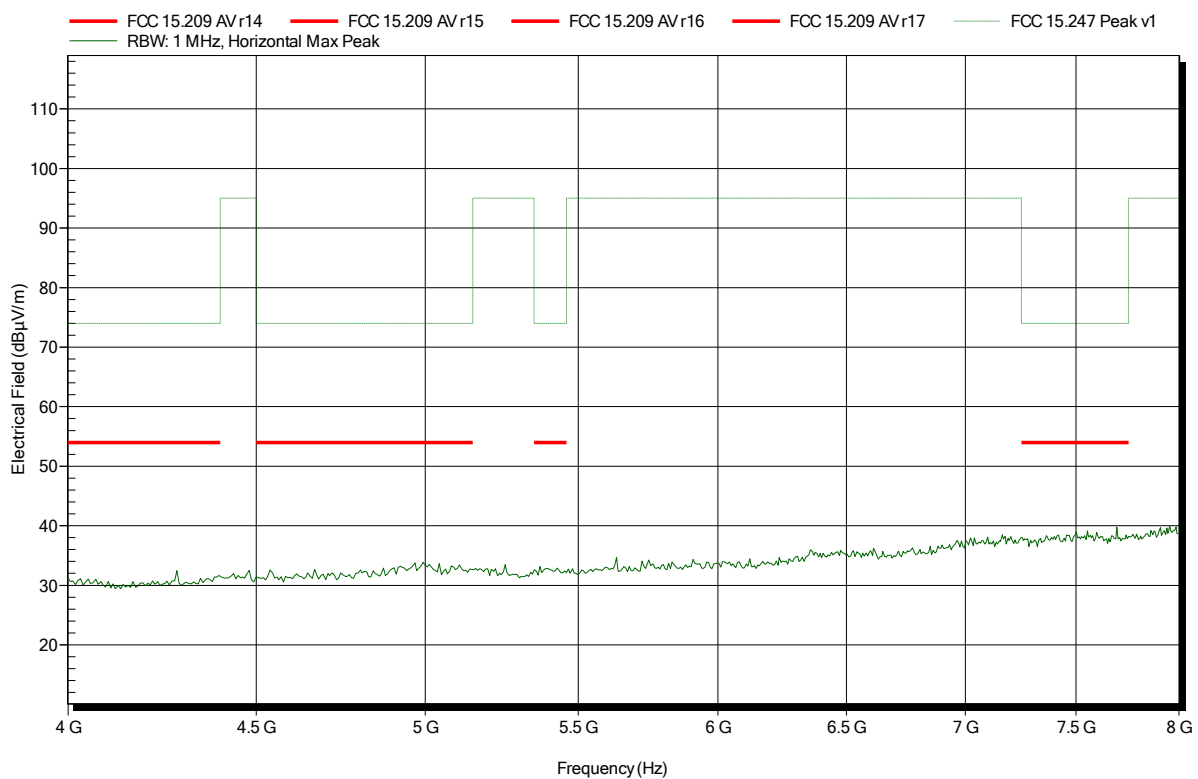

Spurious emissions according to FCC 15.247

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11 n; MCS0; 2462 MHz
 Test Date: 2019-02-07
 Note:

Index 111

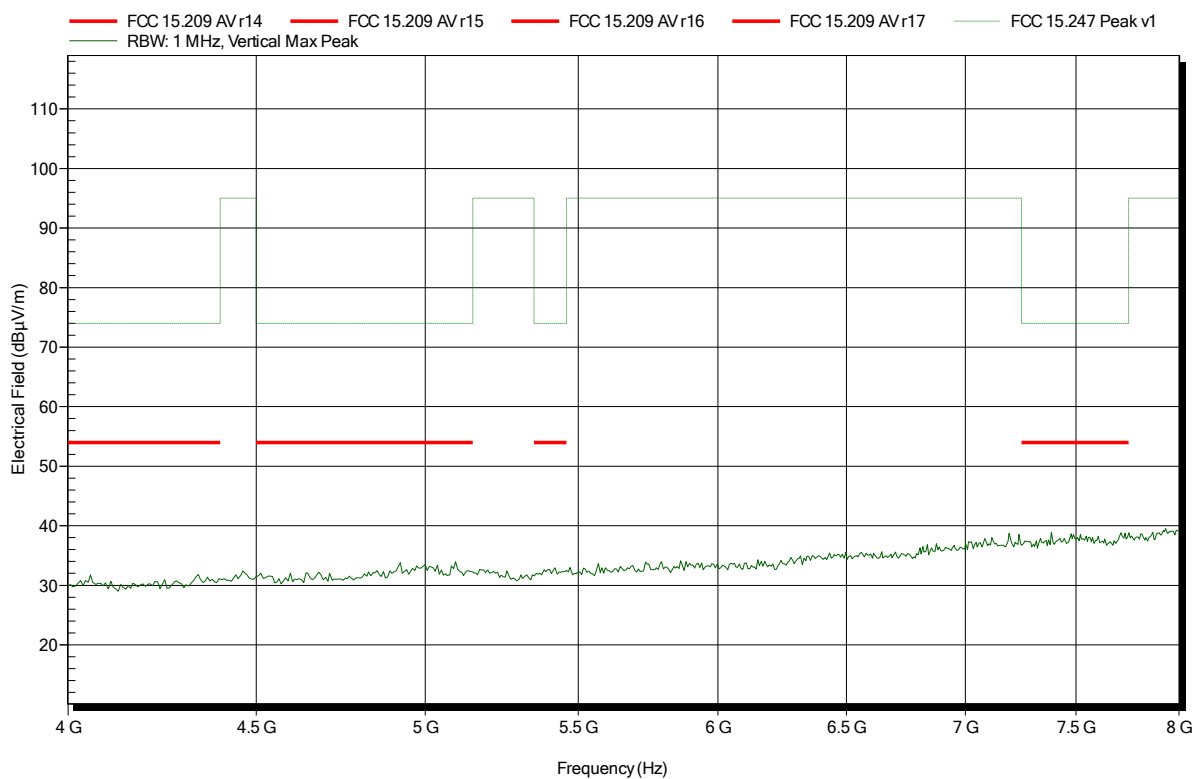


ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 58

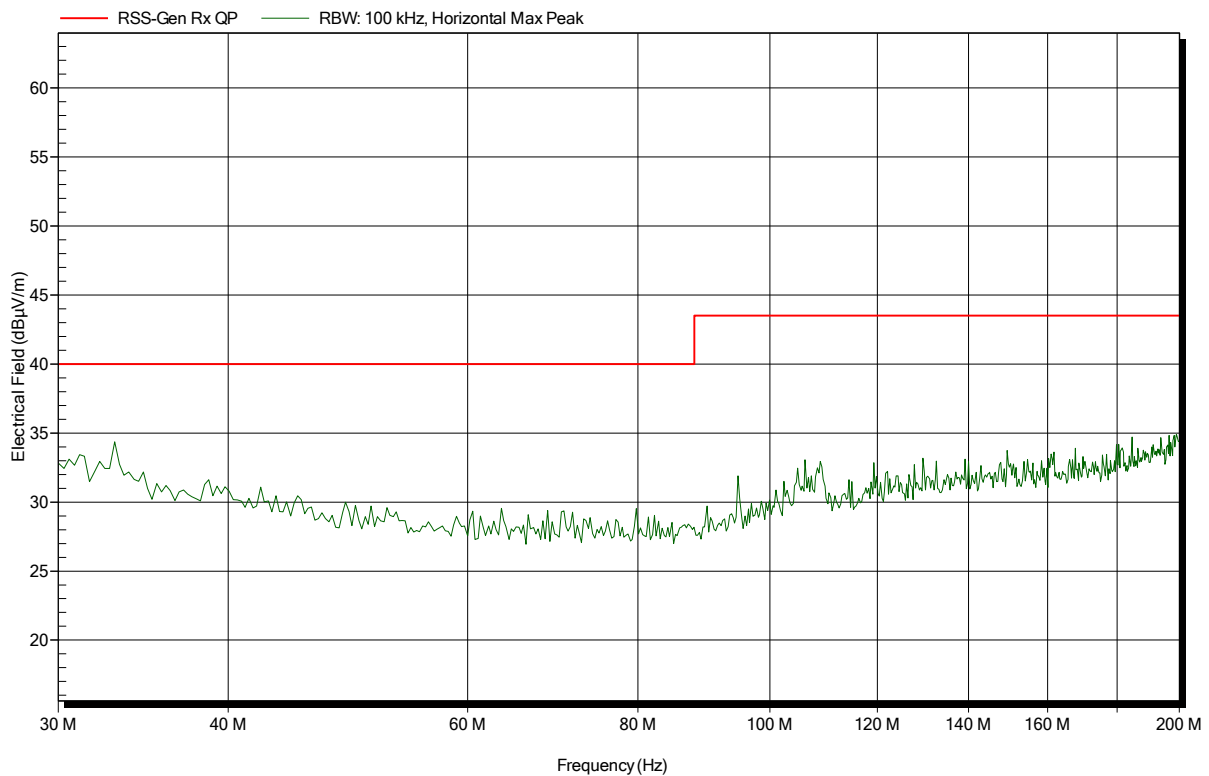


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 59

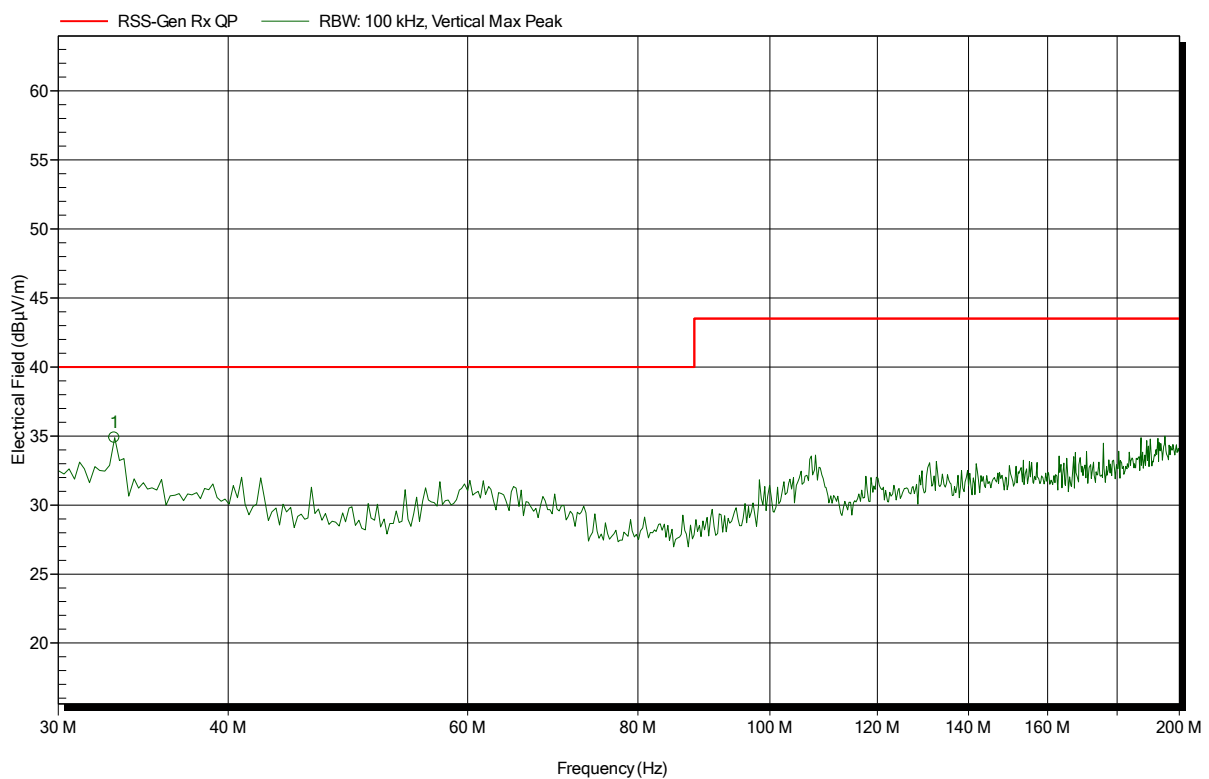


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
32.992 MHz	34.89 dBµV/m	40 dBµV/m	-5.11 dB	Pass	180 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 60

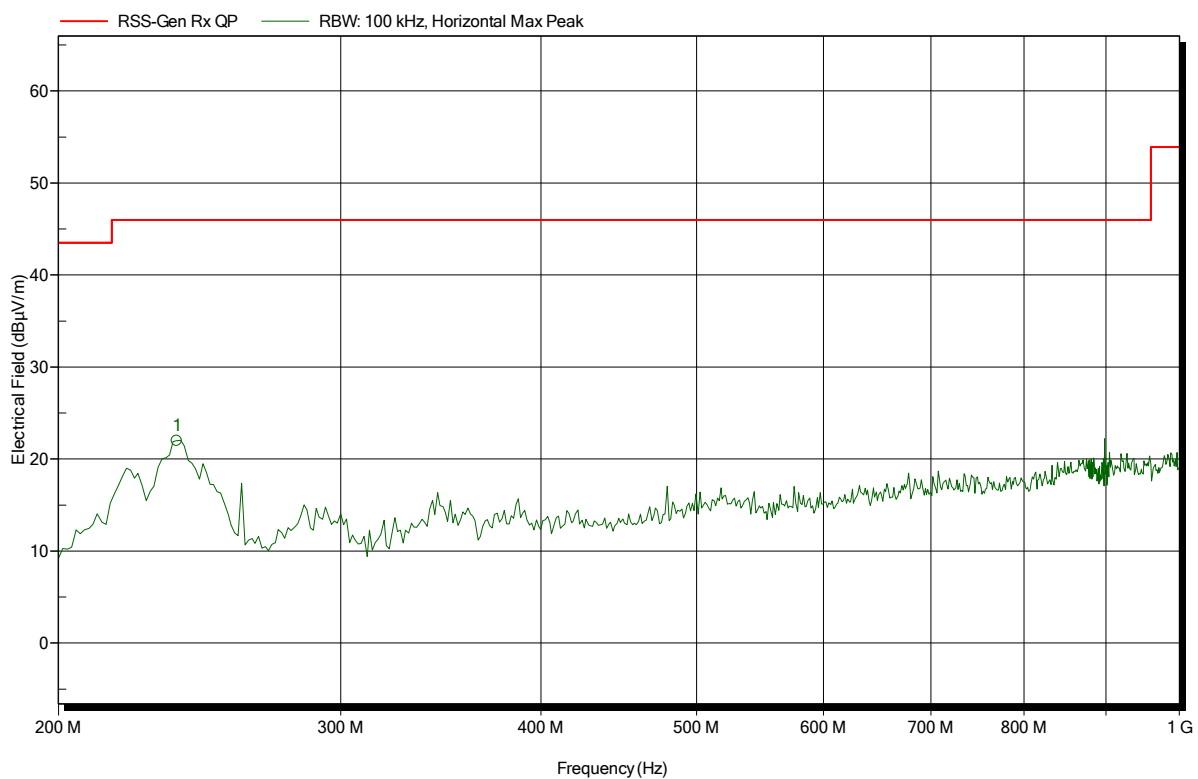


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
237.12 MHz	21.98 dBµV/m	46 dBµV/m	-24.02 dB	Pass	90 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 61

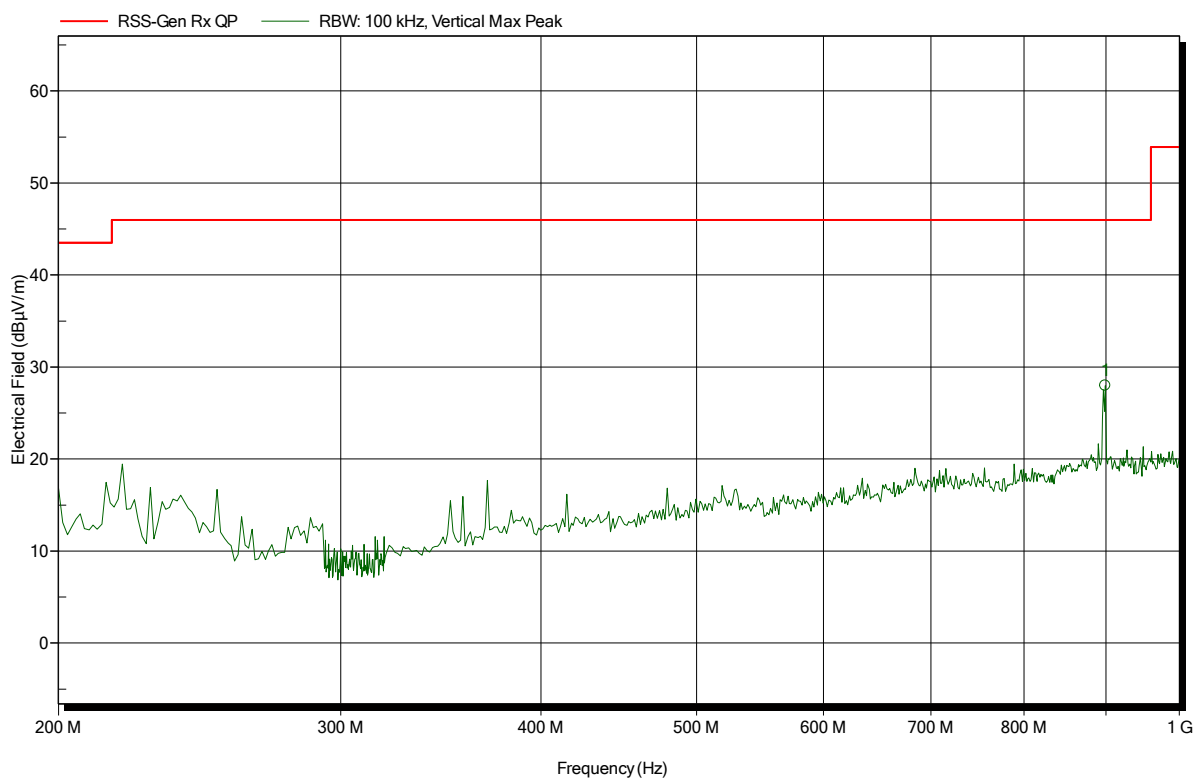


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
898.88 MHz	27.97 dBμV/m	46 dBμV/m	-18.03 dB	Pass	24 Degree	1.2 m

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 51

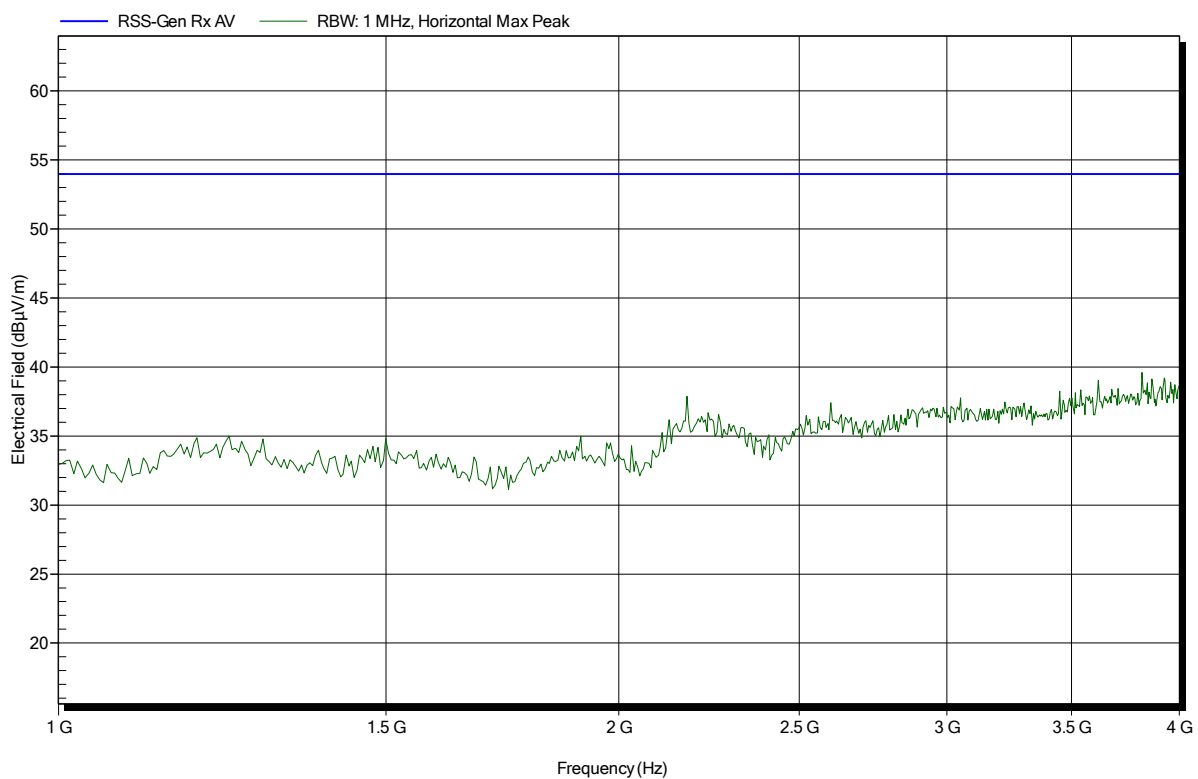


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:


Index 54

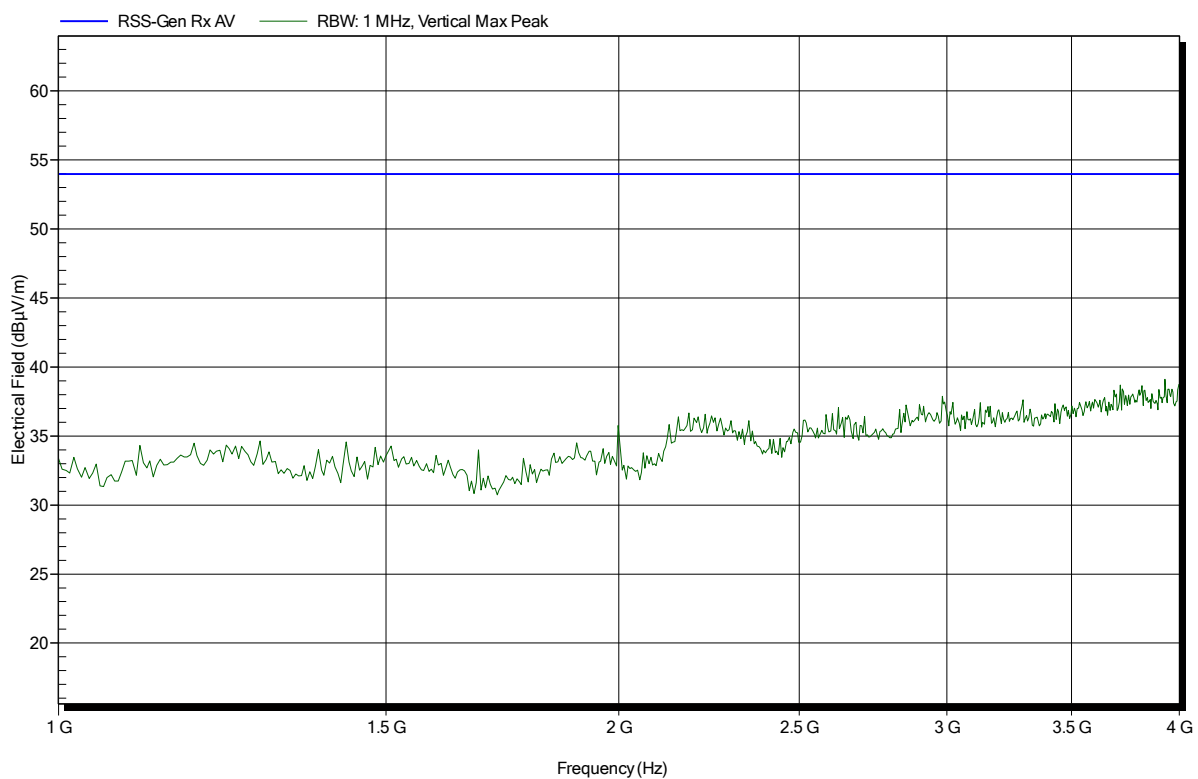

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889
 Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 52

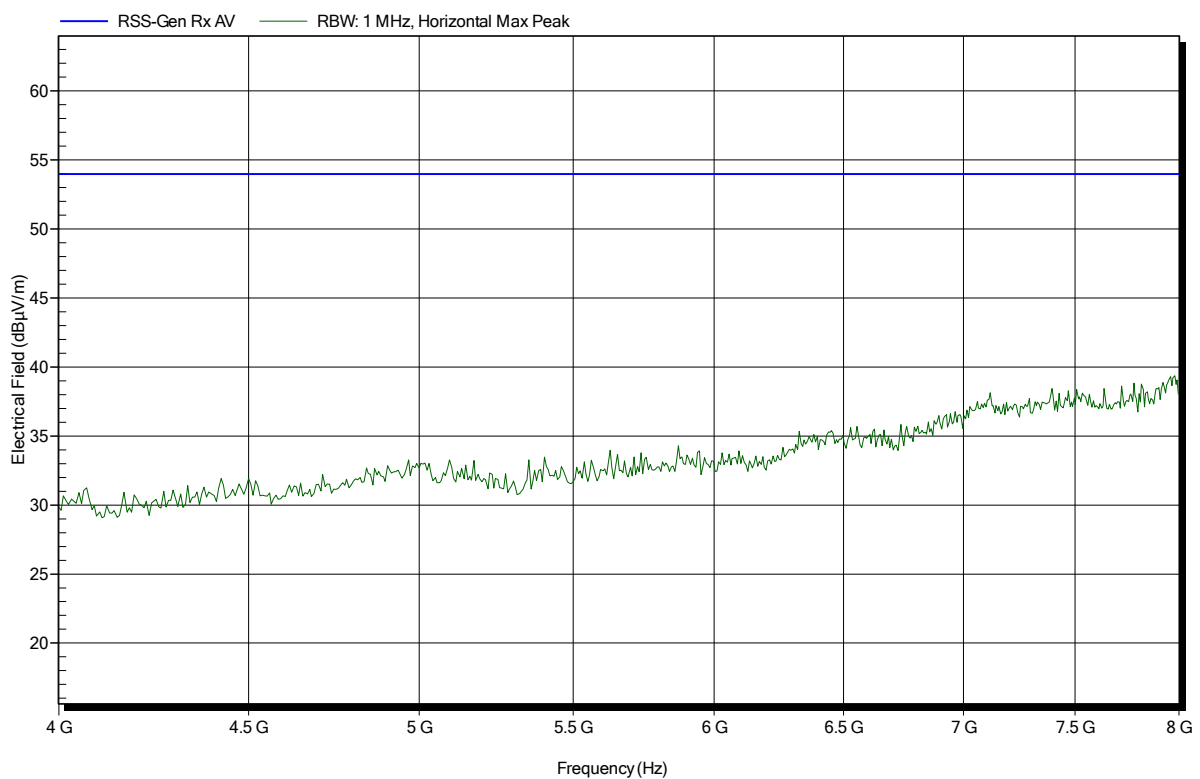


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 56

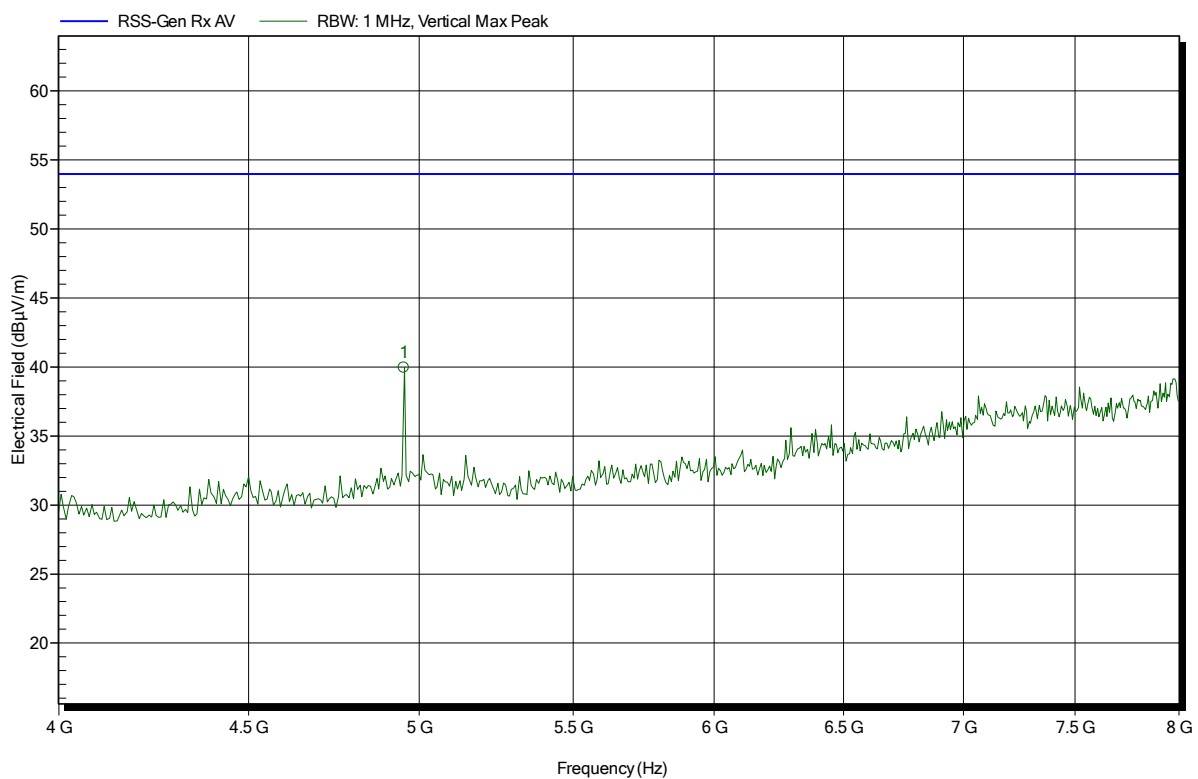


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.954 GHz	39.96 dBµV/m	53.98 dBµV/m	-14.02 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 53

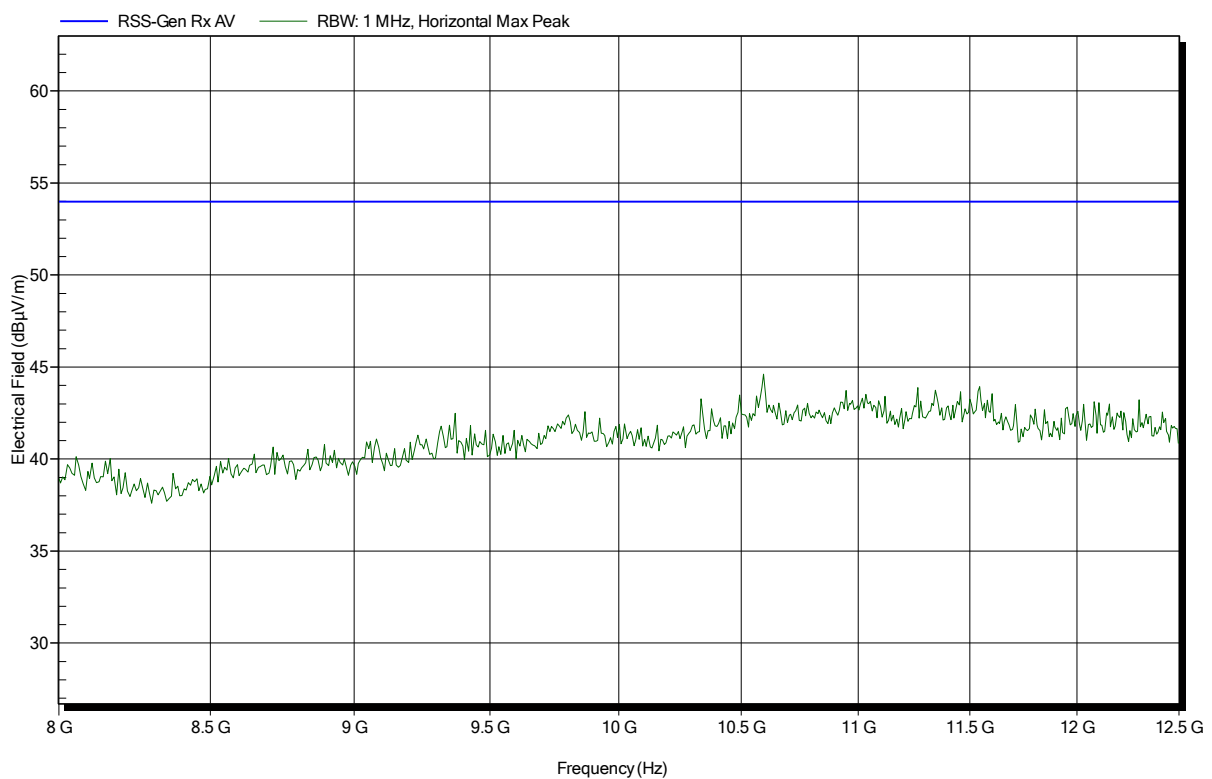

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7889

Applicant: Leica Geosystems AG
 EUT Name: Field Controller Win EC7
 Model: CS20
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 23°C, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: RX; IEEE802.11b; 2437 MHz
 Test Date: 2019-02-07
 Note:

Index 57

