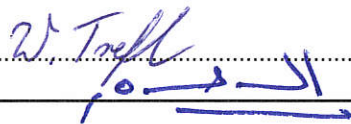



RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No	G0M-1710-6928-TFC247BL-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 IC Testing Laboratory site: 3470A-2</p>
Applicant	Leica Geosystems AG
Address	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 2, 2017-02
Non-Standard Test Method	None
Test Scope	Full compliance test
Equipment under Test (EUT):	
Product Description	Laser Distance Meter
Model(s)	Leica Disto X4-1
Additional Model(s)	None
Brand Name(s)	Leica Geosystems AG
Hardware Version(s)	V 09
Software Version(s)	V 05
FCC-ID	RFF-LD3BT
IC	3177A-LD3BT
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2017-12-13	
Report:		
Compiled by	Christian Weber	
Tested by (+ signature) (Responsible for Test)	Abdullah Al Jamal / Wilfried Treffke	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2018-01-29	
Total number of pages	100	
General Remarks:		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
Additional Comments:		
<p>The customer declared an additional identical model with model name: Leica Disto X3-1 (product type description: Laser Distance meter, hardware version: V 09, software version: V 05). Brand name: Leica Geosystems AG.</p> <p>This additional model has not been tested.</p>		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2018-01-29	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External.....	7
1.2	Photos – Equipment Internal.....	9
1.3	Photos – Test Setup.....	11
1.4	Support Equipment.....	12
1.5	Test Modes.....	13
1.6	Test Frequencies.....	14
1.7	Sample emission level calculation.....	15
2	Result Summary.....	16
3	Test Conditions and Results.....	17
3.1	Test Conditions and Results - Occupied bandwidth.....	17
3.2	Test Conditions and Results - 6 dB bandwidth.....	22
3.3	Test Conditions and Results - Maximum peak conducted output power.....	27
3.4	Test Conditions and Results - Power spectral density.....	29
3.5	Test Conditions and Results - Band-edge compliance.....	34
3.6	Test Conditions and Results - Conducted spurious emissions.....	38
3.7	Test Conditions and Results - Transmitter radiated emissions.....	43
3.8	Test Conditions and Results - Receiver radiated emissions.....	46

1 Equipment (Test Item) Under Test

Description	Laser Distance Meter	
Model	Leica Disto X4-1	
Additional Model(s)	None	
Brand Name(s)	Leica Geosystems AG	
Serial Number(s)	Not specified	
Hardware Version(s)	V 09	
Software Version(s)	V 05	
PMN	Leica Disto X4-1	
HVIN	Leica Disto X4-1	
FVIN	N/A	
HMN	N/A	
FCC-ID	RFF-LD3BT	
IC	3177A-LD3BT	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	Bluetooth LE	
Modulation	GFSK	
Number of antenna ports	1	
Antenna	Type	Integrated antenna
	Model	2450AT42E0100
	Manufacturer	Johanson Technology
	Gain	-2.0 dBi
Supply Voltage	V_{NOM}	3.0 VDC
Operating Temperature	T_{NOM}	25 °C
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A
Manufacturer	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	

1.1 Photos – Equipment External





BOTTOM VIEW 1 (SAMPLE 15823)




BOTTOM VIEW 2 (SAMPLE 15823)




1.2 Photos – Equipment Internal

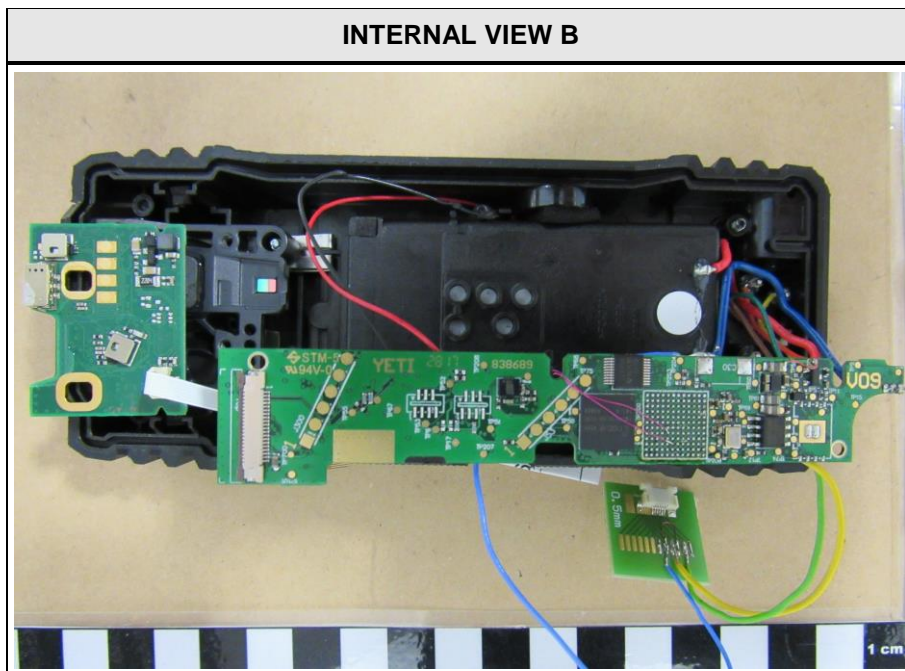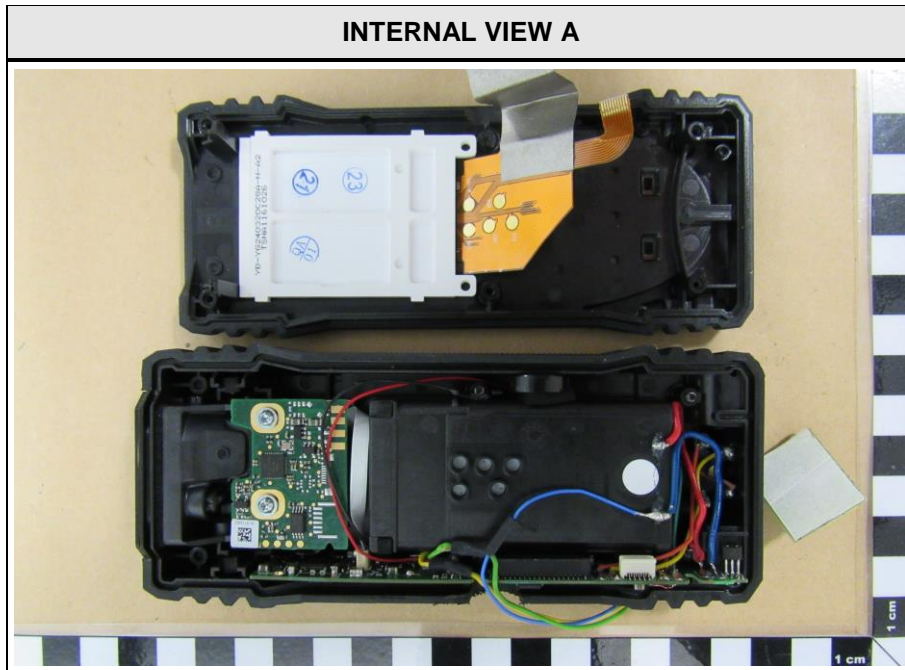

INTERNAL VIEW C

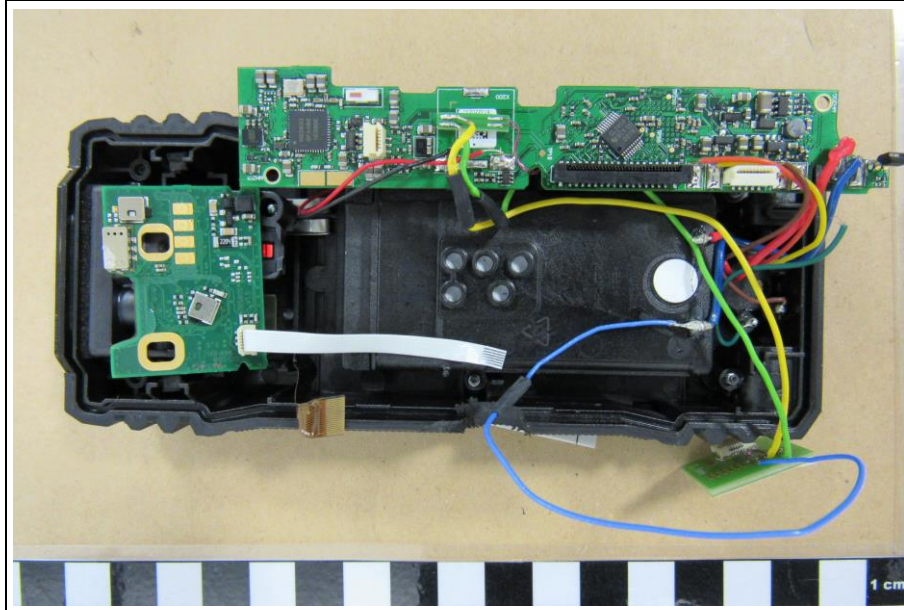

1.3 Photos – Test Setup

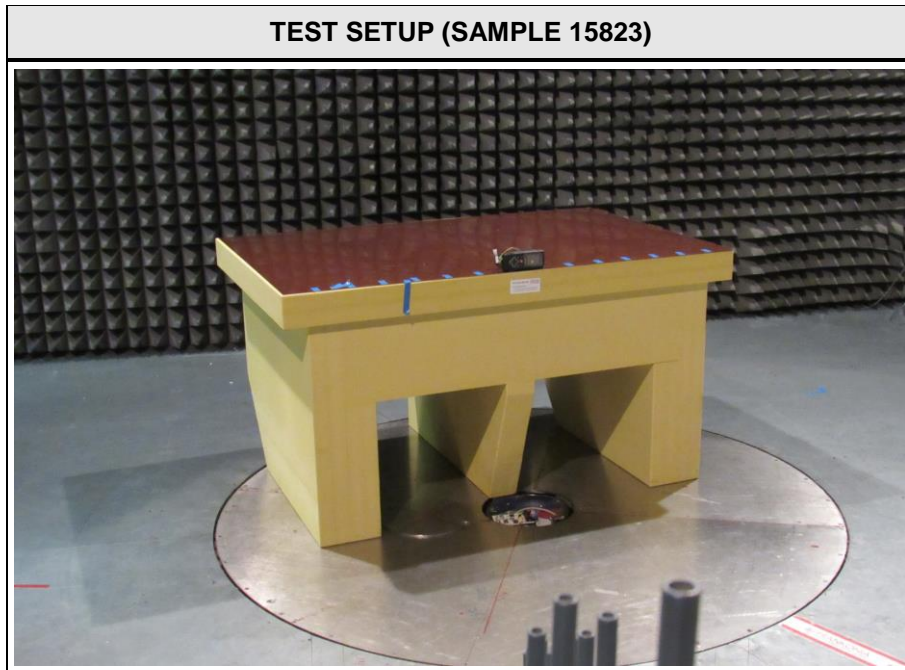

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE1	Disto Box	Not specified	VELARO	None
AE2	Switching Power Supply	I.T.E. Power Supply	MW7E12GS	Power Supply AE1
AE3	Laptop	Dell	Latitude E6430	S/N 4MX5TY1
AE4	Power Supply	Dell	LA65NS2-01	S/N 6TM1C Power Supply AE2
CBL	USB Micro-B	Not specified	Not specified	None
Description:				
AE1 – AE4	Auxillary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment: None.				

1.5 Test Modes

Mode	Description
GFSK	Mode = Transmit Modulation = GFSK Spreading = None Duty cycle = 63%
Receive	Mode = Receive
Comment: None.	

1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	19	2440
F3	Tx / Rx	39	2480

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading	- FCC limit	= Margin
+21.5 dBµV	+ 26 dB = 47.5 dBµV/m	:	47.5 dBµV/m	- 57.0 dBµV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	ANSI C63.10	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247 § 5.2	6 dB Bandwidth	ANSI C63.10	PASS	
FCC § 15.247(b)(3) ISED RSS-247 § 5.4	Maximum peak conducted power	ANSI C63.10	PASS	
FCC § 15.247(e) ISED RSS-247 § 5.2	Power spectral density	ANSI C63.10	PASS	
FCC § 15.207 ISED RSS-247 § 3.1	AC power line conducted emissions	ANSI C63.10	N/R	Battery only
FCC § 15.247(d) ISED RSS-247 § 5.5	Band edge compliance	ANSI C63.10	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5	Conducted spurious emissions	ANSI C63.10	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-GEN § 8.9	Transmitter radiated spurious emissions	ANSI C63.10	PASS	
ISED RSS-247 § 3.1	Receiver radiated spurious emissions	ANSI C63.10	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen 6.6
Measurement Method	ANSI C63.10 6.9.3
Operator	Abdullah Al Jamal
Date	2017-12-14

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

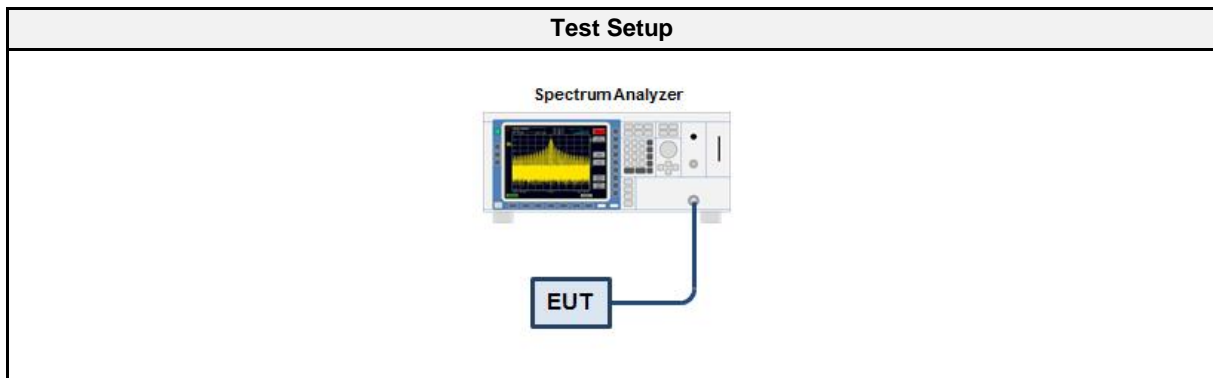

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2017-08	2018-08

3.1.5 Procedure


Test Procedure
<ol style="list-style-type: none"> 1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to 1 % of the bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	1.043
GFSK	2440	1.045
GFSK	2480	1.047

Occupied Bandwidth


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Occupied Bandwidth [MHz]: 1.043

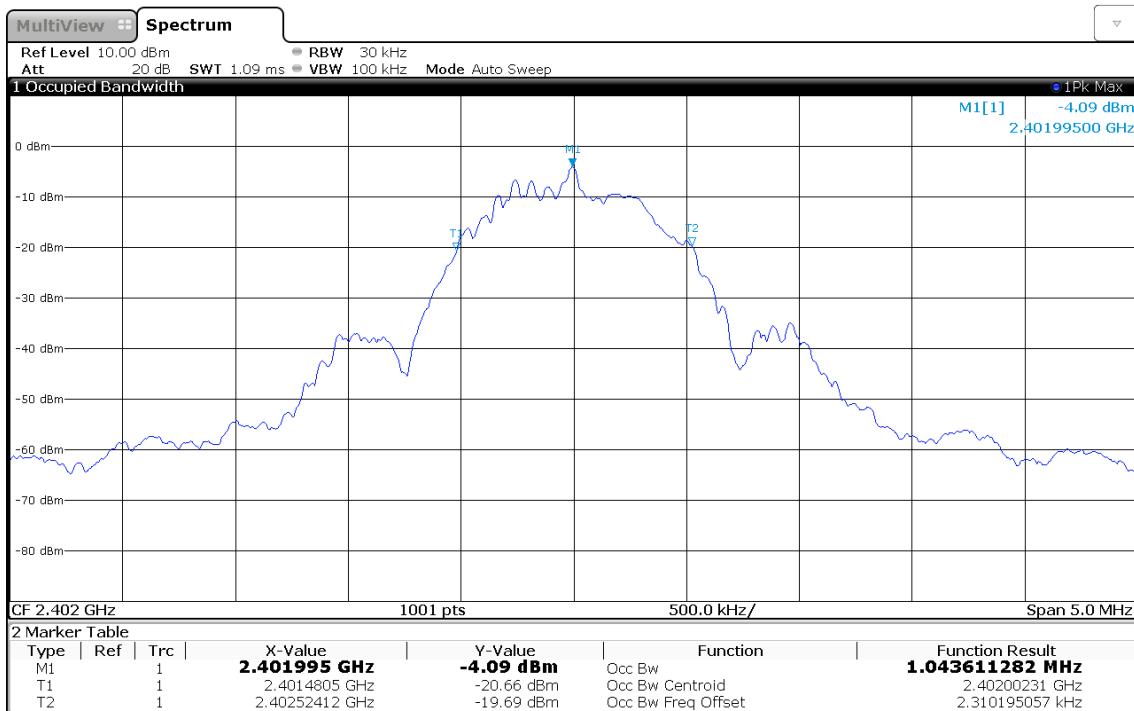

16:10:34 14.12.2017

Occupied Bandwidth


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Occupied Bandwidth [MHz]: 1.045

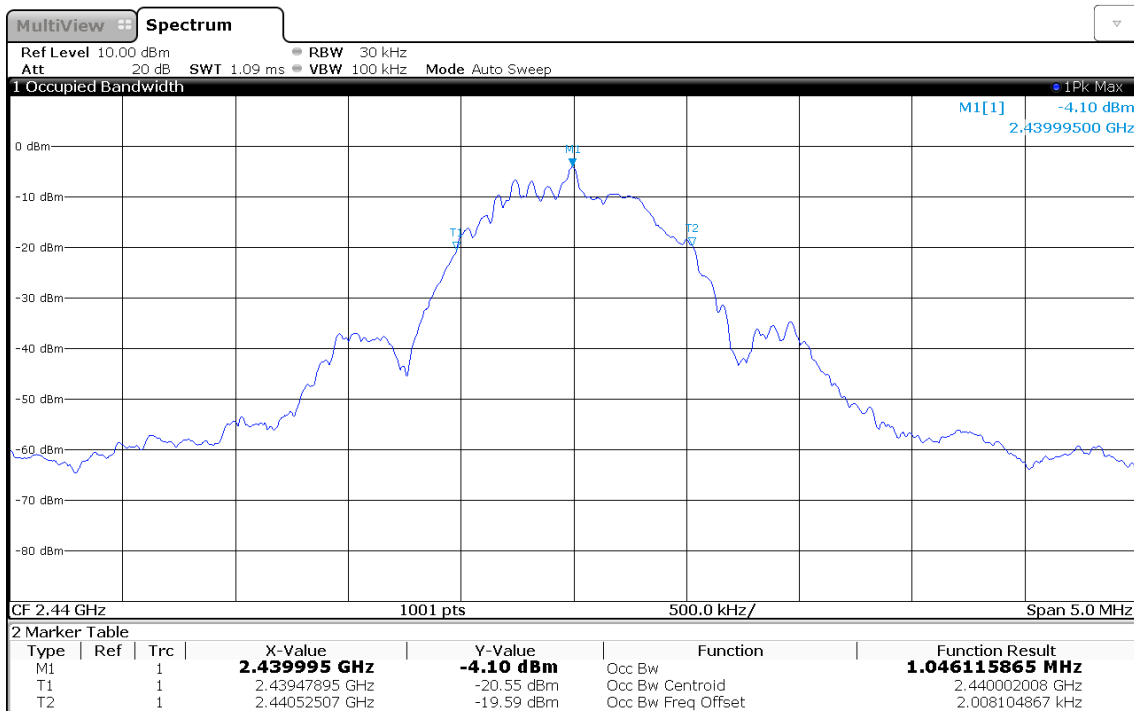

16:11:33 14.12.2017

Occupied Bandwidth

Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Occupied Bandwidth [MHz]: 1.047

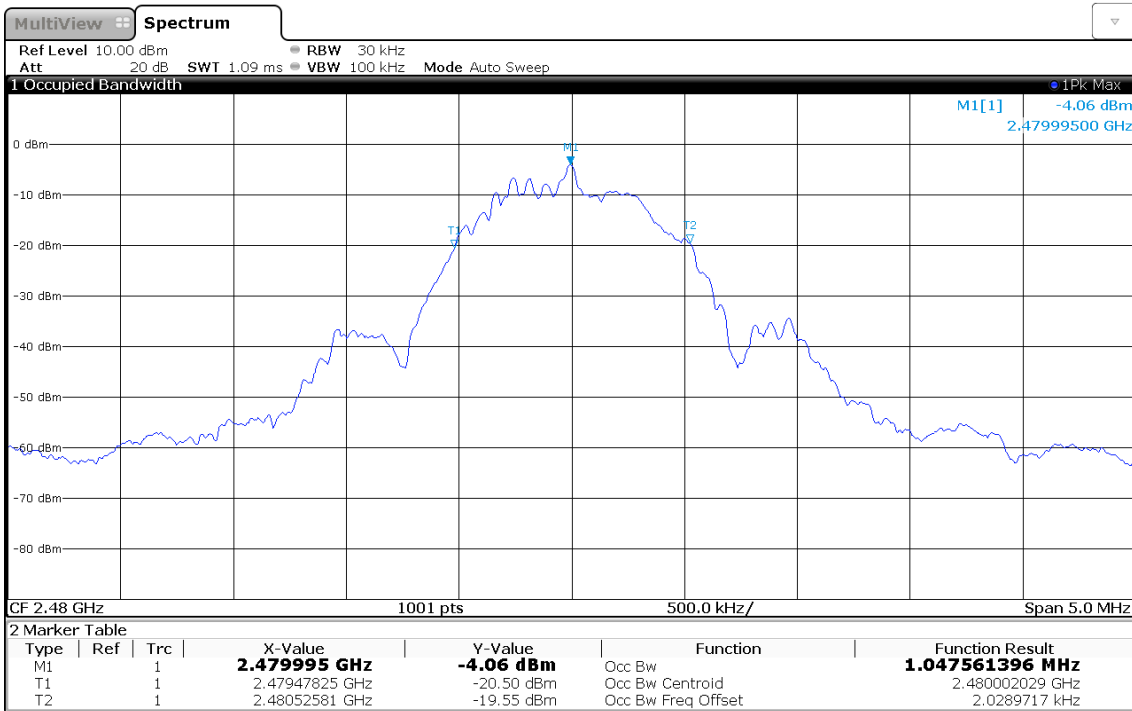

16:12:19 14.12.2017

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

Test Information	
Reference	FCC 15.247(a)(2) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.8
Operator	Abdullah Al Jamal
Date	2017-12-14

3.2.2 Limits

Limits
≥ 500kHz

3.2.3 Setup

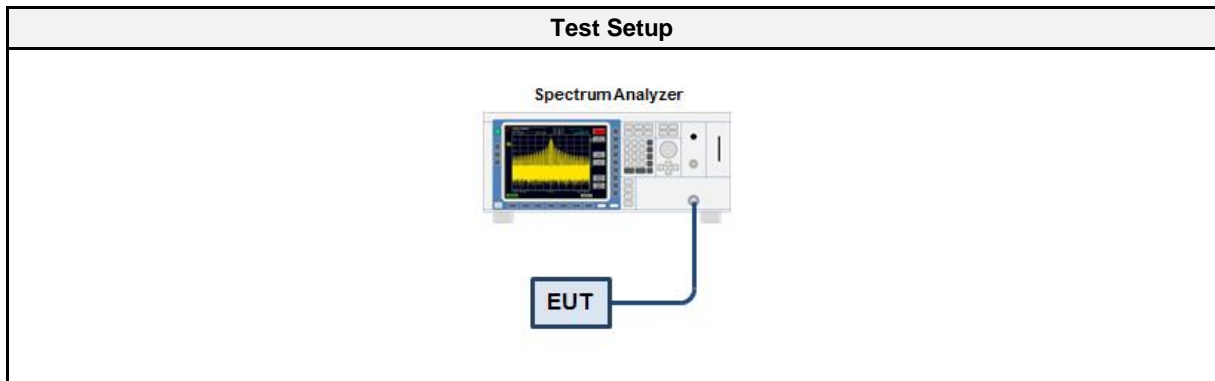

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2017-08	2018-08

3.2.5 Procedure


Test Procedure
<ol style="list-style-type: none"> 1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation

3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	734	500	PASS
GFSK	2440	739	500	PASS
GFSK	2480	739	500	PASS

DTS (6 dB) Bandwidth


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Lower Frequency [MHz]: 2401.620
 Upper Frequency [MHz]: 2402.355
 6 dB Bandwidth [kHz]: 734

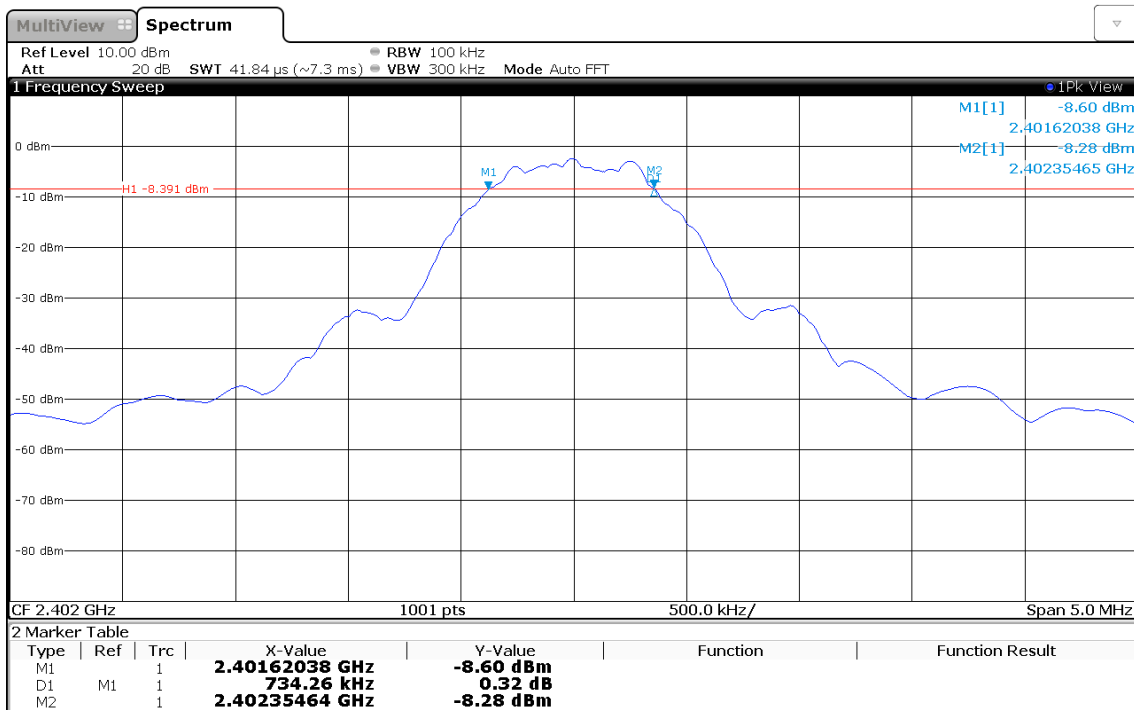

16:16:51 14.12.2017

DTS (6 dB) Bandwidth


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Lower Frequency [MHz]: 2439.620
 Upper Frequency [MHz]: 2440.360
 6 dB Bandwidth [kHz]: 739

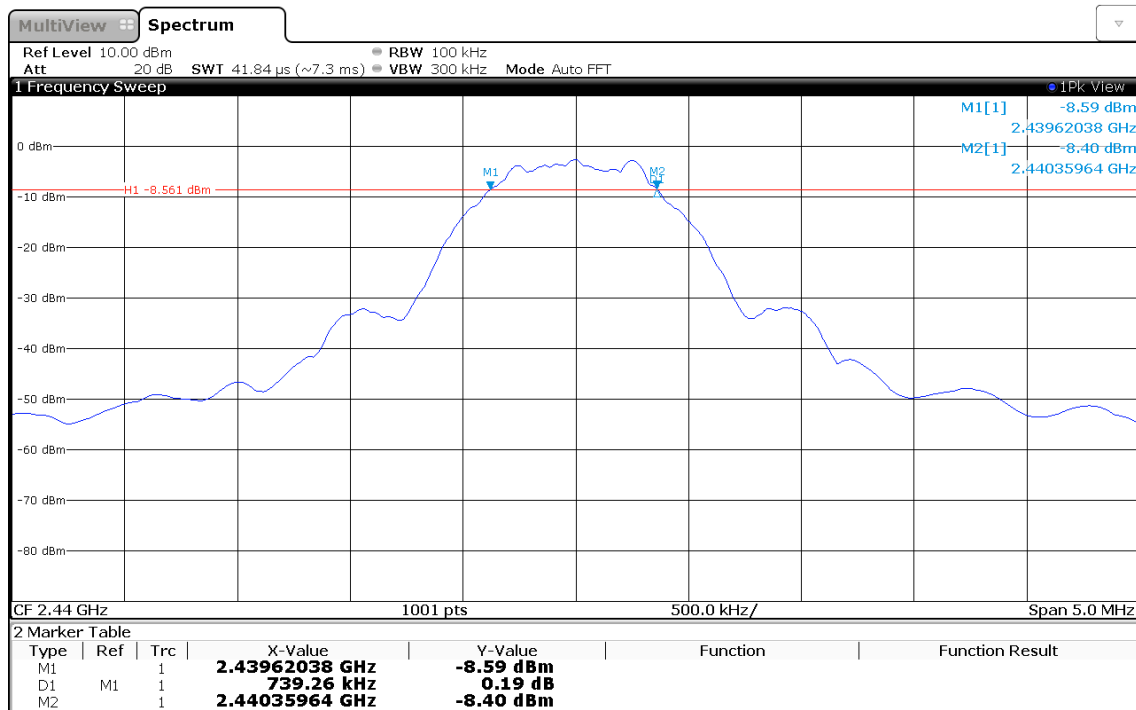

16:16:03 14.12.2017

DTS (6 dB) Bandwidth

Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Lower Frequency [MHz]: 2479.615
 Upper Frequency [MHz]: 2480.355
 6 dB Bandwidth [kHz]: 739

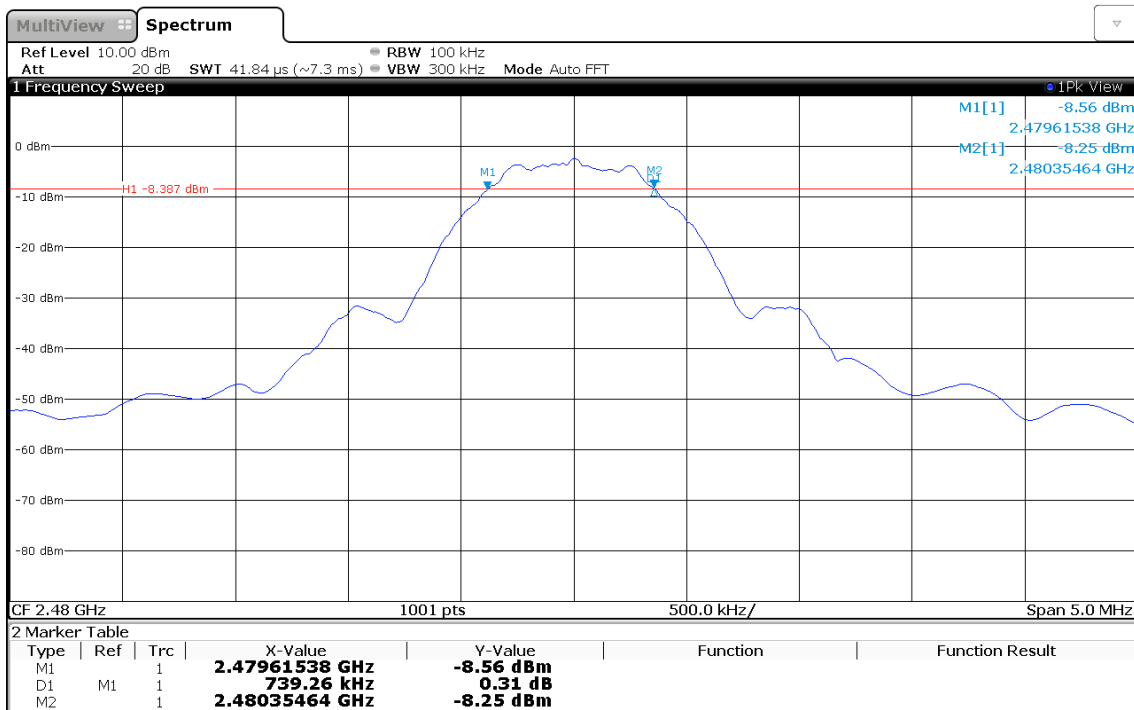

16:15:17 14.12.2017

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

Test Information	
Reference	FCC 15.247(b)(1) / ISED RSS-247 5.4
Measurement Method	ANSI C63.10 11.9.1
Operator	Abdullah Al Jamal
Date	2017-12-14

3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3 Setup

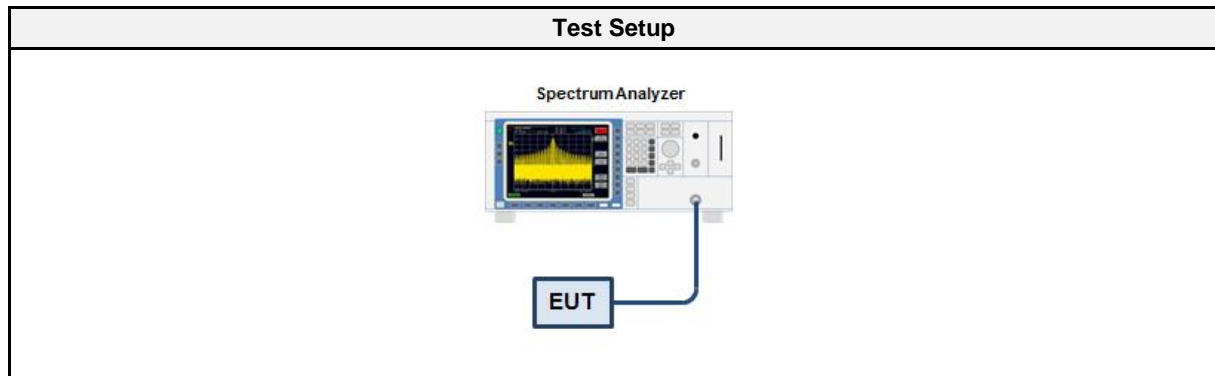

3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2017-08	2018-08

3.3.5 Procedure

Test Procedure
<ol style="list-style-type: none"> 1. EUT set to test hopping mode (Communication tester is used if needed) 2. Analyzer resolution bandwidth is set \geq DTS bandwidth 3. Detector set to peak and max hold 4. Sweep time is set to auto 5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
2402	-1.256	0.0007	1.0	PASS
2440	-1.241	0.0008	1.0	PASS
2480	-1.241	0.0008	1.0	PASS

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

Test Information	
Reference	FCC 15.247(e) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Operator	Abdullah Al Jamal
Date	2017-12-14

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

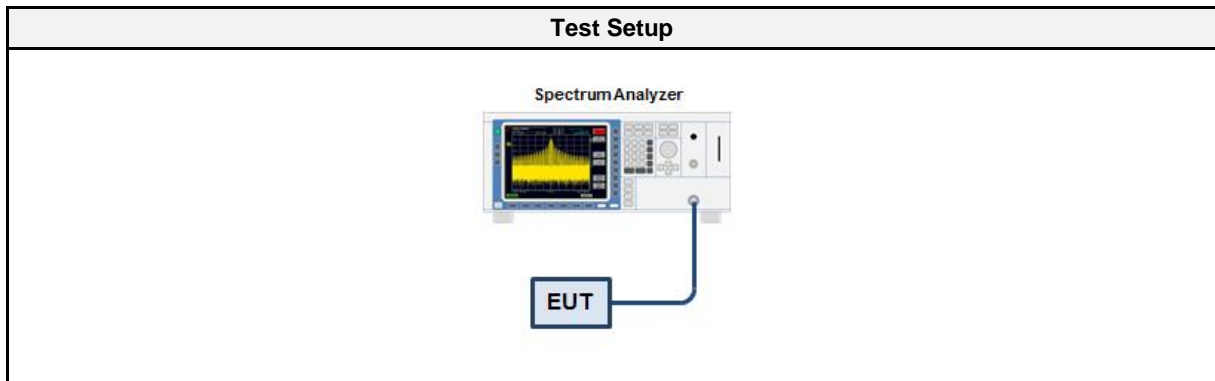

3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2017-08	2018-08

3.4.5 Procedure


Test Procedure
<ol style="list-style-type: none"> 1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW \geq RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain

3.4.6 Results

Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
2402	-2.540	8.0	PASS
2440	-2.905	8.0	PASS
2480	-2.060	8.0	PASS
RBW = 100 kHz			

Peak Power Spectral Density


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Peak Frequency [MHz]: 2401.739
 Spectral Density [dBm/RBW]: -2.540
 Resolution Bandwidth [kHz]: 100 kHz

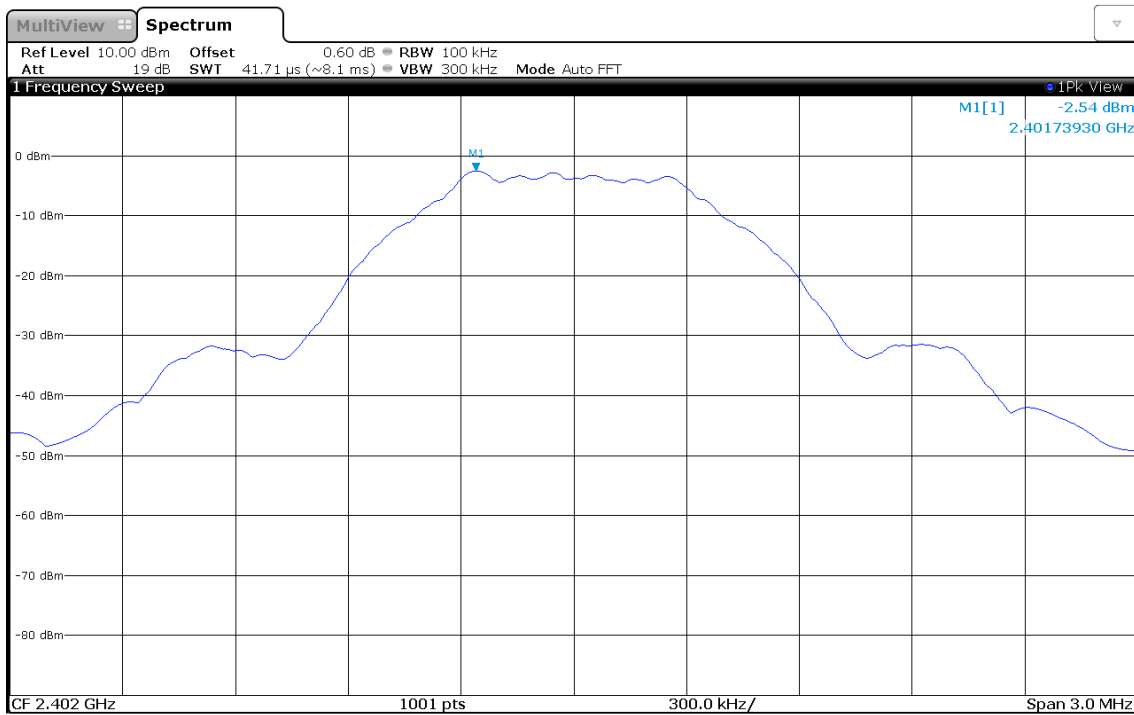

16:24:54 14.12.2017

Peak Power Spectral Density


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Peak Frequency [MHz]: 2439.955
 Spectral Density [dBm/RBW]: -2.905
 Resolution Bandwidth [kHz]: 100 kHz

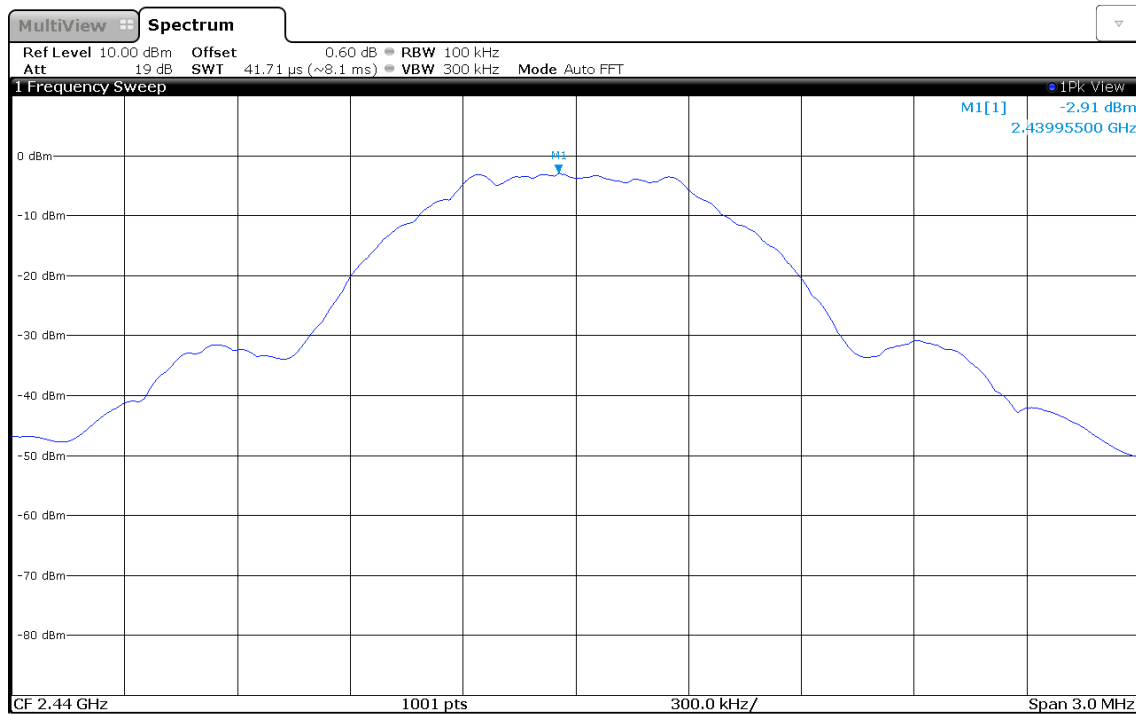

16:25:38 14.12.2017

Peak Power Spectral Density

Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Peak Frequency [MHz]: 2479.991
 Spectral Density [dBm/RBW]: -2.060
 Resolution Bandwidth [kHz]: 100 kHz

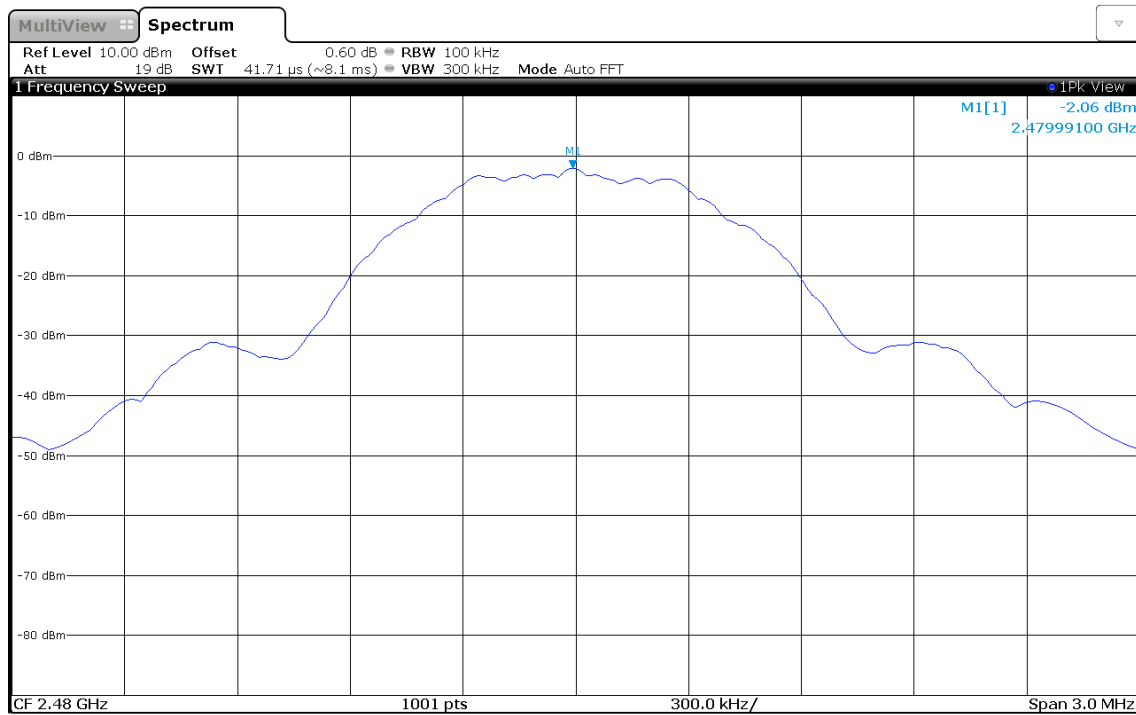

16:26:15 14.12.2017

3.5 Test Conditions and Results - Band-edge compliance


3.5.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.13
Operator	Abdullah Al Jamal
Date	2017-12-14

3.5.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.5.3 Setup

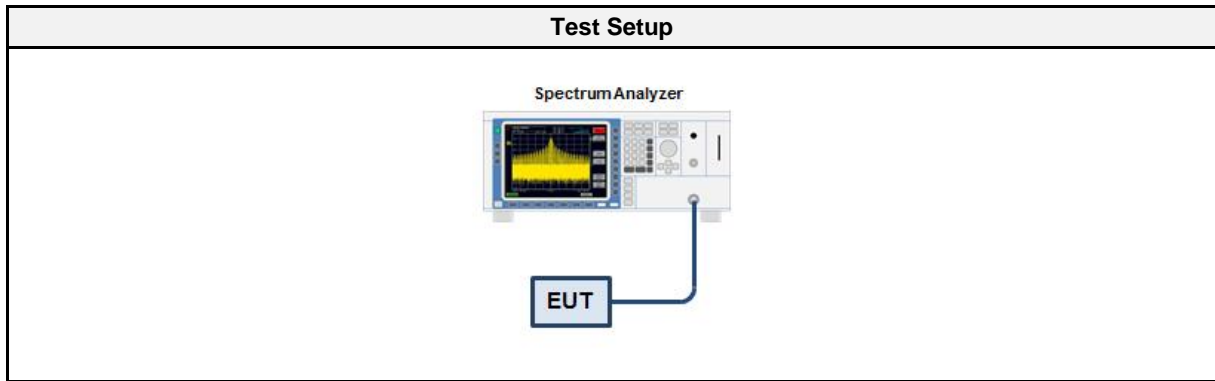

3.5.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2017-08	2018-08

3.5.5 Procedure


Test Procedure
<ol style="list-style-type: none"> 1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.5.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-48.86	-20	PASS
GFSK	2480	-55.44	-20	PASS

Band-edge Compliance


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247(d) / ISED RSS-247 5.5
 Reference Method: ANSI C63.10 11.13
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Band-edge: Lower
 In-band Frequency [MHz]: 2401.978
 Max. in-band Level [dBm/100 kHz]: -1.345
 Out-of-band Frequency [MHz]: 2399.996
 Max. out-of-band Level [dBm/100 kHz]: -50.208
 Attenuation [dB]: -48.86

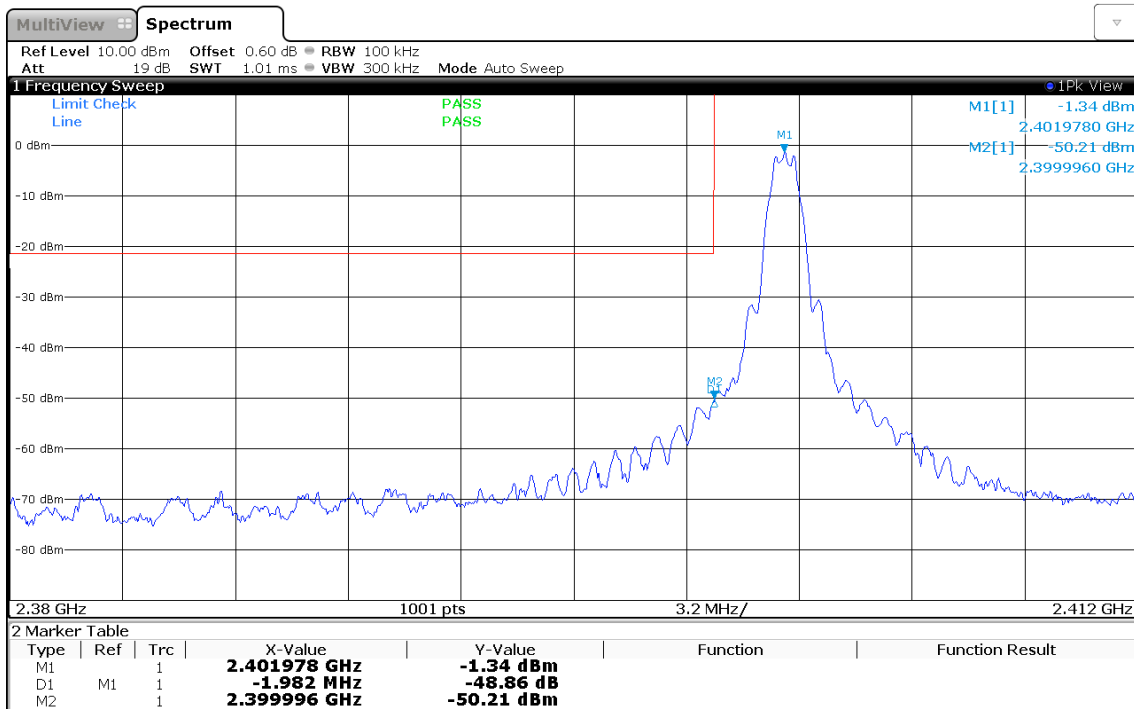

16:38:42 14.12.2017

Band-edge Compliance

Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247(d) / ISED RSS-247 5.5
 Reference Method: ANSI C63.10 11.13
 Operational Mode: GFSK, Channel: 78, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Band-edge: Upper
 In-band Frequency [MHz]: 2479.983
 Max. in-band Level [dBm/100 kHz]: -1.264
 Out-of-band Frequency [MHz]: 2483.514
 Max. out-of-band Level [dBm/100 kHz]: -56.705
 Attenuation [dB]: -55.44

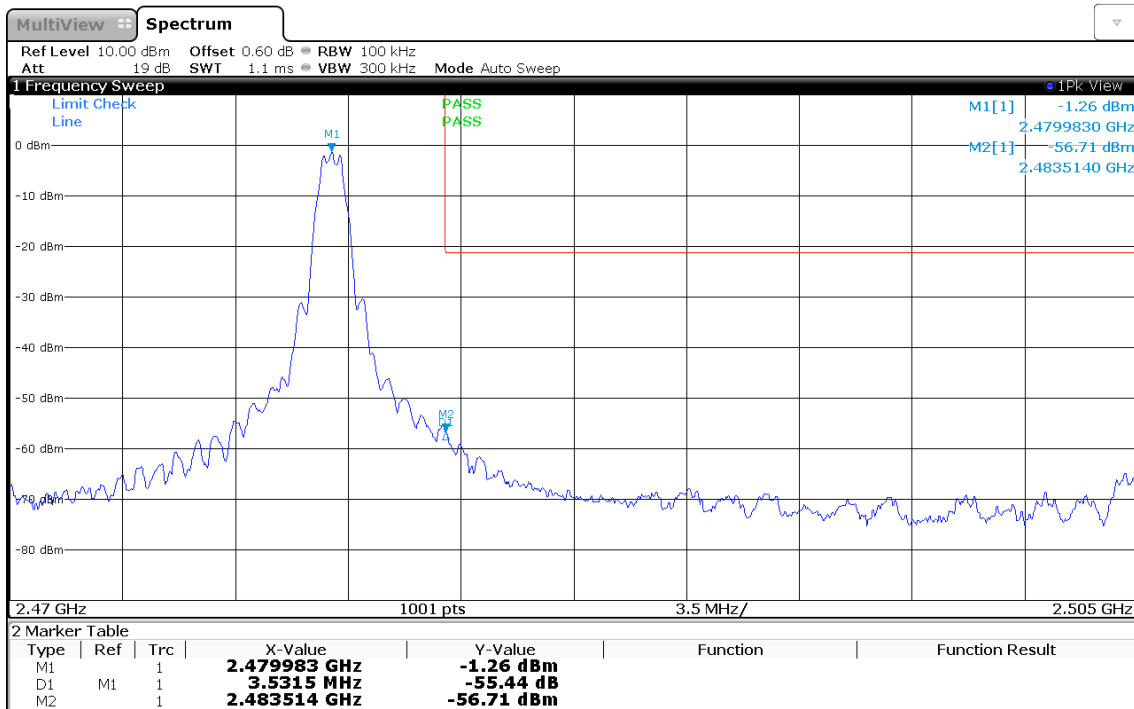

16:41:13 14.12.2017

3.6 Test Conditions and Results - Conducted spurious emissions


3.6.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.11
Operator	Abdullah Al Jamal
Date	2017-12-14

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

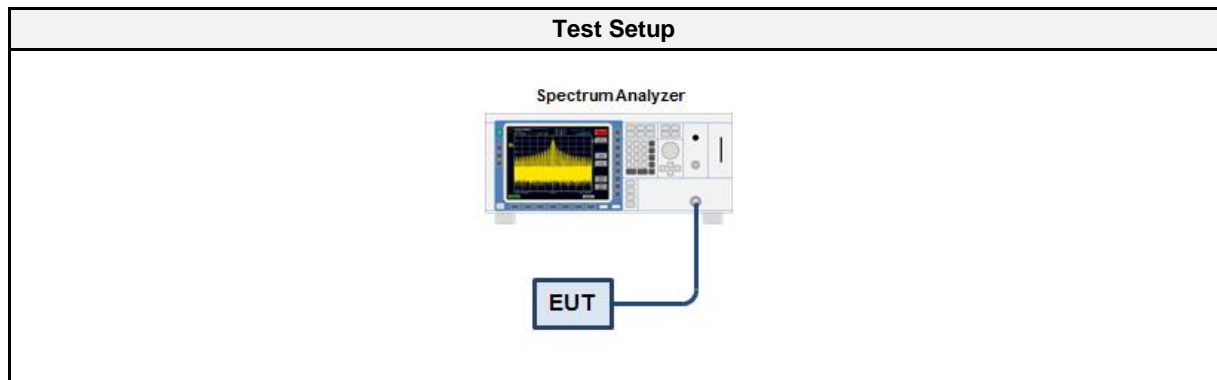

3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2017-08	2018-08

3.6.5 Procedure


Test Procedure
<ol style="list-style-type: none"> 1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.6.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2440	PASS
GFSK	2480	PASS

Conducted Spurious Emissions


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Max. in-band Frequency [MHz]: 2402.0
 Max. in-band Level [dBm/100 kHz]: -1.5
 Out-of-band Limit [dBm/100 kHz]: -21.5

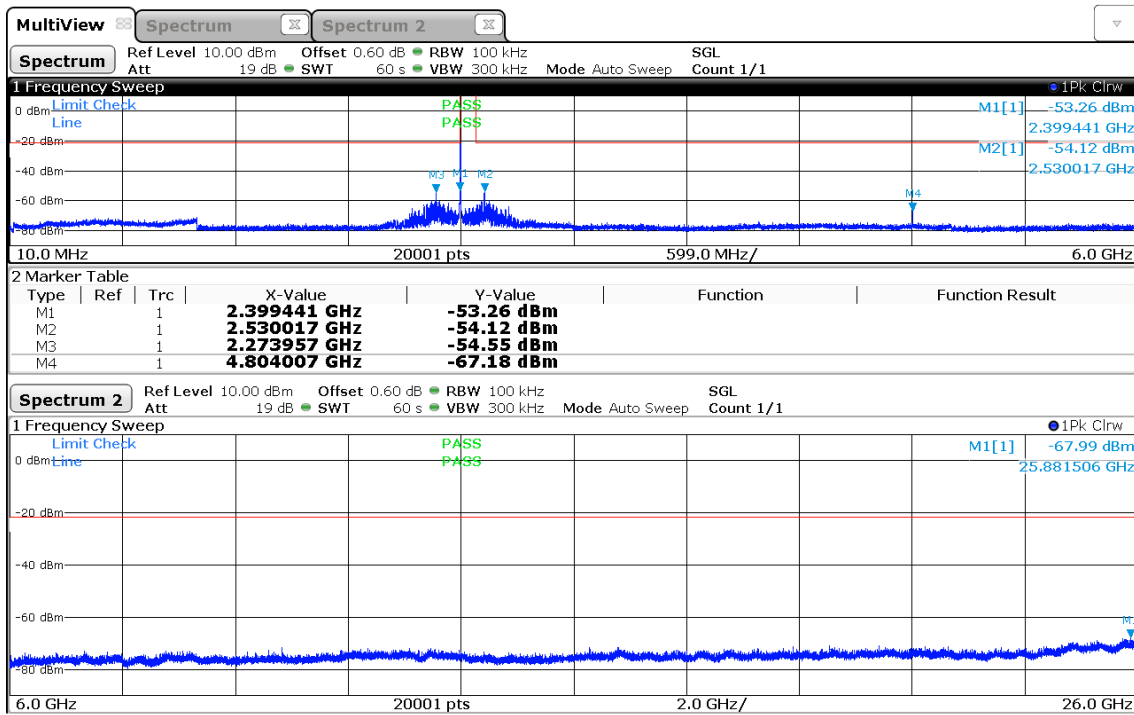

16:49:07 14.12.2017

Conducted Spurious Emissions


Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Max. in-band Frequency [MHz]: 2440.0
 Max. in-band Level [dBm/100 kHz]: -1.4
 Out-of-band Limit [dBm/100 kHz]: -21.4

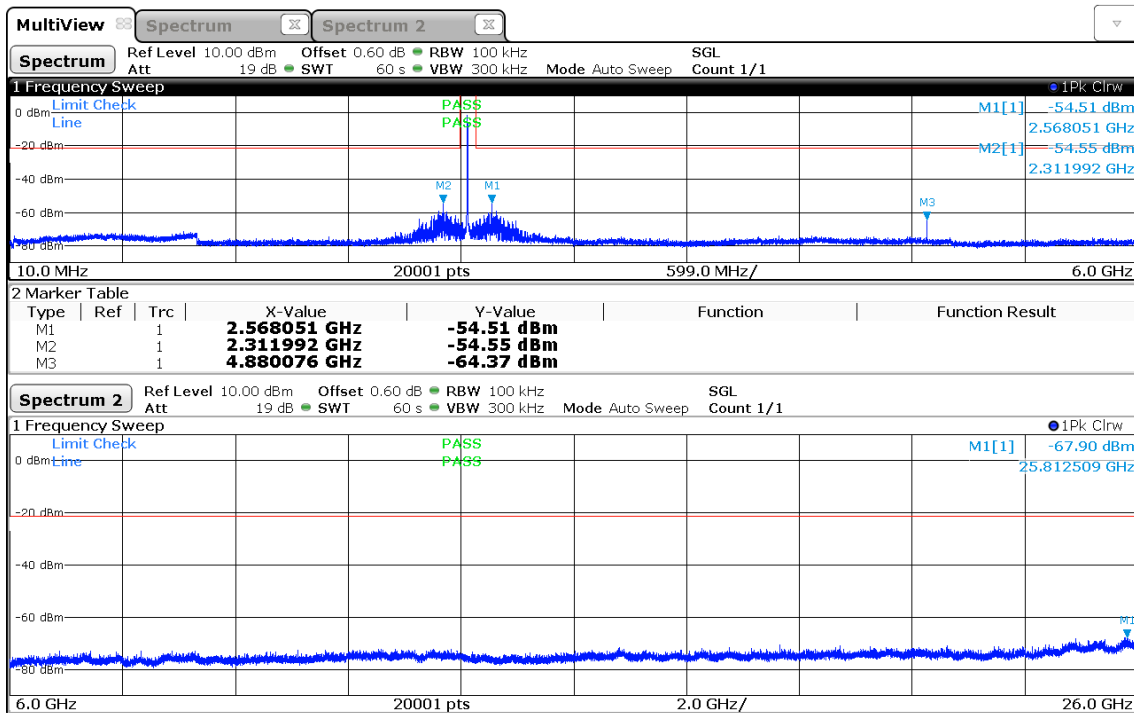

16:53:08 14.12.2017

Conducted Spurious Emissions

Project Number: G0M-1710-6928
 Applicant: Leica Geosystems AG
 Model Description: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Sample ID: 15824
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: A. Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-12-14
 Max. in-band Frequency [MHz]: 2480.0
 Max. in-band Level [dBm/100 kHz]: -1.3
 Out-of-band Limit [dBm/100 kHz]: -21.3

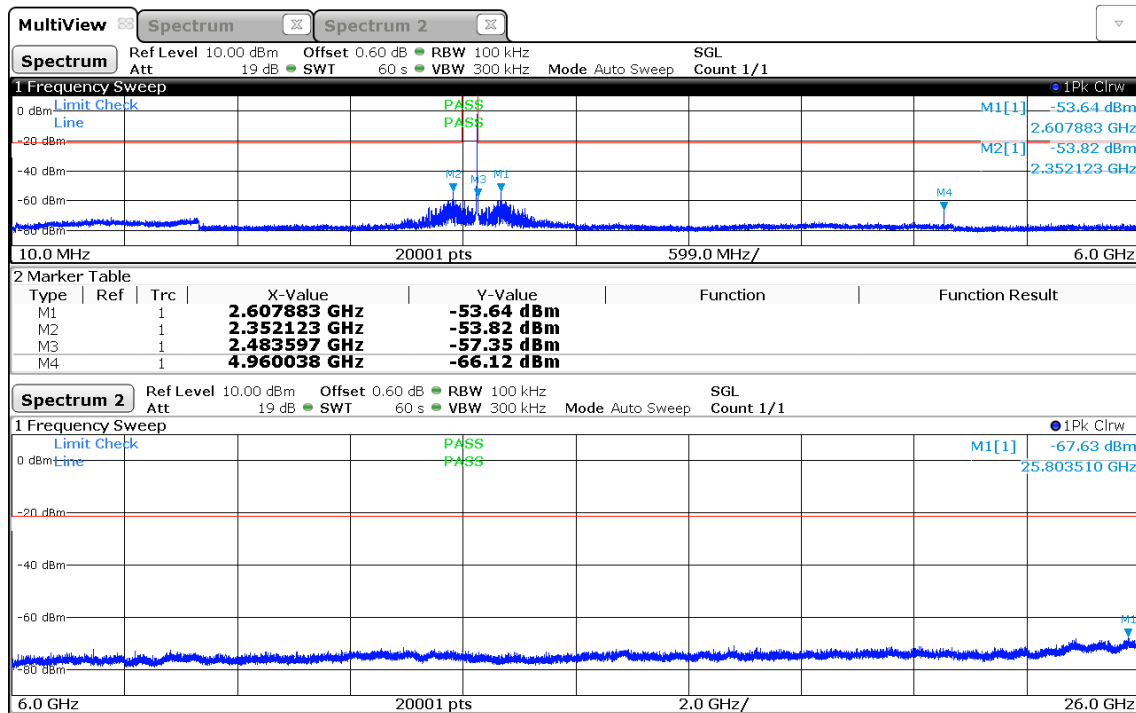

16:56:39 14.12.2017

3.7 Test Conditions and Results - Transmitter radiated emissions


3.7.1 Information


Test Information	
Reference	FCC 15.247(d) / ISED RSS-GEN 8.9
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Abdullah Al Jamal
Date	2017-12-20

3.7.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.7.3 Setup

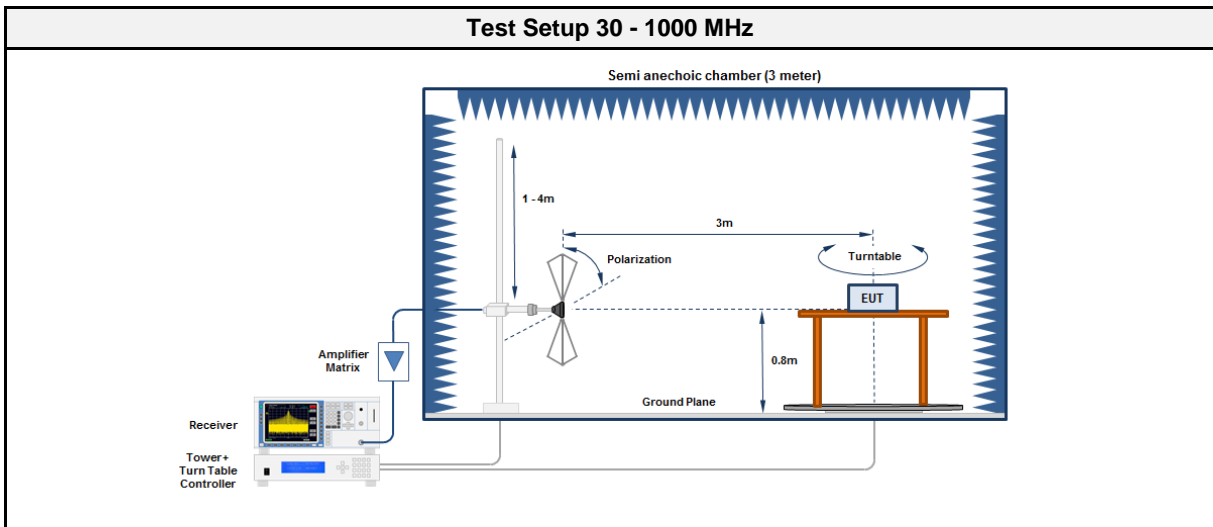

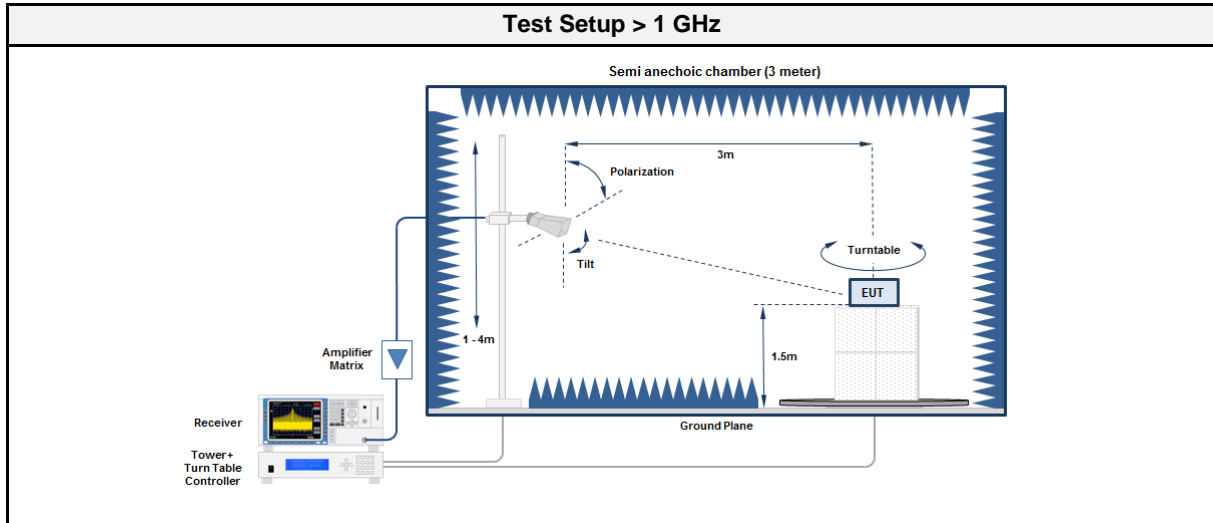

3.7.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	HK 116	EF00012	2016-05	2019-05
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

3.7.5 Procedure

Test Procedure 30 - 1000 MHz
<ol style="list-style-type: none"> 1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
<ol style="list-style-type: none"> 1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.7.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dB μ V/m]	Det.	Pol.	Limit [dB μ V/m]	Margin [dB]
2402	4800	41.14	pk	hor	74.00	-32.86
2440	4880	43.47	pk	ver	74.00	-30.53
2480	2483.7	57.10	pk	hor	74.00	-16.90
2480	2483.7	40.65	RMS	hor	54.00	-13.35
2480	4952	45.18	pk	ver	74.00	-28.82
2480	4960	42.36	pk	hor	74.00	-31.64

3.8 Test Conditions and Results - Receiver radiated emissions


3.8.1 Information


Test Information	
Reference	ISED RSS-247 3.1
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Abdullah Al Jamal
Date	2017-12-19

3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

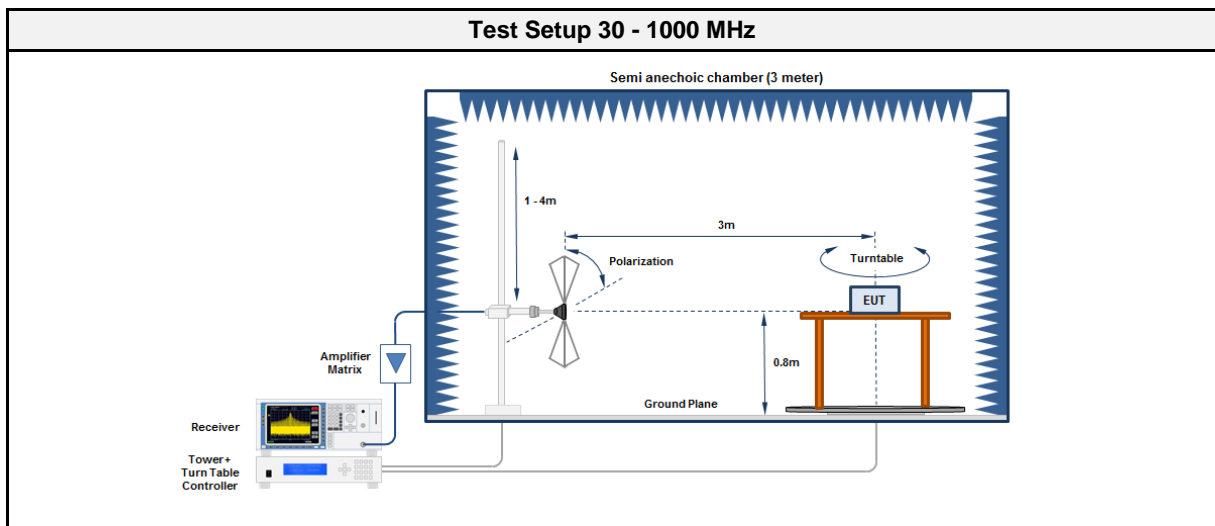

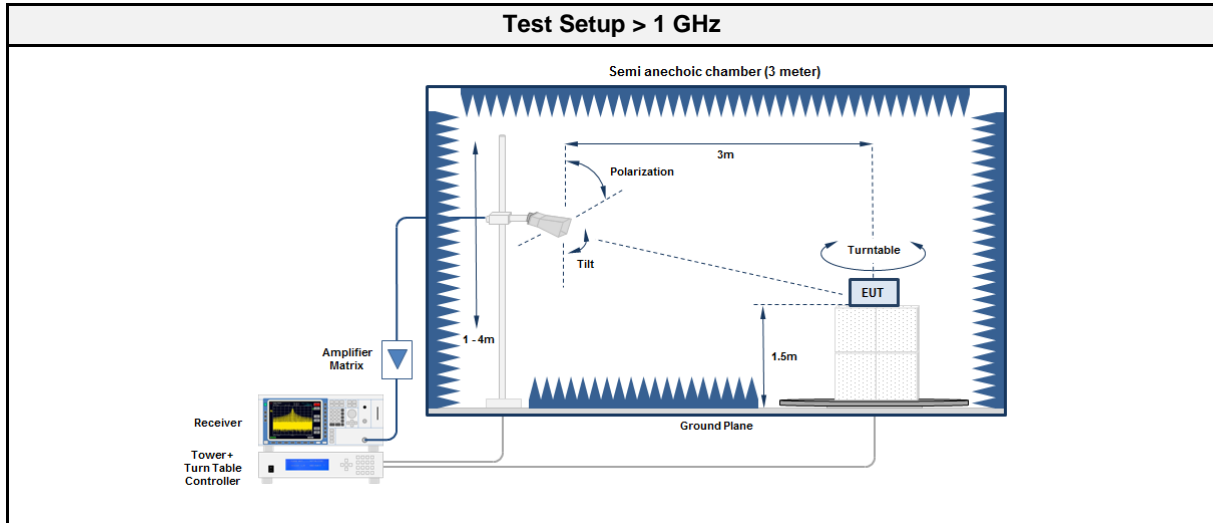

3.8.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	HK 116	EF00012	2016-05	2019-05
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

3.8.5 Procedure

Test Procedure 30 - 1000 MHz
<ol style="list-style-type: none"> 1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
<ol style="list-style-type: none"> 1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.8.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dB μ V/m]	Det.	Pol.	Limit [dB μ V/m]	Margin [dB]
2440	7432	50.77	pk	hor	53.98	-03.21
2440	7432	38.79	avg	hor	53.98	-15.19
2440	7528	50.09	pk	ver	53.98	-03.89
2440	7528	38.06	avg	ver	53.98	-15.92
2440	14570	48.94	pk	ver	53.98	-05.04
2440	14570	36.90	avg	ver	53.98	-17.08
2440	14606	48.96	pk	hor	53.98	-05.02
2440	14606	37.25	avg	hor	53.98	-16.73


ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.4°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-20
 Note:

Index 82

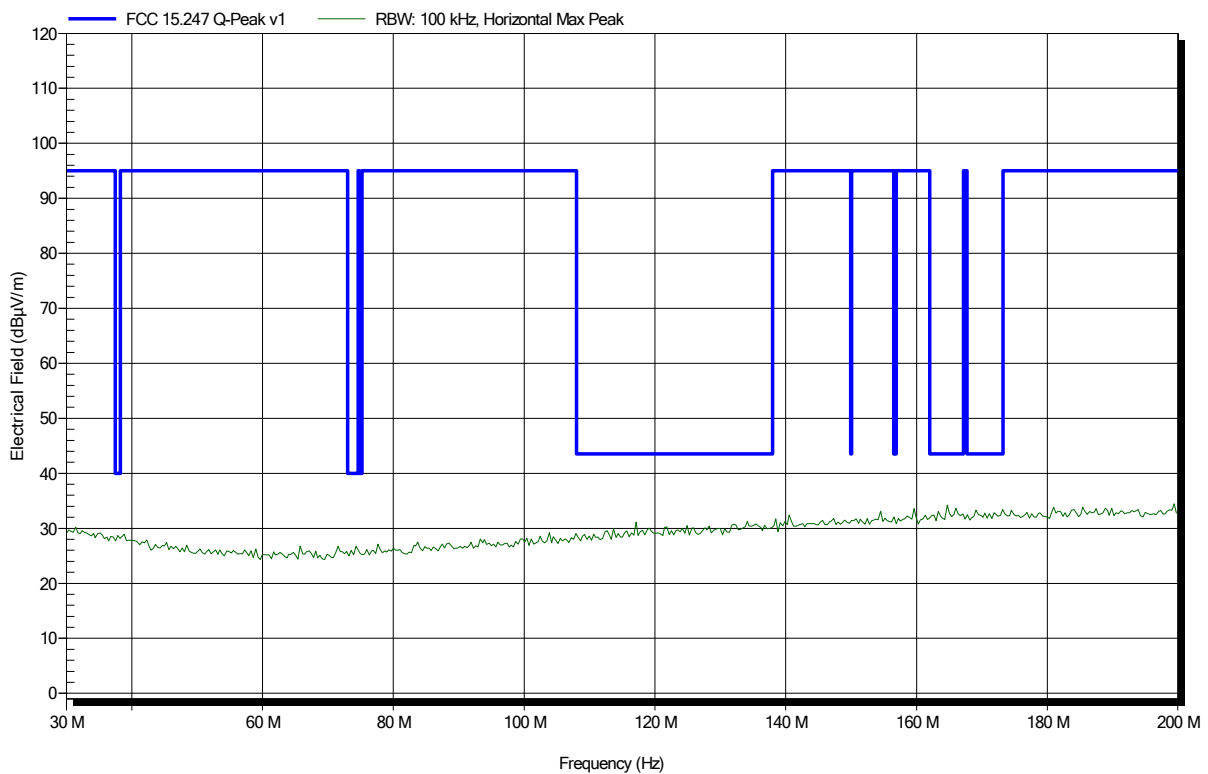


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.4°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-20
 Note:

Index 83

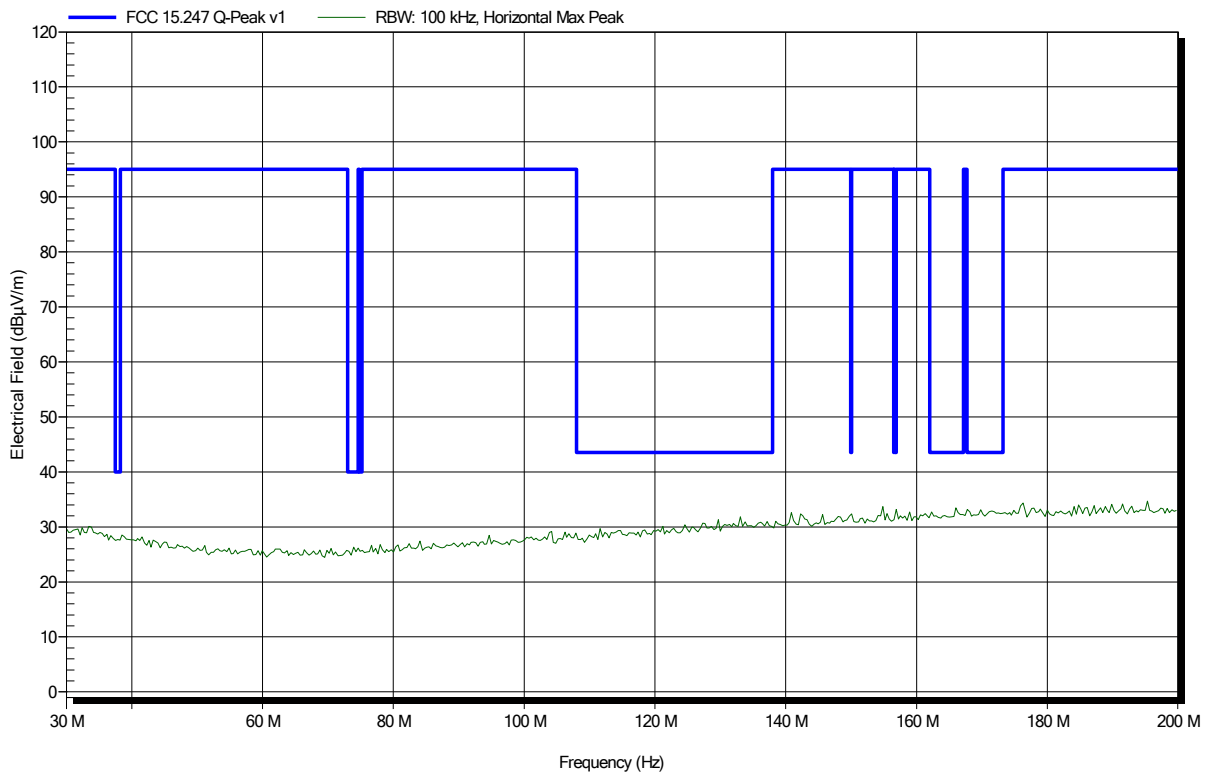


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-19
 Note:

Index 80

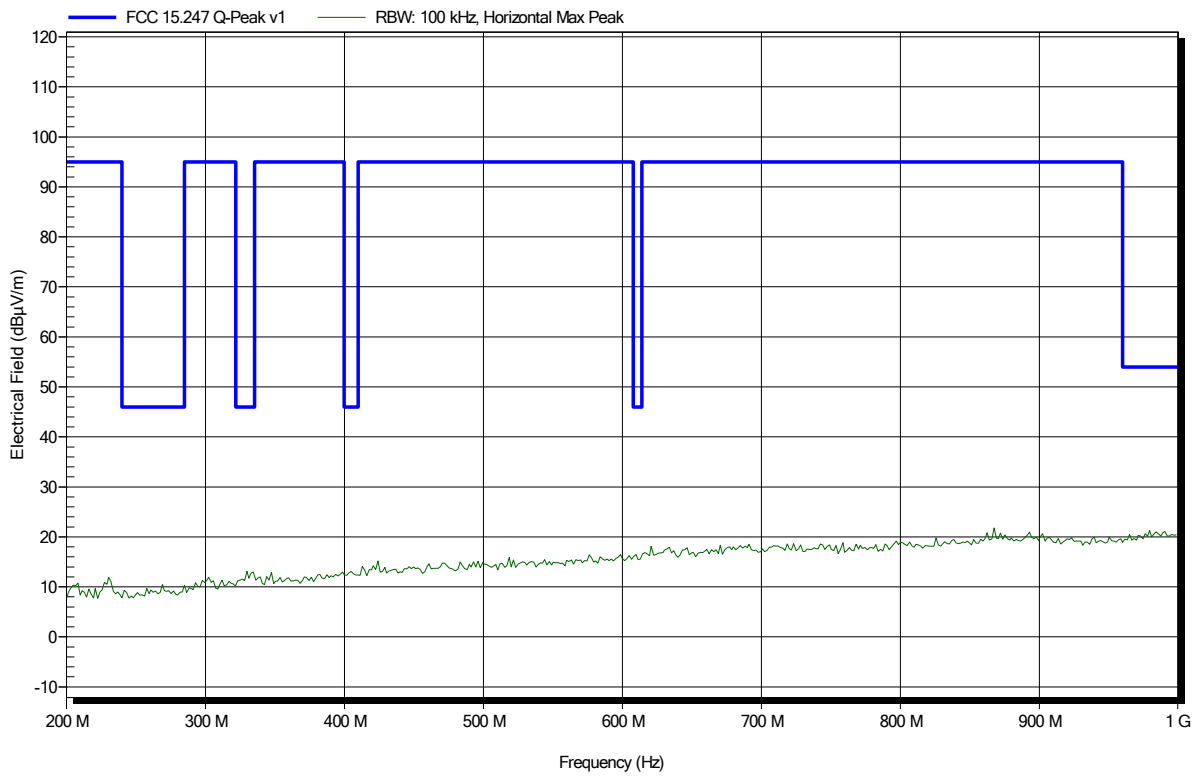


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-19
 Note:

Index 81

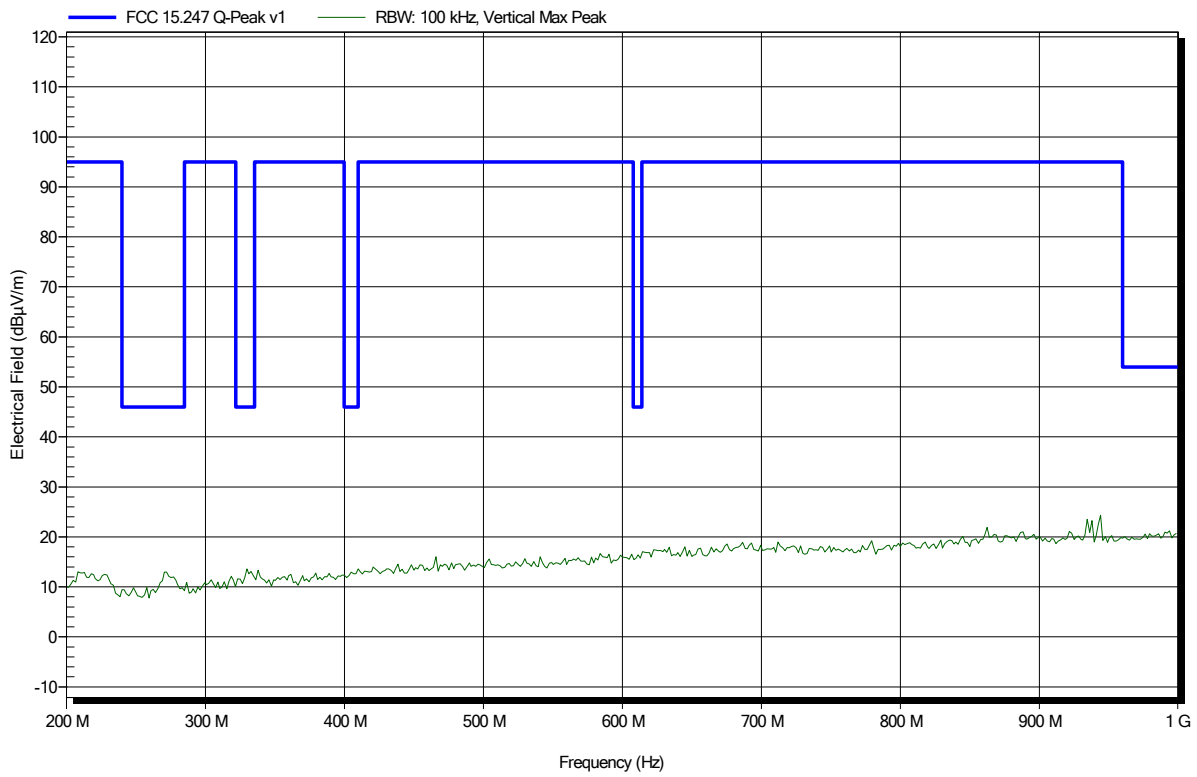


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-18
 Note:

Index 63

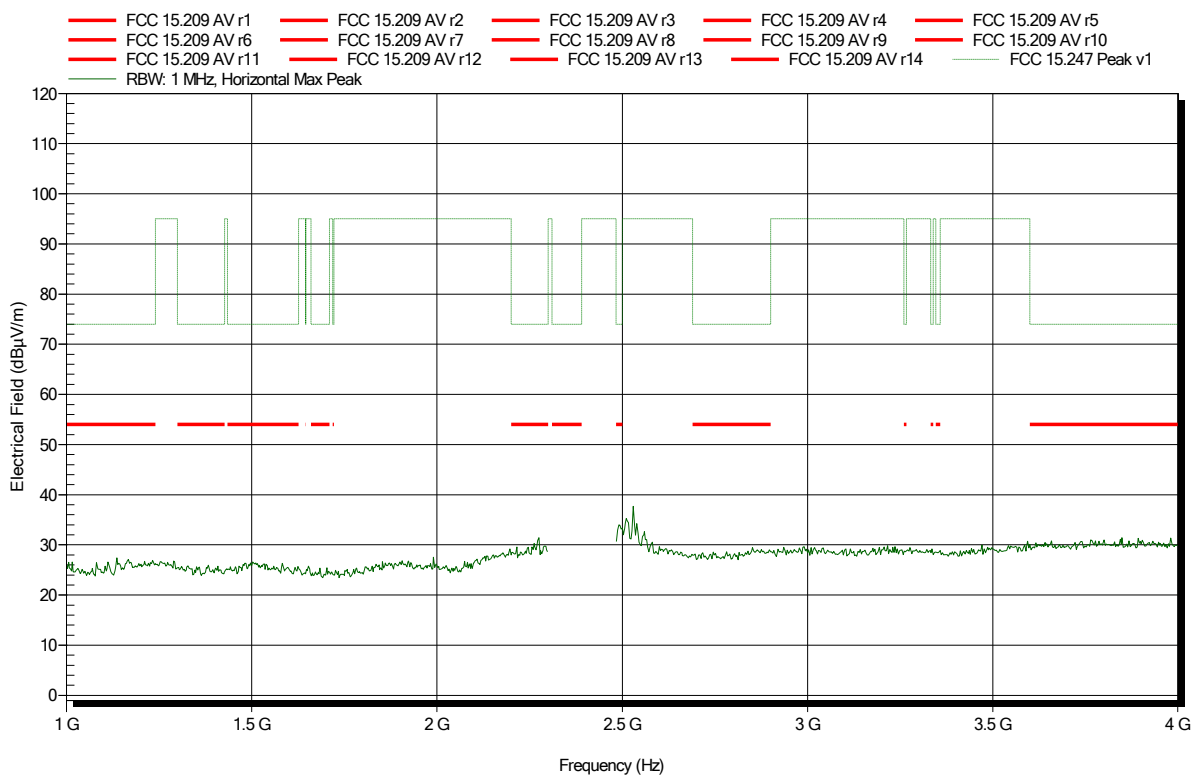


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-18
 Note:

Index 64

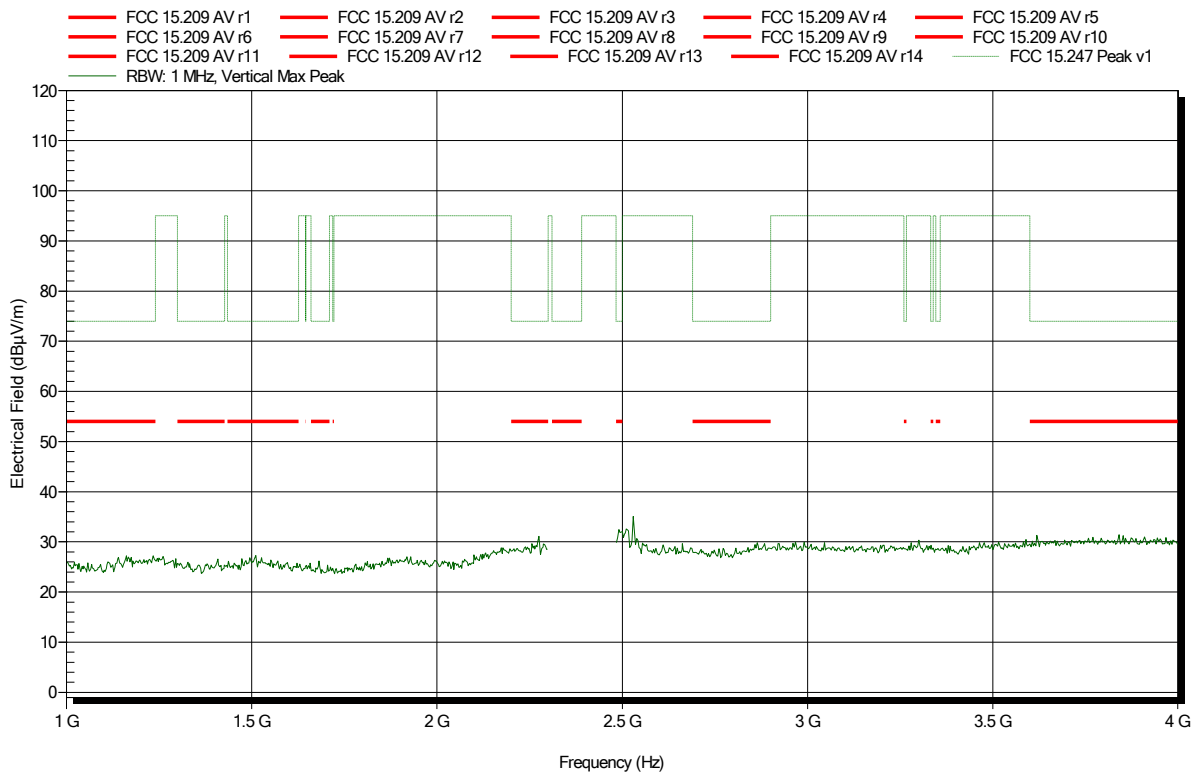


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-18
 Note: lower bandedge

Index 65

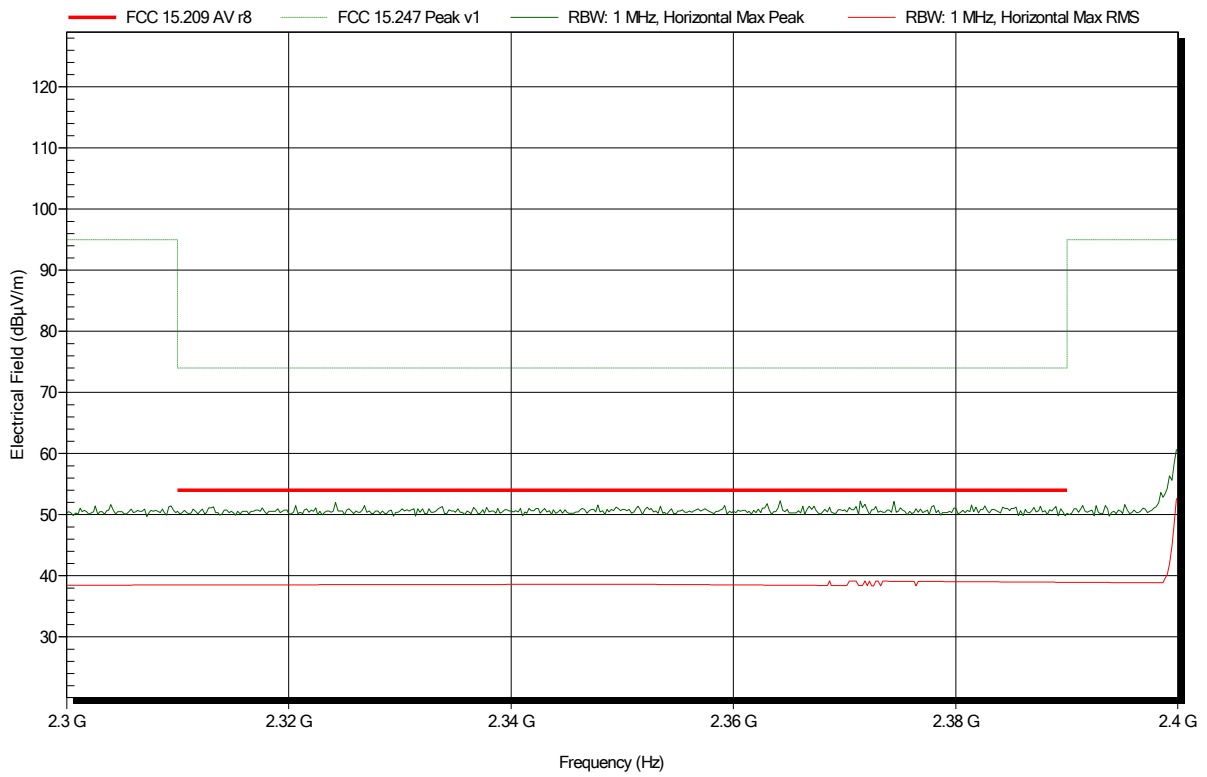


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-18
 Note: lower bandedge

Index 66

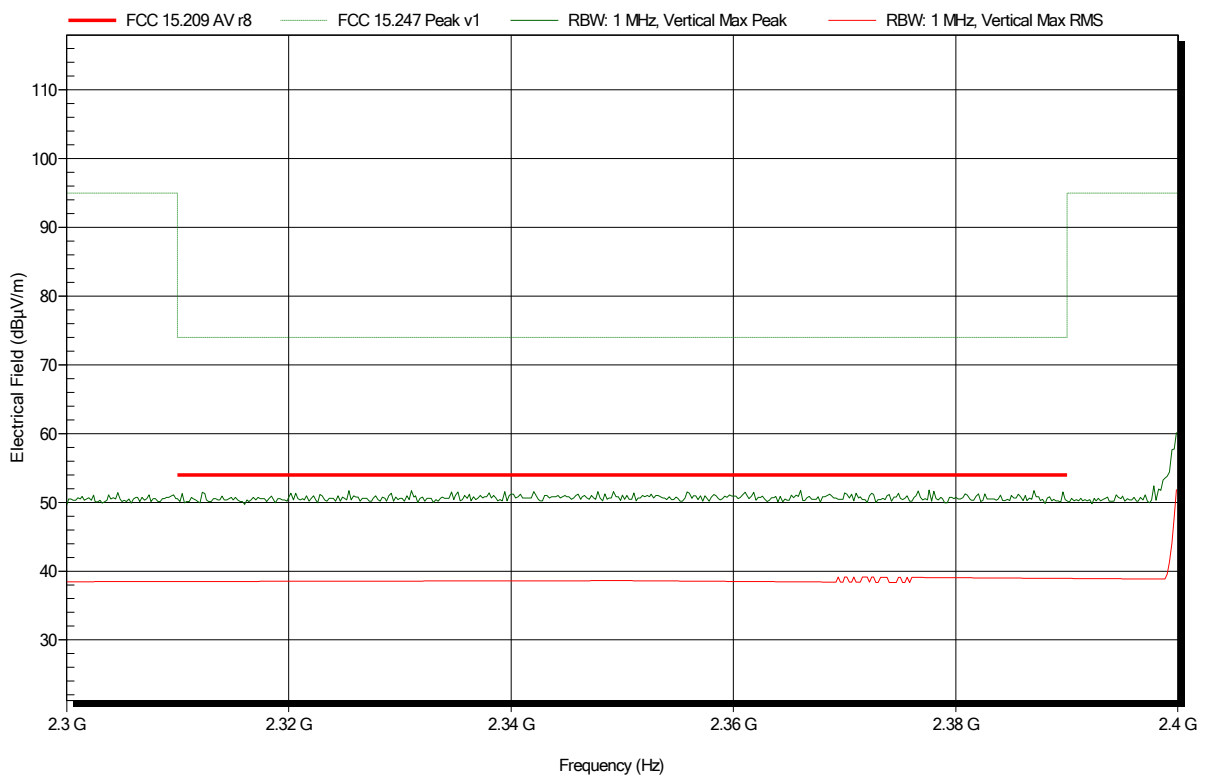


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-18
 Note:

Index 45

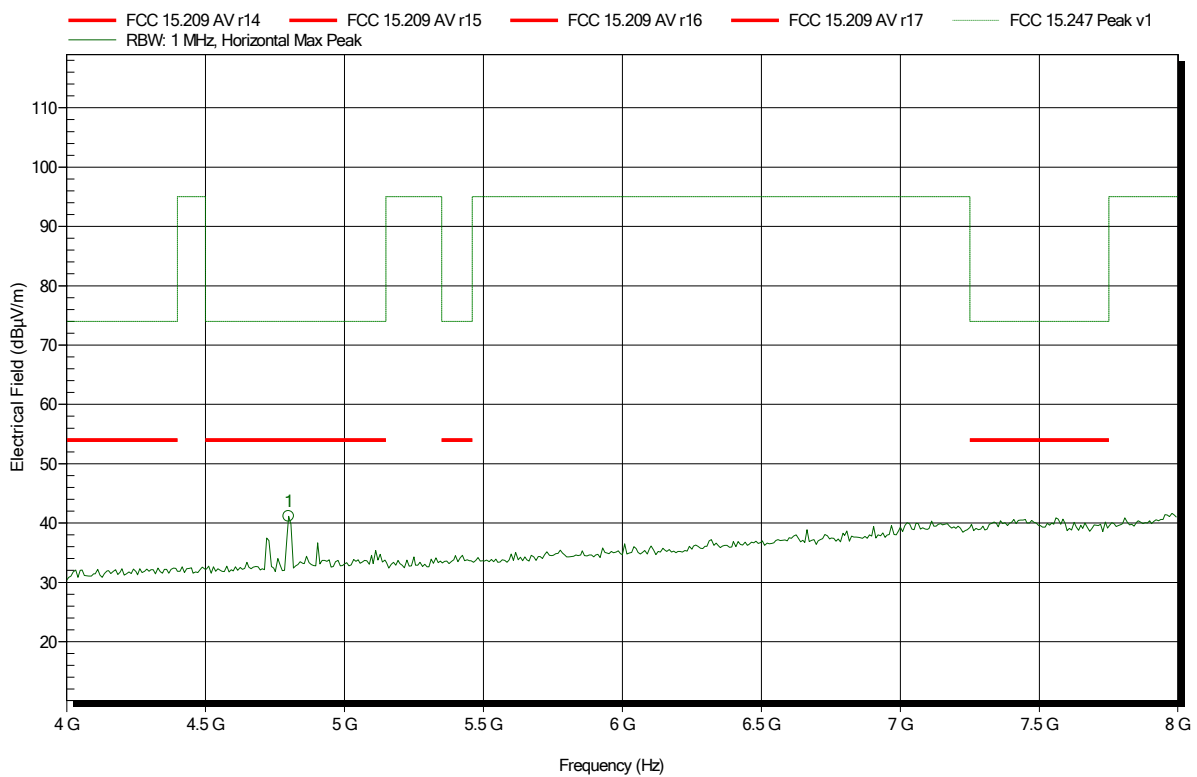


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.8 GHz	41.14 dBµV/m	74 dBµV/m	-32.86 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-18
 Note:

Index 47

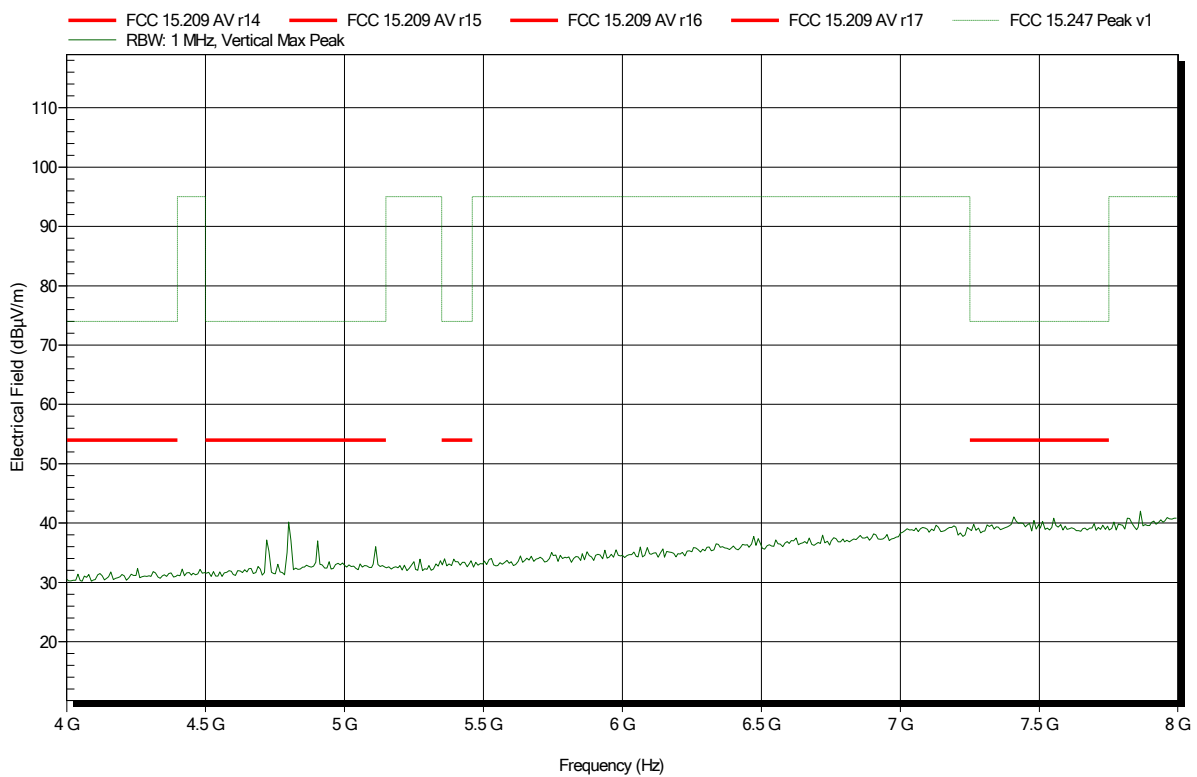


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-18
 Note:

Index 46

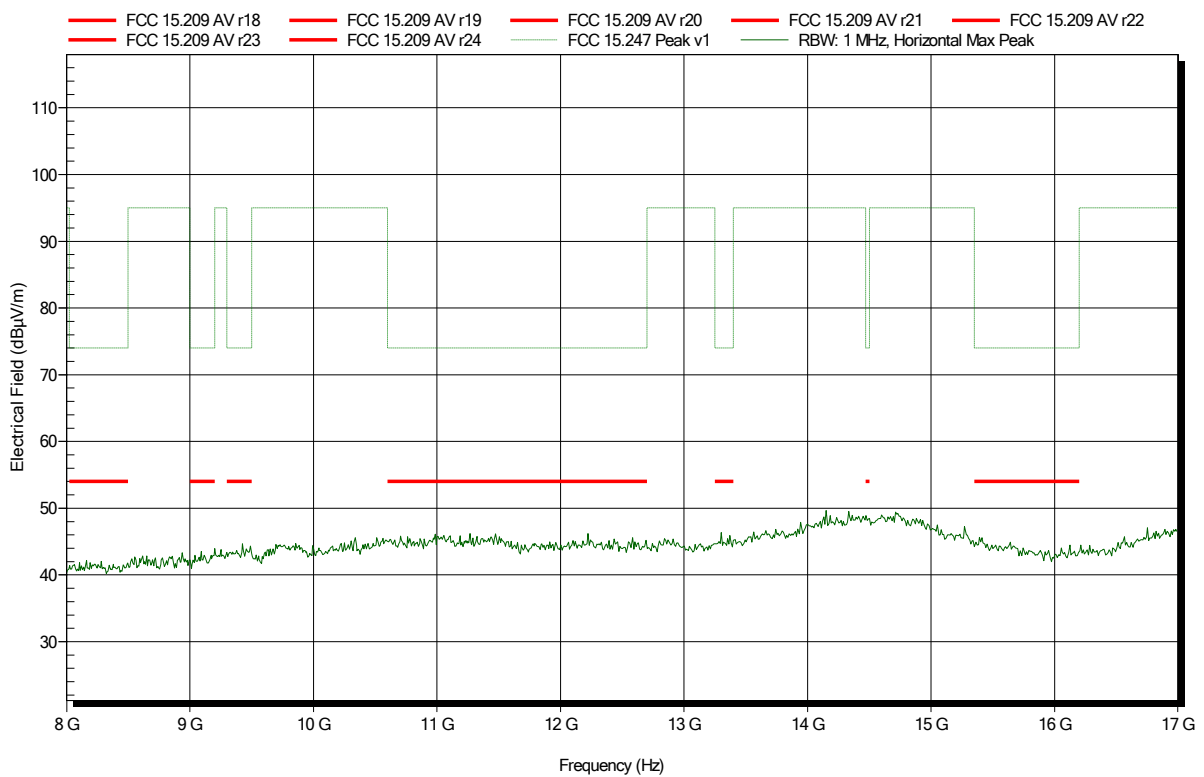


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-18
 Note:

Index 48

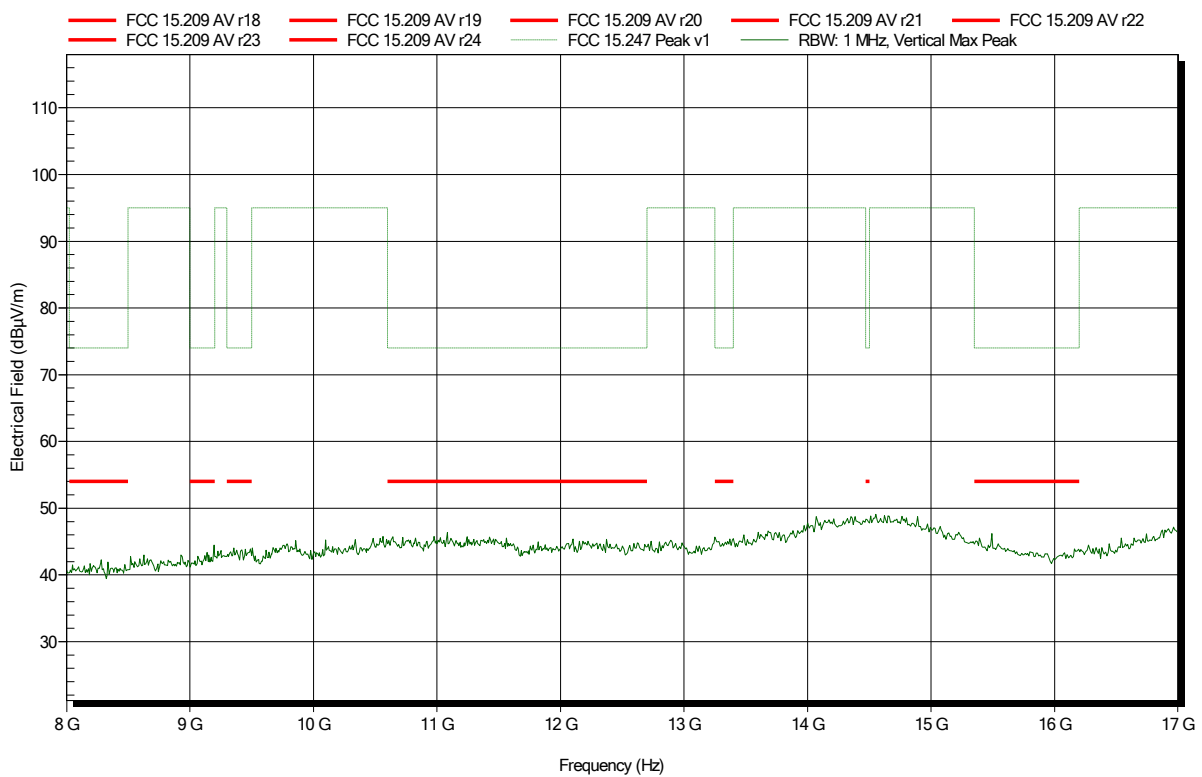


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Amplifier Research AT 4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-19
 Note:

Index 69

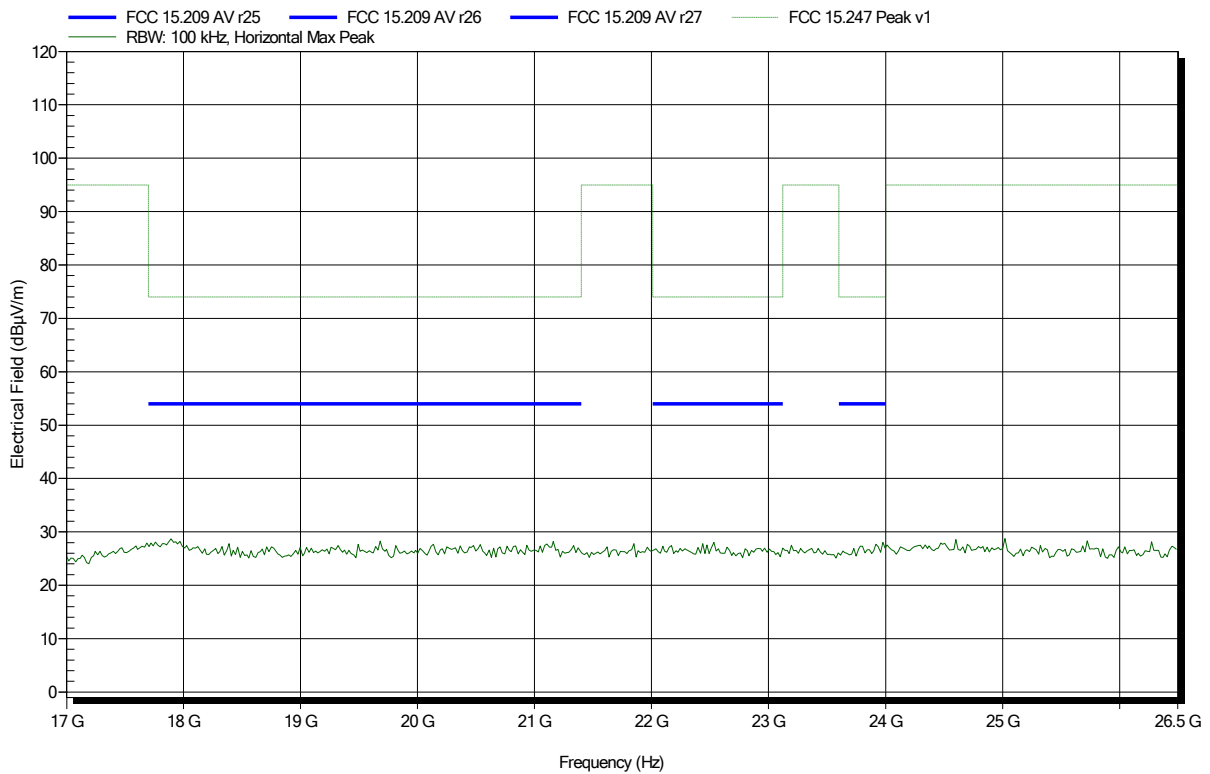


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Amplifier Research AT 4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2402 MHz
 Test Date: 2017-12-19
 Note:

Index 70

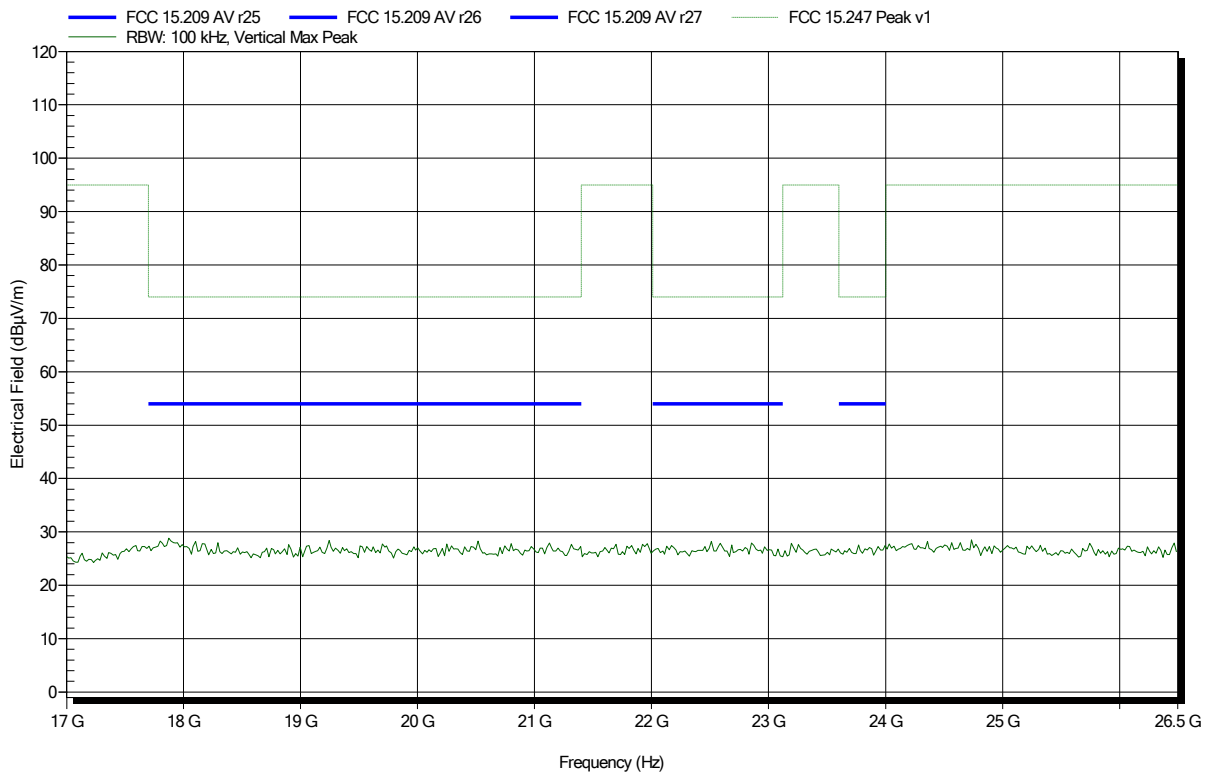


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.4°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-20
 Note:

Index 85

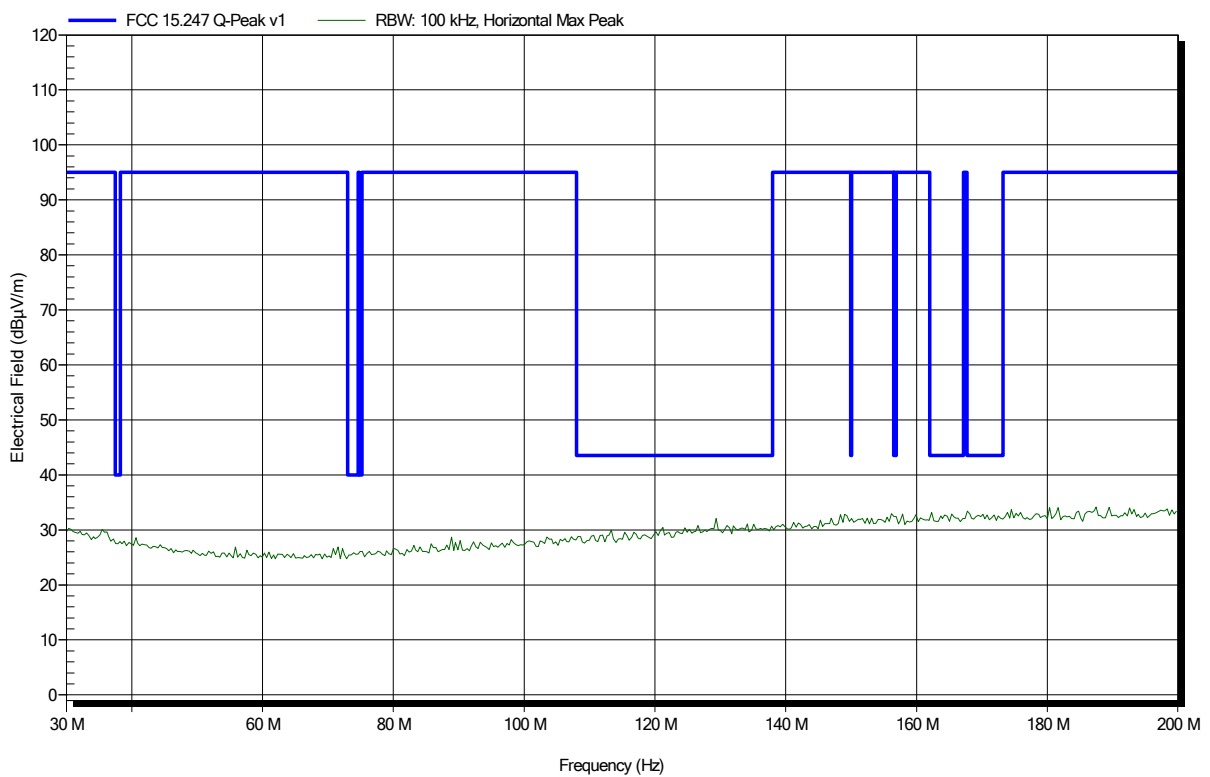


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.4°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-20
 Note:

Index 86

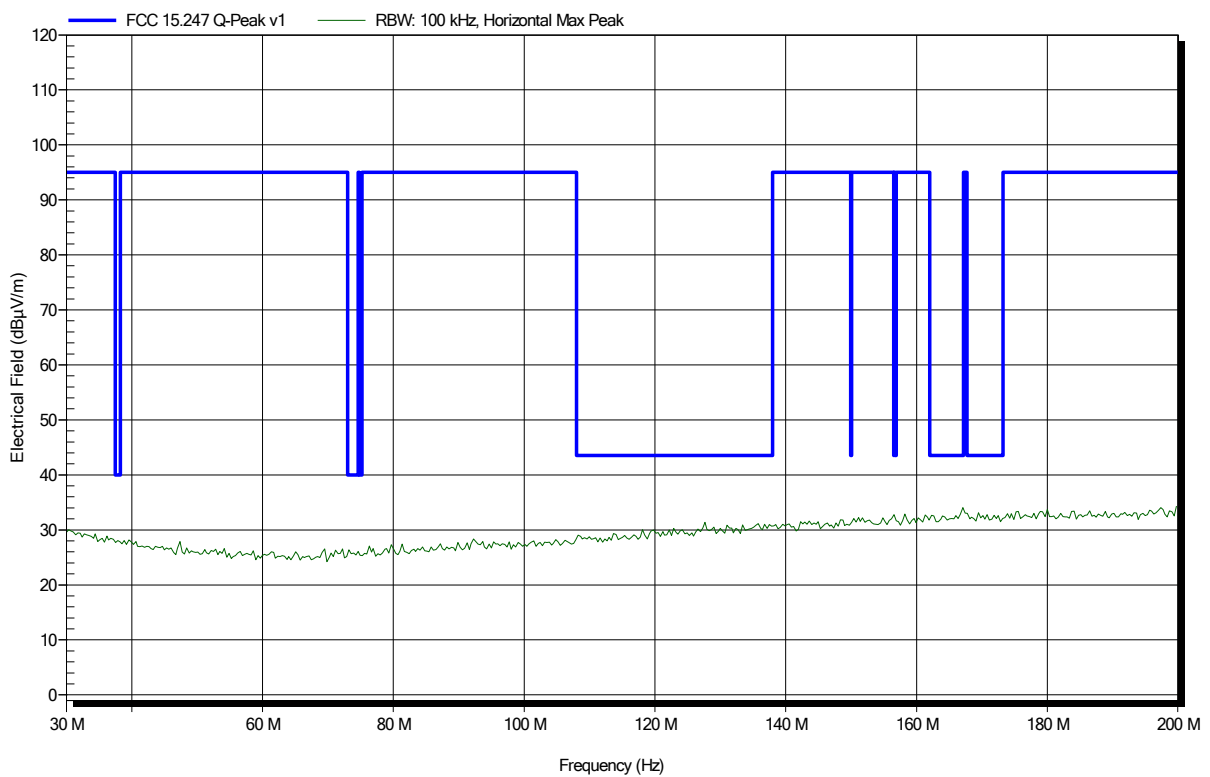


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 79

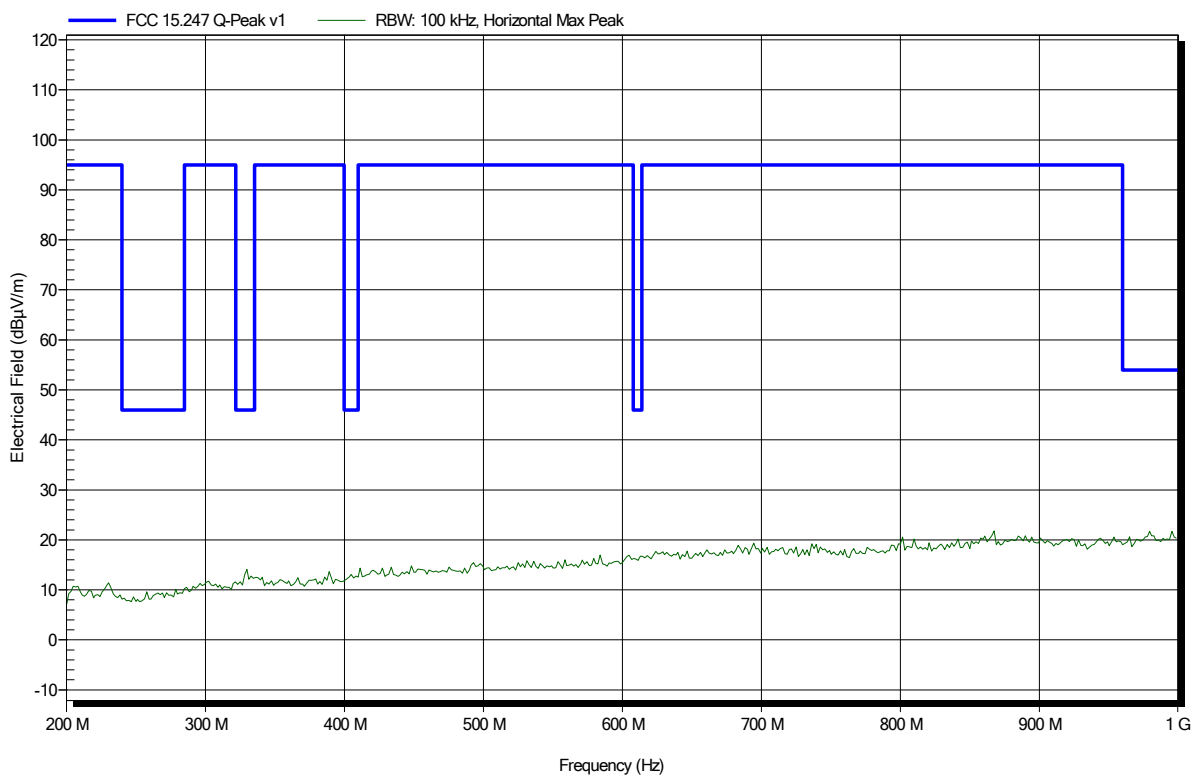


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 78

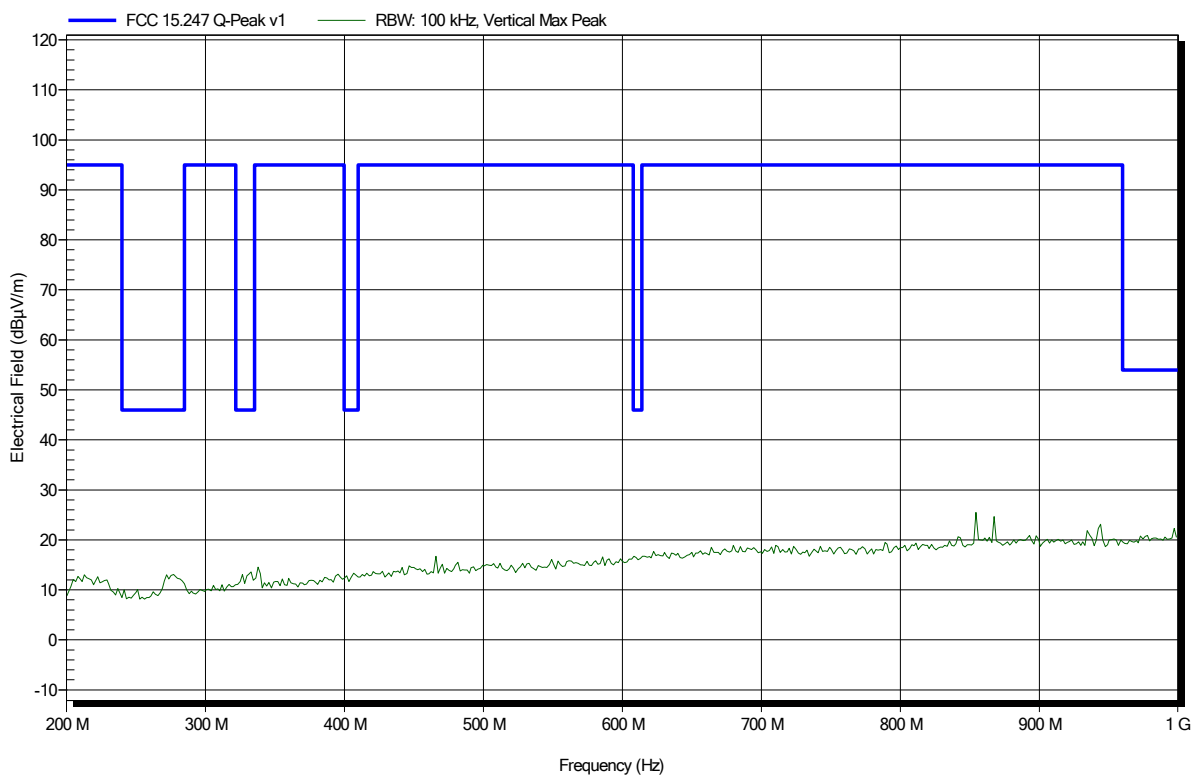


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-18
 Note:

Index 60

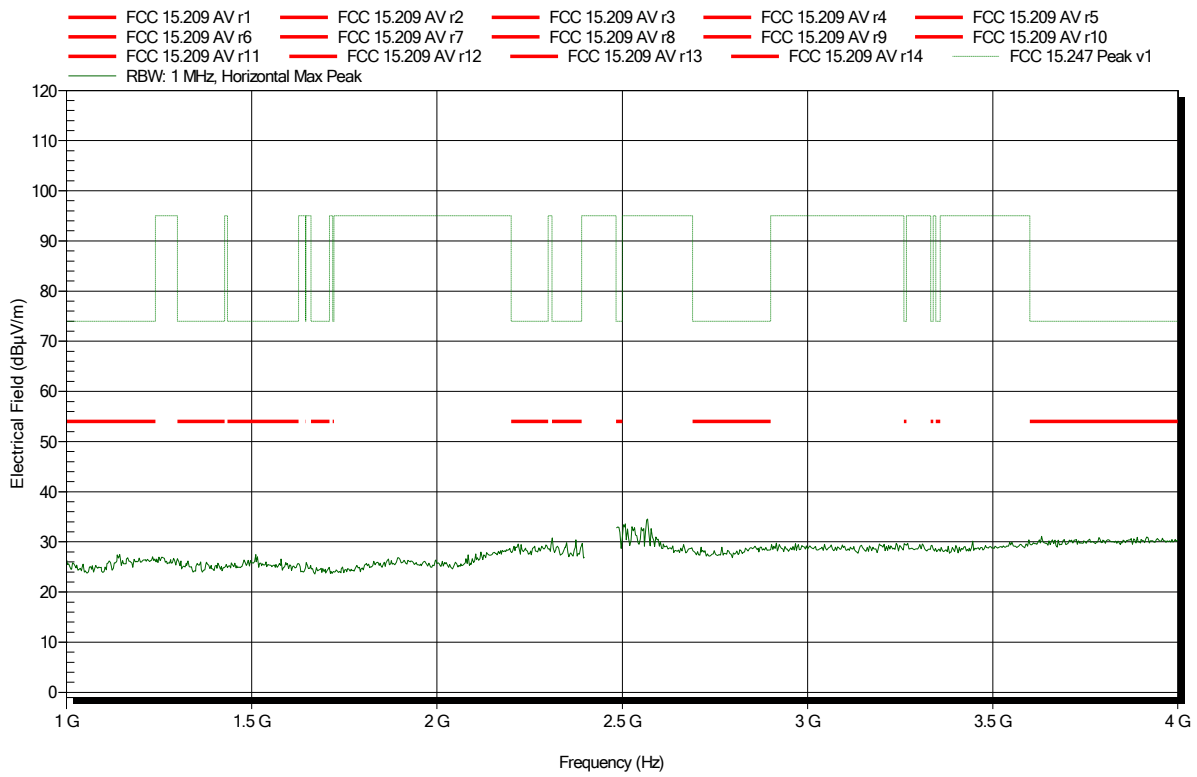


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-18
 Note:

Index 61

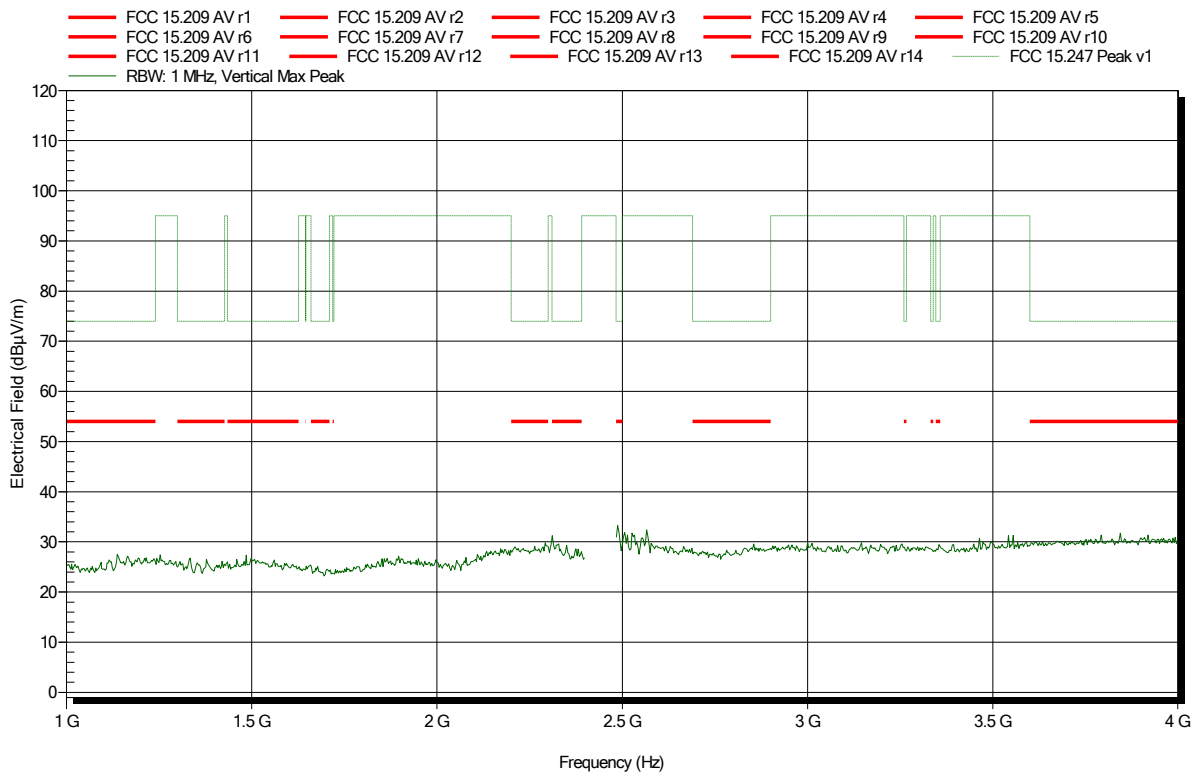


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-18
 Note:

Index 49

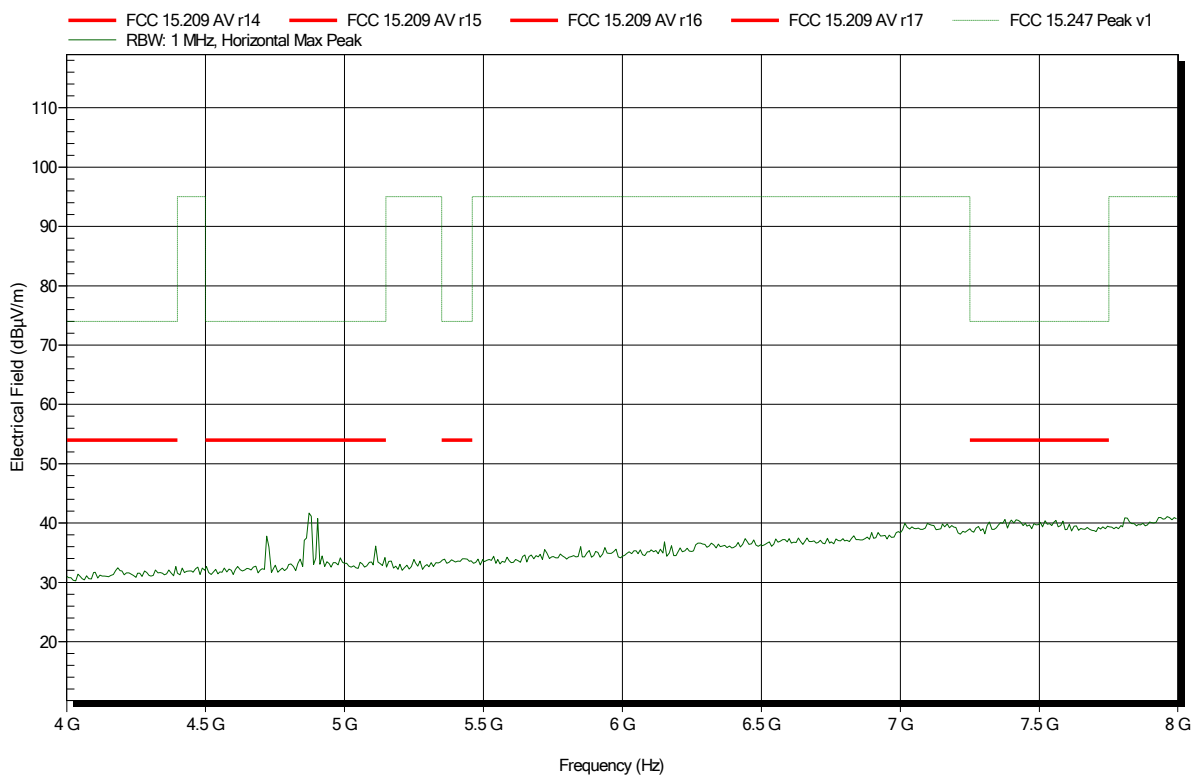


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-18
 Note:

Index 52

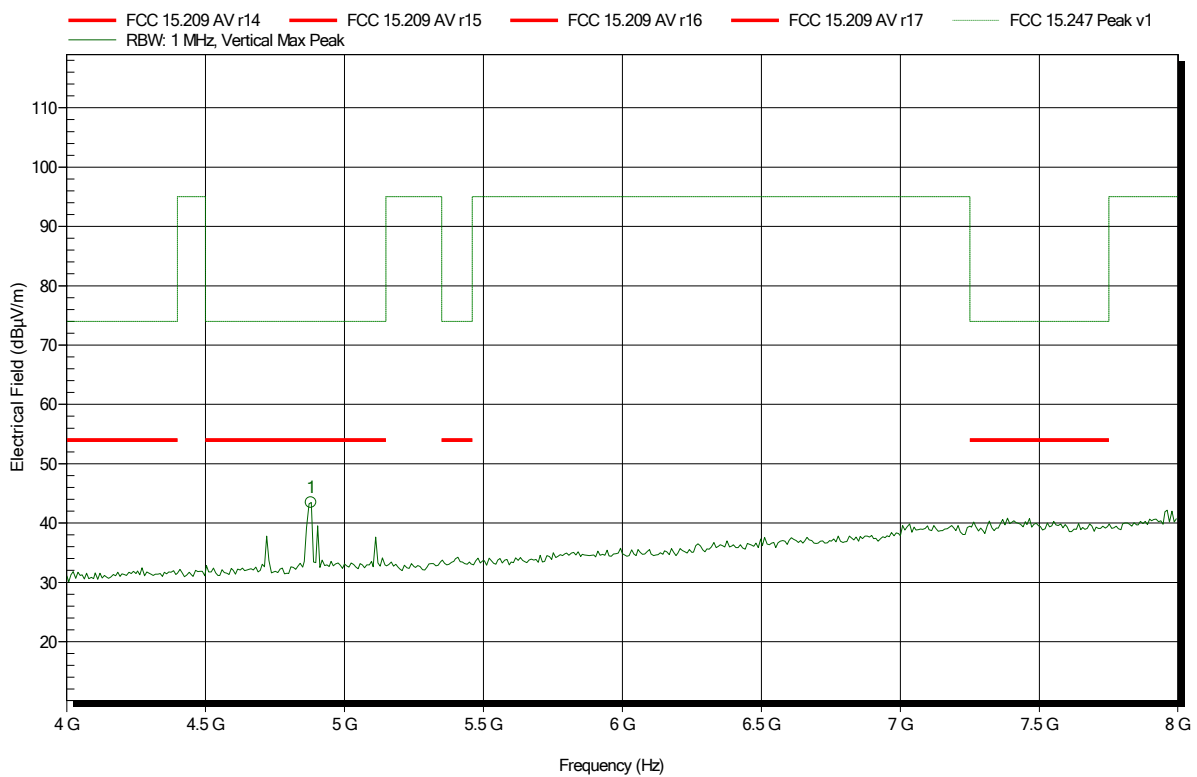


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.88 GHz	43.47 dBµV/m	74 dBµV/m	-30.53 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-18
 Note:

Index 50

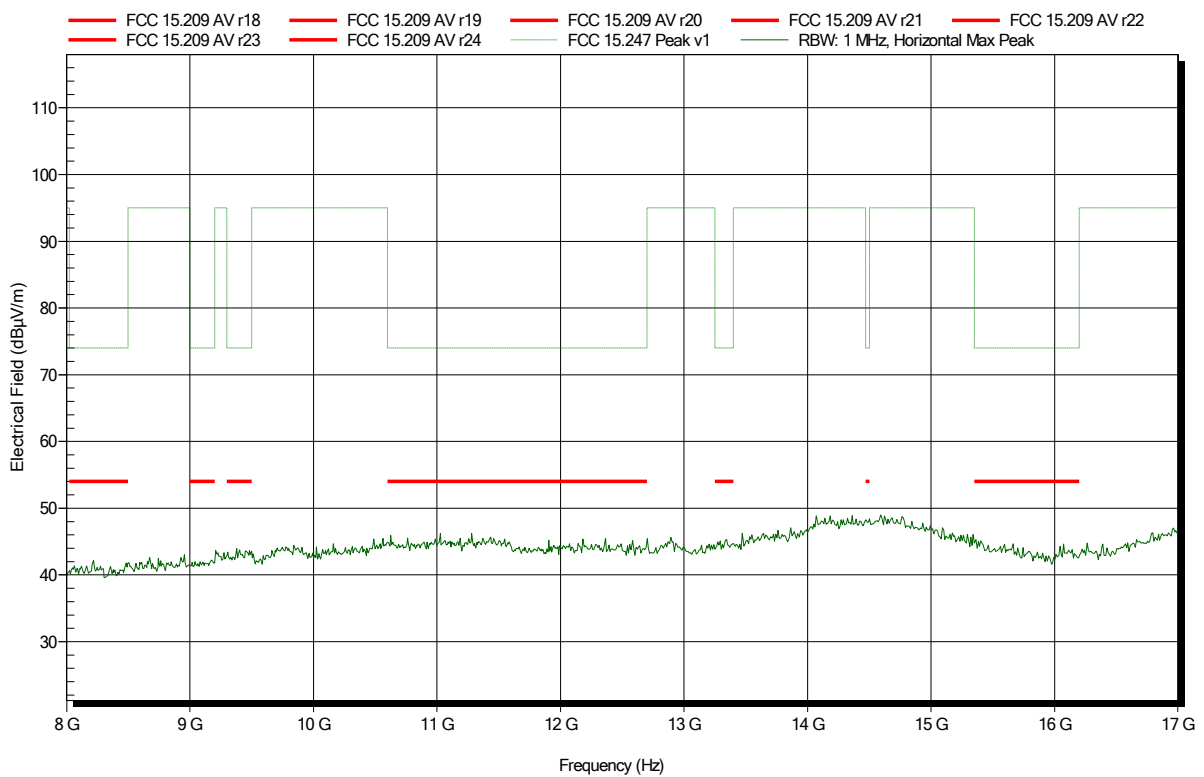


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-18
 Note:

Index 51

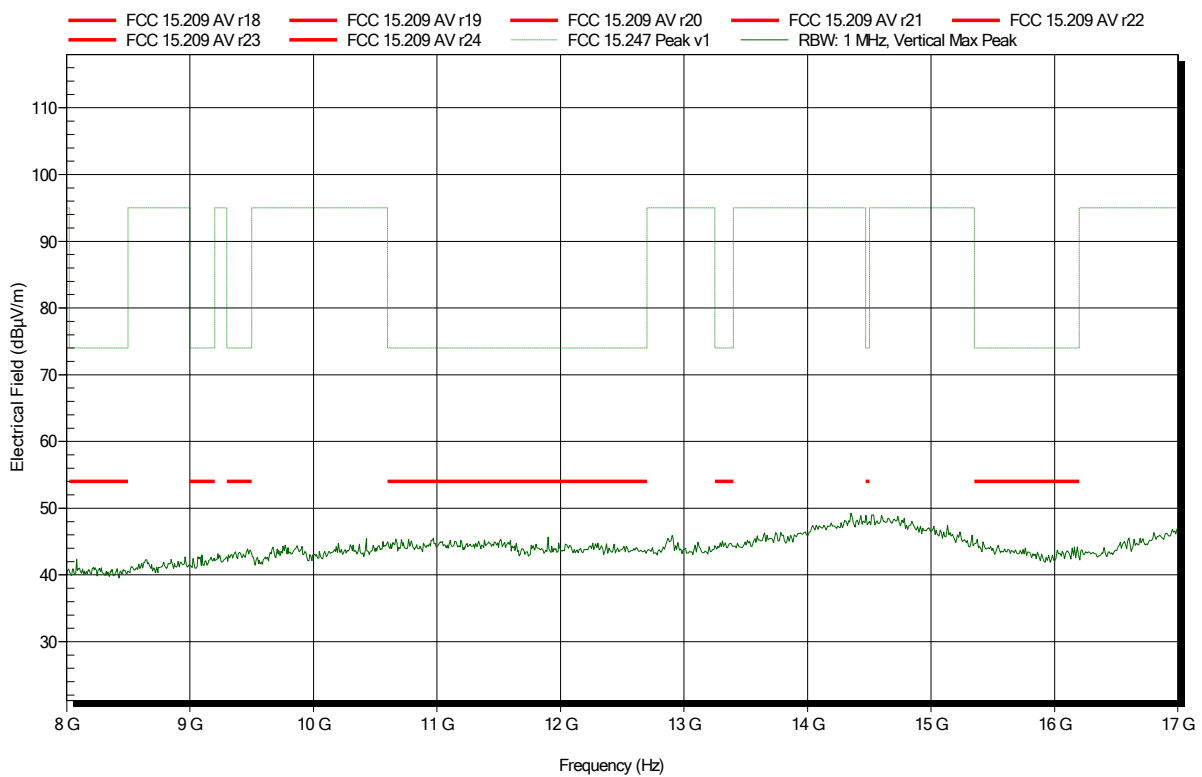


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Amplifier Research AT 4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 71

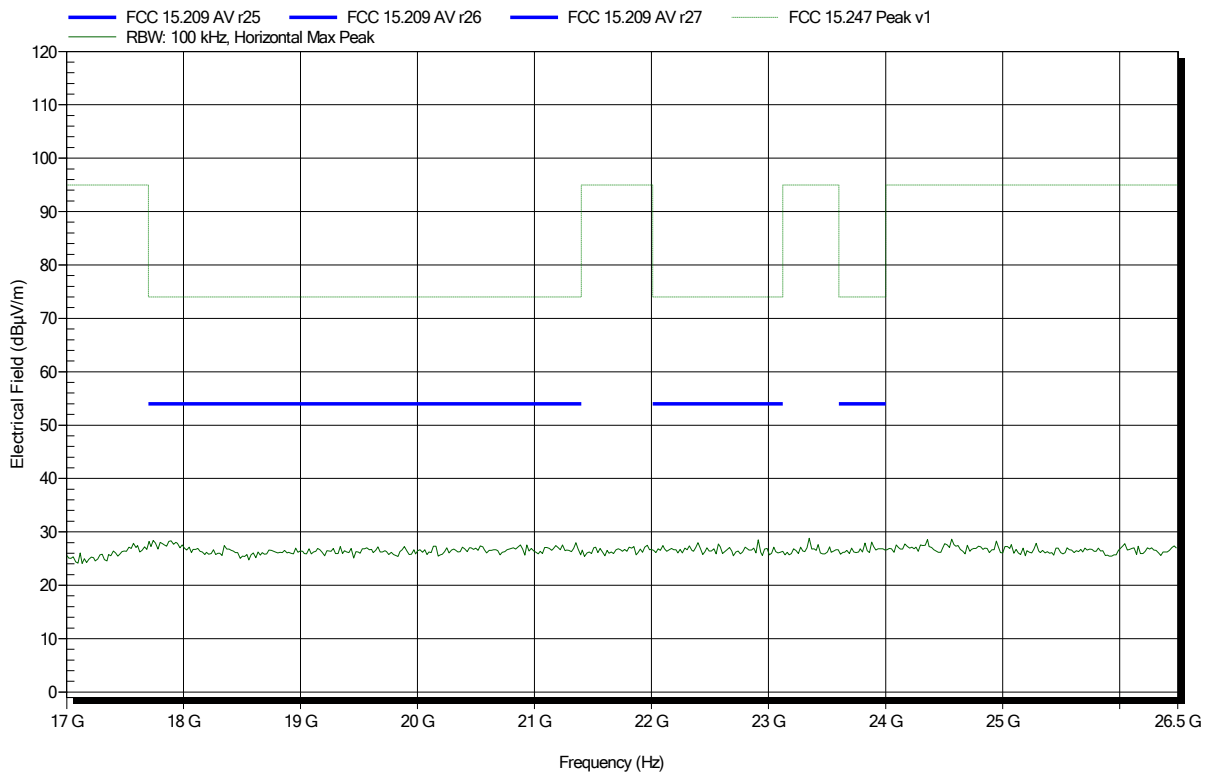


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Amplifier Research AT 4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 72

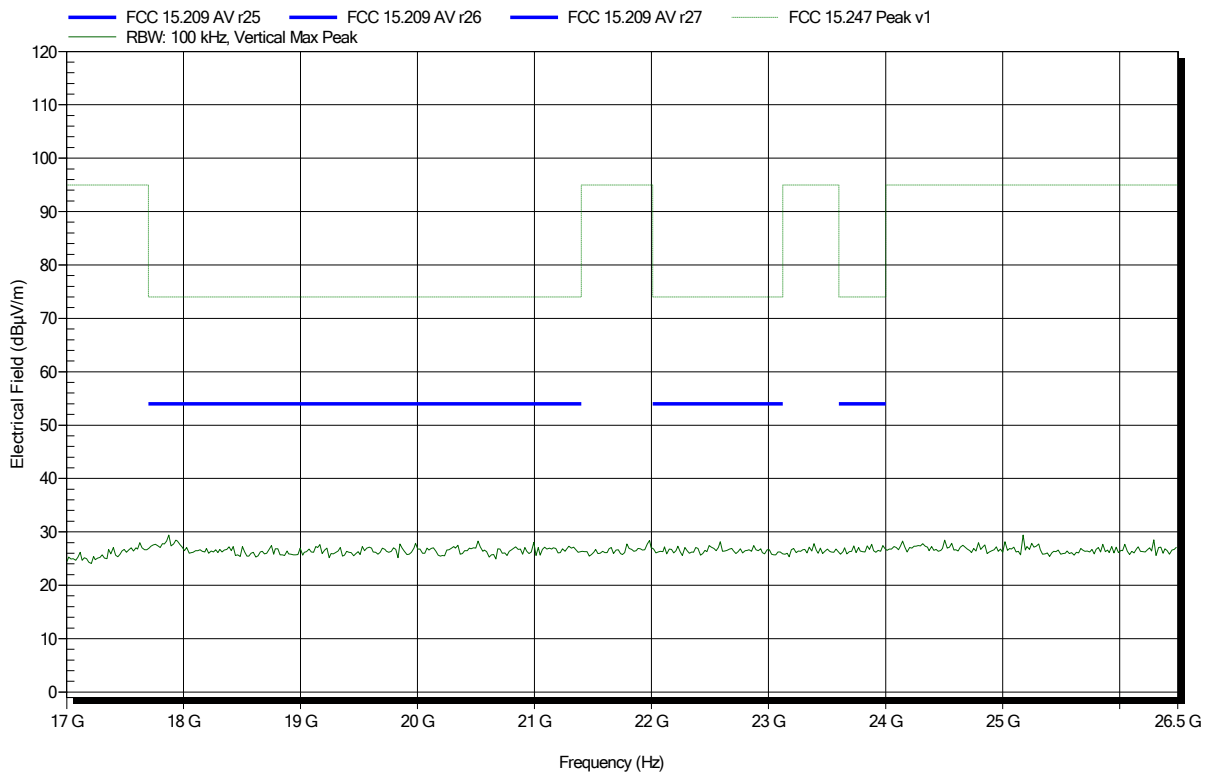


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.4°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-20
 Note:

Index 87

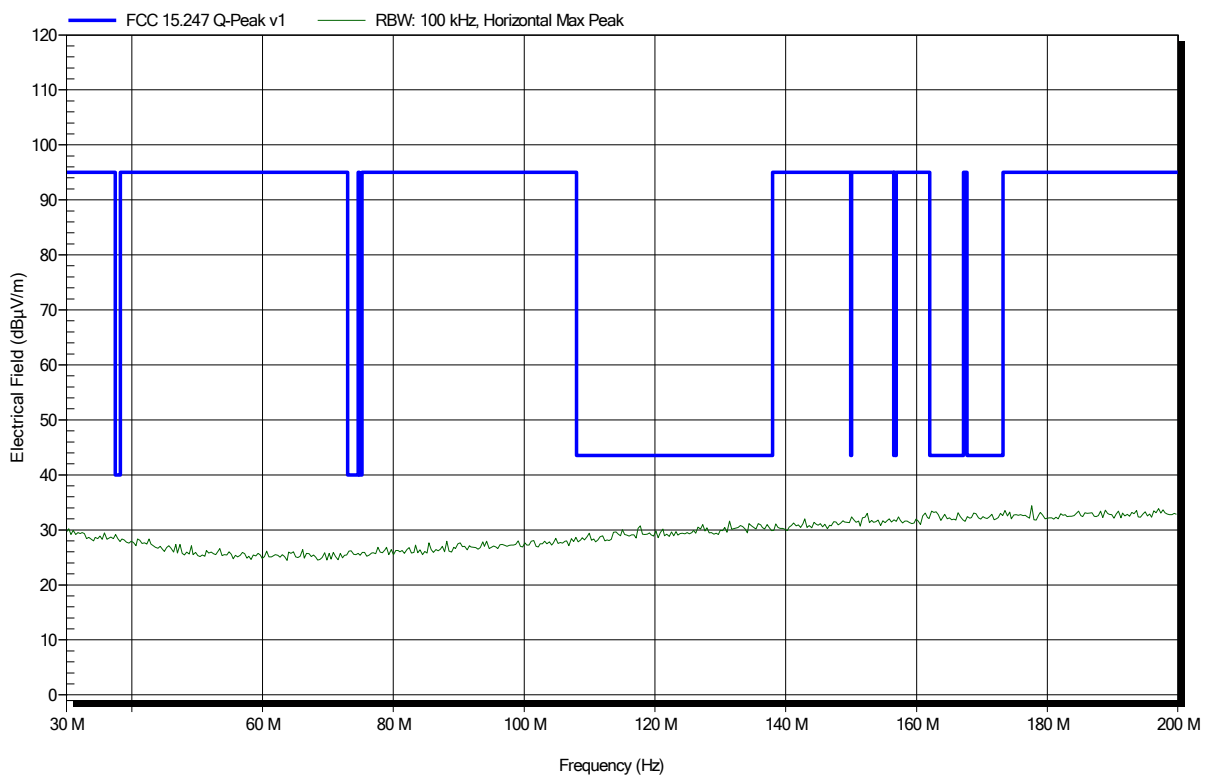


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.4°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-20
 Note:

Index 89

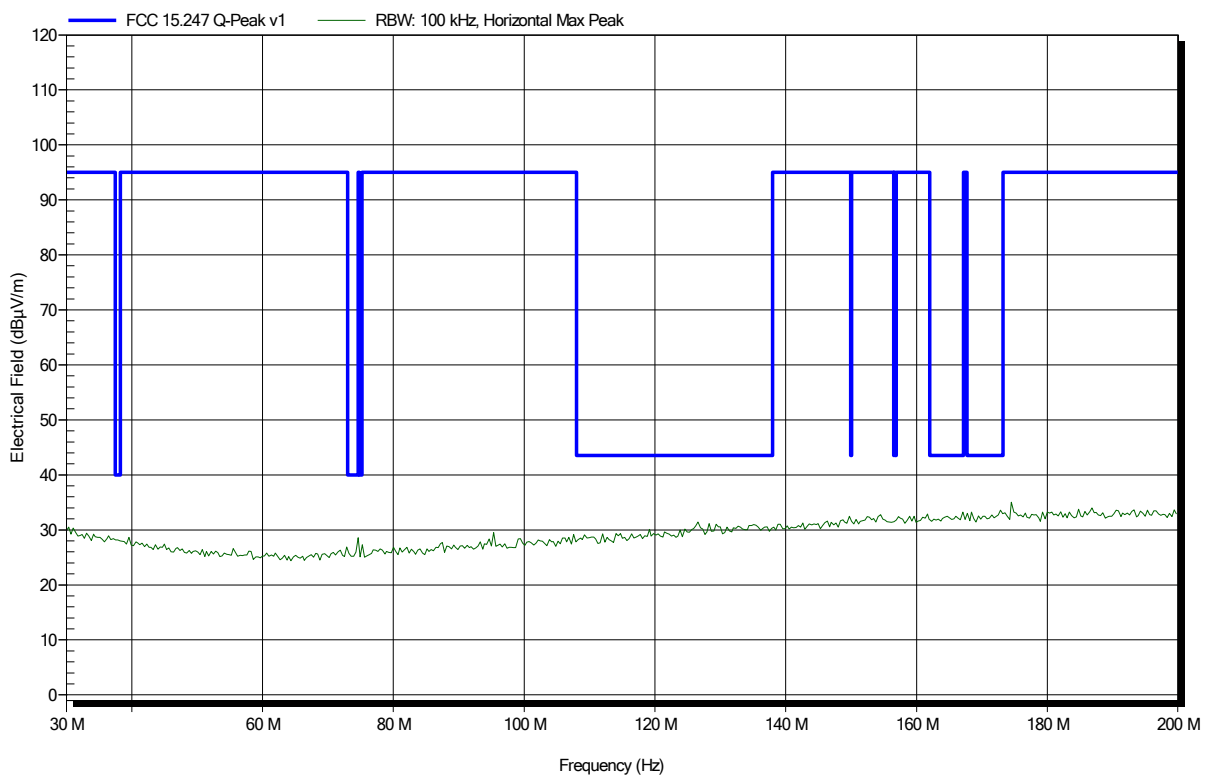


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-19
 Note:

Index 76

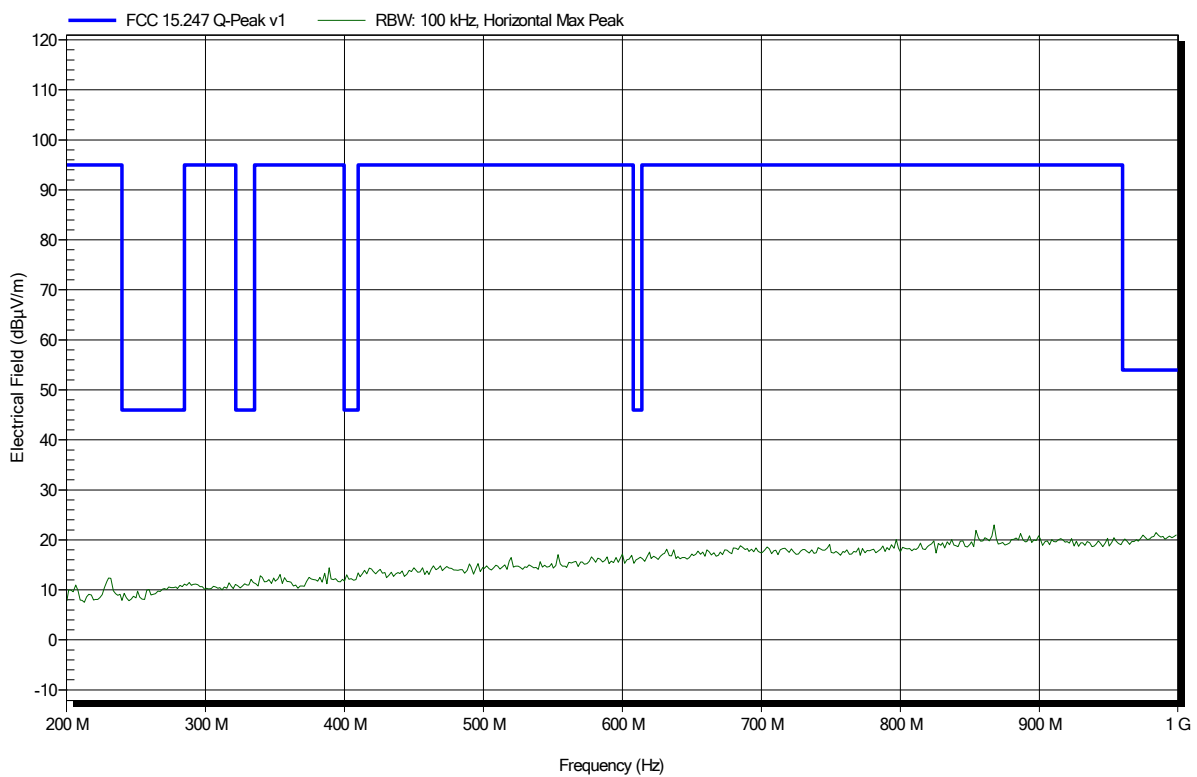


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-19
 Note:

Index 77

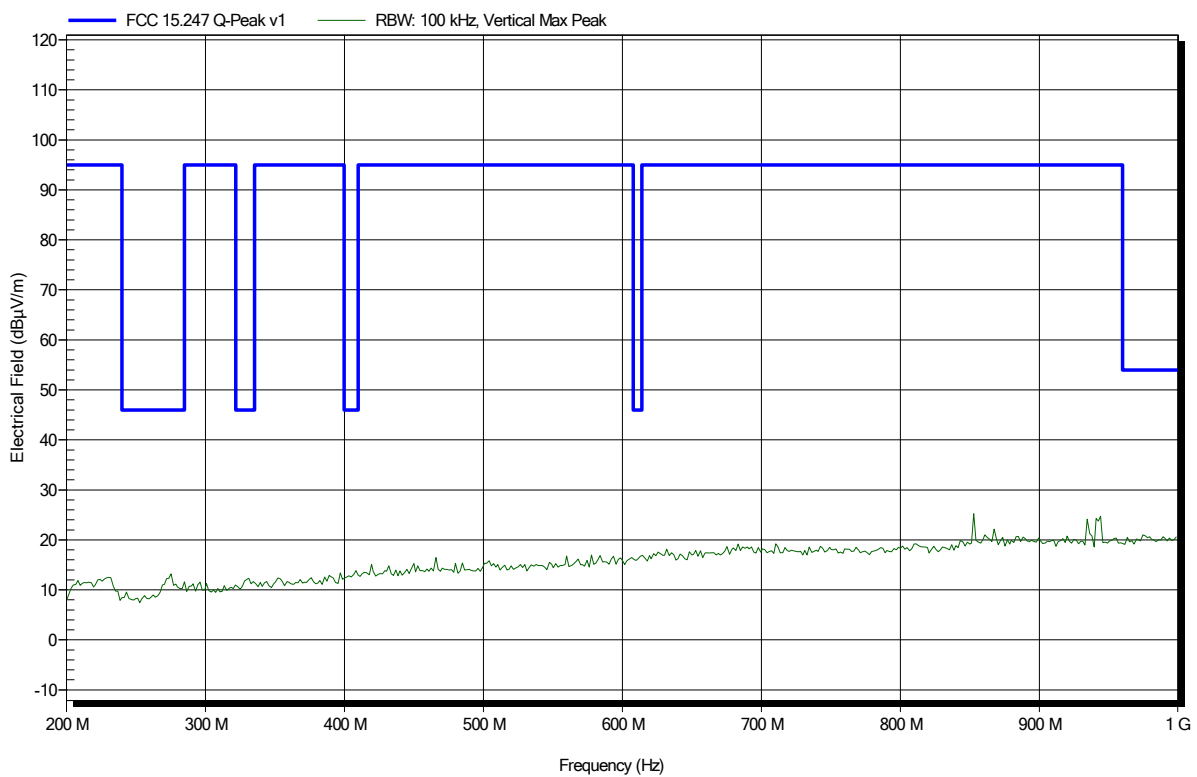


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-18
 Note:

Index 59

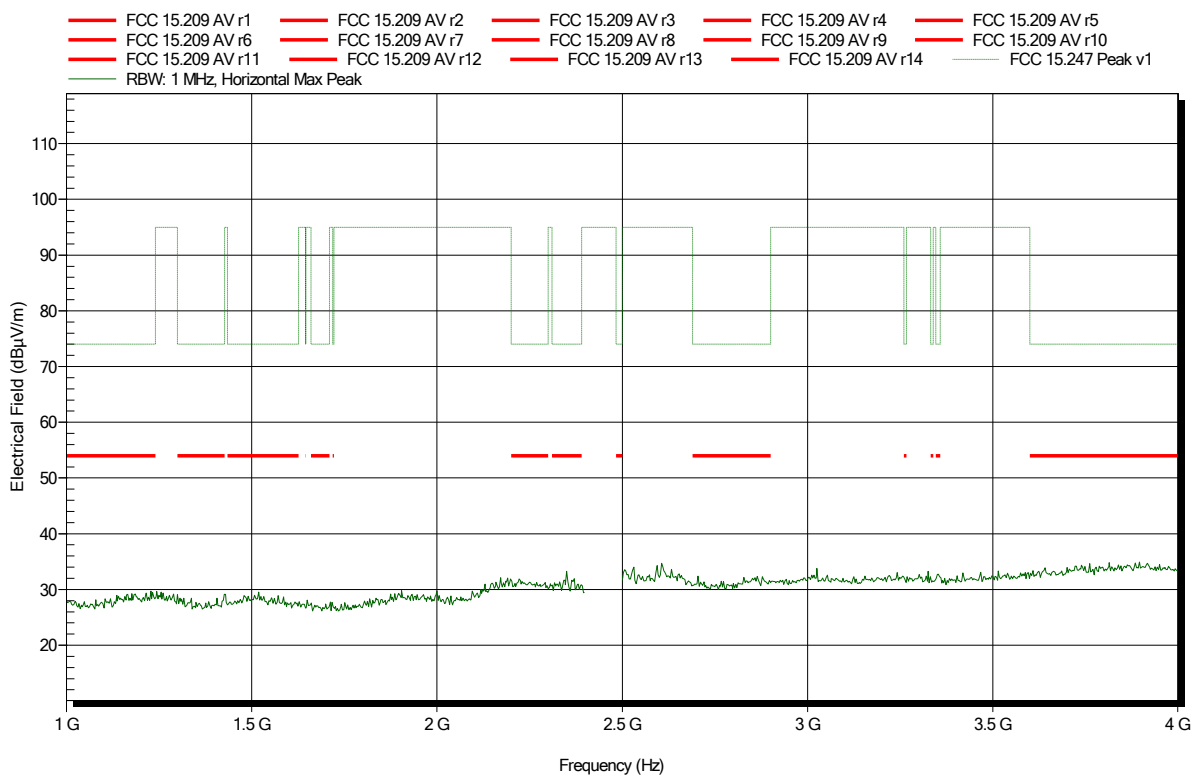


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-18
 Note:

Index 58

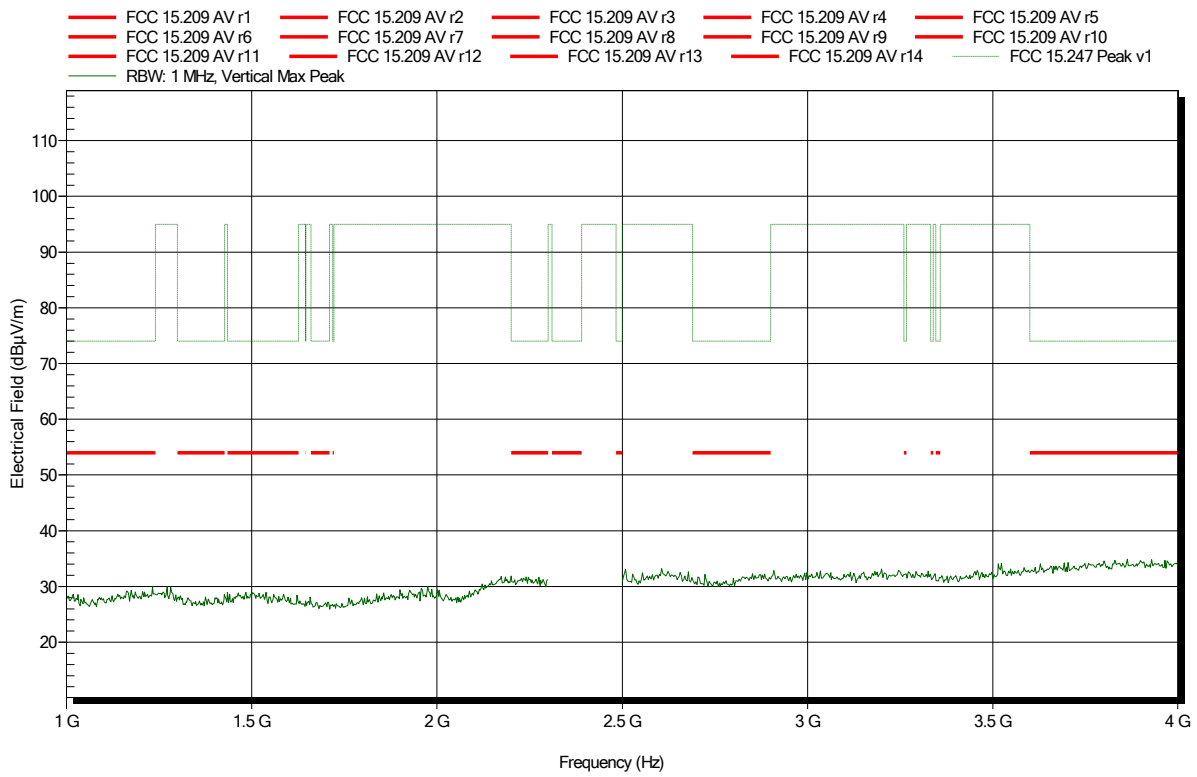


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-18
 Note: upper bandedge

Index 67

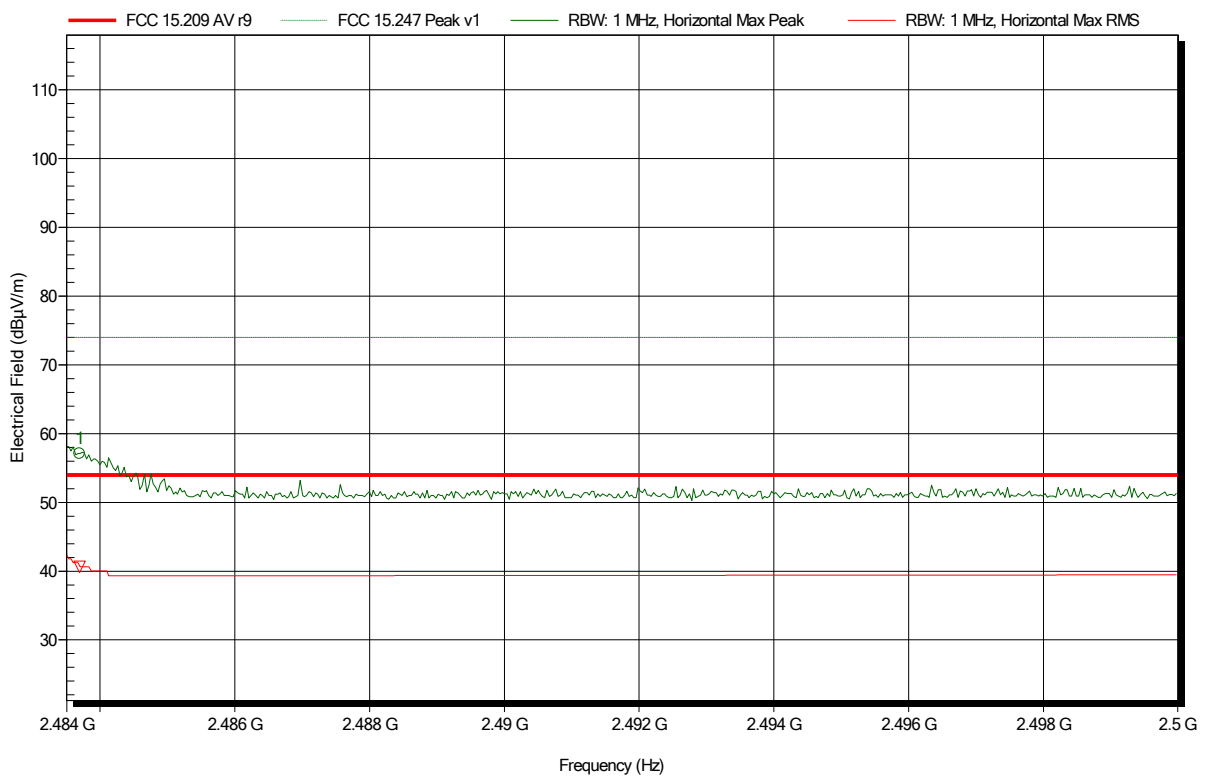


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4837 GHz	57.1 dBµV/m	74 dBµV/m	-16.9 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4837 GHz	40.65 dBµV/m	54 dBµV/m	-13.35 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-18
 Note: upper bandedge

Index 68

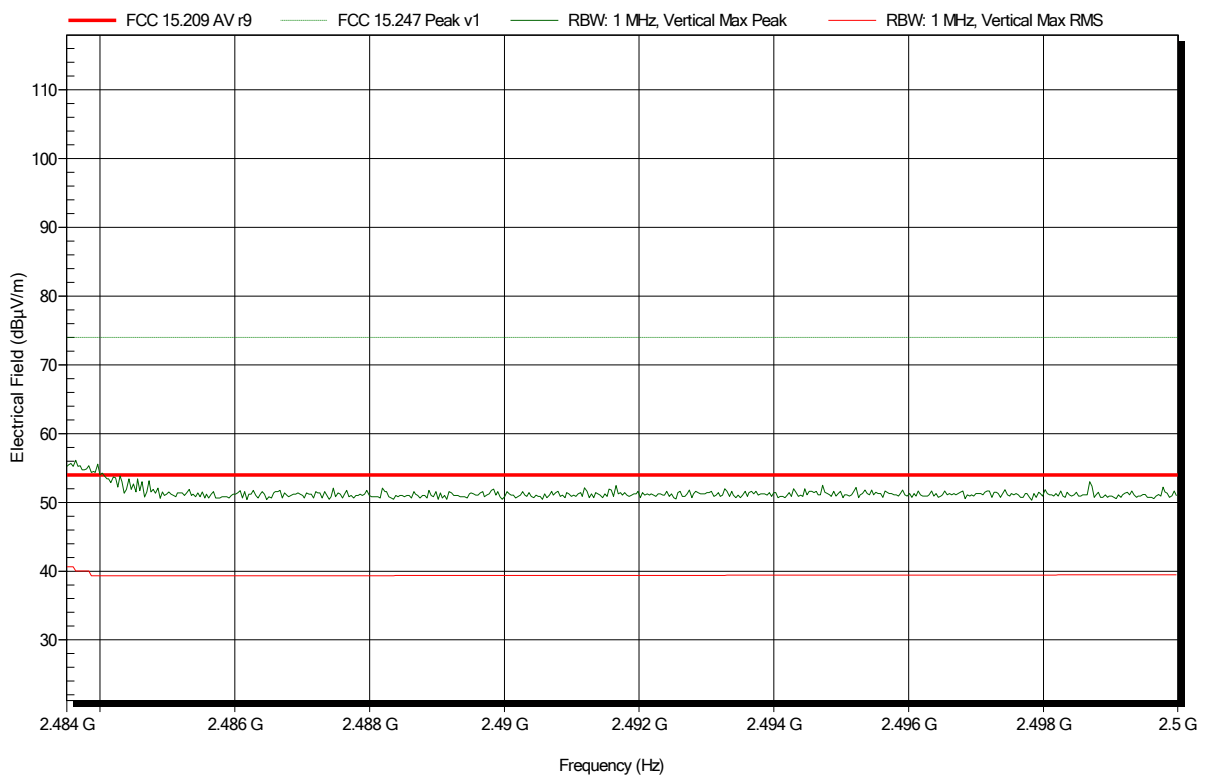


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-18
 Note:

Index 53

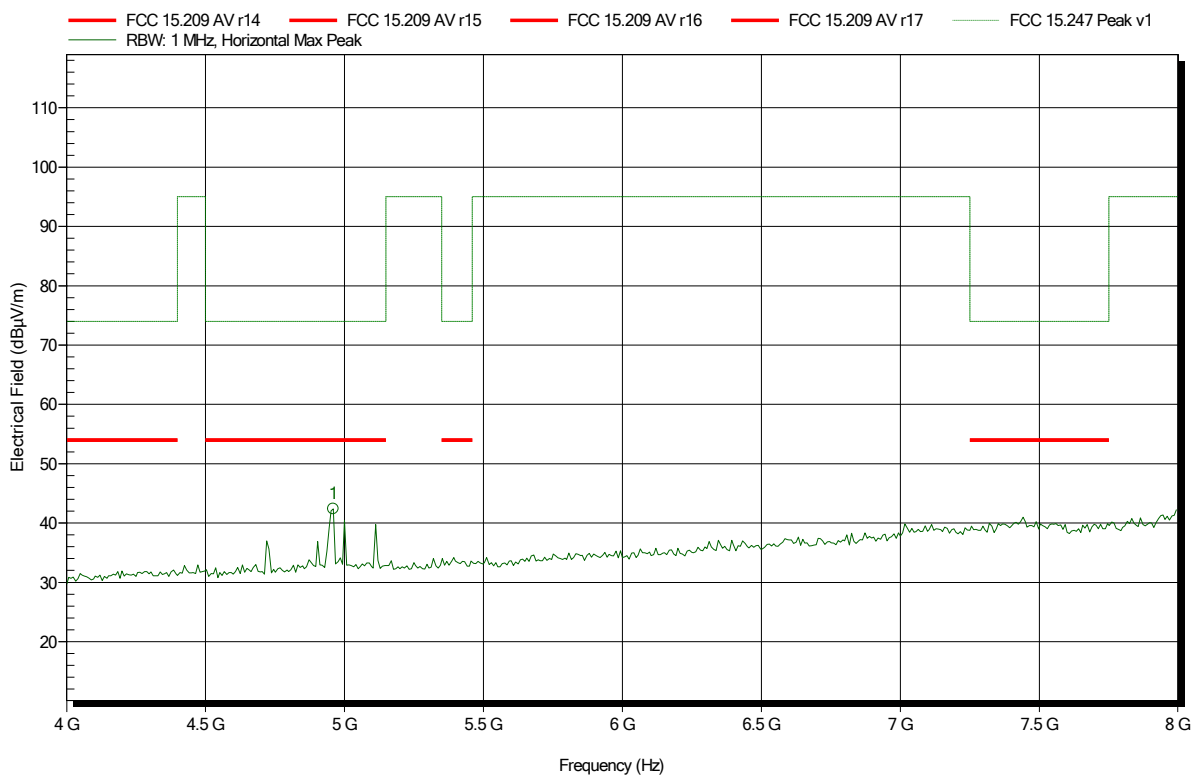


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	42.36 dBµV/m	74 dBµV/m	-31.64 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-18
 Note:

Index 56

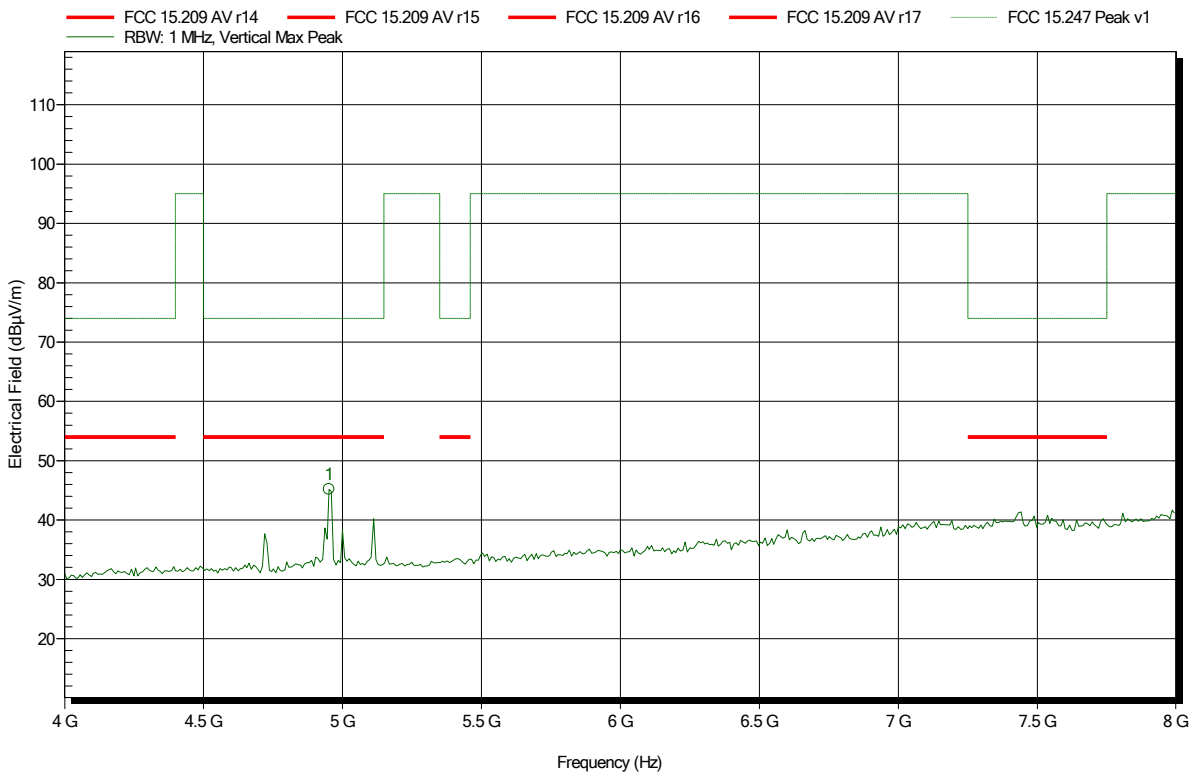


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.952 GHz	45.18 dBµV/m	74 dBµV/m	-28.82 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-18
 Note:

Index 54

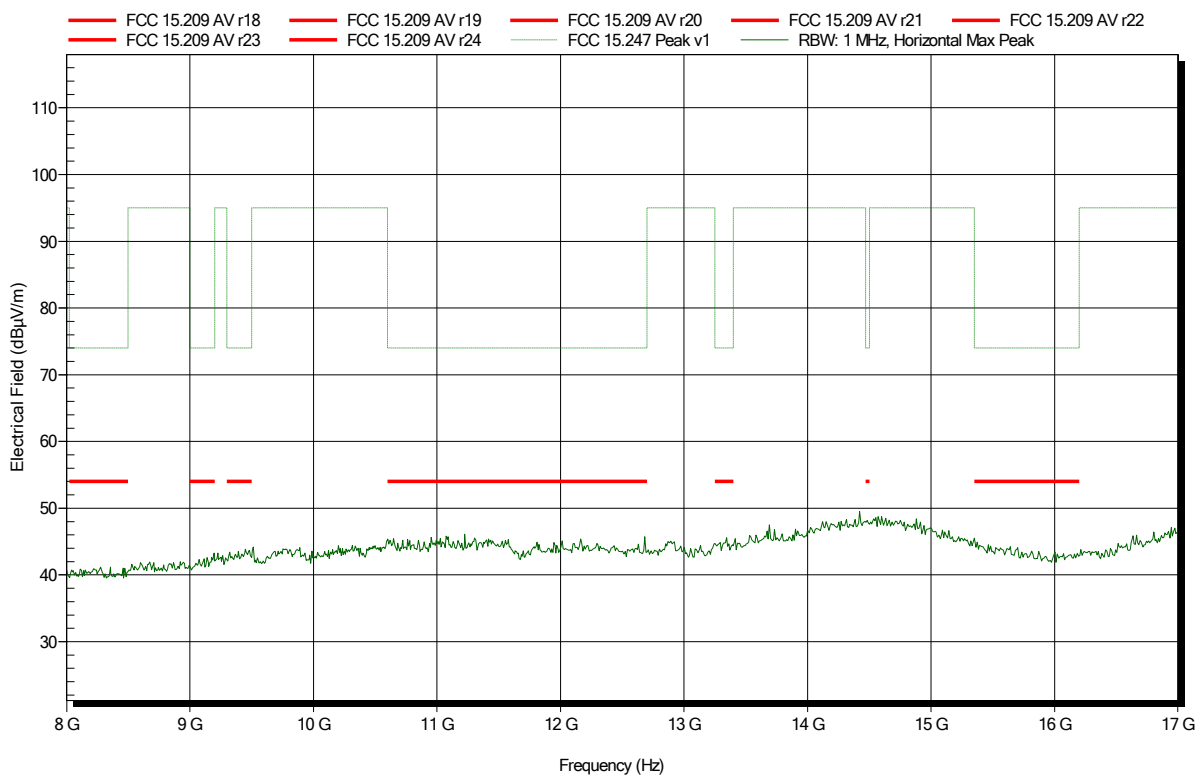


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-18
 Note:

Index 55

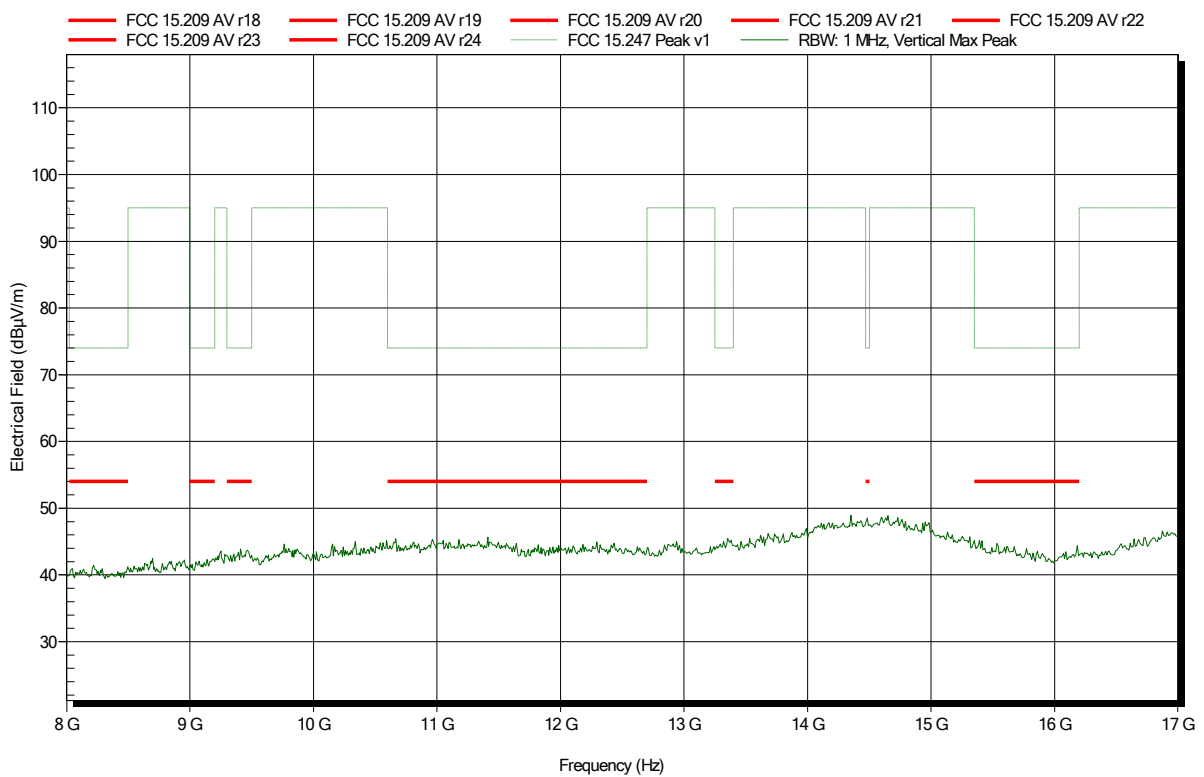


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Amplifier Research AT 4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-19
 Note:

Index 73

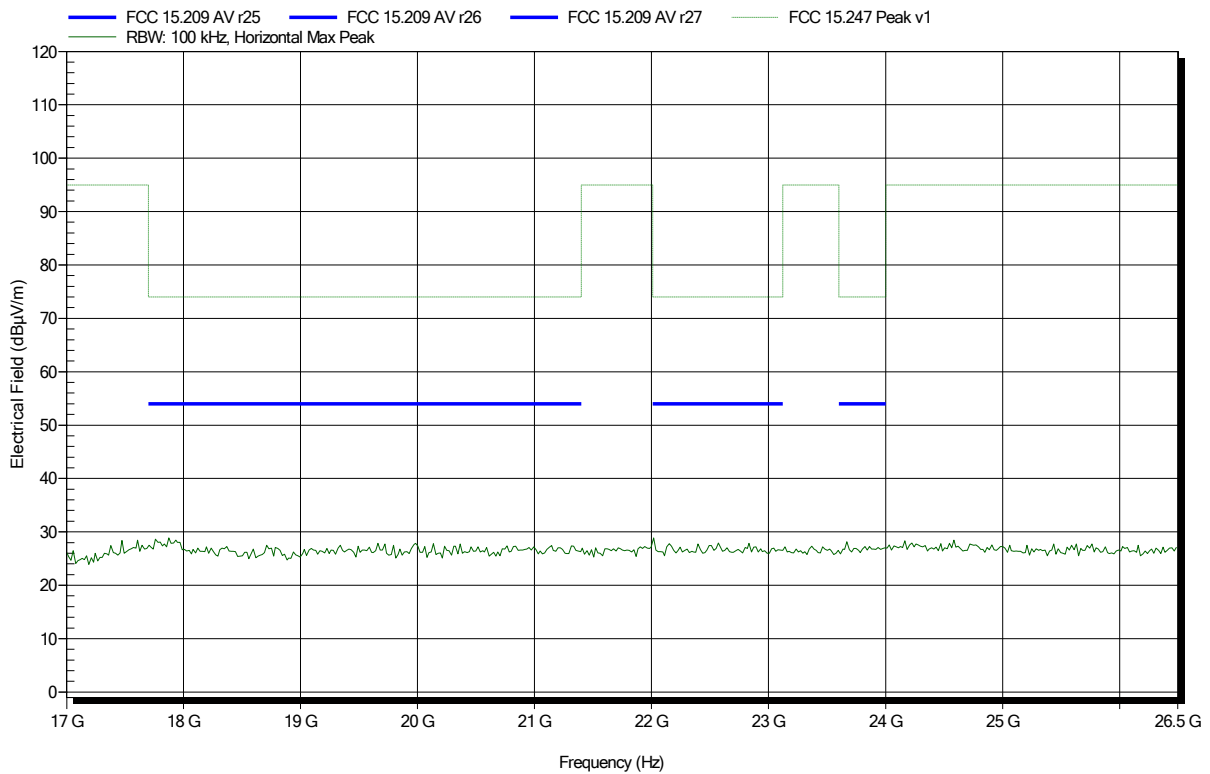


Spurious emissions according to FCC 15.247

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.4°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Amplifier Research AT 4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BL; 2480 MHz
 Test Date: 2017-12-20
 Note:

Index 90

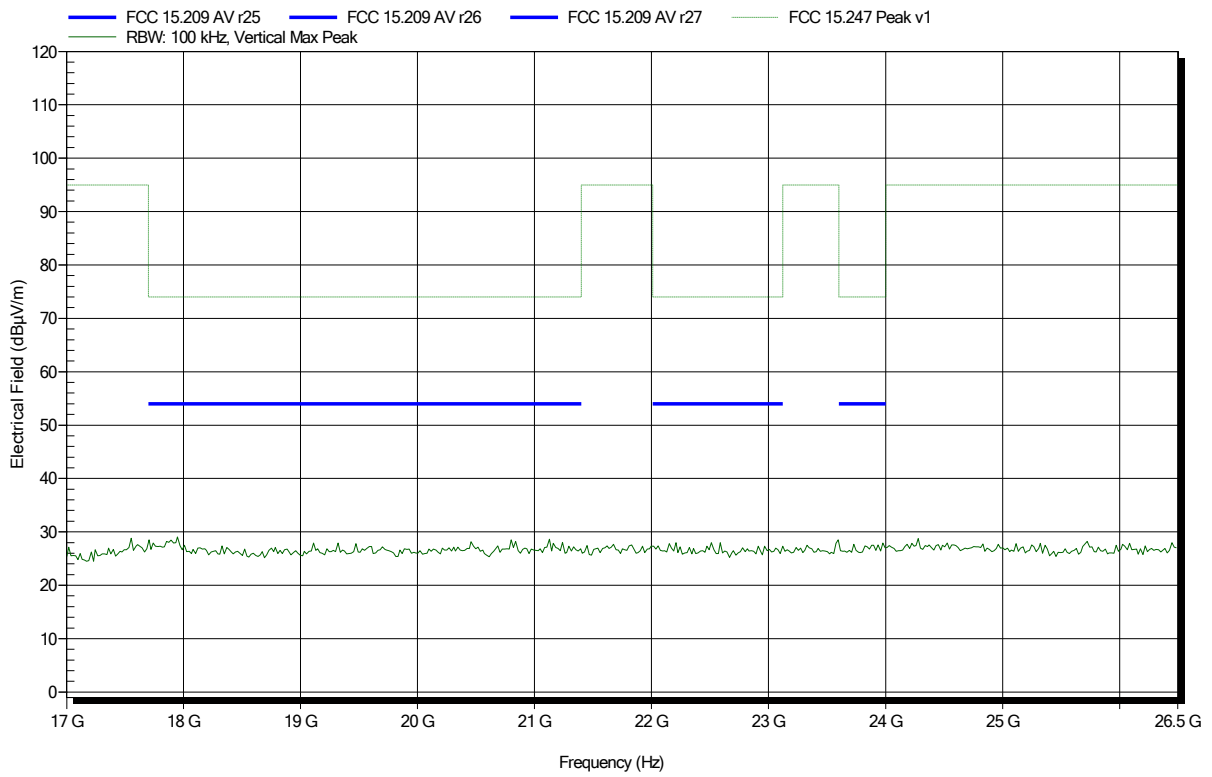


ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 71

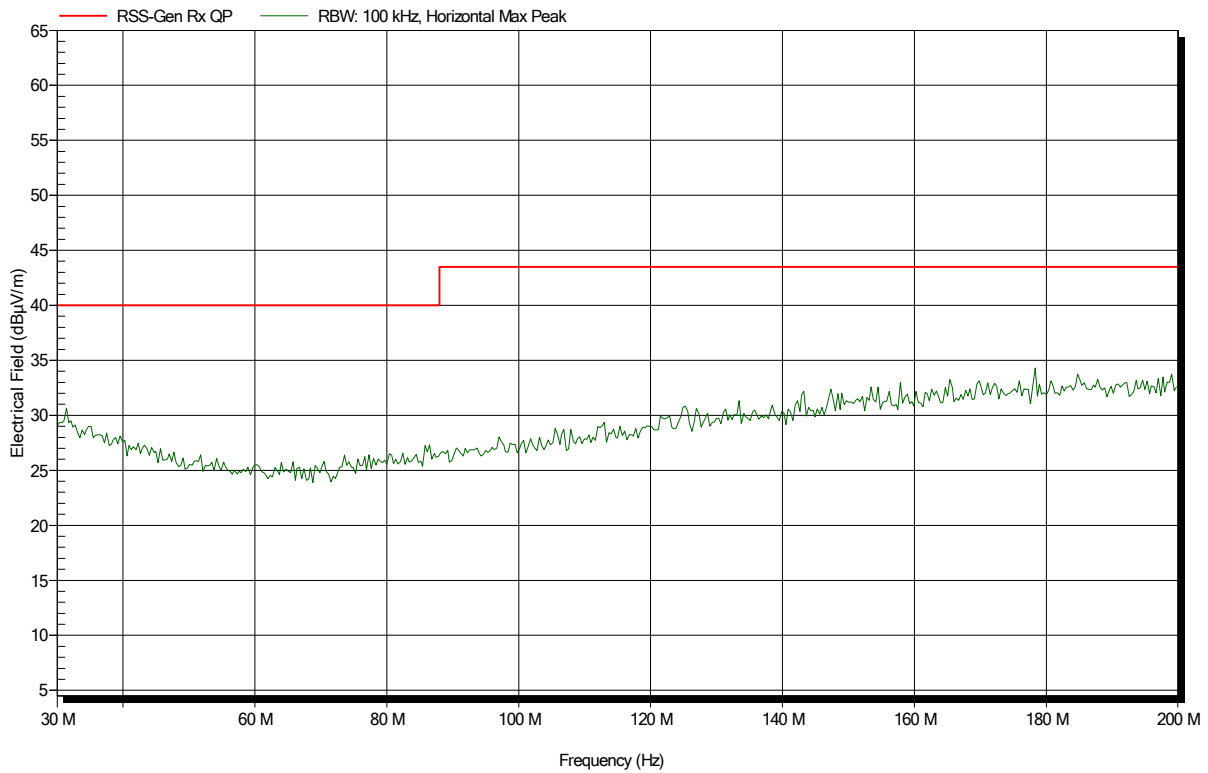


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 72

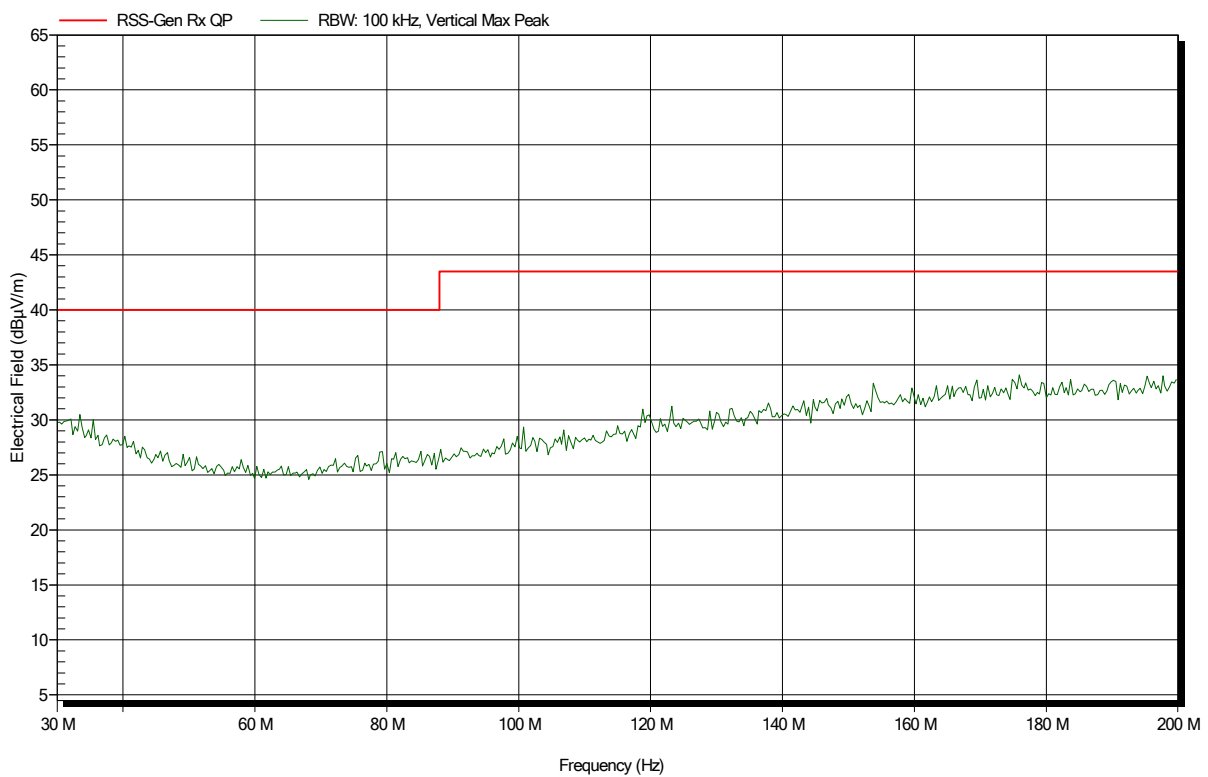


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 69

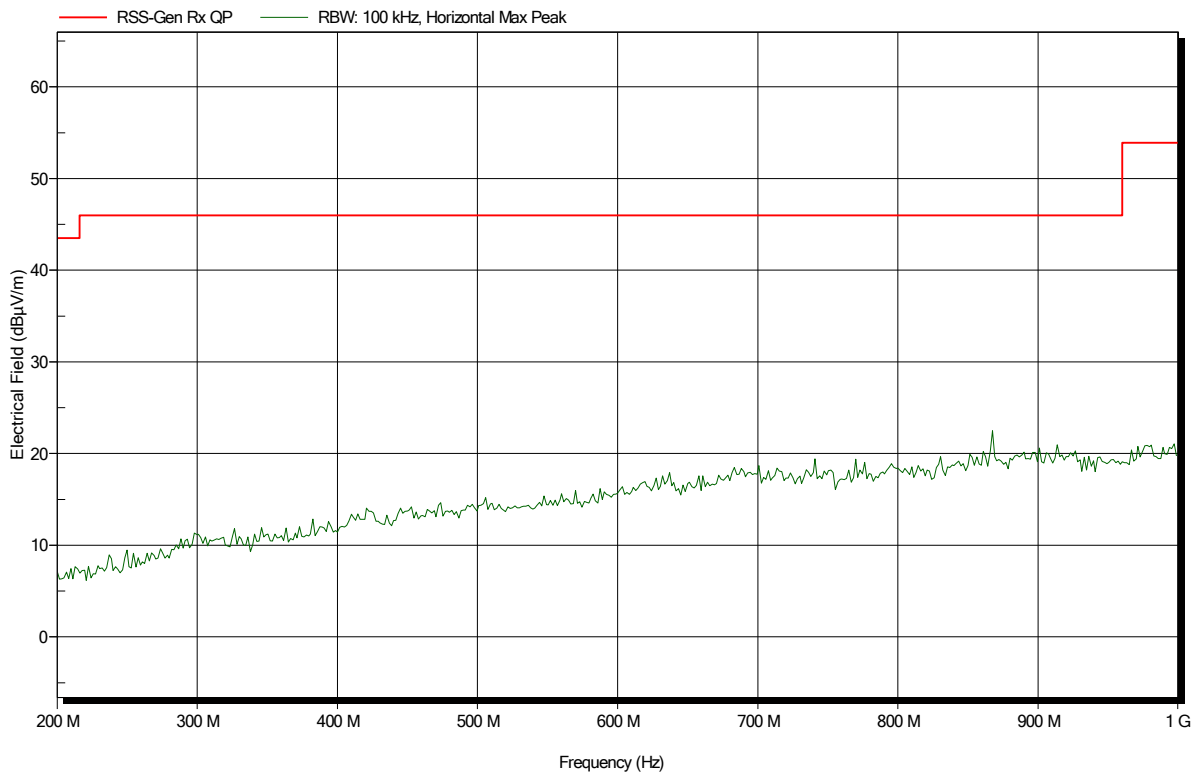


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 70

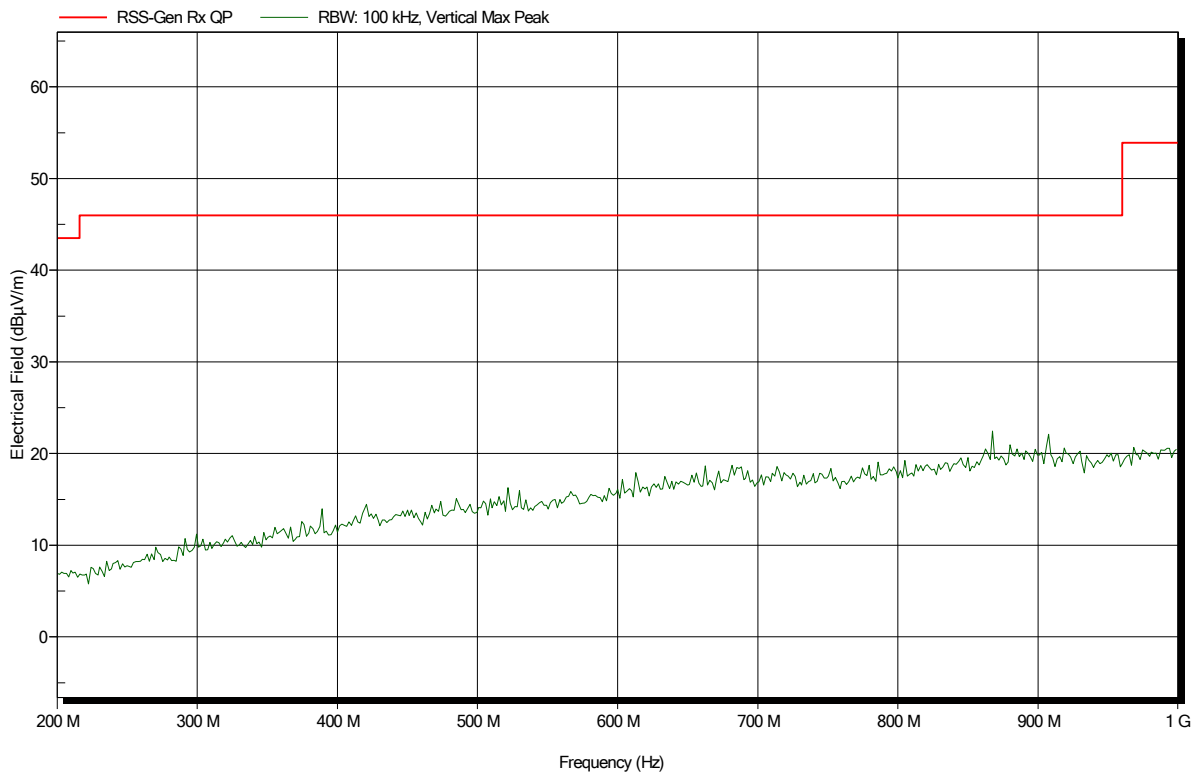


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 73

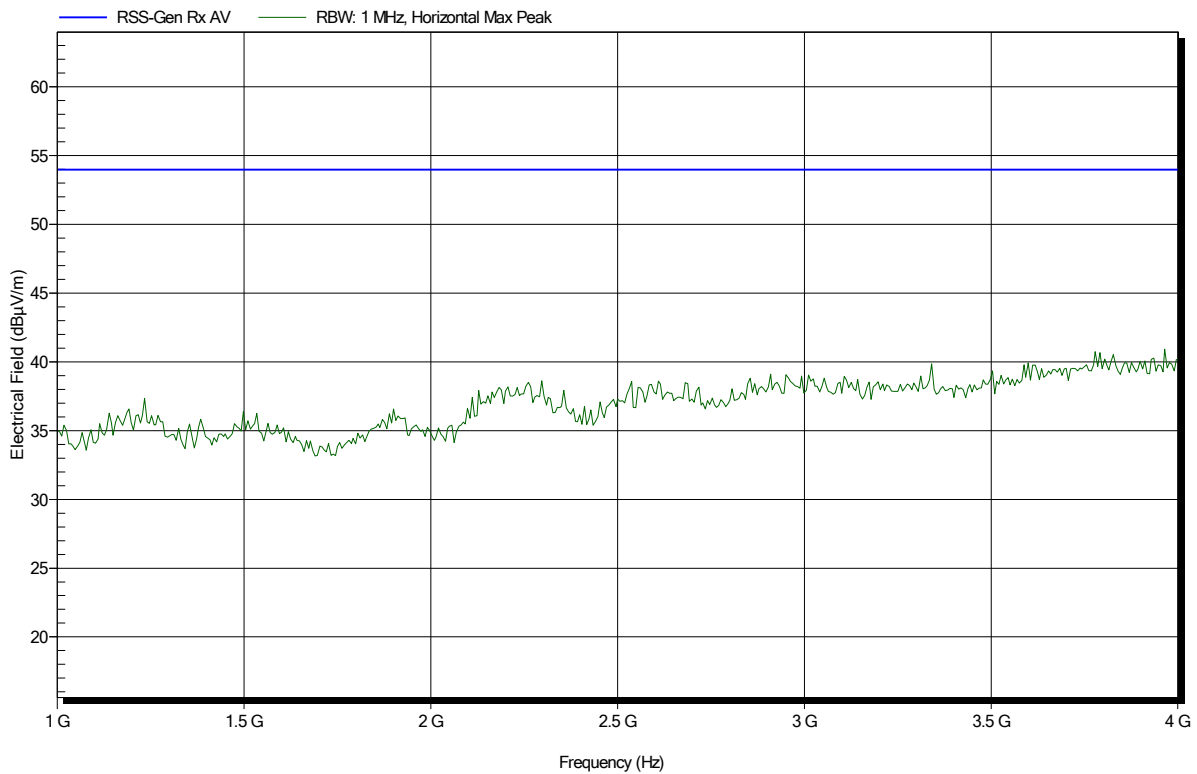


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 76

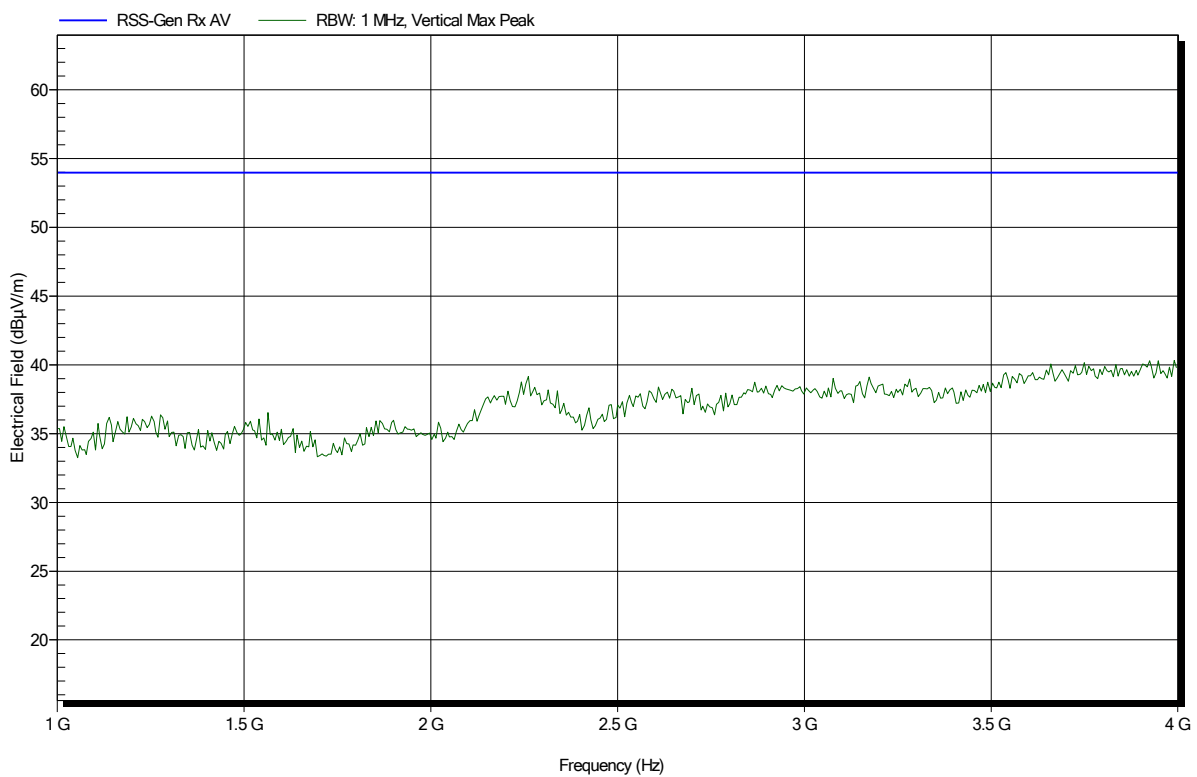


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 74

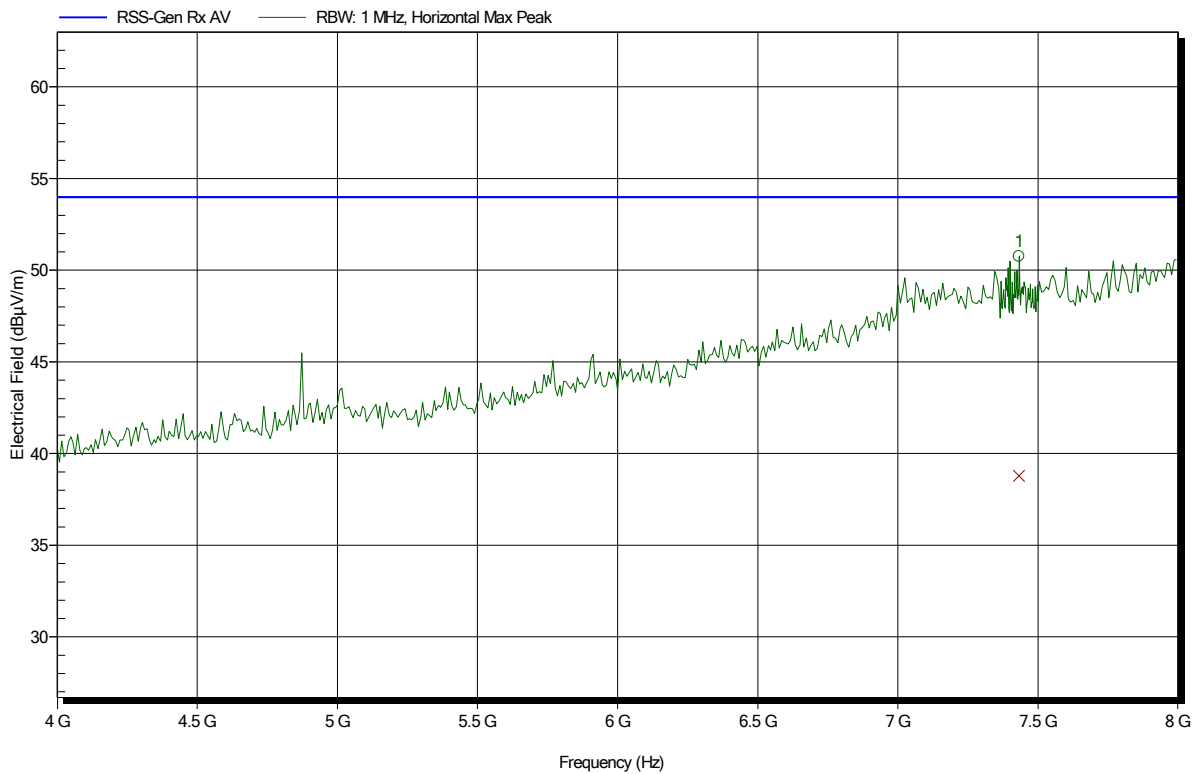


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.432 GHz	50.77 dBµV/m	53.98 dBµV/m	-3.21 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
7.432 GHz	38.79 dBµV/m	53.98 dBµV/m	-15.19 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 75

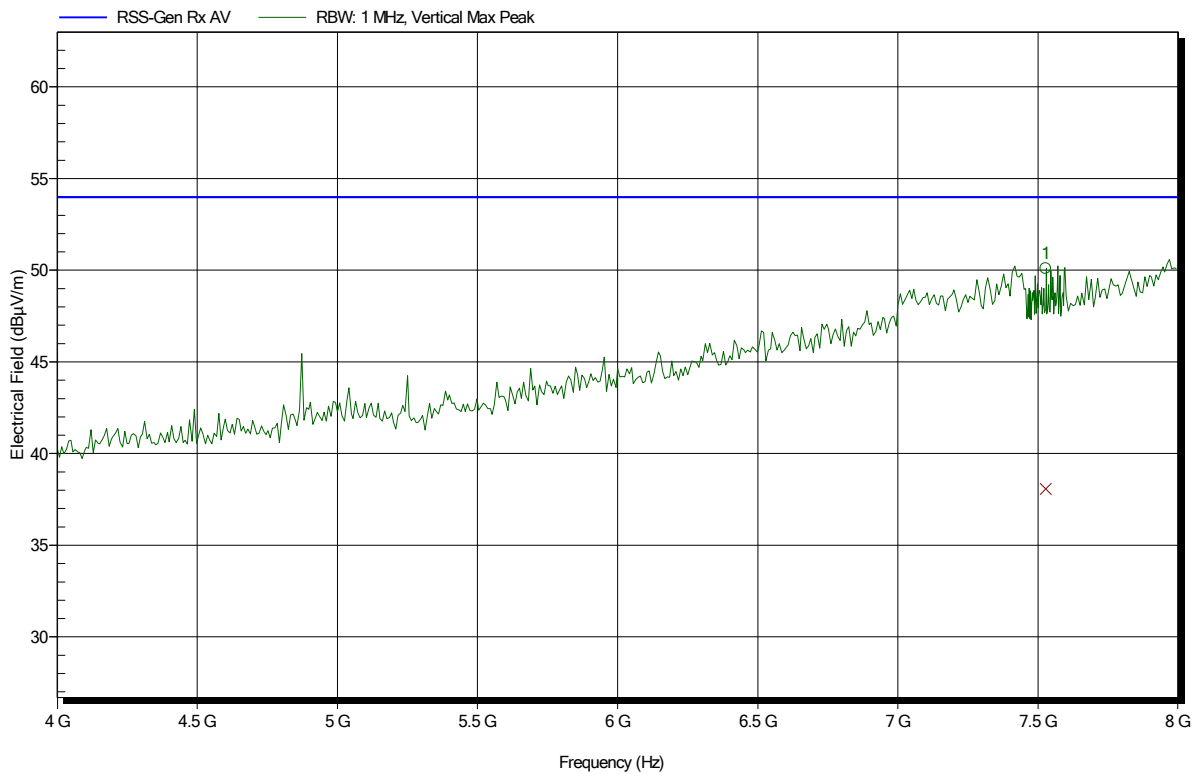


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.528 GHz	50.09 dBµV/m	53.98 dBµV/m	-3.89 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
7.528 GHz	38.06 dBµV/m	53.98 dBµV/m	-15.92 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 77

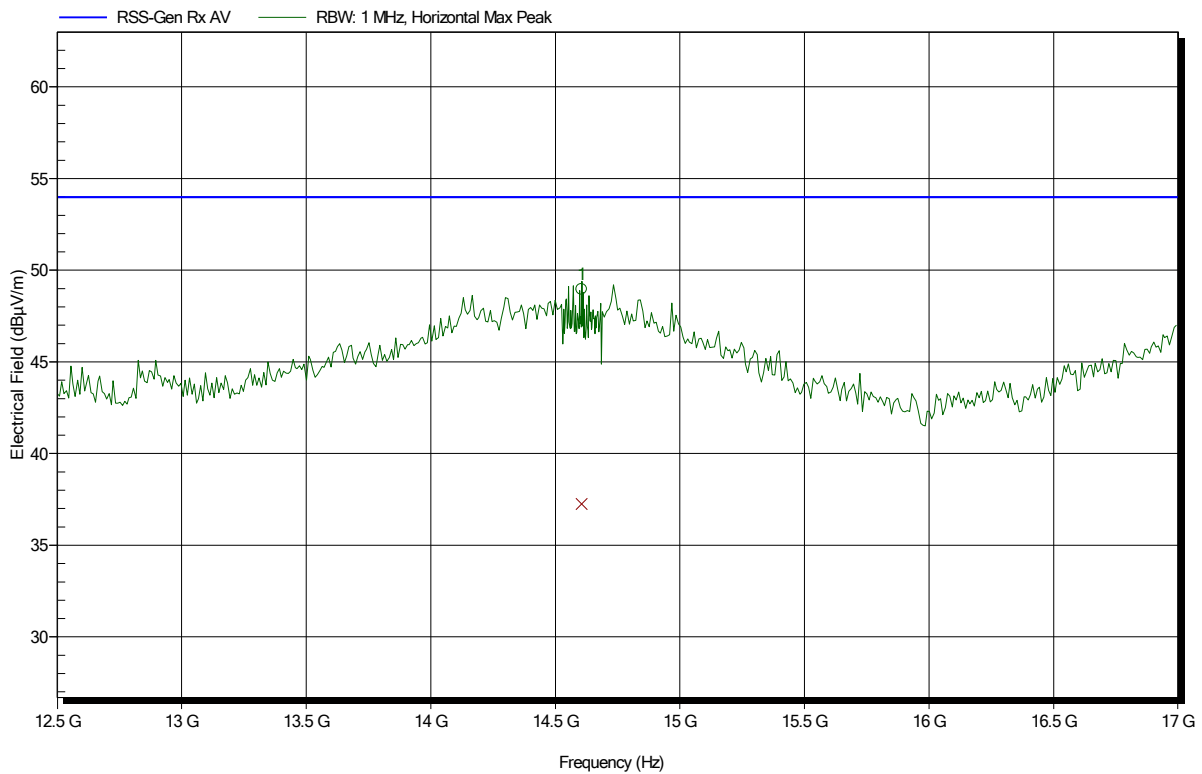


Frequency	Peak	Peak Limit	Peak Difference	Status
14.606 GHz	48.96 dBµV/m	53.98 dBµV/m	-5.02 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
14.606 GHz	37.25 dBµV/m	53.98 dBµV/m	-16.73 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 78

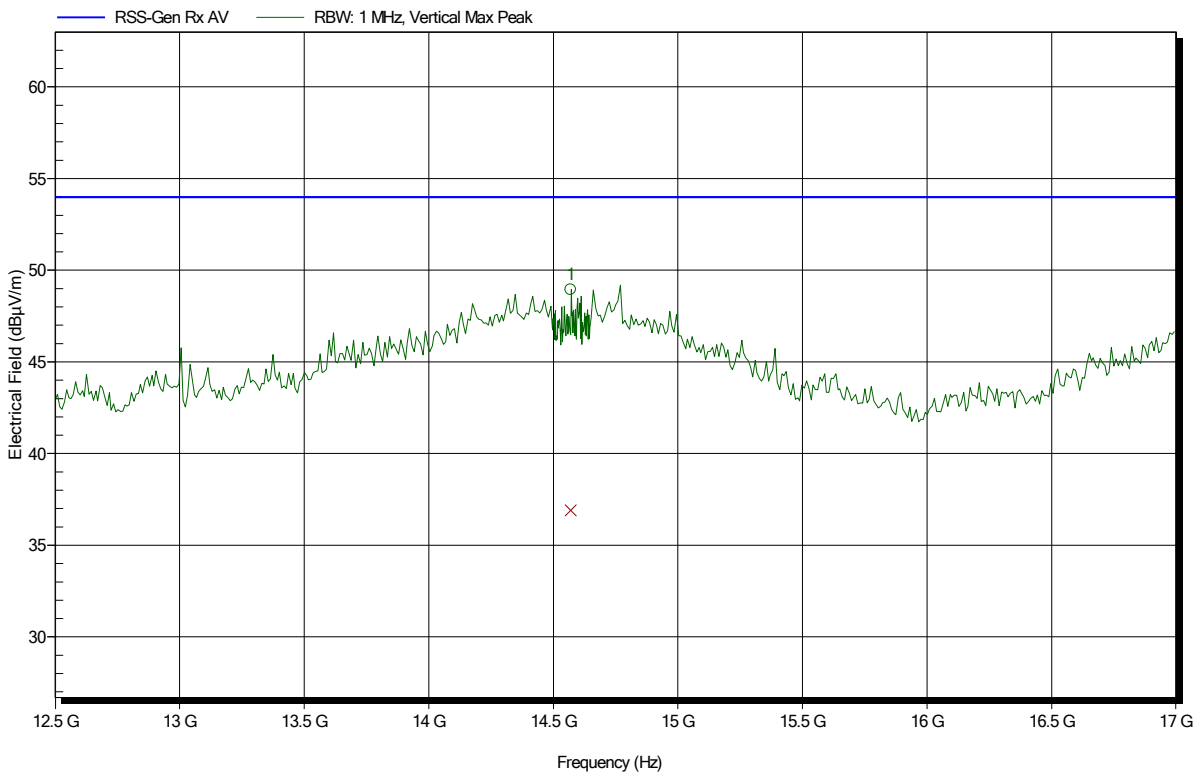


Frequency	Peak	Peak Limit	Peak Difference	Status
14.57 GHz	48.94 dBµV/m	53.98 dBµV/m	-5.04 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
14.57 GHz	36.9 dBµV/m	53.98 dBµV/m	-17.08 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Amplifier Research AT 4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 82

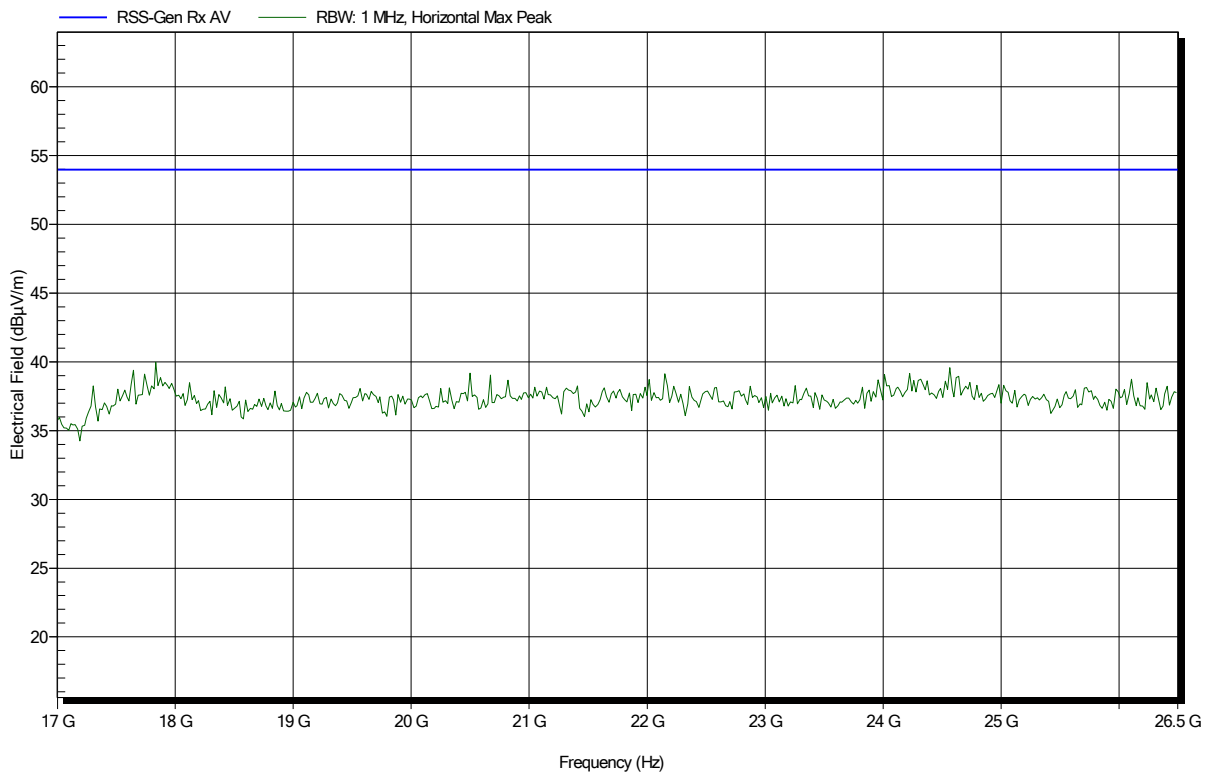

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1710-6928

Applicant: Leica Geosystems AG
 EUT Name: Laser Distance Meter
 Model: Leica DISTO X4-1
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 22.9°C, Vnom: 3.0 VDC (2x Alkaline Typ AA)
 Antenna: Amplifier Research AT 4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: RX; BL; 2440 MHz
 Test Date: 2017-12-19
 Note:

Index 83

