



FCC Test Report

Equipment : 802.11abgn Bluetooth Mini PCIe module
Brand Name : Fukuda Denshi
Model No. : WPEA-251N(BT)
FCC ID : RFH-DS101WIFI
Standard : 47 CFR FCC Part 15.247
RF Specification : Bluetooth LE
Frequency : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : IEI Integration Corp.
No. 29, Chung-Hsing Rd., Sijhih City,
New Taipei City 221, Taiwan (R.O.C.)
Manufacturer : SparkLAN Communications, Inc.
8F., No. 257, Sec. 2, Tiding Blvd., Neihu District,
Taipei 11493, Taiwan

The product sample received on Jan. 06, 2017 and completely tested on Jan. 21, 2017. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Phoenix Chen / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Testing Applied Standards	6
1.3	Testing Location Information	7
1.4	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT.....	8
2.1	Test Condition	8
2.2	Test Channel Mode	8
2.3	The Worst Case Measurement Configuration.....	9
2.4	Support Equipment.....	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT.....	12
3.1	AC Power-line Conducted Emissions	12
3.2	DTS Bandwidth.....	13
3.3	Fundamental Emission Output Power.....	14
3.4	Power Spectral Density	16
3.5	Emissions in Non-restricted Frequency Bands	18
3.6	Emissions in Restricted Frequency Bands	19
4	TEST EQUIPMENT AND CALIBRATION DATA.....	23

APPENDIX A. TEST RESULT OF AC POWER-LINE CONDUCTED EMISSIONS**APPENDIX B. TEST RESULT OF EMISSION BANDWIDTH****APPENDIX C TEST RESULT OF MAXIMUM CONDUCTED OUTPUT POWER****APPENDIX D. TEST RESULT OF POWER SPECTRAL DENSITY****APPENDIX E. TEST RESULT OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS****APPENDIX F. TEST RESULT OF EMISSIONS IN RESTRICTED FREQUENCY BANDS****APPENDIX G. TEST PHOTOS****PHOTOGRAPHS OF EUT v01**



Summary of Test Result

Conformance Test Specifications				
Report Clause	Ref. Std. Clause	Description	Limit	Result
1.1.2	15.203	Antenna Requirement	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	FCC 15.207	Complied
3.2	15.247(a)	DTS Bandwidth	$\geq 500\text{kHz}$	Complied
3.3	15.247(b)	Fundamental Emission Output Power	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	Non-Restricted Bands: $> 20\text{ dBc}$	Complied
3.6	15.247(d)	Emissions in Restricted Frequency Bands	Restricted Bands: FCC 15.209	Complied



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1	1TX

Note:

- Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.
- BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
	<input type="checkbox"/> Single power level with corresponding antenna(s).
	<input type="checkbox"/> Multiple power level and corresponding antenna(s).

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	2



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
HW Version	v1.0
SW Version	v1.0
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input checked="" type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: Fukuda Denshi / DS-101	
<input type="checkbox"/> Other:	

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.706	1.512	441.25u	3k

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input checked="" type="checkbox"/> External AC adapter	<input type="checkbox"/> From Host System	<input type="checkbox"/> Battery

1.1.6 EUT Operate Information

Items	Description		
Operate Condition	<input checked="" type="checkbox"/>	Point-to-multipoint (P2M)	<input type="checkbox"/> Point-to-point (P2P)

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.4-2014
- ♦ KDB 558074 D01 v04



1.3 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.		
	TEL : 886-3-327-3456	FAX : 886-3-327-0973		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Ryan	22.2°C / 51.8%	20/Jan/2017
RF Conducted	TH01-HY	Lisa	23.8°C / 64.5%	19/Jan/2017
Radiated	03CH09-HY	Terry	22.2°C / 51.8%	21/Jan/2017

Test site registered number [553509] with FCC.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Test Item	Uncertainty	
AC power-line conducted emissions	±2.3 dB	
Emission bandwidth, 6dB bandwidth	±0.6 %	
RF output power, conducted	±0.1 dB	
Power density, conducted	±0.6 dB	
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±5 %
DC and low frequency voltages		±0.9%
Time		±1.4 %
Duty Cycle		±0.6 %



2 Test Configuration of EUT

2.1 Test Condition

RF Conducted	Abbreviation	Remark
T _{nom} V _{nom}	T _{nom}	20°C
-	V _{nom}	120V

2.2 Test Channel Mode

Test Software Version	BtUSB_V18.12.12
-----------------------	-----------------

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	default
2440MHz	default
2480MHz	default



2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth, Fundamental Emission Output Power, Power Spectral Density, Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests							
Tests Item	Emissions in Restricted Frequency Bands						
Test Condition	Radiated measurement						
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.						
Operating Mode	<input checked="" type="checkbox"/> 1. Adapter Mode						
Orthogonal Planes of EUT	<table><thead><tr><th>X Plane</th><th>Y Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					
							
Worst Planes of EUT	V						



2.4 Support Equipment

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Patient Monitor	IEI	DS-101	-
2	AC adapter for Patient Monitor	-	EM10683G	-

Note: Support equipment No.1 and No.2 were provided by customer.

Support Equipment - AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Patient Monitor	IEI	DS-101	-
2	AC adapter for Patient Monitor	-	EM10683G	-
3	Mouse	Microsoft	1004	R33057
4	IPod	APPLE	A1051	DoC
5	Wireless AP (Remote)	BUFFALO	WHR-HP-G54	DoC
6	BLUETOOTH HEADSET (Remote)	Sony Ericsson	Z354 (HBH-PV702)	PY7DDA-2006

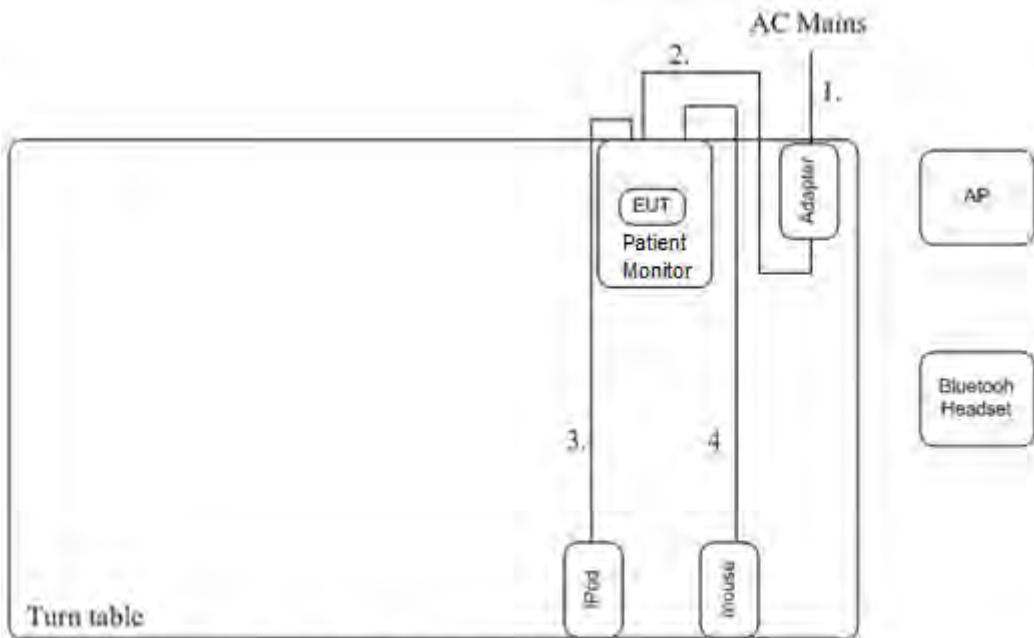
Note: Support equipment No.1 and No.2 were provided by customer.

Support Equipment - Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Patient Monitor	IEI	DS-101	-
2	AC adapter for Patient Monitor	-	EM10683G	-

Note: Support equipment No.1 and No.2 were provided by customer.

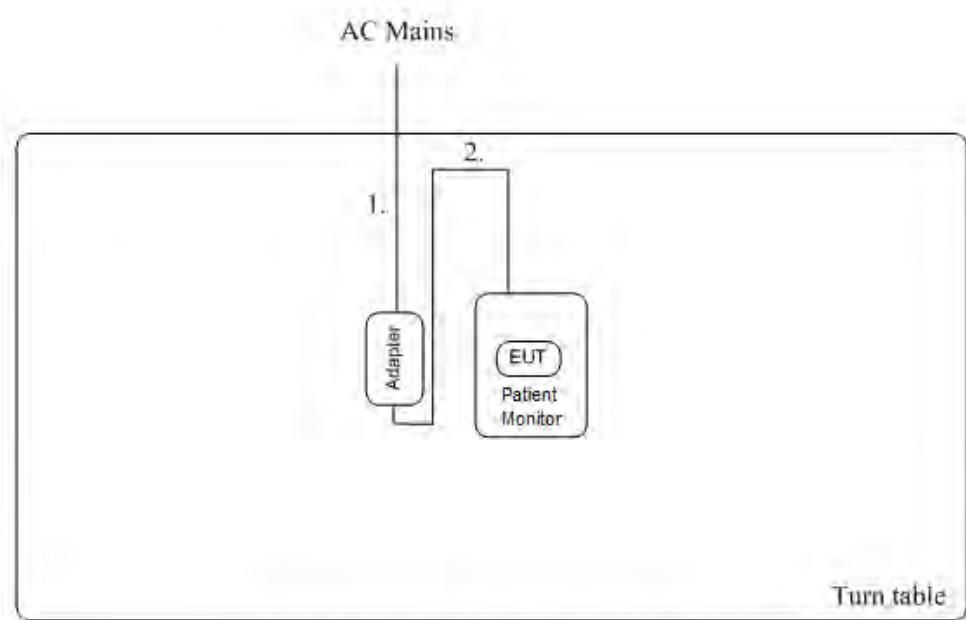
2.5 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test



1. AC Power line, 1.8m ,Non-Shielding
2. DC Power line, 1.8m ,Non-Shielding
3. USB Cable, 1.8m ,Non-Shielding
4. USB Cable, 1m ,Non-Shielding

Test Setup Diagram - Radiated Test



1. AC Power line 1.8m ,Non-Shielding
2. DC Power line 1.8m ,Non-Shielding
4. USB Cable, 1m ,Non-Shielding

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

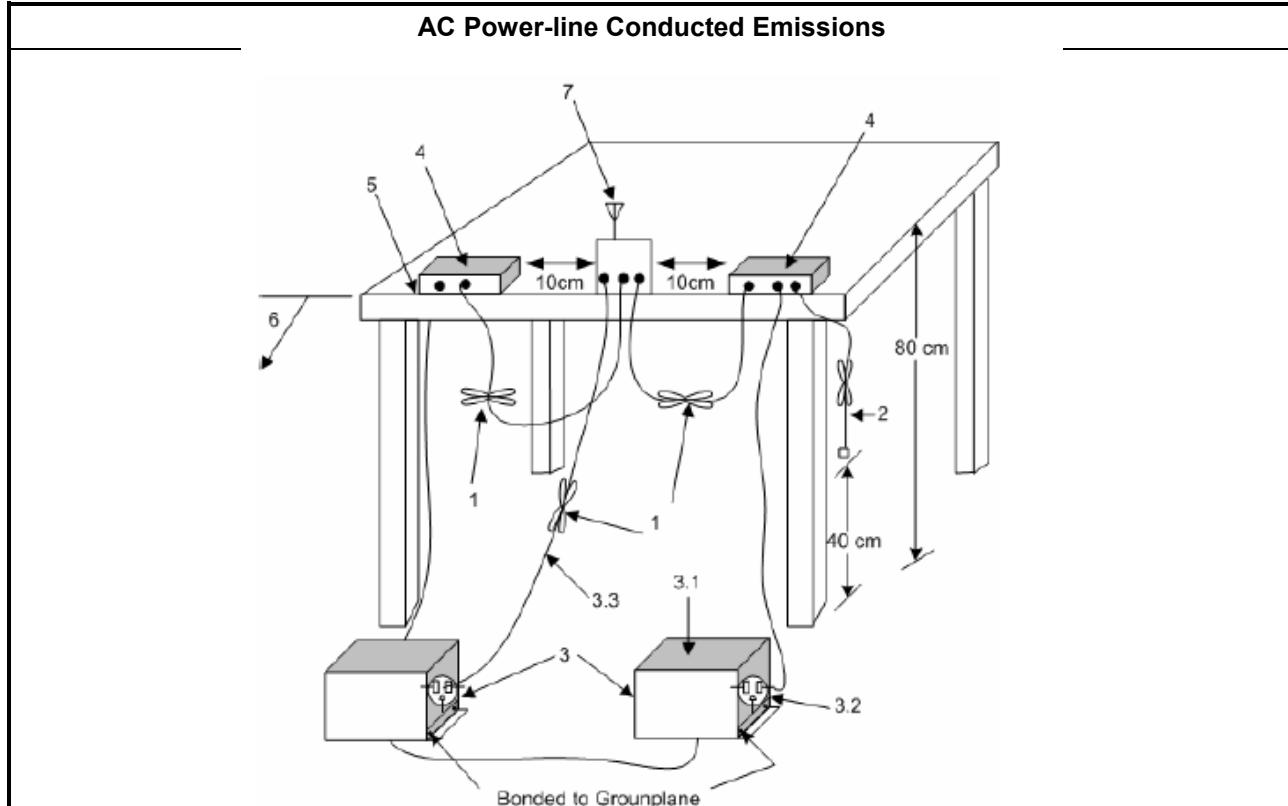
3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
▪ 6 dB bandwidth \geq 500 kHz.

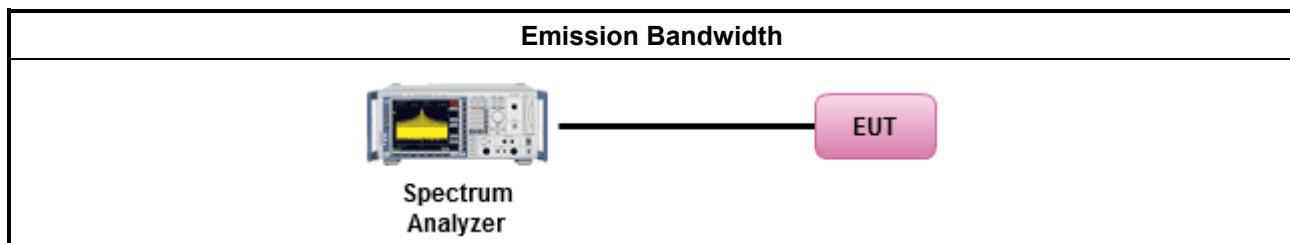
3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup



3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Fundamental Emission Output Power

3.3.1 Fundamental Emission Output Power Limit

Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
▪ 2400-2483.5 MHz Band:	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
▪ 2400-2483.5 MHz Band	
	▪ Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	▪ Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	▪ Smart antenna system (SAS)
	- Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	- Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	- Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	

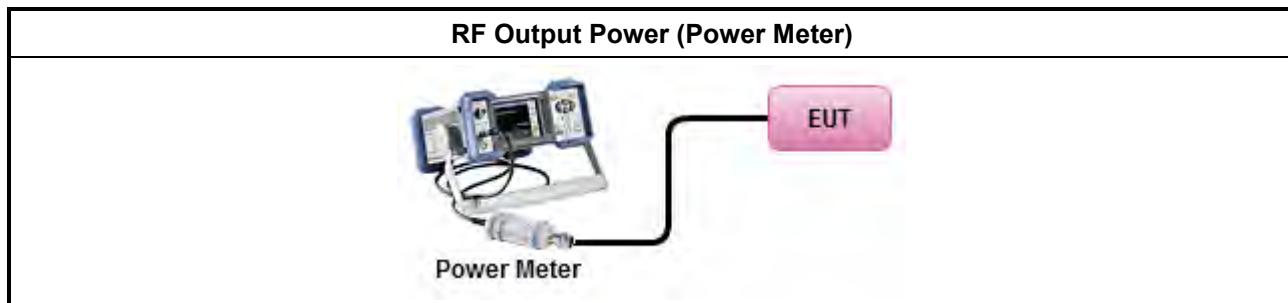
3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ Maximum Peak Conducted Output Power	<input type="checkbox"/> Refer as KDB 558074, clause 9.1.1 Option 1 (RBW \geq EBW method). <input type="checkbox"/> Refer as KDB 558074, clause 9.1.2 Option 2 (integrated band power method) <input checked="" type="checkbox"/> Refer as KDB 558074, clause 9.1.3 Option 3 (peak power meter for VBW \geq DTS BW)
▪ Maximum Average Conducted Output Power	<p>Duty cycle \geq 98%</p> <input type="checkbox"/> Refer as KDB 558074, clause 9.2.2.4 Method AVGSA-2. (spectral trace averaging)
	<p>Duty cycle $<$ 98%</p> <input type="checkbox"/> Refer as KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
	<input checked="" type="checkbox"/> Refer as KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
▪ For conducted measurement.	<ul style="list-style-type: none">▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) $\leq 8 \text{ dBm/3kHz}$

3.4.2 Measuring Instruments

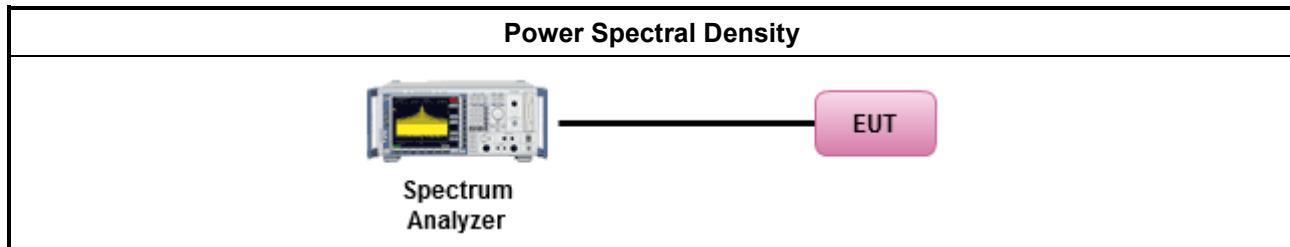
Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak).
Duty cycle $\geq 98\%$
<input type="checkbox"/> Refer as KDB 558074, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
Duty cycle $< 98\%$
<input type="checkbox"/> Refer as KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
▪ For conducted measurement.
<ul style="list-style-type: none">▪ If The EUT supports multiple transmit chains using options given below:<ul style="list-style-type: none"><input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,<input type="checkbox"/> Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.



3.4.4 Test Setup



3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

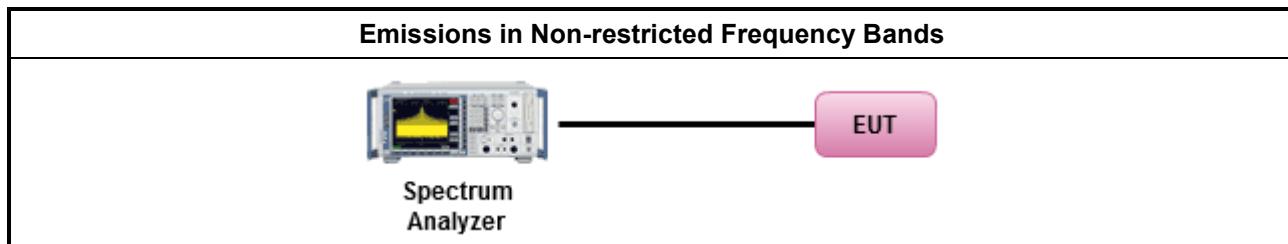
3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
▪ Refer as KDB 558074, clause 11 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup



3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

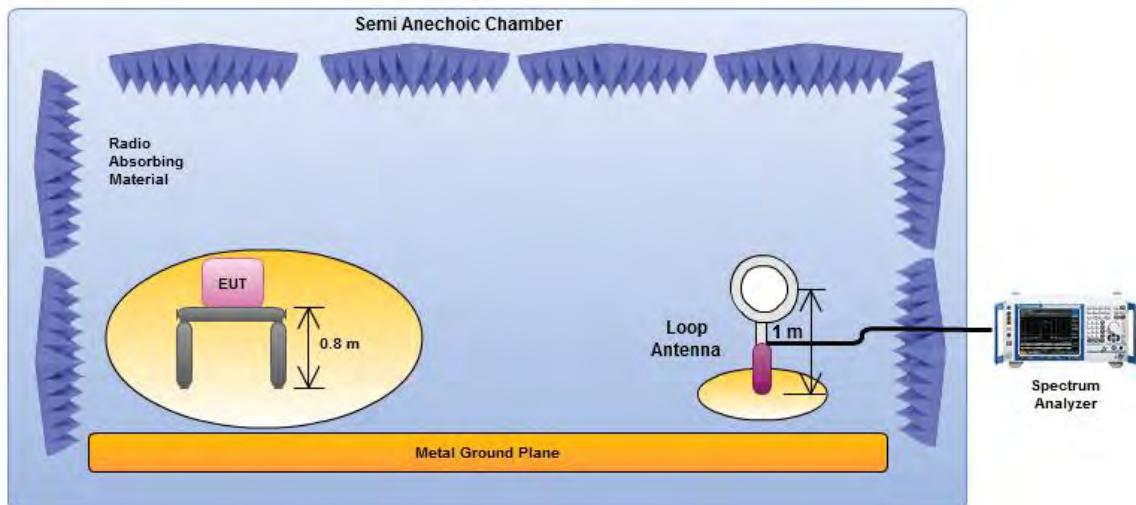


3.6.3 Test Procedures

Test Method	
▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
▪ Refer as KDB 558074, clause 12 for unwanted emissions into restricted bands.	<input type="checkbox"/> Refer as KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%) <input type="checkbox"/> Refer as KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor). <input checked="" type="checkbox"/> Refer as KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T). <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time. <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. <input checked="" type="checkbox"/> Refer as KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit. <input checked="" type="checkbox"/> Refer as KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
▪ Refer as KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.	
▪ Refer as KDB 558074, clause 13.2 (ANSI C63.10, clause 6.9.3) for marker-delta method for band-edge measurements.	
▪ Refer as KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).	
▪ For conducted and cabinet radiation measurement, refer as KDB 558074, clause 12.2.2.	
	<input type="checkbox"/> For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB
	<input type="checkbox"/> For KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

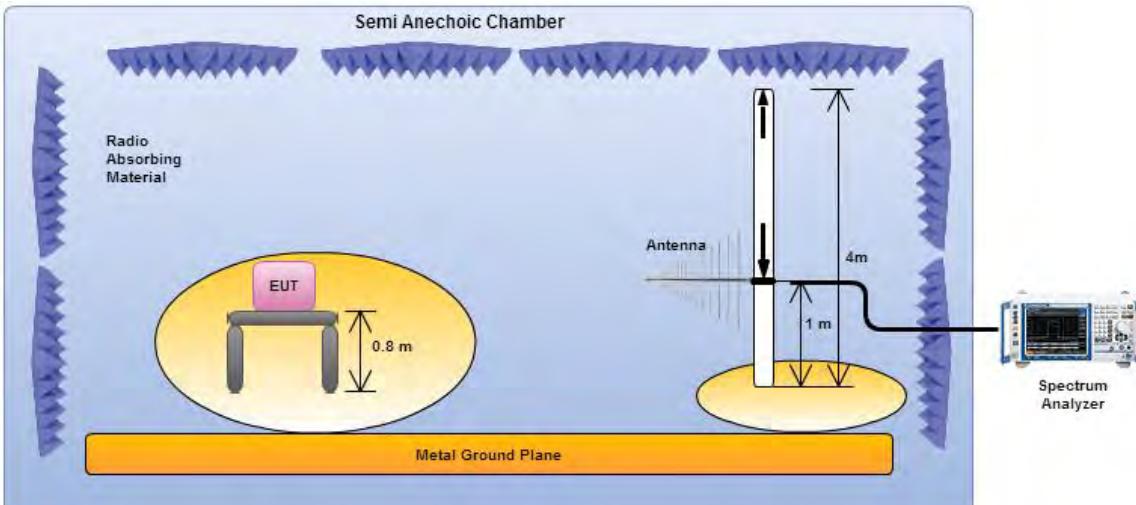
3.6.4 Test Setup

Transmitter Spurious and Out of Band Emissions (9 kHz - 30 MHz)

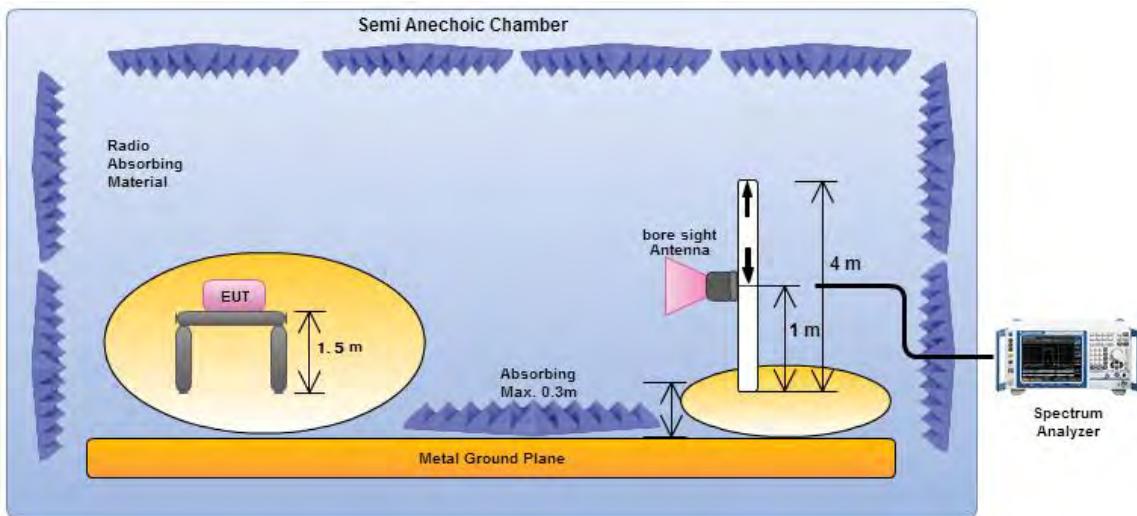


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna.

Transmitter Radiated Unwanted Emissions (below 1GHz)



Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

Transmitter Radiated Unwanted Emissions (above 1GHz)

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. Any spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported.

3.6.6 Transmitter Radiated Unwanted Emissions

Refer as Appendix F



4 Test Equipment and Calibration Data

AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR-3	102051	9kHz~3.6GHz	19/Apr/2016	18/Apr/2017
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz~30MHz	26/Jan/2016	25/Jan/2017
LISN (Support Unit)	R&S	ENV216	101295	9kHz~30MHz	NCR	NCR
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz~30MHz	24/Oct/2016	23/Oct/2017
EMI Filter	LINDGREN	LRE-2030	2651	< 450Hz	NCR	NCR

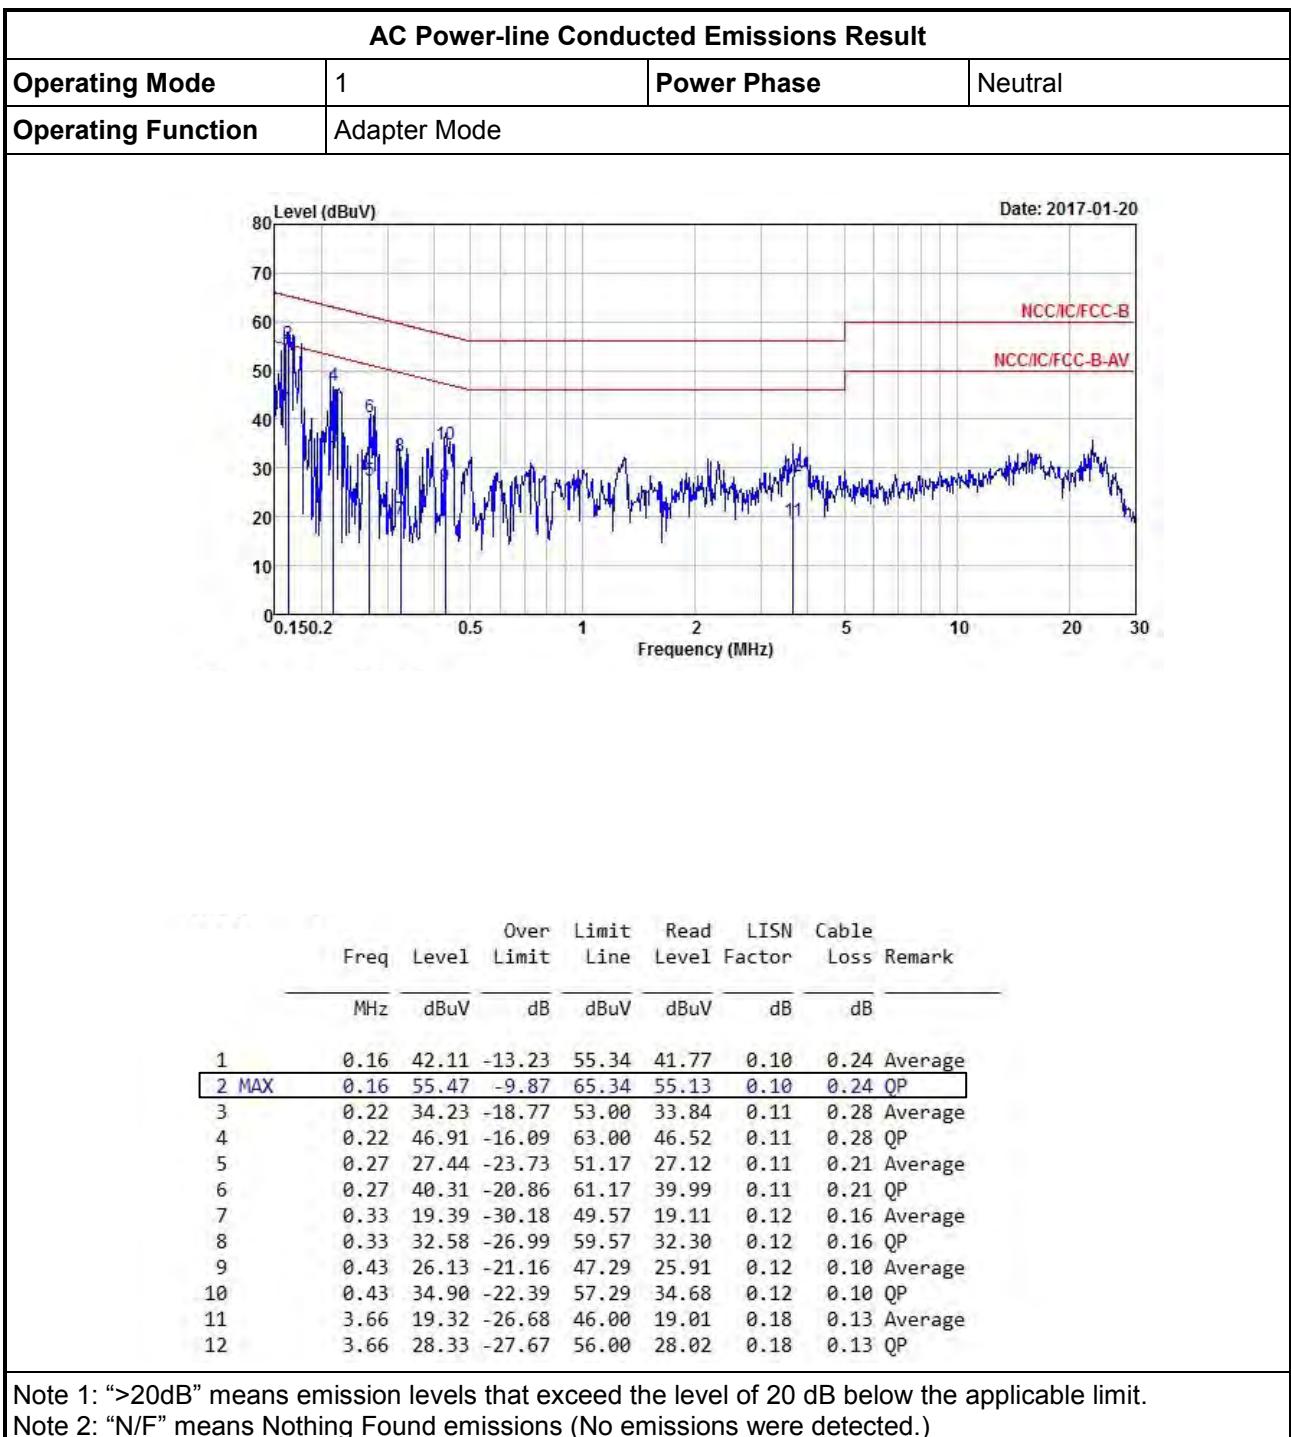
NCR : Non-Calibration Require

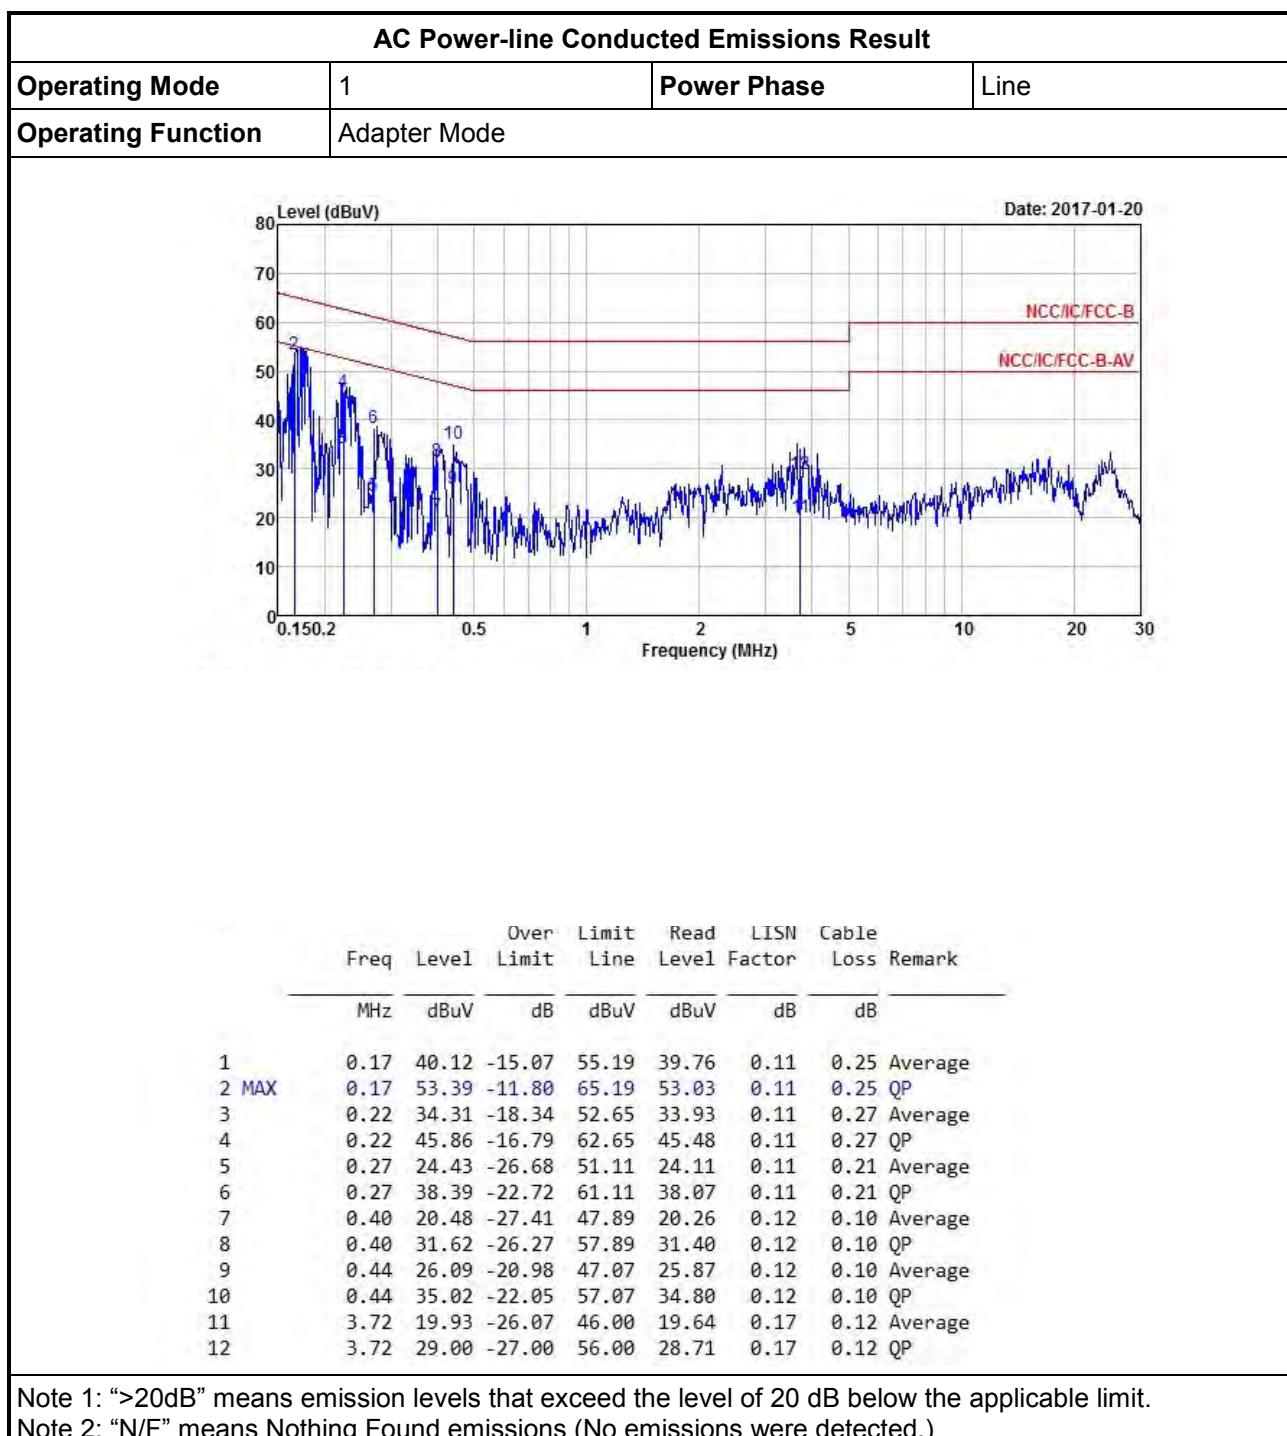
Conducted

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	16/Feb/2016	15/Feb/2017
Power Sensor	Anritsu	MA2411B	917017	300MHz~40GHz	04/Feb/2016	03/Feb/2017
Power Meter	Anritsu	ML2495A	949003	300MHz~40GHz	04/Feb/2016	03/Feb/2017
Signal Generator	R&S	SMR40	100116	10MHz~40GHz	21/Jul/2016	20/Jul/2017
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY677/3	30MHz~26.5GHz	02/Oct/2016	01/Oct/2017
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY678/3	30MHz~26.5GHz	02/Oct/2016	01/Oct/2017
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_104	MY10717/4	30MHz~26.5GHz	02/Oct/2016	01/Oct/2017

Radiated

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz	28/Nov/2016	27/Nov/2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz~18GHz	16/Dec/2016	15/Dec/2017
Amplifier	HP	8447D	2944A08033	10kHz~1.3GHz	10/May/2016	09/May/2017
Amplifier	KEYSIGHT	83017A	MY53270197	1GHz~26.5GHz	29/Aug/2016	28/Aug/2017
Spectrum	R&S	FSV40	101513	9kHz~40GHz	16/Feb/2016	15/Feb/2017
Bilog Antenna	SCHAFFNER	CBL 6112D	2723	30MHz~1GHz	01/Oct/2016	30/Sep/2017
Horn Antenna	SCHWARZBECK	BBHA 9120D	BBHA 9120D 1531	1GHz~18GHz	22/Apr/2016	21/Apr/2017
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz~40GHz	29/Jan/2016	28/Jan/2017
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	02/Feb/2015	01/Feb/2017
RF-Cable-high	SUHNER	SUHNER	CB222	1GHz~40GHz	28/Oct/2016	27/Oct/2017
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz~1GHz	27/Oct/2016	26/Oct/2017





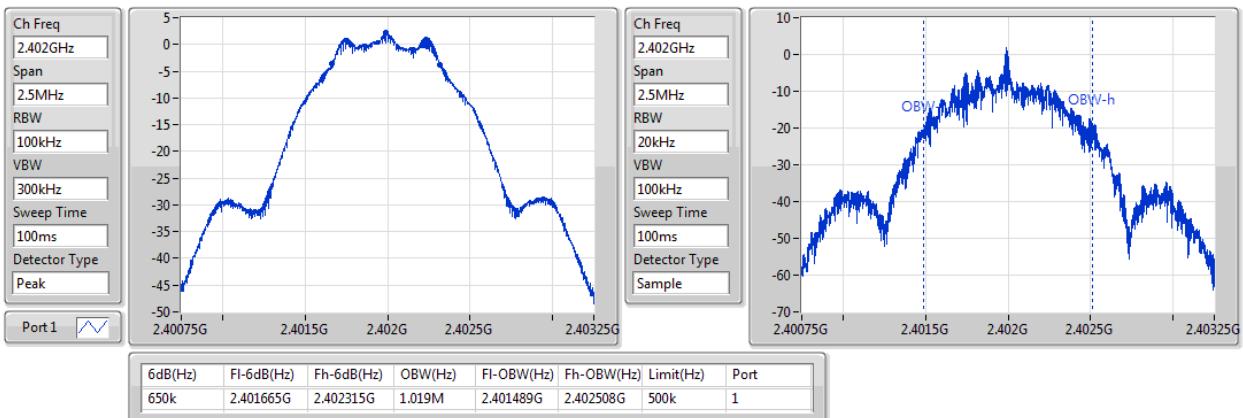
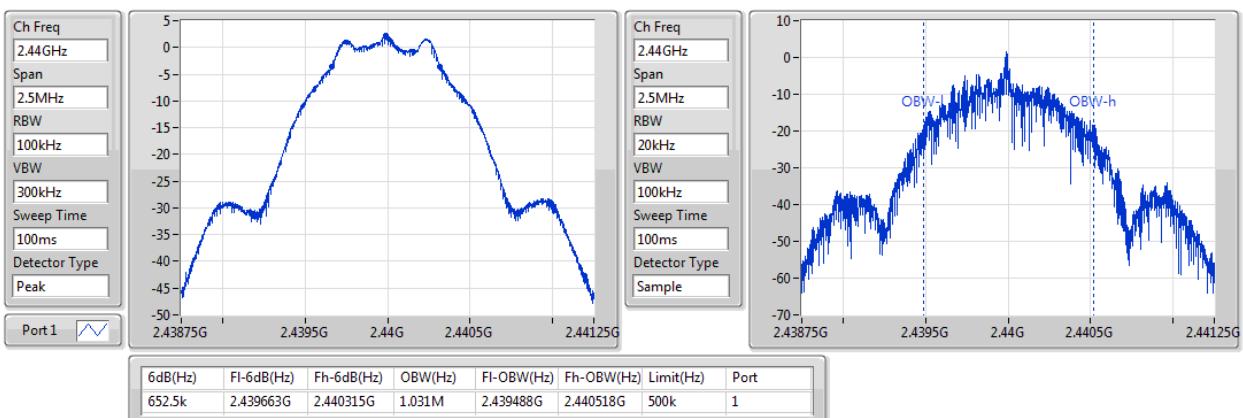
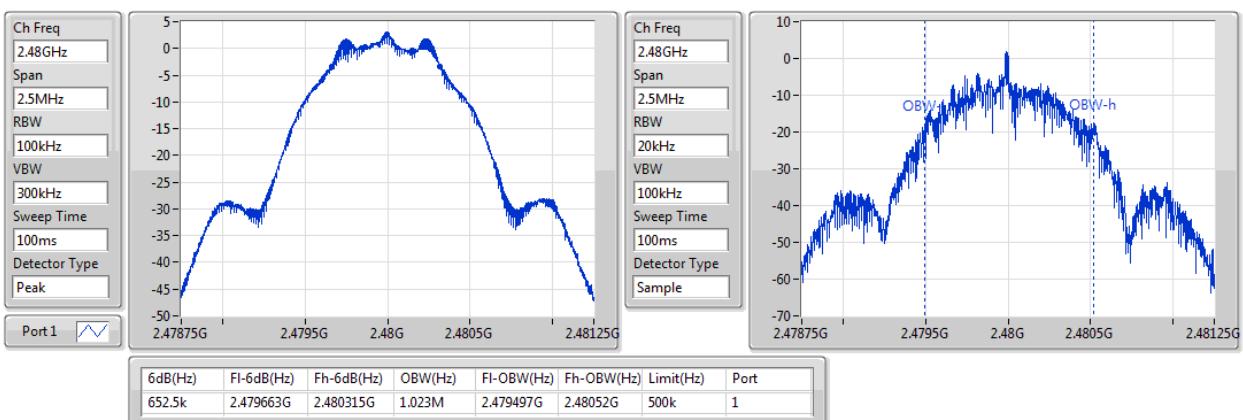
**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-	-
2.4-2.4835GHz	652.5k	1.031M	1M03F1D	650k	1.019M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	650k	1.019M
2440MHz	Pass	500k	652.5k	1.031M
2480MHz	Pass	500k	652.5k	1.023M

Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)
2402MHz

EBW
BT-LE(1Mbps)
2440MHz

EBW
BT-LE(1Mbps)
2480MHz

EBW

**Summary**

Mode	Power (dBm)	Power (W)
BT-LE(1Mbps)	-	-
2.4-2.4835GHz	2.88	0.00194

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	2.43	30.00
2440MHz	Pass	2.00	2.57	30.00
2480MHz	Pass	2.00	2.88	30.00

**Summary**

Mode	Power (dBm)	Power (W)
BT-LE(1Mbps)	-	-
2.4-2.4835GHz	2.16	0.00164

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	1.72	30.00
2440MHz	Pass	2.00	1.94	30.00
2480MHz	Pass	2.00	2.16	30.00

**Summary**

Mode	PD (dBm/RBW)
BT-LE(1Mbps)	-
2.4-2.4835GHz	-5.75

RBW=3kHz.

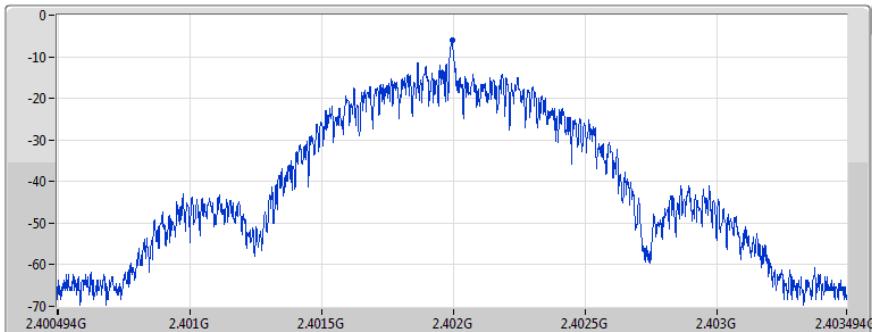
Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	-6.03	8.00
2440MHz	Pass	2.00	-6.00	8.00
2480MHz	Pass	2.00	-5.75	8.00

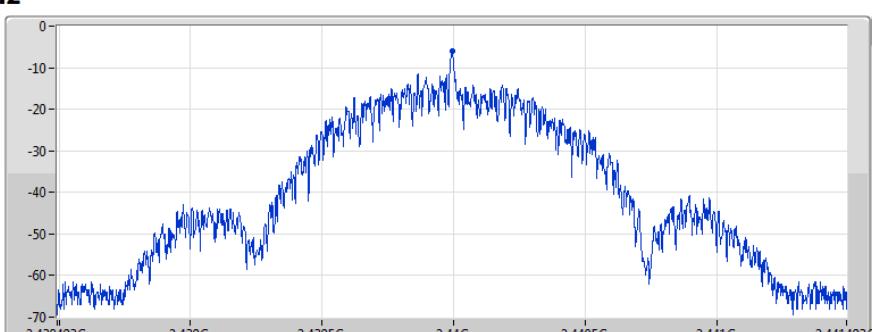
RBW=3kHz.

BT-LE(1Mbps)
PSD
2402MHz

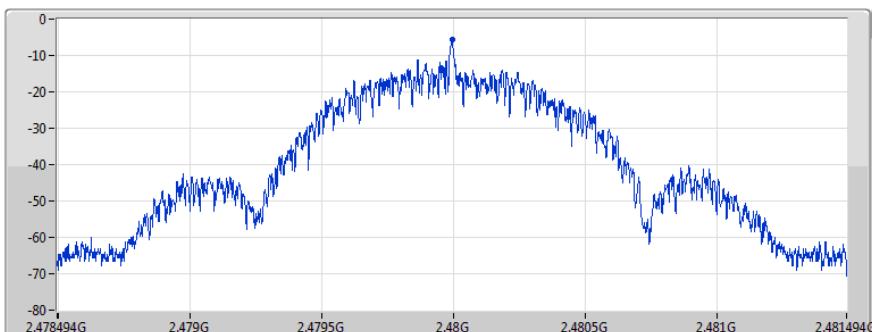
Ch Freq
2.401994GHz
Span
3MHz
RBW
3kHz
VBW
10kHz
Sweep Time
12.6s
Detector Type
Peak


Port 1
BT-LE(1Mbps)
PSD
2440MHz

Ch Freq
2.439993GHz
Span
3MHz
RBW
3kHz
VBW
10kHz
Sweep Time
12.6s
Detector Type
Peak


Port 1
BT-LE(1Mbps)
PSD
2480MHz

Ch Freq
2.479994GHz
Span
3MHz
RBW
3kHz
VBW
10kHz
Sweep Time
12.6s
Detector Type
Peak

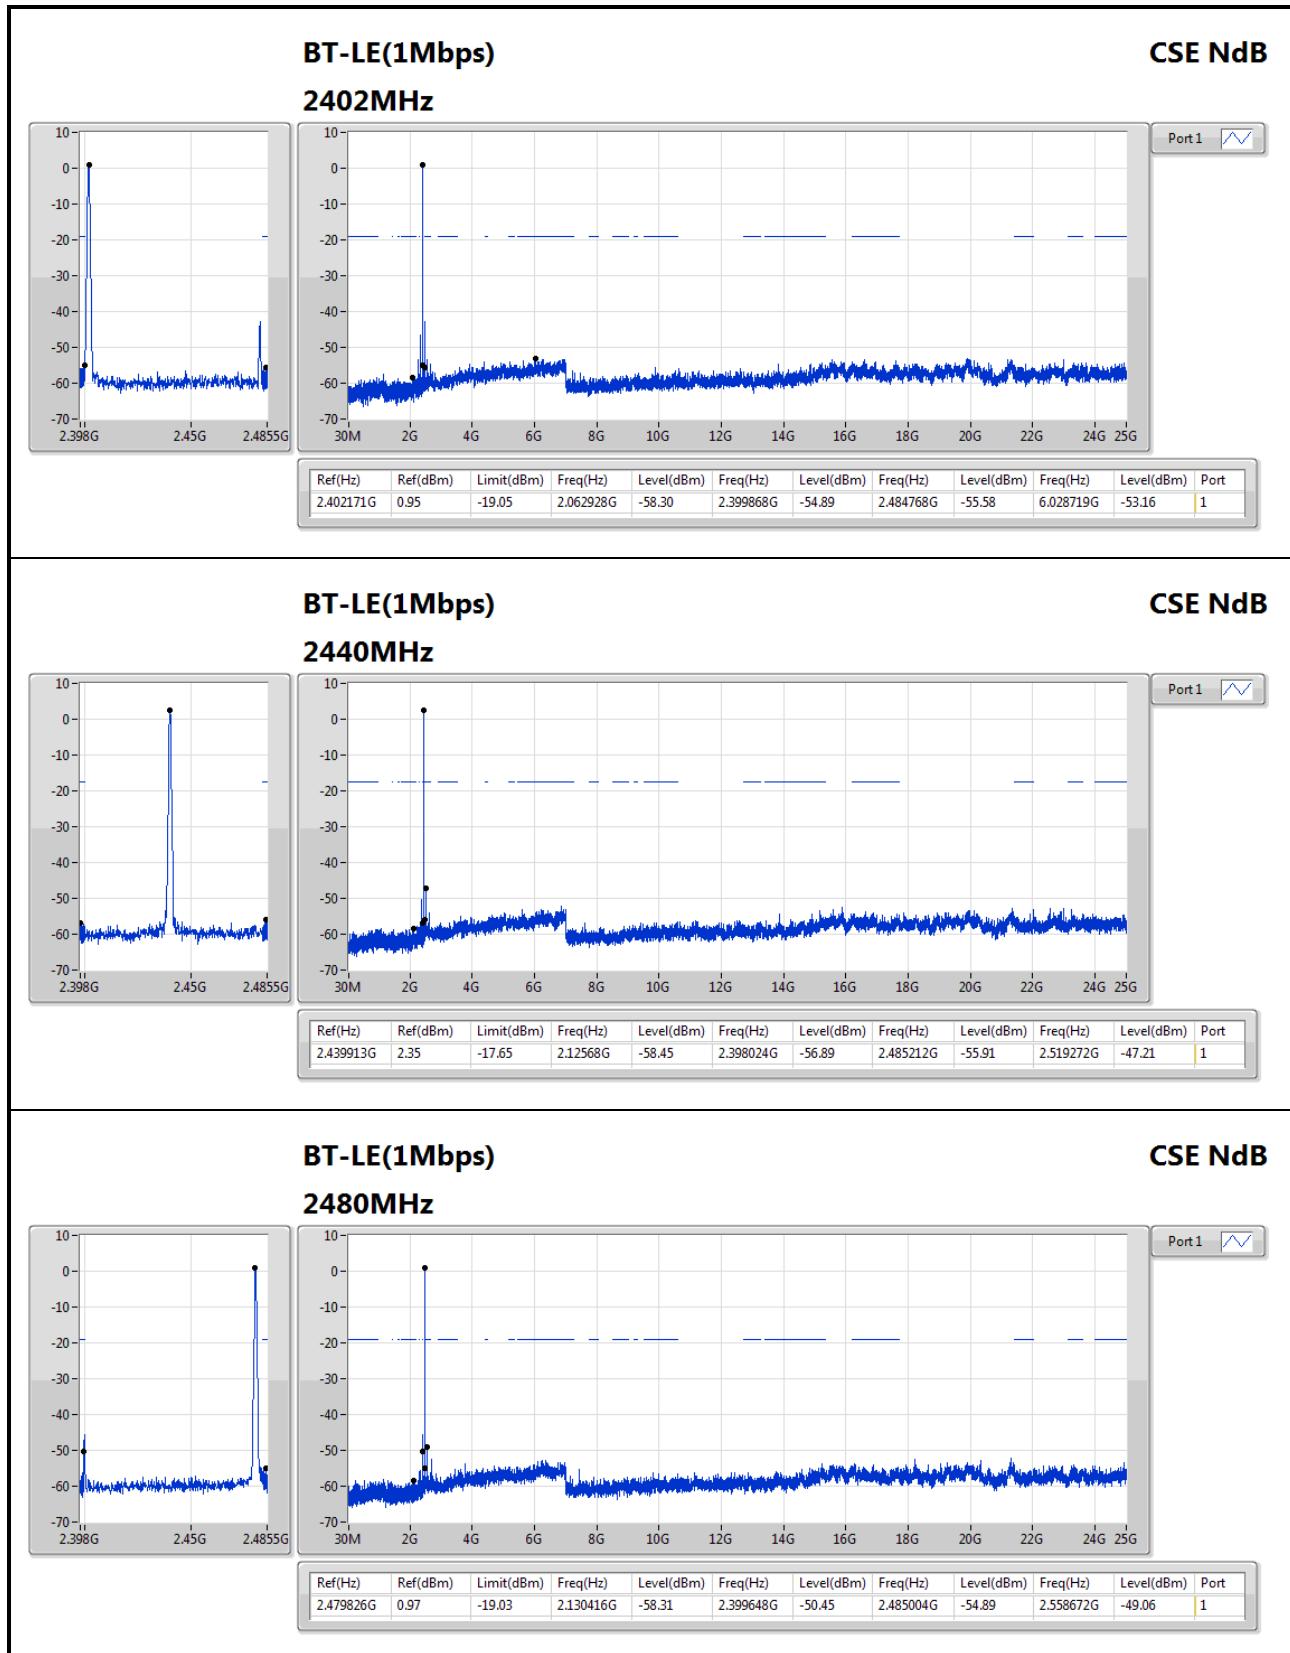

Port 1

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Port						
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	2.439913G	2.35	-17.65	2.12568G	-58.45	2.398024G	-56.89	2.485212G	-55.91	2.519272G	-47.21	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Port						
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402171G	0.95	-19.05	2.062928G	-58.30	2.399868G	-54.89	2.484768G	-55.58	6.028719G	-53.16	1
2440MHz	Pass	2.439913G	2.35	-17.65	2.12568G	-58.45	2.398024G	-56.89	2.485212G	-55.91	2.519272G	-47.21	1
2480MHz	Pass	2.479826G	0.97	-19.03	2.130416G	-58.31	2.399648G	-50.45	2.485004G	-54.89	2.558672G	-49.06	1

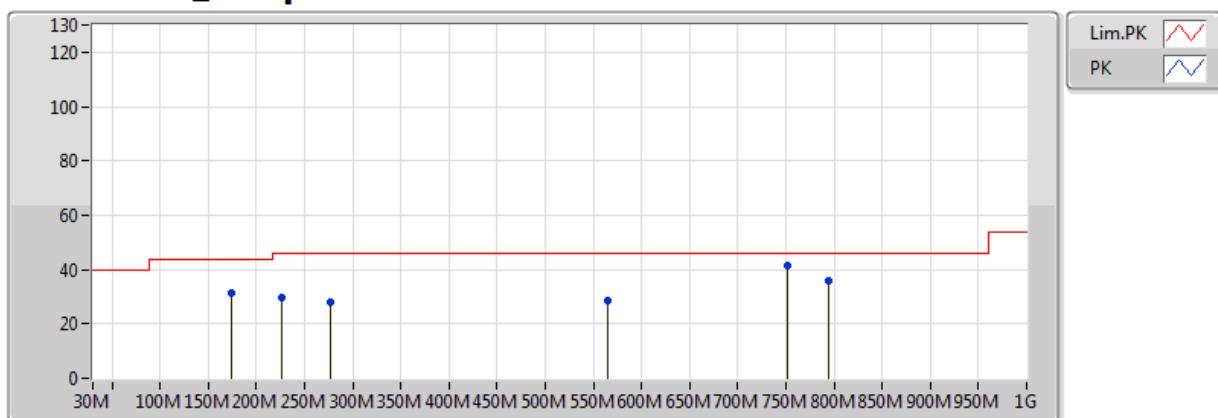


**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	PK	751.68M	41.23	46.00	-4.77	-6.26	3	V	0	1.00	-

**Result**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	35.82M	16.77	40.00	-23.23	-16.20	3	H	360	1.00	-
2440MHz	Pass	PK	165.8M	11.72	43.50	-31.78	-19.42	3	H	360	1.00	-
2440MHz	Pass	PK	241.46M	15.75	46.00	-30.25	-17.56	3	H	360	1.00	-
2440MHz	Pass	PK	590.66M	25.89	46.00	-20.11	-8.64	3	H	360	1.00	-
2440MHz	Pass	PK	794.36M	32.10	46.00	-13.90	-5.73	3	H	360	1.00	-
2440MHz	Pass	PK	885.54M	30.50	46.00	-15.50	-4.94	3	H	360	1.00	-
2440MHz	Pass	PK	173.56M	31.47	43.50	-12.03	-19.96	3	V	0	1.00	-
2440MHz	Pass	PK	225.94M	29.61	46.00	-16.39	-19.21	3	V	0	1.00	-
2440MHz	Pass	PK	276.38M	27.91	46.00	-18.09	-15.76	3	V	0	1.00	-
2440MHz	Pass	PK	565.44M	28.37	46.00	-17.63	-8.21	3	V	0	1.00	-
2440MHz	Pass	PK	751.68M	41.23	46.00	-4.77	-6.26	3	V	0	1.00	-
2440MHz	Pass	PK	794.36M	35.63	46.00	-10.37	-5.73	3	V	0	1.00	-

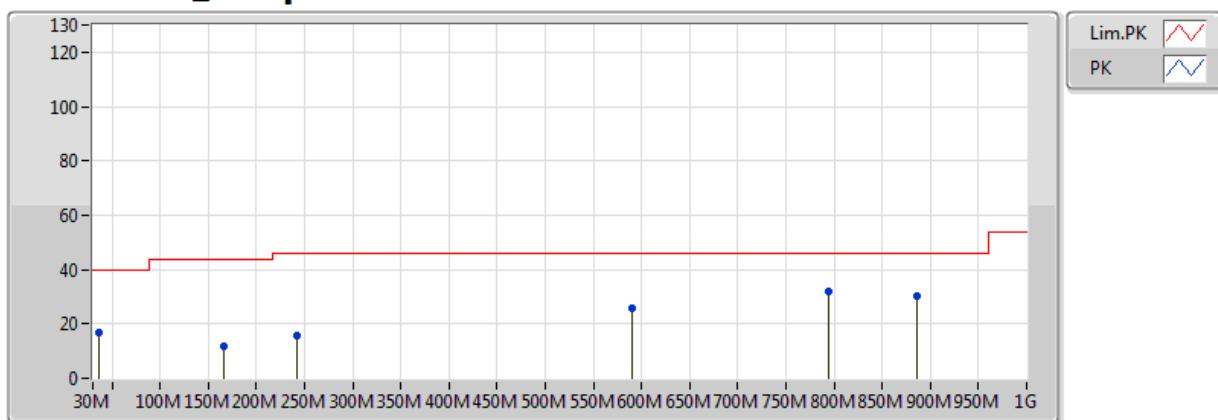
BT-LE(1Mbps)
2440MHz_Adapter


Adapter Mode

ENT = A+B

EUT = Y axis

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
PK	276.38M	27.91	46.00	-18.09	-15.76	3	V	0	1.00	-
PK	225.94M	29.61	46.00	-16.39	-19.21	3	V	0	1.00	-
PK	173.56M	31.47	43.50	-12.03	-19.96	3	V	0	1.00	-
PK	751.68M	41.23	46.00	-4.77	-6.26	3	V	0	1.00	-
PK	794.36M	35.63	46.00	-10.37	-5.73	3	V	0	1.00	-
PK	565.44M	28.37	46.00	-17.63	-8.21	3	V	0	1.00	-

BT-LE(1Mbps)
2440MHz_Adapter


Adapter Mode
 ENT = A+B
 EUT = Y axis

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
PK	241.46M	15.75	46.00	-30.25	-17.56	3	H	360	1.00	-
PK	165.8M	11.72	43.50	-31.78	-19.42	3	H	360	1.00	-
PK	35.82M	16.77	40.00	-23.23	-16.20	3	H	360	1.00	-
PK	794.36M	32.10	46.00	-13.90	-5.73	3	H	360	1.00	-
PK	885.54M	30.50	46.00	-15.50	-4.94	3	H	360	1.00	-
PK	590.66M	25.89	46.00	-20.11	-8.64	3	H	360	1.00	-

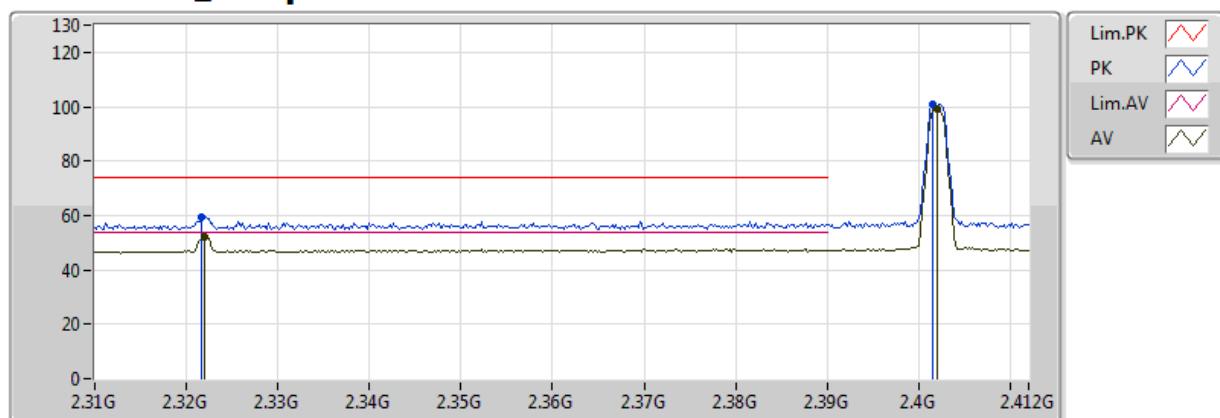
**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	AV	2.322036G	53.19	54.00	-0.81	30.94	3	H	NaN	NaN	-



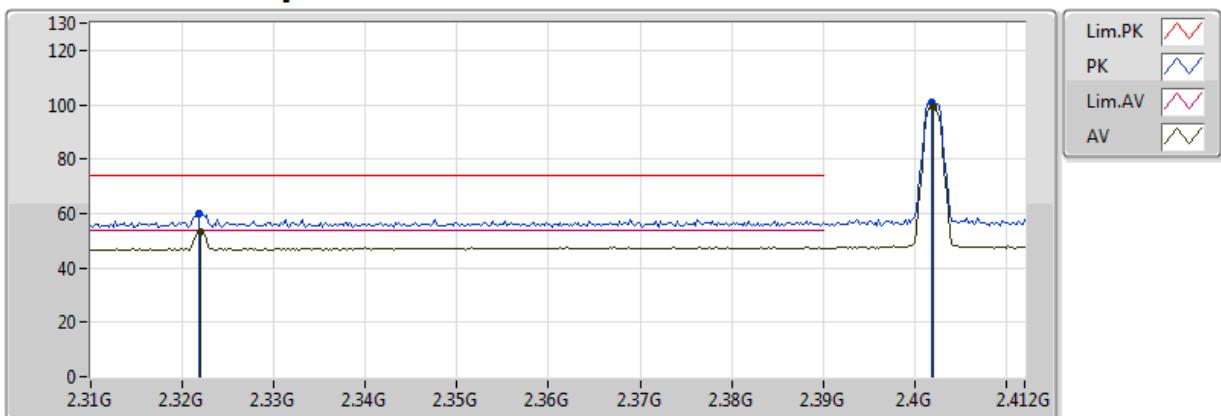
Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.322036G	53.19	54.00	-0.81	30.94	3	H	NaN	NaN	-
2402MHz	Pass	AV	2.402004G	98.92	Inf	-Inf	31.24	3	H	NaN	NaN	-
2402MHz	Pass	PK	2.321832G	59.83	74.00	-14.17	30.94	3	H	NaN	NaN	-
2402MHz	Pass	PK	2.4018G	100.65	Inf	-Inf	31.24	3	H	NaN	NaN	-
2402MHz	Pass	AV	2.322036G	52.32	54.00	-1.68	30.94	3	V	NaN	NaN	-
2402MHz	Pass	AV	2.402004G	99.27	Inf	-Inf	31.24	3	V	NaN	NaN	-
2402MHz	Pass	PK	2.321628G	59.52	74.00	-14.48	30.94	3	V	NaN	NaN	-
2402MHz	Pass	PK	2.401596G	100.88	Inf	-Inf	31.24	3	V	NaN	NaN	-
2402MHz	Pass	AV	4.804G	33.08	54.00	-20.92	2.41	3	H	NaN	NaN	-
2402MHz	Pass	PK	4.804G	45.51	74.00	-28.49	2.41	3	H	NaN	NaN	-
2402MHz	Pass	AV	4.804G	33.11	54.00	-20.89	2.41	3	V	NaN	NaN	-
2402MHz	Pass	PK	4.804G	44.95	74.00	-29.05	2.41	3	V	NaN	NaN	-
2440MHz	Pass	AV	2.36016G	51.18	54.00	-2.82	31.08	3	H	NaN	NaN	-
2440MHz	Pass	AV	2.43996G	97.33	Inf	-Inf	31.37	3	H	NaN	NaN	-
2440MHz	Pass	AV	2.49392G	48.59	54.00	-5.41	31.57	3	H	NaN	NaN	-
2440MHz	Pass	PK	2.36016G	58.76	74.00	-15.24	31.08	3	H	NaN	NaN	-
2440MHz	Pass	PK	2.43958G	98.96	Inf	-Inf	31.37	3	H	NaN	NaN	-
2440MHz	Pass	PK	2.48898G	58.93	74.00	-15.07	31.55	3	H	NaN	NaN	-
2440MHz	Pass	AV	2.36016G	50.44	54.00	-3.56	31.08	3	V	NaN	NaN	-
2440MHz	Pass	AV	2.43996G	96.89	Inf	-Inf	31.37	3	V	NaN	NaN	-
2440MHz	Pass	AV	2.49354G	48.33	54.00	-5.67	31.57	3	V	NaN	NaN	-
2440MHz	Pass	PK	2.35978G	58.75	74.00	-15.25	31.08	3	V	NaN	NaN	-
2440MHz	Pass	PK	2.43958G	98.42	Inf	-Inf	31.37	3	V	NaN	NaN	-
2440MHz	Pass	PK	2.48898G	58.66	74.00	-15.34	31.55	3	V	NaN	NaN	-
2440MHz	Pass	AV	4.804G	33.61	54.00	-20.39	2.41	3	H	NaN	NaN	-
2440MHz	Pass	PK	4.804G	45.41	74.00	-28.59	2.41	3	H	NaN	NaN	-
2440MHz	Pass	AV	4.804G	33.15	54.00	-20.85	2.41	3	V	NaN	NaN	-
2440MHz	Pass	PK	4.804G	44.71	74.00	-29.29	2.41	3	V	NaN	NaN	-
2480MHz	Pass	AV	2.48G	97.98	Inf	-Inf	31.52	3	H	NaN	NaN	-
2480MHz	Pass	AV	2.49328G	48.46	54.00	-5.54	31.57	3	H	NaN	NaN	-
2480MHz	Pass	PK	2.47968G	99.63	Inf	-Inf	31.52	3	H	NaN	NaN	-
2480MHz	Pass	PK	2.48832G	58.27	74.00	-15.73	31.55	3	H	NaN	NaN	-
2480MHz	Pass	AV	2.48G	96.57	Inf	-Inf	31.52	3	V	NaN	NaN	-
2480MHz	Pass	AV	2.49824G	48.41	54.00	-5.59	31.58	3	V	NaN	NaN	-
2480MHz	Pass	PK	2.47968G	98.24	Inf	-Inf	31.52	3	V	NaN	NaN	-
2480MHz	Pass	PK	2.48384G	58.46	74.00	-15.54	31.53	3	V	NaN	NaN	-
2480MHz	Pass	AV	4.96G	33.45	54.00	-20.55	2.65	3	H	NaN	NaN	-
2480MHz	Pass	PK	4.96G	45.35	74.00	-28.65	2.65	3	H	NaN	NaN	-
2480MHz	Pass	AV	4.96G	32.75	54.00	-21.25	2.65	3	V	NaN	NaN	-
2480MHz	Pass	PK	4.96G	45.05	74.00	-28.95	2.65	3	V	NaN	NaN	-

BT-LE(1Mbps)
2402MHz_Adapter


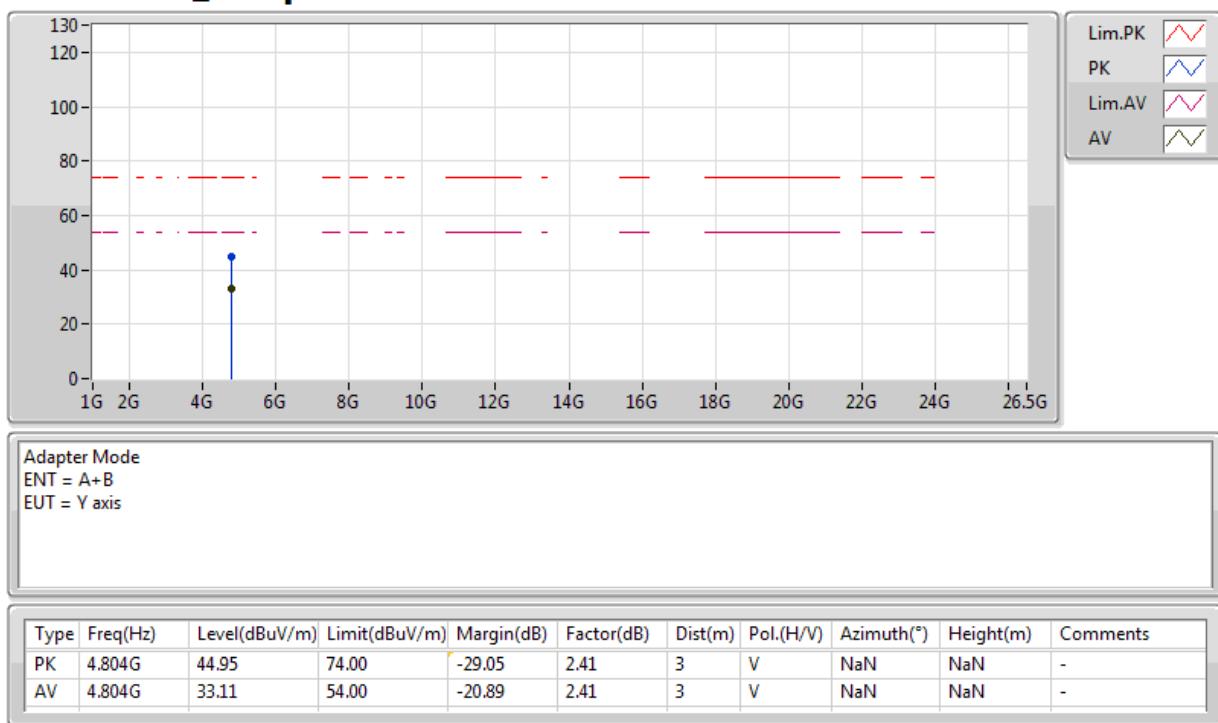
Adapter Mode
 ENT = A+B
 EUT = Y axis

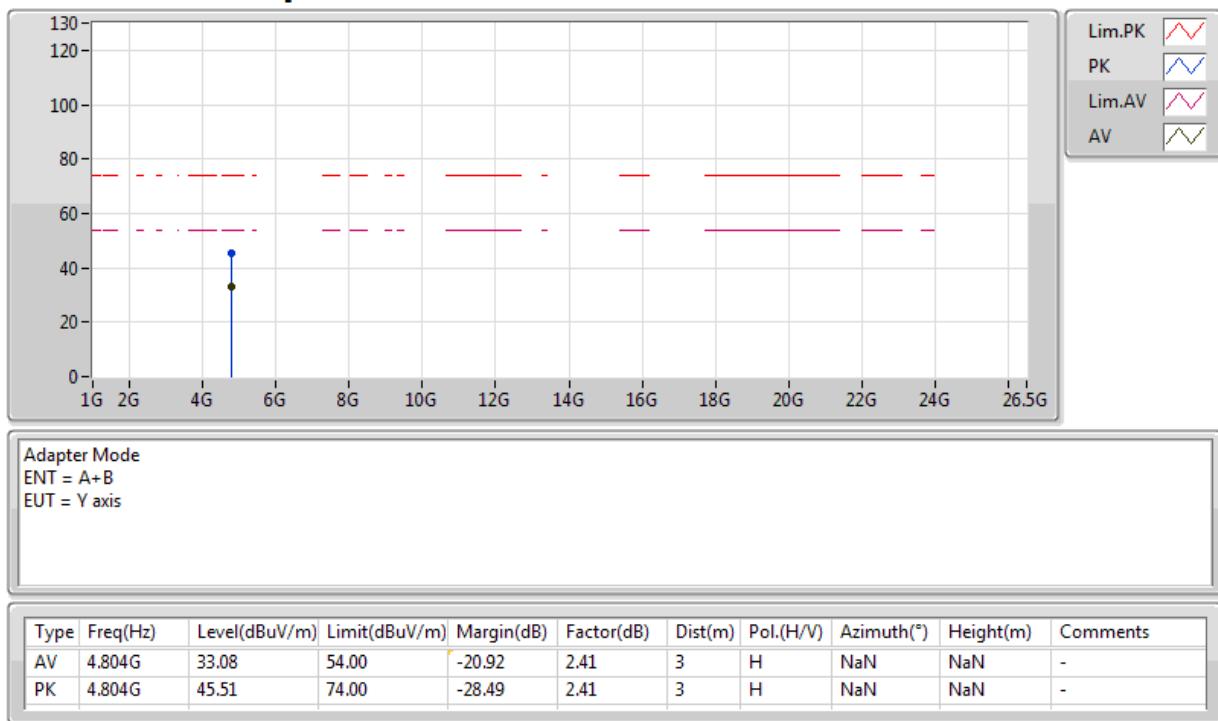
Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.322036G	52.32	54.00	-1.68	30.94	3	V	NaN	NaN	-
AV	2.402004G	99.27	Inf	-Inf	31.24	3	V	NaN	NaN	-
PK	2.321628G	59.52	74.00	-14.48	30.94	3	V	NaN	NaN	-
PK	2.401596G	100.88	Inf	-Inf	31.24	3	V	NaN	NaN	-

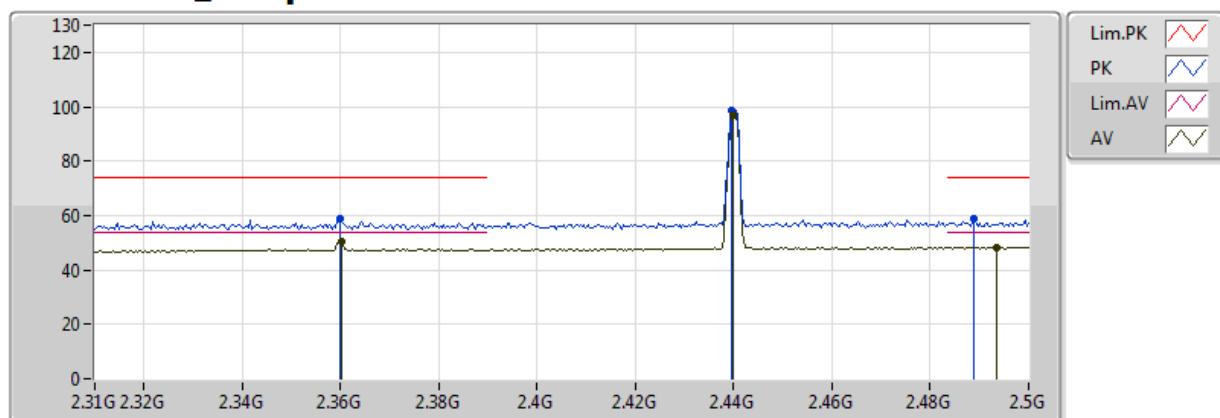
BT-LE(1Mbps)
2402MHz_Adapter


Adapter Mode
 ENT = A+B
 EUT = Y axis

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.402004G	98.92	Inf	-Inf	31.24	3	H	NaN	NaN	-
AV	2.322036G	53.19	54.00	-0.81	30.94	3	H	NaN	NaN	-
PK	2.4018G	100.65	Inf	-Inf	31.24	3	H	NaN	NaN	-
PK	2.321832G	59.83	74.00	-14.17	30.94	3	H	NaN	NaN	-

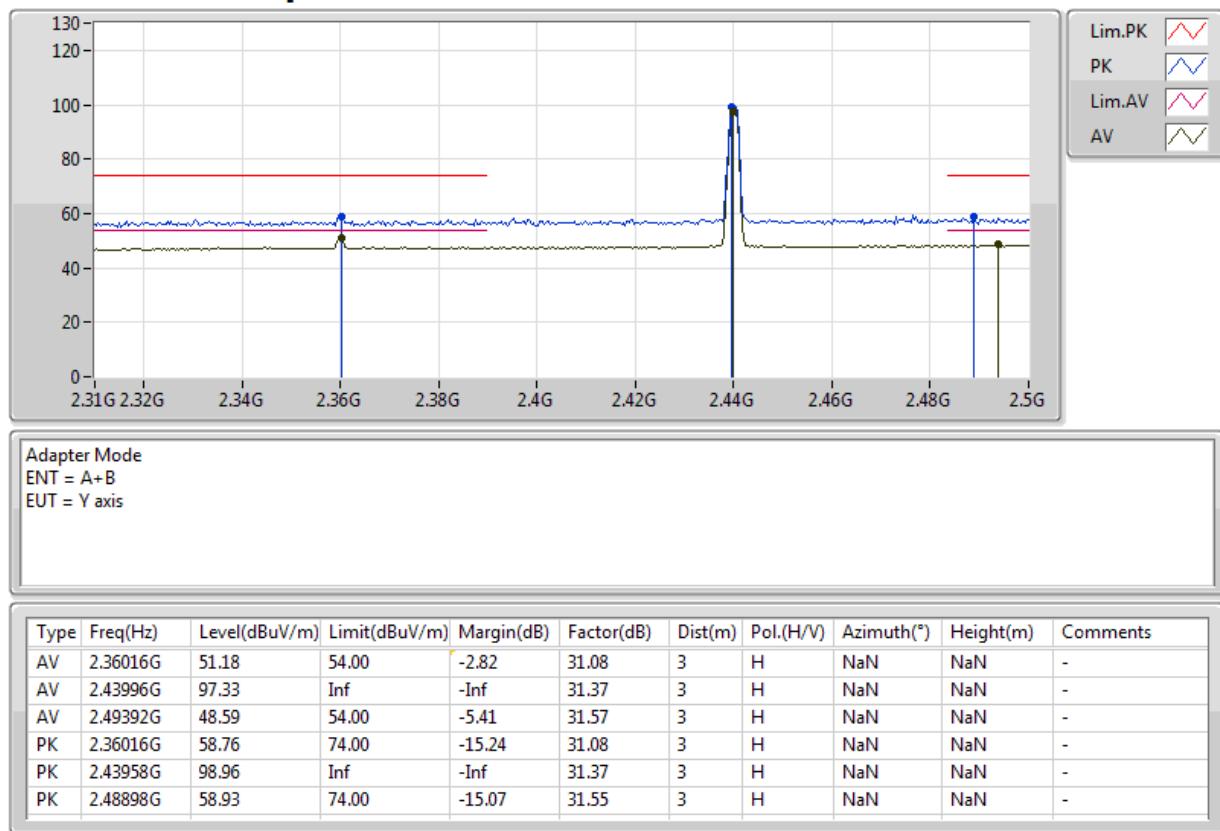
BT-LE(1Mbps)
2402MHz_Adapter


BT-LE(1Mbps)
2402MHz_Adapter


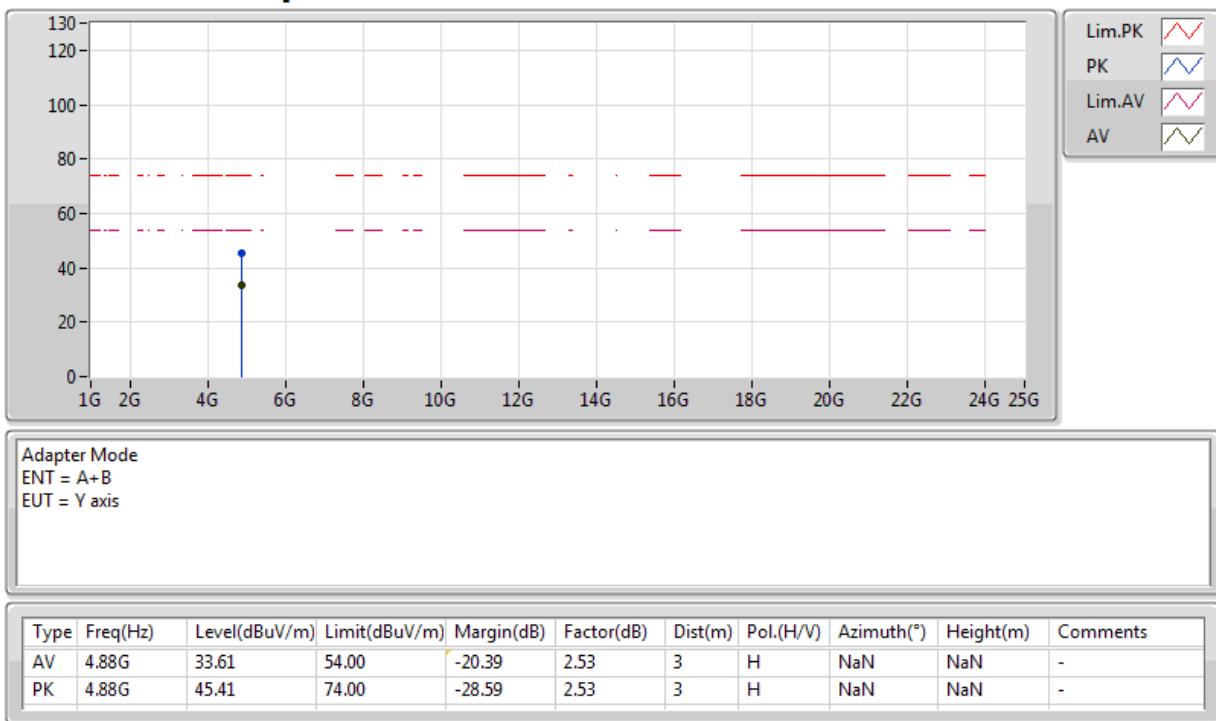
BT-LE(1Mbps)
2440MHz_Adapter


Adapter Mode
 ENT = A+B
 EUT = Y axis

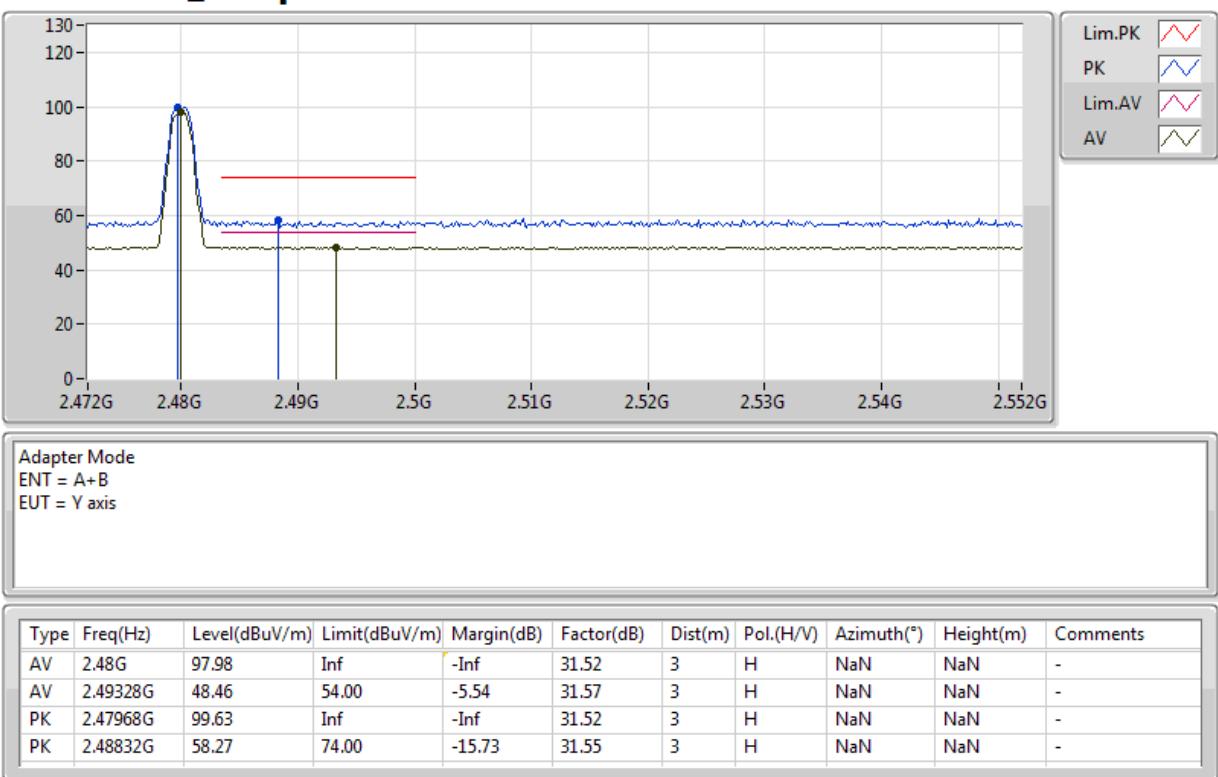
Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.36016G	50.44	54.00	-3.56	31.08	3	V	NaN	NaN	-
AV	2.43996G	96.89	Inf	-Inf	31.37	3	V	NaN	NaN	-
AV	2.49354G	48.33	54.00	-5.67	31.57	3	V	NaN	NaN	-
PK	2.35978G	58.75	74.00	-15.25	31.08	3	V	NaN	NaN	-
PK	2.43958G	98.42	Inf	-Inf	31.37	3	V	NaN	NaN	-
PK	2.48898G	58.66	74.00	-15.34	31.55	3	V	NaN	NaN	-

BT-LE(1Mbps)
2440MHz_Adapter


BT-LE(1Mbps)
2440MHz_Adapter


BT-LE(1Mbps)
2440MHz_Adapter


BT-LE(1Mbps)
2480MHz_Adapter


BT-LE(1Mbps)
2480MHz_Adapter


BT-LE(1Mbps)
2480MHz_Adapter


BT-LE(1Mbps)
2480MHz_Adapter
