

Test Laboratory: BACL . SAR Testing Lab

### #01\_WLAN2.4G\_802.11b 1Mbps\_Right Cheek\_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 40.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.33, 7.33, 7.33); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch6/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0861 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.128 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0870 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0710 W/kg

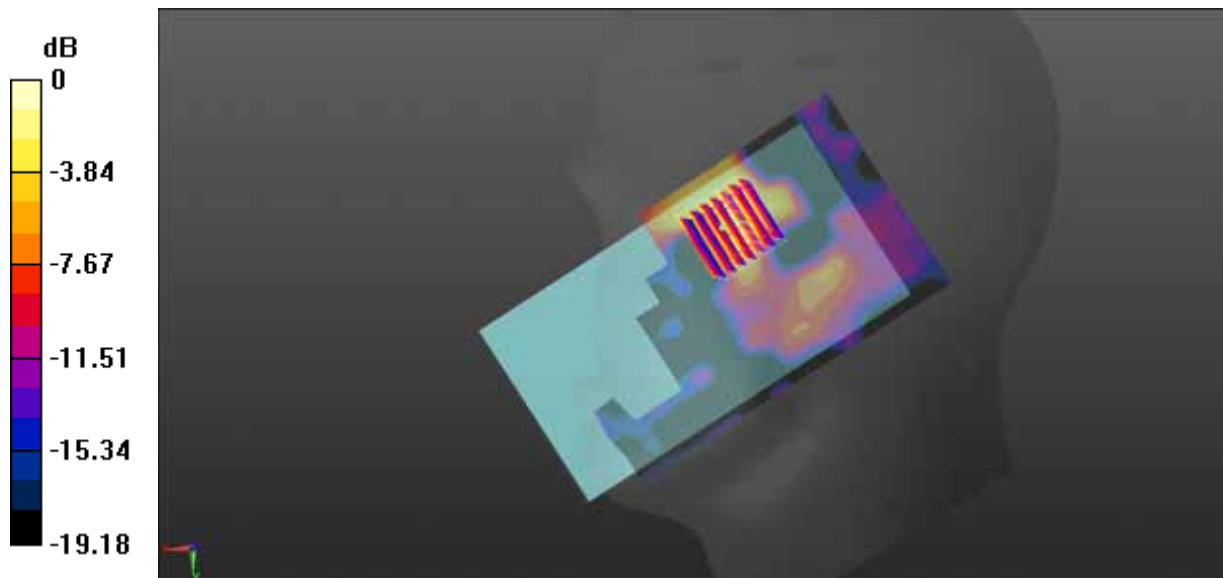

0 dB = 0.0710 W/kg = -11.49 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #02\_WLAN2.4G\_802.11b 1Mbps\_Right Tilted\_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 40.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.33, 7.33, 7.33); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch6/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0366 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.030 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0190 W/kg

**SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00673 W/kg**

Maximum value of SAR (measured) = 0.0160 W/kg

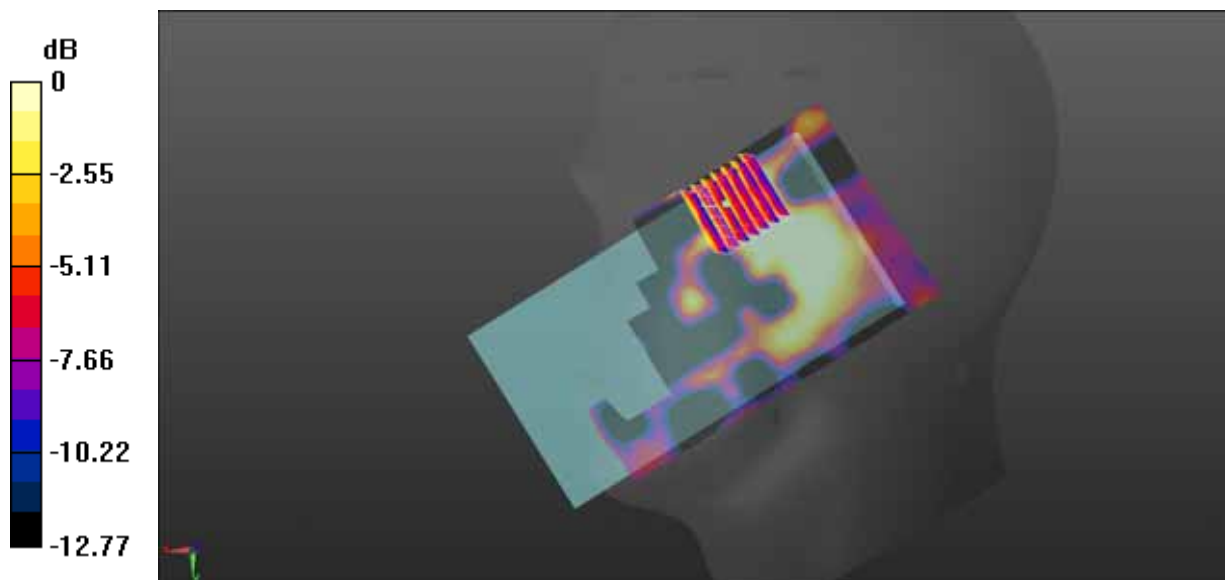

0 dB = 0.0160 W/kg = -17.96 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #03\_WLAN2.4G\_802.11b 1Mbps\_Left Cheek\_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 40.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.33, 7.33, 7.33); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch6/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0876 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.394 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0753 W/kg

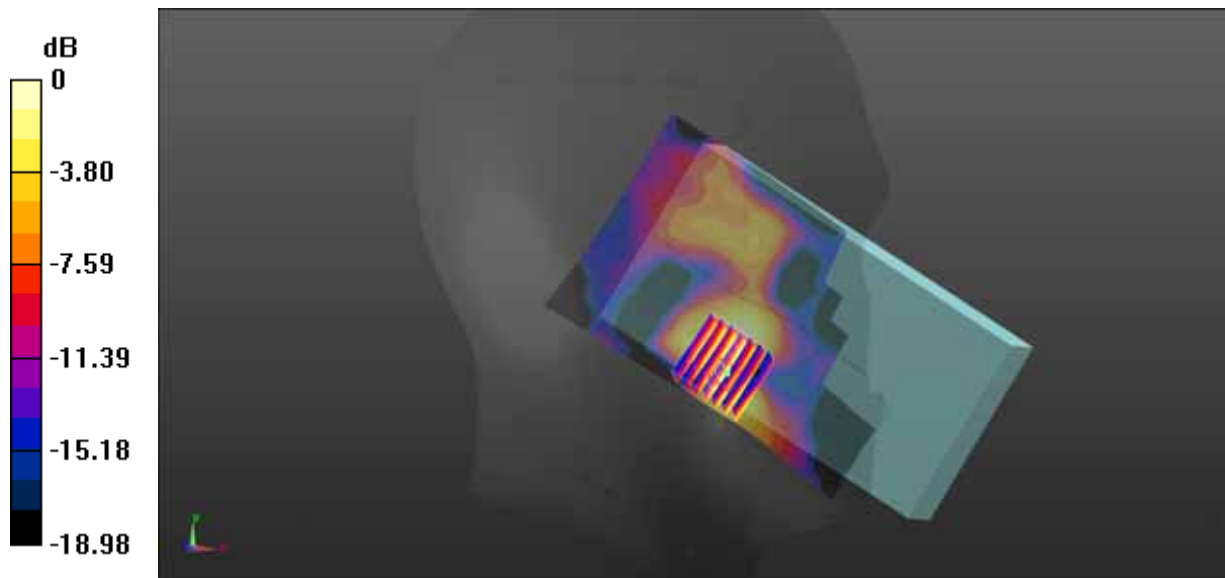

0 dB = 0.0753 W/kg = -11.23 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #04\_WLAN2.4G\_802.11b 1Mbps\_Left Tilted\_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 40.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.33, 7.33, 7.33); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch6/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0243 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.536 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0300 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00907 W/kg**

Maximum value of SAR (measured) = 0.0242 W/kg

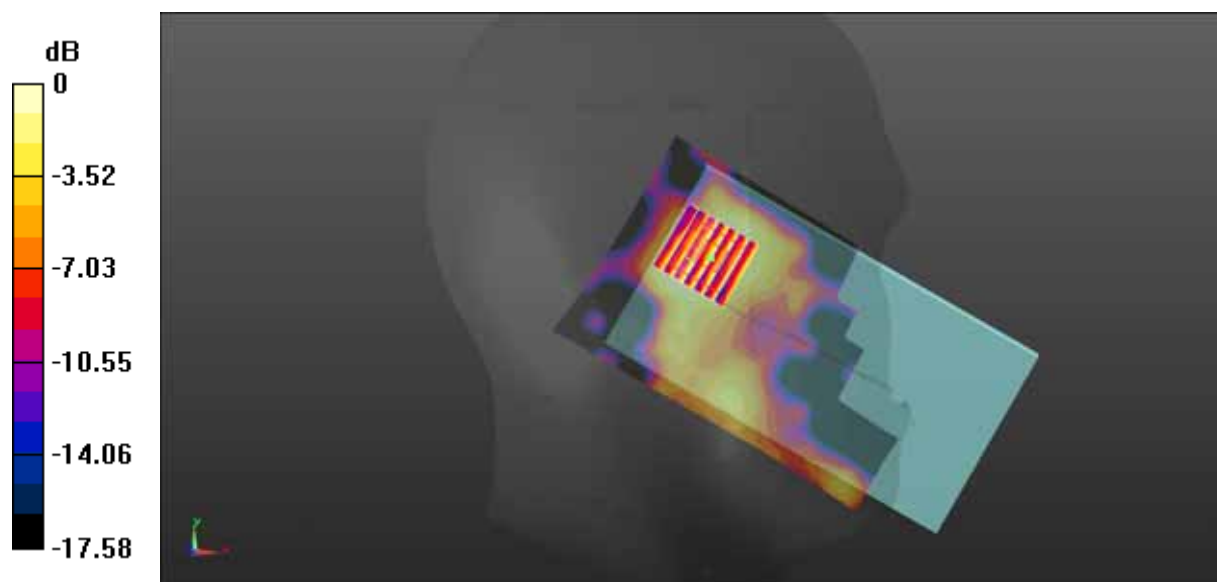

0 dB = 0.0242 W/kg = -16.16 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #05\_WLAN2.4G\_802.11b 1Mbps\_Left Cheek\_Ch1

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.788$  S/m;  $\epsilon_r = 40.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.33, 7.33, 7.33); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch1/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0753 W/kg


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.281 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.0717 W/kg

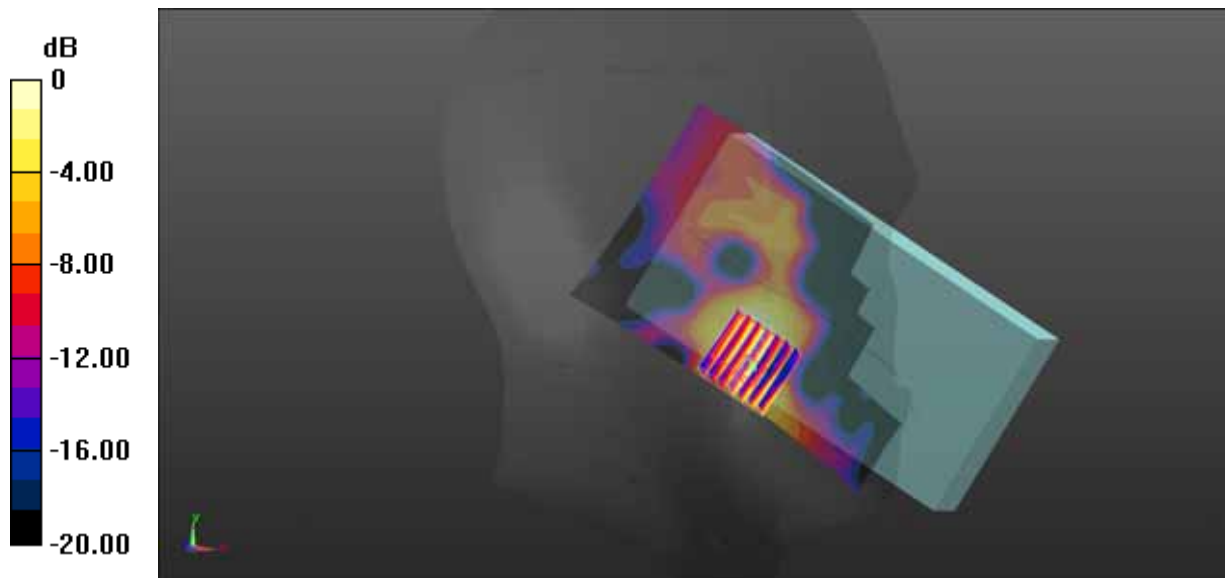

0 dB = 0.0717 W/kg = -11.44 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #06\_WLAN2.4G\_802.11b 1Mbps\_Left Cheek\_Ch11

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.827$  S/m;  $\epsilon_r = 40.782$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.33, 7.33, 7.33); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch11/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0937 W/kg


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.340 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0870 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0677 W/kg

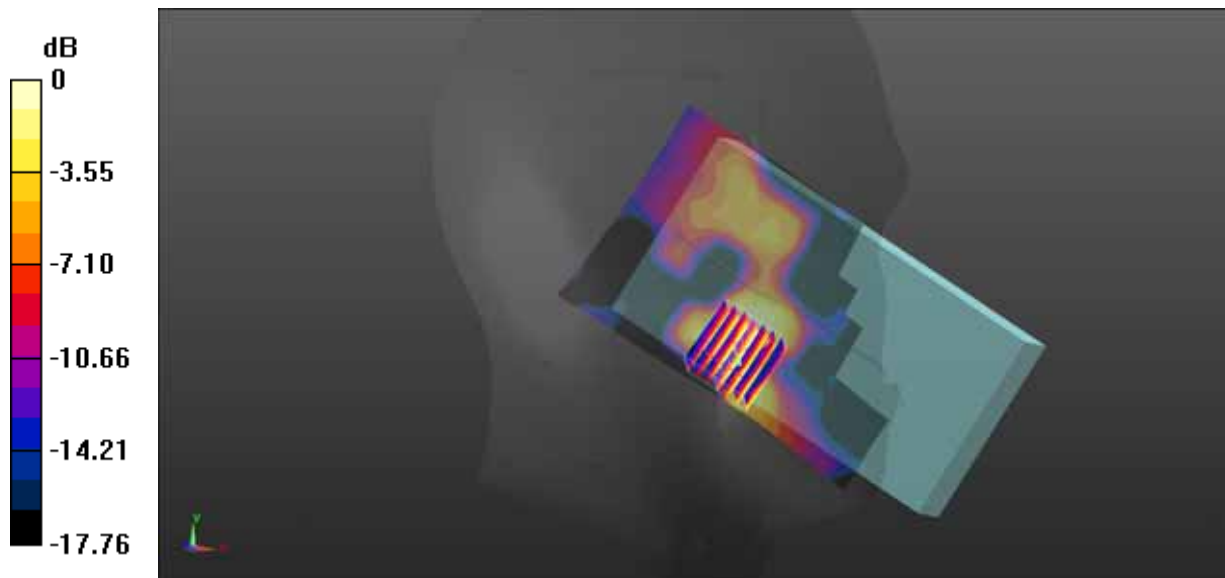

0 dB = 0.0677 W/kg = -11.69 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #07\_WLAN2.4G\_802.11b 1Mbps\_Front\_10mm\_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.002$  S/m;  $\epsilon_r = 52.705$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.48, 7.48, 7.48); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch6/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0306 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.411 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0320 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00697 W/kg**

Maximum value of SAR (measured) = 0.0251 W/kg

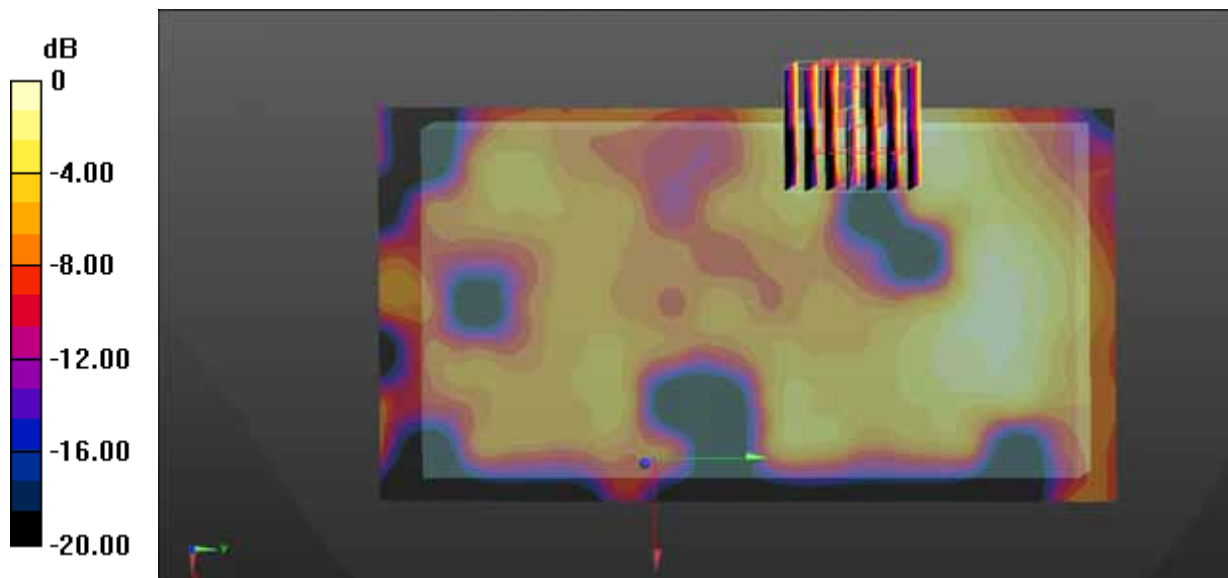

0 dB = 0.0251 W/kg = -16.00 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #08\_WLAN2.4G\_802.11b 1Mbps\_Back\_10mm\_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.002$  S/m;  $\epsilon_r = 52.705$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.48, 7.48, 7.48); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch6/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0363 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.814 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0590 W/kg

**SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.0096 W/kg**

Maximum value of SAR (measured) = 0.0329 W/kg

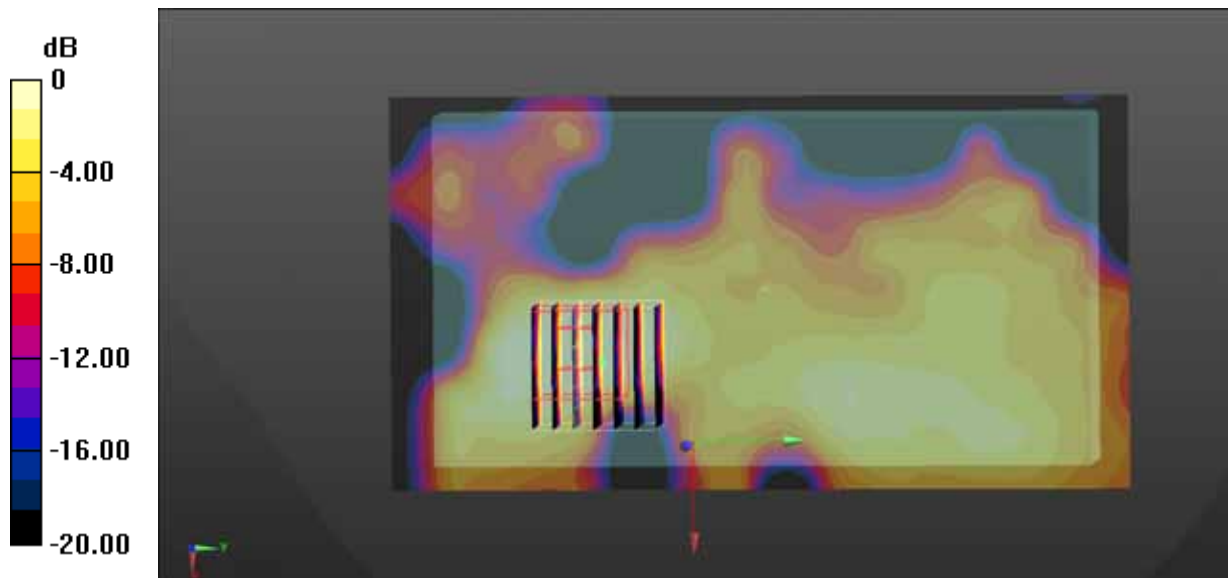

0 dB = 0.0329 W/kg = -14.83 dBW/kg



Test Laboratory: BACL . SAR Testing Lab

### #09\_WLAN2.4G\_802.11b 1Mbps\_Left Side\_10mm\_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.002$  S/m;  $\epsilon_r = 52.705$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.48, 7.48, 7.48); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch6/Area Scan (51x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0523 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.797 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0630 W/kg

**SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0485 W/kg

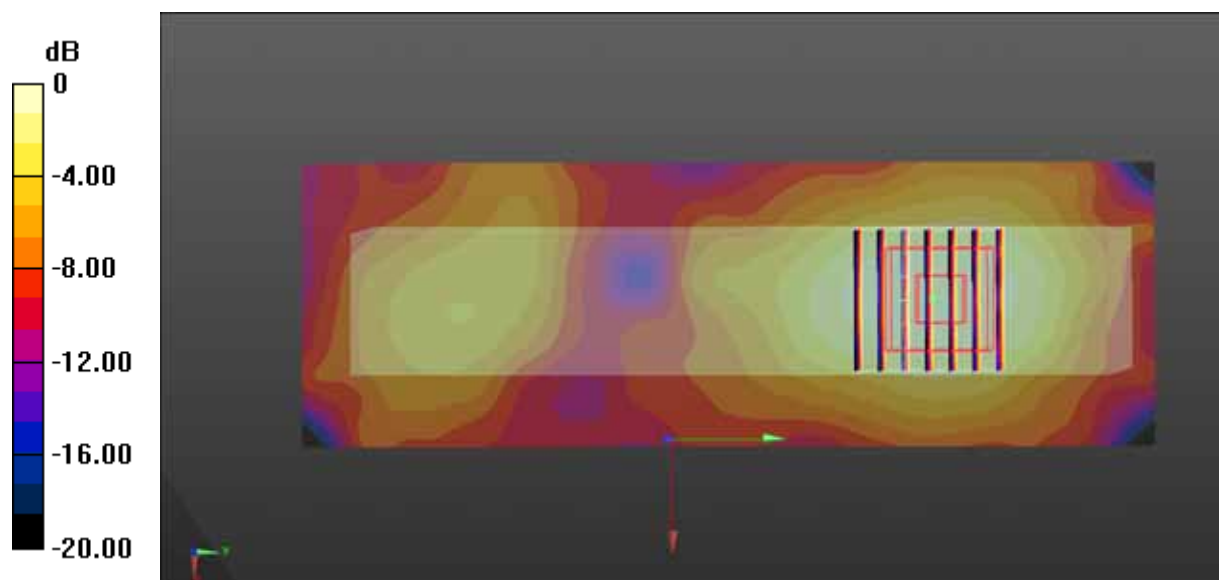

0 dB = 0.0485 W/kg = -13.14 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #10\_WLAN2.4G\_802.11b 1Mbps\_Left Side\_10mm\_Ch1

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.977$  S/m;  $\epsilon_r = 52.755$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.48, 7.48, 7.48); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch1/Area Scan (51x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0495 W/kg


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.808 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0600 W/kg

**SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0475 W/kg

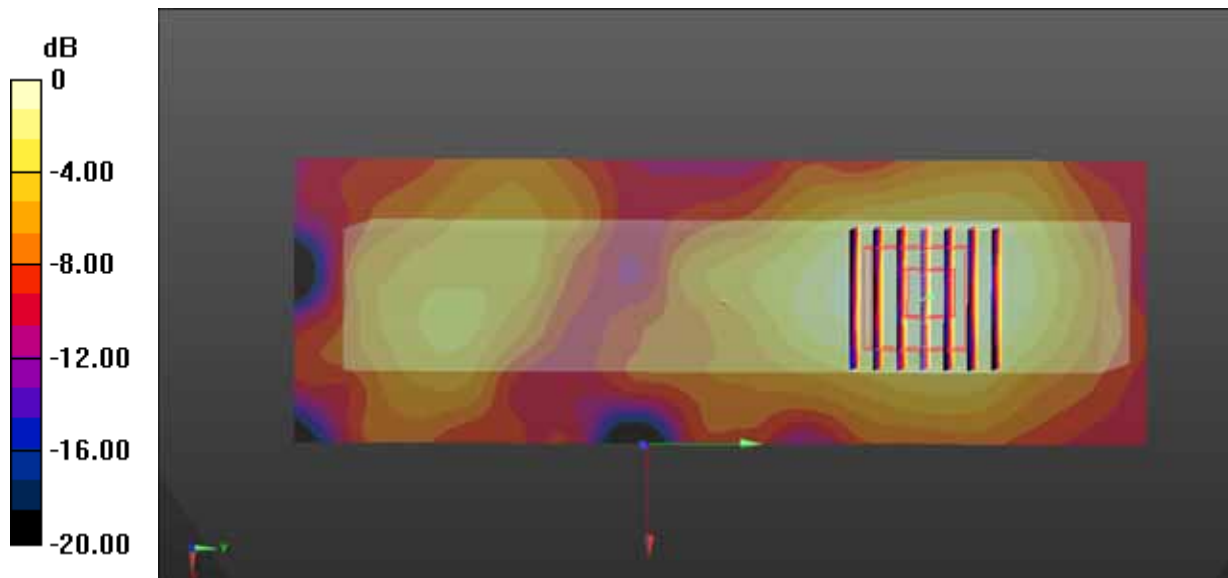

0 dB = 0.0475 W/kg = -13.23 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

**#11\_WLAN2.4G\_802.11b 1Mbps\_Left Side\_10mm\_Ch11**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 2.026 \text{ S/m}$ ;  $\epsilon_r = 52.671$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.48, 7.48, 7.48); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch11/Area Scan (51x151x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0537 W/kg


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.730 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0630 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0500 W/kg

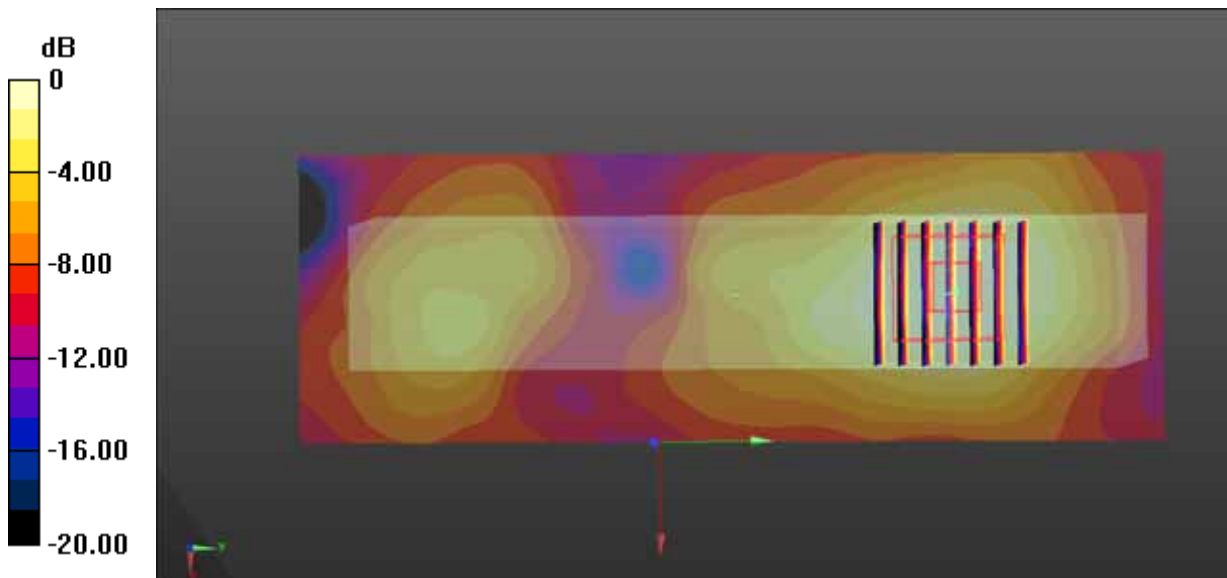

0 dB = 0.0500 W/kg = -13.01 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #12\_WLAN5G\_802.11a 6Mbps\_Right Cheek\_Ch60

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.863$  S/m;  $\epsilon_r = 36.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.55, 5.55, 5.55); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch60/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.127 W/kg


**Ch60/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.365 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.113 W/kg

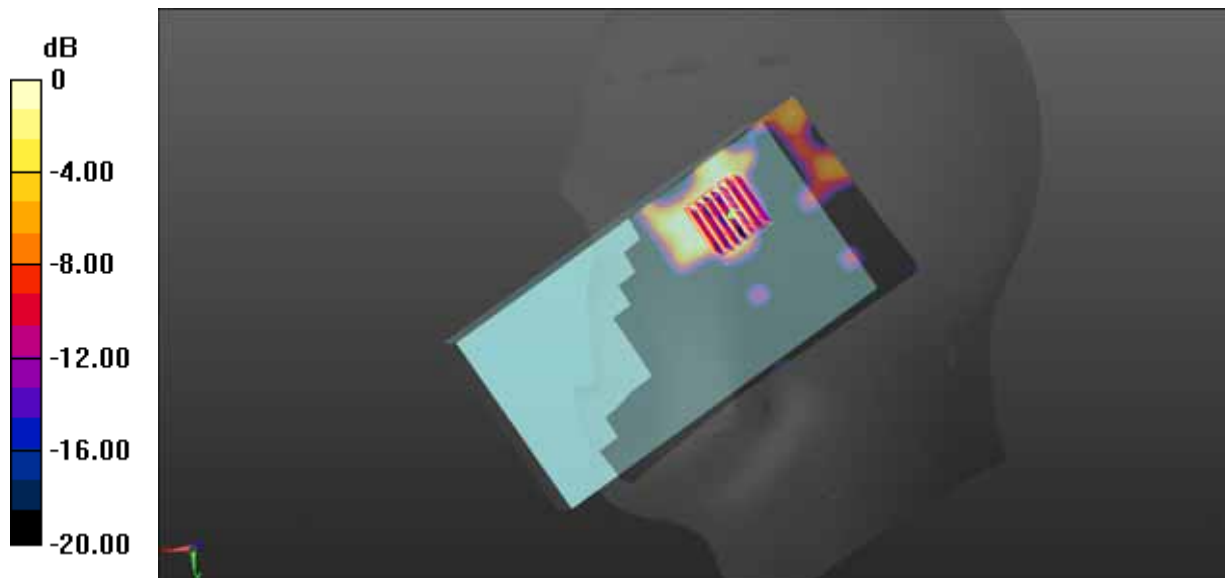

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #13\_WLAN5G\_802.11a 6Mbps\_Right Tilted\_Ch60

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.863$  S/m;  $\epsilon_r = 36.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.55, 5.55, 5.55); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch60/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0523 W/kg


**Ch60/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.020 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00421 W/kg**

Maximum value of SAR (measured) = 0.0408 W/kg

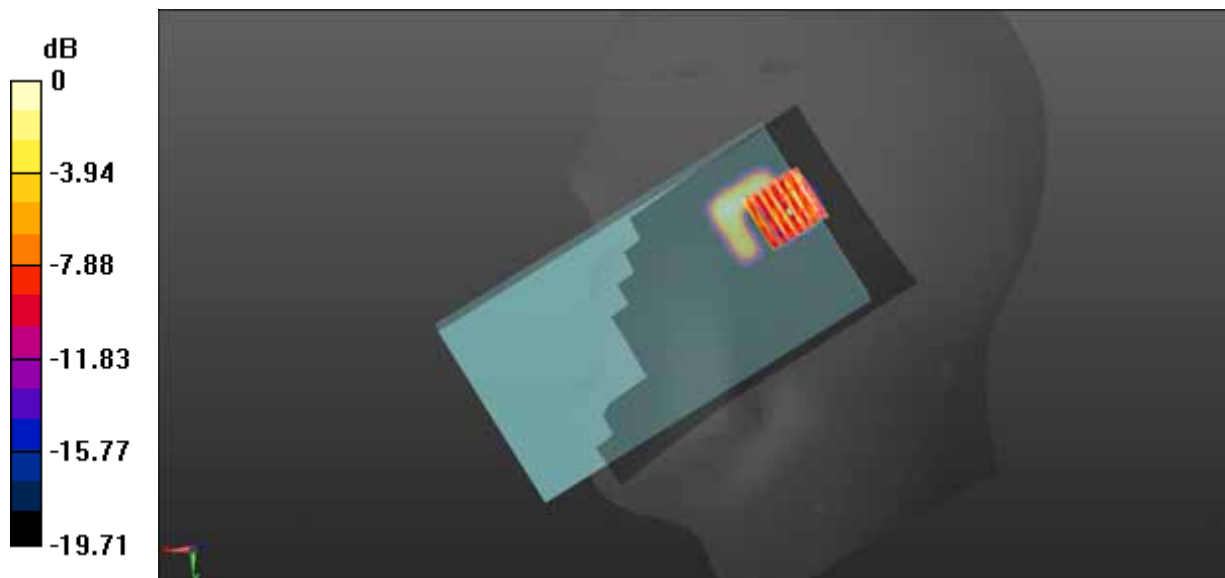

0 dB = 0.0408 W/kg = -13.89 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #14\_WLAN5G\_802.11a 6Mbps\_Left Cheek\_Ch60

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.863$  S/m;  $\epsilon_r = 36.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.55, 5.55, 5.55); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch60/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.133 W/kg


**Ch60/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.329 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.115 W/kg

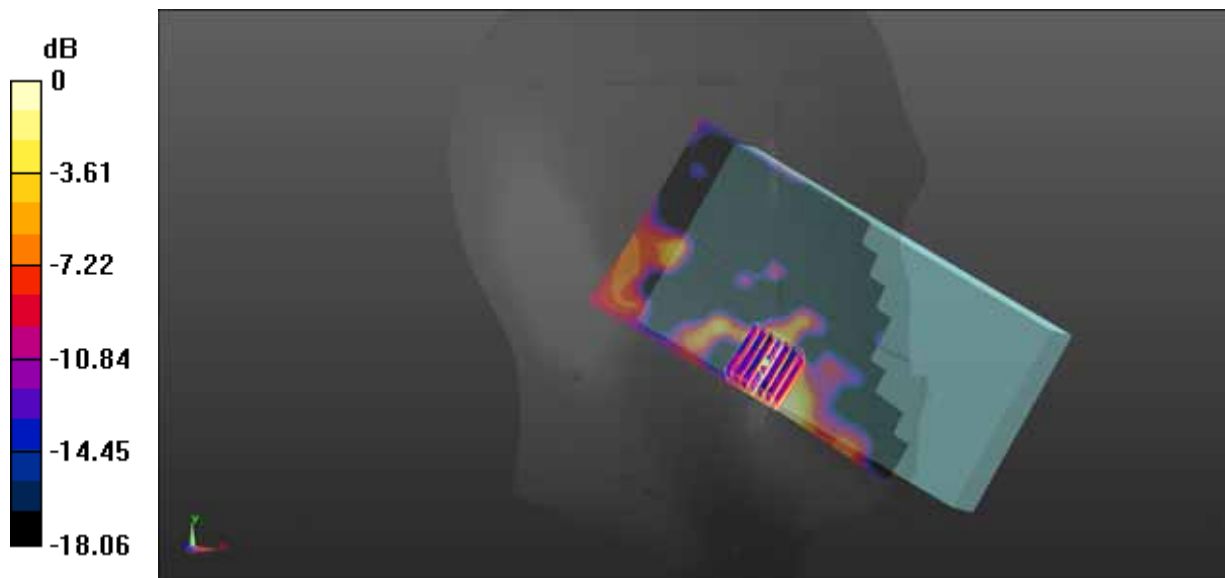

0 dB = 0.115 W/kg = -9.39 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #15\_WLAN5G\_802.11a 6Mbps\_Left Tilted\_Ch60

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.863$  S/m;  $\epsilon_r = 36.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.55, 5.55, 5.55); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch60/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0727 W/kg


**Ch60/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.723 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.133 W/kg

**SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00341 W/kg**

Maximum value of SAR (measured) = 0.0299 W/kg

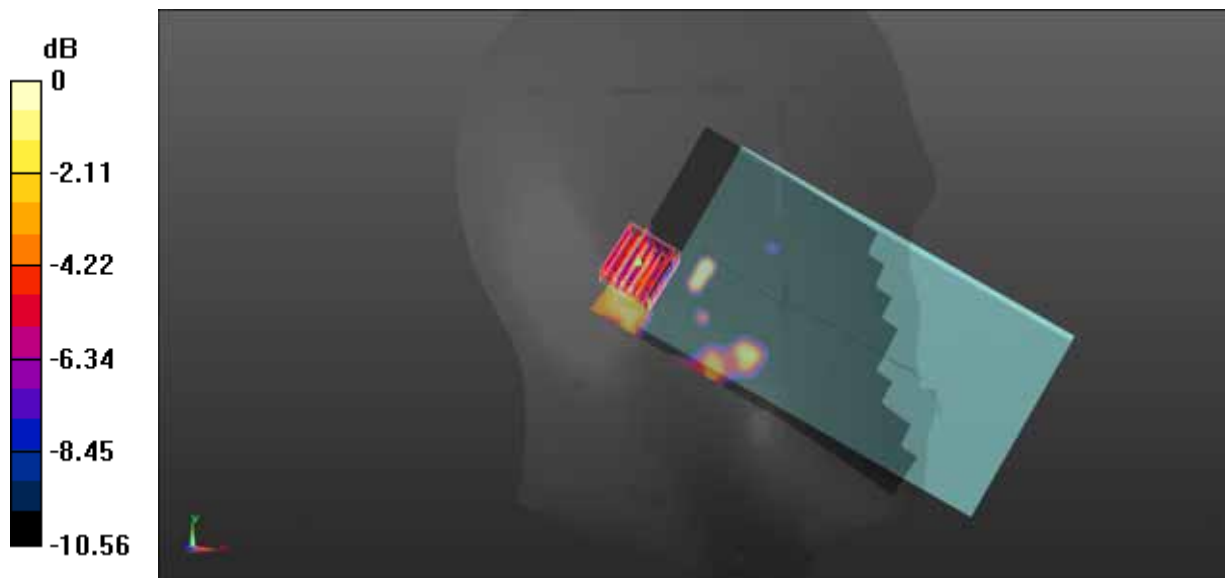

0 dB = 0.0299 W/kg = -15.24 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

**#16\_WLAN5G\_802.11a 6Mbps\_Right Cheek\_Ch52**

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.809$  S/m;  $\epsilon_r = 36.296$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.55, 5.55, 5.55); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch52/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.202 W/kg


**Ch52/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.087 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.166 W/kg

**SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.110 W/kg

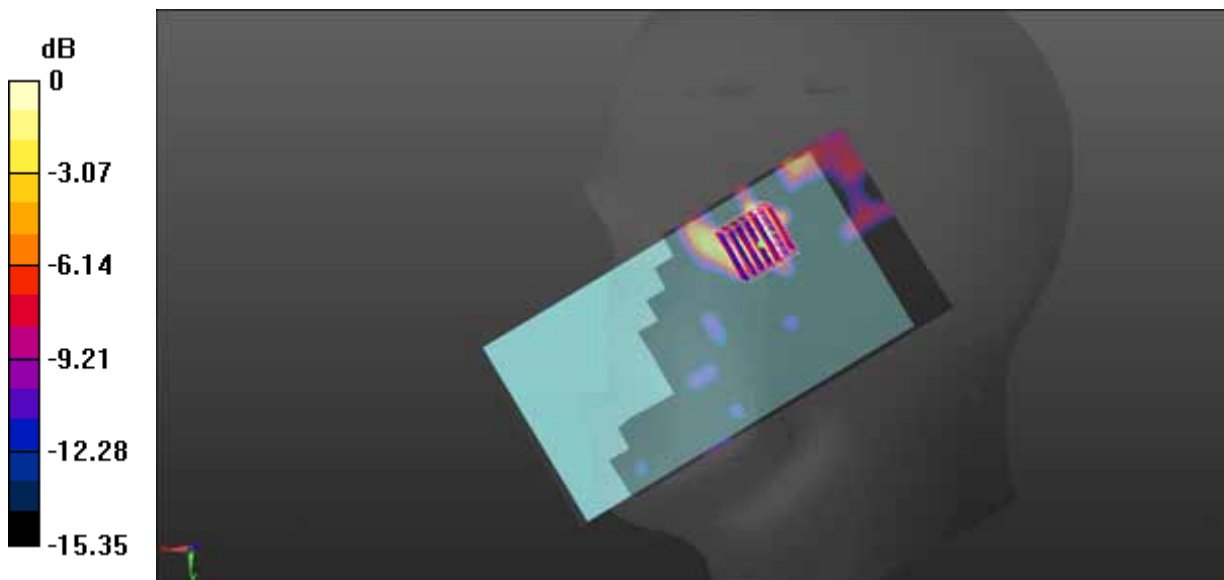

0 dB = 0.110 W/kg = -9.59 dBW/kg



Test Laboratory: BACL . SAR Testing Lab

### #17\_WLAN5G\_802.11a 6Mbps\_Right Cheek\_Ch64

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.893$  S/m;  $\epsilon_r = 36.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.55, 5.55, 5.55); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch64/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.225 W/kg


**Ch64/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.019 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.182 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.120 W/kg

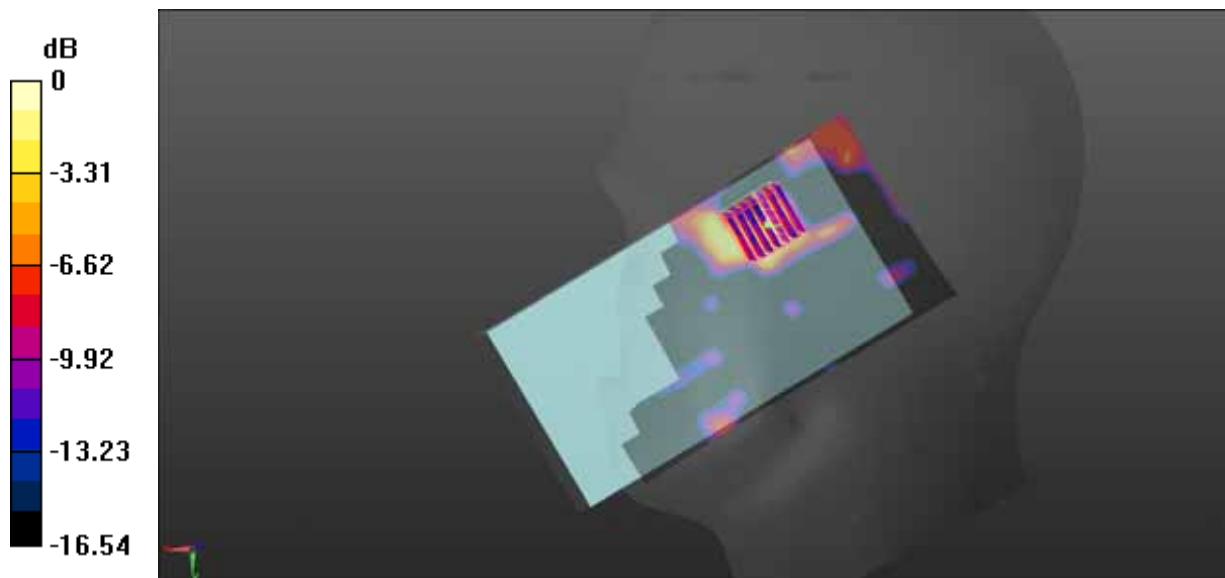

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #18\_WLAN5G\_802.11a 6Mbps\_Right Cheek\_Ch116

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.218$  S/m;  $\epsilon_r = 35.625$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.9, 4.9, 4.9); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch116/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.216 W/kg


**Ch116/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.689 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.364 W/kg

**SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.224 W/kg

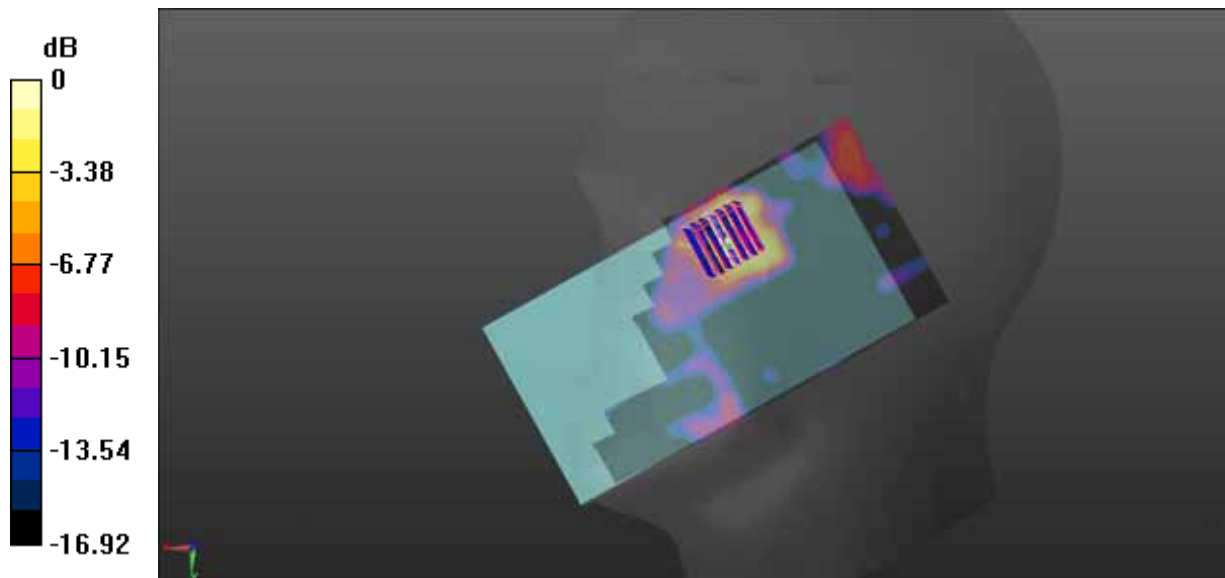

0 dB = 0.224 W/kg = -6.50 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #19\_WLAN5G\_802.11a 6Mbps\_Right Tilted\_Ch116

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.218$  S/m;  $\epsilon_r = 35.625$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.9, 4.9, 4.9); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch116/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0944 W/kg


**Ch116/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.463 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.177 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.00848 W/kg**

Maximum value of SAR (measured) = 0.0649 W/kg

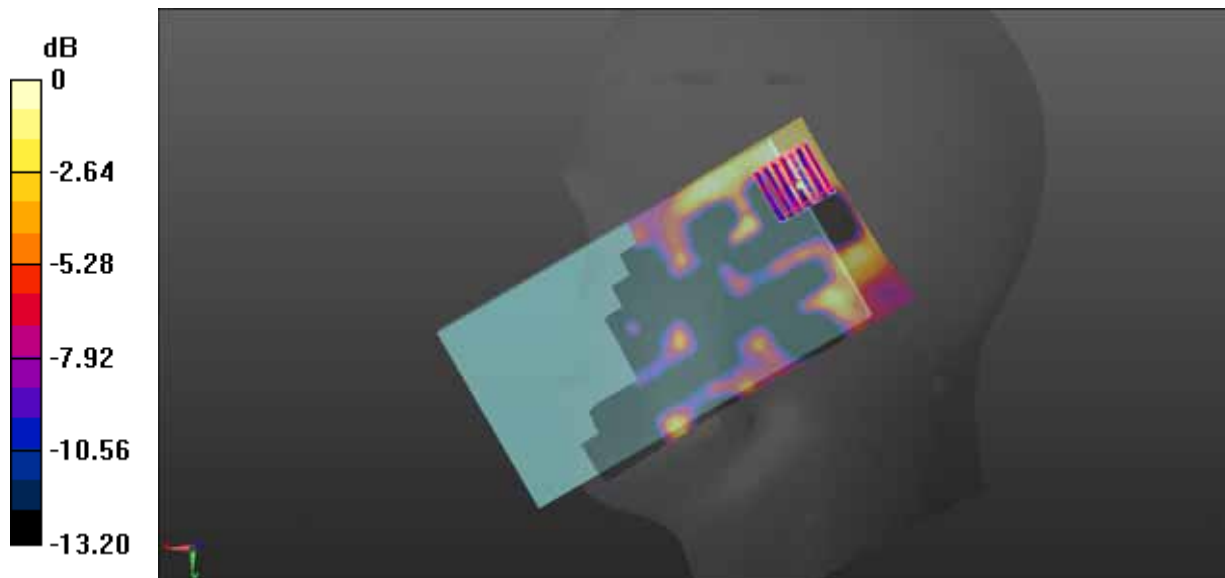

0 dB = 0.0649 W/kg = -11.88 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

**#20\_WLAN5G\_802.11a 6Mbps\_Left Cheek\_Ch116**

Communication System: 802.11a; Frequency: 5580 MHz;Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 5.218 \text{ S/m}$ ;  $\epsilon_r = 35.625$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.9, 4.9, 4.9); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7437)

**Ch116/Area Scan (91x181x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.261 W/kg


**Ch116/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 7.234 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.309 W/kg

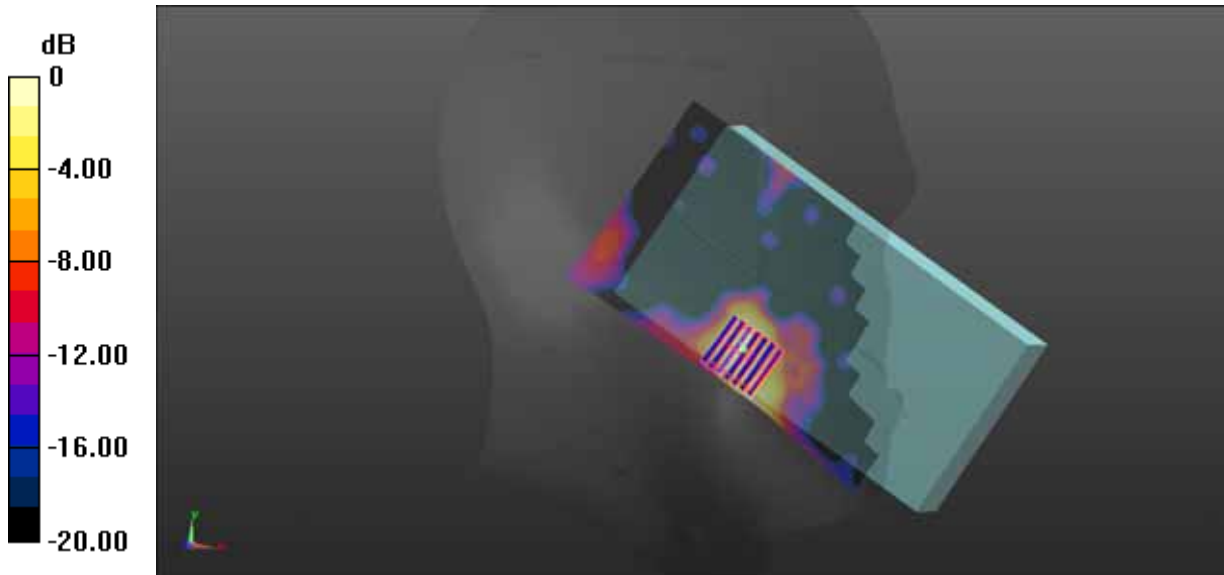

0 dB = 0.309 W/kg = -5.10 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

**#21\_WLAN5G\_802.11a 6Mbps\_Left Tilted\_Ch116**

Communication System: 802.11a; Frequency: 5580 MHz;Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 5.218 \text{ S/m}$ ;  $\epsilon_r = 35.625$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.9, 4.9, 4.9); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7437)

**Ch116/Area Scan (91x181x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0844 W/kg


**Ch116/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 2.998 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.231 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00354 W/kg**

Maximum value of SAR (measured) = 0.0491 W/kg

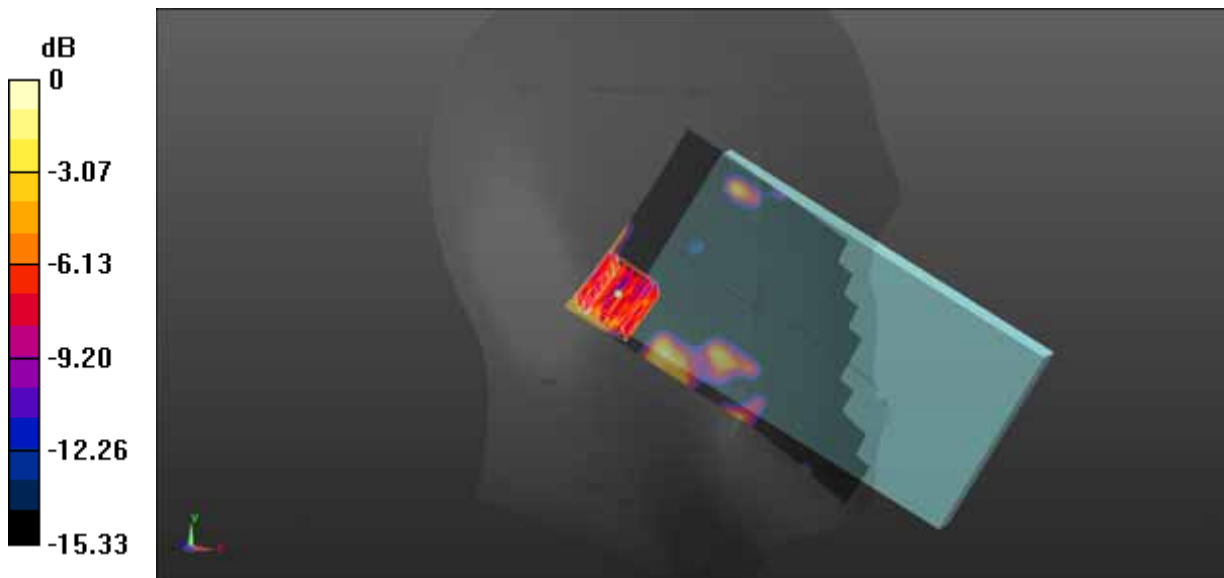

0 dB = 0.0491 W/kg = -13.09 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #22\_WLAN5G\_802.11a 6Mbps\_Left Cheek\_Ch100

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.12$  S/m;  $\epsilon_r = 35.789$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.9, 4.9, 4.9); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch100/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.211 W/kg


**Ch100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.824 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.293 W/kg

**SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.183 W/kg

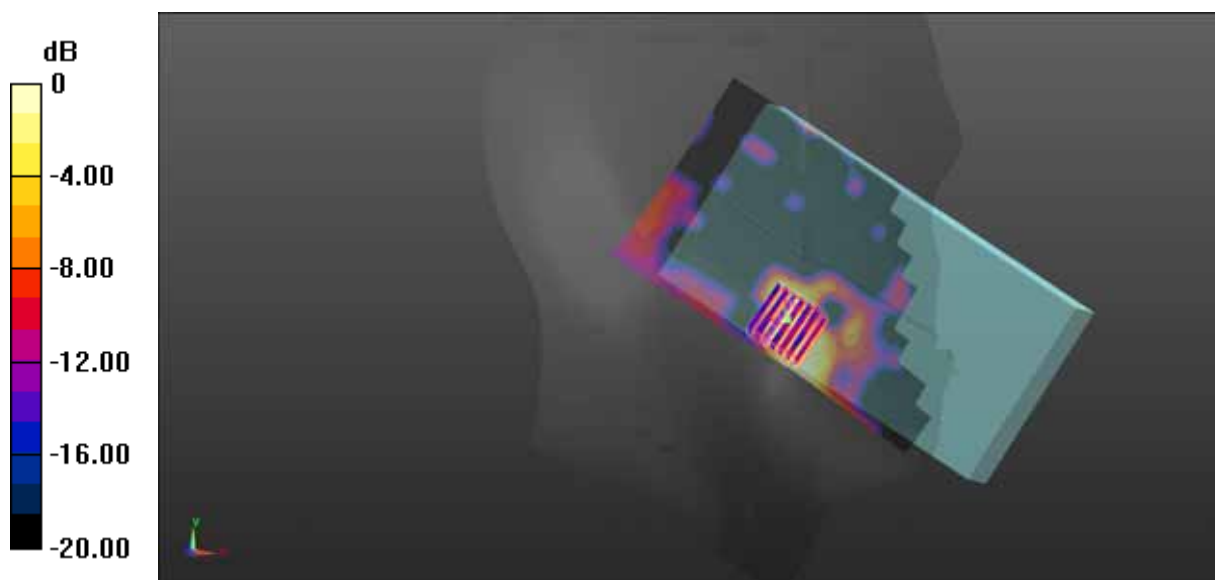

0 dB = 0.183 W/kg = -7.38 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #23\_WLAN5G\_802.11a 6Mbps\_Left Cheek\_Ch140

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.368$  S/m;  $\epsilon_r = 35.367$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch140/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.313 W/kg


**Ch140/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.317 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.588 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.271 W/kg

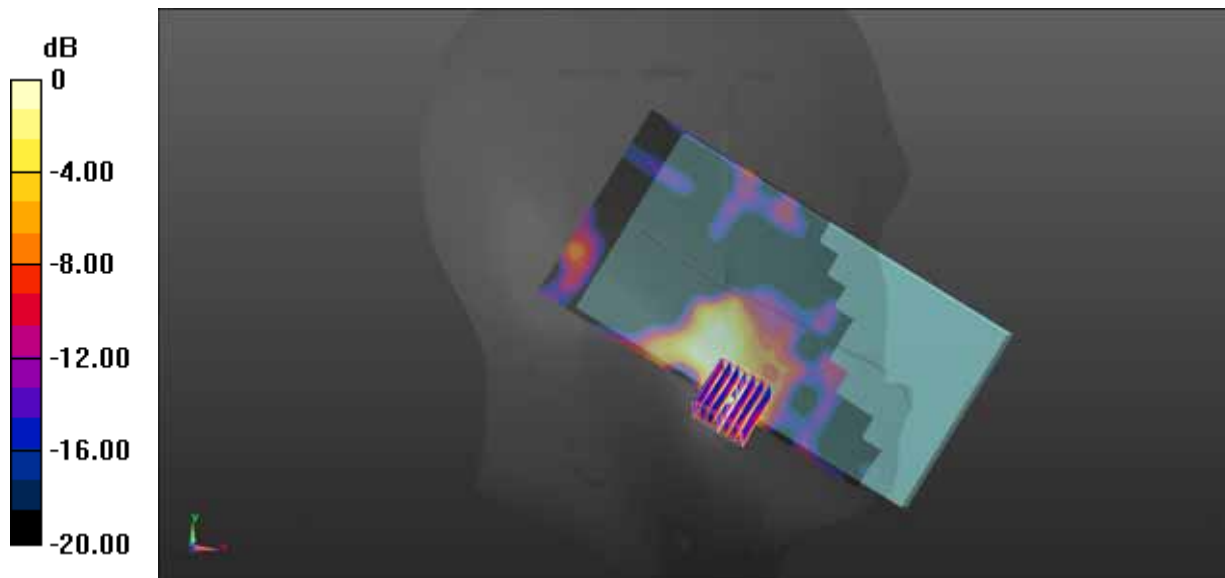

0 dB = 0.271 W/kg = -5.67 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #24\_WLAN5G\_802.11a 6Mbps\_Right Cheek\_Ch157

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.477$  S/m;  $\epsilon_r = 35.206$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch157/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.214 W/kg


**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.214 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.345 W/kg

**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.215 W/kg

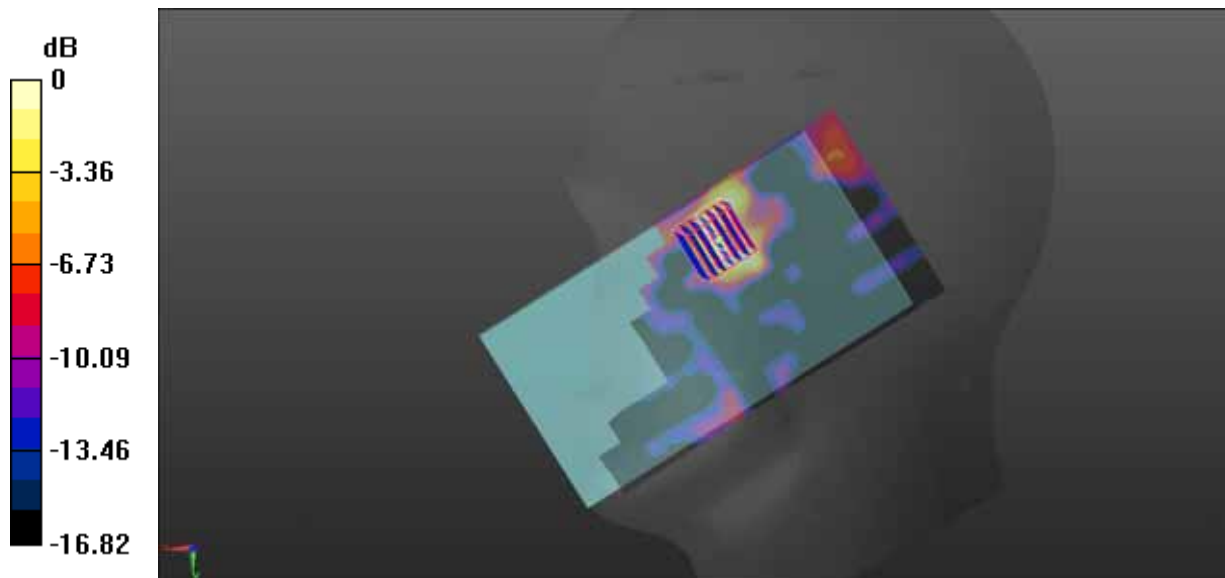

0 dB = 0.215 W/kg = -6.68 dBW/kg



Test Laboratory: BACL . SAR Testing Lab

### #25\_WLAN5G\_802.11a 6Mbps\_Right Tilted\_Ch157

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.477$  S/m;  $\epsilon_r = 35.206$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch157/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.123 W/kg


**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.107 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.178 W/kg

**SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0851 W/kg

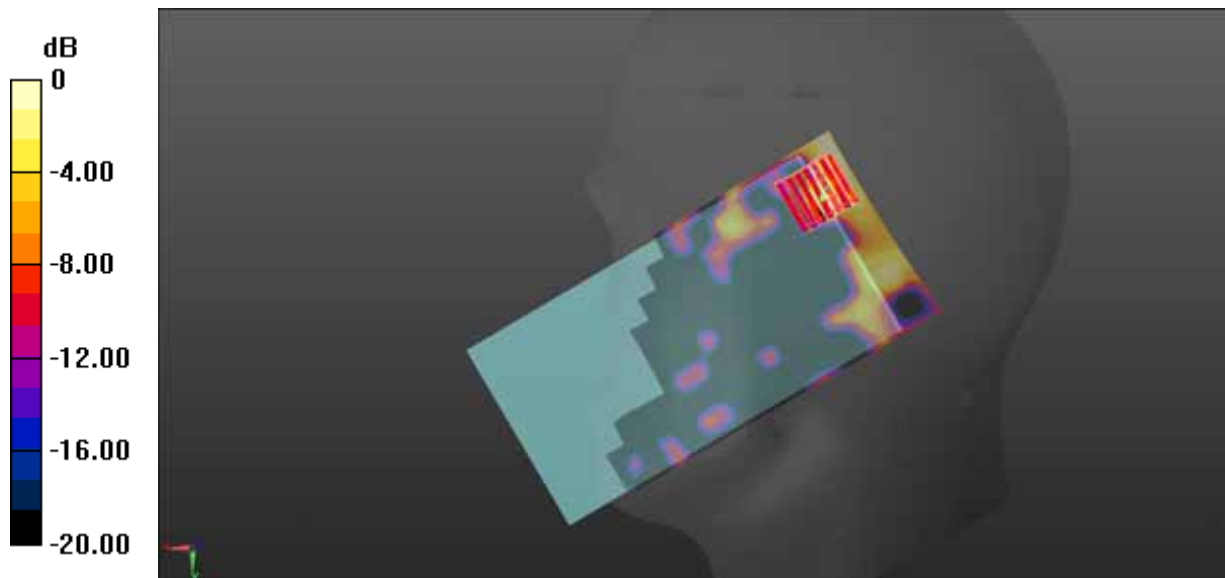

0 dB = 0.0851 W/kg = -10.70 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #26\_WLAN5G\_802.11a 6Mbps\_Left Cheek\_Ch157

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.477$  S/m;  $\epsilon_r = 35.206$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch157/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.298 W/kg


**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.212 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.493 W/kg

**SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.313 W/kg

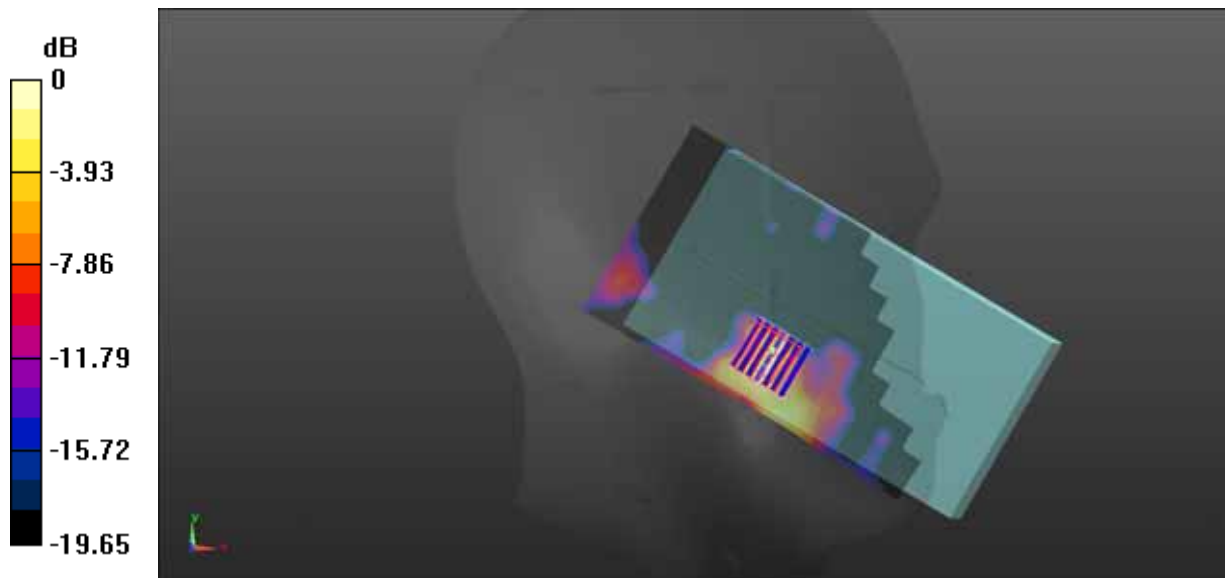

0 dB = 0.313 W/kg = -5.04 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #27\_WLAN5G\_802.11a 6Mbps\_Left Tilted\_Ch157

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.477$  S/m;  $\epsilon_r = 35.206$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch157/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0741 W/kg


**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.245 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.154 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00364 W/kg**

Maximum value of SAR (measured) = 0.0651 W/kg

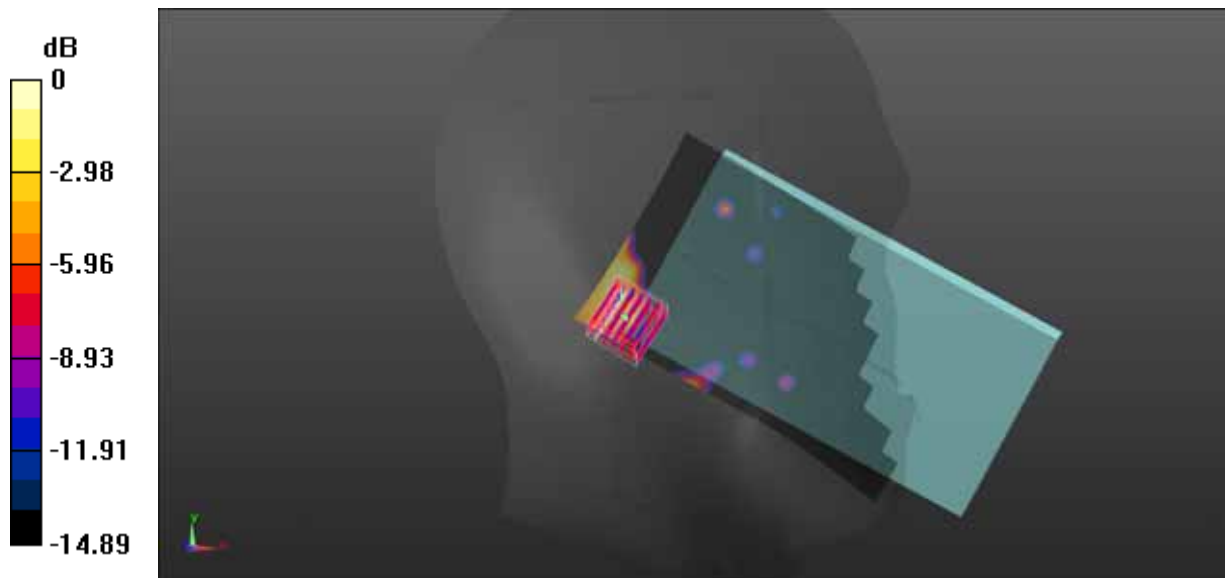

0 dB = 0.0651 W/kg = -11.86 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #28\_WLAN5G\_802.11a 6Mbps\_Left Cheek\_Ch149

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.424$  S/m;  $\epsilon_r = 35.265$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch149/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.385 W/kg


**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.859 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.566 W/kg

**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.341 W/kg

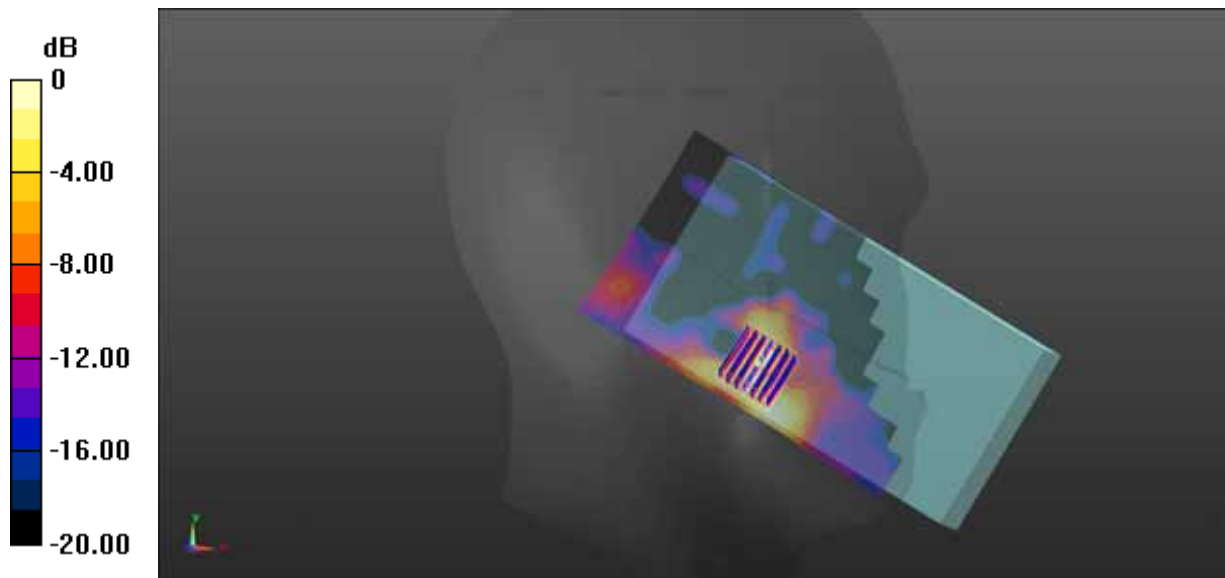

0 dB = 0.341 W/kg = -4.67 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

## #29\_WLAN5G\_802.11a 6Mbps\_Left Cheek\_Ch165

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: HSL\_5G Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.521$  S/m;  $\epsilon_r = 35.112$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch165/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.303 W/kg


**Ch165/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.670 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.521 W/kg

**SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.295 W/kg

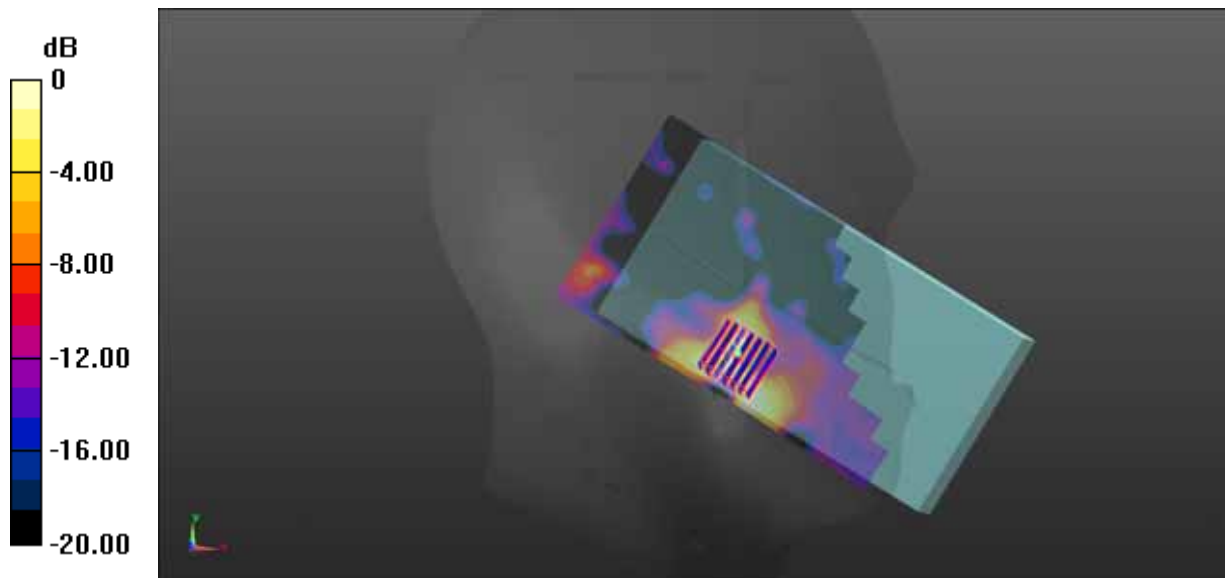

0 dB = 0.295 W/kg = -5.30 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

**#30\_WLAN5G\_802.11a 6Mbps\_Front\_10mm\_Ch60**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5300 \text{ MHz}$ ;  $\sigma = 5.362 \text{ S/m}$ ;  $\epsilon_r = 47.883$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.94, 4.94, 4.94); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch60/Area Scan (121x181x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0421 W/kg


**Ch60/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 2.530 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.156 W/kg

**SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00344 W/kg**

Maximum value of SAR (measured) = 0.0332 W/kg

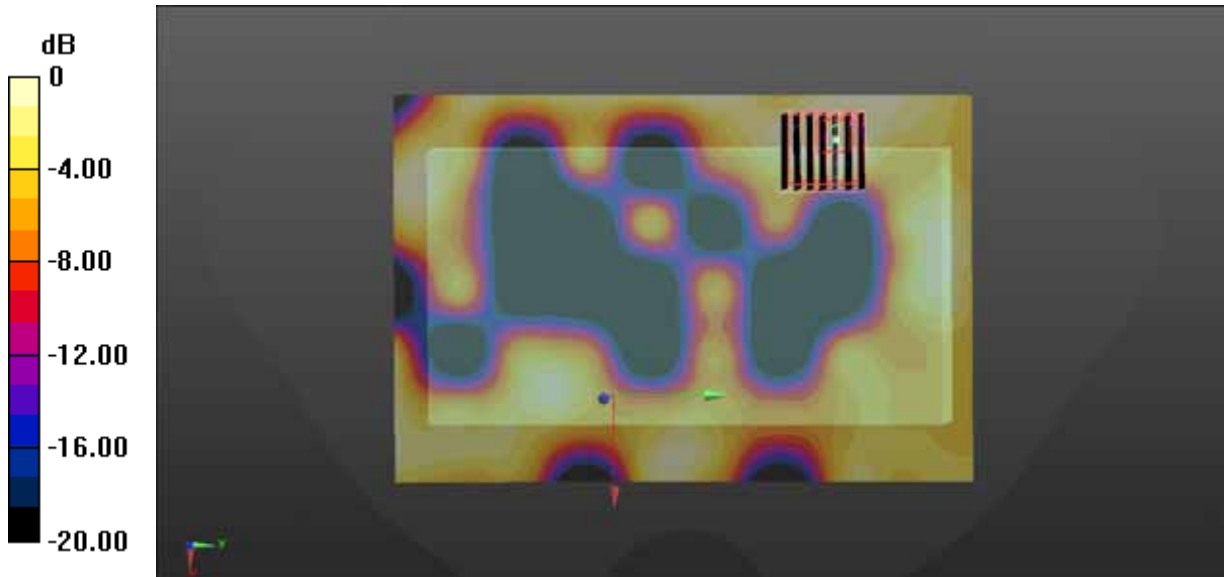

0 dB = 0.0332 W/kg = -14.79 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

**#31\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch60**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5300 \text{ MHz}$ ;  $\sigma = 5.362 \text{ S/m}$ ;  $\epsilon_r = 47.883$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.94, 4.94, 4.94); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch60/Area Scan (121x181x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.557 W/kg


**Ch60/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 7.813 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.786 W/kg

**SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.468 W/kg

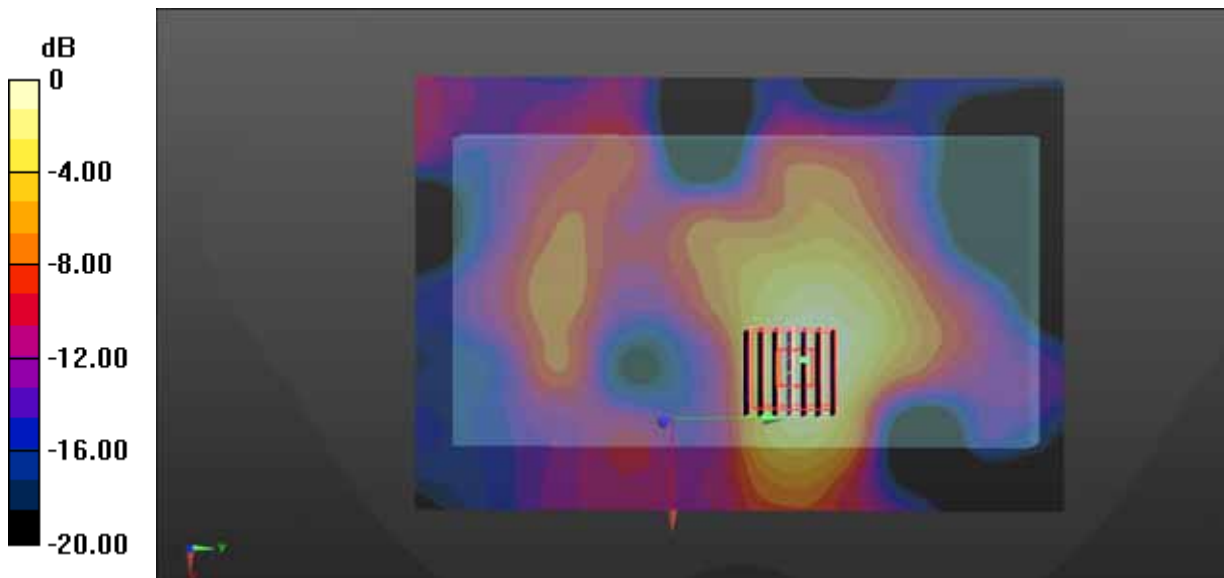

0 dB = 0.468 W/kg = -3.30 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #32\_WLAN5G\_802.11a 6Mbps\_Left Side\_10mm\_Ch60

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.362$  S/m;  $\epsilon_r = 47.883$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.94, 4.94, 4.94); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch60/Area Scan (51x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.208 W/kg


**Ch60/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.885 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.373 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.189 W/kg

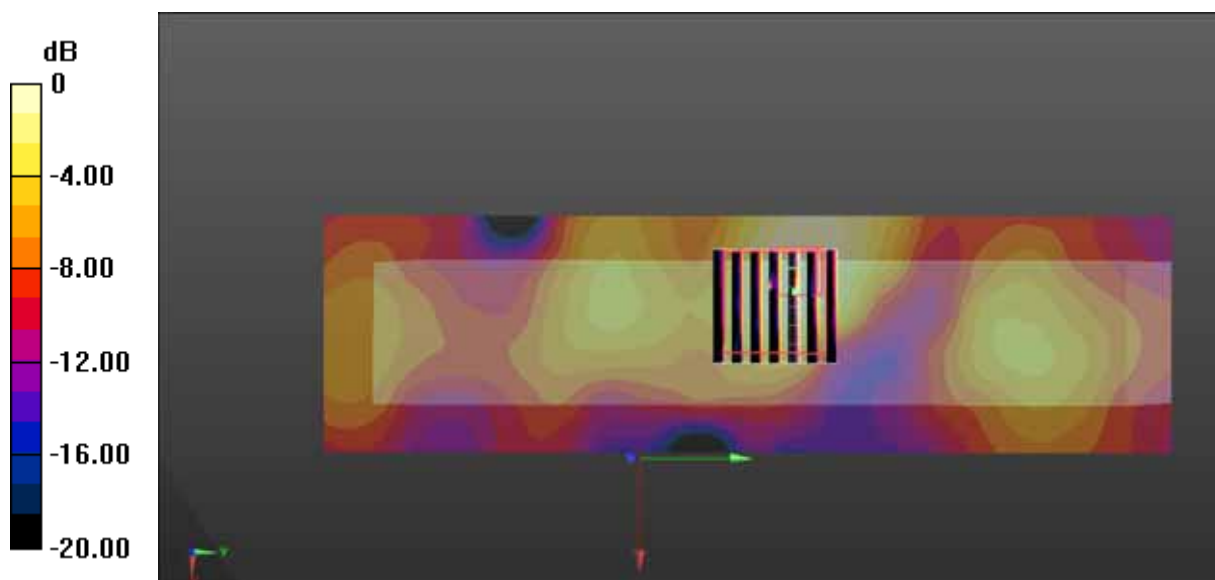

0 dB = 0.189 W/kg = -7.24 dBW/kg



Test Laboratory: BACL . SAR Testing Lab

### #33\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch52

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5260$  MHz;  $\sigma = 5.299$  S/m;  $\epsilon_r = 47.994$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.94, 4.94, 4.94); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch52/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.499 W/kg


**Ch52/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.956 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.802 W/kg

**SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.479 W/kg

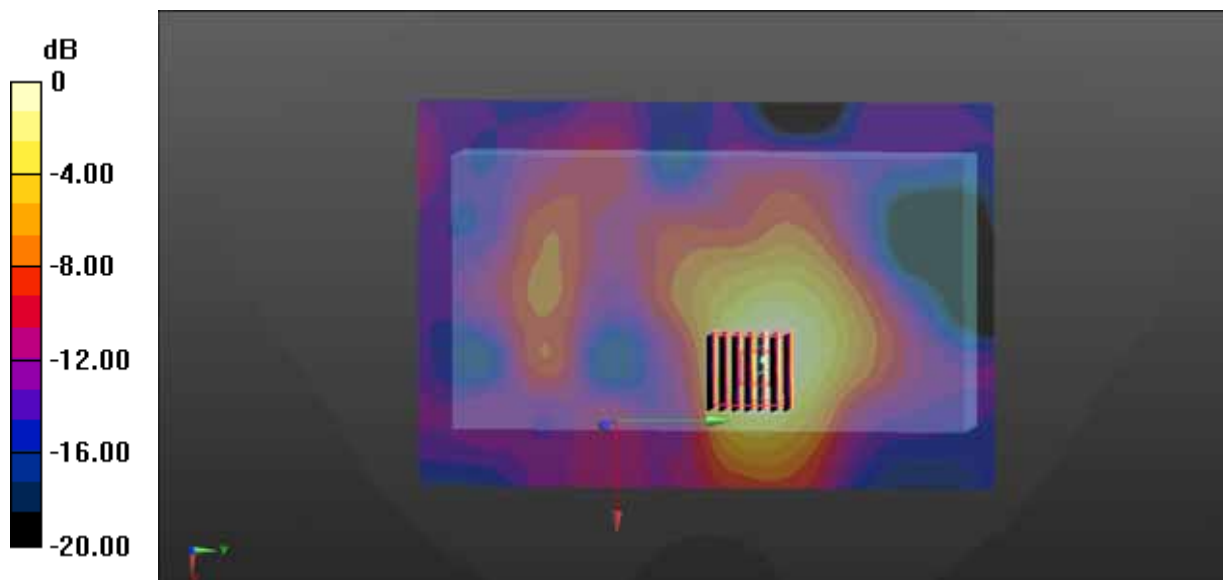

0 dB = 0.479 W/kg = -3.20 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #34\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch64

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5320$  MHz;  $\sigma = 5.389$  S/m;  $\epsilon_r = 47.823$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.94, 4.94, 4.94); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch64/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.514 W/kg


**Ch64/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.216 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.808 W/kg

**SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.091 W/kg**

Maximum value of SAR (measured) = 0.485 W/kg

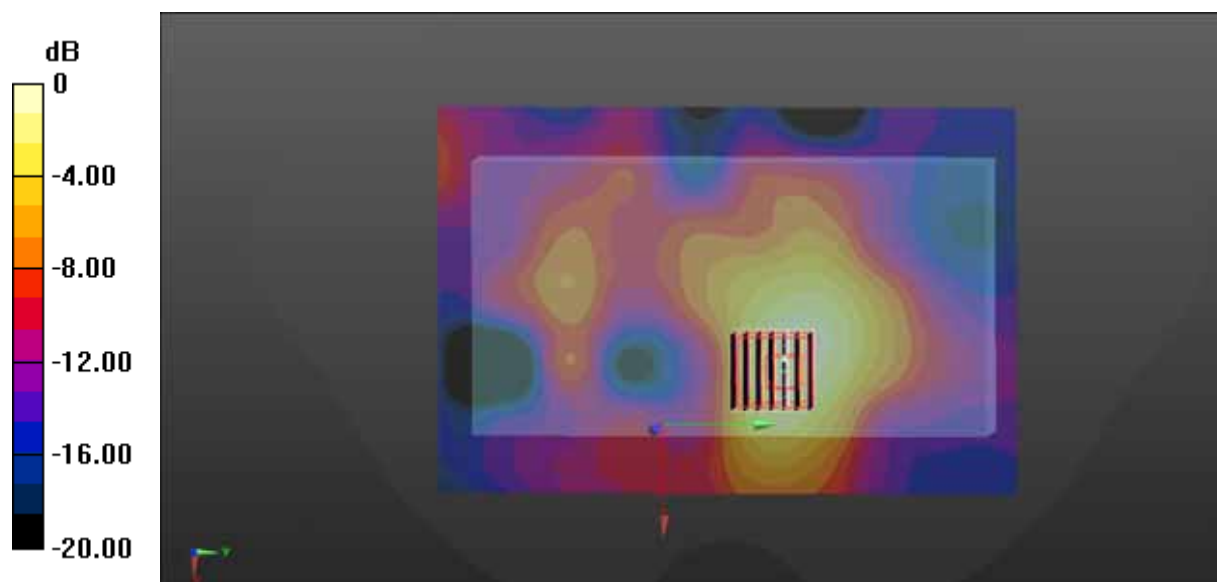

0 dB = 0.485 W/kg = -3.14 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #35\_WLAN5G\_802.11a 6Mbps\_Front\_10mm\_Ch116

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.768$  S/m;  $\epsilon_r = 47.335$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.51, 4.51, 4.51); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)


**Ch116/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.0806 W/kg

**Ch116/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 3.233 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.298 W/kg

**SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0955 W/kg

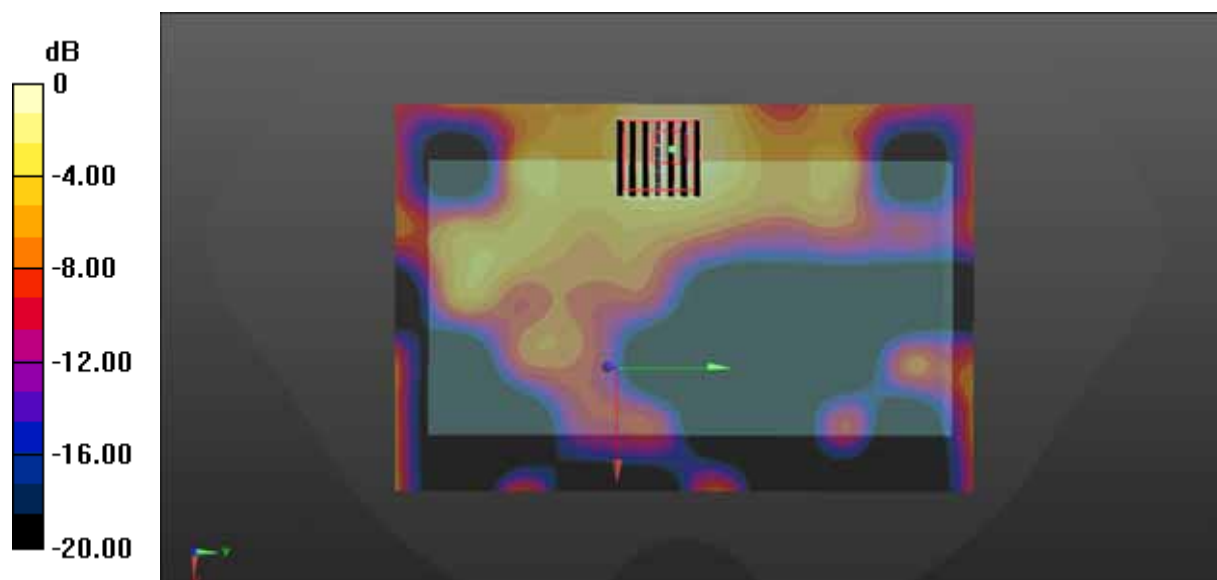

0 dB = 0.0955 W/kg = -10.20 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #36\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch116

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.768$  S/m;  $\epsilon_r = 47.335$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.51, 4.51, 4.51); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch116/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.656 W/kg


**Ch116/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.143 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.642 W/kg

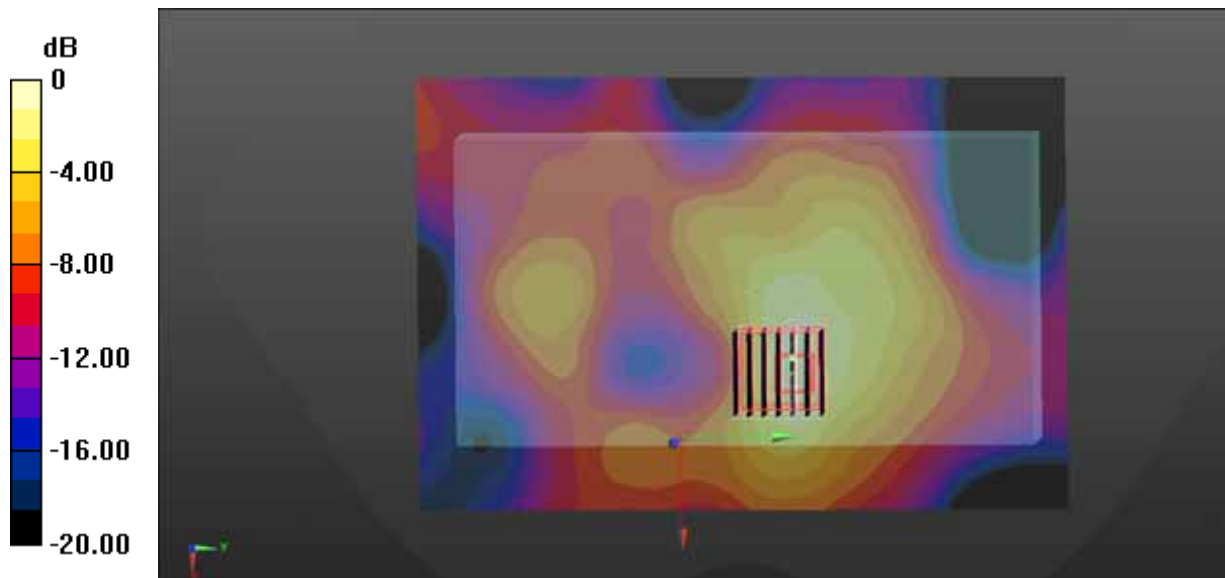

0 dB = 0.642 W/kg = -1.92 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

**#37\_WLAN5G\_802.11a 6Mbps\_Left Side\_10mm\_Ch116**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 5.768 \text{ S/m}$ ;  $\epsilon_r = 47.335$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.51, 4.51, 4.51); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch116/Area Scan (51x181x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.306 W/kg


**Ch116/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 7.079 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.494 W/kg

**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.288 W/kg

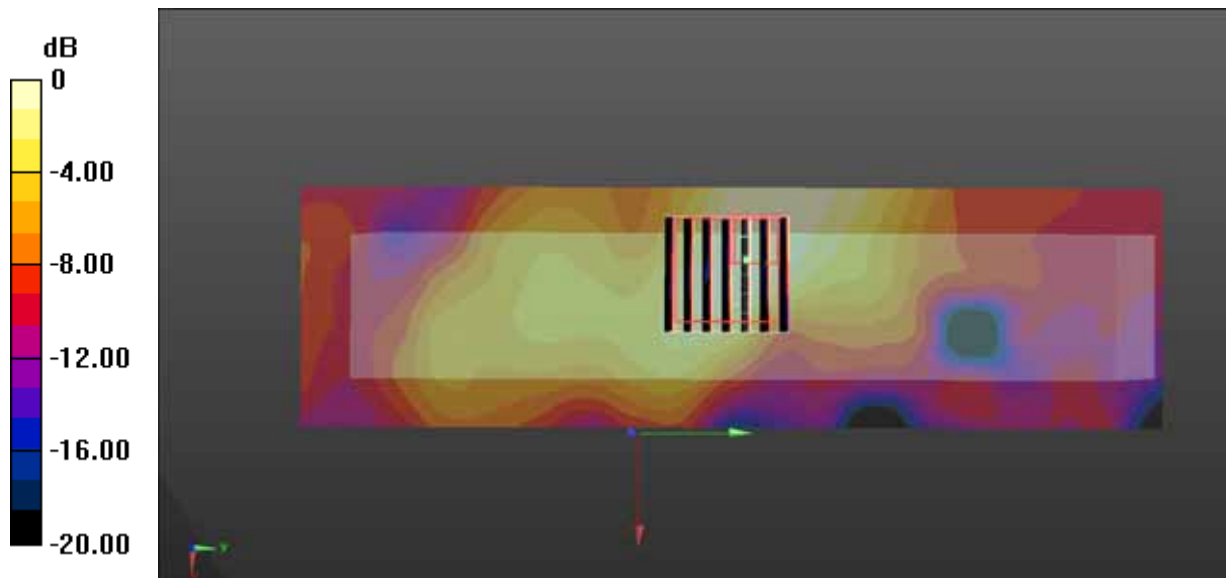

0 dB = 0.288 W/kg = -5.41 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #38\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch100

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.651$  S/m;  $\epsilon_r = 47.484$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.51, 4.51, 4.51); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)


**Ch100/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.609 W/kg

**Ch100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 8.908 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.600 W/kg

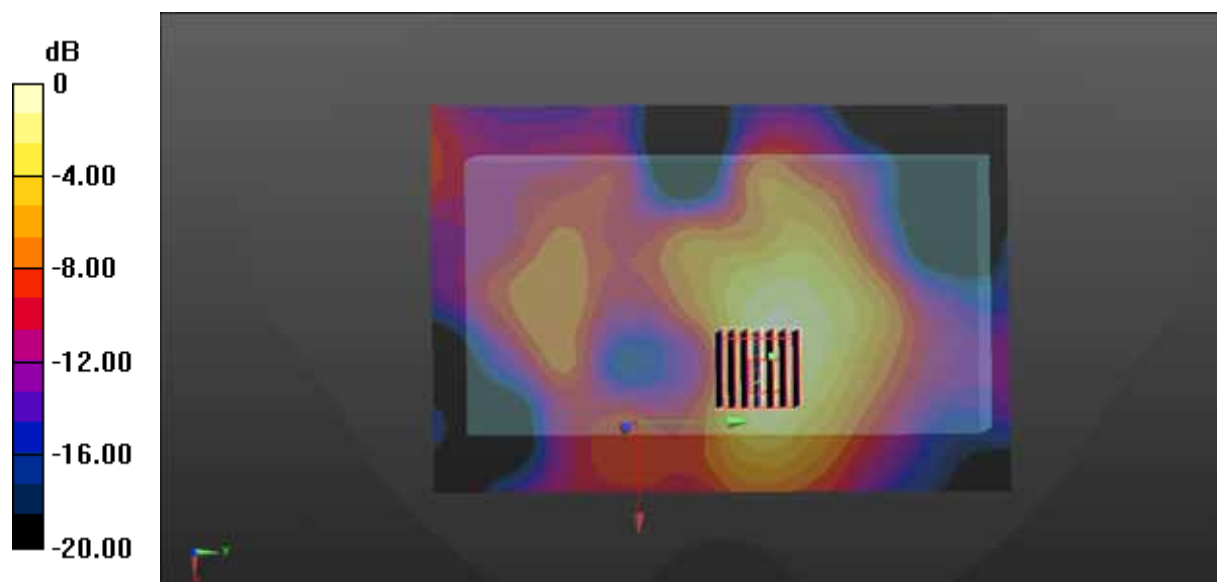

0 dB = 0.600 W/kg = -2.22 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #39\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch140

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.942$  S/m;  $\epsilon_r = 47.108$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.51, 4.51, 4.51); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch140/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.691 W/kg


**Ch140/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.893 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.113 W/kg**

Maximum value of SAR (measured) = 0.726 W/kg

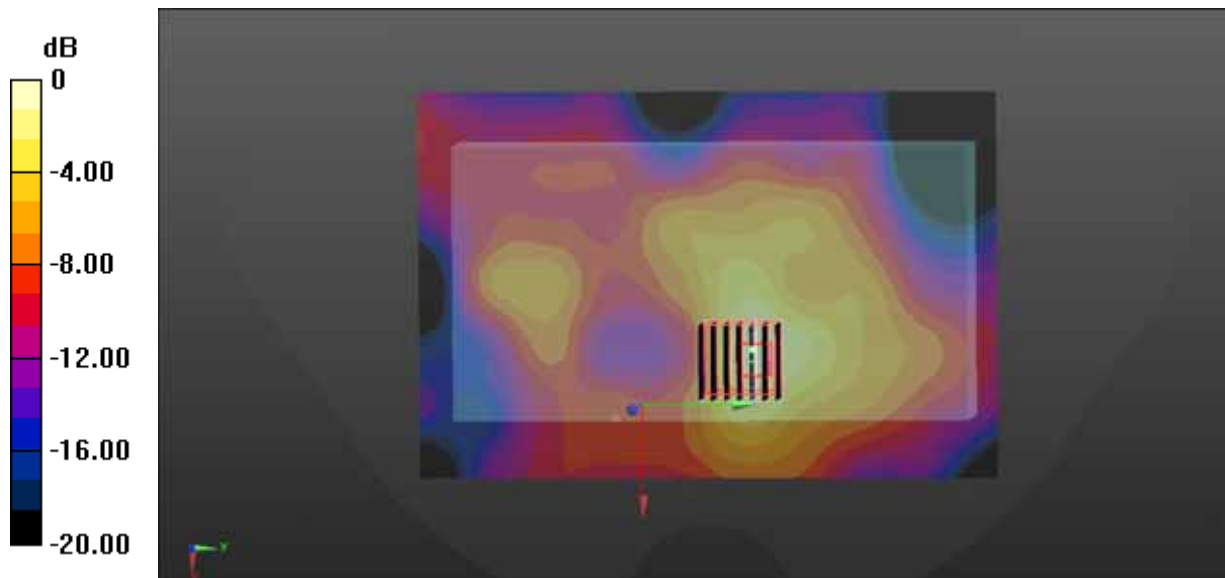

0 dB = 0.726 W/kg = -1.39 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

**#40\_WLAN5G\_802.11a 6Mbps\_Front\_10mm\_Ch157**

Communication System: 802.11a; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.074 \text{ S/m}$ ;  $\epsilon_r = 46.916$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.46, 4.46, 4.46); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7437)

**Ch157/Area Scan (121x181x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0807 W/kg


**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 2.942 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.238 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.00917 W/kg**

Maximum value of SAR (measured) = 0.0825 W/kg

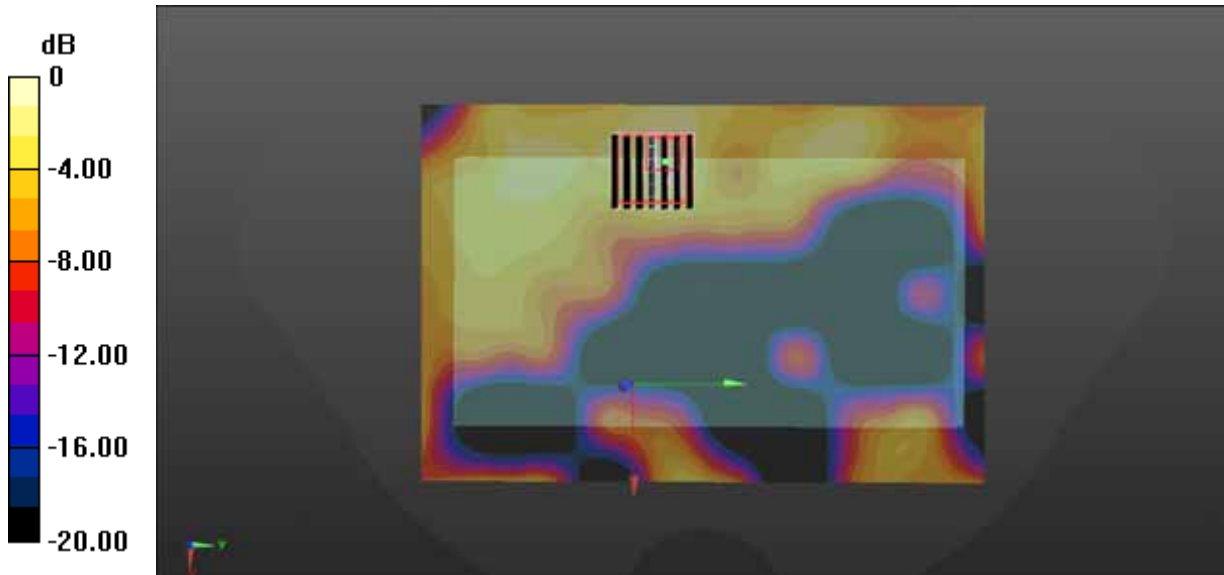

0 dB = 0.0825 W/kg = -10.84 dBW/kg



Test Laboratory: BACL . SAR Testing Lab

### #41\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch157

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.074$  S/m;  $\epsilon_r = 46.916$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.46, 4.46, 4.46); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch157/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.645 W/kg


**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.948 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.662 W/kg

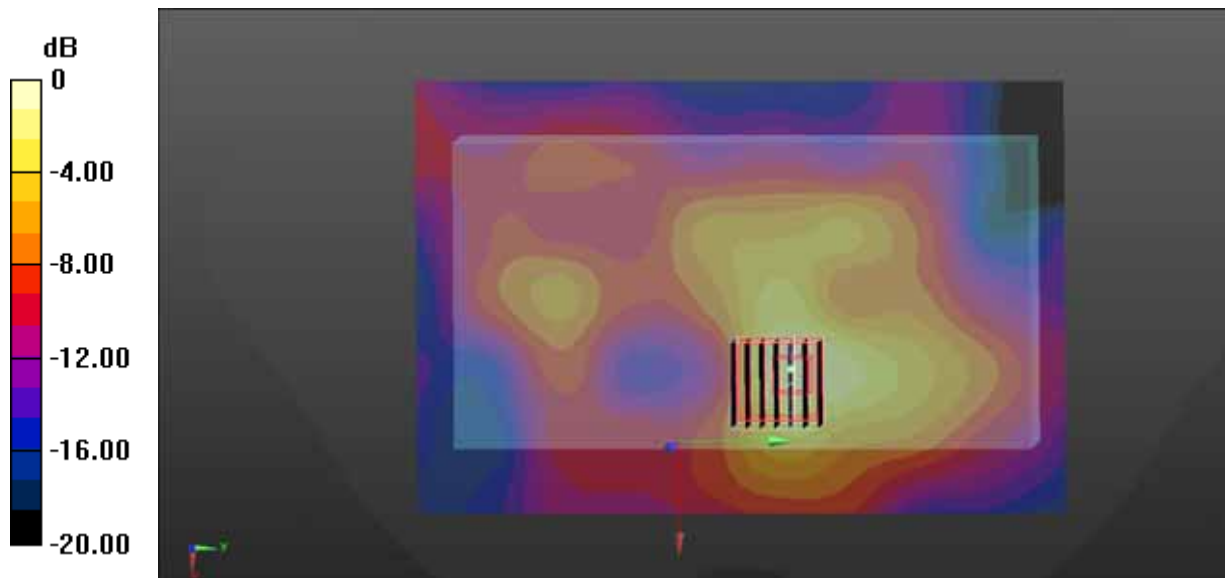

0 dB = 0.662 W/kg = -1.79 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #42\_WLAN5G\_802.11a 6Mbps\_Left Side\_10mm\_Ch157

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.074$  S/m;  $\epsilon_r = 46.916$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.46, 4.46, 4.46); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

**Ch157/Area Scan (51x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.249 W/kg


**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.858 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.306 W/kg

**SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.188 W/kg

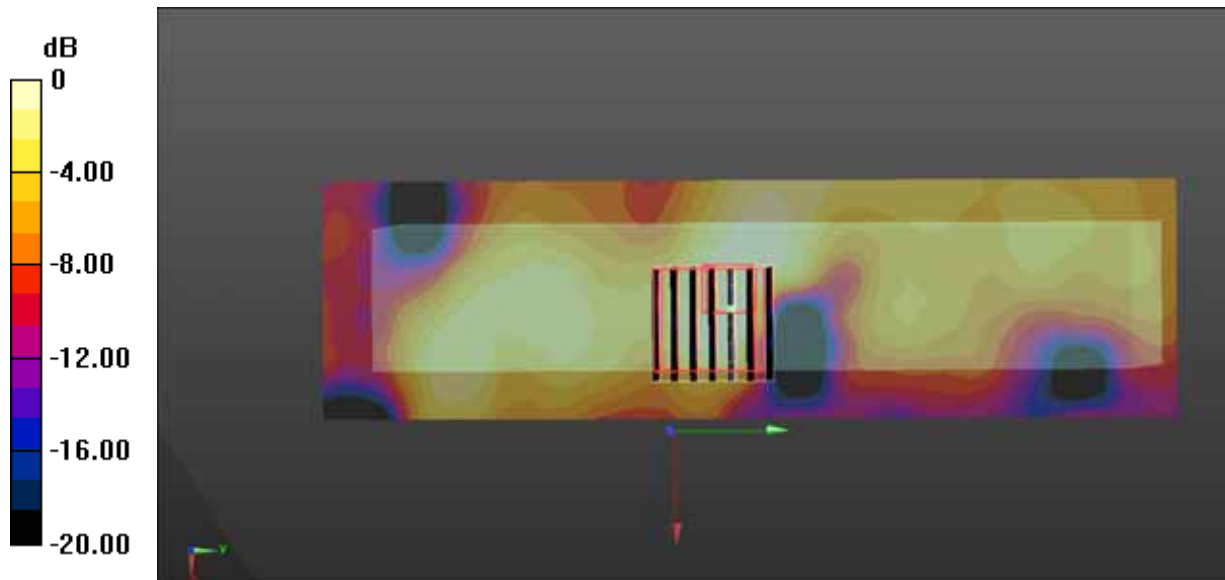

0 dB = 0.188 W/kg = -7.26 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #43\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch149

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.018$  S/m;  $\epsilon_r = 46.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.46, 4.46, 4.46); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)


**Ch149/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.623 W/kg

**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 8.035 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.097 W/kg**

Maximum value of SAR (measured) = 0.635 W/kg

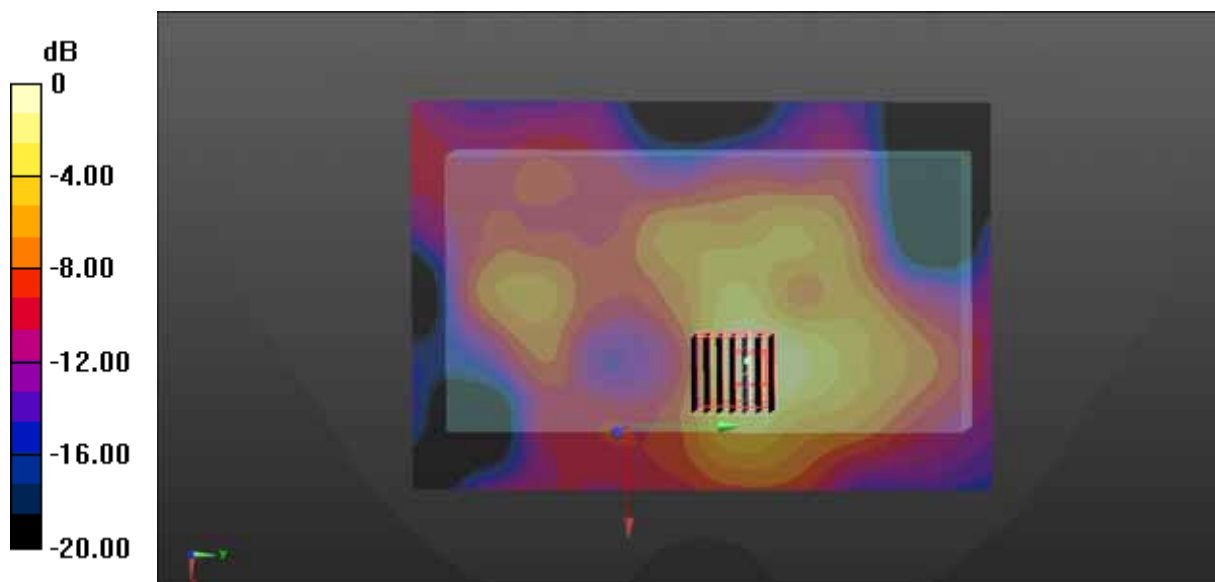

0 dB = 0.635 W/kg = -1.97 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

### #44\_WLAN5G\_802.11a 6Mbps\_Back\_10mm\_Ch165

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL5G Medium parameters used:  $f = 5825$  MHz;  $\sigma = 6.132$  S/m;  $\epsilon_r = 46.845$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(4.46, 4.46, 4.46); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1953
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)


**Ch165/Area Scan (121x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.622 W/kg

**Ch165/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 8.020 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.098 W/kg**

Maximum value of SAR (measured) = 0.657 W/kg

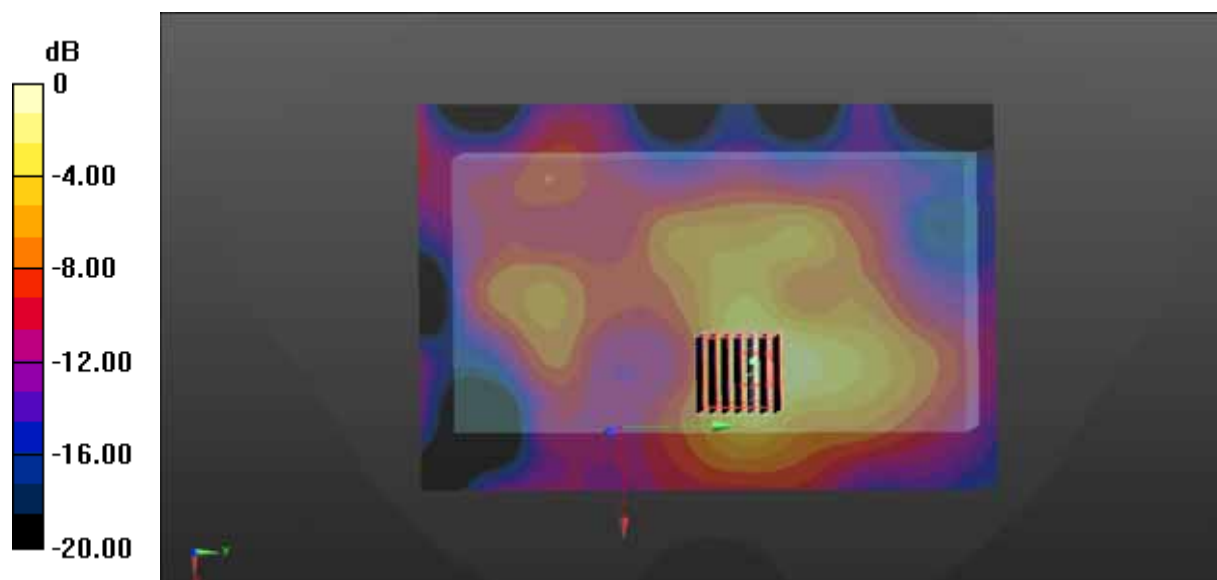

0 dB = 0.657 W/kg = -1.82 dBW/kg