

Test of Strix Systems MWS100

To: FCC 47 CFR Part 90 & IC RSS 111

Test Report Serial No.: STRX16-A12 Rev B





Test of Strix Systems MWS100

To FCC 47 CFR Part 90 & IC RSS 111

Test Report Serial No.: STRX16-A12 Rev B

This report supersedes STRX16-A12 Rev A

Manufacturer: Strix Systems, Inc
26610 Agoura Road
Calabasas
California 91302, USA

Product Function: Wireless Access Point Operating at 4.9 GHz

Copy No: pdf **Issue Date:** 14th April '08

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 3 of 71

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
1. TEST RESULT CERTIFICATE	8
2. REFERENCES AND MEASUREMENT UNCERTAINTY	9
2.1. Normative References	9
2.2. Test and Uncertainty Procedures	9
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	10
3.1. Technical Details	10
3.2. Scope of Test Program	11
3.3. Equipment Model(s) and Serial Number(s)	14
3.4. Antenna Details	14
3.5. Cabling and I/O Ports	14
3.6. Test Configurations	15
3.7. Equipment Modifications	15
3.8. Deviations from the Test Standard	15
3.9. Subcontracted Testing or Third Party Data	15
4. TEST SUMMARY	16
5. TEST RESULTS	18
5.1. Device Characteristics	18
5.1.1. Occupied Bandwidth and Emission Mask	18
5.1.2. Peak Output Power	23
5.1.3. Peak Power Spectral Density (PPSD)	28
5.1.4. Maximum Permissible Exposure	32
5.1.5. Frequency Stability; Temperature Variations, and Voltage Variations ..	33
5.1.6. Spurious Emissions at Antenna Terminals - Transmitter	51
5.1.7. Radiated Spurious Emissions	55
5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)	61
6. TEST SET-UP PHOTOGRAPHS	65
6.1. General Measurement Test Set-Up	65
6.2. Radiated Emissions < 1 GHz (POE)	66
6.3. Radiated Emissions < 1 GHz (dc Powered)	67
6.4. Spurious Emissions > 1 GHz	68
6.5. AC Wireline Emissions (150 kHz - 30 MHz)	69
7. TEST EQUIPMENT DETAILS	70

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 5 of 71

ACCREDITATION, LISTINGS & RECOGNITION

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 6 of 71

LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

North America

United States of America

Federal Communications Commission (FCC) Listing #: 102167

Canada

Industry Canada (IC) Listing #: 4143A-2

RECOGNITION

APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)

Conformity Assessment Body (CAB) – MiCOM Labs

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

Country	Recognition Body	Phase	CAB Identification No.
Australia	Australian Communications and Media Authority (ACMA)	I	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	I	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	I	
Singapore	Infocomm Development Authority (IDA)	I	
Taiwan	Directorate General of Telecommunications (DGT) Bureau of Standards, Metrology and Inspection (BSMI)	I	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 7 of 71

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	1st April 2008	Initial Release
Rev B	14th April 2008	MPE calculation updated.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 8 of 71

1. TEST RESULT CERTIFICATE

Manufacturer:	Strix Systems, Inc 26610 Agoura Road, Calabasas California 91302, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200, Pleasanton California, 94566, USA
EUT:	MWS100, Wireless Access Point Operating at 4.9 GHz	Telephone:	+1 925 462 0304
Model(s):	MWS100	Fax:	+1 925 462 0306
S/N:	#1, #2		
Test Date(s):	18th - 19th Jan '08	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 90 & IC RSS 111	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:


Graeme Grieve
Quality Manager MiCOM Labs,


Gordon Hurst
President & CEO MiCOM Labs, Inc.



CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 9 of 71

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 90	2004	Code of Federal Regulations
(ii)	FCC 47 CFR Part 90 Sect 90.210 Sect 90.1215	18 th May 2005	90.210 Emission Masks (Revised requirements) 90.1215 Power Limits (Revised requirements)
(iii)	RSS-111	2007 Issue 2	Broadband Public Safety Equipment Operating in the Band 4940- 4990 MHz
(iv)	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(v)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vi)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(vii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(viii)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(ix)	A2LA	14 th September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 10 of 71

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Strix Systems MWS100 to FCC 47 CFR Part 90 Subpart Y and Industry Canada RSS-111 regulations.
Applicant:	As Manufacturer
Manufacturer:	Strix Systems, Inc 26610 Agoura Road Calabasas California 91302, USA
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	STRX16-A12 Rev B
Date EUT received:	18 TH January 2008
Standard(s) applied:	FCC 47 CFR Part 90 & IC RSS 111 (Public Safety Band)
Dates of test (from - to):	18th - 19th Jan '08
No of Units Tested:	2
Type of Equipment:	Wireless Access Point
Manufacturers Trade Name:	MWS100
Model(s):	MWS100
Location for use:	Indoor
Declared Frequency Range(s):	4940 - 4990 MHz
Declared Nominal Output Power:	+23 dBm (average)
Type of Modulation:	OFDM
EUT Modes of Operation:	Per 802.11 – DBPSK, DQPSK, CCK, OFDM
Transmit/Receive Operation:	TDD
Rated Input Voltage and Current:	12 – 48Vdc, Current 0.5 – 1.5A
Operating Temperature Range:	Declared range -40 to +80°C
ITU Emission Designator:	4.9 GHz - 18M4W7D
Clock/Oscillator(s):	25 MHz, 40 MHz.
Frequency Stability:	±20 ppm (-40 to +80°C)
Equipment Dimensions:	9.5" x 5.5625" x 1.95" (LxWxH)
Weight:	1.41 lbs
Primary function of equipment:	Transmission of data and voice

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Scope of Test Program

The scope of the test program was to test Strix Systems MWS100 to:-

FCC 47 CFR Part 90, Subpart Y regulatory requirements;-

18th May 2005 revision of FCC 47 CFR Part 90;-

Sub Section 90.210	Emission Masks (revised requirements)
Sub Section 90.1215	Power Limits (revised requirements)

and Industry Canada RSS-111.

The MWS100 is a Wireless Access Point operating in the 4.9 GHz Public Safety Band Radio employing OFDM modulation at 20 MHz bandwidths in the frequency range 4940 to 4990 MHz.

The MWS100 has two antenna ports, RF Main and RF Aux which are terminated in reverse polarized SMA (RP-SMA) connectors.



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Strix Systems Inc
MWS100 - Rear



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 14 of 71

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Manufacturer	Model No.	Serial No.
EUT	Strix Systems MWS100 4.9 GHz Wireless Access Unit	Strix Systems Inc	MWS100	#1
EUT	Strix Systems MWS100 4.9 GHz Wireless Access Unit	Strix Systems Inc	MWS100	#2
EUT	Strix Systems Class II Power Supply 100-240 Vac, 0.8A (50-60 Hz) 18 Vdc, 24W	N/A	SA07H1724	N/A
Support	Laptop	Sony	Vaio	

3.4. Antenna Details

Antenna Type	Gain (dBi)	Manufacturer	Model No.	Serial No.
Radome Dipole	11	Larsen	R380.500.227	N/A

An 11 dBi gain antenna was utilized for the calculation of MPE (Maximum Permissible Exposure) in Section 5.1.4 and testing receive spurious emissions.

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 10/100BT with POE (Power over Ethernet)
2. RF Main
3. RF Aux
4. Vdc Power

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.6. Test Configurations

Matrix of test configurations

Parameter	Operational Mode	Test Conditions	Bandwidths (MHz)
#A Occupied BW & Emission Mask	Modulated	Ambient	20
#A Peak Output power	Modulated	Ambient	20
#A Peak Power Spectral Density	Modulated	Ambient	20
#B Frequency Stability	CW	Temperature Variations and Voltage Variations	--
#B Conducted Spurious	Modulated	Ambient	20
#B Radiated Emissions	Modulated	Ambient	20
AC Wireline Emissions	N/A	--	--

See 3.7 Equipment Modifications

#A – EUT Serial No: #1

#B – EUT Serial No: #2

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

A second device MWS100 (S/N: #2) was used to complete the test program as a result of power amplifier problems in the initial unit (S/N: #1).

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 16 of 71

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 90**, **Subpart Y, Industry Canada RSS-111**, and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
2.1049; 90.210(m) 4.4	26 dB / 99% Occupied BW & Emission Mask	Emission mask and bandwidth measurement(s)	Conducted	Complies	5.1.1
2.1046; 90.1215 (a) 4.3	Peak and Average Output Power	Modulated Output Power	Conducted	Complies	5.1.2
2.1046; 90.1215 (a) 4.3	Peak Power Spectral Density	Maximum Spectral Density	Conducted	Complies	5.1.3
Subpart C 90.1217	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Radiated	Complies	5.1.4
2.1055(a)(1); 90.213 4.2	Frequency Stability	Includes temperature and voltage variations	Conducted	Complies	5.1.5
2.1051; 90.210(m) 4.4/4.5 6	Conducted Spurious Emissions at Antenna Port	Emissions from the antenna port 30 MHz – 40 GHz	Conducted	Complies	5.1.6
2.1053; 90.210(m) ANSI/TIA-603 4.4	Radiated Spurious Emissions	Spurious emissions 30 MHz – 40 GHz	Radiated	Complies	5.1.7
Industry Canada only RSS-Gen §4.8, §6	Receiver Radiated Spurious Emissions	Emissions above 1 GHz	Radiated	Complies	5.1.8
15.207 7.2.2	AC Wireline Conducted	Emissions 150 kHz–30 MHz	Conducted	N/A	5.1.9

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 17 of 71

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. TEST RESULTS

5.1. Device Characteristics

5.1.1. Occupied Bandwidth and Emission Mask

FCC 47 CFR Part 90, Subpart Y; 2.1049; §90.210(m)

IC Section 4.4


Test Procedure

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure the 26 dB occupied bandwidth and emission mask for the radio. The system highest power setting was selected with modulation ON and duty cycle set for 100% i.e. continuous operation at all times.

For emission masks the zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz.

The EUT is not equipped with an audio low-pass filter.

Test Measurement Set up

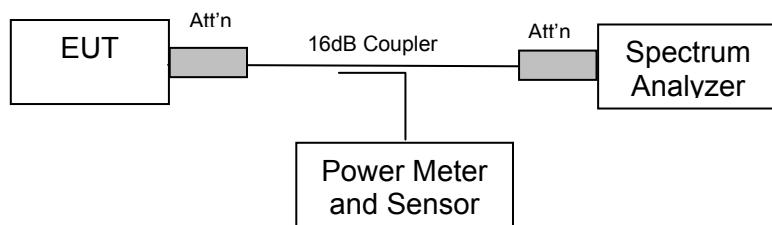

Test set up for Occupied Bandwidth and Emission Mask measurement

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %


Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 20 MHz 26 dB Bandwidth(s)

Center Frequency (MHz)	26 dB Bandwidth (MHz)
4,955.0	18.436

Emission Mask and 26 dB Bandwidth for 20 MHz BW Channel Freq 4955 MHz

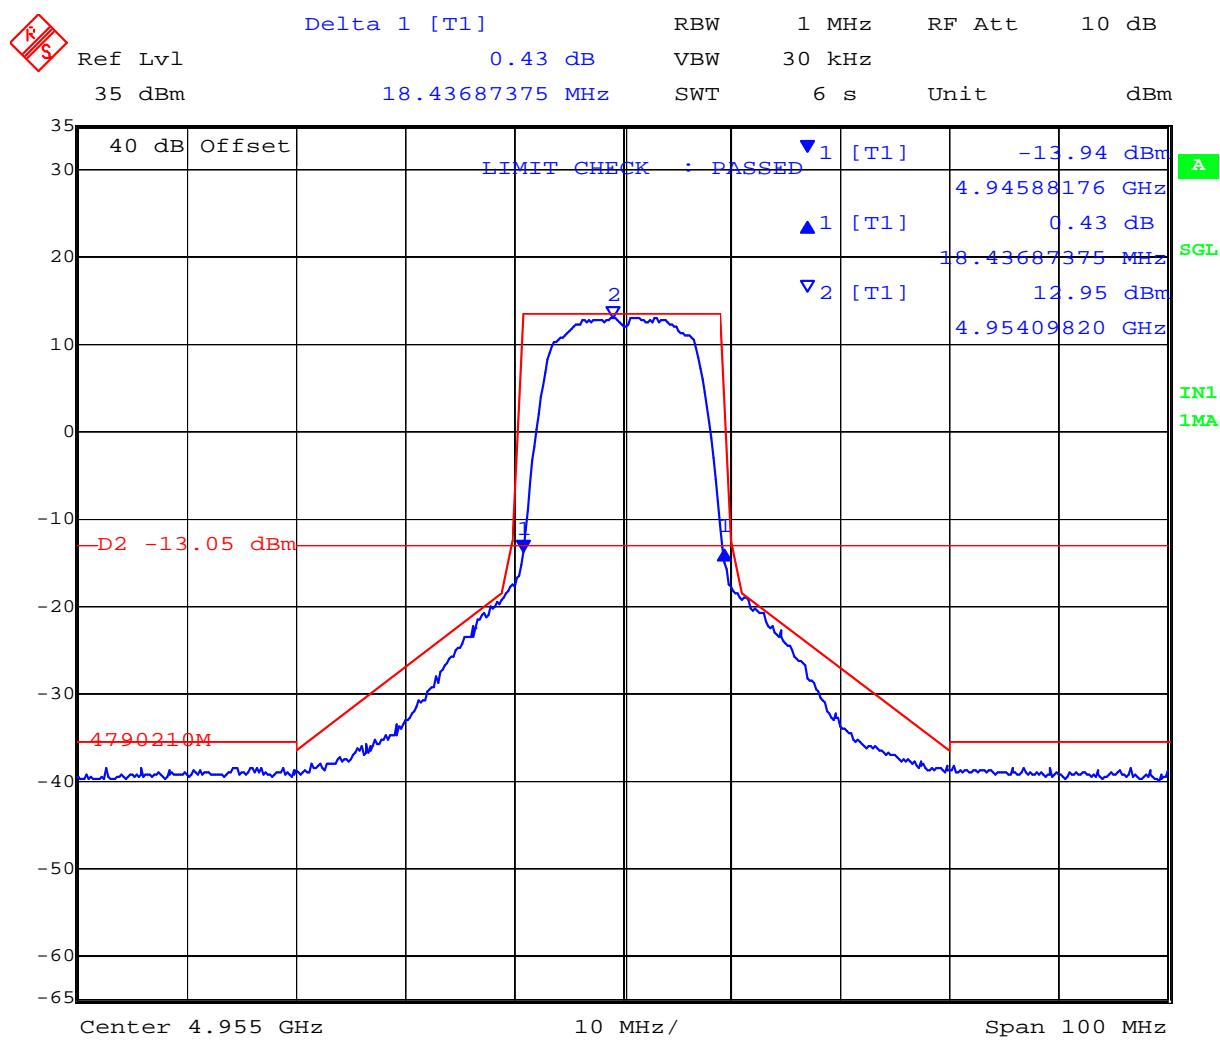


Average Output Power to meet spectrum mask limits: +22.60 dBm

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Center Frequency (MHz)	26 dB Bandwidth (MHz)
4,975.0	18.436

Emission Mask and 26 dB Bandwidth for 20 MHz BW Channel Freq 4975 MHz

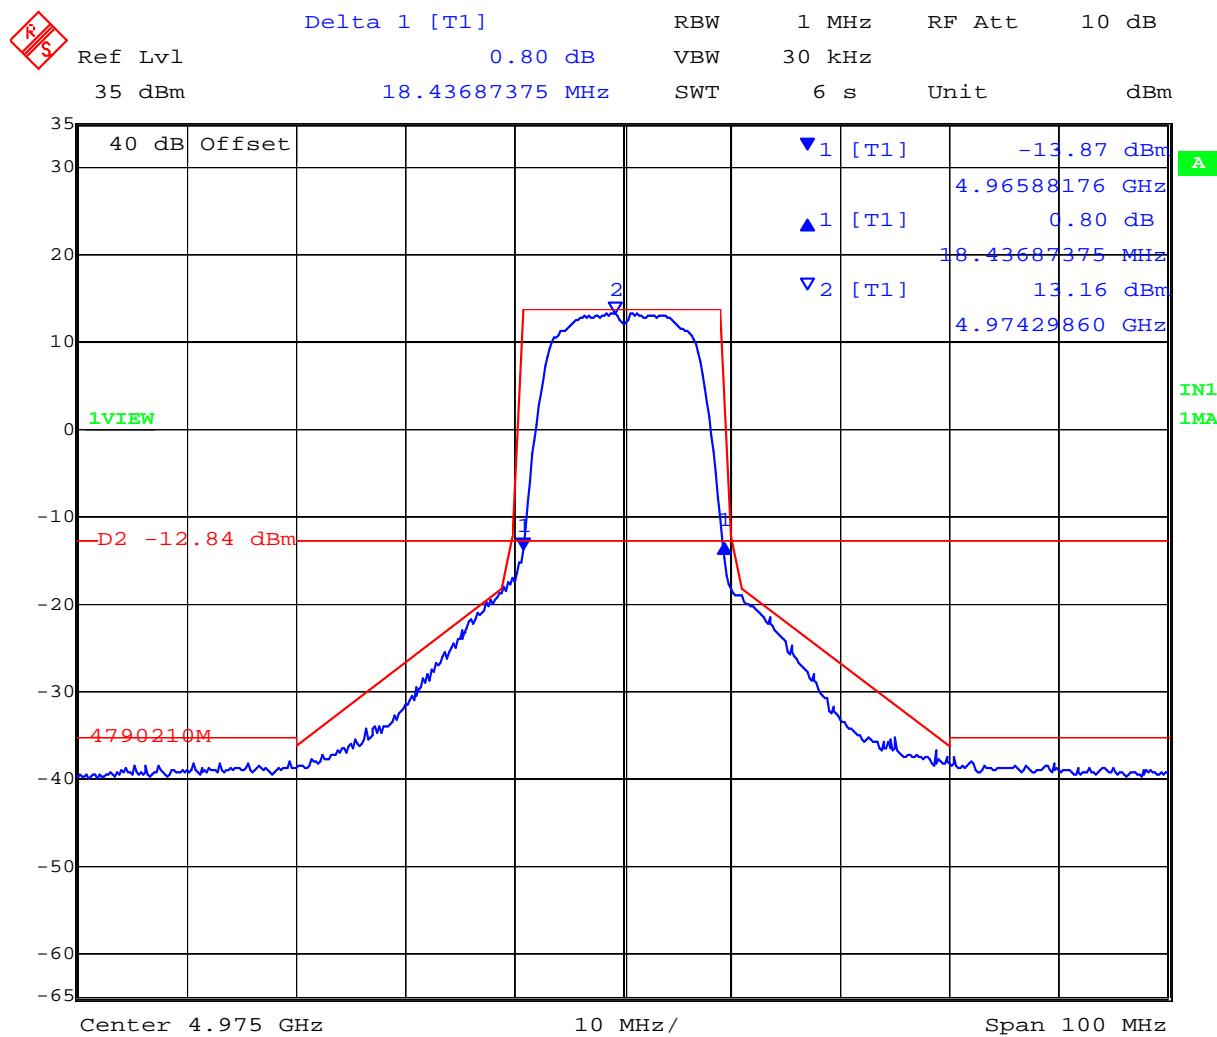

Date: 17.JAN.2008 10:23:24

Average Output Power to meet spectrum mask limits: **+22.80 dBm**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 21 of 71

Specification Limits

FCC Part §90.210

Limits for Authorized Bandwidth

Frequency Band (MHz) and Related Documents	Spectrum Masks with Audio Filter	Without Audio Filter
4950 – 4990 MHz	L or M	L or M

Reference to the emission masks are provided below

Limits Emission Masks

90.210(L), Emission Mask L. For low power transmitters (20 dBm or less) operating in the 4940 – 4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency between 0 – 45% of the authorized bandwidth (BW) : 0dB.
- (2) On any frequency removed from the assigned frequency between 45 – 50 % of the authorized bandwidth: $219 \log (\% \text{ of (BW)}/45)$ dB.
- (3) On any frequency removed from the assigned frequency between 50 – 55 % of the authorized bandwidth: $10 + 242 \log (\% \text{ of (BW)}/50)$ dB.
- (4) On any frequency removed from the assigned frequency between 55 – 100 % of the authorized bandwidth: $20 + 31 \log (\% \text{ of (BW)}/55)$ dB attenuation.
- (5) On any frequency removed from the assigned frequency between 100 – 150 % of the authorized bandwidth: $28 + 68 \log (\% \text{ of (BW)}/100)$ dB attenuation.
- (6) On any frequency removed from the assigned frequency above 150 % of the authorized bandwidth: 50 dB.
- (7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 22 of 71

Limits Emission Masks (continued)

90.210(m), Emission Mask M. For high power transmitters (greater than 20 dBm) operating in the 4940 – 4900 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency between 0 – 45% of the authorized bandwidth (BW) : 0dB.
- (2) On any frequency removed from the assigned frequency between 45 – 50 % of the authorized bandwidth: $568 \log (\% \text{ of (BW)})/45$ dB.
- (3) On any frequency removed from the assigned frequency between 50 – 55 % of the authorized bandwidth: $26 + 145 \log (\% \text{ of (BW)})/50$ dB.
- (4) On any frequency removed from the assigned frequency between 55 – 100 % of the authorized bandwidth: $32 + 31 \log (\% \text{ of (BW)})/55$ dB attenuation.
- (5) On any frequency removed from the assigned frequency between 100 – 150 % of the authorized bandwidth: $40 + 57 \log (\% \text{ of (BW)})/100$ dB attenuation.
- (6) On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.
- (7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

Note to paragraph m: Low power devices may as an option, comply with paragraph (m).

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2. Peak Output Power

FCC 47 CFR Part 90, Subpart Y; 2.1046; §90.1215


IC Section 4.3

Test Procedure

Average power measurements were measured with the use of an average power head. Peak power measurements were recorded via the spectrum analyzer. The system highest power setting was selected with modulation ON and duty cycle set for 100% i.e. continuous operation at all times.

The 26 dB emission bandwidth (see Section 5.1.1) was used by the spectrum analyzer to measure the peak output power.

Test Measurement Set up

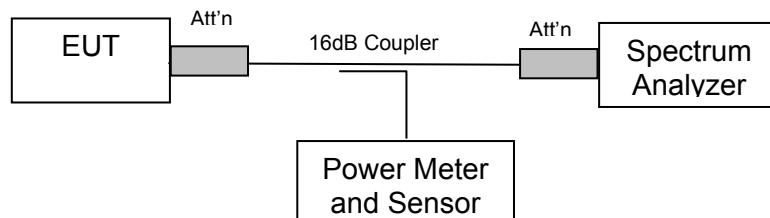


Test set up for modulated output power measurement

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 20 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
4955.0	+31.64	+22.60

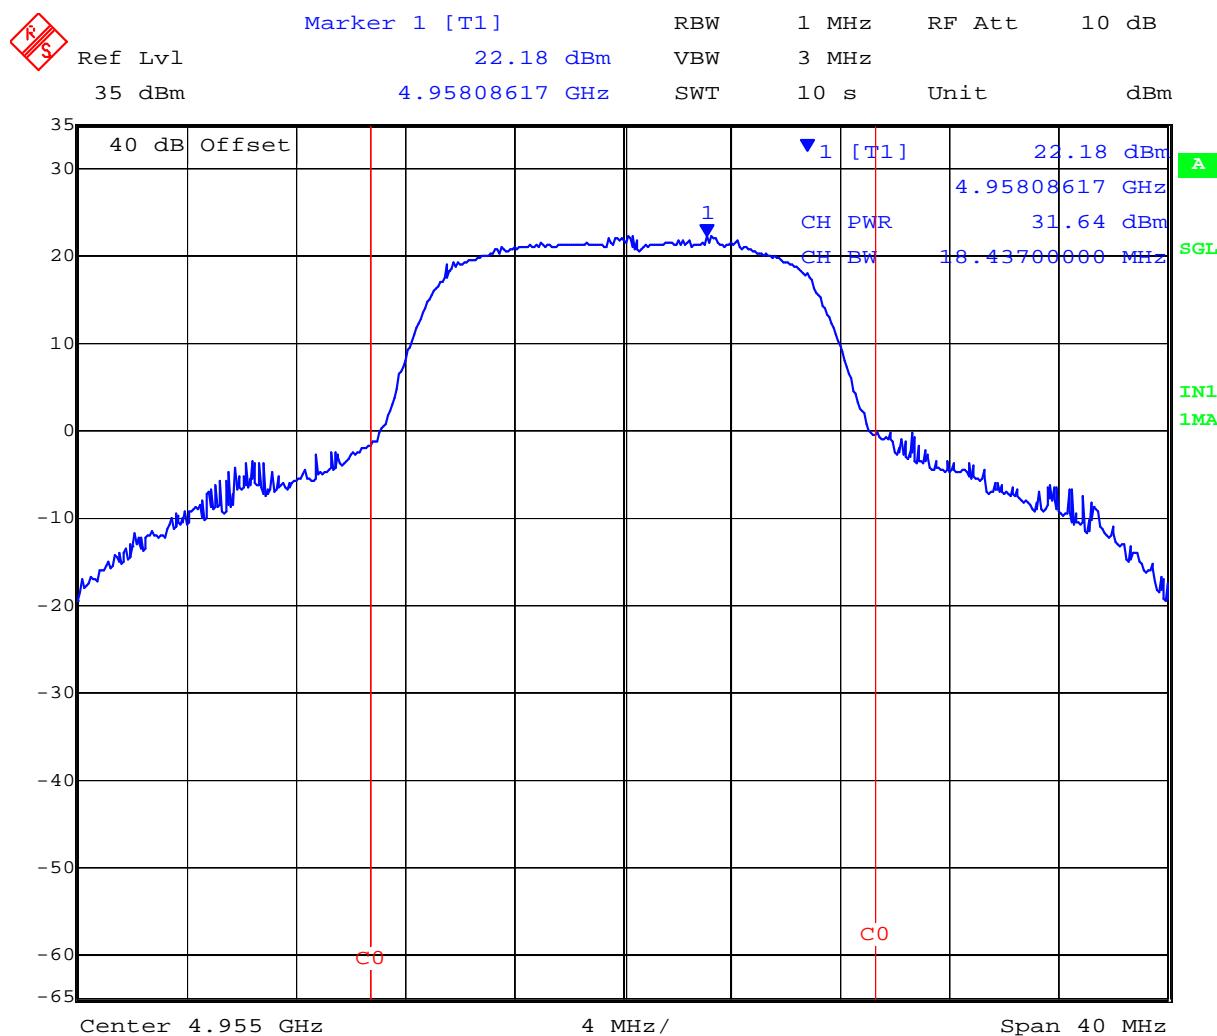


Date: 17.JAN.2008 10:38:30

Peak Power 20 MHz BW Channel Freq 4955 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 20 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
4975.0	+31.78	+22.80

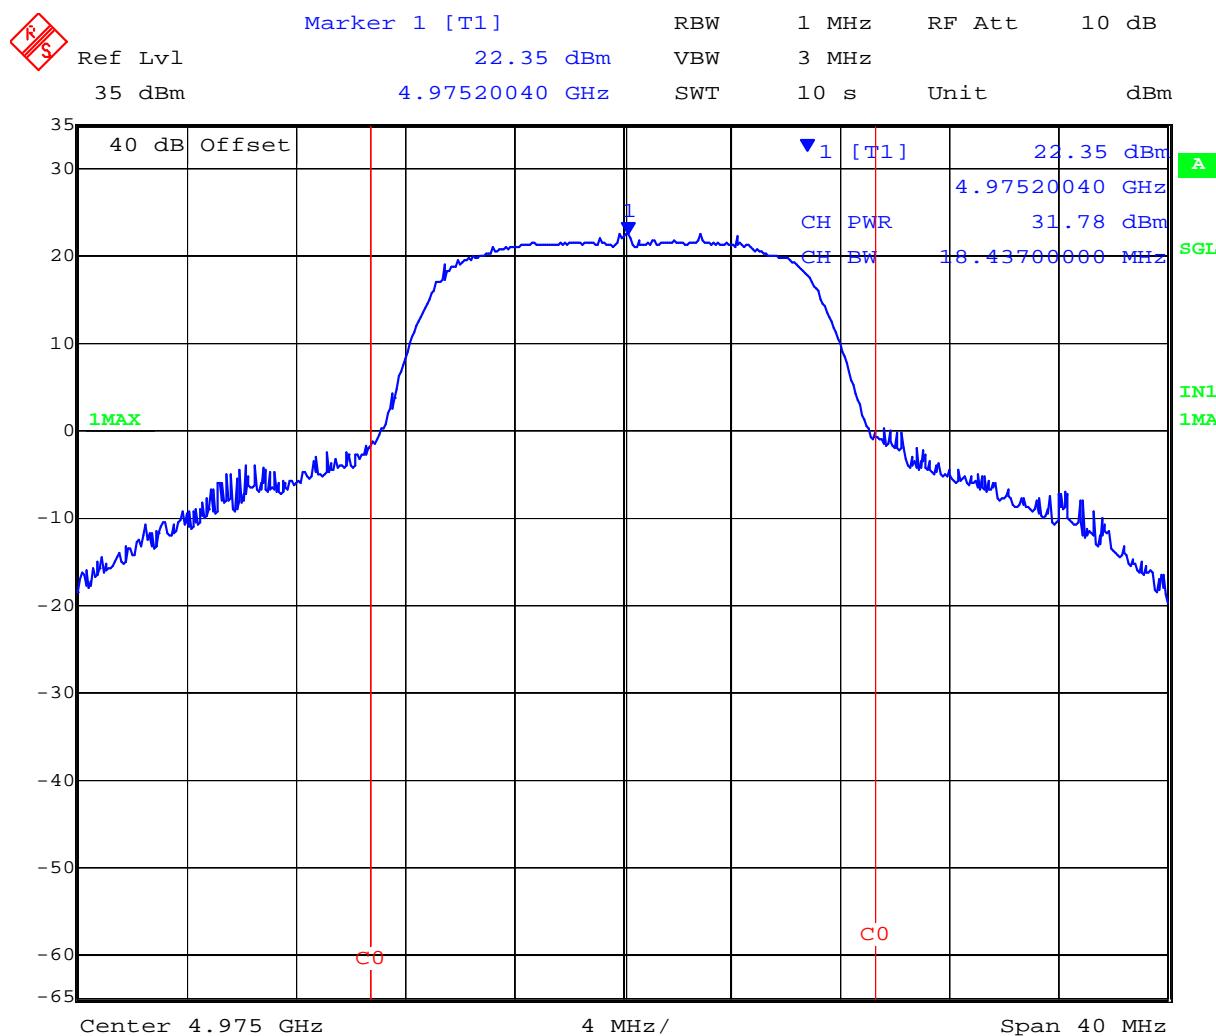

Date: 17.JAN.2008 10:34:55

Peak Power 20 MHz BW Channel Freq 4975 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 26 of 71

Specification Limits

FCC Part §90.1215(a)

Power limits.

The transmitting power of stations operating in the 4940-4990 MHz band must not exceed the maximum limits in this section.

(a) The peak transmit power should not exceed:

Channel Bandwidth (MHz)	Low power peak transmitter power (dBm)	High power peak transmitter power (dBm)
1	7	20
5	14	27
10	17	30
15	18.8	31.8
20	20	33

High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point or point-to-multipoint operation (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the transmitter power or spectral density. Corresponding reduction in the peak transmit power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26 dBi.

(b) Low power devices are also limited to a peak power spectral density of 8 dBm per one MHz. Low power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 8 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi.

(c) The peak transmit power is measured as a conducted emission over any interval of continuous transmission calibrated in terms of an RMS-equivalent voltage. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement conforming to the definitions in this paragraph for the emission in question.

(d) The peak power spectral density is measured as conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 27 of 71

directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of one MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

Laboratory Measurement Uncertainty for Power Measurement

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Output Power'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.3. Peak Power Spectral Density (PPSD)

FCC 47 CFR Part 90, Subpart Y; 2.1046; §90.1215


IC Section 4.3

Test Procedure

The test methodology used for this measurement was determined to provide the highest possible PPSD readings.

Peak power spectral density measurements were performed via the spectrum analyzer and plots were recorded. Modulation was ON and the system duty cycle was set for 100% i.e. continuous operation at all times. The system highest power setting was selected with modulation ON and duty cycle set for 100% i.e. continuous operation at all times.

Test Measurement Set up

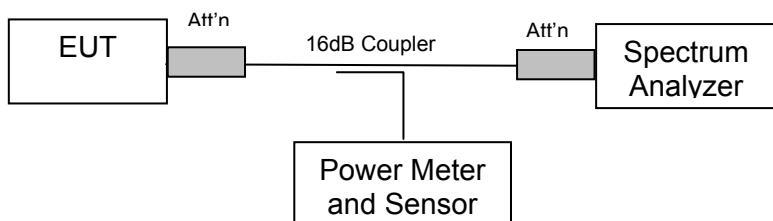

Test set up for Peak Power Spectral Density measurement(s)


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – PPSD 20 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Peak Power Spectral Density (dBm/ MHz)
4955.0	20.93

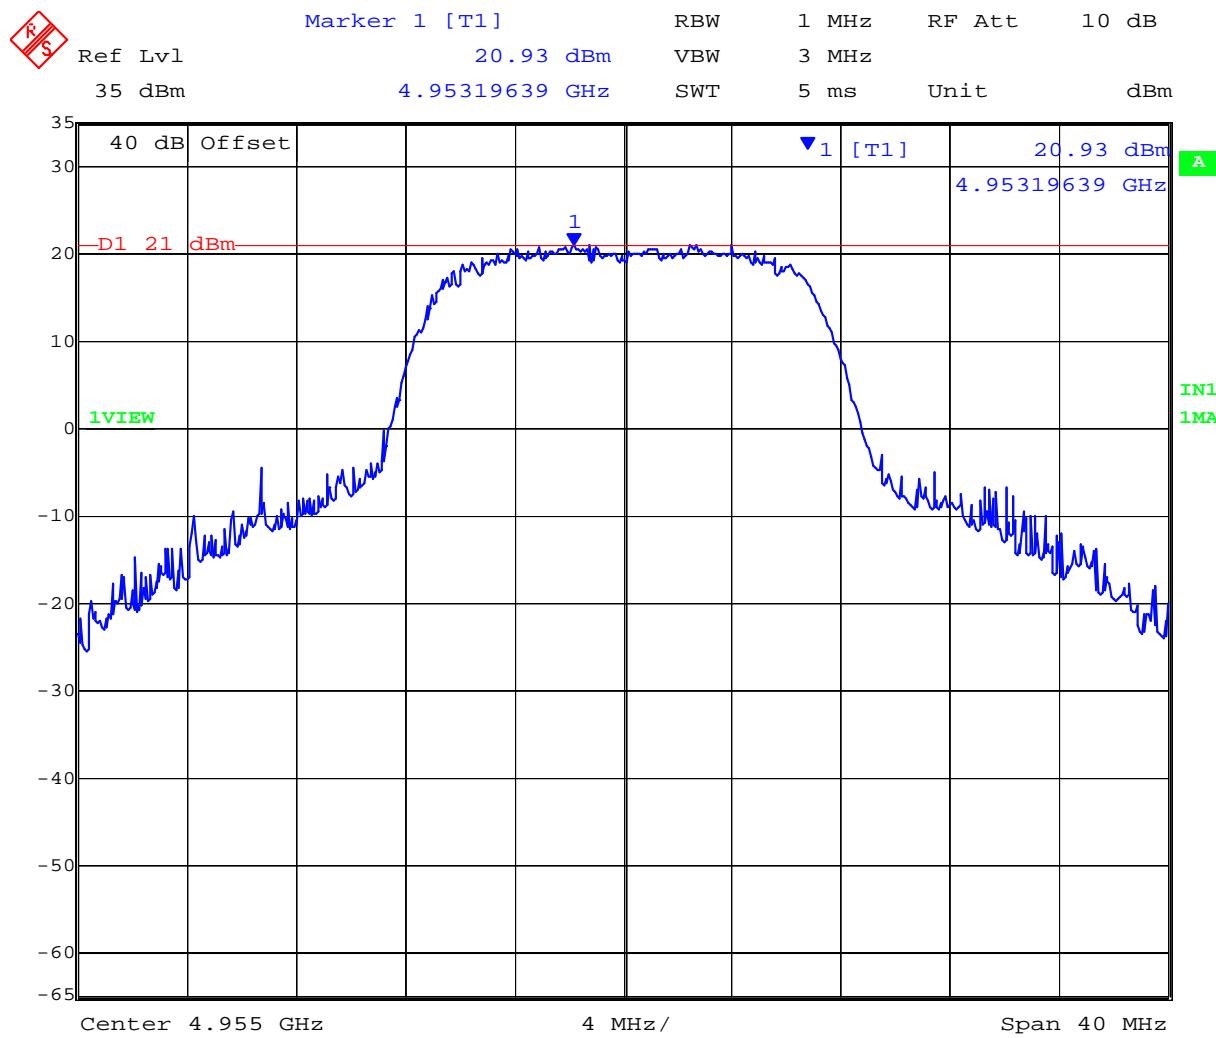


Peak Power Spectral Density 20 MHz BW Channel Freq 4955 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – PPSD 10 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Peak Power Spectral Density (dBm/MHz)
4975.0	20.78

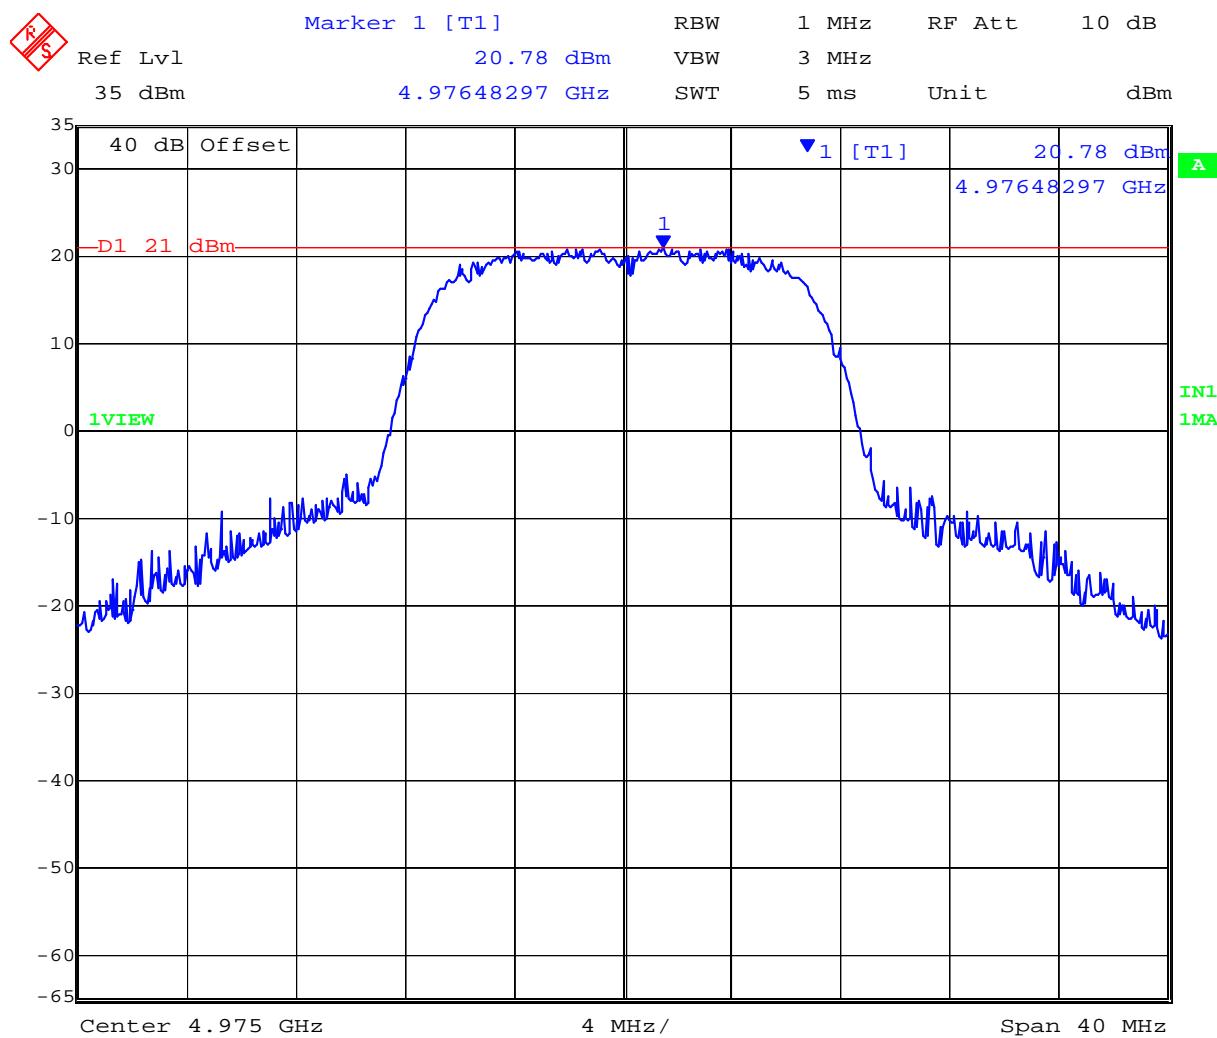

Date: 17.JAN.2008 10:49:13

Peak Power Spectral Density 20 MHz BW Channel Freq 4975 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 31 of 71

Specification Limits
FCC Part §90.1215

Refer to the Power Limits Specification in Section 5.1.2 of this report.

Laboratory Measurement Uncertainty for Power Measurement

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Output Power'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 32 of 71

5.1.4. Maximum Permissible Exposure

FCC, Part 90 Subpart C §90.1217

Calculations for Maximum Permissible Exposure Levels

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10 ^ {(G \text{ (dBi)}/10)}$$

4.9 GHz 20 MHz Channel = Max. Peak Output Power +31.78 dBm, 1,506.61 mW

Max. Antenna Gain = 11.0 dBi, **12.59 numeric**

The EUT belongs to the Occupational/Controlled Exposure class of devices; power density limit is 5.0mW/cm²

Maximum Gain Antennas – Calculated Safe Distance @ 1 mW/cm²

Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm ² Limit(cm)	Minimum Separation Distance (cm)
11.0	12.59	+31.78	1,506.61	38.85	40.0

Note: for 4.9 GHz mobile or fixed location transmitters the minimum separation distance is 40cm, even if calculations indicate the MPE distance to be less.

Specification

Maximum Permissible Exposure Limits

§90.1217 Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines. See §1.1307 (b)(1) of this chapter.

Limit S = 1mW / cm² from 1.310 Table 1

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33dB
-------------------------	---------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.5. Frequency Stability; Temperature Variations, and Voltage Variations


FCC 47 CFR Part 90, Subpart Y; 2.1055(a)(1); §90.213

IC Section 4.2

Test Procedure

The transmitter output was connected to a spectrum analyzer and the frequency stability was measured in an un-modulated state. Frequency stability was measured through the extremes of temperature on the mid channel only. Before measurements were taken at each temperature the equipment waited until thermal balance was obtained.

Test Measurement Set up

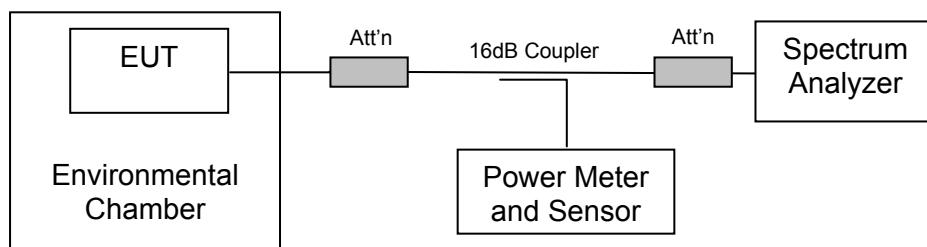

Measurement set up for Frequency Stability

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 34 of 71

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS Frequency Stability;-


Temperature Variations

Voltage (Vdc)	Temperature(°C)	FREQUENCY	
		Measured Value (MHz)	ppm
+12.0	-40	4974.98041	-3.93769
+12.0	-30	4975.00723	1.453266
+12.0	-20	4975.02030	4.080402
+12.0	-10	4975.02527	5.079397
+12.0	0	4975.02129	4.279397
+12.0	+10	4975.01572	3.159799
+10.2	+20	4975.01399	2.81206
+12.0	+20	4975.01395	2.80402
+52.8	+20	4975.01390	2.79397
+12.0	+30	4975.01019	2.048241
+12.0	+40	4975.00522	1.049246
+12.0	+50	4975.00739	1.485427
+12.0	+60	4975.01972	3.963819
+12.0	+70	4975.04142	8.325628
+12.0	+80	4975.08622	17.33065
Maximum Frequency Drift		+86.22 kHz / +17.33065 ppm	
Minimum Frequency Drift		-19.59 kHz / -3.93769 ppm	
Total Frequency Drift		105.81 kHz / 21.26834 ppm	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 35 of 71

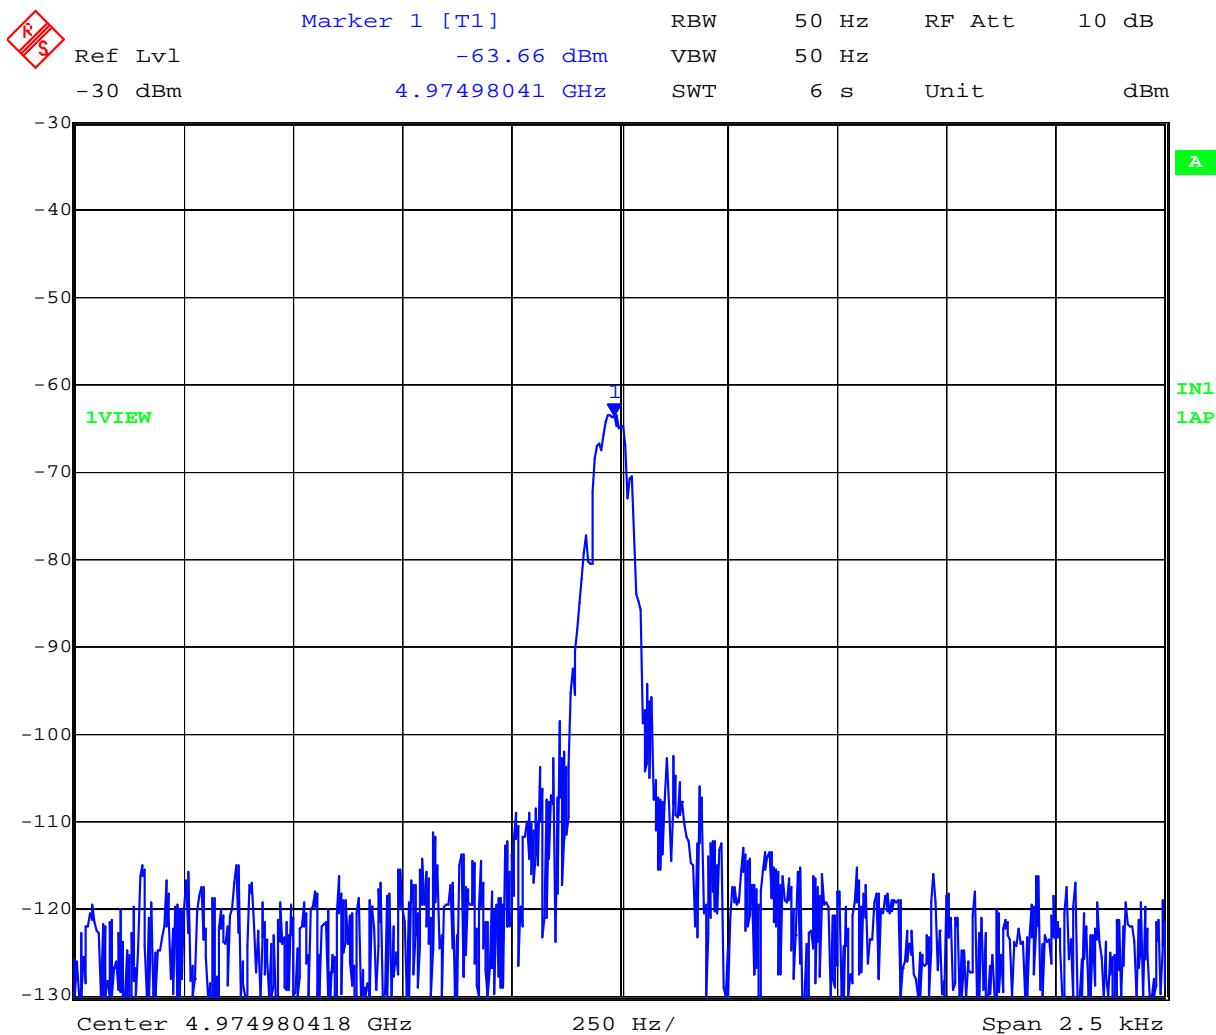


Date: 1.JAN.1997 02:03:44

Frequency Stability @ -40°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 36 of 71

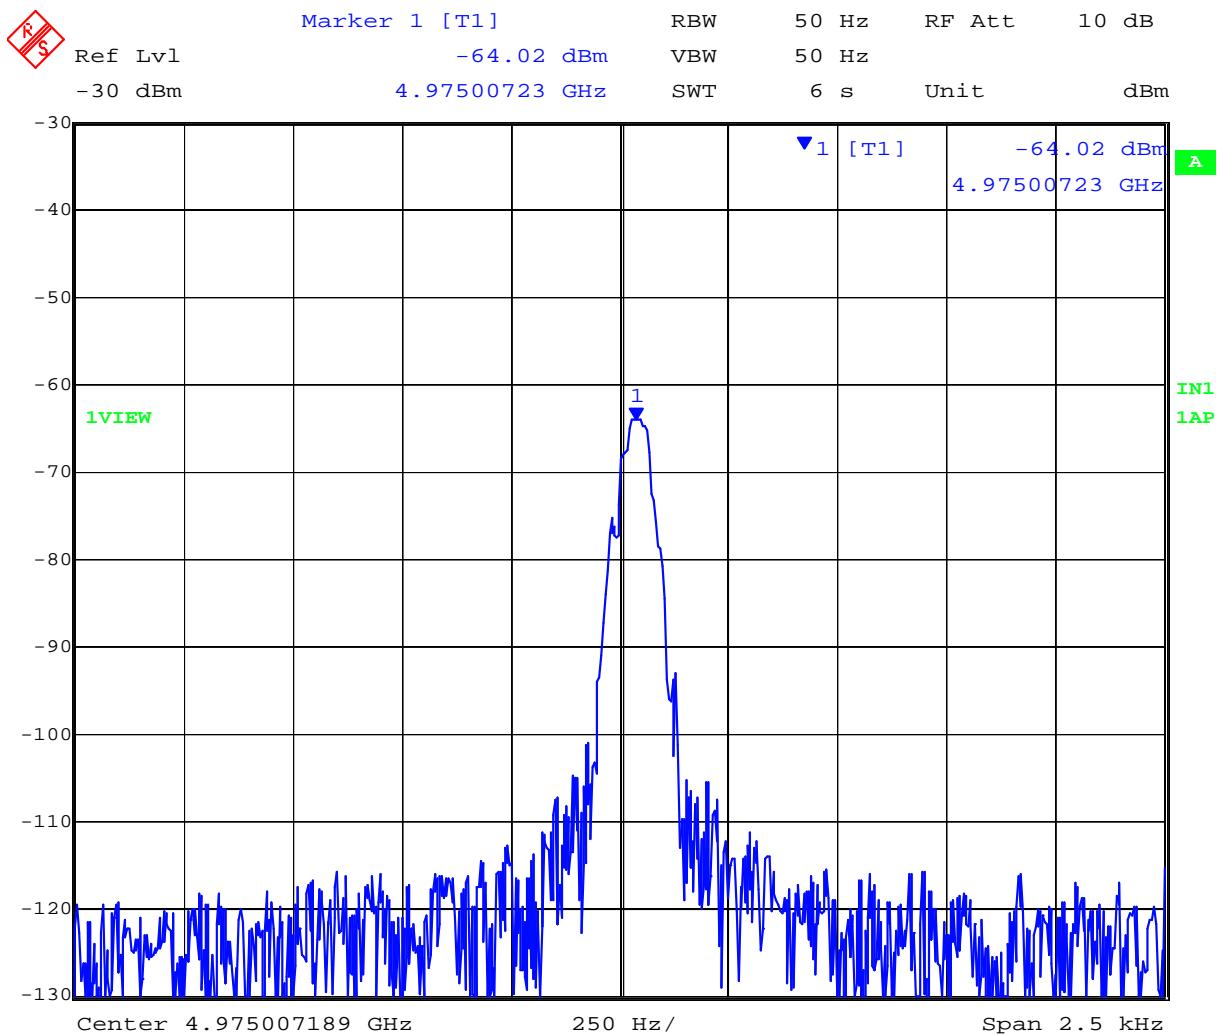


Frequency Stability @ -30°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 37 of 71

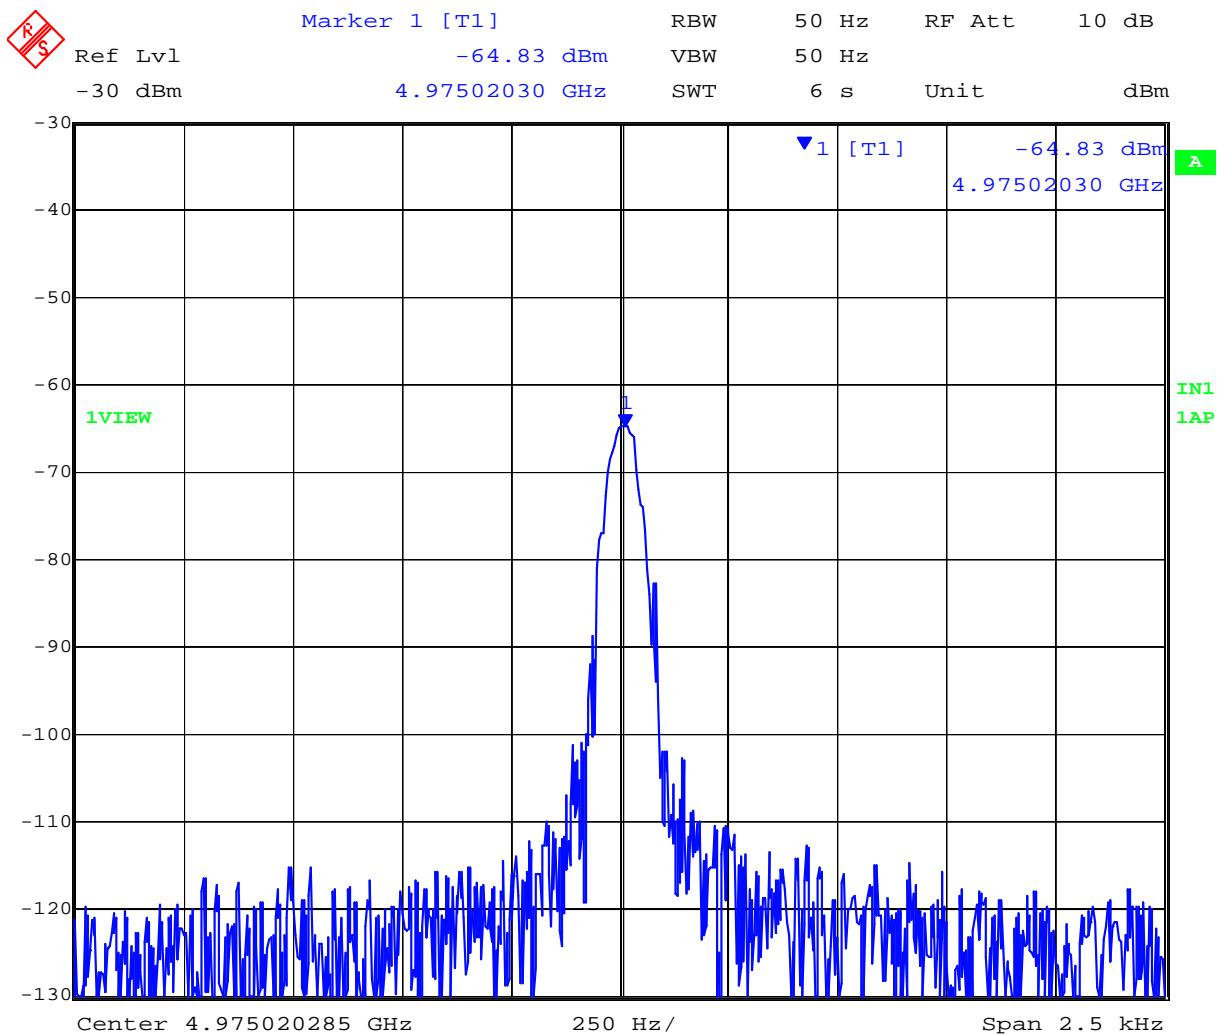


Date: 1.JAN.1997 02:33:21

Frequency Stability @ -20°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 38 of 71

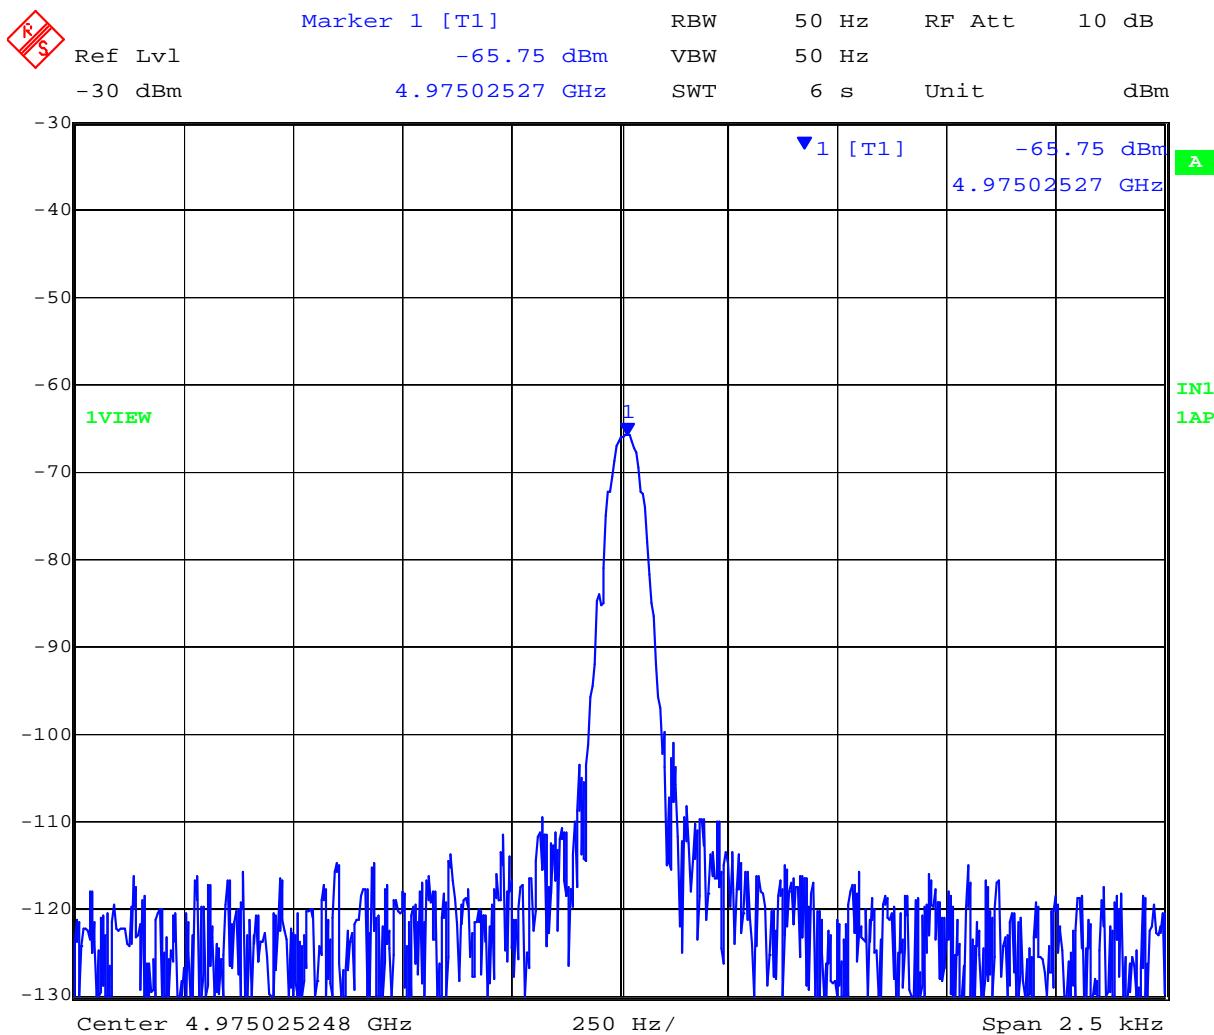


Frequency Stability @ -10°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 39 of 71

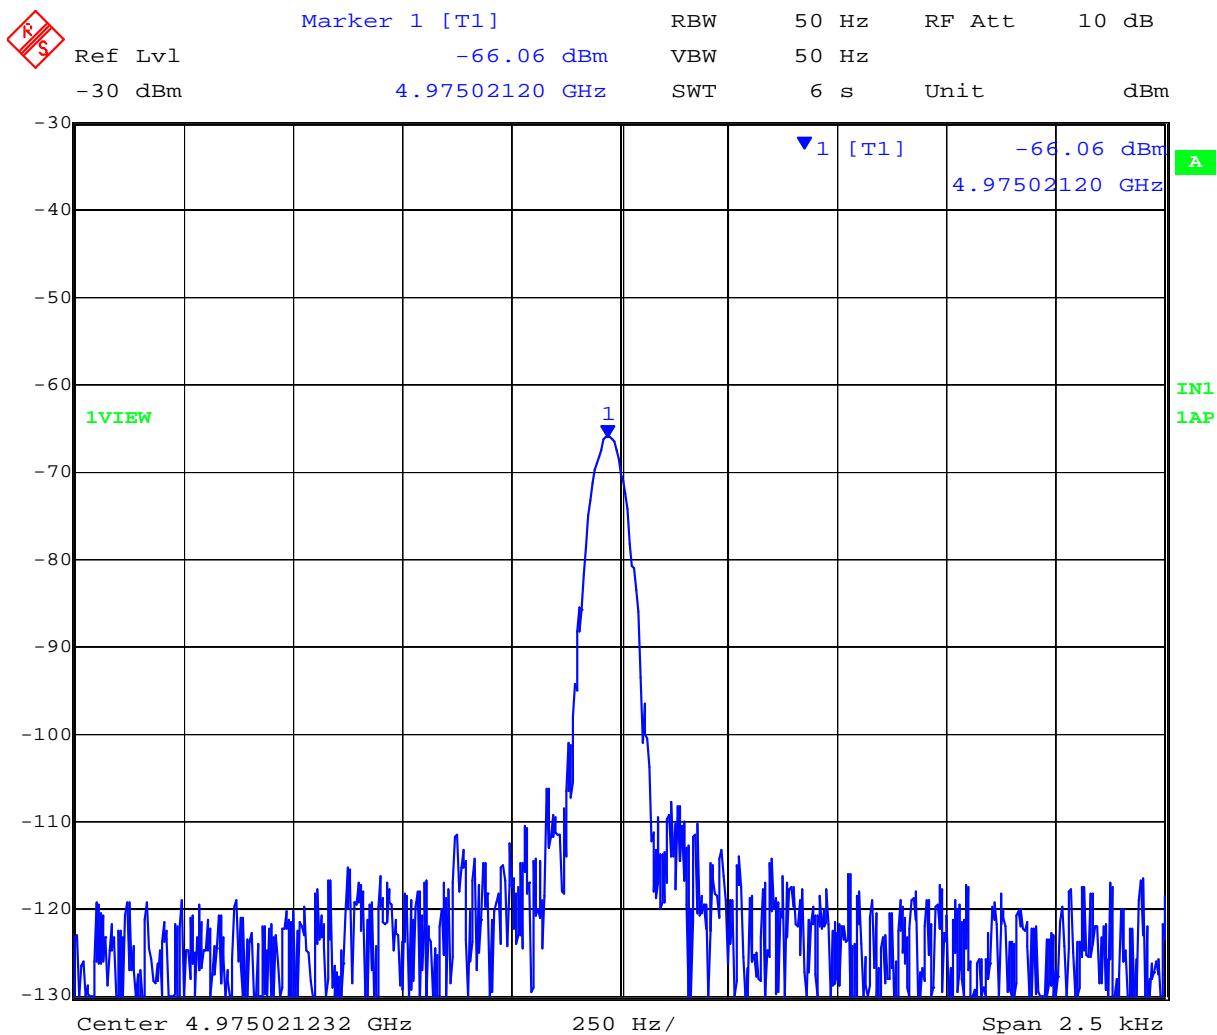


Frequency Stability @ 0°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 40 of 71

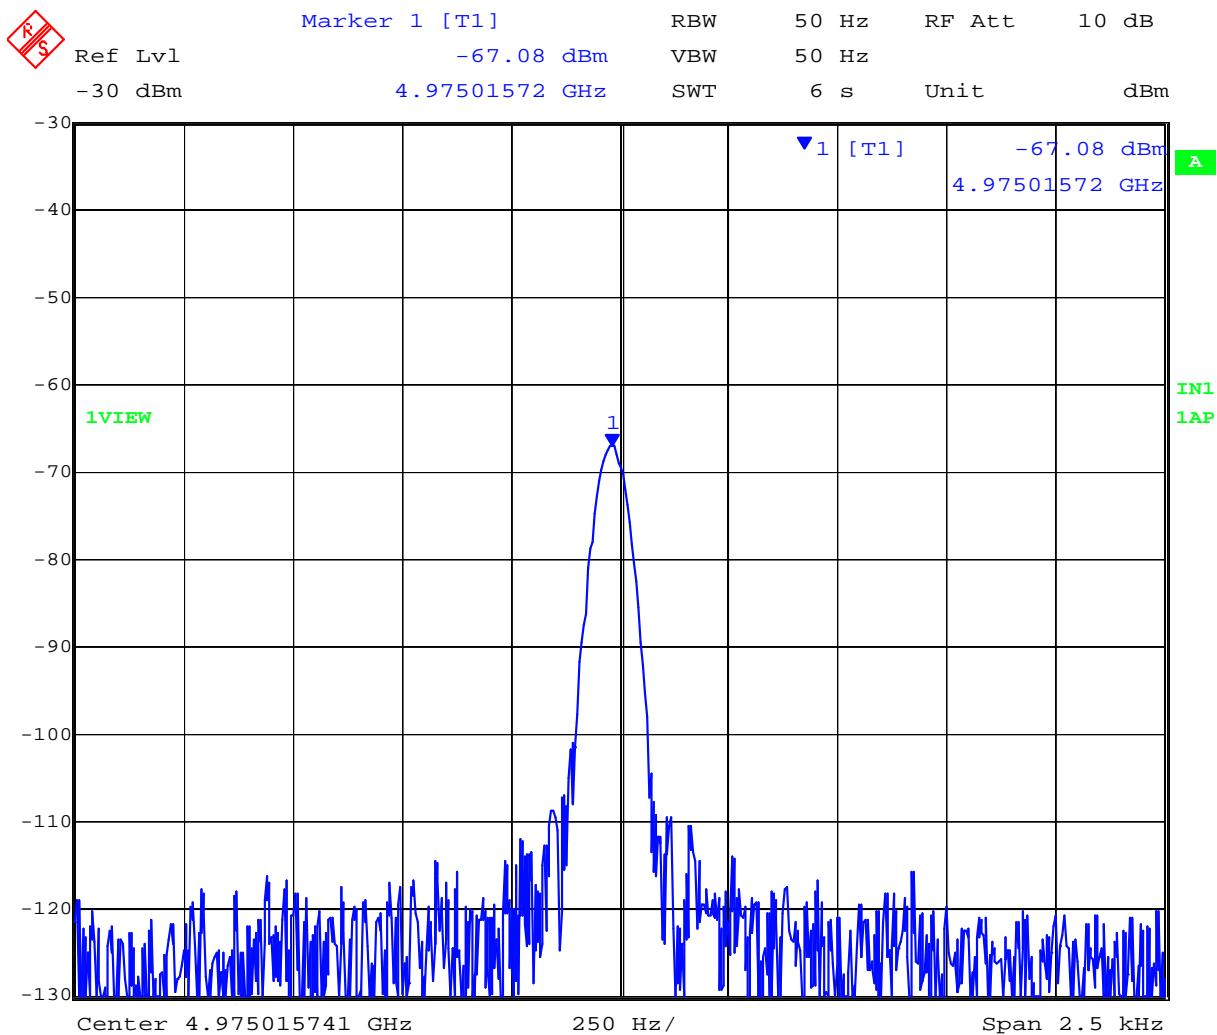


Frequency Stability @ +10°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 41 of 71

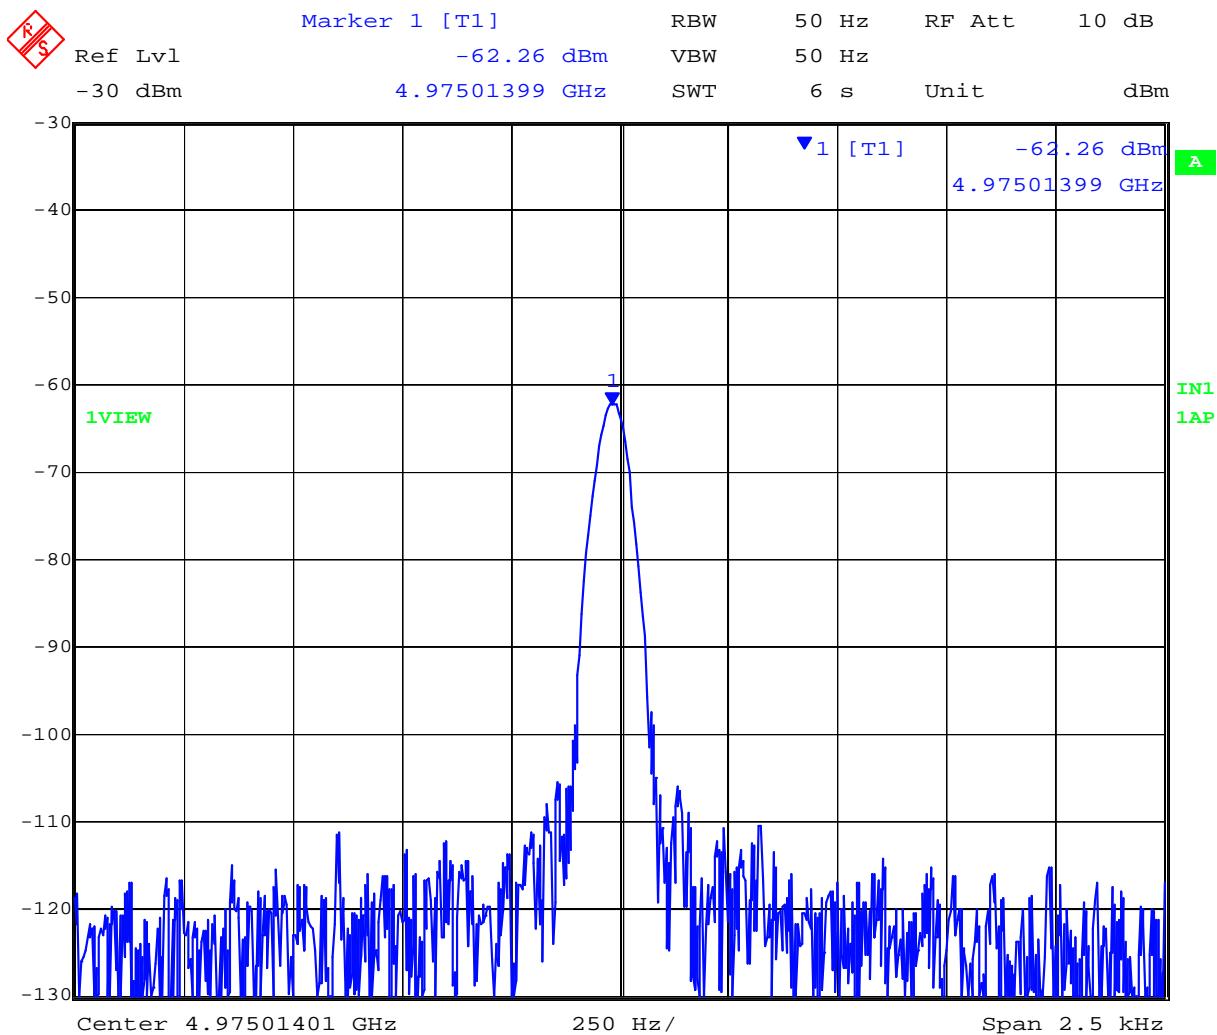


Date: 1.JAN.1997 03:26:56

Frequency Stability @ +20°C, +10.2 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 42 of 71

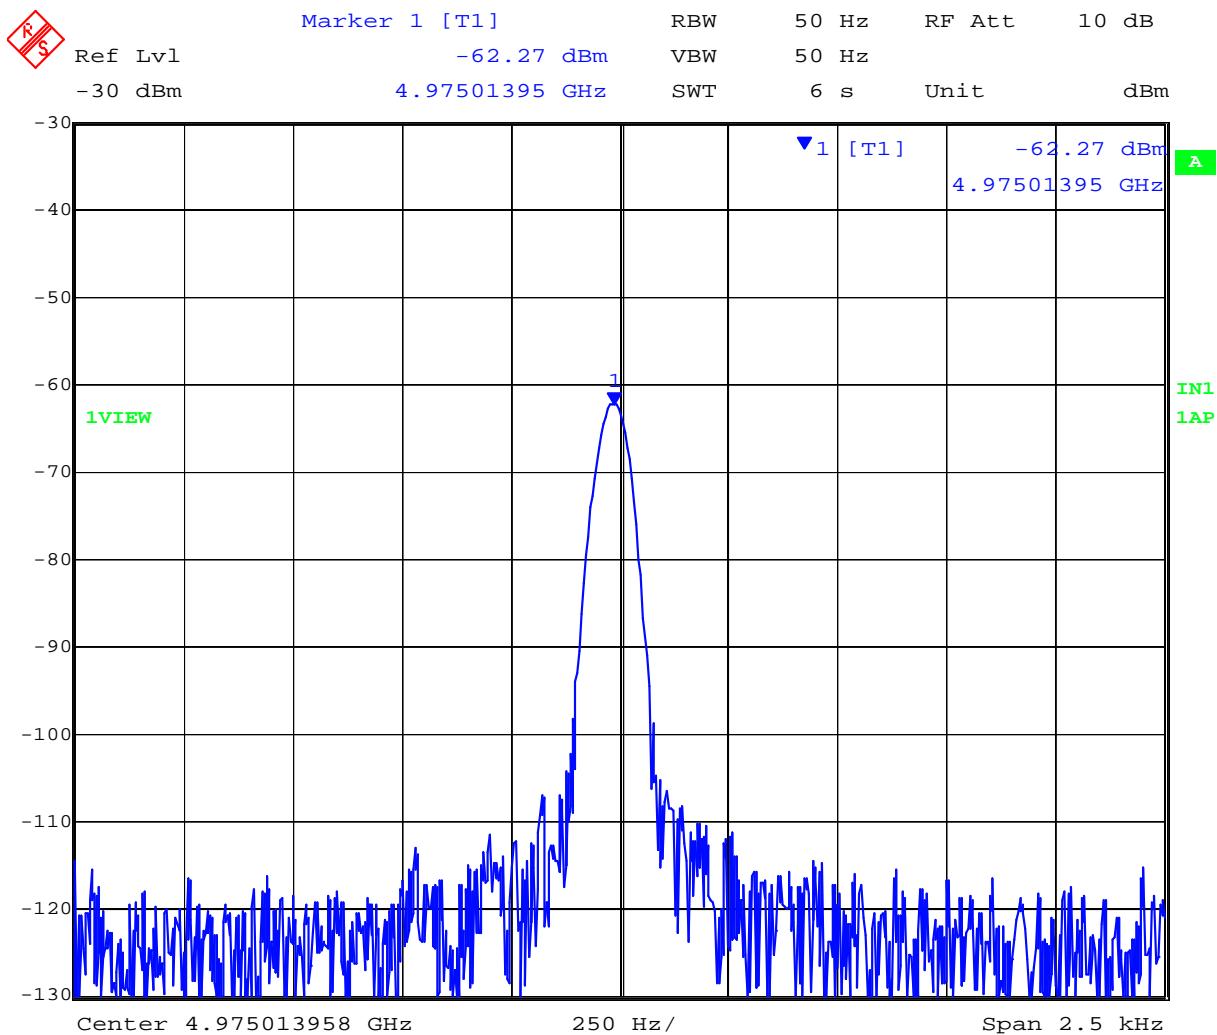


Date: 1.JAN.1997 03:27:56

Frequency Stability @ +20°C, +12 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 43 of 71

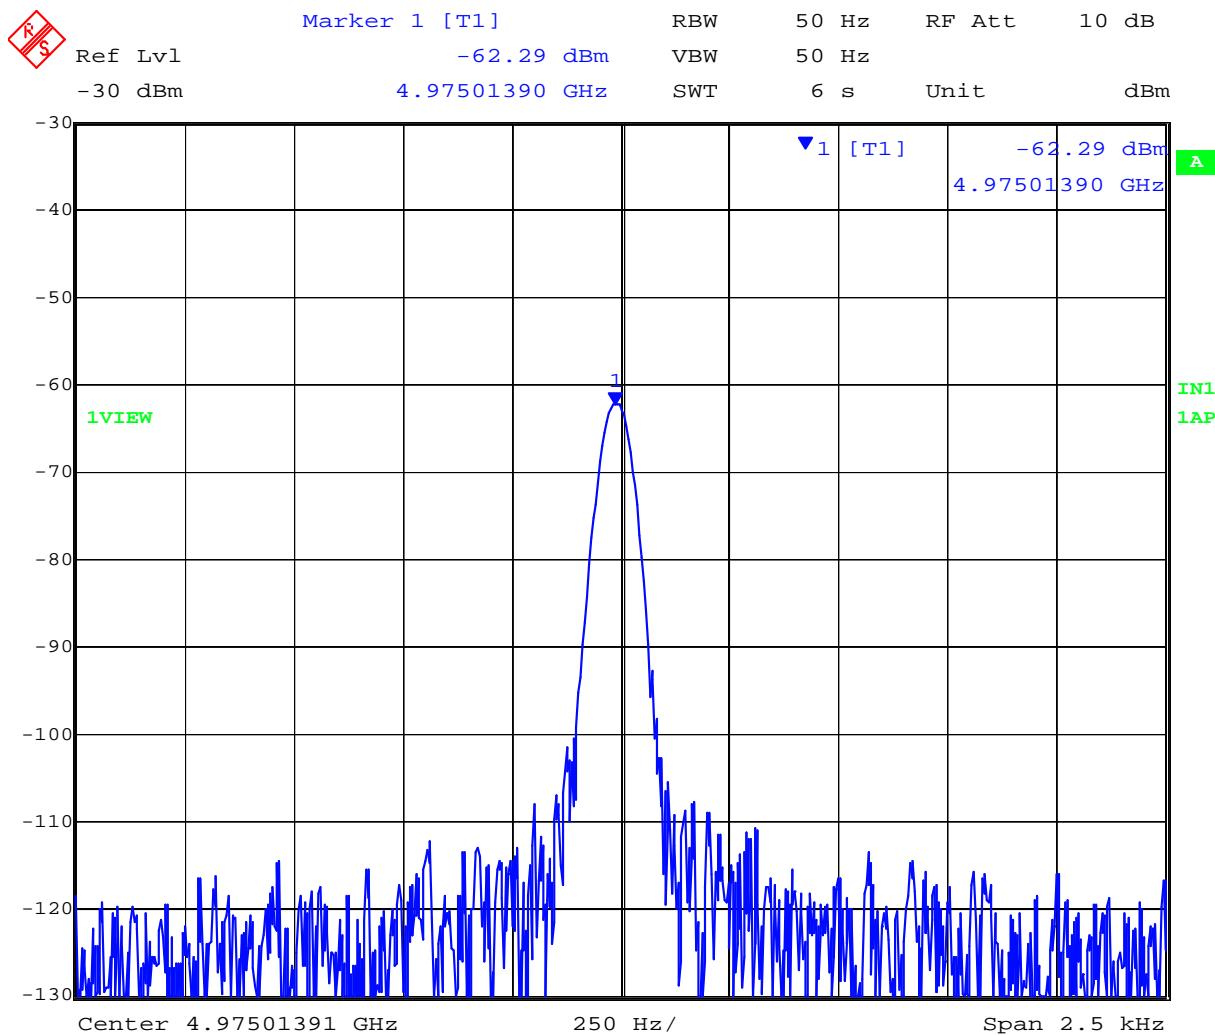


Date: 1.JAN.1997 03:28:59

Frequency Stability @ +20°C, +52.8 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 44 of 71

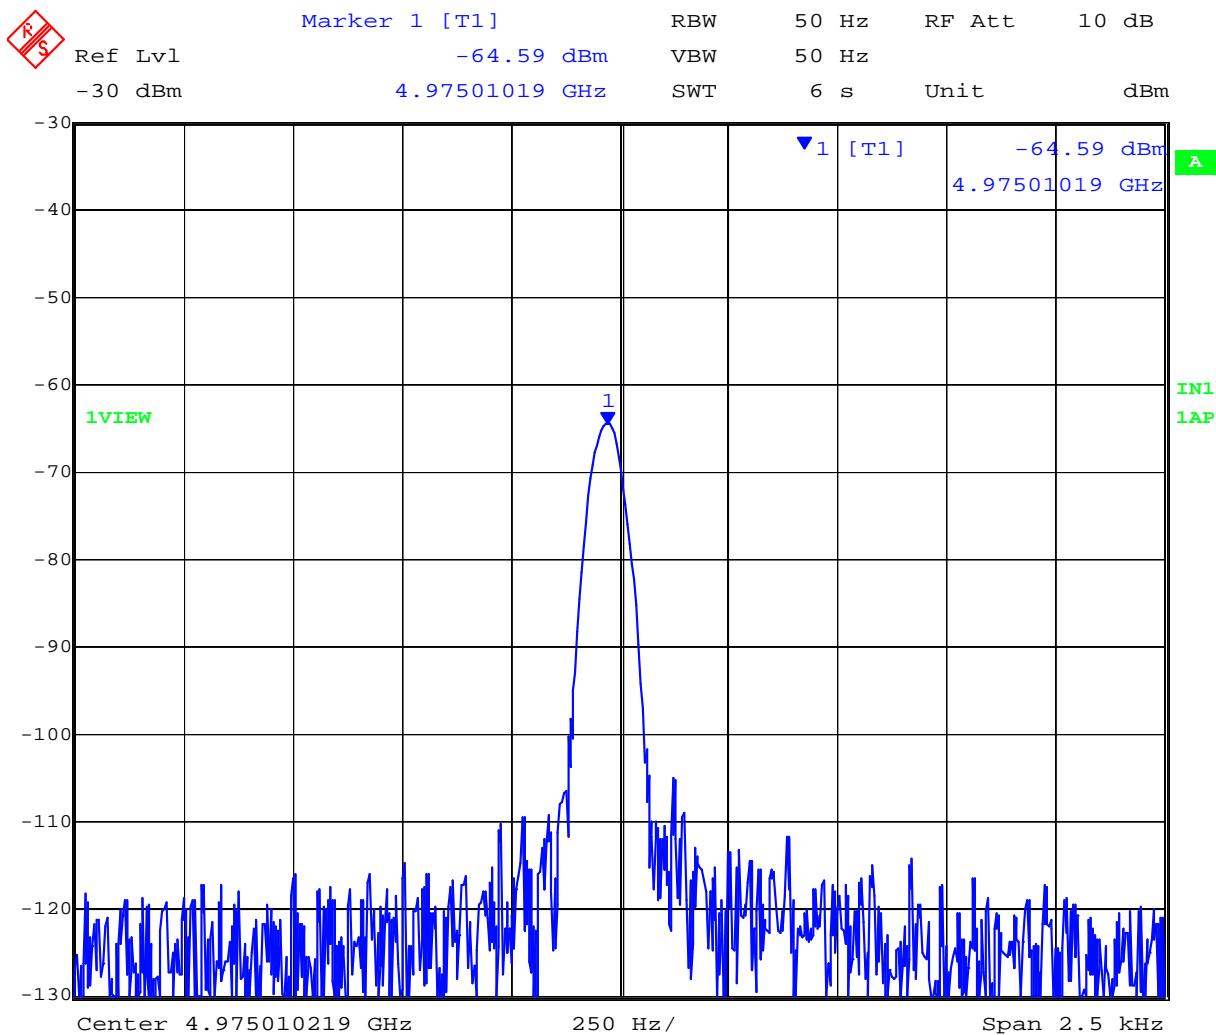


Frequency Stability @ +30°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 45 of 71

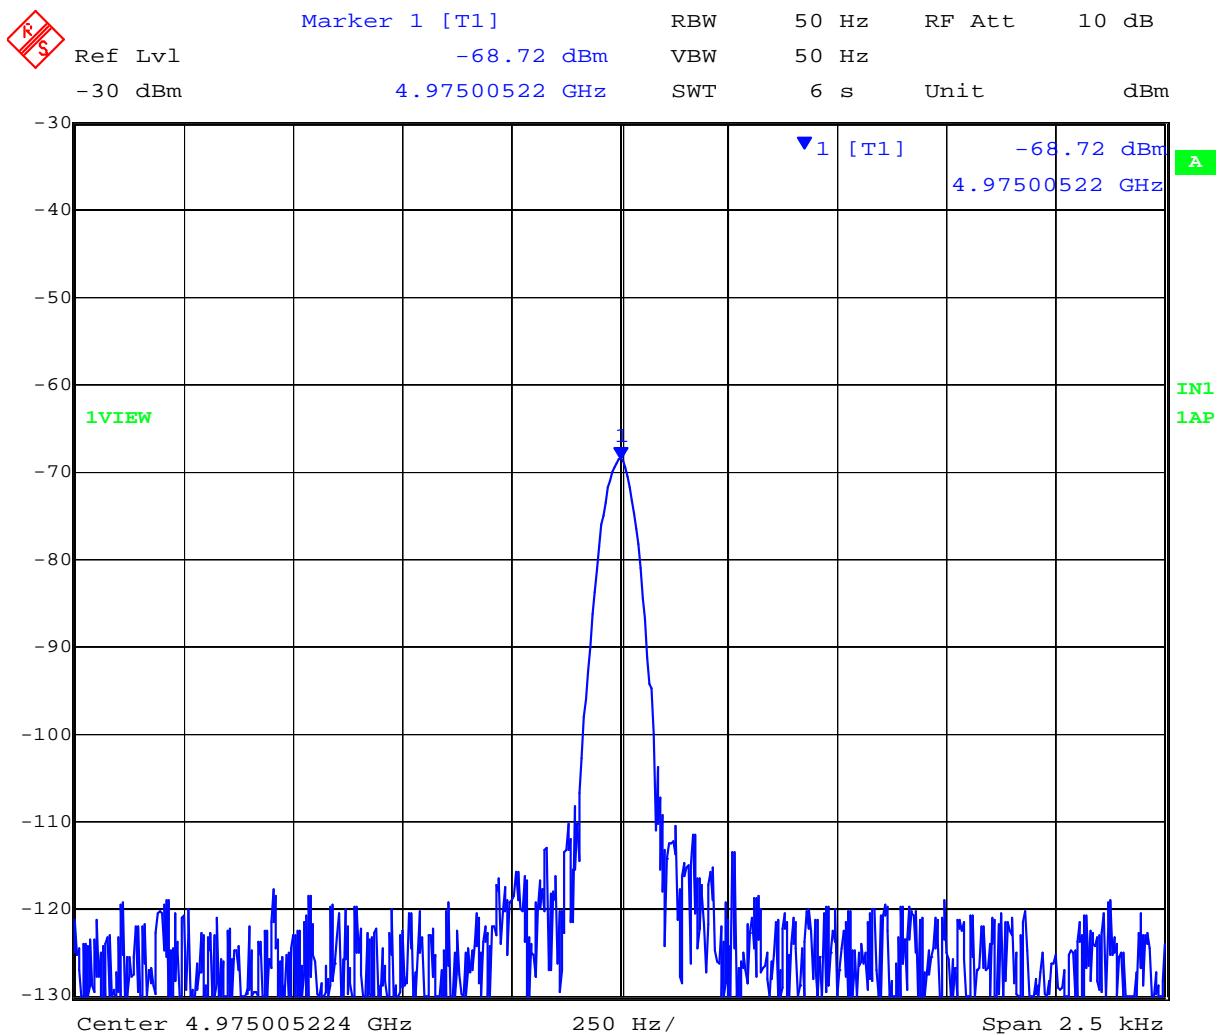


Frequency Stability @ +40°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 46 of 71

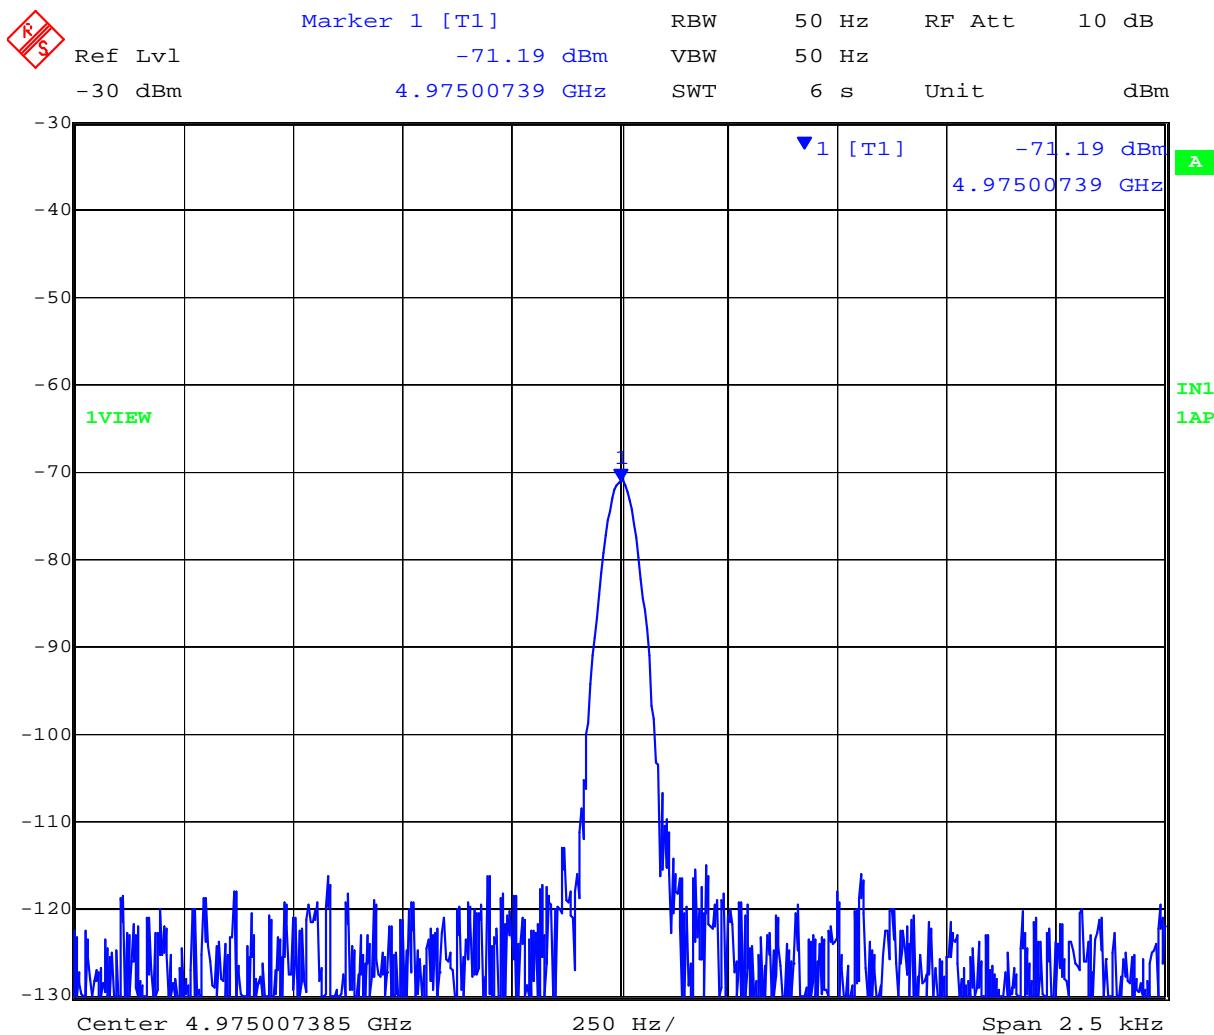


Frequency Stability @ +50°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 47 of 71

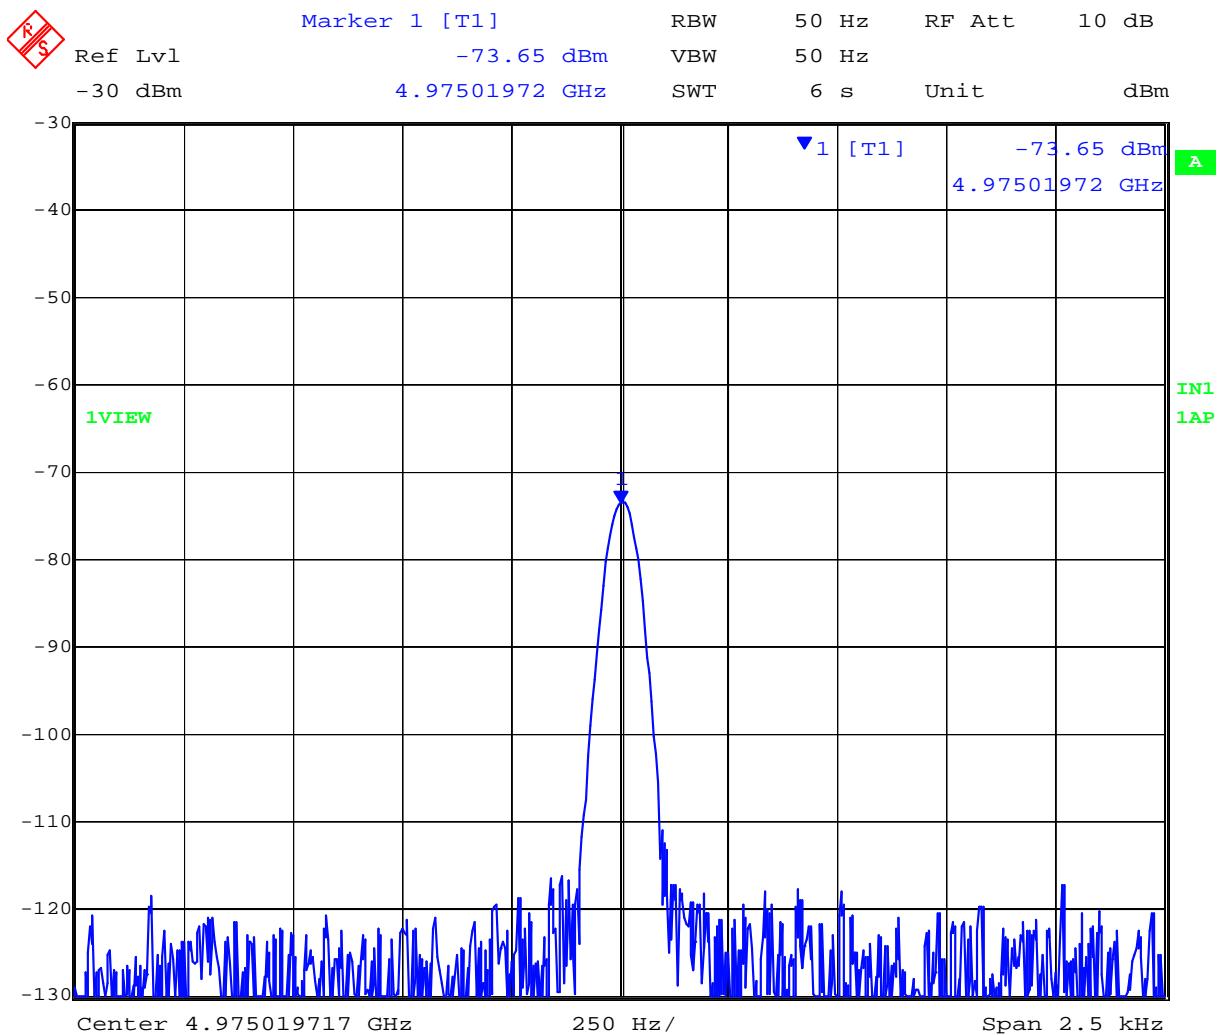


Frequency Stability @ +60°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 48 of 71

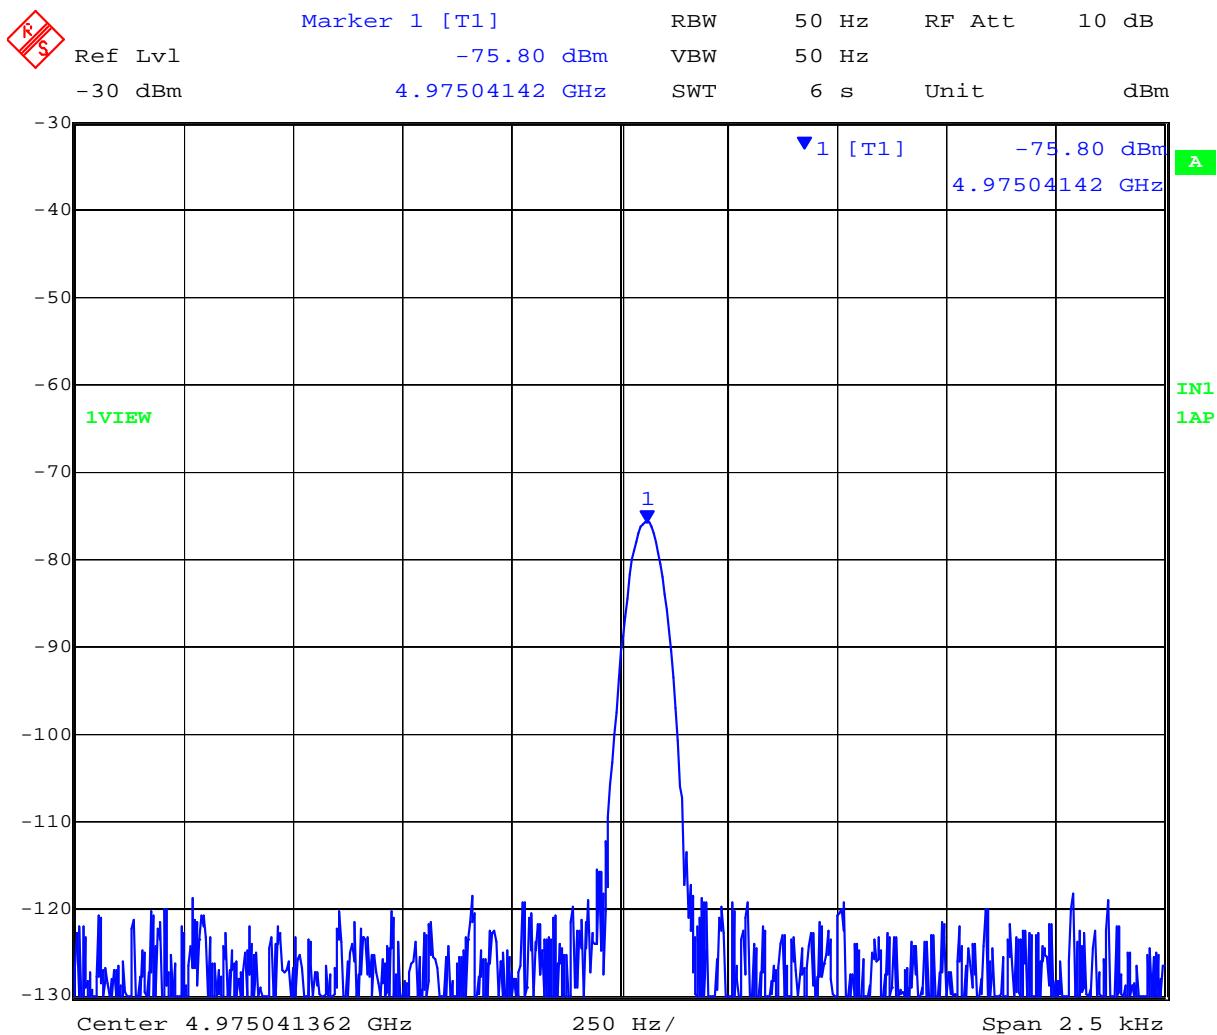


Frequency Stability @ +70°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 49 of 71

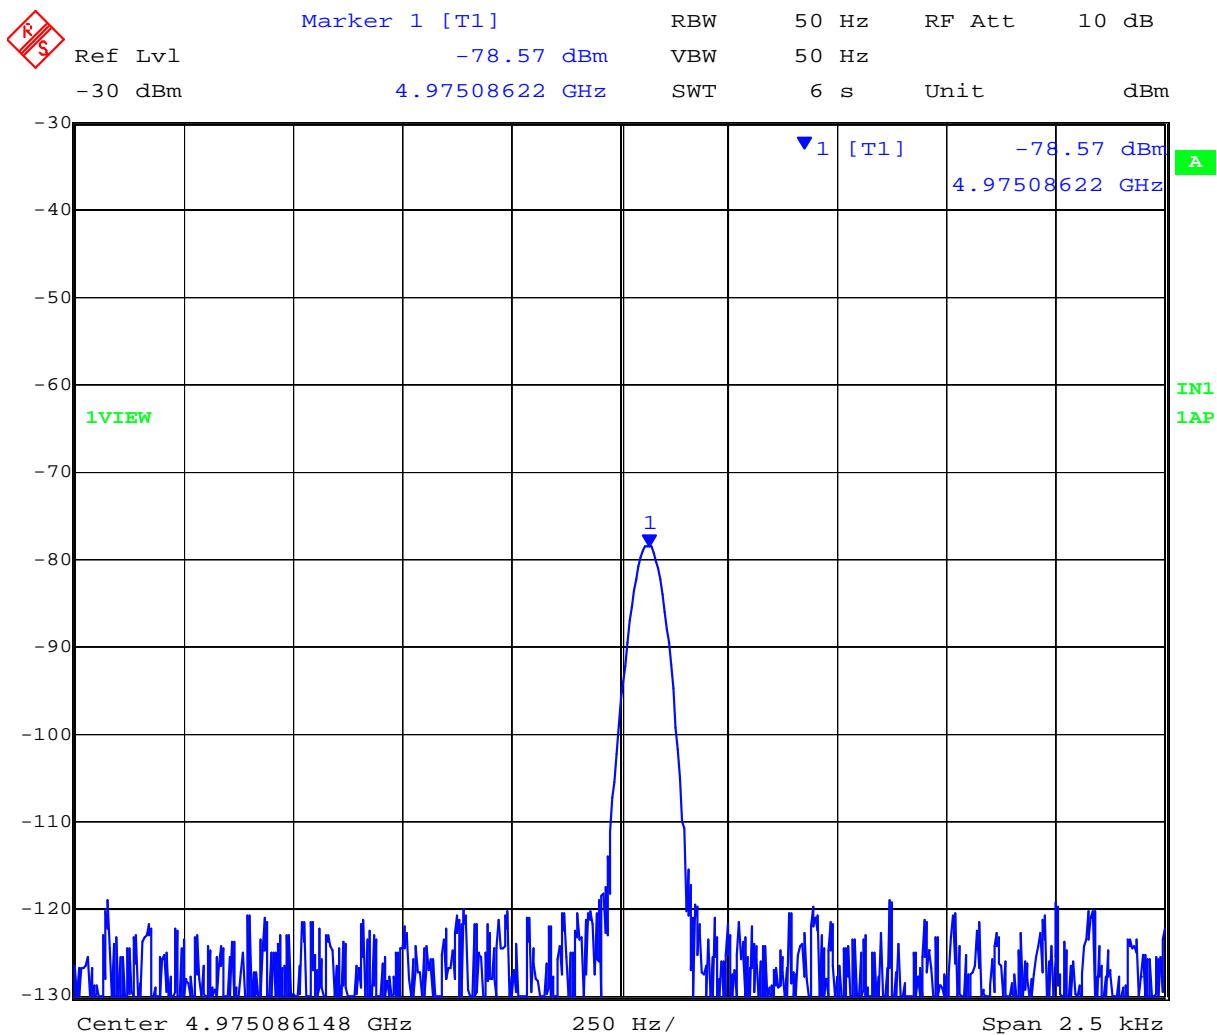

Date: 1.JAN.1997 05:31:15

Frequency Stability @ +80°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 50 of 71

Laboratory Measurement Uncertainty for Frequency Stability

Measurement uncertainty	±0.866 ppm
-------------------------	------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-02 'Frequency Measurement'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.6. Spurious Emissions at Antenna Terminals - Transmitter

FCC 47 CFR Part 90, Subpart Y; 2.1051; §90.210(m)

IC Section 4.4/4.5

Industry Canada RSS-Gen 6

Test Procedure

Transmitter conducted spurious emissions were measured for each bandwidth. Measurement were made while EUT was operating in a modulated transmit mode of operation, at the appropriate center frequency, 100% duty cycle and maximum power at all times. Conducted spurious emissions were measured to 40 GHz.

Limit calculation depended on average transmit power level(s). See test report Section 5.1.2 for maximum power level measurements.

Worst case power measurement: +22.80 dBm

From FCC Part 90.210 (m)


On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Attenuation

$55 + 10 \log (P)$ dB for 20 MHz bandwidth = 47.80 dB attenuation where P is Watts

Limit: $+22.80 - 47.80 = -25.0$ dBm

Test Measurement Set up

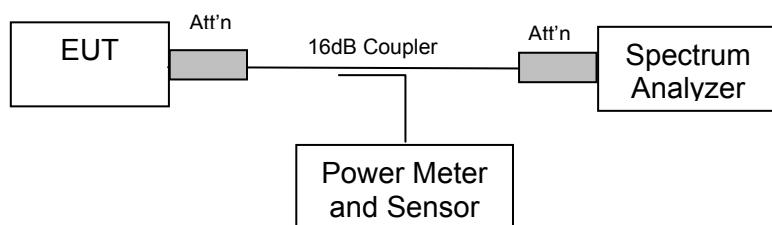

Conducted spurious emission test configuration

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %

Pressure: 999 to 1012 mbar

TABLE OF RESULTS

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 4,955 MHz, Limit: -25.0 dBm

Frequency (MHz)		Freq of Maximum Emission (MHz)	Emission Amplitude (dBm)	Margin (dB)
Start (MHz)	Stop (MHz)			
30	40,000	9,882.32465	-33.96	-8.96



Transmitter Channel 4955 MHz 20 MHz Channel Spacing, 30 – 40,000 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 4,975 MHz, Limit: -25.0 dBm

Frequency (MHz)		Freq of Maximum Emission (MHz)	Emission Amplitude (dBm)	Margin (dB)
Start (MHz)	Stop (MHz)			
30	40,000	9,962.42485	-34.91	-9.91



Date: 17.JAN.2008 19:12:08

Transmitter Channel 4975 MHz 20 MHz Spacing, 30 – 40,000 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 54 of 71

Specification Limits

Conducted Spurious Emission at Antenna Terminals – Transmitter Limits FCC Part §90.210

Emission Mask (m)

(6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10\log(P)$ dB, whichever is the lesser attenuation.

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0070, 0116, 0158, 0088, 0252, 0313, 0314

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7. Radiated Spurious Emissions

FCC 47 CFR Part 90, Subpart Y; 2.1053; §90.210(m)

IC Section 4.4

Test Procedure

Measurements were made while EUT was operating in a modulated transmit mode of operation, at the appropriate center frequency, 100% duty cycle and maximum power at all times. Substitution was performed on any emissions observed within 6 dB of the limit line. The antenna port was attenuated with a $50\ \Omega$ termination.

The measurement equipment was set to measure in peak hold mode. The emissions were measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode.

The highest emissions relative to the limit are listed for each frequency spanned.

Measurements below 1 GHz utilized 100 KHz RBW, measurements above 1 GHz were performed using a minimum RBW of 1 MHz.

Limit calculation depended on average transmit power level(s). See test report Section 5.1.2 for maximum power level measurements.

Worst case power measurement: +22.80 dBm

From FCC Part 90.210 (m)

On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: $50\ \text{dB}$ or $55 + 10 \log (P)\ \text{dB}$, whichever is the lesser attenuation.


Attenuation

$55 + 10 \log (P)\ \text{dB}$ for 20 MHz bandwidth = 47.80 dB attenuation where P is Watts

Limit: $+22.80 - 47.80 = -25.0\ \text{dBm}$

The -25 dBm limit was verified using a substitution method.

Test Measurement Set up

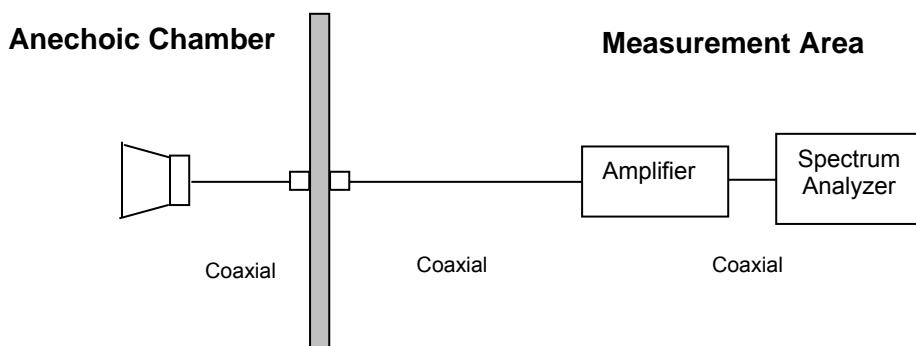

Measurement set up for Radiated Emission Test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 56 of 71

Radio parameters.

MWS100


Channel Freq 4,955 MHz Results

Power setting = +23 dBm, 50 Ohm load on each output
Duty Cycle 100%

INITIAL INVESTIGATION				SUBSTITUTION RESULTS				
Freq. (MHz)	Pol.	Raw (dBuV)	Res BW (KHz)	Pwr @ Antenna (dBm)	Ant. Gain (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	

No emissions were found within 6 dB of the limit

Channel Freq 4,955 MHz Results 30MHz to 1GHz

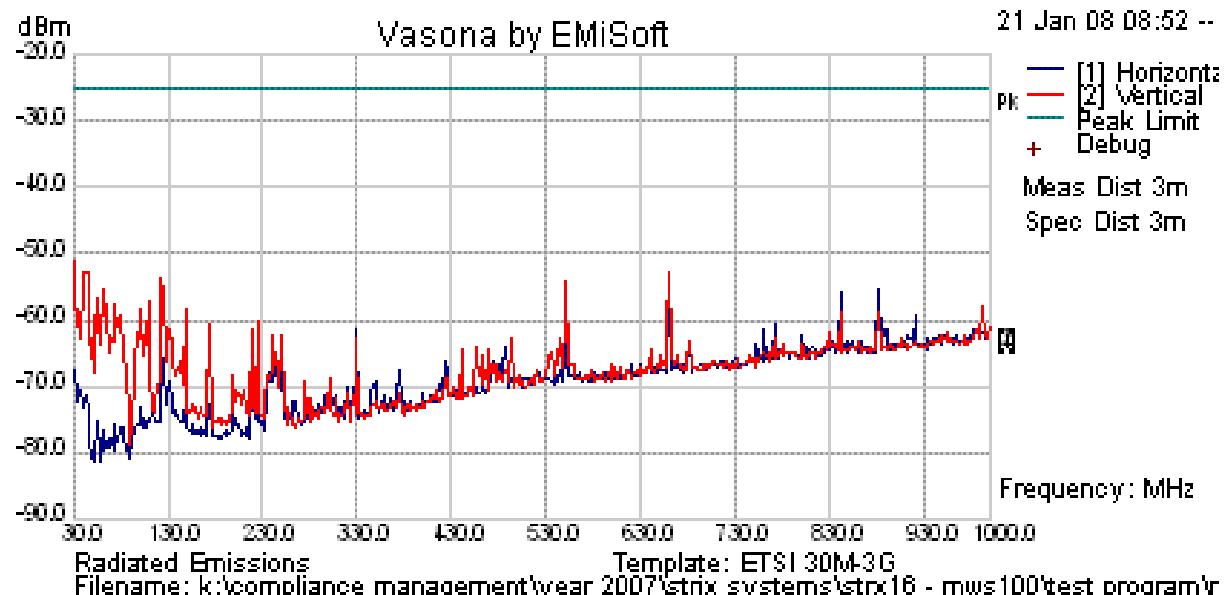


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

MWS100

Channel Freq 4,955 MHz Results 1GHz to 18GHz

Power setting = +23 dBm, 50 Ohm load on each output
 Duty Cycle 100%

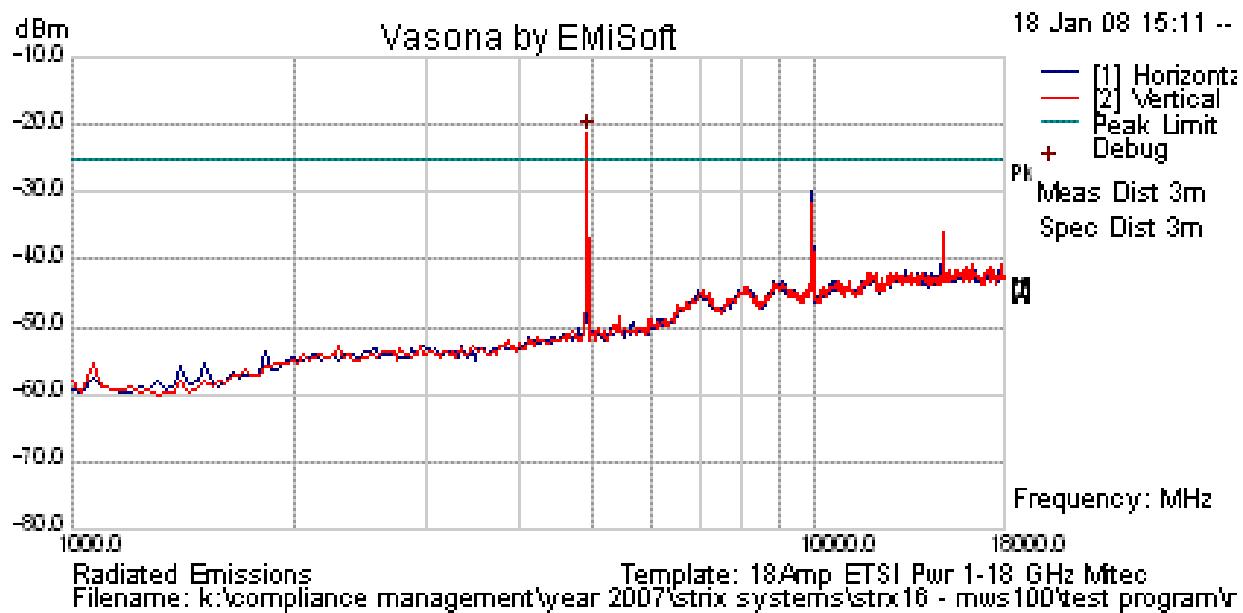

The emission breaking the limit line is the fundamental emission i.e carrier



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 58 of 71

MWS100


Channel Freq 4,975 MHz Results

Power setting = +23 dBm, 50 Ohm load on each output
Duty Cycle 100%

INITIAL INVESTIGATION				SUBSTITUTION RESULTS				
Freq. (MHz)	Pol.	Raw (dBuV)	Res BW (KHz)	Pwr @ Antenna (dBm)	Ant. Gain (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	

No emissions were found within 6 dB of the limit

Channel Freq 4,975 MHz Results 30MHz to 1GHz

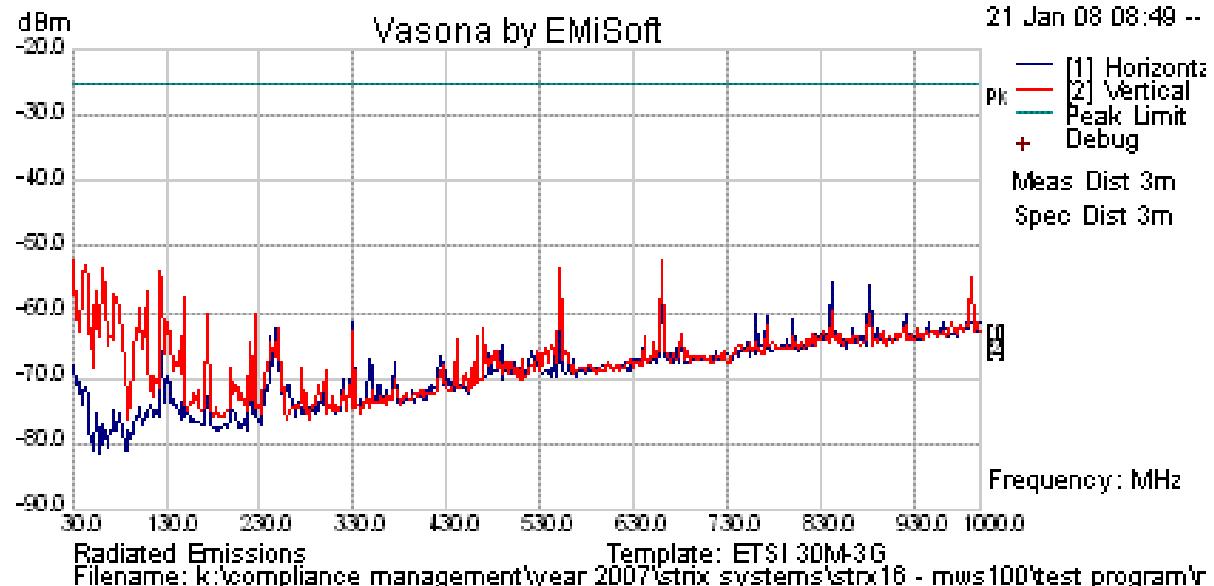


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

MWS100

Channel Freq 4,975 MHz Results

Power setting = +23 dBm, 50 Ohm load on each output
 Duty Cycle 100%

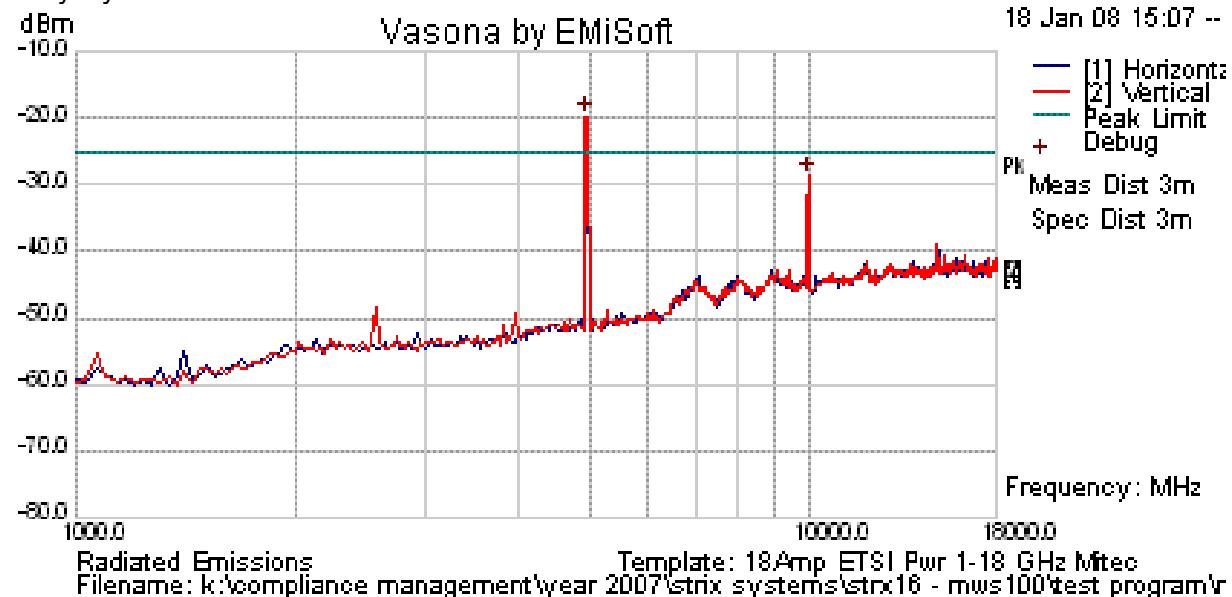

The emission breaking the limit line is the fundamental emission i.e carrier



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 60 of 71

Transmitter Limits

Limits FCC Part §90.210 (m)

Emission Mask M

(6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0104, 0158, 0134, 0310, 0312, Dipole.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)


FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §4.8, §6

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in the anechoic chamber a spectrum analyzer in peak hold in the first instance. To help detect potential offending emissions generated by the EUT an initial scan time of 4 minutes was implemented on each polarity, plot is provided. Emissions closest to the limit are formally assessed using a quasi-peak (QP) detector with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Transmitter was operational and terminated into a 50Ω load.

Test Measurement Set up

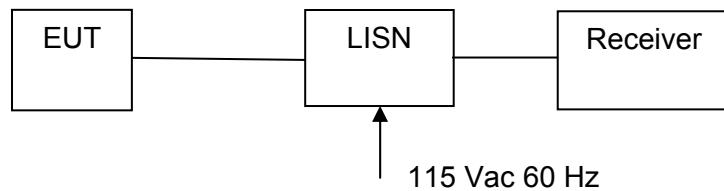

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.


Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radio parameters.

Data Rate(s): 802.11a, 6 MBit/s, +17 dBm output power

TABLE OF RESULTS
LINE – LIVE and NEUTRAL

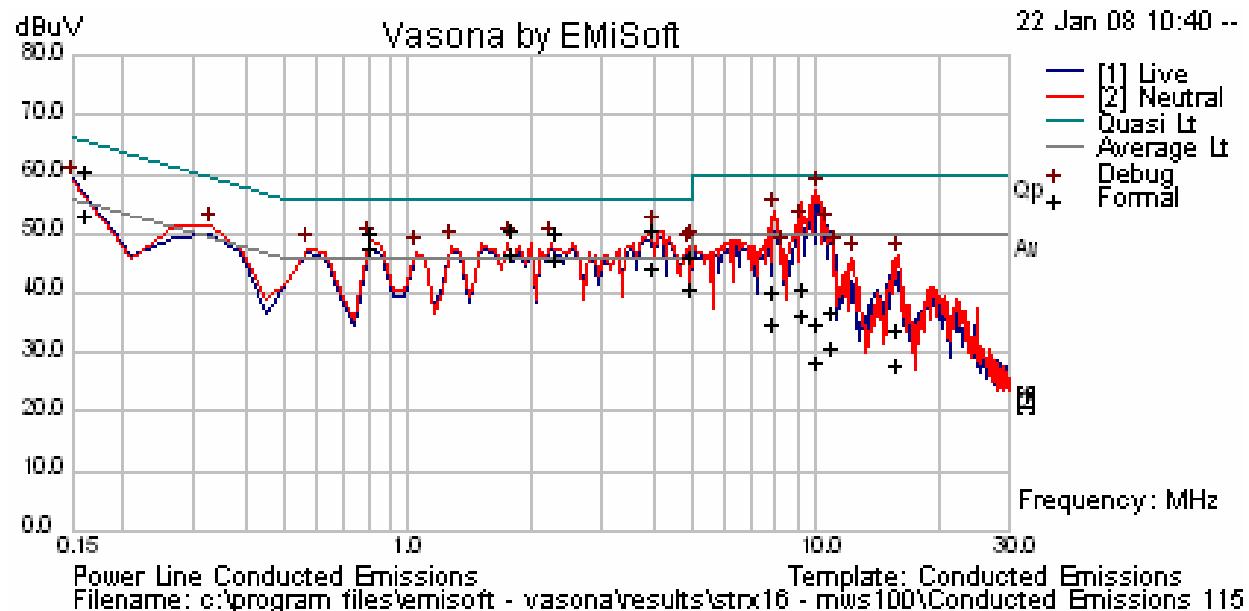

Formally Assessed Frequencies

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
0.164	48.21	9.89	0.1	58.2	Quasi Peak	Live	65.26	-7.06	Pass
0.164	40.72	9.89	0.1	50.72	Average	Live	55.26	-4.54	Pass
4.024	37.78	10.11	0.2	48.09	Quasi Peak	Neutral	56	-7.91	Pass
4.024	31.75	10.11	0.2	42.05	Average	Neutral	46	-3.95	Pass
0.820	37.61	9.94	0.1	47.65	Quasi Peak	Neutral	56	-8.35	Pass
0.820	35.2	9.94	0.1	45.24	Average	Neutral	46	-0.76	Pass
2.300	37.49	10.07	0.1	47.65	Quasi Peak	Neutral	56	-8.35	Pass
2.300	33.03	10.07	0.1	43.2	Average	Neutral	46	-2.8	Pass
1.807	37.93	10.03	0.1	48.06	Quasi Peak	Neutral	56	-7.94	Pass
1.807	34.08	10.03	0.1	44.21	Average	Neutral	46	-1.79	Pass
5.011	33.48	10.15	0.2	43.83	Quasi Peak	Neutral	60	-16.17	Pass
5.011	27.97	10.15	0.2	38.32	Average	Neutral	50	-11.68	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 63 of 71

Debug Frequencies

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line
10.08	46.43	10.3	0.4	57.14	Peak [Scan]	Neutral
3.978	40.53	10.1	0.2	50.84	Peak [Scan]	Neutral
7.927	43.05	10.29	0.3	53.65	Peak [Scan]	Neutral
0.15	49.1	9.89	0.1	59.09	Peak [Scan]	Live
0.808	38.78	9.95	0.1	48.83	Peak [Scan]	Neutral
1.765	38.52	10.02	0.1	48.64	Peak [Scan]	Neutral
2.244	38.45	10.06	0.1	48.62	Peak [Scan]	Neutral
1.287	38.1	9.96	0.1	48.16	Peak [Scan]	Neutral
4.995	37.69	10.15	0.2	48.04	Peak [Scan]	Neutral
4.876	37.6	10.14	0.2	47.95	Peak [Scan]	Neutral
0.329	41.21	9.88	0.1	51.19	Peak [Scan]	Neutral
0.569	37.57	9.94	0.1	47.61	Peak [Scan]	Neutral
10.738	40.49	10.31	0.4	51.2	Peak [Scan]	Live
1.047	37.07	9.92	0.1	47.09	Peak [Scan]	Neutral
11.157	36.53	10.31	0.4	47.24	Peak [Scan]	Live
8.285	36.62	10.3	0.3	47.22	Peak [Scan]	Neutral
15.883	35.28	10.44	0.7	46.42	Peak [Scan]	Neutral
12.293	35.33	10.32	0.5	46.15	Peak [Scan]	Neutral
9.244	41.1	10.3	0.4	51.8	Peak [Scan]	Neutral

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 64 of 71

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

§15.207 (a) Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0193, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6. TEST SET-UP PHOTOGRAPHS

6.1. General Measurement Test Set-Up




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.2. Radiated Emissions < 1 GHz (POE)




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3. Radiated Emissions < 1 GHz (dc Powered)

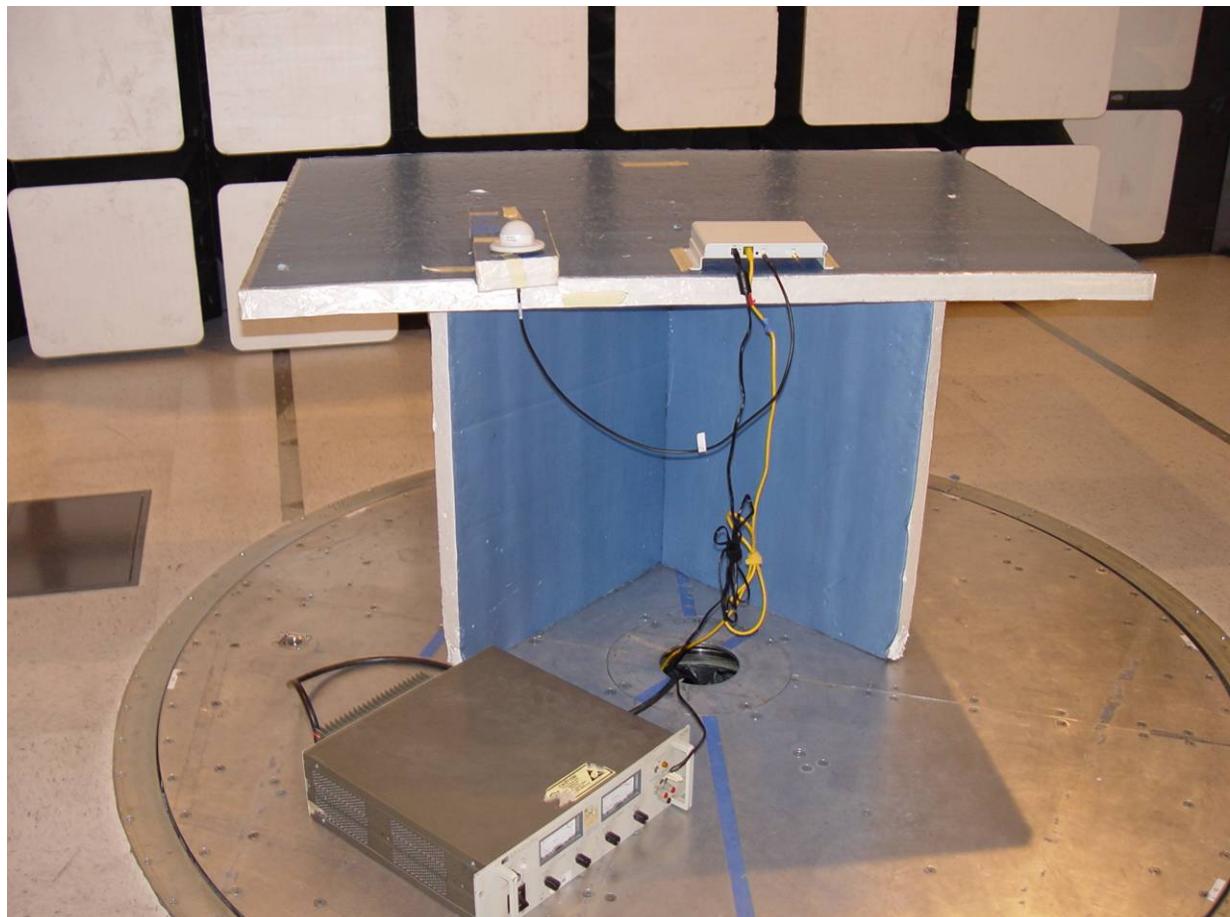

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.4. Spurious Emissions > 1 GHz

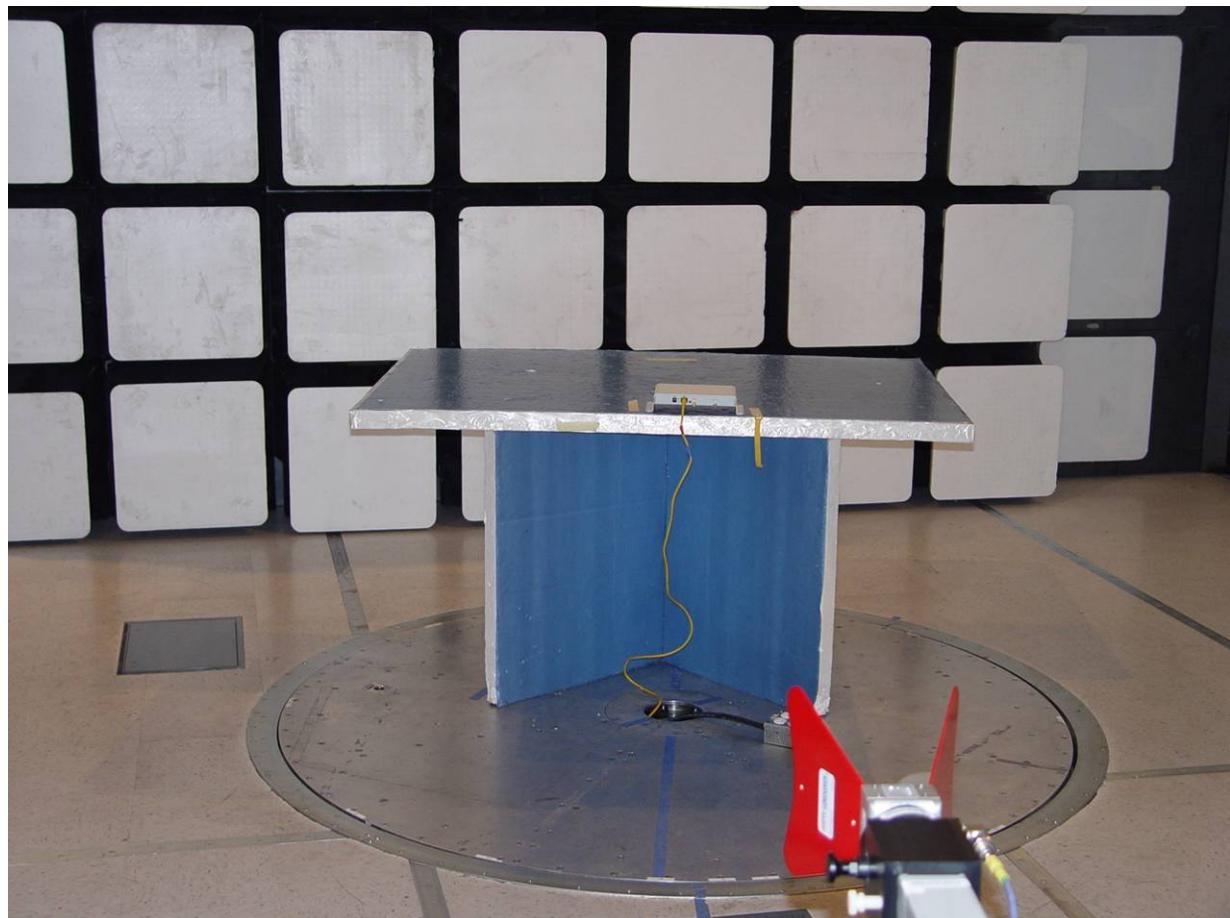

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.5. AC Wireline Emissions (150 kHz - 30 MHz)



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Strix Systems MWS100
To: FCC 47 CFR Part 90 & IC RSS 111
Serial #: STRX16-A12 Rev B
Issue Date: 14th April '08
Page: 70 of 71

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Calibration Due Date	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	20 th June '07	3410A00141
0104	1-18GHz Horn Antenna	The Electro-Mechanics Company	3115	21 st Oct '07	9205-3882
0134	Amplifier	Com Power	PA 122	1 st Dec '07	181910
0158	Barometer /Thermometer	Control Co.	4196	26 th Aug '07	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	17 th Aug 07	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	11 th Jun '07	None
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	1 st Dec 07	001
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	7 th Dec '07	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	9 ^h Dec '07	209092-001
0313	Coupler	Hewlett Packard	86205A	N/A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	N/A	1623
0223	Power Meter	Hewlett Packard	EPM-442A	16 th Aug 07	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	16 th Aug 07	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	20 th June 07	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	3 RD Oct 07	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	22 nd Jun 07	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	13 TH Jul 07	15F50B001
0307	BNC Cable	Megaphase	1689 1GVT4	13 th Jul 07	15F50B002
	Dipole Antenna	EMCO	3121C	30 th Dec '06	9009 - 605

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, California 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com