

Test of Access One Network OWS3600

To: FCC 47 CFR Part 90

Test Report Serial No.: STRX10-A2 Rev C





Test of Access One Network OWS3600

To FCC 47 CFR Part 90

Test Report Serial No.: STRX10-A2 Rev C

This report supersedes STRX10-A2 Rev B

Manufacturer: Strix Systems, Inc
26610 Agoura Road
Calabasas
California 91302, USA

Product Function: Wireless Mesh Router Operating at 4.9 GHz

Copy No: pdf **Issue Date:** 14th February '07

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 3 of 58

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF CONTENTS

COVER PAGE	1
ACCREDITATION & LISTINGS.....	5
1. TEST RESULT CERTIFICATE	8
2. REFERENCES AND MEASUREMENT UNCERTAINTY.....	9
2.1. Normative References	9
2.2. Test and Uncertainty Procedures	9
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	10
3.1. Technical Details	10
3.2. Scope of Test Program.....	11
3.3. Equipment Model(s) and Serial Number(s)	12
3.4. Antenna Details	12
3.5. Cabling and I/O Ports	12
3.6. Test Configurations.....	13
3.7. Equipment Modifications.....	13
3.8. Deviations from the Test Standard	13
3.9. Subcontracted Testing or Third Party Data	13
4. TEST SUMMARY	14
5. TEST RESULTS	15
5.1. Device Characteristics	15
5.1.1. <i>Occupied Bandwidth and Emission Mask</i>	15
5.1.2. <i>Peak Output Power</i>	22
5.1.3. <i>Peak Power Spectral Density (PPSD)</i>	27
5.1.4. <i>Maximum Permissible Exposure</i>	31
5.1.5. <i>Frequency Stability; Temperature Variations, and Voltage Variations</i> ..	32
5.1.6. <i>Spurious Emissions at Antenna Terminals - Transmitter</i>	37
5.1.7. <i>Radiated Spurious Emissions</i>	41
5.1.8. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i>	51
6. TEST SET-UP PHOTOGRAPHS.....	54
6.1. General Measurement Test Set-Up	54
6.2. Radiated Spurious Emissions	55
6.3. AC Wireline Emissions (150 kHz - 30 MHz)	56
7. TEST EQUIPMENT DETAILS.....	57


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 5 of 58

ACCREDITATION & LISTINGS

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>

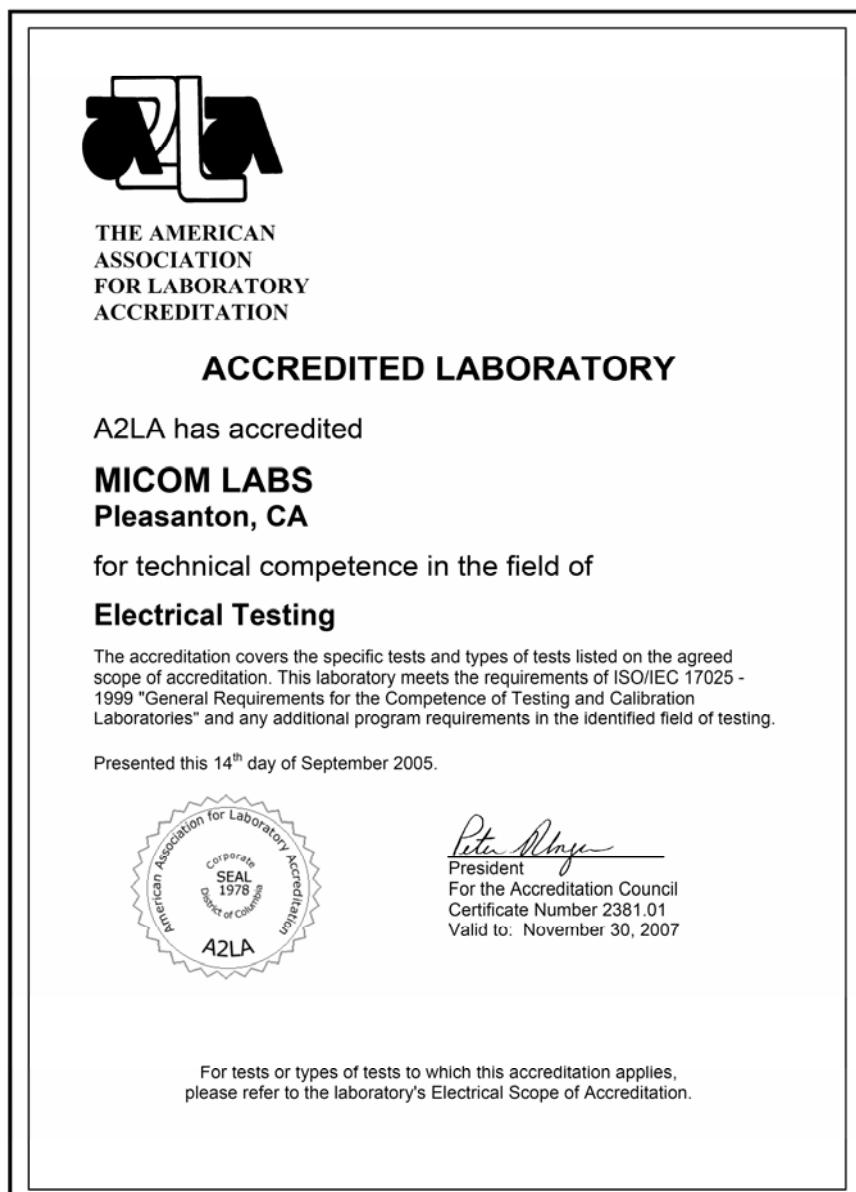

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 6 of 58

LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

North America

United States of America

Federal Communications Commission (FCC) Listing #: 102167

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 7 of 58

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	23 rd December '06	Initial Release
Rev B	31 st December '06	Modified Section 3.7 Equipment Modifications
Rev C	14 th February '07	Recalculation of MPE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 8 of 58

1. TEST RESULT CERTIFICATE

Manufacturer:	Strix Systems, Inc 26610 Agoura Road, Calabasas California 91302, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton California, 94566, USA
EUT:	Wireless Access Point Operating at 4.9 GHz	Telephone:	+1 925 462 0304
Model(s):	OWS 3600-20 OWS 3600-30	Fax:	+1 925 462 0306
S/N:	Not Available		
Test Date(s):	8th Dec to 13th Dec '06	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 90	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:


Graeme Grieve
Quality Manager MiCOM Labs,


ACCREDITED
CERTIFICATE #2381.01

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 90	2004	Code of Federal Regulations
(ii)	FCC 47 CFR Part 90 Sect 90.210 Sect 90.1215	18 th May 2005	90.210 Emission Masks (Revised requirements) 90.1215 Power Limits (Revised requirements)
(iii)	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(iv)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(v)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(vi)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(vii)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(viii)	A2LA	14 th September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 10 of 58

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Strix Systems Inc Access One Network OWS3600 to FCC 47 CFR Part 90 Subpart Y regulations
Applicant:	As Manufacturer
Manufacturer:	Strix Systems, Inc 26610 Agoura Road Calabasas California 91302, USA
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	STRX10-A2 Rev C
Date EUT received:	8 TH December 2006
Standard(s) applied:	FCC 47 CFR Part 90 (Public Safety Band)
Dates of test (from - to):	8th Dec to 13th Dec '06
No of Units Tested:	1
Type of Equipment:	Wireless Access Point
Manufacturers Trade Name:	Access One Network
Model(s):	OWS 3600-20 OWS 3600-30
Location for use:	Outdoor use only.
Declared Frequency Range(s):	4940 - 4990 MHz
Declared Nominal Output Power:	+23 dBm (average)
Type of Modulation:	OFDM
EUT Modes of Operation:	Per 802.11 – DBPSK, DQPSK, CCK, OFDM
Transmit/Receive Operation:	TDD
Rated Input Voltage and Current:	100 to 240 VAC. Single Phase, 50-60 Hz, 1 amp max.
Operating Temperature Range:	Declared range -30 to +55°C
ITU Emission Designator:	4.9 GHz - 21M2W7D
Microprocessor(s) Model:	Atheros AR5312
Clock/Oscillator(s):	25 MHz, 40 MHz.
Frequency Stability:	±20 ppm
Equipment Dimensions:	14"x12"x8"
Weight:	16.5 lbs
Primary function of equipment:	Wireless Access Mesh Networks

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Scope of Test Program

The scope of the test program was to test Strix Systems Access One Network OWS3600 to:-

FCC 47 CFR Part 90, Subpart Y regulatory requirements.

18th May 2005 revision of FCC 47 CFR Part 90;-

Sub Section 90.210	Emission Masks (revised requirements)
Sub Section 90.1215	Power Limits (revised requirements)

The OWS3600 is a 802.11abg Wireless Access Point operating in the 4.9 GHz Public Safety Band Radio employing OFDM modulation at 20 MHz bandwidths in the frequency range 4940 to 4990 MHz.

The OWS3600 series of tests considers two product variants OWS3600-20 and OWS3600-30

The OWS3600-30 is manufactured with three identical 802.11abg wireless cards that are inserted into a common chassis and power supply conditioning system. The OWS3600-20 is manufactured with two wireless cards.

As both the OWS3600-30 and OWS3600-20 utilize the same wireless 802.11abg wireless card a single series of conducted tests was completed on the OWS3600-30. Radiated test results were measured for both devices.

Strix Systems Inc
Access One Network OWS 3600



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 12 of 58

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Manufacturer	Model No.	Serial No.
EUT	Access One Network Microwave Radio 4.9 GHz	Strix Systems Inc	OWS 3600	N/A
EUT	AC Power Cord 115/240V	6'		
Support	Laptop	IBM		

3.4. Antenna Details

Antenna Type	Gain (dBi)	Manufacturer	Model No.	Serial No.

No antennas were submitted for test purposes. An 11 dBi gain antenna was utilized for the calculation of MPE (Maximum Permissible Exposure) in Section 5.1.4.

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. ODU - single cable for power
2. Ethernet 10/100 Base T

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.6. Test Configurations

Matrix of test configurations

Parameter	Operational Mode	Test Conditions	Bandwidths (MHz)
Occupied BW & Emission Mask	Modulated	Ambient	20
Peak Output power	Modulated	Ambient	20
Peak Power Spectral Density	Modulated	Ambient	20
Frequency Stability	CW	Temperature Variations and Voltage Variations	--
Conducted Emissions	Modulated	Ambient	20
Radiated Emissions	Modulated	Ambient	20
AC Wireline Emissions	Modulated	Ambient	20

Only worst case plots are provided for each test parameter are identified within this report. Plots not included are held on file by the test laboratory and available upon request with client permission.

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 14 of 58

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 90, Subpart Y (except Section 5.1.4)**

Section(s)	Test Items	Description	Condition	Result	Test Report Section
2.1049; 90.210(m)	26 dB Occupied BW & Emission Mask	Emission mask and bandwidth measurement(s)	Conducted	Complies	5.1.1
2.1046; 90.1215 (a)	Peak Output Power	Modulated Output Power	Conducted	Complies	5.1.2
2.1046; 90.1215 (a)	Peak Power Spectral Density	Maximum Spectral Density	Conducted	Complies	5.1.3
Subpart C 90.1217	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Radiated	Complies	5.1.4
2.1055(a)(1); 90.213	Frequency Stability	Includes temperature and voltage variations	Conducted	Complies	5.1.5
2.1051; 90.210(m)	Conducted Spurious Emissions at Antenna Port	Emissions from the antenna port 30 MHz – 40 GHz	Conducted	Complies	5.1.6
2.1053; 90.210(m)	Radiated Spurious Emissions	Spurious emissions 30 MHz – 40 GHz OWS3600-30 OWS3600-20	Radiated	Complies	5.1.7
15.207	AC Wireline Emissions	Conducted Emissions	Conducted	Complies	5.1.8

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. TEST RESULTS

5.1. Device Characteristics

5.1.1. Occupied Bandwidth and Emission Mask

FCC 47 CFR Part 90, Subpart Y; 2.1049; §90.210(m)


Test Procedure

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure the 26 dB occupied bandwidth and emission mask for the radio. The system highest power setting was selected with modulation ON and duty cycle set for 100% i.e. continuous operation at all times.

For emission masks the zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz.

The EUT is not equipped with an audio low-pass filter.

Test Measurement Set up

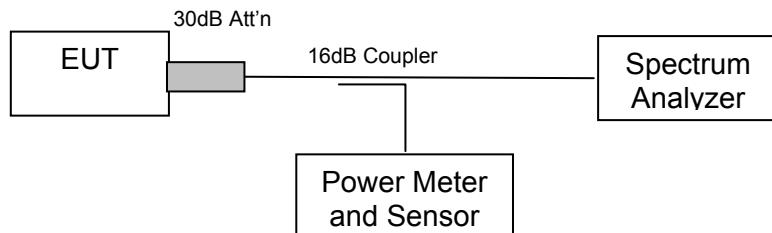

Test set up for Occupied Bandwidth and Emission Mask measurement


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


TABLE OF RESULTS – 20 MHz 26 dB Bandwidth(s)

Center Frequency (MHz)	26 dB Bandwidth (MHz)
4,955.0	21.24248497

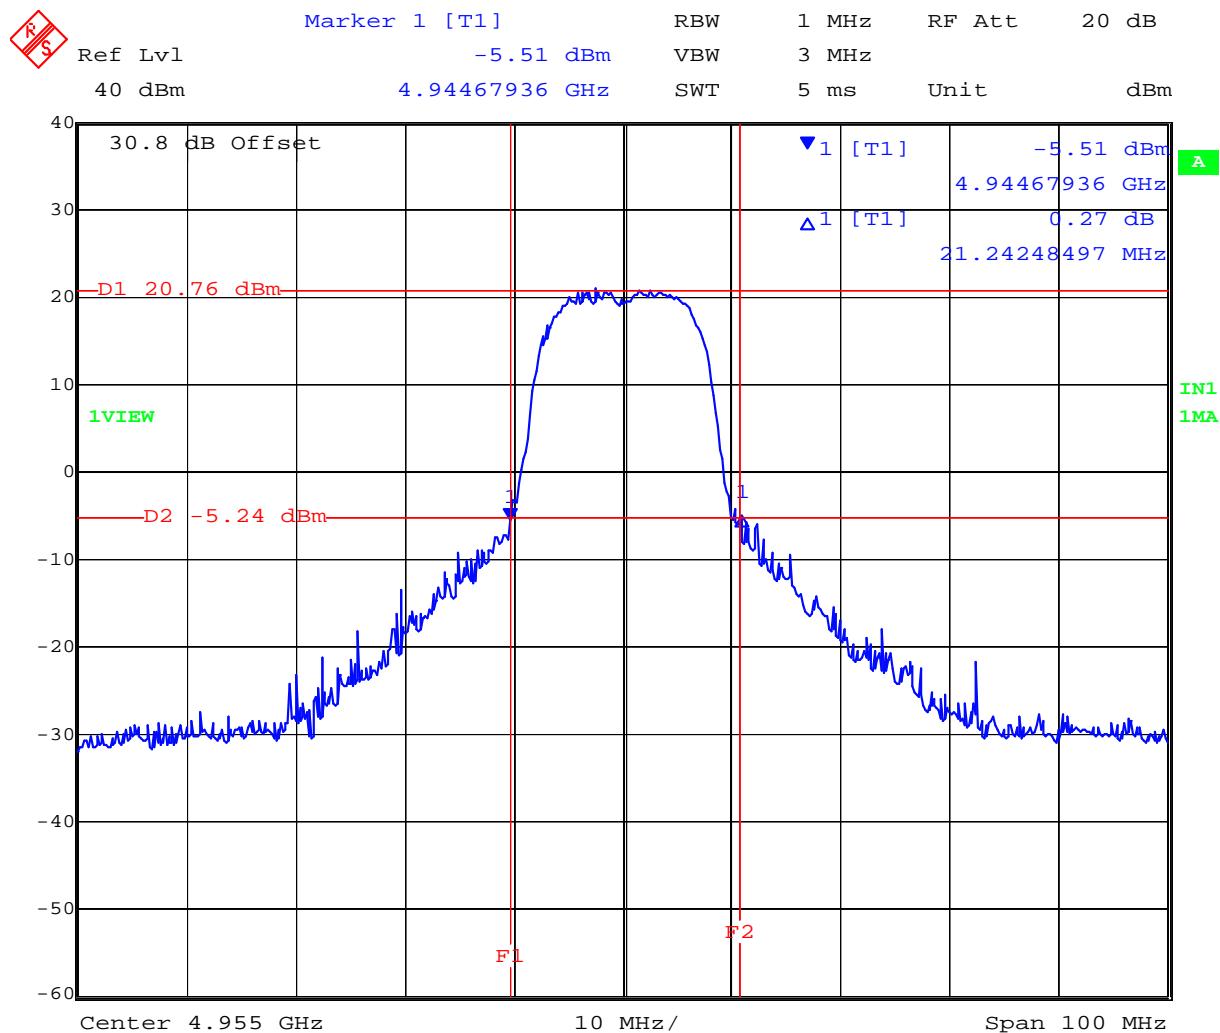

26 dB Bandwidth 20 MHz Channel Freq 4955 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

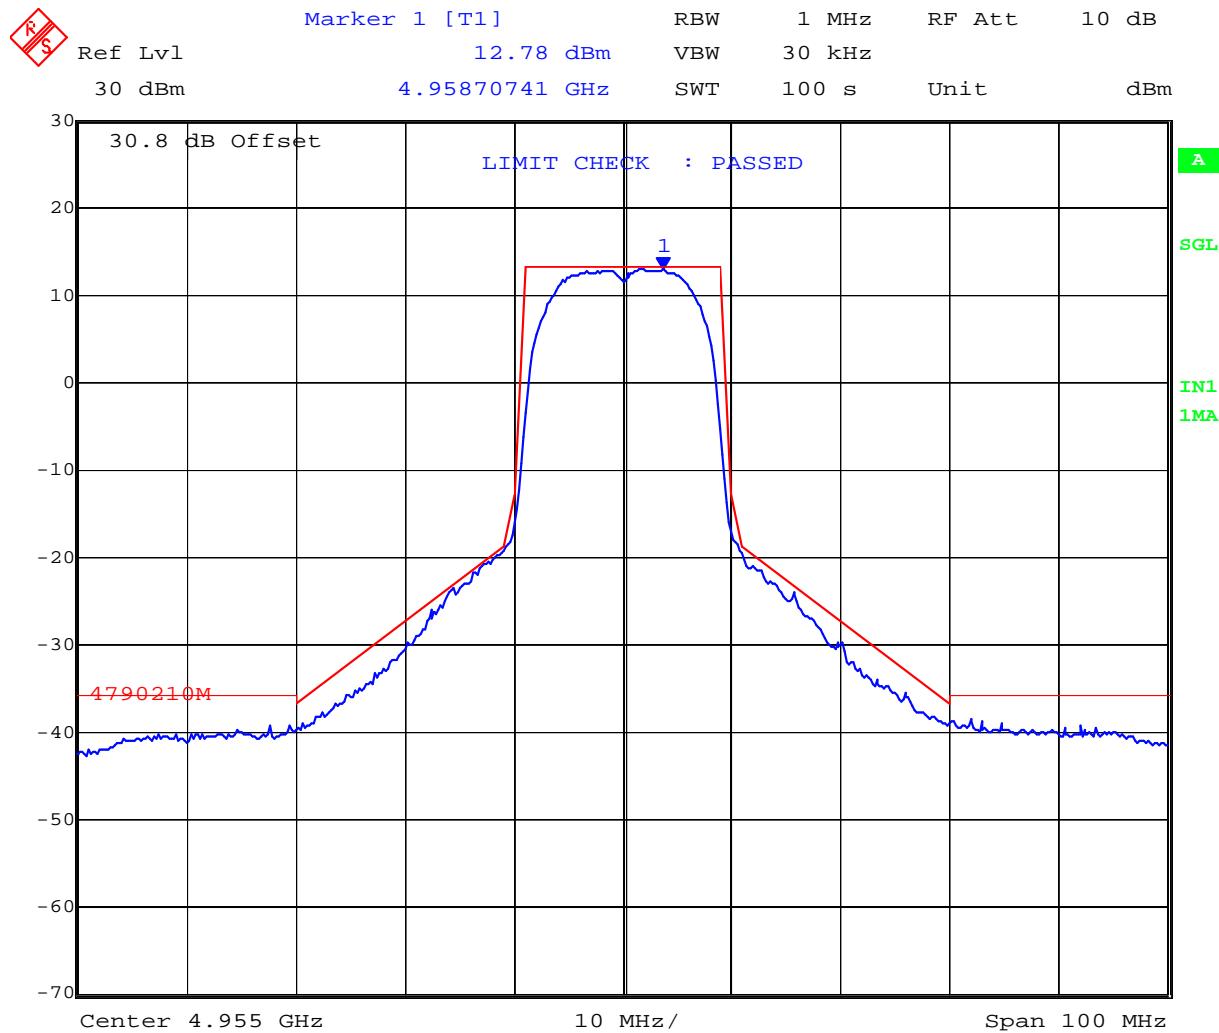

Date: 8.DEC.2006 10:38:10


Emission Mask for 20 MHz BW Channel Freq 4955 MHz

Note: Maximum Average Output Power to meet spectrum mask limits: **+22.75 dBm**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 20 MHz Bandwidth


Center Frequency (MHz)	26 dB Bandwidth (MHz)
4,975.0	20.64128257

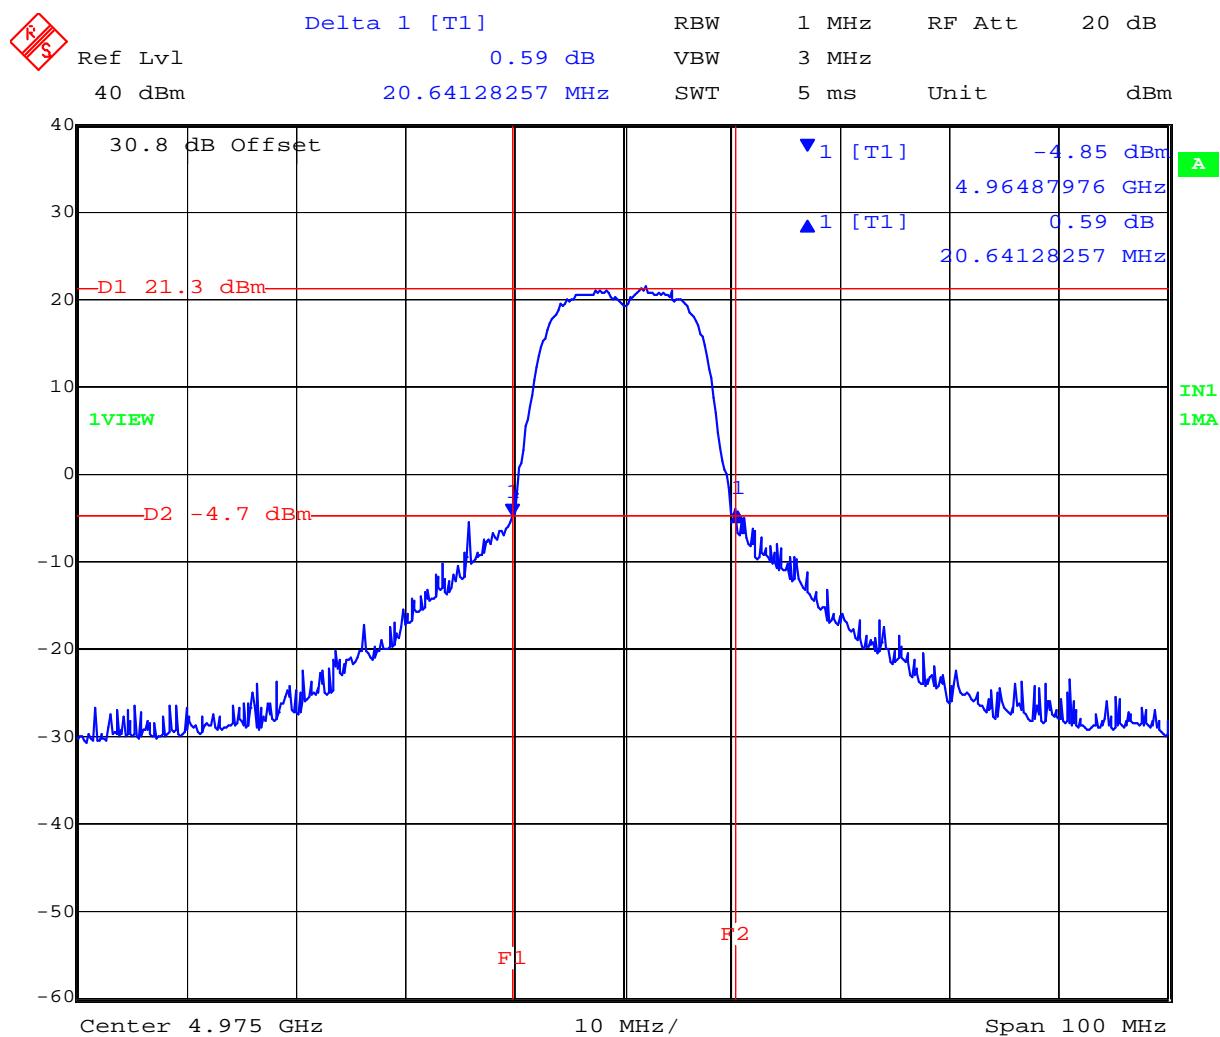

Date: 8.DEC.2006 13:47:40

26 dB Bandwidth 20 MHz Channel Freq 4975 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

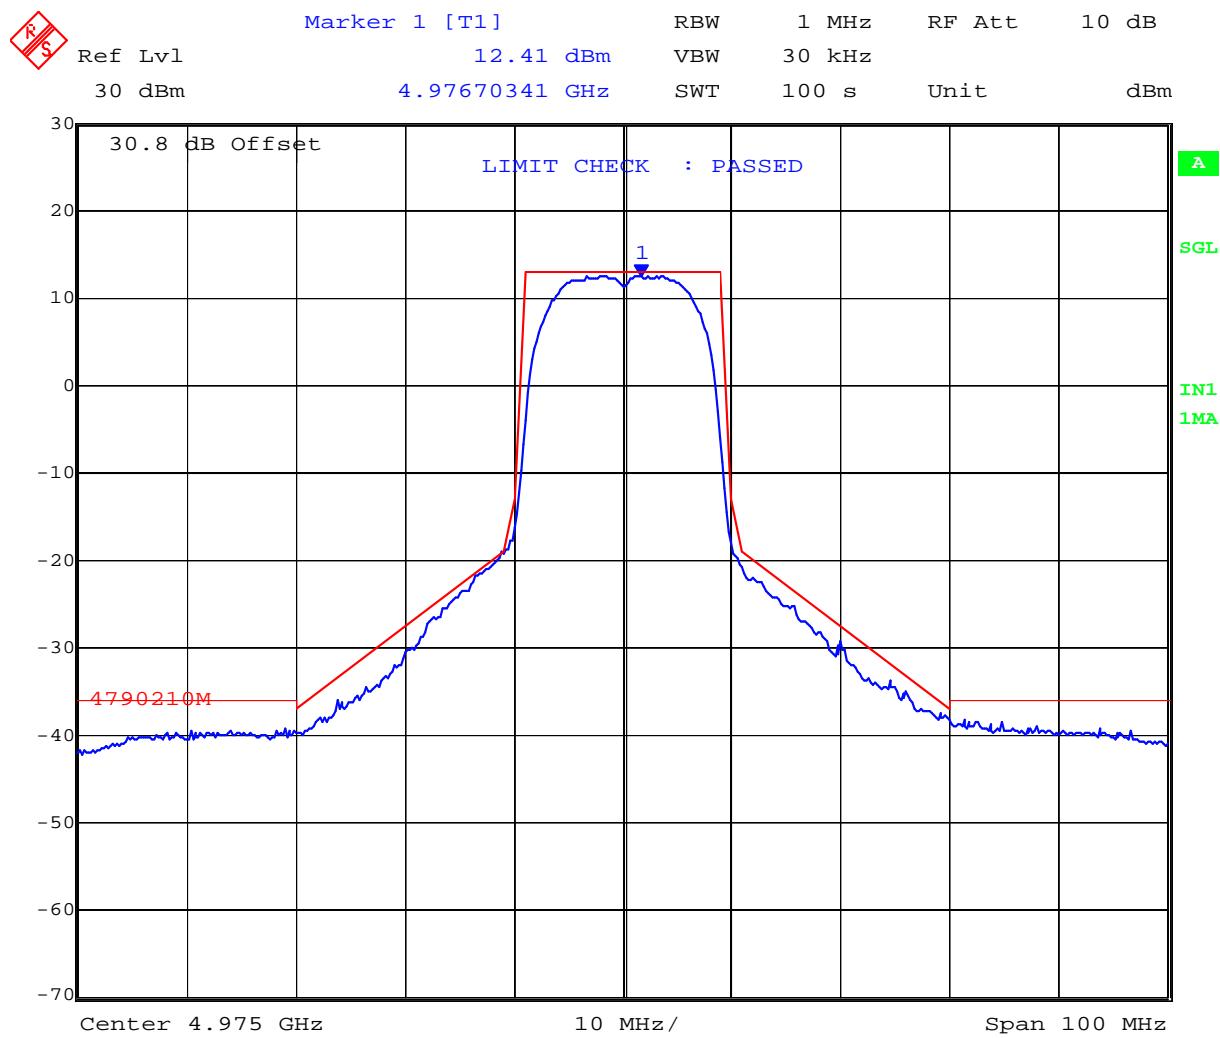

Date: 8.DEC.2006 10:47:06

Emission Mask for 20 MHz BW Channel Freq 4975 MHz

Note: Maximum Average Output Power to meet spectrum mask limits: **+22.31 dBm**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 20 of 58

Specification Limits

FCC Part §90.210

Limits for Authorized Bandwidth

Frequency Band (MHz) and Related Documents	Spectrum Masks with Audio Filter	Without Audio Filter
4950 – 4990 MHz	L or M	L or M

Reference to the emission masks are provided below

Limits Emission Masks

90.210(L), Emission Mask L. For low power transmitters (20 dBm or less) operating in the 4940 – 4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency between 0 – 45% of the authorized bandwidth (BW) : 0dB.
- (2) On any frequency removed from the assigned frequency between 45 – 50 % of the authorized bandwidth: $219 \log (\% \text{ of (BW)}/45)$ dB.
- (3) On any frequency removed from the assigned frequency between 50 – 55 % of the authorized bandwidth: $10 + 242 \log (\% \text{ of (BW)}/50)$ dB.
- (4) On any frequency removed from the assigned frequency between 55 – 100 % of the authorized bandwidth: $20 + 31 \log (\% \text{ of (BW)}/55)$ dB attenuation.
- (5) On any frequency removed from the assigned frequency between 100 – 150 % of the authorized bandwidth: $28 + 68 \log (\% \text{ of (BW)}/100)$ dB attenuation.
- (6) On any frequency removed from the assigned frequency above 150 % of the authorized bandwidth: 50 dB.
- (7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 21 of 58

Limits Emission Masks (continued)

90.210(m), Emission Mask M. For high power transmitters (greater than 20 dBm) operating in the 4940 – 4900 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency between 0 – 45% of the authorized bandwidth (BW) : 0dB.
- (2) On any frequency removed from the assigned frequency between 45 – 50 % of the authorized bandwidth: $568 \log (\% \text{ of (BW)})/45$ dB.
- (3) On any frequency removed from the assigned frequency between 50 – 55 % of the authorized bandwidth: $26 + 145 \log (\% \text{ of (BW)})/50$ dB.
- (4) On any frequency removed from the assigned frequency between 55 – 100 % of the authorized bandwidth: $32 + 31 \log (\% \text{ of (BW)})/55$ dB attenuation.
- (5) On any frequency removed from the assigned frequency between 100 – 150 % of the authorized bandwidth: $40 + 57 \log (\% \text{ of (BW)})/100$ dB attenuation.
- (6) On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.
- (7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

Note to paragraph m: Low power devices may as an option, comply with paragraph (m).

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2. Peak Output Power


FCC 47 CFR Part 90, Subpart Y; 2.1046; §90.1215

Test Procedure

Average power measurements were measured with the use of an average power head. Peak power measurements were recorded via the spectrum analyzer. The system highest power setting was selected with modulation ON and duty cycle set for 100% i.e. continuous operation at all times.

The 26 dB emission bandwidth (see Section 5.1.1) was used by the spectrum analyzer to measure the peak output power.

Test Measurement Set up

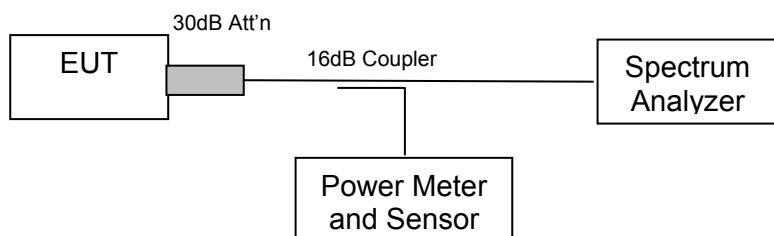

Test set up for modulated output power measurement


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 20 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
4955.0	+30.70	+22.75

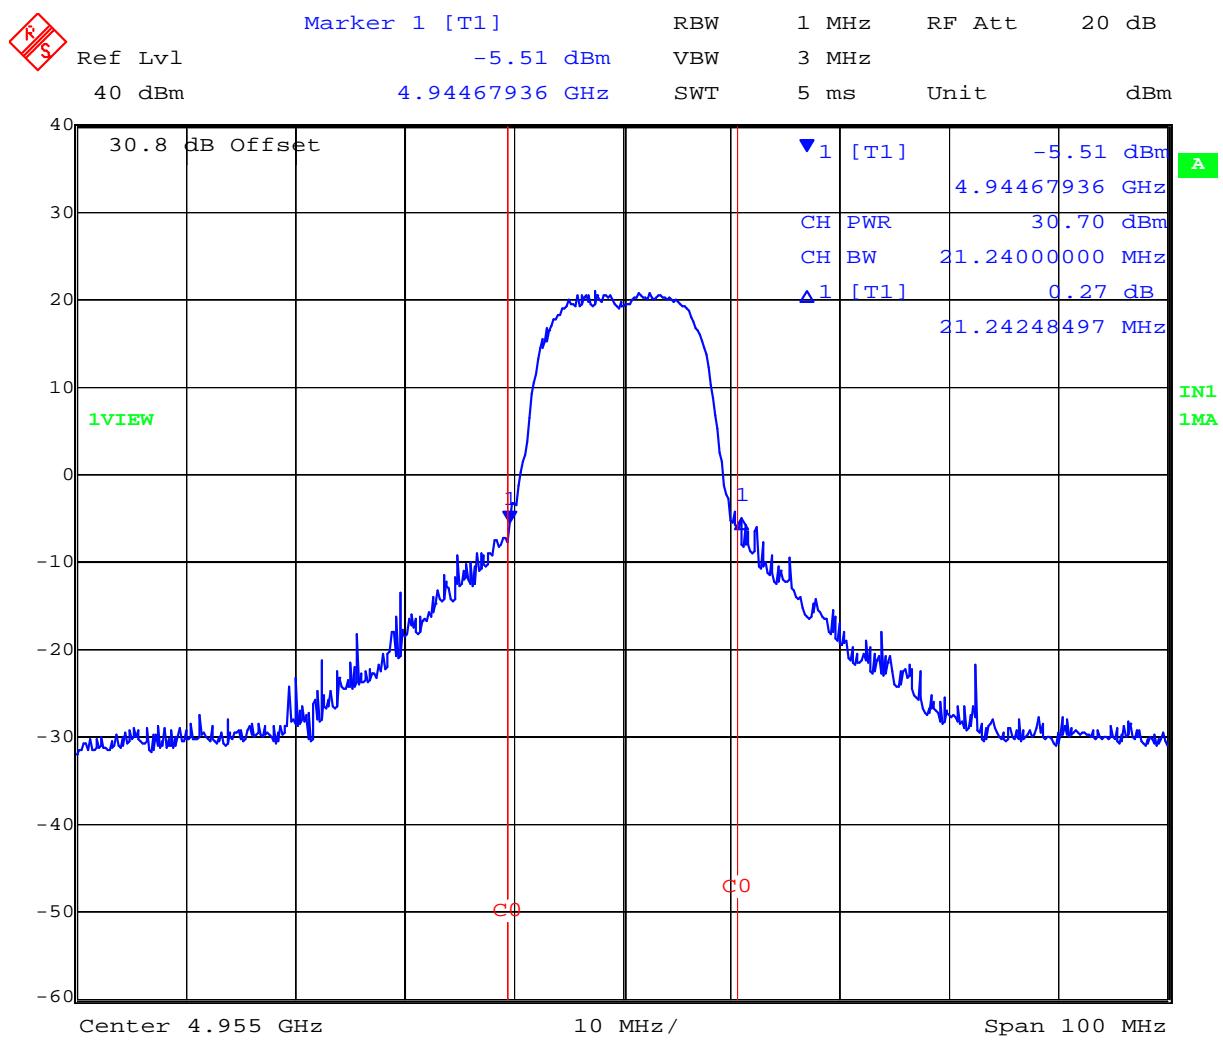


Date: 8.DEC.2006 13:54:15

Peak Power 20 MHz BW Channel Freq 4955 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 20 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
4975.0	+30.55	+22.31

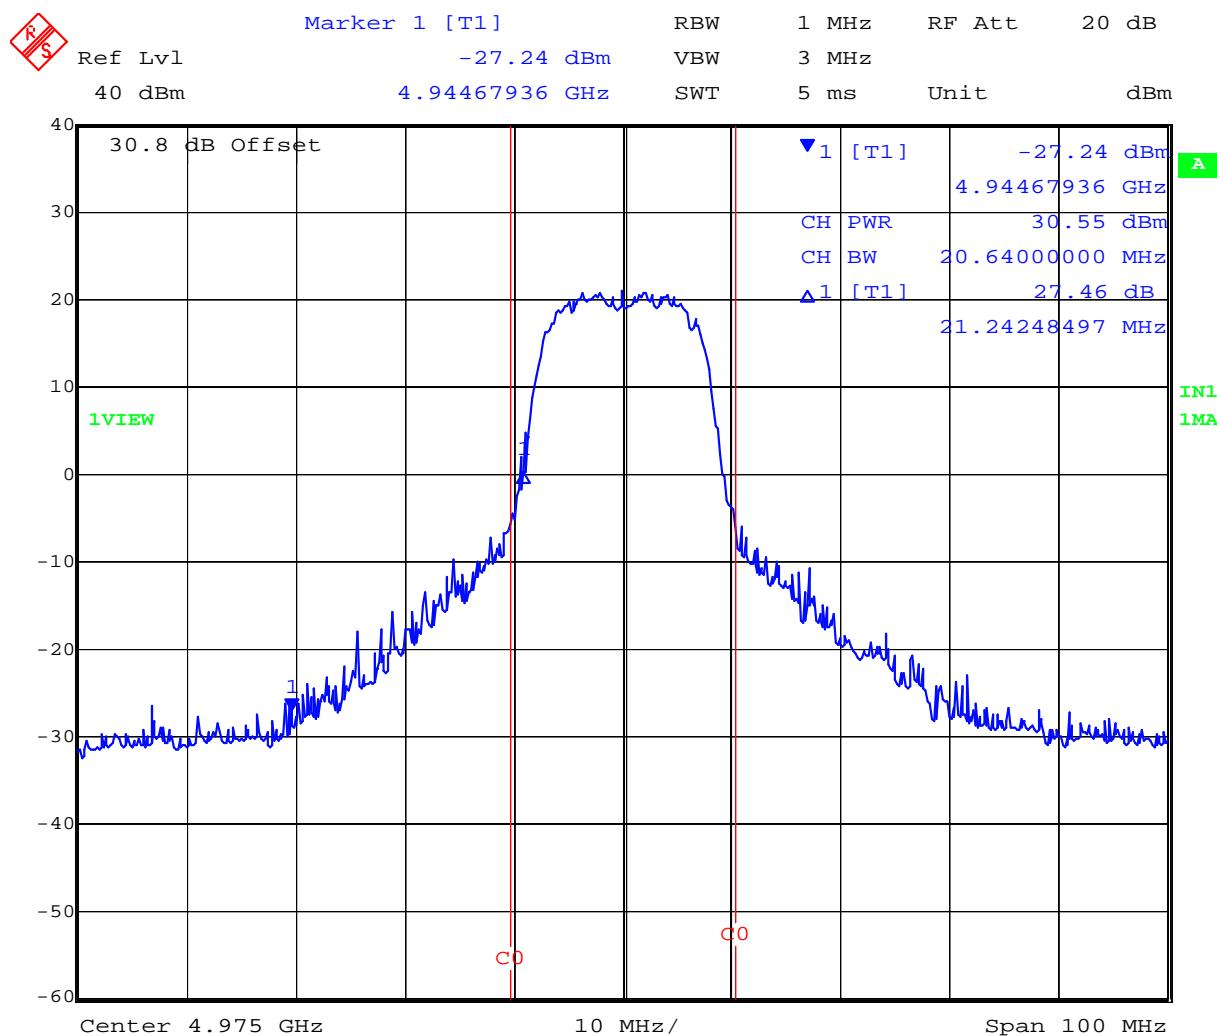

Date: 8.DEC.2006 13:56:23

Peak Power 20 MHz BW Channel Freq 4975 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification Limits

FCC Part §90.1215(a)

Power limits.

The transmitting power of stations operating in the 4940-4990 MHz band must not exceed the maximum limits in this section.

(a) The peak transmit power should not exceed:

Channel Bandwidth (MHz)	Low power peak transmitter power (dBm)	High power peak transmitter power (dBm)
1	7	20
5	14	27
10	17	30
15	18.8	31.8
20	20	33

High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point or point-to-multipoint operation (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the transmitter power or spectral density. Corresponding reduction in the peak transmit power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26 dBi.

(b) Low power devices are also limited to a peak power spectral density of 8 dBm per one MHz. Low power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 8 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi.

(c) The peak transmit power is measured as a conducted emission over any interval of continuous transmission calibrated in terms of an RMS-equivalent voltage. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement conforming to the definitions in this paragraph for the emission in question.

(d) The peak power spectral density is measured as conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 26 of 58

directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of one MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

Laboratory Measurement Uncertainty for Power Measurement

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Output Power'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.3. Peak Power Spectral Density (PPSD)


FCC 47 CFR Part 90, Subpart Y; 2.1046; §90.1215

Test Procedure

The test methodology used for this measurement was determined to provide the highest possible PPSD readings.

Peak power spectral density measurements were performed via the spectrum analyzer and plots were recorded. Modulation was ON and the system duty cycle was set for 100% i.e. continuous operation at all times. The system highest power setting was selected with modulation ON and duty cycle set for 100% i.e. continuous operation at all times.

Test Measurement Set up

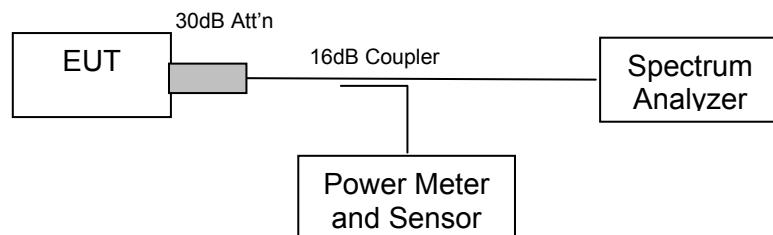

Test set up for Peak Power Spectral Density measurement(s)


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – PPSD 20 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Peak Power Spectral Density (dBm/ MHz)
4955.0	20.45

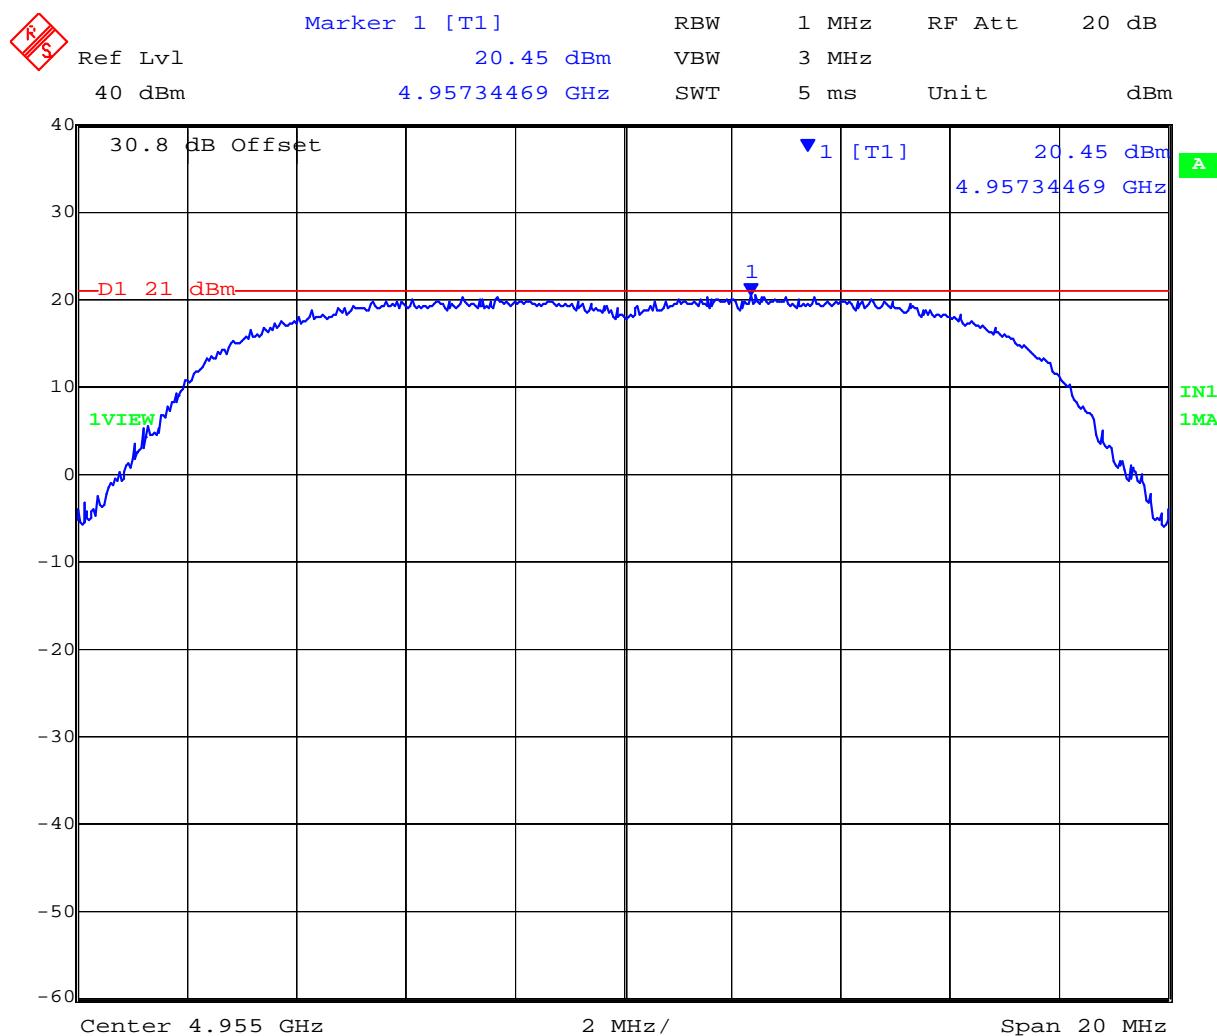


Date: 8.DEC.2006 14:09:59

Peak Power Spectral Density 20 MHz BW Channel Freq 4955 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – PPSD 10 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Peak Power Spectral Density (dBm/MHz)
4975.0	20.79

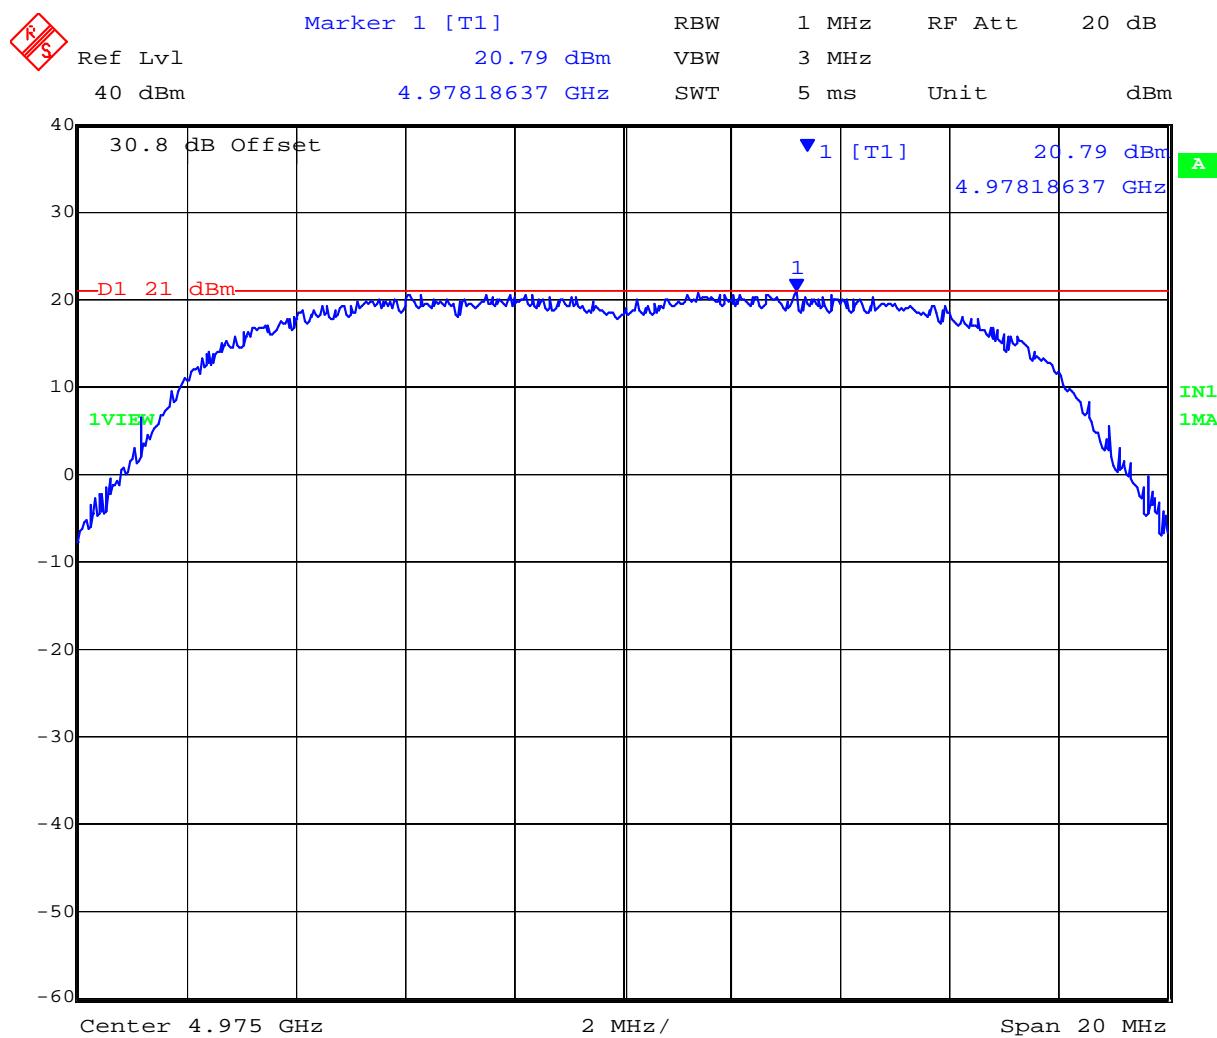

Date: 8.DEC.2006 14:08:49

Peak Power Spectral Density 20 MHz BW Channel Freq 4975 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 30 of 58

Specification Limits
FCC Part §90.1215

Refer to the Power Limits Specification in Section 5.1.2 of this report.

Laboratory Measurement Uncertainty for Power Measurement

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Output Power'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 31 of 58

5.1.4. Maximum Permissible Exposure

FCC, Part 90 Subpart C §90.1217

Calculations for Maximum Permissible Exposure Levels

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10 ^ (G \text{ (dBi)}/10)$$

4 9 GHz 20 MHz Channel = Max. Peak Output Power +30.70 dBm, 1174.89 mW

Max. Antenna Gain = 11.0 dBi, **12.59 numeric**

The EUT belongs to the Occupational/Controlled Exposure class of devices; power density limit is 5.0mW/cm²

Maximum Gain Antennas – Calculated Safe Distance @ 5 mW/cm²

Antenna Gain (Numeric)	Peak Output Power (mW)	Calculated Safe Distance at 5 mW/cm ² (cm)	Limit (mW/cm ²)
12.59	1174.89	15.34	5.0

Specification

Maximum Permissible Exposure Limits

§90.1217 Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines. See §1.1307 (b)(1) of this chapter.

Limit S = 5mW / cm² from 1.310 Table 1

Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33dB
-------------------------	---------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.5. Frequency Stability; Temperature Variations, and Voltage Variations

FCC 47 CFR Part 90, Subpart Y; 2.1055(a)(1); §90.213

Test Procedure

The transmitter output was connected to a spectrum analyzer and the frequency stability was measured in an un-modulated state. Frequency stability was measured through the extremes of temperature on the mid channel only. Before measurements were taken at each temperature the equipment waited until thermal balance was obtained.

Test Measurement Set up

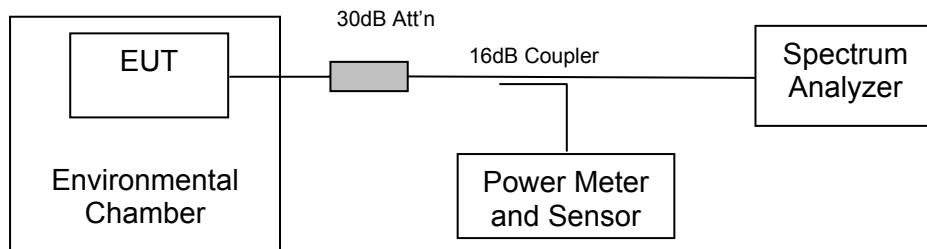

Measurement set up for Frequency Stability

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 33 of 58

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS Frequency Stability;-

Temperature Variations


Voltage (Vac, 60 Hz)	Temperature(°C)	FREQUENCY (MHz)
		Channel 4955 MHz
115	-33	4955.00702
	-30	4955.00562
	-20	4955.00842 ^{Note 1}
	-10	4955.00762
	0	4955.00602
	+10	4955.00241
	+20	4954.99379
	+30	4954.98899 ^{Note 1}
	+40	4954.99119
	+50	4954.99720
	+55	4955.00722
Maximum Frequency Drift		+8.42kHz / -11.01kHz +1.70ppm / -2.22ppm

Note 1 Results for Maximum frequency drift

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 34 of 58

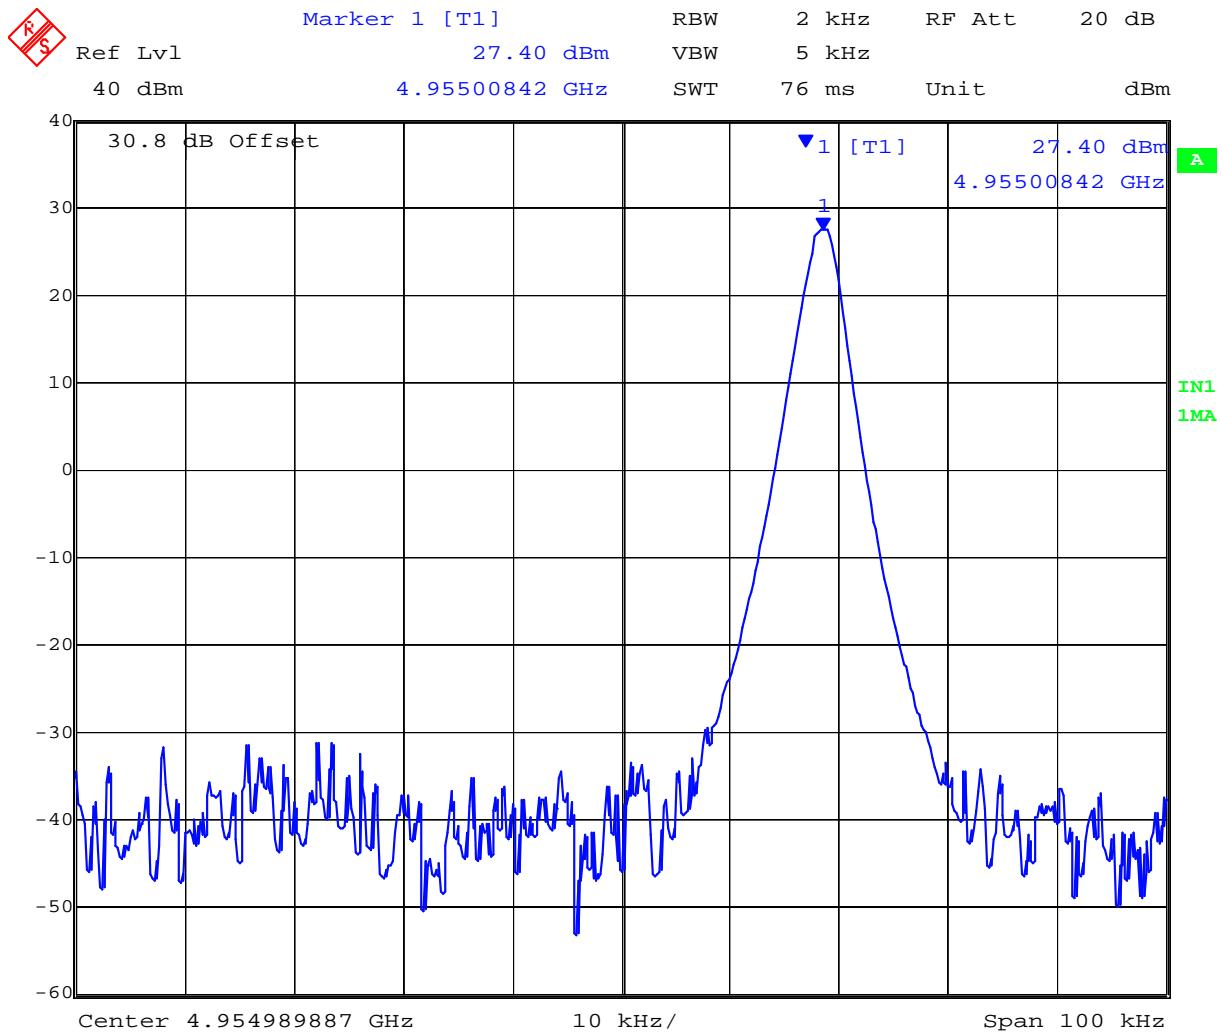


Date: 8 . DEC . 2006 15:48:29

Highest Frequency - Drift @-20°C, +8.42 kHz (+1.70 ppm)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 35 of 58

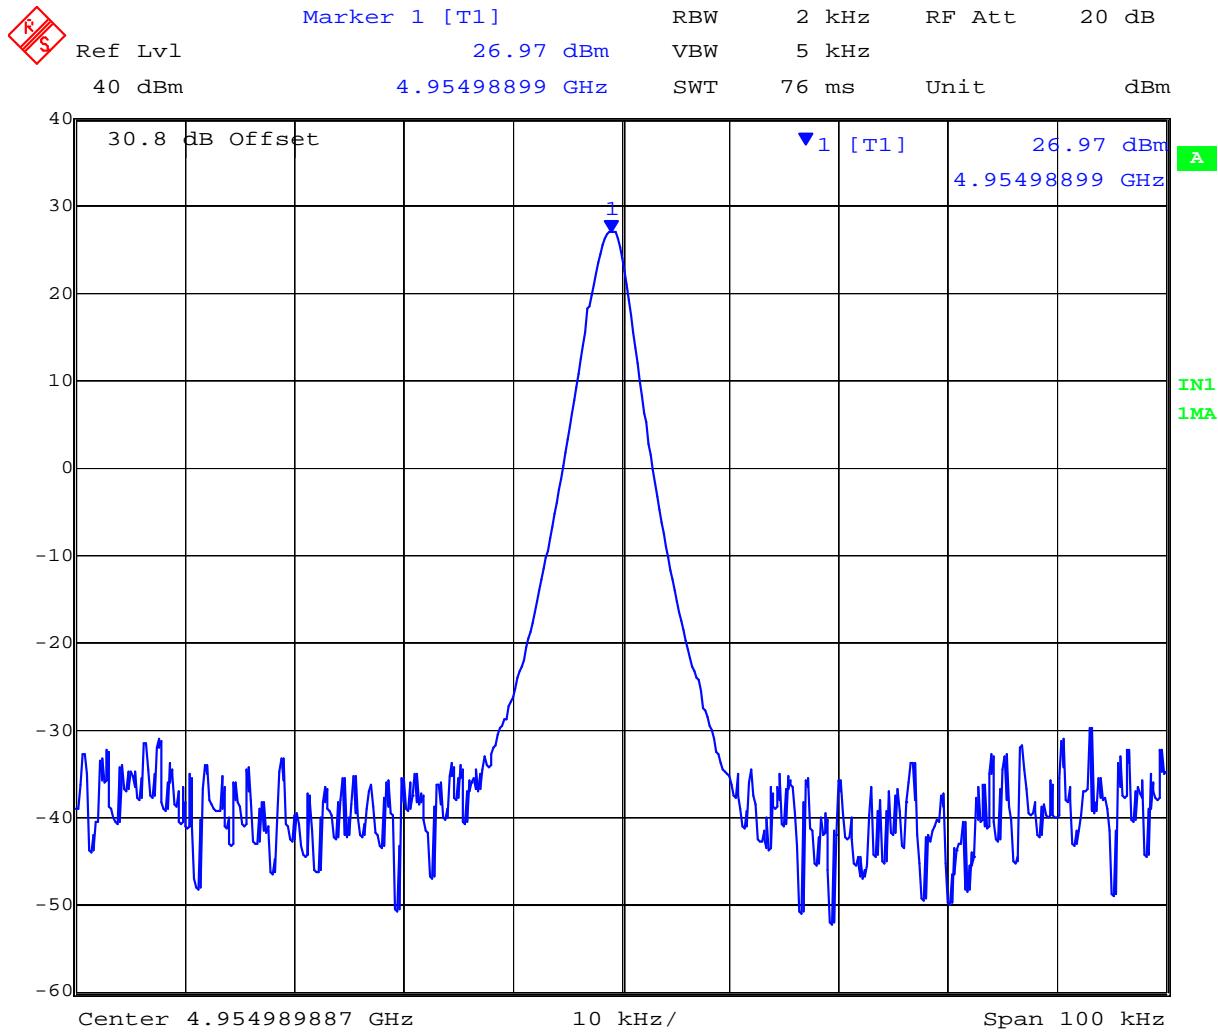

Date: 8 . DEC . 2006 17:33:18

Lowest Frequency - Drift @ +30°C, -11.01 kHz (-2.22 ppm)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 36 of 58

TABLE OF RESULTS Frequency Stability V's Voltage Variation;

Voltage Variations at Ambient CW

Temperature	Voltage (Vac, 60 Hz)	FREQUENCY (MHz)	
		Channel 4955 MHz	
Ambient	+100	4954.99379	
	+115	4954.99379	
	+240	4954.99379	
Maximum Frequency Drift		-0.00 / +0.00	

Frequency stability did not change with voltage variation per the voltages identified in the above table.

Manufacturers Specification for Frequency Stability

As no apparent frequency stability limits were provided the manufacturer's specification was used ± 20 ppm.

Laboratory Measurement Uncertainty for Frequency Stability

Measurement uncertainty	± 0.866 ppm
-------------------------	-----------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-02 'Frequency Measurement'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.6. Spurious Emissions at Antenna Terminals - Transmitter

FCC 47 CFR Part 90, Subpart Y; 2.1051; §90.210(m)

Test Procedure

Transmitter conducted spurious emissions were measured for each bandwidth. Measurement were made while EUT was operating in a modulated transmit mode of operation, at the appropriate center frequency, 100% duty cycle and maximum power at all times. Conducted spurious emissions were measured to 40 GHz.

Limit calculation depended on average transmit power level(s). See test report Section 5.1.2 for maximum power level measurements.

Worst case power measurement: +22.75 dBm

From FCC Part 90.210 (m)


On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Attenuation

$55 + 10 \log (P)$ dB for 20 MHz bandwidth = 47.75 dB attenuation where P is Watts

Limit: $+22.75 - 47.75 = -25.0$ dBm

Test Measurement Set up

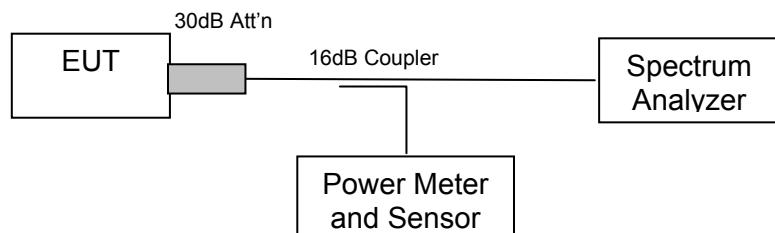

Conducted spurious emission test configuration

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %


Pressure: 999 to 1012 mbar

TABLE OF RESULTS

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 4,955 MHz, Limit: -25.0 dBm

Frequency (MHz)		Freq of Maximum Emission (MHz)	Emission Amplitude (dBm)	Margin (dB)
Start (MHz)	Stop (MHz)			
30	40,000	37,070.00	-40.57	-15.57

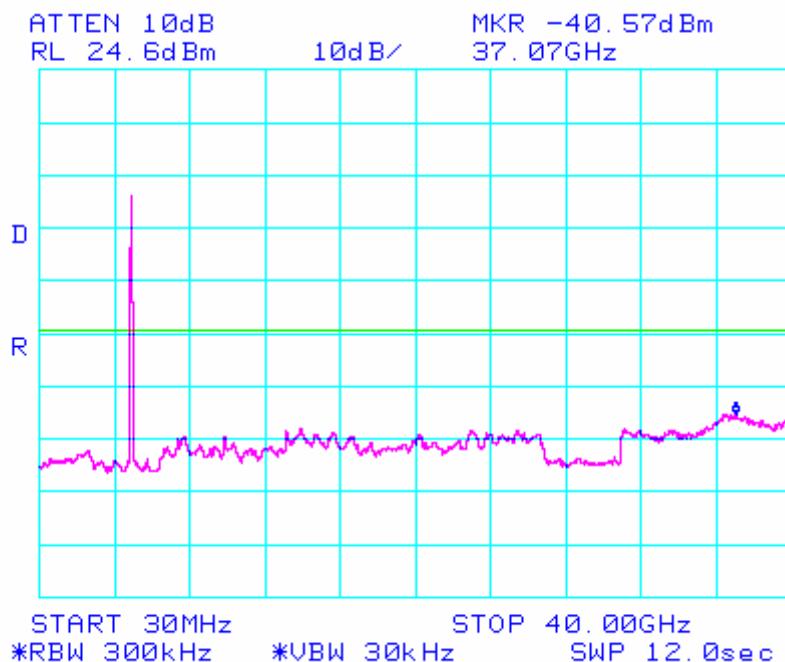


Transmitter Channel 4955 MHz 20 MHz Channel Spacing, 30 – 40,000 MHz

Worst case Conducted Spurious Emissions shown.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 4,975 MHz, Limit: -25.0 dBm

Frequency (MHz)		Freq of Maximum Emission (MHz)	Emission Amplitude (dBm)	Margin (dB)
Start (MHz)	Stop (MHz)			
30	40,000	39,930.00	-40.90	-15.9

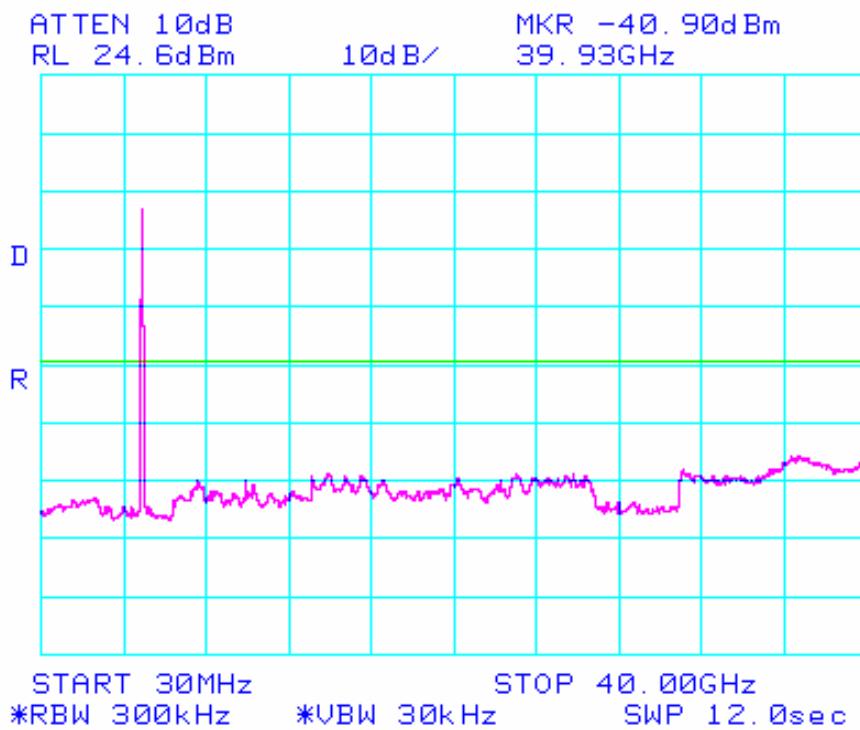

Transmitter Channel 4975 MHz 20 MHz Spacing, 30 – 40,000 MHz

Worst case Conducted Spurious Emissions shown.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 40 of 58

Specification Limits

Conducted Spurious Emission at Antenna Terminals – Transmitter Limits FCC Part §90.210

Emission Mask (m)

(6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10\log(P)$ dB, whichever is the lesser attenuation.

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0070, 0116, 0158, 0088, 0252, 0313, 0314

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7. Radiated Spurious Emissions

FCC 47 CFR Part 90, Subpart Y; 2.1053; §90.210(m)

Test Procedure

Measurements were made while EUT was operating in a modulated transmit mode of operation, at the appropriate center frequency, 100% duty cycle and maximum power at all times. Substitution was performed on any emissions observed within 6 dB of the limit line. The antenna port was attenuated with a $50\ \Omega$ termination.

The measurement equipment was set to measure in peak hold mode. The emissions were measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode.

The highest emissions relative to the limit are listed for each frequency spanned.

Measurements below 1 GHz utilized 100 KHz RBW, measurements above 1 GHz were performed using a minimum RBW of 1 MHz.

Limit calculation depended on average transmit power level(s). See test report Section 5.1.2 for maximum power level measurements.

Worst case power measurement: +22.75 dBm

From FCC Part 90.210 (m)

On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: $50\ \text{dB}$ or $55 + 10 \log (P)\ \text{dB}$, whichever is the lesser attenuation.


Attenuation

$55 + 10 \log (P)\ \text{dB}$ for 20 MHz bandwidth = 47.75 dB attenuation where P is Watts

Limit: $+22.75 - 47.75 = -25.0\ \text{dBm}$.

The -25 dBm limit was verified using a substitution method.

Test Measurement Set up

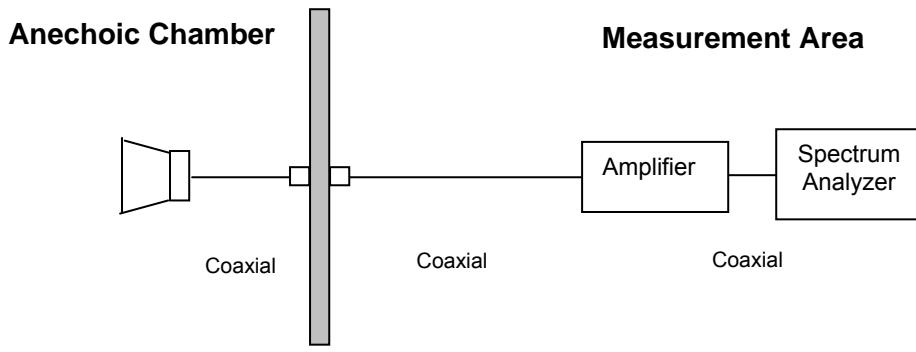

Measurement set up for Radiated Emission Test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radio parameters.

OWS3600-30


Channel Freq 4,955 MHz Results 30MHz to 18GHz

OWS3600-30, all three transmitters were operational. Power setting = +23 dBm, 50 Ohm load on each output

INITIAL INVESTIGATION				SUBSTITUTION RESULTS				
Freq. (MHz)	Pol.	Raw (dBuV)	Res BW (KHz)	Pwr @ Antenna (dBm)	Ant. Gain (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	


No emissions were found within 6 dB of the limit

Channel Freq 4,955 MHz Results 30MHz to 1GHz

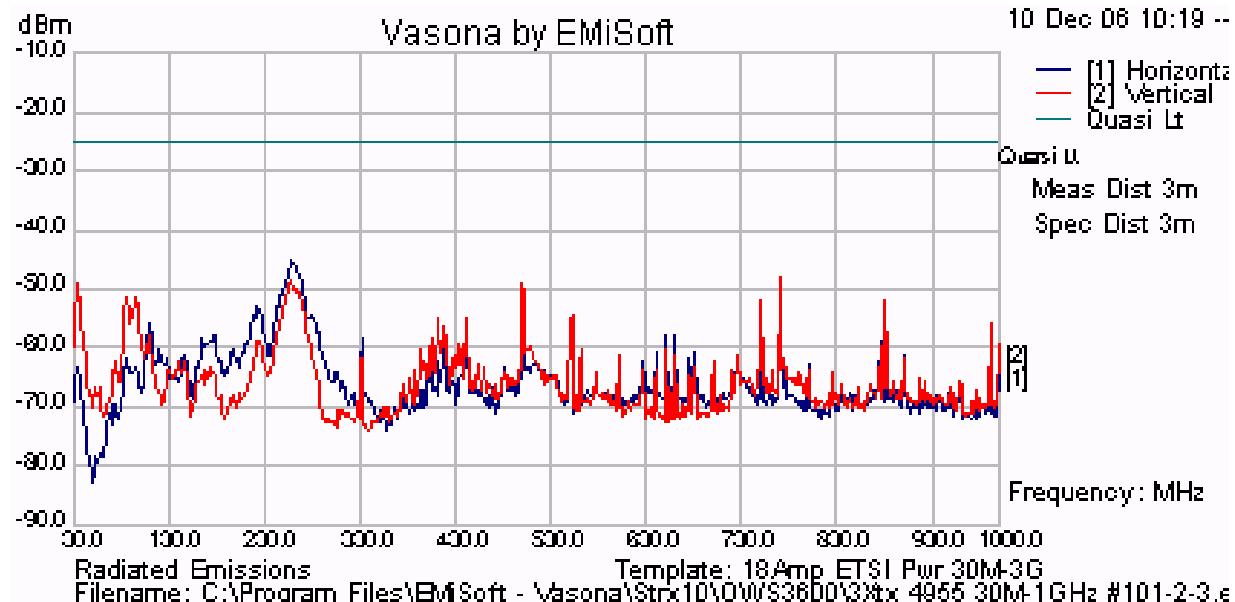

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel Freq 4,955 MHz Results 1GHz to 18GHz

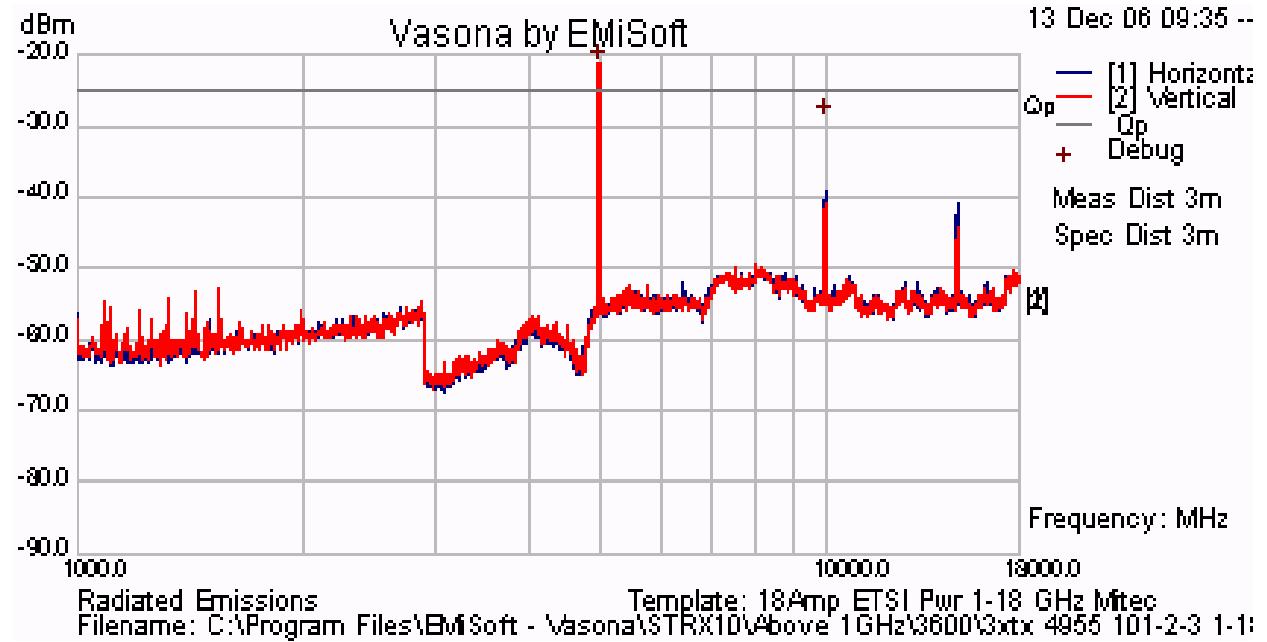

The emission breaking the limit line is the fundamental emission i.e carrier

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

OWS3600-30


Channel Freq 4,975 MHz Results 30MHz to 18GHz

OWS3600-30, all three transmitters were operational. Power setting = +23 dBm, 50 Ohm load on each output

INITIAL INVESTIGATION				SUBSTITUTION RESULTS				
Freq. (MHz)	Pol.	Raw (dBuV)	Res BW (KHz)	Pwr @ Antenna (dBm)	Ant. Gain (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	


No emissions were found within 6 dB of the limit

Channel Freq 4,975 MHz Results 30MHz to 1GHz

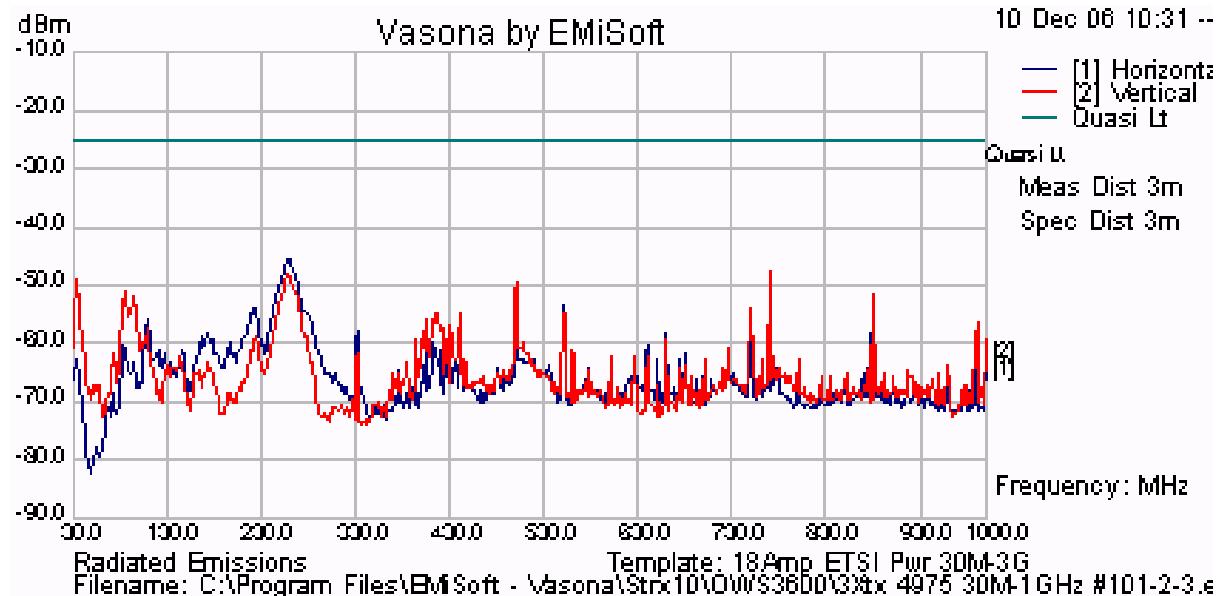

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel Freq 4,975 MHz Results 1GHz to 18GHz

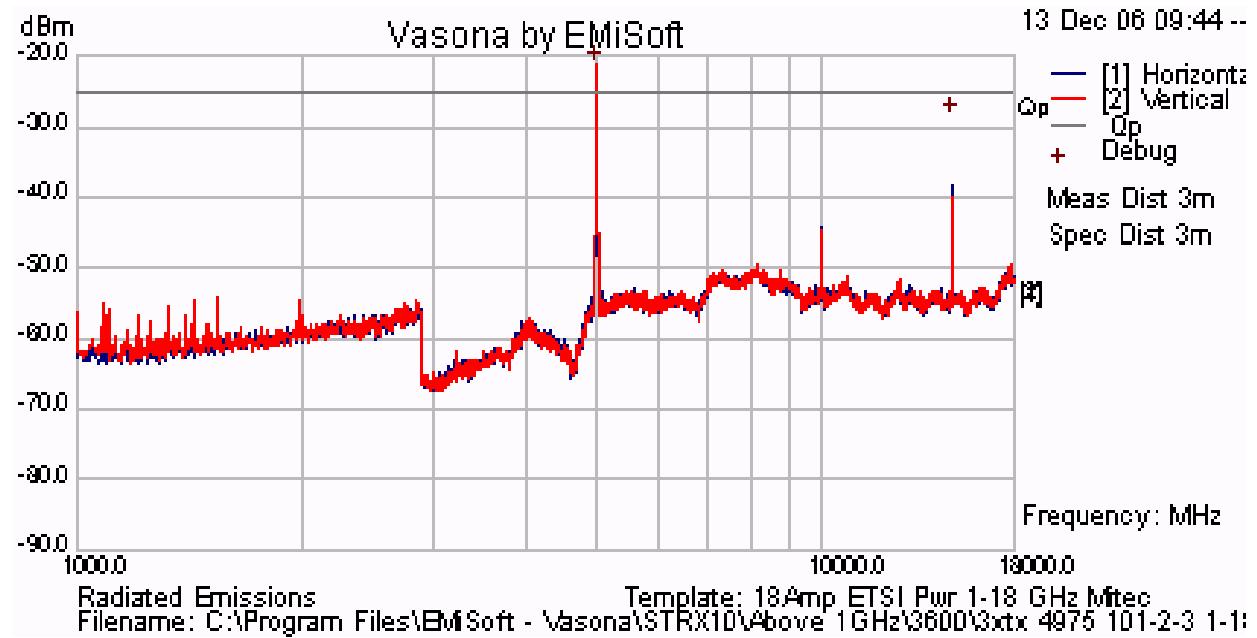

The emission breaking the limit line is the fundamental emission i.e carrier



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 46 of 58

Radio parameters.

OWS3600-20


Channel Freq 4,955 MHz Results 30MHz to 18GHz

OWS3600-20, two transmitters were operational simultaneously. Power setting = +23 dBm, 50 Ohm load on each output

INITIAL INVESTIGATION				SUBSTITUTION RESULTS				
Freq. (MHz)	Pol.	Raw (dBuV)	Res BW (KHz)	Pwr @ Antenna (dBm)	Ant. Gain (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	

No emissions were found within 6 dB of the limit

Channel Freq 4,955 MHz Results 30MHz to 1GHz

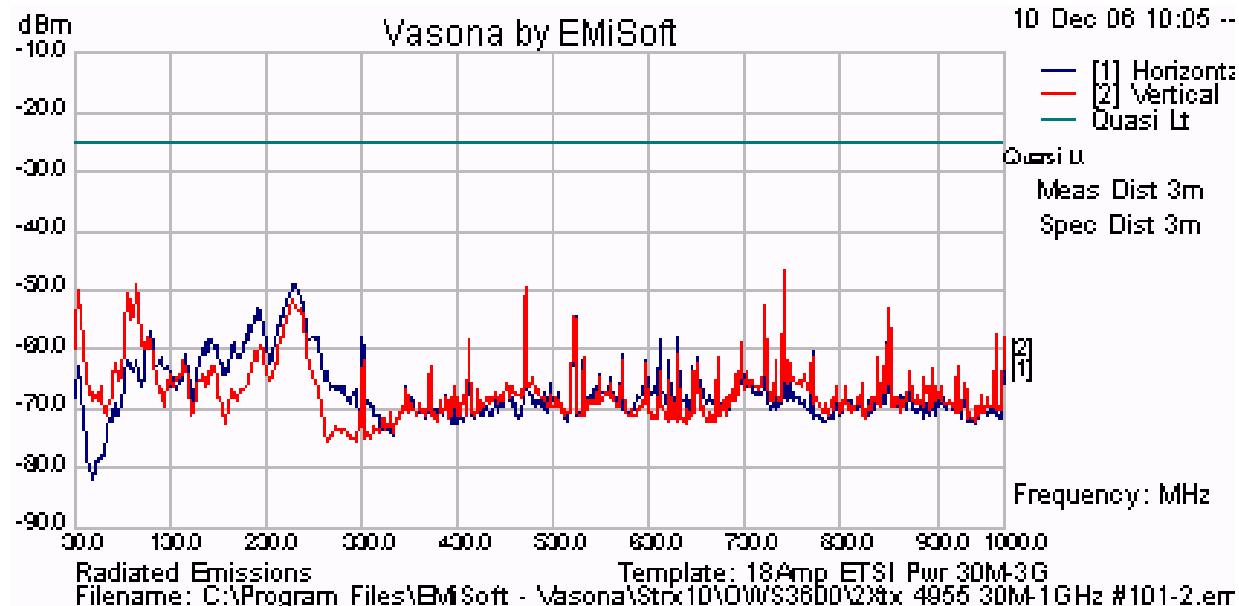

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel Freq 4,955 MHz Results 1GHz to 18GHz



The emission breaking the limit line is the fundamental emission i.e carrier

This test report may be reproduced in full only. The document may only be updated by MiCOM
 Labs personnel. Any changes will be noted in the Document History section of the report.

OWS3600-20


Channel Freq 4,975 MHz Results 30MHz to 18GHz

OWS3600-20, two transmitters were operational simultaneously. Power setting = +23 dBm, 50 Ohm load on each output

INITIAL INVESTIGATION				SUBSTITUTION RESULTS				
Freq. (MHz)	Pol.	Raw (dBuV)	Res BW (KHz)	Pwr @ Antenna (dBm)	Ant. Gain (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	
							-25.0	


No emissions were found within 6 dB of the limit

Channel Freq 4,975 MHz Results 30MHz to 1GHz

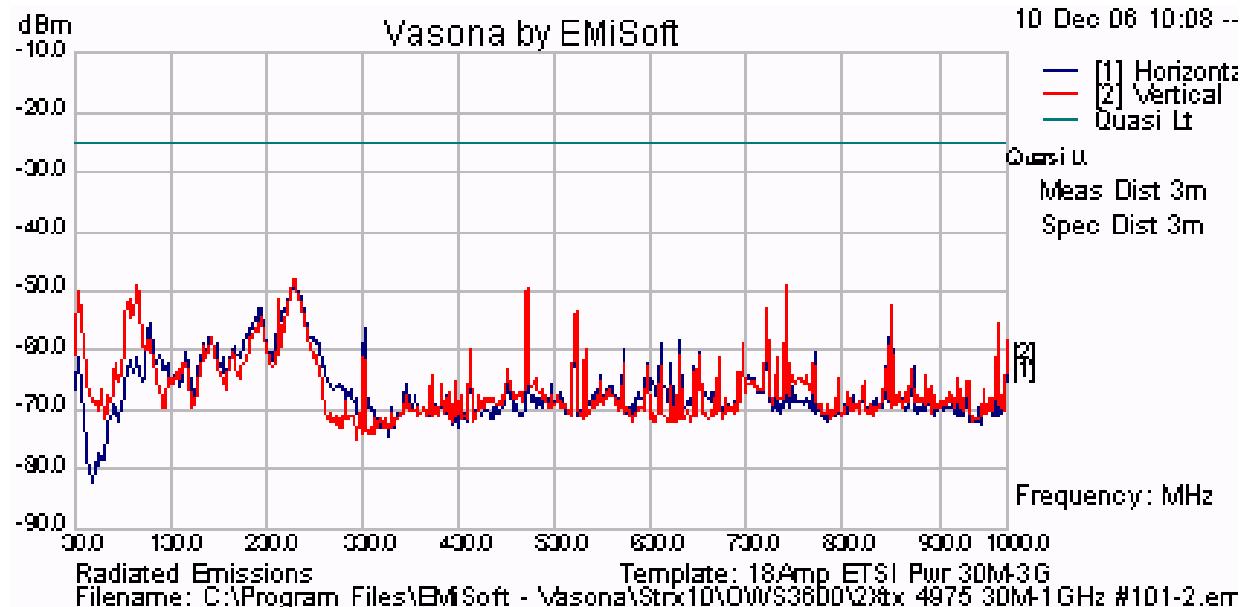

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel Freq 4,975 MHz Results 1GHz to 18GHz

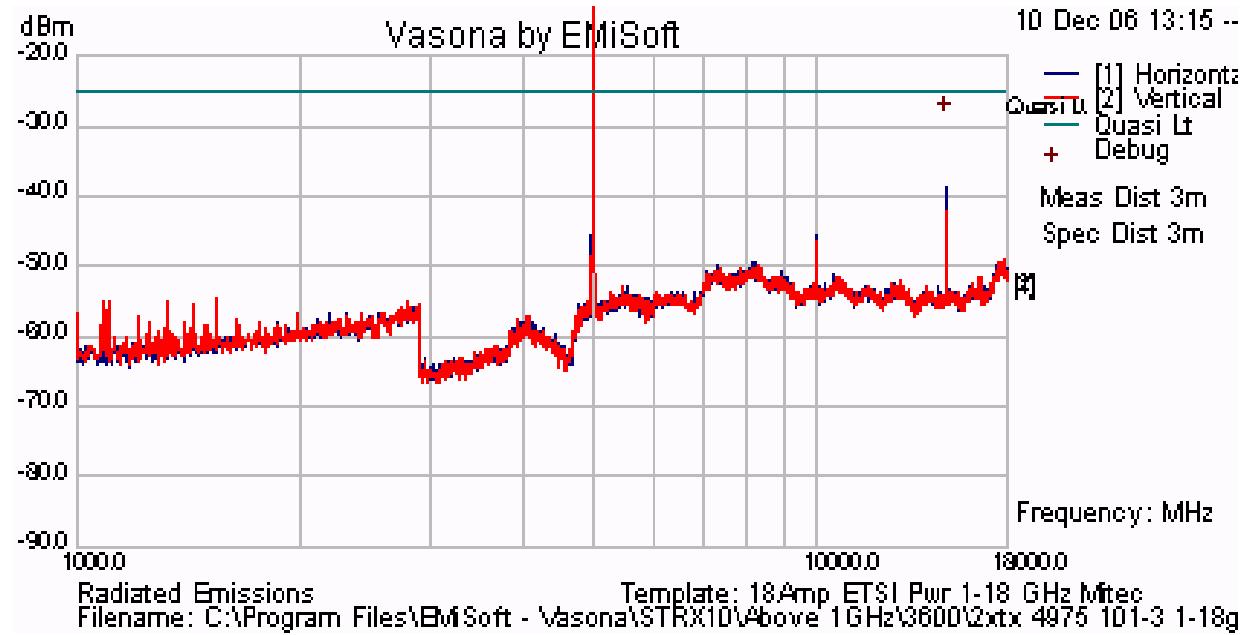

The emission breaking the limit line is the fundamental emission i.e carrier



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 50 of 58

Transmitter Limits

Limits FCC Part §90.210 (m)

Emission Mask M

(6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10 \log(P)$ dB, whichever is the lesser attenuation.

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0104, 0158, 0134, 0310, 0312, Dipole.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)


FCC, Part 15 Subpart C §15.207

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

All six transmitters were operational and terminated into a 50Ω load.

Test Measurement Set up

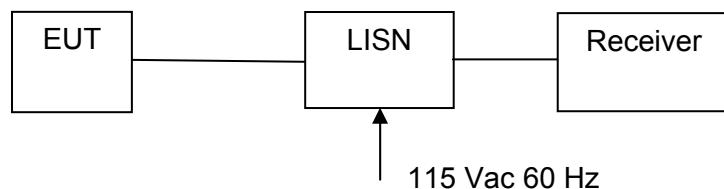

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radio parameters.

Data Rate(s): 802.11a, 6 MBit/s, +17 dBm output power

TABLE OF RESULTS
LINE – LIVE and NEUTRAL

Freq (MHz)	Line	Peak (dB μ V)	QP (dB μ V)	QP Limit (dB μ V)	QP Margin (dB)	Ave. (dB μ V)	Ave. Limit (dB μ V)	Ave. Margin (dB)
0.17	L	60.95	56.18	64.97	-8.79	52.83	54.97	-2.14
0.22	L	60.41	40.2	62.82	-22.61	29.74	52.82	-23.08
0.456	L	50.17	46.05	56.77	-10.72	27.2	46.77	-19.57
0.711	L	46.04	28.64	56	-27.36	15.13	46	-30.87
0.914	L	48.36	31.21	56	-24.79	14.9	46	-31.1
8.276	N	51.92	45.73	60	-14.27	34.17	50	-15.83

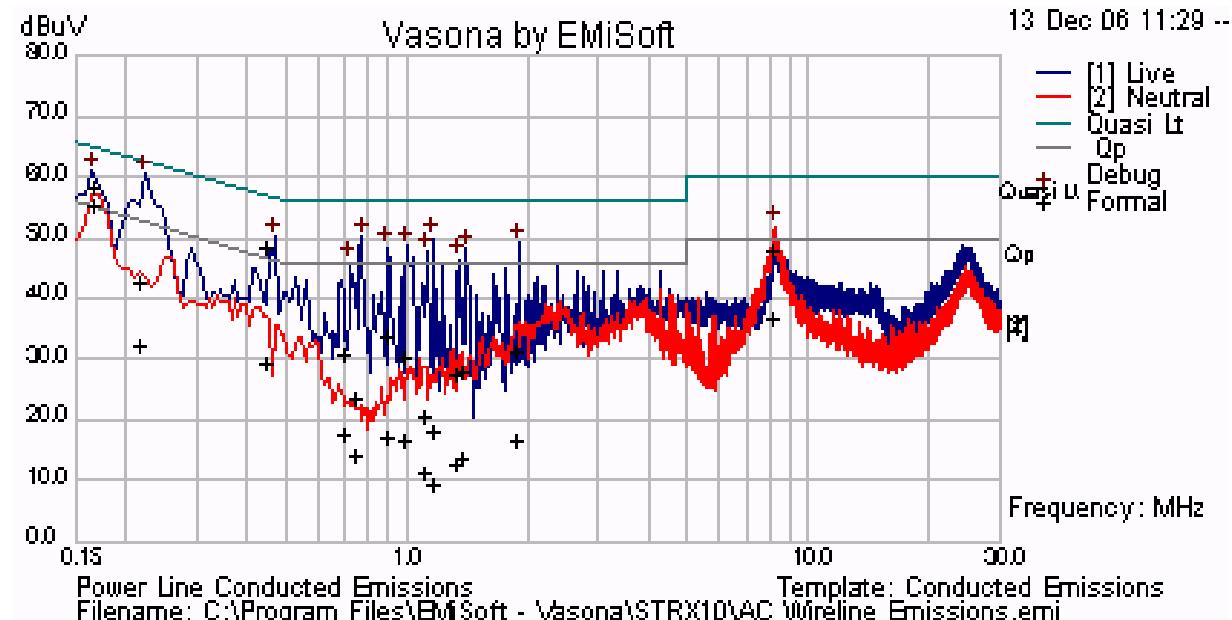

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 53 of 58

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

§15.207 (a) Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------


Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0193, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


6. TEST SET-UP PHOTOGRAPHS

6.1. General Measurement Test Set-Up

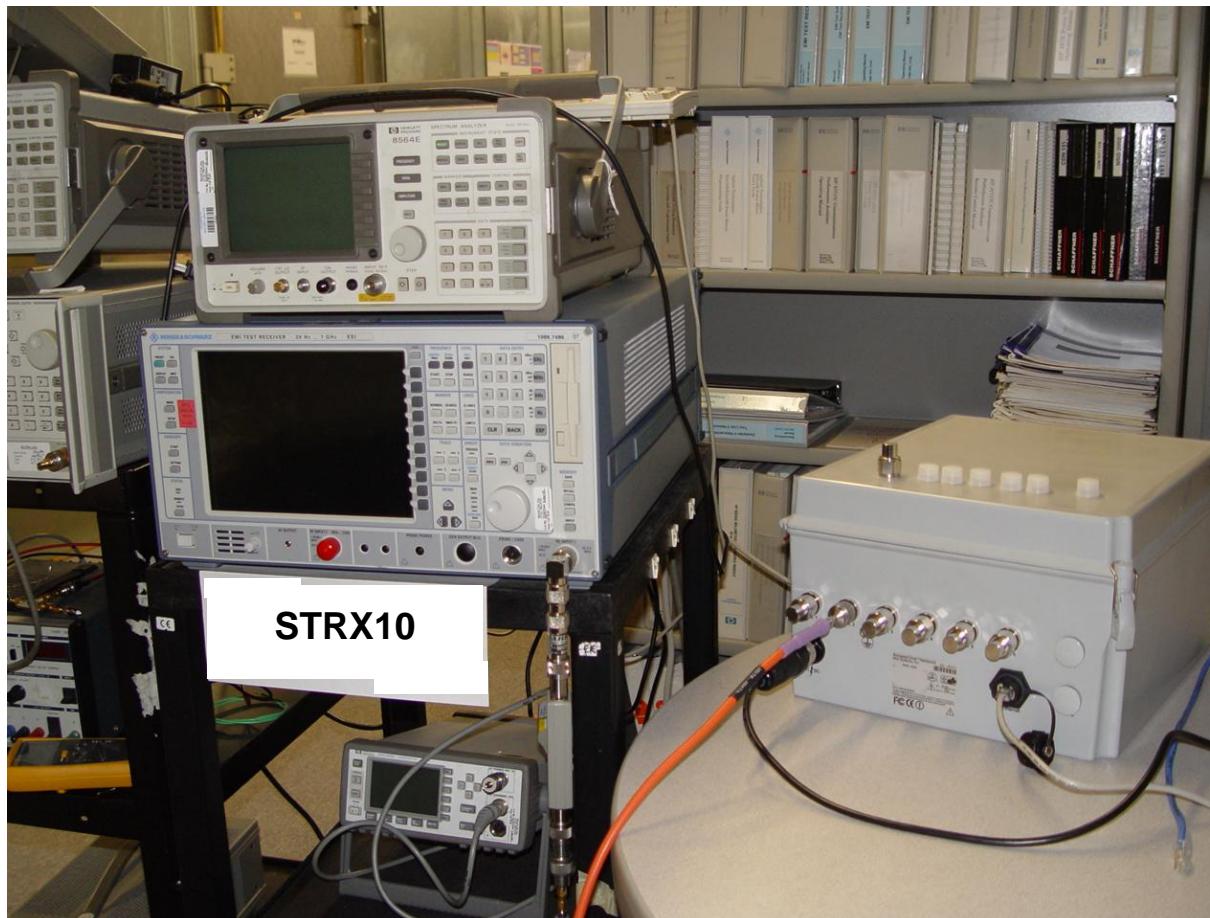


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.2. Radiated Spurious Emissions

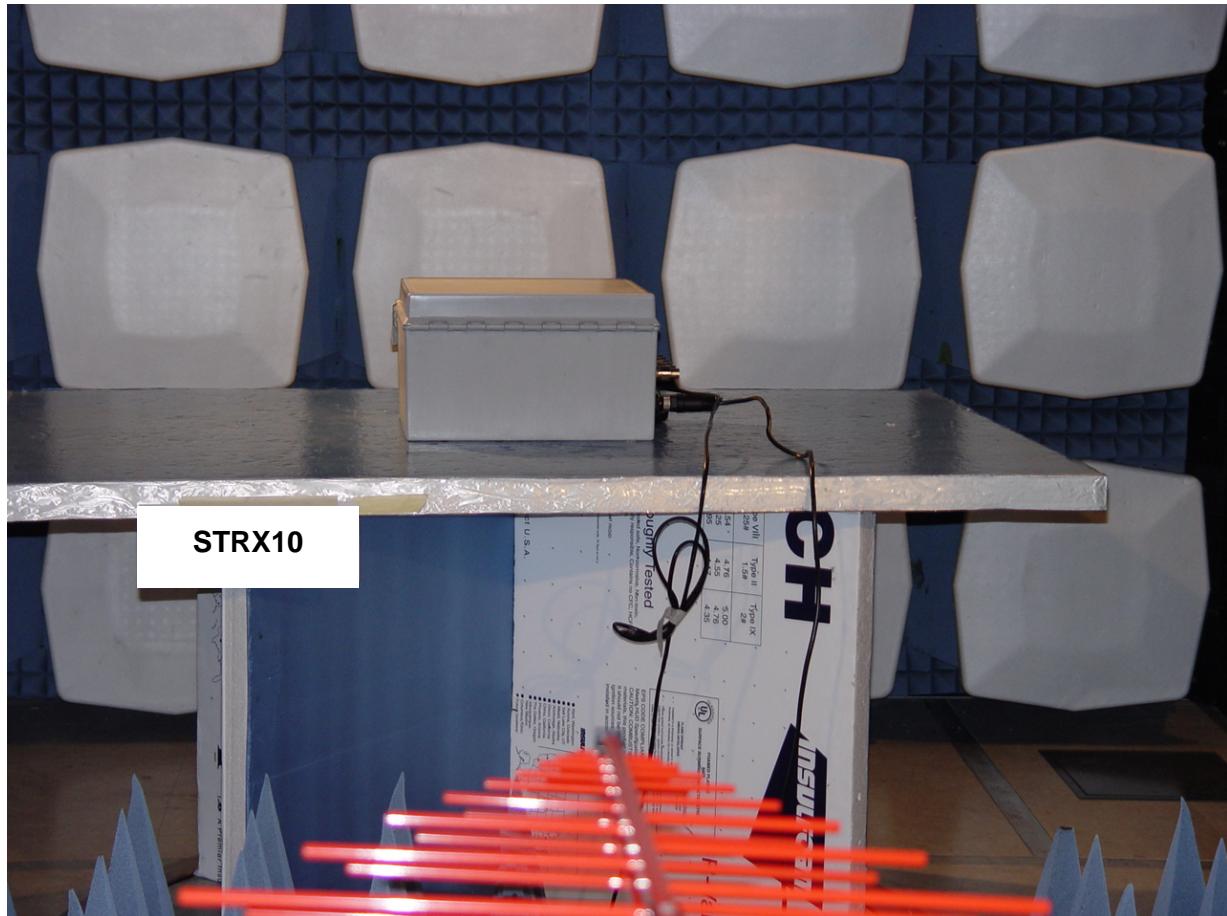

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3. AC Wireline Emissions (150 kHz - 30 MHz)

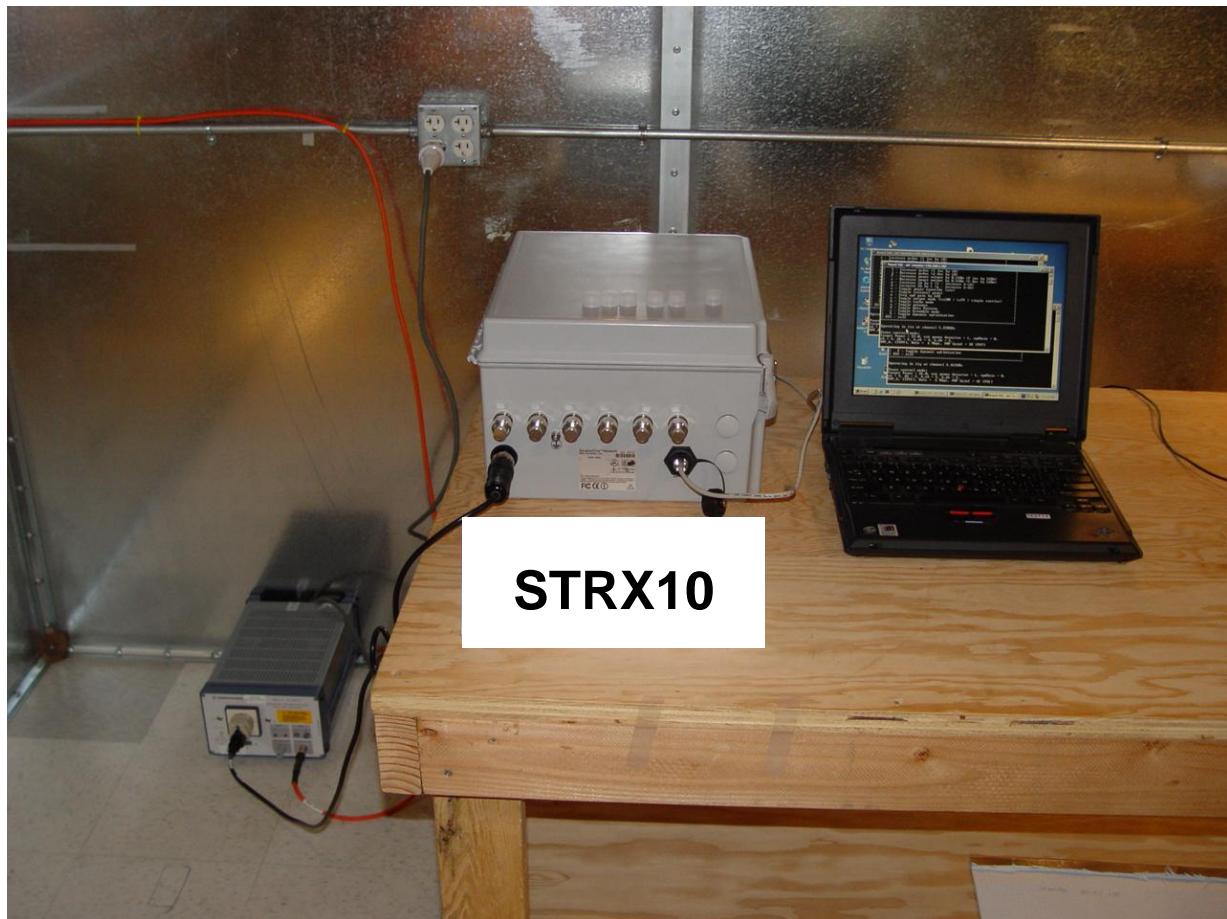

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Access One Network OWS3600
To: FCC 47 CFR Part 90
Serial #: STRX10-A2 Rev C
Issue Date: 14th February '07
Page: 57 of 58

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Calibration Due Date	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	20 th June '07	3410A00141
0104	1-18GHz Horn Antenna	The Electro-Mechanics Company	3115	21 st Oct '07	9205-3882
0134	Amplifier	Com Power	PA 122	1 st Dec '07	181910
0158	Barometer /Thermometer	Control Co.	4196	26 th Aug '07	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	17 th Aug 07	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	11 th Jun '07	None
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	1 st Dec 07	001
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	7 th Dec '07	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	9 ^h Dec '07	209092-001
0313	Coupler	Hewlett Packard	86205A	N/A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	N/A	1623
0223	Power Meter	Hewlett Packard	EPM-442A	16 th Aug 07	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	16 th Aug 07	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	20 th June 07	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	3 RD Oct 07	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	22 nd Jun 07	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	13 TH Jul 07	15F50B001
0307	BNC Cable	Megaphase	1689 1GVT4	13 th Jul 07	15F50B002
	Dipole Antenna	EMCO	3121C	30 th Dec '06	9009 - 605

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, California 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com