

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Wireless Microphone

MODEL No.: HT-U81, HT-8U, UH-81

FCC ID: RFPHT-U81

REPORT NO: E0911028F

ISSUE DATE: November 23, 2009

Prepared for
Dexun Electronic Technology Co., Ltd.
North Banlieue Aote Industry Building Enping, Guangdong, China

Prepared by
SHENZHEN EMTEK CO., LTD

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**
TEL: 86-755-26954280
FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	Dexun Electronic Technology Co., Ltd. North Banlieue Aote Industry Building Enping, Guangdong, China
Product Description:	Wireless Microphone
Model Number:	HT-U81, HT-8U, UH-81 (Note: The samples are same, except model number is different.)
File Number:	E0911028F
Date of Test:	November 13, 2009 to November 20, 2009

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Approved By

David Lee / Q.A. Manager
SHENZHEN EMTEK CO., LTD.

Table of Contents

1.	GENERAL INFORMATION	4
1.1	PRODUCT DESCRIPTION.....	4
1.2	RELATED SUBMITTAL(S) / GRANT (S).....	4
1.3	TEST METHODOLOGY.....	4
1.4	SPECIAL ACCESSORIES	4
1.5	EQUIPMENT MODIFICATIONS	4
1.6	TEST FACILITY	5
2.	SYSTEM TEST CONFIGURATION.....	6
2.1	EUT CONFIGURATION.....	6
2.2	EUT EXERCISE.....	6
2.3	TEST PROCEDURE.....	6
2.4	LIMITATION	6
2.5	CONFIGURATION OF TESTED SYSTEM.....	8
3.	SUMMARY OF TEST RESULTS	9
4.	DESCRIPTION OF TEST MODES	9
5.	RADIATED EMISSION TEST	10
5.1	MEASUREMENT PROCEDURE.....	10
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	11
5.3	MEASUREMENT EQUIPMENT USED:	12
5.4	OUT OF BAND RADIATED MEASUREMENT RESULT	12
5.5	RADIATED MEASUREMENT PHOTOS:	18
6.	ANTENNA APPLICATION.....	19
6.1	ANTENNA REQUIREMENT	19

1. GENERAL INFORMATION

1.1 Product Description

The Dexun Electronic Technology Co., Ltd. Model: HT-U81 (referred to as the EUT in this report) The EUT is an short range, lower power, Wireless Microphone designed as an “Input Device”. It is designed by way of utilizing the FSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 902-928MHz(lower channel :906.00MHz, middle channel: 911.700 MHz, High channel: 921.300MHz)
- B). Modulation: FSK
- C). Antenna Designation: Internal
- D). Power Supply: DC 2*1.5V Battery

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: RFPHT-U81 filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules, The composite system (receiver) is compliance with Subpart B is authorized under a DoC procedure.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters. The customer requested FCC tests for a Wireless Microphone for iPod.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, 2005.11.02
The certificate is valid until 2010.11
The Laboratory has been assessed and proved to be in
compliance with CNAS-CL01: 2006 (identical to
ISO/IEC17025: 2005)
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2008.3
The Laboratory has been assessed according to the
requirements ISO/IEC 17025.

Accredited by FCC, March 18, 2008
The Certificate Registration Number is 709623.

Accredited by Industry Canada, May 24, 2008
The Certificate Registration Number is 46405-4480.

Name of Firm

: SHENZHEN EMTEK CO., LTD

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Limitation

(1) Conducted Emission (Not apply in the report)

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(2) Radiated Emissions**FCC Rule: 15.249(d)(e)**

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength μ V/m	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V}/\text{m}$
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Rem 1. Emission level in $\text{dB}\mu\text{V}/\text{m} = 20 \log (\mu\text{V}/\text{m})$

ark: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A($\text{dB}\mu\text{V}/\text{m}$)(at 3m)		Class B($\text{dB}\mu\text{V}/\text{m}$)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

Peak Output Power(Transmitter)

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	94	94	74.0	54.0
Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
PEAK	AVERAGE	PEAK	AVERAGE	
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

Wireless Microphone (EUT)

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Wireless Microphone	N/A	HT-U81	RFPHT-U81	N/A	EUT

Note:

(1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary Of Test Results

FCC Rules	Description Of Test	Result
§ 15.249(e), (b), § 15.209	Radiated Emission	Compliant
§ 15.203	Antenna Requirement	Compliant

4. Description of test modes

The EUT (Wireless Microphone) has been tested under normal operating condition.

One channels of EUT have been chosen for testing under Normal Operating condition. In this report, all the measured datum of the three channels have been reported. No software used to control the EUT for staying in continuous transmitting mode for testing.

Channel	Frequency(MHz)
Lower channel	906.00MHz
Middle channel	911.700 MHz
High channel	921.300MHz


5. Radiated Emission Test

5.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

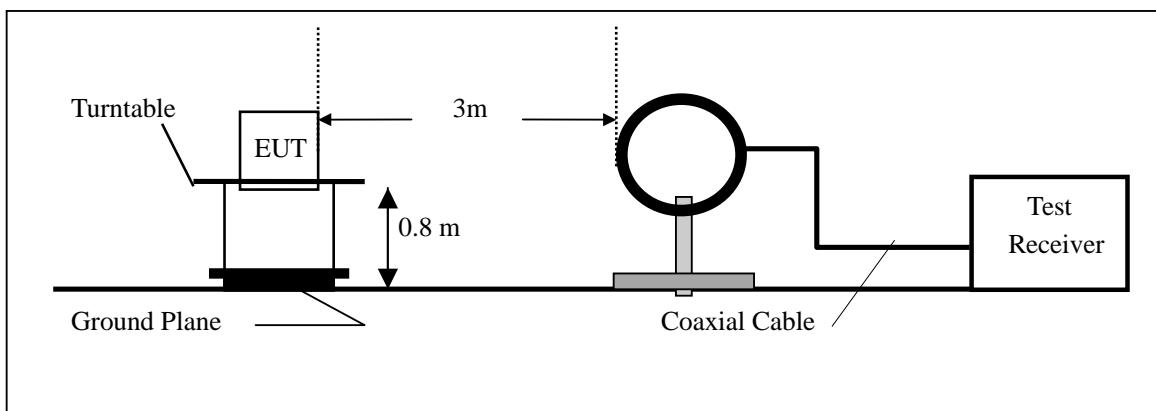

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

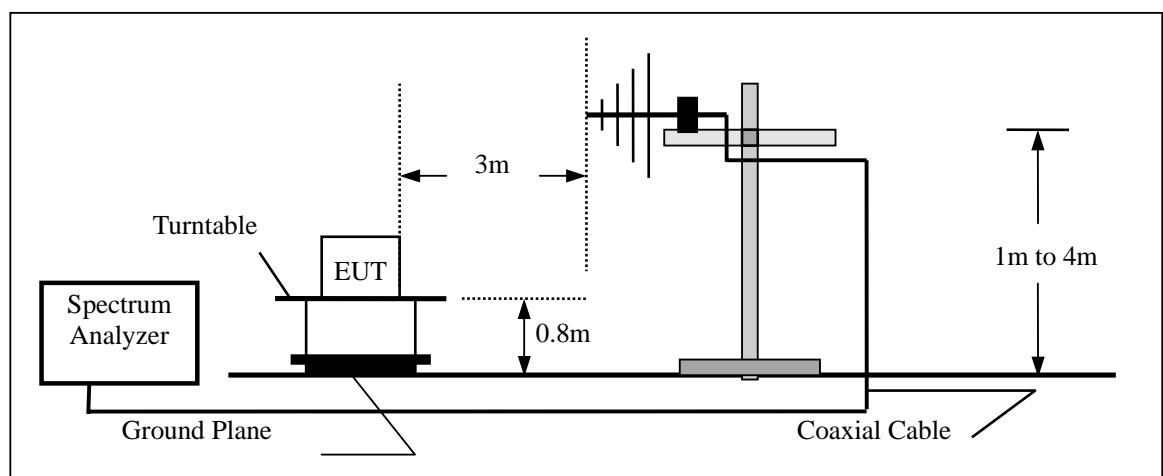

5.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2009	05/29/2010
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2009	05/29/2010
Pre-Amplifier	HP	8447D	2944A07999	05/29/2009	05/29/2010
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2009	05/29/2010
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2009	05/29/2010

5.4 Out of Band Radiated Measurement Result

Operation Mode: TX(906MHz) Test Date : November 11, 2009
 Frequency Range: 30~1000MHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: King

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
200.99	V	39.58	43.50	-3.92	PK
225.63	V	40.25	46.00	-5.75	PK
427.87	V	40.52	46.00	-5.48	PK
452.36	V	40.89	46.00	-5.11	PK
679.77	V	40.52	46.00	-5.48	PK
225.86	H	43.25	46.00	-2.75	PK
378.20	H	38.72	46.00	-7.28	PK
427.94	H	40.26	46.00	-5.74	PK
452.82	H	43.21	46.00	-2.79	PK
477.69	H	35.67	46.00	-10.33	PK

Note: (1) All Readings are Peak Value.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Operation Mode: TX(911.7MHz) Test Date : November 11, 2009
 Frequency Range: 30~1000MHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: King

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
210.25	V	39.56	43.50	-3.94	PK
230.86	V	41.58	46.00	-4.42	PK
432.57	V	40.22	46.00	-5.78	PK
457.36	V	43.62	46.00	-2.38	PK
683.64	V	40.34	46.00	-5.66	PK
225.63	H	41.23	46.00	-4.77	PK
384.53	H	38.42	46.00	-7.58	PK
432.57	H	40.23	46.00	-5.77	PK
458.36	H	41.57	46.00	-4.43	PK
457.578	H	33.52	46.00	-12.48	PK

Note: (1) All Readings are Peak Value.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Operation Mode: TX(921.300MHz) Test Date : November 11, 2009
 Frequency Range: 30~1000MHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: King

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
218.28	V	34.52	46	-11.48	PK
240.57	V	41.53	46	-4.47	PK
242.57	V	40.10	46	-5.90	PK
468.62	V	42.30	46	-3.70	PK
692.35	V	40.56	46	-5.44	PK
230.61	H	41.36	46	-4.64	PK
391.31	H	39.63	46	-6.37	PK
441.63	H	41.36	46	-4.64	PK
470.57	H	40.14	46	-5.86	PK
492.25	H	42.81	46	-3.19	PK

Note: (1) All Readings are Peak Value.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Operation Mode: TX(906MHz) Test Date : November 11, 2009
 Frequency Range: 1-10GHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: King

Freq. (GHz)	Ant.Pol. H/V	Emission Level(dBuV) QP	Limit 3m(dBuV/m) QP	Margin(dB) QP
906.00	V	81.34	94	-12.66
906.00	H	88.25	94	-5.75

Freq. (GHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1812.80	V	50.25	49.24	74	54	-23.75	-4.76
2718.20	V	49.94	49.17	74	54	-24.06	-4.83
3624.77	V	48.78	47.92	74	54	-25.22	-6.08
4530.47	V	46.34	45.97	74	54	-27.66	-8.03
--	V	--	--	74	54	--	--
1812.80	H	51.45	50.24	74	54	-22.55	-3.76
2718.20	H	51.98	50.38	74	54	-22.02	-3.62
3624.77	H	50.47	48.94	74	54	-23.53	-5.06
4530.47	H	46.37	44.15	74	54	-27.63	-9.85
--	H	--	--	74	54	--	--

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Operation Mode: TX(911.7MHz) Test Date : November 11, 2009
 Frequency Range: 1-10GHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: King

Freq. (GHz)	Ant.Pol. H/V	Emission Level(dBuV) QP	Limit 3m(dBuV/m) QP	Margin(dB) QP
911.7	V	82.98	94	-5.76
911.7	H	89.63	94	-11.43

Freq. (GHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1823.9	V	51.25	50.57	74	54	-22.75	-3.43
2735.5	V	48.38	47.63	74	54	-25.62	-6.37
3646.8	V	48.36	47.24	74	54	-25.64	-6.76
4558.7	V	47.36	46.52	74	54	-26.64	-7.48
--	V	--	--	74	54	--	--
1823.9	H	52.47	51.34	74	54	-21.53	-2.66
2735.5	H	51.25	50.25	74	54	-22.75	-3.75
3646.8	H	48.47	47.86	74	54	-25.53	-6.14
4558.7	H	47.36	46.87	74	54	-26.64	-7.13
--	H	--	--	74	54	--	--

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

SHENZHEN EMTEK CO., LTD.

REPORT NO: E0911028F

FCC ID: RFPHT-U81

DATE: 11/23/2009

Operation Mode: TX(921.3MHz) Test Date : November 11, 2009
 Frequency Range: 1-10GHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: King

Freq. (GHz)	Ant.Pol. H/V	Emission Level(dBuV) QP	Limit 3m(dBuV/m) QP	Margin(dB) QP
921.30	V	81.92	94	-12.08
921.30	H	88.34	94	-5.66

Freq. (GHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1842.6	V	50.38	49.27	74	54	-23.62	-4.73
2763.92	V	49.35	48.63	74	54	-24.65	-5.37
3685.30	V	47.44	46.81	74	54	-26.56	-7.19
4606.5	V	47.34	46.38	74	54	-26.66	-7.62
--	V	--	--	74	54	--	--
1842.6	H	52.34	51.23	74	54	-21.66	-2.77
2763.92	H	50.47	49.57	74	54	-23.53	-4.43
3685.30	H	48.63	47.95	74	54	-25.37	-6.05
4606.5	H	46.69	45.62	74	54	-27.31	-8.38
--	H	--	--	74	54	--	--

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

5.5 Radiated Measurement Photos:



6. Antenna Application

6.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.240.

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by responsible party shall be used with the device.

The EUT has a built in antenna which is a short wire solder on the PCB, this is permanently attached antenna and meets the requirements of this section.