

**FCC PART 15, SUBPART B and C
TEST REPORT**

for

RF TRANSMITTER

MODEL NUMBER: MMI-ARM

Prepared for

MICROWAVE MONOLITHICS INCORPORATED
2263 WARD AVE.
SIMI VALLEY, CALIFORNIA 93065

Prepared by: _____

REYNALD O. RAMIREZ

Approved by: _____

RUBY HALL

COMPATIBLE ELECTRONICS INC.
1050 LAWRENCE DRIVE
NEWBURY PARK, CALIFORNIA 91320
(805) 484-4044

DATE: NOVEMBER 6, 2023

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	22	2	2	2	20	67	115

This report shall not be reproduced, except in full,
without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS - DTS	5
1. PURPOSE	6
1.1 DECISION RULE & RISK	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample Was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration – Emissions	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 Emissions Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
6.3 Measurement Uncertainty	12
7. CHARACTERISTICS OF THE TRANSMITTER	13
7.1 Channel Description and Frequencies	13
7.2 Antenna	13
8. TEST PROCEDURES	14
8.1 RF Emissions	14
8.1.1 Conducted Emissions Test	14
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	15
8.1.3 RF Emissions Test Results	16
8.1.4 Sample Calculations	17
8.2 DTS Bandwidth	18
8.3 Maximum Conducted Output Power	18
8.4 Emissions in Non-Restricted Bands	19
8.5 RF Band Edges	19
8.6 Power Spectral Density Test	20
8.7 Variation of the Input Power	20
8.8 Occupied Bandwidth	21
9 CONCLUSIONS	22

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Radiated Emissions Photos • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Layout of the Semi-Anechoic Test Chamber

LIST OF TABLES

TABLE	TITLE
1	Radiated Emissions Results

GENERAL REPORT SUMMARY

This electromagnetic emission report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form except in full, without the written permission of Compatible Electronics.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the U.S. Government.

Device Tested: RF Transmitter
Model: MMI-ARM
S/N: None

Product Description: The MMI-ARM is a self-contained repeater (receiver/transmitter) which receives location data from compatible transmitting devices, consolidates the data and re-transmits the consolidated data to compatible receive devices. The MMI-ARM automatically activates when its removable rechargeable lithium-ion battery pack is connected and is deactivated by disconnecting the battery pack.
Highest Frequency: 2476.25 MHz (Dimensions: 5.23622" x 5.23622" x 2.75591")

Modifications: The EUT was not modified during the testing in order to comply with the specifications.

Manufacturer: Microwave Monolithics Incorporated
2263 Ward Ave.
Simi Valley, CA 93065

Test Dates: October 30 & 31 and November 1, 2 & 3 ,2023



Test Specifications covered by accreditation:

Emissions requirements
CFR Title 47, Part 15, Subpart B and C, sections
15.205, 15.207, 15.209 and 15.247
Test Procedure: ANSI C63.4: 2014, ANSI C63.10:
2013 and KDB 558074 D01 v05r02

SUMMARY OF TEST RESULTS - DTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	This test was not performed because the EUT is battery powered only.
2	Spurious Radiated RF Emissions, 30 MHz – 24762.50 MHz	The EUT complies with the Class B limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15, Subpart C, section 15.209 and 15.247
3	Spurious Radiated RF Emissions, 9 kHz – 30 MHz and 1000 MHz – 24762.50 MHz	The EUT complies with the Class B limits of CFR Title 47, Part 15, Subpart B; CFR Title 47, Part 15, Subpart C, section 15.247(d).
4	Emissions produced by the intentional radiator in non-restricted bands, 9 kHz – 24762.50 MHz	Complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.247(d)
5	Emissions produced by the intentional radiator in restricted bands, 9 kHz – 24762.50 MHz	Complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209, section 15.247 (d)
6	DTS Bandwidth	Complies with the requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (a)(2)
7	Maximum Conducted Output Power	Complies with the requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (b)(3)
8	RF Conducted Antenna Test	Complies with the requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (d).
9	Power Spectral Density from the Intentional Radiator to the Antenna	Complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (e)
10	Occupied Bandwidth	The results of this test were used in the measurement procedures for Maximum Conducted Output Power and Power Spectral Density.
11	Spurious Radiated RF Emissions, 30 MHz – 9280 MHz (Receive mode only)	The EUT complies with the Class B limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15, Subpart B, section 15.109.

1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the RF Transmitter, Model Number: MMI-ARM. The emissions measurements were performed according to the measurement procedure described in ANSI C63.10 and ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B and Subpart C, sections 15.107, 15.205, 15.207, 15.209, and 15.247.

1.1 DECISION RULE & RISK

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the consideration of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a pre-production representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 1050 Lawrence Drive, Newbury Park, California 91320.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Microwave Monolithics Incorporated

Daniel Siu

Director, Research

Compatible Electronics Inc.

Reynald O. Ramirez
Ruby Hall

Sr. Test Engineer
Lab Manager

2.4 Date Test Sample Was Received

The test sample was received on October 30, 2023. Received as described in product description.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
N/A	Not Applicable
NCR	No Calibration Required

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices
FCC Title 47, Part 15 Subpart B	FCC Rules - Radio frequency devices (including digital devices) – Unintentional Radiators
KDB 558074 D01 v05r02	Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules
EN 50147-2: 1997	Anechoic chambers. Alternative test site suitability with respect to site attenuation

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration – Emissions

The EUT was tested in a tabletop configuration. The EUT was transmitting at 2401.25 MHz, 2441.75 MHz and 2476.25 MHz. The EUT was tested in both transmit and receives modes of operation. The EUT was utilizing software FB11C4.

The EUT also contains multiple TX/RX module that receives frequencies from 902-928 MHz. band. According to the client the transmit functionality requires specific instructions that are absent from the control code so the transmission at 900 MHz would not happen. During testing the modules were setup to receive the entire range simultaneously.

All three orthogonal axis were tested in transmit and receive modes of operation.

For direct measurement portion of the test – The EUT was directly connected to the EMI receiver. A special program was used to control the channel of the transmitter.

The radiated final data for the EUT was taken in the worst-case configuration described above. Please see Appendix E for the data sheets.

4.1.1 Cable Construction and Termination

The EUT has no cables.

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
RF TRANSMITTER (EUT)	MICROWAVE MONOLITHICS INCORPORATED	MMI-ARM	N/A	FCC ID: RG6-MMI-ARM

5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
TDK Emissions Lab Software	TDK RF Solutions, Inc.	TDK Emissions Lab	Version: 10.78	NCR	NCR
EMI Receiver	Agilent	N9038A	MY51100115	Jan 11, 2023	Jan 11, 2025
Active Loop Antenna	Com-Power	AL-130R	10160065	Aug. 14, 2023	Aug. 14, 2025
Combi-Log Antenna	Com-Power	AC-220	10030030	Jan. 29, 2022	Jan. 29, 2024
Horn Antenna	Com-Power	AH-118	071370	Jun. 20, 2022	Jun. 20, 2024
Horn Antenna	Com-Power	AH-826	081081	NCR	NCR
Antenna Cable	Belden	RG-214/U	A/N: 6014	Feb. 08, 2022	Feb. 08, 2024
High Freq. Antenna Cables	SucoFlex	102_EA	A/N: 6012 & 6013	Feb. 07, 2022	Feb. 07, 2024
High Freq. Antenna Cables	SucoFlex	102_EA	A/N: 6012 & 6013	Jan. 15, 2024	Jan. 15, 2026
Preamplifier	Com-Power	PAM-118A	551015	Jan. 20, 2022	Jan. 20, 2024
Preamplifier	Com-Power	PAM-118A	551015	Jan. 11, 2024	Jan. 11, 2026
Preamplifier	Com-Power	PAM-118	443009	Jan. 04, 2022	Jan. 04, 2024
Preamplifier(backup)	Com-Power	PA-840	711883	Jan. 17, 2022	Jan. 17, 2024
Preamplifier	Com-Power	PAM-840	461268	Jan. 03, 2023	Jan. 03, 2025
Turntable	EMCO	2088-2.03	None	NCR	NCR
Antenna Mast	EMCO	2075-2	None	NCR	NCR
Multi-Device Controller	ETS EMCO	2090	9511-1095	NCR	NCR
Temperature and Humidity Indicator	Abbeon	HTAB169B	3428	Sep. 08, 2023	Sep. 08, 2024
Barometer	Maximum	Predictor	3429	Jun. 19, 2023	Jun. 19, 2024
Computer	Dell	Vostro 3900	Asset# 3423	NCR	NCR

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

For frequencies 1 GHz and below: The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

For frequencies above 1 GHz: The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

6.3 Measurement Uncertainty

“Compatible Electronics’ U_{lab} value is less than U_{cispr} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit.

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		U_{cispr}	$U_{lab} = 2 u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.73 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.12 dB (Vertical) 3.07 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	3.13 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	3.13 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26 GHz)	N/A	3.57 dB

7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Description and Frequencies

The EUT operates within the bands of 2401.25 to 2476.25 MHz. The low channel is 2401.25 MHz, the middle channel is 2441.75 MHz and the high channel is 2476.25 MHz. There are 51 possible transmitted frequencies. The nominal channel spacing is 1.5 MHz.

7.2 Antenna

The antenna has a gain of 4.4 dBi.

8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

Test Results:

This test was not performed because the EUT operates on battery power only and cannot be connected internally or externally to the AC public mains.

Had this test been applicable it would have been performed as described below.

The EMI Receiver was used as a measuring meter. A 10 dB Attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The six highest emissions are listed in Table 1.0.

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI Receiver was used as the measuring meter. Below 1 GHz, a built-in, internal preamplifier was used to increase the sensitivity of the instrument. At frequencies above 1 GHz, external preamplifiers were used. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit.

The frequencies above 1 GHz were averaged by using the linear average detector function on the EMI Receiver.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	Combilog Antenna
1 GHz to 24.7625 GHz	1 MHz	Horn Antenna

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.0.

Test Results:

The EUT complies with the **Class B** limits of Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C, Sections 15.209 and 15.247 (d) for radiated emissions. Please see Appendix E for the data sheets.

8.1.3 RF Emissions Test ResultsTable 1.0 RADIATED EMISSION RESULTS RF TRANSMITTER
MODEL NUMBER: MMI-ARM

Frequency MHz	Corrected Reading* dBuV/m	Specification Limit dBuV/m	Delta (Cor. Reading – Spec. Limit) dB
556.30	30.43#	46.00	-15.57
560.30	33.41#	46.00	-12.59
938.30	40.15#	56.90	-16.75
14407.50	42.00A	53.98	-11.98
14650.50	41.81A	53.98	-12.17
14857.50	41.90A	53.98	-12.08

Notes:

- * The complete emissions data is given in Appendix E of this report.
- ** The factors for the antenna and preamplifier gain are attached in Appendix D of this report.
- # Quasi-Peak Reading
- A Average Reading

8.1.4 Sample Calculations

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ($\mu\text{V/m}$) $\log \times 20$ = Specification Limit in dBuV/m

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance) $\log \times 40$ = distance factor

For measurements above 30 MHz: (Specification distance / test distance) $\log \times 20$ = distance factor

Corrected Meter Reading = meter reading + F – A + C

Where: F = antenna factor

A = amplifier gain

C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

8.2 DTS Bandwidth

The DTS Bandwidth was measured using the EMI Receiver. The bandwidth was measured using a direct connection from the EUT. The following steps were performed for measuring the DTS Bandwidth.

1. Set RBW = 100 kHz
2. Set the video bandwidth (VBW) to equal or greater than 3 times the RBW
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep = Auto Couple
6. Allow the trace to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Results:

The EUT complies with the requirements of FCC Title 47, Part 15, Subpart C section 15.247 (a)(2).

8.3 Maximum Conducted Output Power

The Maximum Conducted Output Power was measured using the EMI Receiver. The Maximum Conducted Output Power was measured using the procedure described in section 11.9.2.2.2 of ANSI C63.10. The Maximum Conducted Output Power was then taken. The cable loss was also added back into the reading using the reference level offset. The following steps were performed for measuring the Maximum Conducted Output Power.

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq [3 \times \text{RBW}]$.
- d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Test Results:

The EUT complies with the requirements of FCC Title 47, Part 15, Subpart C section 15.247 (b)(3).

8.4 Emissions in Non-Restricted Bands

The emissions in the non-restricted frequency bands measurements were performed using the EMI receiver directly connected to the EUT. The reference level was established by setting the instrument center frequency to the DTS channel center frequency. The span was set to ≥ 1.5 times the DTS bandwidth. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with sweep set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the reference level. For emission level measurement, the center frequency and span were set to encompass the frequency range to be measured. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than the span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d).

8.5 RF Band Edges

The RF band edges were taken at the edges of the ISM spectrum (2401.25 MHz when the EUT was on the low channel and 2476.25 MHz when the EUT was on the high channel) using the EMI Receiver. The plots were taken in single channel mode at a 3-meter test distance. The radiated emissions test procedure as described in section 8.1.2 of this test report was used to maximize the emission.

Test Results:

The EUT complies with the requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d). Please see the data sheets located in Appendix E.

8.6 Power Spectral Density Test

The spectrum density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The following steps were performed for measuring the spectral density.

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

Test Results:

The EUT complies with the requirements of FCC Title 47, Part 15, Subpart C section 15.247 (e).

8.7 Variation of the Input Power

Test Results:

This test was not performed because the EUT operates on battery power only and cannot be connected internally or externally to the AC public mains.

Had this test been applicable it would have been performed as described below.

The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85% and 115% of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

8.8 Occupied Bandwidth

The Occupied Bandwidth was measured using the EMI Receiver. The Occupied Bandwidth was measured using the procedure described in section 6.9.3 of ANSI C63.10. The Occupied Bandwidth was then taken. The cable loss was also added back into the reading using the reference level offset. The following steps were performed for measuring the Occupied Bandwidth.


- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data maybe reported in addition to the plot(s).

Test Results:

The results of this test were used in the measurement procedures for Maximum Conducted Output Power and Power Spectral Density.

9 CONCLUSIONS

The RF Transmitter, Model Number: MMI-ARM (EUT), as tested, meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B, and Subpart C, sections 15.107, 15.205, 15.207, 15.209 and 15.247.

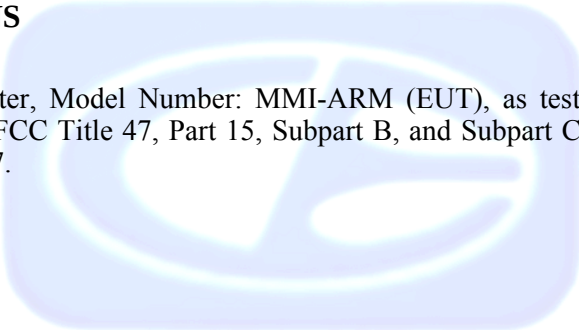

APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

LABORATORY ACCREDITATIONS AND RECOGNITIONS

For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>



Quote from ISO-ILAC-IAF Communiqué on the Management Systems Requirements of ISO/IEC 17025, General Requirements for the competence of testing and calibration laboratories:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025 are written in language relevant to laboratory operations and operate generally in accordance with the principles of ISO 9001"

Innovation, Science and Economic Development Canada Lab Code 22209

APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

There were no modifications made to the EUT.



APPENDIX C

ADDITIONAL MODELS

ADDITIONAL MODELS

Device Tested

RF Transmitter
Model: MMI-ARM
S/N: None


No Additional models.



APPENDIX D

DIAGRAMS AND CHARTS

FIGURE 1: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER

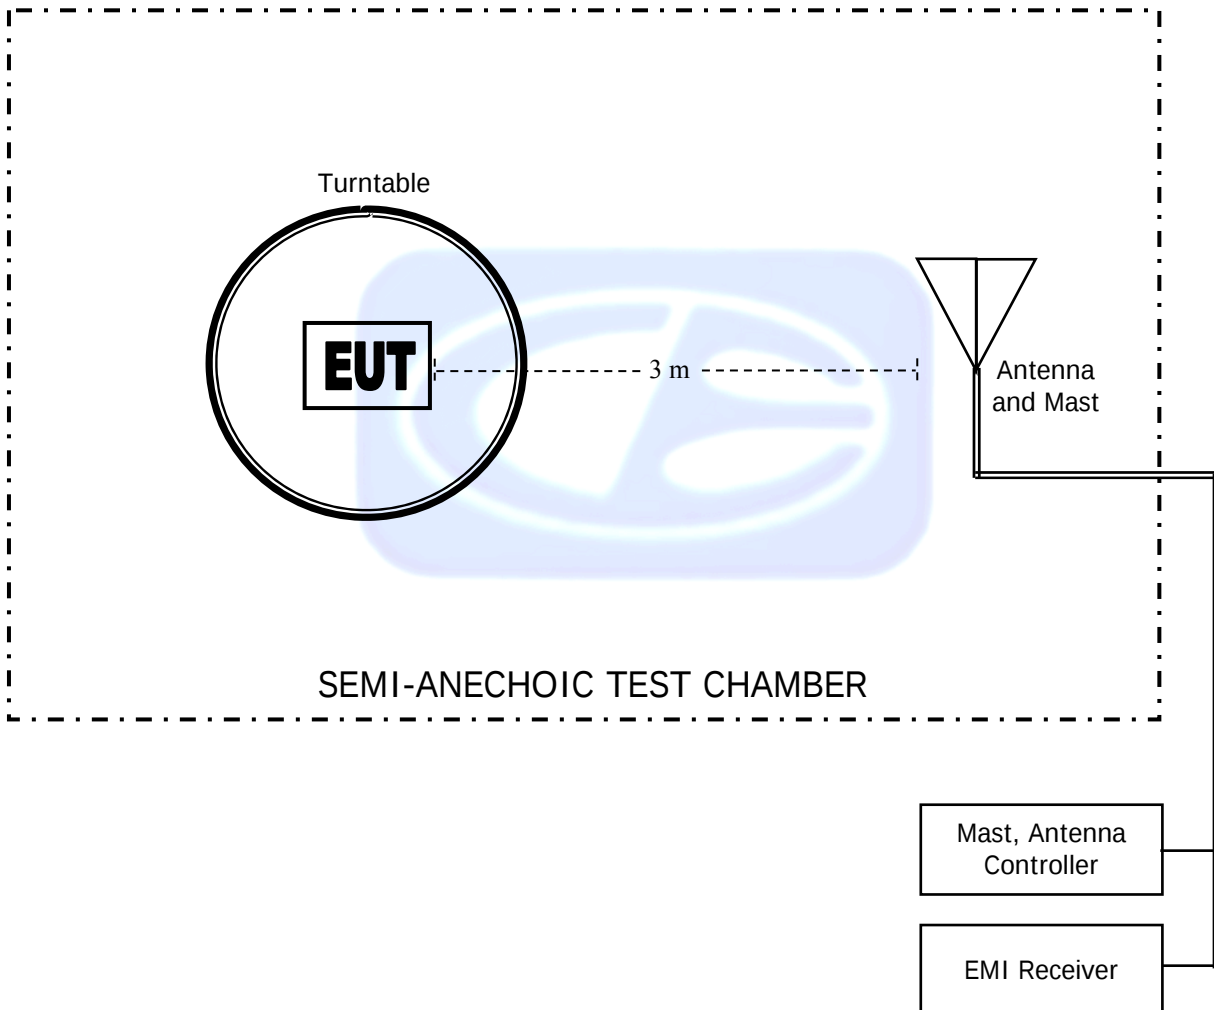

COM-POWER AL-130R

ACTIVE LOOP ANTENNA

S/N: 10160065

CALIBRATION DATE: AUGUST 14, 2023

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
0.009	15.08	1	14.15
0.01	15.24	2	14.26
0.02	14.36	3	14.37
0.03	15.15	4	14.57
0.04	14.72	5	14.56
0.05	14.03	6	14.48
0.06	14.28	7	14.40
0.07	14.07	8	14.20
0.08	13.93	9	14.00
0.09	14.14	10	14.20
0.1	13.78	15	14.71
0.2	13.77	20	13.75
0.3	13.64	25	13.36
0.4	13.63	30	11.78
0.5	13.85		
0.6	13.86		
0.7	13.85		
0.8	13.82		
0.9	13.98		

COM-POWER AC-220**COMBI-LOG ANTENNA****S/N: 10030030****ASSET: 6037****CALIBRATION DATE: JANUARY 29, 2022**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.3	450	21.5
35	21.3	500	22.1
40	20.5	550	22.8
45	19.7	600	24.3
50	18.6	650	24.4
60	14.9	700	24.4
70	11.8	750	26.1
80	11.8	800	26.3
90	13.6	850	26.0
100	14.4	900	27.6
120	15.6	950	28.5
140	14.2	1000	28.3
160	14.1		
180	14.8		
200	15.3		
225	15.8		
250	16.7		
275	18.4		
300	18.5		
350	19.5		
400	20.7		

BELDEN ANTENNA CABLE**RG-214/U****A/N: 6014****CALIBRATION DATE: FEBRUARY 8, 2022**

FREQUENCY (MHz)	CABLE LOSS	FREQUENCY (MHz)	CABLE LOSS
0.01	0.3	200	1.7
0.02	0.3	225	1.7
0.05	0.3	250	1.8
0.1	0.3	275	2.0
0.2	0.3	300	2.1
0.5	0.3	350	2.2
1	0.3	400	2.4
2	0.3	450	2.3
5	0.3	500	2.8
10	0.5	550	3.1
20	0.5	600	2.8
30	0.7	650	3.2
40	0.7	700	3.6
50	0.8	750	3.5
60	0.8	800	3.3
70	1.0	850	3.6
80	1.0	900	3.8
90	1.1	950	3.8
100	1.1	1000	3.9
125	1.3		
150	1.3		
175	1.6		

AH-118**DOUBLE RIDGE HORN ANTENNA****S/N: 071370****CALIBRATION DATE: JUNE 20, 2022**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	24.06	10000	39.24
1500	25.16	10500	39.47
2000	28.25	11000	39.21
2500	28.54	11500	39.96
3000	29.67	12000	40.49
3500	30.58	12500	40.04
4000	31.56	13000	40.25
4500	32.17	13500	40.19
5000	33.40	14000	40.72
5500	33.88	14500	42.04
6000	34.29	15000	41.29
6500	34.89	15500	39.52
7000	36.92	16000	39.58
7500	37.40	16500	39.31
8000	37.65	17000	41.01
8500	37.97	17500	43.31
9000	37.92	18000	45.26
9500	38.63		

AH-826

HORN ANTENNA

S/N: 081081

FREQUENCY (MHz)	FACTOR (dB)
18000	36.6
18500	36.0
19000	36.1
19500	19.0
20000	38.6
20500	37.2
21000	37.6
21500	37.6
22000	37.4
22500	37.9
23000	37.4
23500	36.7
24000	37.4
24500	37.7
25000	38.3
25500	38.0
26000	38.2
26500	38.1

SUCOFLEX ANTENNA CABLES

102_EA

A/N: 6012 & 6013

CALIBRATION DATE: FEBRUARY 7, 2022

FREQUENCY (MHz)	CABLE LOSS	FREQUENCY (MHz)	CABLE LOSS
1000	5.2	6750	14.7
1100	5.3	7000	14.5
1200	5.4	7250	15.0
1300	5.8	7500	14.9
1400	6.0	7750	14.8
1500	6.2	8000	15.2
1600	6.4	8250	15.3
1700	6.5	8500	15.4
1800	6.6	8750	15.5
1900	6.9	9000	15.8
2000	7.0	9250	15.7
2250	7.5	9500	16.0
2500	7.9	9750	16.3
2750	8.5	10000	16.3
3000	8.8	10500	16.9
3250	9.2	11000	17.0
3500	9.6	11500	17.6
3750	9.9	12000	18.1
4000	10.3	12500	18.4
4250	10.6	13000	18.7
4500	10.9	13500	19.2
4750	11.3	14000	19.5
5000	11.7	14500	19.7
5250	12.1	15000	20.6
5500	12.5	15500	20.7
5750	12.9	16000	20.9
6000	13.3	16500	21.4
6250	13.8	17000	22.0
6500	14.3	17500	21.8

SUCOFLEX ANTENNA CABLES
CONTINUED
102_EA

A/N: 6012 & 6013

CALIBRATION DATE: FEBRUARY 7, 2022

FREQUENCY (MHz)	CABLE LOSS	FREQUENCY (MHz)	CABLE LOSS
18000	22.5	26500	28.1
18500	22.7	27000	27.9
19000	23.0	28000	28.8
19500	24.0	29000	29.3
20000	24.6	30000	29.7
20500	24.7	31000	30.5
21000	25.1	32000	31.0
21500	25.1	33000	31.2
22000	25.1	34000	32.3
22500	25.7	35000	33.0
23000	26.4	36000	33.3
23500	26.1	37000	34.0
24000	26.8	38000	35.1
24500	27.2	40000	36.3
25000	27.0		
26000	27.5		

SUCOFLEX ANTENNA CABLES

102_EA

A/N: 6012 & 6013

CALIBRATION DATE: JANUARY 15, 2024

FREQUENCY (MHz)	CABLE LOSS	FREQUENCY (MHz)	CABLE LOSS
1000	4.8	6750	16.1
1100	5.1	7000	17.7
1200	5.2	7250	17.2
1300	5.4	7500	15.7
1400	5.7	7750	14.9
1500	6.1	8000	15.2
1600	6.4	8250	15.0
1700	6.6	8500	14.9
1800	6.6	8750	15.1
1900	6.7	9000	15.5
2000	6.9	9250	15.6
2250	7.3	9500	15.9
2500	7.8	9750	16.0
2750	8.3	10000	16.1
3000	8.6	10500	16.6
3250	9.0	11000	16.9
3500	9.5	11500	17.2
3750	9.8	12000	17.9
4000	10.0	12500	18.4
4250	10.5	13000	18.5
4500	10.8	13500	19.0
4750	11.1	14000	19.5
5000	11.4	14500	19.7
5250	11.7	15000	20.8
5500	12.0	15500	20.9
5750	12.4	16000	20.6
6000	12.9	16500	21.3
6250	13.3	17000	22.0
6500	14.5	17500	21.8

SUCOFLEX ANTENNA CABLES
Continued
102_EA

A/N: 6012 & 6013

CALIBRATION DATE: JANUARY 15, 2024

FREQUENCY (MHz)	CABLE LOSS	FREQUENCY (MHz)	CABLE LOSS
18000	22.5	26500	27.6
18500	22.7	27000	27.9
19000	22.9	28000	28.4
19500	23.5	29000	29.8
20000	23.9	30000	30.1
20500	24.3	31000	31.3
21000	24.1	32000	31.5
21500	24.5	33000	31.7
22000	24.8	34000	31.8
22500	25.2	35000	32.2
23000	25.5	36000	33.3
23500	25.6	37000	34.1
24000	26.0	38000	33.5
24500	26.6	40000	35.4
25000	26.5		
26000	27.4		

COM-POWER PAM-118A**PREAMPLIFIER**

S/N: 551015

CALIBRATION DATE: JANUARY 20, 2022

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	39.86	7500	37.03
1000	39.80	8000	36.06
1100	40.25	8500	36.09
1200	39.77	9000	35.68
1300	40.12	9500	37.53
1400	39.93	10000	36.66
1500	40.05	11000	36.94
1600	40.00	12000	37.06
1700	40.03	13000	36.88
1800	40.40	14000	36.33
1900	40.02	15000	37.06
2000	39.74	16000	38.32
2500	39.95	17000	38.32
3000	39.99	18000	38.17
3500	39.92		
4000	39.58		
4500	39.00		
5000	38.28		
5500	37.42		
6000	37.18		
6500	37.00		
7000	36.95		

**COM-POWER PAM-118A
PREAMPLIFIER**

S/N: 551015

CALIBRATION DATE: JANUARY 11, 2024

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	39.0	7500	37.2
1000	39.8	8000	36.6
1100	39.6	8500	36.4
1200	39.5	9000	36.6
1300	39.7	9500	37.4
1400	39.7	10000	37.6
1500	40.0	11000	36.8
1600	39.9	12000	37.1
1700	39.9	13000	36.8
1800	39.8	14000	35.9
1900	40.0	15000	37.3
2000	39.9	16000	38.0
2500	40.2	17000	37.8
3000	40.3	18000	38.0
3500	40.3		
4000	39.7		
4500	39.0		
5000	38.3		
5500	37.4		
6000	36.6		
6500	37.2		
7000	36.8		

COM-POWER PAM-118**PREAMPLIFIER**

S/N: 443009

CALIBRATION DATE: JANUARY 4, 2022

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	25.6	9500	21.5
1000	24.0	10000	21.8
1100	24.3	11000	21.3
1200	25.0	12000	21.0
1300	25.2	13000	19.8
1400	24.9	14000	19.0
1500	24.5	15000	19.8
1600	24.8	16000	20.1
1700	24.8	17000	19.3
1800	24.5	18000	18.5
1900	25.2		
2000	24.9		
2500	24.9		
3000	24.9		
3500	24.7		
4000	24.6		
4500	23.8		
5000	23.6		
5500	22.5		
6000	21.5		
6500	20.6		
7000	20.3		
7500	20.7		
8000	21.4		
8500	22.1		
9000	22.5		

COM-POWER PAM-840**PREAMPLIFIER**


S/N: 461268

CALIBRATION DATE: JANUARY 3, 2023

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
18000	24.13	31500	22.71
19000	24.2	32000	22.52
20000	25.67	32500	21.74
21000	26.25	33000	21.96
22000	26.23	33500	21.9
23000	26.39	34000	20.28
24000	26.07	34500	21.49
25000	25.19	35000	21.6
26000	23.8	35500	21.05
26500	22.5	36000	20.94
27000	22.42	36500	21.55
27500	22.25	37000	21.94
28000	22.58	37500	22.73
28500	23.25	38000	22.19
29000	22.86	38500	21.23
29500	23.24	39000	22.04
30000	22.61	39500	22.03
30500	22.45	40000	20.44
31000	22.48		

COM-POWER PA-840**PREAMPLIFIER****S/N: 711883****CALIBRATION DATE: JANUARY 17, 2022**


FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
18000	28.9	33500	25.3
19000	29.0	34000	25.2
20000	28.7	34500	25.7
21000	27.4	35000	25.8
22000	26.8	35500	26.8
23000	27.0	36000	27.4
24000	27.3	36500	27.2
25000	28.8	37000	29.0
26000	28.9	37500	29.6
26500	28.3	38000	29.5
27000	28.4	38500	27.7
27500	27.9	39000	28.2
28000	27.7	39500	27.4
28500	27.8	40000	27.4
29000	27.8		
29500	27.5		
30000	26.8		
30500	27.3		
31000	26.1		
31500	26.2		
32000	26.4		
32500	26.5		
33000	25.0		

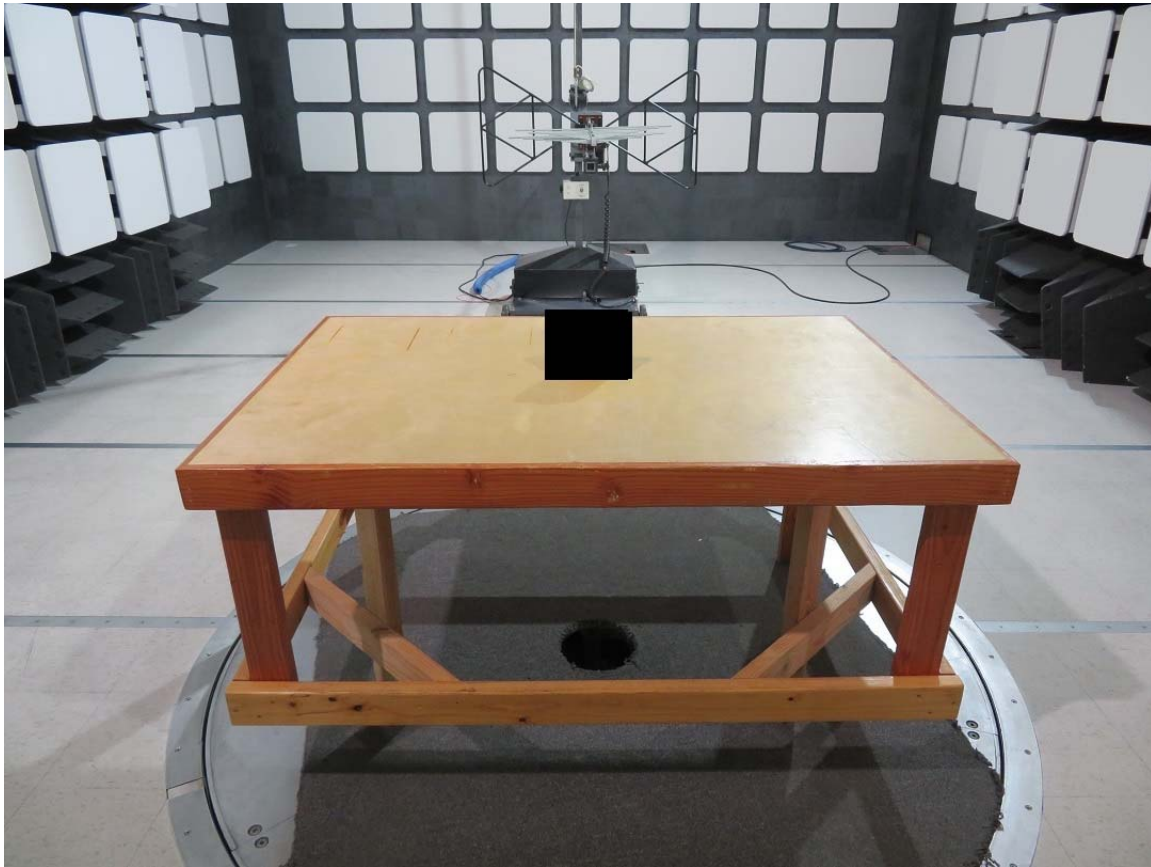

FRONT VIEW

MICROWAVE MONOLITHICS INCORPORATED
RF TRANSMITTER
MODEL NUMBER: MMI-ARM
FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

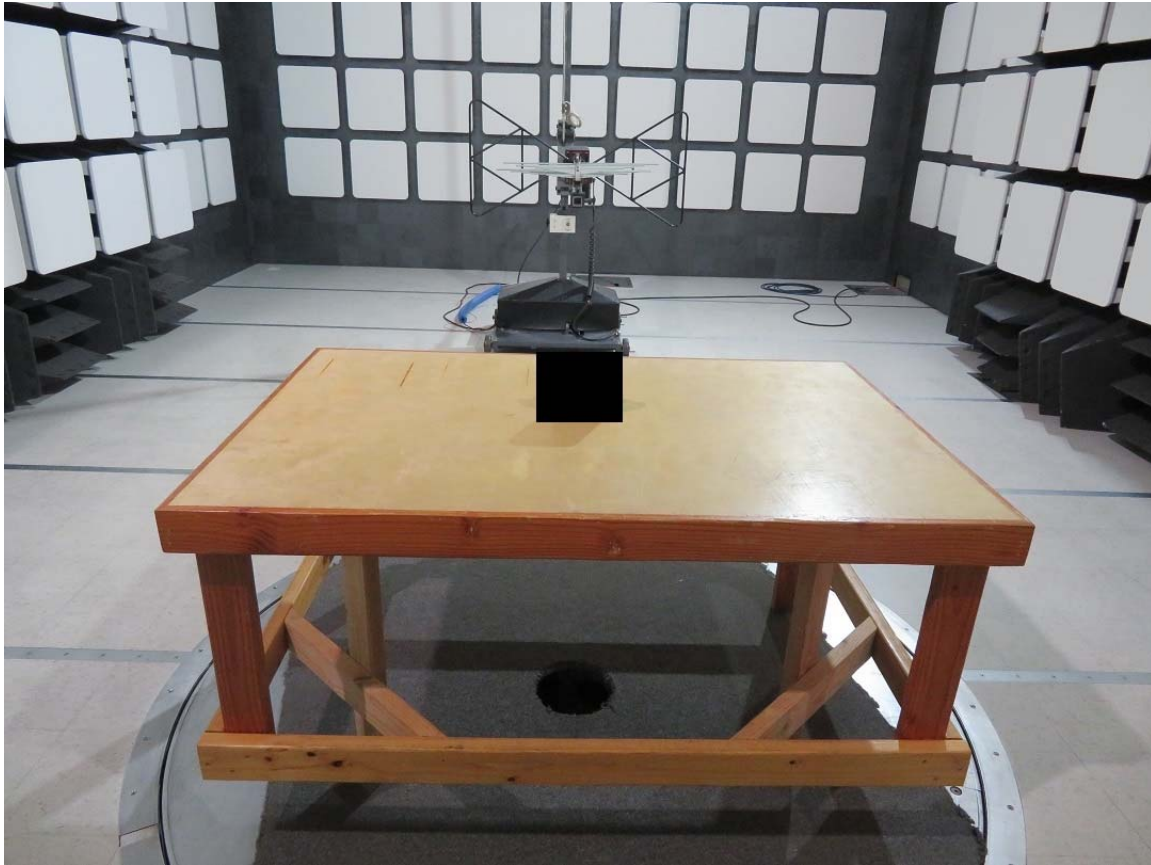

REAR VIEW

MICROWAVE MONOLITHICS INCORPORATED
RF TRANSMITTER
MODEL NUMBER: MMI-ARM
FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

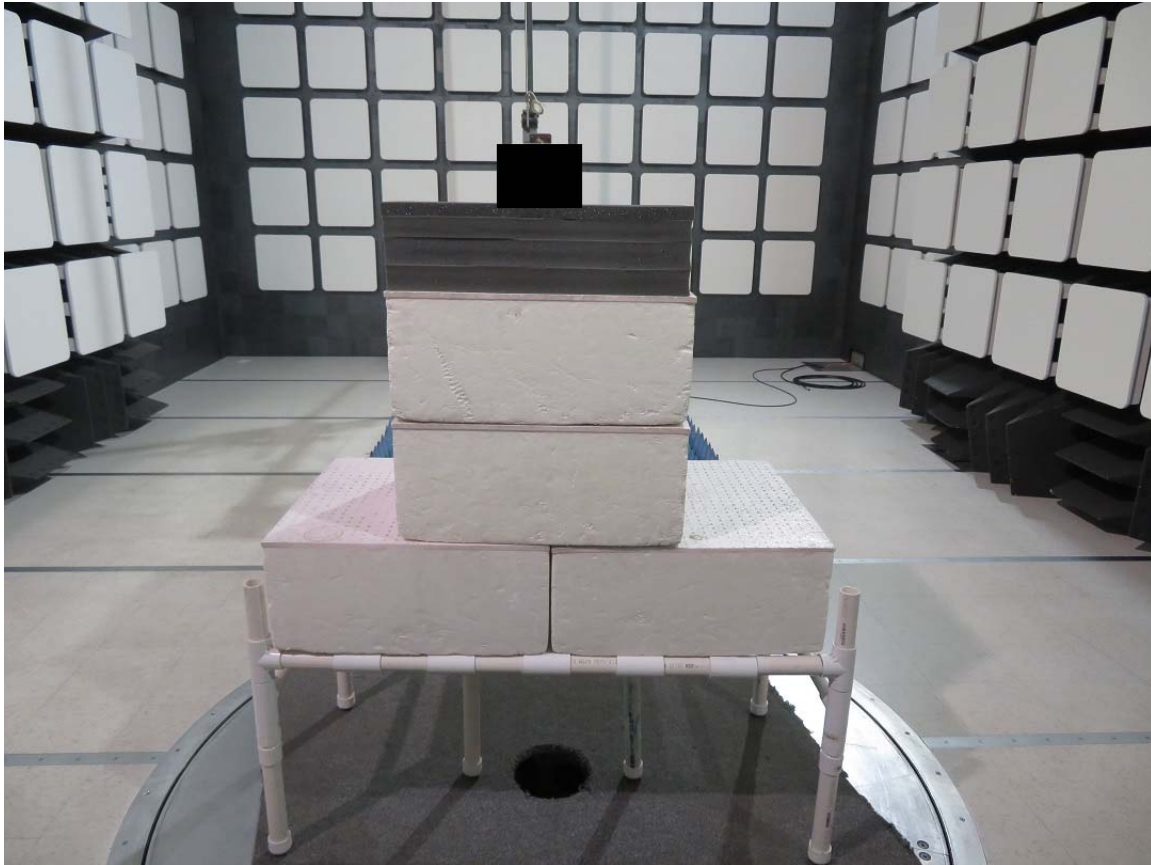

FRONT VIEW

MICROWAVE MONOLITHICS INCORPORATED
RF TRANSMITTER
MODEL NUMBER: MMI-ARM
FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

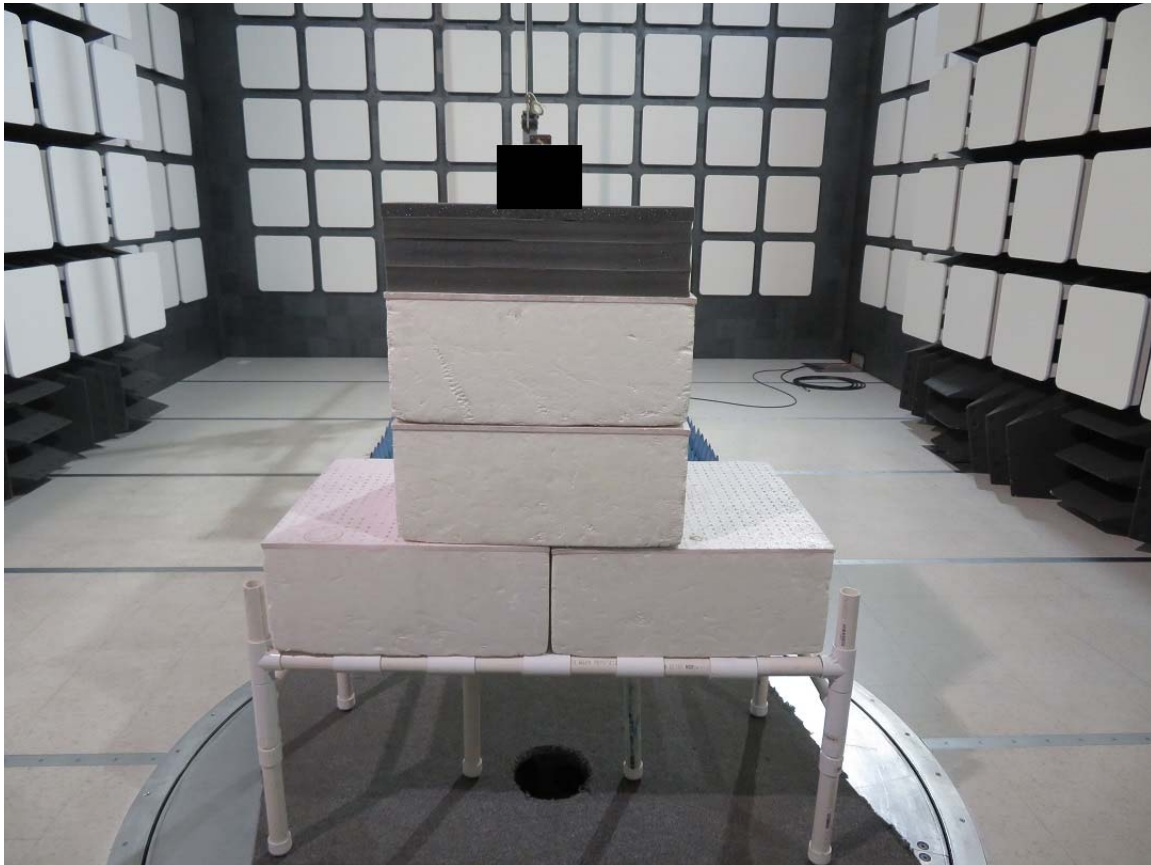

REAR VIEW

MICROWAVE MONOLITHICS INCORPORATED
RF TRANSMITTER
MODEL NUMBER: MMI-ARM
FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**


APPENDIX E

DATA SHEETS

***RADIATED EMISSIONS
(TRANSMITTER)
DATA SHEETS***

Title: Radiated Pre-Scan 30-1000 MHz
File: Radiated Pre-Scan 30-1000 MHz z axis mid
Operator: R. Ramirez
EUT Type: RF Transmitter
EUT Condition: Z Axis
Comments: Lab T
Clock Oscillators: 2441.75 MHz
Company: Microwave Monolithics Incorporated
Model: MMI-ARM
Temperature: 60 F Humidity: 40 % Pressure: 29.4 inHg
Tested to: 24.4175 GHz

10/31/2023 10:40:03 AM
Sequence: Preliminary Scan

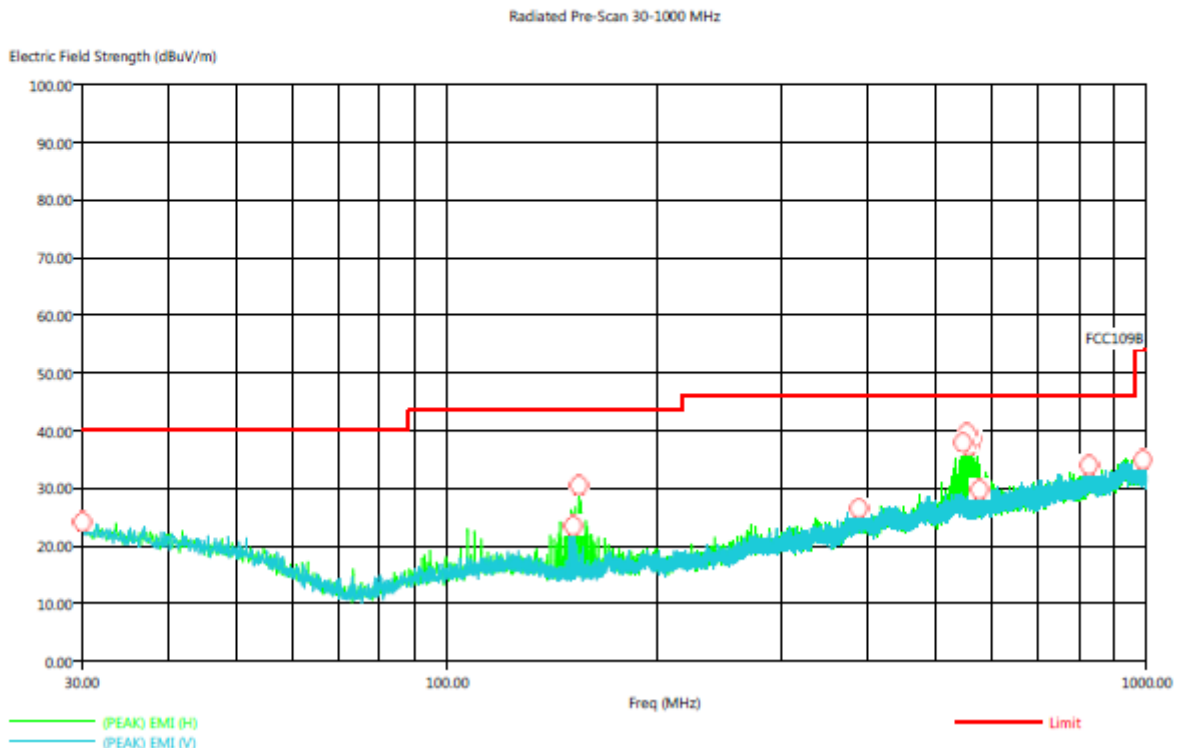

Title: Radiated Final 30-1000 MHz
File: Radiated Final 30-1000 MHz z axis mid
Operator: R. Ramirez
EUT Type: RF Transmitter
EUT Condition: Z Axis
Comments: Lab T
Clock Oscillators: 2441.75 MHz
Company: Microwave Monolithics Incorporated
Model: MMI-ARM
Temperature: 60 F Humidity: 40 % Pressure: 29.4 inHg
Tested to: 24.4175 GHz

10/31/2023 10:56:38 AM
Sequence: Final Measurements


Data

Freq (MHz)	Pol	(PEAK) Trace (dBuV)	Cable (dB)	Transducer (dB)	(PEAK) EMI (dBuV/m)	(QP) EMI (dBuV/m)	Limit (dBuV/m)	(QP) Margin (dB)	Ttbi Aql (deg)	Twr Hit (cm)
30.10	V	0.46	0.72	21.85	23.03	19.80	40.00	-20.20	18.90	315.00
151.50	V	0.45	1.37	13.90	15.72	12.60	43.52	-30.92	40.90	185.60
154.30	H	1.75	1.39	13.97	17.11	13.58	43.52	-29.94	59.70	325.30
387.90	V	2.41	2.37	20.94	25.72	22.94	46.00	-23.06	317.40	180.10
546.20	H	2.24	3.07	22.90	28.21	27.22	46.00	-18.78	148.00	168.60
553.30	H	3.00	3.08	22.60	28.68	23.50	46.00	-22.50	144.70	201.30
556.30	H	0.82	3.05	22.60	26.47	30.43	46.00	-15.57	182.60	189.10
557.60	H	1.28	3.05	22.60	26.93	26.57	46.00	-19.43	190.90	225.30
560.30	H	0.92	3.03	22.60	26.55	33.41	46.00	-12.59	193.90	122.50
563.00	H	0.78	3.01	22.60	26.39	23.58	46.00	-22.42	163.50	230.00
577.30	V	1.66	2.91	23.10	27.67	23.79	46.00	-22.21	92.50	250.60
827.80	V	2.25	3.73	26.35	32.33	27.95	46.00	-18.05	215.70	210.20
988.60	V	1.68	3.87	27.18	32.74	29.06	53.98	-24.92	304.30	294.90

***RADIATED EMISSIONS
(RECEIVER)
DATA SHEETS***

Title: Radiated Pre-Scan 30-1000 MHz
File: Radiated Pre-Scan 30-1000 MHz z axis final class b
Operator: R. Ramirez
EUT Type: RF Transmitter
EUT Condition: Receiver only, RF transmitter turned off, Z axis
Comments: Lab T
Clock Oscillators: 16.368, 32, 40, 52, 902-928 MHz
Company: Microwave Monolithics Incorporated
Model: MMI-ARM
Temperature: 60 F Humidity: 40 % Pressure: 29.4 inHg
Tested to: 9.280 GHz (no frequencies found above 1 GHz)

10/30/2023 1:56:26 PM
Sequence: Preliminary Scan

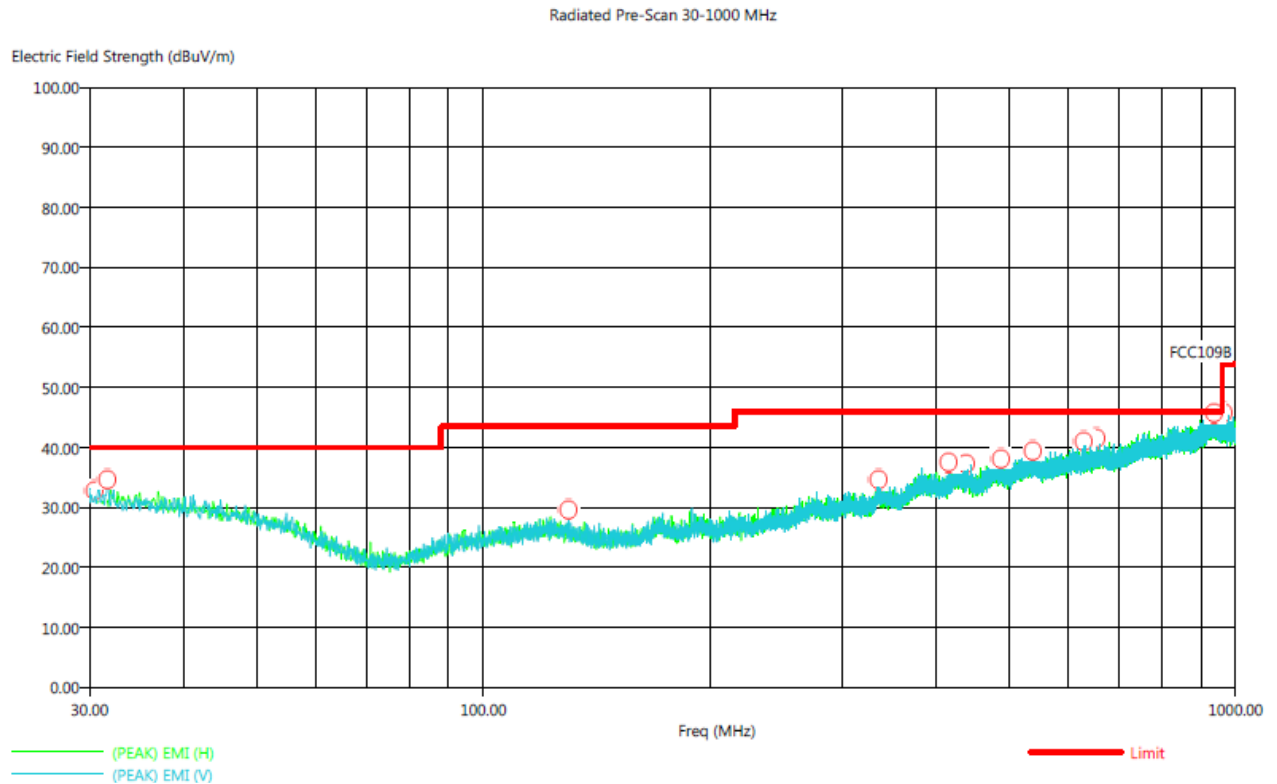

Title: Radiated Final 30-1000 MHz
File: Radiated Final 30-1000 MHz final class b
Operator: R. Ramirez
EUT Type: RF Transmitter
EUT Condition: Receiver only, RF transmitter turned off, Z axis
Comments: Lab T
Clock Oscillators: 16.368, 32, 40, 52, 902-928 MHz
Company: Microwave Monolithics Incorporated
Model: MMI-ARM
Temperature: 60 F Humidity: 40 % Pressure: 29.4 inHg
Tested to: 9.280 GHz (no frequencies found above 1 GHz)

10/30/2023 2:12:30 PM
Sequence: Final Measurements

Data

Freq (MHz)	Pol	(PEAK) Trace (dBuV)	Cable (dB)	Transducer (dB)	(PEAK) EMI (dBuV/m)	(QP) EMI (dBuV/m)	Limit (dBuV/m)	(QP) Margin (dB)	TtBl Aql (deg)	Twr Ht (cm)
30.50	H	9.97	0.72	21.78	32.47	28.91	40.00	-11.09	315.00	211.10
31.70	V	8.99	0.72	21.43	31.14	28.65	40.00	-11.35	34.50	319.10
130.00	V	9.81	1.28	15.19	26.28	23.02	43.52	-20.05	81.50	213.50
335.50	H	11.88	2.21	19.75	33.84	28.98	46.00	-17.02	18.80	180.10
416.40	V	11.09	2.36	21.10	34.55	30.86	46.00	-15.14	8.00	304.20
438.70	H	10.44	2.28	21.72	34.44	31.41	46.00	-14.59	94.80	132.50
487.40	V	11.36	2.64	22.37	36.36	32.68	46.00	-13.32	248.90	228.20
539.10	V	10.76	3.03	23.10	36.89	33.81	46.00	-12.19	205.20	245.70
629.30	H	11.76	3.00	23.80	38.56	34.64	46.00	-11.36	342.80	332.40
653.70	H	11.71	3.19	24.00	38.90	34.92	46.00	-11.08	64.10	180.20
938.30	V	11.32	3.88	27.93	43.13	40.15	46.00	-5.85	332.30	166.90
963.70	H	12.71	3.90	27.55	44.16	39.88	53.98	-14.10	237.90	320.60

HARMONIC EMISSIONS LOW CHANNEL (X AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated
EUT: RF Transmitter
Model: MMI-ARM

Date: 11/1/2023
Lab: T
Test
Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4802.50	41.17	H	73.98	-32.81	Peak	199.30	140.1	In Restricted Band
4802.50	29.13	H	53.98	-24.85	Avg	199.30	140.1	In Restricted Band
7203.75	46.12	H	73.98	-27.86	Peak	175.10	58.5	
7203.75	35.76	H	53.98	-18.22	Avg	175.10	58.5	
9605.00	51.56	H	73.98	-22.42	Peak	152.50	51.9	
9605.00	39.89	H	53.98	-14.09	Avg	152.50	51.9	
12006.25	50.33	H	73.98	-23.65	Peak	203.40	254.3	In Restricted Band
12006.25	38.39	H	53.98	-15.59	Avg	203.40	254.3	In Restricted Band
14407.50	52.62	H	73.98	-21.36	Peak	182.90	107.9	
14407.50	41.36	H	53.98	-12.62	Avg	182.90	107.9	
16808.75								No Frequency Found
16808.75								
19210.00								No Frequency Found
19210.00								In Restricted Band
21611.25								No Frequency Found
21611.25								
24012.50								No Frequency Found
24012.50								

Test distance
3 meter

HARMONIC EMISSIONS LOW CHANNEL (X AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/1/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4802.50	41.32	V	73.98	-32.66	Peak	243.7	109.7	In Restricted Band
4802.50	28.31	V	53.98	-25.67	Avg	243.7	109.7	In Restricted Band
7203.75	47.58	V	73.98	-26.40	Peak	269.7	202.9	
7203.75	35.88	V	53.98	-18.10	Avg	269.7	202.9	
9605.00	51.30	V	73.98	-22.68	Peak	241.3	114.7	
9605.00	39.58	V	53.98	-14.40	Avg	241.3	114.7	
12006.25	50.10	V	73.98	-23.88	Peak	287.6	352.3	In Restricted Band
12006.25	38.71	V	53.98	-15.27	Avg	287.6	352.3	In Restricted Band
14407.50	51.46	V	73.98	-22.52	Peak	150.1	312.9	
14407.50	40.95	V	53.98	-13.03	Avg	150.1	312.9	
16808.75								No Frequency Found
16808.75								
19210.00								No Frequency Found
19210.00								In Restricted Band
21611.25								No Frequency Found
21611.25								
24012.50								No Frequency Found
24012.50								

Test distance

3 meter

HARMONIC EMISSIONS MID CHANNEL (X AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/1/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4883.50	40.78	H	73.98	-33.20	Peak	264.80	80.9	In Restricted Band
4883.50	30.00	H	53.98	-23.98	Avg	264.80	80.9	In Restricted Band
7325.25	48.06	H	73.98	-25.92	Peak	300.00	89.7	In Restricted Band
7325.25	36.19	H	53.98	-17.79	Avg	300.00	89.7	In Restricted Band
9767.00	51.23	H	73.98	-22.75	Peak	234.50	51.5	
9767.00	39.60	H	53.98	-14.38	Avg	234.50	51.5	
12208.75	50.59	H	73.98	-23.39	Peak	205.40	336.5	In Restricted Band
12208.75	39.60	H	53.98	-14.38	Avg	205.40	336.5	In Restricted Band
14650.50	53.19	H	73.98	-20.79	Peak	151.80	124.5	
14650.50	41.81	H	53.98	-12.17	Avg	151.80	124.5	
17092.25								No Frequency Found
17092.25								
19534.00								No Frequency Found
19534.00								In Restricted Band
21975.75								No Frequency Found
21975.75								
24417.50								No Frequency Found
24417.50								

Test distance
3 meter

HARMONIC EMISSIONS MID CHANNEL (X AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/1/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4883.50	40.83	V	73.98	-33.15	Peak	231.3	262	In Restricted Band
4883.50	29.59	V	53.98	-24.39	Avg	231.3	262	In Restricted Band
7325.25	47.09	V	73.98	-26.89	Peak	185.3	28	In Restricted Band
7325.25	35.96	V	53.98	-18.02	Avg	185.3	28	In Restricted Band
9767.00	50.43	V	73.98	-23.55	Peak	191	357.5	
9767.00	39.85	V	53.98	-14.13	Avg	191	357.5	
12208.75	49.40	V	73.98	-24.58	Peak	151.5	232.1	In Restricted Band
12208.75	37.98	V	53.98	-16.00	Avg	151.5	232.1	In Restricted Band
14650.50	52.65	V	73.98	-21.33	Peak	284.9	106.1	
14650.50	41.36	V	53.98	-12.62	Avg	284.9	106.1	
17092.25								No Frequency Found
17092.25								
19534.00								No Frequency Found
19534.00								In Restricted Band
21975.75								No Frequency Found
21975.75								
24417.50								No Frequency Found
24417.50								

Test distance
3 meter

HARMONIC EMISSIONS HIGH CHANNEL (X AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated
EUT: RF Transmitter
Model: MMI-ARM

Date: 11/1/2023
Lab: T
Test
Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4952.50	40.65	H	73.98	-33.33	Peak	170.6	254.7	In Restricted Band
4952.50	29.58	H	53.98	-24.40	Avg	170.6	254.7	In Restricted Band
7428.75	46.60	H	73.98	-27.38	Peak	252	51.8	In Restricted Band
7428.75	36.12	H	53.98	-17.86	Avg	252	51.8	In Restricted Band
9905.00	51.86	H	73.98	-22.12	Peak	182.8	201.3	
9905.00	40.02	H	53.98	-13.96	Avg	182.8	201.3	
12381.25	51.34	H	73.98	-22.64	Peak	289.8	81.4	In Restricted Band
12381.25	38.88	H	53.98	-15.10	Avg	289.8	81.4	In Restricted Band
14857.50	51.53	H	73.98	-22.45	Peak	184.3	336.7	
14857.50	39.60	H	53.98	-14.38	Avg	184.3	336.7	
17333.75								No Frequency Found
17333.75								
19810.00								No Frequency Found
19810.00								In Restricted Band
22286.25								No Frequency Found
22286.25								In Restricted Band
24762.50								No Frequency Found
24762.50								

Test distance
3 meter

HARMONIC EMISSIONS HIGH CHANNEL (X AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/1/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4952.50	40.09	V	73.98	-33.89	Peak	191.6	35.6	In Restricted Band
4952.50	28.37	V	53.98	-25.61	Avg	191.6	35.6	In Restricted Band
7428.75	46.52	V	73.98	-27.46	Peak	156.1	13.9	In Restricted Band
7428.75	35.70	V	53.98	-18.28	Avg	156.1	13.9	In Restricted Band
9905.00	50.04	V	73.98	-23.94	Peak	194.7	13.7	
9905.00	39.35	V	53.98	-14.63	Avg	194.7	13.7	
12381.25	50.96	V	73.98	-23.02	Peak	162.8	245.6	In Restricted Band
12381.25	38.97	V	53.98	-15.01	Avg	162.8	245.6	In Restricted Band
14857.50	50.37	V	73.98	-23.61	Peak	263.7	108	
14857.50	38.84	V	53.98	-15.14	Avg	263.7	108	
17333.75								No Frequency Found
17333.75								
19810.00								No Frequency Found
19810.00								In Restricted Band
22286.25								No Frequency Found
22286.25								In Restricted Band
24762.50								No Frequency Found
24762.50								

Test distance

3 meter

HARMONIC EMISSIONS LOW CHANNEL (Y AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/2/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4802.50	40.65	H	73.98	-33.33	Peak	169.80	242	In Restricted Band
4802.50	29.40	H	53.98	-24.58	Avg	169.80	242	In Restricted Band
7203.75	46.50	H	73.98	-27.48	Peak	232.80	93.7	
7203.75	35.16	H	53.98	-18.82	Avg	232.80	93.7	
9605.00	51.00	H	73.98	-22.98	Peak	211.20	30.2	
9605.00	39.23	H	53.98	-14.75	Avg	211.20	30.2	
12006.25	48.94	H	73.98	-25.04	Peak	215.70	300	In Restricted Band
12006.25	36.67	H	53.98	-17.31	Avg	215.70	300	In Restricted Band
14407.50	52.69	H	73.98	-21.29	Peak	209.10	136.7	
14407.50	41.37	H	53.98	-12.61	Avg	209.10	136.7	
16808.75								No Frequency Found
16808.75								
19210.00								No Frequency Found
19210.00								In Restricted Band
21611.25								No Frequency Found
21611.25								
24012.50								No Frequency Found
24012.50								

Test distance
3 meter

HARMONIC EMISSIONS LOW CHANNEL (Y AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/2/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4802.50	40.12	V	73.98	-33.86	Peak	217.6	234.5	In Restricted Band
4802.50	27.61	V	53.98	-26.37	Avg	217.6	234.5	In Restricted Band
7203.75	46.44	V	73.98	-27.54	Peak	266.7	201.9	
7203.75	35.96	V	53.98	-18.02	Avg	266.7	201.9	
9605.00	50.72	V	73.98	-23.26	Peak	272	124.1	
9605.00	39.89	V	53.98	-14.09	Avg	272	124.1	
12006.25	50.28	V	73.98	-23.70	Peak	245.5	167.9	In Restricted Band
12006.25	38.89	V	53.98	-15.09	Avg	245.5	167.9	In Restricted Band
14407.50	51.51	V	73.98	-22.47	Peak	229.4	354.8	
14407.50	40.52	V	53.98	-13.46	Avg	229.4	354.8	
16808.75								No Frequency Found
16808.75								
19210.00								No Frequency Found
19210.00								In Restricted Band
21611.25								No Frequency Found
21611.25								
24012.50								No Frequency Found
24012.50								

Test distance
3 meter

HARMONIC EMISSIONS MID CHANNEL (Y AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated
EUT: RF Transmitter
Model: MMI-ARM

Date: 11/2/2023
Lab: T
Test
Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4883.50	40.54	H	73.98	-33.44	Peak	232.50	98.5	In Restricted Band
4883.50	29.62	H	53.98	-24.36	Avg	98.50	98.5	In Restricted Band
7325.25	46.57	H	73.98	-27.41	Peak	283.00	188.6	In Restricted Band
7325.25	35.16	H	53.98	-18.82	Avg	188.60	188.6	In Restricted Band
9767.00	50.18	H	73.98	-23.80	Peak	194.80	215.7	
9767.00	39.15	H	53.98	-14.83	Avg	194.80	215.7	
12208.75	50.28	H	73.98	-23.70	Peak	263.50	274.3	In Restricted Band
12208.75	38.71	H	53.98	-15.27	Avg	263.50	274.3	In Restricted Band
14650.50	52.39	H	73.98	-21.59	Peak	277.10	124.3	
14650.50	41.29	H	53.98	-12.69	Avg	277.10	124.3	
17092.25								No Frequency Found
17092.25								
19534.00								No Frequency Found
19534.00								In Restricted Band
21975.75								No Frequency Found
21975.75								
24417.50								No Frequency Found
24417.50								

Test distance
3 meter

HARMONIC EMISSIONS MID CHANNEL (Y AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/2/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4883.50	40.35	V	73.98	-33.63	Peak	264	36.9	In Restricted Band
4883.50	29.38	V	53.98	-24.60	Avg	264	36.9	In Restricted Band
7325.25	47.01	V	73.98	-26.97	Peak	294.4	162.5	In Restricted Band
7325.25	35.74	V	53.98	-18.24	Avg	294.4	162.5	In Restricted Band
9767.00	50.78	V	73.98	-23.20	Peak	273.2	244.8	
9767.00	40.17	V	53.98	-13.81	Avg	273.2	244.8	
12208.75	50.59	V	73.98	-23.39	Peak	253.8	2.8	In Restricted Band
12208.75	38.87	V	53.98	-15.11	Avg	253.8	2.8	In Restricted Band
14650.50	53.63	V	73.98	-20.35	Peak	249.4	110.9	
14650.50	41.19	V	53.98	-12.79	Avg	249.4	110.9	
17092.25								No Frequency Found
17092.25								
19534.00								No Frequency Found
19534.00								In Restricted Band
21975.75								No Frequency Found
21975.75								
24417.50								No Frequency Found
24417.50								

Test distance
3 meter

HARMONIC EMISSIONS HIGH CHANNEL (Y AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated
EUT: RF Transmitter
Model: MMI-ARM

Date: 11/1/2023
Lab: T
Test
Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4952.50	39.31	H	73.98	-34.67	Peak	251.3	322.2	In Restricted Band
4952.50	28.47	H	53.98	-25.51	Avg	251.3	322.2	In Restricted Band
7428.75	47.32	H	73.98	-26.66	Peak	173	146.6	In Restricted Band
7428.75	36.28	H	53.98	-17.70	Avg	173	146.6	In Restricted Band
9905.00	50.90	H	73.98	-23.08	Peak	262.5	209.3	
9905.00	39.91	H	53.98	-14.07	Avg	262.5	209.3	
12381.25	50.77	H	73.98	-23.21	Peak	203.4	201.4	In Restricted Band
12381.25	28.98	H	53.98	-25.00	Avg	203.4	201.4	In Restricted Band
14857.50	50.05	H	73.98	-23.93	Peak	206.9	144.7	
14857.50	39.62	H	53.98	-14.36	Avg	206.9	144.7	
17333.75								No Frequency Found
17333.75								
19810.00								No Frequency Found
19810.00								In Restricted Band
22286.25								No Frequency Found
22286.25								In Restricted Band
24762.50								No Frequency Found
24762.50								

Test distance
3 meter

HARMONIC EMISSIONS HIGH CHANNEL (Y AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/1/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4952.50	40.81	V	73.98	-33.17	Peak	171.2	288.3	In Restricted Band
4952.50	29.43	V	53.98	-24.55	Avg	171.2	288.3	In Restricted Band
7428.75	46.67	V	73.98	-27.31	Peak	219.6	177.7	In Restricted Band
7428.75	35.61	V	53.98	-18.37	Avg	219.6	177.7	In Restricted Band
9905.00	50.07	V	73.98	-23.91	Peak	293.3	129.6	
9905.00	39.01	V	53.98	-14.97	Avg	293.3	129.6	
12381.25	50.59	V	73.98	-23.39	Peak	175	94.5	In Restricted Band
12381.25	38.75	V	53.98	-15.23	Avg	175	94.5	In Restricted Band
14857.50	53.71	V	73.98	-20.27	Peak	287.7	8.4	
14857.50	41.90	V	53.98	-12.08	Avg	287.7	8.4	
17333.75								No Frequency Found
17333.75								
19810.00								No Frequency Found
19810.00								In Restricted Band
22286.25								No Frequency Found
22286.25								In Restricted Band
24762.50								No Frequency Found
24762.50								

Test distance
3 meter

HARMONIC EMISSIONS LOW CHANNEL (Z AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/2/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4802.50	40.02	H	73.98	-33.96	Peak	268.90	114.3	In Restricted Band
4802.50	29.34	H	53.98	-24.64	Avg	268.90	114.3	In Restricted Band
7203.75	46.52	H	73.98	-27.46	Peak	202.10	179.5	
7203.75	35.84	H	53.98	-18.14	Avg	202.10	179.5	
9605.00	51.61	H	73.98	-22.37	Peak	190.10	221.5	
9605.00	39.48	H	53.98	-14.50	Avg	190.10	221.5	
12006.25	51.86	H	73.98	-22.12	Peak	237.90	101.1	In Restricted Band
12006.25	39.75	H	53.98	-14.23	Avg	237.90	101.1	In Restricted Band
14407.50	53.31	H	73.98	-20.67	Peak	150.00	168.1	
14407.50	42.00	H	53.98	-11.98	Avg	150.00	168.1	
16808.75								No Frequency Found
16808.75								
19210.00								No Frequency Found
19210.00								In Restricted Band
21611.25								No Frequency Found
21611.25								
24012.50								No Frequency Found
24012.50								

Test distance
3 meter

HARMONIC EMISSIONS LOW CHANNEL (Z AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/2/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4802.50	40.78	V	73.98	-33.20	Peak	281.7	93.3	In Restricted Band
4802.50	29.47	V	53.98	-24.51	Avg	281.7	93.3	In Restricted Band
7203.75	47.22	V	73.98	-26.76	Peak	201	163.5	
7203.75	36.29	V	53.98	-17.69	Avg	201	163.5	
9605.00	52.14	V	73.98	-21.84	Peak	279.2	159.1	
9605.00	39.84	V	53.98	-14.14	Avg	279.2	159.1	
12006.25	50.10	V	73.98	-23.88	Peak	239.9	72.5	In Restricted Band
12006.25	38.86	V	53.98	-15.12	Avg	239.9	72.5	In Restricted Band
14407.50	52.25	V	73.98	-21.73	Peak	299.1	307.2	
14407.50	40.38	V	53.98	-13.60	Avg	299.1	307.2	
16808.75								No Frequency Found
16808.75								
19210.00								No Frequency Found
19210.00								In Restricted Band
21611.25								No Frequency Found
21611.25								
24012.50								No Frequency Found
24012.50								

Test distance
3 meter

HARMONIC EMISSIONS MID CHANNEL (Z AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated

EUT: RF Transmitter

Model: MMI-ARM

Date: 11/2/2023

Lab: T

Test

Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4883.50	41.66	H	73.98	-32.32	Peak	253.90	113.9	In Restricted Band
4883.50	29.77	H	53.98	-24.21	Avg	253.90	113.9	In Restricted Band
7325.25	47.81	H	73.98	-26.17	Peak	275.70	105.1	In Restricted Band
7325.25	36.31	H	53.98	-17.67	Avg	275.70	105.1	In Restricted Band
9767.00	51.08	H	73.98	-22.90	Peak	288.40	260.4	
9767.00	39.84	H	53.98	-14.14	Avg	288.40	260.4	
12208.75	49.09	H	73.98	-24.89	Peak	213.20	97.6	In Restricted Band
12208.75	38.77	H	53.98	-15.21	Avg	213.20	97.6	In Restricted Band
14650.50	52.29	H	73.98	-21.69	Peak	222.30	106.9	
14650.50	41.11	H	53.98	-12.87	Avg	222.30	106.9	
17092.25								No Frequency Found
17092.25								
19534.00								No Frequency Found
19534.00								In Restricted Band
21975.75								No Frequency Found
21975.75								
24417.50								No Frequency Found
24417.50								

Test distance
3 meter

HARMONIC EMISSIONS MID CHANNEL (Z AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated
EUT: RF Transmitter
Model: MMI-ARM

Date: 11/2/2023
Lab: T
Test
Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4883.50	41.34	V	73.98	-32.64	Peak	257.2	190	In Restricted Band
4883.50	29.52	V	53.98	-24.46	Avg	257.2	190	In Restricted Band
7325.25	47.68	V	73.98	-26.30	Peak	298.9	160.5	In Restricted Band
7325.25	36.25	V	53.98	-17.73	Avg	298.9	160.5	In Restricted Band
9767.00	50.93	V	73.98	-23.05	Peak	150	234	
9767.00	39.02	V	53.98	-14.96	Avg	150	234	
12208.75	49.46	V	73.98	-24.52	Peak	284.9	83.1	In Restricted Band
12208.75	38.33	V	53.98	-15.65	Avg	284.9	83.1	In Restricted Band
14650.50	52.99	V	73.98	-20.99	Peak	164.7	131.3	
14650.50	41.04	V	53.98	-12.94	Avg	164.7	131.3	
17092.25								No Frequency Found
17092.25								
19534.00								No Frequency Found
19534.00								In Restricted Band
21975.75								No Frequency Found
21975.75								
24417.50								No Frequency Found
24417.50								

Test distance
3 meter

HARMONIC EMISSIONS HIGH CHANNEL (Z AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated
EUT: RF Transmitter
Model: MMI-ARM

Date: 11/2/2023
Lab: T
Test
ENG: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4952.50	39.17	H	73.98	-34.81	Peak	179.2	171	In Restricted Band
4952.50	28.69	H	53.98	-25.29	Avg	179.2	171	In Restricted Band
7428.75	47.76	H	73.98	-26.22	Peak	236.8	187.1	In Restricted Band
7428.75	36.51	H	53.98	-17.47	Avg	236.8	187.1	In Restricted Band
9905.00	50.45	H	73.98	-23.53	Peak	256.8	359	
9905.00	39.28	H	53.98	-14.70	Avg	256.8	359	
12381.25	49.82	H	73.98	-24.16	Peak	164.4	190.2	In Restricted Band
12381.25	39.13	H	53.98	-14.85	Avg	164.4	190.2	In Restricted Band
14857.50	52.94	H	73.98	-21.04	Peak	290.5	117.7	
14857.50	41.88	H	53.98	-12.10	Avg	290.5	117.7	
17333.75								No Frequency Found
17333.75								
19810.00								No Frequency Found
19810.00								In Restricted Band
22286.25								No Frequency Found
22286.25								In Restricted Band
24762.50								No Frequency Found
24762.50								

Test distance
3 meter

HARMONIC EMISSIONS HIGH CHANNEL (Z AXIS)

FCC 15.247

Company: Microwave Monolithics Incorporated
EUT: RF Transmitter
Model: MMI-ARM

Date: 11/3/2023
Lab: T
Test
Eng: R. Ramirez

Compatible Electronics, Inc. (Lab T)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4952.50	41.58	V	73.98	-32.40	Peak	266.4	146.3	In Restricted Band
4952.50	30.33	V	53.98	-23.65	Avg	266.4	146.3	In Restricted Band
7428.75	47.24	V	73.98	-26.74	Peak	300	203.8	In Restricted Band
7428.75	36.46	V	53.98	-17.52	Avg	300	203.8	In Restricted Band
9905.00	51.35	V	73.98	-22.63	Peak	295	97.5	
9905.00	40.43	V	53.98	-13.55	Avg	295	97.5	
12381.25	51.17	V	73.98	-22.81	Peak	211.7	359.1	In Restricted Band
12381.25	39.55	V	53.98	-14.43	Avg	211.7	359.1	In Restricted Band
14857.50	50.92	V	73.98	-23.06	Peak	300.1	17.8	
14857.50	39.80	V	53.98	-14.18	Avg	300.1	17.8	
17333.75								No Frequency Found
17333.75								
19810.00								No Frequency Found
19810.00								In Restricted Band
22286.25								No Frequency Found
22286.25								In Restricted Band
24762.50								No Frequency Found
24762.50								

Test distance
3 meter

DTS BANDWIDTH

DATA SHEETS



DTS Bandwidth – Low Channel




DTS Bandwidth – Middle Channel



DTS Bandwidth – High Channel

POWER SPECTRAL DENSITY OUTPUT


DATA SHEETS

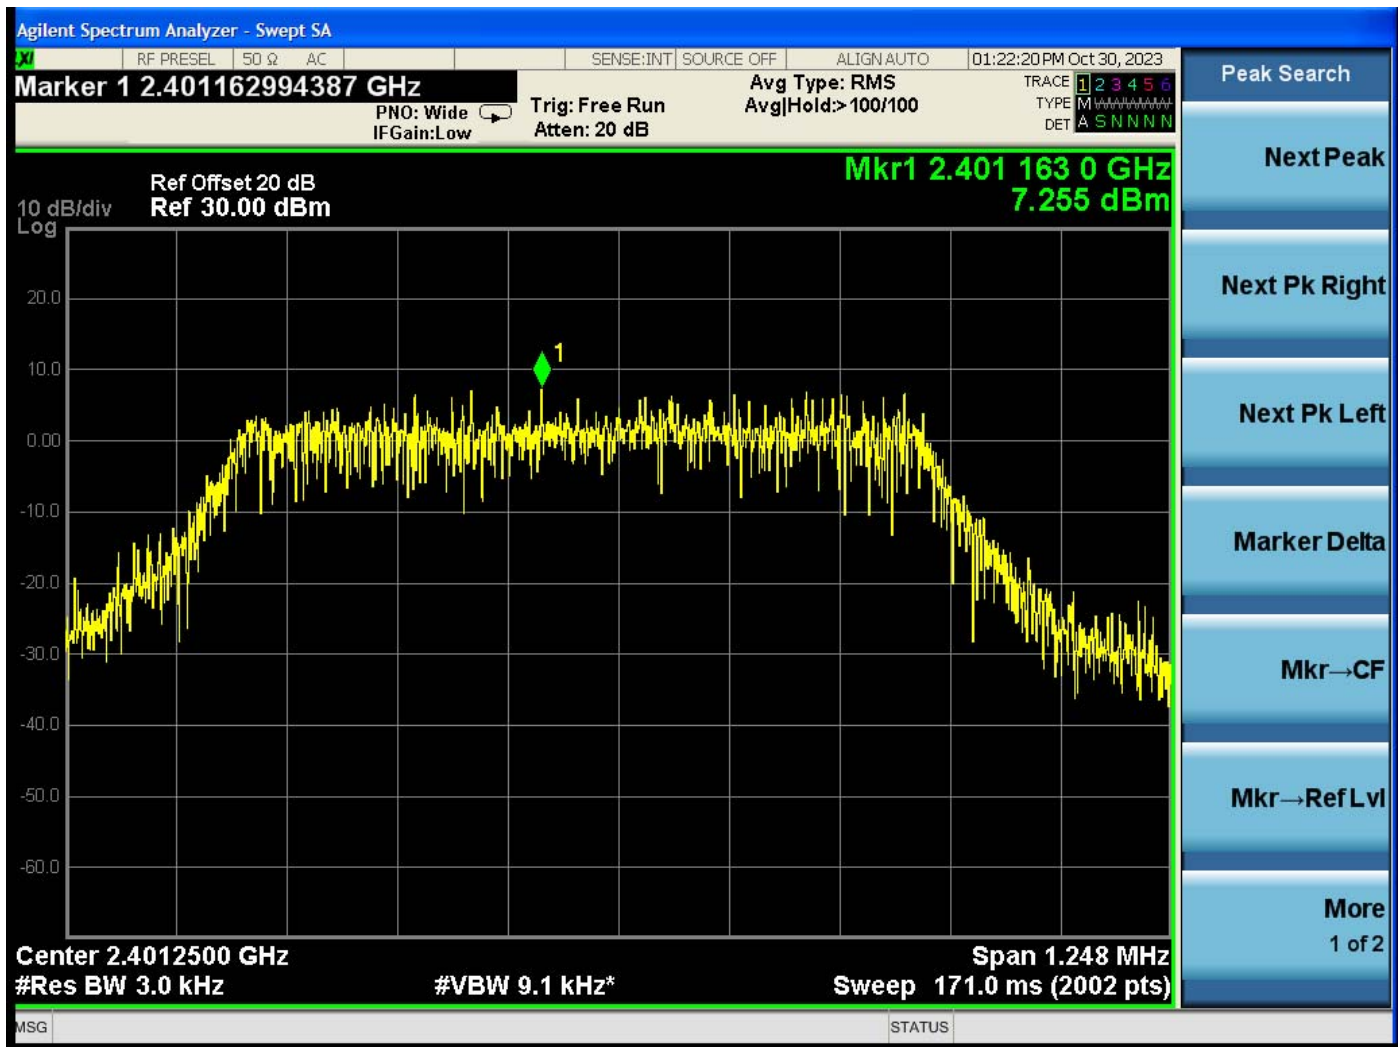

Power Spectral Density – Low Channel




Power Spectral Density – Middle Channel

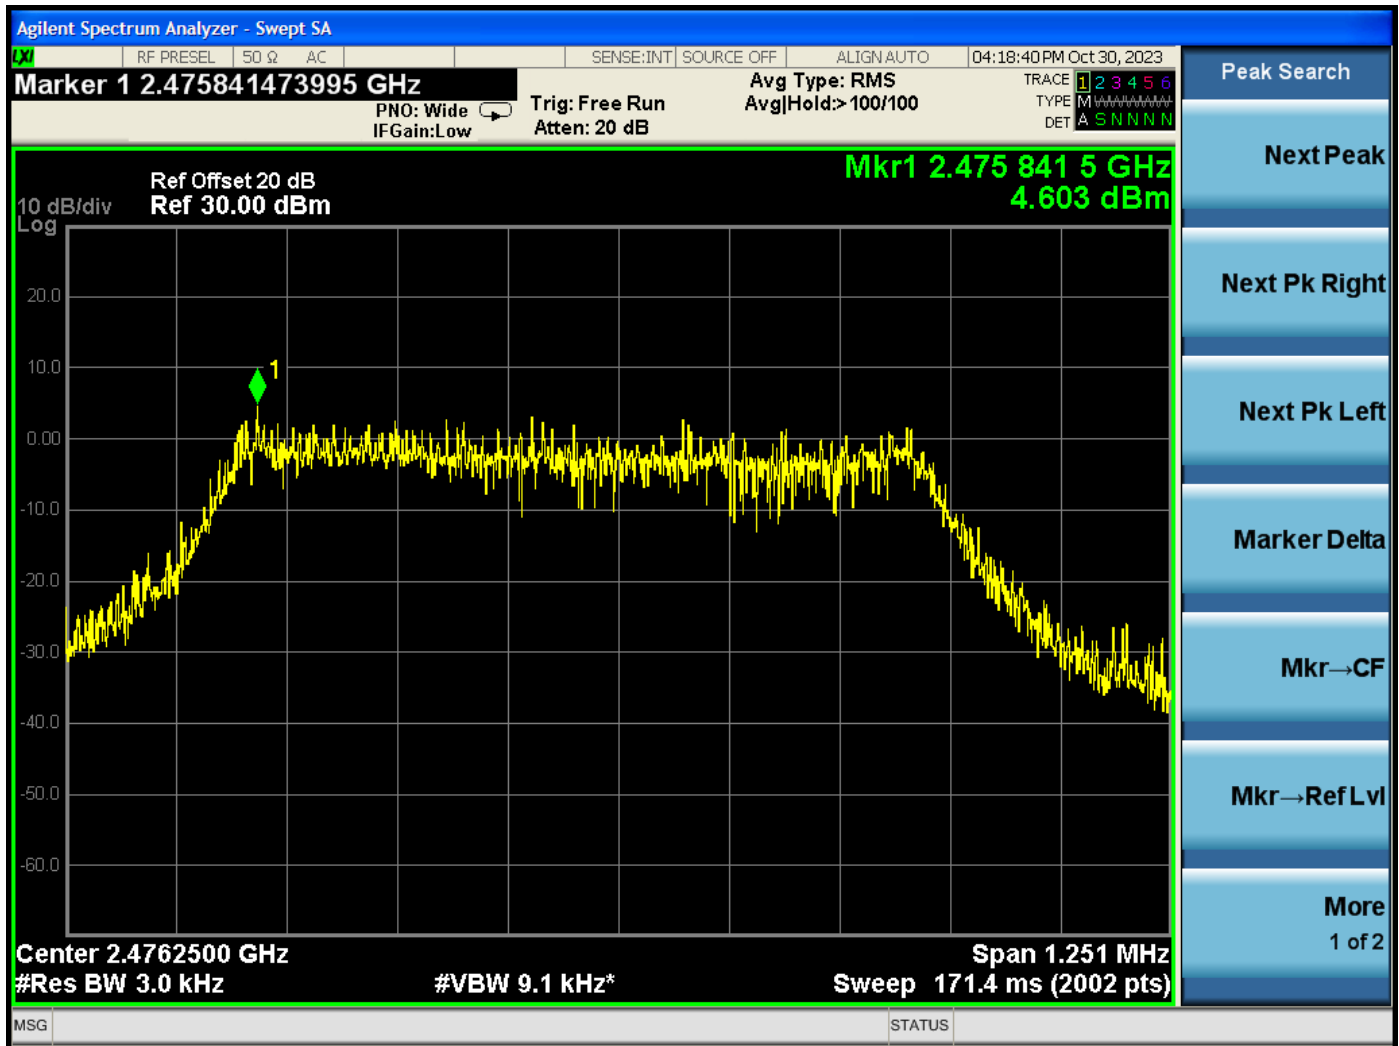


Power Spectral Density – High Channel

OCCUPIED BANDWIDTH – POWER BANDWIDTH (99%)


DATA SHEETS

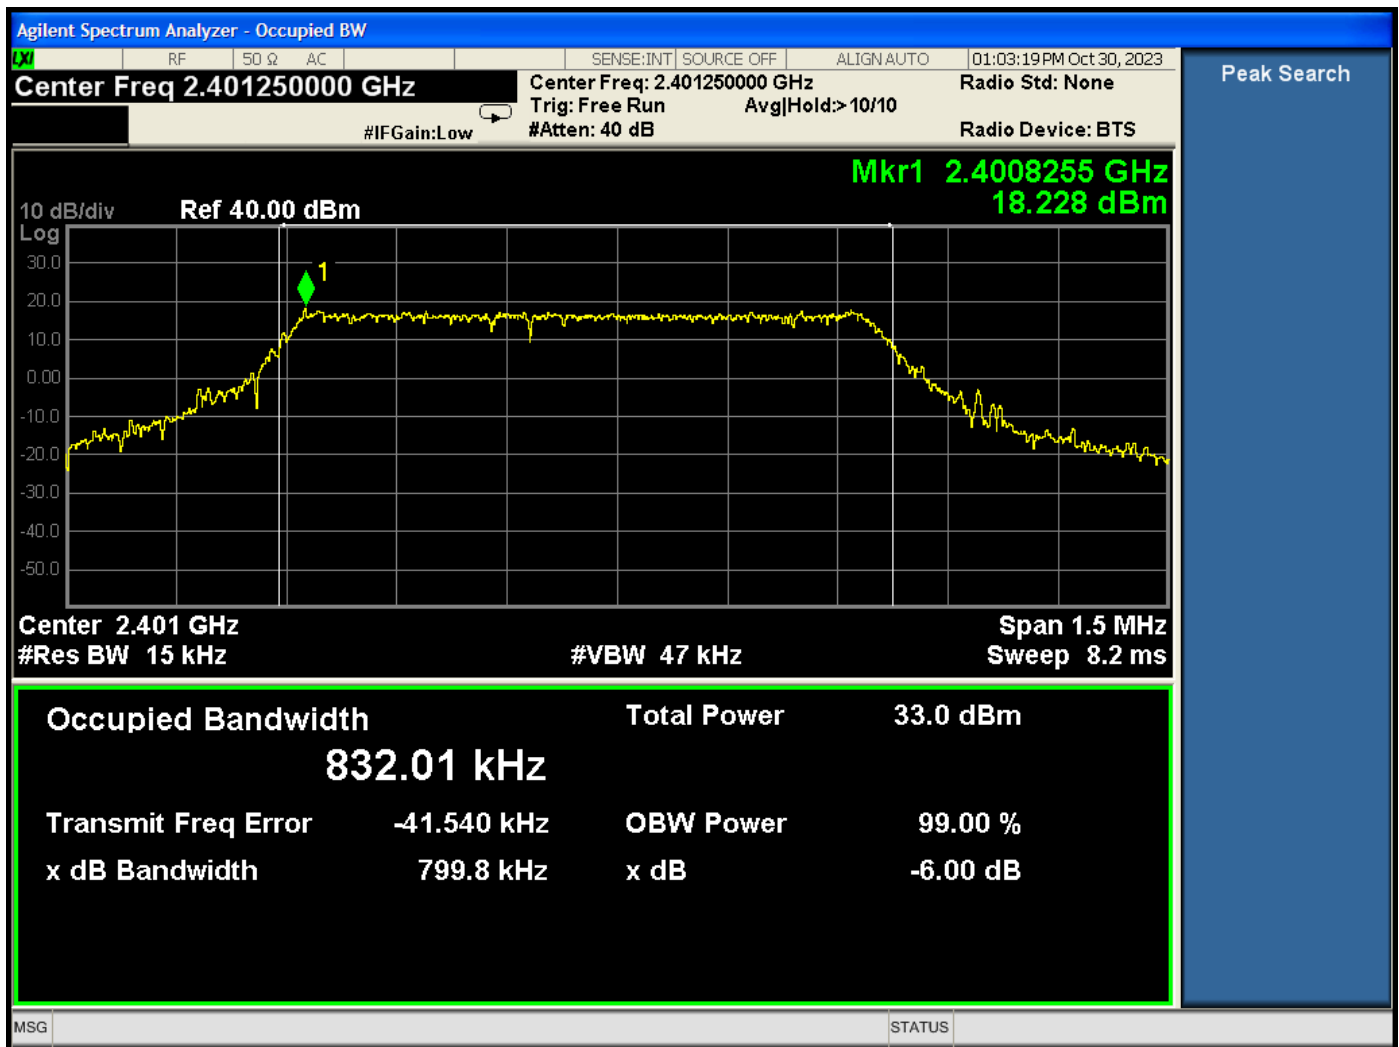

Occupied Bandwidth – Power Bandwidth (99%) – Low Channel

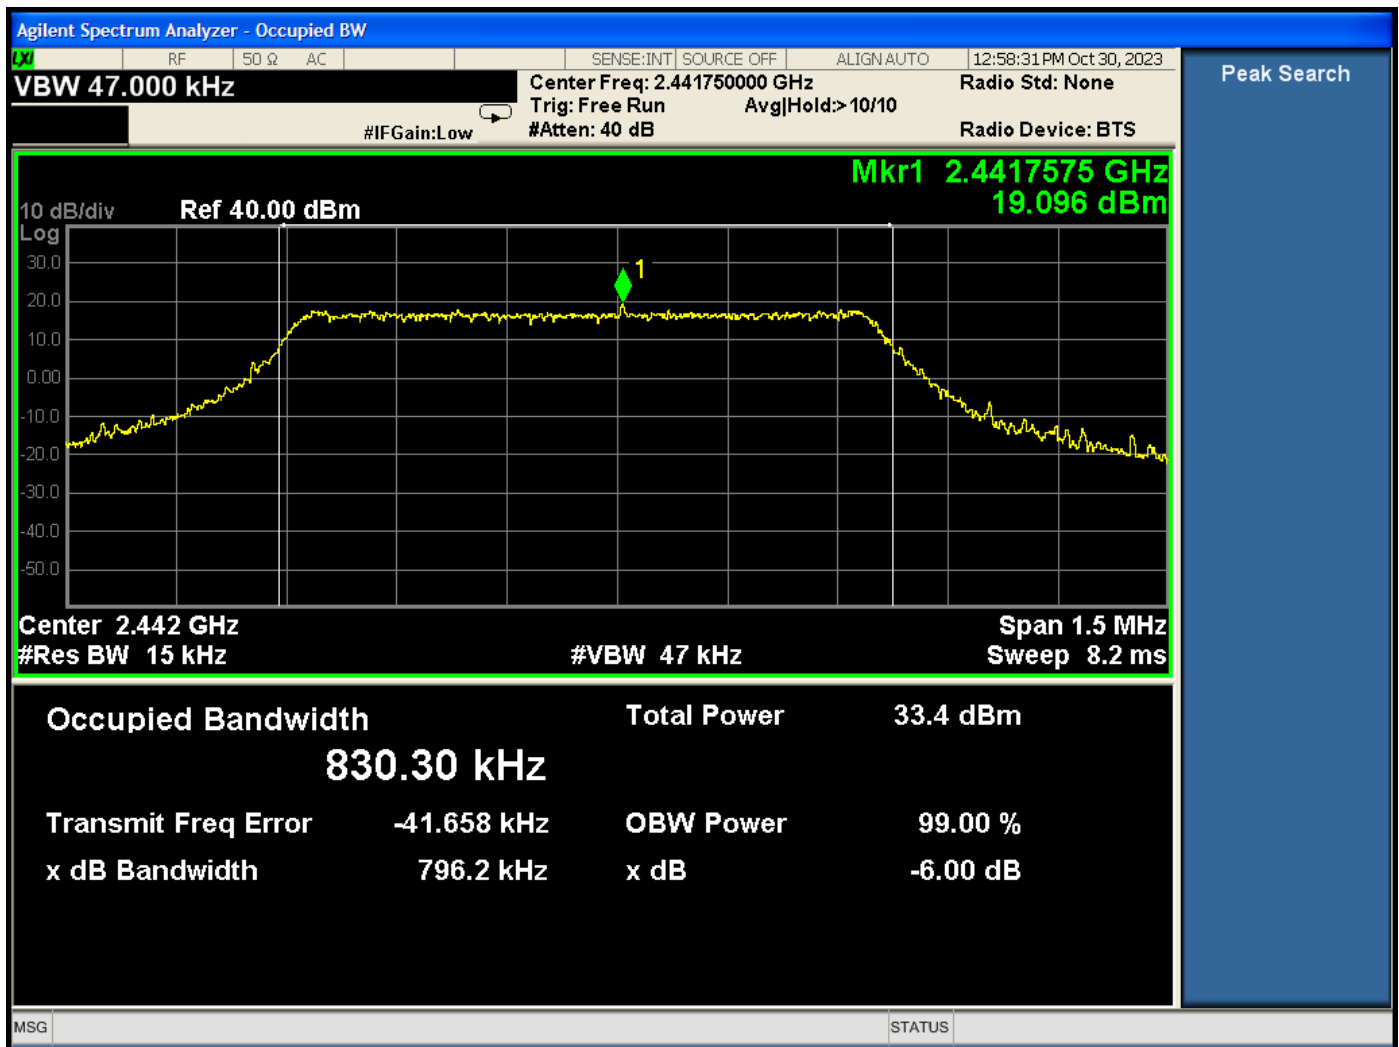


Occupied Bandwidth – Power Bandwidth (99%) – Middle Channel

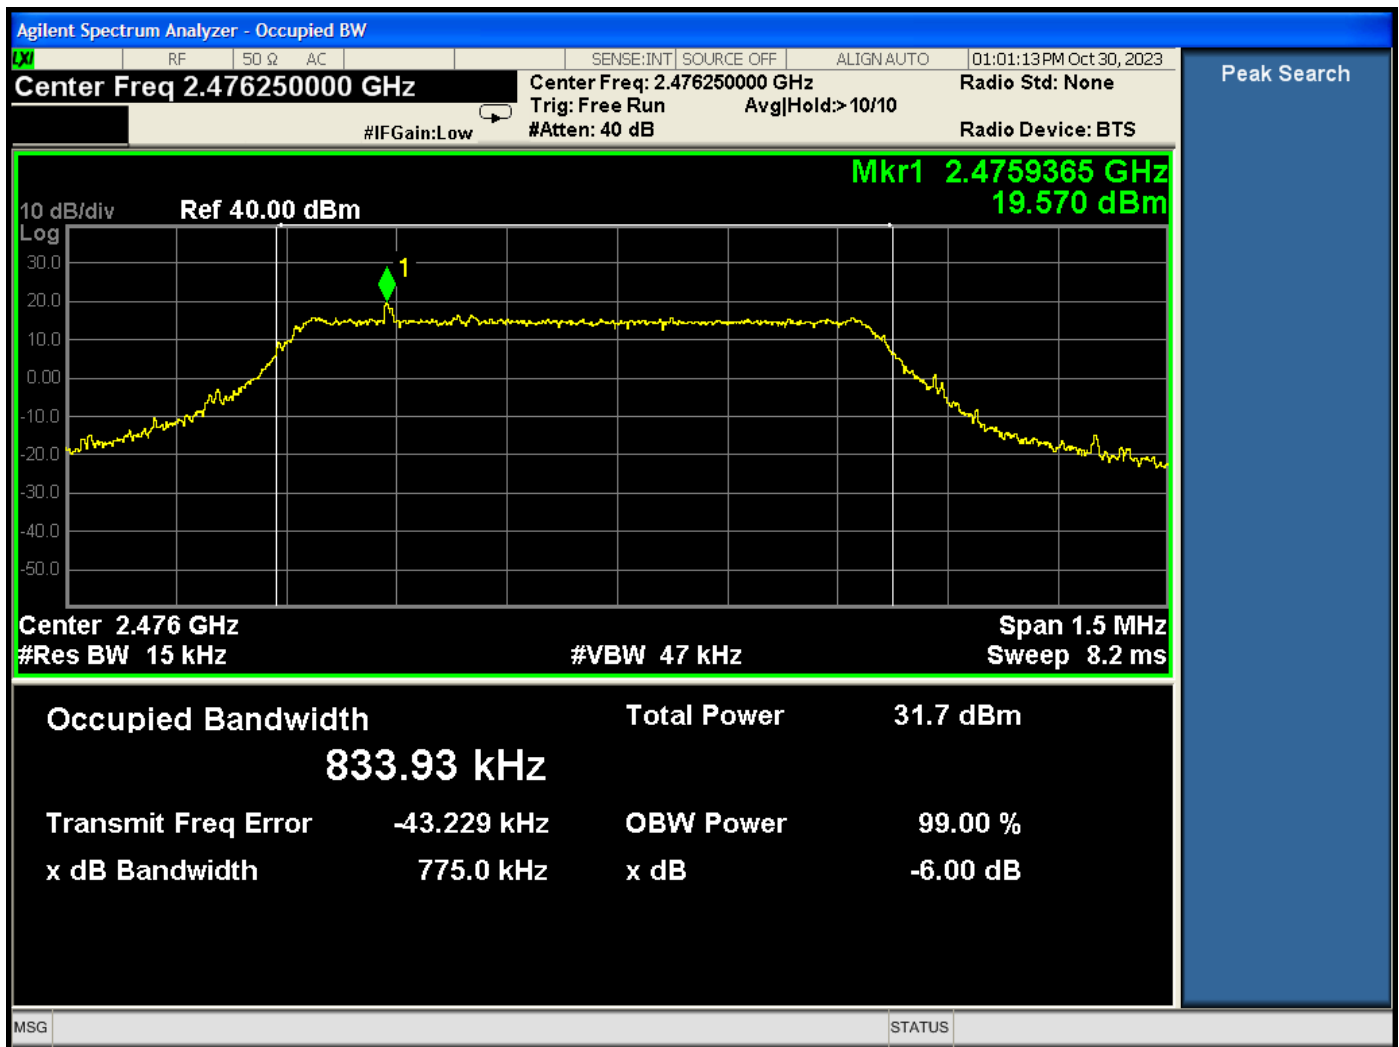


Occupied Bandwidth – Power Bandwidth (99%) – High Channel


***RF ANTENNA CONDUCTED
DATA SHEETS***

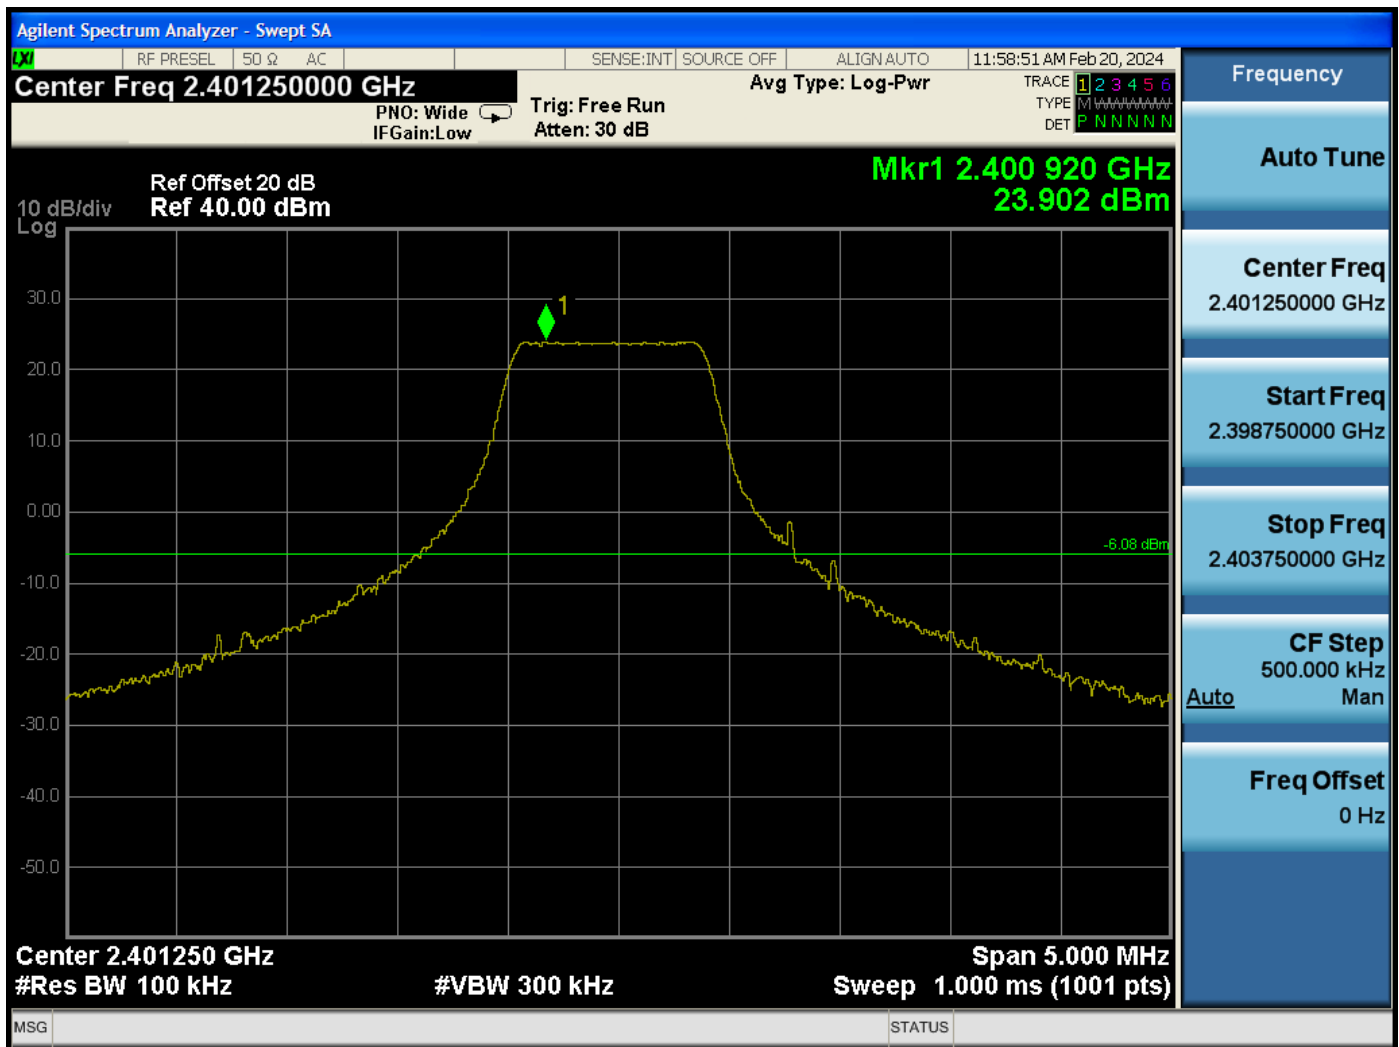


RF Antenna Conducted Test – Low Channel – Reference Level

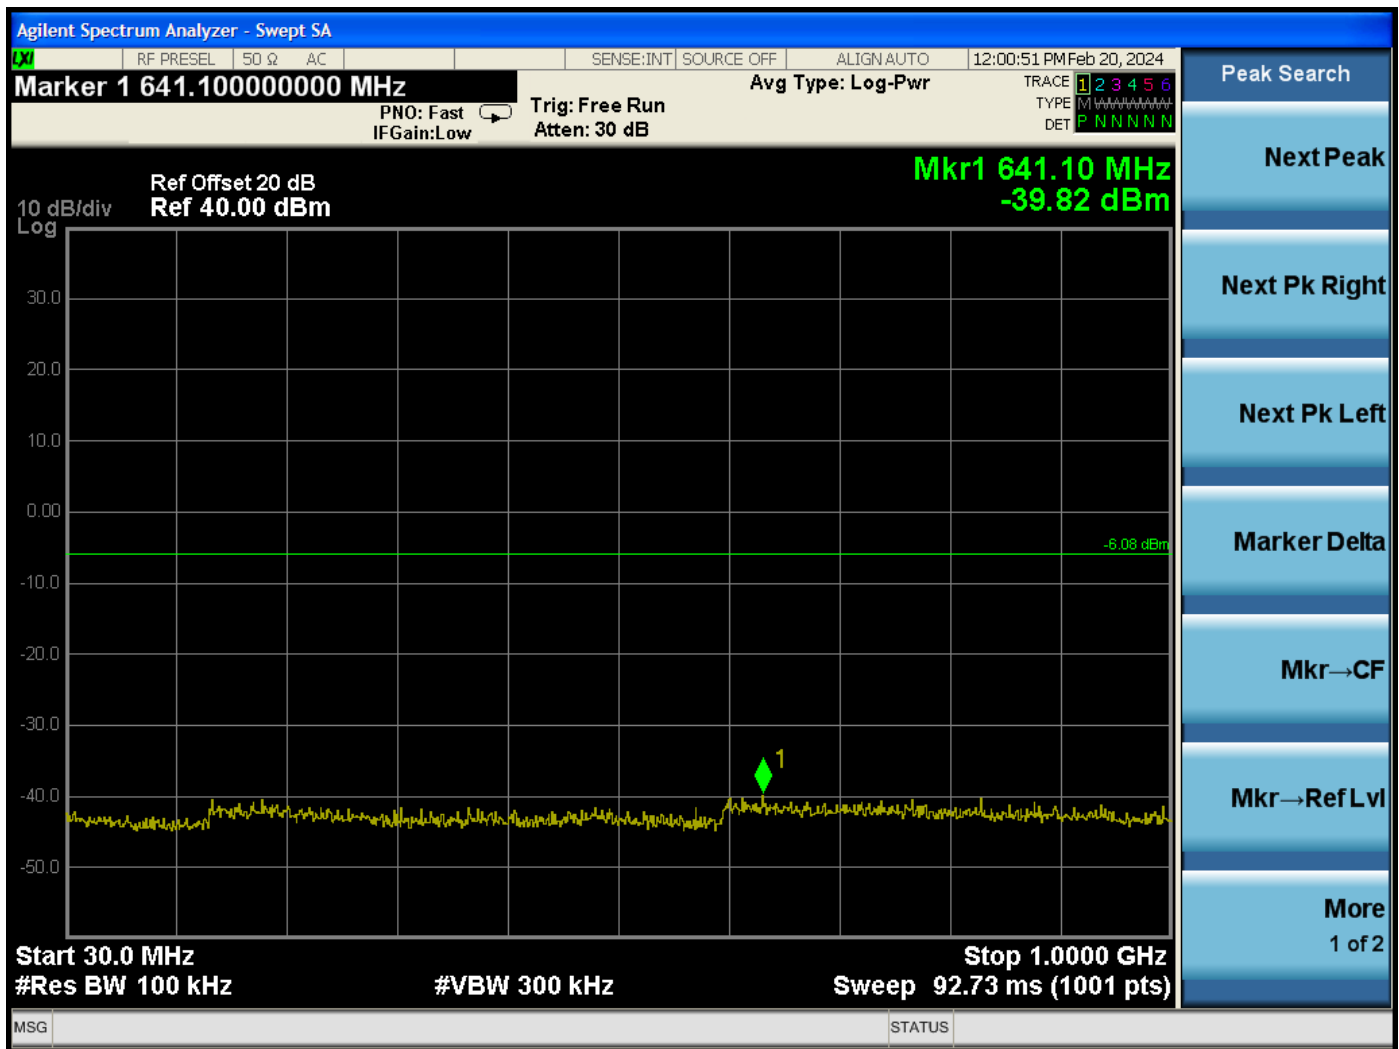

RF Antenna Conducted Test – Low Channel – 30 MHz to 1 GHz

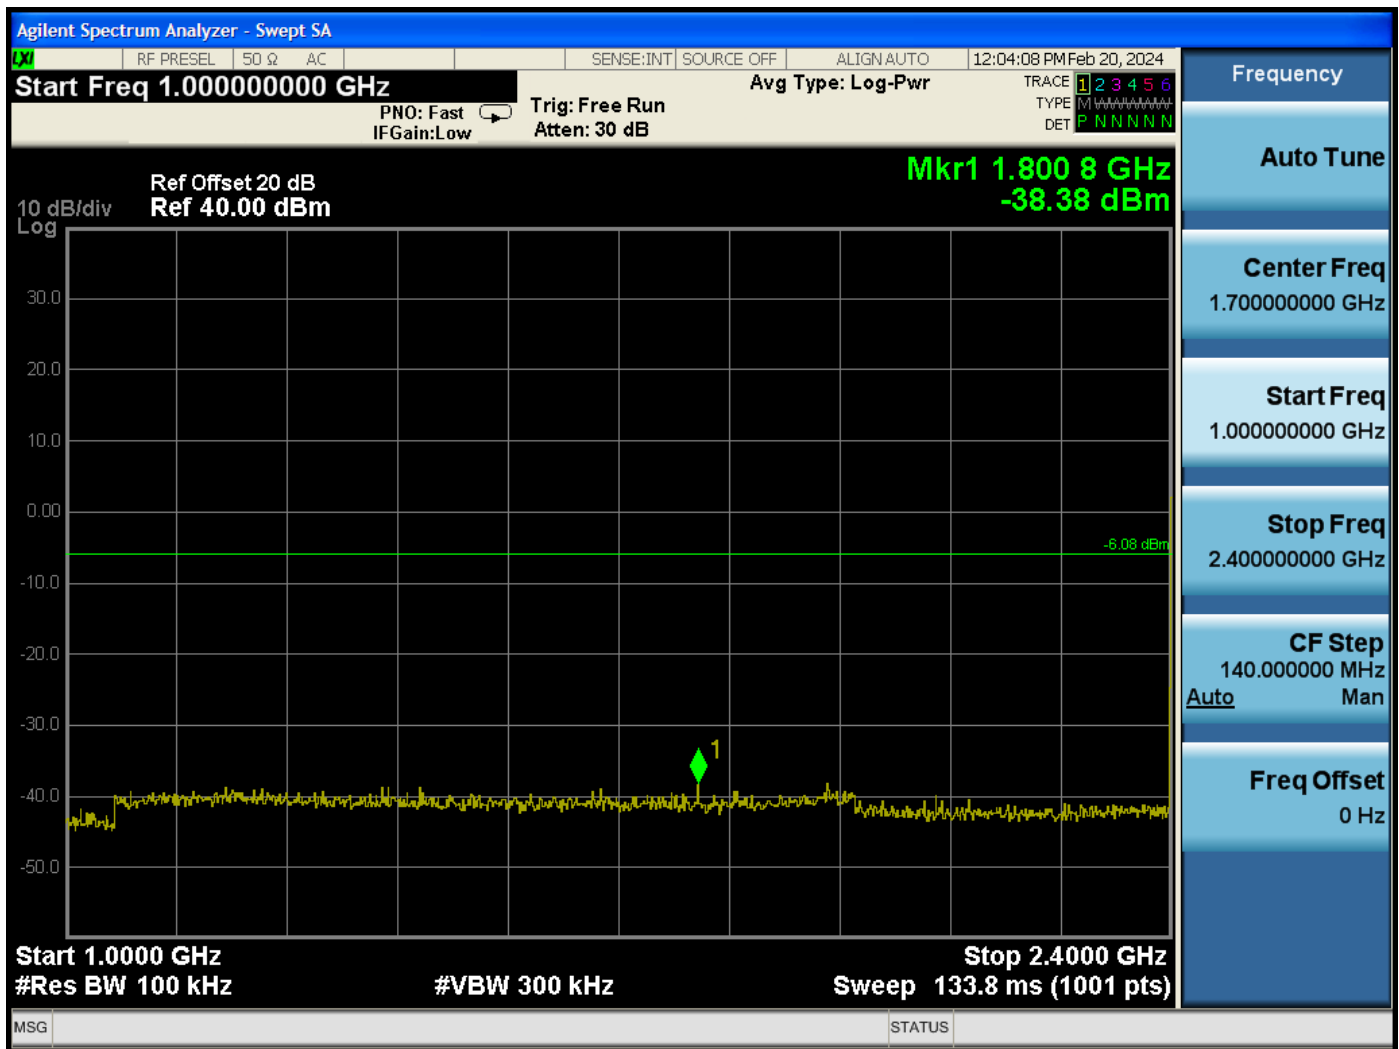


RF Antenna Conducted Test – Low Channel – 1 GHz to 2.4 GHz

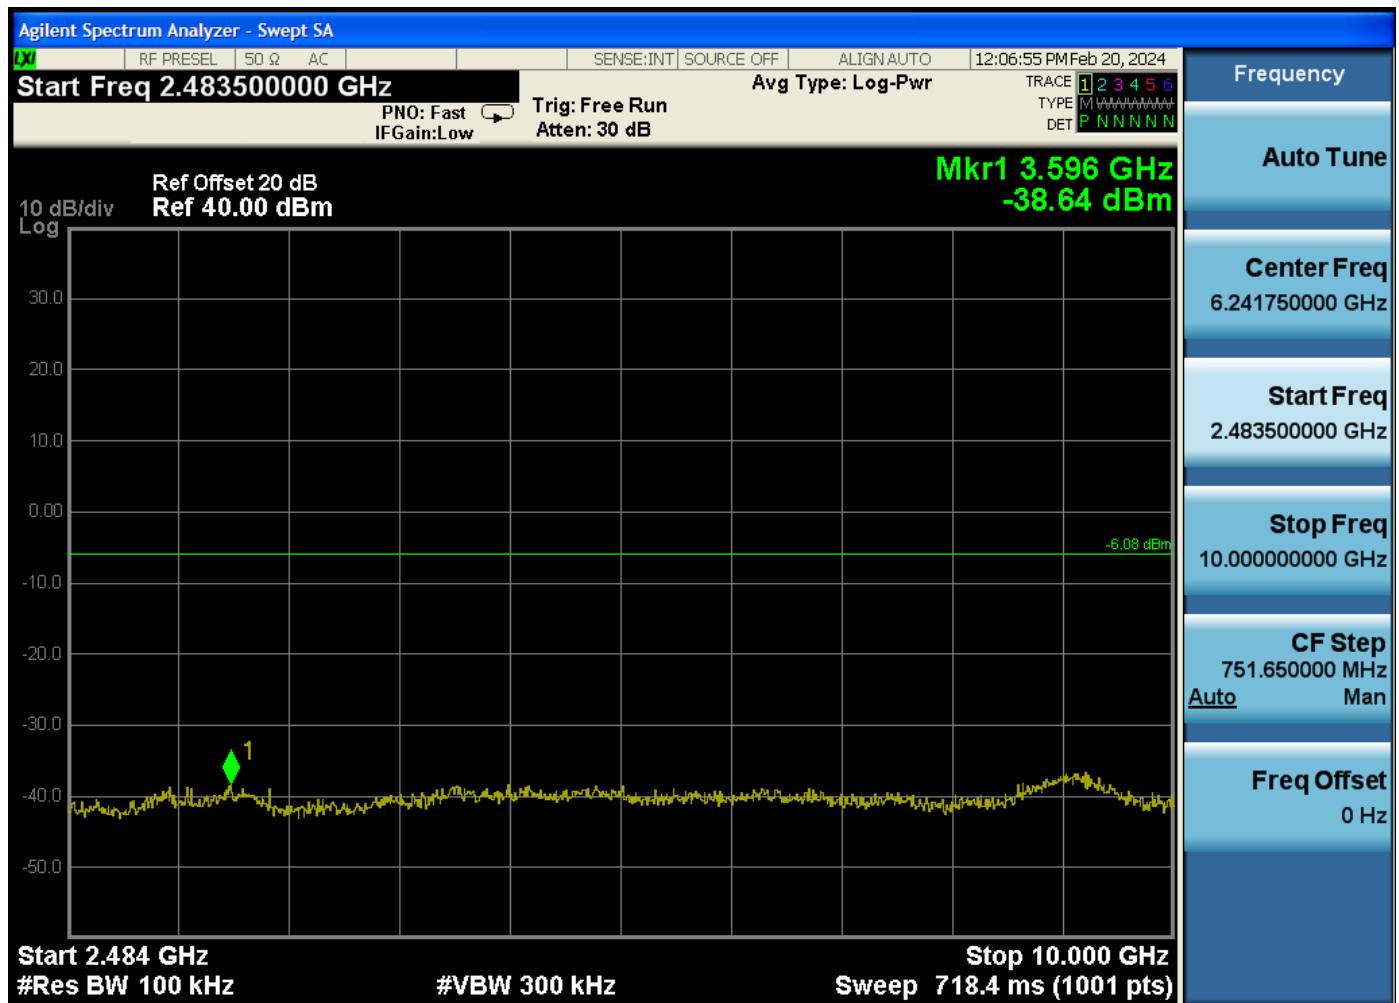


RF Antenna Conducted Test – Low Channel – 2483.5 MHz to 10 GHz




RF Antenna Conducted Test – Low Channel – 10 GHz to 25 GHz

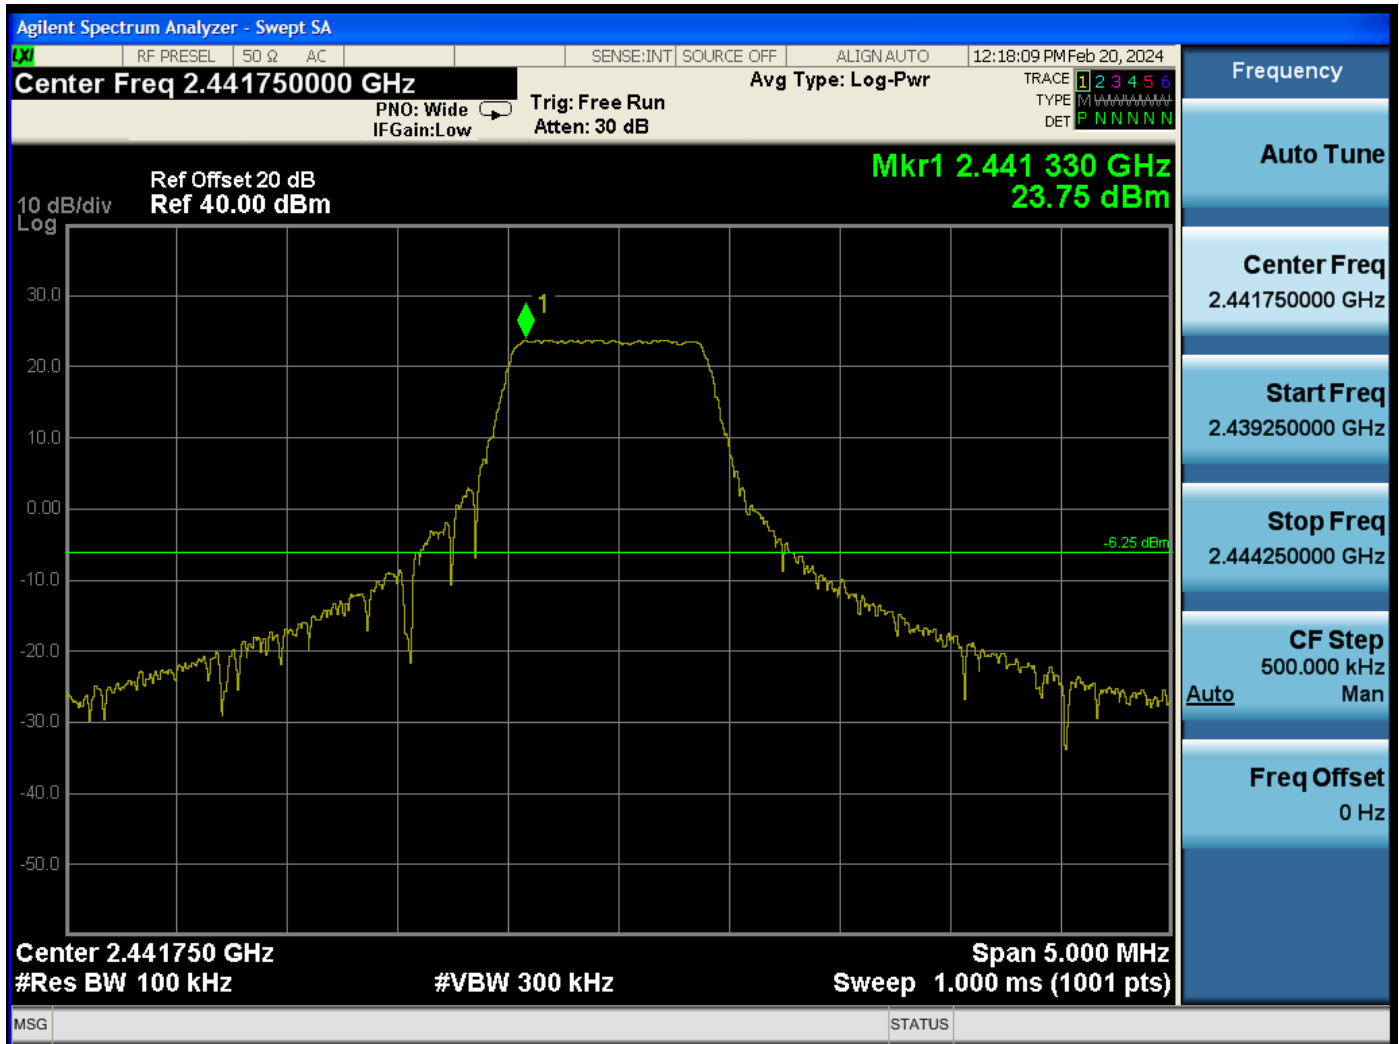


RF Antenna Conducted Test – Mid Channel – Reference Level

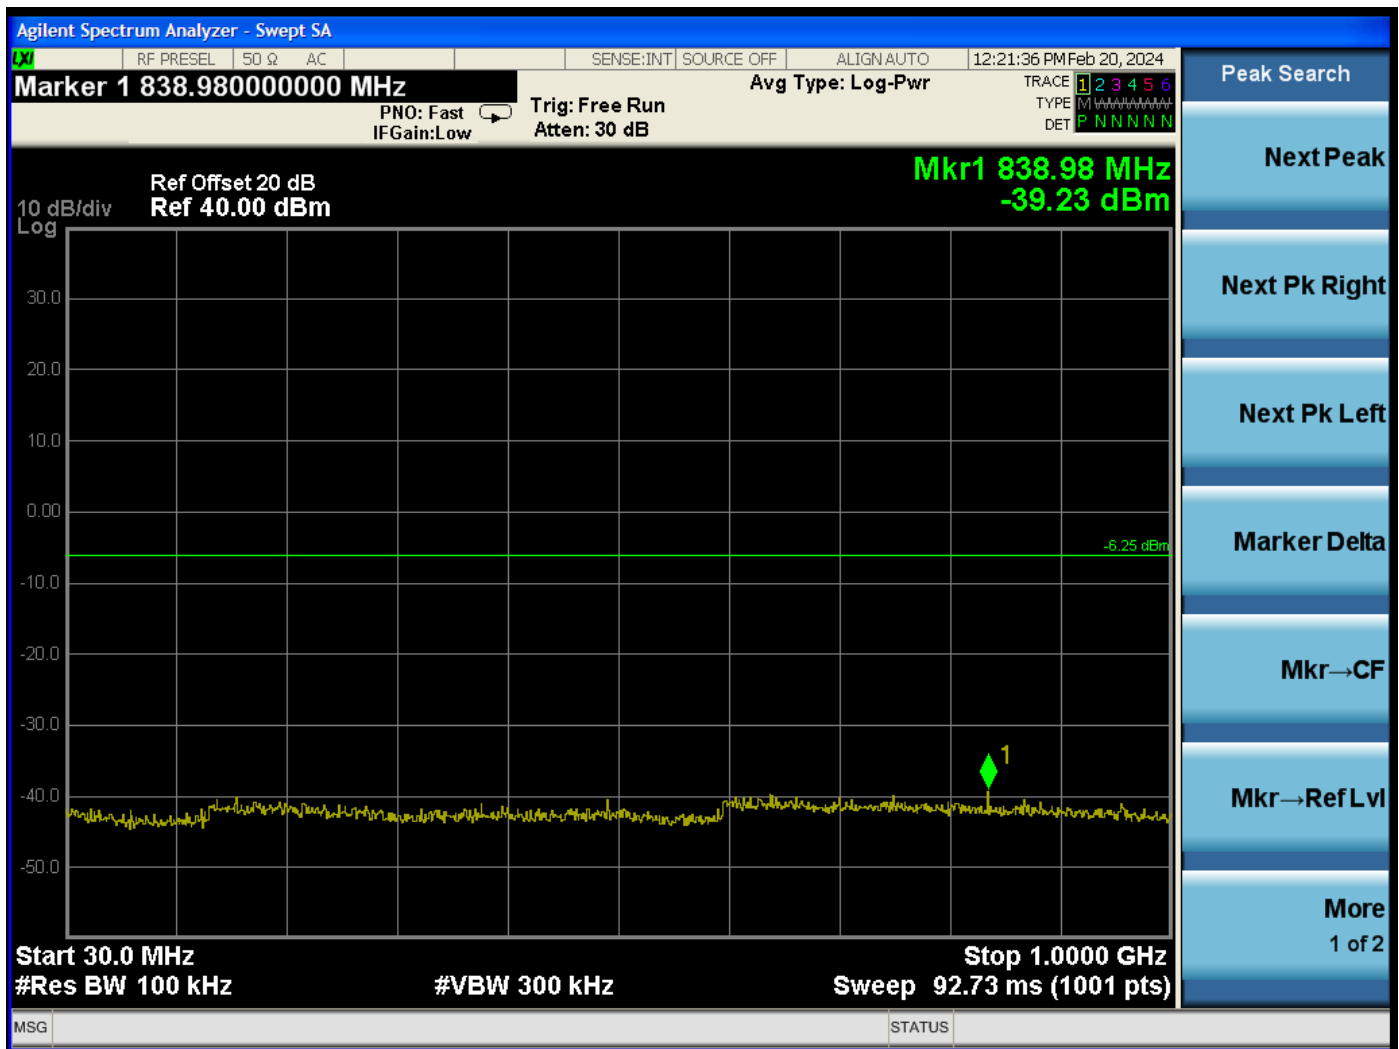

RF Antenna Conducted Test – Middle Channel – 30 MHz to 1 GHz

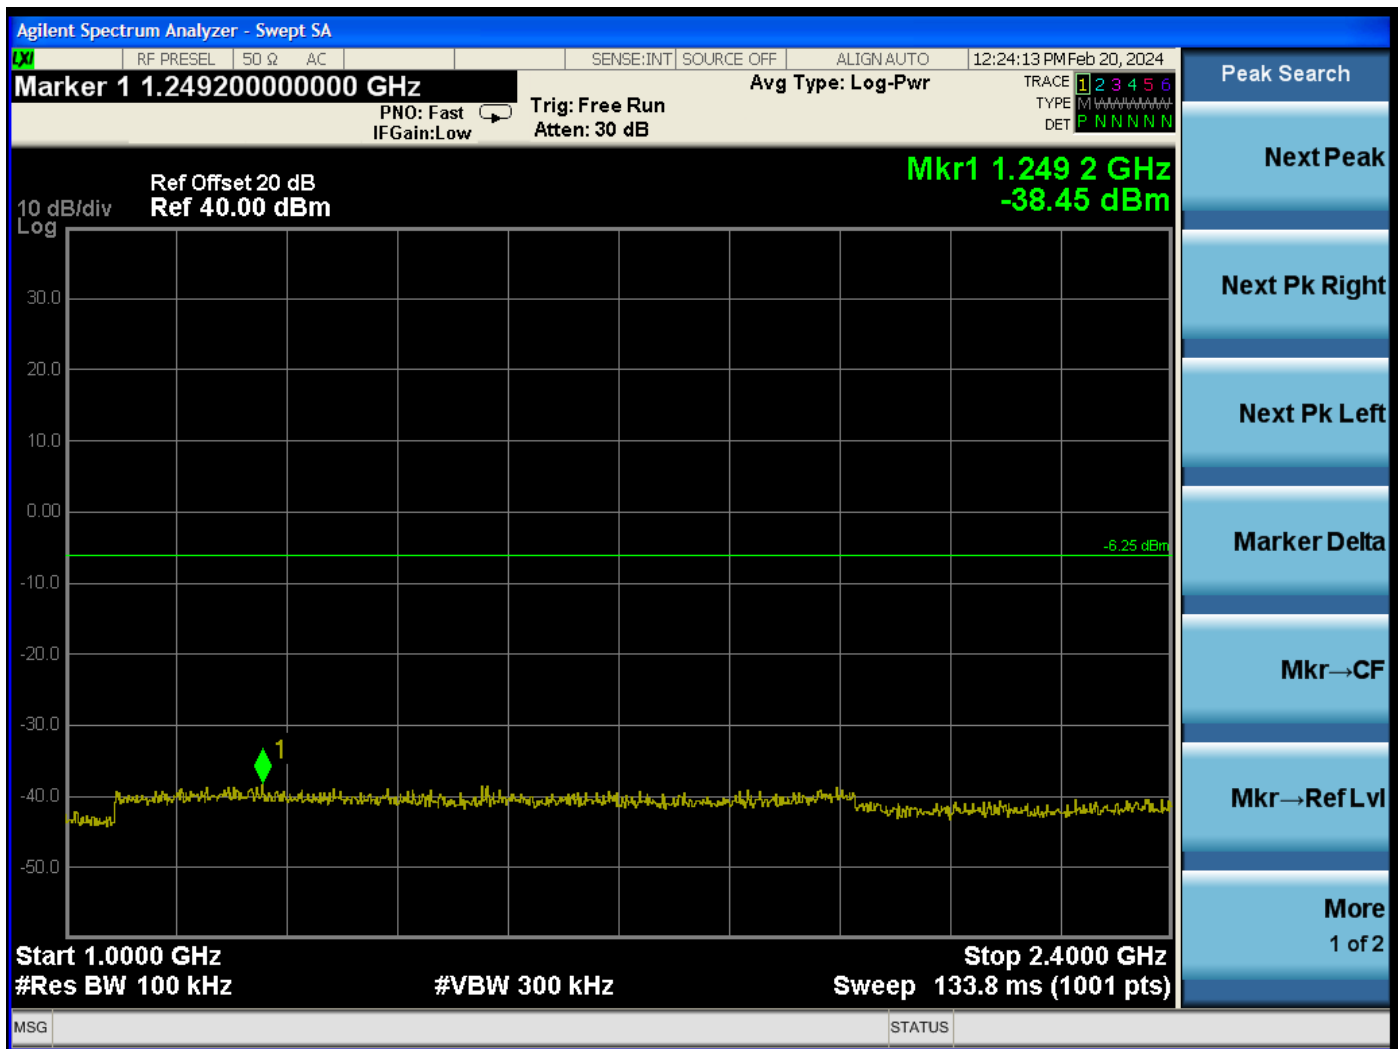


RF Antenna Conducted Test – Middle Channel – 1 GHz to 2.4 GHz

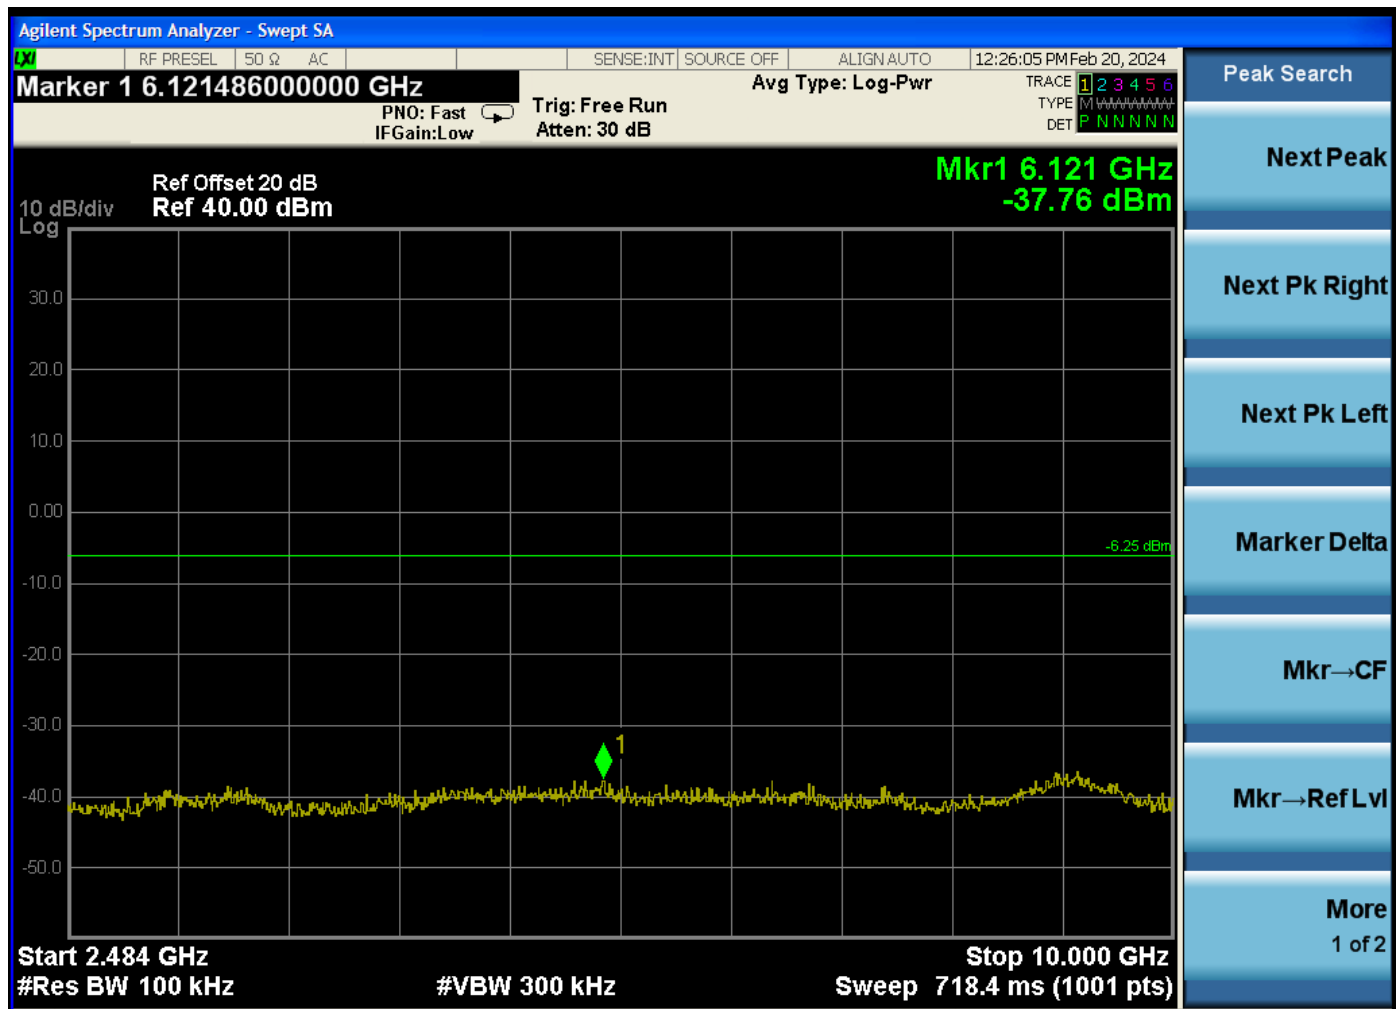


RF Antenna Conducted Test – Middle Channel – 2483.5 MHz to 10 GHz




RF Antenna Conducted Test – Middle Channel – 10 GHz to 25 GHz

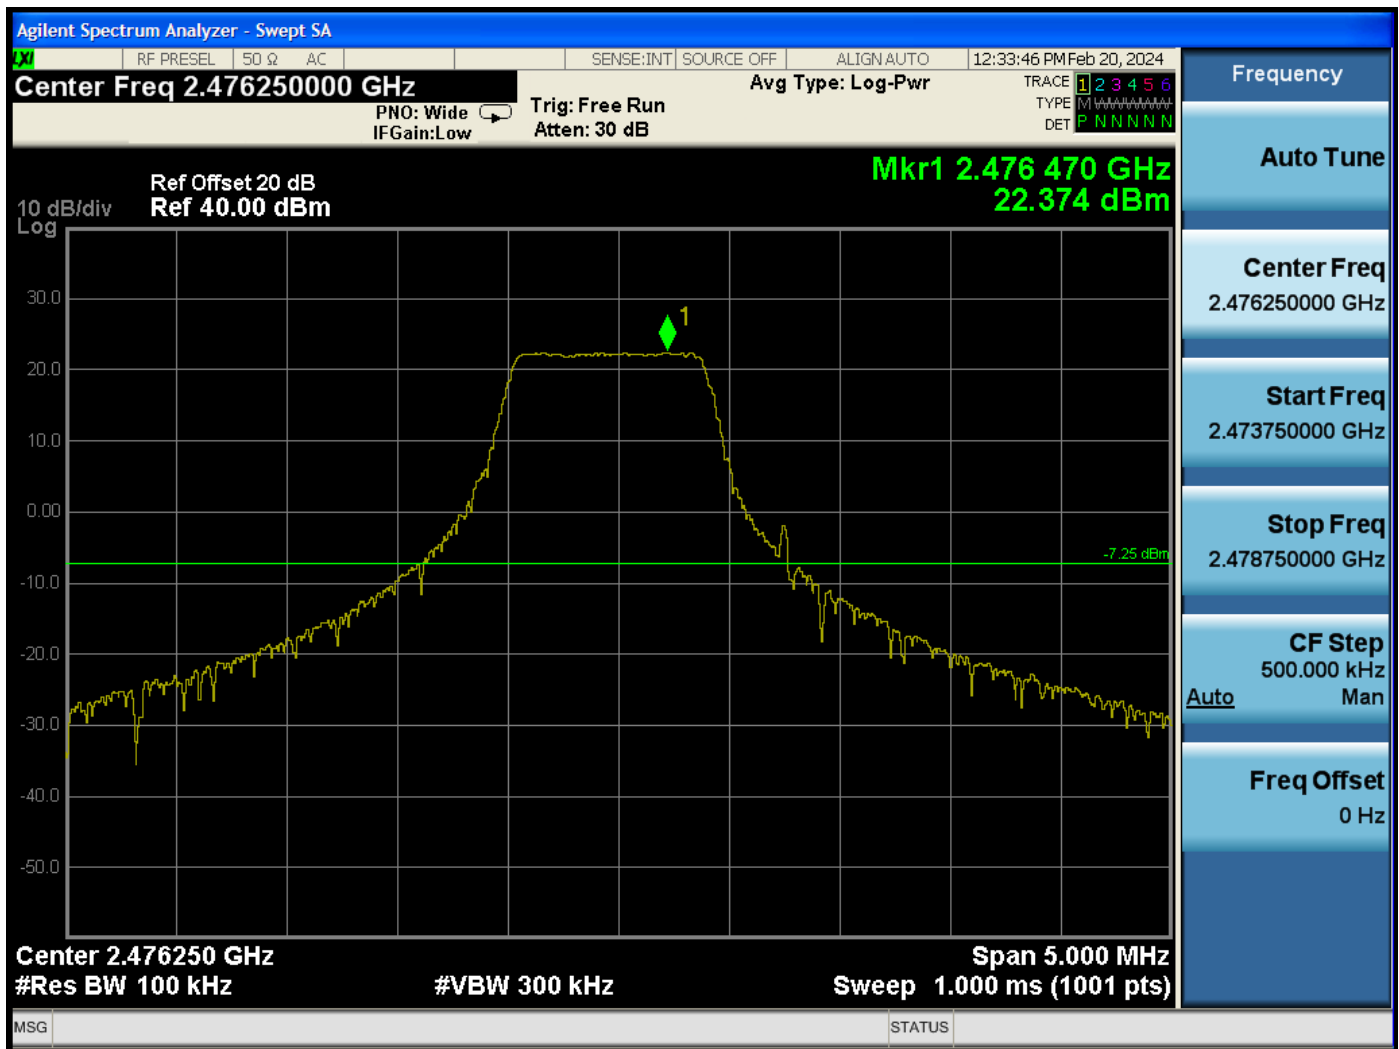


RF Antenna Conducted Test – High Channel – Reference Level

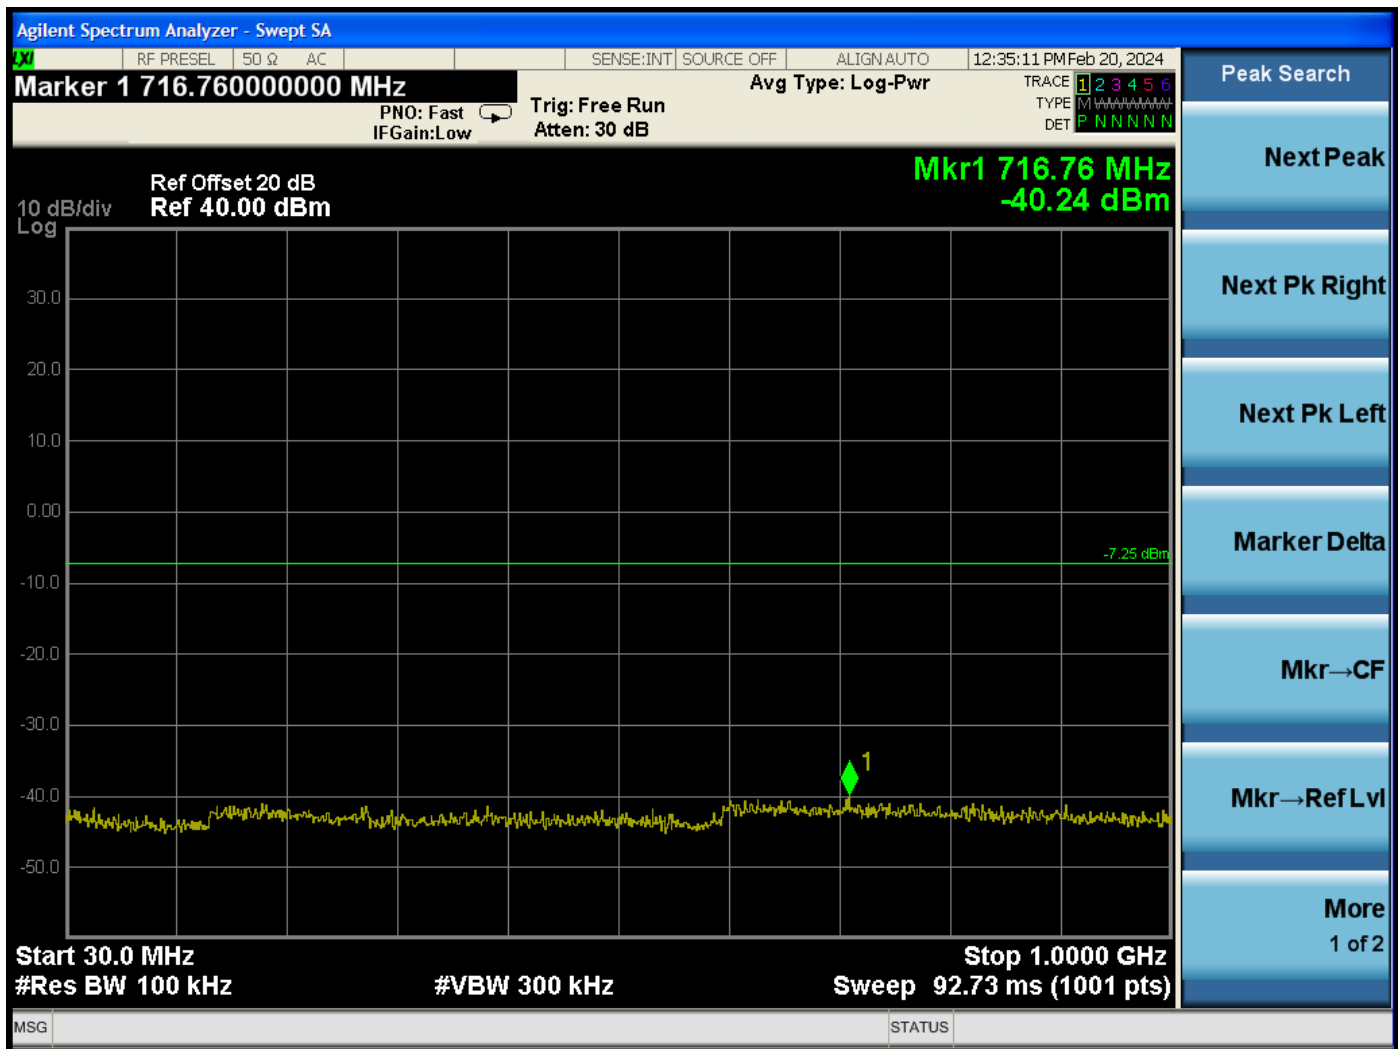

RF Antenna Conducted Test – High Channel – 30 MHz to 1 GHz

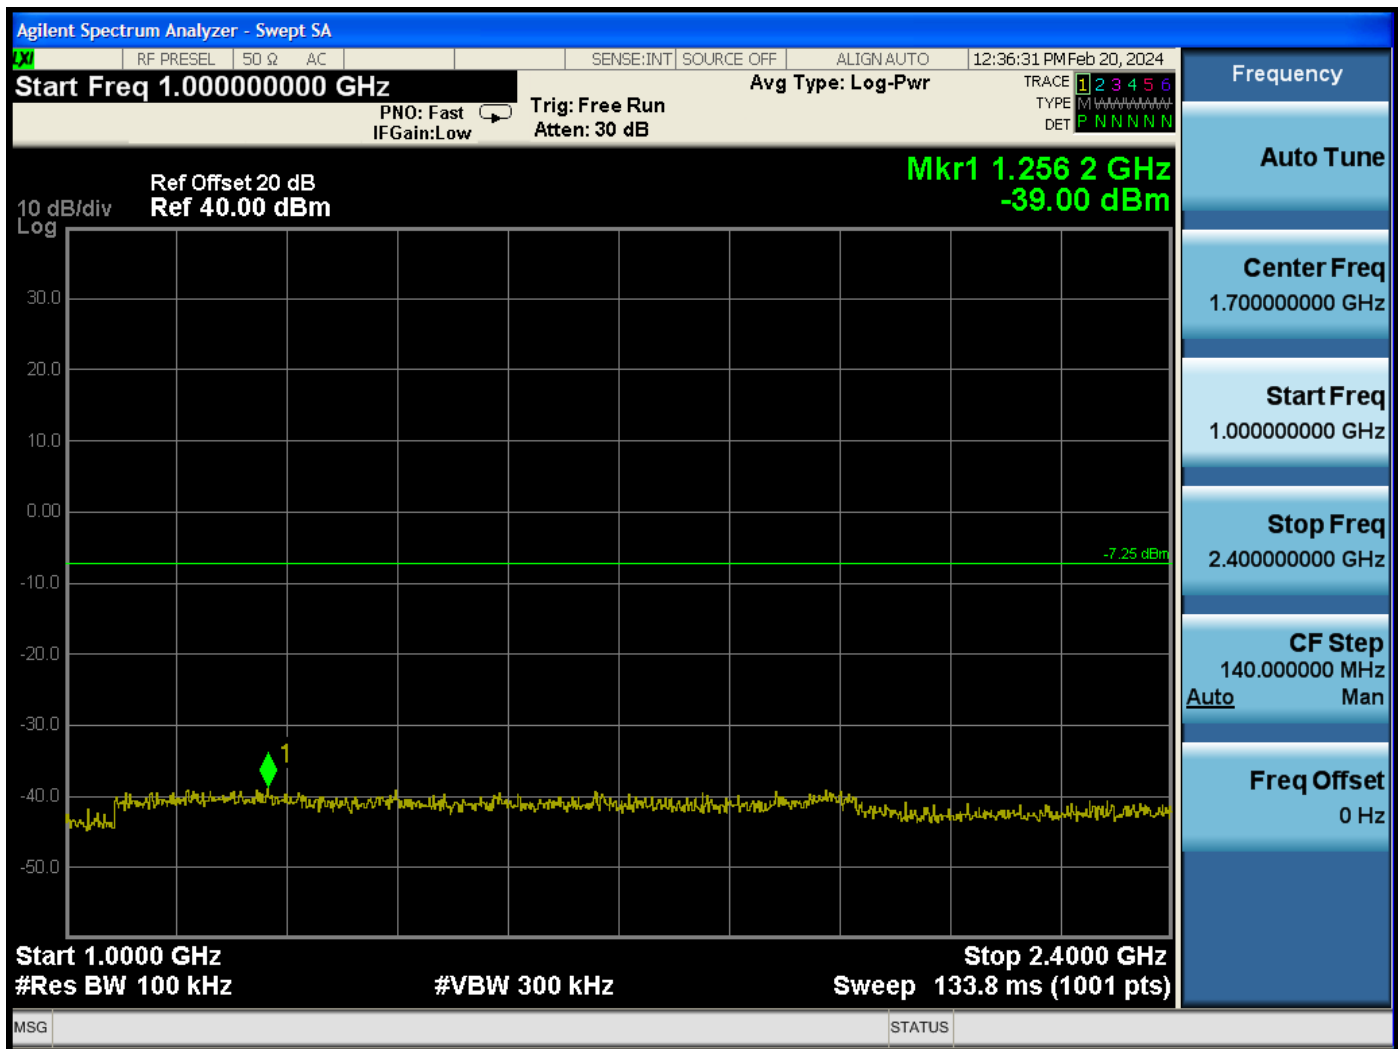

RF Antenna Conducted Test – High Channel – 1 GHz to 2.4 GHz

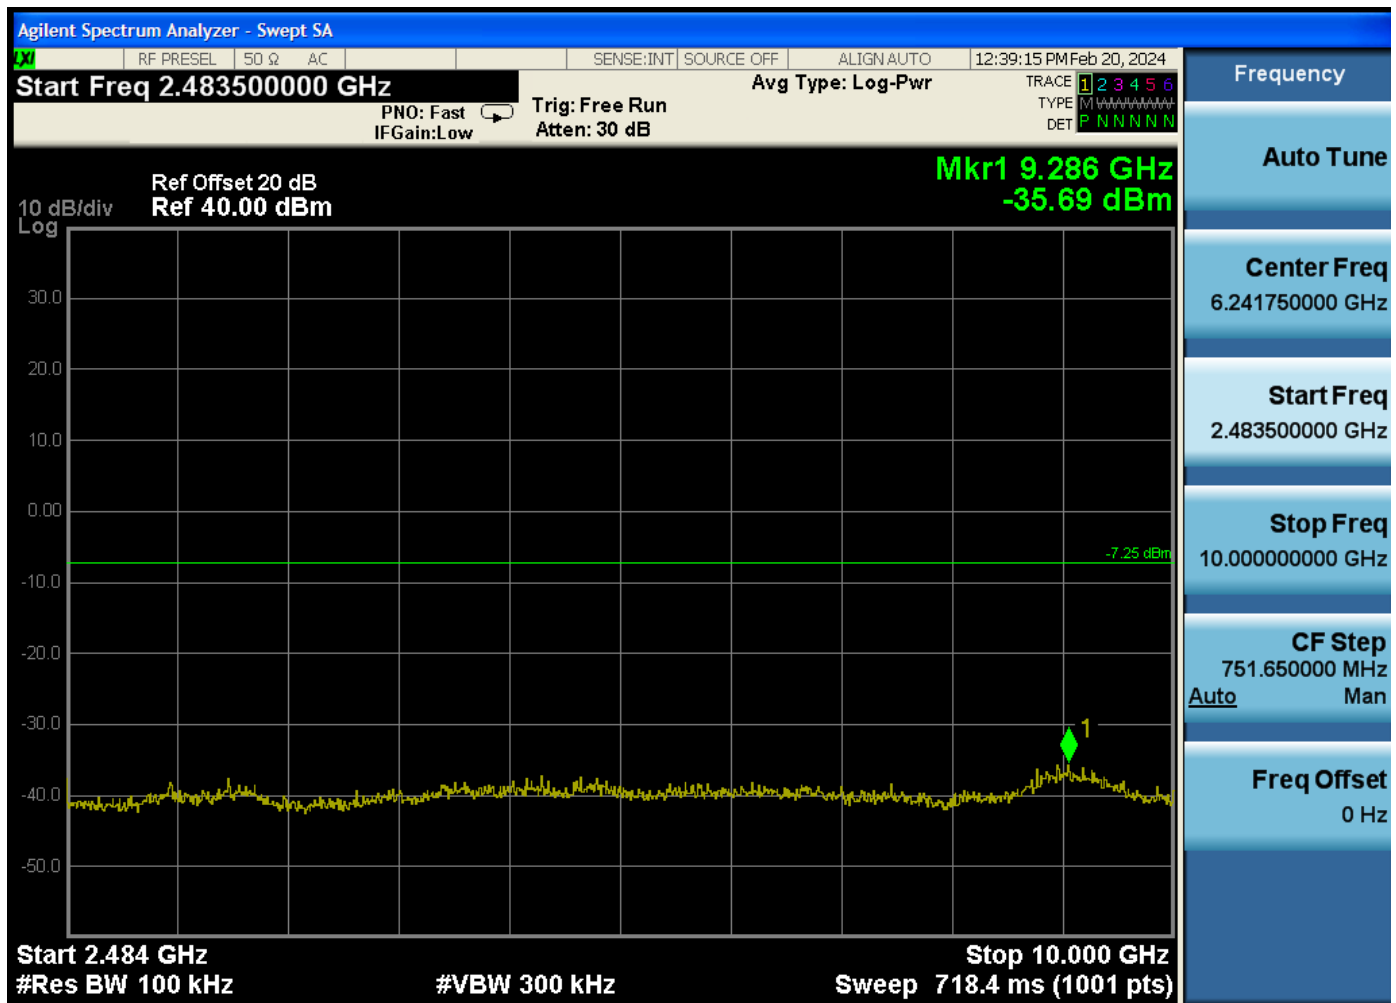

RF Antenna Conducted Test – High Channel – 2483.5 MHz to 10 GHz



RF Antenna Conducted Test – High Channel – 10 GHz to 25 GHz

MICROWAVE MONOLITHICS

RF TRANSMITTER


MODEL: MMI-ARM


HIGHEST EMISSIONS IN THE NON-RESTRICTED BANDS

FREQUENCY (GHZ)	LEVEL (dBm)	Limit* (dBm)	Margin (dB)
24.760	-28.14	-6.25	-21.89
24.820	-28.07	-6.08	-21.99
24.850	-27.88	-7.25	-20.63


Note: The highest non-restricted emissions are reported.

*The Limit is based on 30 dB below the highest reference level obtained on the previous pages.

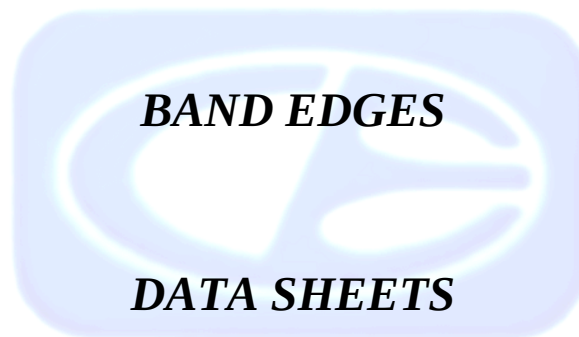


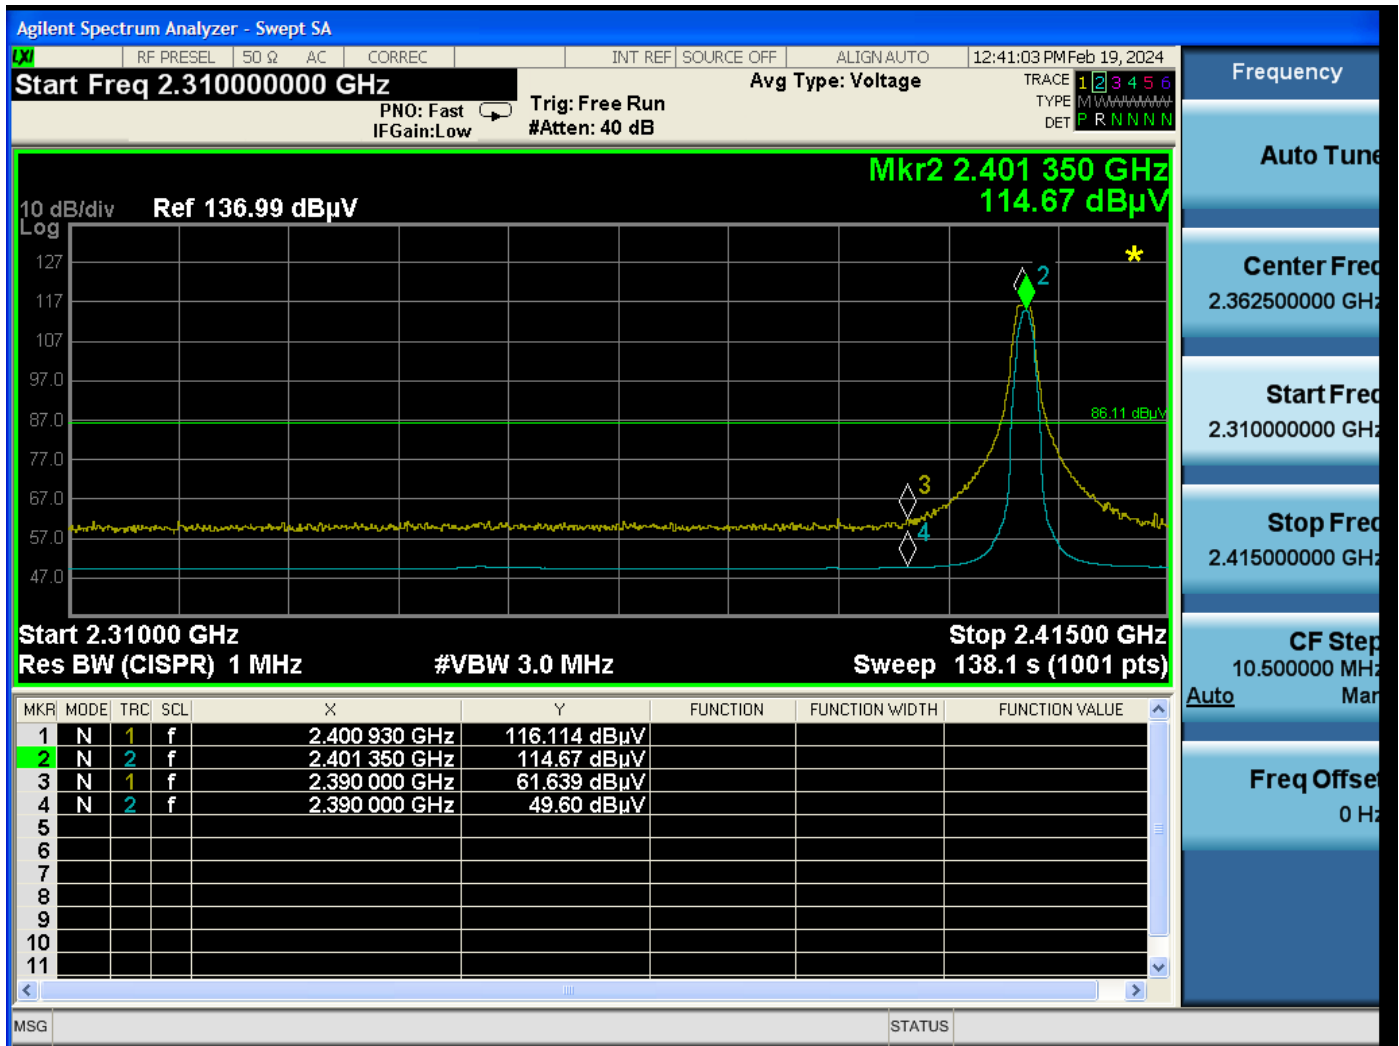


Band Edge – 2401.25 MHz – Vertical – Y Axis

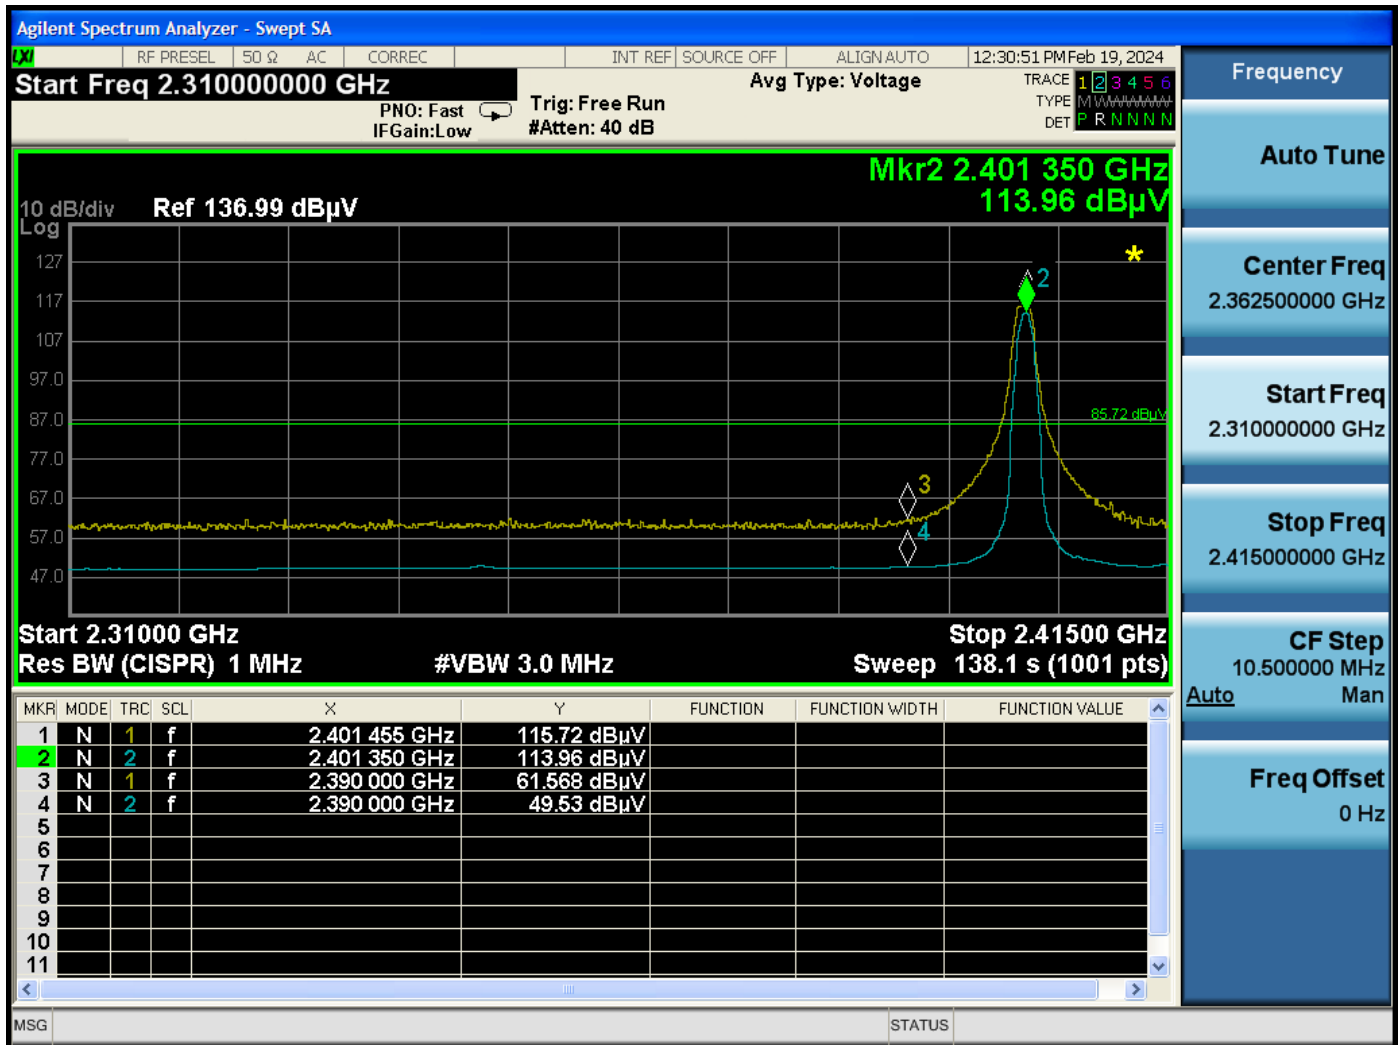


Band Edge – 2401.25 MHz – Horizontal – Y Axis

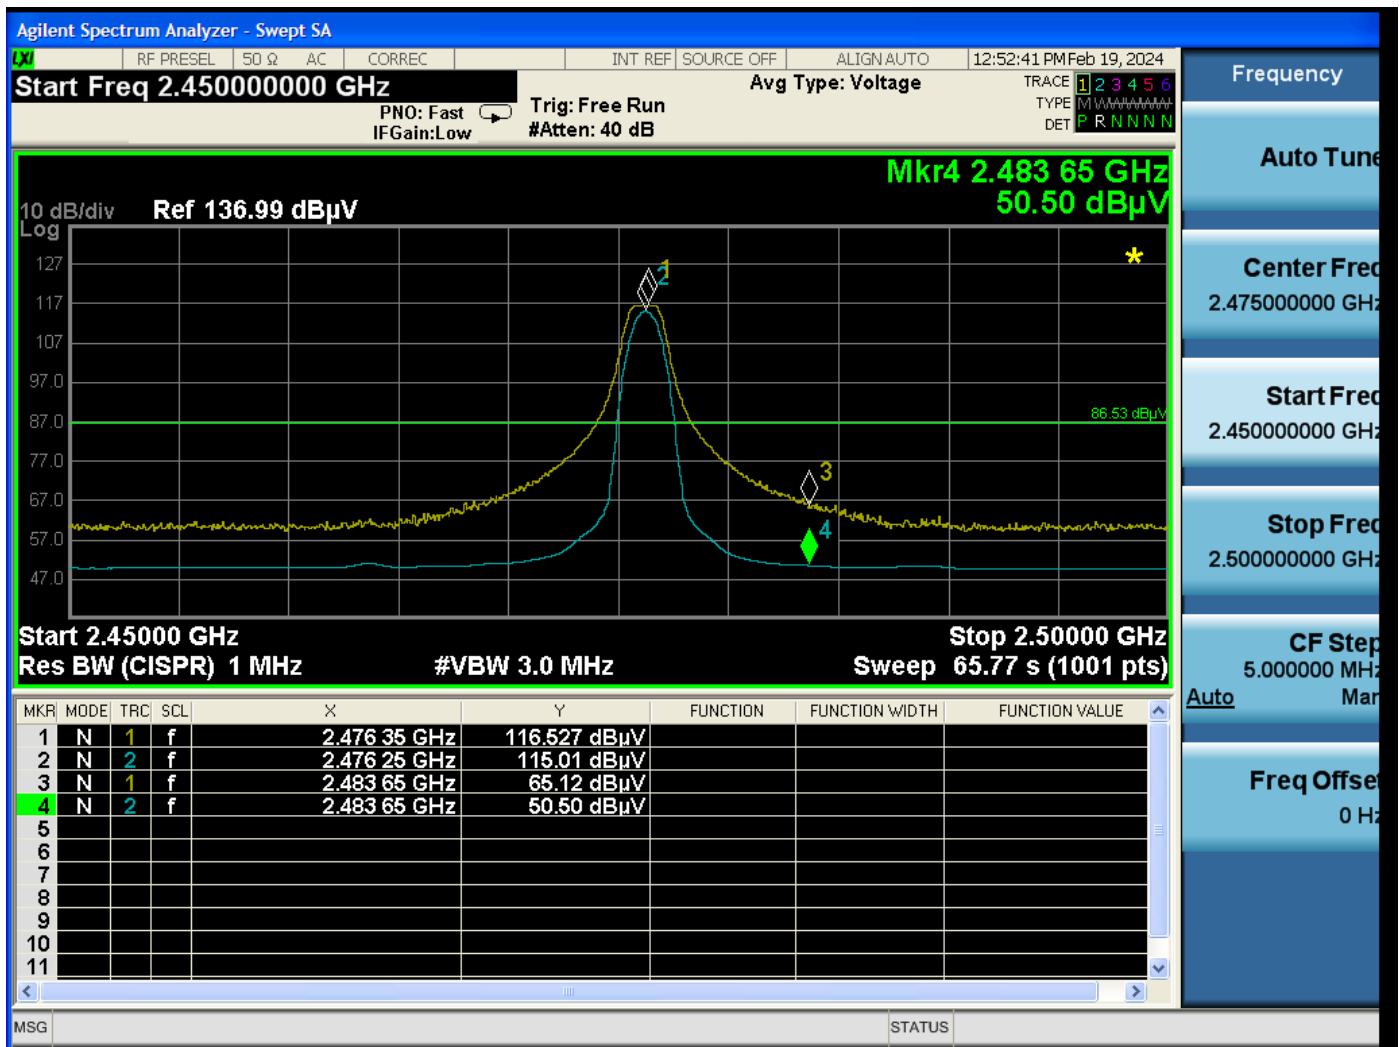

Band Edge – 2476.25 MHz – Vertical – Z Axis

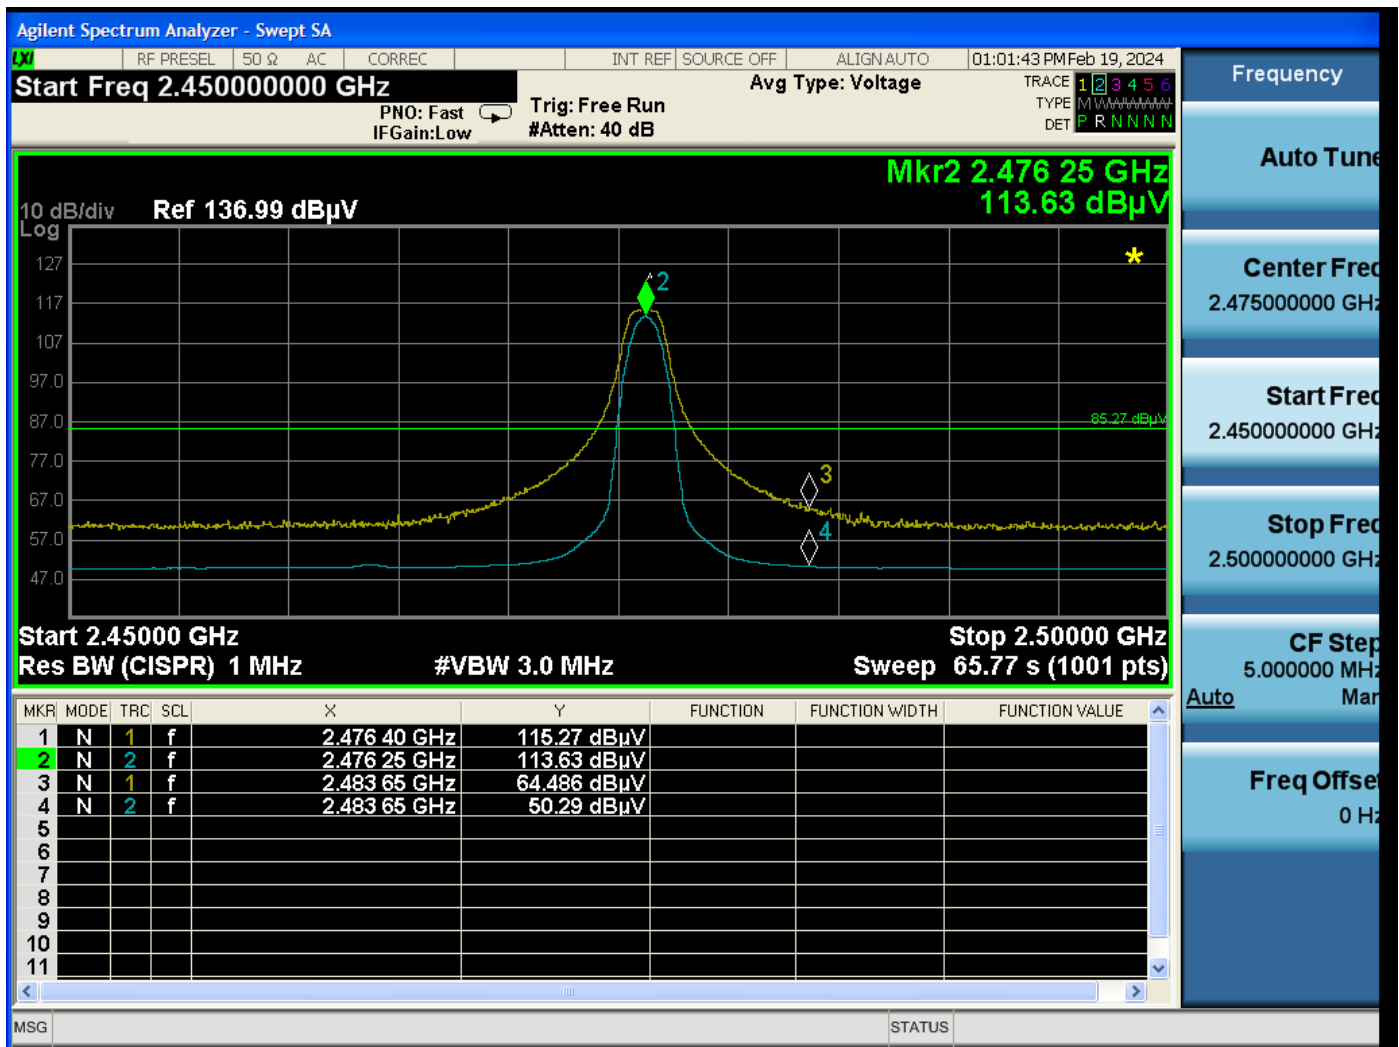


Band Edge – 2476.25 MHz – Horizontal– Z Axis

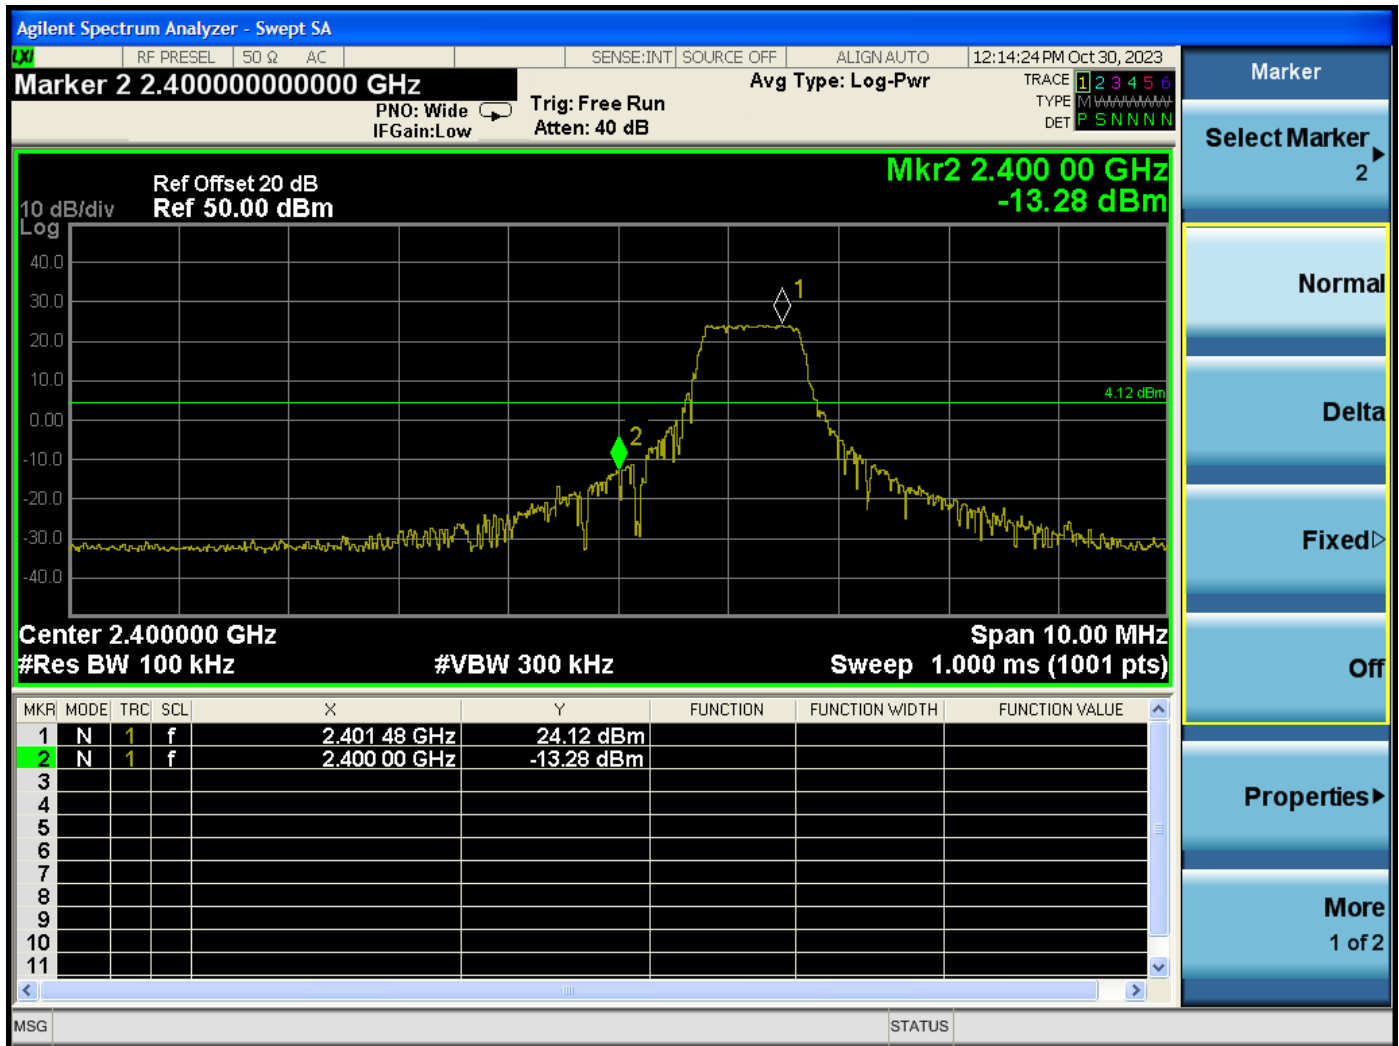

Band Edges – Low channel

MAXIMUM CONDUCTED OUTPUT POWER

DATA SHEETS

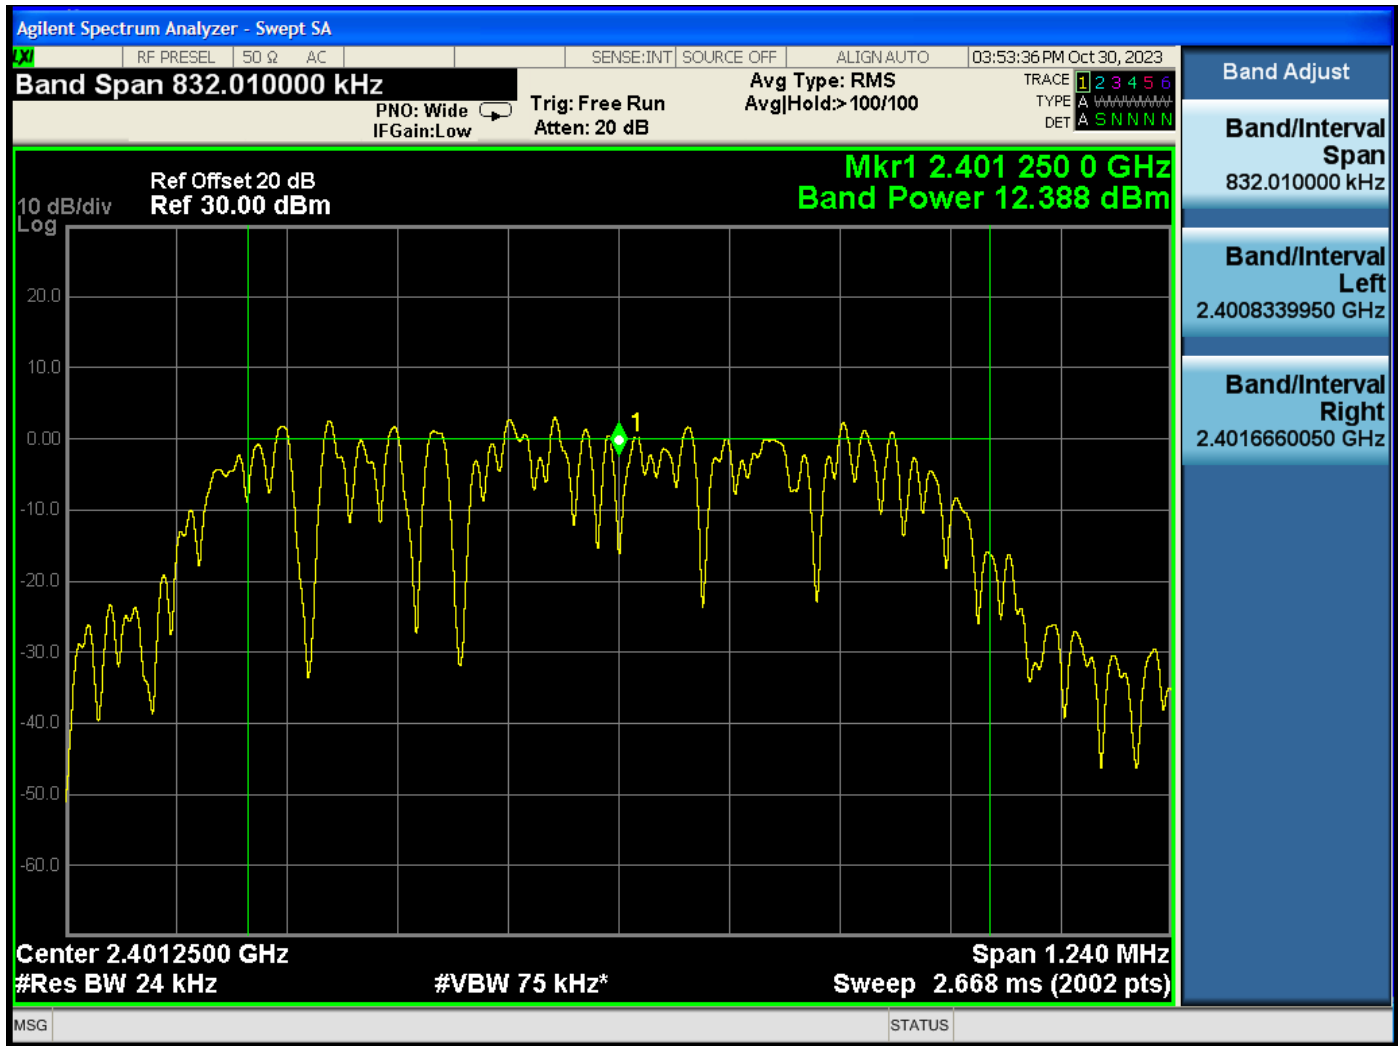

Maximum Conducted Output Power - Low Channel



Maximum Conducted Output Power - Middle Channel



Maximum Conducted Output Power - High Channel