



GSM 850-Body Up Middle CH190	2
GSM 850-Body Down Middle CH190	3
GSM 850-Body Right Middle CH190.....	4
GSM 850-Body Left Middle CH190	5
PCS1900-Body Up Middle CH661	6
PCS1900-Body Down Middle CH661.....	7
PCS1900-Body Right Middle CH661	8
PCS1900-Body Left Middle CH661	9



Test Laboratory: Compliance Certification Services Inc.

January 9, 2013

GSM 850-Body Up Middle CH190

DUT: Bluetooth phone companion; Type: MokeBlue; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:7.99834

Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

GSM 850/GSM850 Body Up Middle CH190/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.826 W/kg


GSM 850/GSM850 Body Up Middle CH190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.457 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.855 mW/g

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.379 mW/g

Maximum value of SAR (measured) = 0.718 W/kg

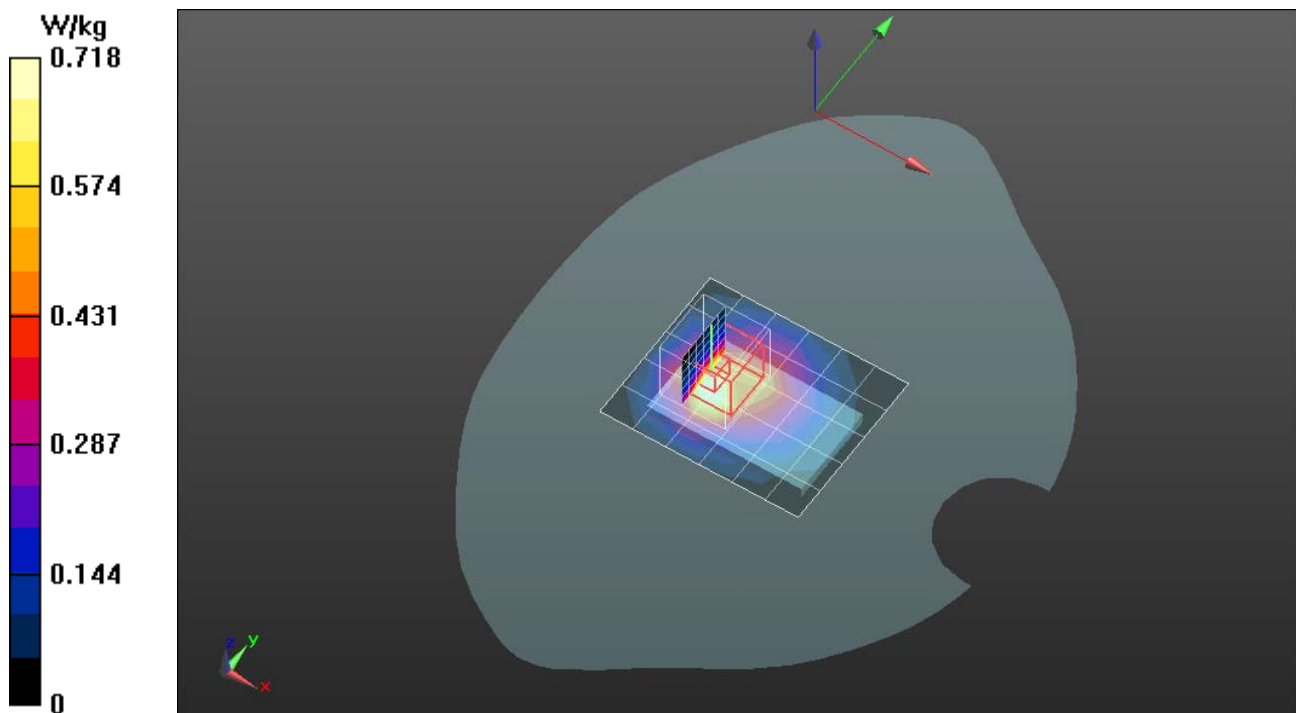



Test Laboratory: Compliance Certification Services Inc.

January 9, 2013

GSM 850-Body Down Middle CH190

DUT: Bluetooth phone companion; Type: MokeBlue; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:7.99834

Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.2(969); SEMCAD X 14.6.6(6824)

GSM 850/GSM850 Body Down Middle CH190/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.358 W/kg


GSM 850/GSM850 Body Down Middle CH190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.062 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.504 mW/g

SAR(1 g) = 0.282 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.366 W/kg

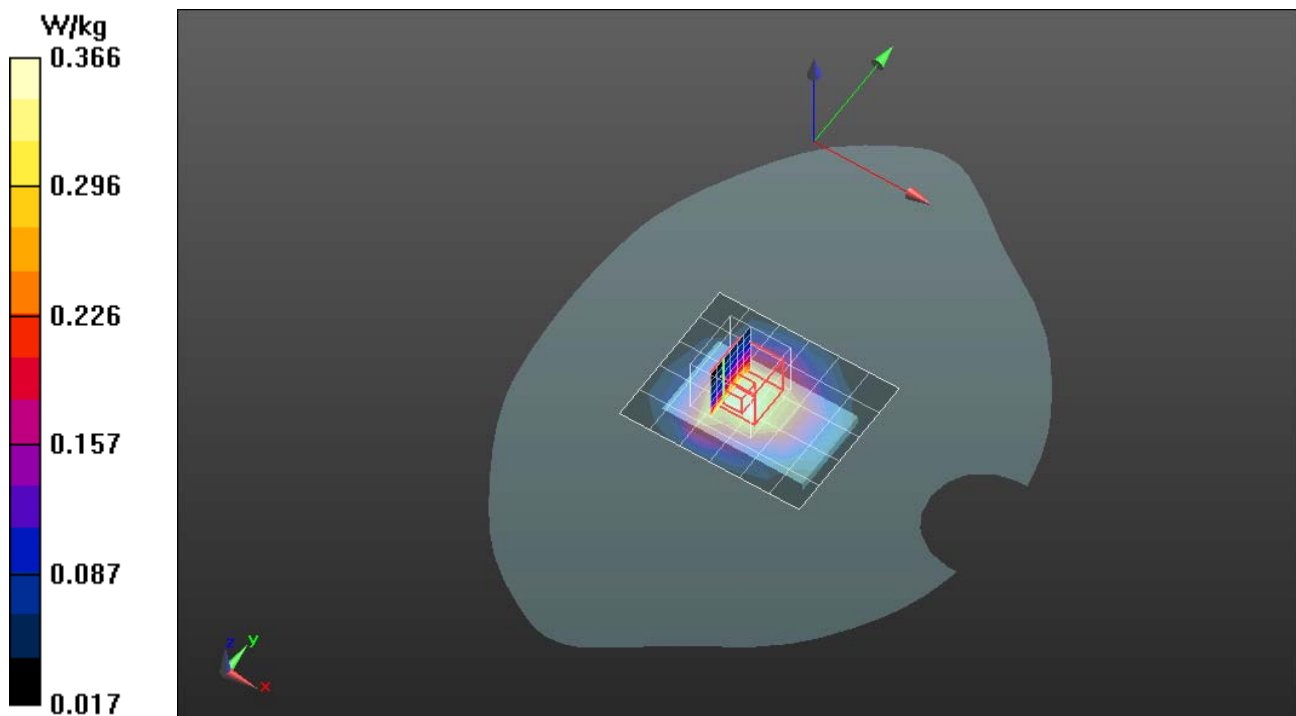



Test Laboratory: Compliance Certification Services Inc.

January 9, 2013

GSM 850-Body Right Middle CH190

DUT: Bluetooth phone companion; Type: MokeBlue; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:7.99834

Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

GSM 850/GSM850 Body Right Middle CH190/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.385 W/kg


GSM 850/GSM850 Body Right Middle CH190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.424 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.877 mW/g

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.349 W/kg

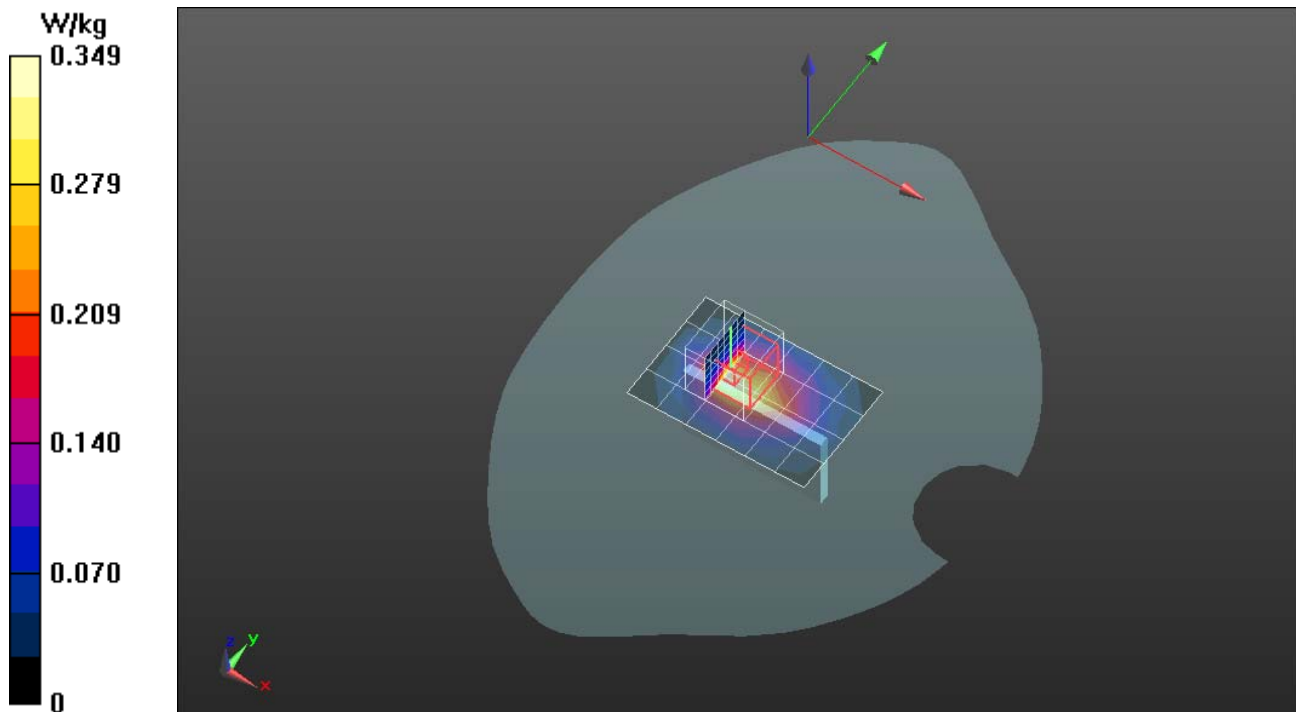



Test Laboratory: Compliance Certification Services Inc.

January 9, 2013

GSM 850-Body Left Middle CH190

DUT: Bluetooth phone companion; Type: MokeBlue; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:7.99834

Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

GSM 850/GSM850 Body Left Middle CH190/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.301 W/kg


GSM 850/GSM850 Body Left Middle CH190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.124 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.332 mW/g

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.272 W/kg

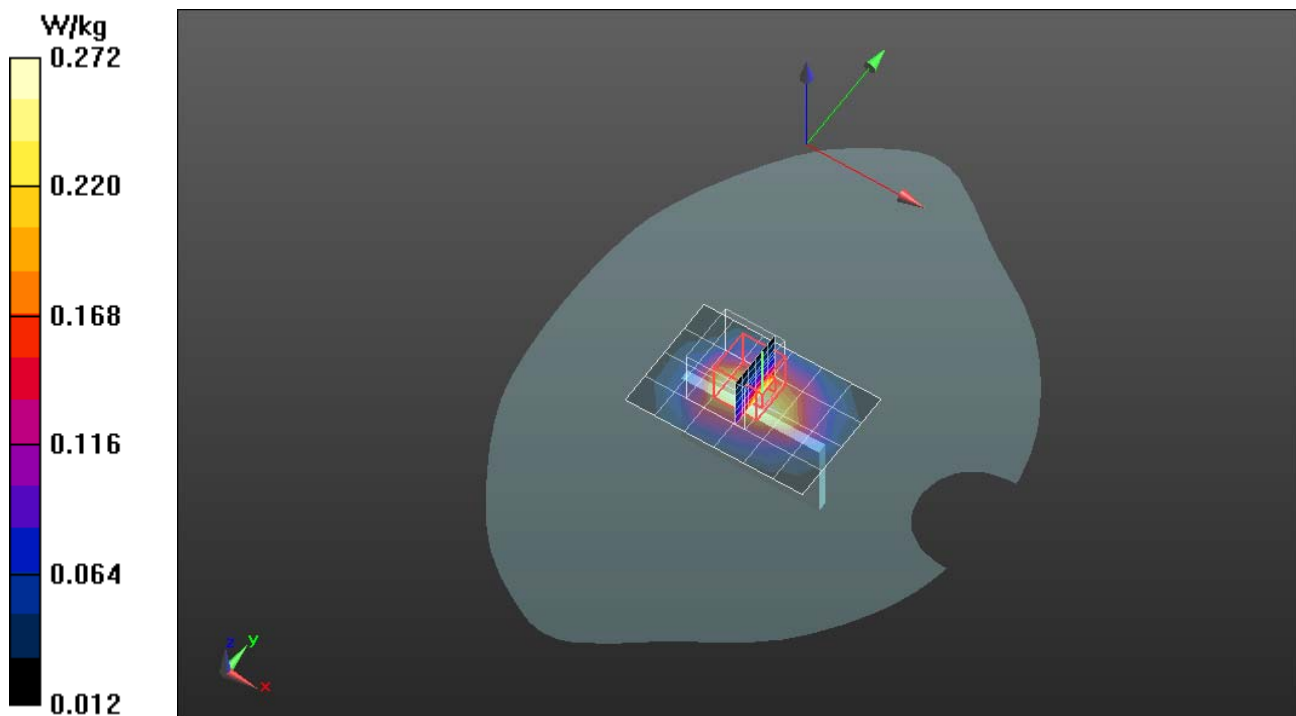



Test Laboratory: Compliance Certification Services Inc.

January 10, 2013

PCS1900-Body Up Middle CH661

DUT: Bluetooth phone companion; Type: MokeBlue; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

GSM1900/GSM1900 Body Up Middle CH661/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.643 W/kg


GSM1900/GSM1900 Body Up Middle CH661/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.884 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.965 mW/g

SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.749 W/kg

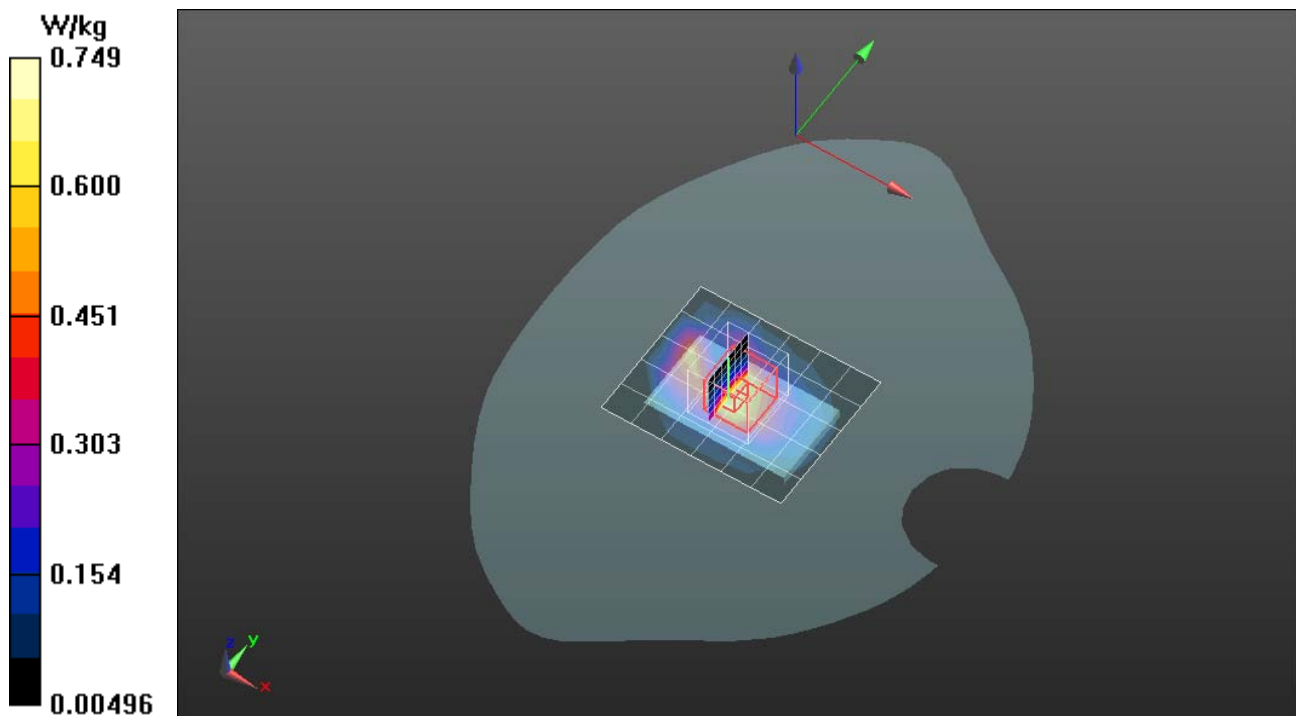



Test Laboratory: Compliance Certification Services Inc.

January 10, 2013

PCS1900-Body Down Middle CH661

DUT: Bluetooth phone companion; Type: MokeBlue; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.2(969); SEMCAD X 14.6.6(6824)

GSM1900/GSM1900 Body Down Middle CH661/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.253 W/kg


GSM1900/GSM1900 Body Down Middle CH661/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.990 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.373 mW/g

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.285 W/kg

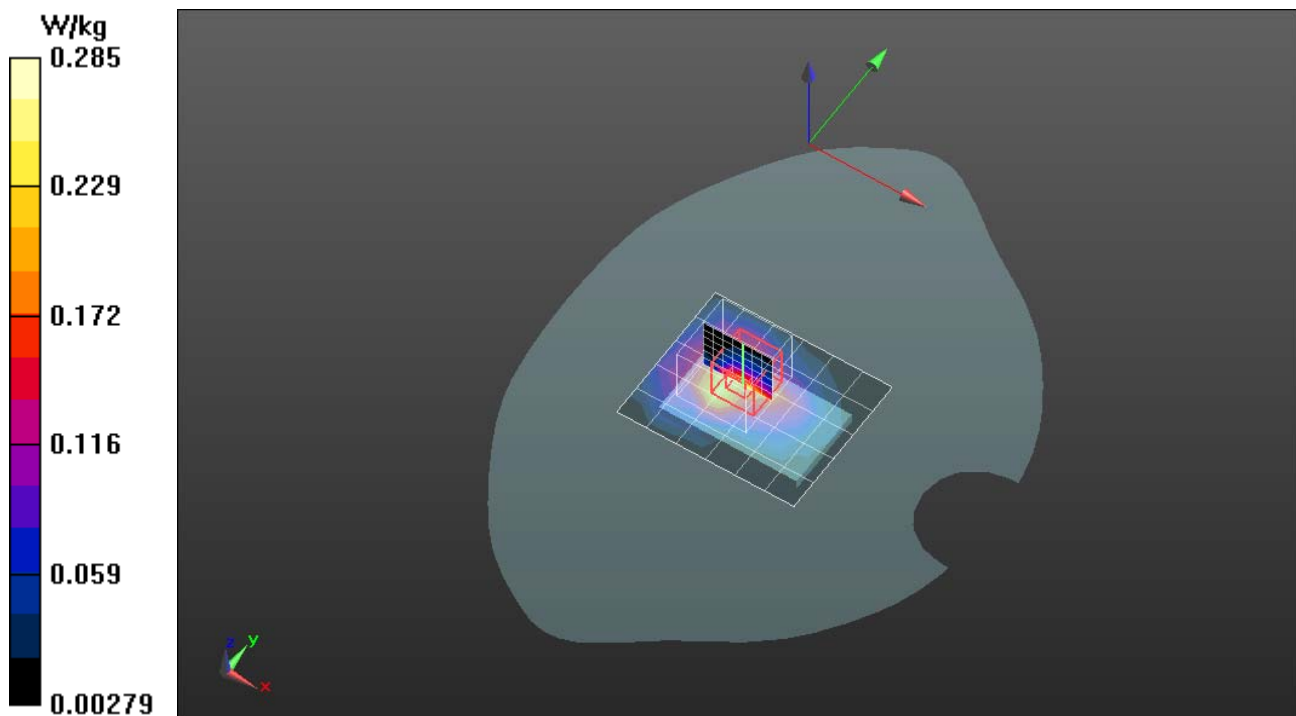



Test Laboratory: Compliance Certification Services Inc.

January 10, 2013

PCS1900-Body Right Middle CH661

DUT: Bluetooth phone companion; Type: MokeBlue; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

GSM1900/GSM1900 Body Right Middle CH661/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.197 W/kg


GSM1900/GSM1900 Body Right Middle CH661/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.431 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.239 mW/g

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.193 W/kg

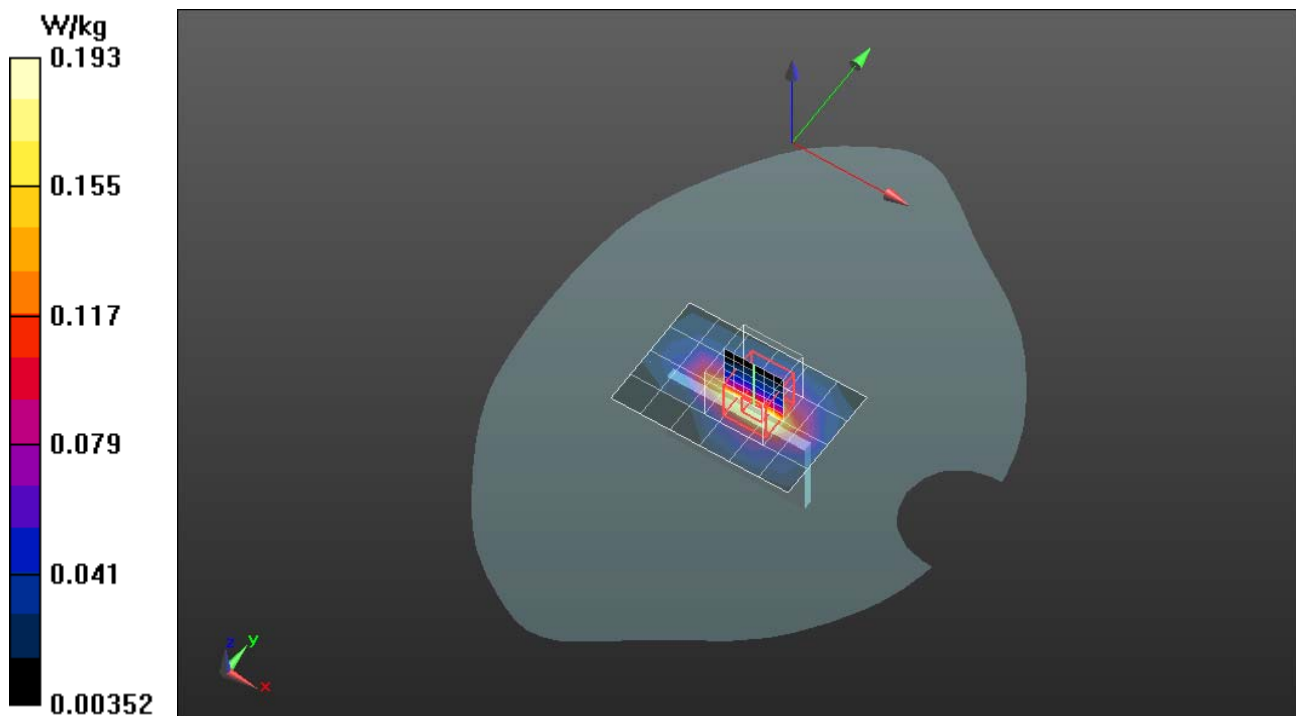



Test Laboratory: Compliance Certification Services Inc.

January 10, 2013

PCS1900-Body Left Middle CH661

DUT: Bluetooth phone companion; Type: MokeBlue; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

GSM1900/GSM1900 Body Left Middle CH661/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 W/kg

GSM1900/GSM1900 Body Left Middle CH661/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.756 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.175 mW/g

SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.127 W/kg

