



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 1 of 57 -

FCC RADIO TEST REPORT

FCC ID: RI5SBT5200

Product : SHARPER IMAGE 5.1CH WITH SOUND BAR

Trade Name : SHARPER IMAGE

Model Name : SBT5200

Addition Model : N/A

Prepared for

Dongguan Earson Audio Technology Co., Ltd
Chuangye Industrial Area, Guanqiaojiao Community, Wanjiang District,
Dongguan City, Guangdong, China

Prepared by

Shenzhen Asia Test Technology Co., Ltd.
7 / F, Xinwei Building, Gushu Village, Xixiang Town, Baoan District,
Shenzhen, China



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 2 of 57 -

TEST RESULT CERTIFICATION

Manufacture's Name..... : Dongguan Earson Audio Technology Co., Ltd

Address : Chuangye Industrial Area, Guanqiaojiao Community, Wanjiang District, Dongguan City, Guangdong, China

Product description

Product name : SHARPER IMAGE 5.1CH WITH SOUND BAR

Model and/or type reference : SBT5200

Rating(s) : DC 12V BY ADAPTER AC 120V/60HZ

Standards : FCC Part15.249

Test procedure ANSI C63.10-2013

This device described above has been tested by ATT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ATT, this document may be altered or revised by ATT, personal only, and shall be noted in the revision of the document.

Date of Test :

Date (s) of performance of tests : Jul. 02 2017 ~ Jul. 11 2017

Date of Issue : Jul.11 2017

Test Result..... : **Pass**

Reviewed by:

Seal-Chen

Approved by:

Jim



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	8
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . ANTENNA REQUIREMENT	11
3.1 STANDARD REQUIREMENT	11
3.2 EUT ANTENNA	11
3.3 CONDUCTED EMISSION MEASUREMENT	12
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.3.2 TEST PROCEDURE	13
3.3.3 DEVIATION FROM TEST STANDARD	13
3.3.4 TEST SETUP	13
3.2.5 TEST RESULT	14
3.4 RADIATED EMISSION MEASUREMENT	16
3.4.1 RADIATED EMISSION LIMITS	16
3.4.2 TEST PROCEDURE	17
3.4.3 DEVIATION FROM TEST STANDARD	17
3.4.4 TEST SETUP	18
3.4.5 TEST RESULTS (BELOW 30MHZ)	21
3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	22
3.4.7 TEST RESULTS (ABOVE 1000 MHZ)	24
4 . BANDWIDTH TEST	30
4.1 TEST PROCEDURE	30
4.2 DEVIATION FROM STANDARD	30
4.3 TEST SETUP	30
4.4 TEST RESULTS	31
5 . EUT TEST PHOTO	42
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 4 of 57 -

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Test	Test Requirement	Standard Paragraph	Result
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9.2	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.1	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS
Antenna Requirement	FCC PART 15 C section 15.203	FCC PART 15 C section 15.203	PASS



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 5 of 57 -

1.1 TEST FACILITY

The test facility is recognized, certified or accredited by the following organizations:

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 348715

Shenzhen Asia Test Technology Co.,Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 6 of 57 -

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT Name:	SHARPER IMAGE 5.1CH WITH SOUND BAR
Model No.:	SBT5200
Addition Model:	N/A
Model Differences:	N/A
Operation frequency:	2402 MHz to 2480 MHz
Bluetooth Version	BT 2.1+EDR
Number of channel:	79 channels
Modulation Type and Antenna Type:	GFSK, $\pi/4$ DQPSK, 8DPSK PCB antenna
H/W No.:	V3.0
S/W No.:	V4.2
Antenna Gain:	0 dBi
Brand Name:	SHARPER IMAGE
Derivative model No.:	N/A
Power Supply Range:	DC 12V by adapter AC 120V/60Hz
Adapter:	M/N:SW018S120150U1 INPUT:100-240V~, 50/60Hz, 0.5a OUTPUT:12Vdc, 1.5A
Power Cord:	N/A
Signal Cable:	N/A

Description of Channel:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	39	2440	77	2478
02	2403	40	2441	78	2479
03	2404	41	2442	79	2480
04	...	42	...		
05	...	43	...		
06	...	44	...		



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH1
Mode 2	CH39
Mode 3	CH79
Mode 4	Link

For Conducted Emission	
Final Test Mode	Description
Mode 4	Link

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH1
Mode 2	CH39
Mode 3	CH79
Mode 4	Link

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels. The EUT use full-charge battery.
- (2) Measurements are performed according to C63.10.
- (3) The relevant RF Conducted Measurement is performed by a temporary antenna connector, please refer to the Equipment List for the detail
- (4) Test performed on all mode, only records worse cases in the test report.
- (5) The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitter signals.

Example:

Frequency used: 2402 - 2480 MHz

79 Channels (Ch 1 - Ch 79)

Hopping Sequence in Data Mode

55,48,26,33,52,35,50,65,54,67,15,08,64,49,66,53,22,25,63,04,41,05,24,43,73,07,75,28,56,37,60,39,58,69,16,40,21,44,23,42,13,17,46,02,51,03,11,29,77,47,62,27,71,10,68,32,57,12,59,72,30,76,31,18,74,61,14,70,36,06,09,45,19,20,34,38,78,00,01



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 8 of 57 -

2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel .

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	Test program: CW6611E_V4.2		
Frequency	2402 MHz	2440 MHz	2480 MHz
Parameters	Default	Default	Default

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	SHARPER IMAGE 5.1CH WITH SOUND BAR	N/A	SBT5200	N/A	EUT
E-2	adapter	N/A	SW018S120150U1	N/A	

Item	Shielded Type	Ferrite Core	Length	Note



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 9 of 57 -

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 10 of 57 -

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Equipment No.	Instrument	Manufacturer	Model Name	Serial Number	Specification	Cal. Data
1	Semi-anechoic chamber	Changzhou Chengyu	EC3088	N/A	9*6*6m	10/25/2016
2	Loop Antenna	TESEQ	HLA6120	35779	9kHz-30MHz	06/05/2017
3	Broadband antenna	R&S	VULB 9160	VULB91 60-516	30MHz-1500 MHz	10/25/2016
4	Horn antenna	R&S	BBHA 9120D	10087	1GHz-18GH z	06/05/2017
5	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	15GHz-26.5GH z	06/05/2017
6	Test receiver	R&S	ESCI	101686	9KHz-3GHz	10/25/2016
7	EMI Measuring Receiver	R&S	ESR	101660	9KHz-40GHz	10/25/2016
8	Multi-device controller	MF	MF-7868	MF78680 8762	N/A	10/25/2016
9	Amplifier	EM	EM-30180	060538	1GHz-18GH z	10/25/2016
10	Amplifier	Schwarzbeck	BBV 9719	BBV 9719-663	18GHz-26.5GH z	06/05/2017
11	Spectrum Analyzer	agilent	E4440B	US44300368	1GHz-26.5GH z	06/05/2017
12	Test receiver	R&S	ESCI	101689	9KHz-3GHz	10/25/2016
13	LISN	R&S	NSLK81 26	8126466	9k-30MHz	10/25/2016
14	LISN	Narda	L2-16B	5589756	9k-30MHz	10/25/2016
15	Radiated Cable 1#	FUJIKURA	5D-2W	01	30MHz-1GHz	10/25/2016
16	Radiated Cable 2#	FUJIKURA	10D2W	02	1GHz -25GHz	10/25/2016
17	Conducted Cable 1#	FUJIKURA	1D-2W	01	9KHz-30MHz	10/25/2016



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 11 of 57 -

18	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	10/25/2016
Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list. The Cal.Interval was one year						

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is PCB Antenna with 0dBi gain. It comply with the standard requirement.



3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	(dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

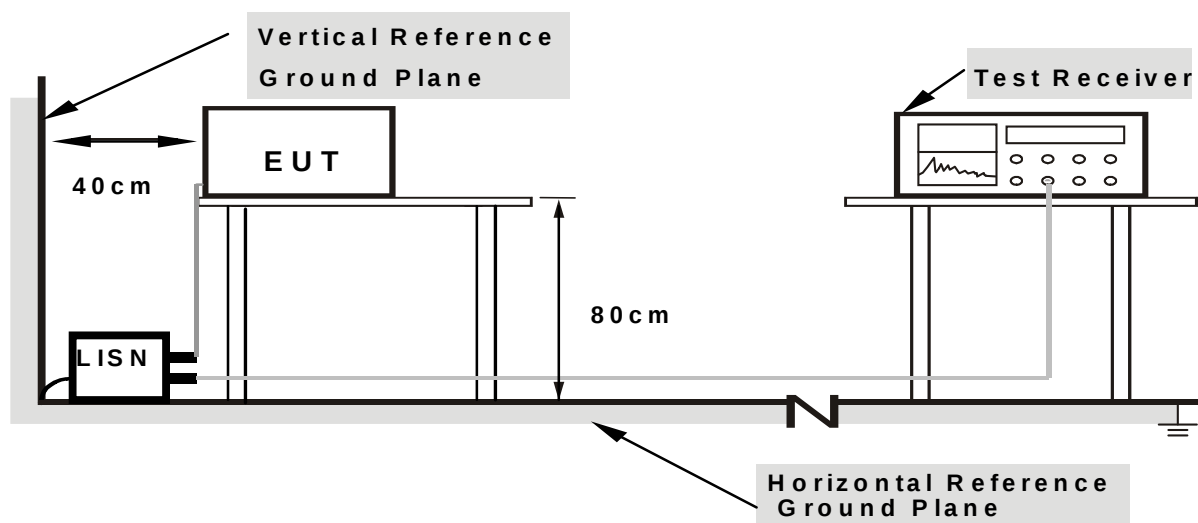

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F

- Page 14 of 57 -


3.2.5 TEST RESULT

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name. :	SBT5200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2017-07-09
Test Mode :	4	Phase :	L
Test Voltage :	DC 12V by adapter AC 120V/60Hz		

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1767	38.82	11.43	50.25	64.63	-14.38	QP	
2		0.1860	26.85	11.31	38.16	54.21	-16.05	AVG	
3		0.7220	30.71	9.94	40.65	56.00	-15.35	QP	
4		1.0500	23.83	9.90	33.73	46.00	-12.27	AVG	
5		3.3860	36.08	9.98	46.06	56.00	-9.94	QP	
6	*	3.4420	26.56	9.98	36.54	46.00	-9.46	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. N/A means All Data have pass Limit

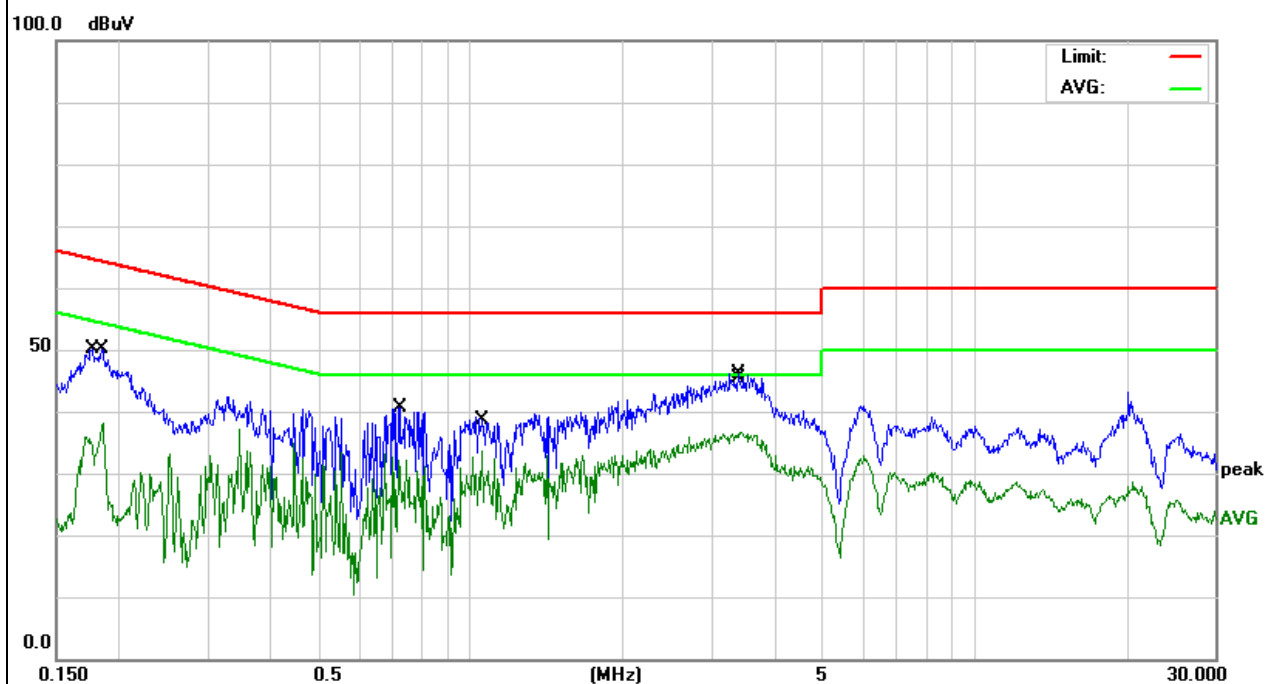



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 15 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name. :	SBT5200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2017-07-09
Test Mode :	4	Phase :	N
Test Voltage :	DC 12V by adapter AC 120V/60Hz		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1819	34.07	11.36	45.43	54.39	-8.96	AVG	
2		0.1844	44.32	11.33	55.65	64.28	-8.63	QP	
3		0.7260	30.82	9.94	40.76	56.00	-15.24	QP	
4		0.9620	23.12	9.90	33.02	46.00	-12.98	AVG	
5		3.3700	35.76	9.98	45.74	56.00	-10.26	QP	
6	*	3.4700	27.40	9.98	37.38	46.00	-8.62	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. N/A means All Data have pass Limit

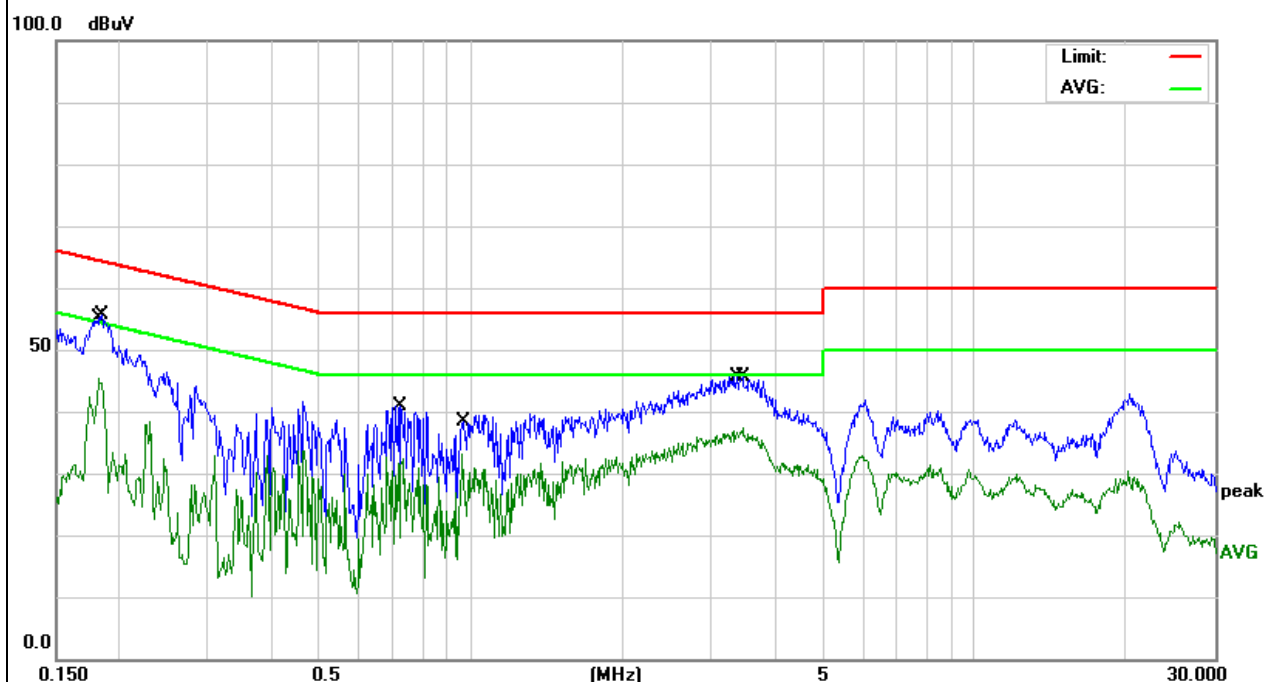



3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
2400 - 2483.5	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.4.2 TEST PROCEDURE

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.


3.4.3 DEVIATION FROM TEST STANDARD

No deviation




3.4.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

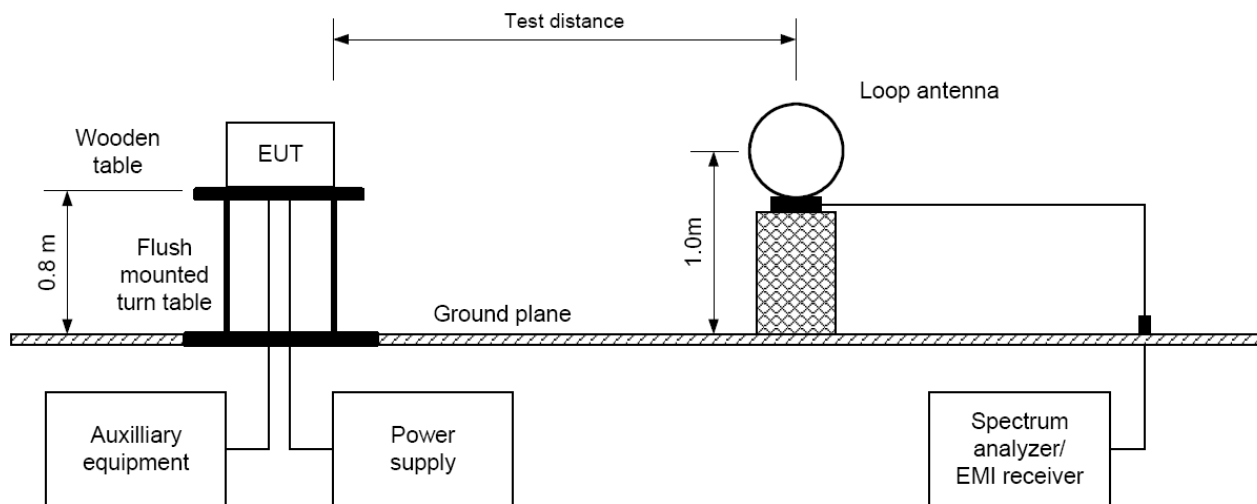

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

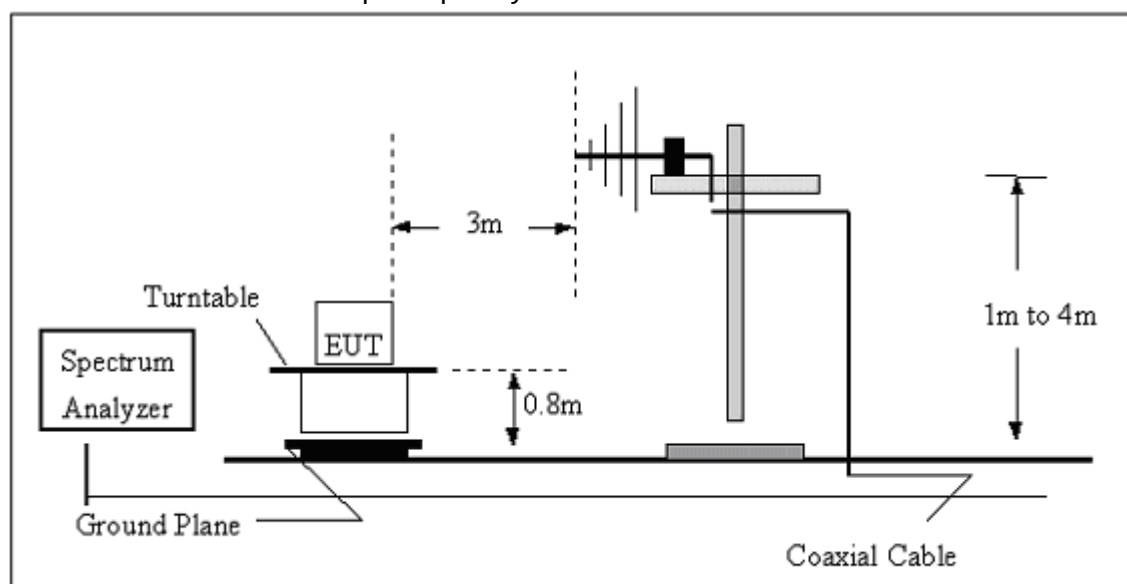




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F

- Page 19 of 57 -

(C) Radiated Emission Test-Up Frequency Above 1GHz

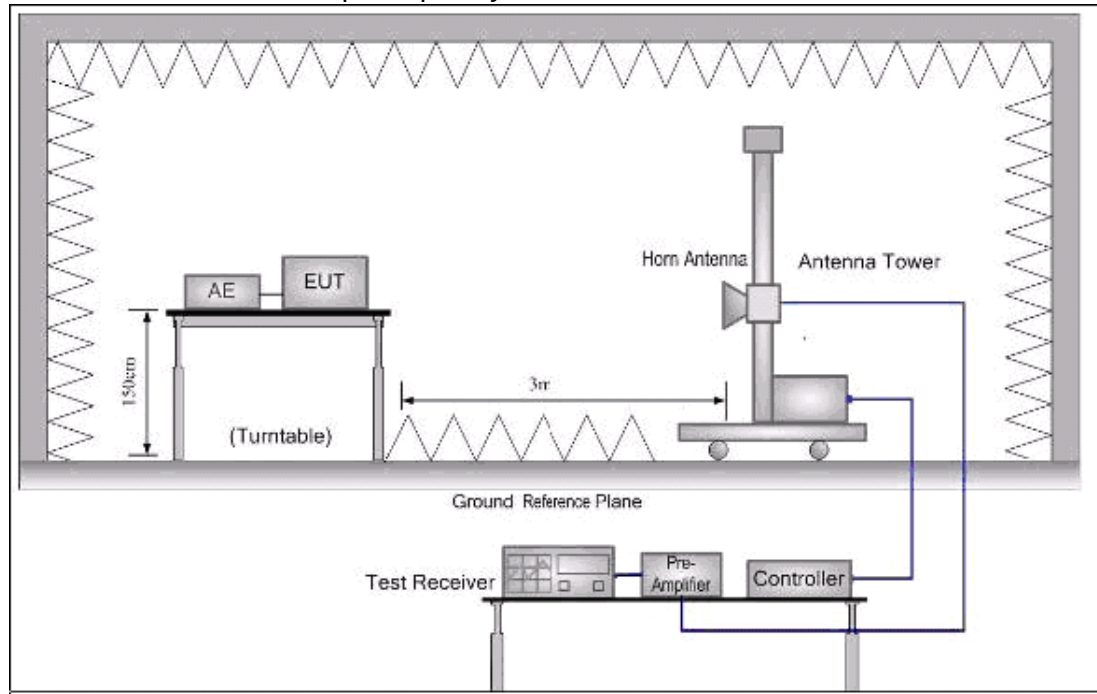



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 20 of 57 -

Field Strength of Fundamental

Frequency (MHz)	Reading Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	amplifier factor (dB)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Detector type	Limits PK/AV (dBuV/m)	Margin (dB)
2402	92.27	25.87	6.56	35.1	89.6	H	Peak	114	-24.4
2402	83.54	25.87	6.56	35.1	80.87	H	AVG	94	-13.13
2440	91.14	25.93	6.64	35.37	88.34	H	Peak	114	-25.66
2440	82.09	25.93	6.64	35.37	79.29	H	AVG	94	-14.71
2480	93.37	26.05	6.7	35.42	90.7	H	Peak	114	-23.3
2480	82.66	26.05	6.7	35.42	79.99	H	AVG	94	-14.01
2402	92.15	25.87	6.56	35.1	89.48	V	Peak	114	-24.52
2402	81.36	25.87	6.56	35.1	78.69	V	AVG	94	-15.31
2440	91.78	25.93	6.64	35.37	88.98	V	Peak	114	-25.02
2440	82.56	25.93	6.64	35.37	79.76	V	AVG	94	-14.24
2480	93.67	26.05	6.7	35.42	91	V	Peak	114	-23
2480	83.27	26.05	6.7	35.42	80.6	V	AVG	94	-13.4

For the band-edge test, both hopping-on mode and hopping-off mode had been pre-tested, and only the worst case was recorded in the test report.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 21 of 57 -

3.4.5 TEST RESULTS (BELOW 30MHz)

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name. :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 22 of 57 -


3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX-CH1	Polarization :	Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.0667	50.69	-17.21	33.48	40.00	-6.52	QP		
2		45.3755	47.98	-17.86	30.12	40.00	-9.88	QP		
3		89.9047	52.20	-18.60	33.60	43.50	-9.90	QP		
4		130.8369	51.33	-14.90	36.43	43.50	-7.07	QP		
5		271.3246	40.65	-12.38	28.27	46.00	-17.73	QP		
6		801.7863	30.88	3.30	34.18	46.00	-11.82	QP		

Remark:

Factor = Antenna Factor + Cable Loss.

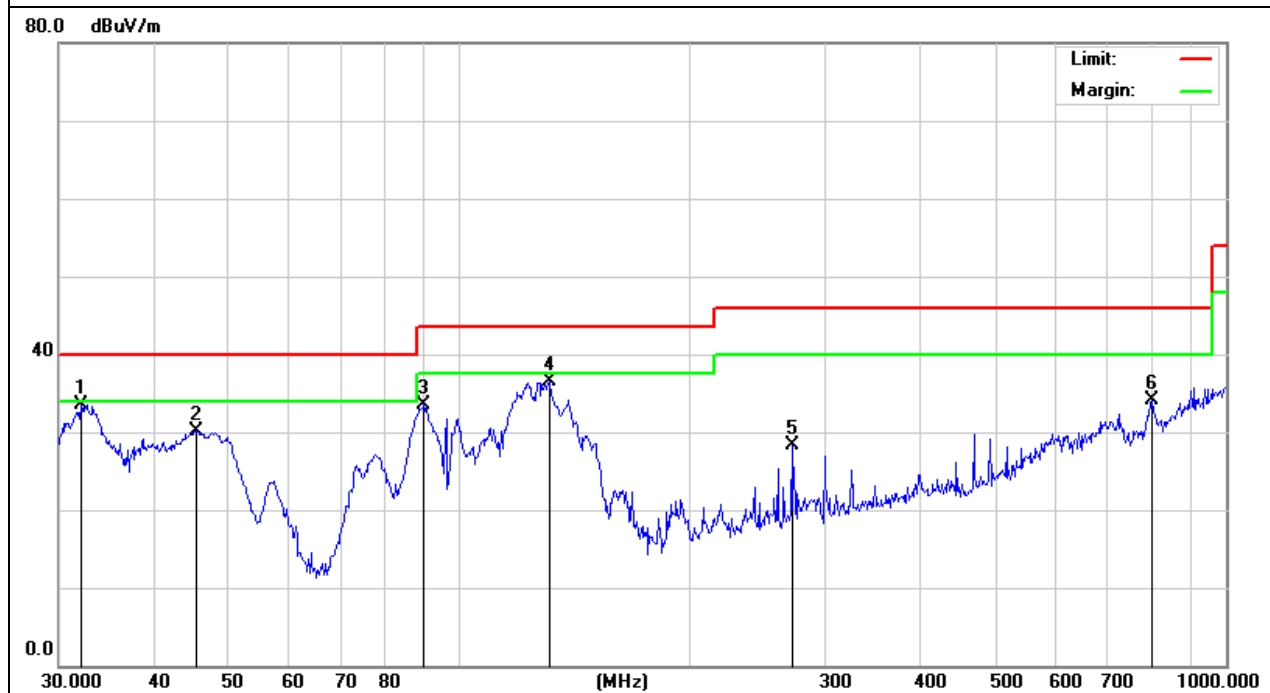

Note: test performed on all mode, "BT 2402" mode is the worst mode and has been reported.



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 23 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX-CH1	Polarization :	Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		47.8260	40.02	-14.23	25.79	40.00	-14.21	QP		
2		71.8320	50.80	-18.96	31.84	40.00	-8.16	QP		
3		89.9047	53.59	-16.82	36.77	43.50	-6.73	QP		
4	*	96.0986	55.89	-16.43	39.46	43.50	-4.04	QP		
5	!	121.1231	52.71	-14.96	37.75	43.50	-5.75	QP		
6		141.3298	50.52	-14.99	35.53	43.50	-7.97	QP		

Remark:

Factor = Antenna Factor + Cable Loss.

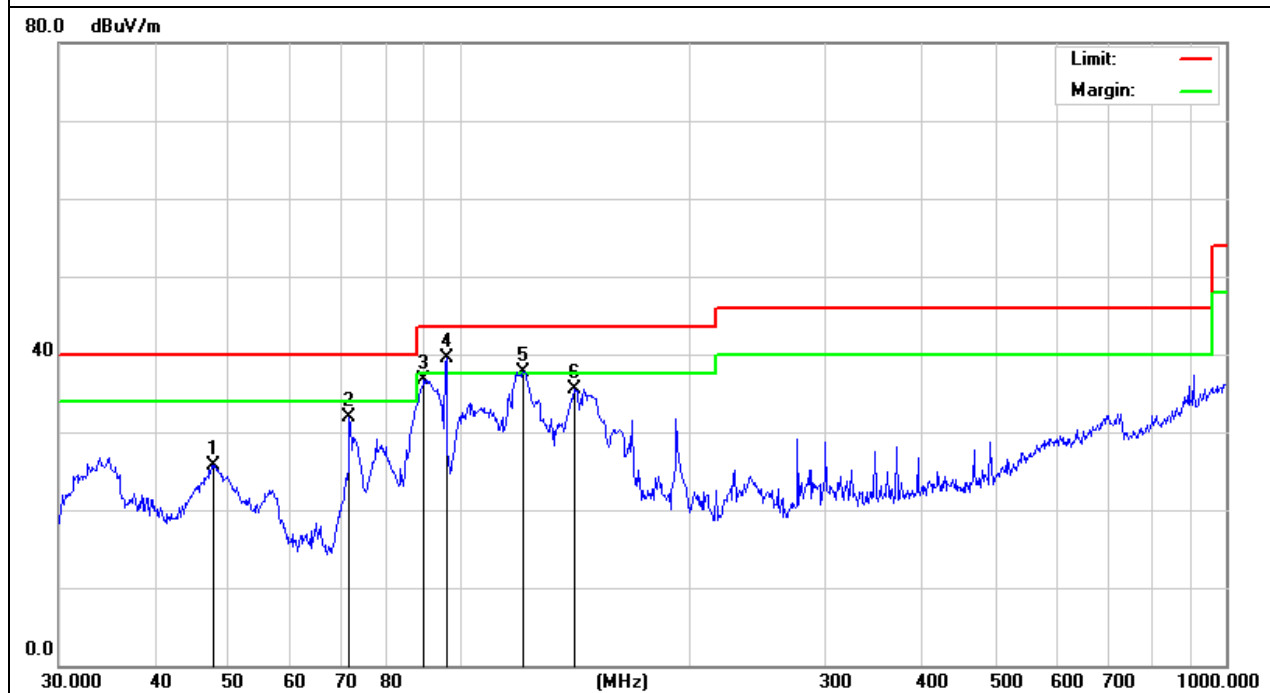

Note: test perform on all mode, "BT 2402" mode is the worst mode and has been reported.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 24 of 57 -

3.4.7 TEST RESULTS (ABOVE 1000 MHZ)

Note: test performed on BDR&EDR, the worst mode and has been reported.


GFSK

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX-CH1	Polarization :	Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4804.000	38.38	8.12	46.50	74.00	-27.50	QP		
2		4804.000	25.92	8.12	34.04	54.00	-19.96	AVG		
3		7206.000	36.81	11.59	48.40	74.00	-25.60	QP		
4	*	7206.000	25.43	11.59	37.02	54.00	-16.98	AVG		
5		9608.000	29.61	17.49	47.10	74.00	-26.90	QP		
6		9608.000	18.56	17.49	36.05	54.00	-17.95	AVG		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

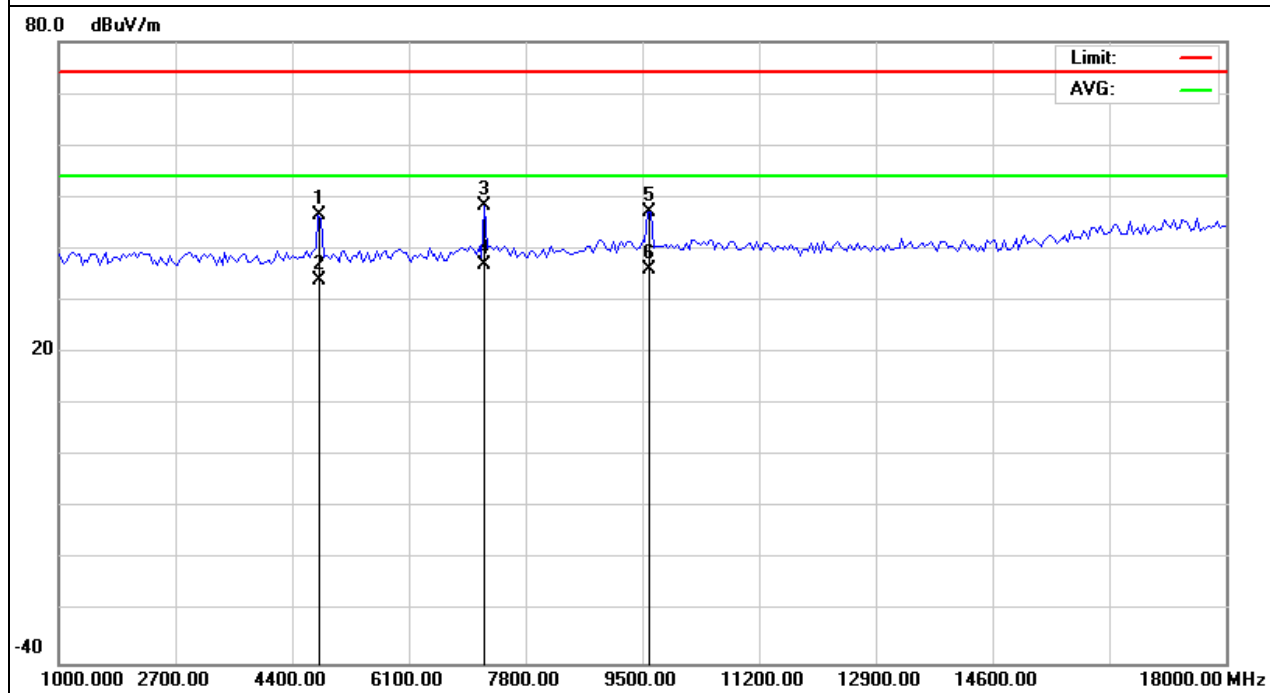



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 25 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX-CH1	Polarization :	Vertical

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4804.000	37.08	8.12	45.20	74.00	-28.80	QP			
2		4804.000	24.83	8.12	32.95	54.00	-21.05	AVG			
3		7206.000	35.11	11.59	46.70	74.00	-27.30	QP			
4		7206.000	24.46	11.59	36.05	54.00	-17.95	AVG			
5		9608.000	30.21	17.49	47.70	74.00	-26.30	QP			
6	*	9608.000	18.97	17.49	36.46	54.00	-17.54	AVG			

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

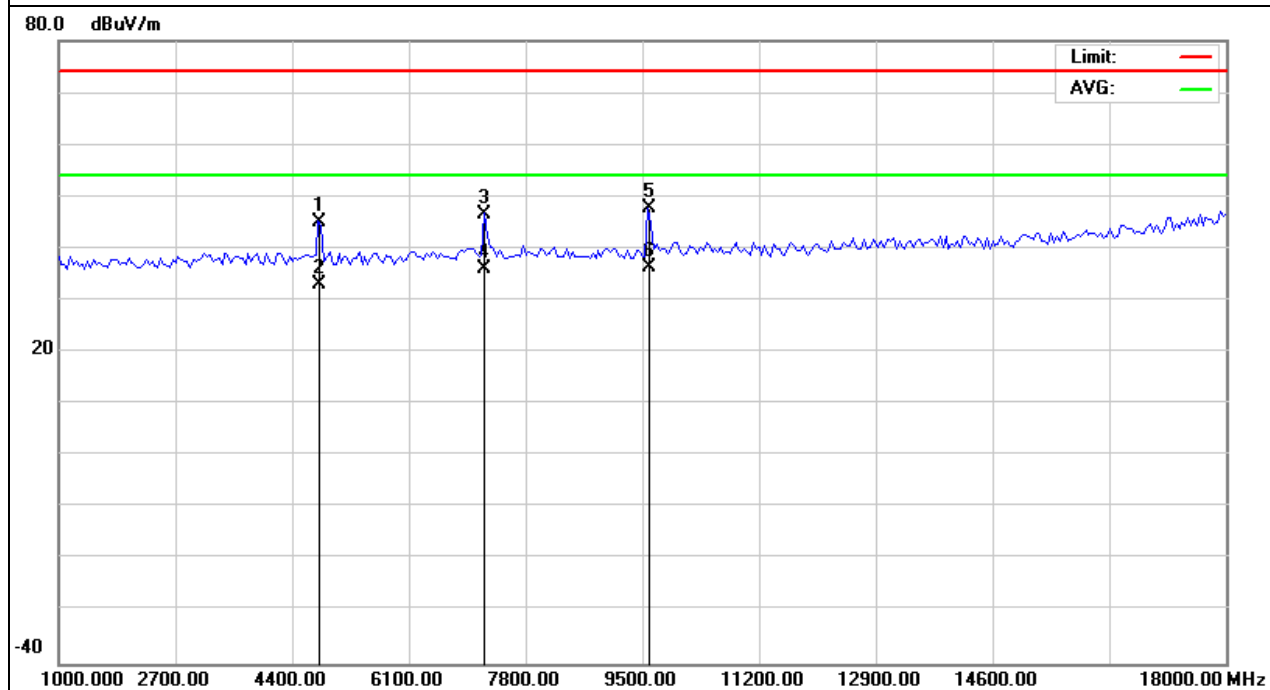

For the band-edge test, both hopping-on mode and hopping-off mode had been pre-tested, and only the worst case was recorded in the test report.



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 26 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX-CH40	Polarization :	Horizontal

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4880.000	37.93	8.17	46.10	74.00	-27.90	QP			
2		4880.000	25.17	8.17	33.34	54.00	-20.66	AVG			
3		7320.000	34.20	12.10	46.30	74.00	-27.70	QP			
4		7320.000	22.74	12.10	34.84	54.00	-19.16	AVG			
5		9760.000	31.74	18.26	50.00	74.00	-24.00	QP			
6	*	9760.000	18.72	18.26	36.98	54.00	-17.02	AVG			

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

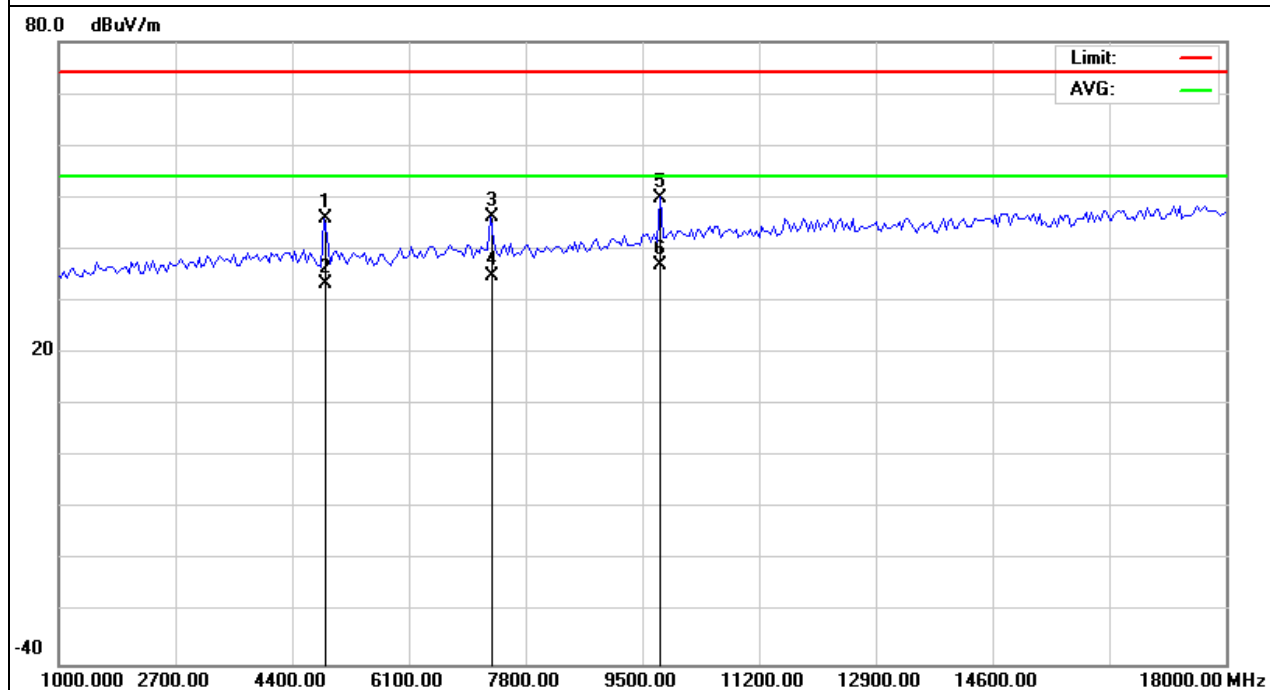



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 27 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX-CH40	Polarization :	Vertical

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4880.000	38.53	8.17	46.70	74.00	-27.30	QP			
2		4880.000	25.77	8.17	33.94	54.00	-20.06	AVG			
3		7320.000	34.90	12.10	47.00	74.00	-27.00	QP			
4	*	7320.000	22.89	12.10	34.99	54.00	-19.01	AVG			
5		9760.000	28.64	18.26	46.90	74.00	-27.10	QP			
6		9760.000	15.90	18.26	34.16	54.00	-19.84	AVG			

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

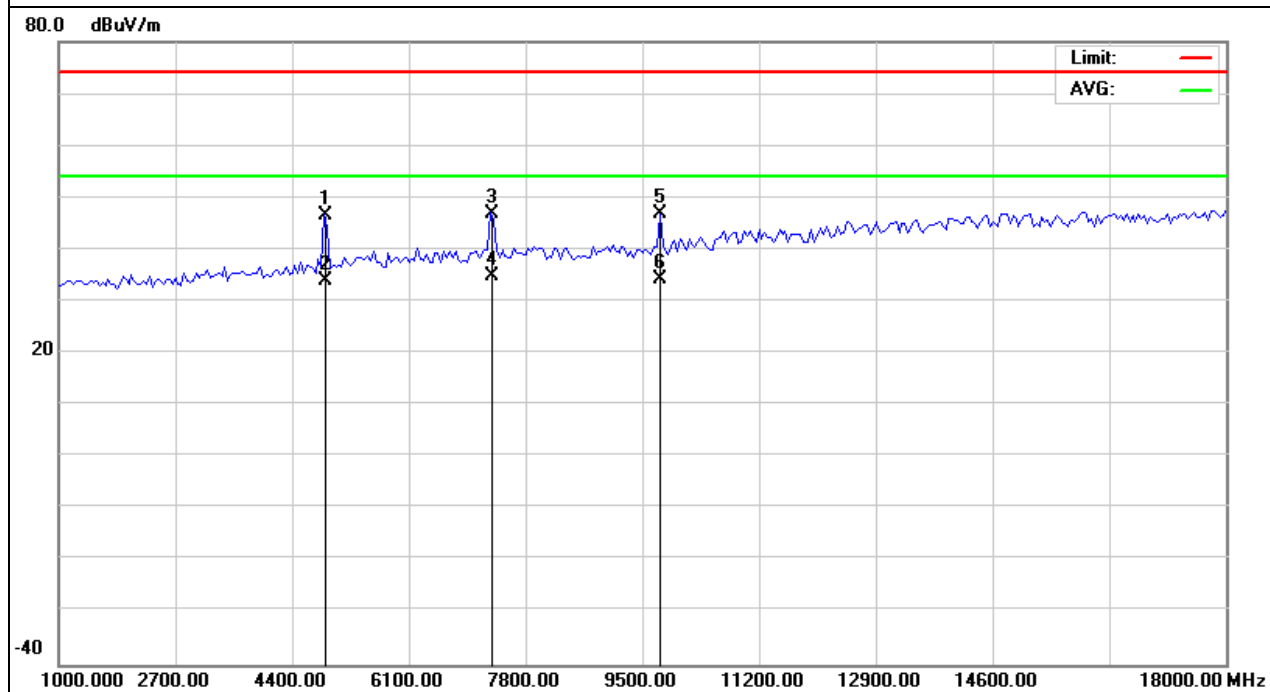



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 28 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX-CH79	Polarization :	Horizontal

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4960.000	33.29	8.21	41.50	74.00	-32.50	QP			
2		4960.000	22.57	8.21	30.78	54.00	-23.22	AVG			
3		7440.000	31.65	12.65	44.30	74.00	-29.70	QP			
4		7440.000	19.31	12.65	31.96	54.00	-22.04	AVG			
5		9920.000	27.12	19.08	46.20	74.00	-27.80	QP			
6	*	9920.000	15.78	19.08	34.86	54.00	-19.14	AVG			

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

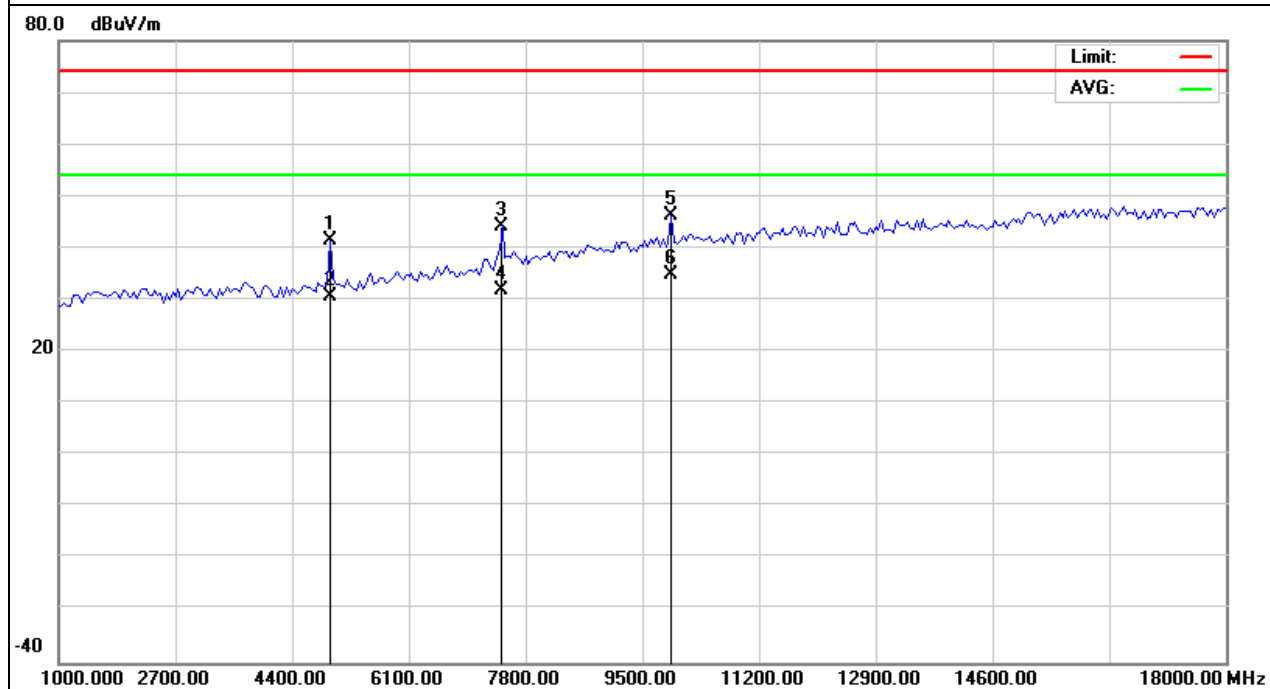



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 29 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	TX-CH79	Polarization :	Vertical

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4960.000	36.59	8.21	44.80	74.00	-29.20	QP			
2		4960.000	24.54	8.21	32.75	54.00	-21.25	AVG			
3		7440.000	34.25	12.65	46.90	74.00	-27.10	QP			
4	*	7440.000	22.40	12.65	35.05	54.00	-18.95	AVG			
5		9920.000	27.32	19.08	46.40	74.00	-27.60	QP			
6		9920.000	15.18	19.08	34.26	54.00	-19.74	AVG			

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

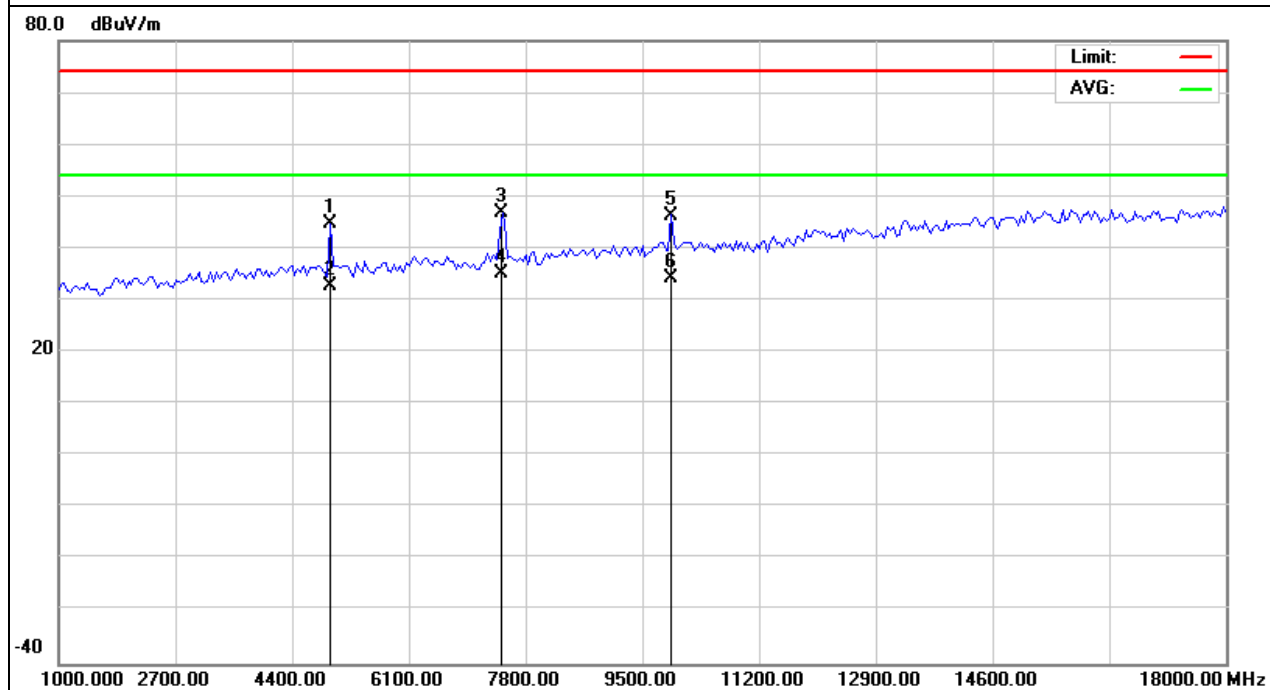

For the band-edge test, both hopping-on mode and hopping-off mode had been pre-tested, and only the worst case was recorded in the test report.



4. BANDWIDTH TEST


4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW $\geq$ RBW, Sweep time = Auto.

4.2 DEVIATION FROM STANDARD

No deviation.

4.3 TEST SETUP

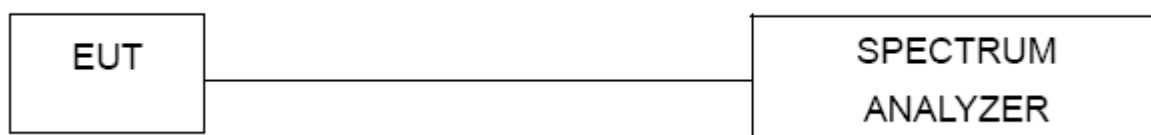




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 31 of 57 -

4.4 TEST RESULTS

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	GFSK CH01 / CH40 /CH79		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1.0958	PASS
2441 MHz	1.0914	PASS
2480 MHz	1.0914	PASS

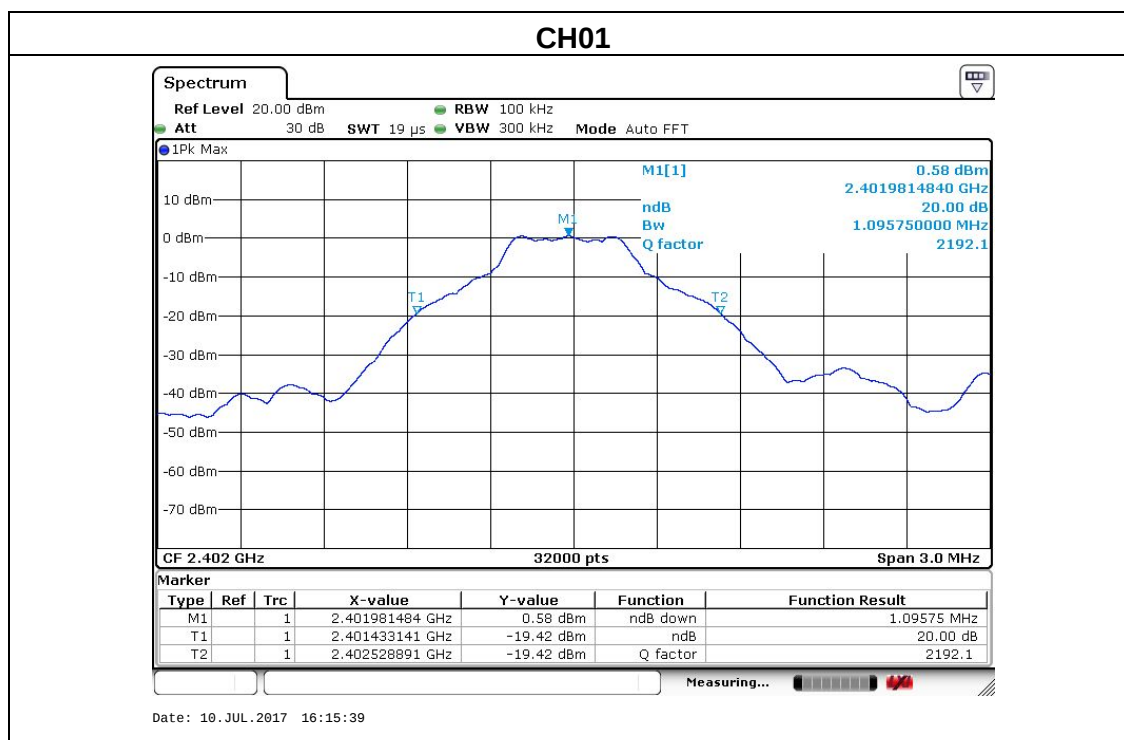




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F

- Page 32 of 57 -

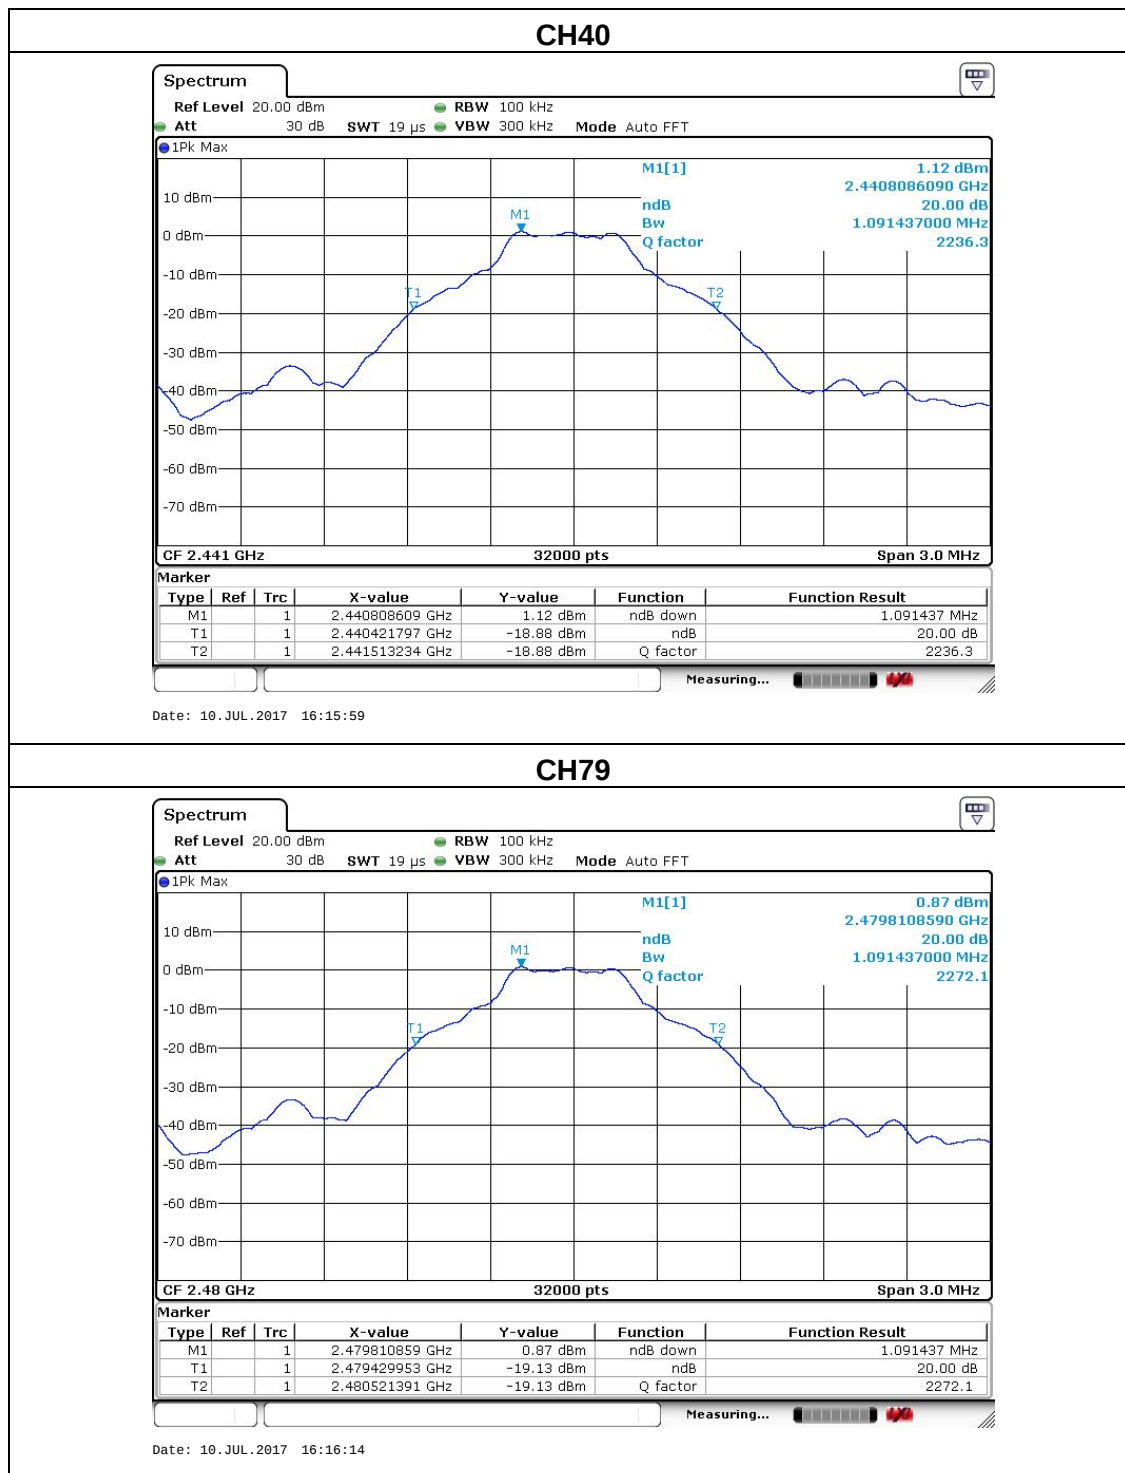




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 33 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	8DPSK CH01 / CH40 /CH79		


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1.3494	PASS
2441 MHz	1.3405	PASS
2480 MHz	1.3422	PASS

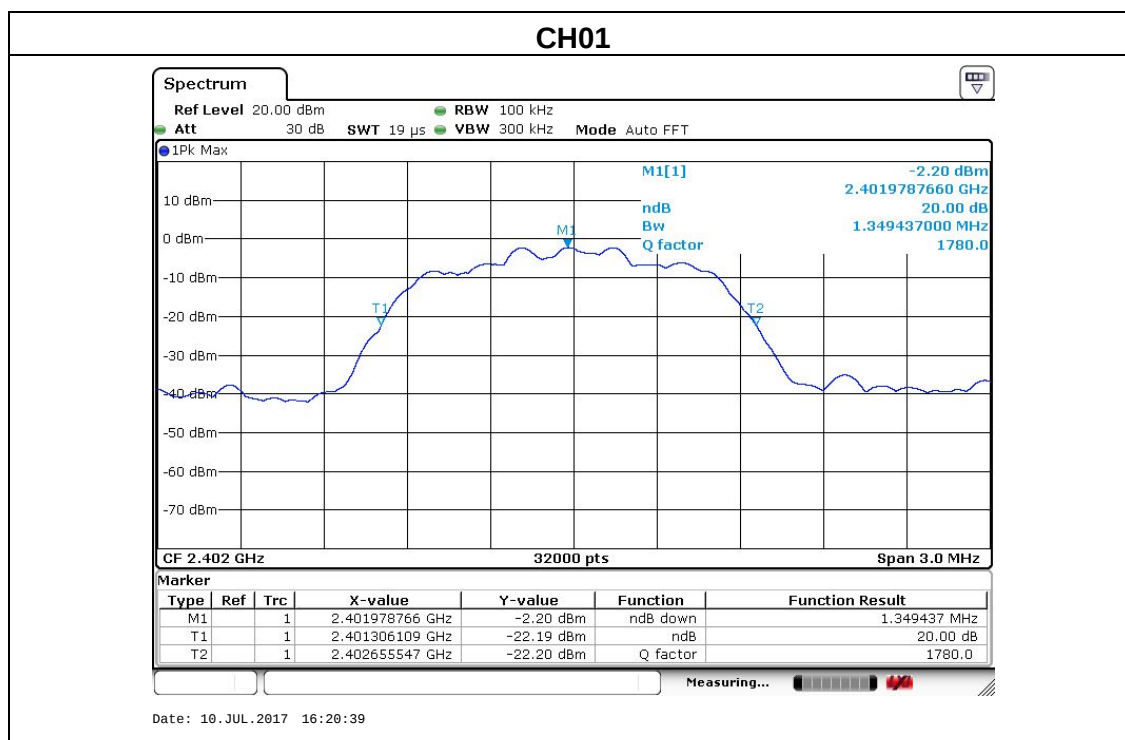



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 34 of 57 -

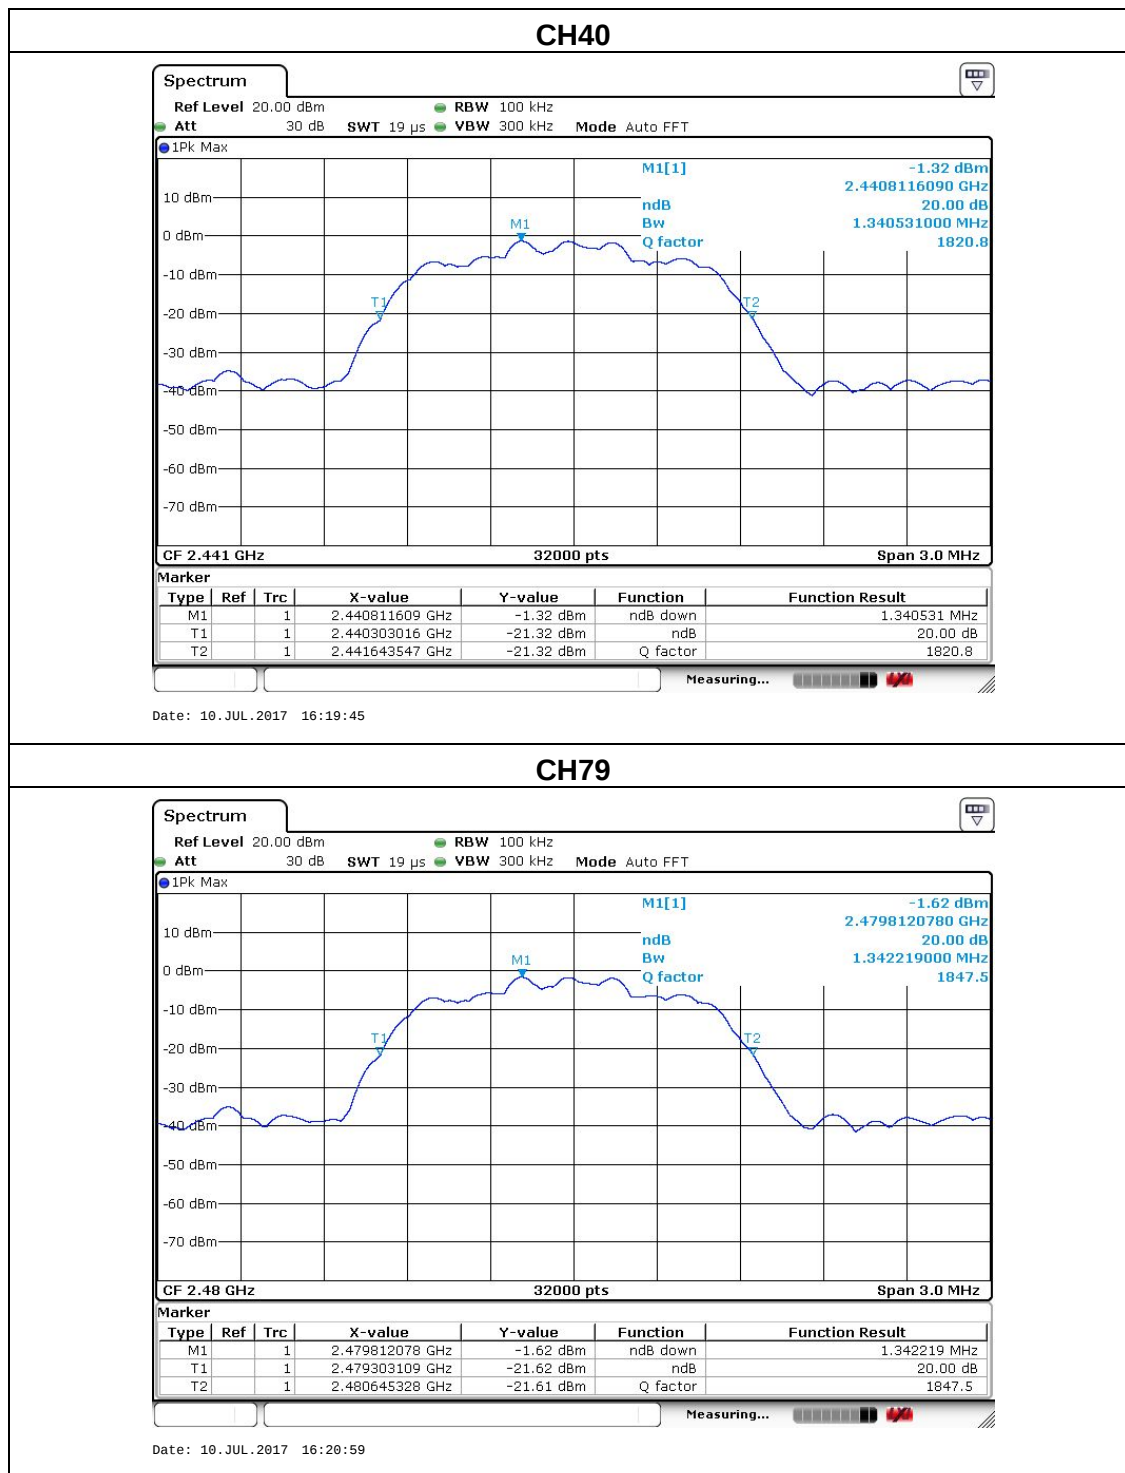



5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

5.1 DEVIATION FROM STANDARD

No deviation.

5.2 TEST SETUP

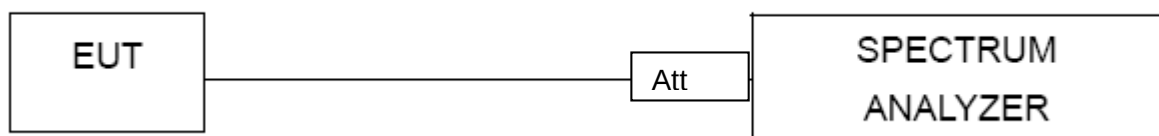

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 36 of 57 -

5.4 TEST RESULTS

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	CH01 / CH39 /CH79		

BDR

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
2390	49.75	1.05	50.8	74	-23.2	peak	Vertical
2390	48.51	1.05	49.56	74	-24.44	peak	Horizontal
2483.5	50.06	1.29	51.35	74	-22.65	peak	Vertical
2483.5	49.22	1.29	50.51	74	-23.49	peak	Horizontal

Note: When PK value is lower than the Average value limit, average not record.

For the band-edge test, both hopping-on mode and hopping-off mode had been pre-tested, and only the worst case was recorded in the test report.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 37 of 57 -

EUT :	SHARPER IMAGE 5.1CH WITH SOUND BAR	Model Name :	SBT5200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V BY ADAPTER AC 120V/60HZ
Test Mode :	CH01 / CH39 /CH79		

EDR

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
2390	48.75	1.05	49.8	74	-24.2	peak	Vertical
2390	48.69	1.05	49.74	74	-24.26	peak	Horizontal
2483.5	49.27	1.29	50.56	74	-23.44	peak	Vertical
2483.5	48.96	1.29	50.25	74	-23.75	peak	Horizontal

Note: When PK value is lower than the Average value limit, average not record.

For the band-edge test, both hopping-on mode and hopping-off mode had been pre-tested, and only the worst case was recorded in the test report.





Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 38 of 57 -

BDR MODE

Band Edge, Left Side

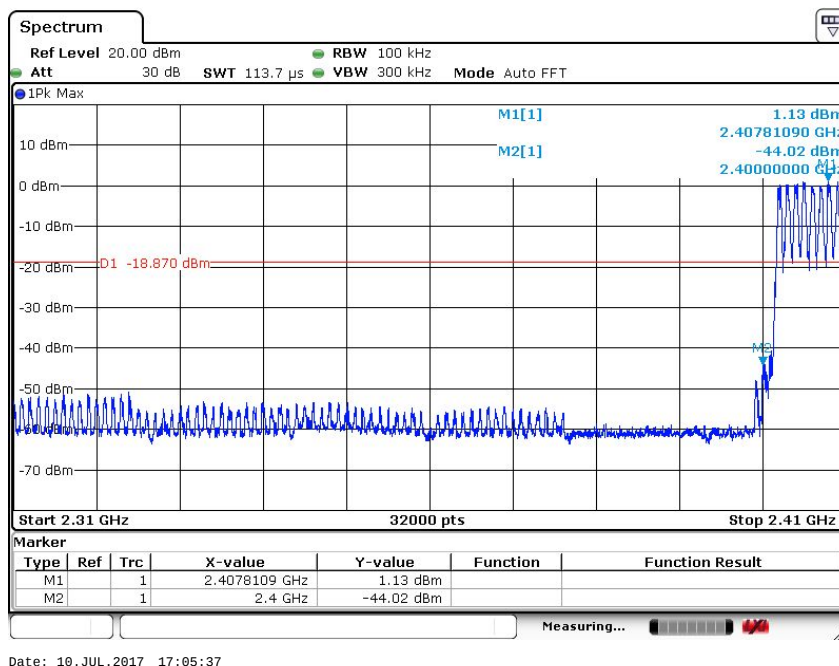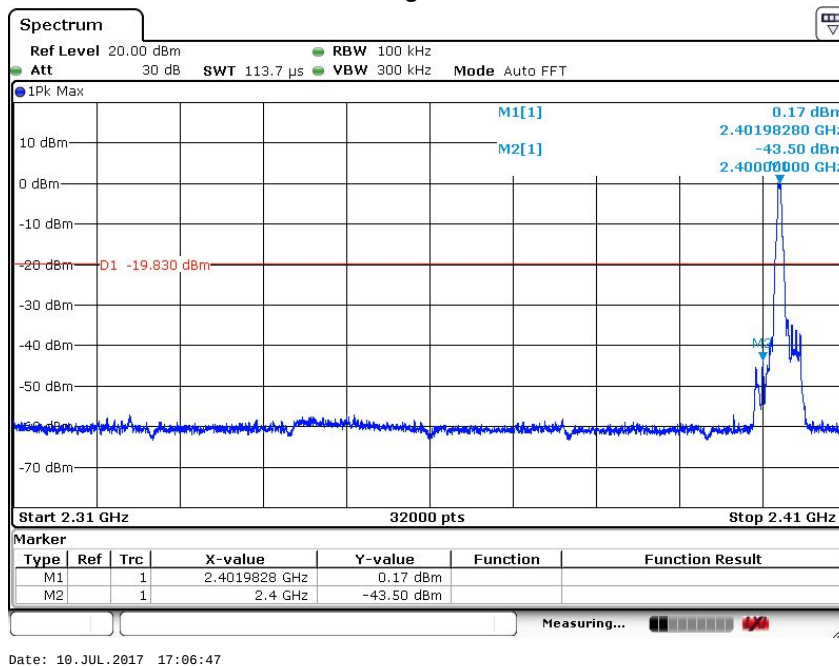





Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 39 of 57 -

Band Edge, Right Side

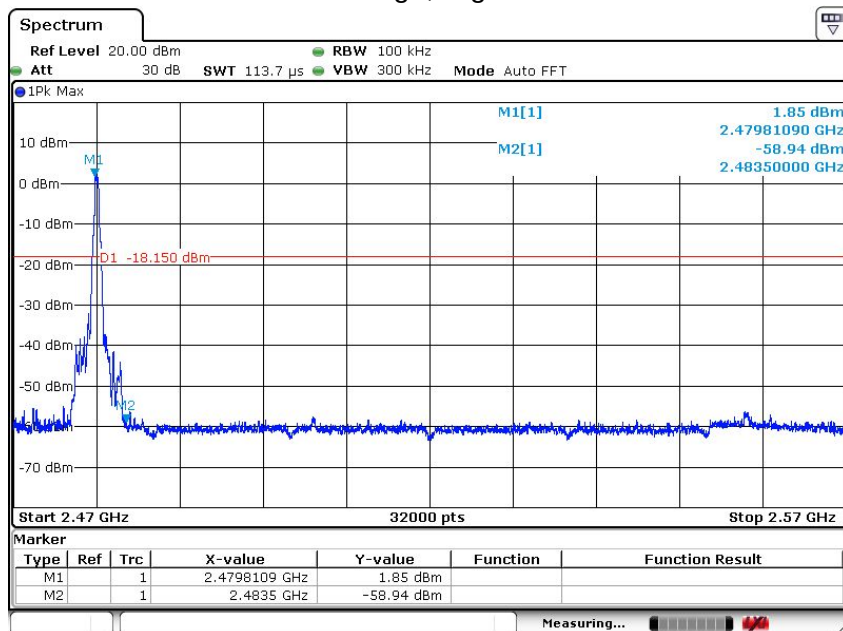

Date: 10. JUL. 2017 17:07:51

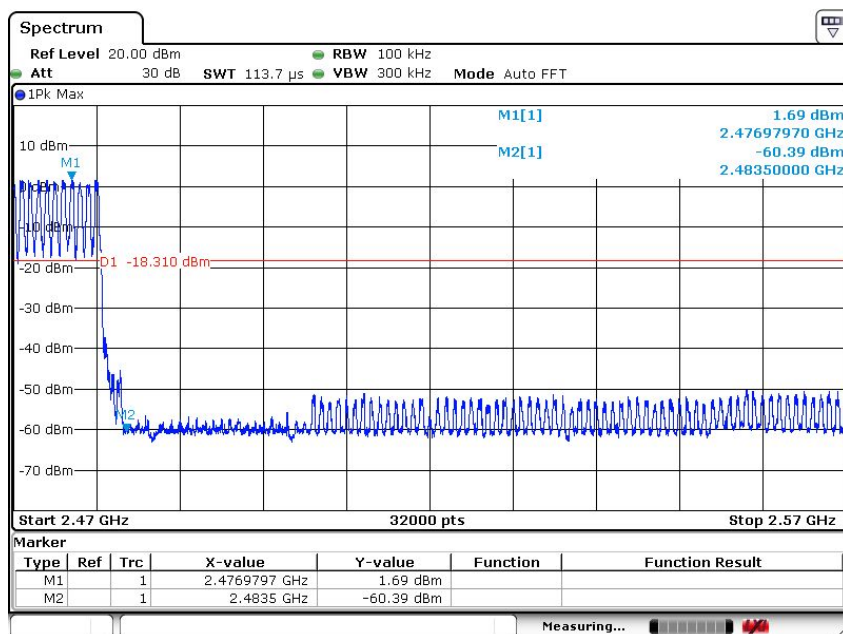

Date: 10. JUL. 2017 17:08:56




Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 40 of 57 -

EDR MODE

Band Edge, Left Side

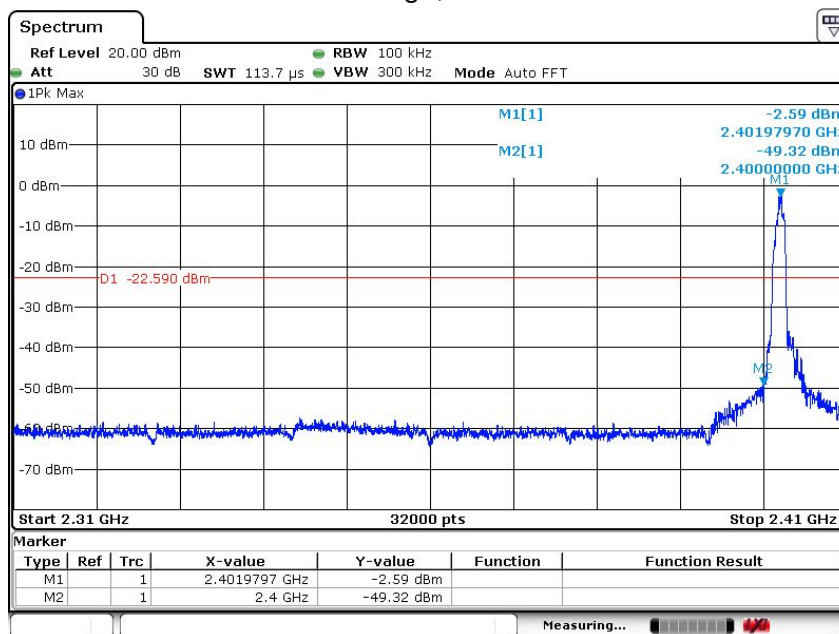

Date: 10. JUL. 2017 18:28:12

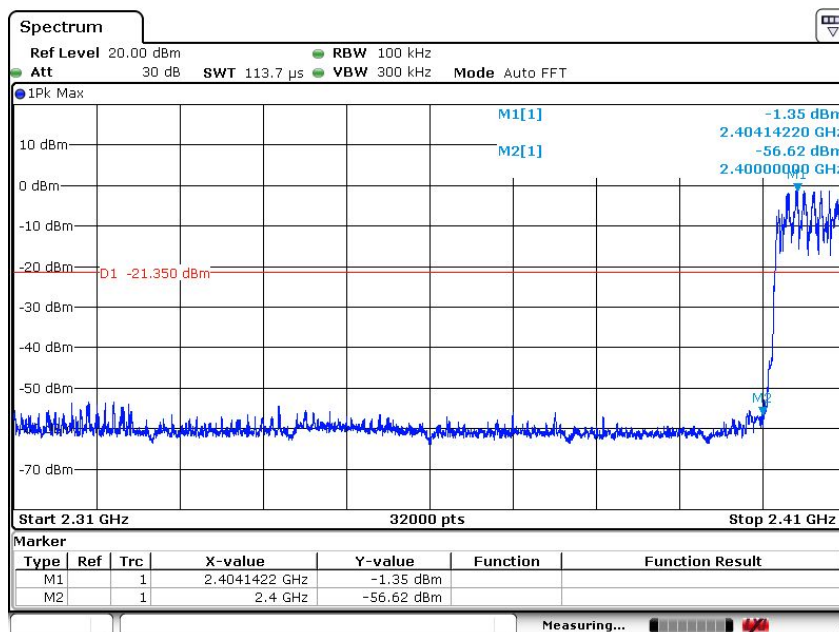


Date: 10. JUL. 2017 18:28:44




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 41 of 57 -

Band Edge, Right Side

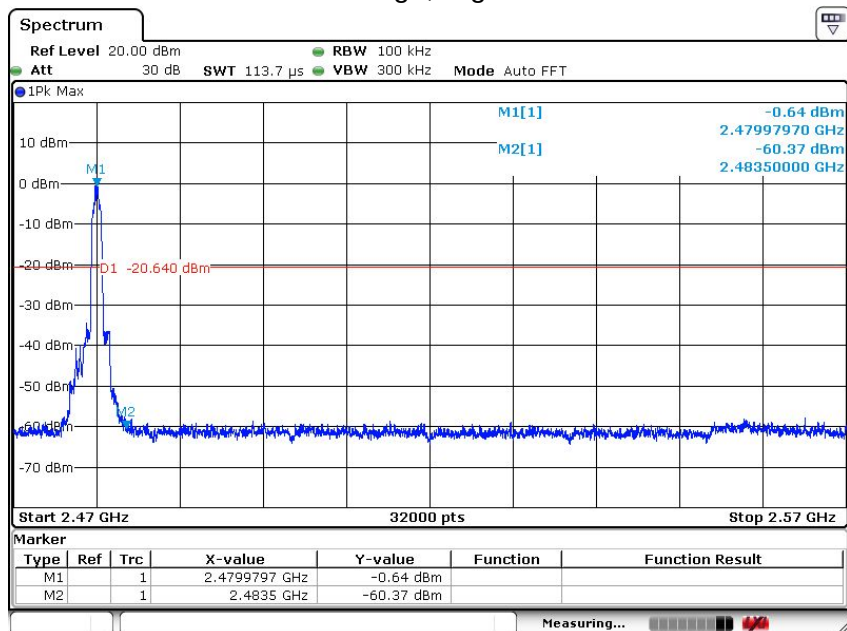

Date: 10. JUL. 2017 18:30:31

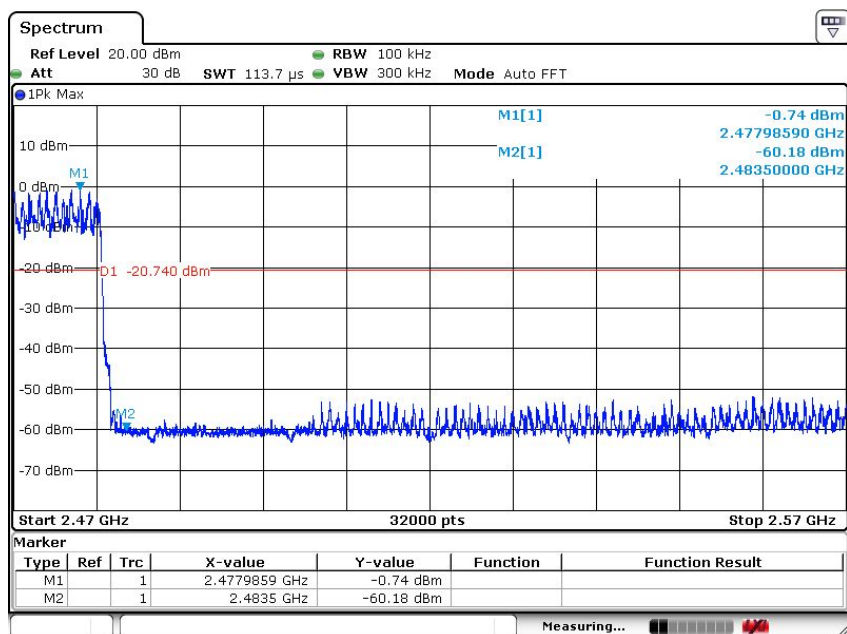

Date: 10. JUL. 2017 18:29:17




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 42 of 57 -

6. EUT TEST PHOTO

Radiated Measurement Photos 30-1000MHz

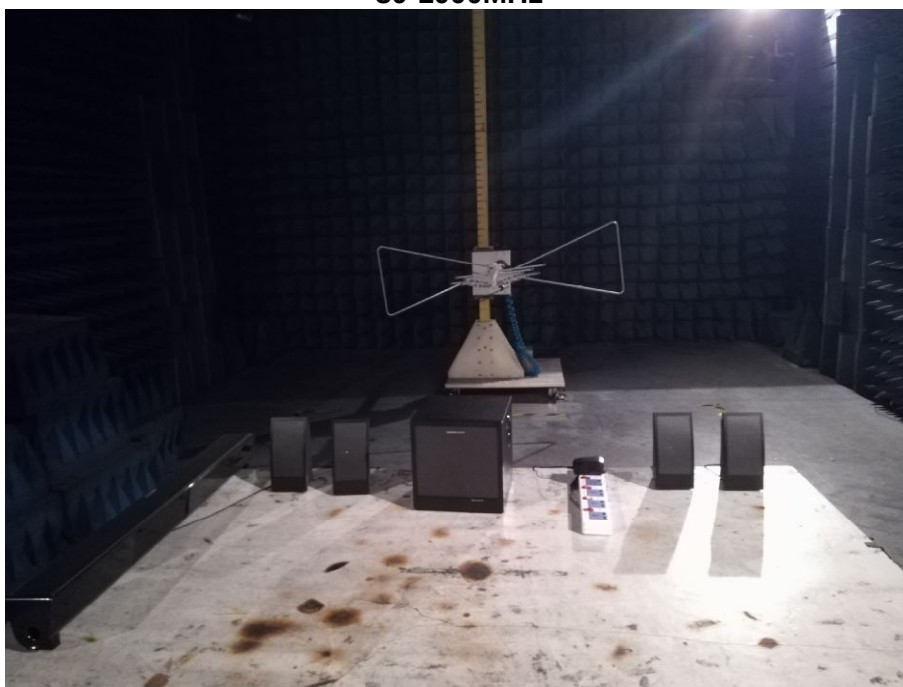

Above 1GHz



Conducted Measurement Photos



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F

- Page 43 of 57 -

0.15-30MHz






Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 44 of 57 -



EXTERNAL PHOTO

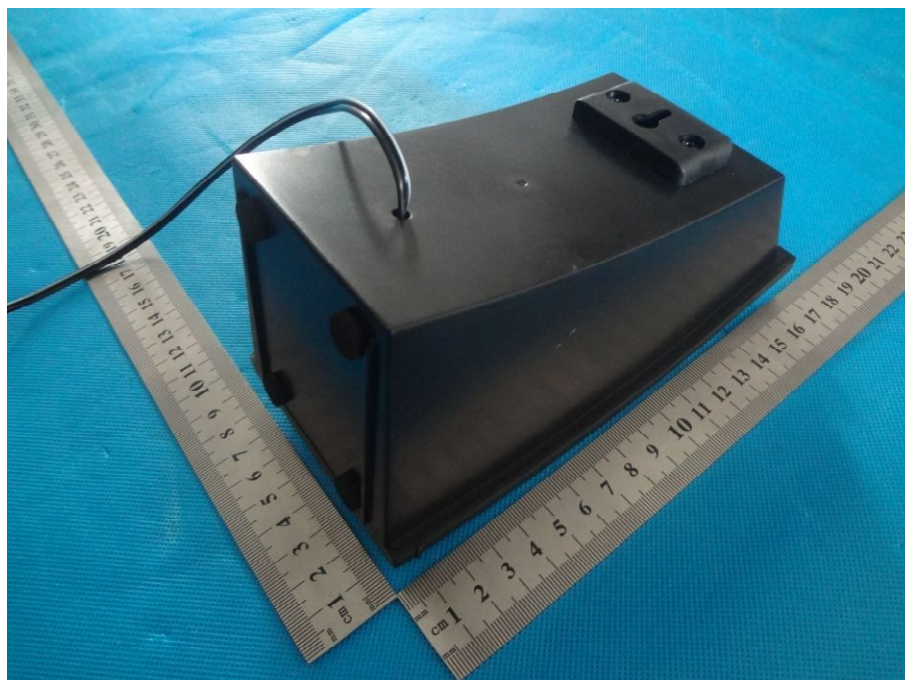



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 45 of 57 -

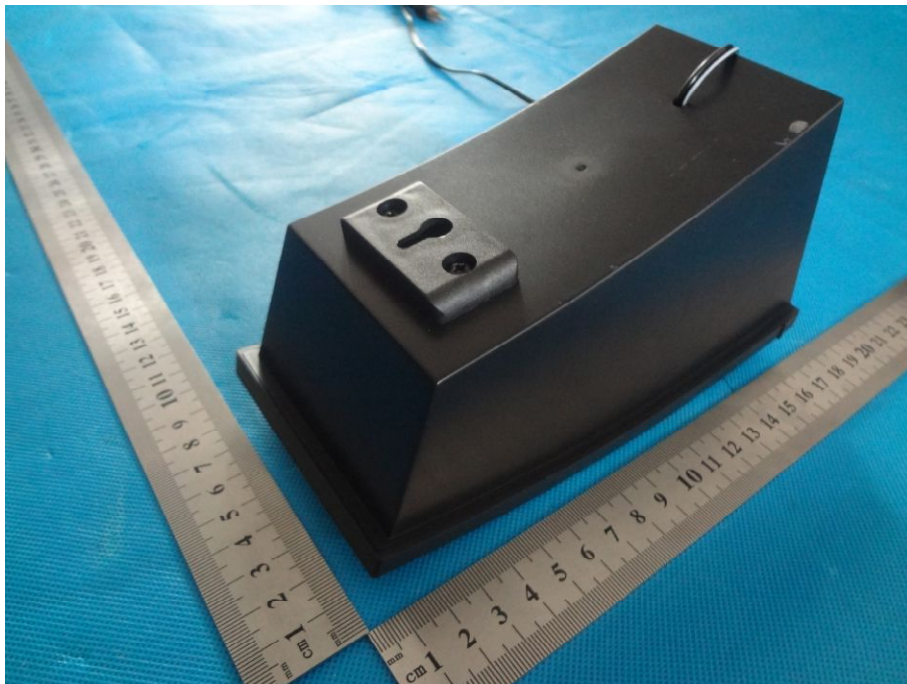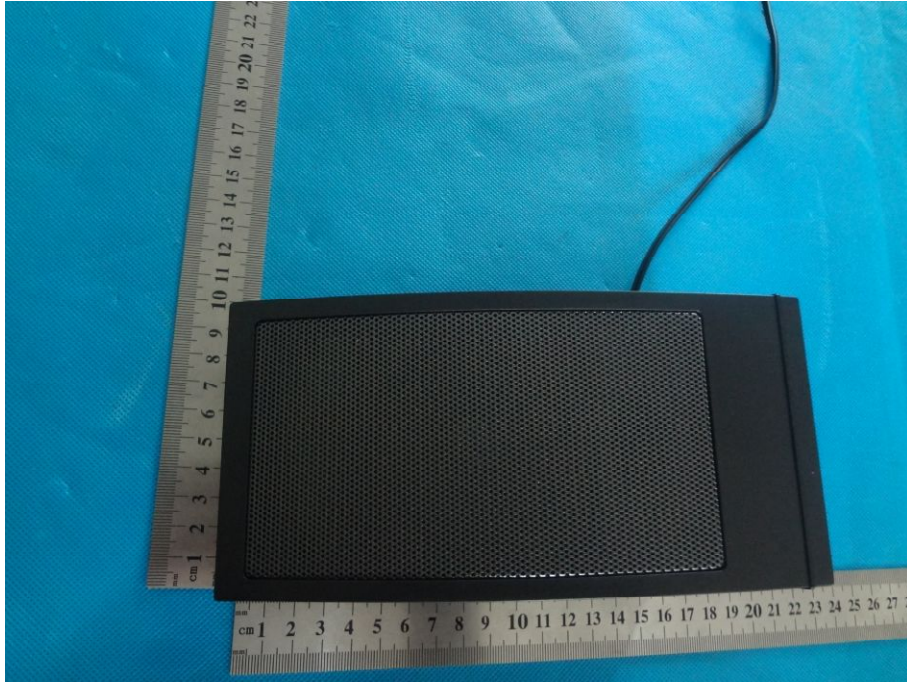



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 46 of 57 -

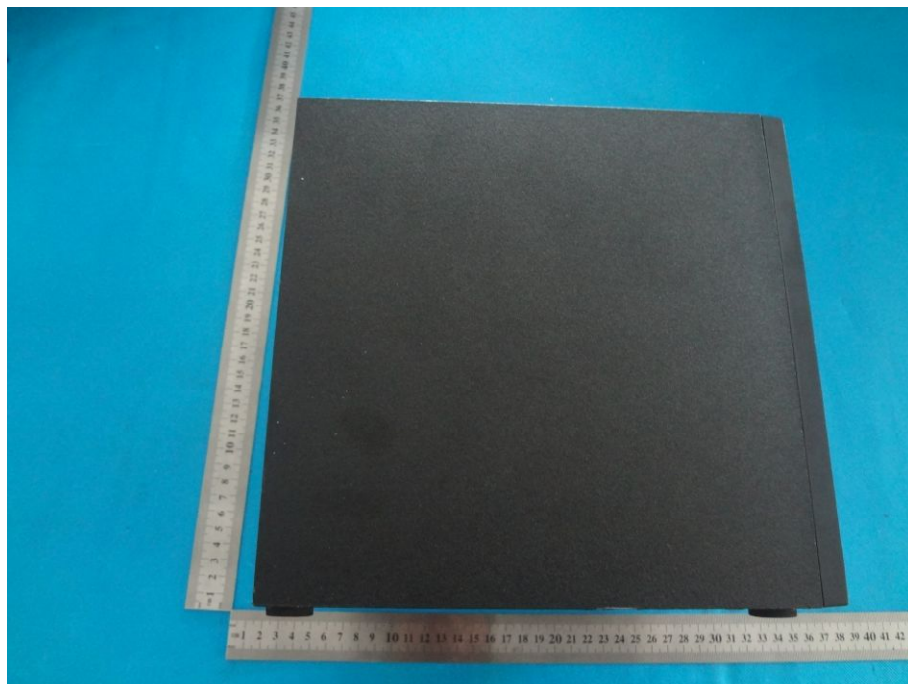




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F



- Page 47 of 57 -

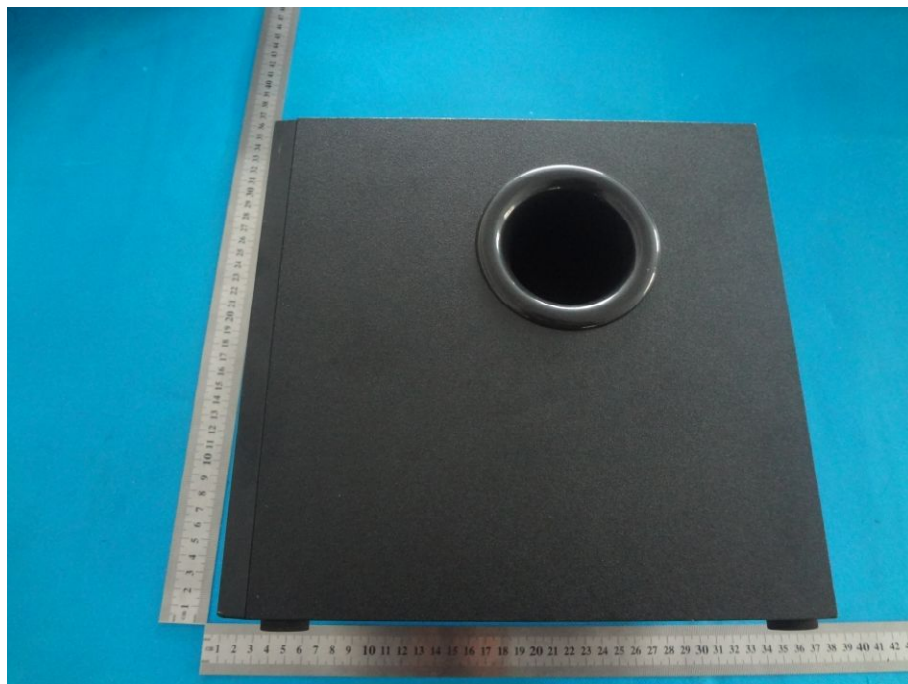



Shenzhen Asia Test Technology Co., Ltd.



Report No. ATT2017SZ0911367F
- Page 48 of 57 -

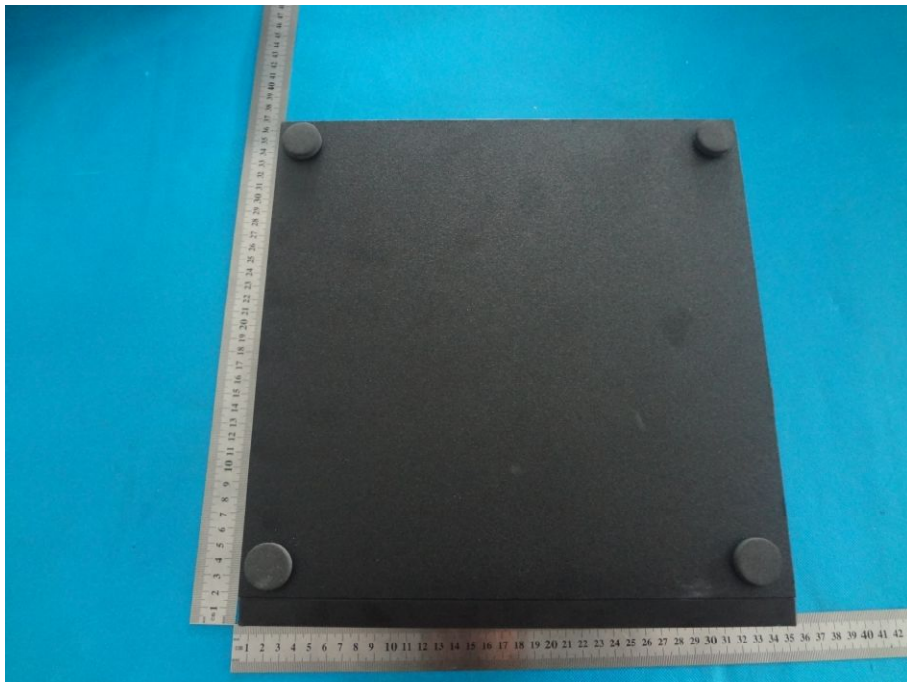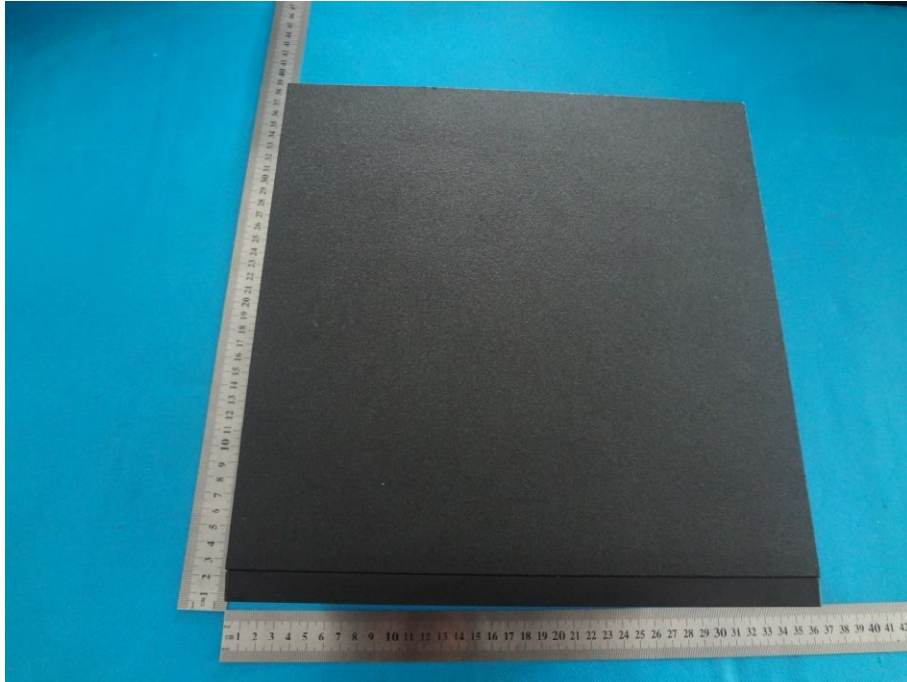



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 49 of 57 -

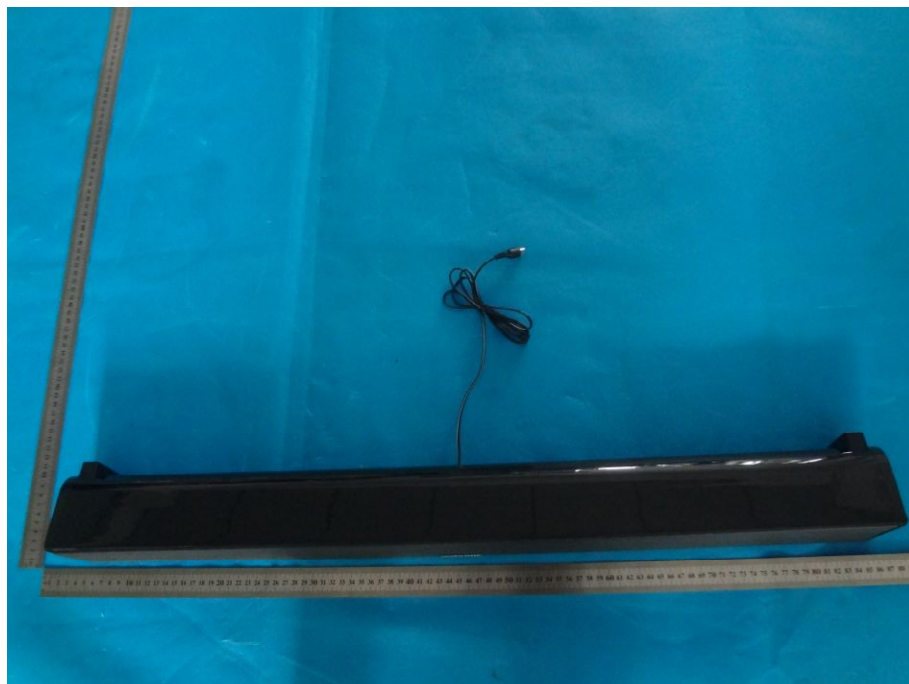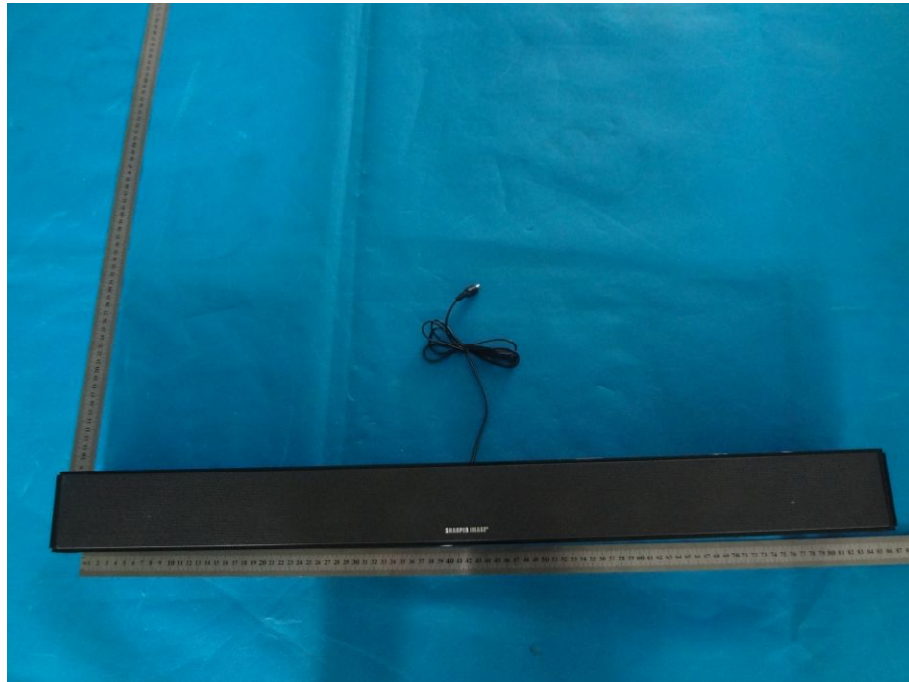



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 50 of 57 -







Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 51 of 57 -



INTERNAL PHOTO

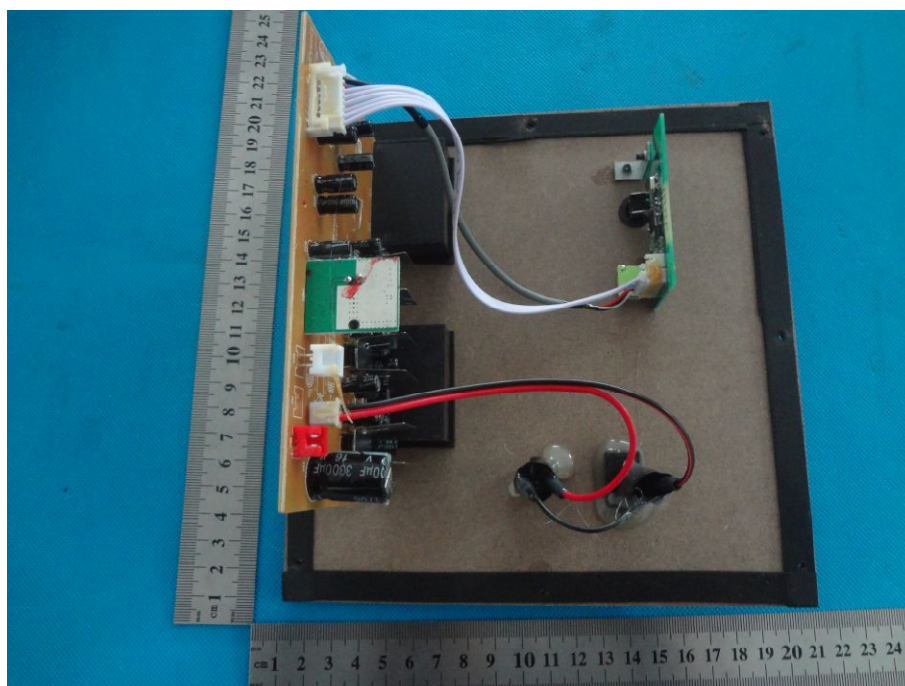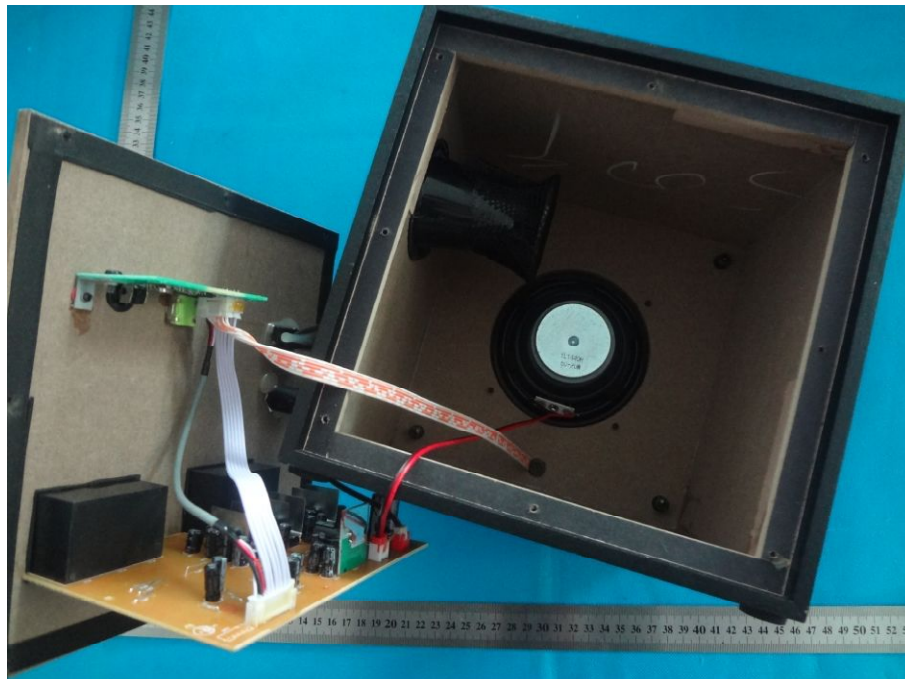



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 52 of 57 -

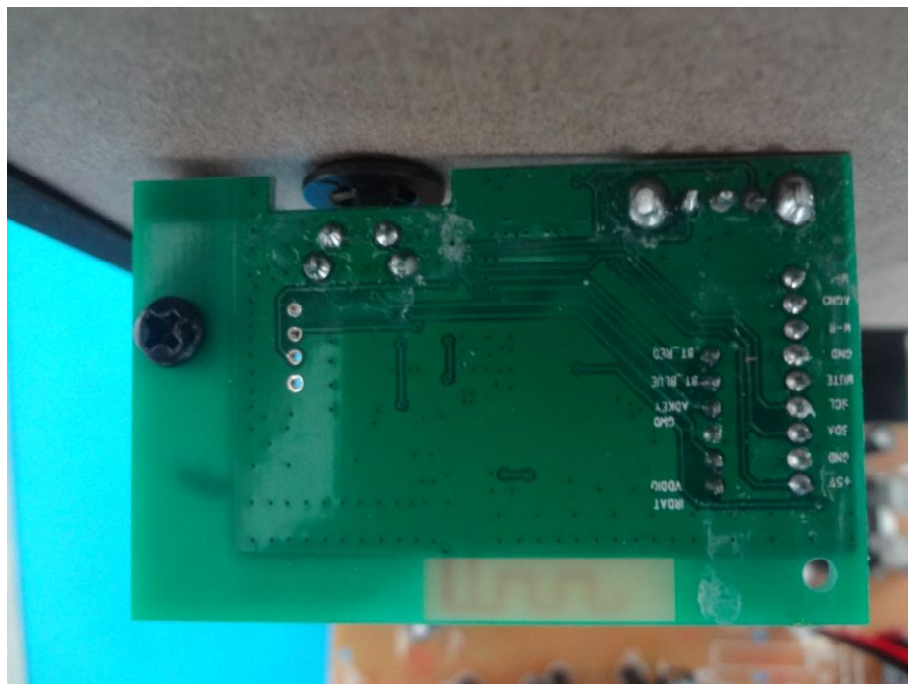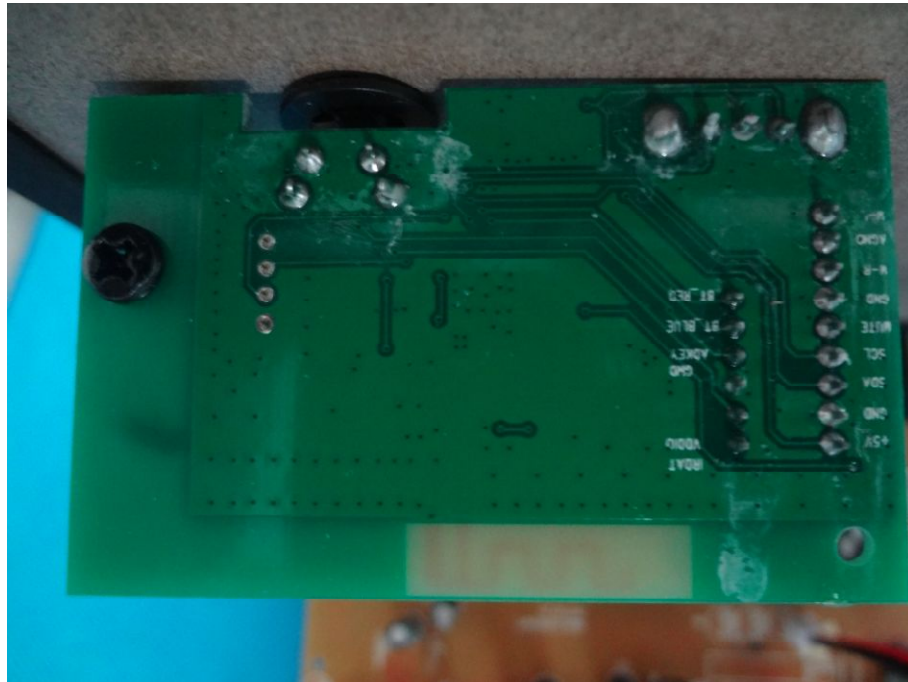




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F



- Page 53 of 57 -

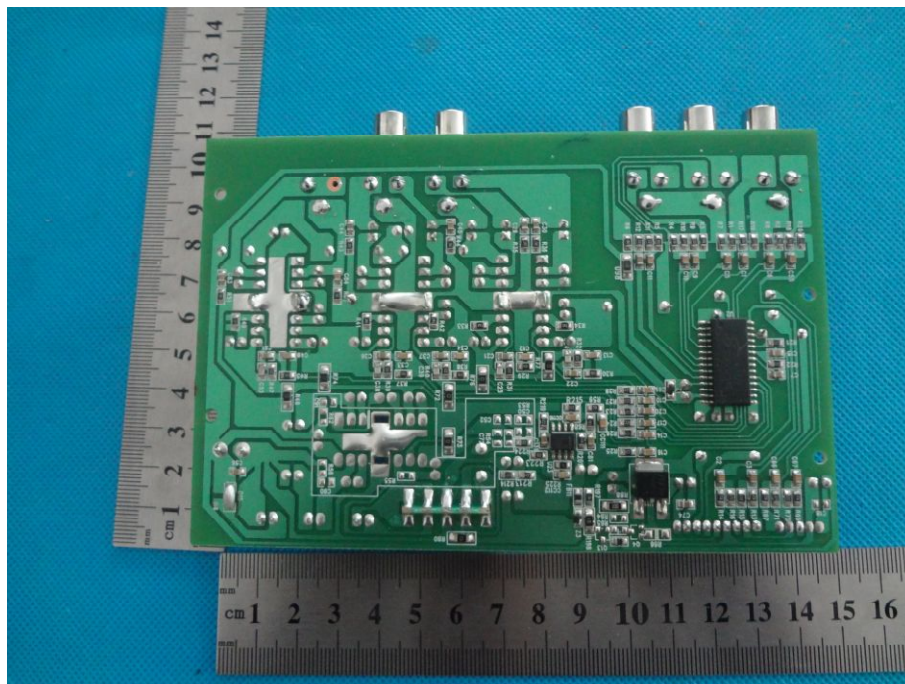



Shenzhen Asia Test Technology Co., Ltd.



Report No. ATT2017SZ0911367F
- Page 54 of 57 -

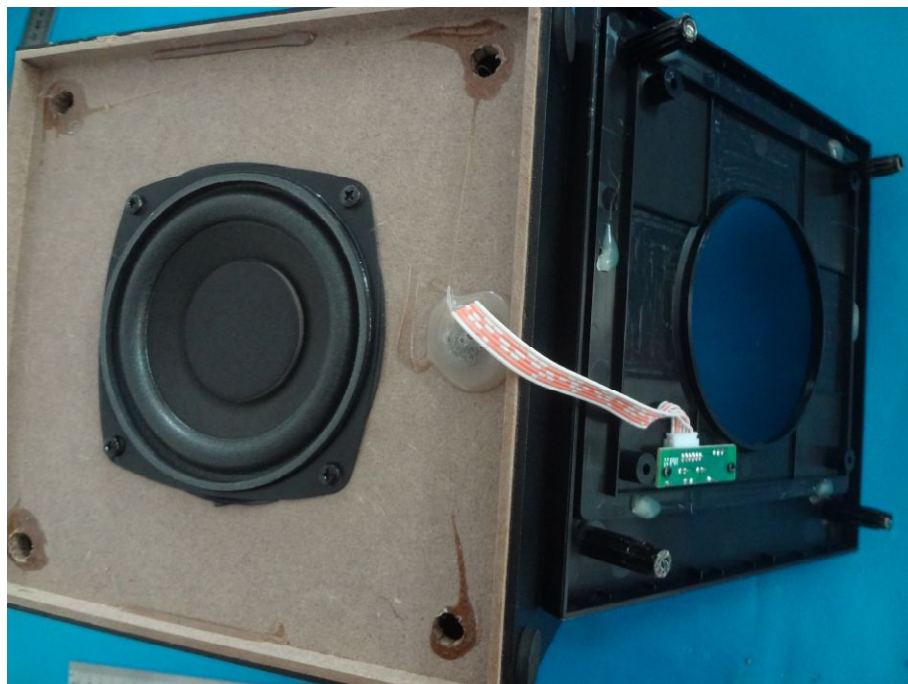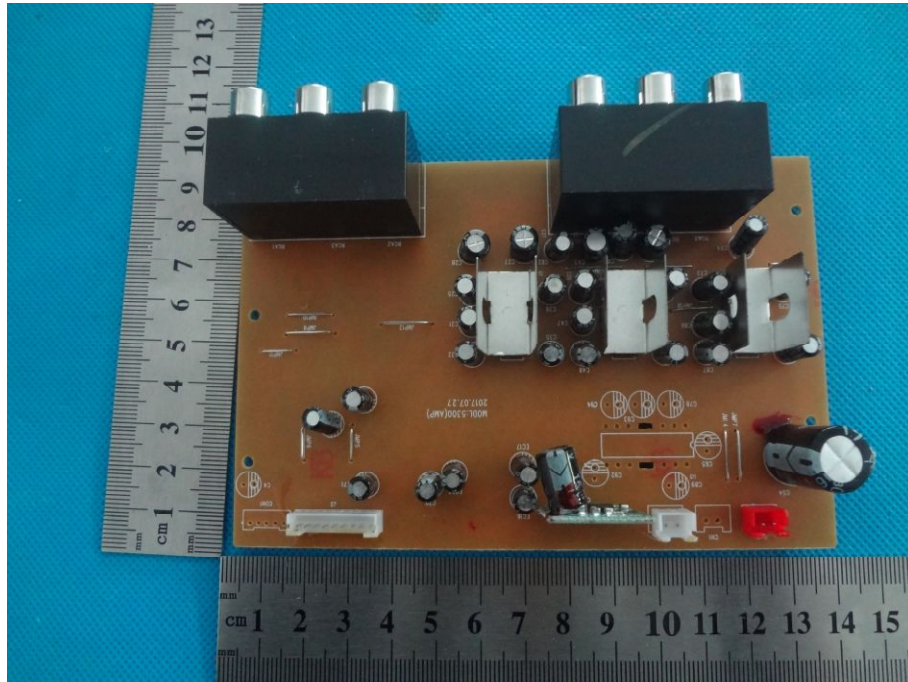



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT2017SZ0911367F
- Page 55 of 57 -

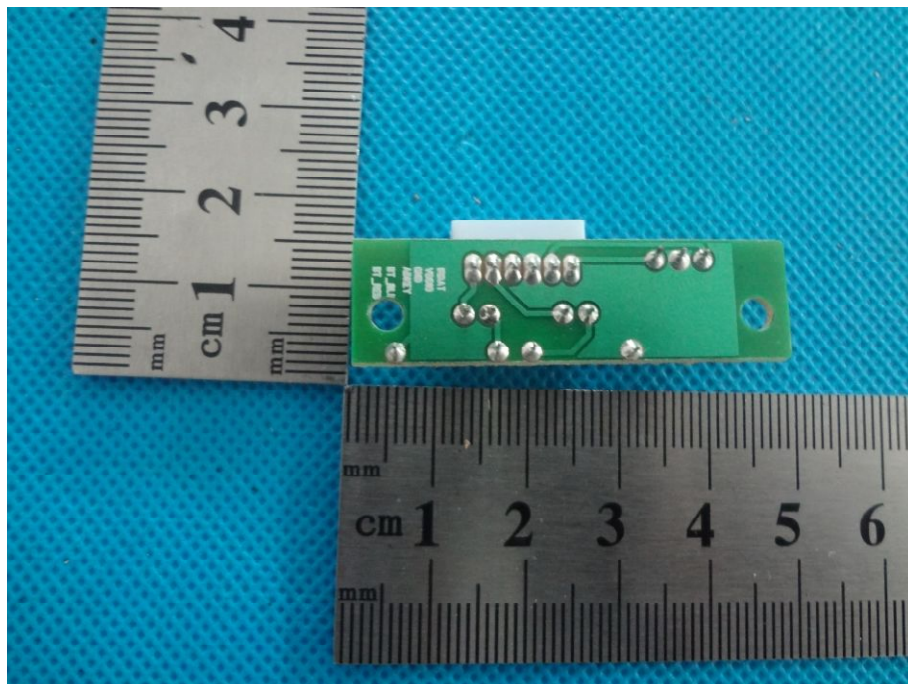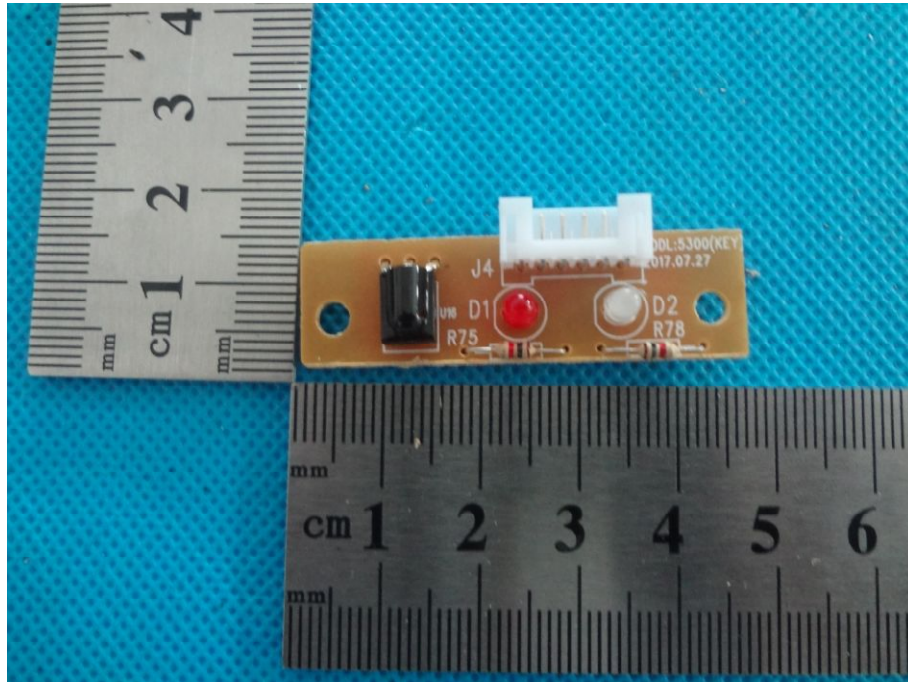



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 56 of 57 -

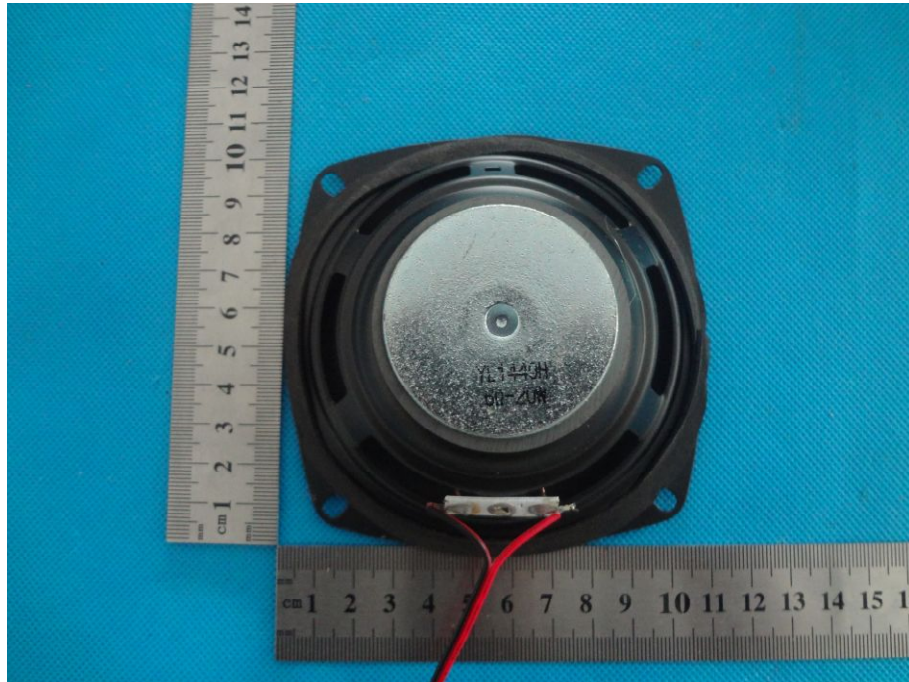



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0911367F
- Page 57 of 57 -

