TEST REPORT

Application No.:	SZCR2506002307MO
Applicant:	Telit Communications S.p.A.
Address of Applicant:	Via Stazione di Prosecco 5/b,Sgonico – Trieste, Italy
Manufacturer:	Telit Communications S.p.A.
Address of Manufacturer:	via Stazione di Prosecco 5/B, 34010 Sgonico, Trieste, Italy
Factory:	Fushan Technology Vietnam
Address of Factory:	No. 8, Road 6, VSIP Bac Ninh, Phu Chan, Tu Son, Bac Ninh, Vietnam
Equipment Under Test (EUT):	
EUT Name:	CMB100B0-WW
Model No.:	CMB100B0-WW
Trade Mark:	Telit Cinterion
FCC ID:	RI7LE910Q1WW
Standard(s) :	47 CFR Part 2 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27 47 CFR Part 90
Date of Receipt:	2025-06-03
Date of Test:	2025-06-03 to 2025-07-14
Date of Issue:	2025-07-15
Test Result:	**Pass**

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu
EMC Laboratory Manager

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com

Revision Record				
Version	***Chapter***	***Date***	***Modifier***	***Remark***
01		*2025-07-15*		*Original*

Authorized for issue by:				
		Calvin Weng		
		Calvin Weng/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn

中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com

2 Test Summary

Test Item	FCC Rule No.	Requirements	Verdict
Field strength of spurious radiation	§2.1051 §22.917 §24.238 §27.50(g) §27.50(h) §27.50(m) §27.53(c) §27.1509 §90.691	 ≤ -13dBm (LTE Band5,26b) ≤ -13dBm (LTE Band2,25) ≤ -13dBm (LTE Band12) ≤ -13dBm (LTE Band4,66) Refer to clause 6.1 for LTE Band7,38,41 Refer to clause 6.1 for LTE Band13 ≤ -13dBm (LTE Band8) Refer to clause 6.1 for LTE Band26a	PASS
Frequency stability	§2.1055 §22.355 §24.235 §27.54 §90.213	≤ ±2.5ppm.	PASS

The original Test Report Ref. No. SZCR240700274102 is a report without A2LA accreditation mark, but the standard based on the original report is 47 CFR Part 2, 47 CFR Part 22, 47 CFR Part 24, 47 CFR Part 27, 47 CFR Part 90 which is within the scope of A2LA accreditation certificate.
47 CFR Part 2 is not accredited by A2LA.

Remark:

Model No.: CMB100B0-WW

This test report (Ref. No.: SZCR250600230702) is only valid with the original test report (Ref. No.: SZCR240700274102).

Review this report and original report, this report just changed the product name, changed the model No., and extended the supply voltage range from DC3.4~4.2V to DC 2.6~5.5V.

According to the declaration from the applicant, the models in this report and models in original report were identical, only difference with being adding the non-RF circuitry.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report Field strength of spurious radiation and Frequency stability was fully retested on model and shown the data in this report, other tests please refer to original report SZCR240700274102.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 Contents

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	DC3.8V
Cable Loss (for RF conducted test):	Below 1GHz: 0.5dB, 1GHz~2GHz:0.7dB, Above 2GHz: 1dB
Sample Type:	Mobile production
LTE Operation Frequency Band:	LTE B2/4/5/7/8/12/13/25/26/38/41/66
Modulation Type:	QPSK, 16QAM
LTE Power Class:	Level 3
Antenna Type:	External Antenna
Antenna Gain:	LTE B2: 2.17dBi, B4: 2.17dBi, B5: 5.17dBi, B7: 2.17dBi, B8: 5.17dBi, B12: 3.17dBi, B13: 3.17dBi, B25: 2.17dBi, B26: 5.17dBi, B38: 2.17dBi, B41: 2.17dBi, B66: 2.17dBi

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Test Frequency

Test mode:	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855.0	1880	1905.0
	15	1857.5	1880	1902.5
	20	1860.0	1880	1900.0
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1751.5
	5	1712.5	1732.5	1752.5
	10	1715.0	1732.5	1750.0
	15	1717.5	1732.5	1747.5
	20	1720.0	1732.5	1745.0
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829.0	836.5	844.0
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 7	5	2502.5	2535.0	2567.5
	10	2505.0	2535.0	2565.0
	15	2507.5	2535.0	2562.5
	20	2510.0	2535.0	2560.0

Test mode:	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE Band 8	1.4	898.2	899.0	899.8
	3	/	899.0	/
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704.0	707.5	711.0
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 13	5	779.5	782.0	784.5
	10	/	782.0	/
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 25	1.4	1850.7	1882.5	1914.3
	3	1851.5	1882.5	1913.5
	5	1852.5	1882.5	1912.5
	10	1855.0	1882.5	1910.0
	15	1857.5	1882.5	1907.5
	20	1860.0	1882.5	1905.0
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 26a	1.4	814.7	819.0	823.3
	3	815.5	819.0	822.5
	5	816.5	819.0	822.2
	10	/	819.0	/

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test mode:	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE Band 26b	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829.0	836.5	844.0
	15	831.5	836.5	841.5
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 26c	15	821.5	831.5	841.5
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE Band 38	5	2572.5	2595.0	2617.5
	10	2575.0	2595.0	2615.0
	15	2577.5	2595.0	2612.5
	20	2580.0	2595.0	2610.0
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE TDD Band 41	5	2498.5	2593.0	2687.5
	10	2501.0	2593.0	2685.0
	15	2503.5	2593.0	2682.5
	20	2506.0	2593.0	2680.0
Test mode:	**Nominal Bandwidth (MHz)**	**RF Channel**		
		Low (L)	**Middle (M)**	**High (H)**
		MHz	**MHz**	**MHz**
LTE FDD Band 66	1.4	1710.7	1745.0	1779.3
	3	1711.5	1745.0	1778.5
	5	1712.5	1745.0	1777.5
	10	1715.0	1745.0	1775.0
	15	1717.5	1745.0	1772.5
	20	1720.0	1745.0	1770.0

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.3 Test Environment

Environment Parameter	Selected Values During Tests	
Temperature:	TL	-30°C
	TN	+20°C
	TH	+50°C
Voltage:	VL	2.6 Vdc
	VN	3.8 Vdc
	VH	5.5 Vdc

NOTE: VL= lower extreme test voltage
VN= nominal voltage
VH= upper extreme test voltage
TL= lower extreme test temperature
TN= normal temperature
TH= upper extreme test temperature

4.4 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Debug board	Telit Communications S.p.A.	E248779	--
DC Source	Chroma	62024P-80-60	--

4.5 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	± 5.4 x 10^{-8}
2	Duty cycle	± 0.3%
3	Occupied Bandwidth	± 3%
4	RF conducted power	± 0.8dB
5	RF power density	± 0.4dB
6	Conducted Spurious emissions	± 2.7dB
7	Radiated Spurious emission test	± 3.1dB (Below 1GHz)
		± 4.4dB (Above 1GHz)
8	Temperature test	± 1°C
9	Humidity test	± 3%
10	Supply voltages	± 1.5%
11	Time	± 3%

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None

5 Equipment List

RE in Chamber					
Test Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal. Date**	**Cal. Due date**
MXE EMI receiver	KEYSIGHT	N9038B	SEM004-29	2024-08-14	2025-08-13
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Pre-Amplifier 30MHz-1GHz	SGS	AMP30M1G30	SEM005-33	2025-03-04	2026-03-03
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-01-07	2026-01-06
Double-ridged waveguide horn(1-18GHz)	ETS-LINDGREN	3117	SEM033-11	2023-09-16	2025-09-15
Trilog-Broadband Antenna(25MHz-2GHz)	Schwarzbeck	VULB9168	SEM003-44	2025-05-28	2027-05-27
TRILOG Breitband Antenne 30MHz-1GHz	SCHWARZBECK	VULB 9168	SZ-WRG-M-054	2023-12-25	2025-12-24
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20
Radio Communication Tester	Anritsu	MT8821C	SZ-WRG-M-042	2024-06-26 2025-06-25	2025-06-25 2026-06-24
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	SEM010-11	2025-03-03	2026-03-02
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Signal Generator(9kHz-40GHz)	N5173B	MY53270267	Agilent	2024-09-14	2025-09-13
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-32	2023-09-17	2025-09-16
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2025-03-21	2026-03-20
Substitution Antenna	Rohde & Schwarz	HF907	SEM003-06	2024-08-03	2025-08-02
Substitution Antenna	ETS-LINDGREN	3160-09	SEM003-12	2024-08-03	2025-08-02
Universal Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-03	2025-03-03	2026-03-02

RF conducted test					
Test Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal. Date**	**Cal. Due date**
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2024-07-10 2025-07-09	2025-07-09 2026-07-08
MXA Signal Analyzer	KEYSIGHT	N9020B	SEM004-24	2025-03-03	2026-03-02
Measurement Software	TST	TST PASS V2.0	N/A	N/A	N/A
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Universal Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-03	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-03-19	2026-03-18
Power Sensor	KEYSIGHT	U2021XA	SEM009-15	2025-03-05	2026-03-04

General used equipment					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Humidity- Temperature Indicator	deli	8838	SEM002-32	2024-07-24	2025-07-23
Humidity- Temperature Indicator	deli	8838	SEM002-33	2024-07-24	2025-07-23
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Matter Test Results

6.1 Field strength of spurious radiation

Test Requirement: §2.1051,§22.917,§24.238, §27.50(g),§27.50(h),§27.50(m),§27.53(c), §27.1509, §90.691

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit: ≤ -13dBm (**LTE Band2,4,5,8,12,25,26b,66**)

For **Band 13**:

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;

On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz(-40dBm/MHz) equivalent isotropically radiated power (EIRP) for wideband signals.

For **Band7,38,41**:

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

For **Band26a**:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50 + 10 Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C Humidity: 45.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode_Keep the EUT in transmitting mode

6.1.2 Test Setup Diagram

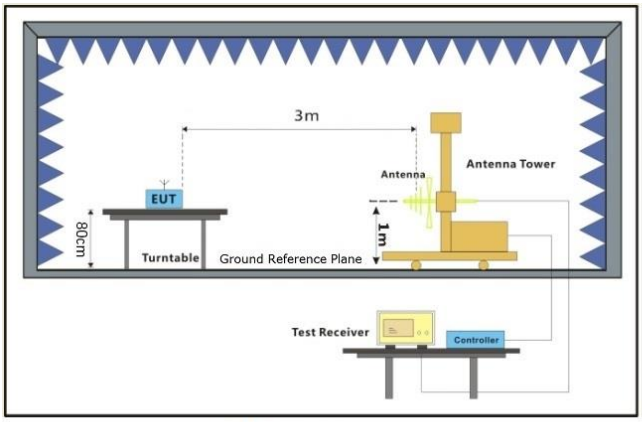

EUT

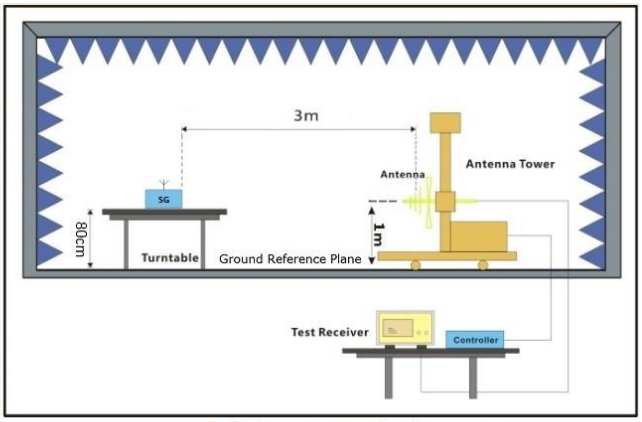

Substiute Antenna+Signal Generator

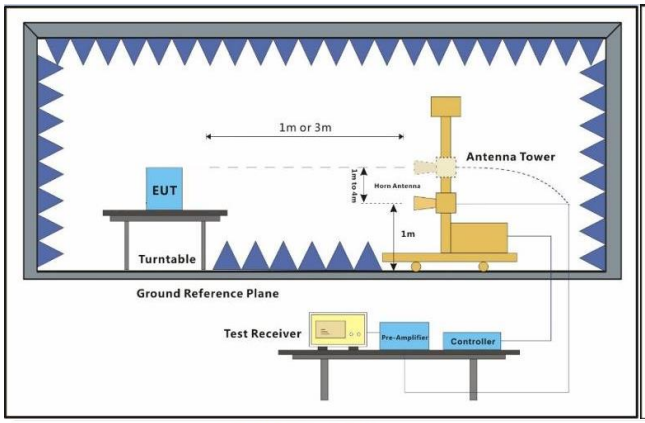

EUT

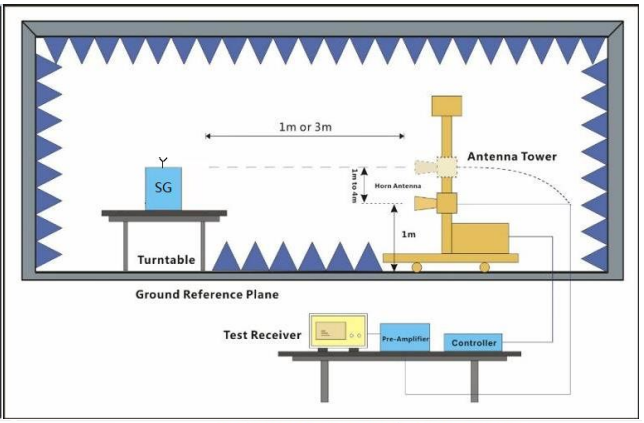

Substiute Antenna+Signal Generator

6.1.3 Measurement Procedure and Data

Test Procedure:

(1)On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
(2)The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
(3)The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
(4)The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
(5)The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
(6)The transmitter shall than be rotated through 360°in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
(7)The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
(8)The maximum signal level detected by the measuring receiver shall be noted.
(9)The measurement shall be repeated with the test antenna set to horizontal polarization.
(10) Replace the antenna with a proper Antenna (substitution antenna).
(11)The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
(12)The substitution antenna shall be connected to a calibrated signal generator.
(13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
(14)The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
(15)The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
(16)The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
(17)The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com

LTE Band 2-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3702.0	-57.99	-13	-44.99	-62.85	3.58	8.44	Horizontal	Pass
5553.0	-52.95	-13	-39.95	-58.66	4.74	10.45	Horizontal	Pass
7404.0	-53.89	-13	-40.89	-60.57	4.94	11.62	Horizontal	Pass
3702.0	-58.09	-13	-45.09	-62.95	3.58	8.44	Vertical	Pass
5553.0	-54.63	-13	-41.63	-60.34	4.74	10.45	Vertical	Pass
7404.0	-52.5	-13	-39.5	-59.18	4.94	11.62	Vertical	Pass

LTE Band 2-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3742.0	-56.54	-13	-43.54	-61.42	3.61	8.49	Horizontal	Pass
5613.0	-55.37	-13	-42.37	-61.08	4.74	10.45	Horizontal	Pass
7484.0	-55.23	-13	-42.23	-62.01	4.94	11.72	Horizontal	Pass
3742.0	-57.37	-13	-44.37	-62.25	3.61	8.49	Vertical	Pass
5613.0	-57.54	-13	-44.54	-63.25	4.74	10.45	Vertical	Pass
7484.0	-56.32	-13	-43.32	-63.1	4.94	11.72	Vertical	Pass

LTE Band 2-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3782.0	-56.79	-13	-43.79	-61.69	3.65	8.55	Horizontal	Pass
5673.0	-54.92	-13	-41.92	-60.62	4.75	10.45	Horizontal	Pass
7564.0	-56.21	-13	-43.21	-63.08	4.95	11.82	Horizontal	Pass
3782.0	-58.01	-13	-45.01	-62.91	3.65	8.55	Vertical	Pass
5673.0	-54.95	-13	-41.95	-60.65	4.75	10.45	Vertical	Pass
7564.0	-54.41	-13	-41.41	-61.28	4.95	11.82	Vertical	Pass

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 4-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3422.0	-57.03	-13	-44.03	-61.65	3.36	7.98	Horizontal	Pass
5133.0	-54.14	-13	-41.14	-59.75	4.61	10.22	Horizontal	Pass
6844.0	-55.35	-13	-42.35	-61.38	4.9	10.93	Horizontal	Pass
3422.0	-57.11	-13	-44.11	-61.73	3.36	7.98	Vertical	Pass
5133.0	-53.89	-13	-40.89	-59.5	4.61	10.22	Vertical	Pass
6844.0	-53.51	-13	-40.51	-59.54	4.9	10.93	Vertical	Pass

LTE Band 4-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3447.0	-56.81	-13	-43.81	-61.48	3.37	8.04	Horizontal	Pass
5170.5	-50.75	-13	-37.75	-56.38	4.62	10.25	Horizontal	Pass
6894.0	-55.6	-13	-42.6	-61.69	4.9	10.99	Horizontal	Pass
3447.0	-57.16	-13	-44.16	-61.83	3.37	8.04	Vertical	Pass
5170.5	-54.64	-13	-41.64	-60.27	4.62	10.25	Vertical	Pass
6894.0	-55.2	-13	-42.2	-61.29	4.9	10.99	Vertical	Pass

LTE Band 4-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3472.0	-57.89	-13	-44.89	-62.6	3.39	8.1	Horizontal	Pass
5208.0	-53.96	-13	-40.96	-59.59	4.64	10.27	Horizontal	Pass
6944.0	-53.95	-13	-40.95	-60.1	4.91	11.06	Horizontal	Pass
3472.0	-56.26	-13	-43.26	-60.97	3.39	8.1	Vertical	Pass
5208.0	-54.93	-13	-41.93	-60.56	4.64	10.27	Vertical	Pass
6944.0	-55.4	-13	-42.4	-61.55	4.91	11.06	Vertical	Pass

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 5-Low channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1649.0	-65.35	-13	-52.35	-68.23	2.62	5.5	Horizontal	Pass
2473.5	-61.25	-13	-48.25	-63.95	3.06	5.76	Horizontal	Pass
3298.0	-58.13	-13	-45.13	-62.49	3.3	7.66	Horizontal	Pass
1649.0	-63.63	-13	-50.63	-66.51	2.62	5.5	Vertical	Pass
2473.5	-62.35	-13	-49.35	-65.05	3.06	5.76	Vertical	Pass
3298.0	-58.16	-13	-45.16	-62.52	3.3	7.66	Vertical	Pass

LTE Band 5-Middle channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1664.0	-65.1	-13	-52.1	-67.94	2.63	5.47	Horizontal	Pass
2496.0	-61.12	-13	-48.12	-63.85	3.08	5.81	Horizontal	Pass
3328.0	-55.62	-13	-42.62	-60.05	3.31	7.74	Horizontal	Pass
1664.0	-65.44	-13	-52.44	-68.28	2.63	5.47	Vertical	Pass
2496.0	-61.62	-13	-48.62	-64.35	3.08	5.81	Vertical	Pass
3328.0	-56.99	-13	-43.99	-61.42	3.31	7.74	Vertical	Pass

LTE Band 5-High channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1679.0	-64.75	-13	-51.75	-67.55	2.63	5.43	Horizontal	Pass
2518.5	-62.13	-13	-49.13	-64.91	3.08	5.86	Horizontal	Pass
3358.0	-57.77	-13	-44.77	-62.26	3.33	7.82	Horizontal	Pass
1679.0	-66.28	-13	-53.28	-69.08	2.63	5.43	Vertical	Pass
2518.5	-61.34	-13	-48.34	-64.12	3.08	5.86	Vertical	Pass
3358.0	-58.41	-13	-45.41	-62.9	3.33	7.82	Vertical	Pass

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 7-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5002.0	-52.83	-25	-27.83	-58.4	4.57	10.14	Horizontal	Pass
7503.0	-54.86	-25	-29.86	-61.66	4.94	11.74	Horizontal	Pass
10004.0	-55.61	-25	-30.61	-63.18	5.46	13.03	Horizontal	Pass
5002.0	-53.04	-25	-28.04	-58.61	4.57	10.14	Vertical	Pass
7503.0	-55.71	-25	-30.71	-62.51	4.94	11.74	Vertical	Pass
10004.0	-55.76	-25	-30.76	-63.33	5.46	13.03	Vertical	Pass

LTE Band 7-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5052.0	-54.19	-25	-29.19	-59.77	4.59	10.17	Horizontal	Pass
7578.0	-54.98	-25	-29.98	-61.86	4.95	11.83	Horizontal	Pass
10104.0	-56.55	-25	-31.55	-64.12	5.48	13.05	Horizontal	Pass
5052.0	-55.02	-25	-30.02	-60.6	4.59	10.17	Vertical	Pass
7578.0	-54.86	-25	-29.86	-61.74	4.95	11.83	Vertical	Pass
10104.0	-56.33	-25	-31.33	-63.9	5.48	13.05	Vertical	Pass

LTE Band 7-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5102.0	-53.86	-25	-28.86	-59.46	4.6	10.2	Horizontal	Pass
7653.0	-54.85	-25	-29.85	-61.82	4.95	11.92	Horizontal	Pass
10204.0	-52.66	-25	-27.66	-60.24	5.49	13.07	Horizontal	Pass
5102.0	-53.58	-25	-28.58	-59.18	4.6	10.2	Vertical	Pass
7653.0	-54.79	-25	-29.79	-61.76	4.95	11.92	Vertical	Pass
10204.0	-54.84	-25	-29.84	-62.42	5.49	13.07	Vertical	Pass

LTE Band 8-Low channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1770.0	-35.57	-13	-22.57	-38.11	2.66	5.2	Horizontal	Pass
2655.0	-42.57	-13	-29.57	-45.63	3.1	6.16	Horizontal	Pass
3540.0	-43.92	-13	-30.92	-48.7	3.44	8.22	Horizontal	Pass
1770.0	-33.13	-13	-20.13	-35.67	2.66	5.2	Vertical	Pass
2655.0	-39.2	-13	-26.2	-42.26	3.1	6.16	Vertical	Pass
3540.0	-45.89	-13	-32.89	-50.67	3.44	8.22	Vertical	Pass

LTE Band 8-Middle channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1795.0	-33.97	-13	-20.97	-36.45	2.66	5.14	Horizontal	Pass
2692.5	-38.79	-13	-25.79	-41.92	3.11	6.24	Horizontal	Pass
3590.0	-40.84	-13	-27.84	-45.65	3.48	8.29	Horizontal	Pass
1795.0	-34.65	-13	-21.65	-37.13	2.66	5.14	Vertical	Pass
2692.5	-39.34	-13	-26.34	-42.47	3.11	6.24	Vertical	Pass
3590.0	-46.08	-13	-33.08	-50.89	3.48	8.29	Vertical	Pass

LTE Band 8-High channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1820.0	-34.73	-13	-21.73	-37.13	2.67	5.07	Horizontal	Pass
2730.0	-42.65	-13	-29.65	-45.87	3.11	6.33	Horizontal	Pass
3640.0	-46.59	-13	-33.59	-51.43	3.52	8.36	Horizontal	Pass
1820.0	-32.9	-13	-19.9	-35.3	2.67	5.07	Vertical	Pass
2730.0	-37.62	-13	-24.62	-40.84	3.11	6.33	Vertical	Pass
3640.0	-38.93	-13	-25.93	-43.77	3.52	8.36	Vertical	Pass

LTE Band 12-Low channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1399.0	-64.08	-13	-51.08	-66.85	2.47	5.24	Horizontal	Pass
2098.5	-63.76	-13	-50.76	-65.83	2.79	4.86	Horizontal	Pass
2798.0	-59.28	-13	-46.28	-62.64	3.12	6.48	Horizontal	Pass
1399.0	-64.36	-13	-51.36	-67.13	2.47	5.24	Vertical	Pass
2098.5	-63.99	-13	-50.99	-66.06	2.79	4.86	Vertical	Pass
2798.0	-59.48	-13	-46.48	-62.84	3.12	6.48	Vertical	Pass

LTE Band 12-Middle channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1406.0	-64.2	-13	-51.2	-67.0	2.48	5.28	Horizontal	Pass
2109.0	-63.23	-13	-50.23	-65.31	2.8	4.88	Horizontal	Pass
2812.0	-59.2	-13	-46.2	-62.59	3.12	6.51	Horizontal	Pass
1406.0	-64.57	-13	-51.57	-67.37	2.48	5.28	Vertical	Pass
2109.0	-65.39	-13	-52.39	-67.47	2.8	4.88	Vertical	Pass
2812.0	-61.12	-13	-48.12	-64.51	3.12	6.51	Vertical	Pass

LTE Band 12-High channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1413.0	-64.26	-13	-51.26	-67.1	2.49	5.33	Horizontal	Pass
2119.5	-63.22	-13	-50.22	-65.32	2.81	4.91	Horizontal	Pass
2826.0	-59.29	-13	-46.29	-62.7	3.13	6.54	Horizontal	Pass
1413.0	-64.53	-13	-51.53	-67.37	2.49	5.33	Vertical	Pass
2119.5	-65.03	-13	-52.03	-67.13	2.81	4.91	Vertical	Pass
2826.0	-58.49	-13	-45.49	-61.9	3.13	6.54	Vertical	Pass

LTE Band 13-Middle channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1555.0	-65.41	-13	-52.41	-68.55	2.6	5.74	Horizontal	Pass
2332.5	-63.46	-13	-50.46	-65.92	2.96	5.42	Horizontal	Pass
3110.0	-58.81	-13	-45.81	-62.81	3.2	7.2	Horizontal	Pass
1555.0	-65.29	-13	-52.29	-68.43	2.6	5.74	Vertical	Pass
2332.5	-63.14	-13	-50.14	-65.6	2.96	5.42	Vertical	Pass
3110.0	-57.44	-13	-44.44	-61.44	3.2	7.2	Vertical	Pass

LTE Band 25-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3702.0	-57.01	-13	-44.01	-61.87	3.58	8.44	Horizontal	Pass
5553.0	-53.81	-13	-40.81	-59.52	4.74	10.45	Horizontal	Pass
7404.0	-55.12	-13	-42.12	-61.8	4.94	11.62	Horizontal	Pass
3702.0	-58.1	-13	-45.1	-62.96	3.58	8.44	Vertical	Pass
5553.0	-54.69	-13	-41.69	-60.4	4.74	10.45	Vertical	Pass
7404.0	-54.17	-13	-41.17	-60.85	4.94	11.62	Vertical	Pass

LTE Band 25-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3747.0	-57.39	-13	-44.39	-62.27	3.62	8.5	Horizontal	Pass
5620.5	-53.94	-13	-40.94	-59.65	4.74	10.45	Horizontal	Pass
7494.0	-53.46	-13	-40.46	-60.25	4.94	11.73	Horizontal	Pass
3747.0	-58.41	-13	-45.41	-63.29	3.62	8.5	Vertical	Pass
5620.5	-55.49	-13	-42.49	-61.2	4.74	10.45	Vertical	Pass
7494.0	-55.06	-13	-42.06	-61.85	4.94	11.73	Vertical	Pass

LTE Band 25-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3792.0	-58.74	-13	-45.74	-63.64	3.66	8.56	Horizontal	Pass
5688.0	-55.63	-13	-42.63	-61.33	4.75	10.45	Horizontal	Pass
7584.0	-55.84	-13	-42.84	-62.73	4.95	11.84	Horizontal	Pass
3792.0	-57.47	-13	-44.47	-62.37	3.66	8.56	Vertical	Pass
5688.0	-55.67	-13	-42.67	-61.37	4.75	10.45	Vertical	Pass
7584.0	-54.15	-13	-41.15	-61.04	4.95	11.84	Vertical	Pass

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 26-Low channel, Modulation: QPSK, Bandwidth:15MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1629.5	-62.79	-13	-49.79	-65.72	2.62	5.55	Horizontal	Pass
2444.25	-61.07	-13	-48.07	-63.72	3.04	5.69	Horizontal	Pass
3259.0	-57.95	-13	-44.95	-62.24	3.28	7.57	Horizontal	Pass
1629.5	-63.53	-13	-50.53	-66.46	2.62	5.55	Vertical	Pass
2444.25	-61.19	-13	-48.19	-63.84	3.04	5.69	Vertical	Pass
3259.0	-56.62	-13	-43.62	-60.91	3.28	7.57	Vertical	Pass

LTE Band 26-Middle channel, Modulation: QPSK, Bandwidth:15MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1649.5	-62.7	-13	-49.7	-65.58	2.62	5.5	Horizontal	Pass
2474.25	-60.72	-13	-47.72	-63.42	3.06	5.76	Horizontal	Pass
3299.0	-58.7	-13	-45.7	-63.07	3.3	7.67	Horizontal	Pass
1649.5	-63.39	-13	-50.39	-66.27	2.62	5.5	Vertical	Pass
2474.25	-60.36	-13	-47.36	-63.06	3.06	5.76	Vertical	Pass
3299.0	-56.65	-13	-43.65	-61.02	3.3	7.67	Vertical	Pass

LTE Band 26-High channel, Modulation: QPSK, Bandwidth:15MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1669.5	-61.12	-13	-48.12	-63.94	2.63	5.45	Horizontal	Pass
2504.25	-60.63	-13	-47.63	-63.38	3.08	5.83	Horizontal	Pass
3339.0	-57.8	-13	-44.8	-62.25	3.32	7.77	Horizontal	Pass
1669.5	-63.13	-13	-50.13	-65.95	2.63	5.45	Vertical	Pass
2504.25	-61.3	-13	-48.3	-64.05	3.08	5.83	Vertical	Pass
3339.0	-58.8	-13	-45.8	-63.25	3.32	7.77	Vertical	Pass

LTE Band 38-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5142.0	-53.17	-25	-28.17	-58.78	4.62	10.23	Horizontal	Pass
7713.0	-57.61	-25	-32.61	-64.64	4.96	11.99	Horizontal	Pass
10284.0	-54.15	-25	-29.15	-61.72	5.51	13.08	Horizontal	Pass
5142.0	-54.55	-25	-29.55	-60.16	4.62	10.23	Vertical	Pass
7713.0	-55.12	-25	-30.12	-62.15	4.96	11.99	Vertical	Pass
10284.0	-55.04	-25	-30.04	-62.61	5.51	13.08	Vertical	Pass

LTE Band 38-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5172.0	-53.95	-25	-28.95	-59.57	4.63	10.25	Horizontal	Pass
7758.0	-57.95	-25	-32.95	-65.03	4.96	12.04	Horizontal	Pass
10344.0	-54.42	-25	-29.42	-61.99	5.52	13.09	Horizontal	Pass
5172.0	-56.94	-25	-31.94	-62.56	4.63	10.25	Vertical	Pass
7758.0	-54.56	-25	-29.56	-61.64	4.96	12.04	Vertical	Pass
10344.0	-53.22	-25	-28.22	-60.79	5.52	13.09	Vertical	Pass

LTE Band 38-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5202.0	-54.96	-25	-29.96	-60.6	4.63	10.27	Horizontal	Pass
7803.0	-56.96	-25	-31.96	-64.1	4.96	12.1	Horizontal	Pass
10404.0	-53.17	-25	-28.17	-60.75	5.52	13.1	Horizontal	Pass
5202.0	-54.16	-25	-29.16	-59.8	4.63	10.27	Vertical	Pass
7803.0	-55.6	-25	-30.6	-62.74	4.96	12.1	Vertical	Pass
10404.0	-54.23	-25	-29.23	-61.81	5.52	13.1	Vertical	Pass

LTE Band 41-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
4994.0	-54.41	-25	-29.41	-59.97	4.57	10.13	Horizontal	Pass
7491.0	-56.75	-25	-31.75	-63.54	4.94	11.73	Horizontal	Pass
9988.0	-55.1	-25	-30.1	-62.68	5.46	13.04	Horizontal	Pass
4994.0	-53.13	-25	-28.13	-58.69	4.57	10.13	Vertical	Pass
7491.0	-55.58	-25	-30.58	-62.37	4.94	11.73	Vertical	Pass
9988.0	-54.33	-25	-29.33	-61.91	5.46	13.04	Vertical	Pass

LTE Band 41-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5168.0	-54.67	-25	-29.67	-60.29	4.62	10.24	Horizontal	Pass
7752.0	-56.28	-25	-31.28	-63.36	4.96	12.04	Horizontal	Pass
10336.0	-55.38	-25	-30.38	-62.96	5.51	13.09	Horizontal	Pass
5168.0	-53.83	-25	-28.83	-59.45	4.62	10.24	Vertical	Pass
7752.0	-56.17	-25	-31.17	-63.25	4.96	12.04	Vertical	Pass
10336.0	-53.34	-25	-28.34	-60.92	5.51	13.09	Vertical	Pass

LTE Band 41-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5342.0	-54.99	-25	-29.99	-60.66	4.68	10.35	Horizontal	Pass
8013.0	-56.5	-25	-31.5	-63.87	4.98	12.35	Horizontal	Pass
10684.0	-54.27	-25	-29.27	-61.82	5.63	13.18	Horizontal	Pass
5342.0	-54.37	-25	-29.37	-60.04	4.68	10.35	Vertical	Pass
8013.0	-56.35	-25	-31.35	-63.72	4.98	12.35	Vertical	Pass
10684.0	-52.66	-25	-27.66	-60.21	5.63	13.18	Vertical	Pass

LTE Band 66-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3422.0	-58.06	-13	-45.06	-62.68	3.36	7.98	Horizontal	Pass
5133.0	-54.18	-13	-41.18	-59.79	4.61	10.22	Horizontal	Pass
6844.0	-57.07	-13	-44.07	-63.1	4.9	10.93	Horizontal	Pass
3422.0	-57.72	-13	-44.72	-62.34	3.36	7.98	Vertical	Pass
5133.0	-57.16	-13	-44.16	-62.77	4.61	10.22	Vertical	Pass
6844.0	-56.33	-13	-43.33	-62.36	4.9	10.93	Vertical	Pass

LTE Band 66-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3472.0	-57.02	-13	-44.02	-61.73	3.39	8.1	Horizontal	Pass
5208.0	-54.09	-13	-41.09	-59.72	4.64	10.27	Horizontal	Pass
6944.0	-55.76	-13	-42.76	-61.91	4.91	11.06	Horizontal	Pass
3472.0	-58.42	-13	-45.42	-63.13	3.39	8.1	Vertical	Pass
5208.0	-55.11	-13	-42.11	-60.74	4.64	10.27	Vertical	Pass
6944.0	-53.79	-13	-40.79	-59.94	4.91	11.06	Vertical	Pass

LTE Band 66-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3522.0	-56.84	-13	-43.84	-61.62	3.42	8.2	Horizontal	Pass
5283.0	-55.5	-13	-42.5	-61.16	4.66	10.32	Horizontal	Pass
7044.0	-56.68	-13	-43.68	-62.94	4.92	11.18	Horizontal	Pass
3522.0	-57.54	-13	-44.54	-62.32	3.42	8.2	Vertical	Pass
5283.0	-53.24	-13	-40.24	-58.9	4.66	10.32	Vertical	Pass
7044.0	-54.75	-13	-41.75	-61.01	4.92	11.18	Vertical	Pass

Note: All modes have been tested and we found QPSK test mode has the worst test result. Only record the worst test result.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6.2 Frequency stability

Test Requirement: §2.1055,§22.355,§24.235,§27.54
Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01
Limit: ≤ ±2.5ppm.

6.2.1 E.U.T. Operation

Operating Environment:
Temperature: 25 °C Humidity: 50.0 % RH Atmospheric Pressure: 1020 mbar
Test mode 32: TX mode_Keep the EUT in transmitting mode

6.2.2 Test Setup Diagram

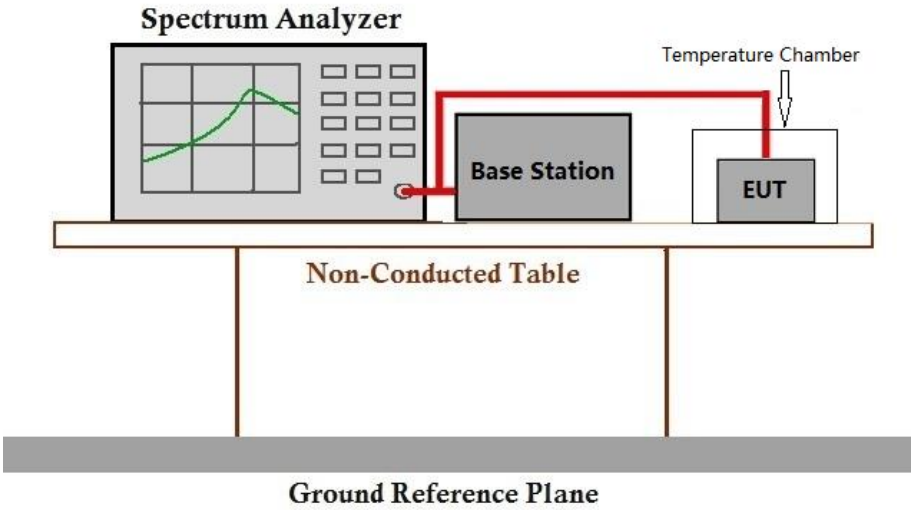

6.2.3 Measurement Data

Please refer to Appendix for LTE test data.

7 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2506002307MO

8 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for SZCR2506002307MO

- End of the Report -