

FCC Test Report

Report No.: RF130805C06F-2

FCC ID: RID-TR300A

Test Model: TR-300A (Refer to item 3.1 for more details)

Received Date: Apr. 29, 2015

Test Date: Aug. 04 ~ Aug. 10, 2015

Issued Date: Aug. 17, 2015

Applicant: GlobalSat WorldCom Corporation

Address: 16F., No.186, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan
(R.O.C.)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan,
R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan, R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	11
3.4 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Set Up	16
4.1.6 EUT Operating Conditions	16
4.1.7 Test Results	17
4.2 Conducted Emission Measurement	25
4.2.1 Limits of Conducted Emission Measurement	25
4.2.2 Test Instruments	25
4.2.3 Test Procedures	26
4.2.4 Deviation from Test Standard	26
4.2.5 Test Setup	26
4.2.6 EUT Operating Conditions	26
4.2.7 Test Results	27
4.3 6dB Bandwidth Measurement	35
4.3.1 Limits of 6dB Bandwidth Measurement	35
4.3.2 Test Setup	35
4.3.3 Test Instruments	35
4.3.4 Test Procedure	35
4.3.5 Deviation from Test Standard	35
4.3.6 EUT Operating Conditions	35
4.3.7 Test Result	36
4.4 Conducted Output Power Measurement	37
4.4.1 Limits of Conducted Output Power Measurement	37
4.4.2 Test Setup	37
4.4.3 Test Instruments	37
4.4.4 Test Procedures	37
4.4.5 Deviation from Test Standard	37
4.4.6 EUT Operating Conditions	37
4.4.7 Test Results	37
4.5 Power Spectral Density Measurement	38
4.5.1 Limits of Power Spectral Density Measurement	38
4.5.2 Test Setup	38
4.5.3 Test Instruments	38
4.5.4 Test Procedure	38
4.5.5 Deviation from Test Standard	38
4.5.6 EUT Operating Condition	38
4.5.7 Test Results	39

4.6	Conducted Out of Band Emission Measurement.....	40
4.6.1	Limits of Conducted Out of Band Emission Measurement	40
4.6.2	Test Setup.....	40
4.6.3	Test Instruments	40
4.6.4	Test Procedure	40
4.6.5	Deviation from Test Standard	40
4.6.6	EUT Operating Condition	40
4.6.7	Test Results	41
5	Pictures of Test Arrangements.....	42
	Appendix – Information on the Testing Laboratories	43



A D T

Release Control Record

Issue No.	Description	Date Issued
RF130805C06F-2	Original release	Aug. 17, 2015

1 Certificate of Conformity

Product: Personal Tracker

Brand: GlobalSat (Refer to item 3.1 for more details)

Test Model: TR-300A (Refer to item 3.1 for more details)

Sample Status: Engineering sample

Applicant: GlobalSat WorldCom Corporation

Test Date: Aug. 04 ~ Aug. 10, 2015

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : , **Date:** Aug. 17, 2015
Pettie Chen / Senior Specialist

Approved by : , **Date:** Aug. 17, 2015
Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -14.07dB at 0.40586MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -3.3dB at 47.46MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Personal Tracker
Brand	GlobalSat (Refer to Note for more details)
Test Model	TR-300A (Refer to Note for more details)
Status of EUT	Engineering sample
Power Supply Rating	3.7Vdc (Battery) 5.0Vdc (Cradle or Charging Clip)
Modulation Type	GFSK
Transfer Rate	1Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Channel Spacing	2MHz
Output Power	0.4656mW
Antenna Type	Chip antenna with 0dBi gain
Antenna Connector	NA
Accessory Device	Cradle, Charging Clip, Neck Lanyard, Belt Pouch
Data Cable Supplied	1.05m non-shielded USB cable without core 1.00m non-shielded USB cable without core

Note:

1. The following models are provided to this EUT.

Brand	Model	Description
GlobalSat	TR-300A	Main model
GlobalSat	TR-300AE	The color is different from TR-300A for marketing purpose
SecuraTrac	TR300-MDS	Speaker with black paint, and the appearance's color is different from TR-300A
GlobalSat	TR-300AR	The color is different from TR300-MDS for marketing purpose

2. The EUT is powered by the following battery, adapters, cradle and charging clip.

Battery	
Brand:	Hangzhou Future Power Technology CO., LTD
Model:	FT503548PA
Input:	3.7V, 820mAh

Adapter 1	
Brand:	PHIHONG
Model:	PSAI05R-050Q
Input:	100-240V, 50-60Hz, 0.3A 12-17VA
Output:	5Vdc, 1A

Adapter 2	
Brand:	Powertron Electronics Corp.
Model:	PA 1005-050SUB100
Input:	100-240V, 50-60Hz, 0.3A
Output:	5Vdc, 1A

Cradle	
Brand:	GlobalSat
Model:	TR-313
Rating:	5Vdc, 0.5A

Charging Clip	
Brand:	GlobalSat
Model:	TR-300
Rating:	5Vdc, 0.5A

3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	-	√	Power from battery
B	-	√	√	-	Powered from adapter 1 + Cradle
C	-	√	√	-	Powered from adapter 1+ Charging Clip
D	-	√	√	-	Powered from adapter 2 + Cradle
E	-	√	√	-	Powered from adapter 2+ Charging Clip

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0, 19, 39	GFSK	1

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A~E	0 to 39	0	GFSK	1

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
B~E	0 to 39	0	GFSK	1

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGUURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0, 19, 39	GFSK	1

Test Condition:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 60%RH	120Vac, 60Hz	Tank Wu
RE<1G	25deg. C, 60%RH	120Vac, 60Hz	Tank Wu
PLC	25deg. C, 60%RH	120Vac, 60Hz	Tank Wu
APCM	25deg. C, 60%RH	120Vac, 60Hz	Antony Lee

3.3 Description of Support Units


The EUT has been tested as an independent unit.

3.3.1 Configuration of System under Test


Test Mode A

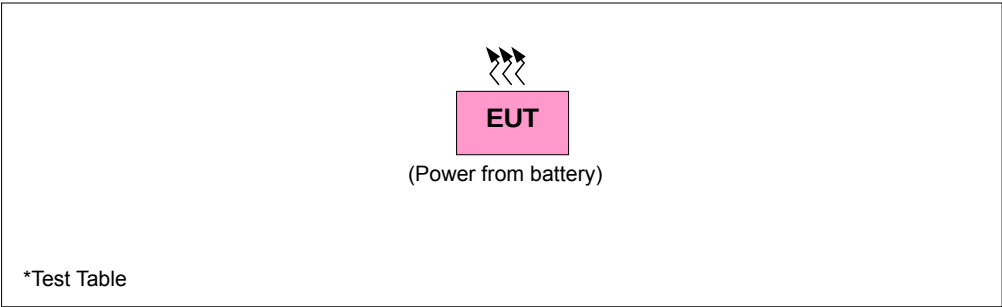

Test Mode B, D

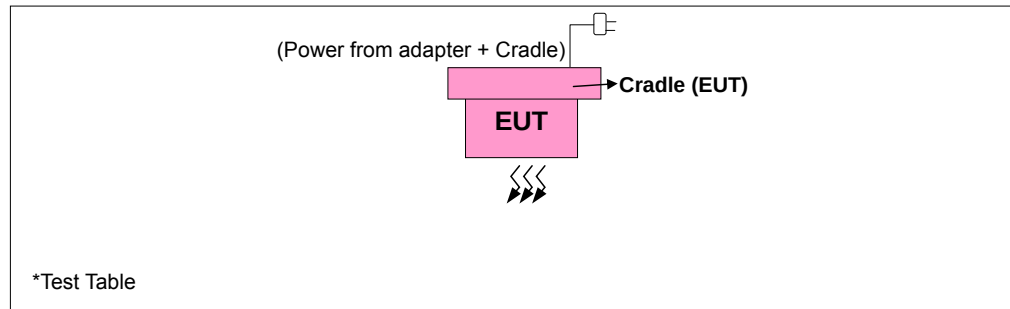

Test Mode C, E

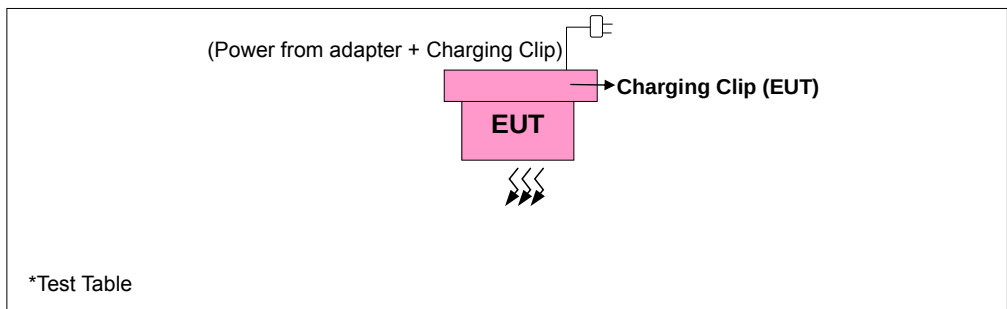

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r03

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).
The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 01, 2014	Nov. 30, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Mar. 30, 2015	Mar. 29, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Feb. 06, 2015	Feb. 05, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Feb. 09, 2015	Feb. 08, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Preamplifier Agilent	8447D	2944A10629	Oct. 18, 2014	Oct. 17, 2015
Preamplifier Agilent	8449B	3008A01961	Oct. 18, 2014	Oct. 17, 2015
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MWX322+MWX221 1308S0295	Nov. 06, 2014	Nov. 05, 2015
RF signal cable Worken	8D-FB	NA	Mar. 22, 2015	Mar. 21, 2016
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
High Speed Peak Power Meter	ML2495A	0824011	Jul. 09, 2015	Jul. 08, 2016
Power Sensor	MA2411B	0738171	Jul. 09, 2015	Jul. 08, 2016

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 215374.
5. The IC Site Registration No. is IC 7450F-9.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

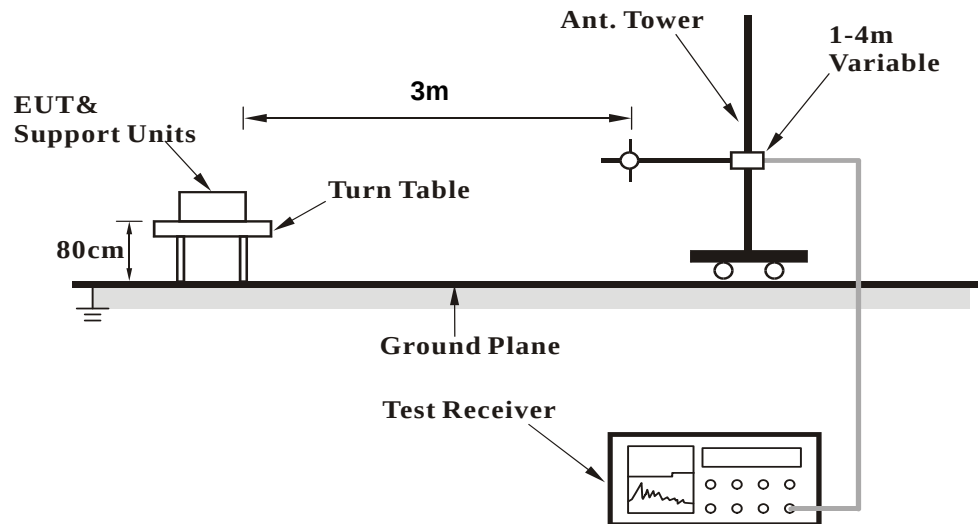

<Frequency Range above 1GHz>

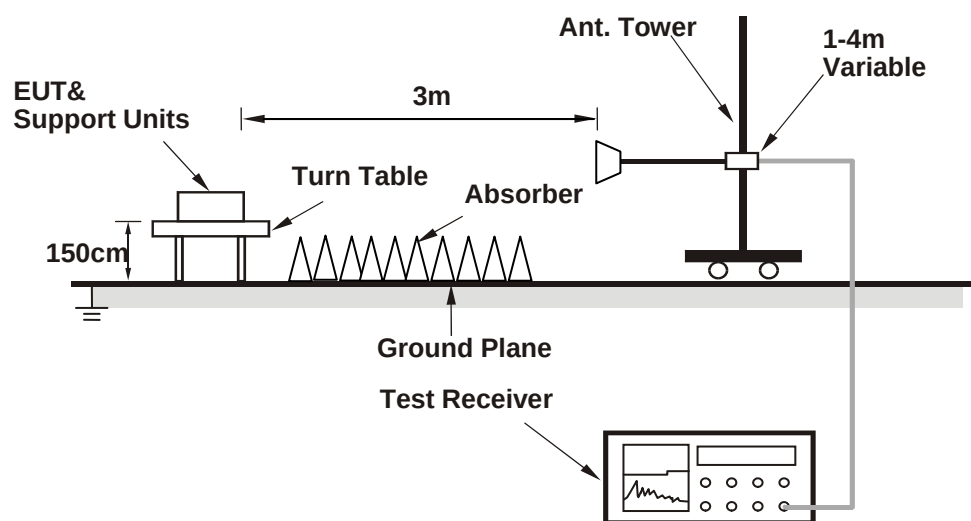

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.10 H	265	24.50	33.00
2	2390.00	46.1 AV	54.0	-7.9	1.10 H	265	13.10	33.00
3	*2402.00	94.6 PK			1.11 H	265	61.60	33.00
4	*2402.00	93.3 AV			1.11 H	265	60.30	33.00
5	4804.00	48.6 PK	74.0	-25.4	1.48 H	204	46.80	1.80
6	4804.00	37.5 AV	54.0	-16.5	1.48 H	204	35.70	1.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.01 V	125	24.20	33.00
2	2390.00	46.0 AV	54.0	-8.0	1.01 V	125	13.00	33.00
3	*2402.00	90.1 PK			1.01 V	125	57.10	33.00
4	*2402.00	88.7 AV			1.01 V	125	55.70	33.00
5	4804.00	48.0 PK	74.0	-26.0	1.84 V	290	46.20	1.80
6	4804.00	36.8 AV	54.0	-17.2	1.84 V	290	35.00	1.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	92.8 PK			1.07 H	238	59.50	33.30
2	*2440.00	91.4 AV			1.07 H	238	58.10	33.30
3	4880.00	47.7 PK	74.0	-26.3	2.07 H	77	45.80	1.90
4	4880.00	37.4 AV	54.0	-16.6	2.07 H	77	35.50	1.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	88.8 PK			1.01 V	128	55.50	33.30
2	*2440.00	87.4 AV			1.01 V	128	54.10	33.30
3	4880.00	48.5 PK	74.0	-25.5	1.00 V	312	46.60	1.90
4	4880.00	38.5 AV	54.0	-15.5	1.00 V	312	36.60	1.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.1 PK			1.06 H	257	56.70	33.40
2	*2480.00	88.7 AV			1.06 H	257	55.30	33.40
3	2483.50	58.2 PK	74.0	-15.8	1.06 H	257	24.80	33.40
4	2483.50	46.2 AV	54.0	-7.8	1.06 H	257	12.80	33.40
5	4960.00	48.6 PK	74.0	-25.4	1.78 H	76	46.40	2.20
6	4960.00	37.9 AV	54.0	-16.1	1.78 H	76	35.70	2.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	86.7 PK			1.14 V	129	53.30	33.40
2	*2480.00	85.1 AV			1.14 V	129	51.70	33.40
3	2483.50	58.4 PK	74.0	-15.6	1.14 V	129	25.00	33.40
4	2483.50	46.1 AV	54.0	-7.9	1.14 V	129	12.70	33.40
5	4960.00	49.1 PK	74.0	-24.9	1.22 V	297	46.90	2.20
6	4960.00	39.6 AV	54.0	-14.4	1.22 V	297	37.40	2.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz worst-case data

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.94	20.5 QP	40.0	-19.5	2.00 H	69	36.60	-16.10
2	59.10	19.1 QP	40.0	-20.9	1.26 H	81	33.80	-14.70
3	158.04	17.9 QP	43.5	-25.6	1.26 H	15	31.70	-13.80
4	631.40	26.6 QP	46.0	-19.4	1.00 H	17	32.30	-5.70
5	798.24	30.1 QP	46.0	-15.9	2.00 H	193	33.00	-2.90
6	972.84	31.4 QP	54.0	-22.6	1.26 H	90	31.40	0.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.94	29.0 QP	40.0	-11.0	1.25 V	148	45.10	-16.10
2	66.86	26.3 QP	40.0	-13.7	1.49 V	196	42.00	-15.70
3	158.04	17.4 QP	43.5	-26.1	1.99 V	118	31.20	-13.80
4	573.20	25.8 QP	46.0	-20.2	1.99 V	296	33.10	-7.30
5	844.80	30.1 QP	46.0	-15.9	1.00 V	267	32.30	-2.20
6	982.54	32.6 QP	54.0	-21.4	1.49 V	15	32.70	-0.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.94	22.2 QP	40.0	-17.8	1.50 H	141	38.30	-16.10
2	53.28	20.4 QP	40.0	-19.6	2.00 H	63	34.60	-14.20
3	84.32	21.0 QP	40.0	-19.0	2.00 H	83	40.20	-19.20
4	148.34	32.8 QP	43.5	-10.7	2.00 H	294	47.00	-14.20
5	241.46	29.6 QP	46.0	-16.4	1.50 H	294	44.40	-14.80
6	988.36	31.6 QP	54.0	-22.4	2.00 H	267	31.60	0.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.88	28.6 QP	40.0	-11.4	1.24 V	87	44.40	-15.80
2	51.34	36.6 QP	40.0	-3.4	1.24 V	175	51.00	-14.40
3	84.32	22.7 QP	40.0	-17.3	1.00 V	175	41.90	-19.20
4	148.34	27.1 QP	43.5	-16.4	1.00 V	183	41.30	-14.20
5	260.86	21.1 QP	46.0	-24.9	1.99 V	221	35.10	-14.00
6	998.06	31.7 QP	54.0	-22.3	1.99 V	160	31.70	0.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.82	22.3 QP	40.0	-17.7	1.99 H	80	37.90	-15.60
2	53.28	21.7 QP	40.0	-18.3	1.99 H	105	35.90	-14.20
3	86.26	23.0 QP	40.0	-17.0	1.99 H	74	42.60	-19.60
4	148.34	33.2 QP	43.5	-10.3	1.24 H	278	47.40	-14.20
5	239.52	28.4 QP	46.0	-17.6	1.24 H	318	43.50	-15.10
6	823.46	30.1 QP	46.0	-15.9	1.24 H	15	32.60	-2.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.94	24.2 QP	40.0	-15.8	1.26 V	80	40.30	-16.10
2	55.22	36.5 QP	40.0	-3.5	1.01 V	11	51.00	-14.50
3	148.34	27.8 QP	43.5	-15.7	1.01 V	203	42.00	-14.20
4	260.86	26.4 QP	46.0	-19.6	1.26 V	207	40.40	-14.00
5	427.70	28.3 QP	46.0	-17.7	1.26 V	209	38.10	-9.80
6	1000.00	31.9 QP	54.0	-22.1	1.26 V	203	31.90	0.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	D		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.46	25.6 QP	40.0	-14.4	1.49 H	55	40.10	-14.50
2	70.74	25.3 QP	40.0	-14.7	1.49 H	109	41.50	-16.20
3	134.76	30.2 QP	43.5	-13.3	1.99 H	96	45.20	-15.00
4	210.42	23.8 QP	43.5	-19.7	1.00 H	121	40.50	-16.70
5	256.98	24.2 QP	46.0	-21.8	1.24 H	109	38.50	-14.30
6	992.24	31.3 QP	54.0	-22.7	1.24 H	277	31.30	0.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.70	35.4 QP	40.0	-4.6	1.01 V	133	50.40	-15.00
2	47.46	36.7 QP	40.0	-3.3	1.25 V	181	51.20	-14.50
3	70.74	34.3 QP	40.0	-5.7	1.01 V	186	50.50	-16.20
4	134.76	29.5 QP	43.5	-14.0	1.01 V	10	44.50	-15.00
5	208.48	22.1 QP	43.5	-21.4	1.51 V	85	38.90	-16.80
6	986.42	32.5 QP	54.0	-21.5	1.01 V	10	32.60	-0.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	E		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.40	35.6 QP	40.0	-4.4	1.01 H	196	50.10	-14.50
2	74.62	29.1 QP	40.0	-10.9	2.00 H	96	46.40	-17.30
3	148.34	29.7 QP	43.5	-13.8	2.00 H	254	43.90	-14.20
4	216.24	23.0 QP	46.0	-23.0	1.01 H	123	39.40	-16.40
5	255.04	23.2 QP	46.0	-22.8	1.25 H	112	37.60	-14.40
6	992.24	32.1 QP	54.0	-21.9	1.25 H	7	32.10	0.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.88	28.8 QP	40.0	-11.2	1.49 V	97	44.60	-15.80
2	47.46	35.5 QP	40.0	-4.5	1.24 V	15	50.00	-14.50
3	74.62	35.2 QP	40.0	-4.8	1.00 V	198	52.50	-17.30
4	138.64	27.0 QP	43.5	-16.5	1.24 V	224	41.80	-14.80
5	216.24	21.4 QP	46.0	-24.6	1.00 V	96	37.80	-16.40
6	881.66	30.8 QP	46.0	-15.2	1.49 V	289	32.50	-1.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 11, 2014	Nov. 10, 2015
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 26, 2015	Feb. 25, 2016
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 24, 2015	Jul. 23, 2016
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

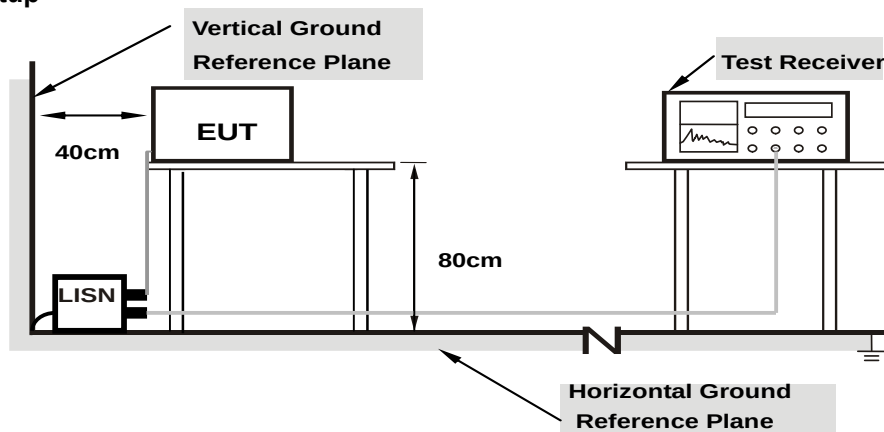

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16139	0.05	38.69	33.36	38.74	33.41	65.39	55.39	-26.65	-21.98
2	0.20084	0.06	34.34	29.70	34.40	29.76	63.58	53.58	-29.18	-23.82
3	0.24343	0.06	30.69	23.36	30.75	23.42	61.98	51.98	-31.23	-28.56
4	0.28288	0.06	29.50	22.12	29.56	22.18	60.73	50.73	-31.17	-28.55
5	0.36143	0.06	30.85	28.69	30.91	28.75	58.70	48.70	-27.79	-19.95
6	12.46259	0.56	23.43	14.58	23.99	15.14	60.00	50.00	-36.01	-34.86

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

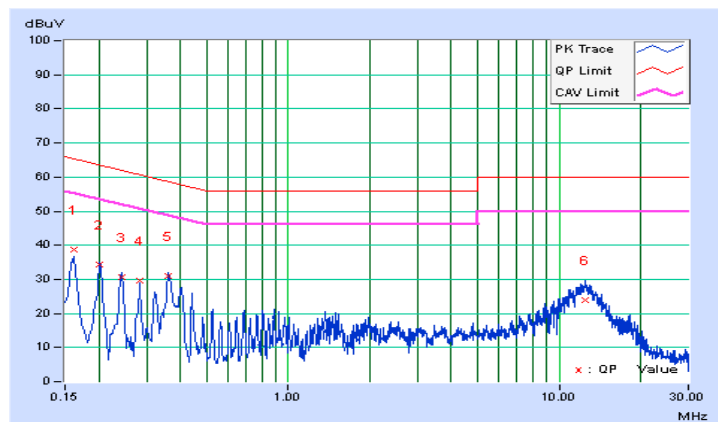


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16139	0.05	40.00	33.86	40.05	33.91	65.39	55.39	-25.34	-21.48
2	0.20084	0.05	35.97	30.17	36.02	30.22	63.58	53.58	-27.56	-23.36
3	0.24384	0.05	32.40	23.54	32.45	23.59	61.96	51.96	-29.51	-28.37
4	0.28288	0.05	33.28	22.54	33.33	22.59	60.73	50.73	-27.40	-28.14
5	0.36505	0.06	33.09	29.54	33.15	29.60	58.61	48.61	-25.46	-19.01
6	12.39612	0.49	27.37	18.87	27.86	19.36	60.00	50.00	-32.14	-30.64

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

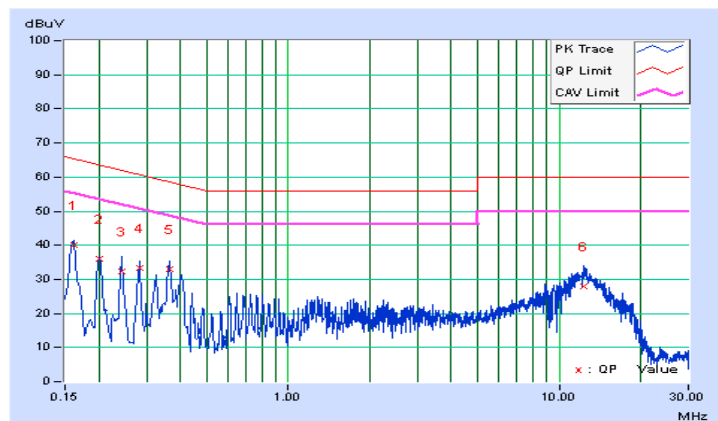


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	0.05	35.58	29.69	35.63	29.74	65.58	55.58	-29.95	-25.84
2	0.20084	0.06	34.66	30.18	34.72	30.24	63.58	53.58	-28.86	-23.34
3	0.24215	0.06	30.75	25.76	30.81	25.82	62.02	52.02	-31.21	-26.20
4	0.36505	0.06	31.64	29.07	31.70	29.13	58.61	48.61	-26.91	-19.48
5	0.48295	0.06	22.62	14.87	22.68	14.93	56.29	46.29	-33.61	-31.36
6	12.05595	0.54	26.05	16.65	26.59	17.19	60.00	50.00	-33.41	-32.81

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

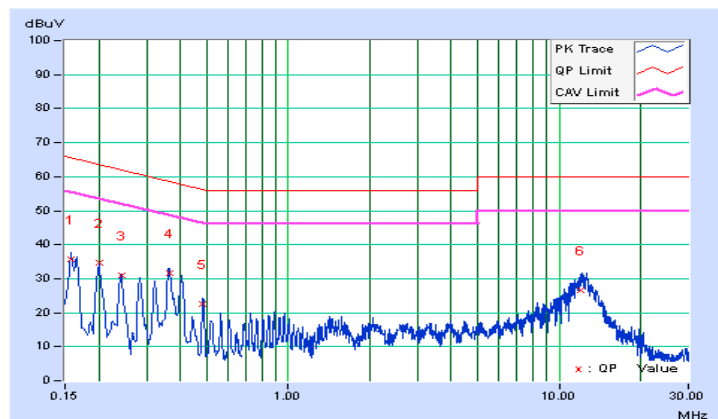


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	0.05	38.94	32.69	38.99	32.74	65.37	55.37	-26.38	-22.63
2	0.20350	0.05	34.28	29.06	34.33	29.11	63.47	53.47	-29.14	-24.36
3	0.23993	0.05	30.09	24.80	30.14	24.85	62.10	52.10	-31.96	-27.25
4	0.36143	0.06	35.87	32.03	35.93	32.09	58.70	48.70	-22.77	-16.61
5	0.72274	0.07	23.35	16.75	23.42	16.82	56.00	46.00	-32.58	-29.18
6	12.13024	0.49	30.44	21.40	30.93	21.89	60.00	50.00	-29.07	-28.11

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

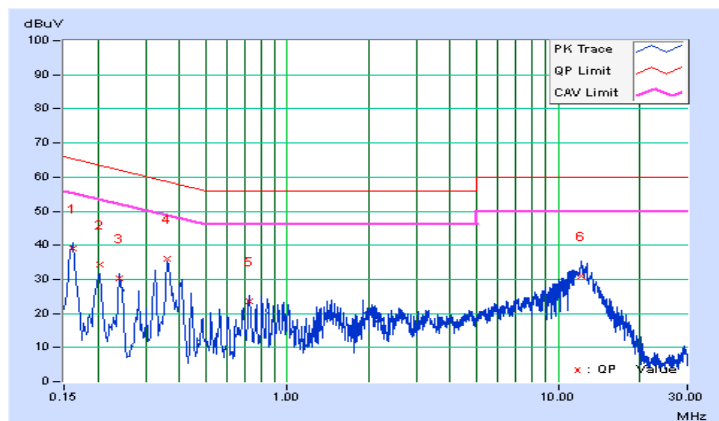


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.05	37.84	29.07	37.89	29.12	66.00	56.00	-28.11	-26.88
2	0.19305	0.06	34.11	26.50	34.17	26.56	63.90	53.90	-29.74	-27.35
3	0.23586	0.06	30.95	26.49	31.01	26.55	62.24	52.24	-31.23	-25.69
4	0.40586	0.06	37.50	33.60	37.56	33.66	57.73	47.73	-20.17	-14.07
5	0.79515	0.07	26.99	18.49	27.06	18.56	56.00	46.00	-28.94	-27.44
6	1.68663	0.11	25.80	19.39	25.91	19.50	56.00	46.00	-30.09	-26.50

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

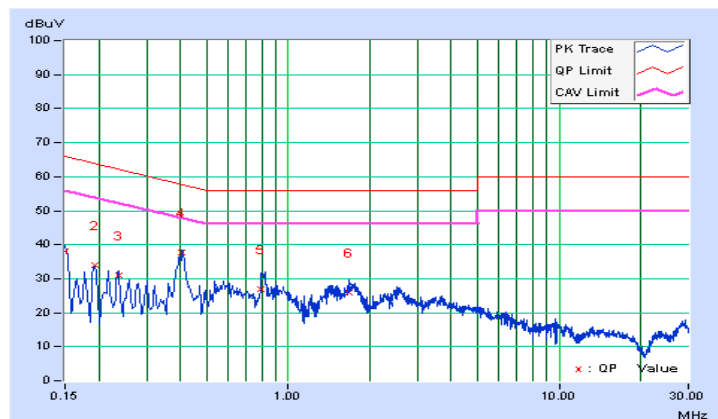


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.05	38.23	28.20	38.28	28.25	66.00	56.00	-27.72	-27.75
2	0.17346	0.05	35.37	24.54	35.42	24.59	64.79	54.79	-29.37	-30.20
3	0.19301	0.05	34.35	24.04	34.40	24.09	63.91	53.91	-29.51	-29.82
4	0.40373	0.06	33.70	25.74	33.76	25.80	57.78	47.78	-24.02	-21.98
5	0.82643	0.07	24.37	14.91	24.44	14.98	56.00	46.00	-31.56	-31.02
6	1.54196	0.10	21.12	11.07	21.22	11.17	56.00	46.00	-34.78	-34.83

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

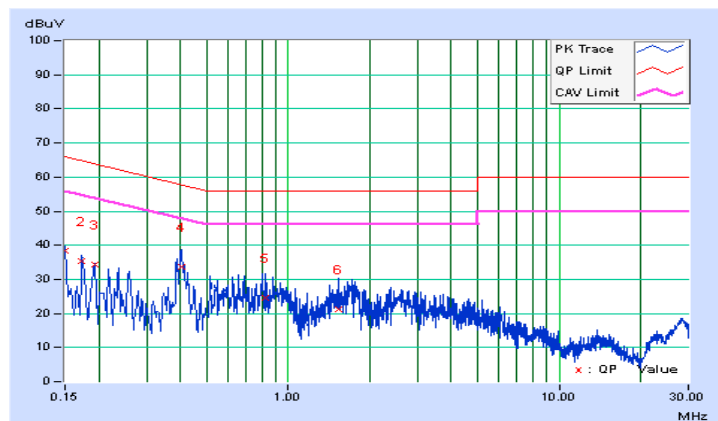


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	E		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.05	39.65	30.22	39.70	30.27	65.79	55.79	-26.09	-25.52
2	0.17605	0.06	37.14	27.64	37.20	27.70	64.67	54.67	-27.47	-26.97
3	0.19717	0.06	35.29	27.14	35.35	27.20	63.73	53.73	-28.38	-26.53
4	0.39635	0.06	34.64	28.19	34.70	28.25	57.93	47.93	-23.23	-19.68
5	0.76789	0.07	25.52	20.32	25.59	20.39	56.00	46.00	-30.41	-25.61
6	1.55760	0.10	25.14	19.15	25.24	19.25	56.00	46.00	-30.76	-26.75

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

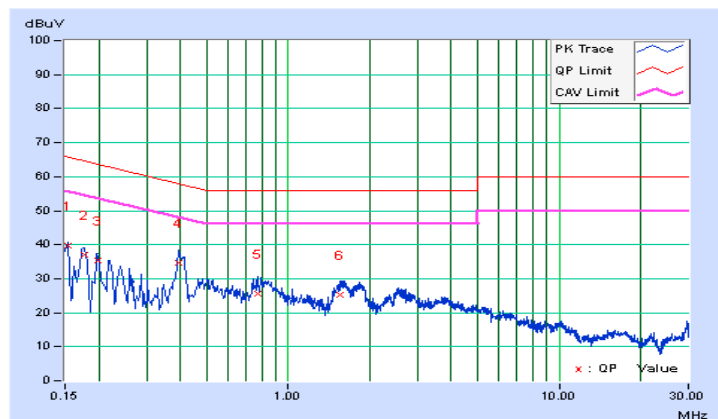


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	E		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.05	38.54	28.61	38.59	28.66	66.00	56.00	-27.41	-27.34
2	0.19665	0.05	34.16	23.95	34.21	24.00	63.75	53.75	-29.54	-29.75
3	0.25932	0.05	31.34	22.90	31.39	22.95	61.45	51.45	-30.06	-28.50
4	0.38851	0.06	33.70	26.77	33.76	26.83	58.10	48.10	-24.34	-21.27
5	0.88117	0.08	24.55	16.05	24.63	16.13	56.00	46.00	-31.37	-29.87
6	1.56933	0.10	23.42	14.96	23.52	15.06	56.00	46.00	-32.48	-30.94

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

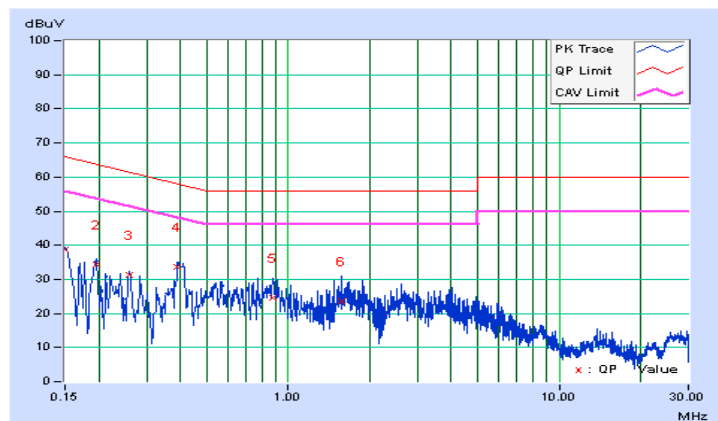


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard


No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.72	0.5	Pass
19	2440	0.74	0.5	Pass
39	2480	0.73	0.5	Pass

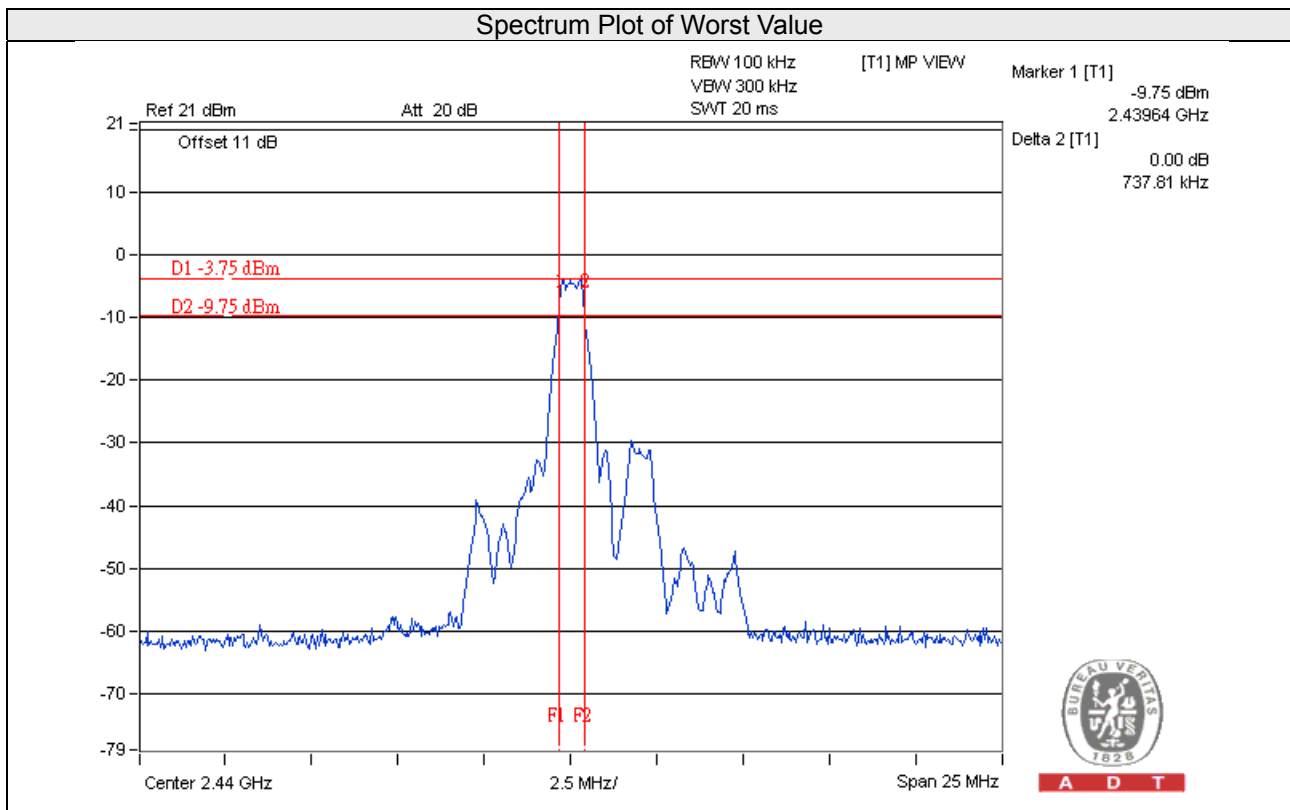


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results


Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	0.4656	-3.32	30	Pass
19	2440	0.4285	-3.68	30	Pass
39	2480	0.4046	-3.93	30	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

Channel	Freq. (MHz)	PSD (dBm)	Limit (dBm)	Pass /Fail
0	2402	-14.24	8	Pass
19	2440	-15.01	8	Pass
39	2480	-15.62	8	Pass

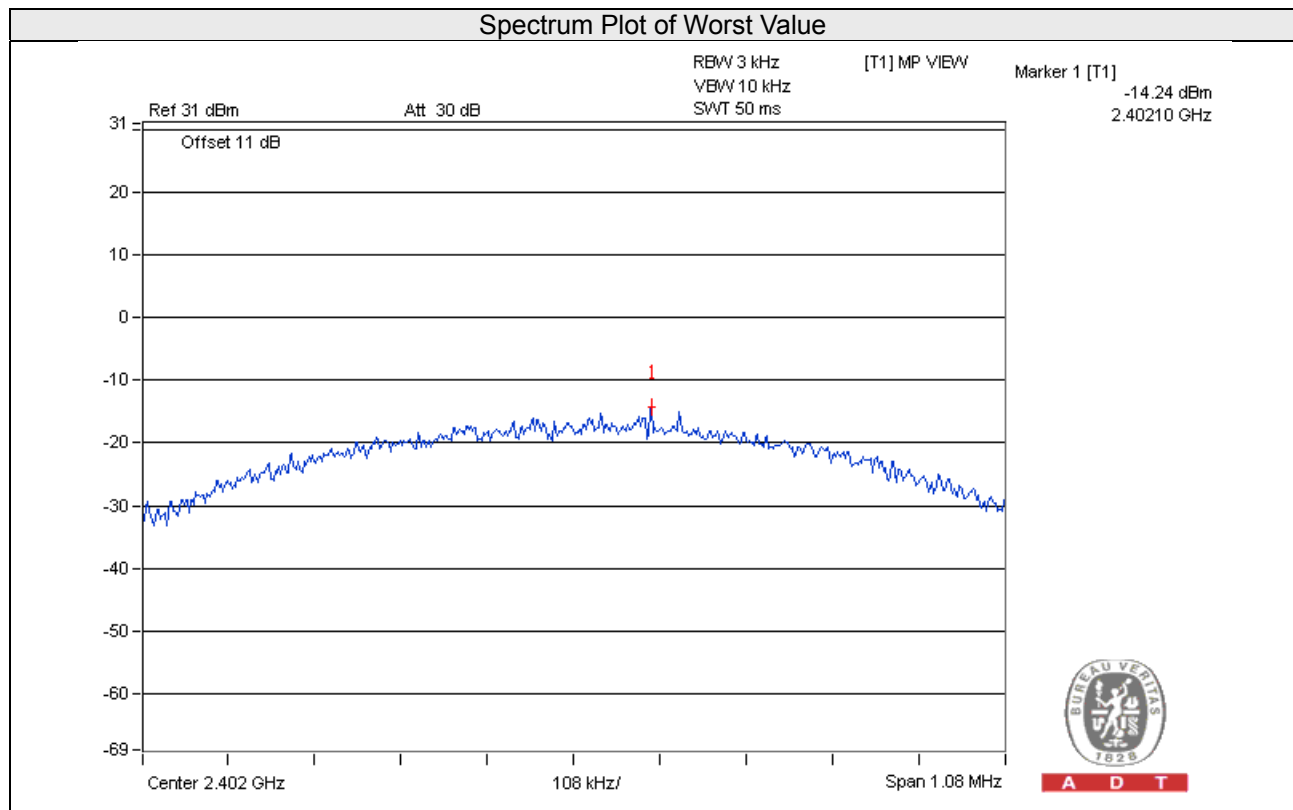


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard



No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



CH 0

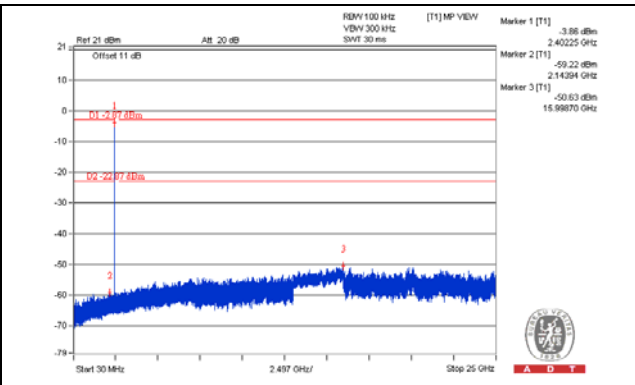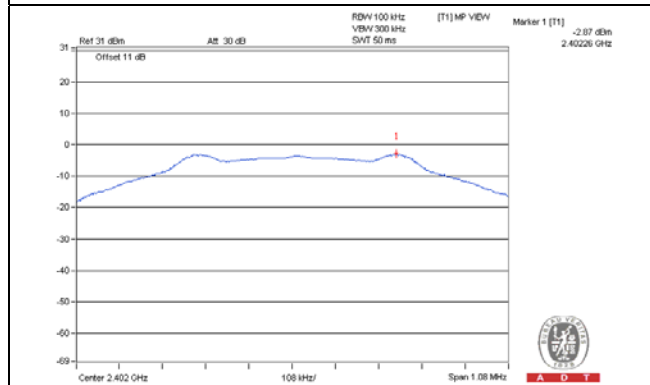



CH 19

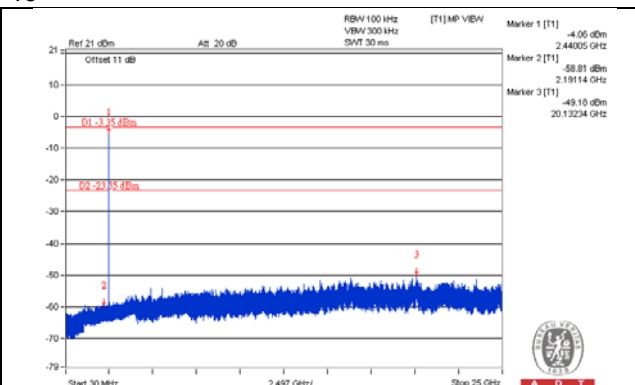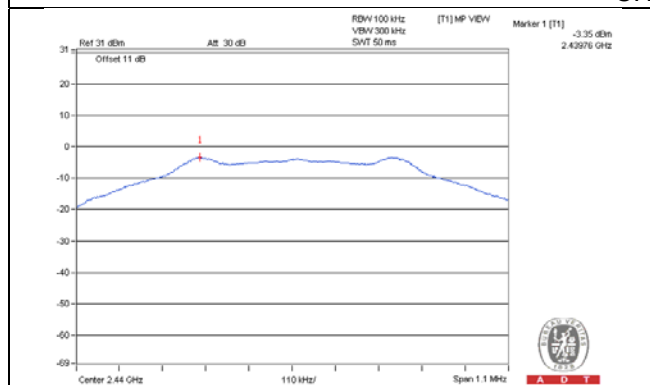

CH 39

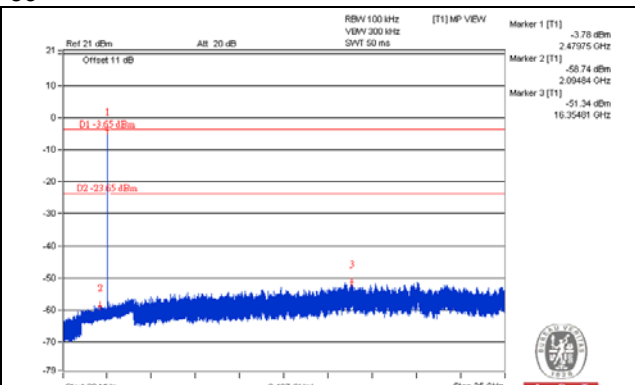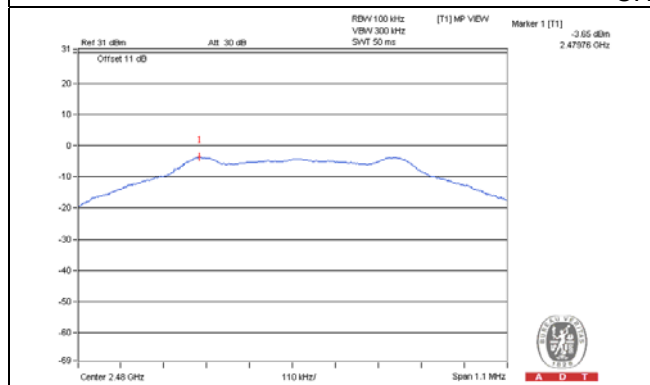

CH 0 Band edge

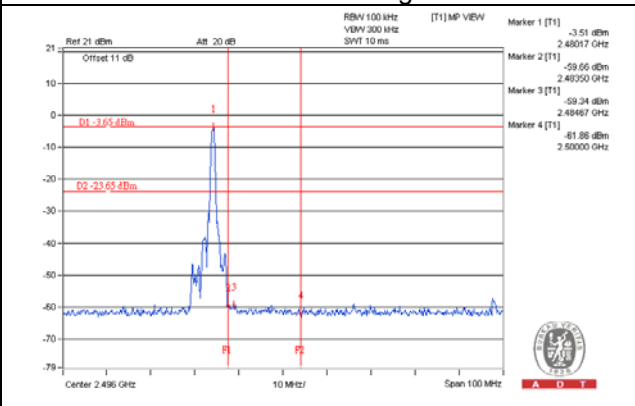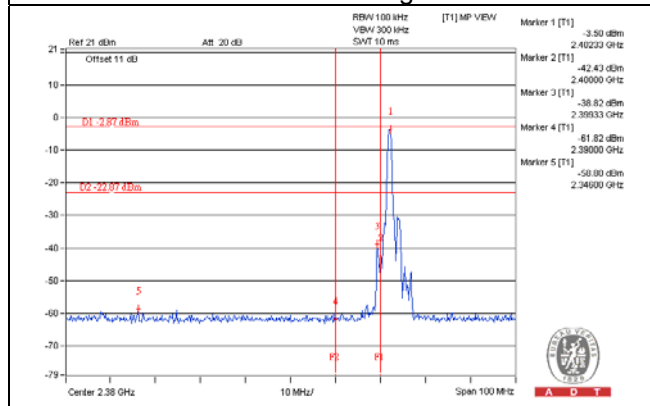

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---