


RECORD OF CHANGES							MATERIAL DESCRIPTION		14800000A	
NO.	DESCRIPTION	BY	APVD	AGENCY	E.R. NO.	DATE	MATERIAL SPEC.		NAME LABEL, DATA, BLANK	
1	UPDATE FLEXCON PRODUCT I.D.	TLT	JFM		50292	4/96	SCALE NONE		1.00 X 4.13	
2	ADDED AGENCY APPROVAL NOTICE	NB	ACT	JR	52857	2/98	UNITS INCHES	DO NOT SCALE DRAWING	DRN DER	12/95
							DIMENSION TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD JFM	12/95
							DECIMAL	FRACTIONAL	AGENCY	
							.XX=±0.02		THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF METTLER-TOLEDO, INC. THE CONTENTS HEREOF MAY NOT BE USED NOR REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF METTLER-TOLEDO, INC. COPYRIGHT 1995 METTLER-TOLEDO, INC.	
							XXX=±0.005		METTLER TOLEDO	
							PROJ.NO./SPEC.NO.	SUPERSEDES		
							5287-15	SUPERSEDED BY		
							ENGR. RELEASE NO.	49974	12/95	

ENGINEERING APPROVED MATERIAL VENDORS:
FLEXCON CO., INC. THERMLfilm TAMPERmark
MM-150-S VOID TC-387 L-156 SPEC 50 K/Q-8 (REF)

SUFFIX CODE INDEX			
SUFFIX	DESCRIPTION	FINISH	CONSISTS OF
00A	SINGLE LABEL	----	00B
00B	PURCHASE ROLL	----	SEE NOTES

SPECIFICATIONS:

- MATERIAL:
SUBSTRATE - SILVER POLYESTER WITH TOPCOAT FOR THERMAL TRANSFER PRINTING AND TAMPER PROOF "VOID" MESSAGE RELEASE COATING ON 2nd SURFACE. 0.003 THICK MAX.
ADHESIVE - PERMANENT ACRYLIC PRESSURE SENSITIVE. 0.001/0.002 THICK.
- THE CORE I.D. SHALL BE GREATER THAN 1.5 AND NOT EXCEED 3.0.
- THE O.D. OF THE ROLL SHALL NOT EXCEED 8.0.
- SUFFX 00A = SINGLE LABEL.
SUFFX 00B = (1) ROLL W/1,000 PER ROLL.

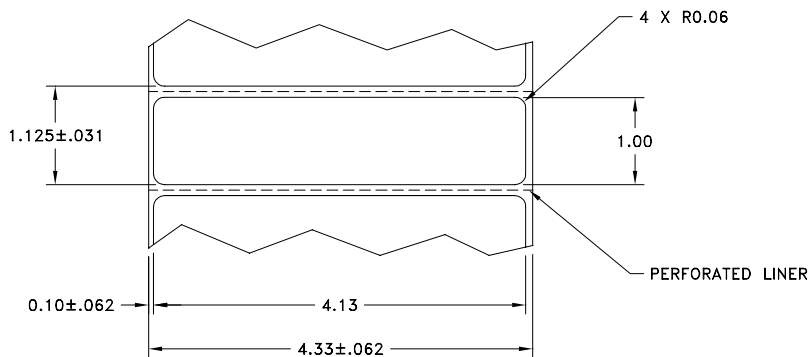

NOTICE

THIS ITEM USED IN AGENCY APPROVED PRODUCT. DO NOT CHANGE DRAWING WITHOUT AGENCY APPROVAL.