

Certification Test Report

For a

Scale Controller


Manufacturer:

Mettler Toledo
6600 Huntley Road
Columbus, OH 43229
United States of America


Laboratory:

F-Squared Laboratories
16740 Peters Road
Middlefield, Ohio 44062
United States of America

The Scale Controller, model MCPC, has been tested and found to comply with the requirements of the Federal Communications Commission outlined in the Federal Register CFR 47, Part 15, subpart C. The product was received on September 12, 2003 and the testing was completed on January 28, 2004.

Evaluation Conducted By:

John Harrington
EMC Technical Manager

Report Reviewed By:
for

Wendy Fuster
President



F-Squared Laboratories
14333 Kinsman Road
Burton, OH 44021
(440) 834-8926
Fax: (440) 834-8914

This report shall not be duplicated except in full without the written approval of F-Squared Laboratories.

Table of Contents

Exhibit	Title	Page
	Cover Page	1
	Table of Contents	2
I	Engineering Statement	3
II	Measurement Instrument List	5
III	EUT Information	6
IV	EUT Configuration and Cables	7
V	Radiated Data	8
VI	Band Occupancy	10
VII	EUT Photos	12

Exhibit I

Engineering Statement

This report has been prepared on behalf of Mettler Toledo to provide documentation for the testing described herein. This equipment has been tested and found to comply with Part 15, subpart C of the FCC Rules and under the regulation section 15.249 and section 15.209 procedures, using ANSI C63.4 1992 standards. The test results found in this report relate only to the items tested.

EQUIPMENT UNDER TEST: Scale Controller
Trade Name: Mettler Toledo
FCC ID: RITSC0001
Model No.: MCPC
Power Supply: 12 VDC Battery

APPLICABLE RULES: CFR 47, Part 15, subpart C

EQUIPMENT CATEGORY: Intentional Radiator

MEASUREMENT LOCATION: F-Squared Laboratories in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

MEASUREMENT PROCEDURE: All measurements were performed according to the 1992 version of ANSI C63.4. A list of the measurement equipment can be found in Exhibit II.

UNCERTAINTY BUDGET:

- Radiated Emission
Combined Uncertainty (+ or -) 2.24 dB
Expanded Uncertainty (+ or -) 4.48 dB
- Conducted Emission
Combined Uncertainty (+ or -) 1.13 dB
Expanded Uncertainty (+ or -) 2.26 dB

ENGINEERING STATEMENT:

I hereby state that: The measurements shown in this application were made in accordance with the procedures indicated and the energy emitted by this equipment was found to be within the limits. I assume full responsibility for the accuracy and completeness of these measurements.

I further state that: On the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15 of the FCC Rules under normal use and maintenance.

Certified by: _____
John Harrington, EMC Technical Manager

Exhibit II

List of Measurement Instrumentation

Equipment Type	Manufacturer	Model	Serial Number	Calibration Due Date
OATS	Compliance Labs	N/A	001	Oct. 8, 2004
Receiver	Dynamic Sciences	DSI-2020	604/002	Sept. 4, 2004
Chamber Antenna 1	EMC Test Systems	3143 Biconilog	9603-1229	June 12, 2004
OATS Antenna 2	EMC Test Systems	3143 Biconilog	9609-1306	July 25, 2004
Pre Amp	Hewlett Packard	83006A	3104A00500	Sept. 9, 2004
Spectrum Analyzer	Hewlett Packard	8566B	2311A02270	Nov. 4, 2004
Active Loop Antenna	AH Systems	SAS-562B	232	Nov. 14, 2004
Horn Antenna	EMCO	3115	9809-5580	Feb. 6, 2005

Exhibit III

EUT Information

TEST ITEM CONDITION:

The equipment to be tested was received in good condition.

TESTING ALGORITHM:

The EUT was powered on using a fully charged battery and was operated using software in a test mode that made it transmit with a constant carrier.

The fundamental emissions, harmonic emissions up to the 10th harmonic and the other spurious emissions are recorded in the data tables.

RADIATED EMISSION TESTING:

The emissions were maximized by rotating the table and raising/lowering the antenna mounted on a 4.0 meter mast. Cable and peripheral positions were also varied to produce maximum emissions. Both horizontal and vertical field components were measured. The output of the antenna was connected to the input of the receiver and emissions were measured in the range 9kHz to 10GHz. The measurement detector, bandwidth and distance are detailed in the table below. The raw measurements were corrected to allow for antenna factor and cable loss. All data for radiated emissions can be found in Exhibit V.

Frequency Range	Detector	Resolution Bandwidth	Distance
9kHz to 150kHz	Quasi-Peak	200Hz	3.0m
150kHz to 30MHz	Quasi-Peak	10kHz	3.0m
30MHz to 1GHz	Quasi-Peak	120kHz	3.0m
1GHz to 10GHz	Peak	1MHz	3.0m

Exhibit IV

EUT Configuration and Cables

Equipment Under Test (EUT):

Device	Manufacturer	Model Number	Serial Number
Scale Controller	Mettler Toledo	MCPC	None

Accessories (Support Equipment):

Device	Manufacturer	Model Number	Serial Number
12 VDC Battery	Panasonic	LC-LC1233P	N/A

Cables:

Cable Function	Length	Shielded (Yes/No)
DC Power	1 meter	N

Exhibit V

Radiated Data

Test Date:	Jan. 28, 2004	Test Engineer:	J. Harrington
Standard:	FCC 47 CFR 15, subpart C, clause 15.249	Air Temperature:	21°C
Limit:	Class A	Relative Humidity:	45%
Distance:	3.0 Meters		

Carrier Frequency: 914.997MHz

Frequency (MHz)	Polarity (V/H)	Measurement (dBuV)	Antenna Factor (dB/m)	Cable loss (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
914.997	H	53.4	23.8	8.0	85.2	94.0	8.8
914.997	V	50.5	23.8	8.0	82.3	94.0	11.7
1829.994	H	15.7	28.3	8.5	52.5	54.0	1.5
1829.994	V	15.6	28.3	8.5	52.4	54.0	1.6
112.71	H	19.35	12.95	1.05	33.35	43.50	10.15
112.71	V	16.27	12.95	1.05	30.27	43.50	13.23
162.83	H	18.00	12.48	1.20	31.68	43.50	11.82
162.83	V	15.49	12.48	1.20	29.17	43.50	14.33
564.27	H	15.43	19.05	2.63	37.11	46.00	8.89
564.27	V	19.71	19.05	2.63	41.39	46.00	4.61
663.30	H	19.90	20.30	2.80	43.00	46.00	3.00
663.30	V	20.36	20.30	2.80	43.46	46.00	2.54
701.56	H	15.10	20.70	2.90	38.70	46.00	7.30
701.56	V	14.48	20.70	2.90	38.08	46.00	7.92

Carrier Frequency: 902.09MHz

Frequency (MHz)	Polarity (V/H)	Measurement (dBuV)	Antenna Factor (dB/m)	Cable loss (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
902.09	V	49.6	24.0	8.0	81.6	94.0	12.4
902.09	H	54.1	24.0	8.0	86.1	94.0	7.9
1804.18	V	16.1	28.3	8.5	52.9	54.0	1.1
1804.18	H	14.9	28.3	8.5	51.7	54.0	2.3
112.71	H	18.65	12.95	1.05	32.65	43.5	10.85
112.71	V	16.17	12.95	1.05	30.17	43.5	13.33
162.83	H	18.52	12.48	1.2	32.2	43.5	11.3
162.83	V	16.49	12.48	1.2	30.17	43.5	13.33
564.27	H	15.43	19.05	2.63	37.11	46	8.89
564.27	V	20.15	19.05	2.63	41.83	46	4.17
663.3	H	19.45	20.3	2.8	42.55	46	3.45
663.3	V	19.57	20.3	2.8	42.67	46	3.33
701.56	H	14.9	20.7	2.9	38.5	46	7.5
701.56	V	14.35	20.7	2.9	37.95	46	8.05

Carrier Frequency: 927.98MHz

Frequency (MHz)	Polarity (V/H)	Measurement (dBuV)	Antenna Factor (dB/m)	Cable loss (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
927.98	V	45.5	23.8	8.0	77.3	94.0	16.7
927.98	H	48	23.8	8.0	79.8	94.0	14.2
1855.96	H	16.1	28.3	8.5	52.9	54.0	1.1
1855.96	V	16.8	28.3	8.5	53.6	54.0	0.4
112.71	H	19.35	12.95	1.05	33.35	43.50	10.15
112.71	V	16.27	12.95	1.05	30.27	43.50	13.23
162.83	H	18.00	12.48	1.20	31.68	43.50	11.82
162.83	V	15.49	12.48	1.20	29.17	43.50	14.33
564.27	H	15.43	19.05	2.63	37.11	46.00	8.89
564.27	V	19.71	19.05	2.63	41.39	46.00	4.61
663.30	H	19.90	20.30	2.80	43.00	46.00	3.00
663.30	V	20.36	20.30	2.80	43.46	46.00	2.54
701.56	H	15.10	20.70	2.90	38.70	46.00	7.30
701.56	V	14.48	20.70	2.90	38.08	46.00	7.92


PASS

FAIL

Exhibit VI

Band Occupancy

Test Date:	Dec. 16, 2003	Test Engineer:	F. Gonzales
Relative Humidity:	46%	Air Temperature:	21° C

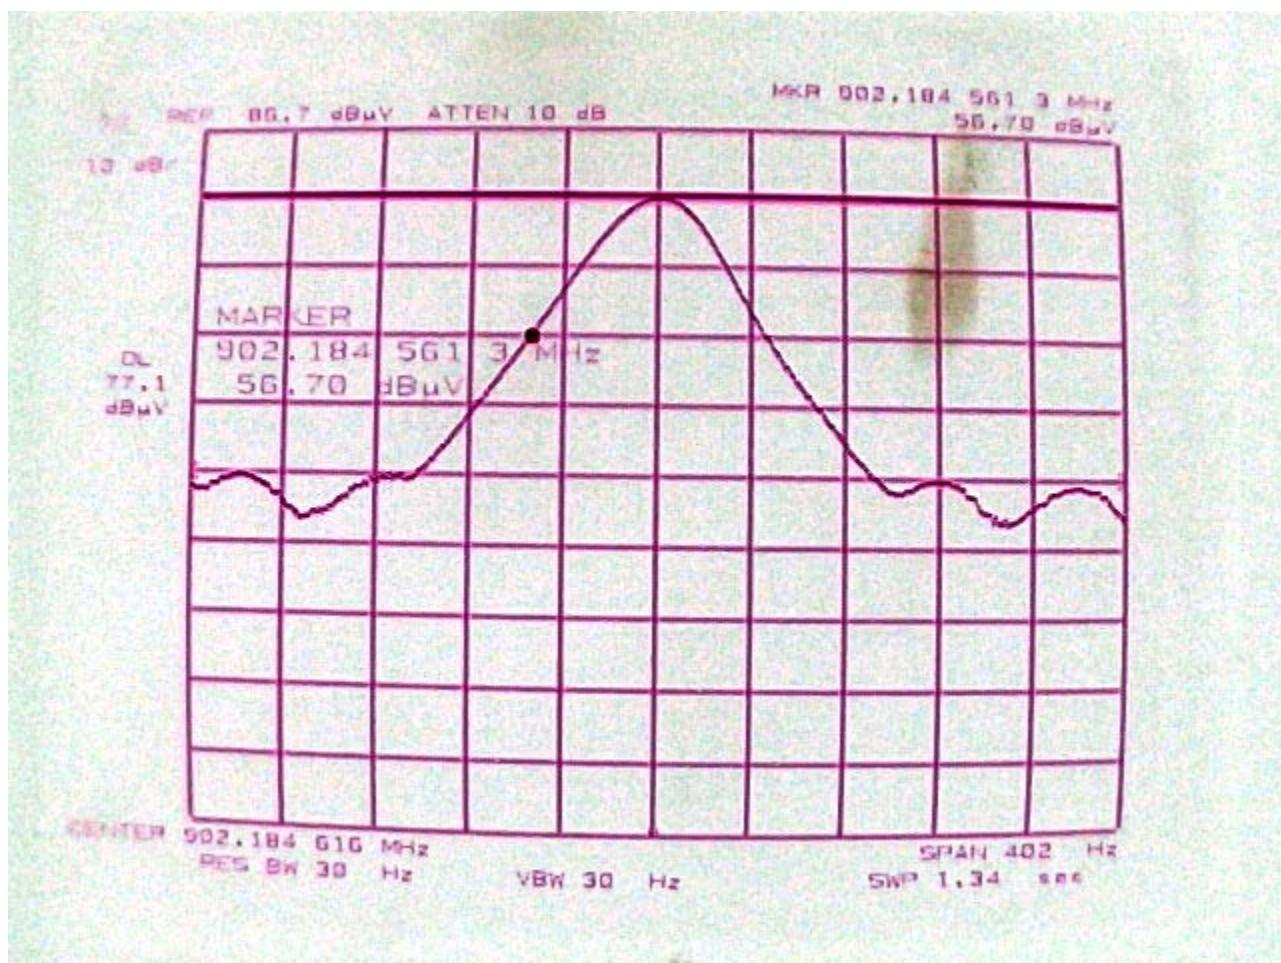

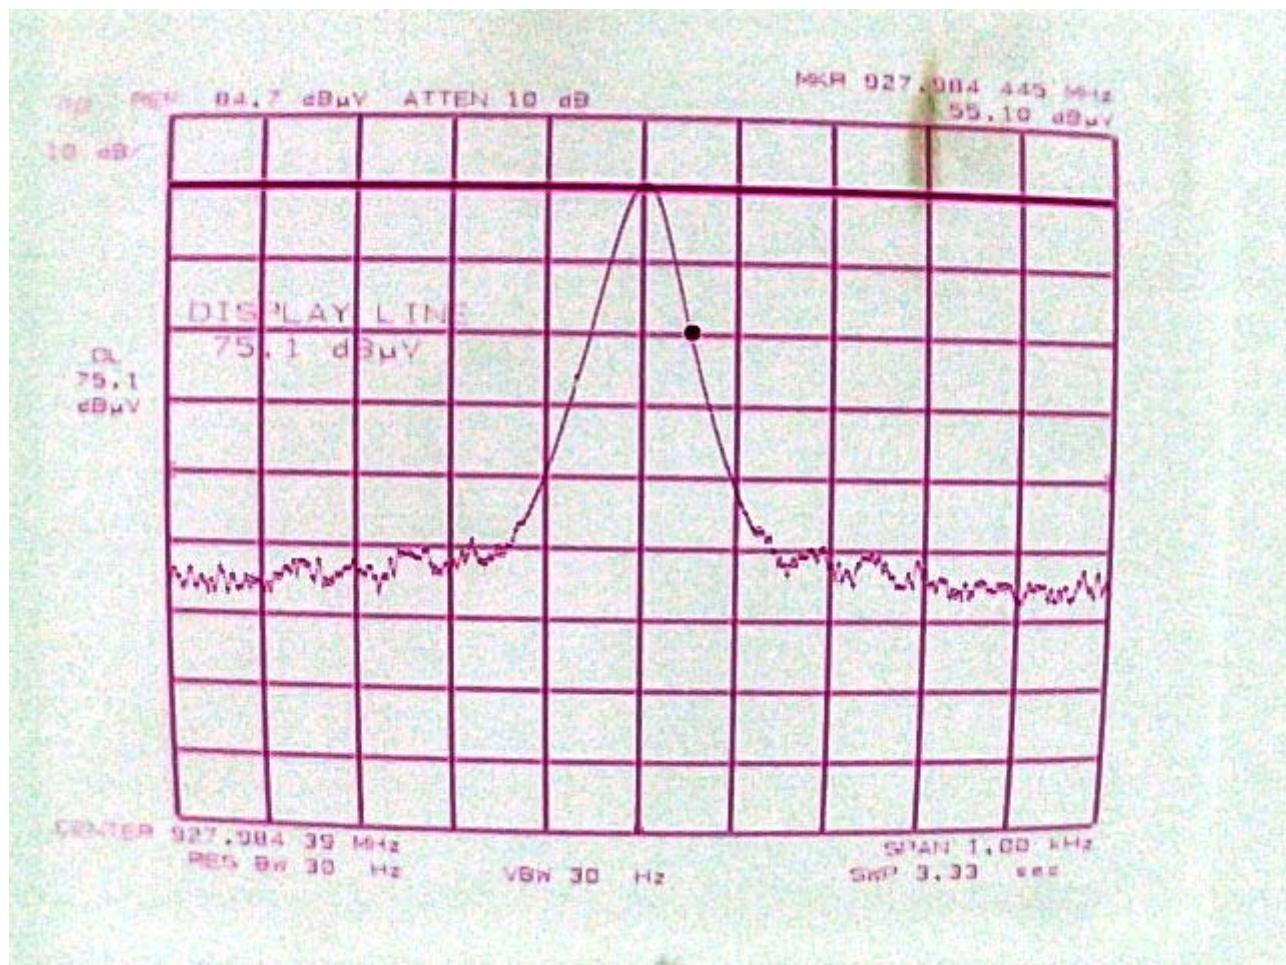


Exhibit VII




TEST SET-UP


&

EUT PHOTOGRAPHS

RADIATED TEST

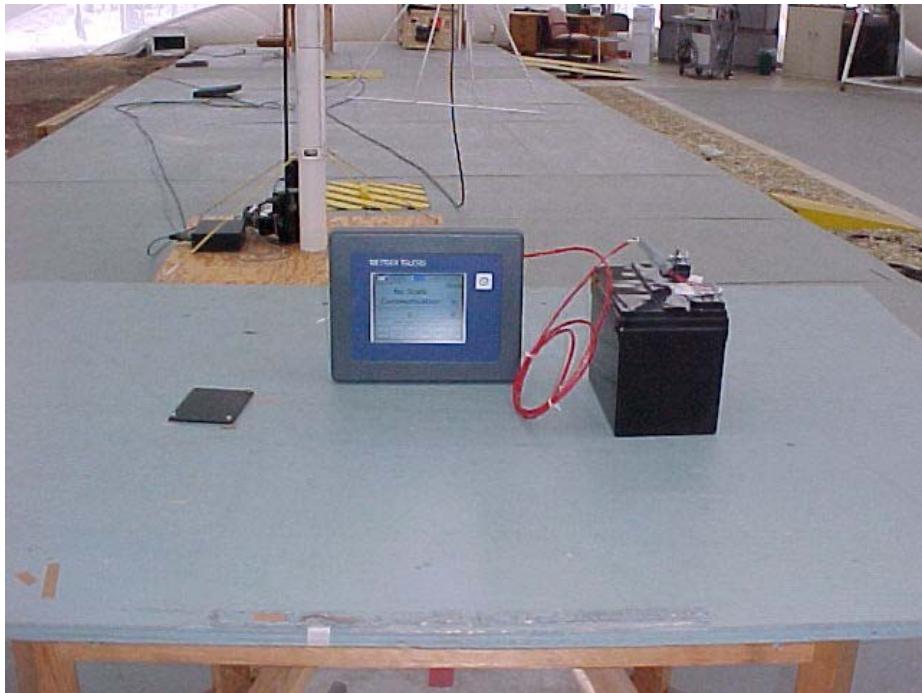


RADIATED TEST

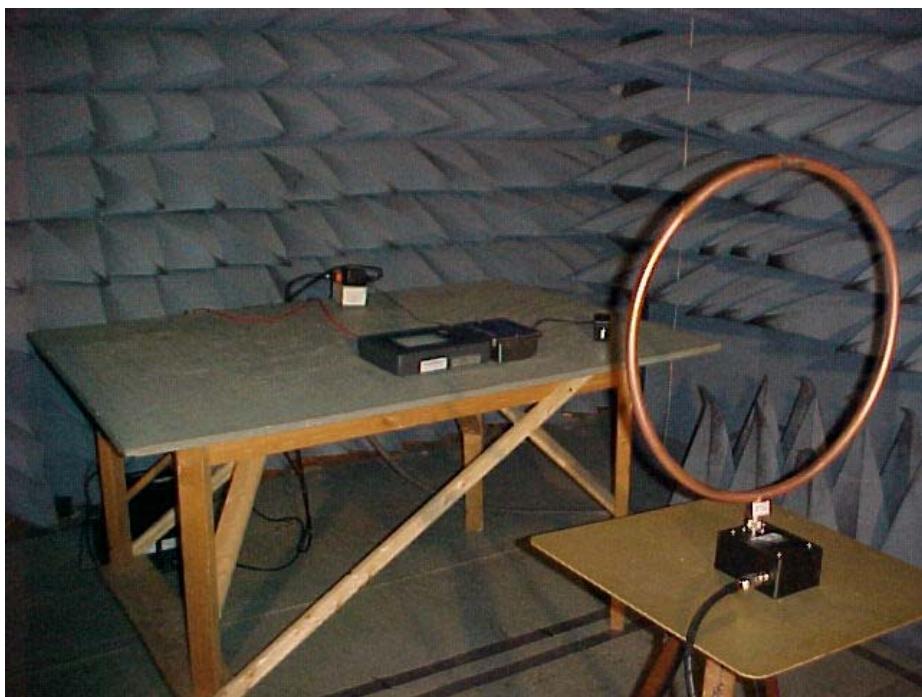


Client: Mettler Toledo
Model: MCPC

Order Number: CLE091702-01

PHOTOGRAPH OF EUT – *Front View*

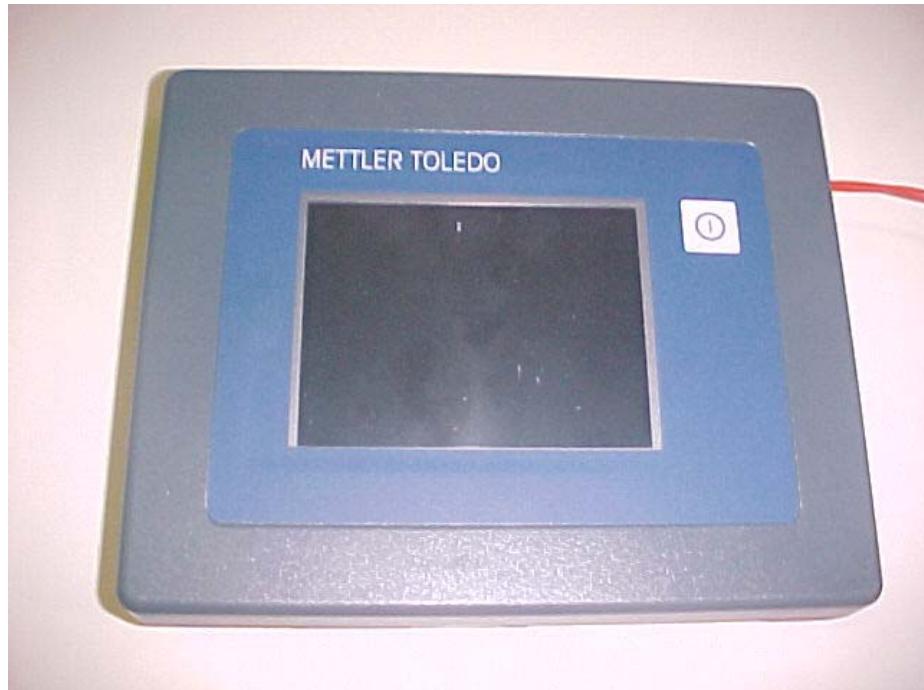

PHOTOGRAPH OF EUT – *Back View*

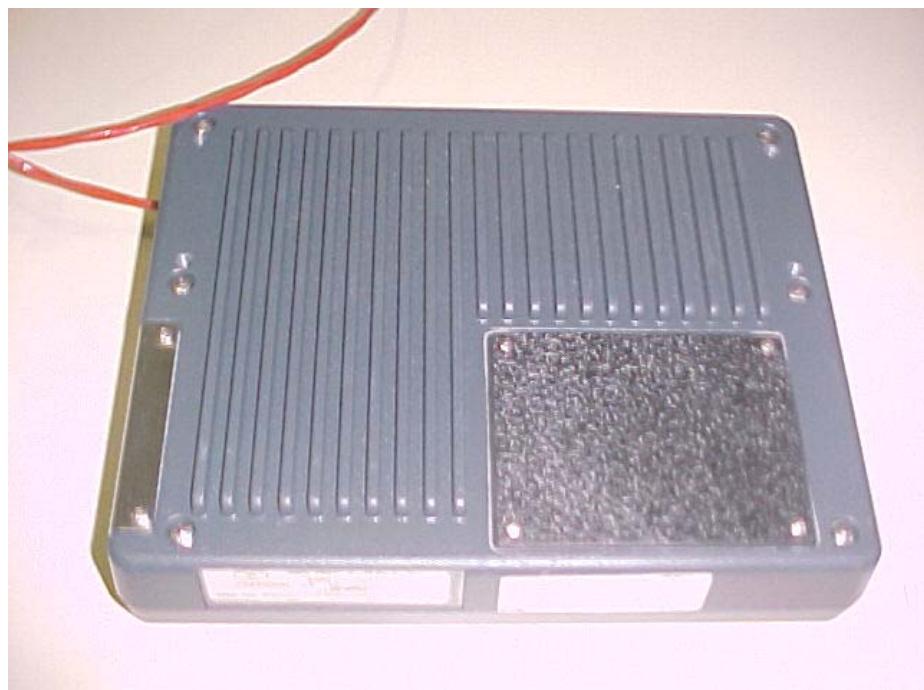

Client: Mettler Toledo
Model: MCPC

Order Number: CLE091702-01


Photograph of EUT – *Main Board (Component Side View)*



Photograph of EUT – *Main Board (Solder Side View)*



Photograph of EUT – *Inside View*

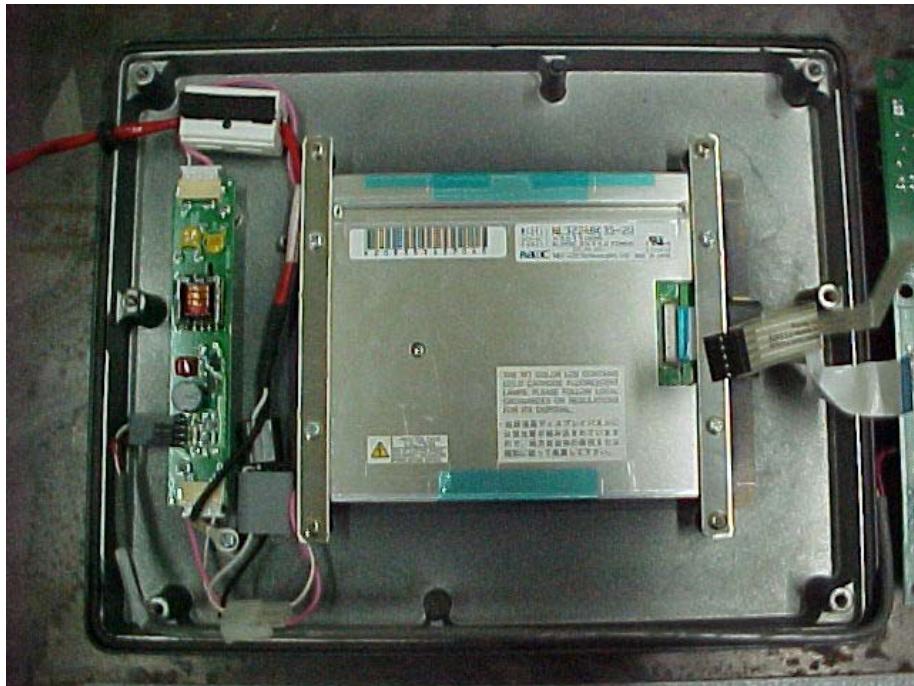


Photograph of EUT – *Chassis (Inside View)*



Client: Mettler Toledo
Model: MCPC


Order Number: CLE091702-01

Photographs of EUT – *Radio Module Detail*

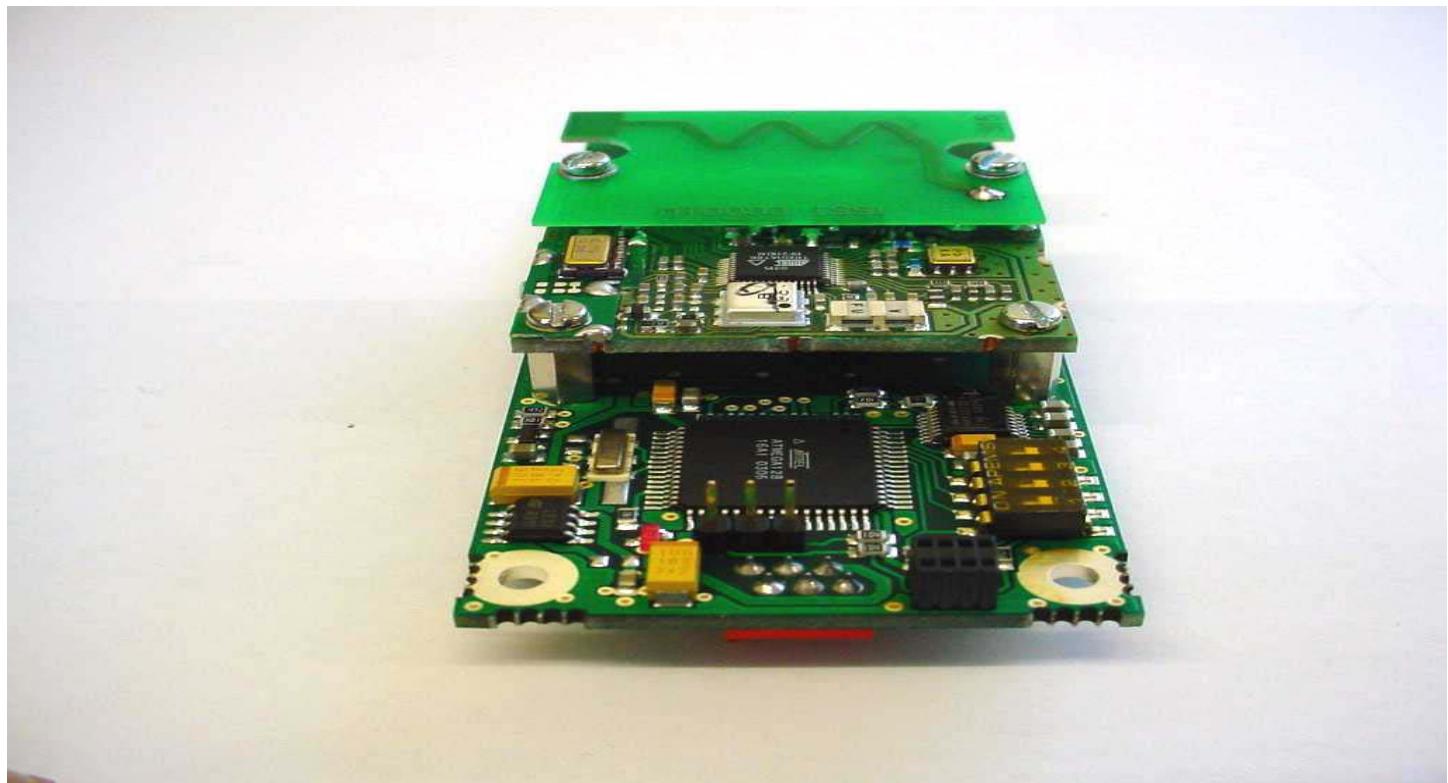

Client: Mettler Toledo
Model: MCPC

Order Number: CLE091702-01

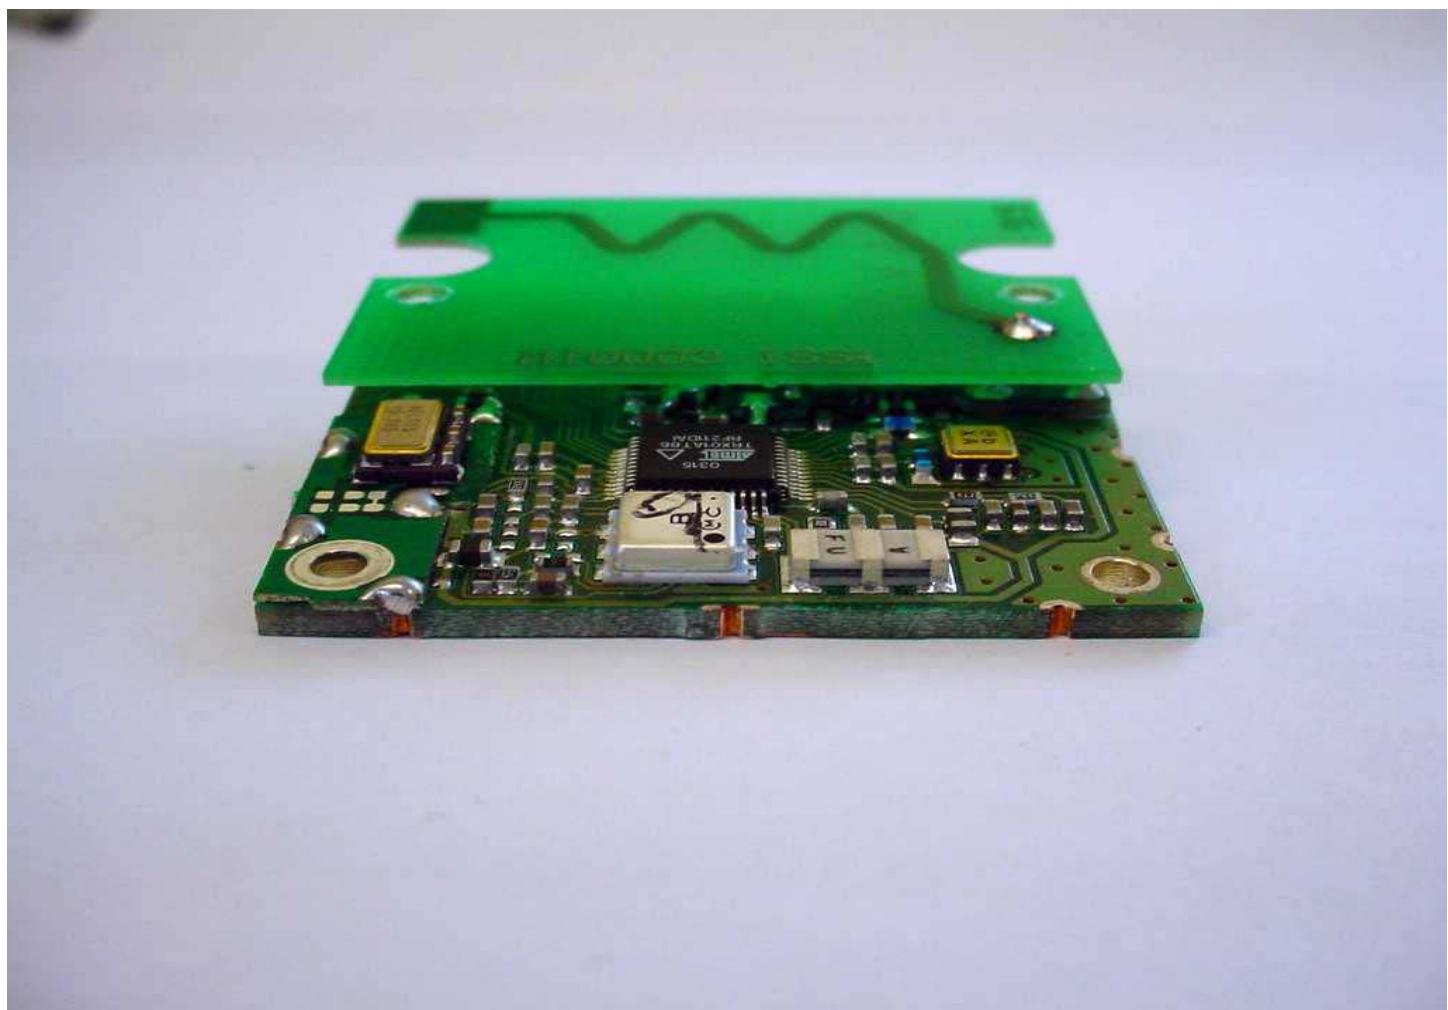

Client: Mettler Toledo
Model: MCPC

Order Number: CLE091702-01

