



FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

GL soft.mobi

Hone

Model No: HN1000

FCC ID: RJ7HONE

Prepared for : GL soft.mobi
4610 Ledge Ave.,Toluca Lake, CA,USA.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F13033
Date of Test : Jan. 10 ~ Feb.16, 2013
Date of Report : Feb. 21, 2013

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	1-1
1.1. Description of Standards and Results.....	1-1
2. GENERAL INFORMATION.....	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Information.....	2-2
2.3. Block Diagram of Test Setup	2-3
2.4. Test Facility.....	2-3
2.5. Measurement Uncertainty (95% confidence levels, k=2)	2-4
3. POWER LINE CONDUCTED EMISSION TEST	3-1
4. RADIATED EMISSION TEST.....	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup	4-1
4.3. Radiated Emission Limit.....	4-2
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results	4-4
5. CONDUCTED SPURIOUS EMISSIONS.....	5-1
5.1. Test Equipment	5-1
5.2. Limit.....	5-1
5.3. Test Procedure.....	5-1
5.4. Test result	5-1
6. BAND EDGE COMPLIANCE TEST.....	6-1
6.1. Test Equipment	6-1
6.2. Limit.....	6-1
6.3. Test Produce	6-1
6.4. Test Results	6-1
7. 6dB Bandwidth Test.....	7-1
7.1. Test Equipment	7-1
7.2. Limit.....	7-1
7.3. Test Procedure.....	7-1
7.4. Test Results	7-1
8. OUTPUT POWER TEST	8-1
8.1. Test Equipment	8-1
8.2. Limit.....	8-1
8.3. Test Procedure.....	8-1
8.4. Test Results	8-2
9. POWER SPECTRAL DENSITY TEST.....	9-1
9.1. Test Equipment	9-1
9.2. Limit.....	9-1
9.3. Test Procedure.....	9-1
9.4. Test Results	9-2
10. ANTENNA REQUIREMENT.....	10-1
10.1. STANDARD APPLICABLE	10-1
10.2. ANTENNA CONNECTED CONSTRUCTION	10-1



11.	DEVIATION TO TEST SPECIFICATIONS	11-1
12.	PHOTOGRAPH OF TEST	12-1
	12.1. Photos of Radiated Emission Test.....	12-1
13.	PHOTOS OF THE EUT	13-1

TEST REPORT CERTIFICATION

Applicant : GL soft.mobi
 Manufacturer : GL soft.mobi
 EUT Description : Hone
 FCC ID : RJ7HONE

(A) Model No : HN1000
 (B) Power Supply : DC 3V
 (C) Test Voltage : DC 3V

Tested for comply with:
 FCC Rules and Regulations Part 15 Subpart C
 Test procedure used:
 ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. This report contains data that are not covered by the NVLAP accreditation. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jan. 10 ~ Feb. 16, 2013 Report of date: Feb. 21, 2013

Prepared by : April Tseng Reviewed by : Sunny Lu
 April Tseng / Assistant Sunny Lu / Assistant Manager

 信華科技(深圳)有限公司
 Audix Technology (Shenzhen) Co., Ltd.
 EMC 部門報告專用章

Stamp only for EMC Dept. Report

Approved & Authorized Signer : Ken Lu
 Ken Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 :2009	N/A
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10: 2009	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10:2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	: Hone
Model Number	: HN1000
FCC ID	: RJ7HONE
Radio	: Bluetooth 4.0
Operation Frequency	: 2402-2480MHz
Channel Number	: 40
Modulation Technology	: GFSK
Antenna Assembly Gain	: PCB Antenna , 0dBi
Applicant	: GL soft.mobi 4610 Ledge Ave.,Toluca Lake, CA,USA.
Manufacturer	: GL soft.mobi 4610 Ledge Ave.,Toluca Lake, CA,USA.
Date of Test	: Jan. 10 ~ Feb. 16, 2013
Date of Receipt	: Jan. 07, 2013
Sample Type	: Prototype production

2.2.Test Information

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

Mode	Channel	Frequency (MHz)
GFSK	Low : CH0	2402
	Middle: CH19	2440
	High: CH39	2480

Channel List

CH	Frequency(MHz)	CH	Frequency(MHz)	CH	Frequency(MHz)	
0	2402	16	2434	32	2466	
1	2404	17	2436	33	2468	
2	2406	18	2438	34	2470	
3	2408	19	2440	35	2472	
4	2410	20	2442	36	2474	
5	2412	21	2444	37	2476	
6	2414	22	2446	38	2478	
7	2416	23	2448	39	2480	
8	2418	24	2450			
9	2420	25	2452			
10	2422	26	2454			
11	2424	27	2456			
12	2426	28	2458			
13	2428	29	2460			
14	2430	30	2462			
15	2432	31	2464			

2.3. Block Diagram of Test Setup



(EUT: Hone)

2.4. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Valid Date: Feb.22, 2015

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Valid Date: Oct.31, 2015

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Jun.13, 2014

: Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-01
Valid Date: Feb.01, 2014

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2013

2.5. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.06 dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.6 dB(30~200MHz, Polarize: H)
	3.8 dB(30~200MHz, Polarize: V)
	4.2 dB(200M~1GHz, Polarize: H)
	3.8 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	3.1dB (Distance: 3m Polarize: V)
	3.7 dB (Distance: 3m Polarize: H)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57 dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Power density test	2.00 dB
Uncertainty for Frequency range test	7×10^{-8}
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (c) of FCC Part 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30MHz~1000MHz (At Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Nov.24,12	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 12	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 12	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 12	1 Year
5	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-429	Nov.27, 12	1.0 Year
6	RF Cable	MIYAZAKI	CFD400-NL	3# Chamber No.1	May.08, 12	1 Year

4.1.2. For frequency range 1GHz~25GHz (At Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 12	1 Year
2	Horn Antenna	EMCO	3115	9510-4580	June.05, 12	1 Year
3	Horn Antenna	EMCO	3116	00060089	Nov.25, 11	1.5 Year
4	Amplifier	Agilent	8449B	3008A00863	May.08, 12	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	77980/6	May.08, 12	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	May.08, 12	1 Year

4.2. Block Diagram of Test Setup

4.2.1. In Semi Anechoic Chamber Test Setup Diagram for 30MHz~1000MHz

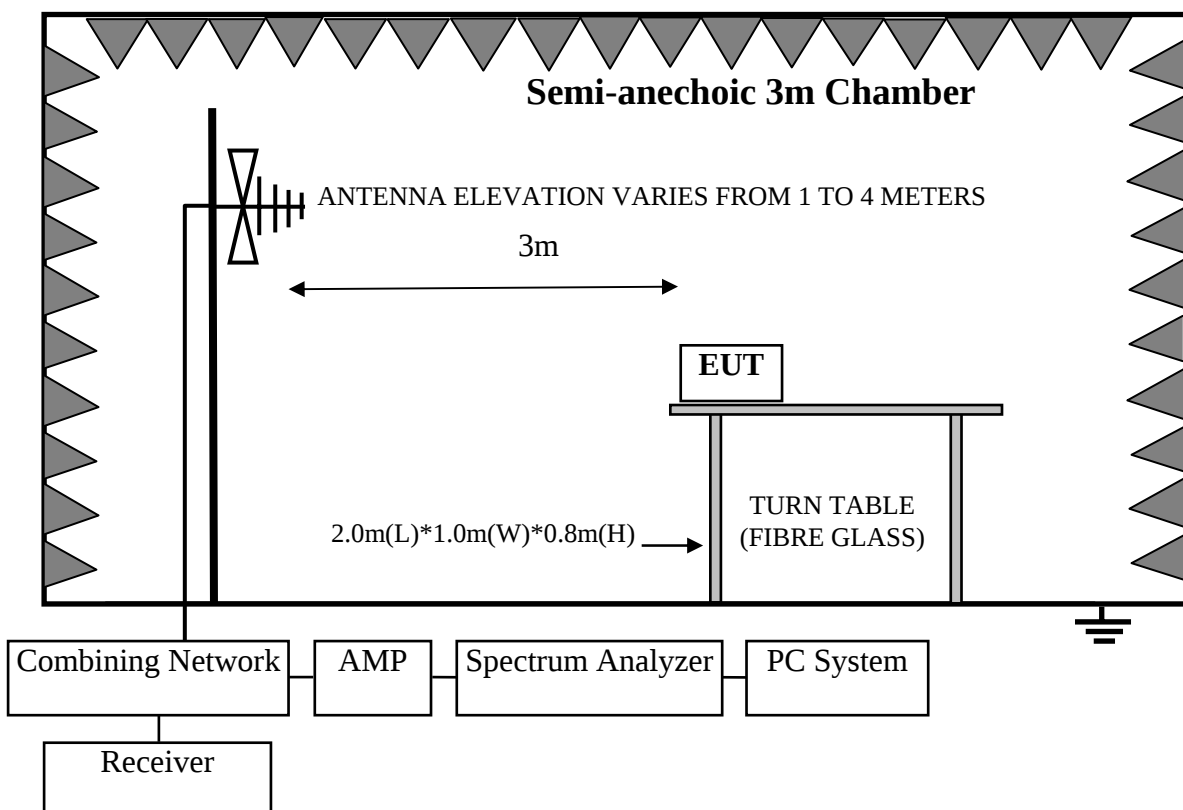

4.2.2.I In 3m Anechoic Chamber Test Setup Diagram for 1-25GHz

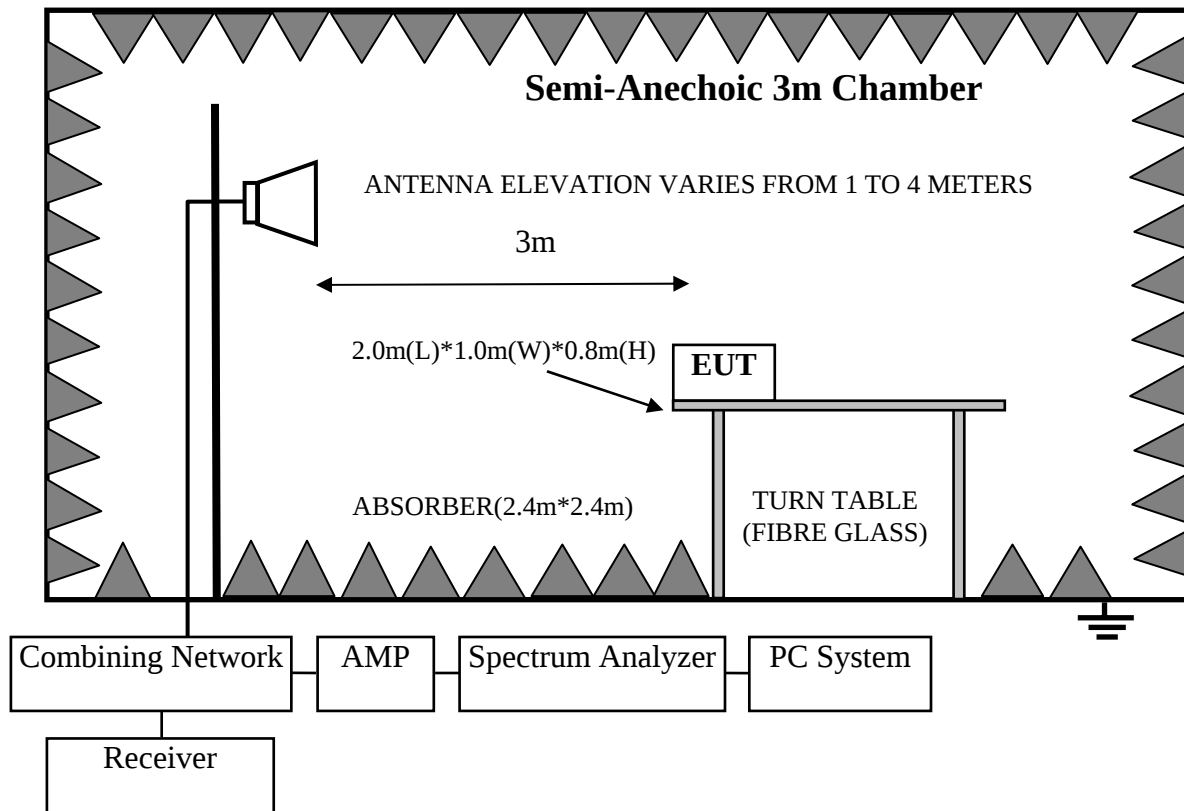

4.3. Radiated Emission Limit

4.3.1. 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2.15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 4.2.

4.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as test photo indicated.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz.

The bandwidth of the Spectrum's VBW is set at 10Hz and RBW is set at 1MHz for Average emissions measurement above 1GHz.

This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

The Duty cycle of signal during the test is 100%.

4.7.Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.


For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

Frequency: 30MHz~1GHz

Data: 1

File: E:\2012 Report Data\G\GL\ACS12Q2688.EM6 (6)

Date: 2013-01-10

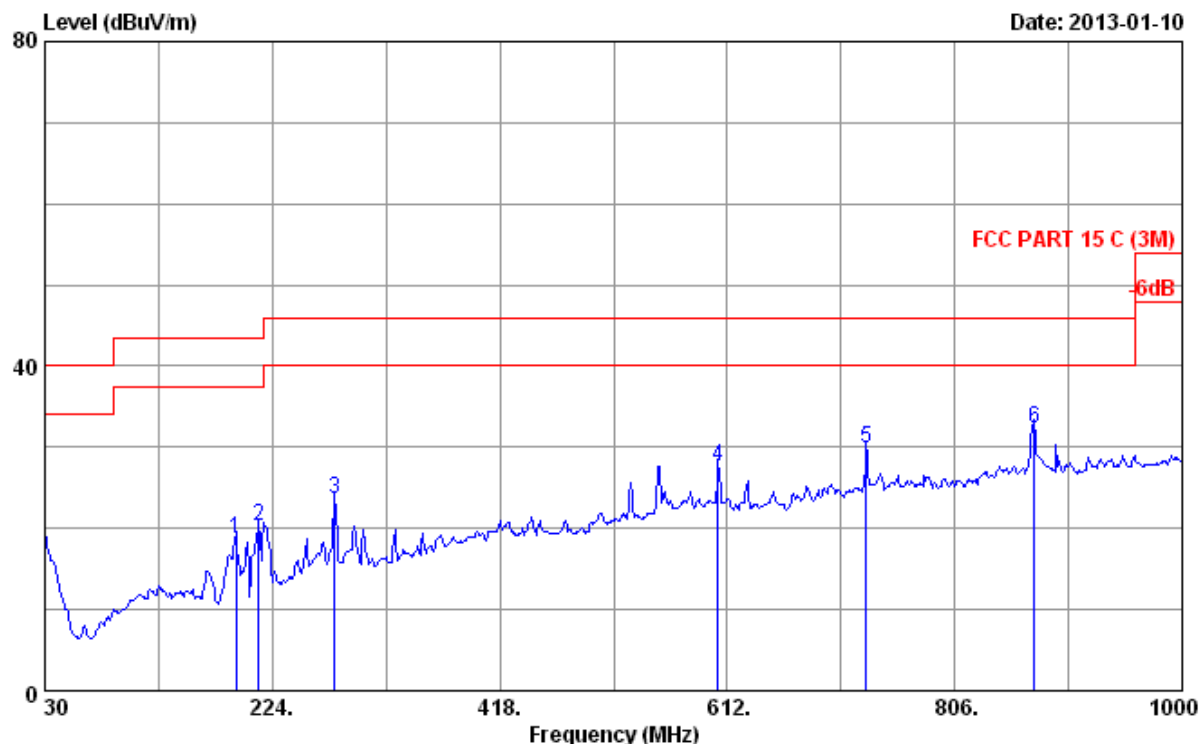


Site no. : 3m Chamber
 Dis. / Ant. : 3m 9168-429
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56%
 EUT : Hone M/N:HN1000
 Power rating : DC 3V
 Test Mode : Tx Mode

Data no. : 1
 Ant. pol. : HORIZONTAL
 Engineer : Leo_Li

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	192.960	10.30	1.04	7.28	18.62	43.50	24.88	QP
2	212.360	10.20	1.09	8.99	20.28	43.50	23.22	QP
3	277.350	12.30	1.23	10.09	23.62	46.00	22.38	QP
4	604.240	18.40	2.13	7.09	27.62	46.00	18.38	QP
5	730.340	20.03	2.50	7.25	29.78	46.00	16.22	QP
6	873.900	21.31	2.78	8.26	32.35	46.00	13.65	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

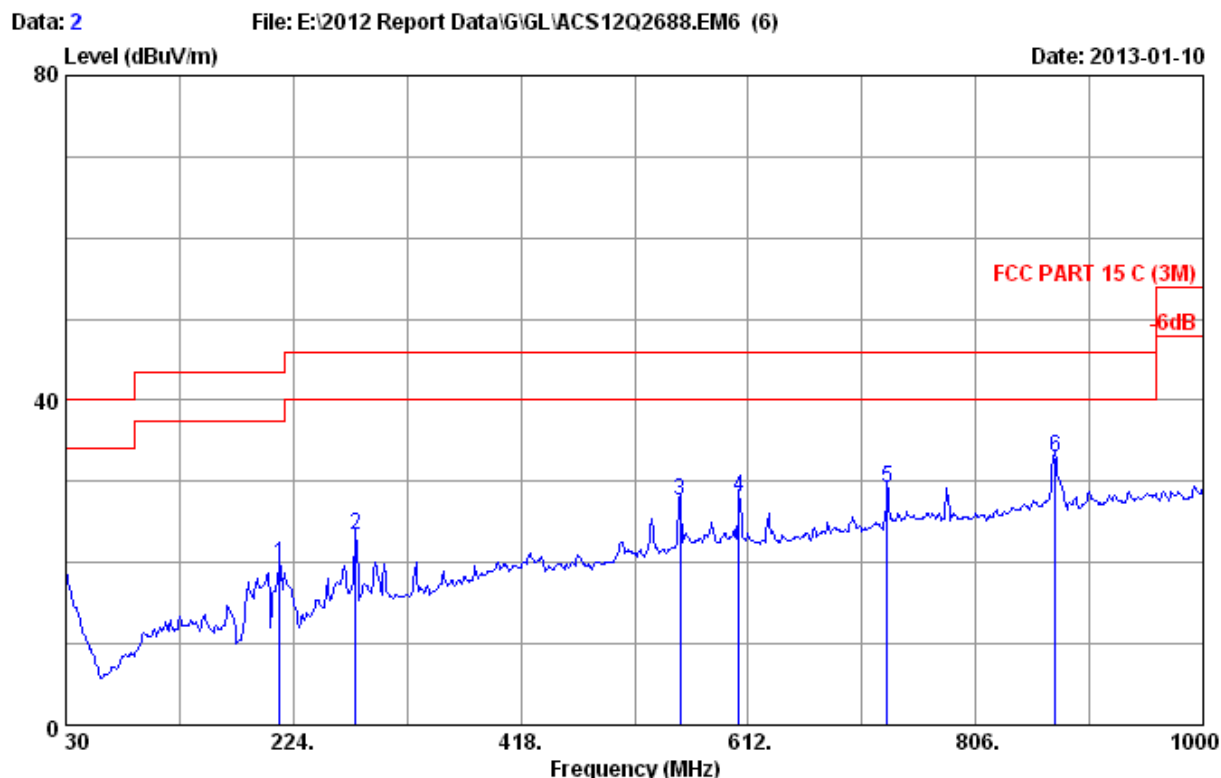

Site no. : 3m Chamber
 Dis. / Ant. : 3m 9168-429
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56%
 EUT : Hone M/N:HN1000
 Power rating : DC 3V
 Test Mode : Tx Mode

Data no. : 2
 Ant. pol. : VERTICAL
 Engineer : Leo_Li

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	212.360	10.20	1.09	8.55	19.84	43.50	23.66	QP
2	277.350	12.30	1.23	9.82	23.35	46.00	22.65	QP
3	553.800	17.45	1.99	8.15	27.59	46.00	18.41	QP
4	604.240	18.40	2.13	7.51	28.04	46.00	17.96	QP
5	730.340	20.03	2.50	6.60	29.13	46.00	16.87	QP
6	873.900	21.31	2.78	8.85	32.94	46.00	13.06	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz


Data: 1

File: G:\2012 Report\G\GL\ACS12Q2688.EM6 (44)

Date: 2013-01-31

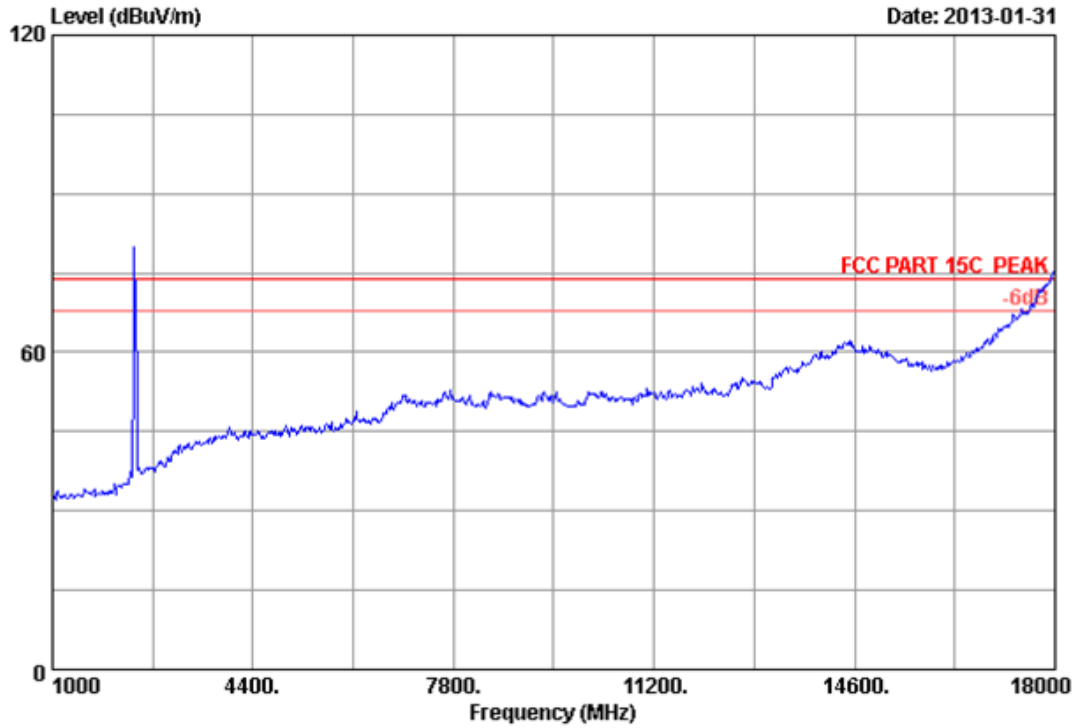

Site no.	: 3m Chamber	Data no.	: 1
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Hone		
Power supply	: DC 3V		
Test mode	: BT4.0 2402MHz Tx		
M/N	: HN1000		
	:		

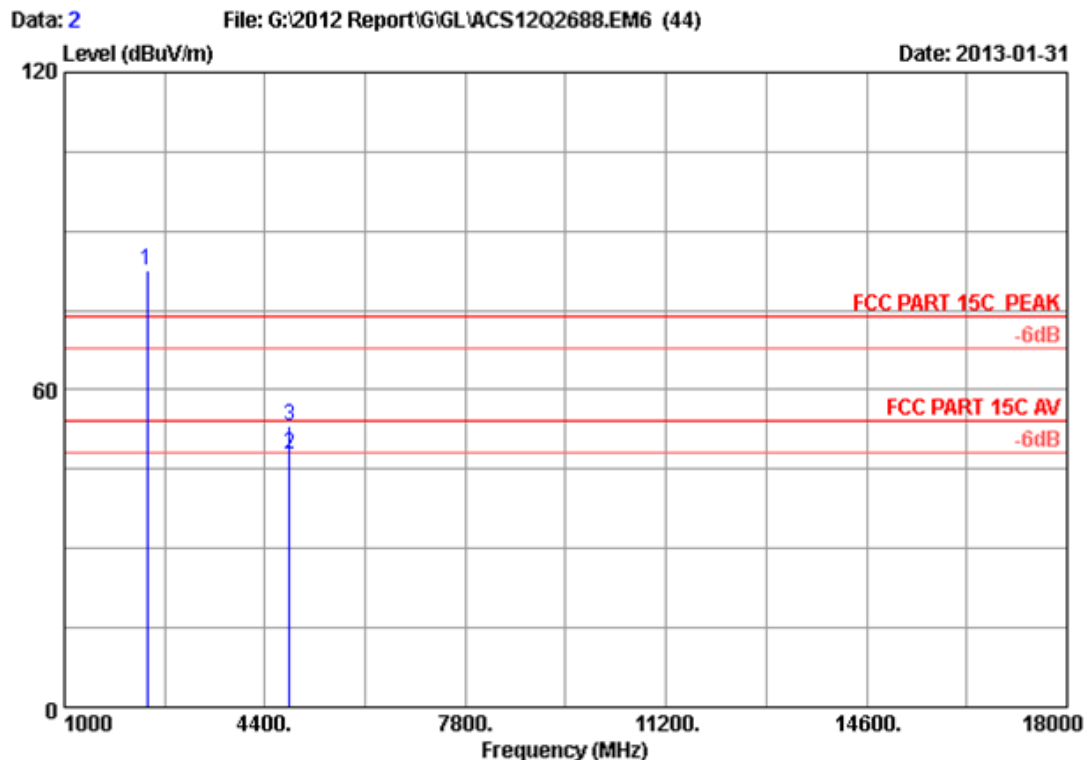


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2402MHz Tx
 M/N : HN1000
 :


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	26.77	6.02	35.92	85.64	82.51	74.00	-8.51	Peak
2	4808.000	32.48	8.67	35.72	42.35	47.78	54.00	6.22	Average
3	4808.000	32.48	8.67	35.72	47.77	53.20	74.00	20.80	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

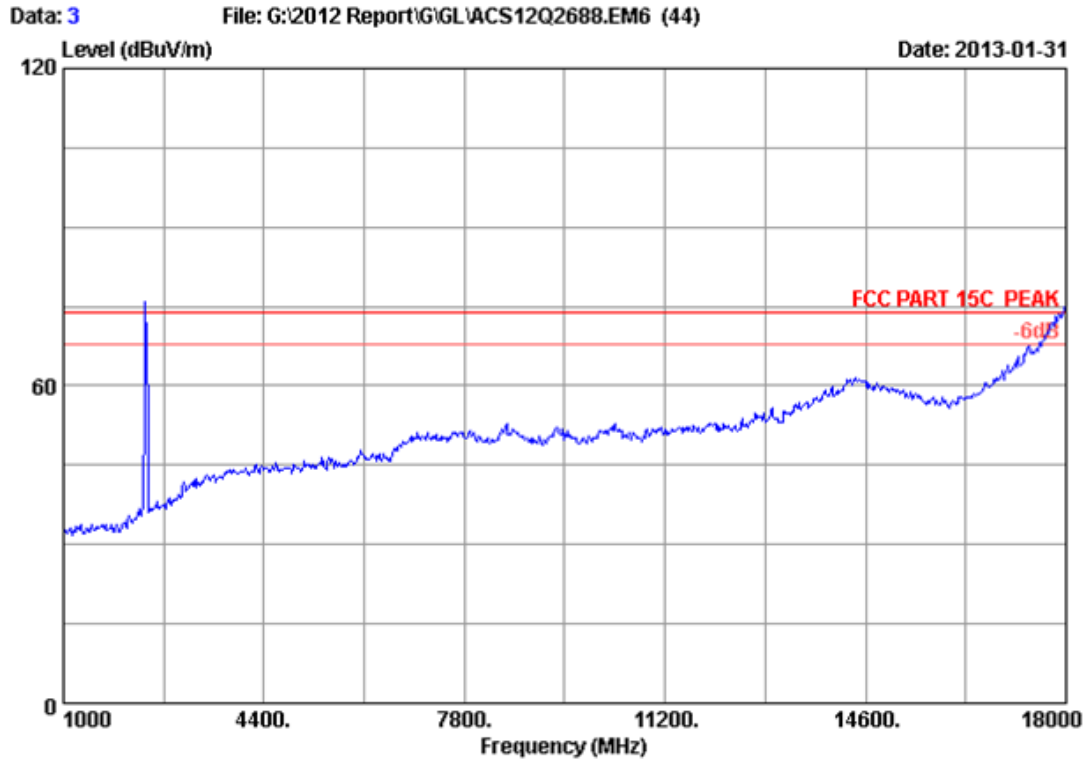

Site no.	: 3m Chamber	Data no.	: 3
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Hone		
Power supply	: DC 3V		
Test mode	: BT4.0 2402MHz Tx		
M/N	: HN1000		
	:		

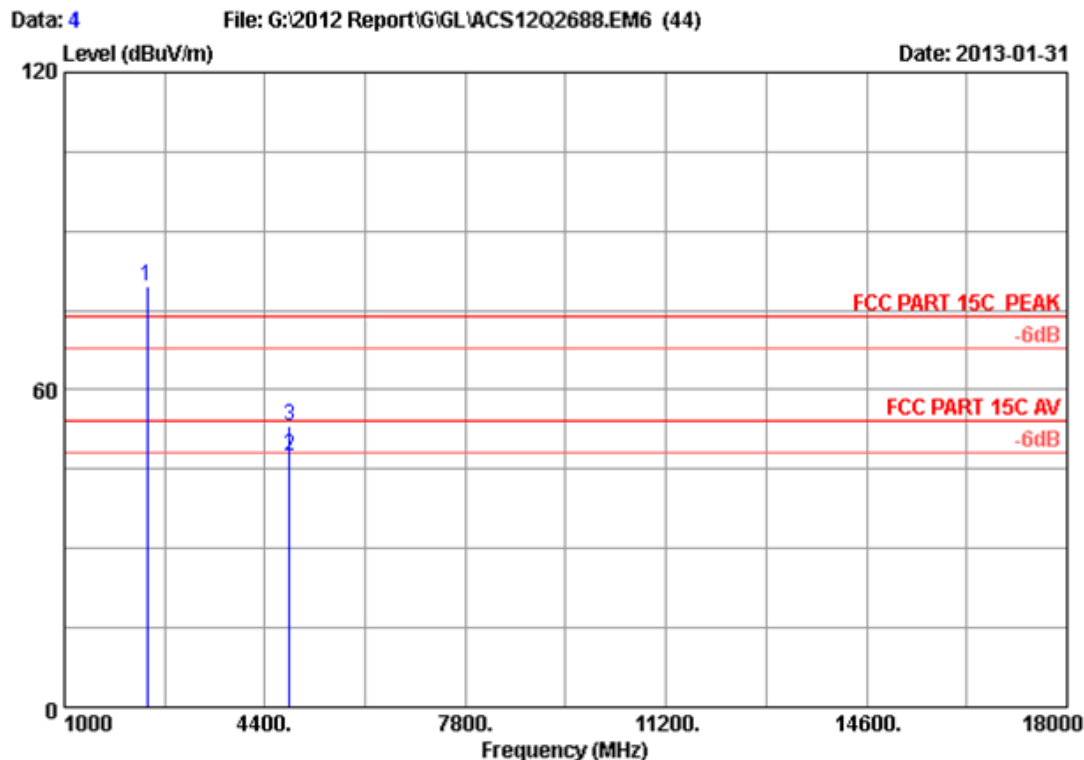


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2402MHz Tx
 M/N : HN1000
 :


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	26.77	6.02	35.92	82.60	79.47	74.00	-5.47	Peak
2	4808.000	32.48	8.67	35.72	42.15	47.58	54.00	6.42	Average
3	4808.000	32.48	8.67	35.72	47.85	53.28	74.00	20.72	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

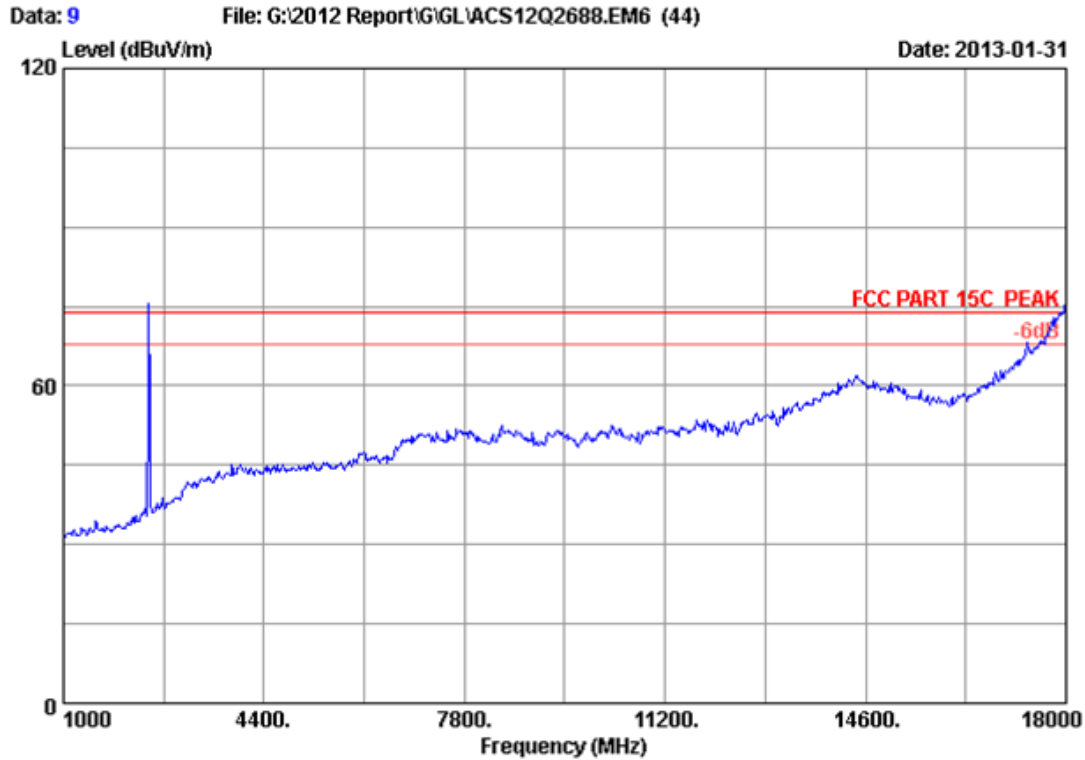

Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Hone		
Power supply	: DC 3V		
Test mode	: BT4.0 2440MHz Tx		
M/N	: HN1000		
	:		

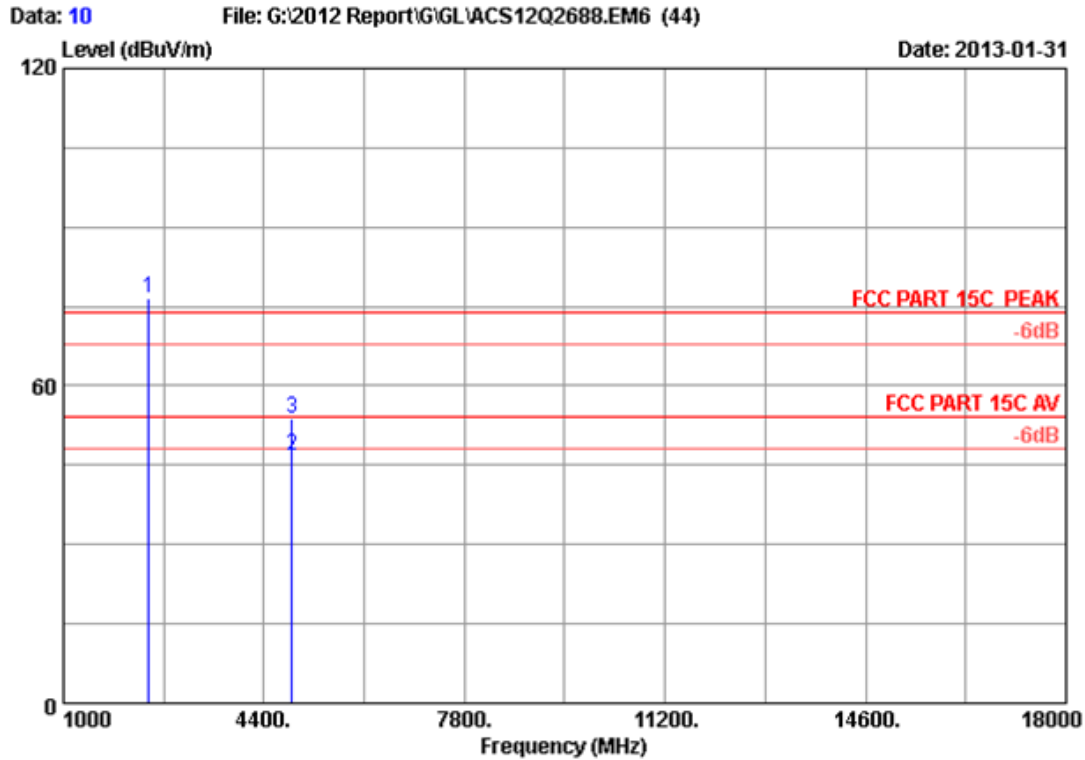


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2440MHz Tx
 M/N : HN1000
 :


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.000	27.02	6.09	35.92	79.33	76.52	74.00	-2.52	Peak
2	4880.000	32.64	8.74	35.69	41.24	46.93	54.00	7.07	Average
3	4880.000	32.64	8.74	35.69	48.16	53.85	74.00	20.15	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

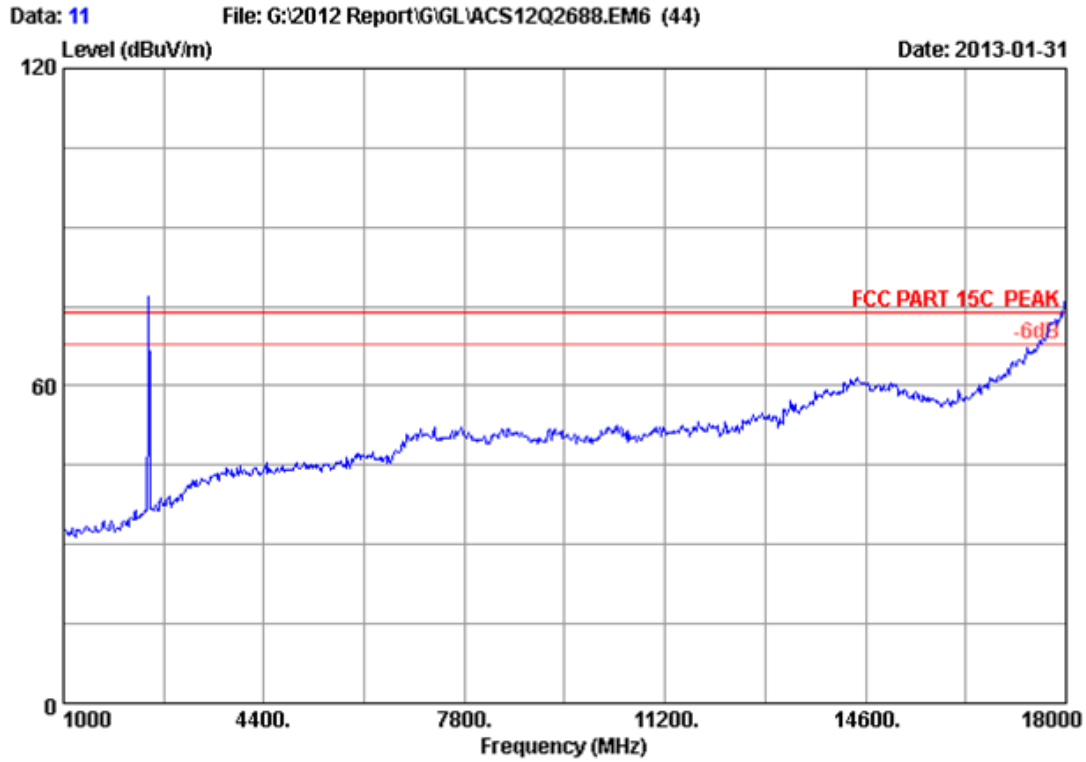

Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Hone		
Power supply	: DC 3V		
Test mode	: BT4.0 2440MHz Tx		
M/N	: HN1000		
	:		

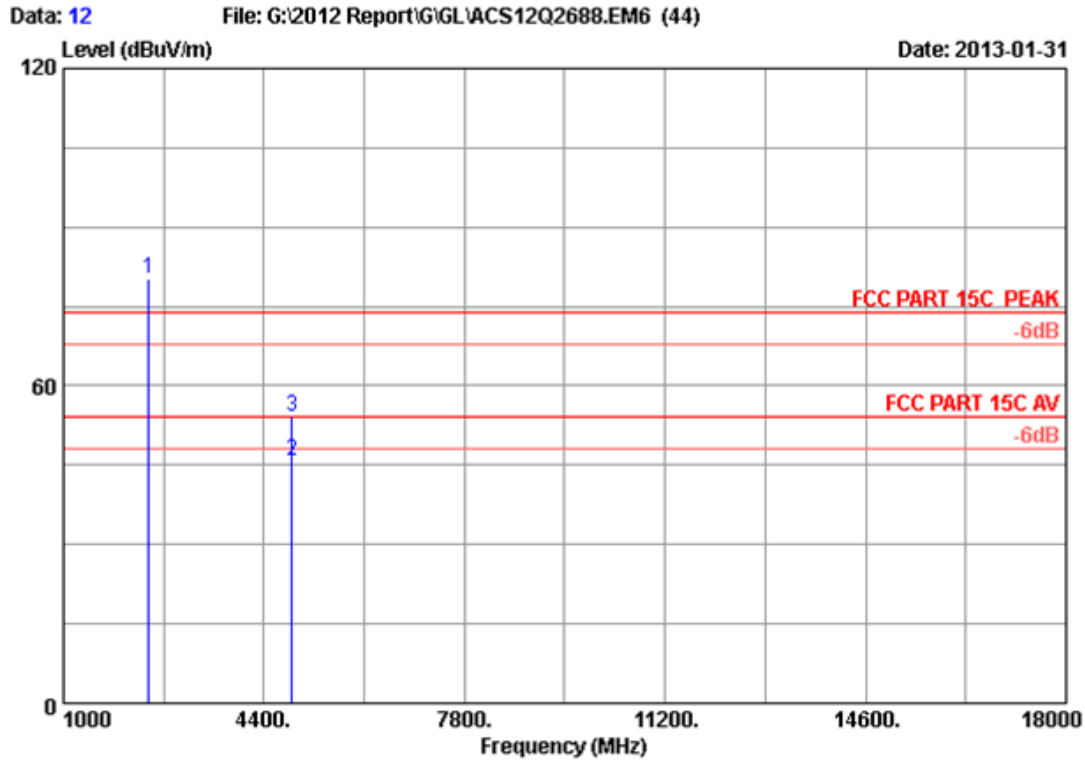


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2440MHz Tx
 M/N : HN1000
 :


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.000	27.02	6.09	35.92	83.02	80.21	74.00	-6.21	Peak
2	4880.000	32.64	8.74	35.69	40.24	45.93	54.00	8.07	Average
3	4880.000	32.64	8.74	35.69	48.48	54.17	74.00	19.83	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

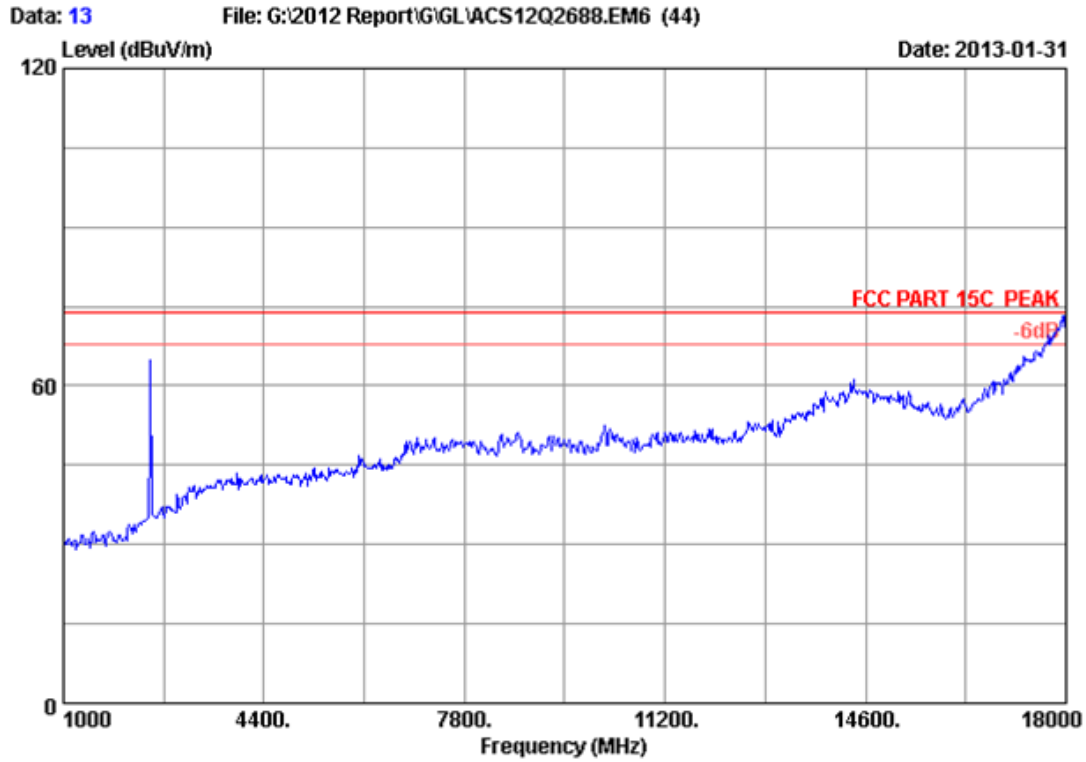

Site no.	: 3m Chamber	Data no.	: 13
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Hone		
Power supply	: DC 3V		
Test mode	: BT4.0 2480MHz Tx		
M/N	: HN1000		
	:		

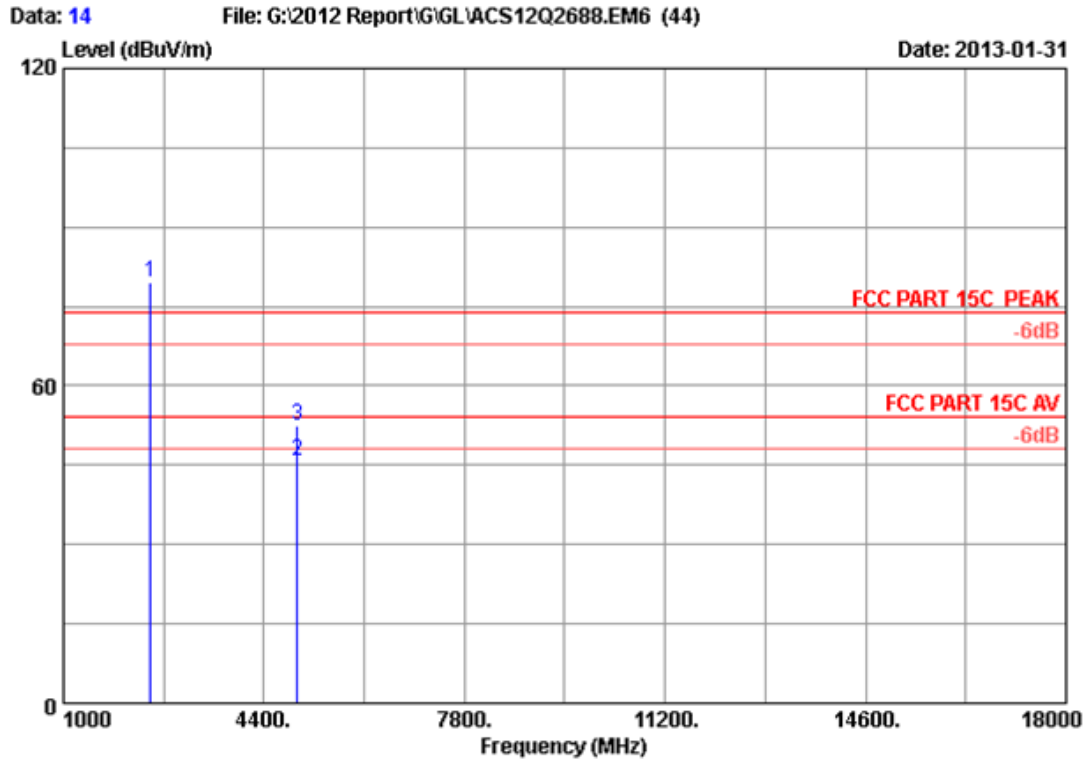


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2480MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	27.27	6.15	35.92	82.07	79.57	74.00	-5.57	Peak
2	4961.000	32.81	8.81	35.66	39.68	45.64	54.00	8.36	Average
3	4961.000	32.81	8.81	35.66	46.64	52.60	74.00	21.40	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

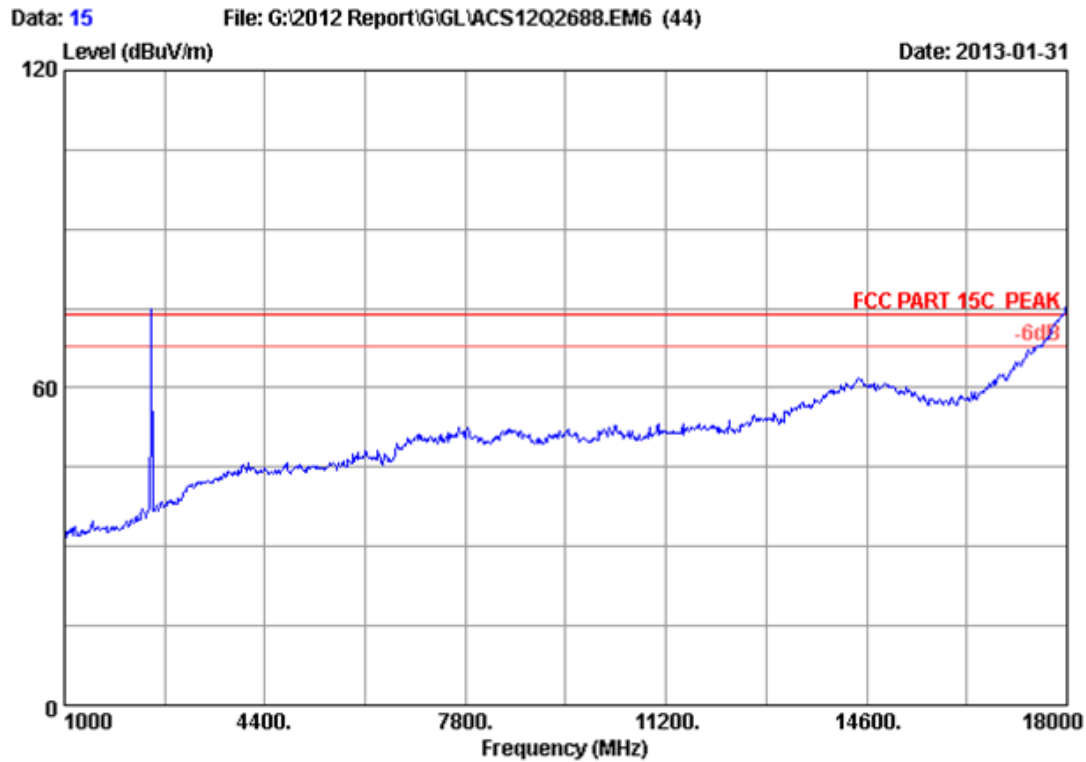

Site no.	: 3m Chamber	Data no.	: 15
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Hone		
Power supply	: DC 3V		
Test mode	: BT4.0 2480MHz Tx		
M/N	: HN1000		
	:		

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,12	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,12	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,12	1Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure



The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions detected.



5.4. Test result

PASS (The testing data was attached in the next pages.)



GFSK


CH 0: 2402MHz

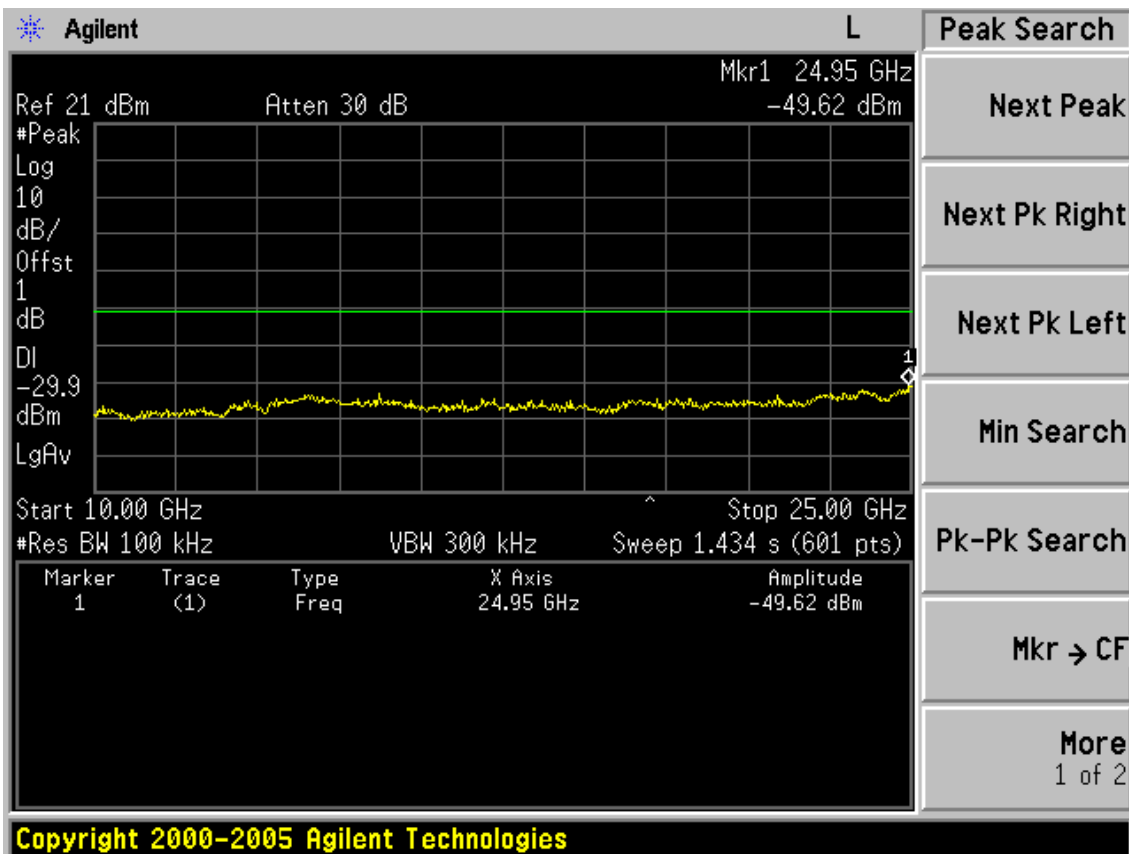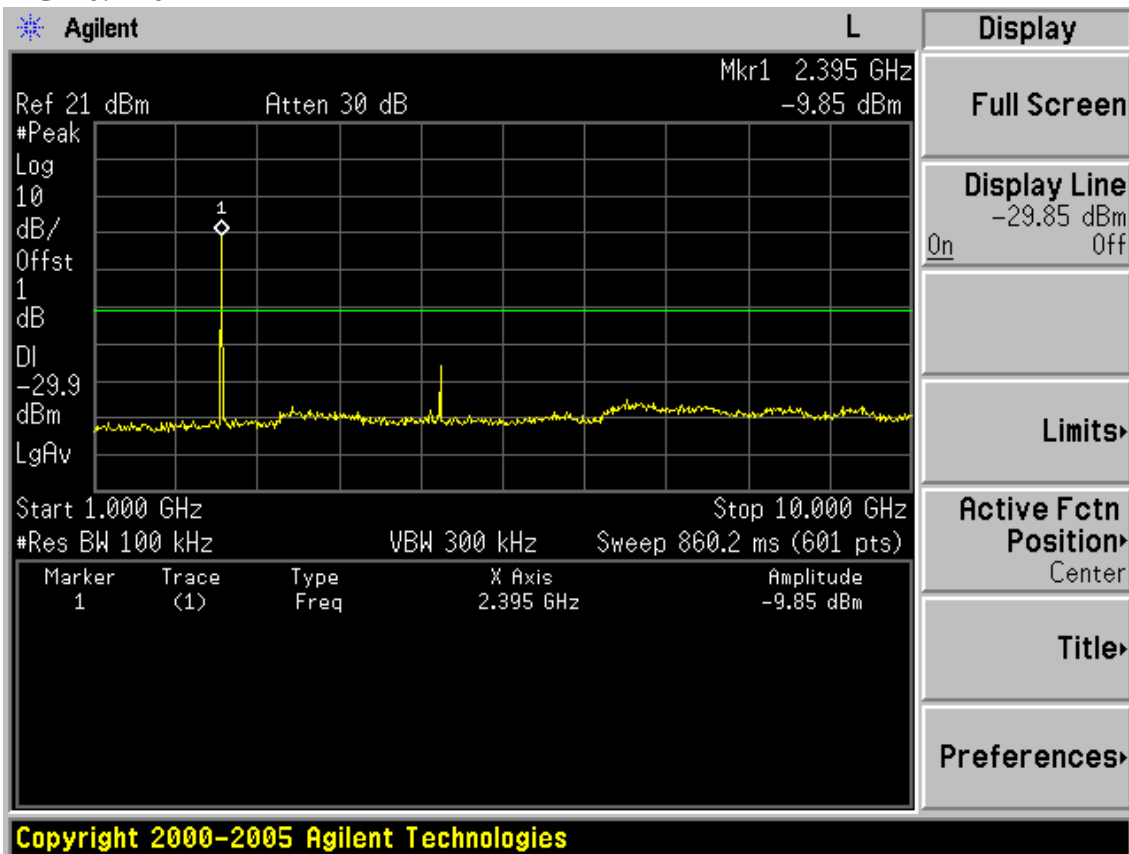

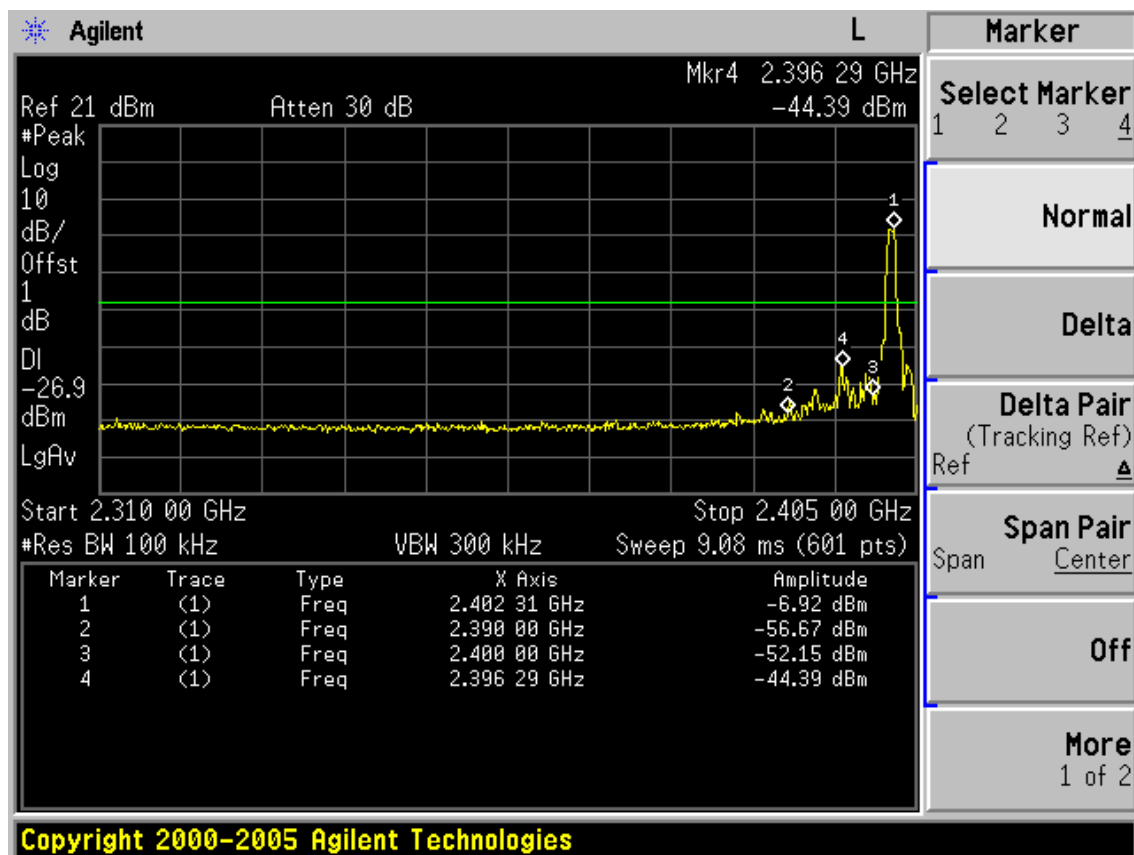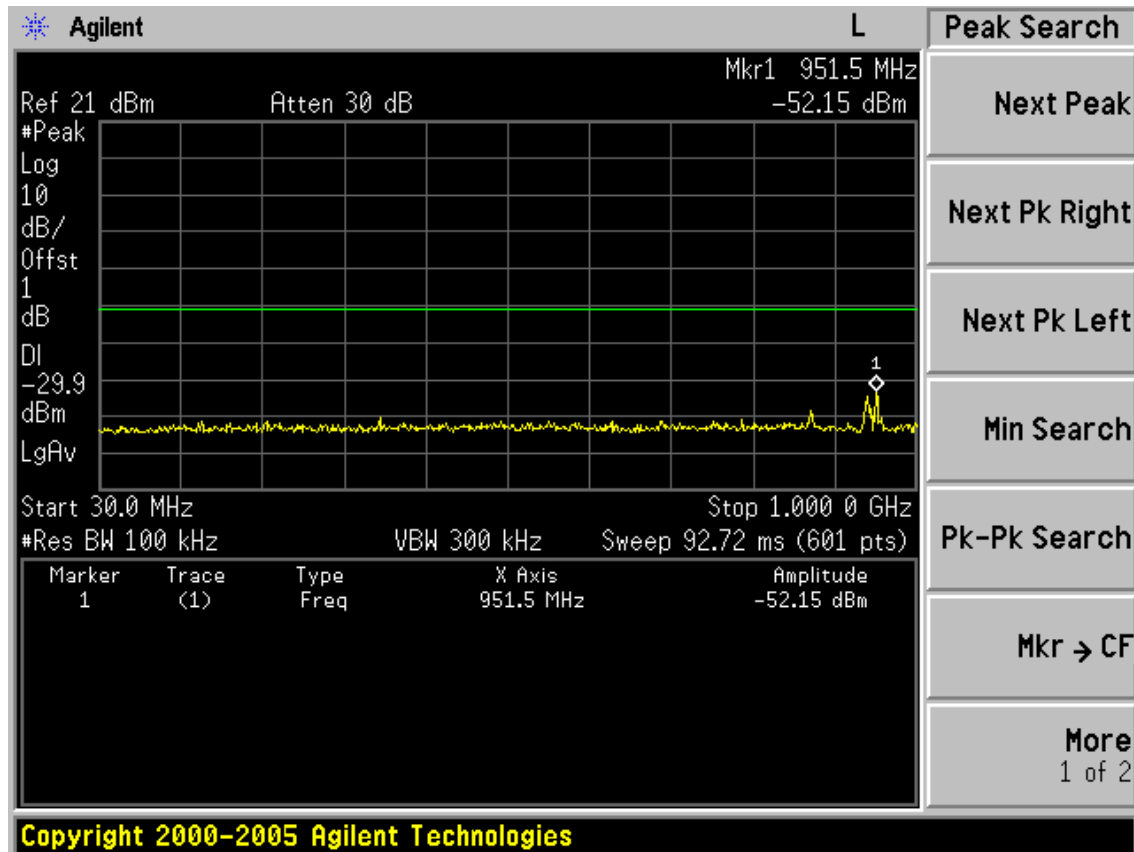




CH 19: 2440MHz

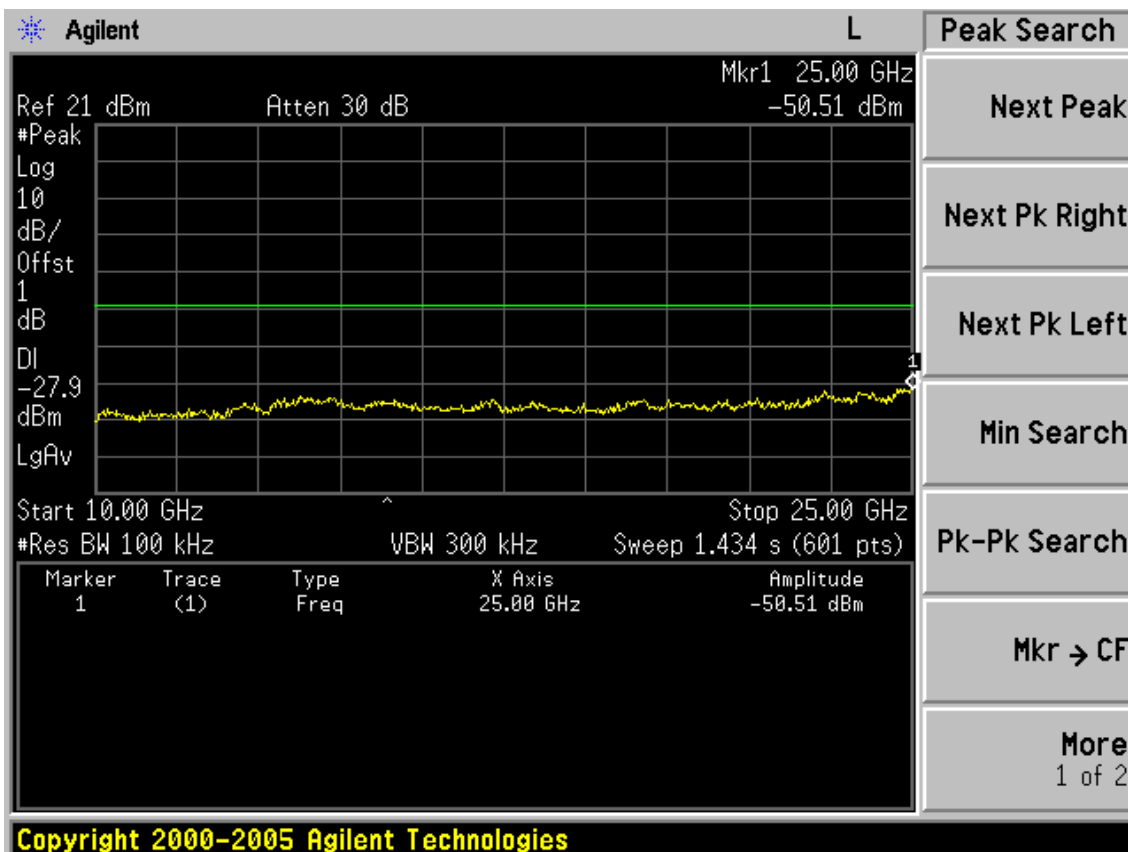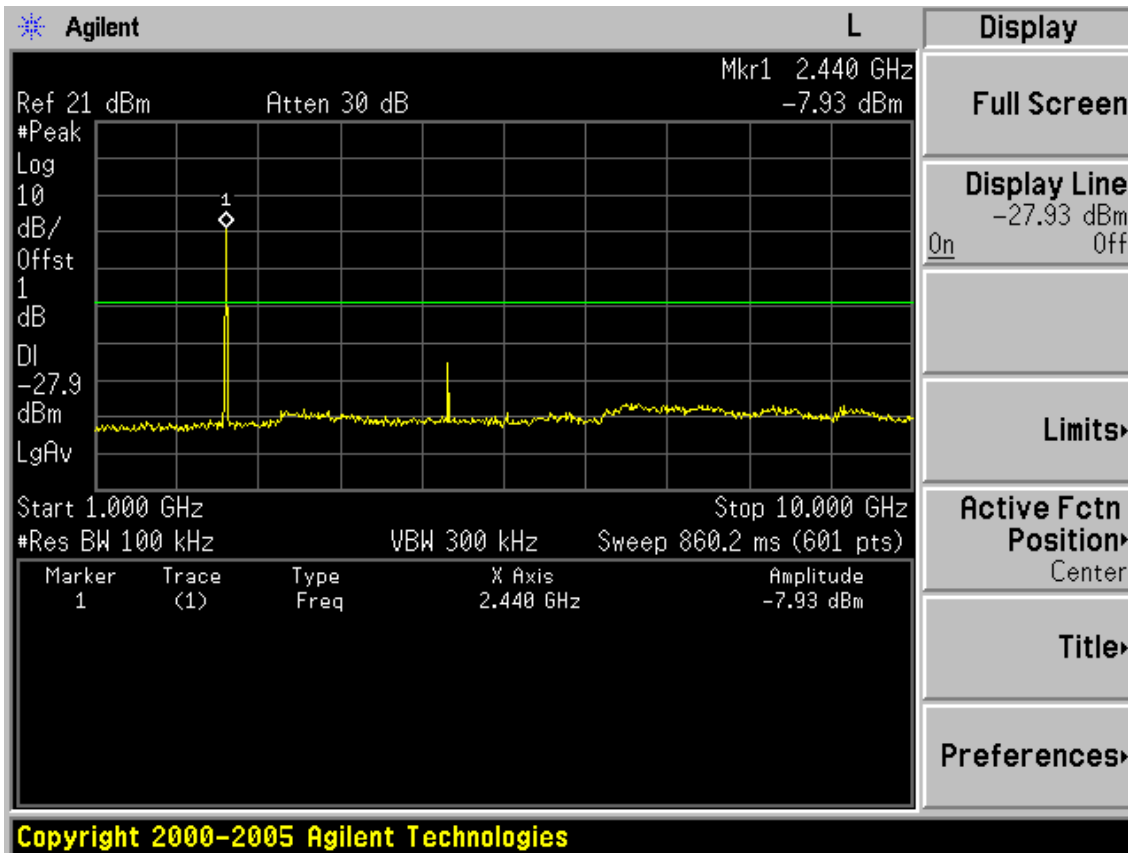


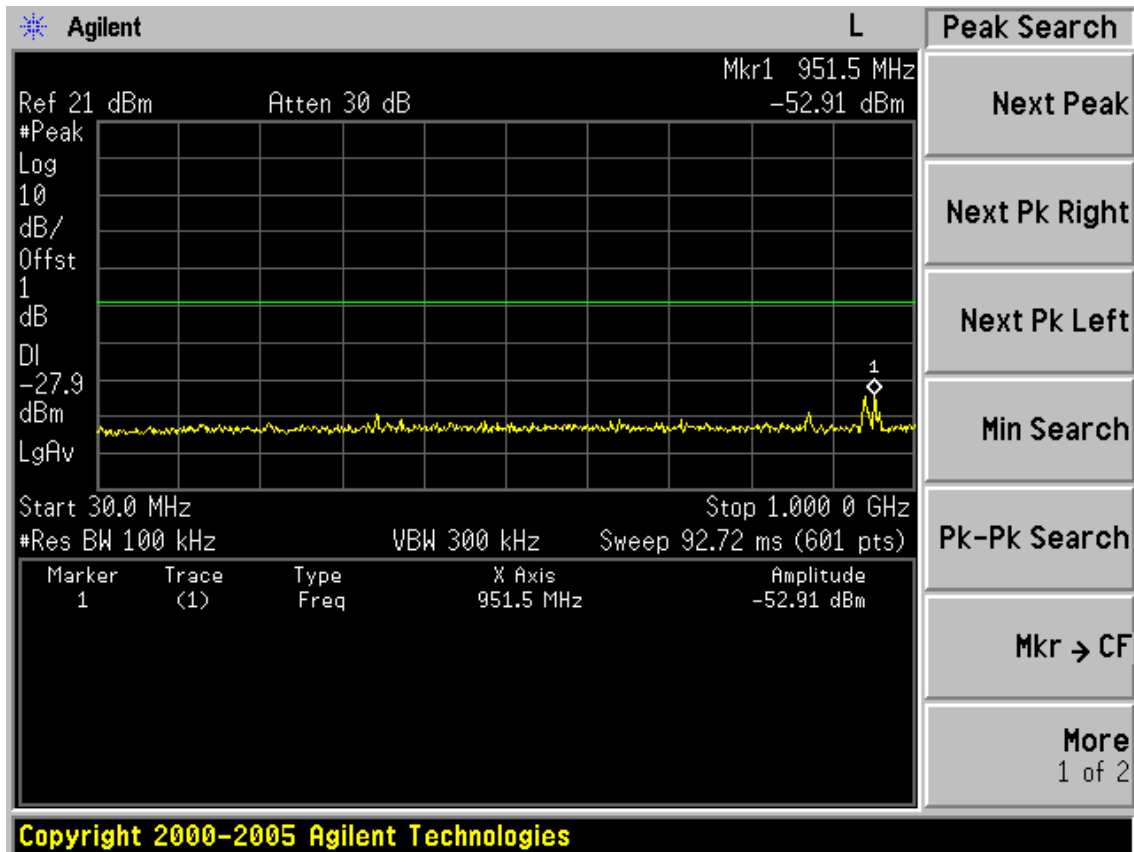

CH 39: 2480MHz

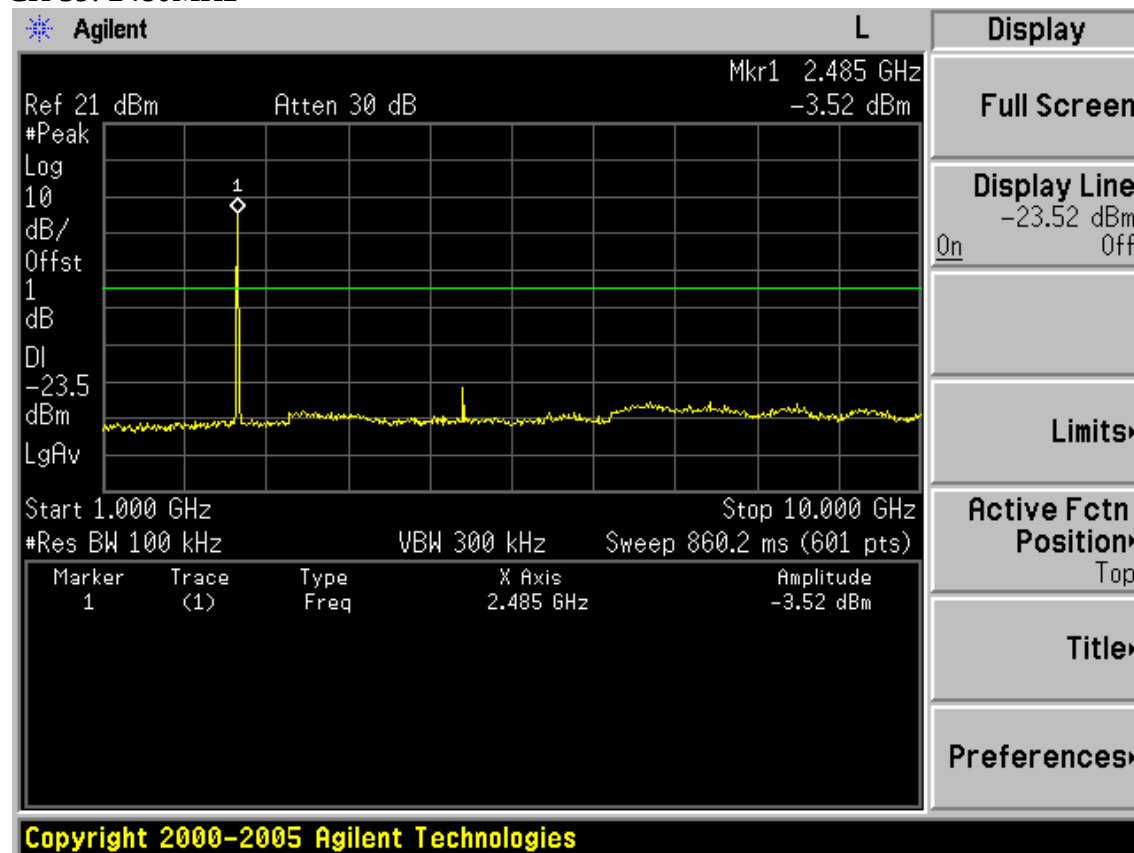

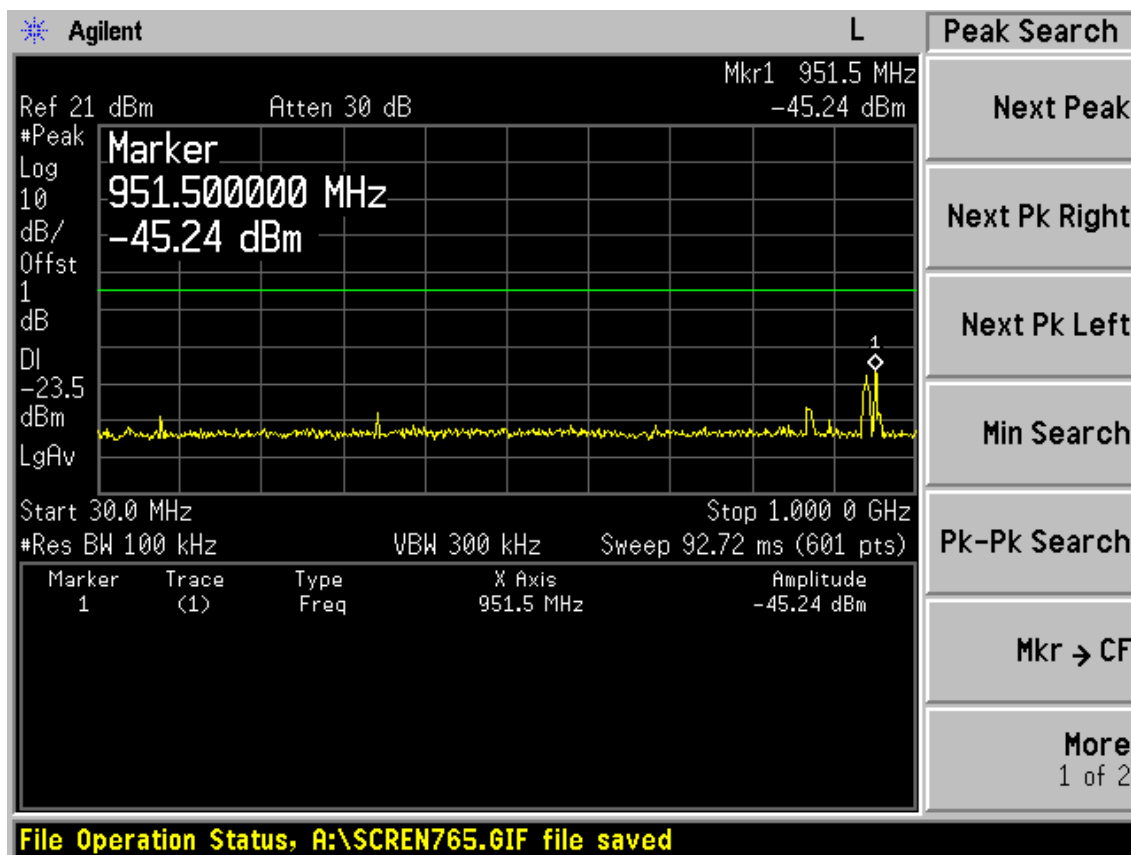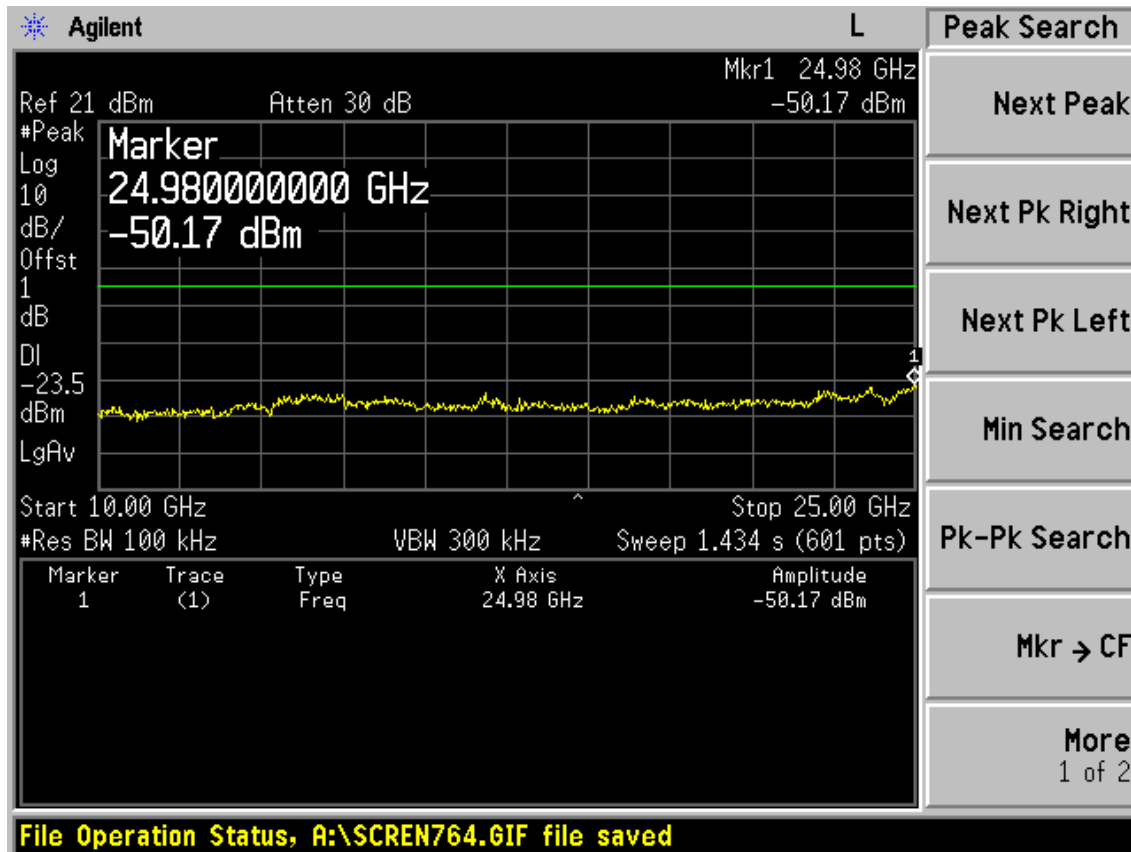

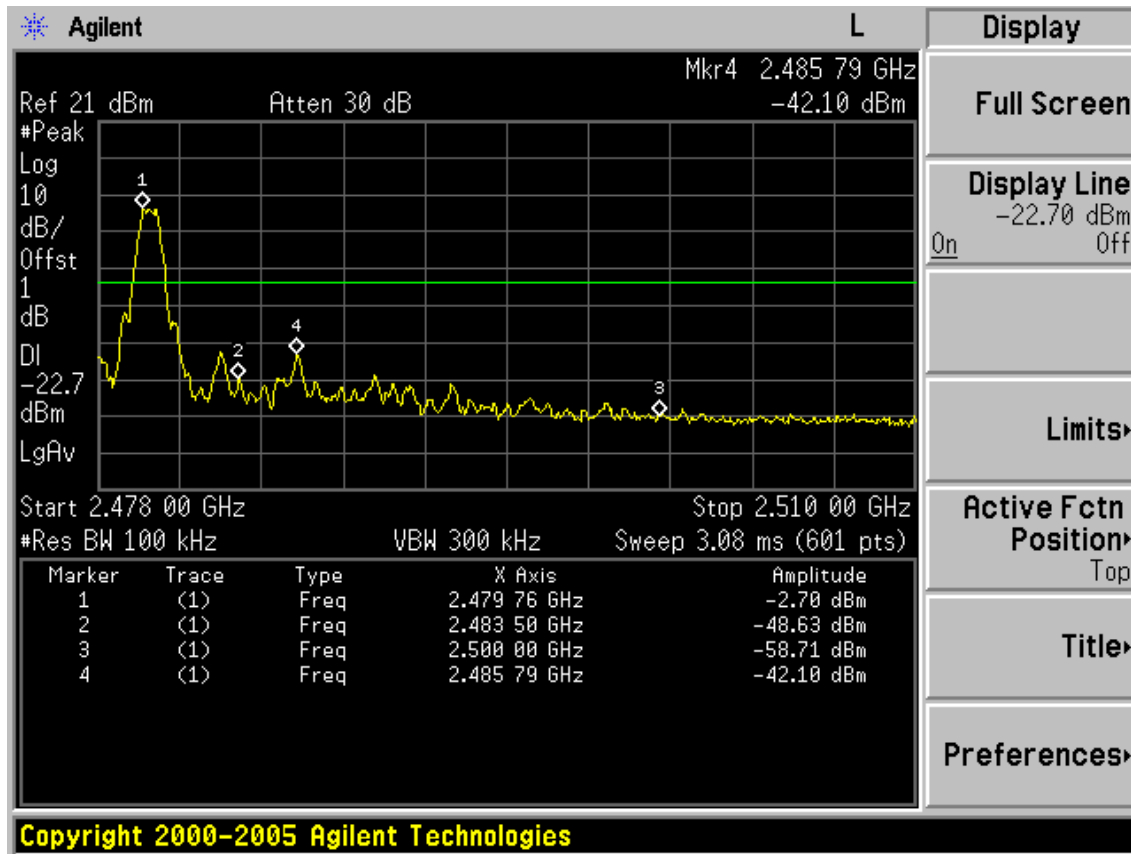

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year

6.2. Limit


All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AV: RBW=1MHz; VBW=10Hz; Sweep=AUTO

6.4. Test Results

Pass (The testing data was attached in the next pages.)

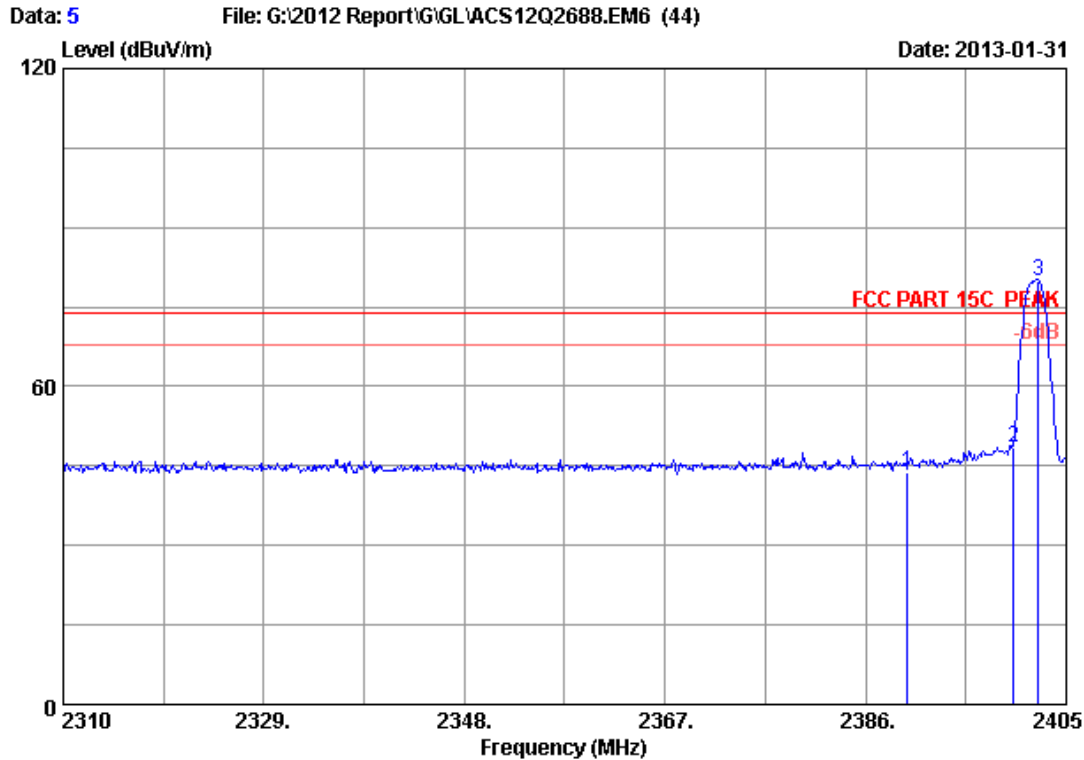

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2402MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	26.70	6.00	35.92	47.12	43.90	74.00	30.10	Peak
2	2400.000	26.76	6.02	35.92	51.55	48.41	74.00	25.59	Peak
3	2402.340	26.77	6.02	35.92	82.86	79.73	74.00	-5.73	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2402MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	26.70	6.00	35.92	36.71	33.49	54.00	20.51	Average
2	2400.000	26.76	6.02	35.92	44.57	41.43	54.00	12.57	Average
3	2401.960	26.77	6.02	35.92	83.79	80.66	54.00	-26.66	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

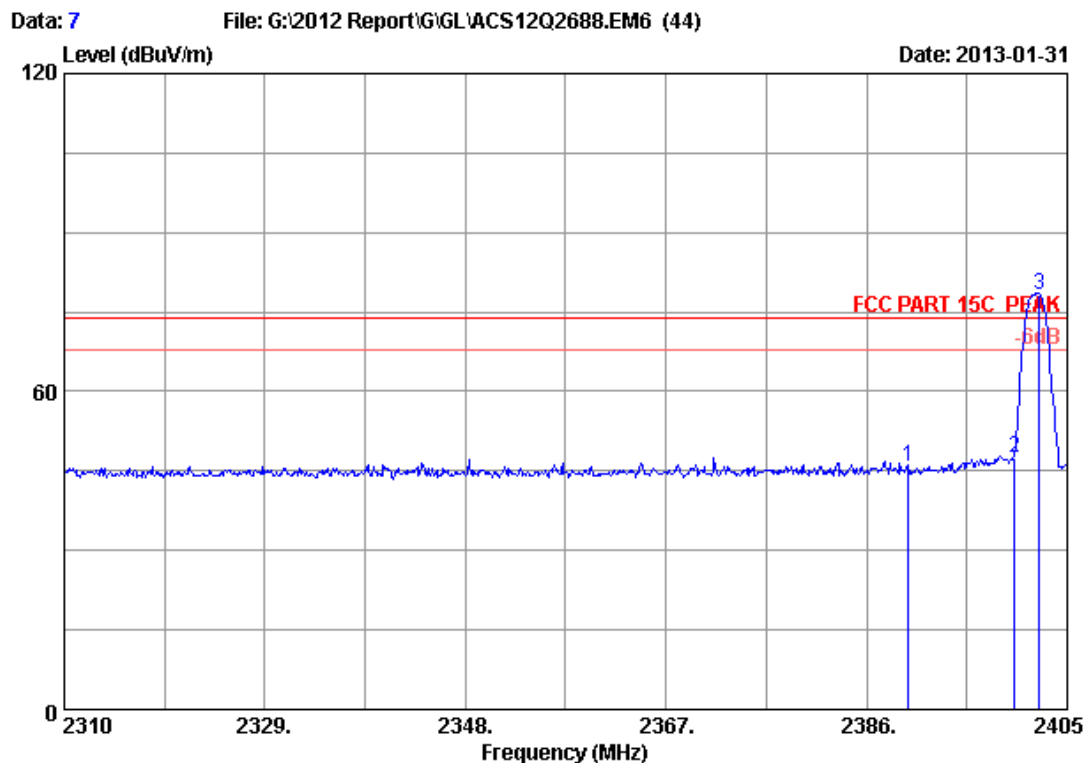

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2402MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	26.70	6.00	35.92	48.85	45.63	74.00	28.37	Peak
2	2400.000	26.76	6.02	35.92	50.65	47.51	74.00	26.49	Peak
3	2402.340	26.77	6.02	35.92	81.29	78.16	74.00	-4.16	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2402MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	26.70	6.00	35.92	36.69	33.47	54.00	20.53	Average
2	2400.000	26.76	6.02	35.92	44.55	41.41	54.00	12.59	Average
3	2401.960	26.77	6.02	35.92	83.65	80.52	54.00	-26.52	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Data: 17

File: G:\2012 Report\G\GL\ACS12Q2688.EM6 (44)

Date: 2013-01-31

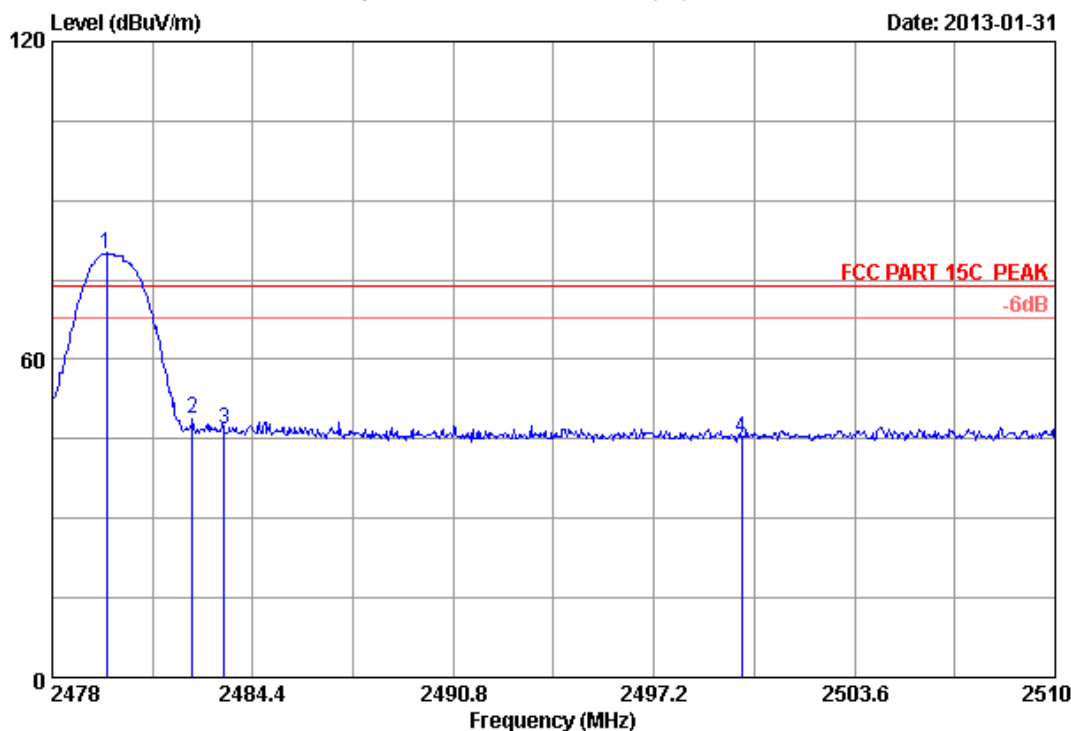


Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2480MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.724	27.27	6.15	35.92	82.36	79.86	74.00	-5.86	Peak
2	2482.478	27.29	6.16	35.92	51.11	48.64	74.00	25.36	Peak
3	2483.500	27.29	6.16	35.92	49.14	46.67	74.00	27.33	Peak
4	2500.000	27.40	6.19	35.93	47.44	45.10	74.00	28.90	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

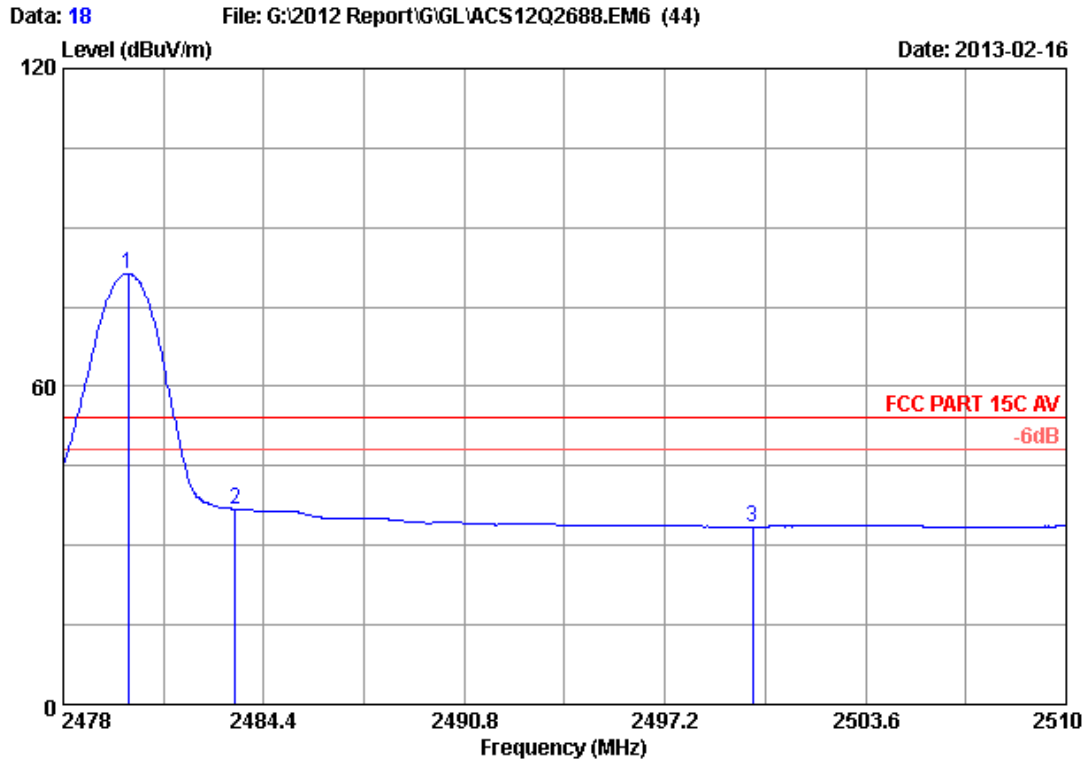

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2480MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.080	27.27	6.15	35.92	83.73	81.23	54.00	-27.23	Average
2	2483.500	27.29	6.16	35.92	39.36	36.89	54.00	17.11	Average
3	2500.000	27.40	6.19	35.93	35.89	33.55	54.00	20.45	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Data: 19

File: G:\2012 Report\G\GL\ACS12Q2688.EM6 (44)

Date: 2013-01-31

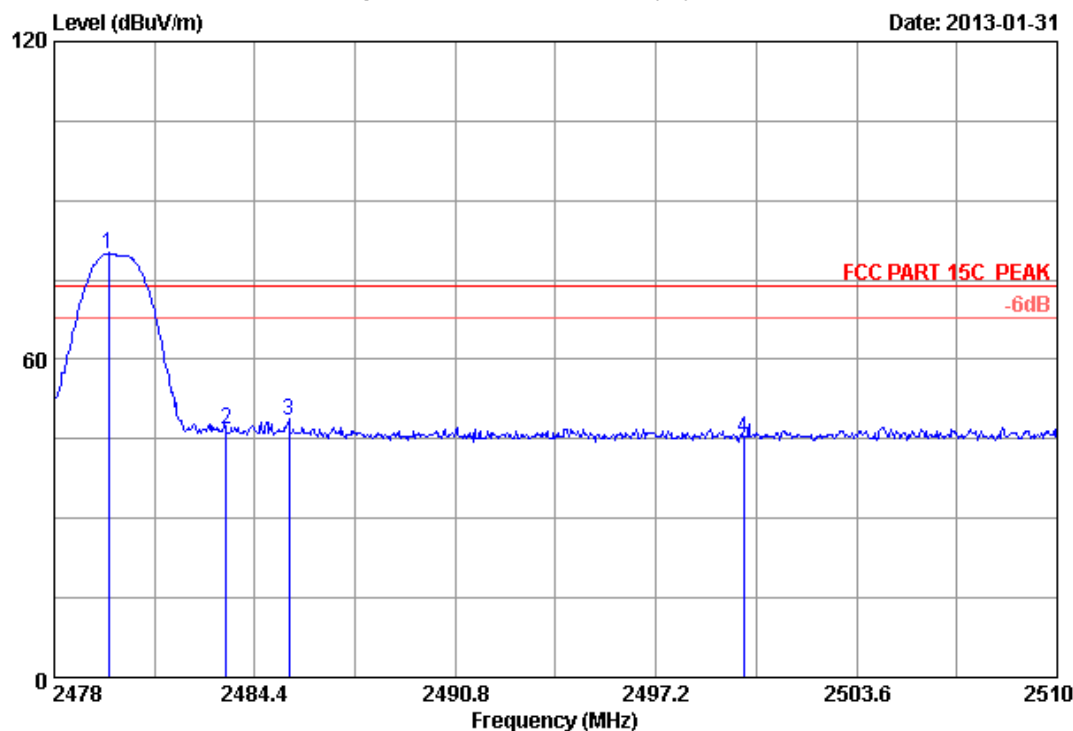


Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2480MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.739	27.27	6.15	35.92	82.26	79.76	74.00	-5.76	Peak
2	2483.500	27.29	6.16	35.92	49.11	46.64	74.00	27.36	Peak
3	2485.481	27.31	6.16	35.92	50.86	48.41	74.00	25.59	Peak
4	2500.000	27.40	6.19	35.93	47.33	44.99	74.00	29.01	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

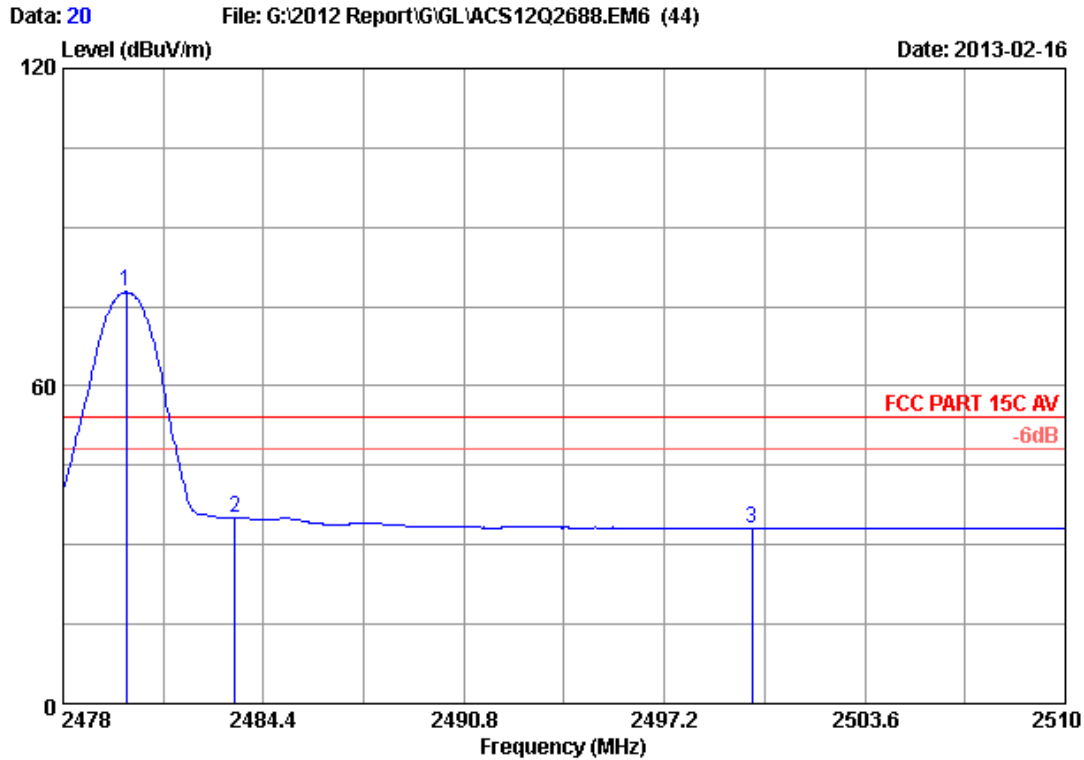

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Hone
 Power supply : DC 3V
 Test mode : BT4.0 2480MHz Tx
 M/N : HN1000
 :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.016	27.27	6.15	35.92	80.23	77.73	54.00	-23.73	Average
2	2483.500	27.29	6.16	35.92	37.48	35.01	54.00	18.99	Average
3	2500.000	27.40	6.19	35.93	35.37	33.03	54.00	20.97	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

7. 6dB Bandwidth Test

7.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1Year
4.	HF Cable	Hubersuhner	Sucoflex104	-	May.08, 12	1 Year

7.2.Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.3.Test Procedure


The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100 kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4.Test Results


EUT: Hone		
M/N: HN1000		
Test date:2013-01-23	Pressure: 101.2±1. 0kpa	Humidity: 49.5 ±3.0%
Tested by:Leo-Li	Test site: RF site	Temperature: 21.1±0.6℃

Cable loss: 1.0 dB		Attenuator loss: 20 dB	
Test Mode	CH (MHz)	6 dB bandwidth (kHz)	Limit (KHz)
GFSK	2402	665.165	500
	2440	675.526	500
	2480	684.612	500
Conclusion : PASS			


2402MHz

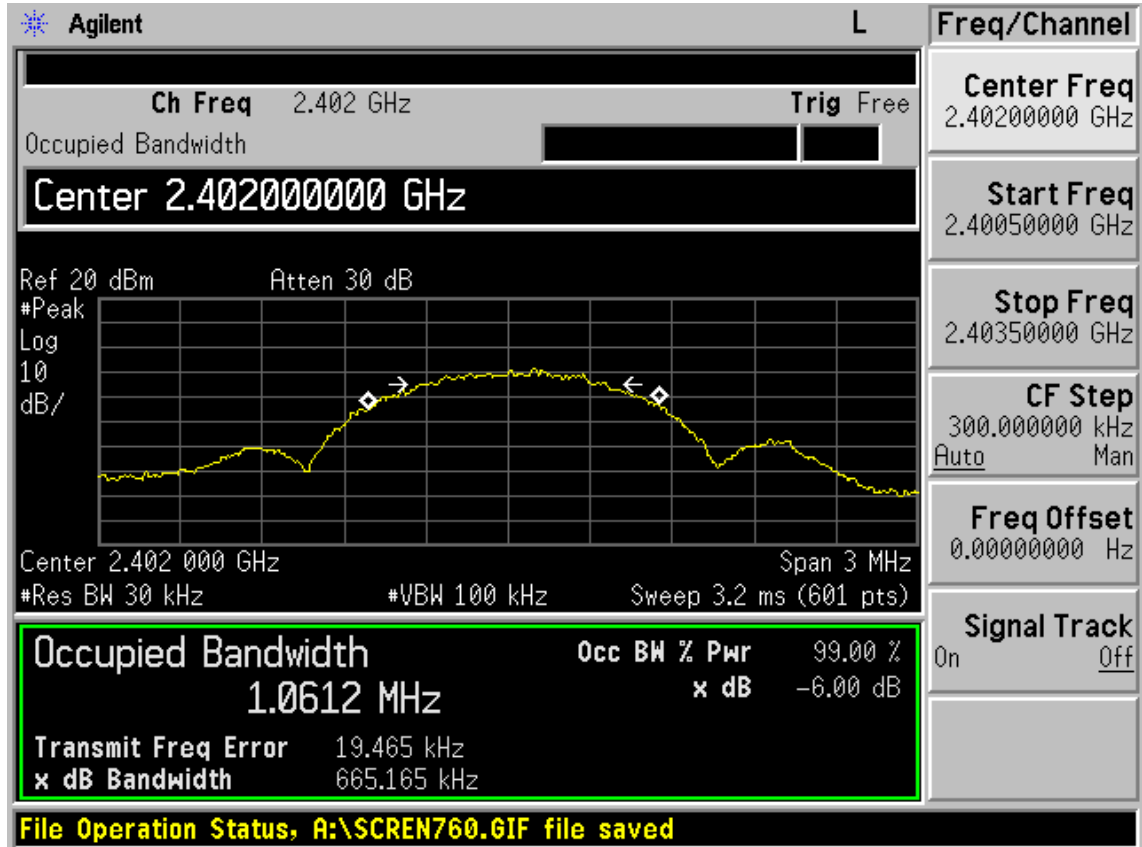

2440MHz

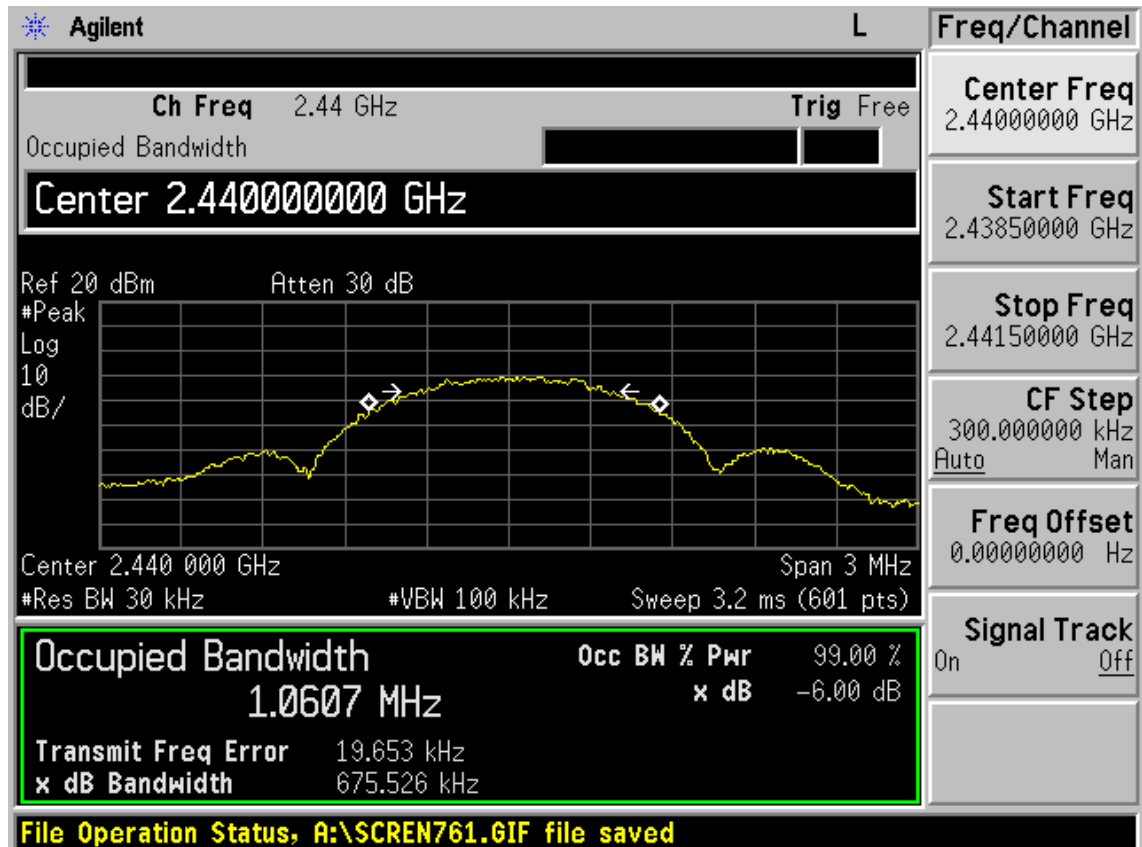

2480MHz

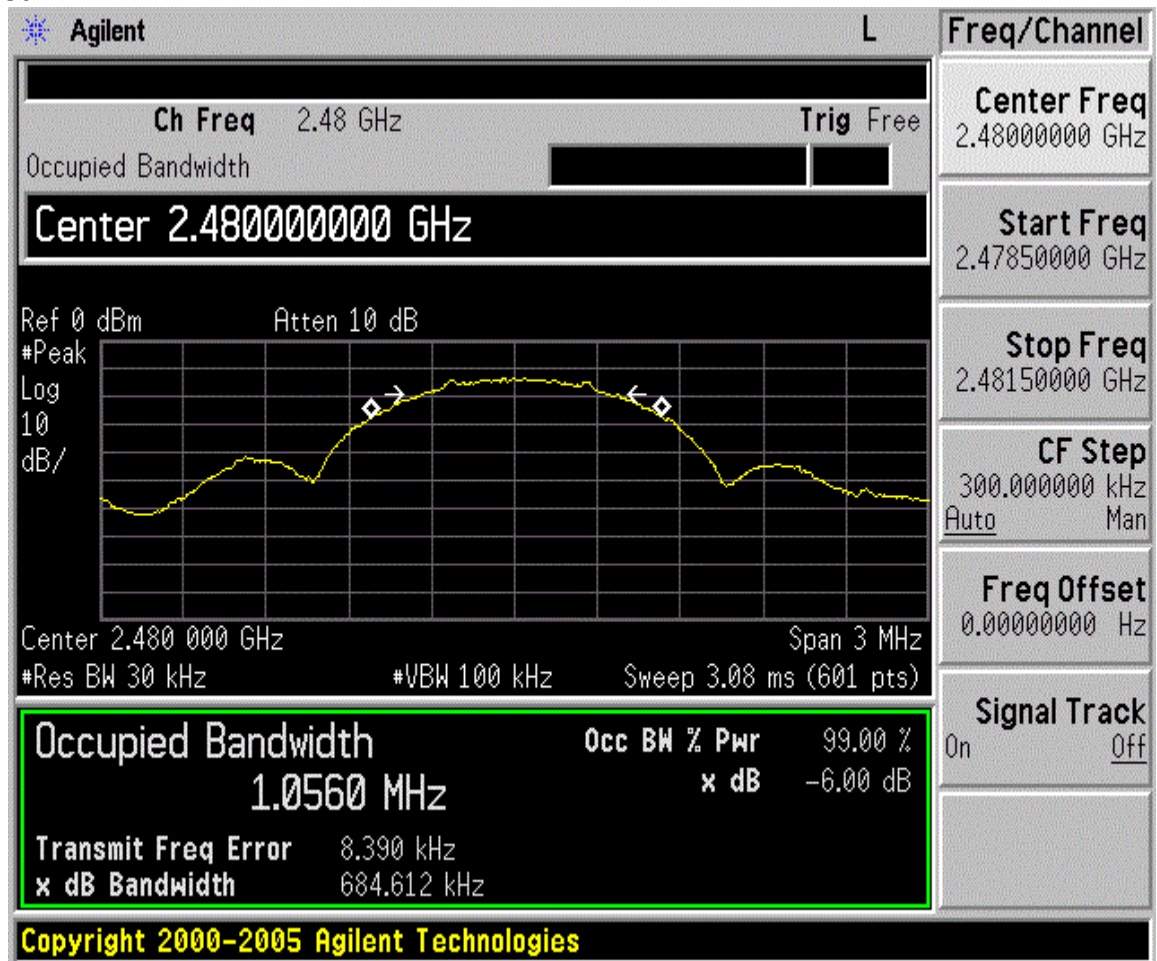

8. OUTPUT POWER TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year
1.	Power Meter	Anritsu	ML2487A	6K00002472	May.08, 12	1Year
2.	Power Sensor	Anritsu	MA2491A	033005	May.08, 12	1Year

8.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

8.3. Test Procedure

1. Connected the EUT's antenna port to power meter Via suitable attenuation.
2. Read the Peak output power of the EUT from the power meter directly.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

8.4.Test Results

EUT: Hone			
M/N: HN1000			
Test date:2013-01-23		Pressure: 101.2±1. 0kpa	Humidity: 46.9 ±3.0%
Tested by:Leo-Li		Test site: RF site	Temperature: 21.8±0.6℃
Cable loss: 1.0 dB		Attenuator loss: 20 dB	
Test Mode	CH (MHz)	Peak output Power (dBm)	Limit (dBm)
GFSK	2402	-1.95	21
	2440	-2.74	21
	2480	-3.45	21
Conclusion: PASS			

9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 12	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.


9.3. Test Procedure



1. Connected the EUT's antenna port to spectrum analyzer device by 20dB attenuator.
2. Set the test frequency as center frequency, Set RBW=3KHz, VBW=10KHz, Span large enough capture the entire frequency, Read out maximum peak level frequency.
3. Set the frequency read from produce 2 as center frequency, then set the span= 300KHz, Sweep time=Span/RBW, Then Max hold, read out each mode and each chain's Power density.

9.4.Test Results

EUT: Hone		
M/N: HN1000		
Test date:2013-01-23	Pressure: 101.2±1.0kpa	Humidity: 47.7 ± 3.0%
Tested by:Leo-Li	Test site: RF site	Temperature: 21.3± 0.6℃

Cable loss: 1 dB		Attenuator loss: 20 dB	
Test Mode	CH (MHz)	Power density (dBm/3KHz)	Limit (dBm/3KHz)
GFSK	2402	-3.41	8
	2440	-0.40	8
	2480	-3.53	8
Conclusion : PASS			

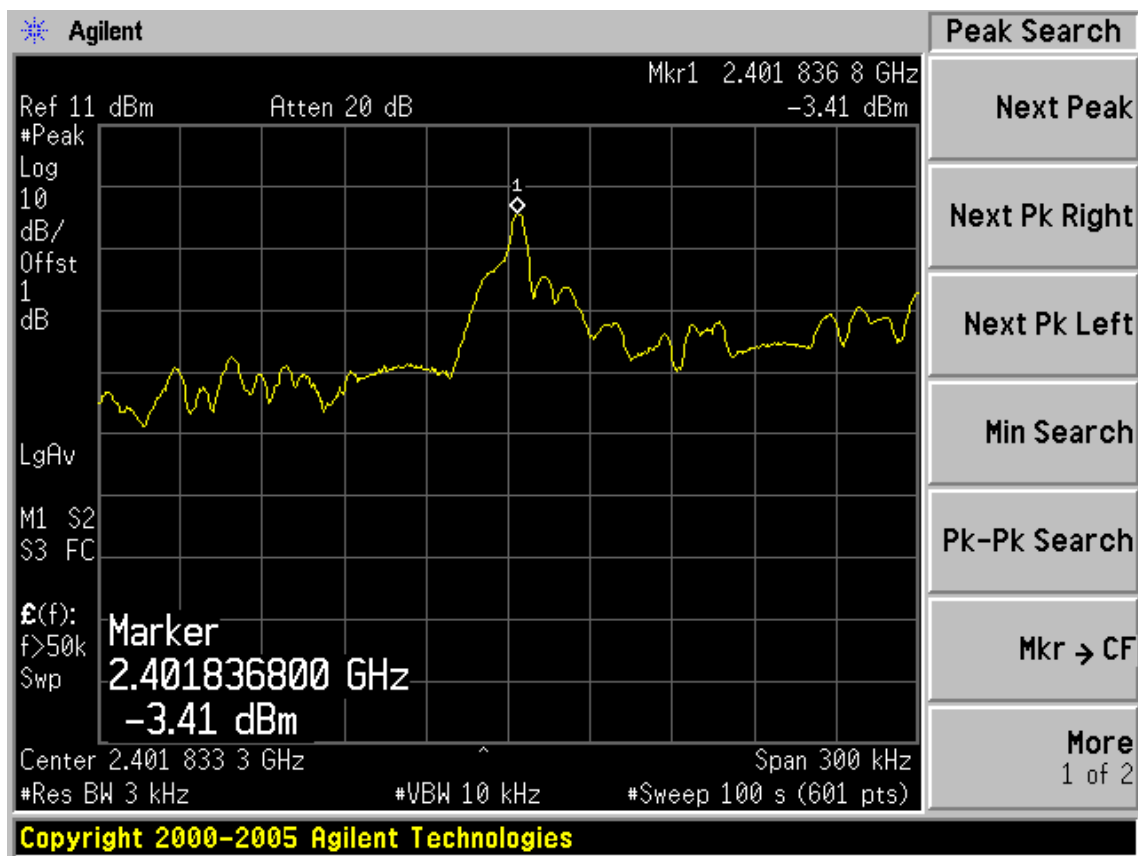

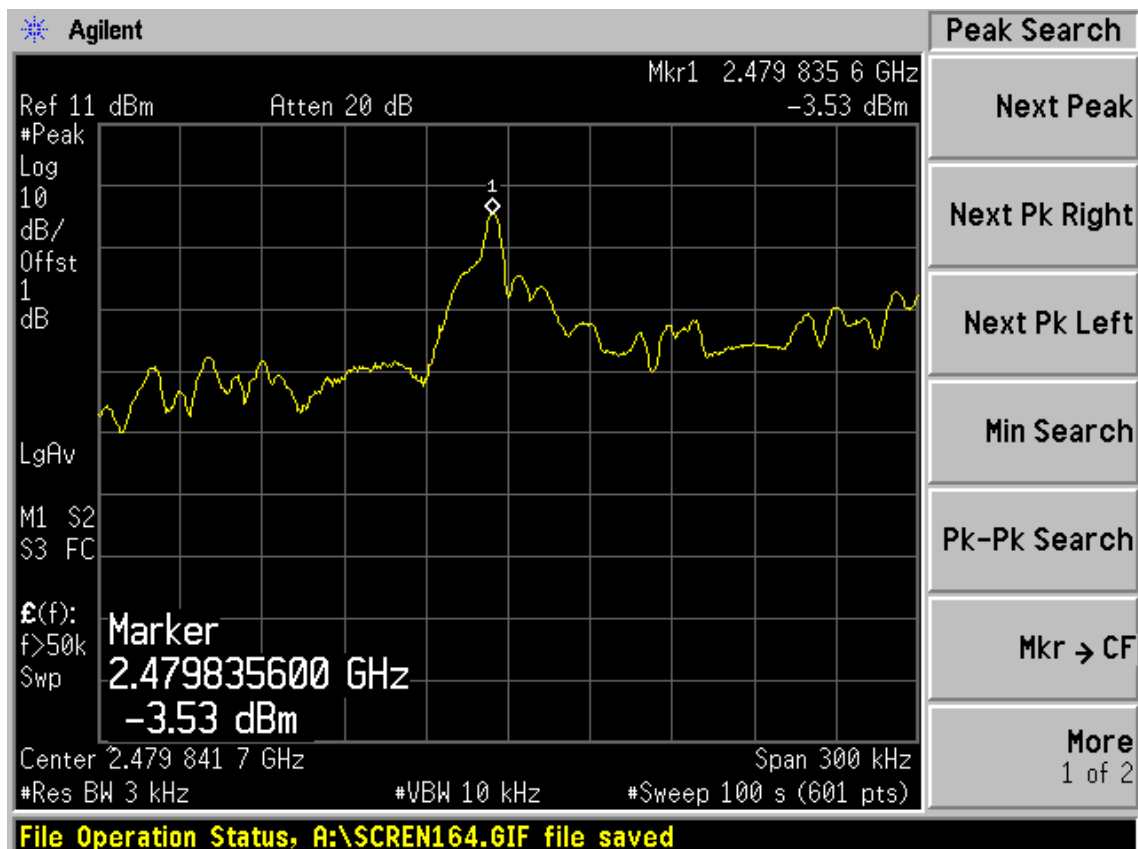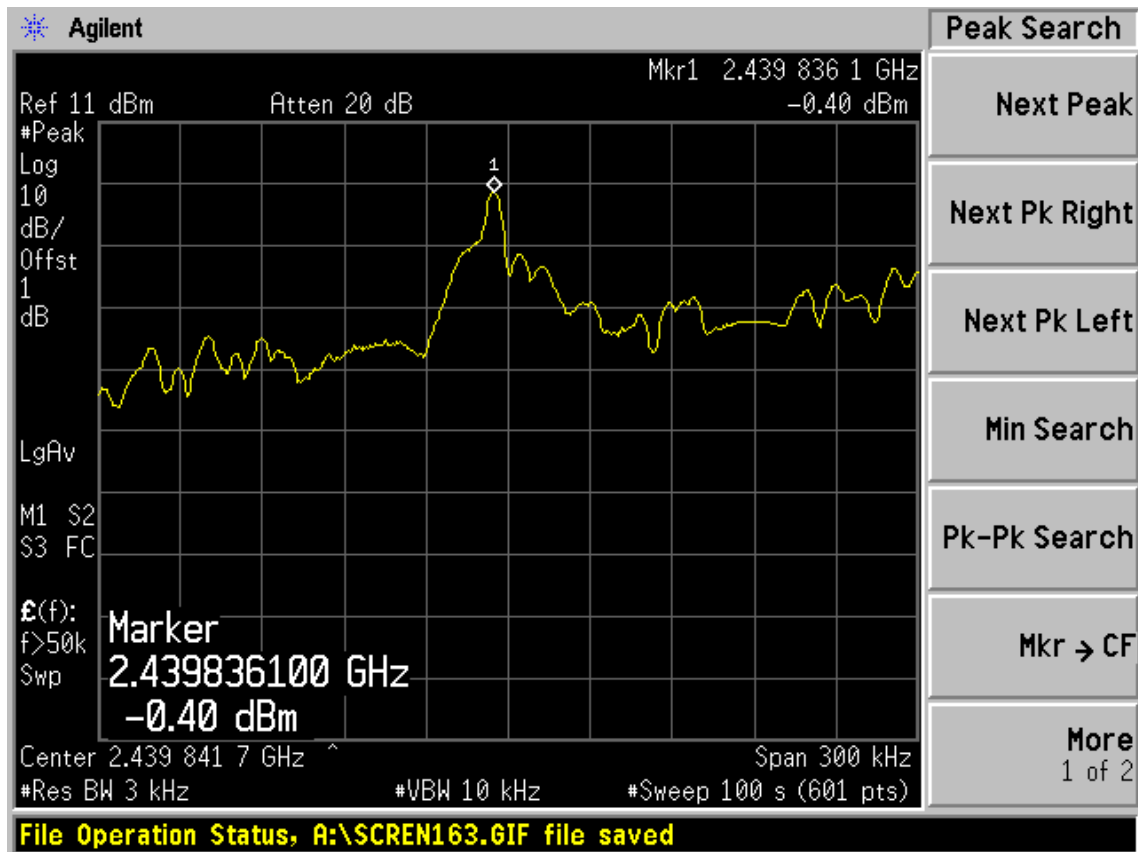

10. ANTENNA REQUIREMENT

10.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are PCB antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 0dBi.

11.DEVIATION TO TEST SPECIFICATIONS

[NONE]