

APPLICATION FOR CERTIFICATION

On Behalf of
Gold Alliance Electronics Co., Ltd.

2.4GHz Wireless 5.7" Black & White Receiver And Transmitter

Model Number: W618+1720

Prepared for : Gold Alliance Electronics Co., Ltd.
Unit 1111, 11/F., K.Wah Centre, No.191 Java Rd.,
North Point, Hong Kong.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F03227
Date of Test : Sep.08~09, 2003
Date of Report : Oct.08, 2003

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Tested Supporting System Details	1-1
1.3. Test Facility	1-2
1.4. Test Uncertainty	1-2
2. POWER LINE CONDUCTED EMISSION TEST	2-1
2.1. Test Equipment	2-1
2.2. Block Diagram of Test Setup	2-1
2.3. Power Line Conducted Emission Limit	2-1
2.4. EUT Configuration on Test	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure	2-2
2.7. Power Line Conducted Emission Test Results	2-3
3. RADIATED EMISSION TEST	3-1
3.1. Test Equipment	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit 30~1000MHz	3-2
3.4. EUT Configuration on Test	3-2
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Results	3-4
4. PHOTOGRAPH	4-1
4.1. Photos of Power Line Conducted Emission Test	4-1
4.2. Photos of Radiated Emission Test (In Anechoic Chamber)	4-2

APPENDIX I	(9 pages)
APPENDIX II	(29 pages)

TEST REPORT DECLARATION

Applicant : Gold Alliance Electronics Co., Ltd.
 Manufacturer : Gold Alliance Electronics Co., Ltd.
 EUT Description : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter
 (A) MODEL NO. : W618+1720
 (B) SERIAL NO. : F2003100802
 (C) Power Supply : Adaptor AC Input 120V/60Hz
 Output DC 9V

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Aug. 2003

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test :

Sep.08~09, 2003

Elsa Wu

Elsa Wu / Assistant

Prepared by :

Lake Wang

Lake Wang / Supervisor

Reviewer :



Approved & Authorized Signer :

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter
This report is about transmitter FCC ID and the receiver FCC DOC report please refer to AUDIX Number ACS-F03226.

Model Number : W618+1720

Applicant : Gold Alliance Electronics Co., Ltd.
Unit 1111, 11/F., K.Wah Centre, No.191 Java Rd.,
North Point, Hong Kong.

Manufacturer : Gold Alliance Electronics Co., Ltd.
Qin Fu 1st St., Qin Fu Rd., Jin Tang Industrial Area,
Liu Yue, Shenzhen

Date of Test : Sep.08~09, 2003

1.2. Tested Supporting System Details

1.2.1. Power Adaptor

Model Number : MCDC090025UA2
Manufacturer: TGI
Cable: Unshielded, Undetachable, 1.8m

1.3. Test Facility

Site Description

3m Anechoic Chamber : Certificated by FCC, USA
Aug. 24, 2000

EMC Lab. : Certificated by DATech, German
Feb. 02, 1999

Certificated by NVLAP, USA
NVLAP Code: 200372-0
Mar. 31, 2003

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.4. Test Uncertainty

Conducted Emission Uncertainty = $\pm 2.66\text{dB}$

Radiated Emission Uncertainty = $\pm 4.26\text{dB}$


2. POWER LINE CONDUCTED EMISSION TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	May.31, 03	1 Year
2.	L.I.S.N. #1	Kyoritsu	KNW-407	8-541-4	May.31, 03	1 Year
3.	L.I.S.N. #2	R&S	ESH2-Z5	834066/011	May.31, 03	1 Year
4.	Terminator	EMCO	50Ω	No. 1	May.31, 03	1 Year
5.	Terminator	EMCO	50Ω	No. 2	May.31, 03	1 Year
6.	RF Cable	FUJIKURA	RG-55/U	LISN Cable	Aug.21, 03	1/2 Year
7.	Coaxial Switch	Anritsu	MP59B	M74389	May.29, 03	1/2 Year
8.	PC	N/A	586ATXS	N/A	N/A	N/A
9.	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

2.2. Block Diagram of Test Setup

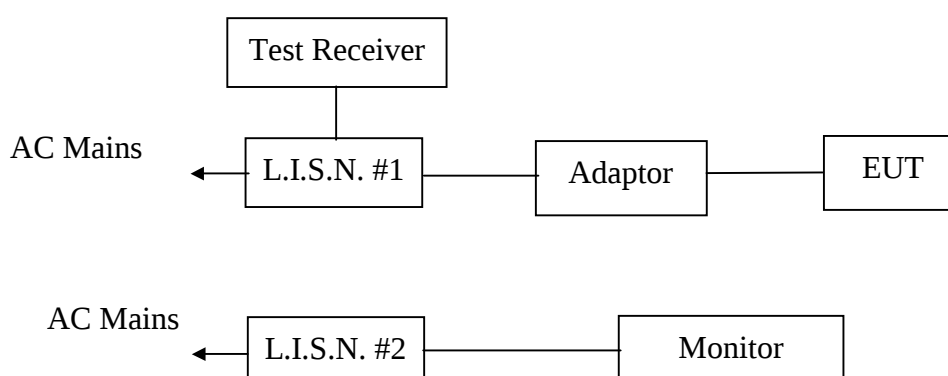

(EUT: 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter)

2.3. Power Line Conducted Emission Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150KHz ~ 500KHz	66 ~ 56*	56 ~ 46*
500KHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4. EUT Configuration on Test

The following equipments are installed on RF LINE VOLTAGE Test to meet the Commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter (EUT)

Model Number	:	W618+1720
Serial Number	:	F2003100802
Manufacturer	:	Gold Alliance Electronics Co., Ltd.

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown on Section 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test mode (TX Channel A/TX Channel B/TX Channel C/ TX Channel D) and measure it.

2.6. Test Procedure

The EUT is put on the table which is 0.8m above the ground and away from other metallic surface at least 0.4m. The EUT is connected to the AC/DC Adapter. The AC/DC Adapter power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the testing equipment; and the peripheral equipment powers form other L.I.S.N.. Please refer to the block diagram of the test setup and photographs. Both sides of AC line(Line & Neutral) are checked for maximum conducted interference. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables must be changed according to ANSI / IEEE Standard 213-1987 on Conducted Emission Test.

The bandwidth of the field strength meter (R & S Test Receiver ESHS20) is set at 10KHz.

The bandwidth of the VBW is set at 30KHz.

The frequency range from 150KHz to 30MHz is checked.

The details of test modes are as the followings, and the test data please see APPENDIX I.

2.7. Power Line Conducted Emission Test Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

Date of Test:	Sep.09, 2003	Temperature:	24°C
EUT:	2.4GHz Wireless 5.7" Black & White Receiver And Transmitter	Humidity:	56%
M/N:	W618+1720	Test Mode:	TX Channel D
Test Engineer:	Seco		

Frequency (MHz)	Reading (dBμV)				Limit (dBμV)	
	VA		VB		Quasi-Peak	Average
	Quasi-Peak	Average	Quasi-Peak	Average		
0.150	43.60	39.60	43.10	39.10	66.00	56.00
0.200	41.00	37.40	*	*	63.60	53.60
0.210	*	*	41.00	38.10	63.20	53.20
0.450	37.90	34.80	*	*	56.90	46.90
0.460	*	*	38.10	34.60	56.70	46.70
0.510	21.00	17.80	*	*	56.00	46.00
0.621	*	*	20.80	17.10	56.00	46.00
1.891	8.90	7.40	*	*	56.00	46.00
2.440	*	*	8.90	7.10	56.00	46.00
17.910	*	*	8.10	6.80	60.00	50.00
18.940	8.40	7.10	*	*	60.00	50.00

"" As the QP value is too low against AV limit, So AV Value had been omitted.

Reviewer:

Cake Wang

3. RADIATED EMISSION TEST

3.1. Test Equipment


The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May.31, 03	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May.31, 03	1 Year
3.	Amplifier	HP	8447D	2944A07794	Sep.18, 03	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 14, 03	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Aug.02, 03	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Aug.02, 03	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Aug.02, 03	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Aug. 02, 03	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	May.29, 03	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators



(EUT: 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

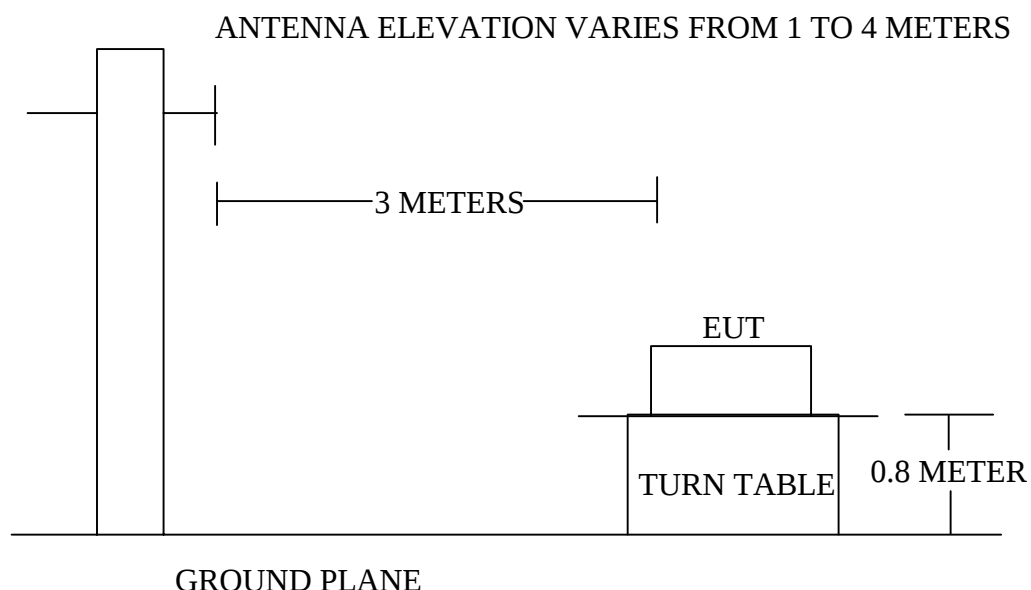

3.3. Radiated Emission Limit 30~1000MHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Local Oscillator: 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter (EUT)

Model Number	:	W618+1720
Serial Number	:	F2003100802
Manufacturer	:	Gold Alliance Electronics Co., Ltd.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX Channel A/TX Channel B/
TX Channel C/TX Channel D) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-1992 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the VBW is set at 300KHz and RBW is set at 120KHz for measurement below 1GHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.

The test modes (TX Channel A/TX Channel B/TX Channel C/TX Channel D) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

Date of Test :	Sep.09, 2003	Temperature :	20°C
EUT :	2.4GHz Wireless 5.7" Black & White Receiver And Transmitter	Humidity :	58%
Model No. :	W618+1720	Test Mode :	TX Channel D
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
34.500	13.97	1.16	8.60	23.73	-16.27	40.00
98.600	9.71	2.01	7.80	19.52	-23.98	43.50
136.800	11.52	2.37	7.60	21.50	-22.00	43.50
216.900	9.88	3.12	7.50	20.50	-25.50	46.00
346.800	15.49	4.15	6.80	26.45	-19.55	46.00
679.800	19.75	6.58	4.70	31.03	-14.97	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 679.800MHz with corrected signal level of 31.03dBμV/m(Limit is 46.00 dBμV/m) when the antenna was at horizontal polarization and at 1.60m high and the turn table was at 313 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer: Cake Wang

Date of Test : Sep.09, 2003 Temperature : 20°C
 EUT : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter Humidity : 58%
 Model No. : W618+1720 Test Mode : TX Channel D
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m
48.500	7.26	1.34	13.60	22.21	-17.79	40.00
79.800	8.09	1.77	9.60	19.46	-20.54	40.00
167.800	9.10	2.70	8.60	20.40	-23.10	43.50
243.500	12.65	3.29	7.80	23.74	-22.26	46.00
369.800	15.01	4.37	6.80	26.17	-19.83	46.00
679.800	20.35	6.58	7.10	34.04	-11.96	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 679.800MHz with corrected signal level of 34.04dBμV/m(Limit is 46.00dBμV/m) when the antenna was at vertical polarization and at 1.30m high and the turn table was at 48.9 °.

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:

Cake Wang

Date of Test :	Sep.08, 2003	Temperature :	20°C
EUT :	2.4GHz Wireless 5.7" Black & White Receiver And Transmitter	Humidity :	58%
Model No. :	W618+1720	Test Mode :	TX Channel A
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2414.100	28.07	35.00	3.21	82.70	78.98	-35.02	114.00	Peak
4825.000	33.03	32.32	4.64	61.64	66.99	-7.01	74.00	Peak
7256.000	34.70	33.05	5.93	44.77	52.35	-21.65	74.00	Peak

Remark: 1. All readings are Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2414.100	28.07	35.00	3.21	81.78	78.06	-15.94	94.00	Average
4825.000	33.03	32.32	4.64	38.40	43.75	-10.25	54.00	Average
7256.000	34.70	33.05	5.93	33.04	40.62	-13.38	54.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer: Cake Wang

Date of Test : Sep.08, 2003 Temperature : 20°C
 EUT : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter Humidity : 58%
 Model No. : W618+1720 Test Mode : TX Channel A
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2414.100	28.07	35.00	3.21	82.70	78.98	-15.02	94.00	Average
4825.000	33.03	32.32	4.64	38.64	43.99	-10.01	54.00	Average
7256.000	34.70	33.05	5.93	33.77	41.35	-12.65	54.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2414.100	28.07	35.00	3.21	92.78	89.06	-24.94	114.00	Peak
4825.000	33.03	32.32	4.64	65.40	70.75	-3.25	74.00	Peak
7256.000	34.70	33.05	5.93	50.04	57.62	-16.38	74.00	Peak

Remark: 1. All readings are Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer:

Choke Wang

Date of Test : Sep.08, 2003 Temperature : 20°C
 EUT : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter Humidity : 58%
 Model No. : W618+1720 Test Mode : TX Channel B
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2432.200	28.11	35.00	3.22	82.61	78.94	-35.06	114.00	Peak
4859.000	33.06	32.26	4.66	58.85	64.31	-9.69	74.00	Peak
7290.000	34.73	33.03	5.95	48.49	56.14	-17.86	74.00	Peak

Remark: 1. All readings are Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor


3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2432.200	28.11	35.00	3.22	77.02	73.35	-20.65	94.00	Average
4859.000	33.06	32.26	4.66	37.42	42.88	-11.12	54.00	Average
7290.000	34.73	33.03	5.95	32.78	40.43	-13.57	54.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer: 

Date of Test :	Sep.08, 2003	Temperature :	20°C
EUT :	2.4GHz Wireless 5.7" Black & White Receiver And Transmitter	Humidity :	58%
Model No. :	W618+1720	Test Mode :	TX Channel B
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2432.200	28.11	35.00	3.22	73.61	69.94	-24.06	94.00	Average
4859.000	33.06	32.26	4.66	36.85	42.31	-11.69	54.00	Average
7290.000	34.73	33.03	5.95	31.49	39.14	-14.86	54.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2432.200	28.11	35.00	3.22	91.02	87.35	-26.65	114.00	Peak
4859.000	33.06	32.26	4.66	60.42	65.88	-8.12	74.00	Peak
7290.000	34.73	33.03	5.95	50.78	58.43	-15.57	74.00	Peak

Remark: 1. All readings are Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer:

Choke Wang

Date of Test : Sep.08, 2003 Temperature : 20°C
 EUT : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter Humidity : 58%
 Model No. : W618+1720 Test Mode : TX Channel C
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2451.100	28.14	35.00	3.23	84.40	80.77	-33.23	114.00	Peak
4910.000	33.12	32.16	4.70	59.96	65.62	-8.38	74.00	Peak
7341.000	34.77	32.99	5.98	45.42	53.18	-20.82	74.00	Peak

Remark: 1. All readings are Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2451.100	28.14	35.00	3.23	78.57	74.94	-19.06	94.00	Average
4910.000	33.12	32.16	4.70	38.87	44.53	-9.47	54.00	Average
7375.000	34.80	32.97	5.99	33.61	41.43	-12.57	54.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer:

Chase Wang

Date of Test : Sep.08, 2003 Temperature : 20°C
EUT : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter Humidity : 58%
Model No. : W618+1720 Test Mode : TX Channel C
Test Engineer: Seco

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2451.100	28.14	35.00	3.23	77.40	73.77	-20.23	94.00	Average
4910.000	33.12	32.16	4.70	39.96	45.62	-8.38	54.00	Average
7341.000	34.77	32.99	5.98	33.42	41.18	-12.82	54.00	Average

Remark: 1. All readings are Average values.
2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor
3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2451.100	28.14	35.00	3.23	92.57	88.94	-25.06	114.00	Peak
4910.000	33.12	32.16	4.70	60.87	66.53	-7.47	74.00	Peak
7375.000	34.80	32.97	5.99	51.61	59.43	-14.57	74.00	Peak

Remark: 1. All readings are Peak values.
2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor
3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer: Chae Wang

Date of Test : Sep.08, 2003 Temperature : 20°C
 EUT : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter Humidity : 58%
 Model No. : W618+1720 Test Mode : TX Channel D
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2468.600	28.17	35.00	3.25	84.45	80.87	-33.13	114.00	Peak
4944.000	33.15	32.10	4.72	57.87	63.64	-10.36	74.00	Peak
7426.000	34.84	32.95	6.02	52.06	59.97	-14.03	74.00	Peak

Remark: 1. All readings are Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m	Remark
2468.600	28.17	35.00	3.25	77.67	74.09	-19.91	94.00	Average
4944.000	33.15	32.10	4.72	38.50	44.27	-9.73	54.00	Average
7426.000	34.84	32.95	6.02	31.11	39.02	-14.98	54.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer: Chen Wang

Date of Test : Sep.08, 2003 Temperature : 20°C
 EUT : 2.4GHz Wireless 5.7" Black & White Receiver And Transmitter Humidity : 58%
 Model No. : W618+1720 Test Mode : TX Channel D
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2468.600	28.17	35.00	3.25	75.45	71.87	-22.13	94.00	Average
4944.000	33.15	32.10	4.72	38.87	44.64	-9.36	54.00	Average
7426.000	34.84	32.95	6.02	33.06	40.97	-13.03	54.00	Average

Remark: 1. All readings are Average values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Antenna Factor dB/m	Preamp Factor	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2468.600	28.17	35.00	3.25	90.67	87.09	-26.91	114.00	Peak
4944.000	33.15	32.10	4.72	60.50	66.27	-7.73	74.00	Peak
7426.000	34.84	32.95	6.02	52.11	60.02	-13.98	74.00	Peak

Remark: 1. All readings are Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer:

Chase Wang




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 95 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:32:20

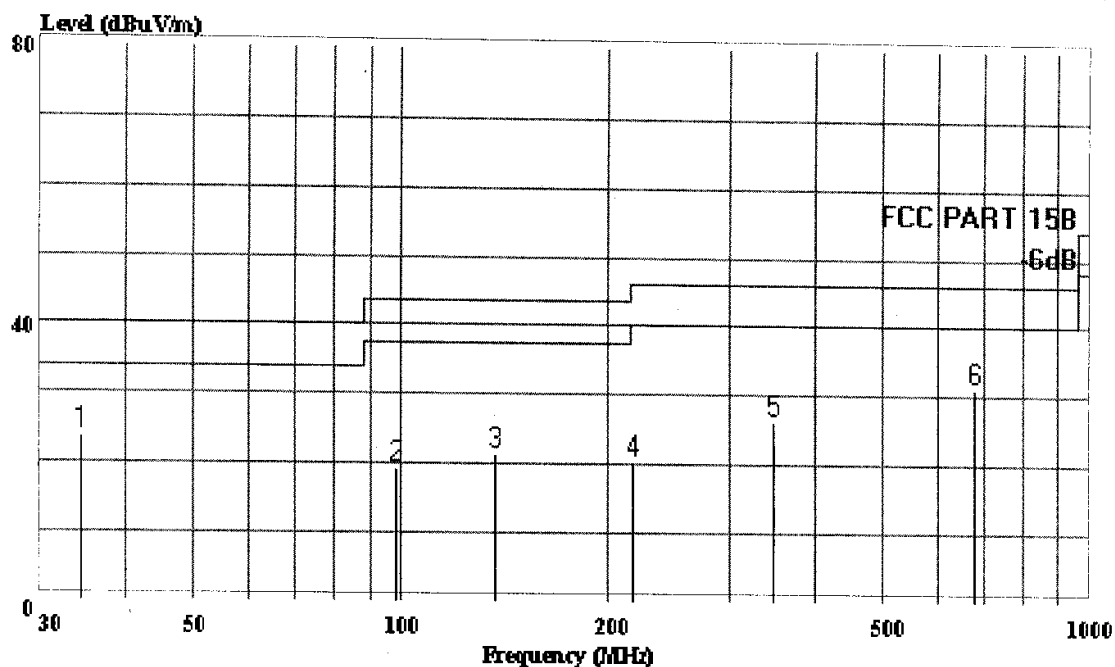

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:.

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4GHz Wireless 5.7'' Black & White

: Receiver Transmitter

M/N : W618+1720

Power : Adaptor AC input120V/60Hz Output DC9V

Test Engineer: Seco

Comment : Temp:25.4'C Humi:58%

Memo : TX Channel D

: Ant.Pos:1.6m

: TablePos:313'

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
			dBuV/m	dB	dBuV	dB	dB
1	34.500	23.73	40.00	-16.27	8.60	13.97	1.16
2	98.600	19.52	43.50	-23.98	7.80	9.71	2.01
3	136.800	21.50	43.50	-22.00	7.60	11.52	2.37
4	216.900	20.50	46.00	-25.50	7.50	9.88	3.12
5	346.800	26.45	46.00	-19.55	6.80	15.49	4.15
6	679.800	31.03	46.00	-14.97	4.70	19.75	6.58




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 97 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:36:23

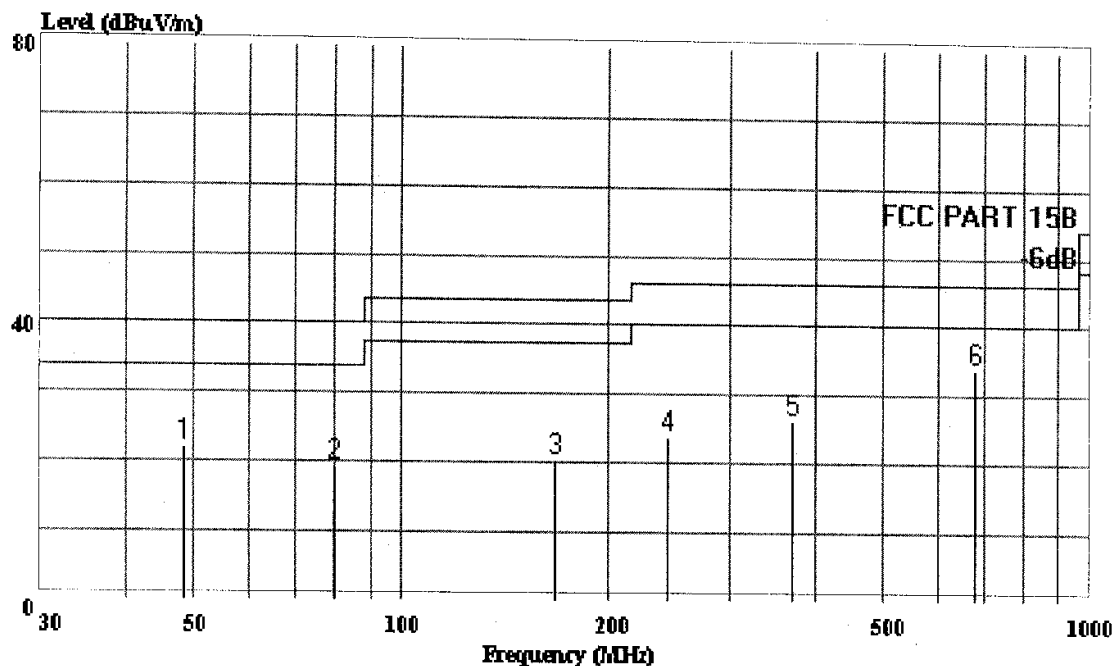

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4GHz Wireless 5.7'' Black & White

: Receiver Transmitter

M/N : W618+1720

Power : Adaptor AC input120V/60Hz Output DC9V

Test Engineer: Seco

Comment : Temp:25.4'C Humi:58%

Memo : TX Channel D

: AntPos:1.3m

: TablePos:48.9'

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	48.500	22.21	40.00	-17.79	13.60	7.26	1.34
2	79.800	19.46	40.00	-20.54	9.60	8.09	1.77
3	167.800	20.40	43.50	-23.10	8.60	9.10	2.70
4	243.500	23.74	46.00	-22.26	7.80	12.65	3.29
5	369.800	26.17	46.00	-19.83	6.80	15.01	4.37
6	679.800	34.04	46.00	-11.96	7.10	20.35	6.58




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 5 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

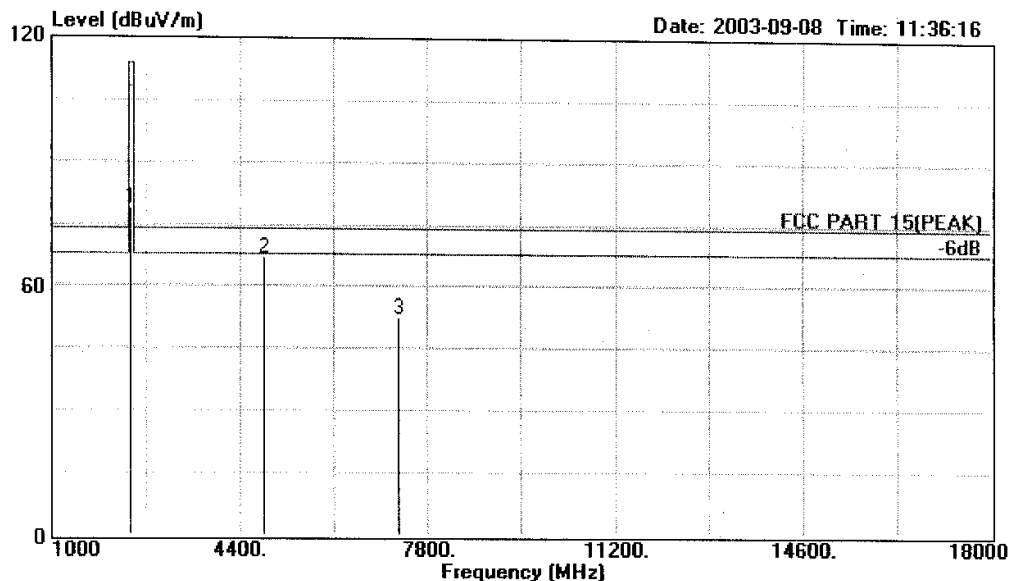

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23° Humi:52%

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2414.100	78.98	-35.02	114.00	82.70	3.21	28.07	35.00	Peak
2	4825.000	66.99	-7.01	74.00	61.64	4.64	33.03	32.32	Peak
3	7256.000	52.35	-21.65	74.00	44.77	5.93	34.70	33.05	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 3 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

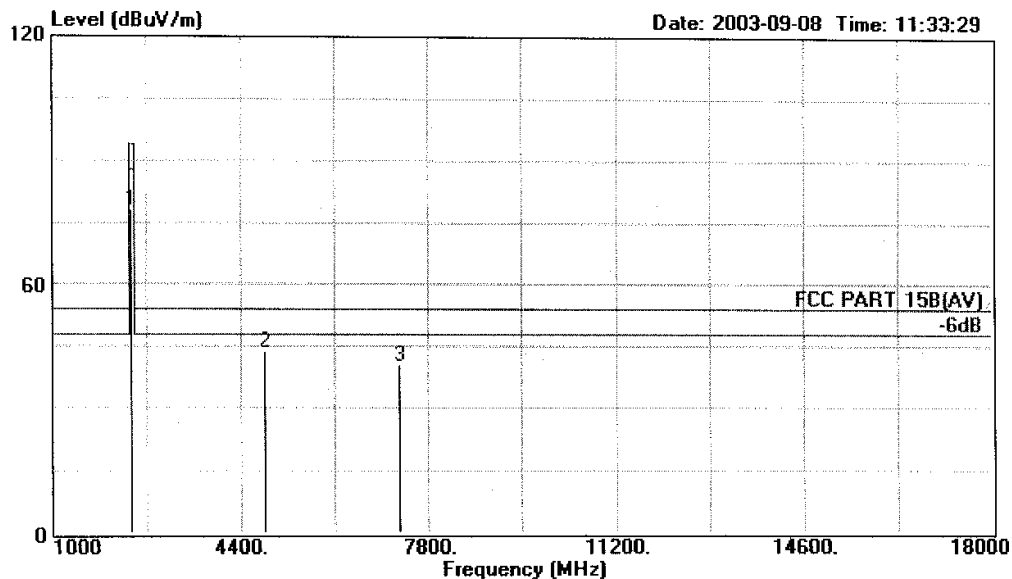

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23' Humi:52%

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2414.100	78.06	-15.94	94.00	81.78	3.21	28.07	35.00	Average
2	4825.000	43.75	-10.25	54.00	38.40	4.64	33.03	32.32	Average
3	7256.000	40.62	-13.38	54.00	33.04	5.93	34.70	33.05	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 6 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

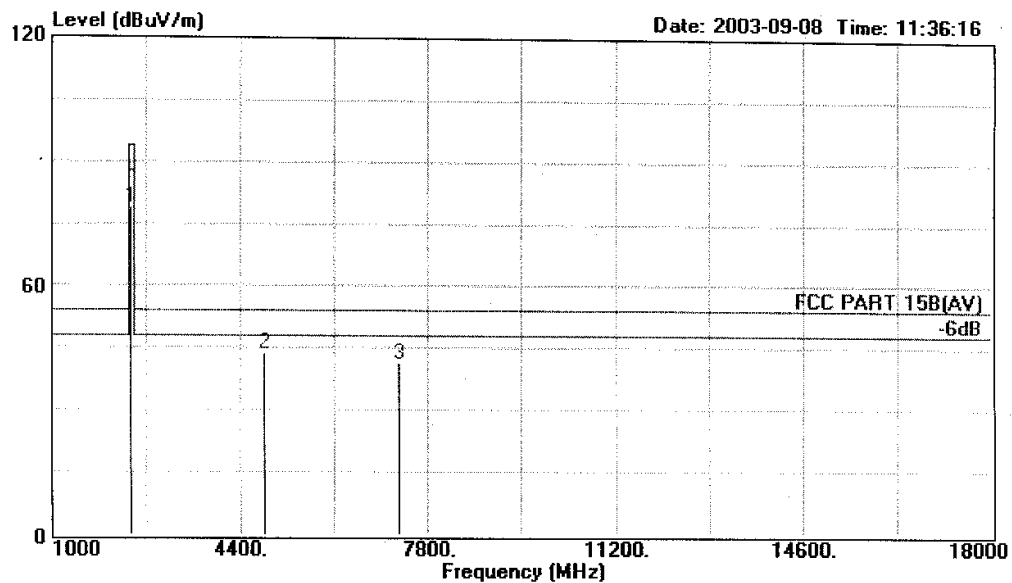

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23' Humi:52%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	Remark
1	2414.100	78.98	-15.02	94.00	82.70	3.21	28.07	35.00	Average
2	4825.000	43.99	-10.01	54.00	38.64	4.64	33.03	32.32	Average
3	7256.000	41.35	-12.65	54.00	33.77	5.93	34.70	33.05	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 2 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

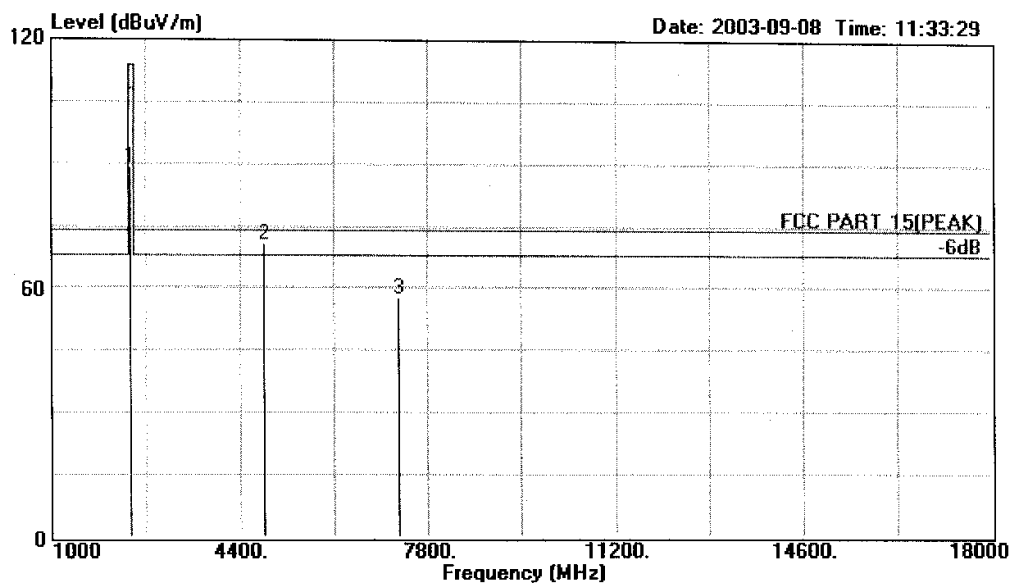

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23' Humi:52%

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2414.100	89.06	-24.94	114.00	92.78	3.21	28.07	35.00	Peak
2	4825.000	70.75	-3.25	74.00	65.40	4.64	33.03	32.32	Peak
3	7256.000	57.62	-16.38	74.00	50.04	5.93	34.70	33.05	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ka Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 8 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

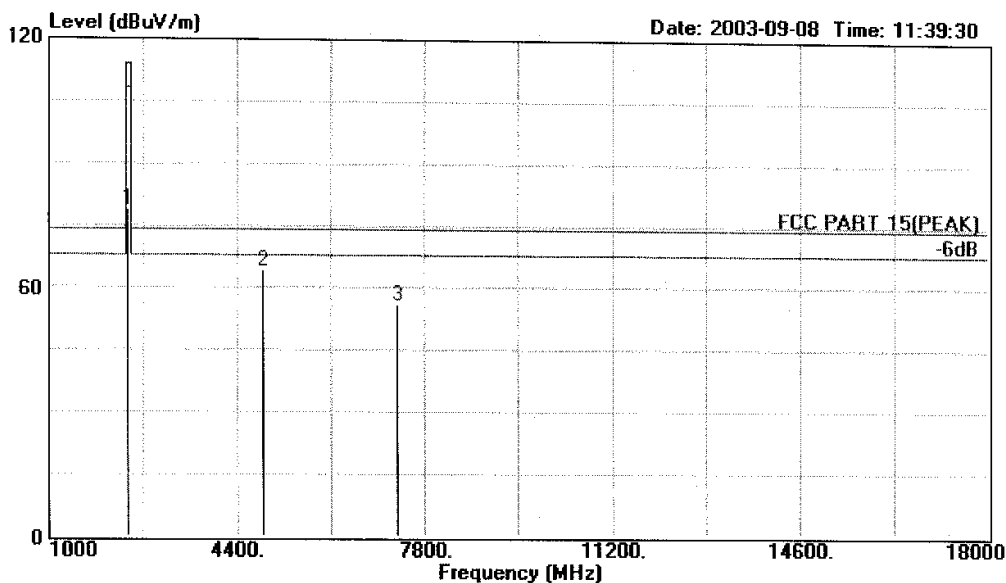

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23° Humi:52%

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m		dB	dBuV/m	dB	dB	dB	
1	2432.200	78.94	-35.06	114.00	82.61	3.22	28.11	35.00	Peak
2	4859.000	64.31	-9.69	74.00	58.85	4.66	33.06	32.26	Peak
3	7290.000	56.14	-17.86	74.00	48.49	5.95	34.73	33.03	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 12 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

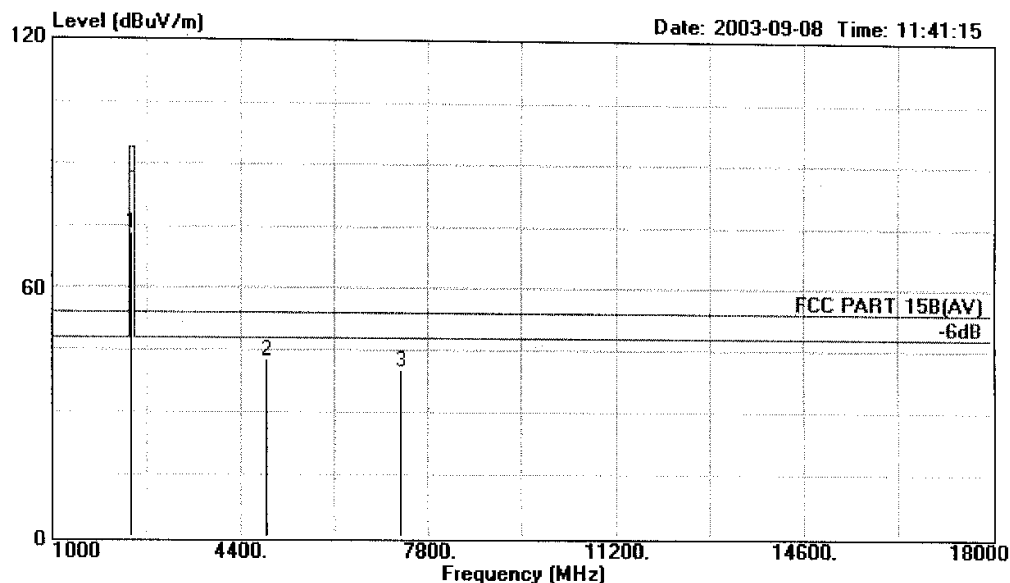

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23' Humi:52%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	
	MHz	dBuV/m		dBuV/m	dBuV	Loss	Factor	Factor	Remark
			dB			dB	dB	dB	
1	2432.200	73.35	-20.65	94.00	77.02	3.22	28.11	35.00	Average
2	4859.000	42.88	-11.12	54.00	37.42	4.66	33.06	32.26	Average
3	7290.000	40.43	-13.57	54.00	32.78	5.95	34.73	33.03	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 9 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

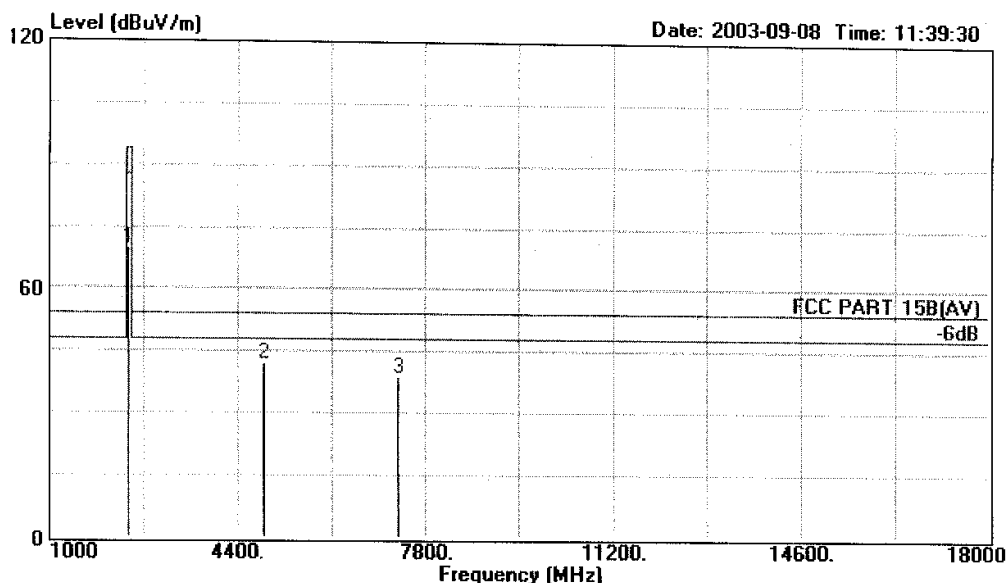

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23' Humi:52%


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2432.200	69.94	-24.06	94.00	73.61	3.22	28.11	35.00	Average
2	4859.000	42.31	-11.69	54.00	36.85	4.66	33.06	32.26	Average
3	7290.000	39.14	-14.86	54.00	31.49	5.95	34.73	33.03	Average



信華科技(深圳)有限公司
AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 11 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

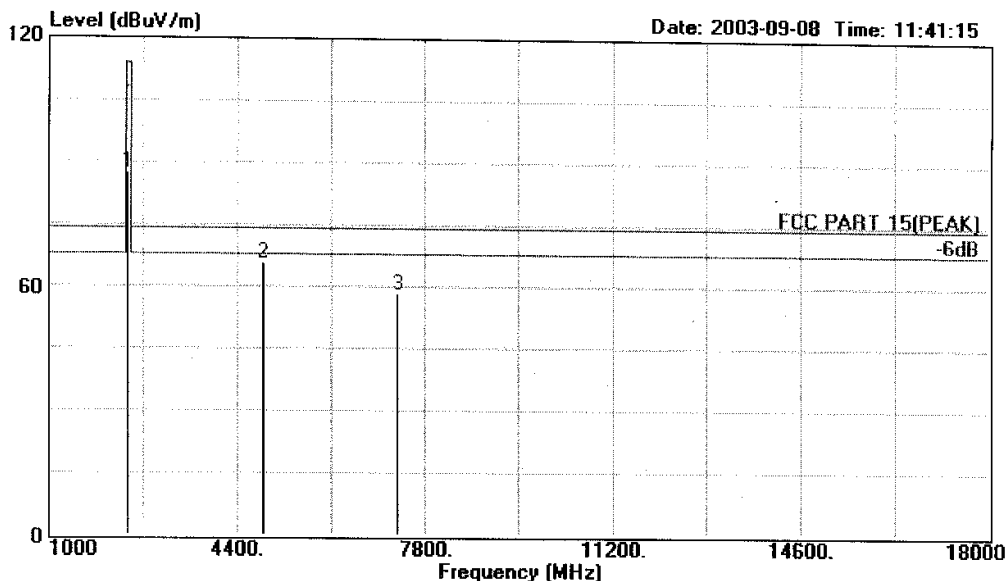

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23' Humi:52%

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamplifier	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2432.200	87.35	-26.65	114.00	91.02	3.22	28.11	35.00	Peak
2	4859.000	65.88	-8.12	74.00	60.42	4.66	33.06	32.26	Peak
3	7290.000	58.43	-15.57	74.00	50.78	5.95	34.73	33.03	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 17

File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

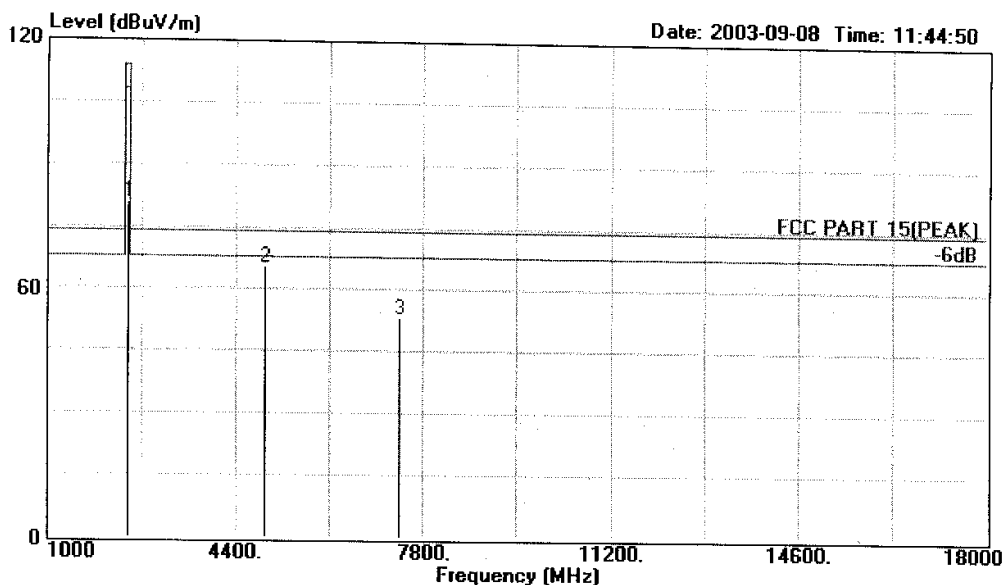

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23' Humi:52%

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	dB	
1	2451.100	80.77	-33.23	114.00	84.40	3.23	28.14	35.00	Peak
2	4910.000	65.62	-8.38	74.00	59.96	4.70	33.12	32.16	Peak
3	7341.000	53.18	-20.82	74.00	45.42	5.98	34.77	32.99	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 15 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

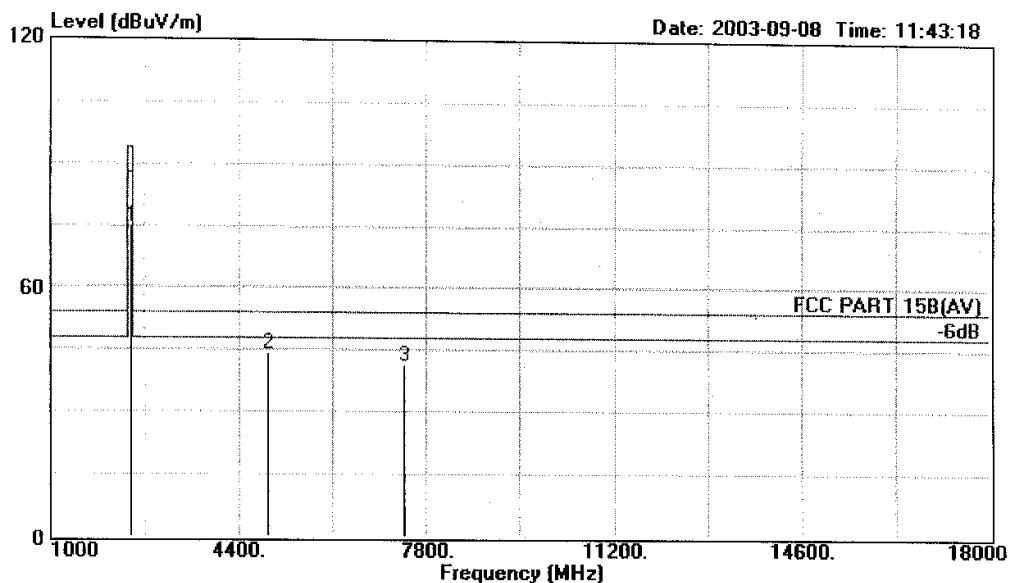

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23' Humi:52%

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamplifier	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2451.100	74.94	-19.06	94.00	78.57	3.23	28.14	35.00	Average
2	4910.000	44.53	-9.47	54.00	38.87	4.70	33.12	32.16	Average
3	7375.000	41.43	-12.57	54.00	33.61	5.99	34.80	32.97	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 18

File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

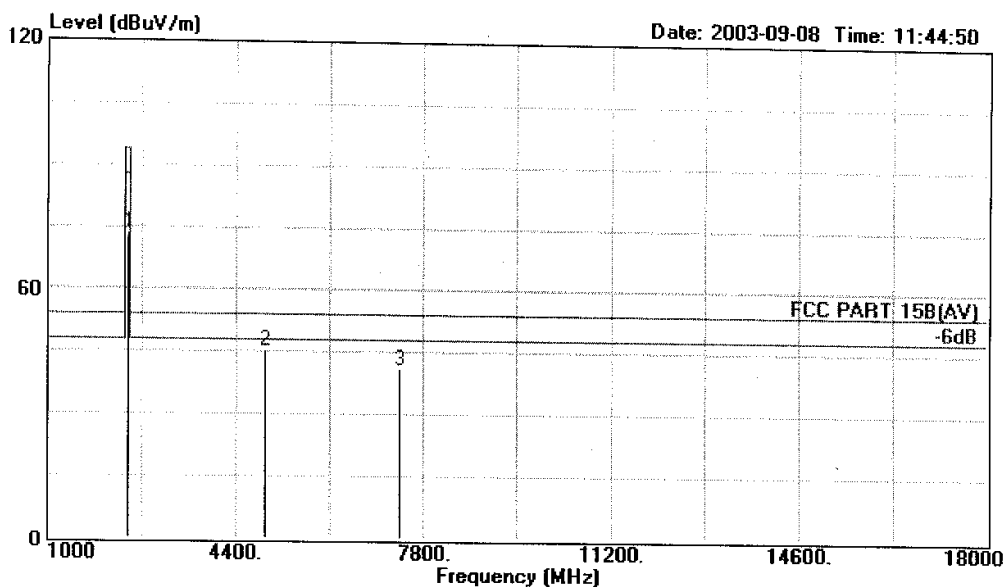

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23° Humi:52%

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2451.100	73.77	-20.23	94.00	77.40	3.23	28.14	35.00	Average
2	4910.000	45.62	-8.38	54.00	39.96	4.70	33.12	32.16	Average
3	7341.000	41.18	-12.82	54.00	33.42	5.98	34.77	32.99	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 14 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

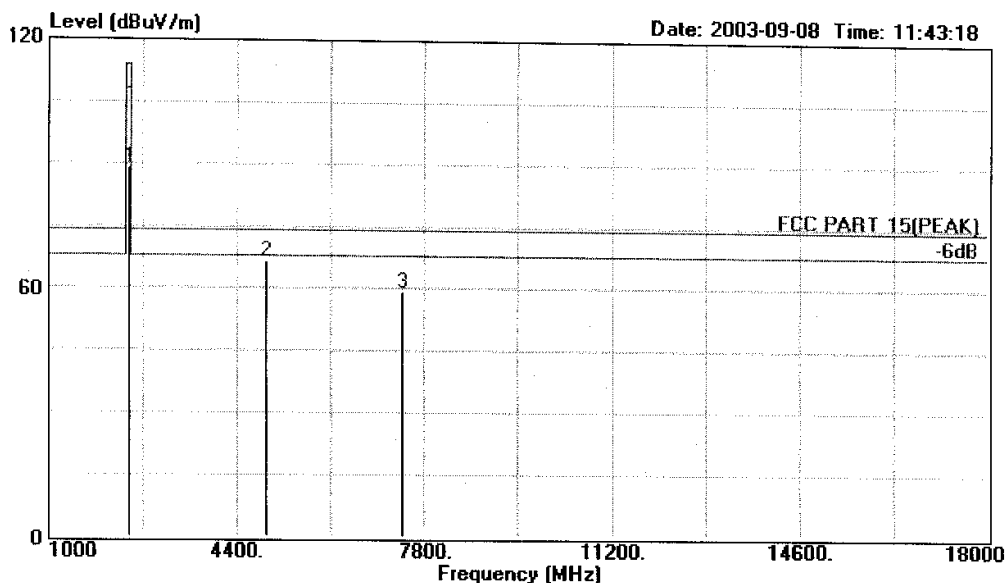

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23' Humi:52%


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2451.100	88.94	-25.06	114.00	92.57	3.23	28.14	35.00	Peak
2	4910.000	66.53	-7.47	74.00	60.87	4.70	33.12	32.16	Peak
3	7375.000	59.43	-14.57	74.00	51.61	5.99	34.80	32.97	Peak



信華科技(深圳)有限公司
AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 20 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

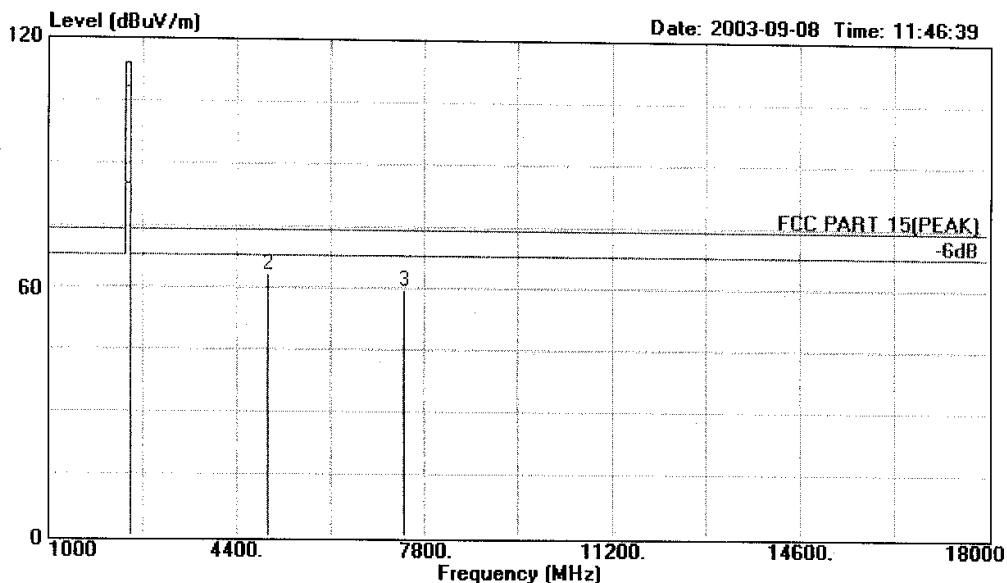

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23' Humi:52%

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamplifier	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2468.600	80.87	-33.13	114.00	84.45	3.25	28.17	35.00	Peak
2	4944.000	63.64	-10.36	74.00	57.87	4.72	33.15	32.10	Peak
3	7426.000	59.97	-14.03	74.00	52.06	6.02	34.84	32.95	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 24 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

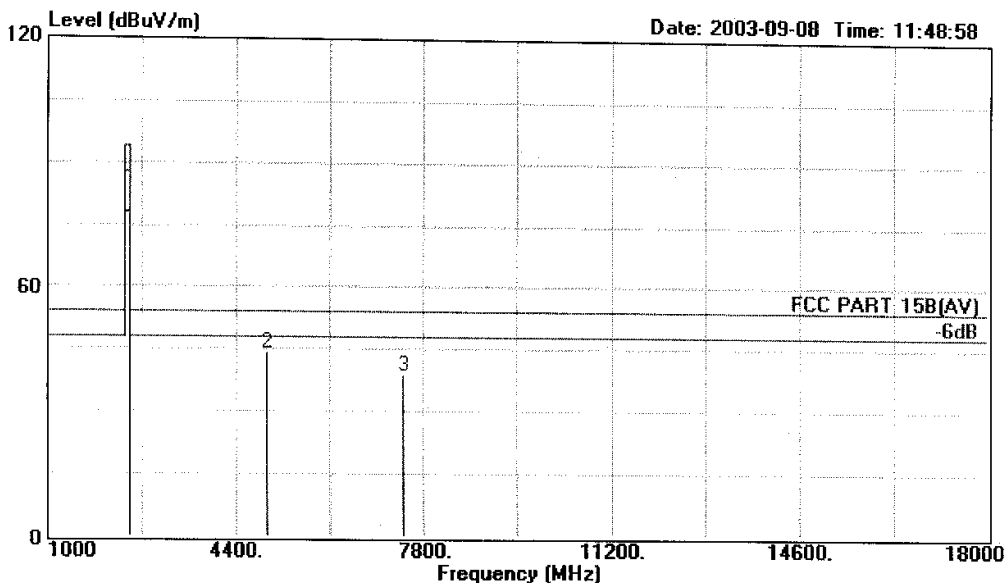

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23' Humi:52%

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamplifier	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2468.600	74.09	-19.91	94.00	77.67	3.25	28.17	35.00	Average
2	4944.000	44.27	-9.73	54.00	38.50	4.72	33.15	32.10	Average
3	7426.000	39.02	-14.98	54.00	31.11	6.02	34.84	32.95	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 21 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

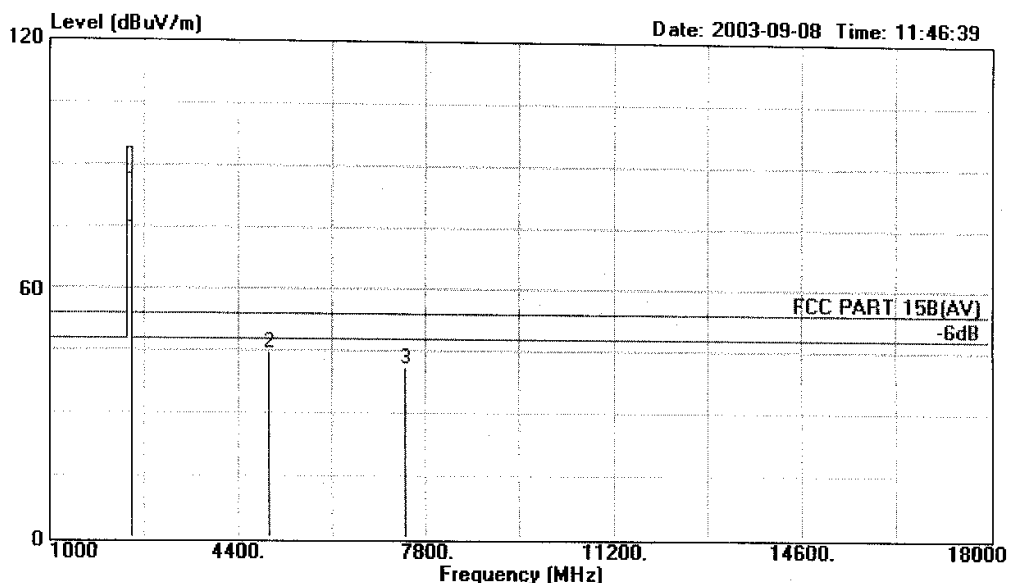

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23' Humi:52%

			Over	Limit	Read	Cable	Probe	Preamp	
	Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2468.600	71.87	-22.13	94.00	75.45	3.25	28.17	35.00	Average
2	4944.000	44.64	-9.36	54.00	38.87	4.72	33.15	32.10	Average
3	7426.000	40.97	-13.03	54.00	33.06	6.02	34.84	32.95	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 23 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

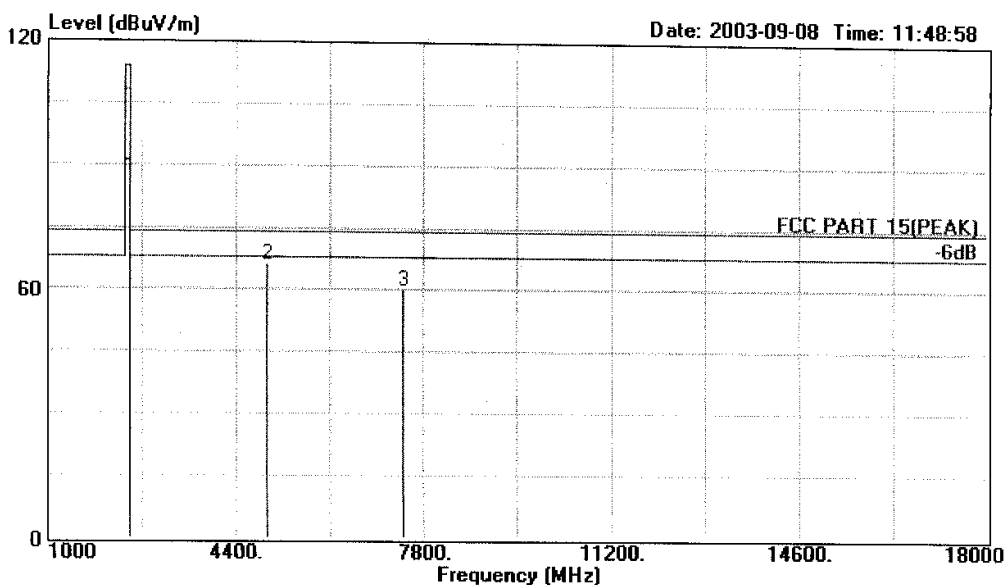

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23' Humi:52%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	Remark
1	2468.600	87.09	-26.91	114.00	90.67	3.25	28.17	35.00	Peak
2	4944.000	66.27	-7.73	74.00	60.50	4.72	33.15	32.10	Peak
3	7426.000	60.02	-13.98	74.00	52.11	6.02	34.84	32.95	Peak


APPENDIX I



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 65 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 09:05:12

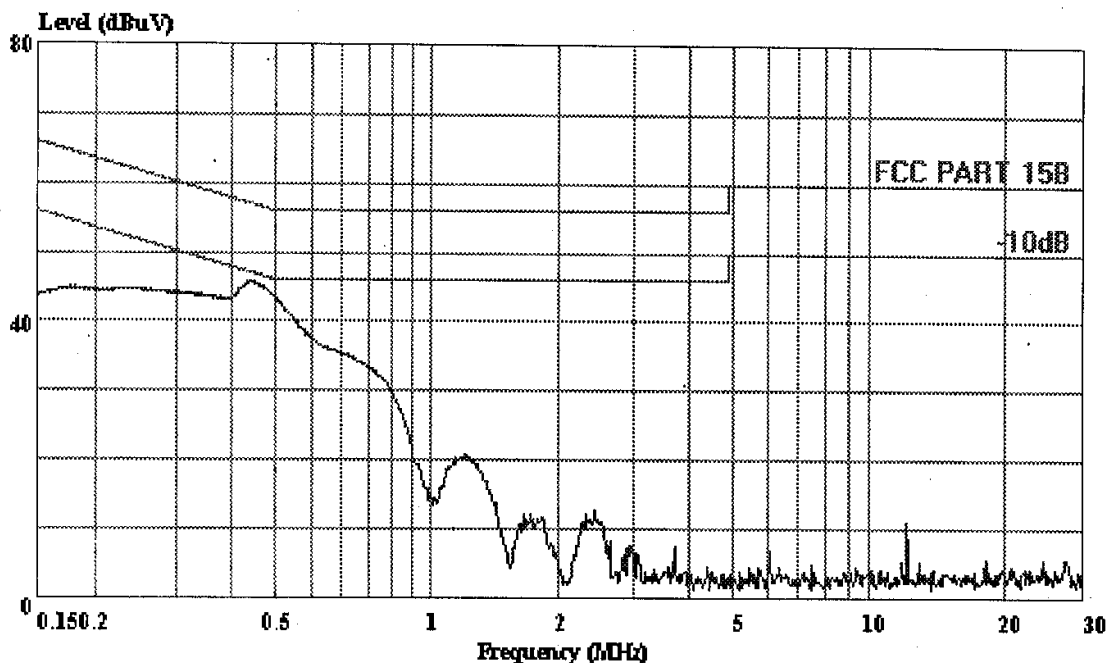

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA (KNW-407)
EUT : 2.4GHz Wireless 5.7" Black & White
: Receiver And Transmitter
M/N : W618+1720
OP Condition : TX Channel A
Test Spec : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer: Seco
Comment : Temp:24.6'C Humi:52%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 66 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 09:06:18

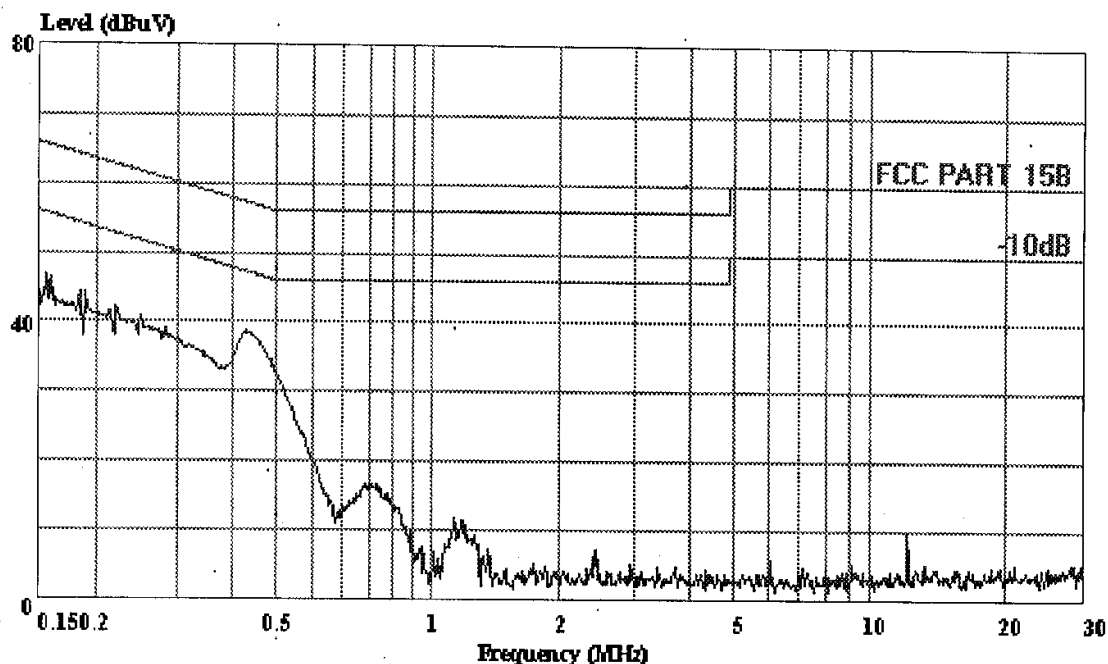

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VB (KNW-407)
 EUT : 2.4GHz Wireless 5.7" Black & White
 : Receiver And Transmitter
 M/N : TX Channel A
 OP Condition : Adaptor AC Input 120V/60Hz Ouput DC9V
 Test Spec : Seco
 Test Engineer: Temp:24.6'C Humi:52%
 Comment :



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 68 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 09:07:35

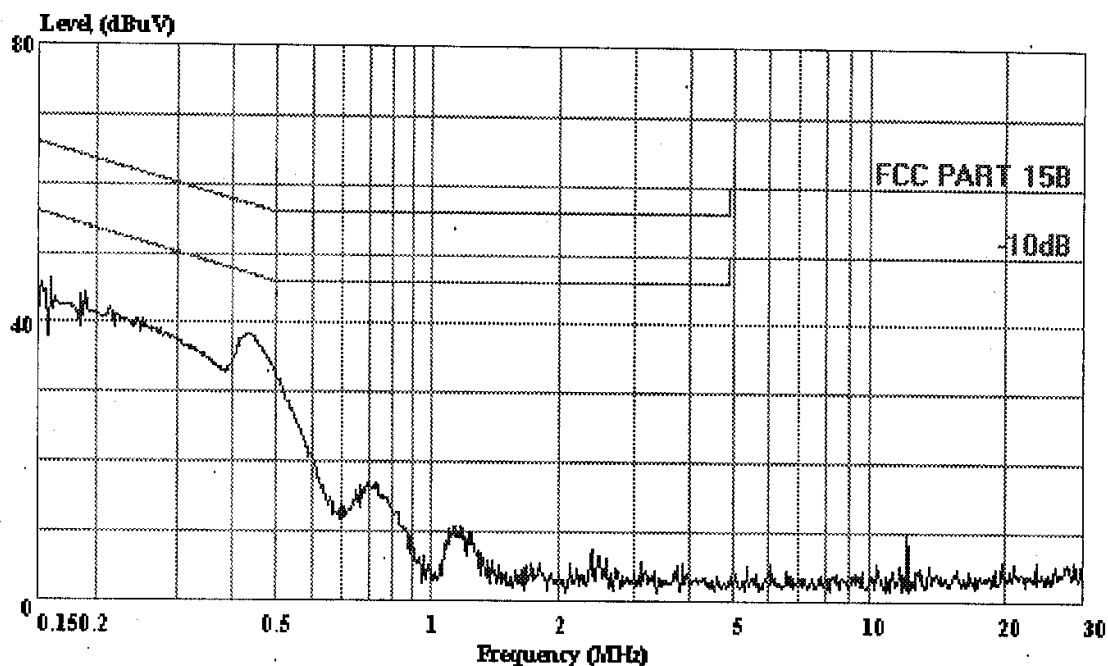

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA (KNW-407)
 EUT : 2.4GHz Wireless 5.7" Black & White
 : Receiver And Transmitter
 M/N : W618+1720
 OP Condition : TX Channel B
 Test Spec : Adaptor AC Input 120V/60Hz Ouput DC9V
 Test Engineer: Seco
 Comment : Temp:24.6'C Humi:52%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 67 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 09:06:57

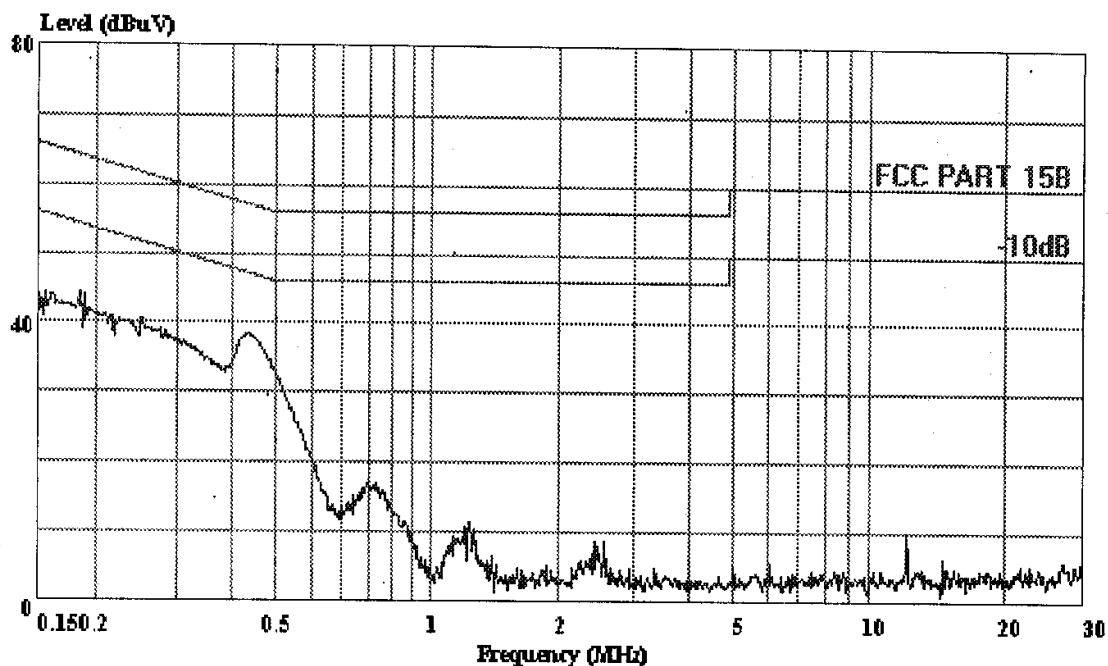

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VB (KNW-407)
EUT : 2.4GHz Wireless 5.7" Black & White
: Receiver And Transmitter
M/N : W618+1720
OP Condition : TX Channel B
Test Spec : Adaptor AC Input 120V/60Hz Ouput DC9V
Test Engineer: Seco
Comment : Temp:24.6'C Humi:52%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 69 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 09:08:16

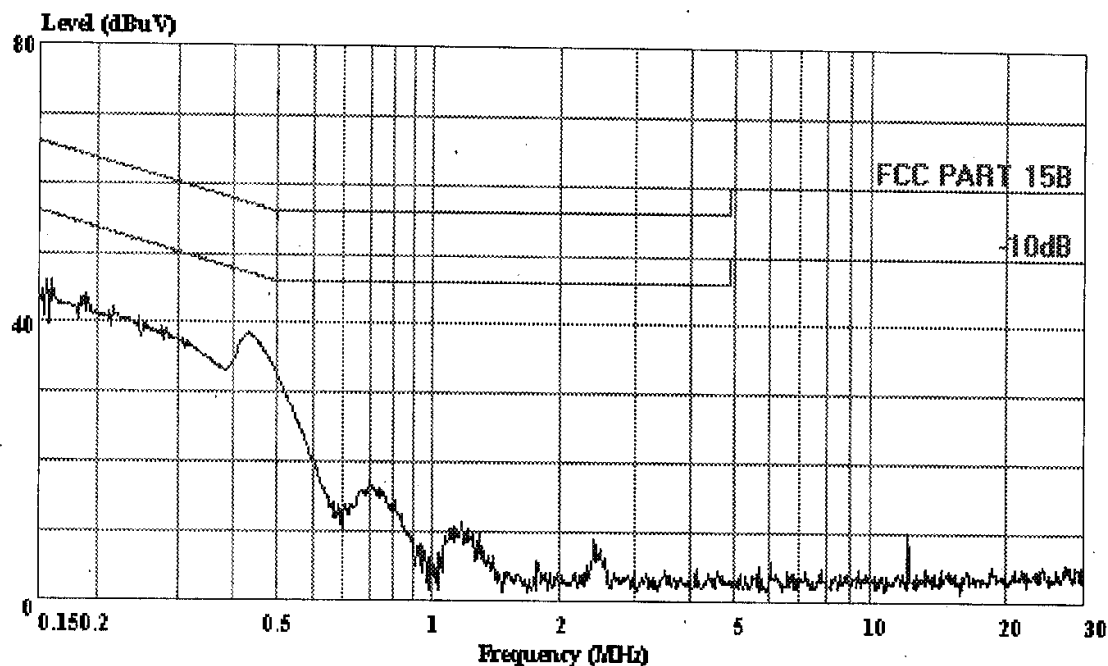

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA (KNW-407)
EUT : 2.4GHz Wireless 5.7" Black & White
: Receiver And Transmitter
M/N : W618+1720
OP Condition : TX Channel C
Test Spec : Adaptor AC Input 120V/60Hz Ouput DC9V
Test Engineer: Seco.
Comment : Temp:24.6'C Humi:52%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 70 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 09:08:49

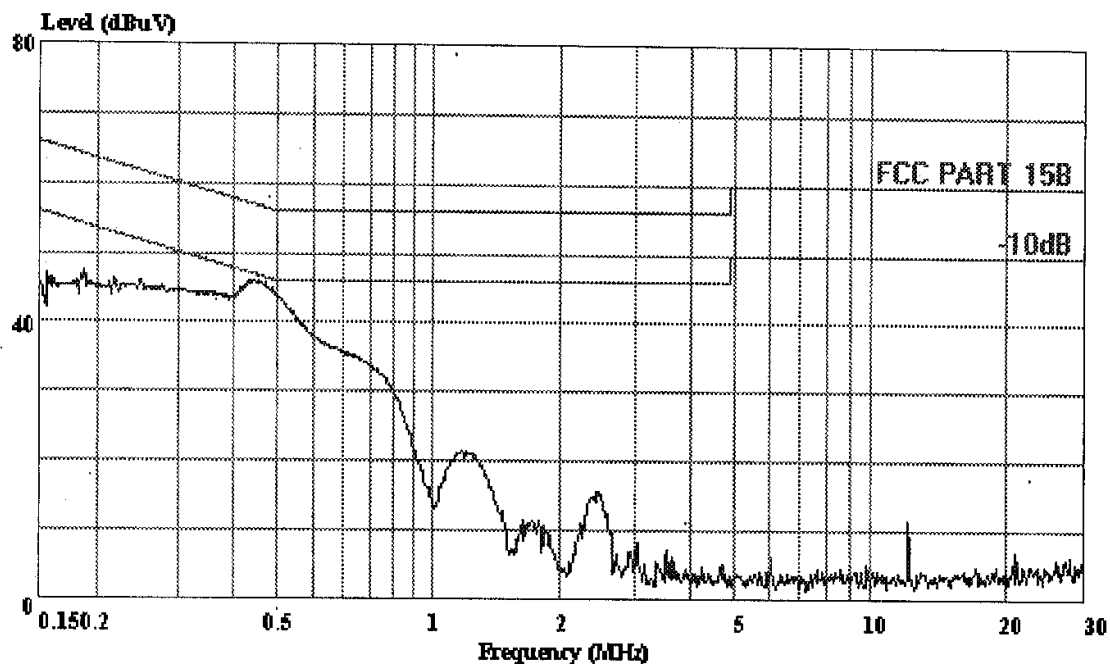

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15B VB (KNW-407)
 EUT : 2.4GHz Wireless 5.7" Black & White
 : Receiver And Transmitter
 M/N : W618+1720
 OP Condition : TX Channel C
 Test Spec : Adaptor AC Input 120V/60Hz Ouput DC9V
 Test Engineer: Seco
 Comment : Temp:24.6'C Humi:52%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park

Tel:0755-26639496

Fax:26632877

Data#: 72 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 09:10:45

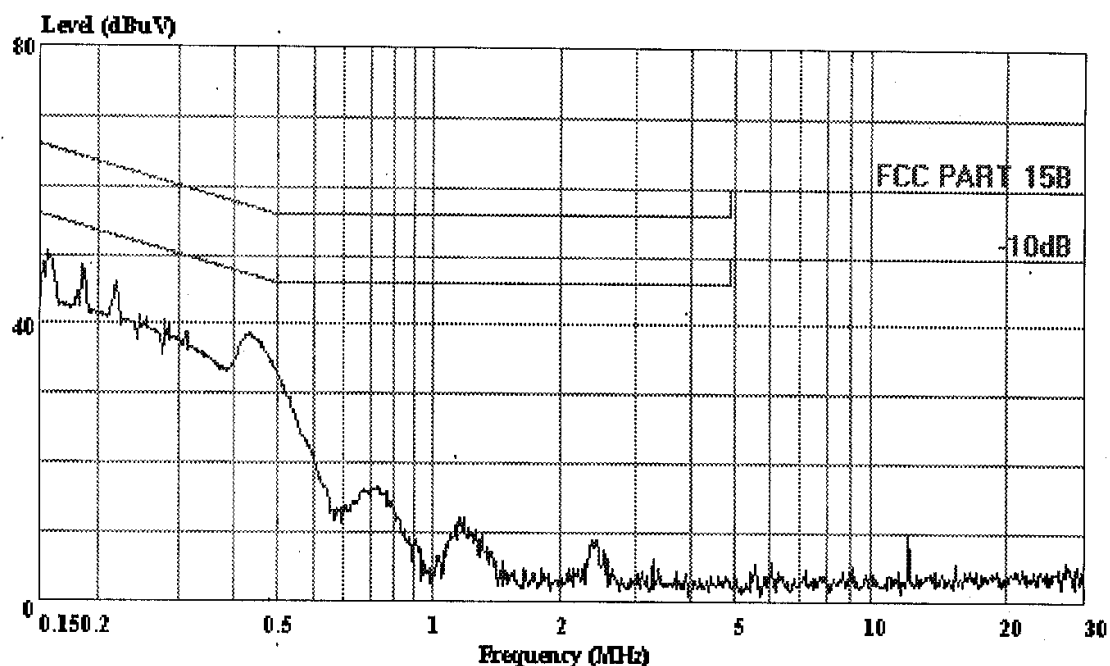

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15B VA (KNW-407)

EUT : 2.4GHz Wireless 5.7" Black & White

: Receiver And Transmitter

M/N : W618+1720

OP Condition : TX Channel D

Test Spec : Adaptor AC Input 120V/60Hz Ouput DC9V

Test Engineer: Seco


Comment : Temp:24.6'C Humi:52%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 71 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 09:09:30

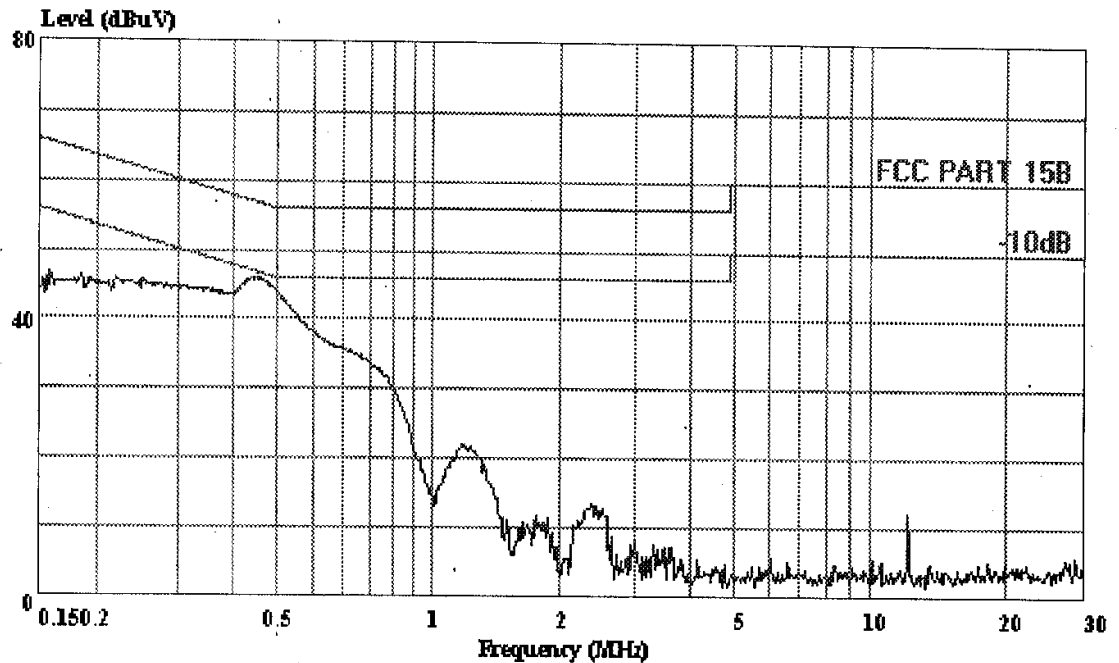

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15B VB (KNW-407)
 EUT : 2.4GHz Wireless 5.7" Black & White
 : Receiver And Transmitter
 M/N : W618+1720
 OP Condition : TX Channel D
 Test Spec : Adaptor AC Input 120V/60Hz Ouput DC9V
 Test Engineer: Seco
 Comment : Temp:24.6'C Humi:52%

APPENDIX II




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 89 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:29:51

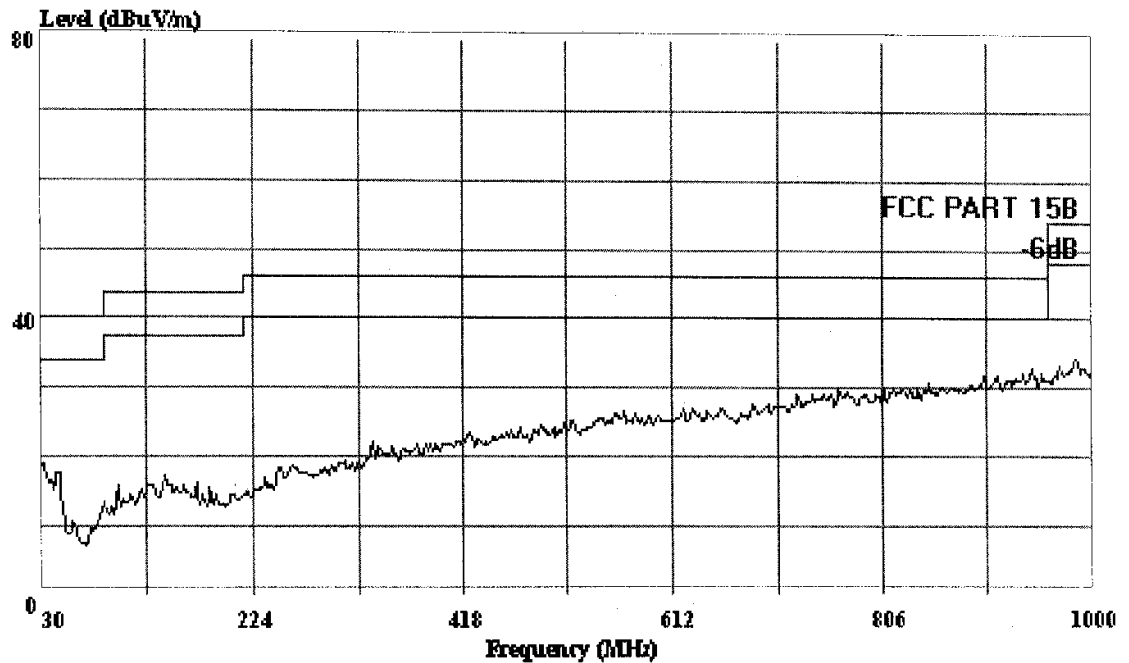

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4GHz Wireless 5.7'' Black & White
 : Receiver Transmitter
 M/N : W618+1720
 Power : Adaptor AC input120V/60Hz Output DC9V
 Test Engineer: Seco
 Comment : Temp:25.4'C Humi:58%
 Memo : TX Channel A




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 88 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:28:42

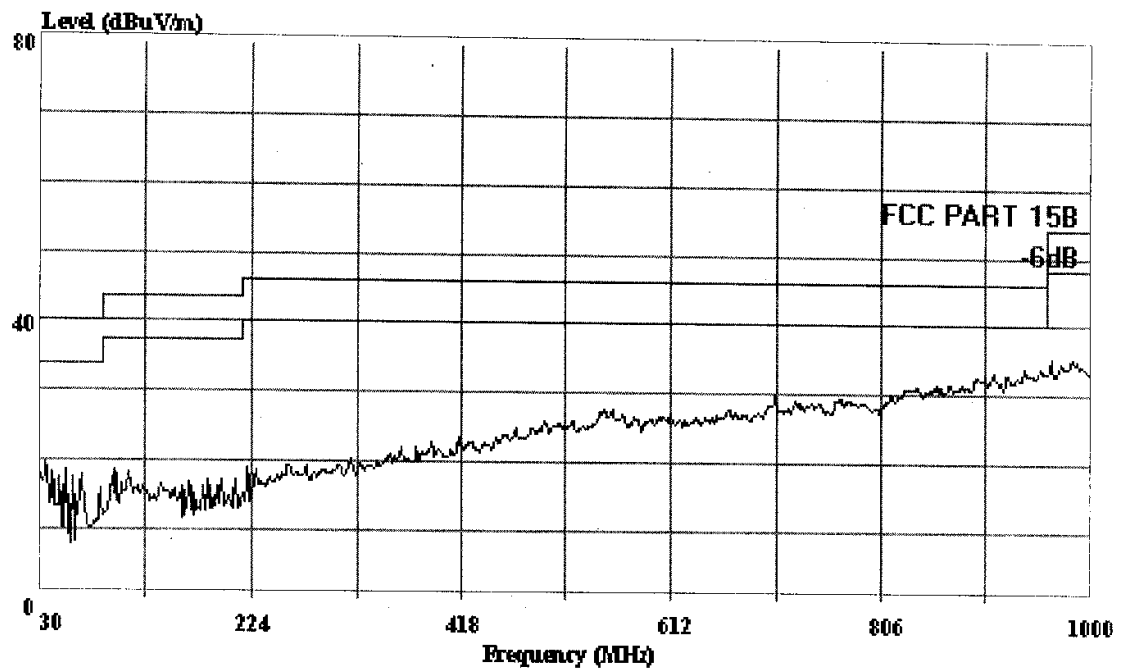

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4GHz Wireless 5.7'' Black & White

: Receiver Transmitter

M/N : W618+1720

Power : Adaptor AC input120V/60Hz Output DC9V

Test Engineer: Seco

Comment : Temp:25.4'C Humi:58%

Memo : TX Channel A




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 90 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:30:12

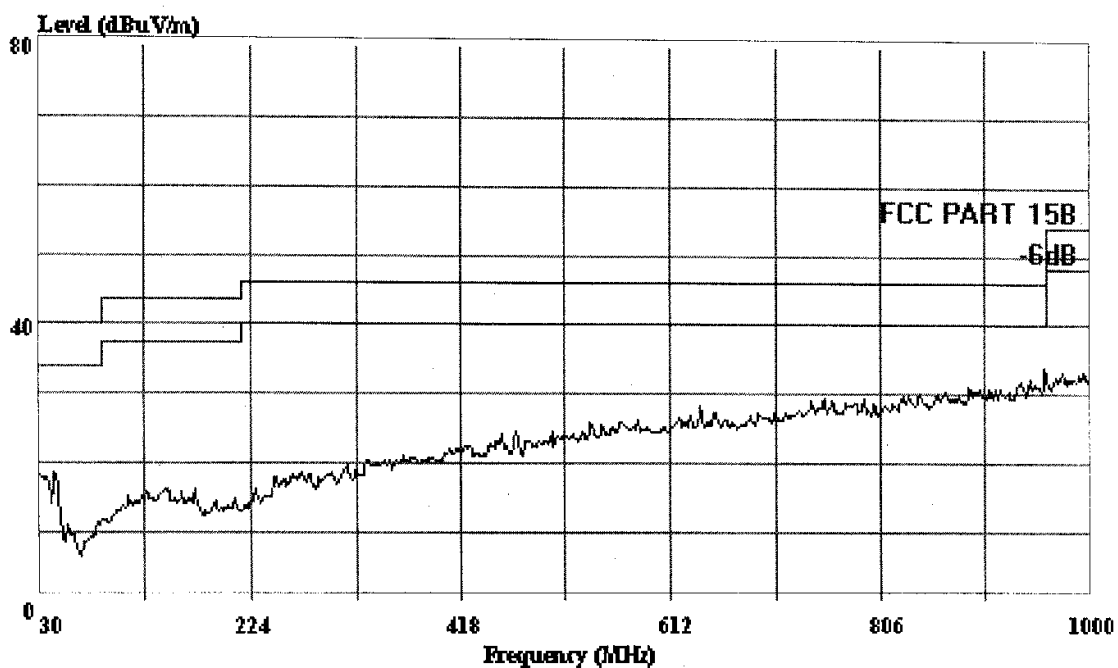

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4GHz Wireless 5.7'' Black & White

: Receiver Transmitter

M/N : W618+1720

Power : Adaptor AC input120V/60Hz Output DC9V

Test Engineer: Seco

Comment : Temp:25.4'C Humi:58%

Memo : TX Channel B




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 91 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:30:57

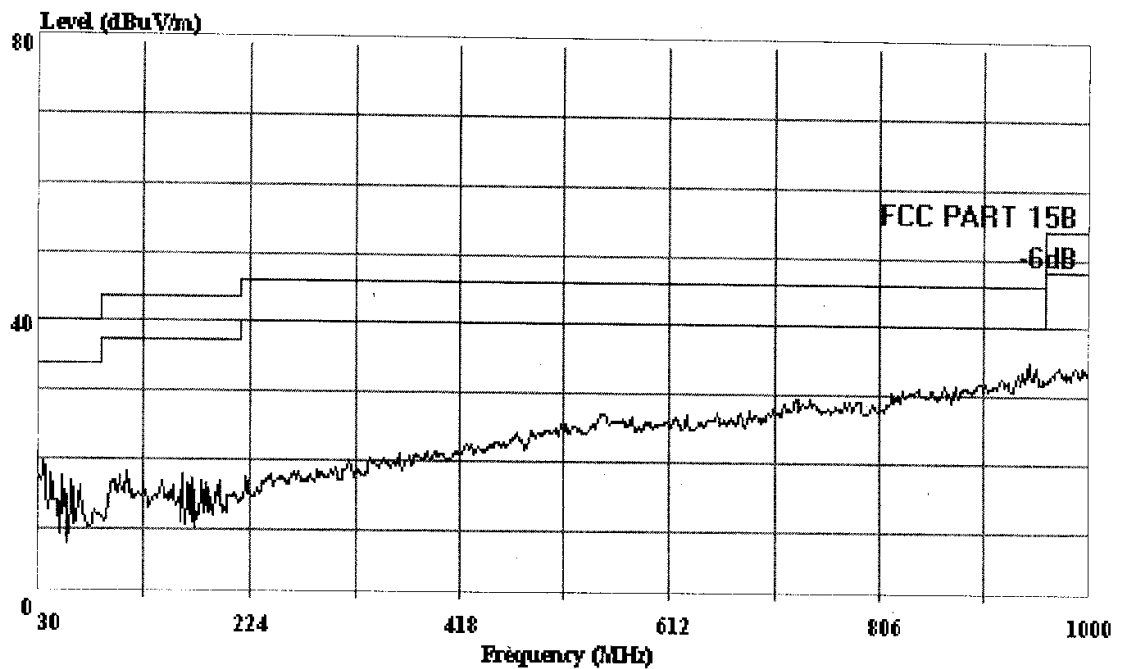

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4GHz Wireless 5.7'' Black & White
 : Receiver Transmitter
 M/N : W618+1720
 Power : Adaptor AC input120V/60Hz Output DC9V
 Test Engineer: Seco
 Comment : Temp:25.4'C Humi:58%
 Memo : TX Channel B




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 93 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:31:47

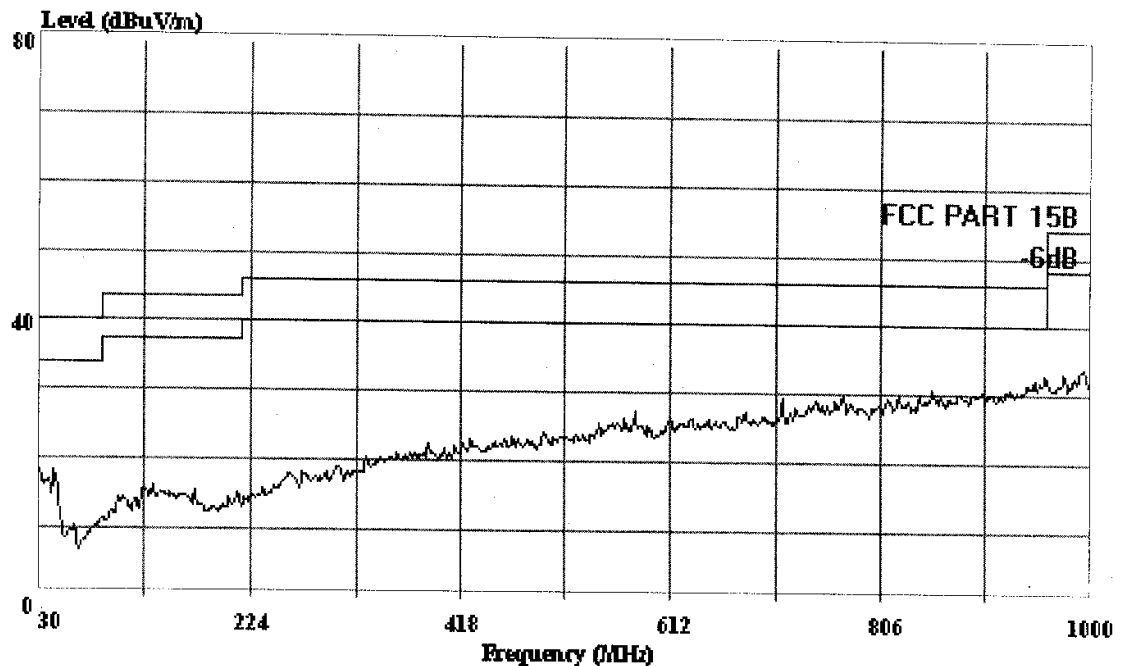

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4GHz Wireless 5.7'' Black & White
 : Receiver Transmitter
 M/N : W618+1720
 Power : Adaptor AC input120V/60Hz Output DC9V
 Test Engineer: Seco
 Comment : Temp:25.4'C Humi:58%
 Memo : TX Channel C




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 92 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:31:12

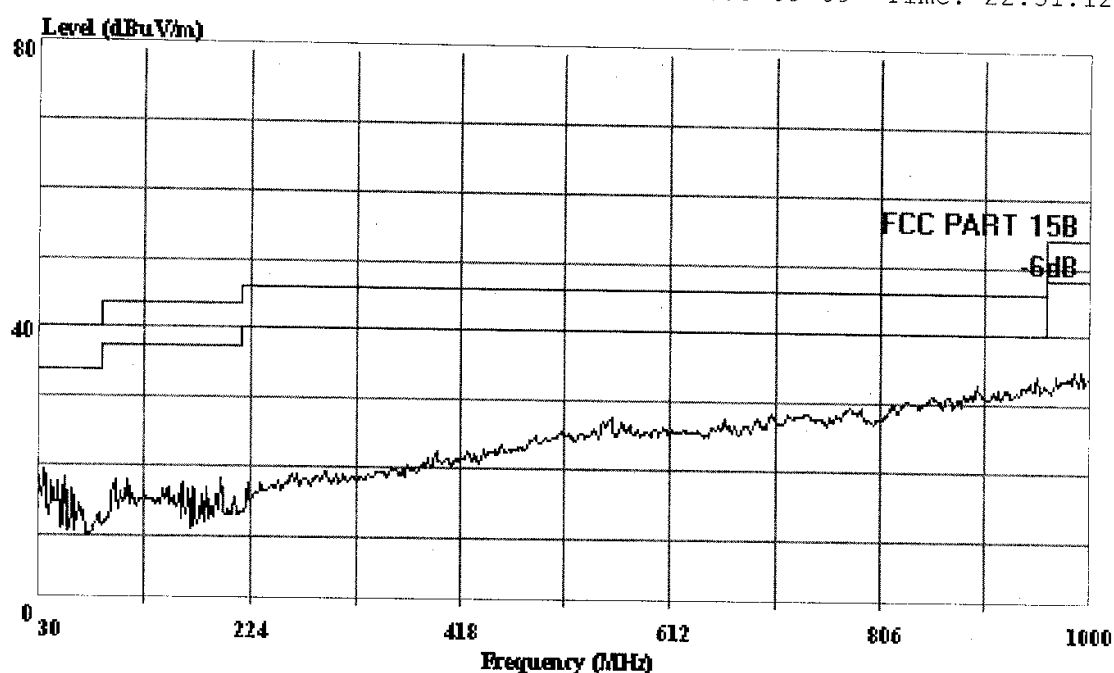

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4GHz Wireless 5.7'' Black & White
 : Receiver Transmitter
 M/N : W618+1720
 Power : Adaptor AC input120V/60Hz Output DC9V
 Test Engineer: Seco
 Comment : Temp:25.4'C Humi:58%
 Memo : TX Channel C




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 94 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:32:15

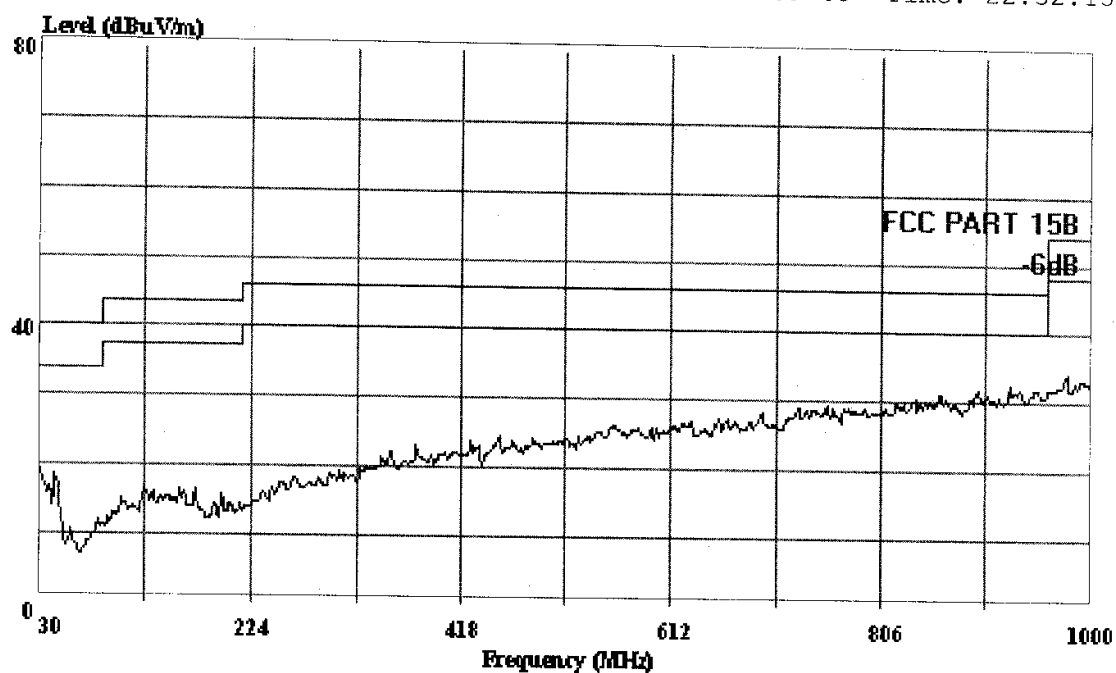

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4GHz Wireless 5.7'' Black & White

: Receiver Transmitter

M/N : W618+1720

Power : Adaptor AC input120V/60Hz Output DC9V

Test Engineer: Seco

Comment : Temp:25.4'C Humi:58%


Memo : TX Channel D



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: 96 File#: Gold Alliance.EMI Date: 2003-09-09 Time: 22:35:16

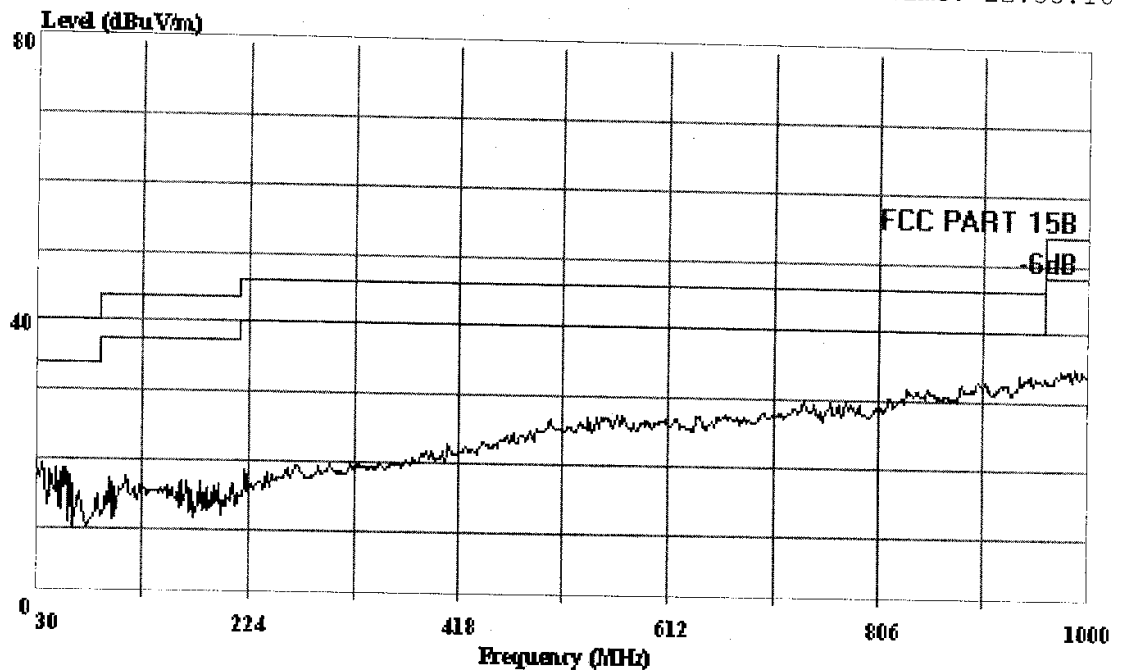

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4GHz Wireless 5.7" Black & White
 : Receiver Transmitter
 M/N : W618+1720
 Power : Adaptor AC input120V/60Hz Output DC9V
 Test Engineer: Seco
 Comment : Temp:25.4'C Humi:58%
 Memo : TX Channel D




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 36 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

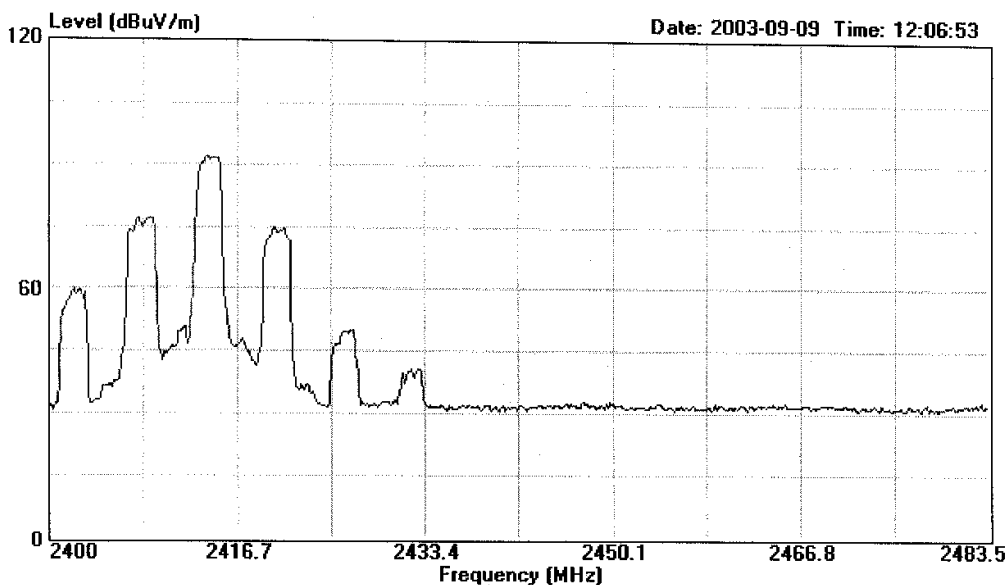

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 35 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

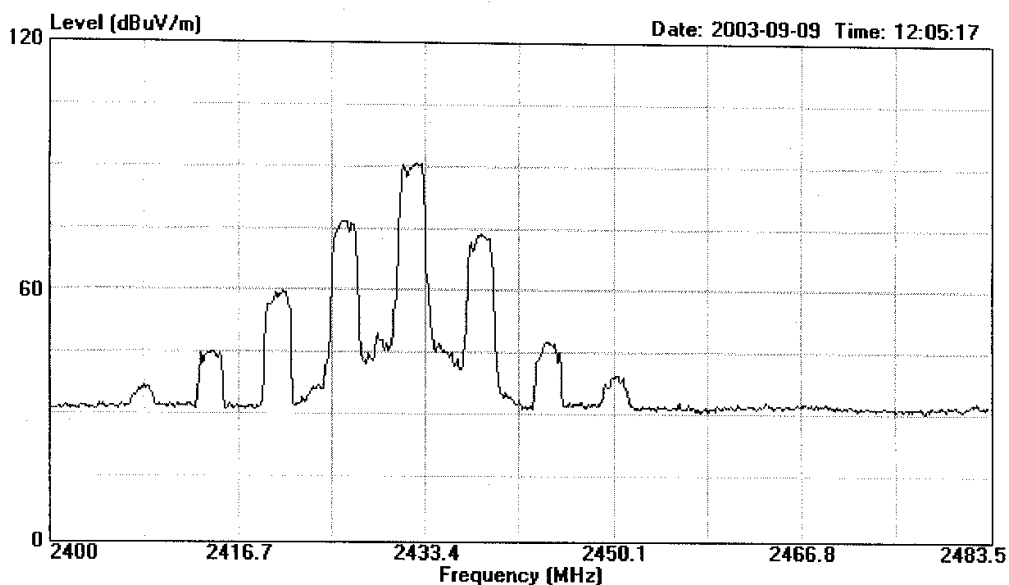

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23° Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 34 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

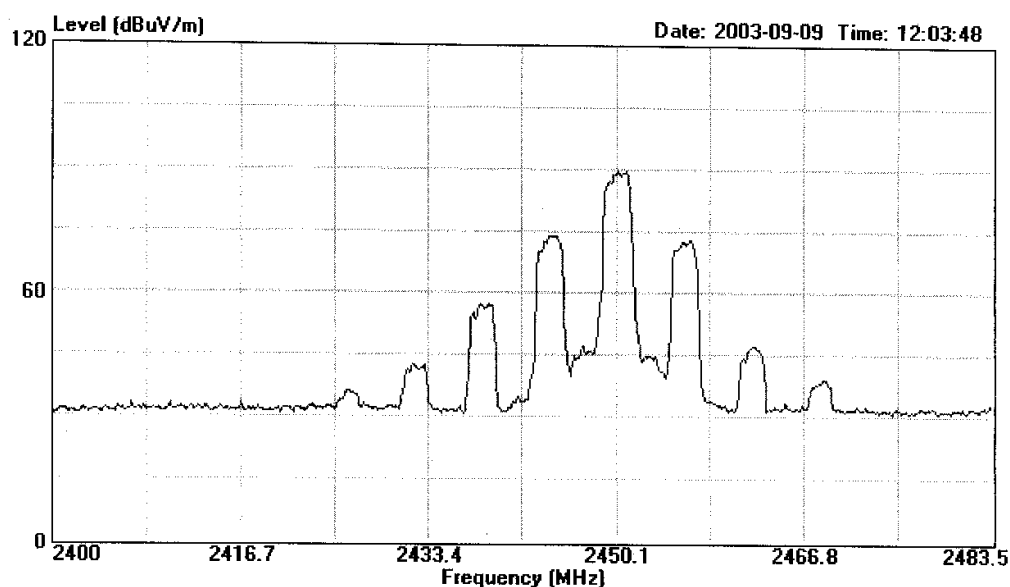

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 33 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

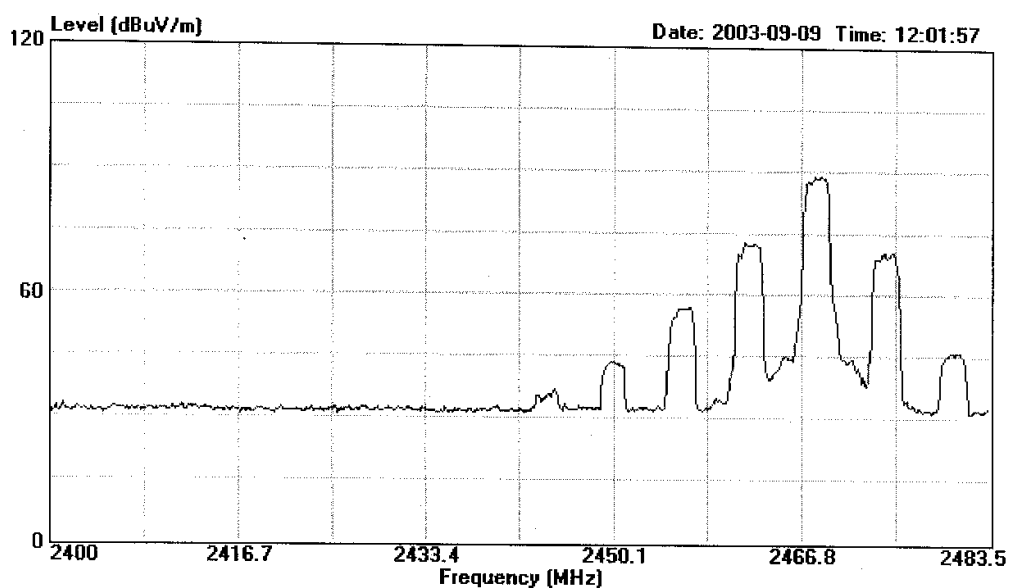

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23! Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 4 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

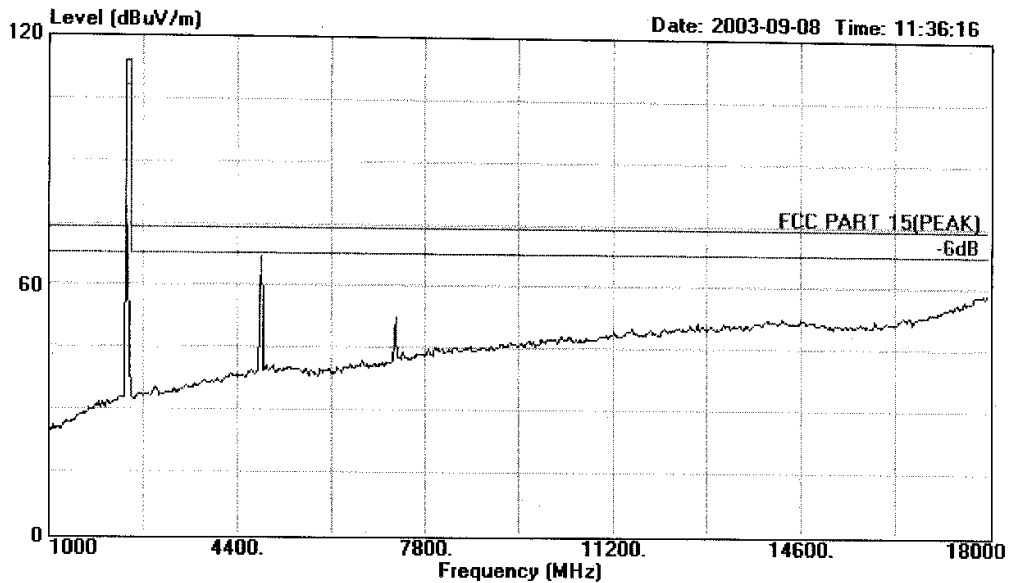

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 1 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

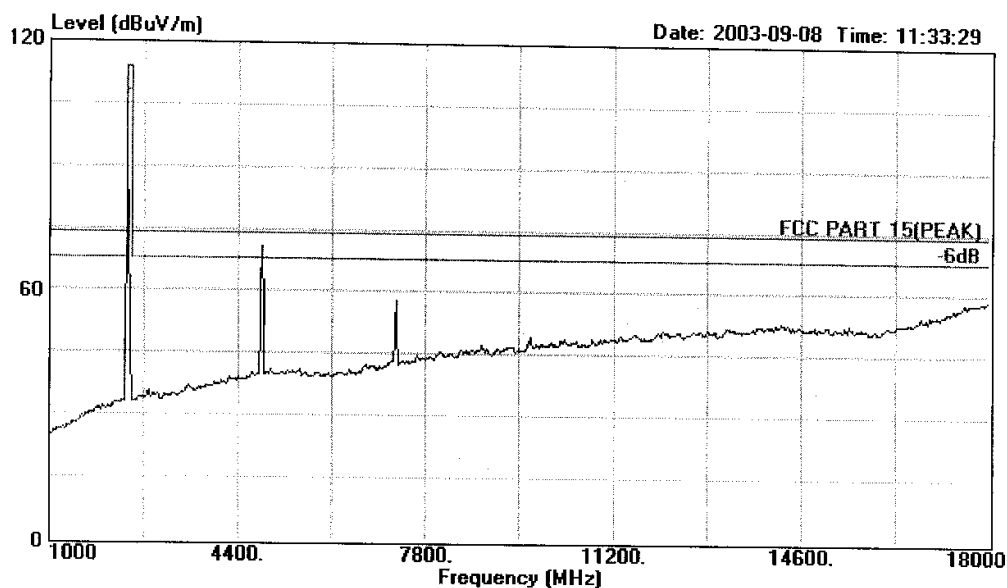

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 7 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

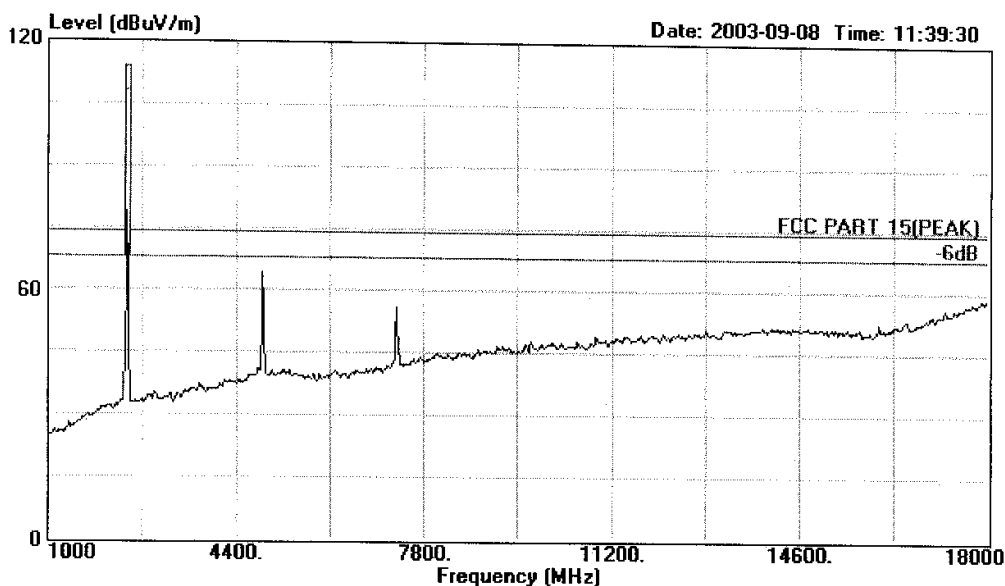

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23℃ Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 10

File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

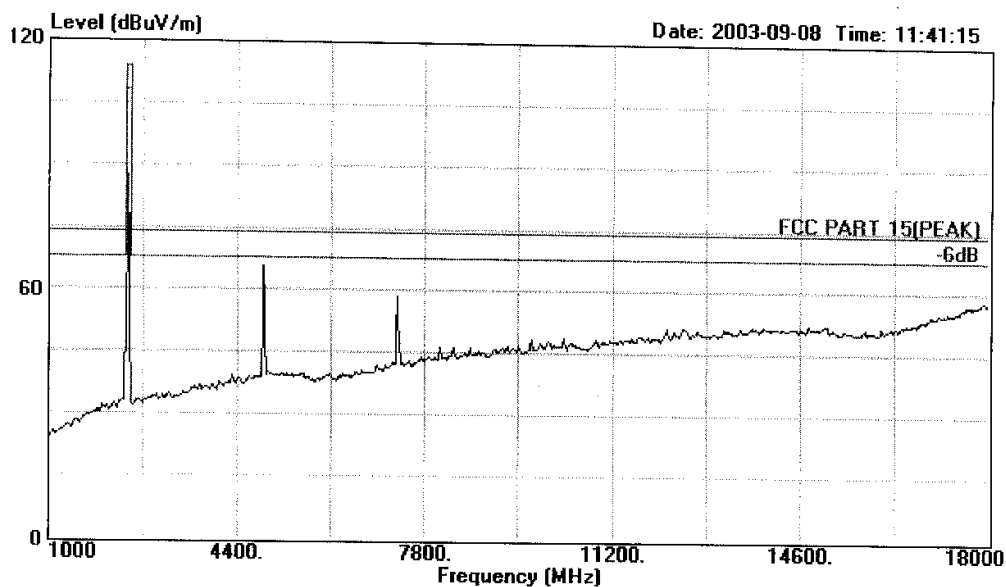

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 16

File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

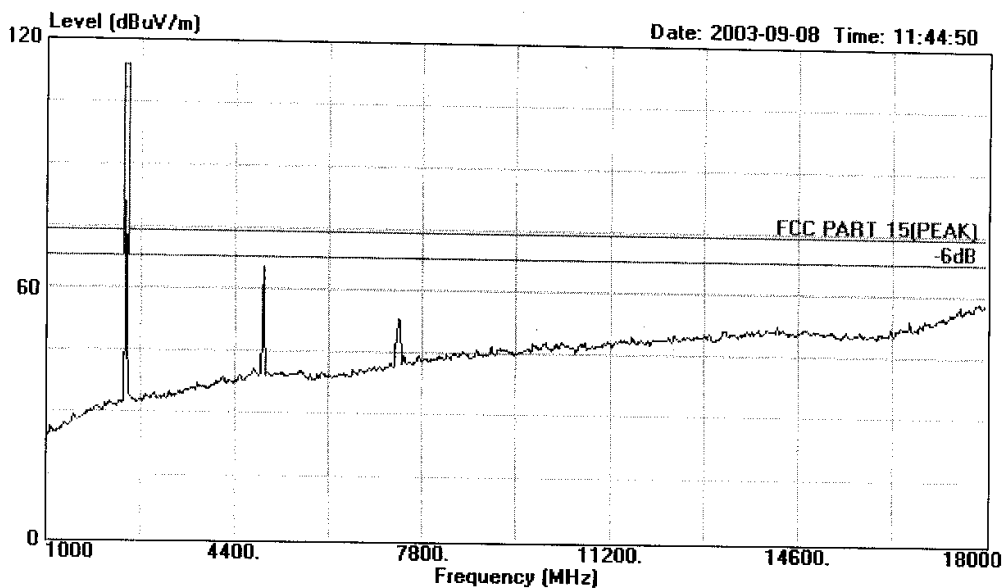

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 13 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

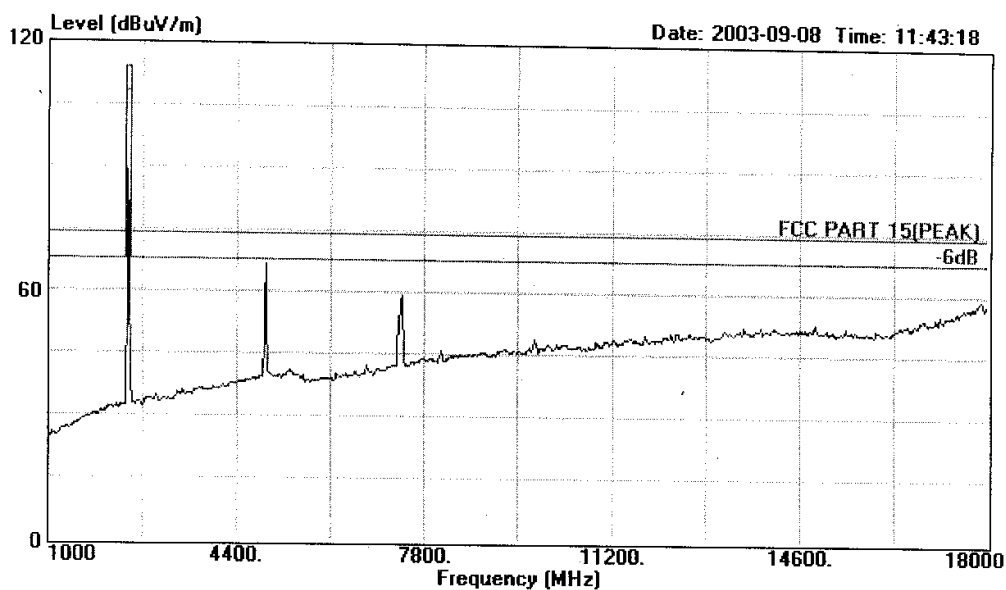

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 19

File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

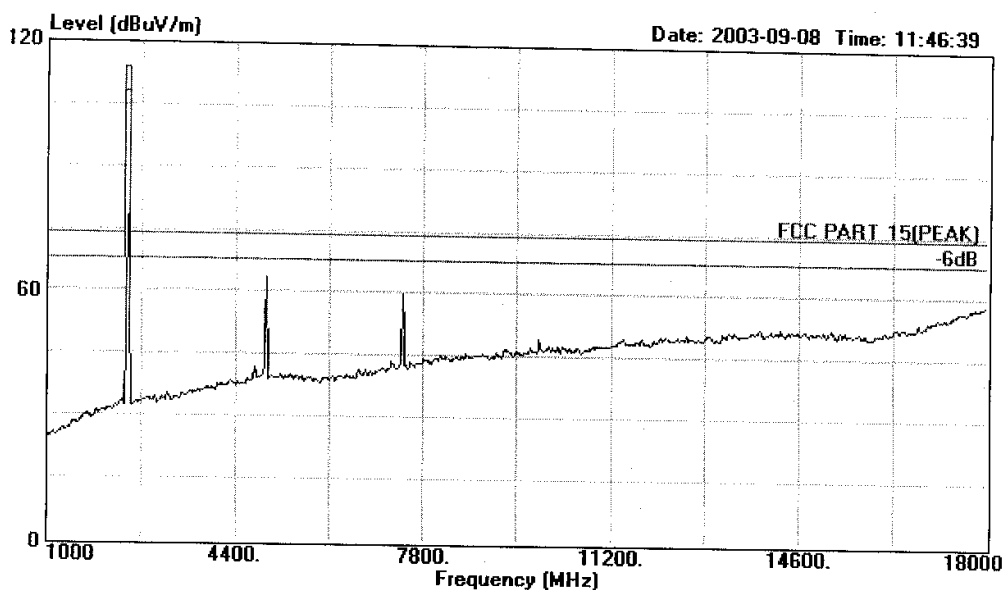

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 22 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

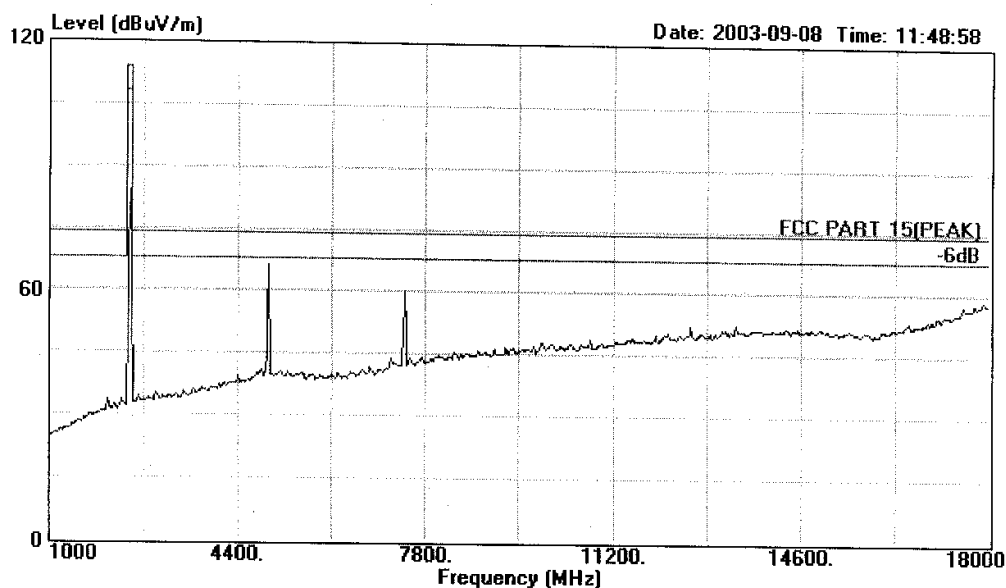

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 26 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

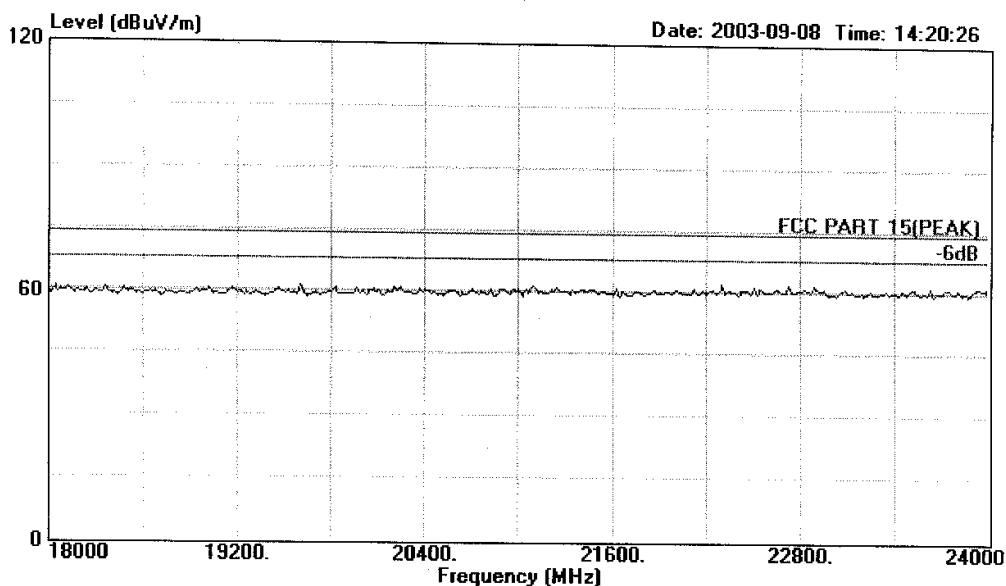

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 25 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

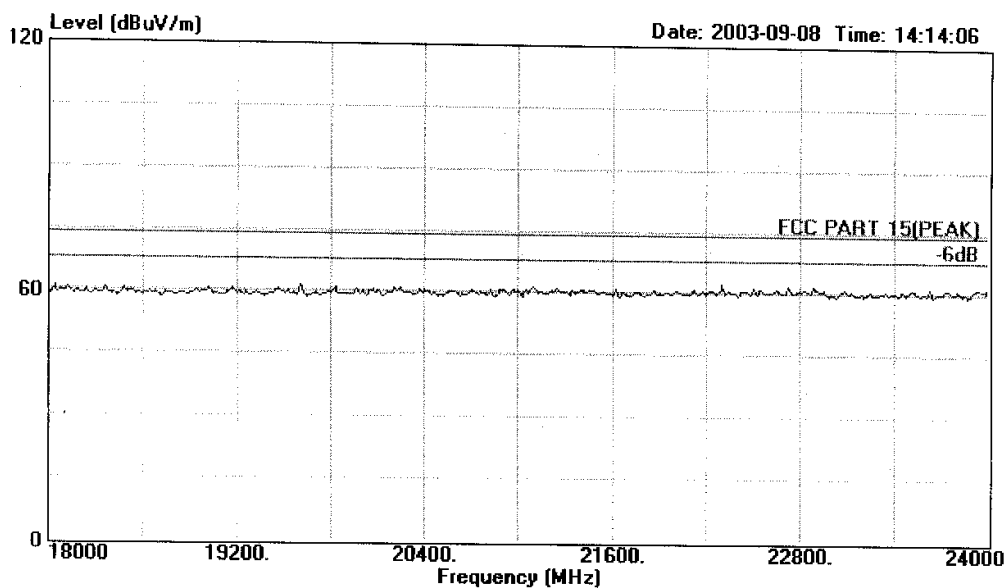

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel A
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 28 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

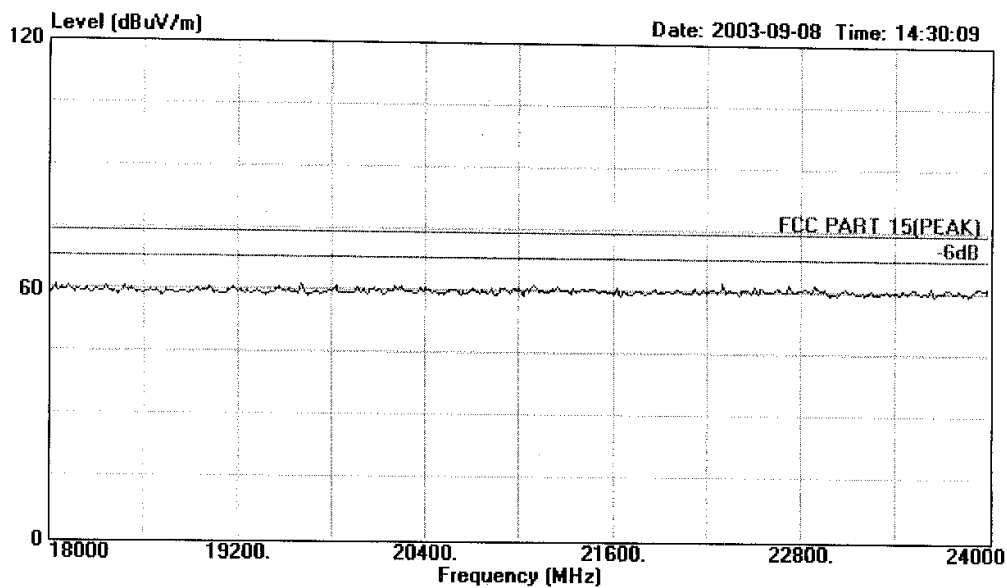

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23° Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 27 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

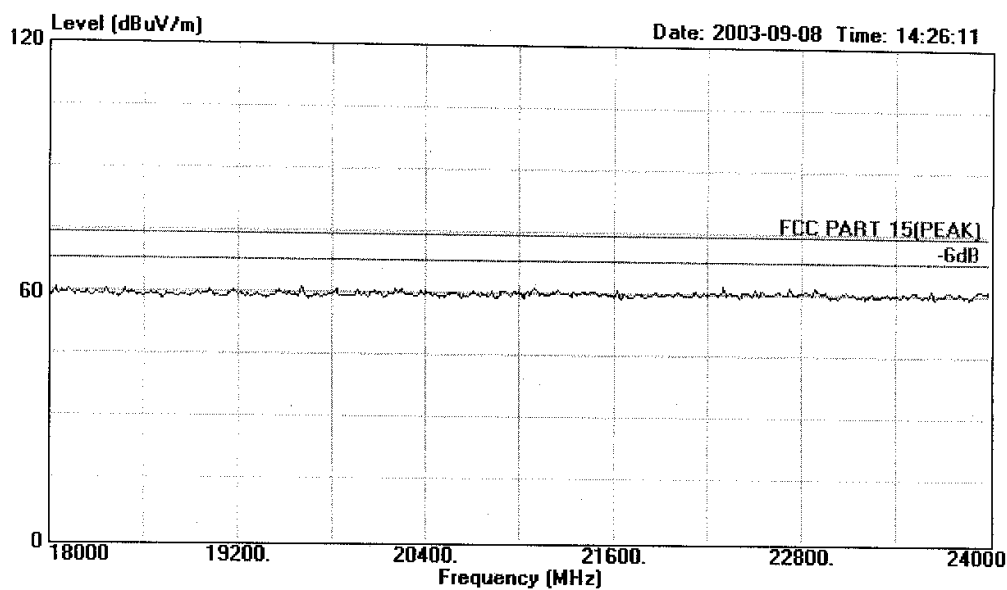

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel B
Memo : Temp:23° Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 30

File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

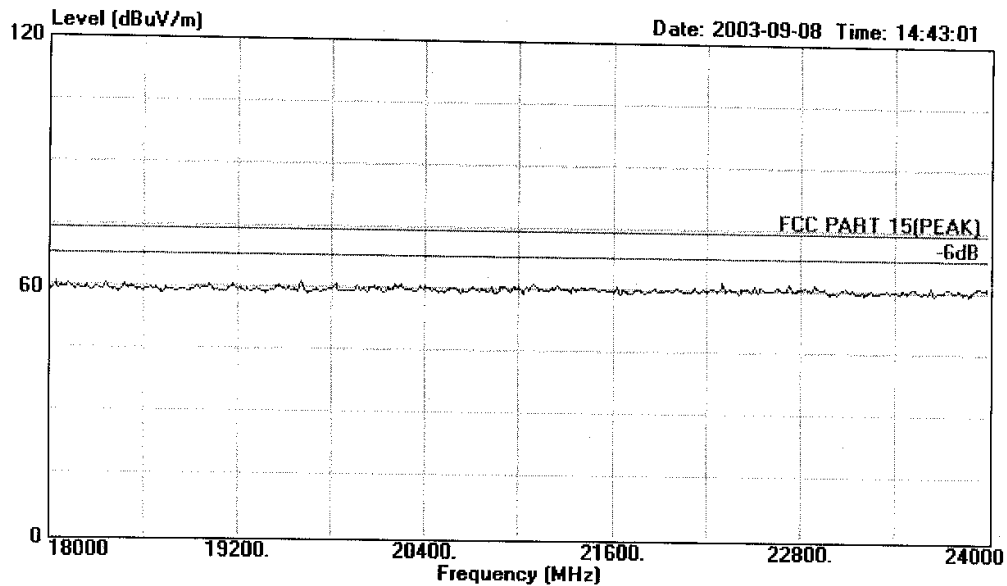

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 29 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

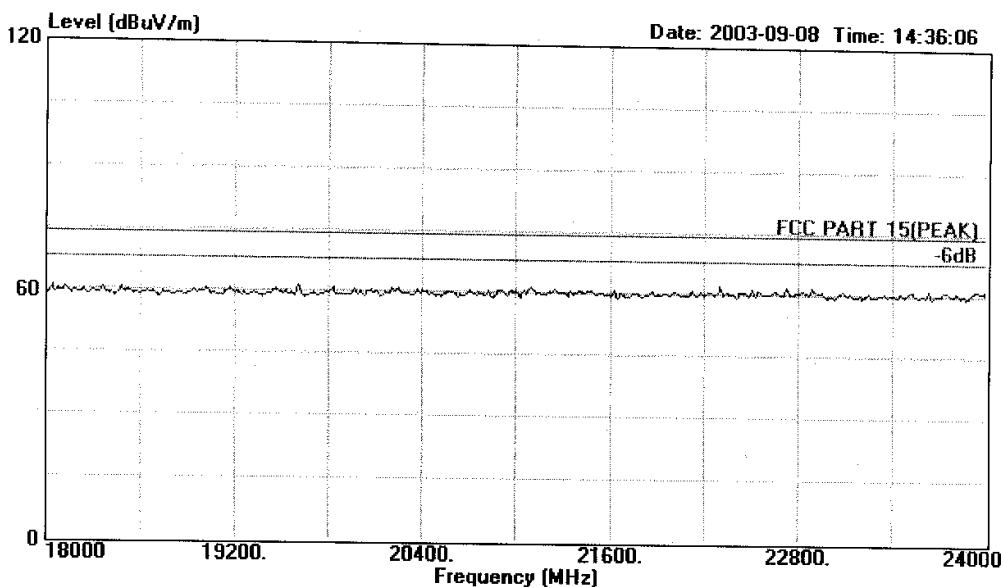

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel C
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 32

File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

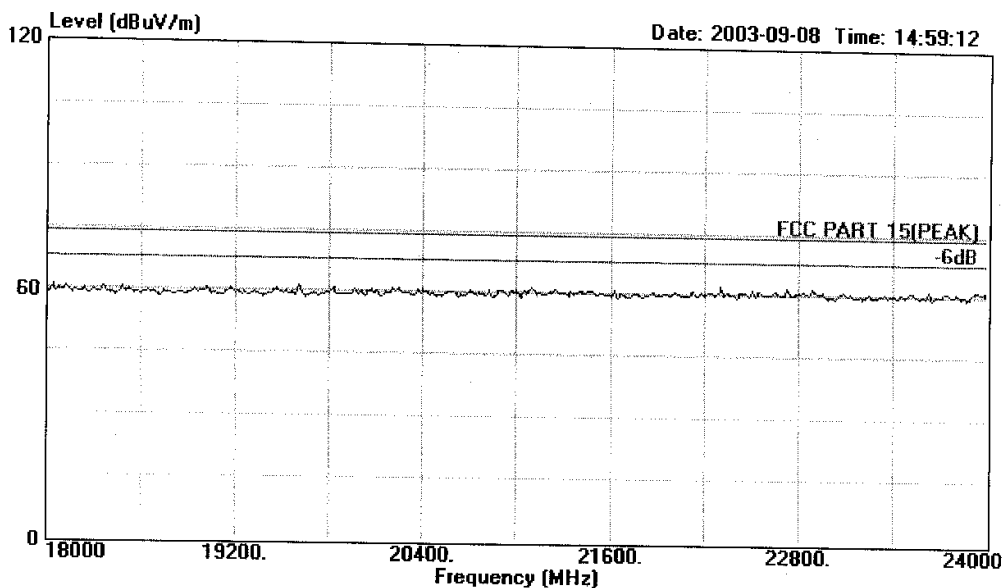

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23' Humi:52%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 31 File#: C:\EMI TEST DATA\G\Gold Alliance.EMI

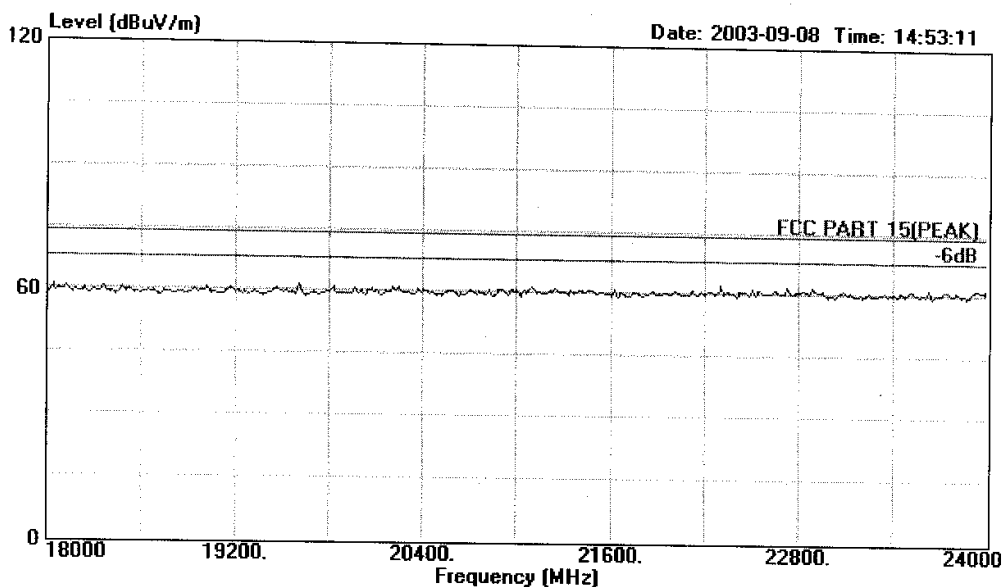

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4GHz Wireless 5.7" Black & White
EUT : Receiver And Transmitter
M/N : W618+1720
Power : Adaptor AC Input 120V/60Hz Output DC9V
Test Engineer : Seco
Memo : TX Channel D
Memo : Temp:23' Humi:52%