

ATTACHMENT O – SAR TEST PLOTS (2 of 2)

INNO-P10 (BODY)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 8.0; Body 1900 MHz: $\sigma = 1.57 \text{ mho/m}$ $\epsilon_r = 50.9$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.195 mW/g, SAR (10g): 0.105 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.12 dB

Comment:

MODEL : INNO-P10


Company : Innostream Inc.

Test Position: Body / Antenna: Fixed

Mode: GSM1900 / Channel: 512

Liquid Temperature: 21.3°C

Date Tested : March 2, 2005

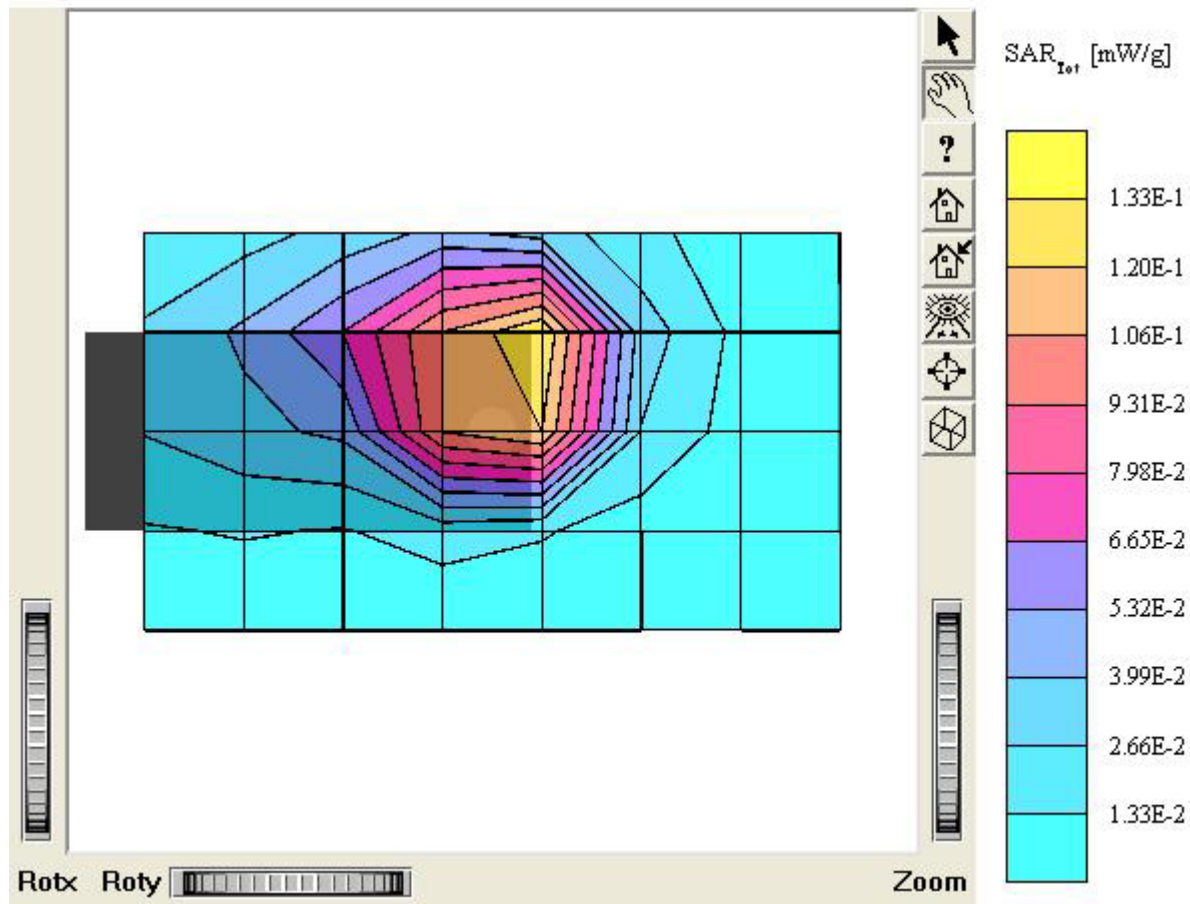

INNO-P10 (BODY)

SAM II Phantom, Flat Section, Position: (90°,90°), Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 8.0; Body 1900 MHz: $\sigma = 1.57 \text{ mho/m}$, $\rho = 50.9 \text{ g/cm}^3$
 $= 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.243 mW/g, SAR (10g): 0.133 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.23 dB

Comment:

MODEL : INNO-P10


Company : Innostream Inc.

Test Position: Body / Antenna: Fixed

Mode: GSM1900 / Channel : 661

Liquid Temperature: 21.3°C

Date Tested : March 2, 2005

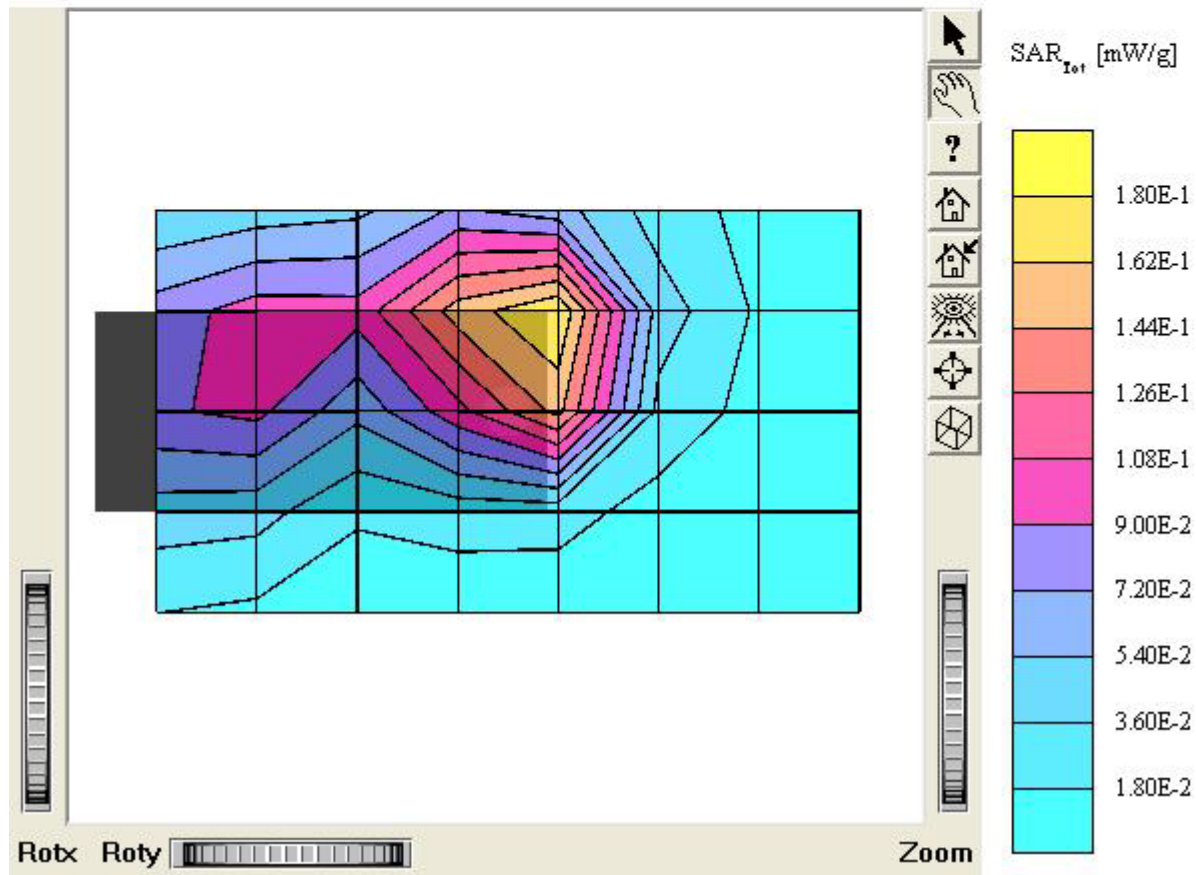

INNO-P10 (BODY)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 8.0; Body 1900 MHz: $\sigma = 1.57 \text{ mho/m}$ $\epsilon_r = 50.9$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.251 mW/g, SAR (10g): 0.137 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.13 dB

Comment:

MODEL : INNO-P10


Company : Innostream Inc.

Test Position: Body / Antenna: Fixed

Mode: GSM1900 / Channel: 810

Liquid Temperature: 21.3°C

Date Tested : March 2, 2005

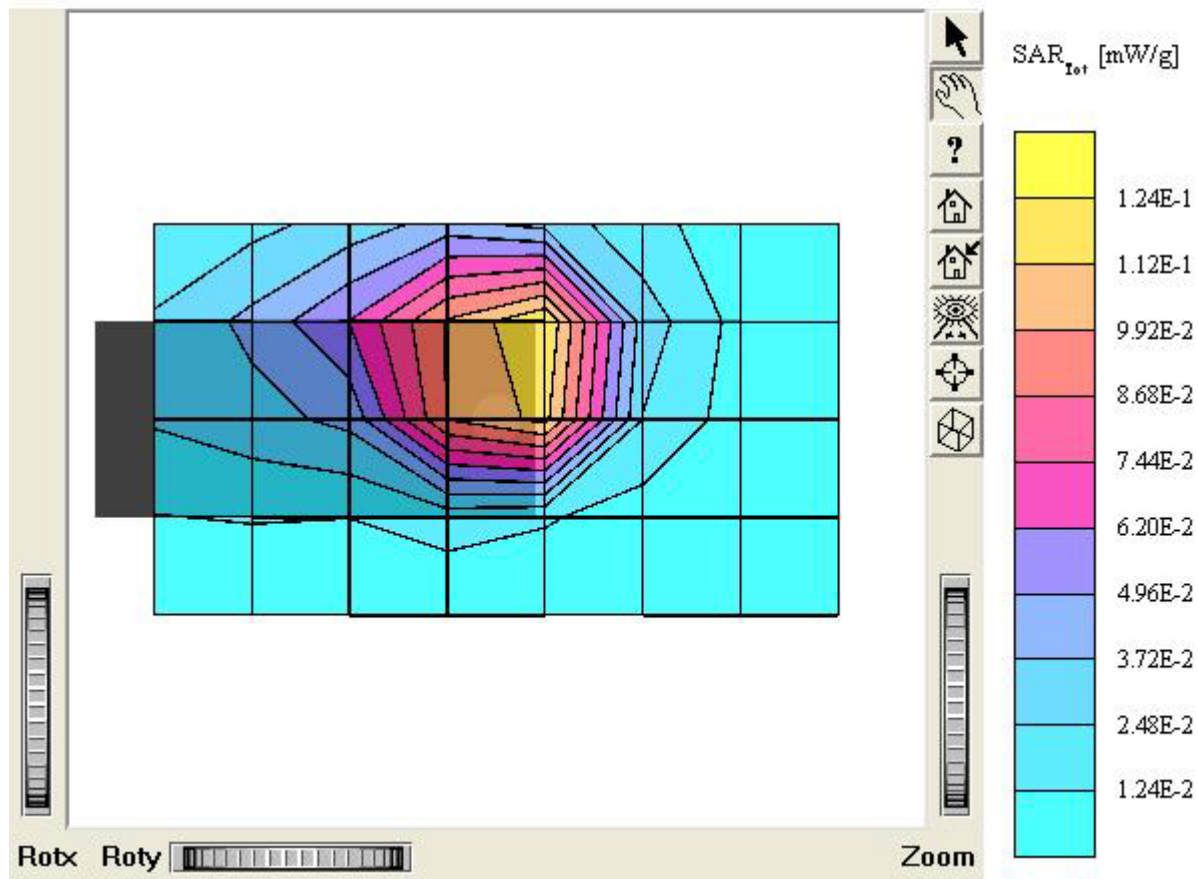

INNO-P10 (Slide Down)

SAM II Phantom; Section; Position: ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.39 \text{ mho/m}$ $\epsilon_r = 40.4$ $\rho = 1.00 \text{ g/cm}^3$

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

:

Comment :

MODEL : INNO-P10


Company : Innostream Inc.

Test Position: Right Touch / Antenna: Fixed

Mode: GSM1900 / Channel: 810

Liquid Temperature: 21.3°C

Date Tested : March 2, 2005

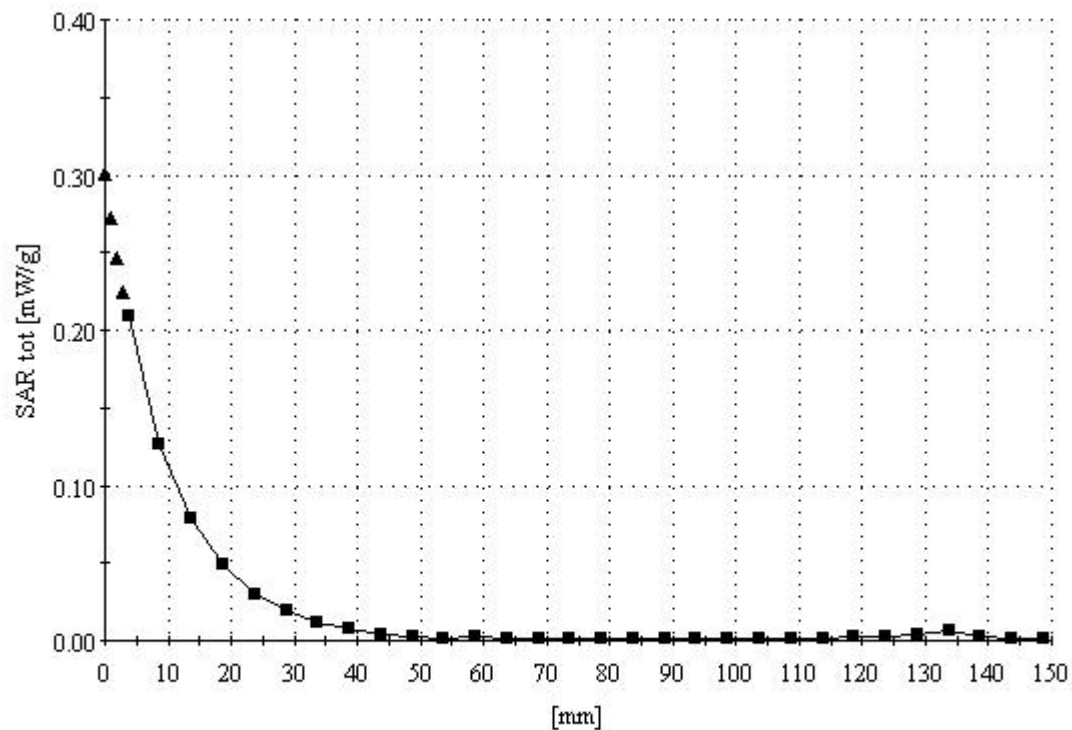

INNO-P10 (BODY)

SAM II Phantom; Section; Position: ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 8.0; Body 1900 MHz: $\sigma = 1.57 \text{ mho/m}$ $\epsilon_r = 50.9$ $\rho = 1.00 \text{ g/cm}^3$

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

MODEL : INNO-P10

Company : Innostream Inc.

Test Position: Body / Antenna: Fixed

Mode: GSM1900 / Channel : 810

Liquid Temperature: 21.3°C

Date Tested : March 2, 2005

