

EMC TEST REPORT

For

2.4G Wireless Monitor
Transmitter

Model Number: HQ-2000AV
FCC ID: RJWHQ2000AV

Report Number : 300319-IT/WT

Test Laboratory : Shenzhen Academy of Metrology and
Quality Inspection EMC Laboratory

Site Location : Bldg. of Metrology &Quality Inspection,
Longzhu Road, Shenzhen, Guangdong,
China

Tel : 0086-755-26941637, 26941531
Fax : 0086-755-26941545

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. TEST RESULTS	4
2. GENERAL INFORMATION	4
2.1. Description of EUT	4
2.2. Test Facility	5
3. TEST EQUIPMENT	5
3.1. For Conducted Disturbance Test	5
3.2. For Radiated Disturbance Test	5
4. CONDUCTED DISTURBANCE TEST	6
4.1. Block Diagram of Test Setup.....	6
4.2. Conducted Disturbance Test Standard and Limit.....	6
4.3. Test Procedure	6
4.4. Operating Condition of EUT	7
4.5. Test Data.....	7
5. RADIATED DISTURBANCE TEST	8
5.1. Block Diagram of Test Setup.....	8
5.2. Test Standard and Limit.....	8
5.3. Test Procedure	9
5.4. Operating Condition of EUT	9
5.5. Test Data.....	10
6. BAND EDGES TESTING.....	10
6.1 Test Procedure	10
6.2 Test Equipment	10
6.3 Test Results	10
7. OCCUPIED BANDWIDTH	11
8. ANTENNA REQUIREMENTS.....	12
Appendix I	
Appendix II	

CERTIFICATION

Applicant : Shenzhen Hengqiangsheng Industrial and commerce Co., Ltd.
Address : Block 6, Swan Industrial Zone, Egongling, Pinghu, Shenzhen
Manufacturer : Shenzhen Hengqiangsheng Industrial and commerce Co., Ltd.
Address : Block 6, Swan Industrial Zone, Egongling, Pinghu, Shenzhen
EUT Description : 2.4G Wireless Monitor Transmitter
MODEL No : HQ-2000AV

Test Standards:


**FCC RULES AND REGULATIONS PART 15 :2002
ANSI C63.4 2000**

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with FCC requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Tested by : 

(George Luo)

Checked by : 

(Peter Lin)

Approved by : 

(Steven Yang)

1. TEST RESULTS

Table 1 Test Results

Test Items	Test Results
Conducted Disturbance	Pass
Radiated Disturbance	Pass
Band edge	Pass
Antenna requirement	Pass

2. GENERAL INFORMATION

2.1. Description of EUT

Description : 2.4G Wireless Monitor
 Model Number : HQ-2000AV
 Applicant : Shenzhen Youjin Electronic Co., Ltd.
 Manufacturer : Shenzhen Youjin Electronic Co., Ltd.
 Input Voltage : 110V/60Hz
 Transmitter:
 Working Frequency : 2414MHz
 Channel : 1
 Transmitting Power : 10mW
 Power Supply : DC12V 200mA
 Adaptor: Input Power: AC110V 60Hz
 Output Power: DC12V 200mA
 Receiver:
 Working Frequency : 2414MHz
 Channel : 1
 Power Supply : DC14.8V 1200mA
 Adaptor: Input Power: AC110V 60Hz

Output Power: DC14.8V 1200mA

The system have a Wireless camera(Transmitter) and a wireless receiver(monitor). The system have Fixed and permanent antenna. The antenna have a plastic case. It is compliance with the 15.203 requirement.

This unit is mostly used in transmitting and receiving of Audio and Video signal. It is divided into two parts of transmitter and receiver. It has the functions of infrared remote control. The transmitter even has the function of automatically turning off when signal is not available.

2.2. Test Facility

Name of Facility	:	Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory
Site Location	:	Bldg. of Metrology &Quality Inspection, Longzhu Road, Shenzhen, Guangdong, China
Site Description		Apr. 17, 2000 file on Federal Communications Commission Registration Number: 97379
		Aug. 11, 2000 certificated by TUV Rheinland, Shenzhen.

3. TEST EQUIPMENT

3.1. For Conducted Disturbance Test

Table 2 Conducted Disturbance Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Jan.31,2003	1 Year
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.31,2003	1 Year
SB2589	L.I.S.N	KYROTISU	KNW-407	Jan.31,2003	1 Year

3.2. For Radiated Disturbance Test


Table 3 Radiated Disturbance Test Equipment

NO.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB3436	EMI Test Receiver	Rohde & Schwarz	ESI26	Jan.31,2003	1 Year
SB3440	Bilog Antenna	Chase	CBL6112B	Jan.31,2003	1 Year
	Horn antenna	Rohde & Schwarz	HF906	Jan.31,2003	1 Year

4. CONDUCTED DISTURBANCE TEST

4.1. Block Diagram of Test Setup

Figure 1 Conducted Disturbance Test Setup

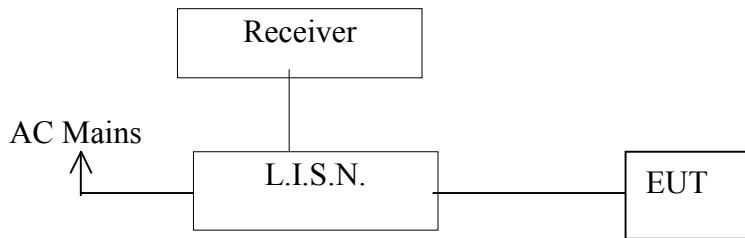

4.2. Conducted Disturbance Test Standard and Limit

4.2.1. Test Standard

FCC Part 15 :2002

4.2.2. Test Limit

Table 4 Conducted Disturbance Test Limit(Class B)

Frequency	Limits (dB μ V)	
	At mains terminals	
	Quasi-peak	Average
150kHz ~ 500kHz	66 ~ 56 *	59 ~ 46 *
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

* Decreasing linearly with logarithm of the frequency.

4.3. Test Procedure

The measurement is performed at the shielding room, using the setup per ANSI C63.4-2000 test procedure .

The EUT is put on a table of non-conducting material which is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The adaptor of the EUT is connected to the 120V/60Hz AC mains through a LISN. A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions from both sides of AC line. First, use the PK detector to do the pretest. And then use QP detector to do final test. Pretest result is shown in the curve, and the final test result is shown in table.

Setup of EMI Test Receiver:
Start frequency 150kHz

Stop frequency	30MHz
IF bandwidth	9kHz.

4.4.Operating Condition of EUT

4.4.1. Setup the EUT as shown in section 4.1.

4.4.2. Turn on the power.

4.4.3 Let the Transmitter in each channel.

When the power on the Transmitter can change the video signal from camera and the audio signal form the microphone to RF signal.

4.5.Test Data

The emissions don't show in below are too low against the limits, the test curves are shown in the APPENDIX I

Table 5 Conducted Disturbance Test Data

Date of Test:	2003.6.28	Temperature:	23 °C
EUT:	2.4G Wireless Monitor	Humidity:	61 %
M/N:	HQ-2000AV(Transmitter)		

Frequency (MHz)	Line				Neutral				
	Quasi-Peak		Average		Frequency (MHz)	Quasi-Peak		Average	
	Reading (dB μ V)	Limits (dB μ V)	Reading (dB μ V)	Limits (dB μ V)		Reading (dB μ V)	Limits (dB μ V)	Reading (dB μ V)	Limits (dB μ V)
0.150	46.6	66	16.5	56	0.150	47.1	66	17.1	56
0.240	44.4	62.1	13.3	52.1	0.240	43.7	62.1	12.8	52.1
0.463	37.9	56.6	7.5	46.6	0.463	36.2	56.6	6.7	46.6


5. RADIATED DISTURBANCE TEST

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of the EUT


Figure 2 EUT

AC Mains



5.1.2. Test setup of Open Site Test

Figure 3 Test Setup(Open Site)

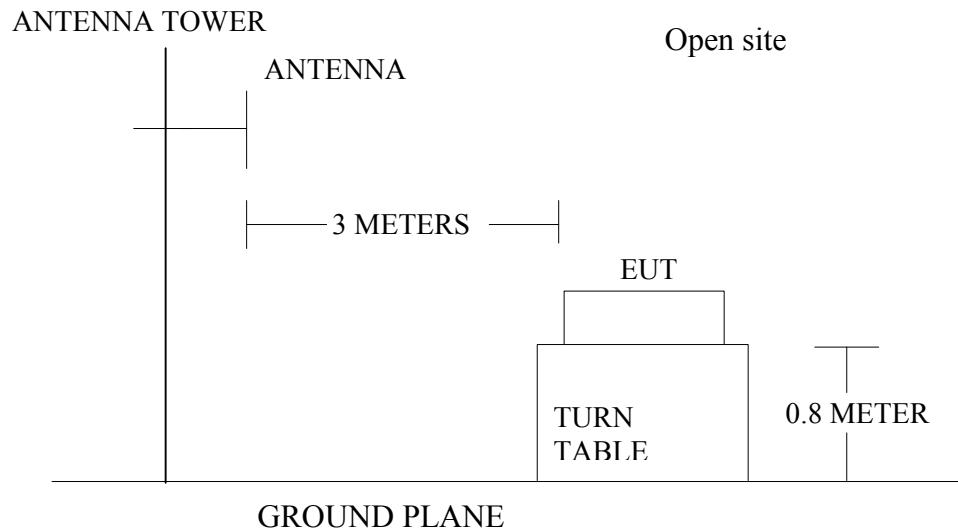

5.2. Test Standard and Limit

5.2.1. Test Standard

FCC Part 15:2002

5.2.2. Test Limit

Table 9 Radiated Disturbance Test Limit For Transmitter

FREQUENCY MHz	FIELD STRENGTHS LIMITS dB(μ V/m)
Fundamental	94.0
Harmonics	54.0
other	
30 ~ 88	44.0
88 ~ 216	44.0
216 ~ 960	46.0
960 ~ 1000	54.0

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

Table 10 Radiated Disturbance Test Limit For Receiver

FREQUENCY MHz	FIELD STRENGTHS LIMITS dB(μ V/m)
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
960 ~ 1000	54.0

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

5.3. Test Procedure

The measurement is performed at the shielding room, using the setup per ANSI C63.4-2000 test procedure

The EUT is placed on a turntable which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The pretest is processed in semi-anechoic chamber and do the final test in open area test site.

For 30~1000MHz, the detector of test receiver is QP. For 1~24GHz, the detector of the test receiver is AV.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT as shown in section 5.1.

5.4.2. Turn on the power.

5.4.3. Let the Transmitter working in each channel.

When the power on the Transmitter can change the video signal from camera and the audio signal from the microphone to RF signal.

5.5. Test Data

The emissions don't show in below are too low against the limits, the test curves are shown in the APPENDIX I

Table 11 Radiated Disturbance Test Data

Date of Test	2003.6.29	Temperature	20	°C
EUT	2.4G Wireless Monitor	Humidity	58	%
Model Number	HQ-2000AV(Transmitter)			

Frequency GHz	Readings(AV) (dB μ V/m)	Polarization	Limits (dB μ V/m)
2.413	48.8	Vertical	94.0
4.827	30.4	Horizontal	54.0

6. BAND EDGES TESTING

Requirements: FCC 15.249 (c), the emission power at the START and STOP frequencies shall be at least 50 dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209, whichever is the lesser attenuation.

6.1 Test Procedure


The antenna was removed and a low loss RF cable was connected to the transmitter output. The other end of the cable was connected to a spectrum analyzer with the START and STOP frequencies set to the operation band. Transmitter output was read off the spectrum analyzer in dBm. The power output at the transmitter was determined by adding the value of the attenuator to the spectrum analyzer reading. The test was performed for handset and the base respectively.

6.2 Test Equipment

RS ESI26 EMI Test Receiver
HP 930C printer


6.3 Test Results

Please refer to the attached plots.

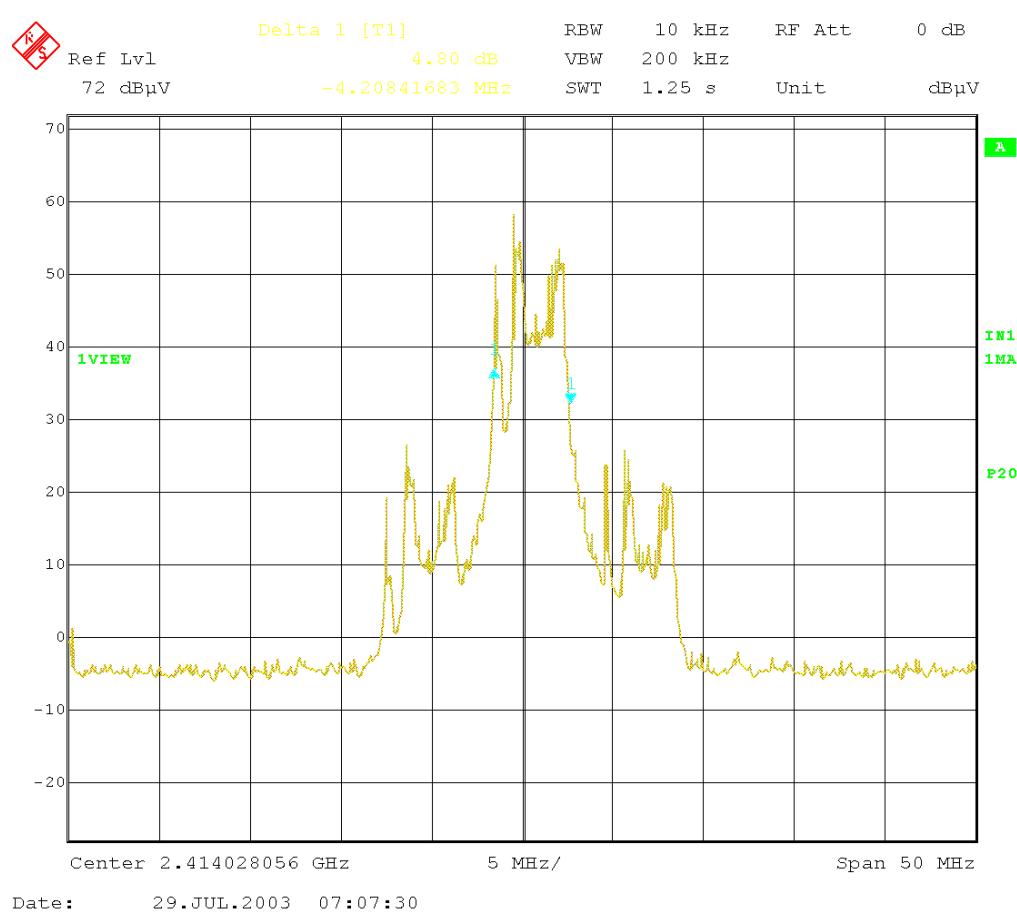

7. OCCUPIED BANDWIDTH

Use the ANSI C63.4 to do test the occupied band width. The results is shown in the the attached plots.

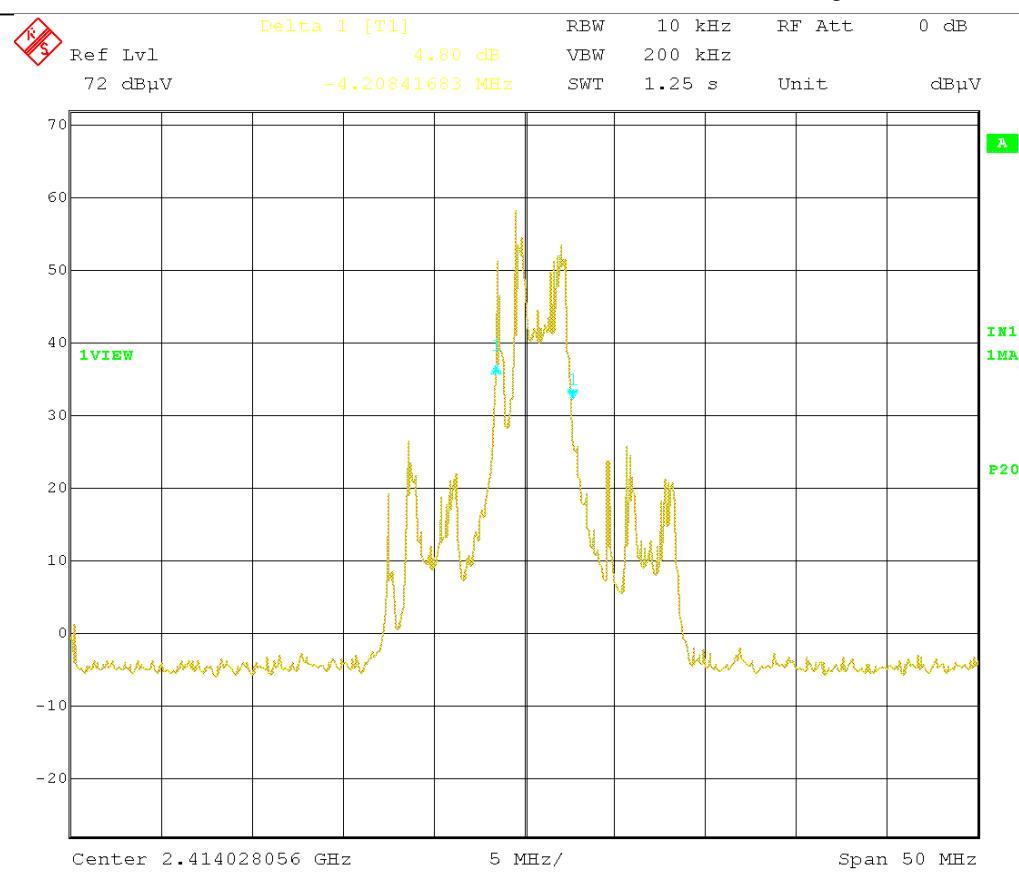

8. ANTENNA REQUIREMENTS

According to 15.203 requirement, the Transmitter is used a fixed and permanent antenna.

APPENDIX I

Conducted Disturbance

FCC Part 15

EUT: M/N:HQ-2000AV

Manufacturer:

Operating Condition: ON


Test Site: SMQ EMC Lab

Operator:

Test Specification: L&N

Comment: AC120V/50Hz

Adaptor of Cam

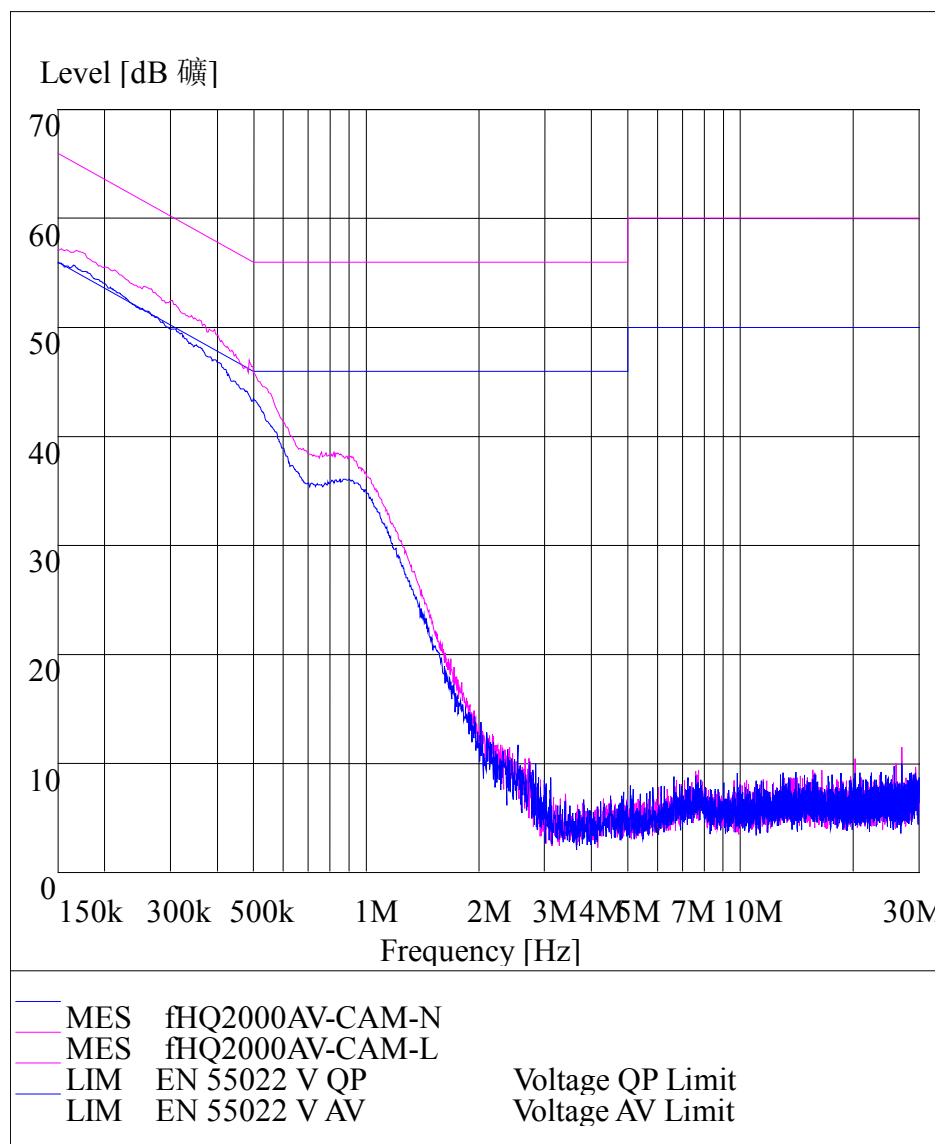

Radiated Disturbance***FCC15******EUT: 2.4GHz Wireless Monitor M/N:HQ-2000AV******Manufacturer:******Operating Condition: TX******Test Site: SMQ EMC Lab.SAC******Operator:******Test Specification: Vertical & Horizontal******Comment:***