

APPLICATION FOR VERIFICATION  
On Behalf of  
Chuango Security Technology Corporation.

## K1 SMARTHOMER DIY KIT

Model No.: K1

FCC ID: RJY-K1

Prepared for : Chuango Security Technology Corporation.  
Address : Room 6-17, Overseas Students Pioneer Park, No.108,  
                  Jiangbin East Road, Economic & Technological  
                  Development Zone, Fuzhou 350015, China.

Prepared by : Accurate Technology Co., Ltd.  
Address : F1, Bldg. A&D, Changyuan New Material Port, Keyuan  
                  Rd., Science & Industry Park, Nanshan District, Shenzhen  
                  518057, P.R. China

Tel: +86-755-26503290  
Fax: +86-755-26503396

Report No. : ATE20170746  
Date of Test : May 12-27, 2017  
Date of Report : May 27, 2017

## TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. TEST RESULTS SUMMARY .....	4
2. GENERAL INFORMATION.....	5
2.1. Product of Device (EUT) .....	5
2.2. Accessory and Auxiliary Equipment.....	5
2.3. Description of Test Facility .....	6
2.4. Measurement Uncertainty.....	6
3. MEASURING DEVICE AND TEST EQUIPMENT .....	7
4. POWER LINE CONDUCTED MEASUREMENT.....	8
4.1. Block Diagram of Test Setup .....	8
4.2. The Emission Limit.....	8
4.3. Configuration of EUT on Measurement .....	8
4.4. Operating Condition of EUT .....	8
4.5. Test Procedure .....	9
4.6. Power Line Conducted Emission Measurement Results.....	9
5. RADIATED EMISSION MEASUREMENT .....	14
5.1. Block Diagram of Test Setup .....	14
5.2. The Emission Limit For Section 15.109 (a).....	14
5.3. EUT Configuration on Measurement .....	15
5.4. Operating Condition of EUT .....	15
5.5. Test Procedure .....	15
5.6. Radiated Emission Noise Measurement Result.....	15

## Test Report Declaration

Applicant : Chuango Security Technology Corporation.  
Address : Room 6-17, Overseas Students Pioneer Park, No.108, Jiangbin East Road, Economic & Technological Development Zone, Fuzhou 350015, China  
Manufacturer : Chuango Security Technology Corporation  
Address : Room 6-17, Overseas Students Pioneer Park, No.108, Jiangbin East Road, Economic & Technological Development Zone, Fuzhou 350015, China  
Product : K1 SMARTHOMER DIY KIT  
Model No. : K1  
Trade name : smanos

## Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart B  
ANSI C63.4: 2014**

The device described above is tested by Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Accurate Technology Co., Ltd.

Date of Test :

May 12, 2017--May 27, 2017

Date of Report:

May 27, 2017

Prepared by :



Approved &amp; Authorized Signer :

(Sean Liu, Manager)

## 1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
Power Line Conducted Emission	FCC Part 15 Subpart B	Pass
Radiated Emission	FCC Part 15 Subpart B	Pass

## 2. GENERAL INFORMATION

### 2.1. Product of Device (EUT)

EUT : K1 SMARTHOMER DIY KIT

Model Number : K1

Power Supply : DC 12V(Powered by Adapter)

Adapter information : Model: SA-US12V  
Input: AC 100-240V~60Hz 0.3A  
Output: DC 12.0V 0.5A

Modulation: : FSK

Receiver Frequency : 915MHz RX

Applicant : Chuango Security Technology Corporation  
Address : Room 6-17, Overseas Students Pioneer Park,  
No.108, Jiangbin East Road, Economic & Technological  
Development Zone, Fuzhou 350015, China.

Manufacturer : Chuango Security Technology Corporation  
Address : Room 6-17, Overseas Students Pioneer Park,  
No.108, Jiangbin East Road, Economic & Technological  
Development Zone, Fuzhou 350015, China.

Date of sample received : May 12, 2017

Date of Test : May 12, 2017-May 27, 2017

### 2.2. Accessory and Auxiliary Equipment

N/A

### 2.3. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004

Listed by FCC

The Registration Number is 253065

Listed by FCC

The Registration Number is 752051

Listed by Industry Canada

The Registration Number is 5077A-1

Listed by Industry Canada

The Registration Number is 5077A-2

Accredited by China National Accreditation Committee for Laboratories

The Certificate Registration Number is L3193

Name of Firm : Accurate Technology Co., Ltd.

Site Location : F1, Bldg. A&D, Changyuan New Material Port, Keyuan Rd., Science & Industry Park, Nanshan District, Shenzhen 518057, P.R. China

### 2.4. Measurement Uncertainty

Conducted emission expanded uncertainty :  $U=2.23\text{dB}$ ,  $k=2$

Power disturbance expanded uncertainty :  $U=2.92\text{dB}$ ,  $k=2$

Radiated emission expanded uncertainty :  $U=3.08\text{dB}$ ,  $k=2$   
(9kHz-30MHz)

Radiated emission expanded uncertainty :  $U=4.42\text{dB}$ ,  $k=2$   
(30MHz-1000MHz)

Radiated emission expanded uncertainty :  $U=4.06\text{dB}$ ,  $k=2$   
(Above 1GHz)


### 3. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan.07, 2017	One Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan.07, 2017	One Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan.07, 2017	One Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan.07, 2017	One Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan.07, 2017	One Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan.07, 2017	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan.13, 2017	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan.13, 2017	One Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan.13, 2017	One Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan.13, 2017	One Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan.13, 2017	One Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/251 0-60/11SS	N/A	Jan.13, 2017	One Year

## 4. POWER LINE CONDUCTED MEASUREMENT

### 4.1. Block Diagram of Test Setup

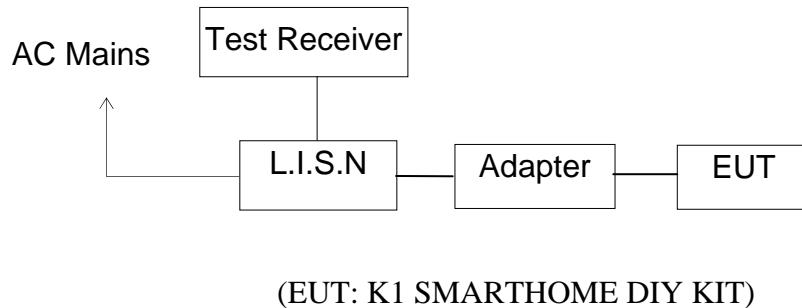

### 4.2. The Emission Limit

#### 4.2.1. Conducted Emission Measurement Limits According to Section 15.107(a)

Frequency (MHz)	Limit dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

\* Decreases with the logarithm of the frequency.

### 4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

#### 4.3.1. K1 SMARTHOMER DIY KIT (EUT)

Model Number: K1

Serial Number: N/A

Manufacturer: Chuango Security Technology Corporation.

### 4.4. Operating Condition of EUT

#### 4.4.1. Setup the EUT and simulator as shown as Section 4.1

#### 4.4.2. Turn on the power of all equipment.

#### 4.4.3. Let the EUT work in test mode and measure it.

#### 4.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test REMOTE CONTROL (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

#### 4.6. Power Line Conducted Emission Measurement Results

**PASS.**

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are shown in the following pages.


## ACCURATE TECHNOLOGY CO., LTD

## CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: K1 SMARTHOME DIY KIT M/N:K1  
 Manufacturer: CHUANGO  
 Operating Condition: 915MHz RX  
 Test Site: 1#Shielding Room  
 Operator: DING  
 Test Specification: N 240V/60Hz  
 Comment: Report NO.:ATE20170746  
 Start of Test: 5/18/2017 / 5:41:35PM

## SCAN TABLE: "V 9K-30MHz fin"

Short Description:			SUB STD VTERM2 1.70	Detector	Meas.	IF	Transducer
Start Frequency	Stop Frequency	Step Width			Time	Bandw.	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s		200 Hz	NSLK8126 2008
			Average				
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s		9 kHz	NSLK8126 2008
			Average				

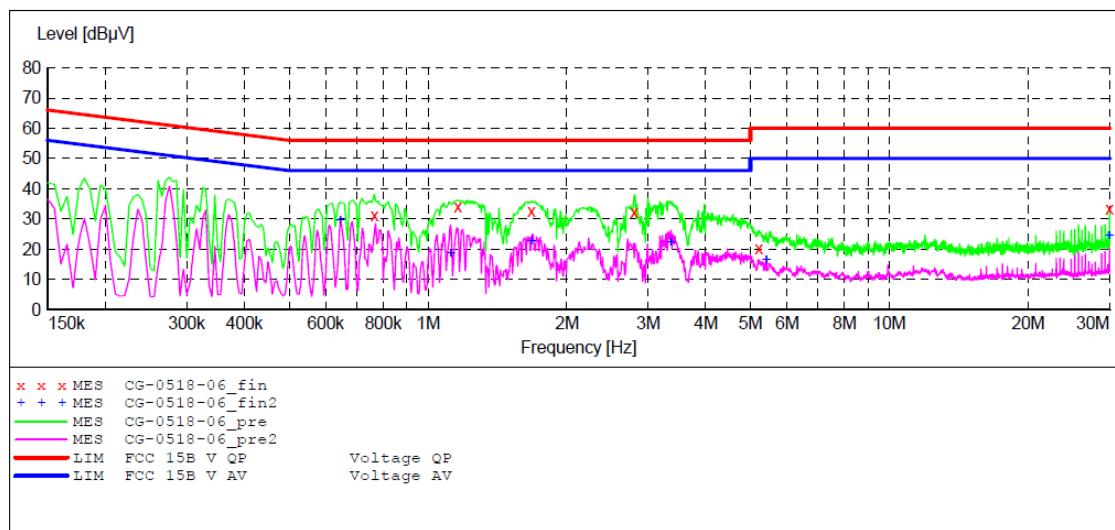

## MEASUREMENT RESULT: "CG-0518-06\_fin"

5/18/2017 5:42PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.765000	31.00	10.8	56	25.0	QP	N	GND
1.160000	34.00	10.9	56	22.0	QP	N	GND
1.675000	32.70	10.9	56	23.3	QP	N	GND
2.800000	32.20	11.0	56	23.8	QP	N	GND
5.210000	20.20	11.2	60	39.8	QP	N	GND
30.000000	33.30	11.5	60	26.7	QP	N	GND

## MEASUREMENT RESULT: "CG-0518-06\_fin2"

5/18/2017 5:42PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.645000	29.80	10.8	46	16.2	AV	N	GND
1.120000	18.80	10.9	46	27.2	AV	N	GND
1.675000	22.80	10.9	46	23.2	AV	N	GND
3.360000	22.50	11.1	46	23.5	AV	N	GND
5.410000	16.50	11.2	50	33.5	AV	N	GND
30.000000	24.60	11.5	50	25.4	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

## CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: K1 SMARTHOME DIY KIT M/N:K1  
 Manufacturer: CHUANGO  
 Operating Condition: 915MHz RX  
 Test Site: 1#Shielding Room  
 Operator: DING  
 Test Specification: L 240V/60Hz  
 Comment: Report NO.:ATE20170746  
 Start of Test: 5/18/2017 / 5:30:17PM

## SCAN TABLE: "V 9K-30MHz fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			
			QuasiPeak	1.0 s		
			Average			

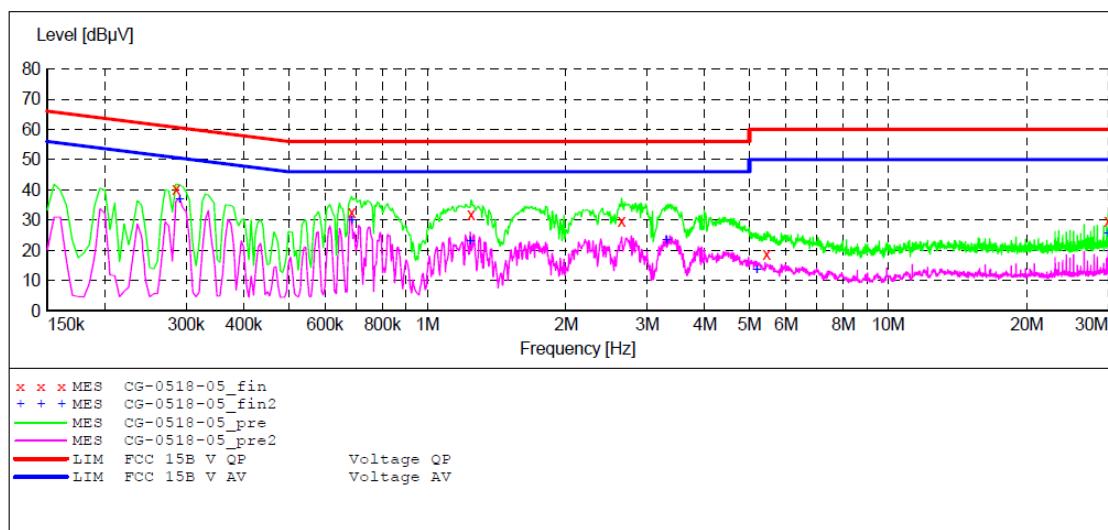

## MEASUREMENT RESULT: "CG-0518-05\_fin"

5/18/2017 5:33PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.285000	40.10	10.6	60.7	20.6	QP	L1	GND
0.685000	32.50	10.8	56	23.5	QP	L1	GND
1.245000	31.70	10.9	56	24.3	QP	L1	GND
2.640000	29.80	11.0	56	26.2	QP	L1	GND
5.450000	18.90	11.2	60	41.1	QP	L1	GND
30.000000	29.80	11.5	60	30.2	QP	L1	GND

## MEASUREMENT RESULT: "CG-0518-05\_fin2"

5/18/2017 5:33PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.290000	37.10	10.6	50.5	13.4	AV	L1	GND
0.685000	30.00	10.8	46	16.0	AV	L1	GND
1.240000	23.00	10.9	46	23.0	AV	L1	GND
3.300000	23.60	11.1	46	22.4	AV	L1	GND
5.180000	13.70	11.2	50	36.3	AV	L1	GND
30.000000	25.60	11.5	50	24.4	AV	L1	GND


## ACCURATE TECHNOLOGY CO., LTD

## CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: K1 SMARTHOMA DIY KIT M/N:K1  
 Manufacturer: CHUANGO  
 Operating Condition: 915MHz RX  
 Test Site: 1#Shielding Room  
 Operator: DING  
 Test Specification: N 120V/60Hz  
 Comment: Report NO.:ATE20170746  
 Start of Test: 5/18/2017 / 5:13:43PM

## SCAN TABLE: "V 9K-30MHz fin"

Short Description:		SUB STD VTERM2 1.70				
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
			Average			
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			

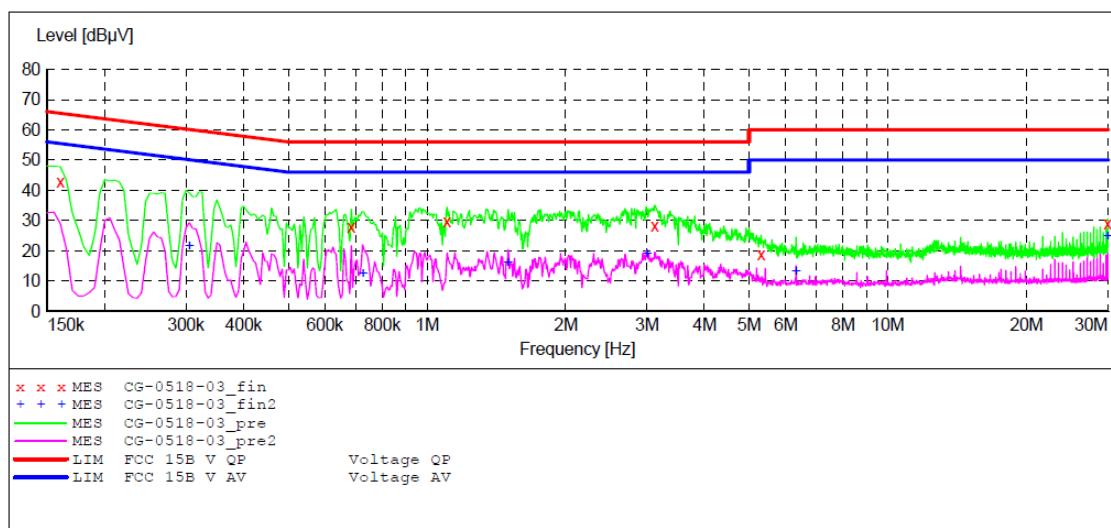

## MEASUREMENT RESULT: "CG-0518-03\_fin"

5/18/2017 5:17PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.160000	42.90	10.5	65.5	22.6	QP	N	GND
0.685000	27.90	10.8	56	28.1	QP	N	GND
1.105000	29.80	10.9	56	26.2	QP	N	GND
3.120000	28.20	11.1	56	27.8	QP	N	GND
5.310000	18.90	11.2	60	41.1	QP	N	GND
30.000000	29.00	11.5	60	31.0	QP	N	GND

## MEASUREMENT RESULT: "CG-0518-03\_fin2"

5/18/2017 5:17PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.305000	21.80	10.6	50.1	28.3	AV	N	GND
0.725000	12.50	10.8	46	33.5	AV	N	GND
1.500000	16.30	10.9	46	29.7	AV	N	GND
3.000000	19.00	11.1	46	27.0	AV	N	GND
6.320000	13.30	11.2	50	36.7	AV	N	GND
30.000000	25.00	11.5	50	25.0	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

## CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: K1 SMARTHOMA DIY KIT M/N:K1  
 Manufacturer: CHUANGO  
 Operating Condition: 915MHz RX  
 Test Site: 1#Shielding Room  
 Operator: DING  
 Test Specification: L 120V/60Hz  
 Comment: Report NO.:ATE20170746  
 Start of Test: 5/18/2017 / 5:18:00PM

## SCAN TABLE: "V 9K-30MHz fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
				Average		
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
				Average		

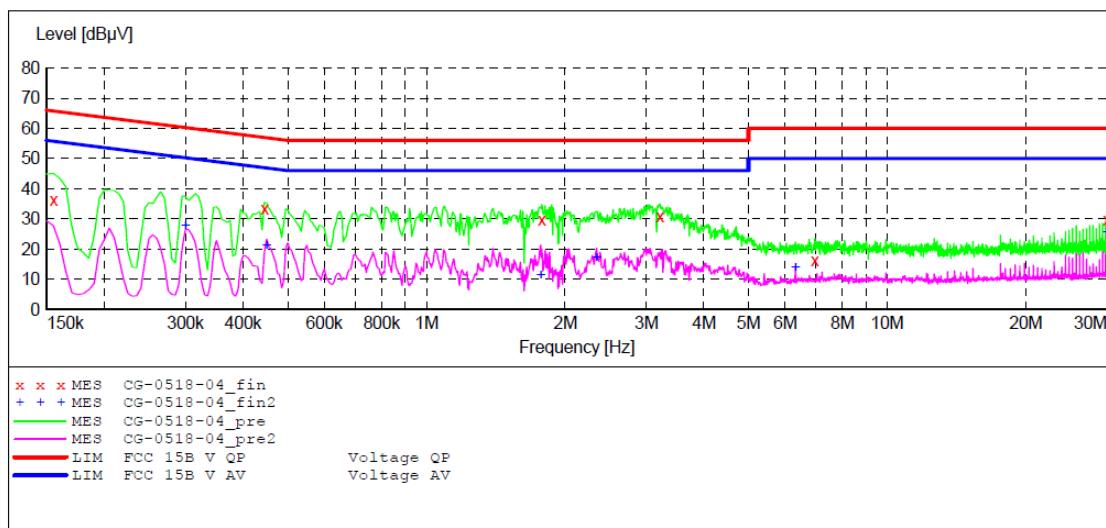

## MEASUREMENT RESULT: "CG-0518-04\_fin"

5/18/2017 5:21PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.155000	36.10	10.5	65.7	29.6	QP	L1	GND
0.445000	33.40	10.7	57	23.6	QP	L1	GND
1.780000	29.70	11.0	56	26.3	QP	L1	GND
3.210000	30.80	11.1	56	25.2	QP	L1	GND
6.960000	16.40	11.2	60	43.6	QP	L1	GND
30.000000	29.80	11.5	60	30.2	QP	L1	GND

## MEASUREMENT RESULT: "CG-0518-04\_fin2"


5/18/2017 5:21PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.300000	27.90	10.6	50.2	22.3	AV	L1	GND
0.450000	21.40	10.7	47	25.5	AV	L1	GND
1.770000	11.60	11.0	46	34.4	AV	L1	GND
2.340000	17.40	11.0	46	28.6	AV	L1	GND
6.320000	13.90	11.2	50	36.1	AV	L1	GND
30.000000	25.80	11.5	50	24.2	AV	L1	GND

## 5. RADIATED EMISSION MEASUREMENT


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators

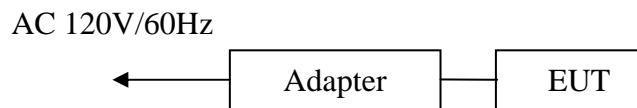

(EUT: K1 SMARTHOME DIY KIT)

#### 5.1.2. Block diagram of test setup (In chamber)

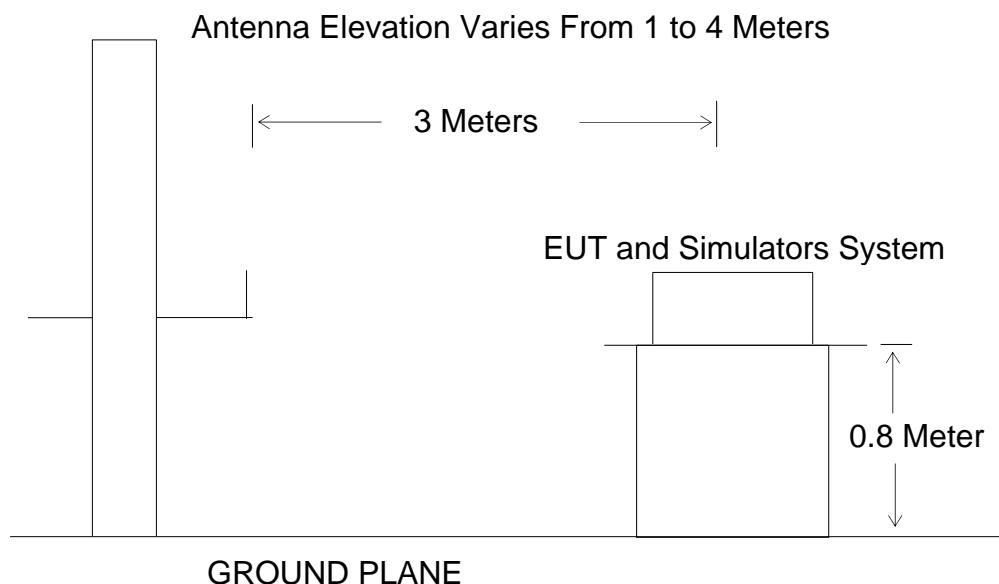

### 5.2. The Emission Limit For Section 15.109 (a)

#### 5.2.1. Radiation Emission Measurement Limits According to Section 15.109 (a).

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V/m)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
960-1000	3	500	54.0

Remark: (1) Emission level dB ( $\mu$ V) = 20 log Emission level  $\mu$ V/m.  
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

### 5.3.EUT Configuration on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.3.1.K1 SMARTHOME DIY KIT

Model Number: K1

Serial Number: N/A

Manufacturer: Chuango Security Technology Corporation.

### 5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in test mode and measure it.

### 5.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2014 on radiated emission measurement.

The bandwidth of the EMI test REMOTE CONTROL (R&S ESCS30) is set at 120kHz from 30MHz to 1000MHz.

The frequency range from 30MHz to 10000MHz is checked.

### 5.6.Radiated Emission Noise Measurement Result

**PASS.**

Model Number: K1  
Test mode: RX 915MHz

		No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
Horizontal		1	33.5700	33.75	-15.59	18.16	40.00	-21.84	QP	
		2	53.7559	38.80	-21.41	17.39	40.00	-22.61	QP	
		3	131.2235	38.87	-22.16	16.71	43.50	-26.79	QP	
		4	157.5290	38.93	-21.64	17.29	43.50	-26.21	QP	
		5	274.4464	38.83	-16.92	21.91	46.00	-24.09	QP	
		6	540.7072	36.35	-9.93	26.42	46.00	-19.58	QP	
		No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
Vertical		1	33.4522	43.50	-15.56	27.94	40.00	-12.06	QP	
		2	40.1581	44.41	-18.13	26.28	40.00	-13.72	QP	
		3	45.4130	44.81	-19.07	25.74	40.00	-14.26	QP	
		4	51.8998	46.68	-21.11	25.57	40.00	-14.43	QP	
		5	59.9418	40.92	-21.80	19.12	40.00	-20.88	QP	
		6	130.3048	47.94	-22.14	25.80	43.50	-17.70	QP	
Above 1G										
		No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
Horizontal		1	10227.420	34.46	13.49	47.95	74.00	-26.05	peak	
		2	10227.420	27.16	13.49	40.65	54.00	-13.35	AVG	
		No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
Vertical		1	10045.533	34.85	13.96	48.81	74.00	-25.19	peak	
		2	10045.533	27.36	13.96	41.32	54.00	-12.68	AVG	

Below 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #3620

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2017/05/18

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 18:51:24

EUT: K1 SMARTHOME DIY KIT

Engineer Signature: DING


Mode: RX 915MHz

Distance: 3m

Model: K1

Manufacturer: CHUANGO

Note: Report NO.:ATE20170746

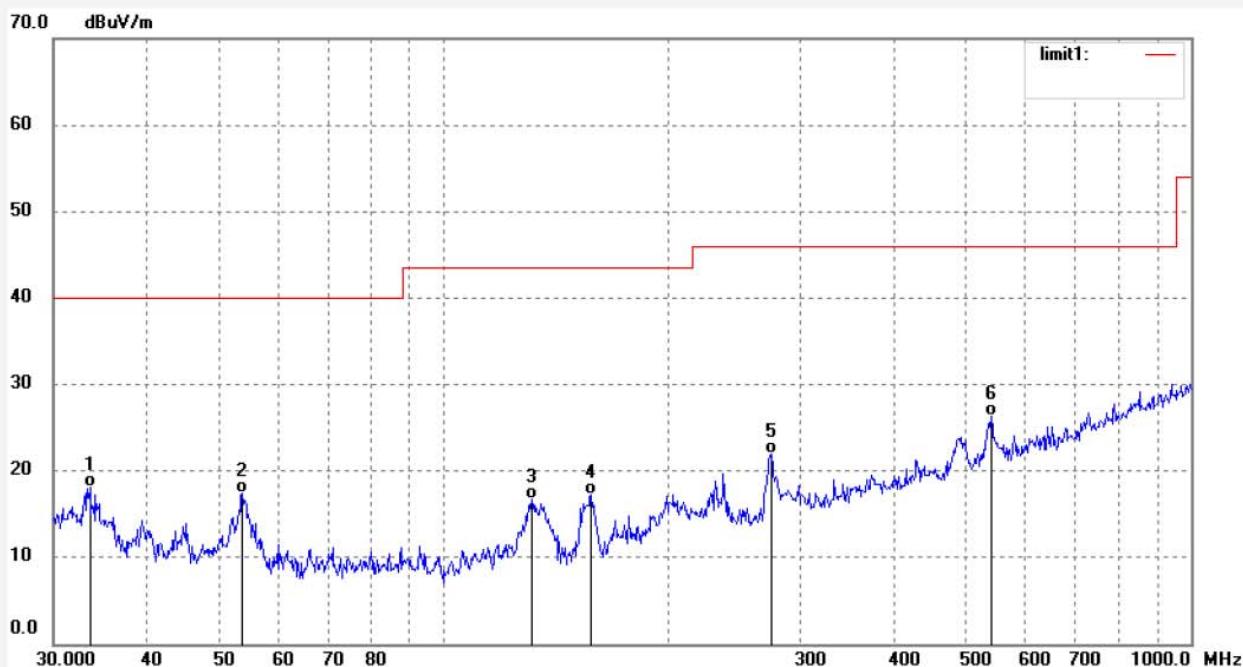

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.5700	33.75	-15.59	18.16	40.00	-21.84	QP			
2	53.7559	38.80	-21.41	17.39	40.00	-22.61	QP			
3	131.2235	38.87	-22.16	16.71	43.50	-26.79	QP			
4	157.5290	38.93	-21.64	17.29	43.50	-26.21	QP			
5	274.4464	38.83	-16.92	21.91	46.00	-24.09	QP			
6	540.7072	36.35	-9.93	26.42	46.00	-19.58	QP			

Job No.: DING #3621

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2017/05/18

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 18:52:22

EUT: K1 SMARTHOMA DIY KIT

Engineer Signature: DING


Mode: RX 915MHz

Distance: 3m

Model: K1

Manufacturer: CHUANGO

Note: Report NO.:ATE20170746

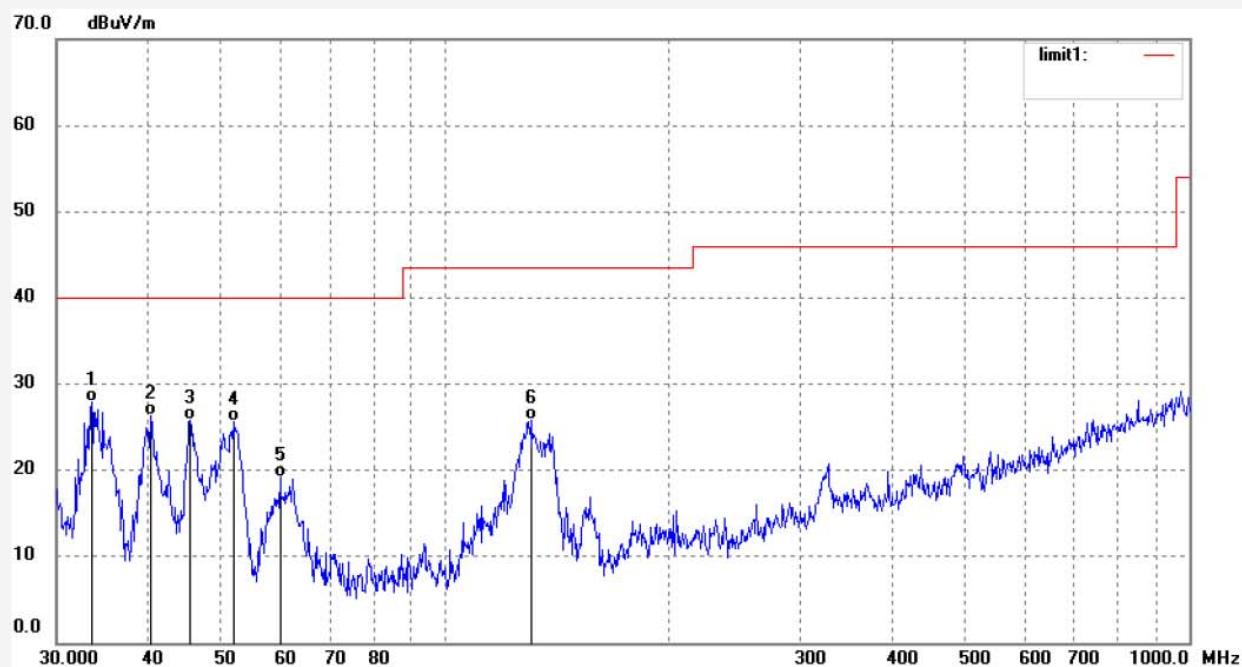

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.4522	43.50	-15.56	27.94	40.00	-12.06	QP			
2	40.1581	44.41	-18.13	26.28	40.00	-13.72	QP			
3	45.4130	44.81	-19.07	25.74	40.00	-14.26	QP			
4	51.8998	46.68	-21.11	25.57	40.00	-14.43	QP			
5	59.9418	40.92	-21.80	19.12	40.00	-20.88	QP			
6	130.3048	47.94	-22.14	25.80	43.50	-17.70	QP			

## Above 1GHz



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: ding #3683

Polarization: Horizontal

Standard: FCC PART 15B 3m

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2017/05/24

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 20:41:20

EUT: K1 SMARTHOME DIY KIT

Engineer Signature: DING


Mode: 915MHz RX

Distance: 3m

Model: K1

Manufacturer: CHUANGO

Note: Report NO.:ATE20170746

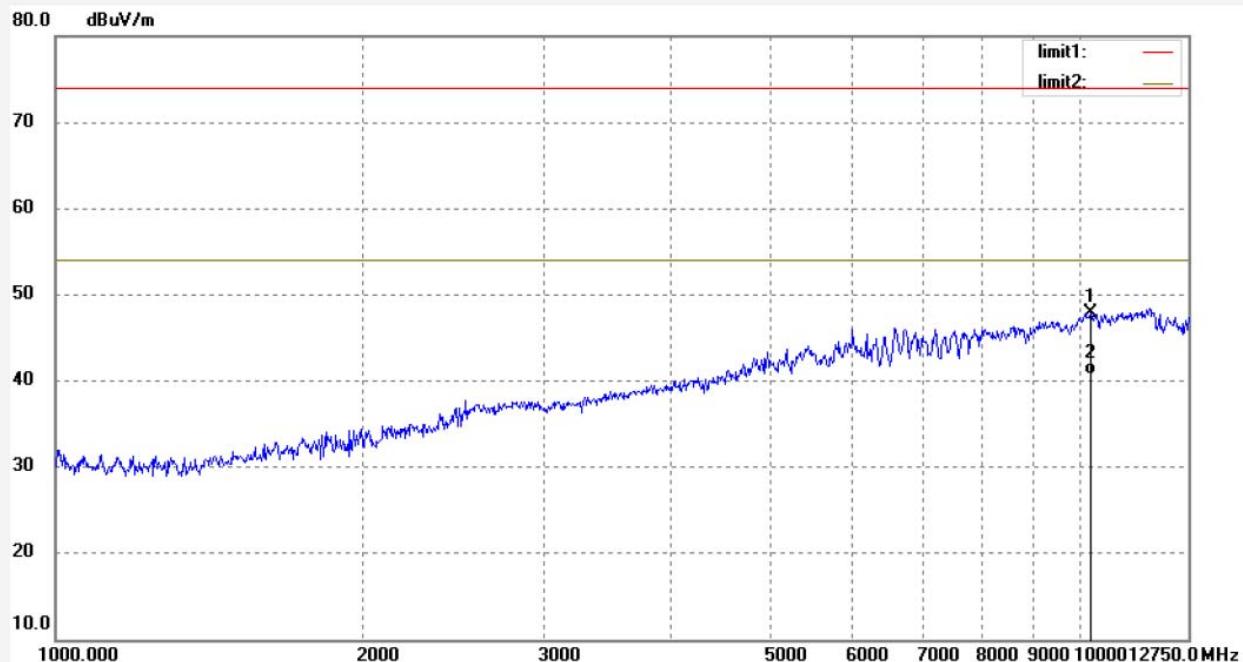

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	10227.420	34.46	13.49	47.95	74.00	-26.05	peak			
2	10227.420	27.16	13.49	40.65	54.00	-13.35	AVG			

Job No.: ding #3682

Polarization: Vertical

Standard: FCC PART 15B 3m

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2017/05/24

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 20:40:39

EUT: K1 SMARTHOMER DIY KIT

Engineer Signature: DING


Mode: 915MHz RX

Distance: 3m

Model: K1

Manufacturer: CHUANGO

Note: Report NO.:ATE20170746

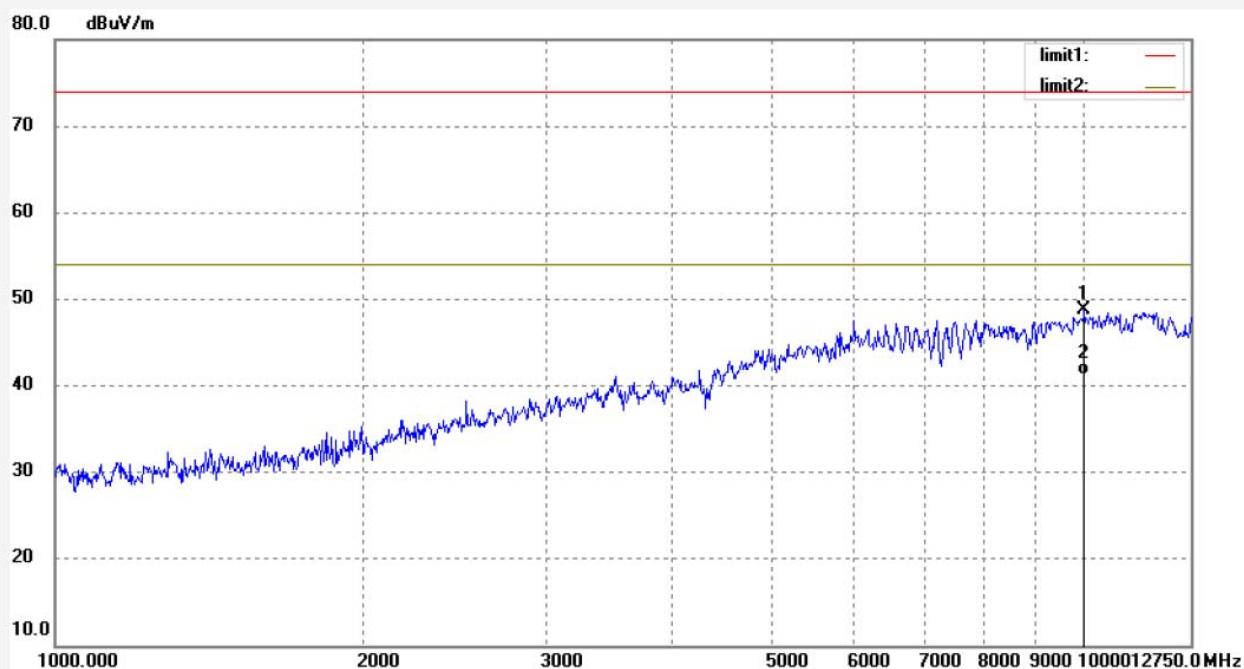

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	10045.533	34.85	13.96	48.81	74.00	-25.19	peak			
2	10045.533	27.36	13.96	41.32	54.00	-12.68	AVG			